



ONE WORLD  OUR APPROVAL

# Test report

**312742-4TRFWL**

Date of issue: November 30, 2016

Applicant:

**Seiko Epson Corporation**

Product:

**Smart Glasses**

Model:

**H756A (BT-300)**

FCC ID:

**SKSH756A**

IC Registration number:

**1052D-H756A**

Specifications:

- ◆ **FCC 47 CFR Part 15 Subpart E, §15.407**  
Unlicensed National Information Infrastructure Devices
- ◆ **RSS-247, Issue 1, Section 6, May 2015**  
Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

[www.nemko.com](http://www.nemko.com)

Nemko Canada Inc., a testing laboratory, is accredited by the Standards Council of Canada. The tests included in this report are within the scope of this accreditation

*FCC 15.407 and RSS-247 5.3 GHz.docx; Date: June 2015*



---

**Test location**

---

Company name	Nemko Canada Inc.
Address	292 Labrosse Avenue
City	Pointe-Claire
Province	QC
Postal code	H9R 5L8
Country	Canada
Telephone	+1 514 694 2684
Facsimile	+1 514 694 3528
Toll free	+1 800 563 6336
Website	<a href="http://www.nemko.com">www.nemko.com</a>
Site number	FCC: 722545; IC: 2040G-5 (3 m semi anechoic chamber)

Tested by	Yong Huang, Wireless/EMC Specialist
Reviewed by	Andrey Adelberg, Senior Wireless/EMC Specialist
Review date	November 30, 2016
Reviewer signature	

---

**Limits of responsibility**

---

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contained in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

---

**Copyright notification**

---

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.

## Table of contents

<b>Table of contents .....</b>	<b>3</b>
<b>Section 1. Report summary .....</b>	<b>4</b>
1.1    Applicant and manufacturer .....	4
1.2    Test specifications .....	4
1.3    Test methods.....	4
1.4    Statement of compliance .....	4
1.5    Exclusions.....	4
1.6    Test report revision history .....	4
<b>Section 2. Summary of test results.....</b>	<b>5</b>
2.1    FCC Part 15 Subpart C, general requirements test results.....	5
2.2    FCC Part 15 Subpart E, test results .....	5
2.3    IC RSS-GEN, Issue 4, test results .....	5
2.4    IC RSS-247, Issue 1, test results .....	6
<b>Section 3. Equipment under test (EUT) details .....</b>	<b>7</b>
3.1    Sample information.....	7
3.2    EUT information .....	7
3.3    Technical information .....	8
3.4    Product description and theory of operation .....	9
3.5    EUT exercise details.....	9
3.6    EUT setup diagram .....	9
<b>Section 4. Engineering considerations.....</b>	<b>10</b>
4.1    Modifications incorporated in the EUT.....	10
4.2    Technical judgment.....	10
4.3    Deviations from laboratory tests procedures.....	10
<b>Section 5. Test conditions.....</b>	<b>11</b>
5.1    Atmospheric conditions .....	11
5.2    Power supply range .....	11
<b>Section 6. Measurement uncertainty.....</b>	<b>12</b>
6.1    Uncertainty of measurement .....	12
<b>Section 7. Test equipment .....</b>	<b>13</b>
7.1    Test equipment list.....	13
<b>Section 8. Testing data .....</b>	<b>14</b>
8.1    FCC 15.403(i) Emission bandwidth .....	14
8.2    RSS-Gen 6.6 Occupied bandwidth .....	16
8.3    FCC 15.407(a)(2) and RSS-247 6.2.3(1) 5.47–5.725 GHz band output power and spectral density limits.....	18
8.4    FCC 15.407(b) and RSS-247 6.2.2(2) Undesirable (unwanted) emissions .....	24
8.5    FCC 15.207(a) and RSS-Gen 8.8 AC power line conducted emissions limits .....	47
8.6    FCC 15.407(g) and RSS-Gen 8.11 Frequency stability .....	51
8.7    FCC 15.407(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS) .....	52
<b>Section 9. Block diagrams of test set-ups .....</b>	<b>57</b>
9.1    Radiated emissions set-up for frequencies below 1 GHz.....	57
9.2    Radiated emissions set-up for frequencies above 1 GHz.....	58
9.3    Conducted emissions set-up .....	58

## Section 1. Report summary

---

### 1.1 Applicant and manufacturer

---

Company name	Seiko Epson Corporation
Address	6925 Tazawa, Toyoshina, Azumino-shi, Nagano 399-8285 Japan

### 1.2 Test specifications

---

FCC 47 CFR Part 15, Subpart E, Clause 15.407	Unlicensed National Information Infrastructure Devices
RSS-247, Issue 1, May 2015	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

### 1.3 Test methods

---

789033 D02 General U-NII Test Procedures New Rules v01r03 (August 22, 2016)	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
905462 D03	UNII Clients Without Radar Detection New Rules v01r02
905462 D02	UNII DFS Compliance Procedures New Rules v02
ANSI C63.10 v2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

### 1.4 Statement of compliance

---

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See "Summary of test results" for full details.

### 1.5 Exclusions

---

None

### 1.6 Test report revision history

---

Revision #	Details of changes made to test report
TRF	Original report issued

## Section 2. Summary of test results

### 2.1 FCC Part 15 Subpart C, general requirements test results

Part	Test description	Verdict
§15.31(e)	Variation of power source	Pass <sup>1</sup>
§15.203	Antenna requirement	Pass <sup>2</sup>

Notes: <sup>1</sup>Measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, was performed with the supply voltage varied between 85 % and 115 % of the nominal rated supply voltage. No noticeable output power variation was observed

<sup>2</sup>The Antennas are located within the enclosure of EUT and not user accessible.

### 2.2 FCC Part 15 Subpart E, test results

Part	Test description	Verdict
§15.403(i)	Emission bandwidth	Not applicable
§15.407(a)(1)	Power and density limits within 5.15–5.25 GHz band	Not applicable
§15.407(a)(2)	Power and density limits within 5.25–5.35 GHz and 5.47–5.725 GHz bands	Pass
§15.407(a)(3)	Power and density limits within 5.725–5.85 GHz band	Not applicable
§15.407(b)(1)	Undesirable emission limits for 5.15–5.25 GHz band	Not applicable
§15.407(b)(2)	Undesirable emission limits for 5.25–5.35 GHz band	Not applicable
§15.407(b)(3)	Undesirable emission limits for 5.47–5.725 GHz bands	Pass
§15.407(b)(4)	Undesirable emission limits for 5.725–5.85 GHz band	Not applicable
§15.407(b)(6)	Conducted limits for U-NII devices using an AC power line	Pass
§15.407(e)	Minimum 6 dB bandwidth of U-NII devices within the 5.725–5.85 GHz band	Not applicable
§15.407(g)	Frequency stability	Pass
§15.407(h)(1) <sup>1</sup>	Transmit power control (TPC)	Not applicable <sup>1</sup>
§15.407(h)(2) <sup>1</sup>	Dynamic Frequency Selection (DFS)	Pass

Note: <sup>1</sup>EUT maximum EIRP is less than 500 mW (24 dBm), therefore a TPC mechanism is not required

### 2.3 IC RSS-GEN, Issue 4, test results

Part	Test description	Verdict
6.6	Occupied Bandwidth	Pass
7.1.2 <sup>1</sup>	Receiver radiated emission limits	Not applicable
7.1.3 <sup>1</sup>	Receiver conducted emission limits	Not applicable
8.8	Power Line Conducted Emissions Limits for Licence-Exempt Radio Apparatus	Pass
8.11 <sup>2</sup>	Frequency stability	Pass

Notes: <sup>1</sup>According to sections 5.2 and 5.3 of RSS-Gen, Issue 4: if EUT does not have a stand-alone receiver neither scanner receiver, then it exempt from receiver requirements.

<sup>2</sup>According to section 8.11 of RSS-Gen, Issue 4: if the frequency stability of the licence-exempt radio apparatus is not specified in the applicable standard (RSS), measurement of the frequency stability is not required

## 2.4 IC RSS-247, Issue 1, test results

Section	Test description	Verdict
6.1 (1) <sup>1</sup>	Types of Modulation	Pass
6.2.1 (1)	Power limits for 5150–5250 MHz band	Not applicable
6.2.2 (1)	Power limits for 5250–5350 MHz band	Not applicable
6.2.3 (1)	Power limits for 5470–5600 MHz and 5650–5725 MHz bands	Pass
6.2.4 (1)	Power limits for 5725–5850 MHz band	Not applicable
6.2.4 (1)	Minimum 6 dB bandwidth	Not applicable
6.2.1 (2)	Unwanted emission limits for 5150–5250 MHz band	Not applicable
6.2.2 (2)	Unwanted emission limits for 5250–5350 MHz band	Not applicable
6.2.2 (2)	TPC requirements for devices with a maximum e.i.r.p. greater than 500 mW	Not applicable
6.2.2 (3)	e.i.r.p. at different elevations restrictions for 5250–5350 MHz band	Not applicable
6.2.3 (2)	Unwanted emission limits for 5470–5600 MHz and 5650–5725 MHz bands	Pass
6.2.4 (2)	Unwanted emission limits for 5725–5850 MHz band	Not applicable
6.3	Dynamic Frequency Selection (DFS) for devices operating in the bands 5250–5350 MHz, 5470–5600 MHz and 5650–5725 MHz	Pass

Notes: <sup>1</sup> The EUT employs digital modulations, such as: 802.11a, 802.11n HT20 and 802.11n HT40

## Section 3. Equipment under test (EUT) details

---

### 3.1 Sample information

---

Receipt date	October 4, 2016
Nemko sample ID number	133-003152 (Conducted sample) and 133-003139 (Radiated sample)

### 3.2 EUT information

---

Product name	Smart Glasses
Model	H756A (BT-300)
Model variant	N/A
Serial number	TCW27560112

### 3.3 Technical information

Applicant IC company number	1052D
IC UPN number	H756A
All used IC test site(s) Reg. number	2040G-5
RSS number and Issue number	RSS-247 Issue 1, Section 6, May 2015
Frequency band	5470–5600 MHz (FCC) 5470–5600 MHz and 5650–5725 MHz (ISED) <sup>1</sup>
Frequency Min (MHz)	5500 (802.11a, 802.11n HT20 and 802.11ac VHT20) 5510 (802.11n HT40 and 802.11ac VHT40) 5530 (802.11ac VHT80)
Frequency Max (MHz)	5700 (802.11a, 802.11n HT20 and 802.11ac VHT20) 5670 (802.11n HT40 and 802.11ac VHT40) 5610 (802.11ac VHT80)
RF power Min (W), Conducted	N/A
RF power Max (W), Conducted	0.0115 (10.6 dBm, 802.11a) 0.0102 (10.5 dBm, 802.11n. HT20) 0.0099 (9.8 dBm, 802.11n.HT40) 0.0102 (10.5 dBm, 802.11ac.VHT20) 0.0100 (10.1 dBm, 802.11ac.VHT40) 0.0099 (9.7 dBm,802.11ac VHT80)
Field strength, Units @ distance	N/A
Measured BW (kHz) (99% dB)	16730 (802.11a) 17930 (802.11n. HT20) 36540 (802.11n.HT40) 17970 (802.11ac.VHT20) 36517 (802.11ac.VHT40) 75930 (802.11ac VHT80)
Calculated BW (kHz), as per TRC-43	N/A
Type of modulation	802.11a/n/ac
Emission classification (F1D, G1D, D1D)	W7D
Transmitter spurious, Units @ distance	44.3 dB $\mu$ V/m @ 3m, Quasi-peak
Power requirements	5 VDC (Powered via external AC-DC adapter 100–240 VAC, 50/60 Hz) and via battery
Antenna information	The EUT uses a non-detachable antenna to the intentional radiator. As per customer the antenna gain is 2.4 dBi at 5 GHz band

Note: <sup>1</sup>As per customer's declaration, the EUT is not capable of transmitting in the band 5600–5650 MHz in Canada.

### 3.4 Product description and theory of operation

---

EUT is a smart glass with see-through lenses, which allows to overlay images on actual view. The virtual images were provided by a controller.


### 3.5 EUT exercise details

---

EUT was set to test modes during tests, by software drivers provided by customer.

### 3.6 EUT setup diagram

---

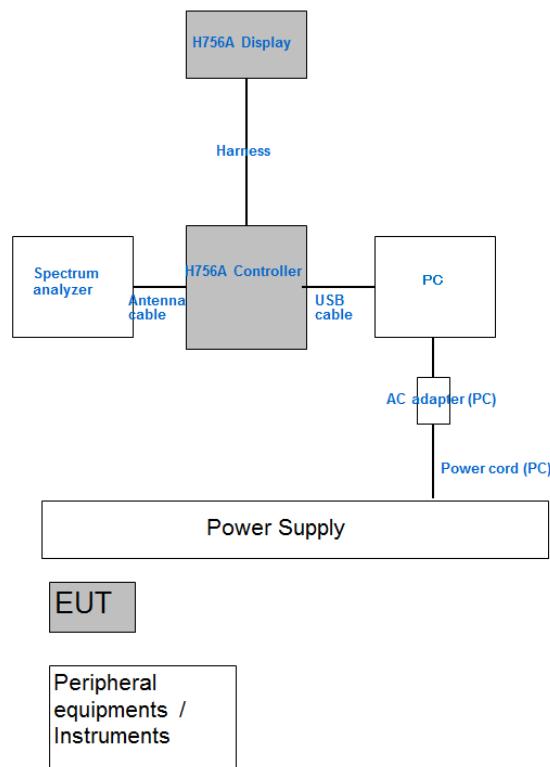

**Figure 3.6-1: Setup diagram**

## Section 4. Engineering considerations

---

### 4.1 Modifications incorporated in the EUT

---

There were no modifications performed to the EUT during this assessment.

### 4.2 Technical judgment

---

EUT could be configured to different data rates. From preliminary investigation, the following was chosen to be worst case to present in this report: 6 Mbps in 802.11a, MCS0 in 802.11n and MCS0 in 802.11ac.

### 4.3 Deviations from laboratory tests procedures

---

No deviations were made from laboratory procedures.

## Section 5. Test conditions

---

### 5.1 Atmospheric conditions

---

Temperature	15–30 °C
Relative humidity	20–75 %
Air pressure	860–1060 mbar

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

### 5.2 Power supply range

---

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages  $\pm 5\%$ , for which the equipment was designed.

## Section 6. Measurement uncertainty

---

### 6.1 Uncertainty of measurement

---

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of  $K = 2$  with 95% certainty.

Test name	Measurement uncertainty, dB
All antenna port measurements	0.55
Conducted spurious emissions	1.13
Radiated spurious emissions	3.78
AC power line conducted emissions	3.55

## Section 7. Test equipment

### 7.1 Test equipment list

*Table 7.1-1: Equipment list*

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
3 m EMI test chamber	TDK	SAC-3	FA002532	2 year	May 25/17
Flush mount turntable	Sunol	FM2022	FA002550	—	NCR
Controller	Sunol	SC104V	FA002551	—	NCR
Antenna mast	Sunol	TLT2	FA002552	—	NCR
spectrum analyzer	Rohde & Schwarz	FSV 40	FA002731	1 year	Apr 06/17
Receiver/spectrum analyzer	Rohde & Schwarz	ESU 40	FA002071	1 year	March 23/17
Biconical antenna (30–300 MHz)	Sunol	BC2	FA002078	1 year	March 4/17
Log periodic antenna (200–5000 MHz)	Sunol	LP5	FA002077	1 year	March 14/17
Horn antenna (1–18 GHz)	EMCO	RGA-60	FA002577	1 year	April 5/17
Horn antenna (18–40 GHz)	EMCO	3116	FA002487	2 year	Aug. 16/17
Pre-amplifier (0.5–18 GHz)	COM-POWER	PAM-118A	FA002561	1 year	May 6/17
Pre-amplifier (18–40 GHz)	COM-POWER	PAM-840	FA002508	1 year	May 6/17
50 Ω coax cable	C.C.A.	None	FA002603	—	VOU
50 Ω coax cable	C.C.A.	None	FA002605	—	VOU
50 Ω coax cable	C.C.A.	None	FA002607	—	VOU
Signal generator	Rohde & Schwarz	SMR 40	FA002698	1 year	May 10/17
Power Sensor	Rohde & Schwarz	NRP18S	FA002730	1 year	Mar. 14/17
Environmental Chamber	ESPEC	EPX-4H	FA002736	1 year	Jan. 18/17
LISN	Rohde & Schwarz	ENV216	FA002514	1 year	Nov. 20/16
Power source	California Instruments	5001ix	FA002494	1 year	Apr 29/17
DFS test box	Aeroflex	PXI	FA002628	1 year	May 19/17
Spectrum analyzer	Rohde & Schwarz	FSU	FA001877	1 year	Apr 15/17

Note: NCR - no calibration required, VOU - verify on use

## Section 8. Testing data

### 8.1 FCC 15.403(i) Emission bandwidth

#### 8.1.1 Definitions and limits

For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

#### 8.1.2 Test summary

Test date	November 8, 2016	Temperature	25 °C
Test engineer	Yong Huang	Air pressure	1015 mbar
Verdict	Pass	Relative humidity	30 %

#### 8.1.3 Observations, settings and special notes

Spectrum analyser settings:

Resolution bandwidth	approximately 1% of the emission bandwidth
Video bandwidth	> RBW
Detector mode	Peak
Trace mode	Max Hold

#### 8.1.4 Test data

*Table 8.1-1: 26 dB bandwidth results*

Modulation	Frequency, MHz	26 dB bandwidth, MHz
802.11a	5500	21.38
	5600	21.38
	5700	21.27
802.11n HT20	5500	21.43
	5600	21.55
	5700	21.70
802.11n HT40	5510	40.37
	5590	40.37
	5670	40.62
802.11ac VHT20	5500	21.73
	5600	21.62
	5700	21.58
802.11ac VHT40	5510	40.27
	5590	40.25
	5670	40.41
802.11ac VHT80	5530	82.27
	5610	82.20

### 8.1.4 Test data, continued

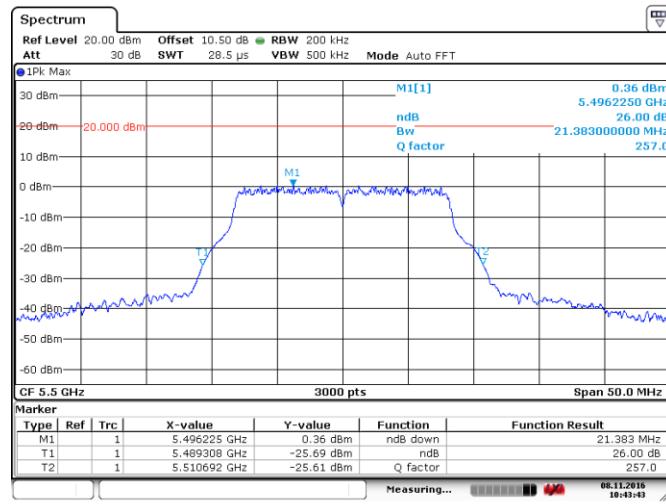


Figure 8.1-1: 26 dB bandwidth on 802.11a, sample plot

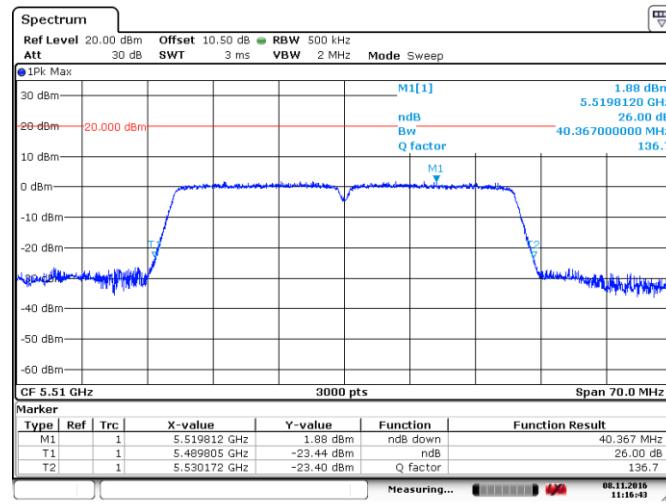


Figure 8.1-2: 26 dB bandwidth on 802.11n HT40, sample plot

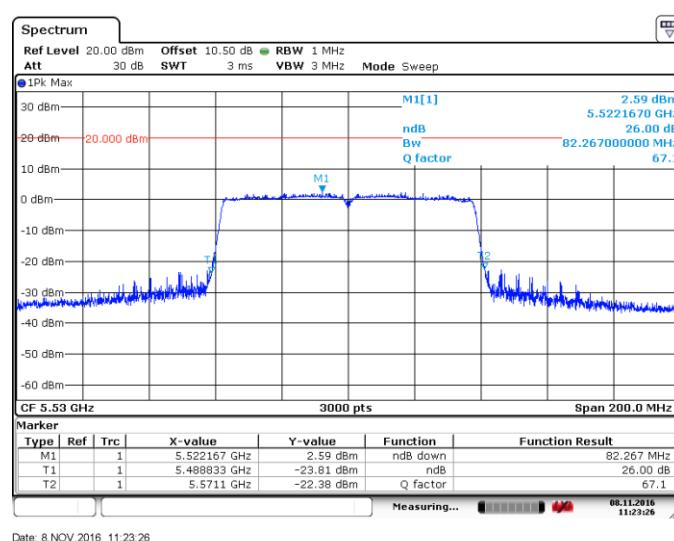


Figure 8.1-3: 26 dB bandwidth on 802.11ac VHT80, sample plot

## 8.2 RSS-Gen 6.6 Occupied bandwidth

### 8.2.1 Definitions and limits

The emission bandwidth ( $\times$ dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated  $\times$  dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3 $\times$  the resolution bandwidth.

When the occupied bandwidth limit is not stated in the applicable RSS or reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

## 8.2.2 Test summary

Test date	November 8, 2016	Temperature	25 °C
Test engineer	Yong Huang	Air pressure	1015 mbar
Verdict	Pass	Relative humidity	30 %

### 8.2.3 Observations, settings and special notes

### Spectrum analyser settings:


Resolution bandwidth:	1 % to 5 % of the OBW
Video bandwidth:	$\geq 3 \times$ RBW
Detector mode:	Peak
Trace mode:	Max Hold

## 8.2.4 Test data

**Table 8.2-1: 99 % bandwidth results**


Modulation	Frequency, MHz	99 % bandwidth, MHz
802.11a	5500	16.60
	5600	16.73
	5700	16.60
802.11n HT20	5500	17.87
	5600	17.88
	5700	17.93
802.11n HT40	5510	36.54
	5590	36.54
	5670	36.54
802.11ac VHT20	5500	17.90
	5600	17.97
	5700	17.97
802.11ac VHT40	5510	36.47
	5590	36.49
	5670	36.52
802.11ac VHT80	5530	75.93
	5610	75.87

### 8.2.4 Test data, continued

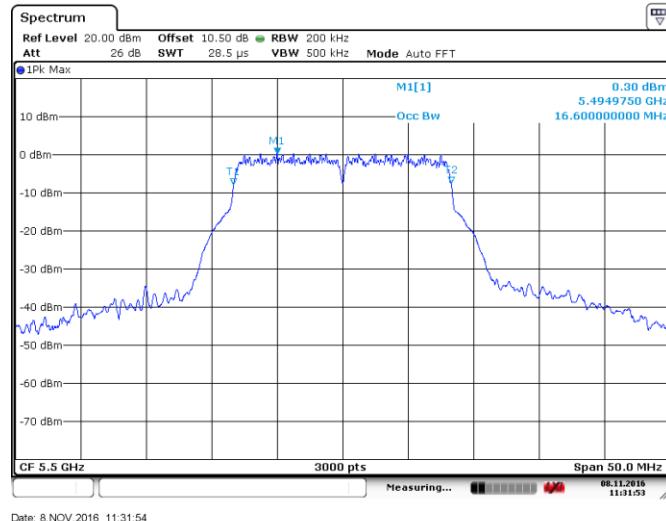


Date: 8.NOV.2016 11:31:54

Figure 8.2-1: 99 % bandwidth on 802.11a, sample plot

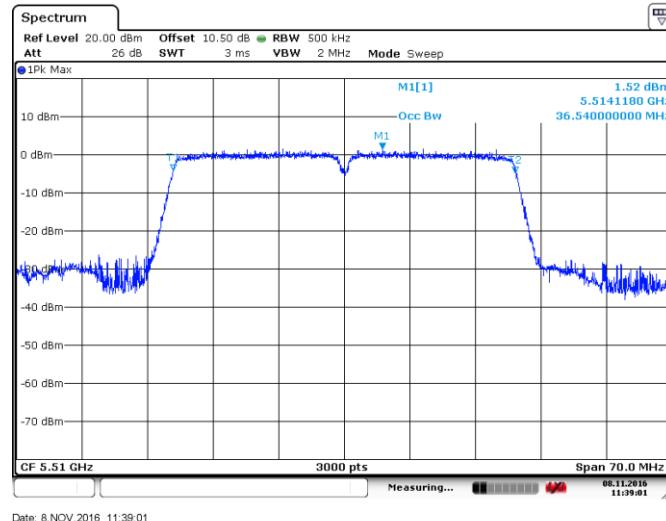

Date: 8.NOV.2016 11:39:01

Figure 8.2-2: 99 % bandwidth on 802.11n HT40, sample plot

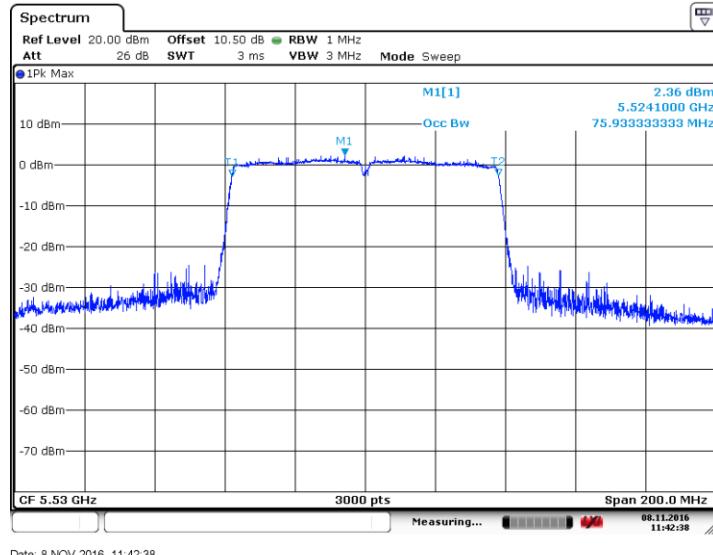

Date: 8.NOV.2016 11:42:38

Figure 8.2-3: 99 % bandwidth on 802.11ac VHT80, sample plot

## 8.3 FCC 15.407(a)(2) and RSS-247 6.2.3(1) 5.47–5.725 GHz band output power and spectral density limits

### 8.3.1 Definitions and limits

#### FCC:

The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24 dBm) or  $11 \text{ dBm} + 10 \log_{10} (B)$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### FCC §15.407(h)(1) Transmit power control (TPC).

U-NII devices shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

#### IC:

Until further notice, devices subject to this section **shall not be capable of transmitting in the band 5600–5650 MHz**. This restriction is for the protection of Environment Canada's weather radars operating in this band.

The maximum conducted output power shall not exceed 250 mW (24 dBm) or  $11 + 10 \log_{10} (B)$ , dBm, whichever is less, where B is the 99% emission bandwidth in megahertz. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W (30 dBm) or  $17 + 10 \log_{10} (B)$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW (27 dBm) shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W (30 dBm).

### 8.3.2 Test summary

Test date	November 8, 2016	Temperature	25 °C
Test engineer	Yong Huang	Air pressure	1015 mbar
Verdict	Pass	Relative humidity	30 %

<b>Section 8</b>	Testing data
<b>Test name</b>	FCC 15.407(a)(2) and RSS-247 6.2.3(1) 5.47–5.725 GHz band output power and spectral density limits
<b>Specification</b>	FCC Part 15 Subpart E and RSS-247, Issue 1



### 8.3.3 Observations, settings and special notes

---

The test was performed according to 789033 D02 General UNII Test Procedures New Rules v01 section E) 2) b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep).

The maximum measured 26 dB emission bandwidth for 802.11a was 21.38 MHz, for 802.11n HT20 was 21.70 MHz, for 802.11n HT40 was 40.44 MHz, for 802.11ac VHT20 was 21.73 MHz, for 802.11ac VHT40 was 40.44 MHz and for 802.11ac VHT80 was 82.33 MHz.

FCC output power limit for 802.11a was calculated as follows:  $11 \text{ dBm} + 10 \times \log_{10} (21.38) = 24.30 \text{ dBm} > 24 \text{ dBm}$ , therefore the limit is 24 dBm

FCC output power limit for 802.11n HT20 was calculated as follows:  $11 \text{ dBm} + 10 \times \log_{10} (21.70) = 24.35 \text{ dBm} > 24 \text{ dBm}$ , therefore the limit is 24 dBm

FCC output power limit for 802.11n HT40 was calculated as follows:  $11 \text{ dBm} + 10 \times \log_{10} (40.44) = 27.07 \text{ dBm} > 24 \text{ dBm}$ , therefore the limit is 24 dBm

FCC output power limit for 802.11ac VHT20 was calculated as follows:  $11 \text{ dBm} + 10 \times \log_{10} (21.73) = 24.37 \text{ dBm} > 24 \text{ dBm}$ , therefore the limit is 24 dBm

FCC output power limit for 802.11ac VHT40 was calculated as follows:  $11 \text{ dBm} + 10 \times \log_{10} (40.44) = 27.07 \text{ dBm} > 24 \text{ dBm}$ , therefore the limit is 24 dBm

FCC output power limit for 802.11ac VHT80 was calculated as follows:  $11 \text{ dBm} + 10 \times \log_{10} (82.33) = 30.15 \text{ dBm} > 24 \text{ dBm}$ , therefore the limit is 24 dBm

The maximum measured 99 % occupied bandwidth for 802.11a was 16.73 MHz, for 802.11n HT20 was 17.93 MHz, for 802.11n HT40 was 36.54 MHz, for 802.11ac VHT20 was 17.97 MHz, for 802.11ac VHT40 was 36.49 MHz and for 802.11ac VHT80 was 76.00 MHz.

IC output power limit for 802.11a was calculated as follows:  $11 + 10 \times \log_{10} (16.73) = 23.23 \text{ dBm} < 24 \text{ dBm}$

IC output power limit for 802.11n HT20 was calculated as follows:  $11 + 10 \times \log_{10} (17.93) = 23.54 \text{ dBm} < 24 \text{ dBm}$

IC output power limit for 802.11n HT40 was calculated as follows:  $11 + 10 \times \log_{10} (36.54) = 26.63 \text{ dBm} > 24 \text{ dBm}$ , therefore the limit is 24 dBm

IC output power limit for 802.11ac VHT20 was calculated as follows:  $11 \text{ dBm} + 10 \times \log_{10} (17.97) = 23.55 \text{ dBm} < 24 \text{ dBm}$

IC output power limit for 802.11ac VHT40 was calculated as follows:  $11 \text{ dBm} + 10 \times \log_{10} (36.49) = 26.62 \text{ dBm} > 24 \text{ dBm}$ , therefore the limit is 24 dBm

IC output power limit for 802.11ac VHT80 was calculated as follows:  $11 \text{ dBm} + 10 \times \log_{10} (76.00) = 29.80 \text{ dBm} > 24 \text{ dBm}$ , therefore the limit is 24 dBm

IC EIRP limit for 802.11a was calculated as follows:  $17 + 10 \times \log_{10} (16.73) = 29.23 \text{ dBm} < 30 \text{ dBm}$

IC EIRP limit for 802.11n HT20 was calculated as follows:  $17 + 10 \times \log_{10} (17.93) = 29.54 \text{ dBm} < 30 \text{ dBm}$

IC EIRP limit for 802.11n HT40 was calculated as follows:  $17 + 10 \times \log_{10} (36.54) = 32.63 \text{ dBm} > 30 \text{ dBm}$ , therefore the limit is 30 dBm

IC EIRP limit for 802.11ac VHT20 was calculated as follows:  $17 + 10 \times \log_{10} (17.97) = 29.55 \text{ dBm} < 30 \text{ dBm}$

IC EIRP limit for 802.11ac VHT40 was calculated as follows:  $17 + 10 \times \log_{10} (36.49) = 32.62 \text{ dBm} > 30 \text{ dBm}$ , therefore the limit is 30 dBm

IC EIRP limit for 802.11ac VHT80 was calculated as follows:  $17 + 10 \times \log_{10} (76.00) = 35.80 \text{ dBm} > 30 \text{ dBm}$ , therefore the limit is 30 dBm

TPC EIRP limit is 24 dBm

### 8.3.4 Test data

**Table 8.3-1: Output power measurements results for FCC**

Modulation	Frequency, MHz	Conducted output power, dBm	Power limit, dBm	Margin, dB
802.11a	5500	10.6	24	13.4
	5600	10.4	24	13.6
	5700	10.0	24	14.0
802.11n HT20	5500	10.5	24	13.5
	5600	10.4	24	13.6
	5700	9.8	24	14.2
802.11n HT40	5510	9.8	24	14.2
	5590	9.8	24	14.2
	5670	9.3	24	14.7
802.11ac VHT20	5500	10.4	24	13.6
	5600	10.5	24	13.5
	5700	9.8	24	14.2
802.11ac VHT40	5510	10.1	24	13.9
	5590	9.7	24	14.3
	5670	9.3	24	14.7
802.11ac VHT80	5530	9.7	24	14.3
	5610	9.5	24	14.5

**Table 8.3-2: PSD measurements results**

Modulation	Frequency, MHz	PSD, dBm/MHz	PSD limit, dBm/MHz	Margin, dB
802.11a	5500	-0.3	11	11.3
	5600	-0.4	11	11.4
	5700	-0.7	11	11.7
802.11n HT20	5500	-0.6	11	11.6
	5600	-0.8	11	11.8
	5700	-1.4	11	12.4
802.11n HT40	5510	-4.0	11	15.0
	5590	-4.0	11	15.0
	5670	-4.9	11	15.9
802.11ac VHT20	5500	-1.1	11	12.1
	5600	-0.7	11	11.7
	5700	-1.4	11	12.4
802.11ac VHT40	5510	-3.9	11	14.9
	5590	-4.3	11	15.3
	5670	-4.8	11	15.8
802.11ac VHT80	5530	-7.4	11	18.4
	5610	-7.6	11	18.6

**Table 8.3-3: Output power measurements and EIRP calculations results for IC**

Modulation	Frequency, MHz	Conducted output power, dBm	Antenna gain, dBi	EIRP, dBm	EIRP limit, dBm	Margin, dB
802.11a	5500	10.6	2.4	13.0	29.23	16.2
	5600	10.4	2.4	12.8	29.23	16.4
	5700	10.0	2.4	12.4	29.23	16.8
802.11n HT20	5500	10.5	2.4	12.9	29.54	16.6
	5600	10.4	2.4	12.8	29.54	16.7
	5700	9.8	2.4	12.2	29.54	17.3
802.11n HT40	5510	9.8	2.4	12.2	30	17.8
	5590	9.8	2.4	12.2	30	17.8
	5670	9.3	2.4	11.7	30	18.3
802.11ac VHT20	5500	10.4	2.4	12.8	29.55	16.8
	5600	10.5	2.4	12.9	29.55	16.7
	5700	9.8	2.4	12.2	29.55	17.4
802.11ac VHT40	5510	10.1	2.4	12.5	30	17.5
	5590	9.7	2.4	12.1	30	17.9
	5670	9.3	2.4	11.7	30	18.3
802.11ac VHT80	5530	9.7	2.4	12.1	30	17.9
	5610	9.5	2.4	11.9	30	18.1

## Section 8

Test name

Specification

Testing data

FCC 15.407(a)(2) and RSS-247 6.2.3(1) 5.47–5.725 GHz band output power and spectral density limits

FCC Part 15 Subpart E and RSS-247, Issue 1

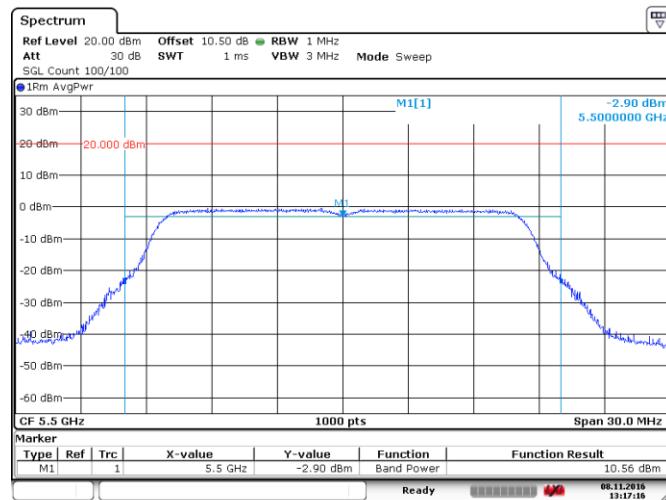


Figure 8.3-1: Sample plot for power on 802.11a

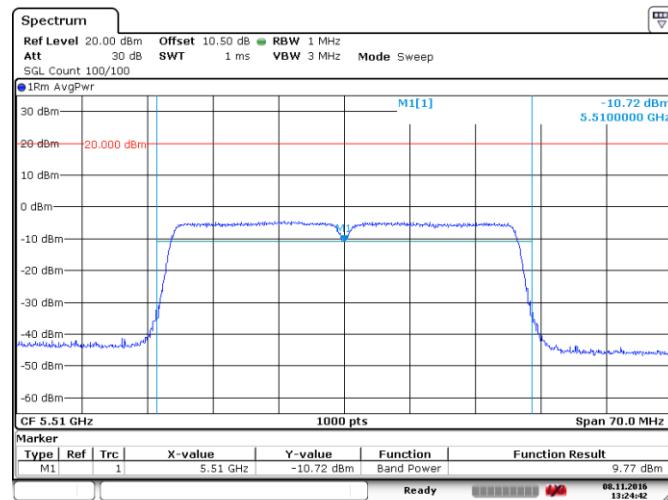


Figure 8.3-2: Sample plot for power on 802.11n HT40

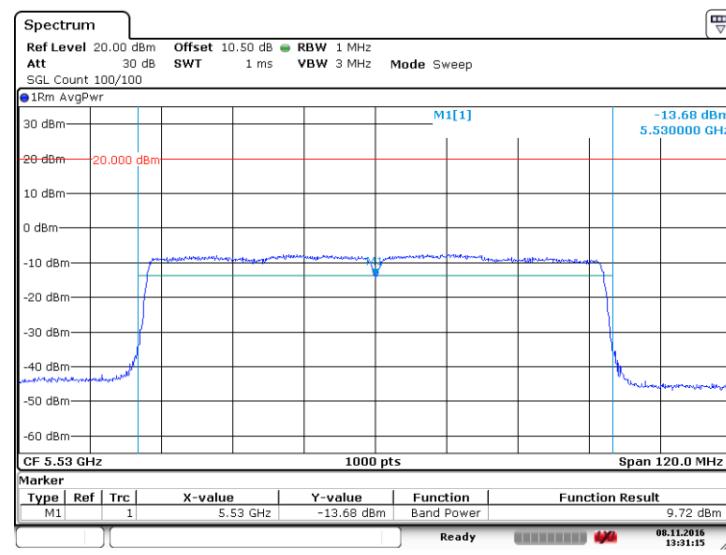



Figure 8.3-3: Sample plot for power and PSD on 802.11ac VHT80

**Section 8****Test name****Specification**


Testing data

FCC 15.407(a)(2) and RSS-247 6.2.3(1) 5.47–5.725 GHz band output power and spectral density limits


FCC Part 15 Subpart E and RSS-247, Issue 1

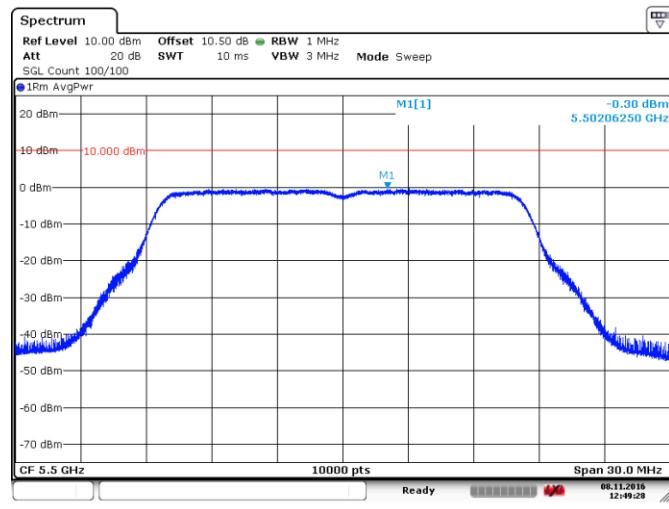

Date: 8.NOV.2016 12:49:28

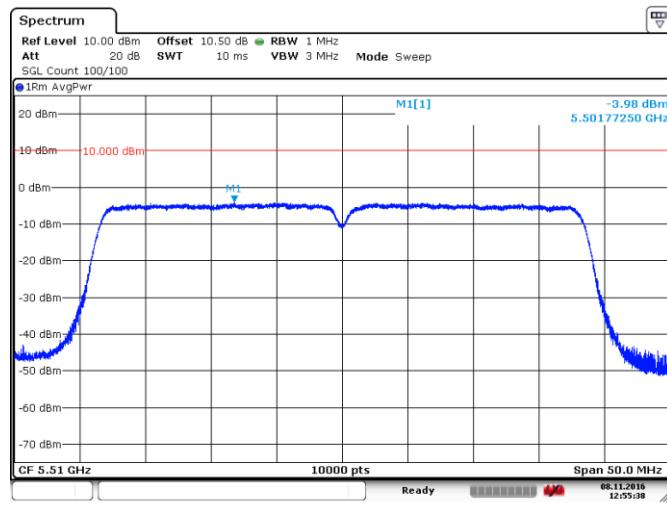**Figure 8.3-4: Sample plot for PSD on 802.11a**

Date: 8.NOV.2016 12:55:38

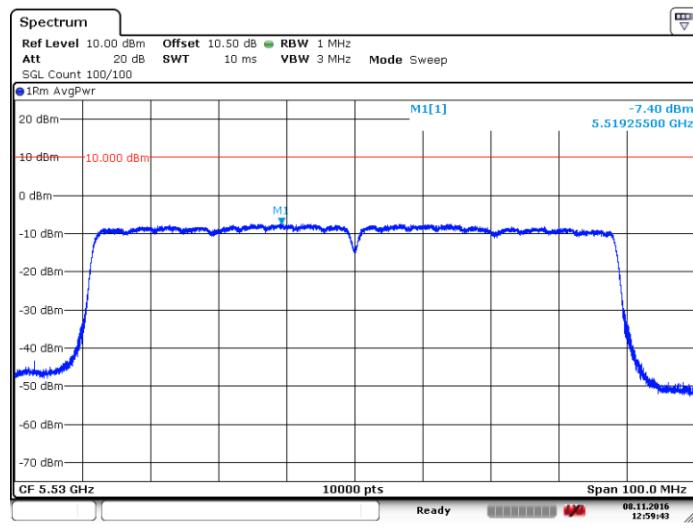**Figure 8.3-5: Sample plot for PSD on 802.11n HT40**

Date: 8.NOV.2016 12:59:43

**Figure 8.3-6: Sample plot for PSD on 802.11ac VHT80**

## 8.4 FCC 15.407(b) and RSS-247 6.2.2(2) Undesirable (unwanted) emissions

### 8.4.1 Definitions and limits

#### FCC:

- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47–5.725 GHz band shall not exceed an e.i.r.p. of  $-27 \text{ dBm/MHz}$ .
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.
- (7) The provisions of § 15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency block edges as the design of the equipment permits.

#### IC:

- 2) Emissions outside the band 5470–5725 MHz shall not exceed  $-27 \text{ dBm/MHz}$  e.i.r.p.

#### RSS-Gen 8.10 Emissions falling within restricted frequency bands

Restricted bands, identified in Table 8.4-2, are designated primarily for safety-of-life services (distress calling and certain aeronautical bands), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following restrictions apply:

- (a) fundamental components of modulation of licence-exempt radio apparatus shall not fall within the restricted bands of below;
- (b) unwanted emissions falling into restricted bands of below shall comply with the limits specified in RSS-Gen;
- (c) unwanted emissions not falling within restricted frequency bands shall either comply with the limits specified in the applicable RSS, or with those specified in RSS-Gen.

**Table 8.4-1: FCC §15.209 and RSS-Gen – Radiated emission limits**

Frequency, MHz	Field strength of emissions		Measurement distance, m
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	
0.009–0.490	$2400/F \text{ (} F \text{ in kHz)}$	$67.6 - 20 \times \log_{10}(F) \text{ (} F \text{ in kHz)}$	300
0.490–1.705	$24000/F \text{ (} F \text{ in kHz)}$	$87.6 - 20 \times \log_{10}(F) \text{ (} F \text{ in kHz)}$	30
1.705–30.0	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes: In the emission table above, the tighter limit applies at the band edges.

For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test

#### 8.4.1 Definitions and limits, continued

**Table 8.4-2: IC restricted frequency bands**

MHz	MHz	MHz	GHz
0.090–0.110	12.51975–12.52025	399.9–410	5.35–5.46
2.1735–2.1905	12.57675–12.57725	608–614	7.25–7.75
3.020–3.026	13.36–13.41	960–1427	8.025–8.5
4.125–4.128	16.42–16.423	1435–1626.5	9.0–9.2
4.17725–4.17775	16.69475–16.69525	1645.5–1646.5	9.3–9.5
4.20725–4.20775	16.80425–16.80475	1660–1710	10.6–12.7
5.677–5.683	25.5–25.67	1718.8–1722.2	13.25–13.4
6.215–6.218	37.5–38.25	2200–2300	14.47–14.5
6.26775–6.26825	73–74.6	2310–2390	15.35–16.2
6.31175–6.31225	74.8–75.2	2655–2900	17.7–21.4
8.291–8.294	108–138	3260–3267	22.01–23.12
8.362–8.366	156.52475–156.52525	3332–3339	23.6–24.0
8.37625–8.38675	156.7–156.9	3345.8–3358	31.2–31.8
8.41425–8.41475	240–285	3500–4400	36.43–36.5
12.29–12.293	322–335.4	4500–5150	Above 38.6

Note: Certain frequency bands listed in Table 8.4-2 and above 38.6 GHz are designated for low-power license-exempt applications. These frequency bands and the requirements that apply to the devices are set out in this Standard

**Table 8.4-3: FCC restricted frequency bands**

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			

#### 8.4.2 Test summary

Test date:	November 8, 2016 to November 13, 2016	Temperature:	24 °C
Test engineer:	Yong Huang	Air pressure:	1010 mbar
Verdict:	Pass	Relative humidity:	40 %

### 8.4.3 Observations, settings and special notes

---

The spectrum was searched from 30 MHz to 40 GHz.

EUT was set to transmit with 100 % duty cycle.

Radiated measurements were performed at a distance of 3 m. Radiated emissions were performed while antenna connector was terminated with  $50 \Omega$  load.

Spectrum analyser for peak conducted measurements within restricted bands below 1 GHz:

Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz
Detector mode:	Peak
Trace mode:	Max Hold

Average limit line was set as follows:  $54 \text{ dB}\mu\text{V}/\text{m} - 95.23 \text{ dB} - 4.7 \text{ dB} = -45.93 \text{ dBm}$

Antenna gain is included in the offset of the measurement.

Spectrum analyser for peak conducted measurements within restricted bands above 1 GHz:

Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	Peak
Trace mode:	Max Hold

Average limit line was set as follows:  $54 \text{ dB}\mu\text{V}/\text{m} - 95.23 \text{ dB} = -41.23 \text{ dBm}/\text{MHz}$

Antenna gain is included in the offset of the measurement.

Spectrum analyser for average conducted measurements within restricted bands above 1 GHz for frequencies where peak results were above the average limit:

Resolution bandwidth:	1 MHz
Video bandwidth:	10 MHz
Detector mode:	RMS
Trace mode:	Power average
Number of averaging traces:	100


Peak limit is 20 dB higher than the average limit:  $-41.23 \text{ dBm}/\text{MHz} + 20 \text{ dB} = -41.23 \text{ dBm}/\text{MHz}$

Antenna gain is included in the offset of the measurement.

Spectrum analyser for peak conducted measurements outside restricted bands:


Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	Peak
Trace mode:	Max Hold

#### 8.4.4 Test data

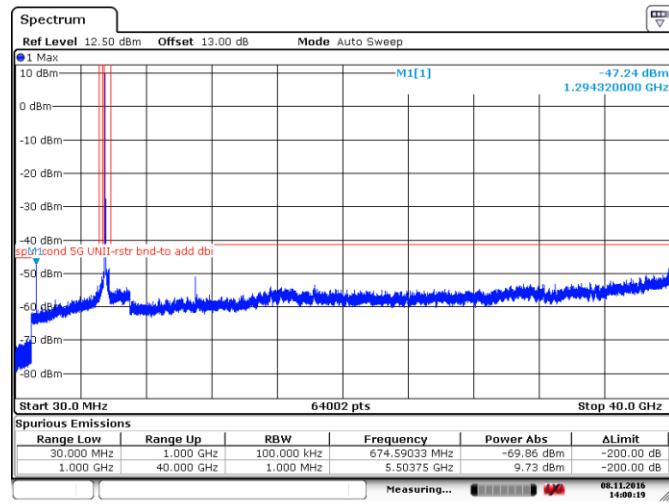


Date: 8.NOV.2016 14:00:19

**Figure 8.4-1:** Peak spurious emissions within restricted bands at low channel, 802.11a, ch100

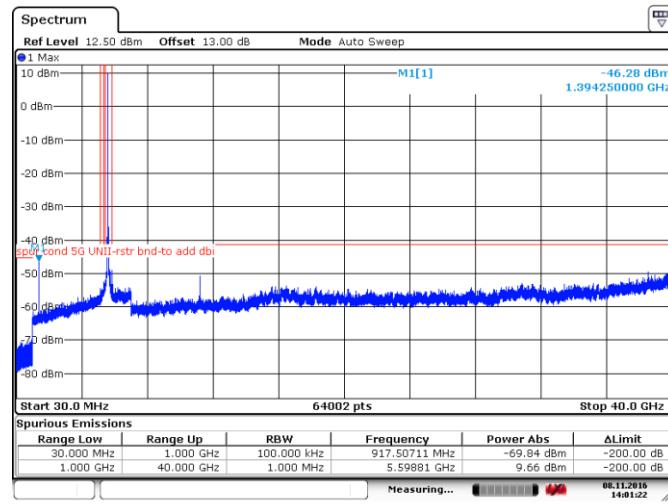


Date: 8.NOV.2016 14:01:22

**Figure 8.4-2:** Peak spurious emissions within restricted bands at mid channel, 802.11a, ch120

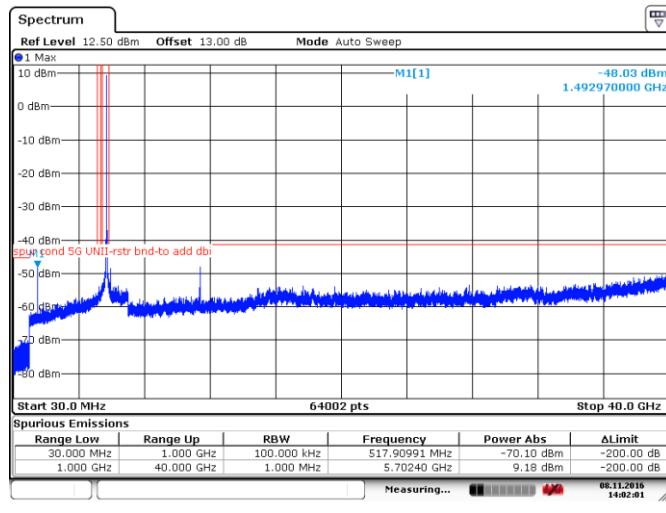


Date: 8.NOV.2016 14:02:00

**Figure 8.4-3:** Peak spurious emissions within restricted bands at high channel, 802.11a, ch140

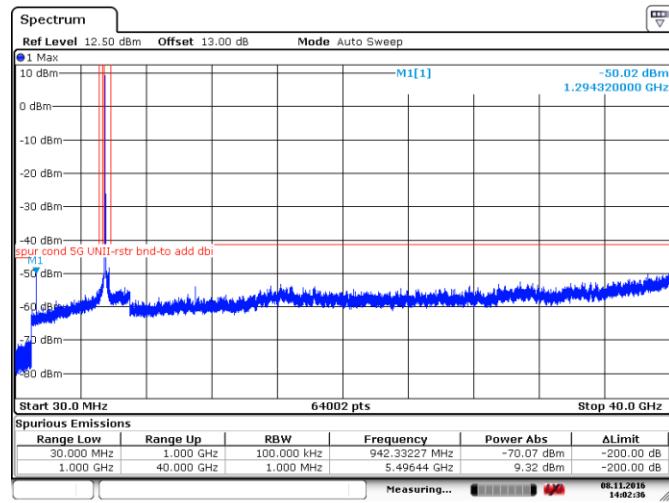


Date: 8.NOV.2016 14:02:36

**Figure 8.4-4:** Peak spurious emissions within restricted bands at low channel, 802.11n-HT20, ch100

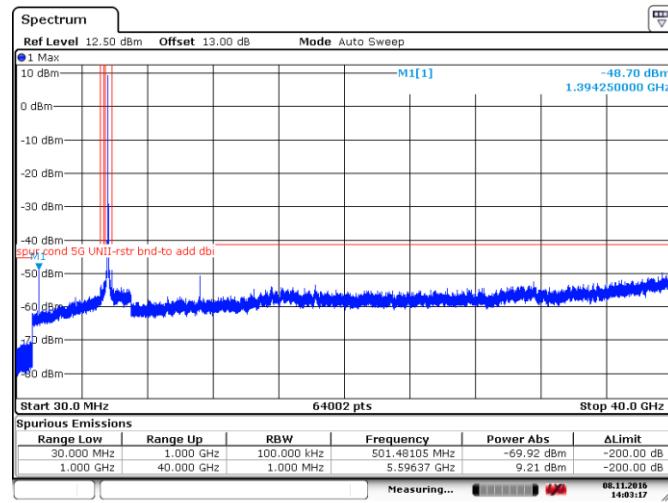


Date: 8.NOV.2016 14:03:16

**Figure 8.4-5:** Peak spurious emissions within restricted bands at mid channel, 802.11n-HT20, ch120

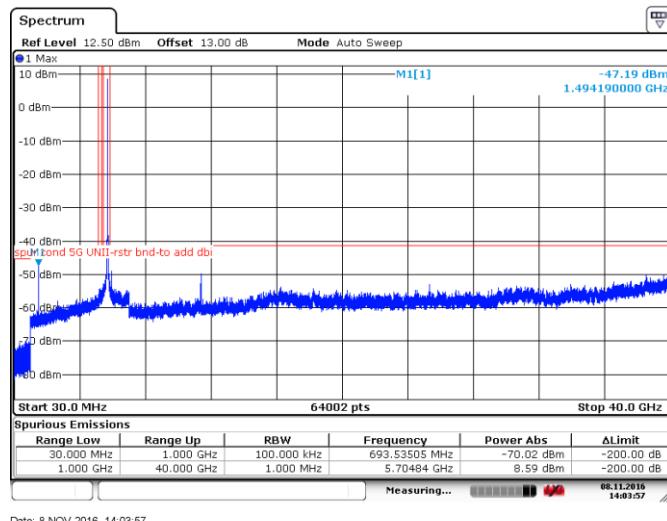


**Figure 8.4-6:** Peak spurious emissions within restricted bands at high channel, 802.11n-HT20, ch140

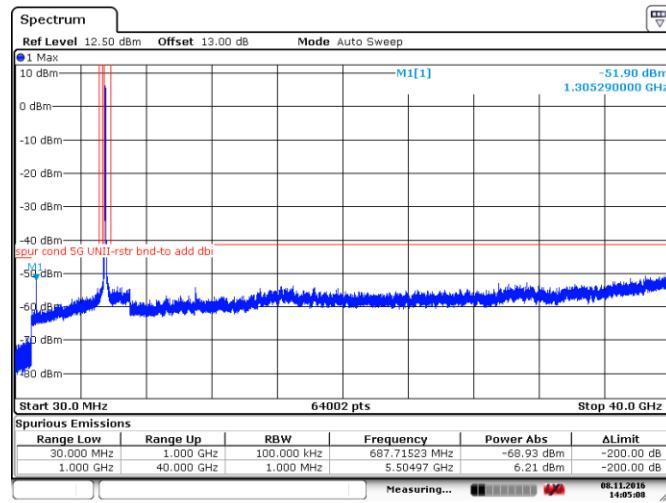


Date: 8.NOV.2016 14:05:08

**Figure 8.4-7:** Peak spurious emissions within restricted bands at low channel, 802.11n-HT40, ch100

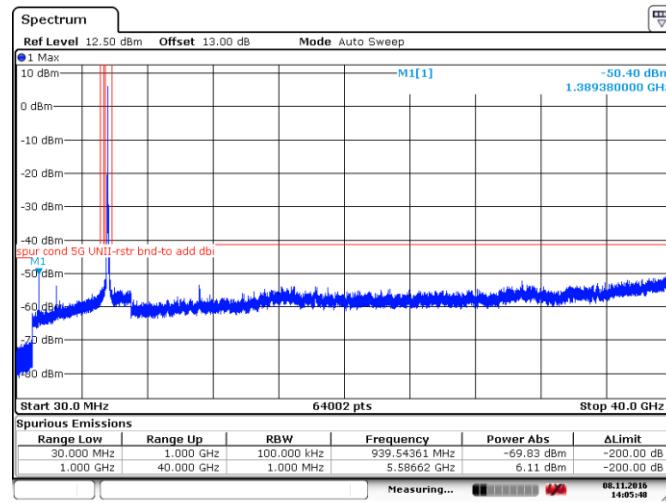


Date: 8.NOV.2016 14:05:47

**Figure 8.4-8:** Peak spurious emissions within restricted bands at mid channel, 802.11n-HT40, ch116

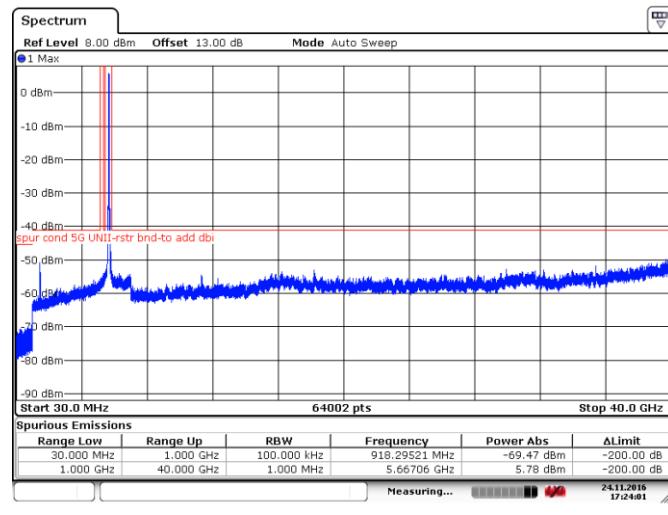


Date: 24.NOV.2016 17:24:01


**Figure 8.4-9:** Peak spurious emissions within restricted bands at mid channel, 802.11n-HT40, ch132

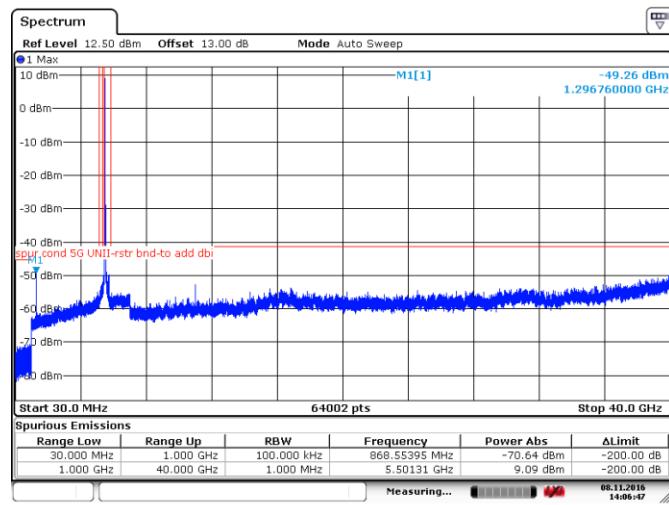


**Figure 8.4-10:** Peak spurious emissions within restricted bands at low channel, 802.11ac-VHT20, ch100

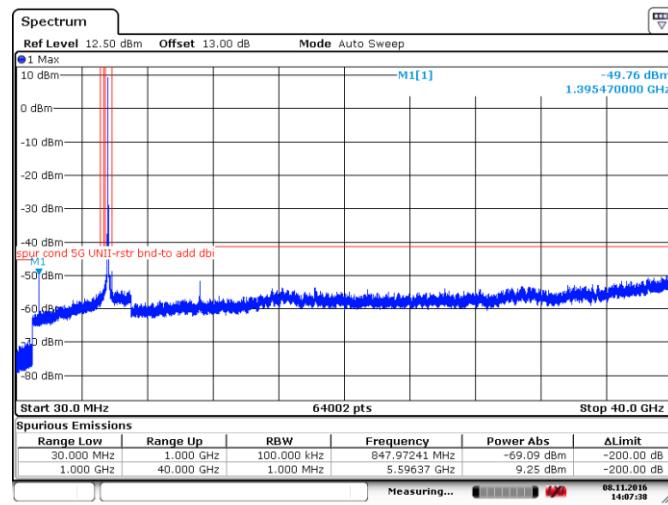

**Figure 8.4-11:** Peak spurious emissions within restricted bands at mid channel, 802.11ac-VHT20, ch120

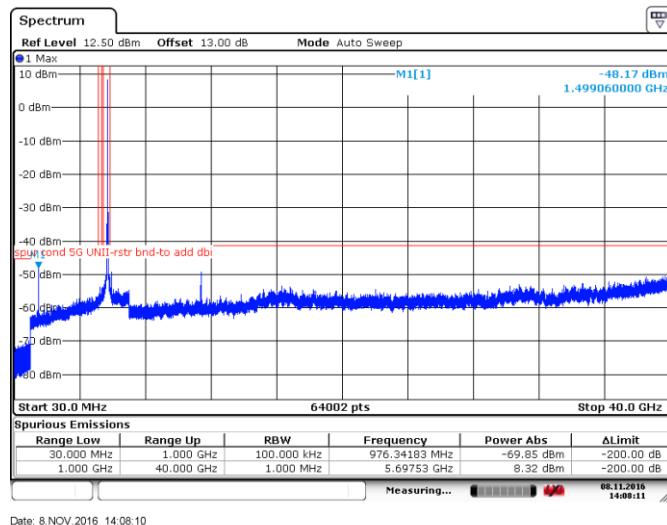


**Figure 8.4-12:** Peak spurious emissions within restricted bands at high channel, 802.11ac-VHT20, ch140

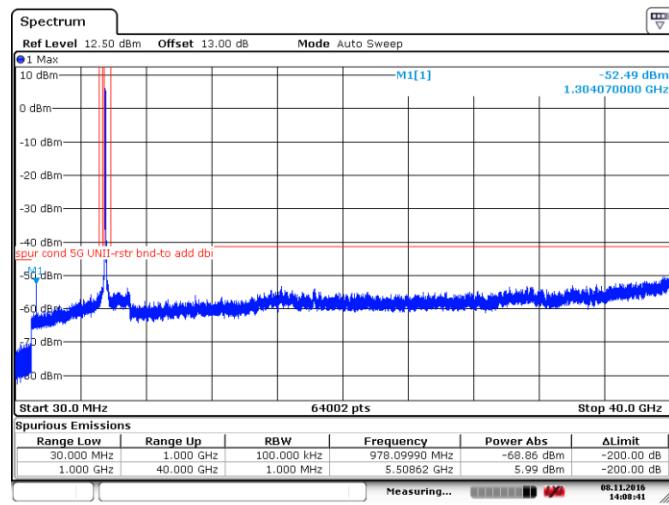


Date: 8.NOV.2016 14:08:41

**Figure 8.4-13:** Peak spurious emissions within restricted bands at low channel, 802.11ac-VHT40, ch100

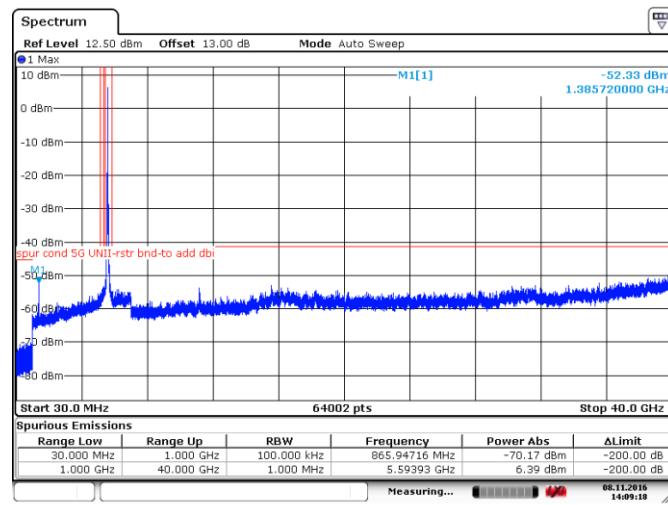


Date: 8.NOV.2016 14:09:17

**Figure 8.4-14:** Peak spurious emissions within restricted bands at mid channel, 802.11ac-VHT40, ch116

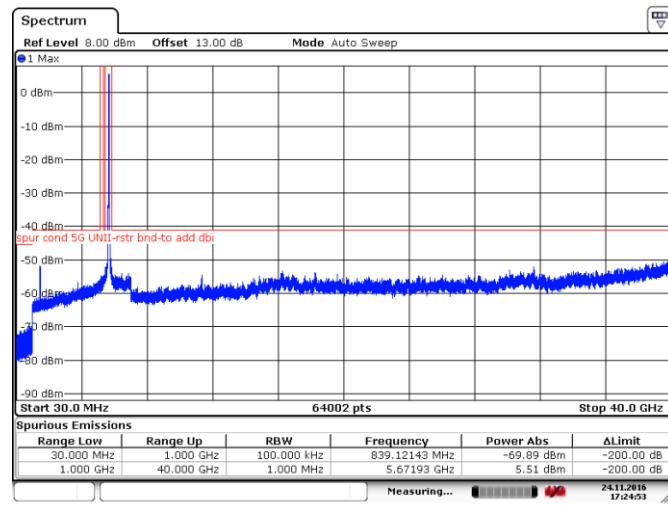


Date: 24.NOV.2016 17:24:53

**Figure 8.4-15:** Peak spurious emissions within restricted bands at mid channel, 802.11ac-VHT40, ch132

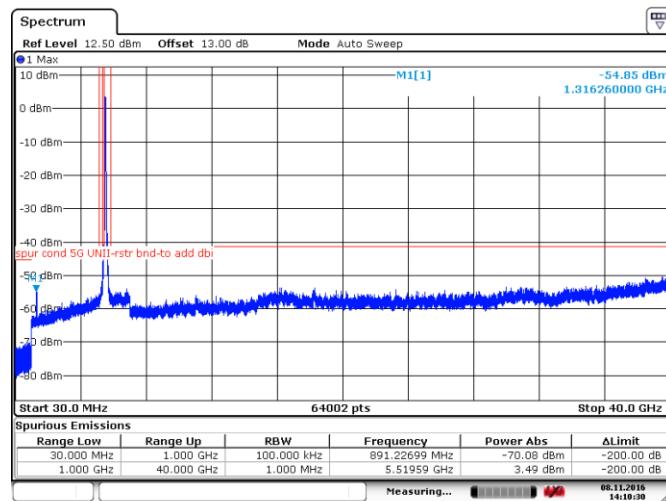


Date: 8.NOV.2016 14:10:29

**Figure 8.4-16:** Peak spurious emissions within restricted bands at low channel, 802.11ac-VHT80, ch100

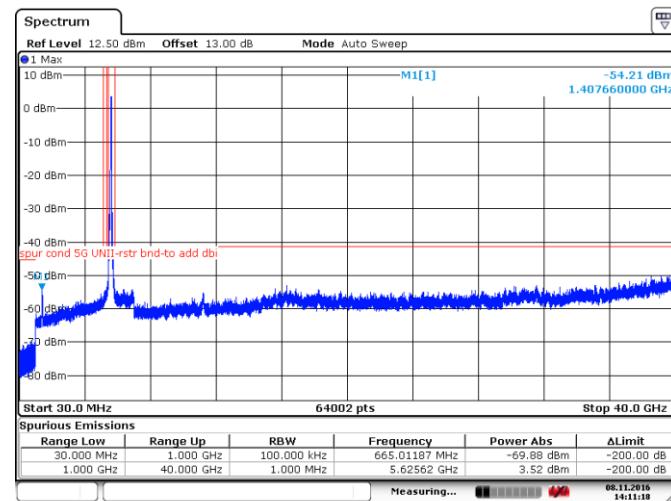


Date: 8.NOV.2016 14:11:16


**Figure 8.4-17:** Peak spurious emissions within restricted bands at mid channel, 802.11ac-VHT80, ch116

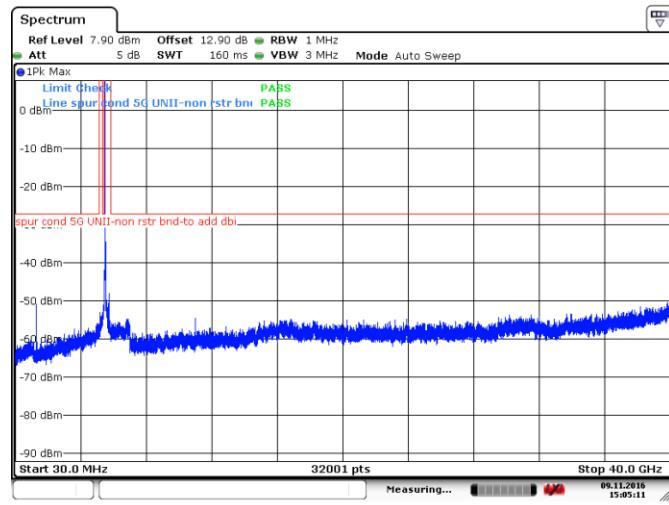


Date: 9.NOV.2016 15:05:11

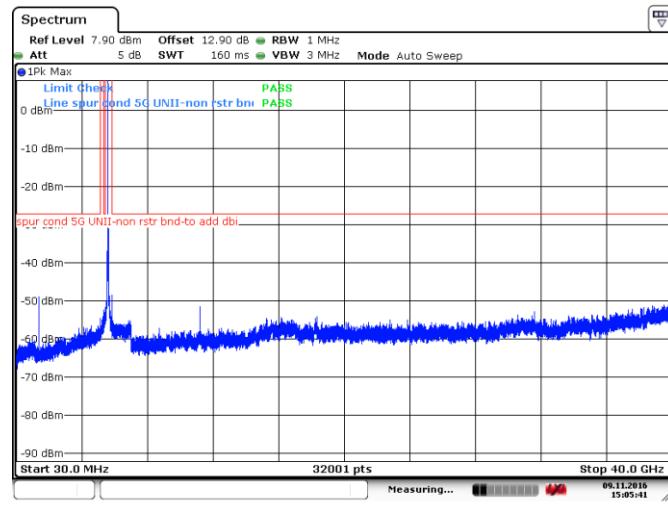

Date: 9.NOV.2016 15:05:41

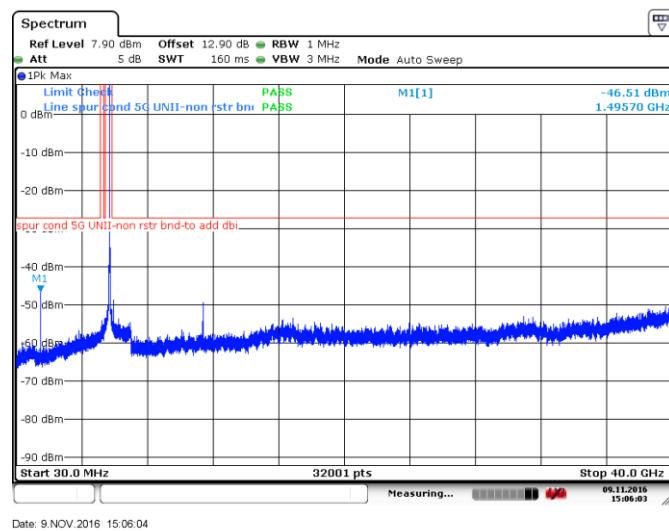


Date: 9.NOV.2016 15:06:04

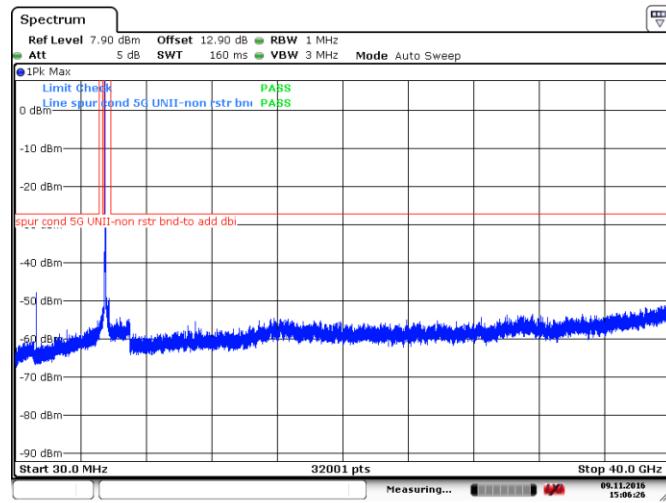


Date: 9.NOV.2016 15:06:26

**Figure 8.4-21:** Peak spurious emissions outside restricted bands at low channel, 802.11n-HT20, ch100

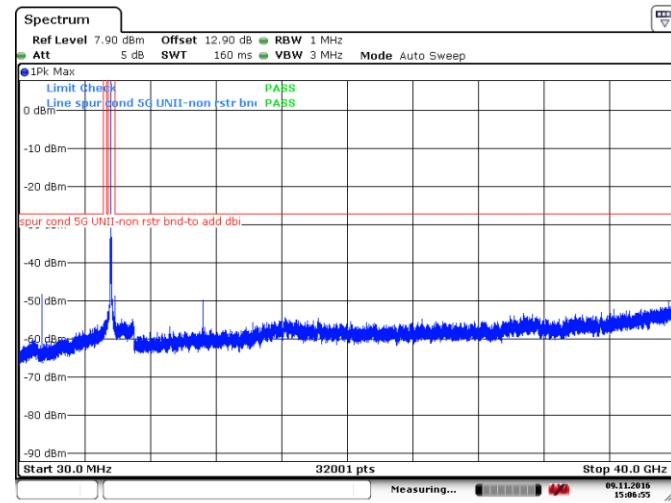


Date: 9.NOV.2016 15:06:55

**Figure 8.4-22:** Peak spurious emissions outside restricted bands at mid channel, 802.11n-HT20, ch120

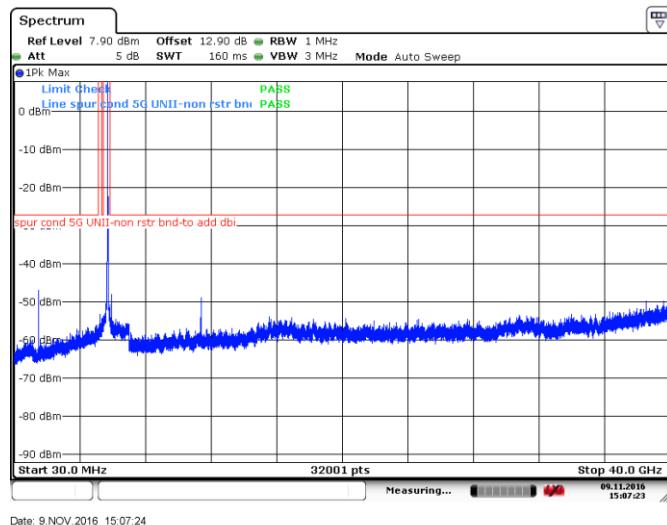


Date: 9.NOV.2016 15:07:24

**Figure 8.4-23:** Peak spurious emissions outside restricted bands at high channel, 802.11n-HT20, ch140

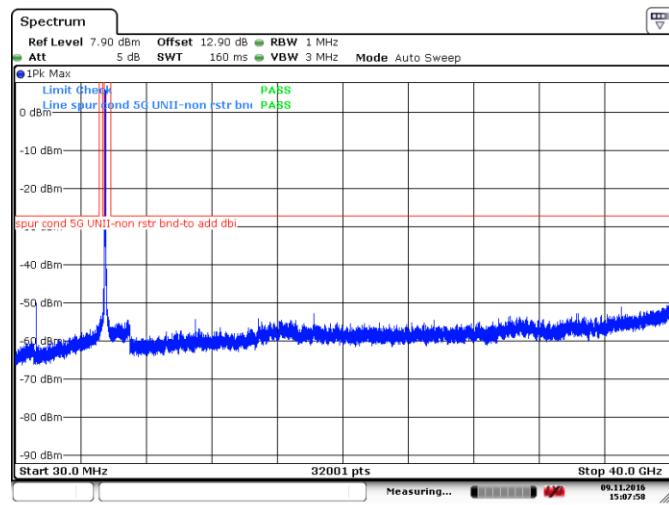


Date: 9.NOV.2016 15:07:58

**Figure 8.4-24:** Peak spurious emissions outside restricted bands at low channel, 802.11n-HT40, ch100

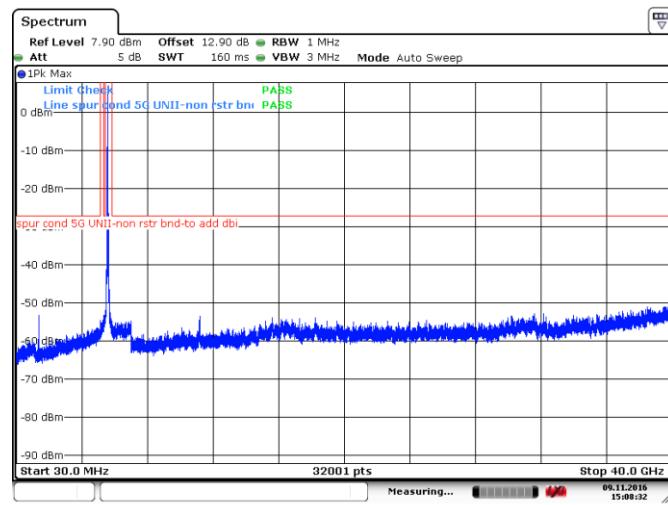


Date: 9.NOV.2016 15:08:32

**Figure 8.4-25:** Peak spurious emissions outside restricted bands at mid channel, 802.11n-HT40, ch116

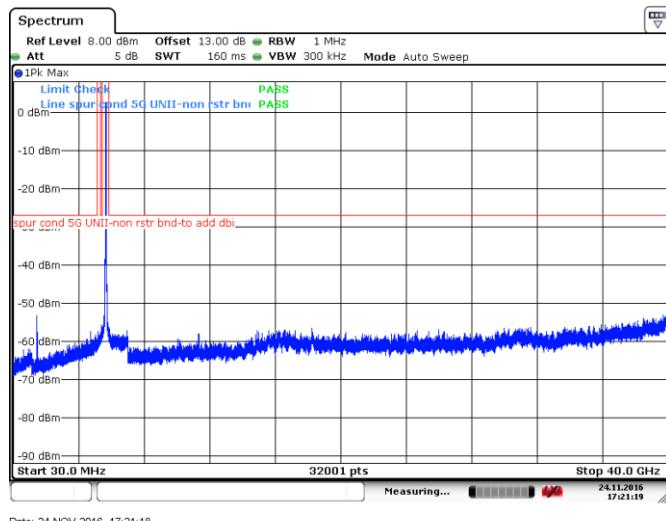


Date: 24.NOV.2016 17:21:18

**Figure 8.4-26:** Peak spurious emissions outside restricted bands at mid channel, 802.11n-HT40, ch132

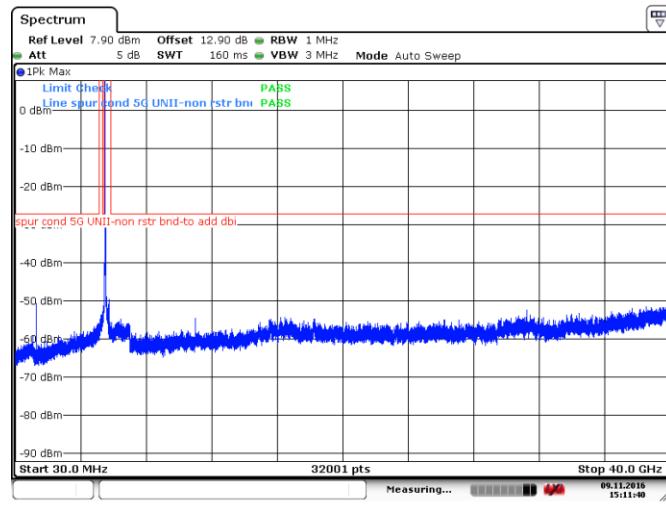


Date: 9.NOV.2016 15:11:40

**Figure 8.4-27:** Peak spurious emissions outside restricted bands at low channel, 802.11ac-VHT20, ch100

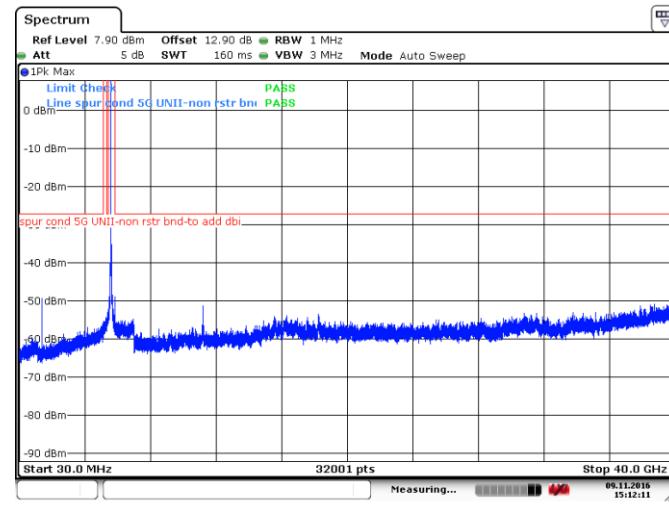


Date: 9.NOV.2016 15:12:12

**Figure 8.4-28:** Peak spurious emissions outside restricted bands at mid channel, 802.11ac-VHT20, ch120

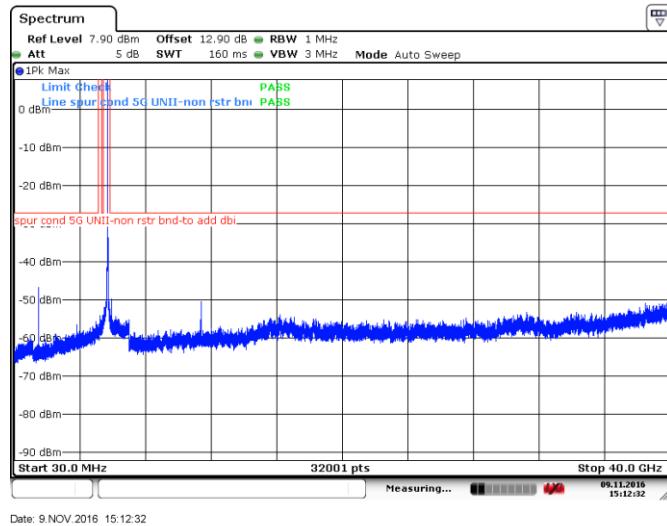


Date: 9.NOV.2016 15:12:32

**Figure 8.4-29:** Peak spurious emissions outside restricted bands at high channel, 802.11ac-VHT20, ch140

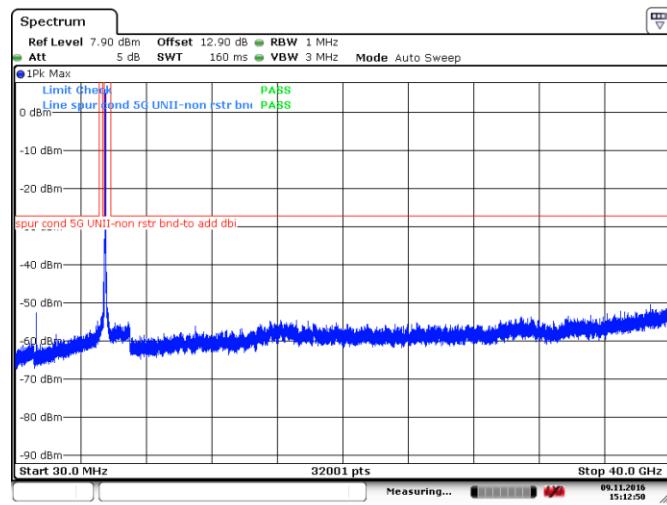


Date: 9.NOV.2016 15:12:50

**Figure 8.4-30:** Peak spurious emissions outside restricted bands at low channel, 802.11ac-VHT40, ch100

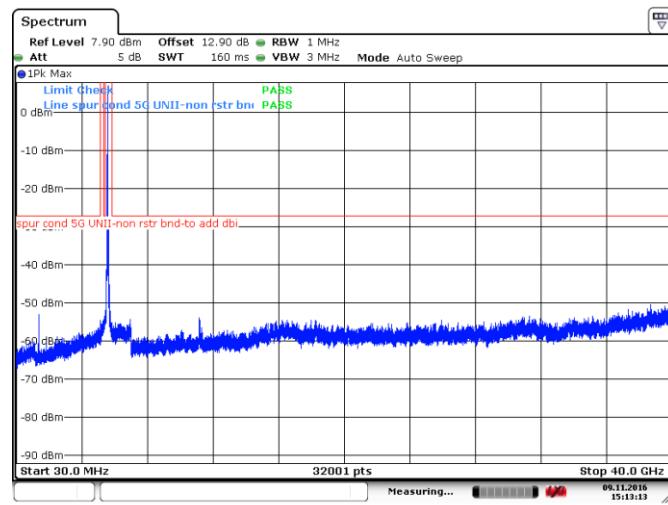


Date: 9.NOV.2016 15:13:13

**Figure 8.4-31:** Peak spurious emissions outside restricted bands at mid channel, 802.11ac-VHT40, ch116

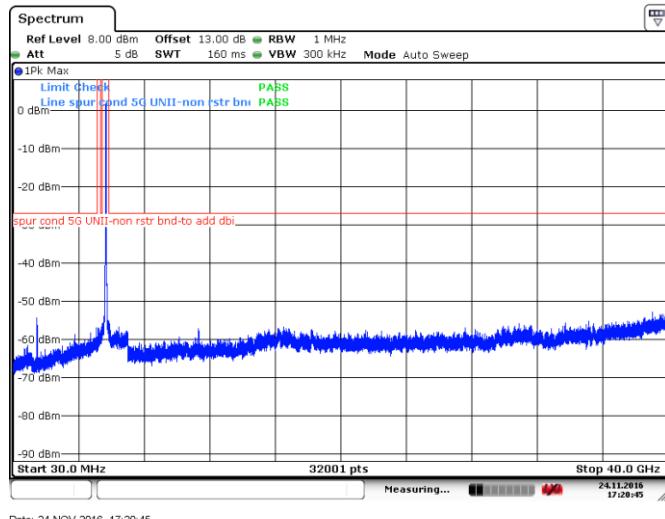


Date: 24.NOV.2016 17:20:45

**Figure 8.4-32:** Peak spurious emissions outside restricted bands at mid channel, 802.11ac-VHT40, ch132

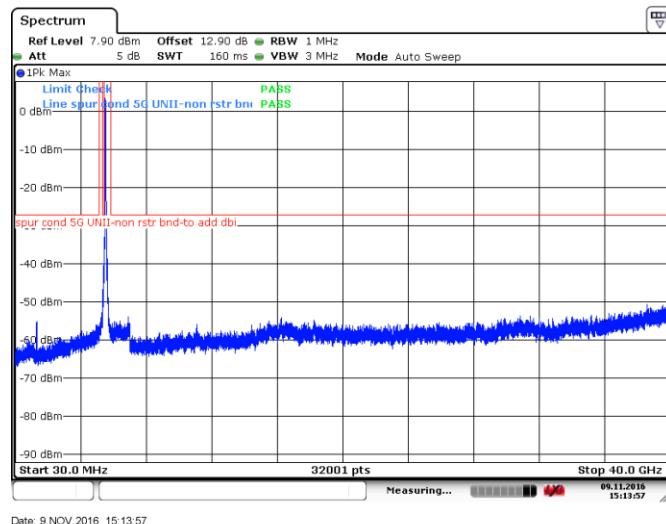


Date: 9.NOV.2016 15:13:57

**Figure 8.4-33:** Peak spurious emissions outside restricted bands at low channel, 802.11ac-VHT80, ch100

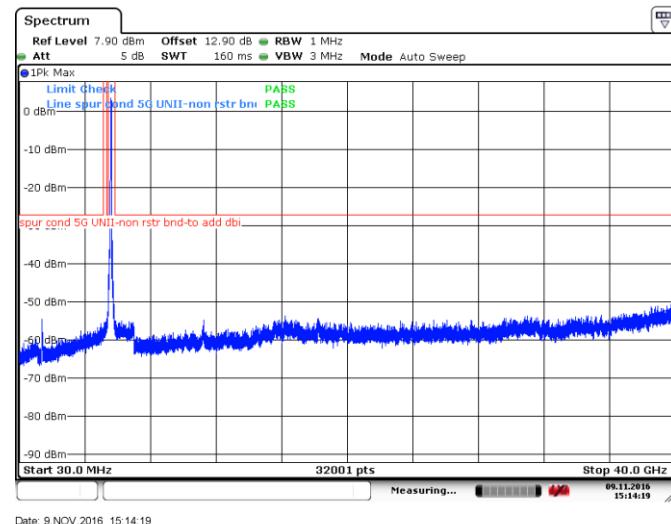


Date: 9.NOV.2016 15:14:19

**Figure 8.4-34:** Peak spurious emissions outside restricted bands at mid channel, 802.11ac-VHT80, ch116

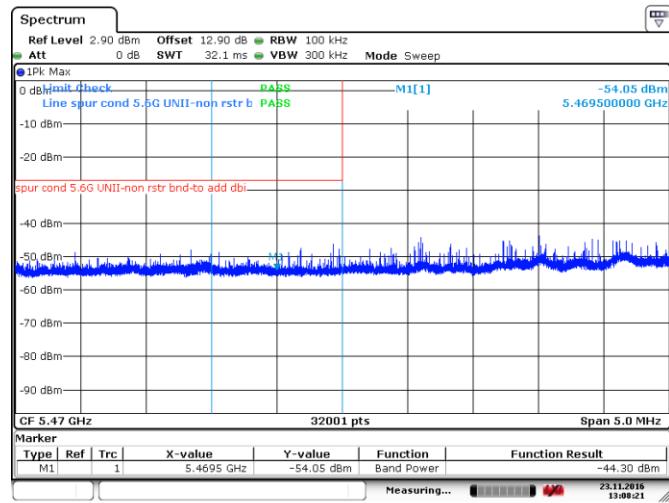


Date: 23.NOV.2016 13:08:21

Figure 8.4-35: Lower band edge emission, 802.11a

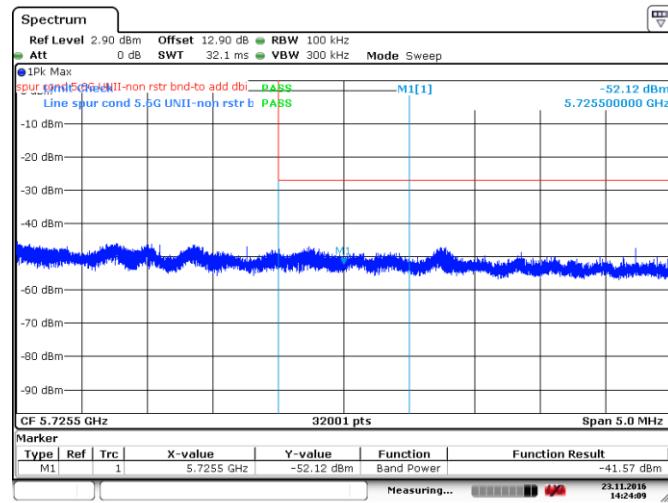


Date: 23.NOV.2016 14:24:09

Figure 8.4-36: Upper band edge emission, 802.11a

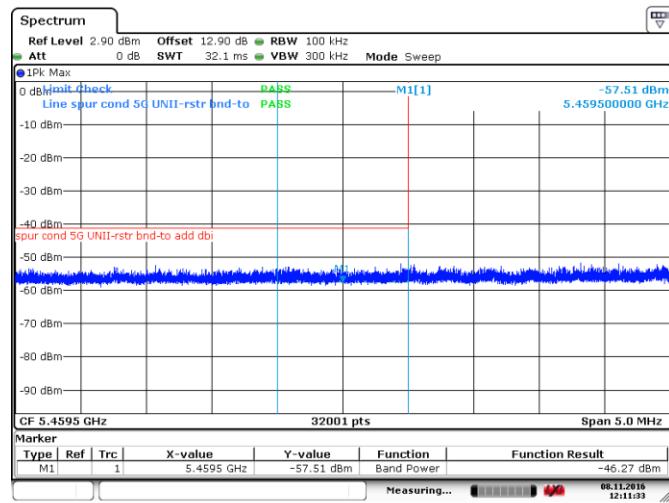


Date: 08.NOV.2016 12:11:33

Figure 8.4-37: Lower band edge emission(restricted band), 802.11a

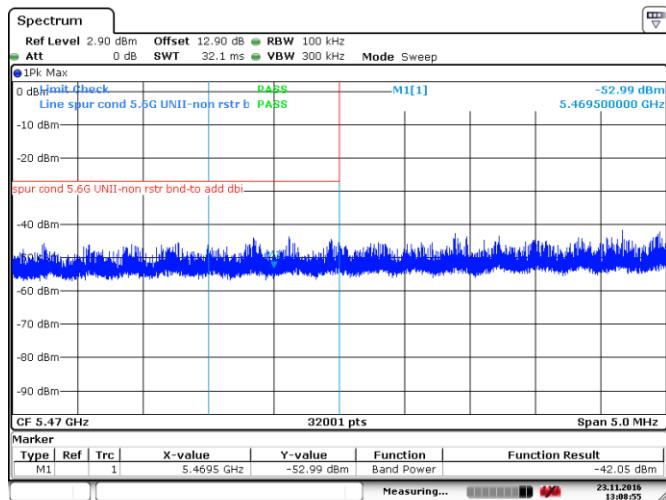


Date: 23.NOV.2016 13:08:55

**Figure 8.4-38:** Lower band edge emission, 802.11n-HT20

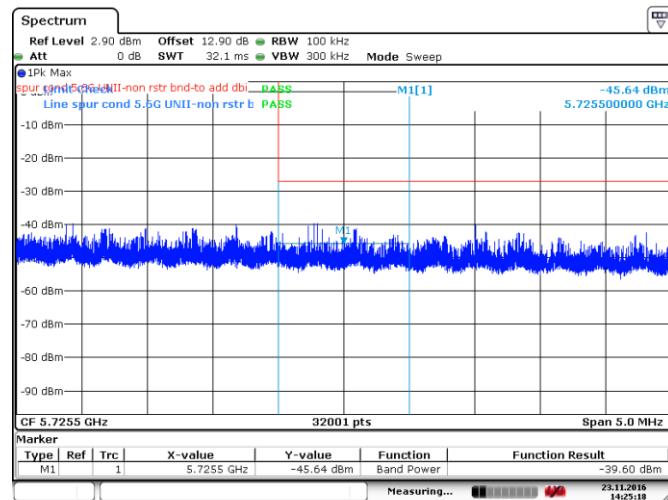

Date: 23.NOV.2016 14:25:18

**Figure 8.4-39:** Upper band edge emission, 802.11n-HT20

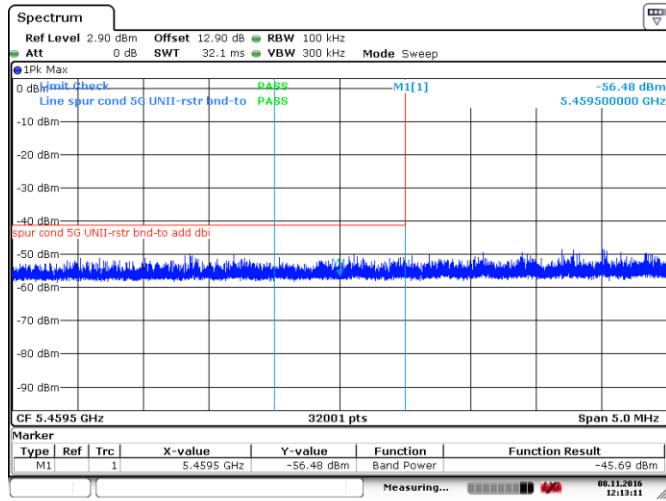

Date: 8.NOV.2016 12:13:12

**Figure 8.4-40:** Lower band edge emission (restricted band), 802.11n-HT20

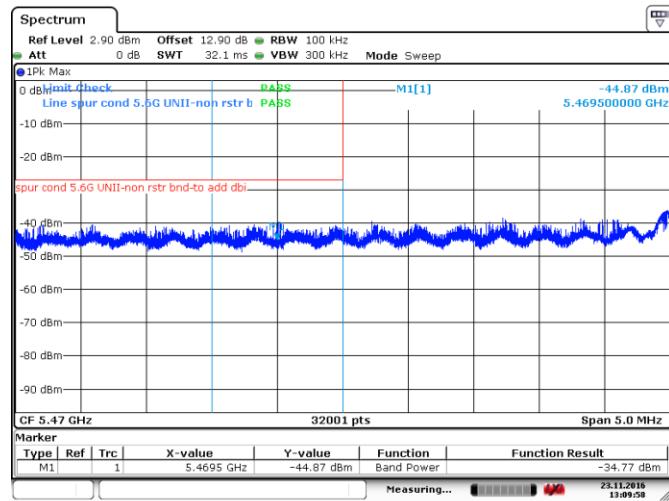


Figure 8.4-41: Lower band edge emission, 802.11n-HT40

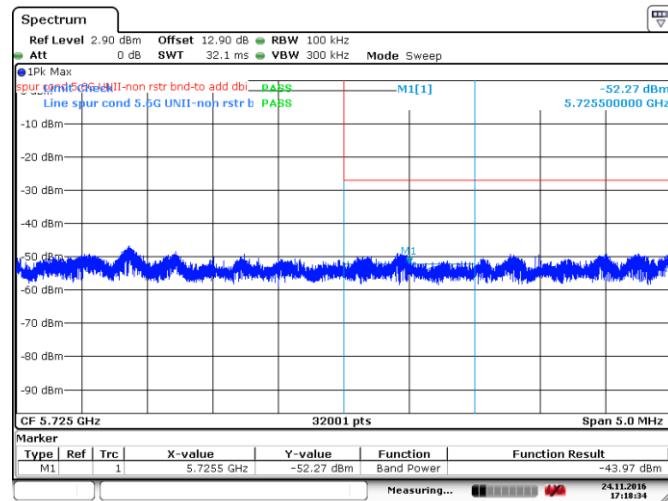


Figure 8.4-42: Upper band edge emission, 802.11n-HT40



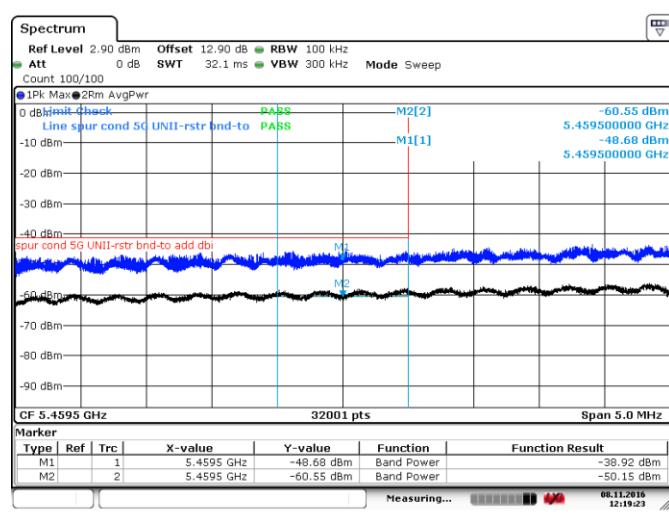


Figure 8.4-43: Lower band edge emission(restricted band), 802.11n-HT40

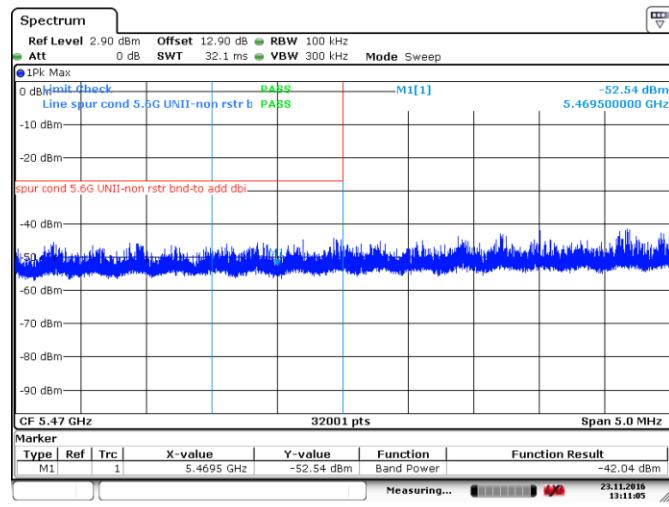


Date: 23.NOV.2016 13:11:06

Figure 8.4-44: Lower band edge emission, 802.11ac-VHT20

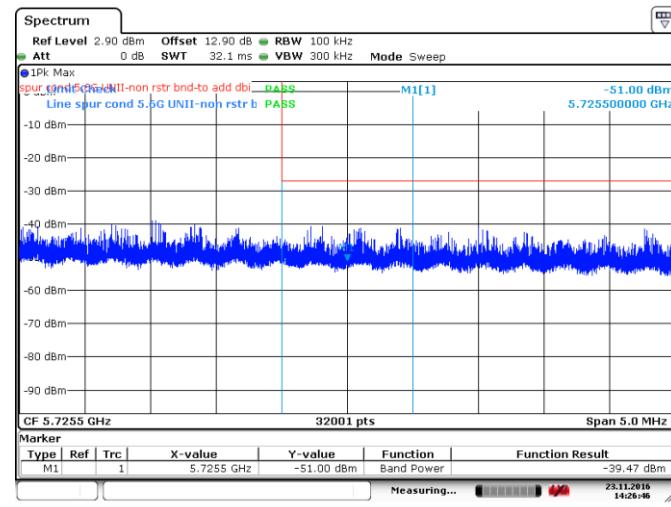


Date: 23.NOV.2016 14:26:46

Figure 8.4-45: Upper band edge emission, 802.11ac-VHT20

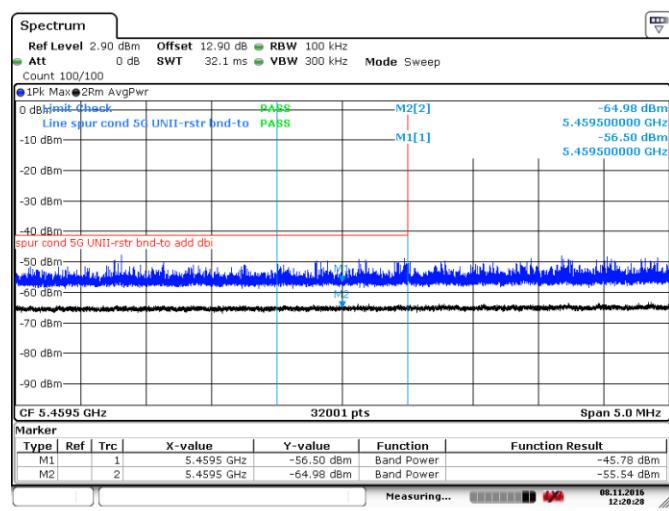


Date: 08.NOV.2016 12:20:29

Figure 8.4-46: Lower band edge emission(restricted), 802.11ac-VHT20

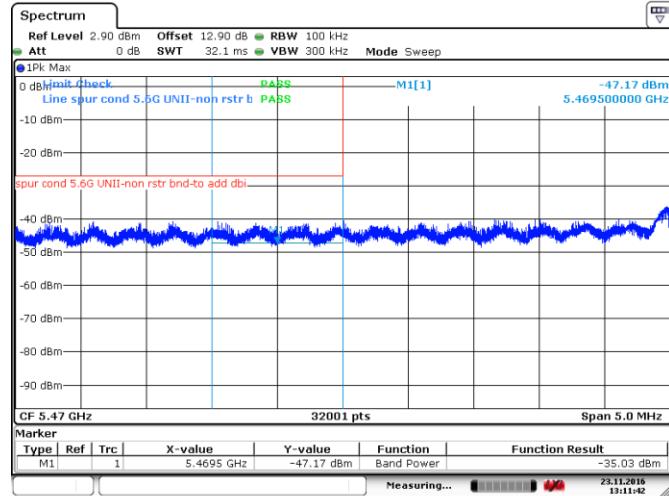


Date: 23.NOV.2016 13:11:42

Figure 8.4-47: Lower band edge emission, 802.11ac-VHT40

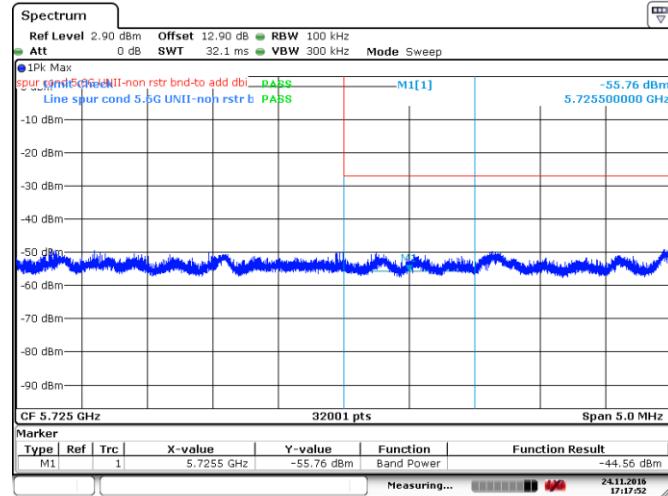


Date: 24.NOV.2016 17:17:52

Figure 8.4-48: Upper band edge emission, 802.11ac-VHT40

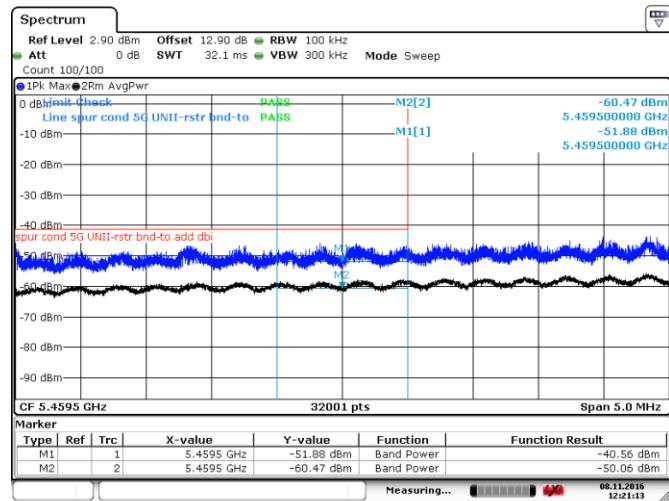


Date: 8.NOV.2016 12:21:13

Figure 8.4-49: Lower band edge emission(restricted band), 802.11ac-VHT40

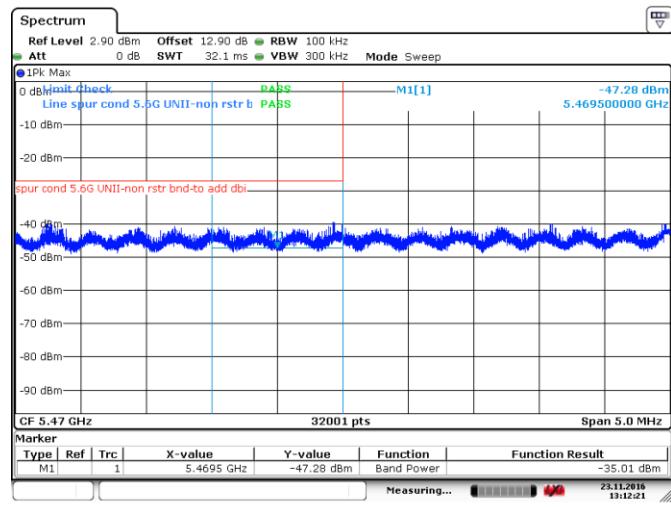


Date: 23.NOV.2016 13:12:21

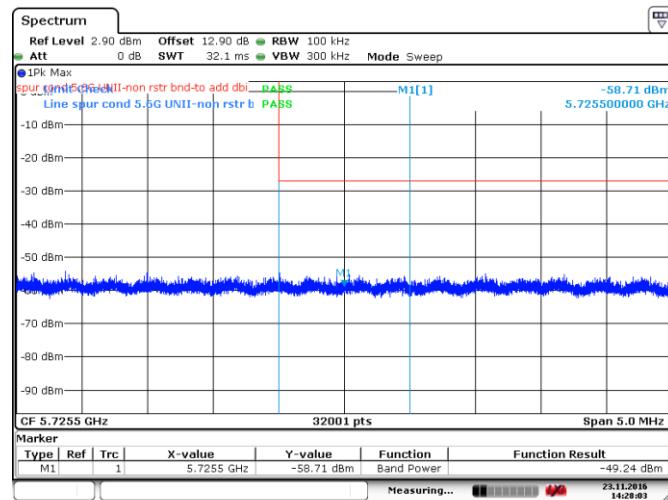

Date: 23.NOV.2016 14:28:03

Figure 8.4-50: Lower band edge emission, 802.11ac-VHT80

Figure 8.4-51: Upper band edge emission, 802.11ac-VHT80

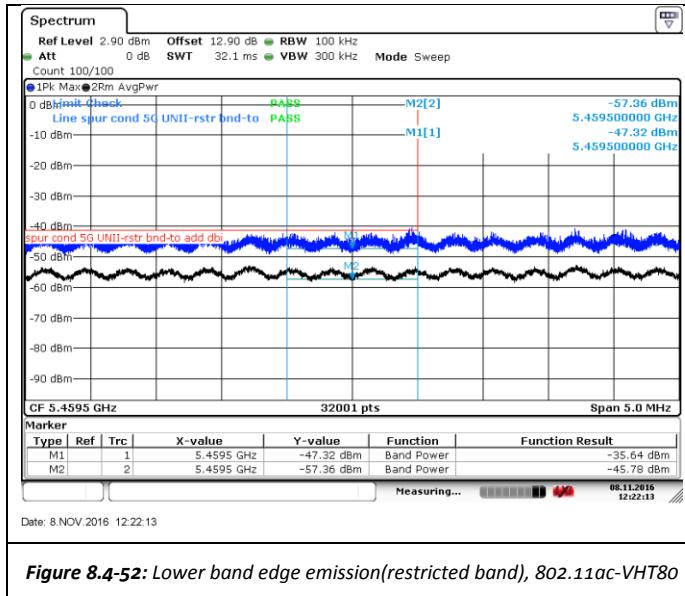

Date: 08.NOV.2016 12:22:13

Figure 8.4-52: Lower band edge emission(restricted band), 802.11ac-VHT80

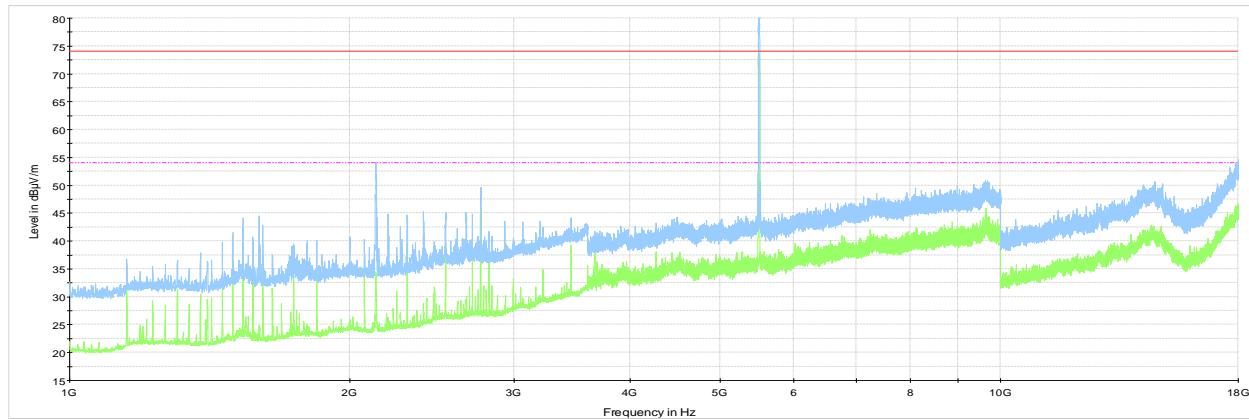


Figure 8.4-53: Cabinet Radiated spurious emission 1to18 GHz sample plot, low channel

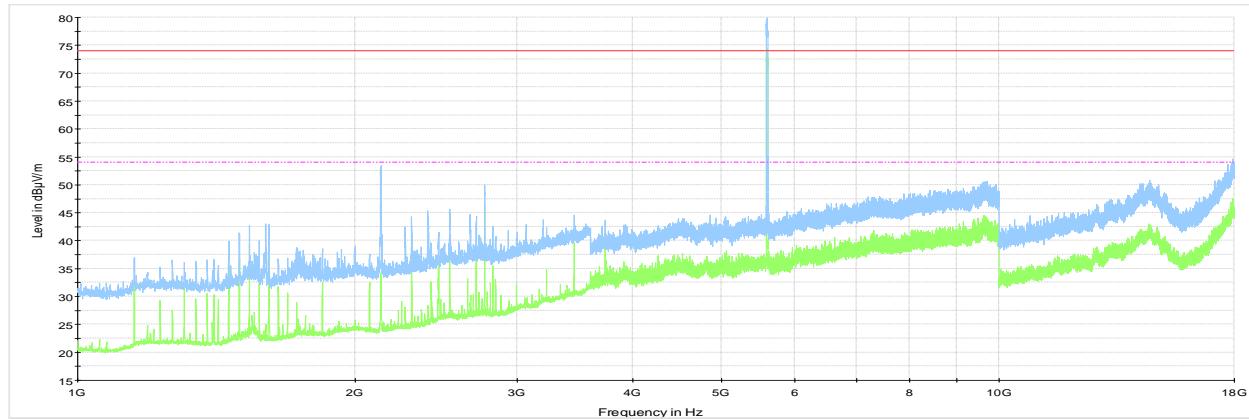


Figure 8.4-54: Cabinet Radiated spurious emission 1to18 GHz sample plot, mid channel

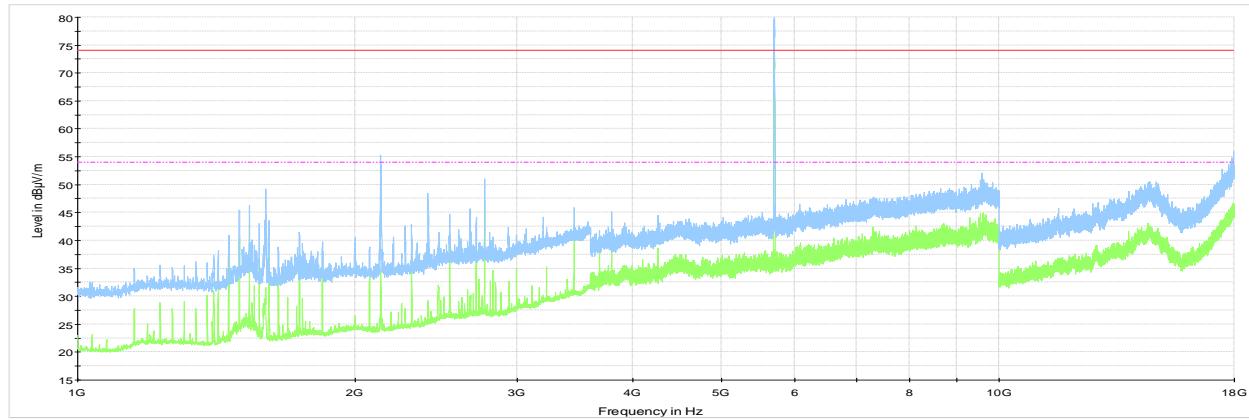



Figure 8.4-55: Cabinet Radiated spurious emission 1to18 GHz sample plot, high channel

Note: Spectrum were investigated from 30 MHz to 25 GHz, no emission were detected above 18 GHz within 10 dB below the limit.  
EUT was investigated in 802.11a/802.11n/802.11ac modes, only worst case was presented.

**Table 8.4-4: Radiated field strength measurement results below 1 GHz**

Frequency, MHz	Peak Field strength, dB $\mu$ V/m	Limit, dB $\mu$ V/m	Margin, dB
30.2	32.1	40.0	7.9
246.4	44.1	46.0	1.9
584.0	44.3	46.0	1.7

Notes: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.

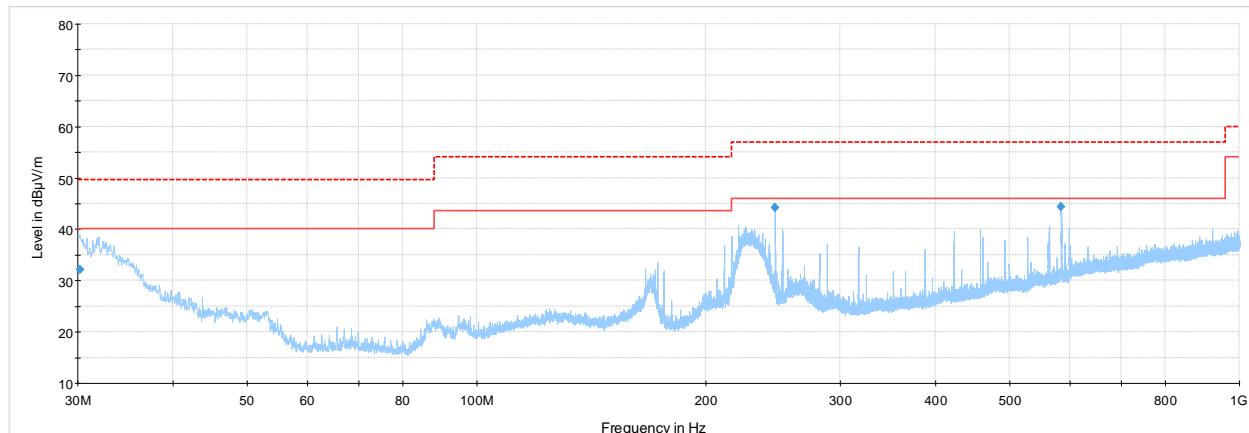

**Figure 8.4-56: Radiated spurious emission below 1 GHz sample plot**

Note: EUT was investigated in 802.11b/802.11G/802.11n modes, only the worst case was presented.

## 8.5 FCC 15.207(a) and RSS-Gen 8.8 AC power line conducted emissions limits

### 8.5.1 Definitions and limits

#### FCC §15.407(6)(b):

Any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207

#### FCC §15.207(a):

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Omega$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

#### IC:

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz, shall not exceed the limits in table below.

Unless the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in table below. The more stringent limit applies at the frequency range boundaries.

**Table 8.5-1: Conducted emissions limit**

Frequency of emission (MHz)	Quasi-peak	Conducted limit (dB $\mu$ V)	Average**
0.15–0.5	66 to 56*	56 to 46*	
0.5–5	56	46	
5–30	60	50	

Note: \* - The level decreases linearly with the logarithm of the frequency.

\*\* - A linear average detector is required.

### 8.5.2 Test summary

Test date	October 6, 2016	Temperature	25 °C
Test engineer	Yong Huang	Air pressure	1009 mbar
Verdict	Pass	Relative humidity	40 %

### 8.5.3 Observations, settings and special notes

---

The EUT was set up as tabletop configuration.

The spectral scan has been corrected with transducer factors (i.e. cable loss, LISN factors, and attenuators) for determination of compliance.

A preview measurement was generated with the receiver in continuous scan mode. Emissions detected within 6 dB or above limit were re-measured with the appropriate detector against the correlating limit and recorded as the final measurement.


Receiver settings for preview measurements:

Resolution bandwidth	9 kHz
Video bandwidth	30 kHz
Detector mode	Peak and Average
Trace mode	Max Hold
Measurement time	100 ms

Receiver settings for final measurements:

Resolution bandwidth	9 kHz
Video bandwidth	30 kHz
Detector mode	Quasi-Peak and Average
Trace mode	Max Hold
Measurement time	100 ms

### 8.5.1 Test data

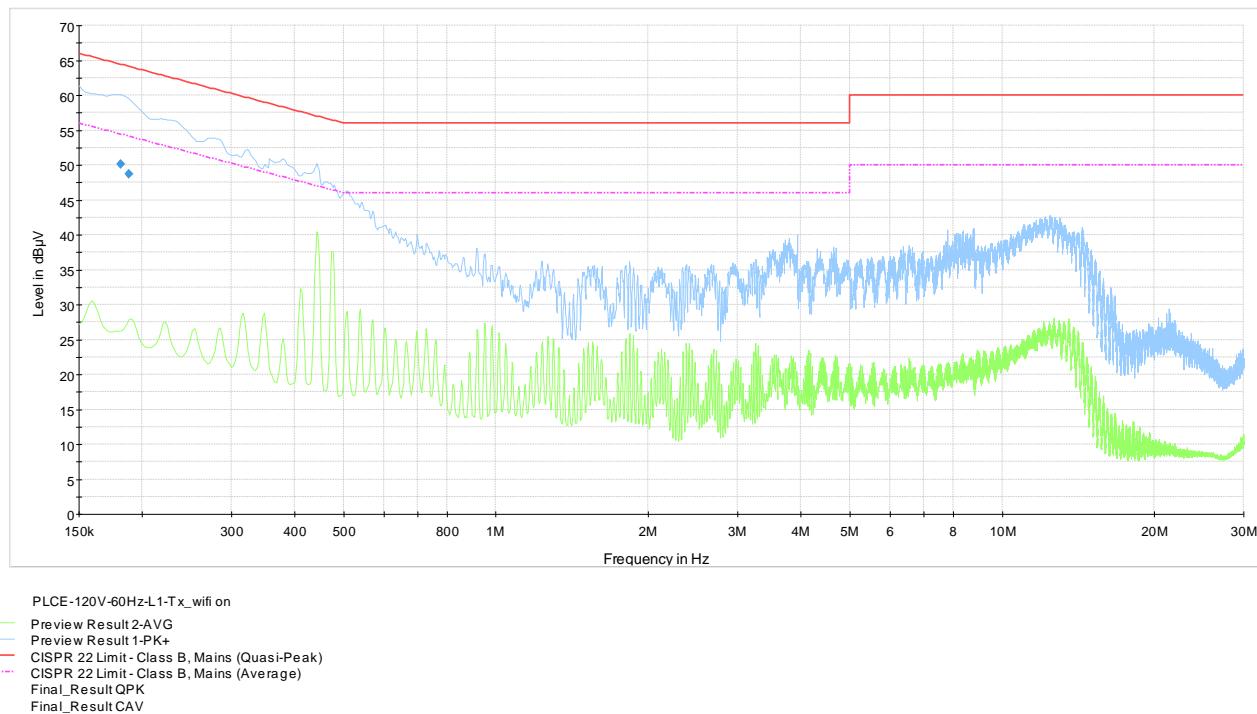

**Plot 8.5-1:** Conducted emissions on phase line

**Table 8.5-2:** Quasi-Peak results AC power line conducted emissions limits – phase line

Frequency (MHz)	Quasi-Peak result <sup>1 and 3</sup> (dBμV)	Quasi-Peak limit (dBμV)	Margin (dB)	Measurement time (ms)	Bandwidth (kHz)	Conductor	Filter	Correction factor <sup>2</sup> (dB)
0.181500	50.1	64.4	14.3	100.0	9	L1	ON	10.2
0.188250	48.8	64.1	15.4	100.0	9	L1	ON	10.2

Notes: <sup>1</sup> Result (dBμV) = receiver/spectrum analyzer value (dBμV) + correction factor (dB)

<sup>2</sup> Correction factor (dB) = LISN factor IL (dB) + cable loss (dB) + attenuator (dB)

<sup>3</sup> The maximum measured value observed over a period of 15 seconds was recorded.

Sample calculation: 53.4 dBμV (result) = 43.3 dBμV (receiver reading) + 9.9 dB (Correction factor)

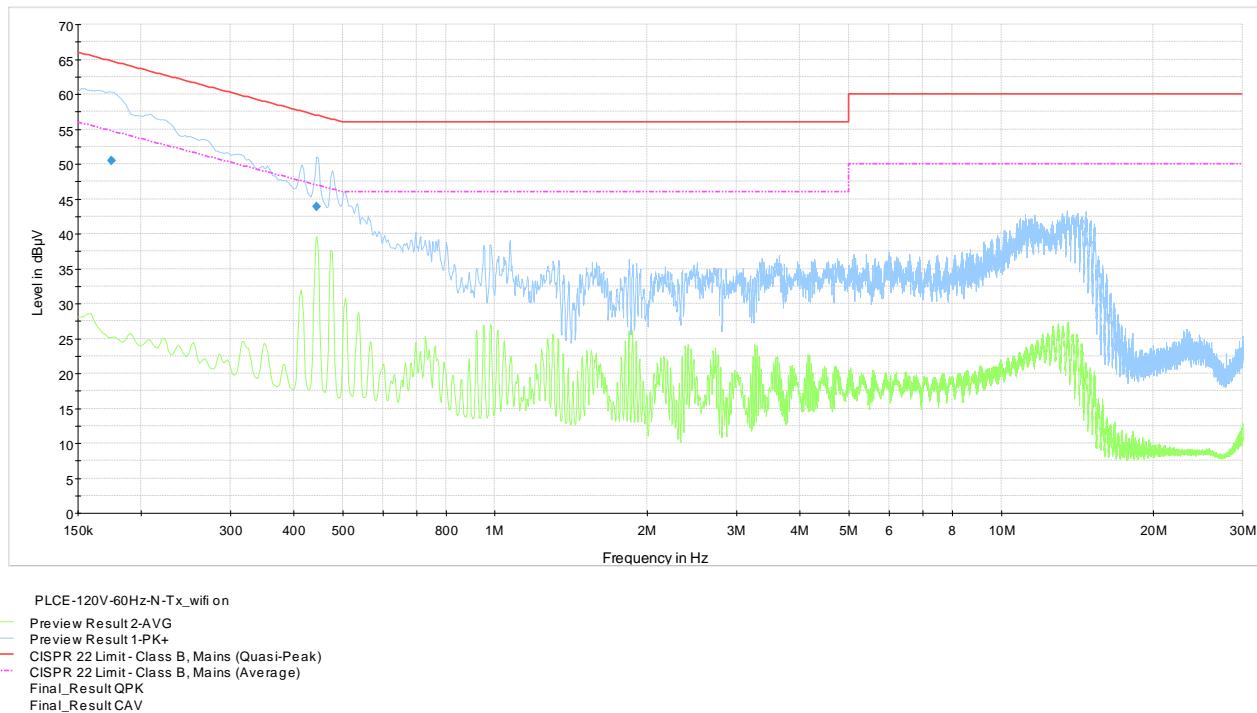


Table 8.5-3: Quasi-Peak results AC power line conducted emissions limits – neutral line

Frequency (MHz)	Quasi-Peak result <sup>1 and 3</sup> (dB $\mu$ V)	Quasi-Peak limit (dB $\mu$ V)	Margin (dB)	Measurement time (ms)	Bandwidth (kHz)	Conductor	Filter	Correction factor <sup>2</sup> (dB)
0.174750	50.4	64.7	14.3	100.0	9	N	ON	10.2
0.444750	43.9	57.0	13.1	100.0	9	N	ON	10.0

Notes: <sup>1</sup> Result (dB $\mu$ V) = receiver/spectrum analyzer value (dB $\mu$ V) + correction factor (dB)

<sup>2</sup> Correction factor (dB) = LISN factor IL (dB) + cable loss (dB) + attenuator (dB)

<sup>3</sup> The maximum measured value observed over a period of 15 seconds was recorded.

Sample calculation: 53.4 dB $\mu$ V (result) = 43.3 dB $\mu$ V (receiver reading) + 9.9 dB (Correction factor)

## 8.6 FCC 15.407(g) and RSS-Gen 8.11 Frequency stability

---

### 8.6.1 Definitions and limits

---

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

### 8.6.2 Test summary

---

Test date:	November 10, 2016	Temperature:	24 °C
Test engineer:	Yong Huang	Air pressure:	1009 mbar
Verdict:	Pass	Relative humidity:	37 %

### 8.6.3 Observations, settings and special notes

---

Spectrum analyser settings:

Resolution bandwidth:	10 Hz
Video bandwidth:	10 Hz
Detector mode:	Peak
Trace mode:	Max Hold

### 8.6.4 Test data

---

*Table 8.6-1: Frequency drift measurement*

Test conditions	Frequency, GHz	Drift, Hz
+35 °C, Nominal	5.49996653	-5219
+30 °C, Nominal	5.49997029	-1460
+20 °C, +15 %	5.49997175	0
+20 °C, Nominal	5.49997175	Reference
+20 °C, -15 %	5.49997175	0
+10 °C, Nominal	5.49998775	16001
+5 °C, Nominal	5.5000047	32945

Note: Frequency stability was assessed between two +5 °C and +35 °C, as per client's manual.

Maximum recorded frequency drift was 33 kHz, which is 6 ppm

## 8.7 FCC 15.407(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS)

### 8.7.1 Definitions and limits

(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25–5.35 GHz and 5.47–5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems. Operators shall only use equipment with a DFS mechanism that is turned on when operating in these bands. The device must sense for radar signals at 100 percent of its emission bandwidth. The minimum DFS detection threshold for devices with a maximum e.i.r.p. of 200 mW to 1 W (23–30 dBm) is –64 dBm. For devices that operate with less than 200 mW (23 dBm) e.i.r.p. and a power spectral density of less than 10 dBm in a 1 MHz band, the minimum detection threshold is –62 dBm. The detection threshold is the received power averaged over 1 microsecond referenced to a 0 dBi antenna. For the initial channel setting, the manufacturers shall be permitted to provide for either random channel selection or manual channel selection.

(i) Operational Modes. The DFS requirement applies to the following operational modes:

(A) The requirement for channel availability check time applies in the master operational mode.

(B) The requirement for channel move time applies in both the master and slave operational modes.

(ii) Channel Availability Check Time. A U-NII device shall check if there is a radar system already operating on the channel before it can initiate a transmission on a channel and when it has to move to a new channel. The U-NII device may start using the channel if no radar signal with a power level greater than the interference threshold values listed in paragraph (h)(2) of this section, is detected within 60 seconds.

(iii) Channel Move Time. After a radar's presence is detected, all transmissions shall cease on the operating channel within 10 seconds. Transmissions during this period shall consist of normal traffic for a maximum of 200 ms after detection of the radar signal. In addition, intermittent management and control signals can be sent during the remaining time to facilitate vacating the operating channel.

(iv) Non-occupancy Period. A channel that has been flagged as containing a radar system, either by a channel availability check or in-service monitoring, is subject to a non-occupancy period of at least 30 minutes. The non-occupancy period starts at the time when the radar system is detected.

Table 8.7-1: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds <sup>1</sup>
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period <sup>1 and 2</sup>
U-NII Detection Bandwidth	Minimum 80% of the 99% power bandwidth <sup>3</sup>

Notes: <sup>1</sup>The instant that the *Channel Move Time* and the *Channel Closing Transmission Time* begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

<sup>2</sup>The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate Channel changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

<sup>3</sup>During the *U-NII Detection Bandwidth* detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

Table 8.7-2: Short Pulse Radar Test Waveforms

Radar type	Pulse width, $\mu$ s	Pulse Repetition Interval (PRI), $\mu$ s	Number of pulses	Minimum percentage of successful detection	Minimum number of trials
0	1	1428	18	See note	See note
1	1	<b>Test A:</b> 15 unique PRI values randomly selected from the list of 23 PRI values in table below  <b>Test B:</b> 15 unique PRI values randomly selected within the range of 518–3066 $\mu$ s, with a minimum increment of 1 $\mu$ s, excluding PRI values selected in Test A	Roundup $\{(1 \div 360) \times (19 \times 10^6 \div \text{PRI}_{\mu\text{s}})\}$	60%	30
2	1–5	150–230	23–29	60%	30
3	6–10	200–500	16–18	60%	30
4	11–20	200–500	12–16	60%	30
Aggregate (Radar types 1–4)				80%	120

Note: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.

Table 8.7-3: Pulse Repetition Intervals Values for Test A

Pulse Repetition Frequency number	Pulse Repetition Frequency, Pulses per second	Pulse Repetition Interval (PRI), $\mu$ s
1	1930.5	518
2	1818.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355.0	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139.0	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

Table 8.7-4: Long Pulse Radar Test Waveforms

Radar type	Pulse width, $\mu$ s	Chirp width, MHz	Pulse Repetition Interval (PRI), $\mu$ s	Number of pulses per burst	Number of bursts	Minimum percentage of successful detection	Minimum number of trials
5	50–100	5–20	1000–2000	1–3	8–20	80%	30

Table 8.7-5: Frequency Hopping Radar Test Waveforms

Radar type	Pulse width, $\mu$ s	Pulse Repetition Interval (PRI), $\mu$ s	Pulses per hop	Hopping rate, kHz	Hopping sequence length, ms	Minimum percentage of successful detection	Minimum number of trials
6	1	333	9	0.333	300	70%	30

### 8.7.2 Test summary

Test date:	November 25, 2016	Temperature:	24 °C
Test engineer:	Yong Huang	Air pressure:	1009 mbar
Verdict:	Pass	Relative humidity:	37 %

### 8.7.3 Observations, settings and special notes

Since EUT is a client device without DFS radar detection mechanism, therefore only two tests are applicable: Channel Move Time and Channel Closing Transmission Time. Transmit channel was set at 5510 MHz (for channel move time test) and 5540 MHz (for non-occupancy time test). The Radar type 0 was supplied to a Master device antenna port. The testing was performed with an approved master (provided by customer) operating in 40 MHz BW mode.

### 8.7.4 Test data

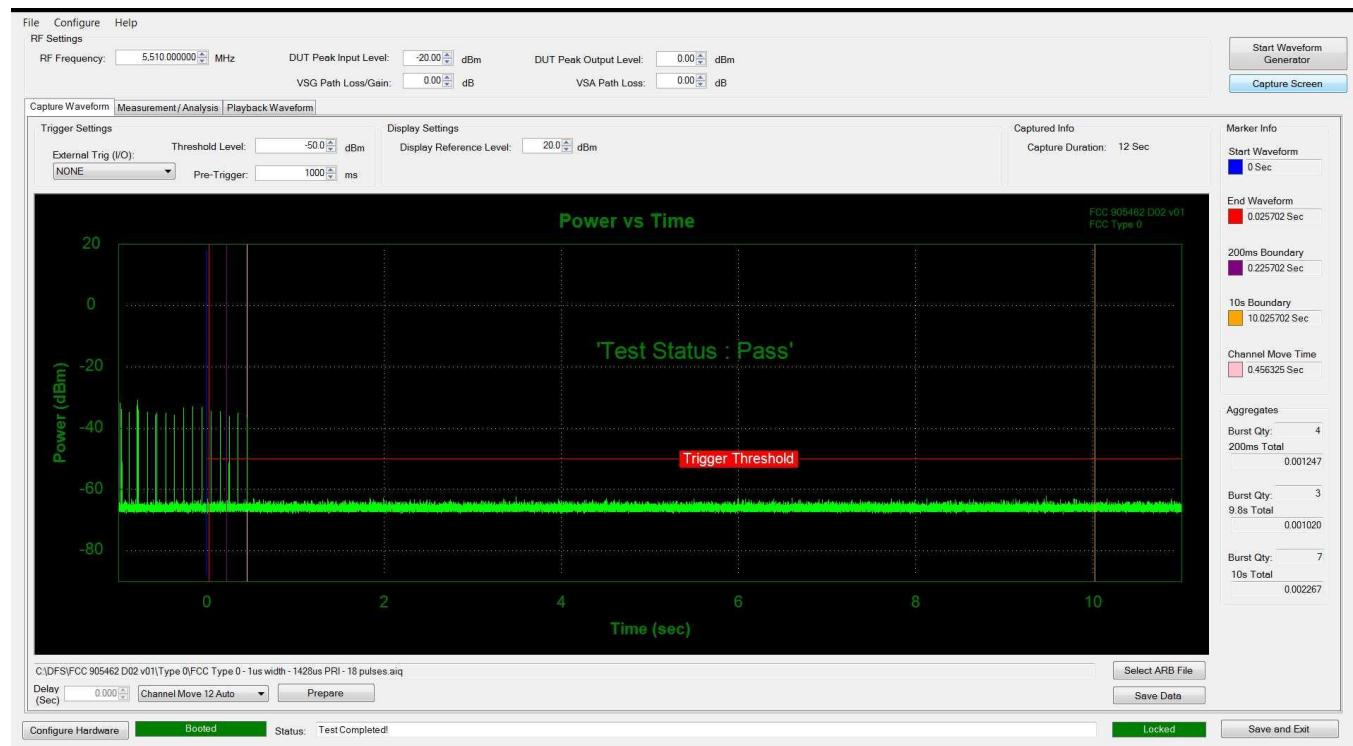


Figure 8.7-1: Channel move time measurement

Report Generated :25/11/2016

Test Result :Passed

Test Type :Channel Move Auto 12

Waveform : C:\DFS\FCC 905462 D02 v01\Type 0\FCC Type 0 - 1us width - 1428us PRI - 18 pulses.aiq

Reported results are filtered. Any gaps in transmission less than 1E-05ms are assumed to be continuous transmission

Aggregate time is calculated on filtered data

#### Timings Relative to Start of Capture


T1 : 25.702 (ms)

Transmission Duration by Region					
Region	Start (sec)	End (sec)	Power Allowed (ms)	Power Measured (ms)	Pass/Fail
0	0	0.2	200	1.247	Pass
1	0.2	10	60	1.02	Pass
2	10	12	0	0	Pass

#### Pulses Detected

Start Time (ms)	Stop Time (ms)	Duration (ms)
-977.629	-977.296	0.332
-961.291	-961.003	0.289
-960.62	-960.303	0.316
-875.228	-874.896	0.332
-784.852	-784.809	0.043
-784.791	-784.763	0.028
-779.715	-779.687	0.028
-779.671	-779.643	0.028
-779.626	-779.582	0.044
-779.567	-779.534	0.032
-772.826	-772.493	0.332
-670.426	-670.094	0.332
-579.021	-578.956	0.064
-578.941	-578.896	0.044
-568.025	-567.693	0.332
-465.623	-465.29	0.333
-363.223	-362.891	0.332
-260.822	-260.49	0.332


-158.42	-158.088	0.332
-56.019	-55.687	0.332
-55.653	-55.517	0.136
-55.446	-55.282	0.164
46.381	46.721	0.34
46.755	47.024	0.268
47.13	47.43	0.3
148.783	149.123	0.34
251.184	251.524	0.34
353.584	353.924	0.34
455.985	456.325	0.34

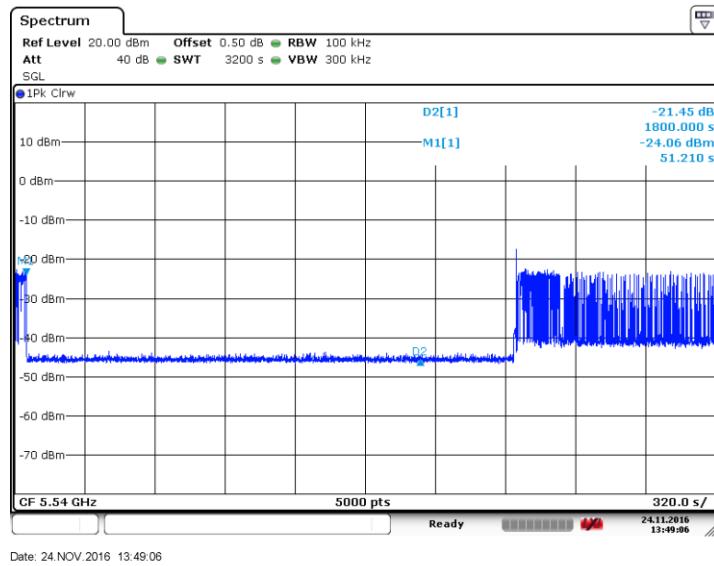


**Figure 8.7-2:** Client non-occupancy 30 minutes period test (30 minutes is 1800 seconds)

## Section 9. Block diagrams of test set-ups

### 9.1 Radiated emissions set-up for frequencies below 1 GHz

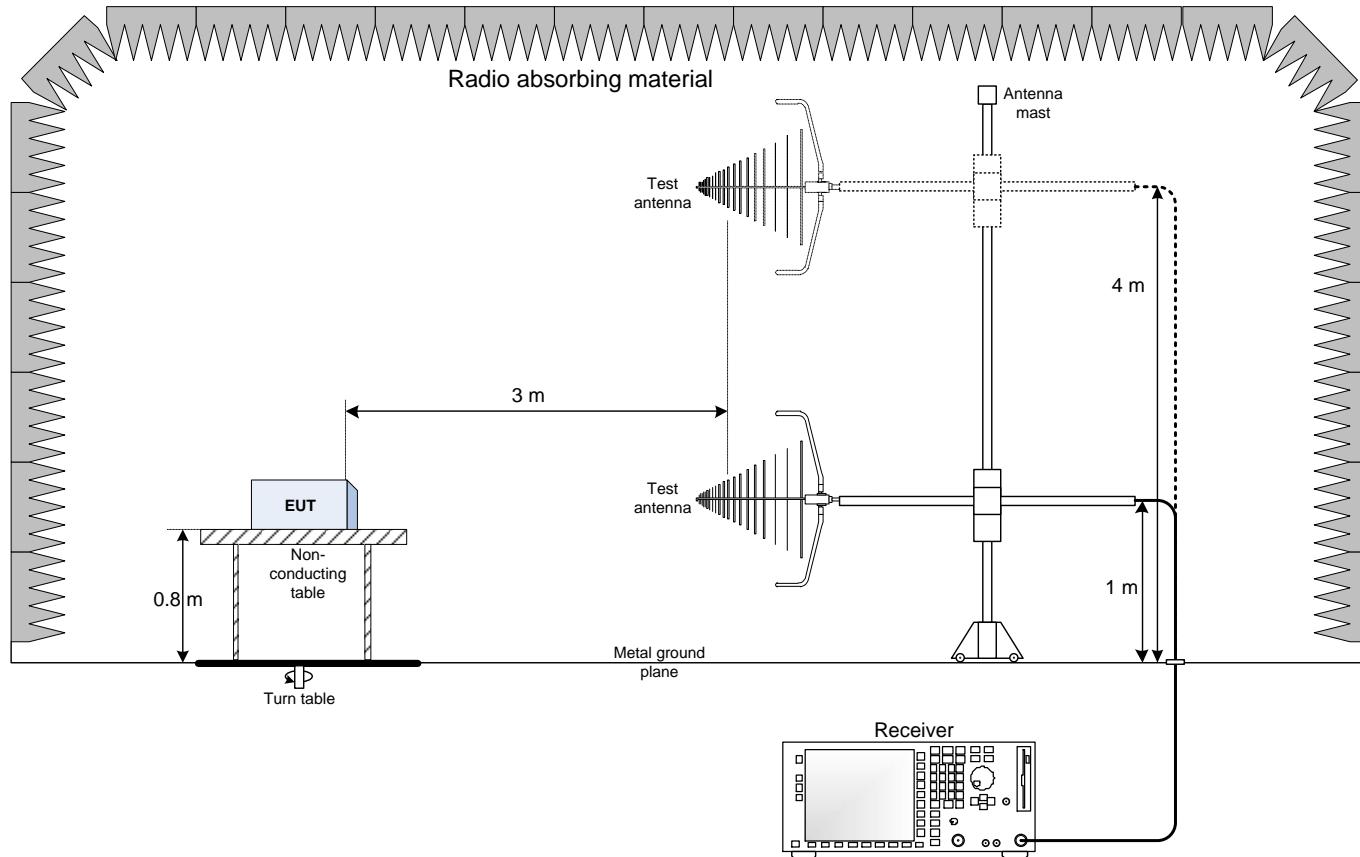

## 9.2 Radiated emissions set-up for frequencies above 1 GHz

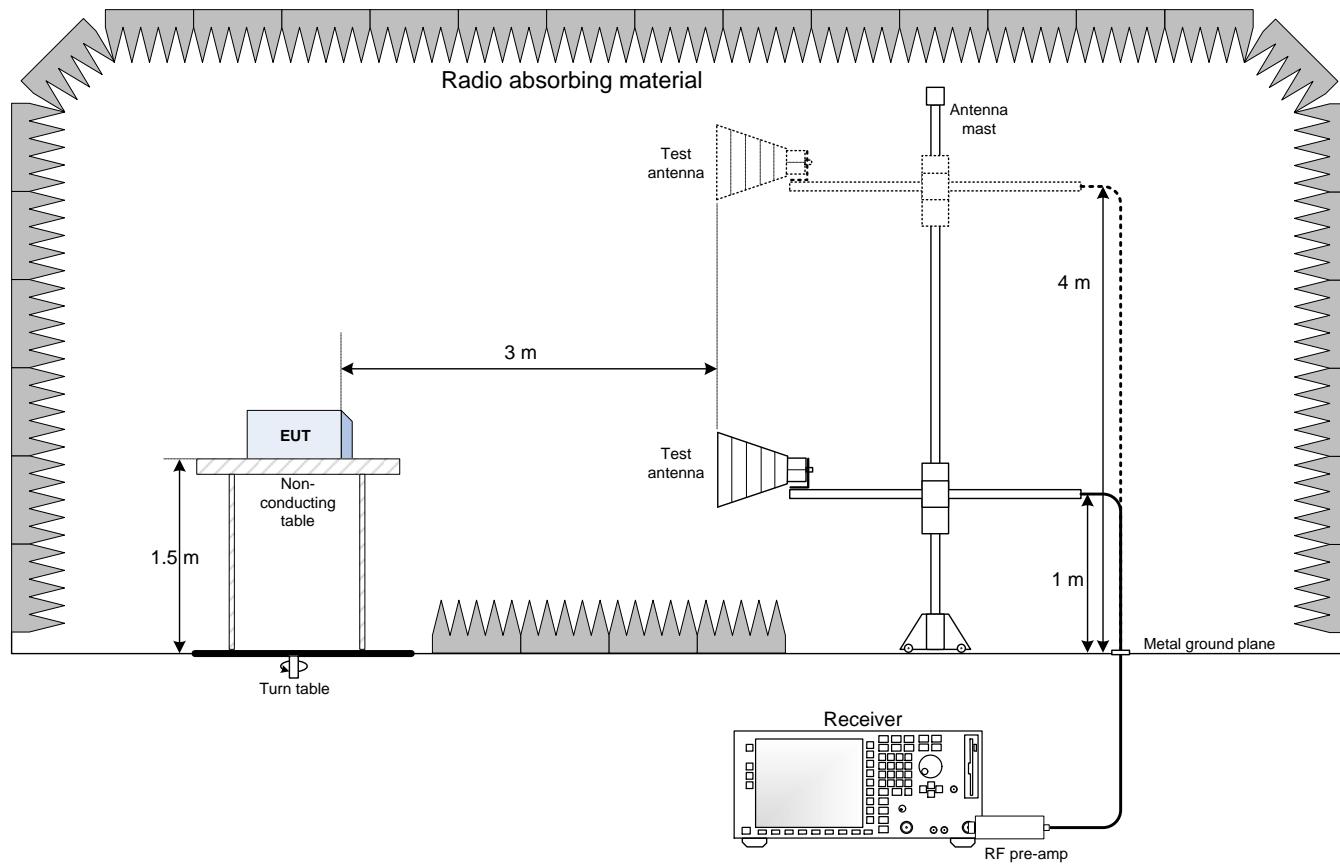

## 9.3 Conducted emissions set-up

