

TEST REPORT

Test report no.: 1-6182/13-01-03-A



Testing laboratory

CETECOM ICT Services GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.cetecom.com>
e-mail: ict@cetecom.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01
Area of Testing: Radio/Satellite Communications

Applicant

TESA SA
Route du Bugnon 38
1020 Renens / SWITZERLAND
Contact: Nicolas Auberson
e-mail: nicolas.auberson@hexagonmetrology.com
Phone: +41 21 633 16 78

Manufacturer

TESA SA
Route du Bugnon 38
1020 Renens / SWITZERLAND

Test standard/s

47 CFR 15	Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 210 Issue 8	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item:	Axial probe with wireless interface
Model name:	05030012
FCC ID:	SKW05030012
IC:	11163A-05030012
Frequency:	ISM band 2400MHz – 2483.5 MHz
Technology tested:	Proprietary data transmission
Antenna:	External antenna with reverse SMA connector
Power supply:	5.0V DC by USB port
Temperature range:	+10°C to +40°C



This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorised:

Stefan Bös
Senior Testing Manager

Test performed:

Tobias Wittenmeier
Expert

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	3
3	Test standard/s	3
4	Test environment	4
5	Test item	4
6	Test laboratories sub-contracted	4
7	Summary of measurement results	5
8	RF measurements	6
8.1	Description of test setup	6
8.1.1	Radiated measurements	6
8.2	Additional comments	7
8.3	RSP100 test report cover sheet / performance test data	8
9	Measurement results	9
9.1	Timing of the transmitter	9
9.2	Spectrum bandwidth – 99% bandwidth	12
9.3	Maximum field strength	15
9.4	Band edge compliance radiated	16
9.5	TX spurious emissions radiated	18
9.6	RX spurious emissions radiated	32
9.7	Spurious emissions radiated < 30 MHz	37
9.8	Spurious emissions conducted < 30 MHz	39
10	Test equipment and ancillaries used for tests	42
11	Observations	43
Annex A	Photographs of the test setup	44
Annex B	External photographs of the EUT	48
Annex C	Internal photographs of the EUT	51
Annex D	Document history	53
Annex E	Further information	53
Annex F	Accreditation Certificate	54

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2013-06-20
Date of receipt of test item:	2013-08-19
Start of test:	2013-08-19
End of test:	2013-08-20
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Date	Test standard description
47 CFR 15	10.2012	Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 210 Issue 8	12.2010	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

4 Test environment

Temperature:	T_{nom}	+22 °C during room temperature tests
	T_{max}	+40 °C during high temperature tests
	T_{min}	+10 °C during low temperature tests
Relative humidity content:		55 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	V_{nom}	5.0 V DC by USB port
	V_{max}	-/- V
	V_{min}	-/- V

5 Test item

Kind of test item	:	Axial probe with wireless interface
Type identification	:	05030012
S/N serial number	:	660005-01
HW hardware status	:	D
SW software status	:	297 + V3.1.7
Frequency band [MHz]	:	ISM band 2400MHz – 2483.5 MHz
Type of radio transmission	:	Single carrier
Use of frequency spectrum	:	
Type of modulation	:	GFSK
Number of channels	:	40
Antenna	:	External antenna with reverse SMA connector
Power supply	:	5.0 V DC by USB port
Temperature range	:	+10°C to +40 °C

6 Test laboratories sub-contracted

None

7 Summary of measurement results



No deviations from the technical specifications were ascertained



There were deviations from the technical specifications ascertained

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210, Issue 8, Annex 2	Passed	2013-10-02	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	Mode	Pass	Fail	NA	NP	Results (max.)
CFR 15.35(c) RSS Gen (Issue 3) / 4.5	Timing of the transmitter	Nominal	Nominal	TX	☒	☐	☐	☐	Not limited
RSS Gen (Issue 3) / 4.6.1	99% - Occupied Bandwidth	Nominal	Nominal	TX	☒	☐	☐	☐	Not limited
§15.249(a)(e) RSS-210 / A2.9(a)	Maximum field strength	Nominal	Nominal	TX	☒	☐	☐	☐	complies
§15.249(d) RSS-210 / A2.9(a)(b)	Band edge compliance radiated	Nominal	Nominal	TX	☒	☐	☐	☐	complies
§15.249(d) RSS-210 / A2.9(a)(b)	TX spurious emissions radiated	Nominal	Nominal	TX	☒	☐	☐	☐	complies
§15.109 RSS-Gen	RX spurious emissions radiated	Nominal	Nominal	Idle	☒	☐	☐	☐	complies
§15.209(a) RSS-Gen	Spurious emissions radiated < 30 MHz	Nominal	Nominal	TX/Idle	☒	☐	☐	☐	complies
§15.107(a) RSS-Gen	Spurious emissions conducted < 30 MHz	Nominal	Nominal	TX/Idle	☒	☐	☐	☐	complies

Note: NA = Not Applicable; NP = Not Performed

8 RF measurements


8.1 Description of test setup

8.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63.2-1996 clause 15 and ANSI C63.10-2009 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.10-2009 clause 4.2.

Antennas are confirmed with ANSI C63.2-1996 item 15.

Semi anechoic chamber

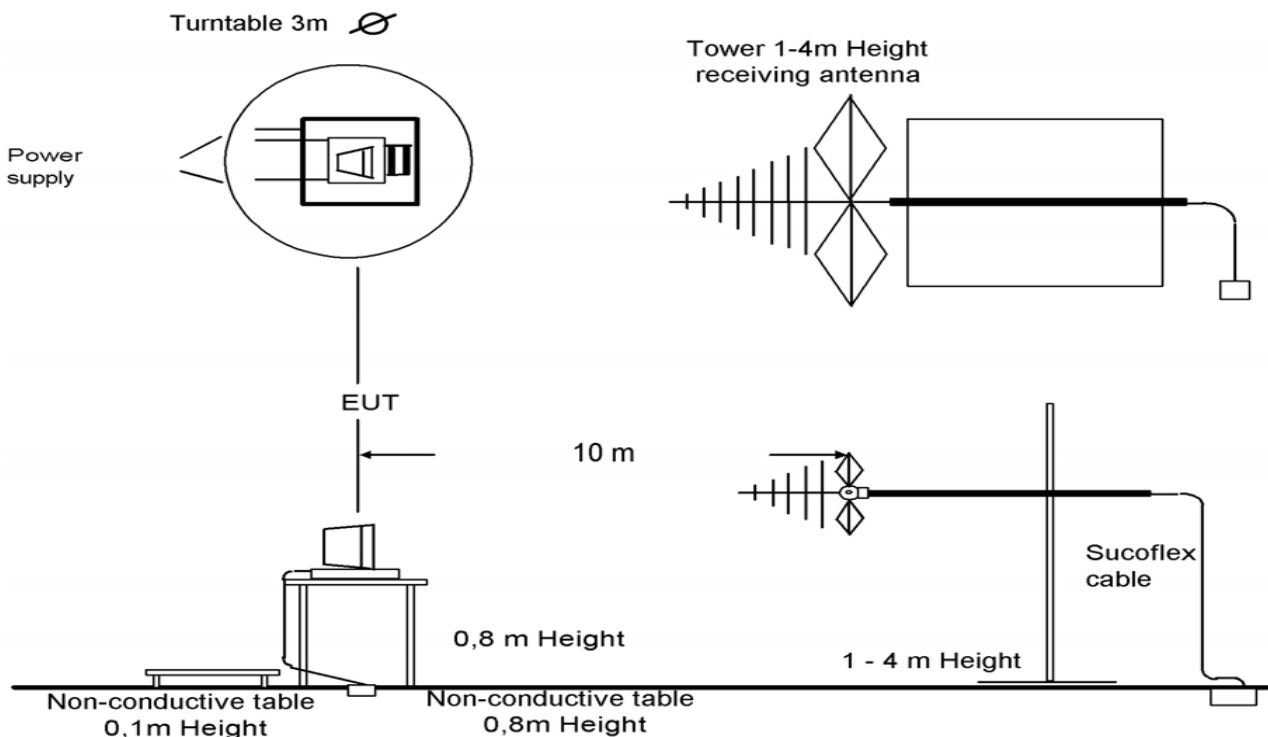

Picture 1: Diagram radiated measurements

9 kHz - 30 MHz:	active loop antenna
30 MHz – 1 GHz:	tri-log antenna
> 1 GHz:	horn antenna

The EUT is powered by an external power supply with nominal voltage or with battery.

8.2 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

Test mode:

- ☐ No test mode available.
Iperf was used to ping another device with the largest support packet size
- ☒ Special software is used.
EUT is transmitting pseudo random data by itself

8.3 RSP100 test report cover sheet / performance test data

Test report number	:	1-6182/13-01-03-A
Equipment model number	:	05030012
Certification number	:	11163A-05030012
Manufacturer (complete address)	:	TESA SA Route du Bugnon 38 1020 Renens / SWITZERLAND
Tested to radio standards specification no.	:	RSS 210, Issue 8, Annex 2
Open area test site IC No.	:	IC 3462C-1
Frequency range	:	ISM band 2400 MHz to 2483.5 MHz (lowest channel 2402 MHz, highest channel 2480 MHz)
RF-field strength [dBμV/m @ 3 m] (max.)	:	99.1 PK / 62.31 AVG
Occupied bandwidth (99%-BW) [MHz]	:	2.02
Type of modulation	:	Digital Transmission System using GFSK modulation
Emission designator (TRC-43)	:	2M02FXD
Antenna information	:	External antenna with reverse SMA connector
Transmitter spurious (worst case) [dBμV/m @ 10m]:	:	29.0 @ 84.13 MHz

ATTESTATION:

DECLARATION OF COMPLIANCE:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Laboratory manager:

2013-10-02

Tobias Wittenmeier

Date

Name

Signature

9 Measurement results

9.1 Timing of the transmitter

Measurement:


Measurement parameter	
Detector:	Peak
Sweep time:	See plot
Resolution bandwidth:	See plot
Video bandwidth:	See plot
Span:	Zero
Trace-Mode:	Single

Limits:


FCC	IC
Timing of the transmitter	
(c) Unless otherwise specified, e.g. Section 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.	

Result:

Plot 1: Transmit bursts (within 100ms): 11

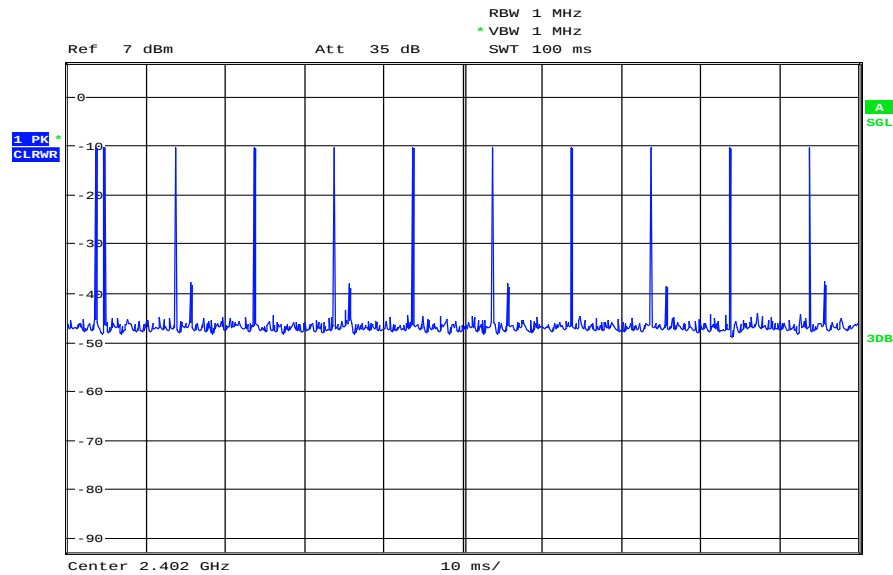

Date: 20.AUG.2013 08:58:47

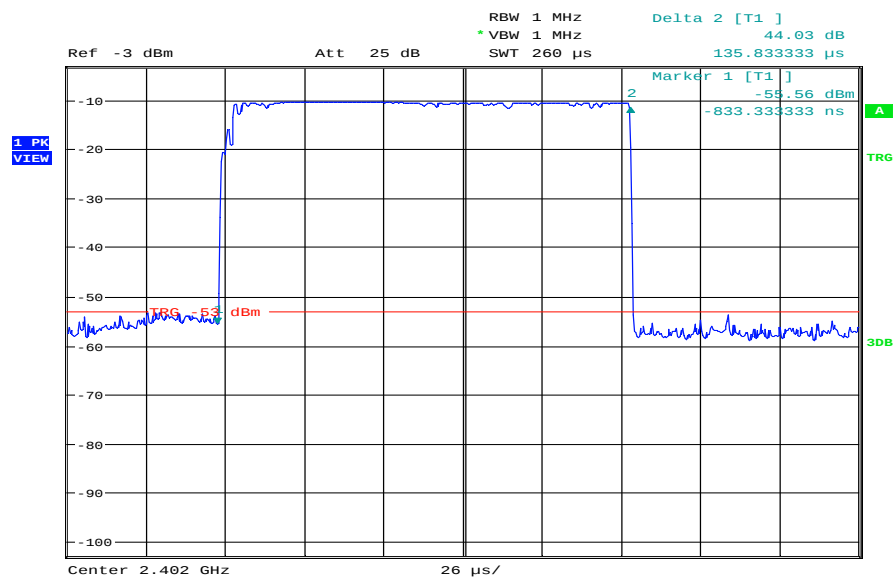Plot 2: Transmit burst in detail: Burst length 135.83 μ s

Date: 20.AUG.2013 08:57:33

Transmit time (Tx on) within 100 ms = $11 \times 135.83 \mu\text{s} = 1.5 \text{ ms}$

Assumed Transmit time (Tx on) within 100 ms for further calculations: 1.5 ms

The peak-to-average correction factor [dB] is calculated with $20\text{Log} [\text{Tx on} / 100\text{ms}]$.

Result:

peak-to-average correction factor [dB]: -36.48

9.2 Spectrum bandwidth – 99% bandwidth

Description:

Measurement of the 99% bandwidth of the modulated signal.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	10 kHz
Video bandwidth:	10 kHz
Span:	3 MHz
Trace-Mode:	Max Hold

Limits:


FCC	IC
Spectrum Bandwidth – 99% Bandwidth	
Required for emission designator	

Results:

Modulation Frequency	99% BANDWIDTH [MHz]		
	2402 MHz	2441 MHz	2480 MHz
GFSK	2.02	1.67	1.65
Measurement uncertainty	± 30 kHz		


Plots:

Plot 1: lowest channel

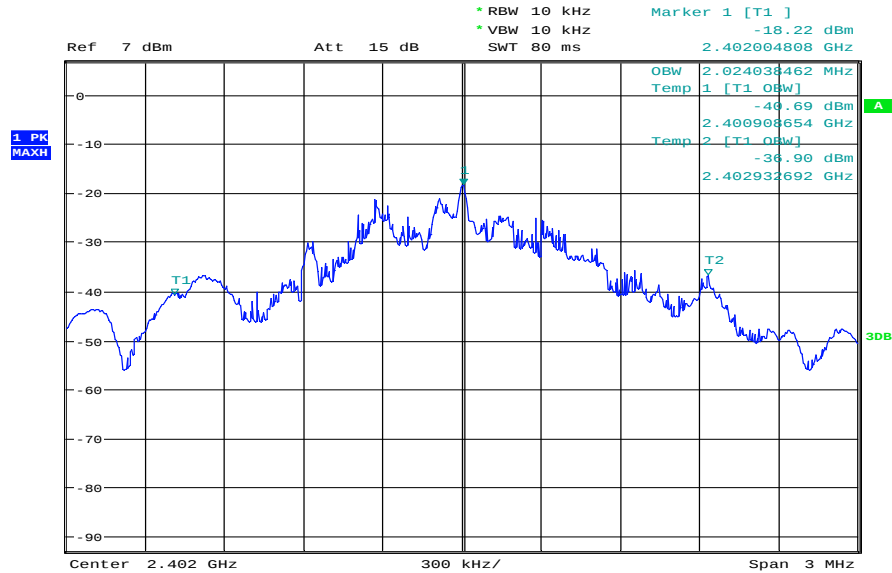


Date: 20.AUG.2013 09:30:51

Plot 2: middle channel

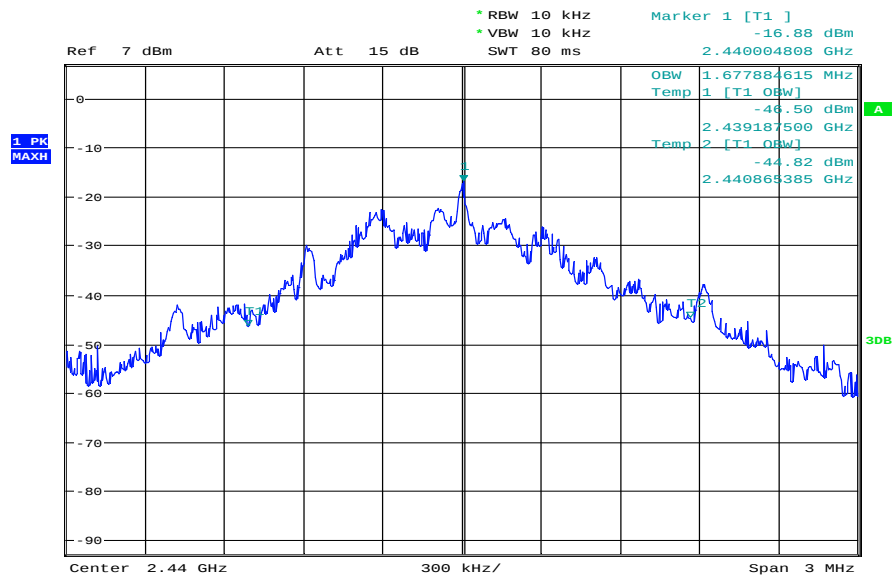

Date: 20.AUG.2013 09:37:40

Plot 3: highest channel

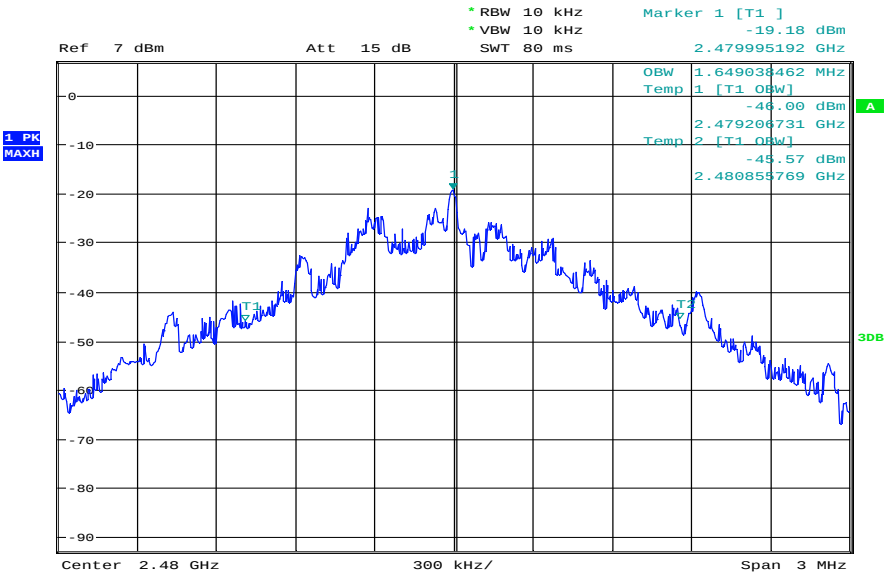

Date: 20.AUG.2013 09:54:35

9.3 Maximum field strength

Description:

Measurement of the maximum field strength radiated.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	1 MHz
Span:	3 MHz
Trace-Mode:	Max Hold
Measurement distance:	3 m

Limits:

FCC	IC
Maximum field strength	
The field strength of emissions of intentional radiators shall comply with the following: Field strength of fundamental: 50 mV/m / (94 dB μ V/m) @ 3 m (AVG) 500 mV/m / (114 dB μ V/m) @ 3 m (Peak)	

Result:

Modulation Frequency	Maximum field strength [dB μ V/m]		
	2402 MHz	2441 MHz	2480 MHz
Peak	97.51	98.60	99.11
AVG*)	61.03	62.12	62.31
Measurement uncertainty	± 3 dB		

*) Average value calculated with duty cycle correction factor. (see chapter 9.1)

Result: **Passed.**

9.4 Band edge compliance radiated

Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to lowest channel for the lower restricted band and to highest channel for the upper restricted band. Measurement distance is 3m.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 MHz
Video bandwidth:	10 Hz
Span:	Lower Band: 2300 – 2400 MHz Upper Band: 2480 – 2500 MHz
Trace-Mode:	Max Hold


Limits:

FCC	IC
Band Edge Compliance Radiated	
Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209 / RSS GEN, whichever is the lesser attenuation.	
54 dB μ V/m (AVG) / 74 dB μ V/m (Pk)	


Result:

Modulation	Band Edge Compliance Radiated [dB μ V/m]
	GFSK
Lower Band Edge – Lowest Channel	< 54 dB μ V/m (see plot 1)
Upper Band Edge – Highest Channel	< 54 dB μ V/m (see plot 2)
Measurement uncertainty	$\pm$ 3 dB

Plot 1: lower band edge, vertical & horizontal polarization

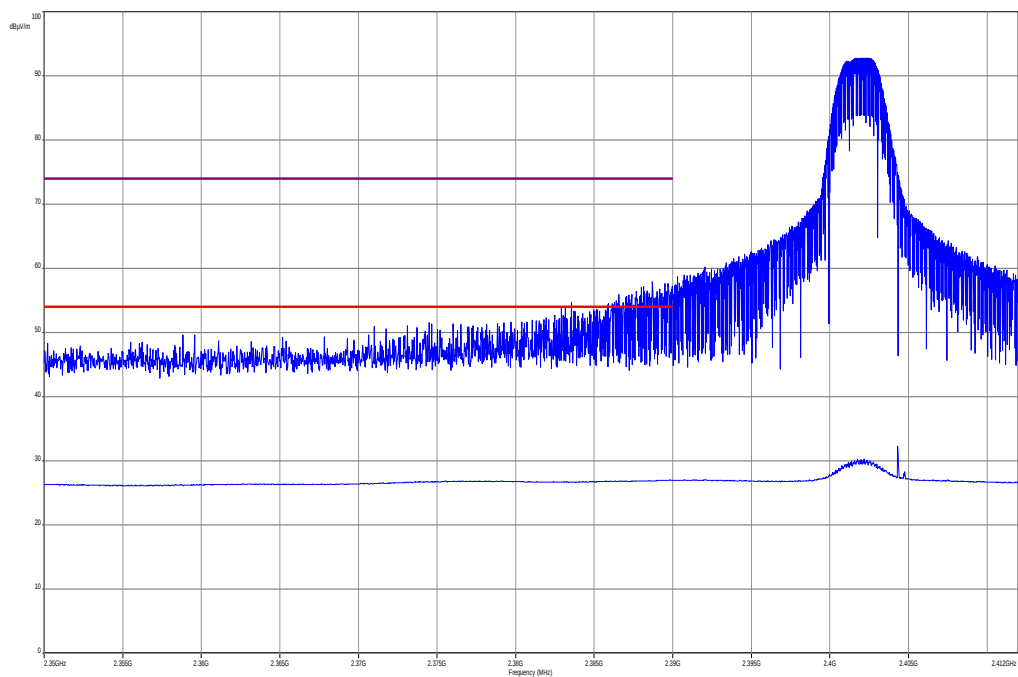

Plot 2: upper band edge, vertical & horizontal polarization

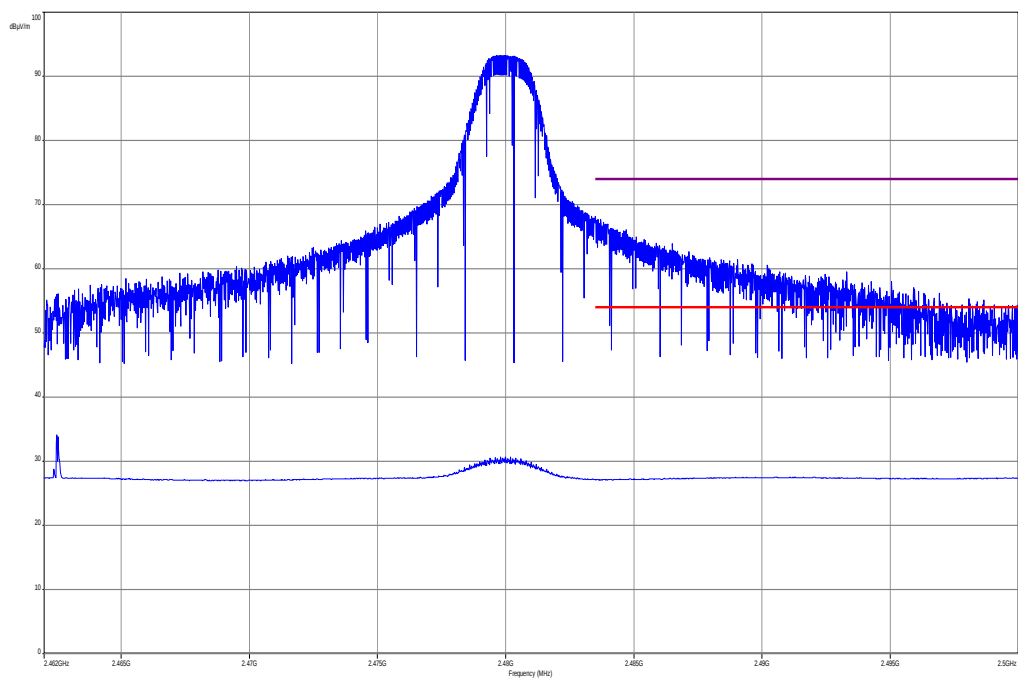

Result: **Passed.**

9.5 TX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed at lowest, middle and highest channel.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz or Duty cycle correction
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold

Limits:

FCC		IC
TX spurious emissions radiated		
Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209 / RSS GEN, whichever is the lesser attenuation.		
§15.209		
Frequency (MHz)	Field Strength (dBμV/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

Results:

TX Spurious Emissions Radiated [dB μ V/m]								
2402 MHz			2441 MHz			2480 MHz		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
See result tables below 30 MHz to 1 GHz plots								
Measurement uncertainty			± 3 dB					

Result: Passed.


Plot 1: Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization**Common Information**

EUT: Twin station
 Serial Number: 6C0002-01
 Test Description: FCC part 15 class B
 Operating Conditions: TX channel 1
 Operator Name: Kraus
 Comment: USB powered

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESC1 3]
 Level Unit: dB μ V/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

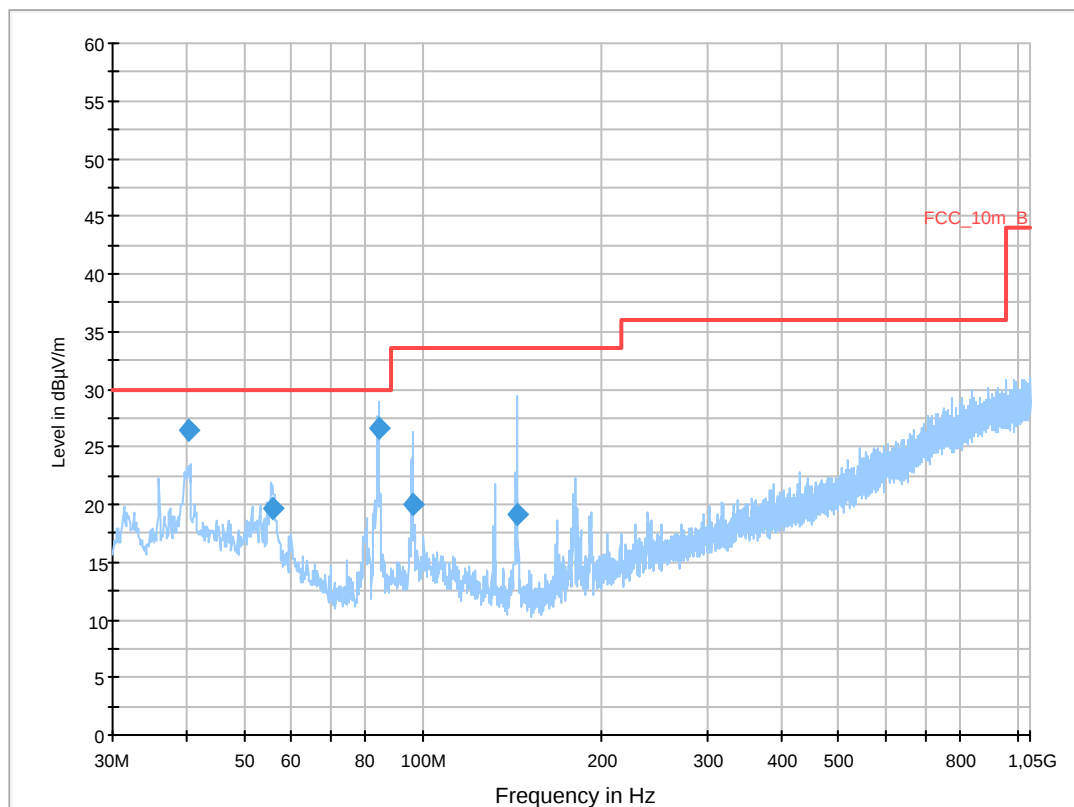**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
40.299750	26.5	1000.0	120.000	100.0	V	315.0	13.4	3.5	30.0	
55.655400	19.7	1000.0	120.000	243.0	V	185.0	12.7	10.3	30.0	
84.102300	26.6	1000.0	120.000	331.0	V	0.0	9.7	3.4	30.0	
96.112350	20.0	1000.0	120.000	264.0	V	0.0	11.4	13.5	33.5	
144.268650	19.1	1000.0	120.000	100.0	V	225.0	8.8	14.4	33.5	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1


Frequency Range: 30 MHz - 2 GHz

Receiver: Receiver [ESCI 3]
@ GPIB0 (ADR 20), SN 100083/003, FW 4.42Signal Path: without Notch
FW 1.0Antenna: VULB 9163
SN 9163-295, FW ---
Correction Table (vertical): VULP6113
Correction Table (horizontal): VULP6113
Correction Table (vertical): Cable_EN_1GHz (1005)
Correction Table (horizontal): Cable_EN_1GHz (1005)Antenna Tower: Tower [EMCO 2090 Antenna Tower]
@ GPIB0 (ADR 8), FW REV 3.12

Turntable: Turntable [EMCO Turntable]


EMC 32 Version 8.52

Plot 2: Lowest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

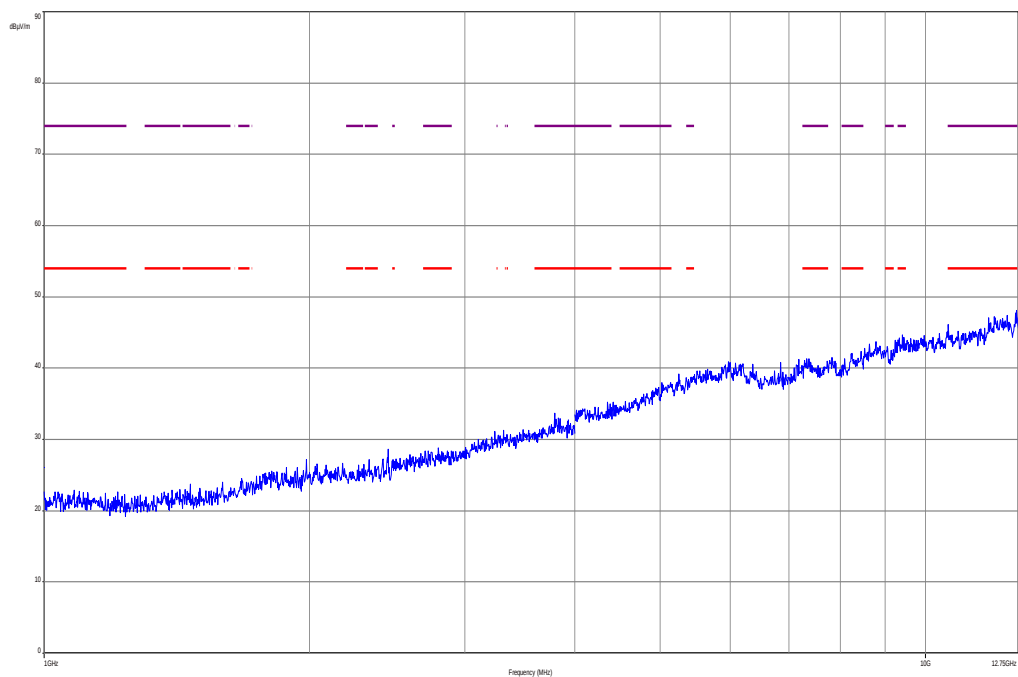


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 3: Lowest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

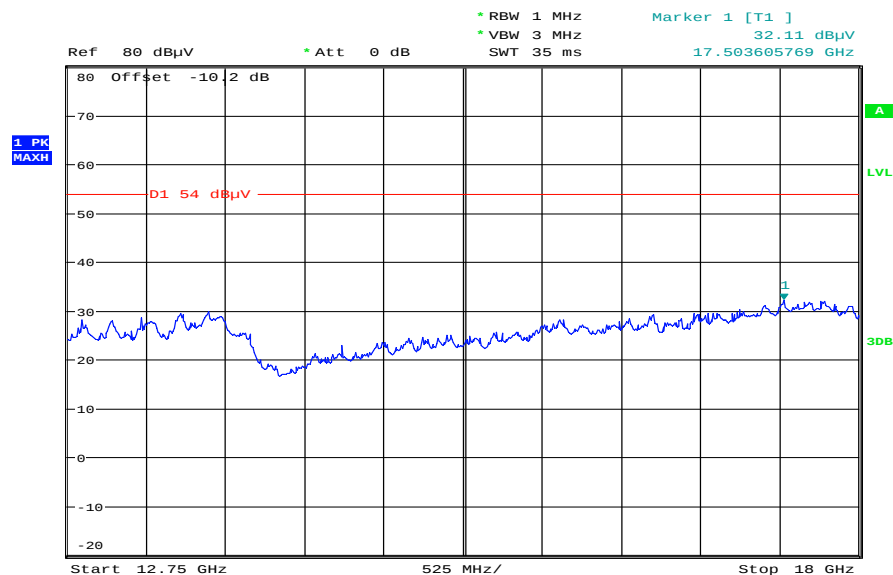

Date: 19.AUG.2013 14:56:54

Plot 4: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

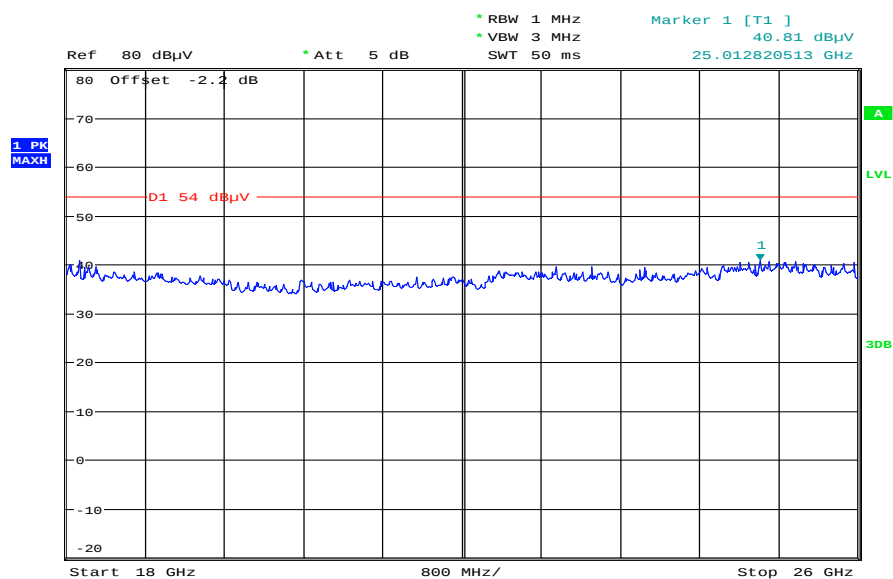

Date: 19.AUG.2013 15:12:15


Plot 5: Middle channel, 30 MHz to 1 GHz, vertical & horizontal polarization
Common Information

EUT: Twin station
 Serial Number: 6C0002-01
 Test Description: FCC part 15 class B
 Operating Conditions: TX channel 20
 Operator Name: Kraus
 Comment: USB powered

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESC1 3]
 Level Unit: dB μ V/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

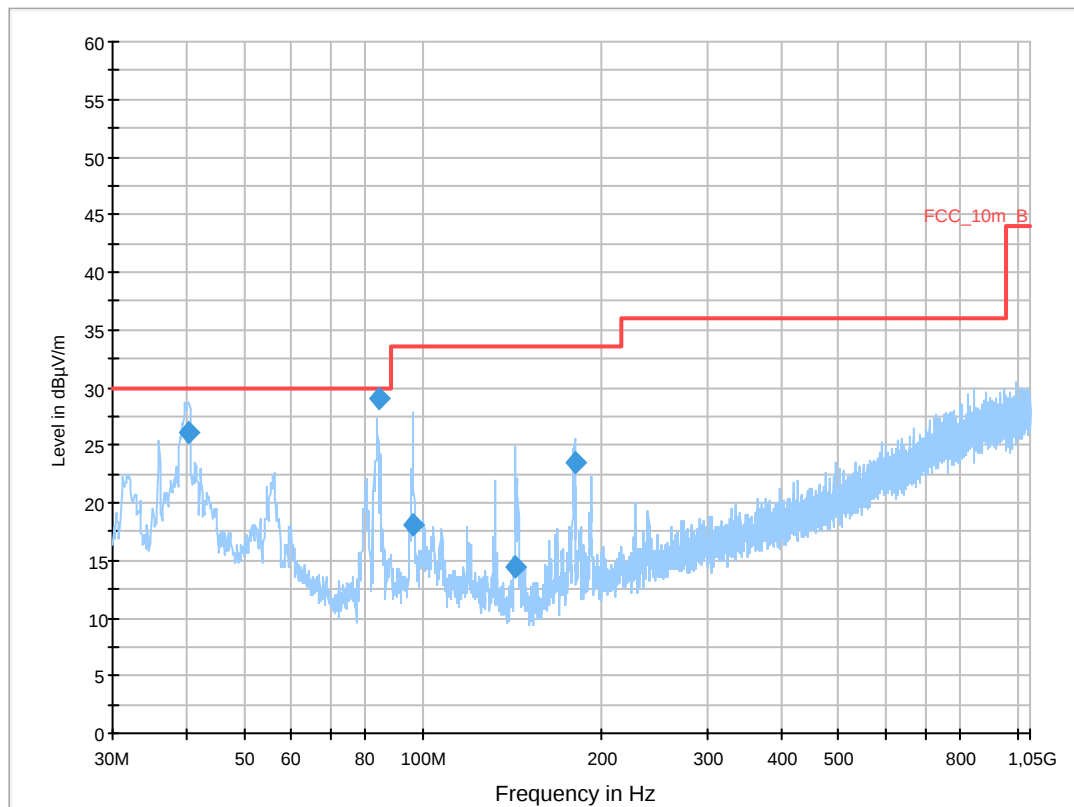
Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
40.151850	26.1	1000.0	120.000	98.0	V	-3.0	13.4	3.9	30.0	
84.133800	29.0	1000.0	120.000	143.0	V	10.0	9.7	1.0	30.0	
95.924400	18.1	1000.0	120.000	120.0	V	170.0	11.4	15.4	33.5	
142.808850	14.5	1000.0	120.000	98.0	V	280.0	8.7	19.0	33.5	
180.251250	23.5	1000.0	120.000	170.0	V	182.0	10.4	10.0	33.5	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]


Subrange 1

Frequency Range: 30 MHz - 2 GHz

Receiver: Receiver [ESCI 3]
@ GPIB0 (ADR 20), SN 100083/003, FW 4.42Signal Path: without Notch
FW 1.0Antenna: VULB 9163
SN 9163-295, FW ---
Correction Table (vertical): VULP6113
Correction Table (horizontal): VULP6113
Correction Table (vertical): Cable_EN_1GHz (1005)
Correction Table (horizontal): Cable_EN_1GHz (1005)Antenna Tower: Tower [EMCO 2090 Antenna Tower]
@ GPIB0 (ADR 8), FW REV 3.12Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), FW REV 3.12


EMC 32 Version 8.52

Plot 6: Middle channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

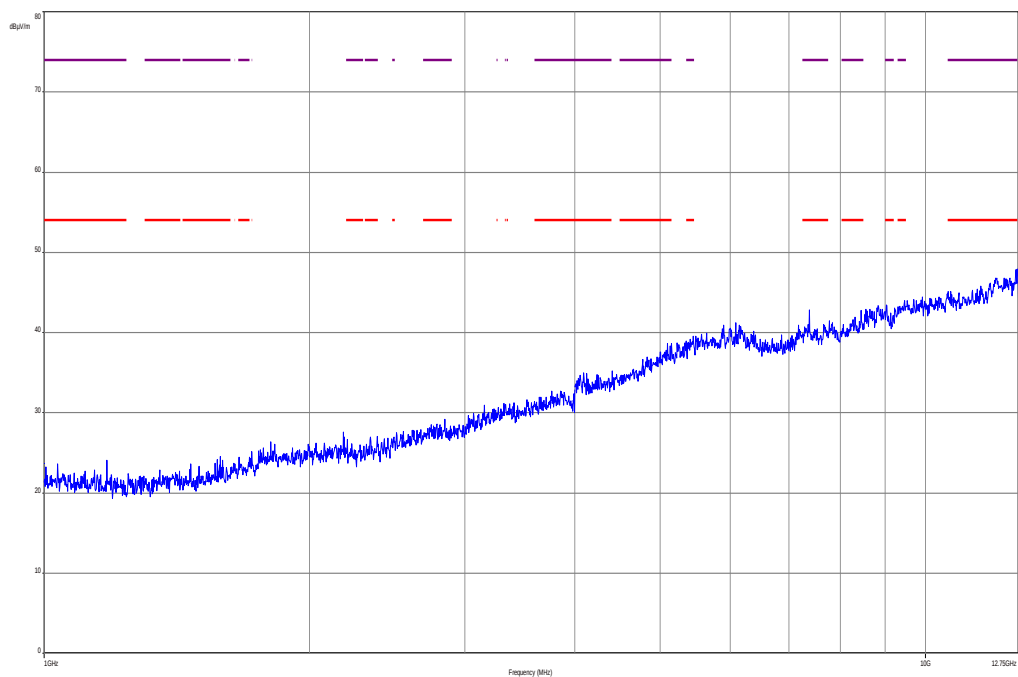


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 7: Middle channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

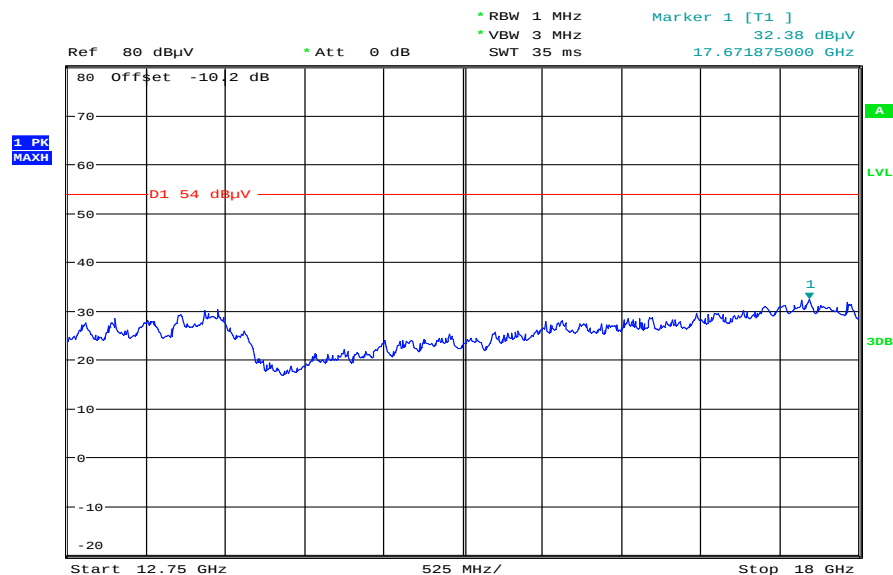

Date: 19.AUG.2013 15:01:28

Plot 8: Middle channel, 18 GHz to 25 GHz, vertical & horizontal polarization

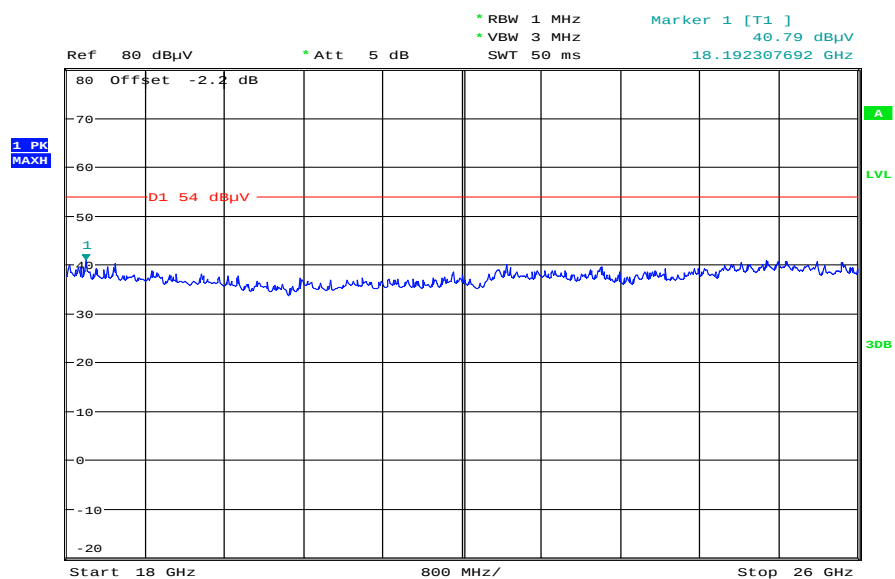

Date: 19.AUG.2013 15:08:31


Plot 9: Highest channel, 30 MHz to 1 GHz, vertical & horizontal polarization**Common Information**

EUT: Twin station
 Serial Number: 6C0002-01
 Test Description: FCC part 15 class B
 Operating Conditions: TX channel 40
 Operator Name: Kraus
 Comment: USB powered

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dB μ V/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

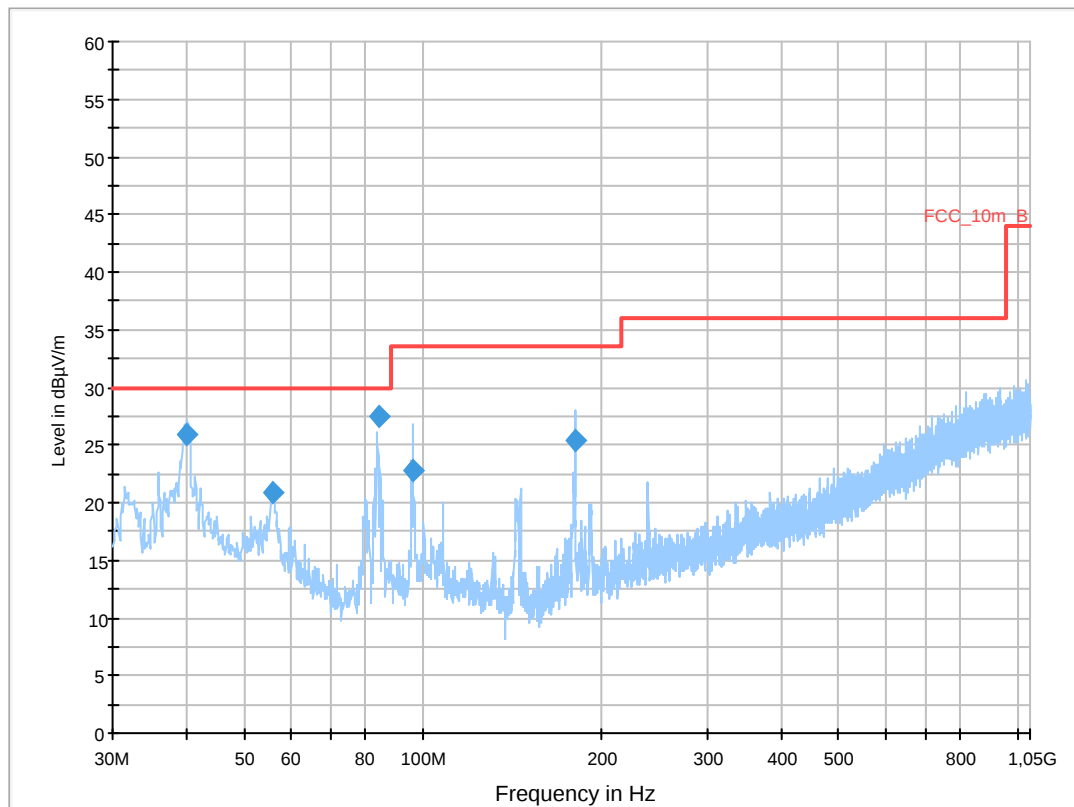**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
39.971100	26.0	1000.0	120.000	144.0	V	88.0	13.4	4.0	30.0	
56.016600	20.9	1000.0	120.000	170.0	V	272.0	12.6	9.1	30.0	
84.096300	27.5	1000.0	120.000	121.0	V	272.0	9.7	2.5	30.0	
96.189450	22.9	1000.0	120.000	104.0	V	260.0	11.4	10.6	33.5	
180.299250	25.3	1000.0	120.000	98.0	V	190.0	10.4	8.2	33.5	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]


Subrange 1

Frequency Range: 30 MHz - 2 GHz

Receiver: Receiver [ESCI 3]
@ GPIB0 (ADR 20), SN 100083/003, FW 4.42Signal Path: without Notch
FW 1.0Antenna: VULB 9163
SN 9163-295, FW ---
Correction Table (vertical): VULP6113
Correction Table (horizontal): VULP6113
Correction Table (vertical): Cable_EN_1GHz (1005)
Correction Table (horizontal): Cable_EN_1GHz (1005)
Antenna Tower: Tower [EMCO 2090 Antenna Tower]
@ GPIB0 (ADR 8), FW REV 3.12Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), FW REV 3.12


EMC 32 Version 8.52

Plot 10: Highest channel, 1 GHz to 12.75 GHz, vertical & horizontal polarization

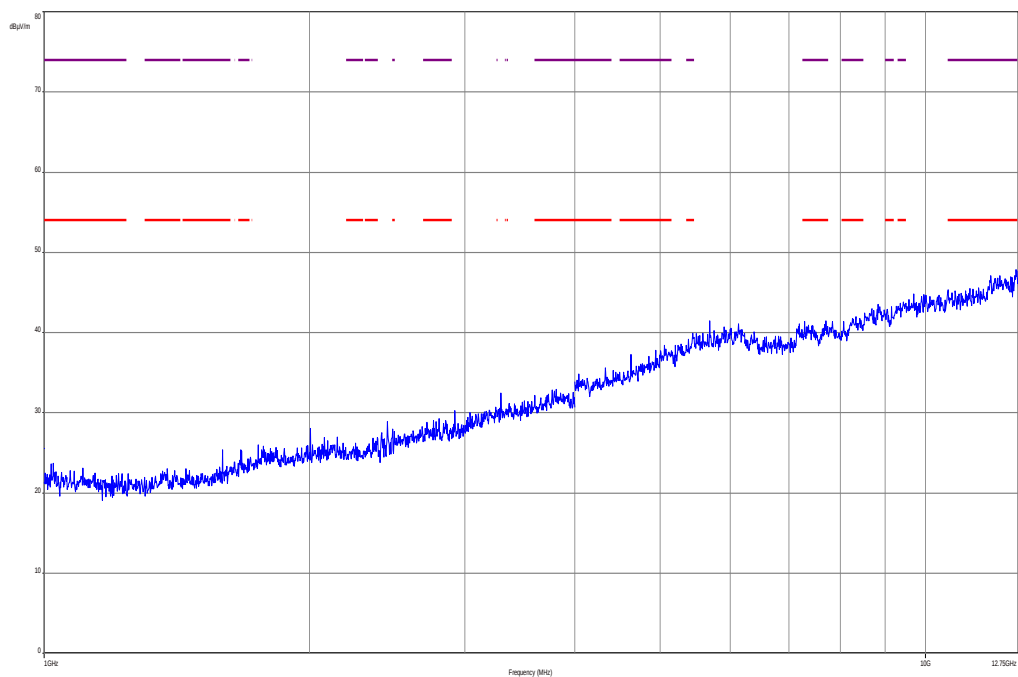


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 11: Highest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

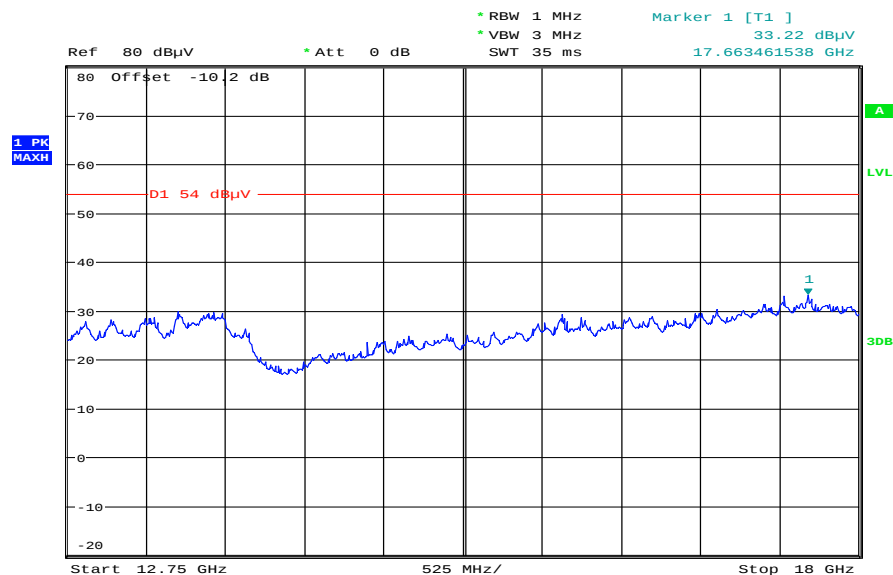

Date: 19.AUG.2013 15:03:06

Plot 12: Highest channel, 18 GHz to 25 GHz, vertical & horizontal polarization

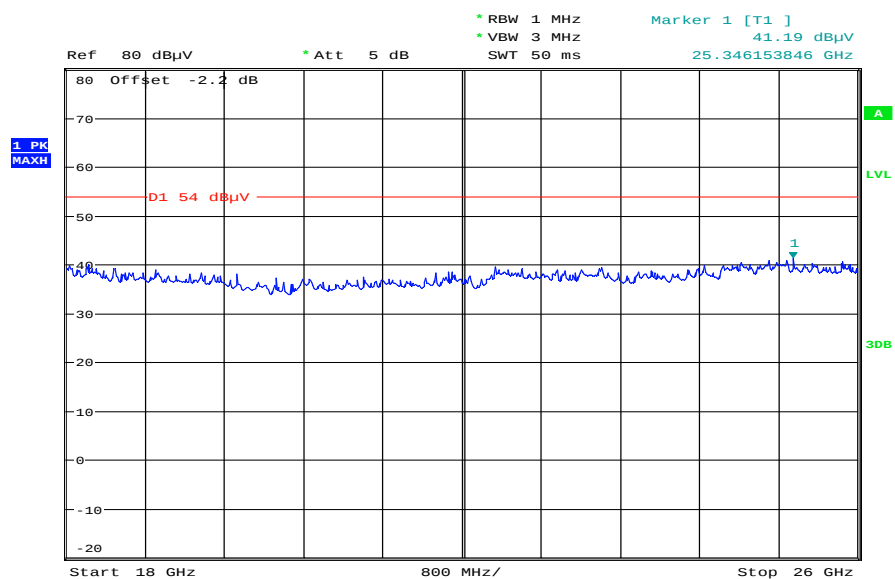

Date: 19.AUG.2013 15:07:27

9.6 RX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in idle/receive mode.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold

Limits:

FCC		IC
RX Spurious Emissions Radiated		
Frequency (MHz)	Field Strength (dB μ V/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

Results:

RX Spurious Emissions Radiated [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
See result table below 30 MHz to 1 GHz plot		
Measurement uncertainty	± 3 dB	

Result: **Passed.**


Plots: RX / Idle – mode**Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization****Common Information**

EUT: Twin station
 Serial Number: 6C0002-01
 Test Description: FCC part 15 class B
 Operating Conditions: idle
 Operator Name: Kraus
 Comment: USB powered

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESC1 3]
 Level Unit: dB μ V/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

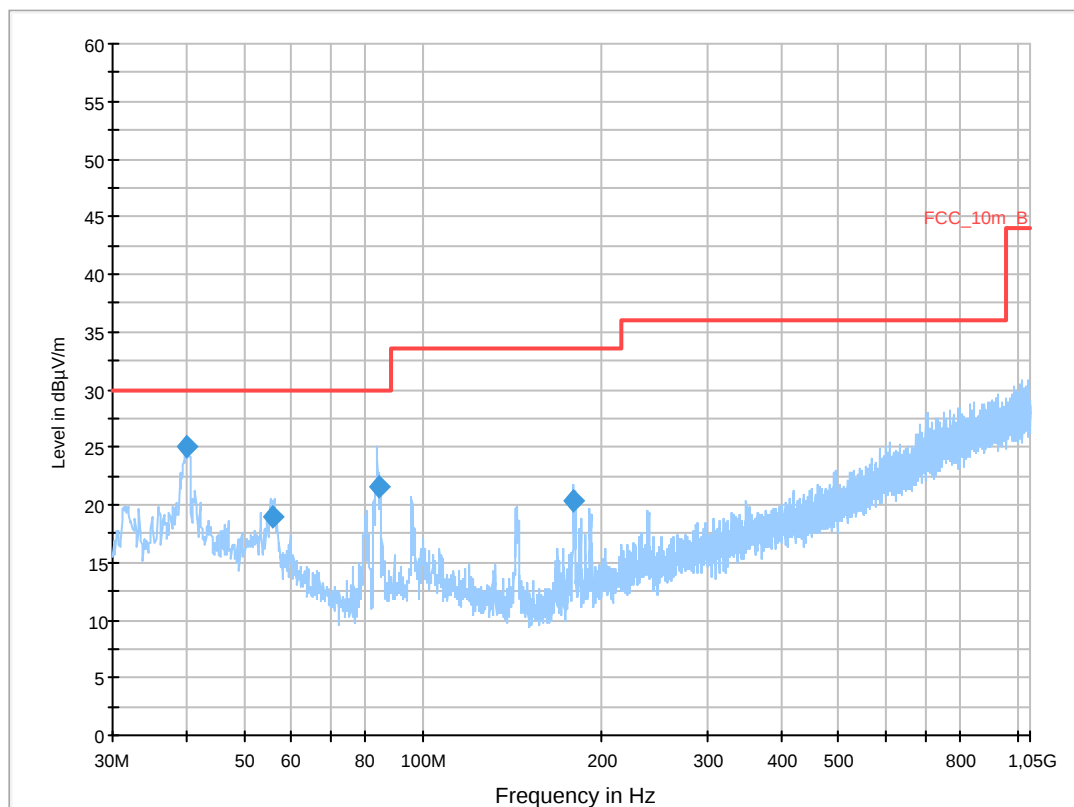**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
39.970950	25.1	1000.0	120.000	104.0	V	261.0	13.4	4.9	30.0	
55.655550	19.0	1000.0	120.000	170.0	V	272.0	12.7	11.0	30.0	
83.938950	21.7	1000.0	120.000	170.0	V	280.0	9.7	8.4	30.0	
179.266650	20.3	1000.0	120.000	161.0	V	270.0	10.4	13.2	33.5	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]


Subrange 1

Frequency Range: 30 MHz - 2 GHz


Receiver: Receiver [ESCI 3]
@ GPIB0 (ADR 20), SN 100083/003, FW 4.42Signal Path: without Notch
FW 1.0Antenna: VULB 9163
SN 9163-295, FW ---
Correction Table (vertical): VULP6113
Correction Table (horizontal): VULP6113
Correction Table (vertical): Cable_EN_1GHz (1005)
Correction Table (horizontal): Cable_EN_1GHz (1005)
Antenna Tower: Tower [EMCO 2090 Antenna Tower]
@ GPIB0 (ADR 8), FW REV 3.12Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), FW REV 3.12

EMC 32 Version 8.52

Plot 2: 1 GHz to 12.75 GHz, vertical & horizontal polarization

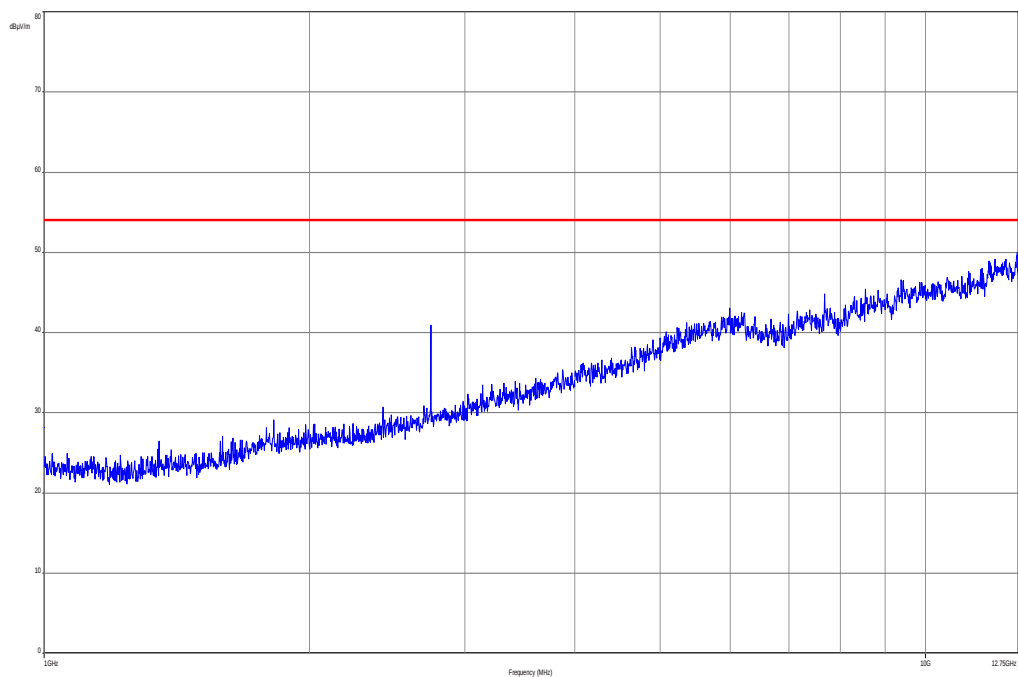


Plot 3: 12.75 GHz to 18 GHz, vertical & horizontal polarization

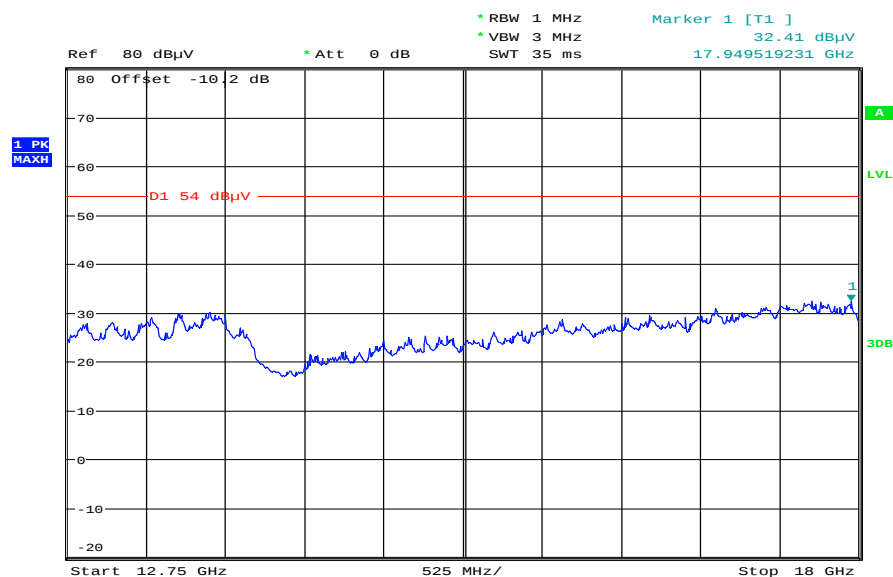

Date: 19.AUG.2013 14:48:00

Plot 4: 18 GHz to 25 GHz, vertical & horizontal polarization

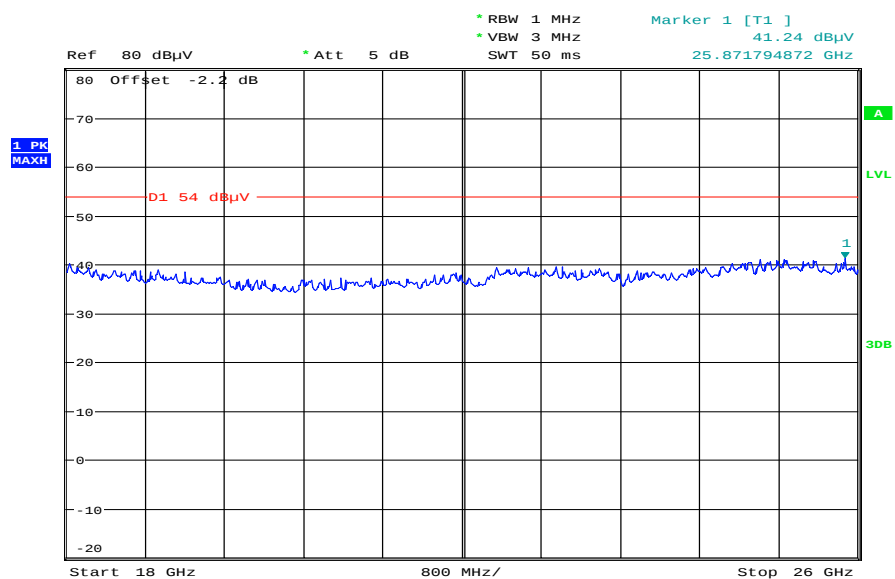

Date: 19.AUG.2013 14:50:53

9.7 Spurious emissions radiated < 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:


FCC		IC
Spurious Emissions Radiated < 30 MHz		
Frequency (MHz)	Field Strength (dB μ V/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Results:


Spurious Emissions Radiated < 30 MHz [dB μ V/m]								
TX mode			Idle mode			-/-		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
No peaks found			No peaks found					
Measurement uncertainty			± 3 dB					

Result: Passed.

Plot 1: 9 kHz to 30 MHz / TX mode

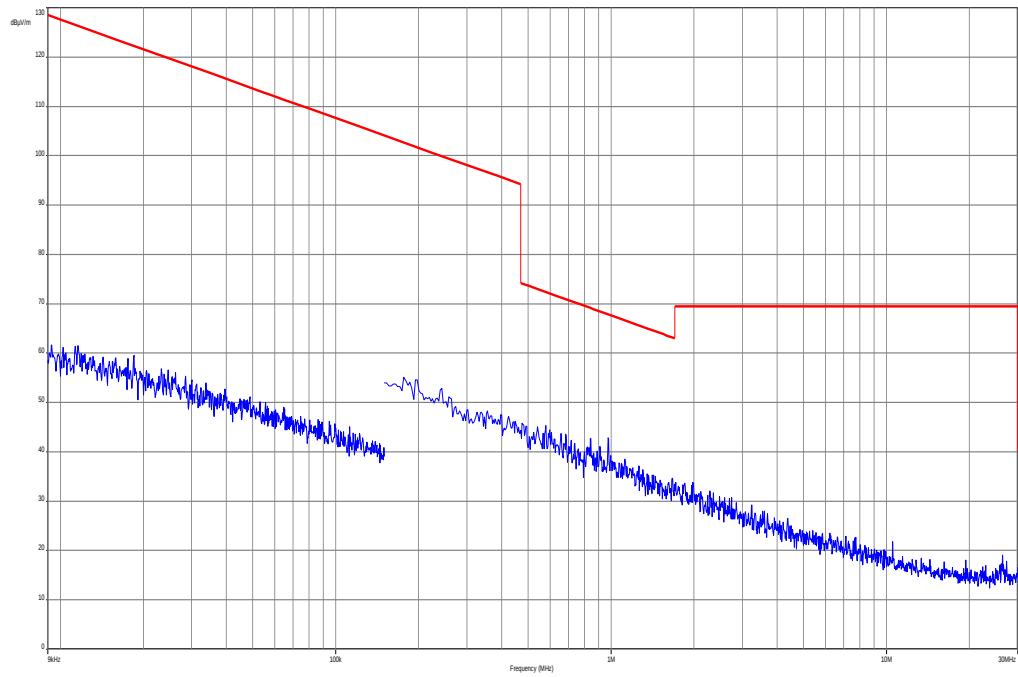

Plot 2: 9 kHz to 30 MHz / Idle mode

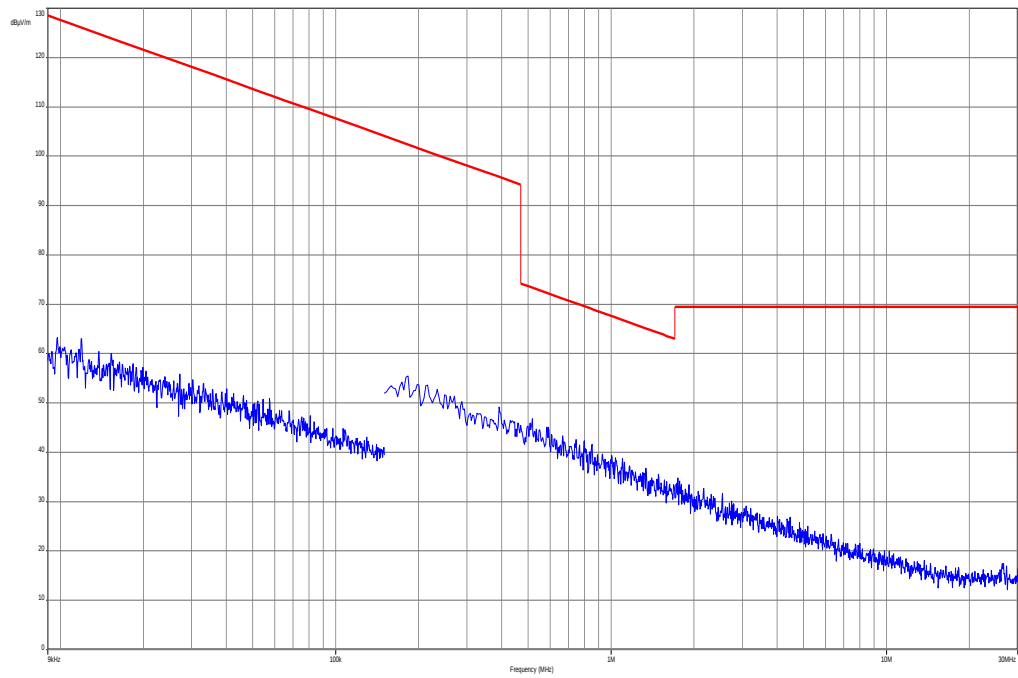

9.8 Spurious emissions conducted < 30 MHz

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to middle channel and Idle mode. If critical peaks are found the lowest and highest channel will be measured too. Both power lines, phase and neutral line, are measured. Found peaks are remeasured with average and quasi peak detection to show compliance to the limits.

Measurement:

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Span:	150 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:

FCC		IC
TX Spurious Emissions Conducted < 30 MHz		
Frequency (MHz)	Quasi-Peak (dB μ V/m)	Average (dB μ V/m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50


*Decreases with the logarithm of the frequency

Results:


Spurious Emissions Conducted < 30 MHz [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
No peaks found		
Measurement uncertainty	± 3 dB	

Result: Passed.


Plot 1: 150 kHz to 30 MHz / phase Line, TX mode

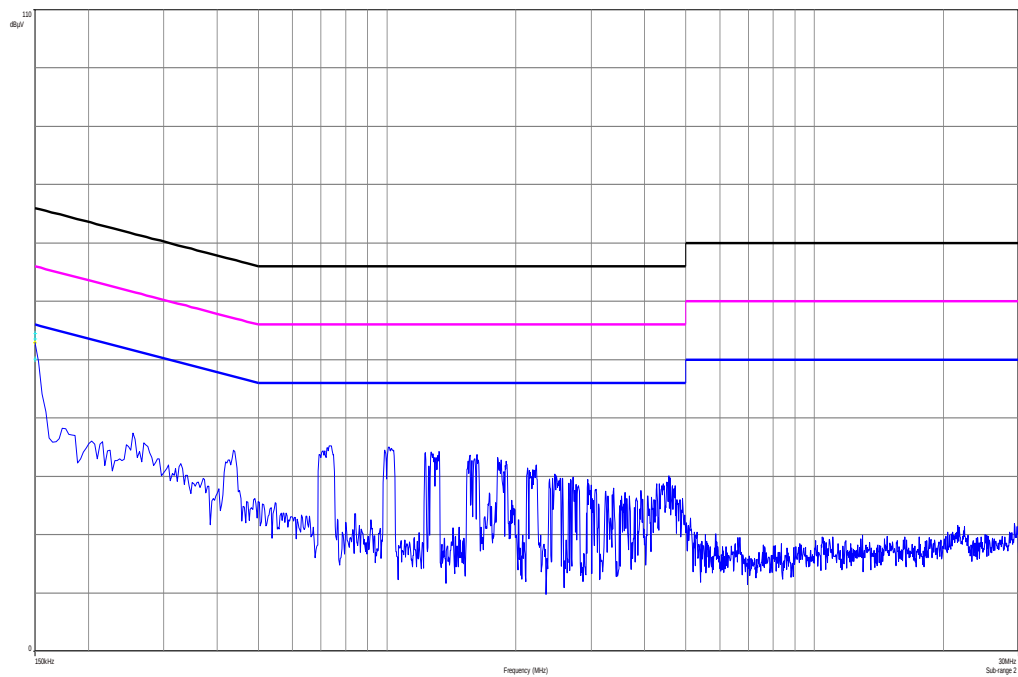


Plot 2: 150 kHz to 30 MHz / neutral Line, TX mode

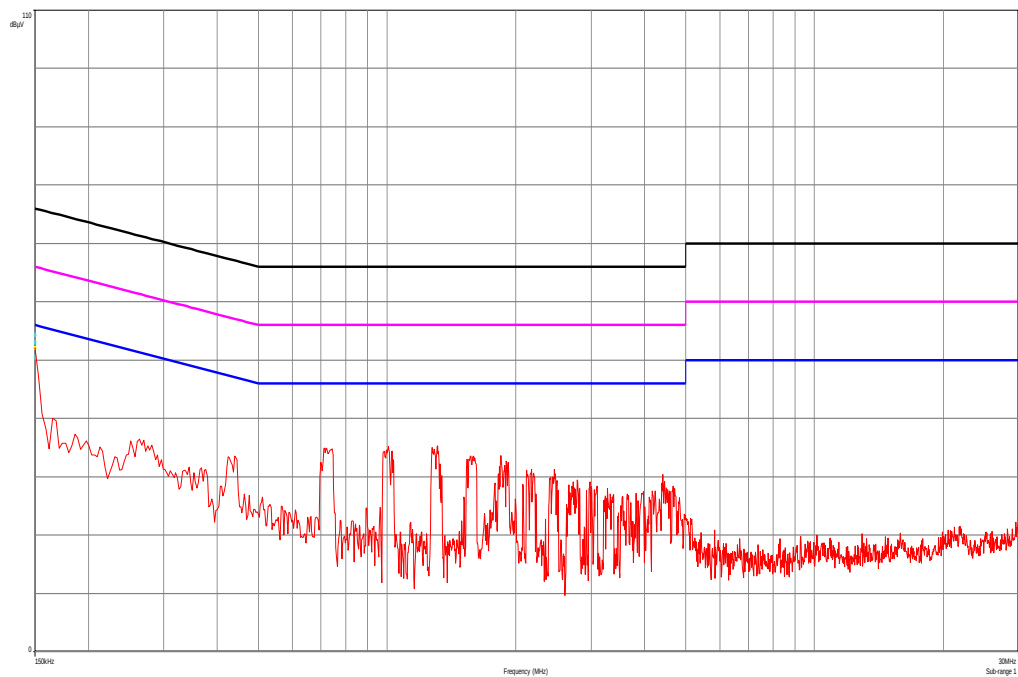

Plot 3: 150 kHz to 30 MHz / phase Line, Idle mode

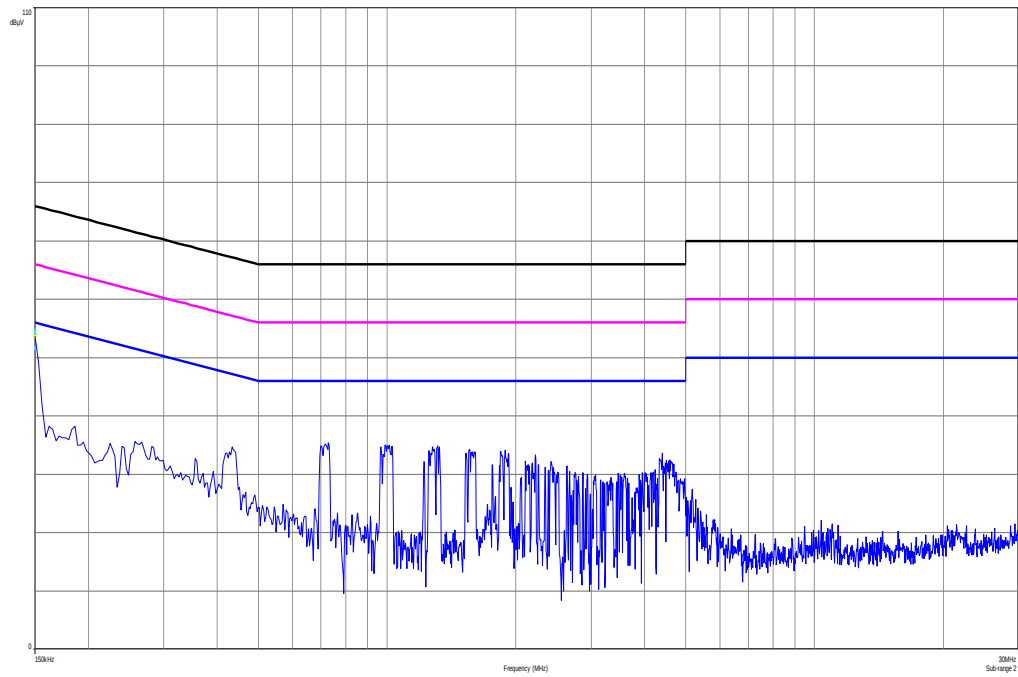

Plot 4: 150 kHz to 30 MHz / neutral Line, Idle mode

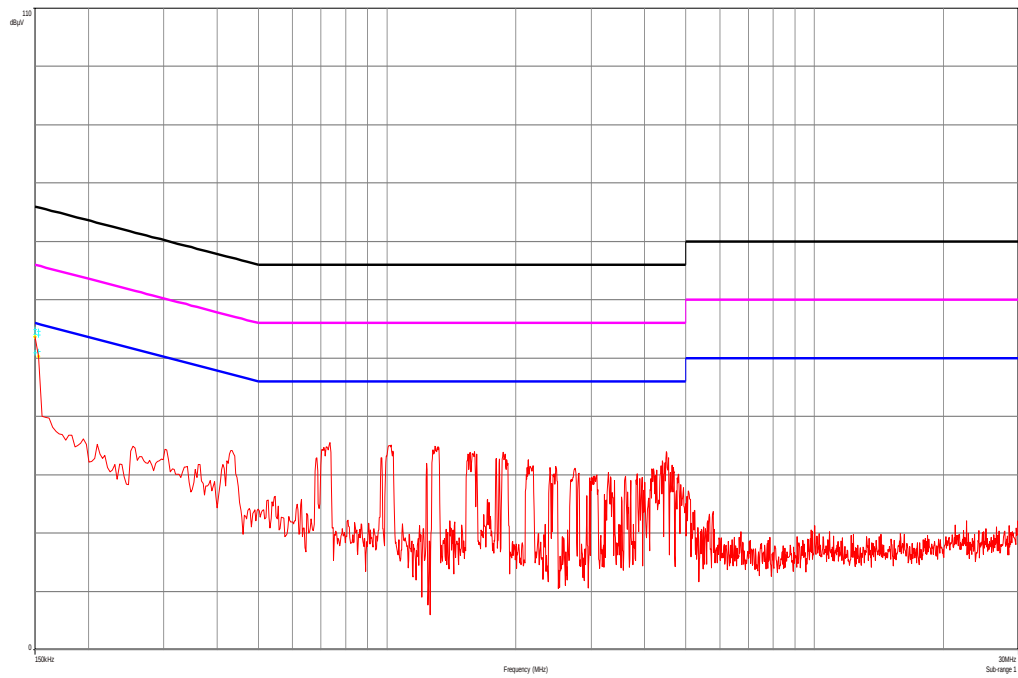

10 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	n. a.	Spectrum Analyzer 20 Hz - 50 GHz	FSU50	R&S	200012	300003443	Ve	09.10.2012	09.10.2014
2	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vKI!	08.05.2013	08.05.2015
3	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev		
4	n. a.	Switch / Control Unit	3488A	HP Meßtechnik	*	300000199	ne		
5	9	Artificial Mains 9 kHz to 30 MHz	ESH3-Z5	R&S	828576/020	300001210	Ve	06.01.2012	06.01.2014
6	n. a.	Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001156	ne		
7	9	Isolating Transformer	MPL IEC625 Bus Regeltrennt ravo	Erft	91350	300001155	ne		
8	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
9	90	Active Loop Antenna 10 kHz to 30 MHz	6502	Kontron Psychotech	8905-2342	300000256	k	13.06.2013	13.06.2015
10	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
11	n. a.	Band Reject filter	WRCG185 5/1910-1835/1925-40/8SS	Wainwright	7	300003350	ev		
12	n. a.	Band Reject filter	WRCG240 0/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev		
13	n. a.	Highpass Filter	WHKX7.0/1 8G-8SS	Wainwright	18	300003789	ne		
14	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vKI!	14.10.2011	14.10.2014
15	n. a.	MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405	k	21.02.2013	21.02.2014

Agenda: Kind of Calibration

k calibration / calibrated
 ne not required (k, ev, izw, zw not required)
 ev periodic self verification
 Ve long-term stability recognized
 vKI! Attention: extended calibration interval
 NK! Attention: not calibrated

EK limited calibration
 zw cyclical maintenance (external cyclical maintenance)
 izw internal cyclical maintenance
 g blocked for accredited testing
 *) next calibration ordered / currently in progress

11 Observations

No observations exceeding those reported with the single test cases have been made.

Annex A Photographs of the test setup

Photo documentation:

Photo 1:

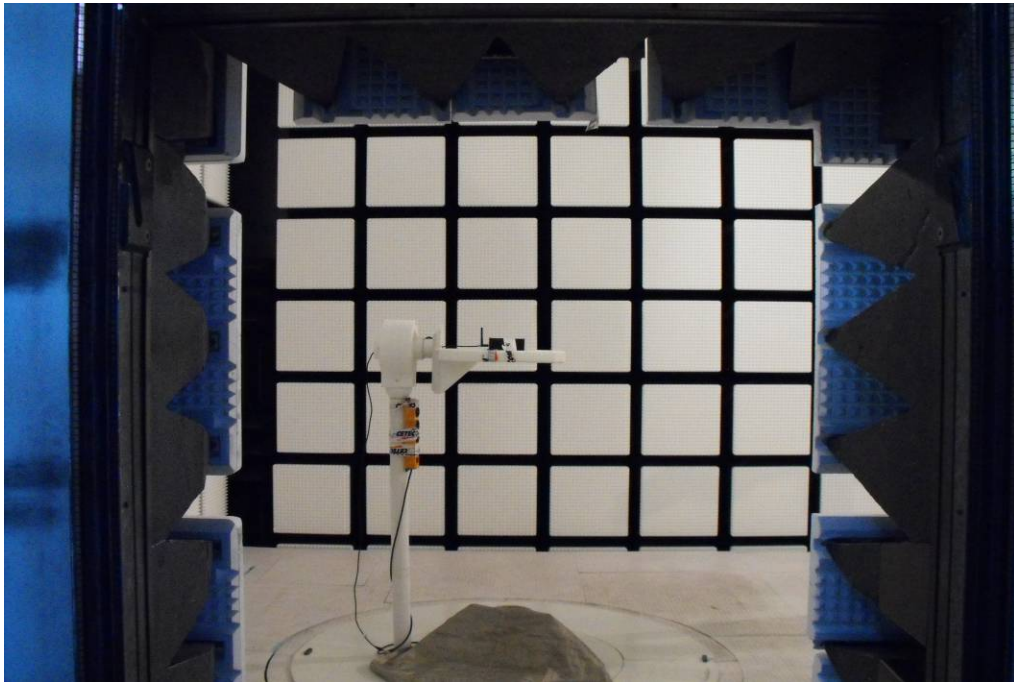


Photo 2:



Photo 3:

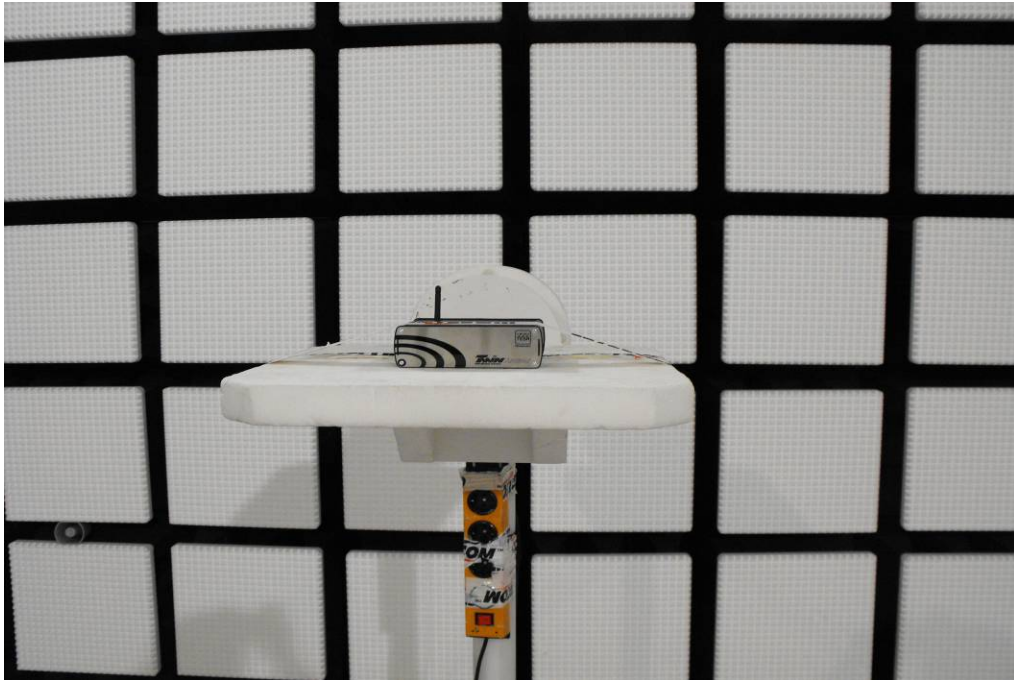


Photo 4:



Photo 5:



Photo 6:


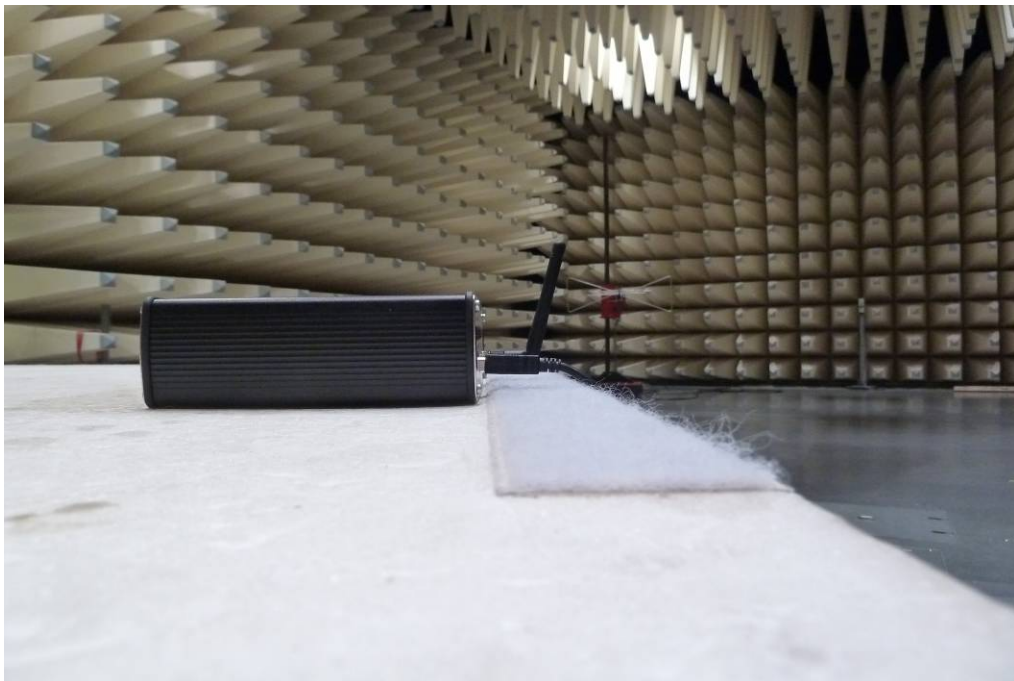


Photo 7:

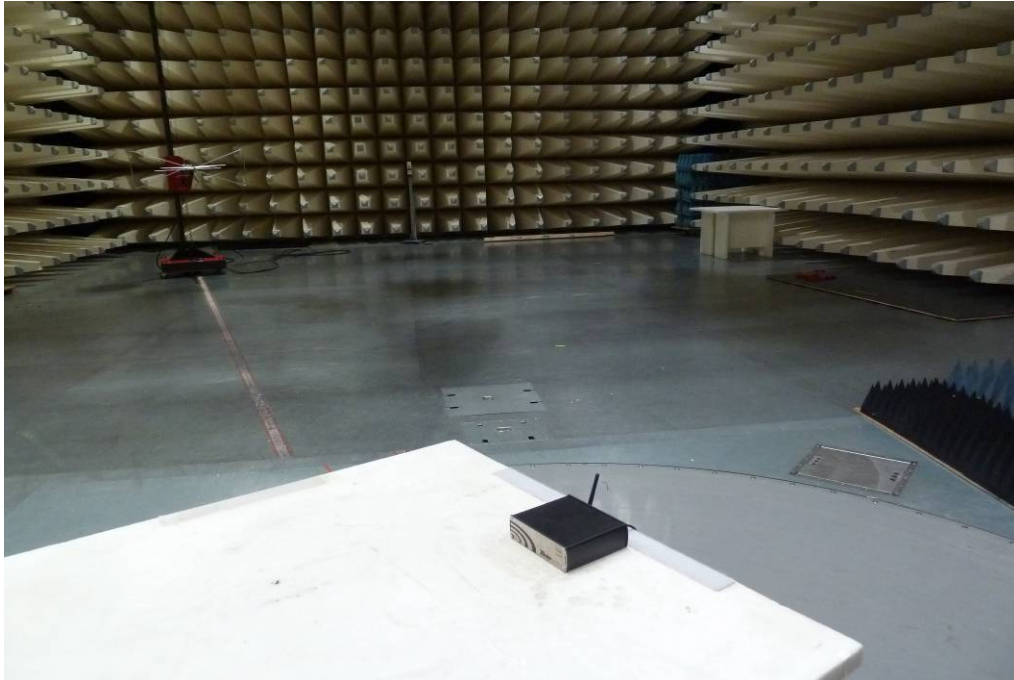

Annex B External photographs of the EUT

Photo documentation:

Photo 1:



Photo 2:



Photo 3:



Photo 4:



Photo 5:



Annex C Internal photographs of the EUT

Photo documentation:

Photo 1:



Photo 2:


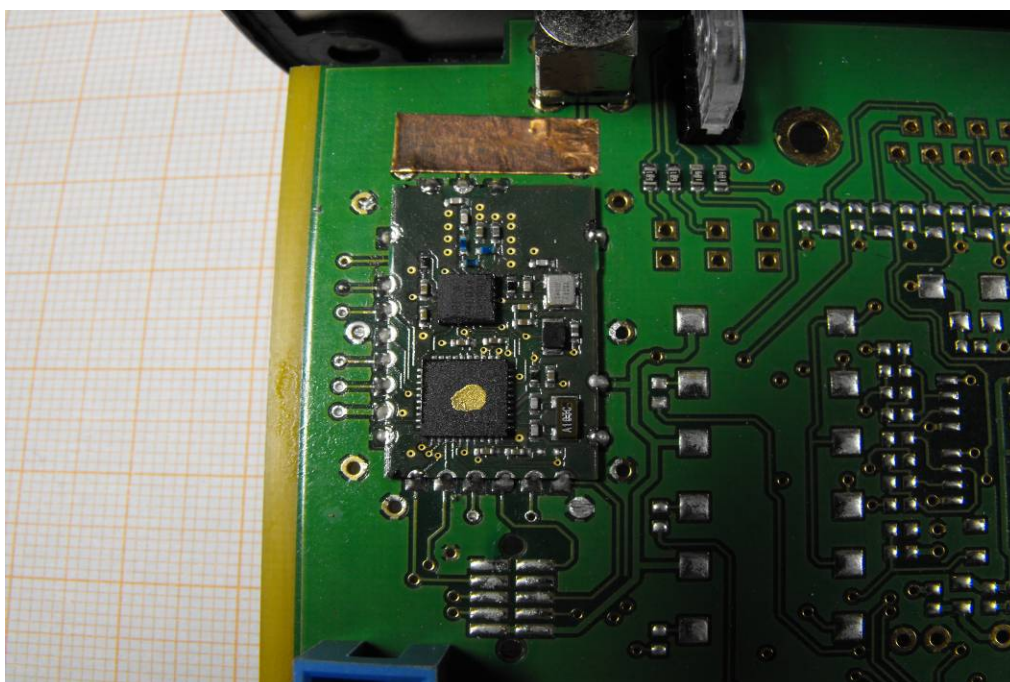


Photo 3:

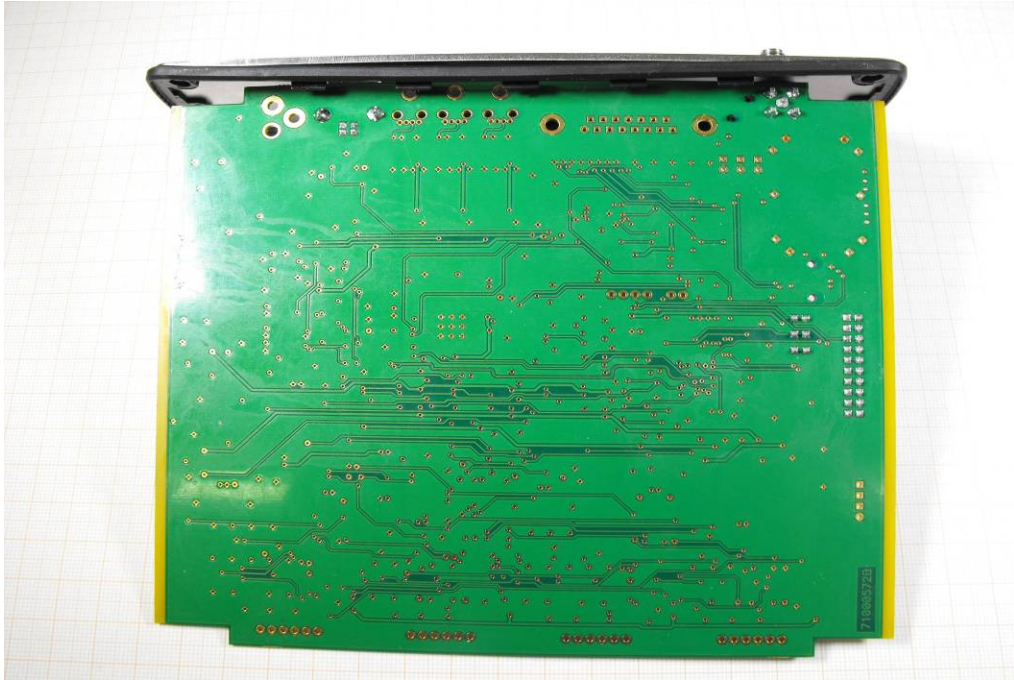

Annex D Document history

Version	Applied changes	Date of release
1.0	Initial release	2013-09-27
-A	Editorial changings	2013-10-02

Annex E Further information**Glossary**

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software

Annex F Accreditation Certificate

Front side of certificate



Deutsche Akkreditierungsstelle GmbH

Befehle gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV
Unterzeichnerin der Multilateralen Abkommen
von EA, ILAC und IAF zur gegenseitigen Anerkennung

Akkreditierung



Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium

CETECOM ICT Services GmbH
Untertürkheimer Straße 6-10, 66117 Saarbrücken

die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen durchzuführen:

Drahtgebundene Kommunikation einschließlich xDSL
VoIP und DECT
Akustik
Funk einschließlich WLAN
Short Range Devices (SRD)
RFID
WiMax und Richtfunk
Mobilfunk (GSM / DCS, Over the Air (OTA) Performance)
Elektromagnetische Verträglichkeit (EMV) einschließlich Automotive
Produktsicherheit
SAR und Hearing Aid Compatibility (HAC)
Umweltsimulation
Smart Card Terminals
Bluetooth
Wi-Fi Services

Die Akkreditierungskunde gilt nur in Verbindung mit dem Bescheid vom 18.01.2013 mit der Akkreditierungsnummer D-PL-12076-01 und ist gültig 17.01.2018. Sie besteht aus diesem Deckblatt, der Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 80 Seiten.

Registrierungsnummer der Urkunde: D-PL-12076-01-01

Frankfurt am Main, 18.01.2013
Unterzeichnet auf der Rückseite

Impfstrag
Dilger, (FH) Jäger
Abteilungsleiter

Back side of certificate

Deutsche Akkreditierungsstelle GmbH

Standort Berlin
Spittelmarkt 10
10117 Berlin

Standort Frankfurt am Main
Gartenstraße 6
60594 Frankfurt am Main

Standort Braunschweig
Rundellallee 100
38116 Braunschweig

Die auszugsweise Veröffentlichung der Akkreditierungskunde bedarf der vorherigen schriftlichen Zustimmung der Deutschen Akkreditierungsstelle GmbH (DAKKS). Ausgenommen davon ist die separate Weiterverbreitung des Deckblatts durch die umseitig genannte Konformitätsbewertungsstelle in unveränderter Form.

Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt, die über den durch die DAKKS bestätigten Akkreditierungsbereich hinausgehen.

Die Akkreditierung erfolgte gemäß des Gesetzes über die Akkreditierungsstelle (AkkStelleG) vom 31. Juli 2009 (BGBl. I S. 2625) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Marktüberwachung im Zusammenhang mit der Vermarktung von Produkten (Abt. L 218 vom 9. Juli 2008, S. 30). Die DAKKS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der European co-operation for Accreditation (EA), des International Accreditation Forum (IAF) und der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen erkennen ihre Akkreditierungen gegenseitig an.

Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden:
EA: www.european-accreditation.org
ILAC: www.ilac.org
IAF: www.iaf.nu

Note:

The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

<http://www.cetecom.com/eu/de/cetecom-group/europa/deutschland-saarbruecken/akkreditierungen.html>