

Produkte
Products

Prüfbericht - Nr.: 14037984 001
Test Report No.:

Seite 1 von 15
Page 1 of 15

Auftraggeber: BluVision, Inc
Client: 3201 Griffin Rd Bld Suit 200 Fort Lauderdale
Florida United States 33312

Gegenstand der Prüfung: BLE to WiFi Gateway
Test Item:

Bezeichnung: BluFi **Serien-Nr.:** **Engineering sample**
Identification: **Serial No.:**

Wareneingangs-Nr.: A000143026-009 **Eingangsdatum:** 02.03.2015
Receipt No.: *Date of Receipt:*

Zustand des Prüfgegenstandes bei Anlieferung: Test sample is not damaged and suitable for testing.
Condition of test item at delivery:

Prüfort: TÜV Rheinland Hong Kong Ltd.
Testing Location: 8/F, First Group Centre, 14 Wang Tai Road, Kowloon Bay, Kowloon, Hong Kong
Hong Kong Productivity Council
HKPC Building, 78 Tat Chee Avenue, Kowloon, Hong Kong

Prüfgrundlage: FCC Part 15 Subpart C
Test Specification: ANSI C63.4-2003

Prüfergebnis: Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben genannter Prüfgrundlage.
Test Results: The above mentioned product was tested and **passed**.

Prüflaboratorium: TÜV Rheinland Hong Kong Ltd.
Testing Laboratory: 8 - 10/F., Goldin Financial Global Square, 7 Wang Tai Road, Kowloon Bay, Kowloon, Hong Kong

geprüft/ tested by:

03.06.2016 Benny Lau
Datum Name/Stellung
Date Senior Project Manager



kontrolliert/ reviewed by:

03.06.2016 Sharon Li
Datum Name/Stellung
Date Department Manager



Sonstiges:
Other Aspects

FCC ID: SL6-BEEKSBLUFI

Abkürzungen: P(ass) = entspricht Prüfgrundlage
F(all) = entspricht nicht Prüfgrundlage
N/A = nicht anwendbar
N/T = nicht getestet

Abbreviations: P(ass) = passed
F(all) = failed
N/A = not applicable
N/T = not tested

Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.
This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.

Table of Content

	Page
Cover Page	1
Table of Content	2
Product information.....	4
Manufacturers declarations	4
Product function and intended use	4
Submitted documents.....	4
Independent Operation Modes	4
Related Submittal(s) Grants	5
Remark	5
Test Set-up and Operation Mode.....	6
Principle of Configuration Selection	6
Test Operation and Test Software	6
Special Accessories and Auxiliary Equipment.....	6
Countermeasures to achieve EMC Compliance.....	6
Test Methodology	7
Radiated Emission	7
Field Strength Calculation.....	7
Test Setup Diagram	8
List of Test and Measurement Instruments.....	9
Measurement Uncertainty	10
Results FCC Part 15 – Subpart C	11
FCC 15.203 – Antenna Requirement 1.....	Pass 11
FCC 15.204 – Antenna Requirement 2.....	Pass 11
FCC 15.207 – Conducted Emission on AC Mains	Pass 11
Subclause 15.215 (c) – 20 dB Bandwidth.....	Pass 12
Subclause 15.249 (a) – Field Strength of Fundamental and Harmonics.....	Pass 12
Subclause 15.249 (d), 15.205 – Out Of Band Radiated Emission	Pass 15
Appendix 1 – Test protocols	4 pages
Appendix 2 – Test setup	2 pages
Appendix 3 – EUT External Photos	3 pages
Appendix 4 – EUT Internal Photos	4 pages

Appendix 5 – RF exposure information..... 2 pages

Product information

Manufacturers declarations

WIFI Transceiver	
Operating frequency range	2412 - 2462 MHz
Type of modulation	DSSS, OFDM, MCS0-7
Number of channels	11
Channel separation	5 MHz
Type of antenna	Integral PCB Antenna
Antenna gain (dBi)	0 dBi
Power level	fix
Type of equipment	stand alone radio device
Connection to public utility power line	Yes
Nominal voltage	V _{nor} : 100 to 240 VAC
Independent Operation Modes	Transmitting mode

Bluetooth Low Energy Transceiver	
Operating frequency range	2402 - 2480 MHz
Type of modulation	GFSK
Number of channels	40
Channel separation	2 MHz
Type of antenna	Integral PCB Antenna
Antenna gain (dBi)	0 dBi
Power level	fix
Type of equipment	stand alone radio device
Connection to public utility power line	Yes
Nominal voltage	V _{nor} : 100 to 240 VAC
Independent Operation Modes	Transmitting mode

Product function and intended use

The equipment under test (EUT) is a BLE to WIFI Gateway operating at 2.4GHz. It is powered by 100–240VAC.

FCC ID: SL6-BEEKSBLUFI

Models	Product description
BluFi	BLE to WiFi Gateway

Submitted documents

Circuit Diagram
 Block Diagram
 Bill of material
 User manual
 Rating Label

Independent Operation Modes

The basic operation modes are:

- Transmitting mode.

For further information refer to User Manual

Related Submittal(s) Grants

This is a single application for certification of the BLE transmitter.

The WIFI portion is authorized under the certification procedure (refer to test report 14037985 001)

Remark

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production.

Test Set-up and Operation Mode

Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Test Operation and Test Software

Test operation should refer to test methodology.

- During test, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power was selected according to the instruction given by the manufacturer. The setting of the RF output power expected by the customer shall be fixed on the firmware of the final end product.
- Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Simultaneous transmission was investigated, no additional spurious emission was found from 9kHz to 25GHz.

Special Accessories and Auxiliary Equipment

- none

Countermeasures to achieve EMC Compliance

- none

Test Methodology

Radiated Emission

The radiated emission measurements of the transmitter part were performed according to the procedures in ANSI C63.4-2003.

For measurement below 1GHz - the equipment under test (EUT) was placed at the middle of the 80 cm height turntable. For measurement above 1GHz - the EUT was placed at the middle of the 1.5 m height turntable and RF absorbing material was placed on ground plane between turntable and measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360 °, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:

$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters.

R = Reading of Spectrum Analyzer in dBuV.

AF = Antenna Factor in dB.

CF = Cable Attenuation Factor in dB.


FA = Filter Attenuation Factor in dB.

PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.


Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

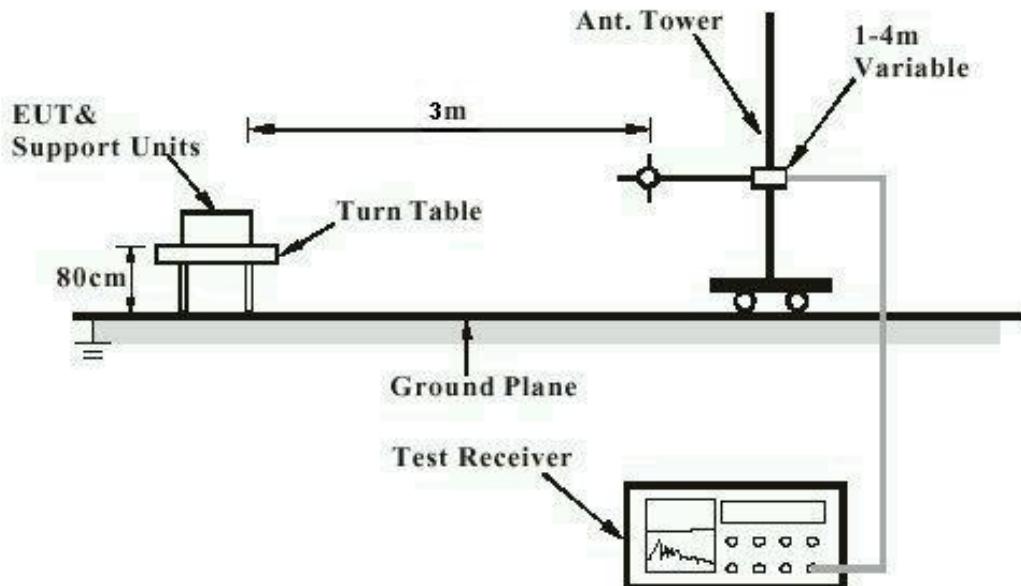

Note: Measurements above 1 GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)

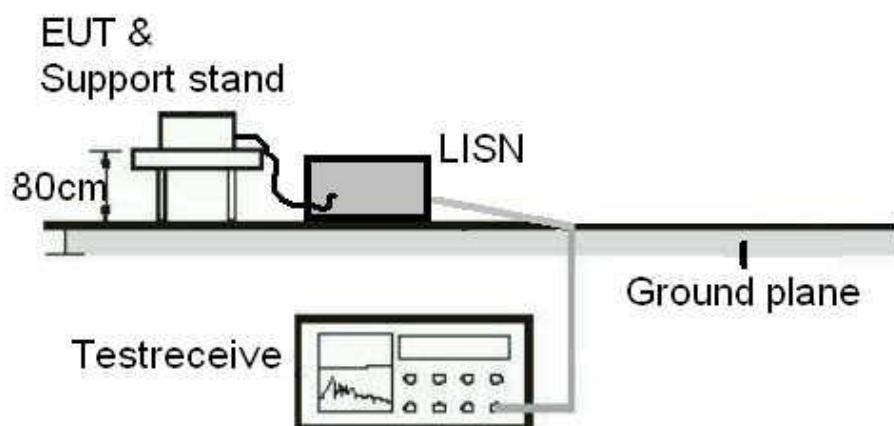

List of Test and Measurement Instruments

Hong Kong Productivity Council (FCC Registration number: 90656)

Radiated Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
Semi-anechoic Chamber	Frankonia	Nil	25-Apr-16	25-Apr-17
New Fully Anechoic Chamber	TDK	N/A	19-Apr-16	19-Apr-17
Cable	Hubersuhner	SUCOFLEX 104	31-Mar-16	31-Mar-18
Test Receiver	R & S	ESU26	7-Dec-15	7-Dec-16
Bi-conical Antenna	R & S	HK116	1-Sep-15	1-Sep-17
Log Periodic Antenna	R & S	HL223	1-Sep-15	1-Sep-17
Coaxial cable	Harbour	LL335	10-Jun-14	10-Jun-16
Microwave amplifier 0.5-26.5GHz, 25dB gain	HP	83017A	17-Jul-14	17-Jul-16
High Pass Filter (cutoff freq. =1000MHz)	Trilithic	23042	28-Oct-15	28-Oct-17
Horn Antenna	EMCO	3115	26-Aug-15	26-Aug-17
Active Loop Antenna	EMCO	6502	15-Aug-15	15-Aug-16

TÜV Rheinland Hong Kong Ltd

AC Mains Conducted Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
Test Receiver	R & S	ESR3	22-Oct-15	22-Oct-16
LISN	R & S	ENV216	05 Feb 15	19-Jan-17
EMC32	R & S	v9.12	N/A	N/A

Measurement Uncertainty

The estimated combined standard uncertainty for power-line conducted emissions measurements is $\pm 3.43\text{dB}$.

The estimated combined standard uncertainty for radiated emissions measurements is $\pm 5.10\text{dB}$ (30MHz to 200MHz) and $\pm 5.08\text{dB}$ (200MHz to 1000MHz) and is $\pm 5.10\text{dB}$ (30MHz to 200MHz) and $\pm 5.08\text{dB}$ (above 1GHz).

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for the level of confidence is approximately 95%.

Results FCC Part 15 – Subpart C

FCC 15.203 – Antenna Requirement 1		Pass
FCC Requirement: No antenna other than that furnished by the responsible party shall be used with the device		
Results:	Antenna type:	Fixed Integral wire antenna
Verdict:	Pass	

FCC 15.204 – Antenna Requirement 2		Pass
FCC Requirement: An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.		
Results:	Only one integral antenna can be used.	
Verdict:	N/A	

FCC 15.207 – Conducted Emission on AC Mains		Pass				
Test Specification : ANSI C63.4 – 2003 Mode of operation : TX mode Port of testing : AC Mains input port of power supply Detector : Quasi-peak and Average RBW : 9 kHz Supply voltage : 120Vac 60Hz Temperature : 23°C Humidity : 50%						
Requirement: 15.207(a)						
Results: Pass						
Live measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dB μ V	Average dB μ V	Limit QP (dB μ V)	Limit AV (dB μ V)	Verdict
0,15 – 0,5	No peak found	---	---	66 - 56	56 - 46	Pass
> 0,5 - 5	No peak found	---	---	56	46	Pass
> 5 - 30	No peak found	---	---	60	50	Pass
Neutral measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dB μ V	Average dB μ V	Limit QP (dB μ V)	Limit AV (dB μ V)	Verdict
0,15 – 0,5	No peak found	---	---	66 - 56	56 - 46	Pass
> 0,5 - 5	No peak found	---	---	56	46	Pass
> 5 - 30	No peak found	---	---	60	50	Pass

Results:	Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate.
	The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz does not exceed the limits. For test Results plots refer to Appendix 1, page 2.

Subclause 15.215 (c) – 20 dB Bandwidth		Pass		
Test Specification	: ANSI C63.4 – 2003			
Mode of operation	: Tx mode			
Port of testing	: Enclosure			
RBW/VBW	: 30 kHz / 100 kHz			
Supply voltage	: 120VAC			
Temperature	: 23°C			
Humidity	: 50%			
Requirement:	The intentional radiators must be designed to ensure that the 20dB bandwidth of the emission, is contained within the frequency band designated in the rule section under which the equipment is operated.			
Results:	For test protocols refer to Appendix 1, page 2-3.			
Frequency (MHz)	20 dB left (MHz)	Limit (MHz)	20 dB right (MHz)	Limit (MHz)
2402	2401.496	> 2400	2402.608	< 2483.5
2440	2439.476	> 2400	2440.604	< 2483.5
2480	2479.460	> 2400	2480.604	< 2483.5

Subclause 15.249 (a) – Field Strength of Fundamental and Harmonics		Pass
Test Specification	: ANSI C63.4 – 2003	
Mode of operation	: Tx mode	
Port of testing	: Enclosure	
Frequency range	: 9kHz – 25GHz	
RBW/VBW	: 100 kHz / 300 kHz for f < 1 GHz 1 MHz / 3 MHz for f > 1 GHz	
Supply voltage	: 120VAC	
Temperature	: 23°C	
Humidity	: 50%	
Requirement:	The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following limit.	
Results:	PASS.	
Fundamental Frequency 2402MHz	Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2402.000	91.23	114.0 / PK
2402.000	69.06	94.0 / AV
Fundamental Frequency 2403MHz	Horizontal Polarization	

Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2402.000	95.76	114.0 / PK
2402.000	71.88	94.0 / AV
Harmonics 2403MHz		Vertical Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4804.000	55.89	74.0 / PK
4804.000	45.09	54.0 / AV
Harmonics 2403MHz		Horizontal Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4804.000	54.62	74.0 / PK
4804.000	43.53	54.0 / AV
7206.000	64.49	74.0 / PK
7206.000	48.32	54.0 / AV
Fundamental Frequency 2440MHz		Vertical Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2440.000	91.55	114.0 / PK
2440.000	69.30	94.0 / AV
Fundamental Frequency 2440MHz		Horizontal Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2440.000	91.77	114.0 / PK
2440.000	69.48	94.0 / AV
Harmonics 2440MHz		Vertical Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4880.000	52.80	74.0 / PK
4880.000	39.52	54.0 / AV
Harmonics 2440MHz		Horizontal Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
No peak found	---	74.0 / PK
No peak found	---	54.0 / AV
Fundamental Frequency 2480MHz		Vertical Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2480.000	89.85	114.0 / PK
2480.000	67.91	94.0 / AV
Fundamental Frequency 2480MHz		Horizontal Polarization
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2480.000	93.34	114.0 / PK
2480.000	70.37	94.0 / AV

Harmonics 2475MHz		
Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
No peak found	---	74.0 / PK
No peak found	---	54.0 / AV

Harmonics 2475MHz		
Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
7440.000	57.71	74.0 / PK
7440.000	44.48	54.0 / AV

Subclause 15.249 (d), 15.205 – Out Of Band Radiated Emission			Pass
Test Specification : ANSI C63.4 – 2003			
Mode of operation : Tx mode			
Port of testing : Enclosure			
Detector : Peak			
Frequency range : 9kHz – 25GHz			
RBW/VBW : 1 MHz / 3 MHz for f > 1 GHz			
Supply voltage : 120VAC			
Temperature : 23°C			
Humidity : 50%			
Requirement: Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.			
Results: All three transmit frequency modes comply with the field strength limit of section 15.209. There is no spurious found below 30MHz.			
Tx frequency 2403MHz			
Vertical Polarization			
Freq MHz		Level dBuV/m	Limit/ Detector dBuV/m
2400.000		53.93	74.0 / PK
2400.000		31.76	54.0 / AV
Tx frequency 2403MHz			
Horizontal Polarization			
Freq MHz		Level dBuV/m	Limit/ Detector dBuV/m
2400.000		58.46	74.0 / PK
2400.000		34.58	54.0 / AV
Tx frequency 2440MHz			
Vertical Polarization			
Freq MHz		Level dBuV/m	Limit/ Detector dBuV/m
No peak found		---	74.0 / PK
No peak found		---	54.0 / AV
Tx frequency 2440MHz			
Horizontal Polarization			
Freq MHz		Level dBuV/m	Limit/ Detector dBuV/m
No peak found		---	74.0 / PK
No peak found		---	54.0 / AV
Tx frequency 2480MHz			
Vertical Polarization			
Freq MHz		Level dBuV/m	Limit/ Detector dBuV/m
2483.500		62.54	74.0 / PK
2483.500		38.30	54.0 / AV
Tx frequency 2480MHz			
Horizontal Polarization			
Freq MHz		Level dBuV/m	Limit/ Detector dBuV/m
2483.500		67.78	74.0 / PK
2483.500		41.75	54.0 / AV