


Project No.: 2407V20721E-RF
Test Mode: 11n20-5280
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 24.2°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

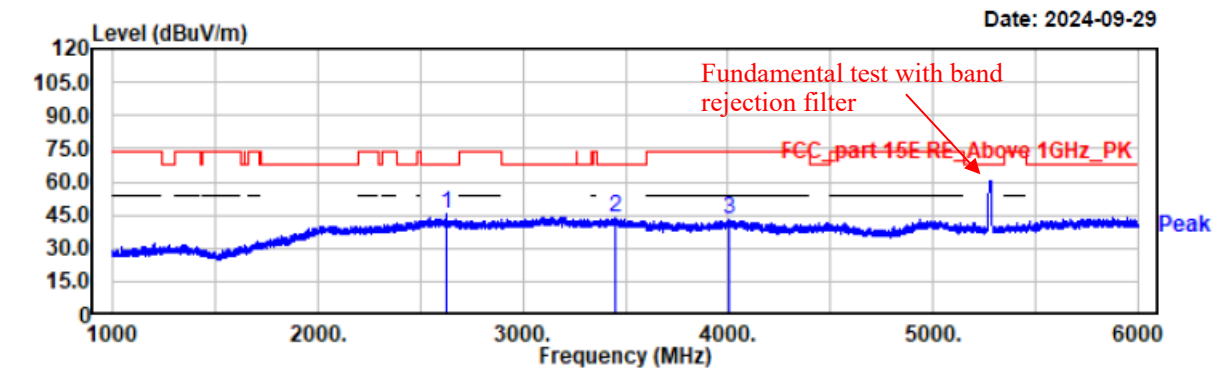

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2628.00	48.45	-3.34	45.11	68.20	23.09	vertical	Peak
3448.00	47.40	-3.65	43.75	68.20	24.45	vertical	Peak
4008.00	47.27	-4.43	42.84	74.00	31.16	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5320
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 24.2℃/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

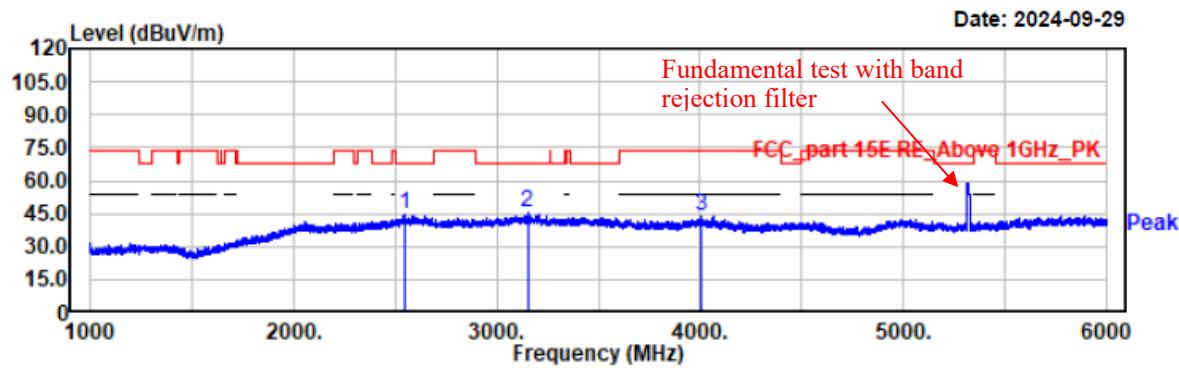

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2547.00	47.86	-3.51	44.35	68.20	23.85	horizontal	Peak
3151.00	48.41	-2.94	45.47	68.20	22.73	horizontal	Peak
4009.50	48.29	-4.42	43.87	74.00	30.13	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5320
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 24.2℃/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

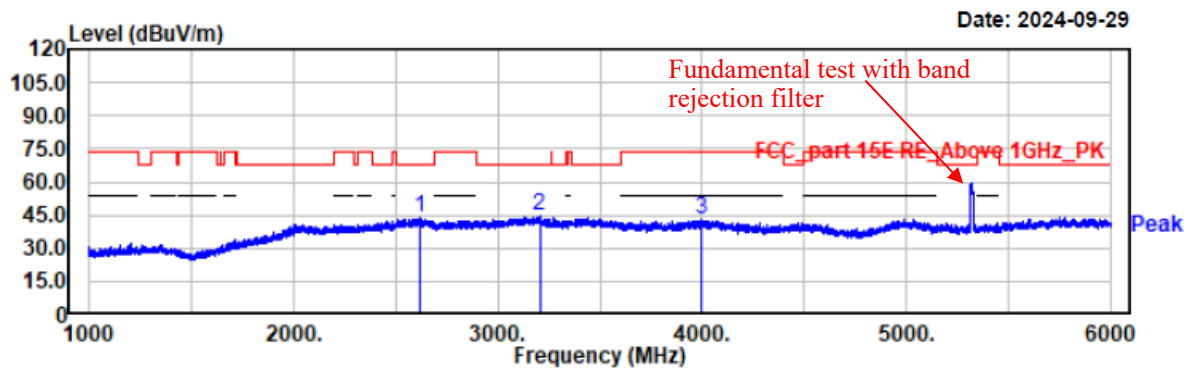

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2616.50	47.23	-3.32	43.91	68.20	24.29	vertical	Peak
3205.00	47.30	-3.02	44.28	68.20	23.92	vertical	Peak
3997.00	47.22	-4.46	42.76	74.00	31.24	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5270
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 23.9°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

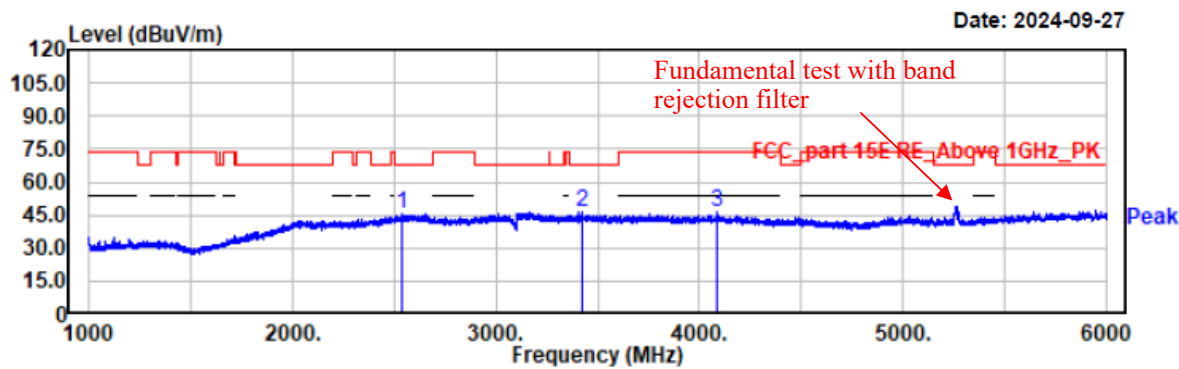

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2537.00	48.89	-3.64	45.25	68.20	22.95	horizontal	Peak
3422.00	50.28	-3.62	46.66	68.20	21.54	horizontal	Peak
4088.50	50.27	-4.23	46.04	74.00	27.96	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5270
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 23.9°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

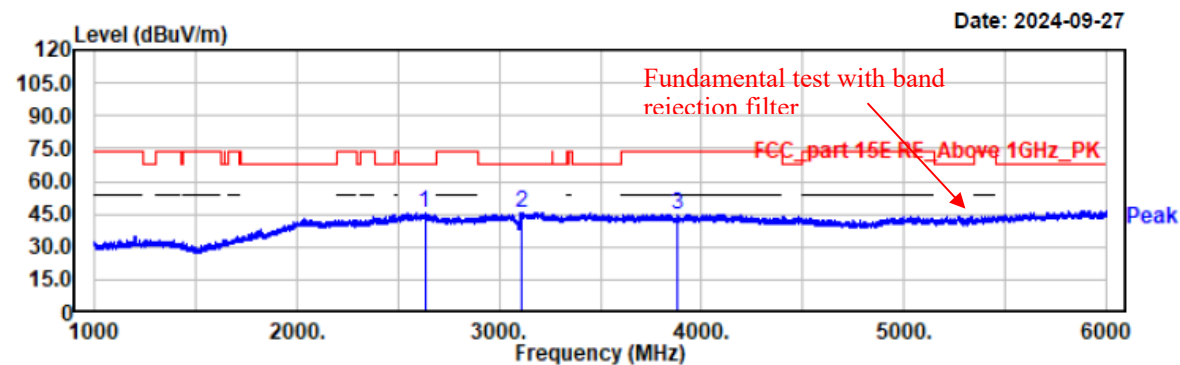

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2632.00	49.04	-3.34	45.70	68.20	22.50	vertical	Peak
3113.50	48.84	-3.01	45.83	68.20	22.37	vertical	Peak
3882.00	49.34	-4.48	44.86	74.00	29.14	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5310
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 23.9°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

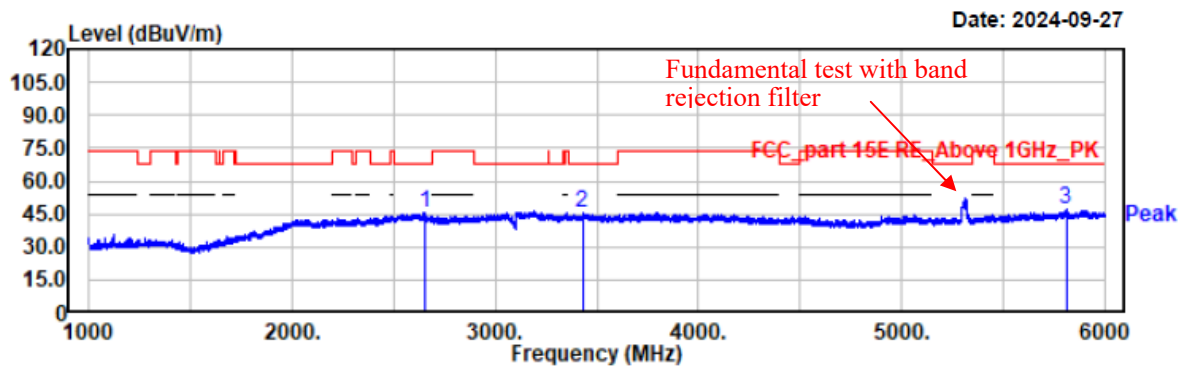

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2655.00	48.75	-3.50	45.25	68.20	22.95	horizontal	Peak
3428.50	48.95	-3.63	45.32	68.20	22.88	horizontal	Peak
5809.50	49.65	-2.72	46.93	68.20	21.27	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5310
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 23.9°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

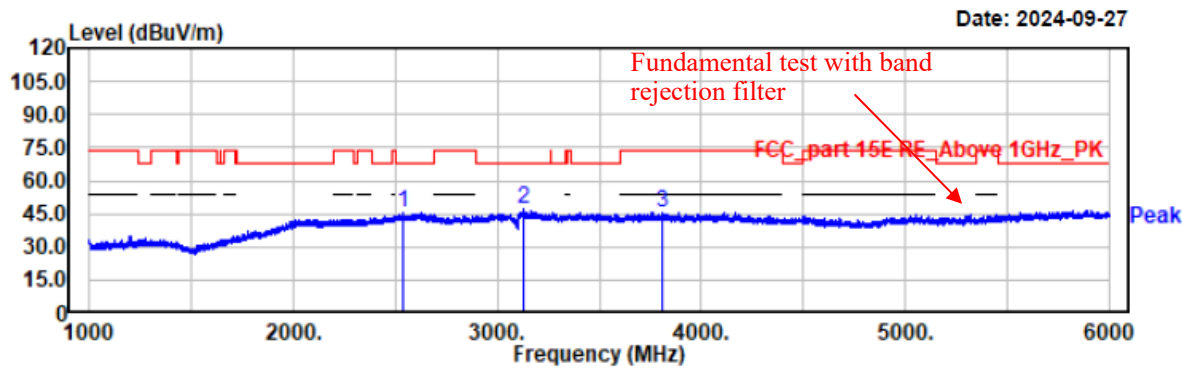

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2534.00	48.86	-3.68	45.18	68.20	23.02	vertical	Peak
3130.00	49.83	-2.98	46.85	68.20	21.35	vertical	Peak
3808.00	49.68	-4.20	45.48	74.00	28.52	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5290
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 23.9°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

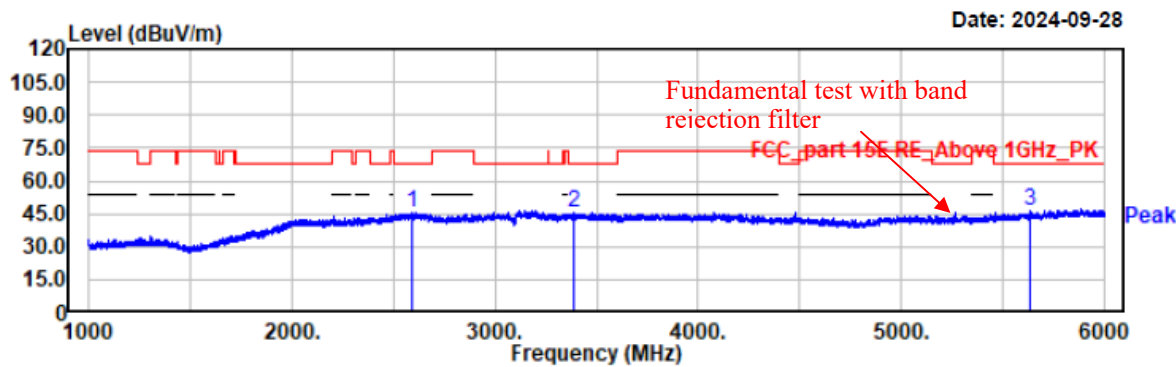

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2594.00	48.66	-3.31	45.35	68.20	22.85	horizontal	Peak
3387.50	48.92	-3.65	45.27	68.20	22.93	horizontal	Peak
5637.50	49.78	-3.74	46.04	68.20	22.16	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5290
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

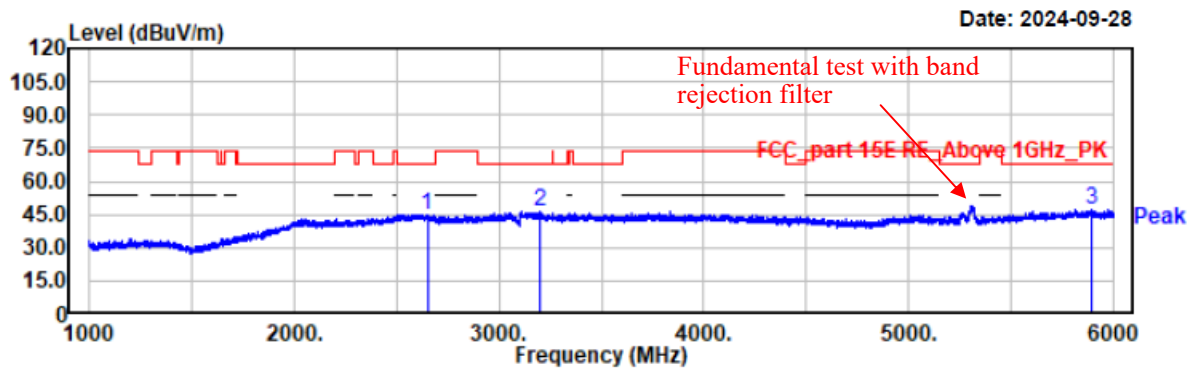


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2650.00	48.44	-3.37	45.07	68.20	23.13	vertical	Peak
3200.00	48.98	-2.94	46.04	68.20	22.16	vertical	Peak
5891.50	49.89	-2.66	47.23	68.20	20.97	vertical	Peak

Band 3:

Project No.: 2407V20721E-RF
Test Mode: 11a-5500
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 24.2°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

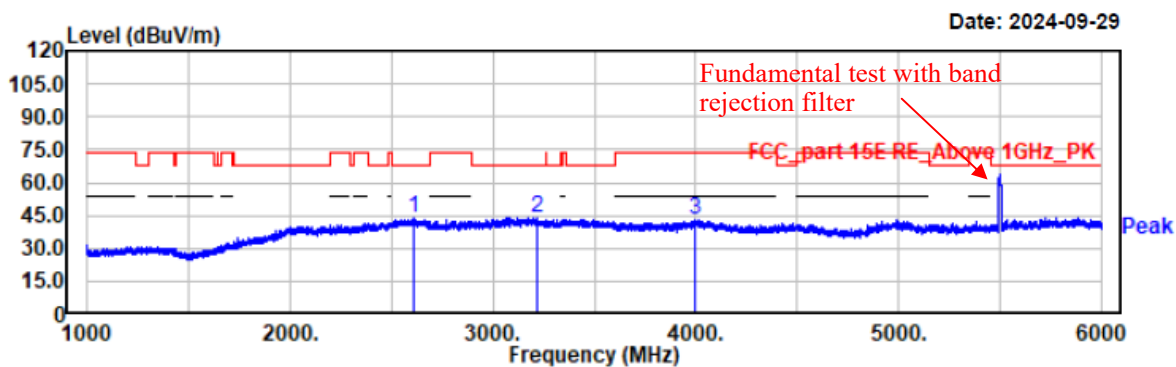

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2611.50	46.77	-3.31	43.46	68.20	24.74	horizontal	Peak
3215.00	46.98	-3.17	43.81	68.20	24.39	horizontal	Peak
3996.00	47.47	-4.46	43.01	74.00	30.99	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5500
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 24.2°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

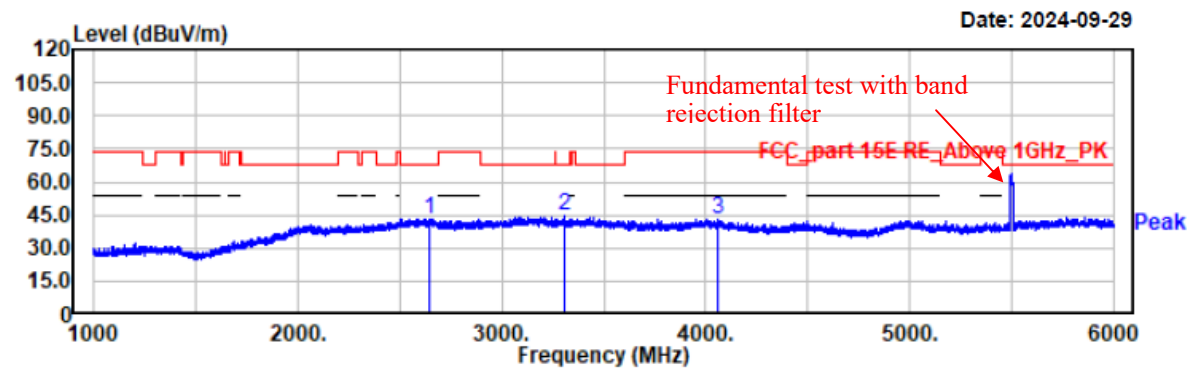

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2642.50	46.76	-3.36	43.40	68.20	24.80	vertical	Peak
3307.50	48.34	-4.02	44.32	68.20	23.88	vertical	Peak
4059.00	47.54	-4.22	43.32	74.00	30.68	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5580
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 24.2℃/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

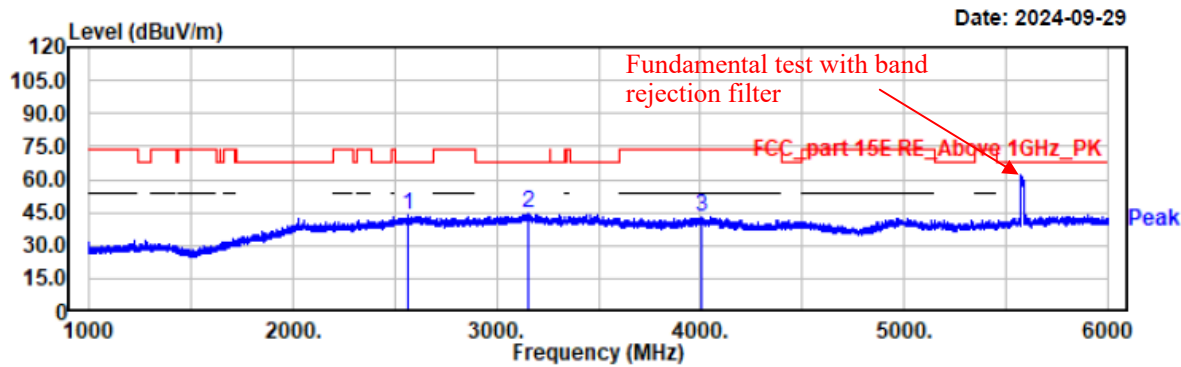

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2562.50	47.20	-3.43	43.77	68.20	24.43	horizontal	Peak
3158.50	47.47	-2.94	44.53	68.20	23.67	horizontal	Peak
4006.50	47.41	-4.44	42.97	74.00	31.03	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5580
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 24.2°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

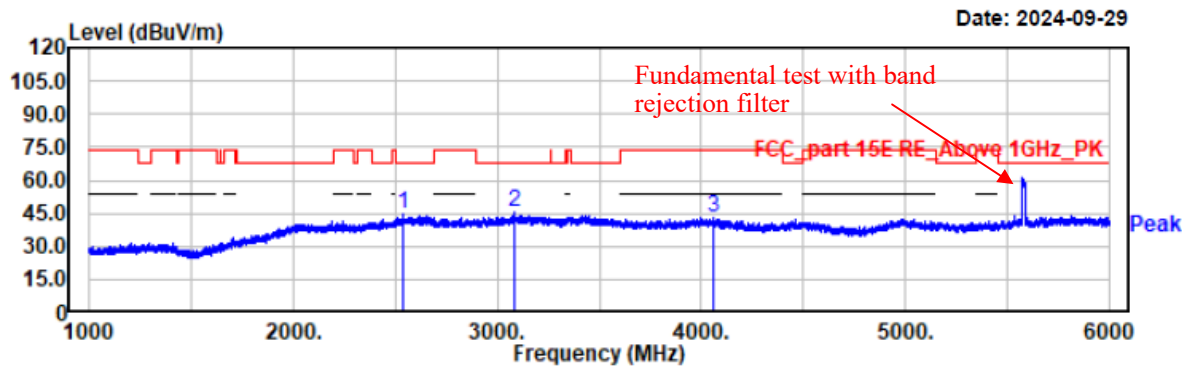

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2540.00	47.88	-3.60	44.28	68.20	23.92	vertical	Peak
3083.50	48.38	-3.22	45.16	68.20	23.04	vertical	Peak
4062.50	47.47	-4.22	43.25	74.00	30.75	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5700
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 24.2°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

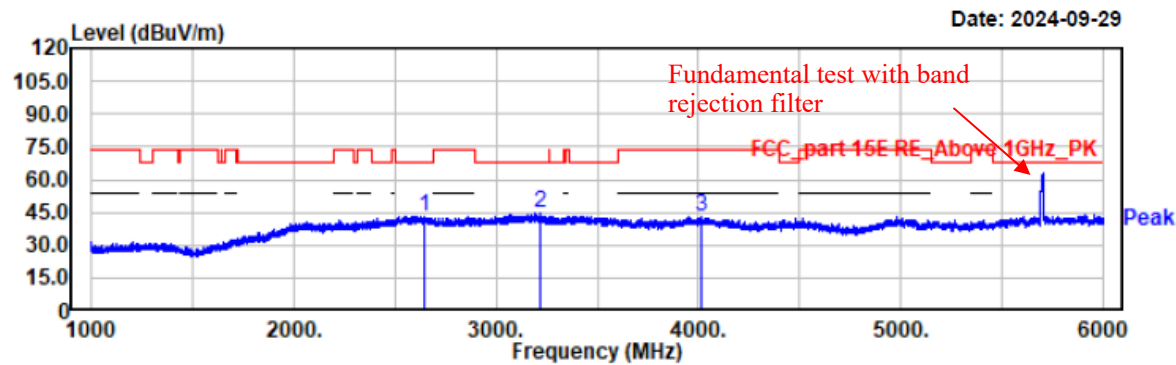

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2643.50	46.65	-3.37	43.28	68.20	24.92	horizontal	Peak
3219.00	47.69	-3.22	44.47	68.20	23.73	horizontal	Peak
4012.50	47.27	-4.40	42.87	74.00	31.13	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5700
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 24.2℃/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

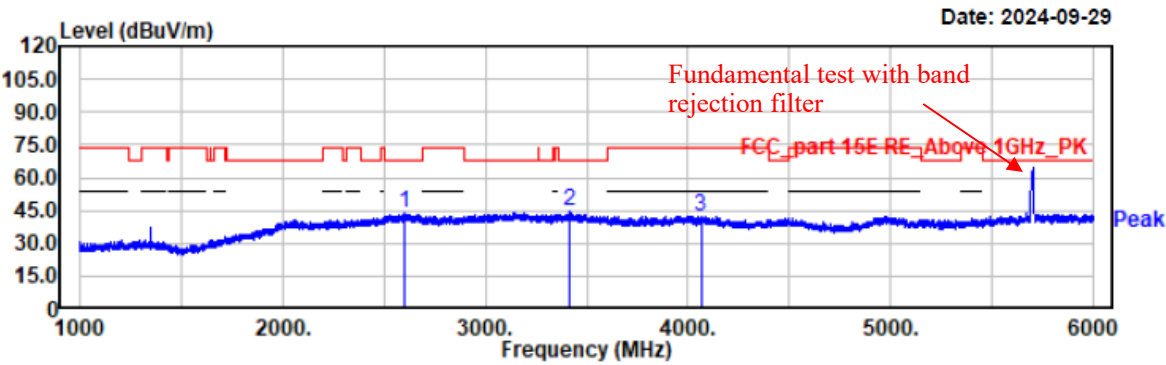

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2603.00	47.26	-3.31	43.95	68.20	24.25	vertical	Peak
3418.00	47.95	-3.62	44.33	68.20	23.87	vertical	Peak
4064.00	46.82	-4.23	42.59	74.00	31.41	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5500
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 24.2℃/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

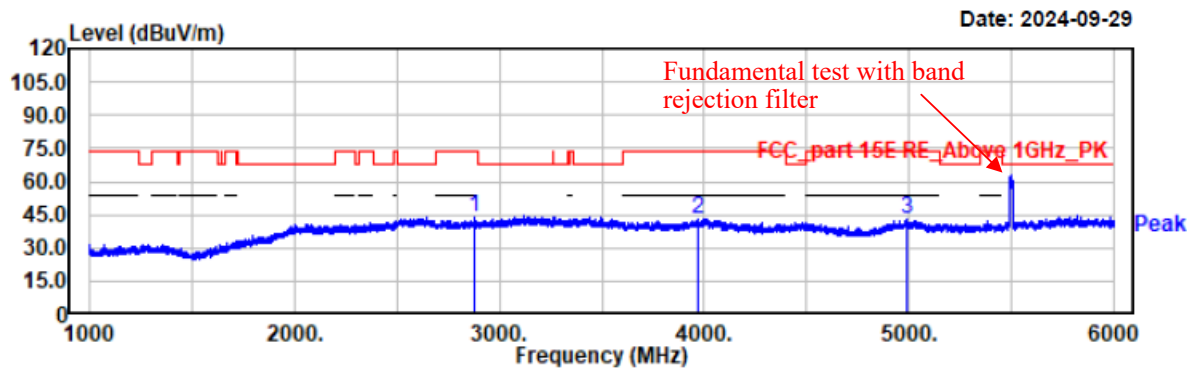

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2876.50	48.60	-4.46	44.14	74.00	29.86	horizontal	Peak
3969.00	47.22	-4.39	42.83	74.00	31.17	horizontal	Peak
4988.00	48.92	-5.51	43.41	74.00	30.59	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5500
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.2 °C / 54% / 100.1 kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

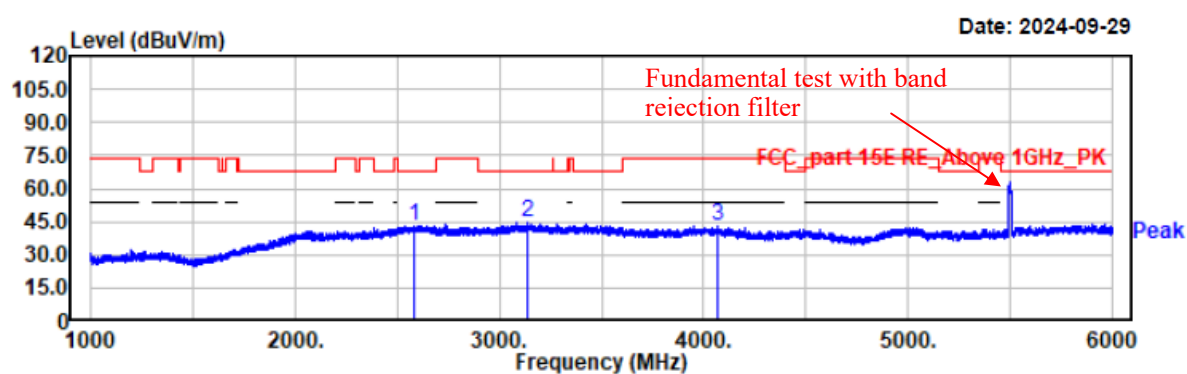

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2580.00	46.79	-3.37	43.42	68.20	24.78	vertical	Peak
3136.00	47.49	-2.97	44.52	68.20	23.68	vertical	Peak
4065.50	47.08	-4.22	42.86	74.00	31.14	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20-5580


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 24.2°C/54%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

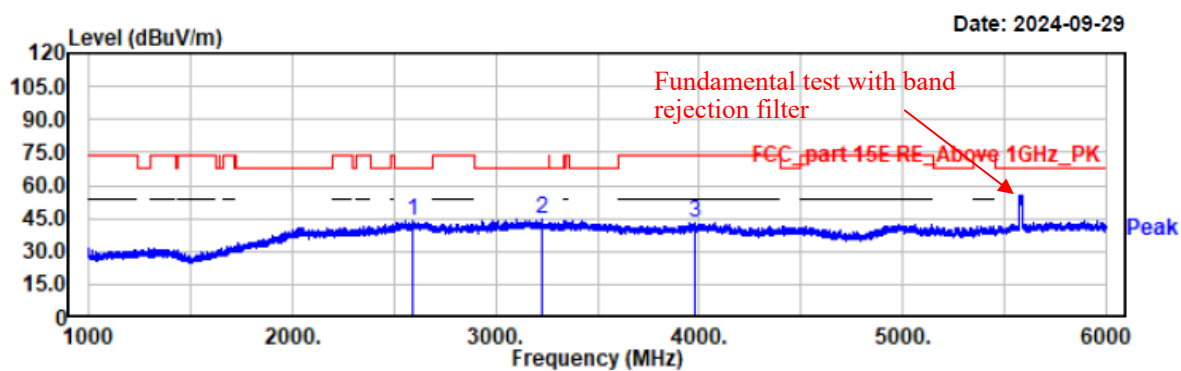

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2595.50	47.25	-3.32	43.93	68.20	24.27	horizontal	Peak
3228.50	48.09	-3.37	44.72	68.20	23.48	horizontal	Peak
3976.50	47.23	-4.41	42.82	74.00	31.18	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5580
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 24.2°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

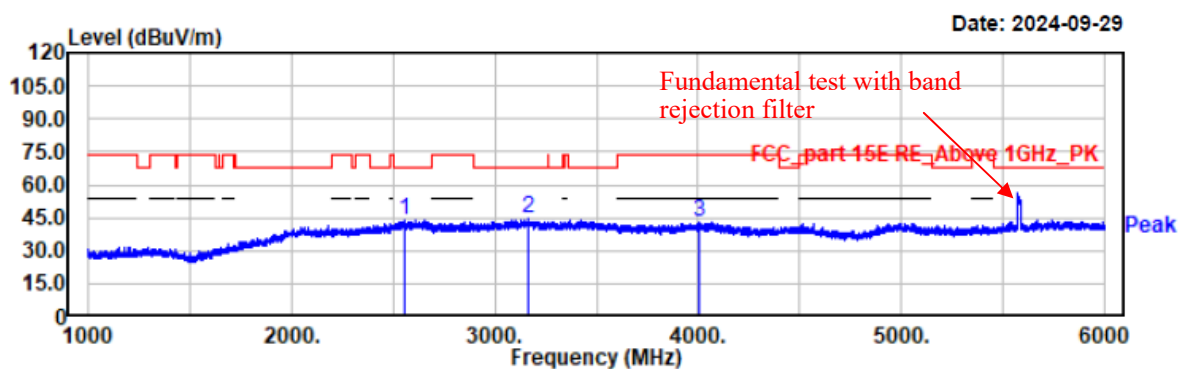

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2555.50	47.36	-3.45	43.91	68.20	24.29	vertical	Peak
3164.00	47.59	-2.94	44.65	68.20	23.55	vertical	Peak
4010.00	47.31	-4.42	42.89	74.00	31.11	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5700
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 24.2℃/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

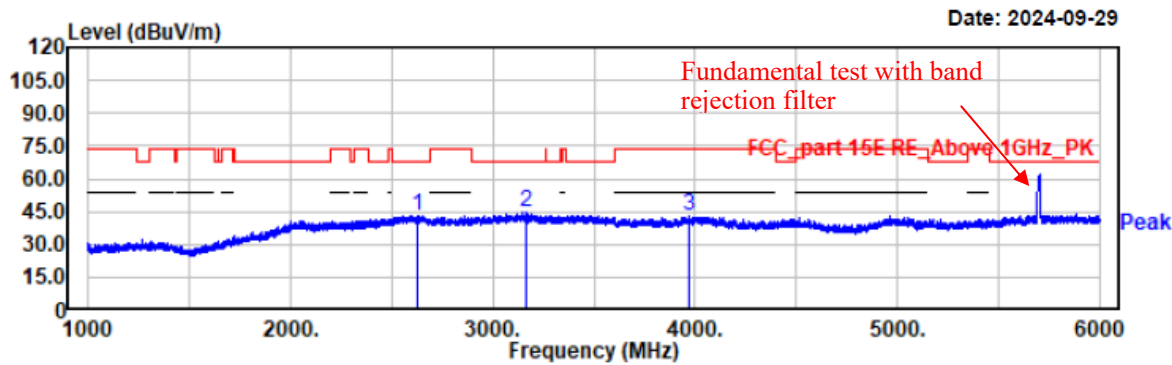

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2628.50	46.71	-3.34	43.37	68.20	24.83	horizontal	Peak
3162.00	47.57	-2.94	44.63	68.20	23.57	horizontal	Peak
3966.50	47.47	-4.38	43.09	74.00	30.91	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5700
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 24.2°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

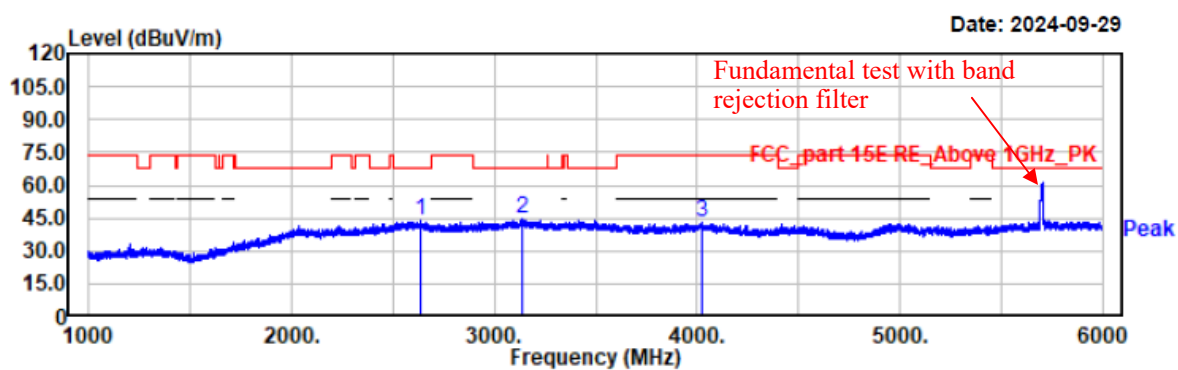

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2639.50	46.88	-3.36	43.52	68.20	24.68	vertical	Peak
3135.00	47.35	-2.97	44.38	68.20	23.82	vertical	Peak
4021.00	47.19	-4.37	42.82	74.00	31.18	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5510
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 23.9°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

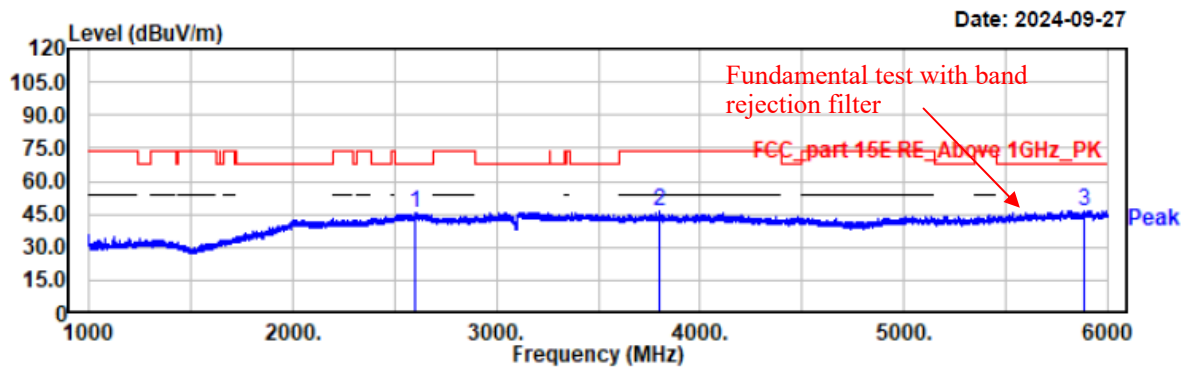

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2598.50	48.49	-3.31	45.18	68.20	23.02	horizontal	Peak
3800.00	50.27	-4.15	46.12	74.00	27.88	horizontal	Peak
5889.00	49.17	-2.69	46.48	68.20	21.72	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5510
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 23.9°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

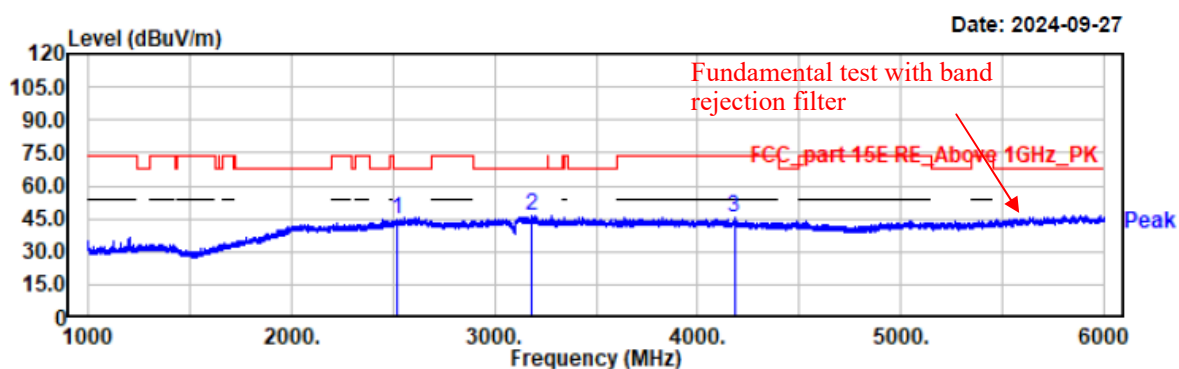

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2523.50	48.87	-3.83	45.04	68.20	23.16	vertical	Peak
3180.50	49.15	-2.94	46.21	68.20	21.99	vertical	Peak
4180.50	50.61	-4.89	45.72	74.00	28.28	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5550
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 23.9°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

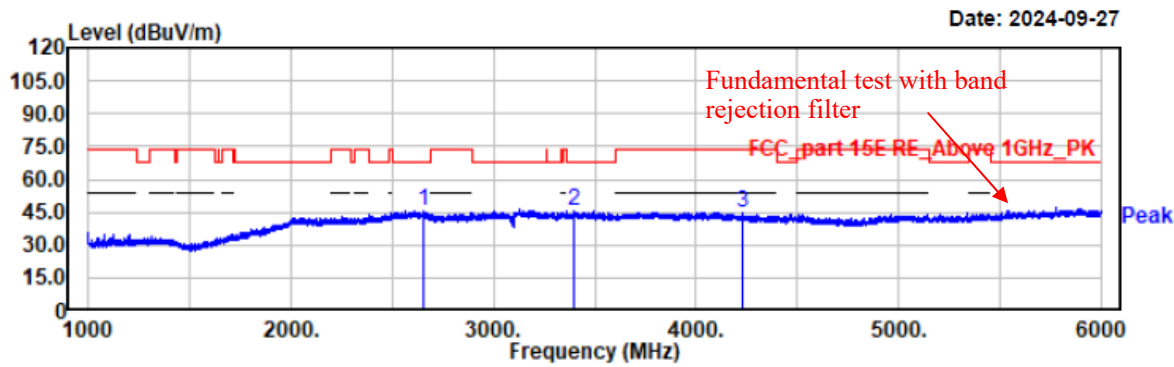

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2656.50	49.20	-3.54	45.66	68.20	22.54	horizontal	Peak
3395.50	49.39	-3.62	45.77	68.20	22.43	horizontal	Peak
4229.00	49.96	-5.23	44.73	74.00	29.27	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5550
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 23.9°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

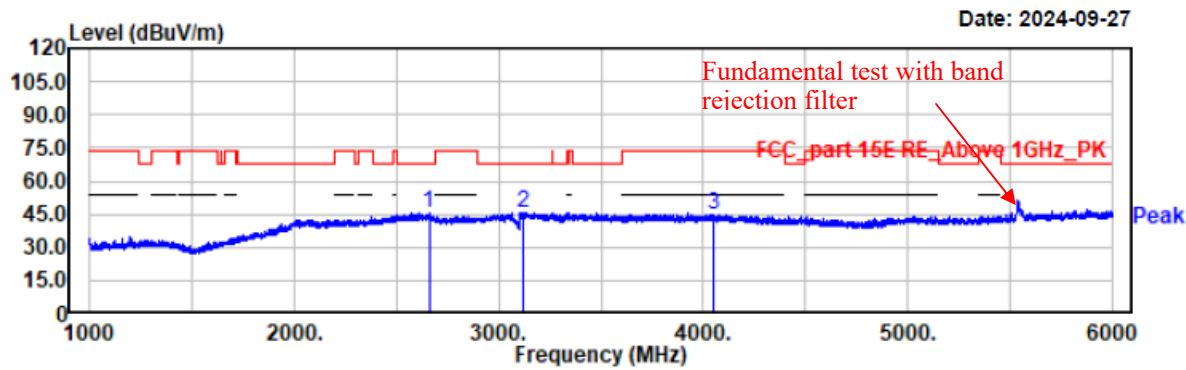

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2659.00	49.22	-3.60	45.62	68.20	22.58	vertical	Peak
3122.00	48.68	-3.00	45.68	68.20	22.52	vertical	Peak
4051.50	48.96	-4.22	44.74	74.00	29.26	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5670
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 23.9°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

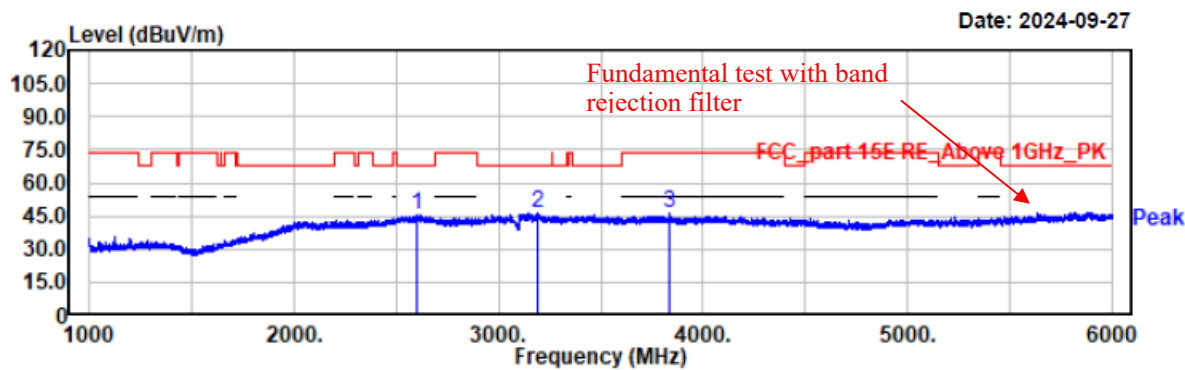

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2603.00	48.99	-3.31	45.68	68.20	22.52	horizontal	Peak
3191.00	49.25	-2.94	46.31	68.20	21.89	horizontal	Peak
3836.00	50.51	-4.36	46.15	74.00	27.85	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5670
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 23.9°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

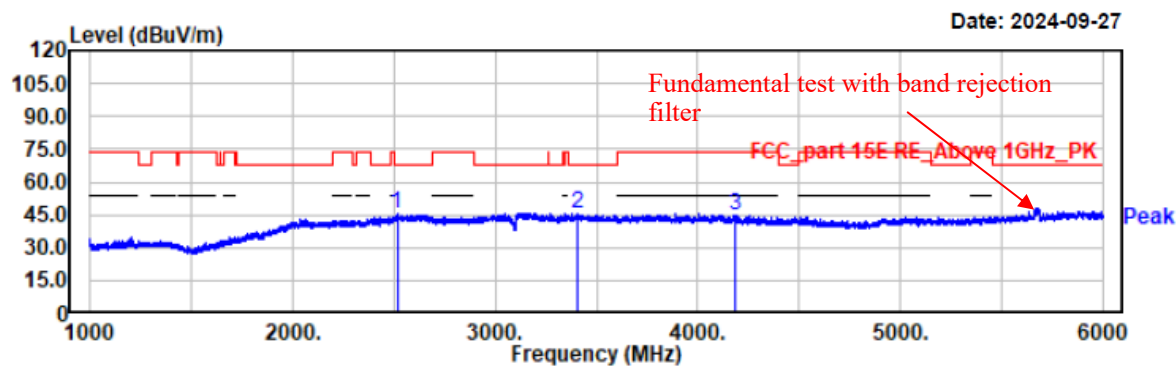

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2515.50	49.16	-3.93	45.23	68.20	22.97	vertical	Peak
3405.00	49.50	-3.61	45.89	68.20	22.31	vertical	Peak
4189.00	49.56	-4.93	44.63	74.00	29.37	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5530
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 24.2℃/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

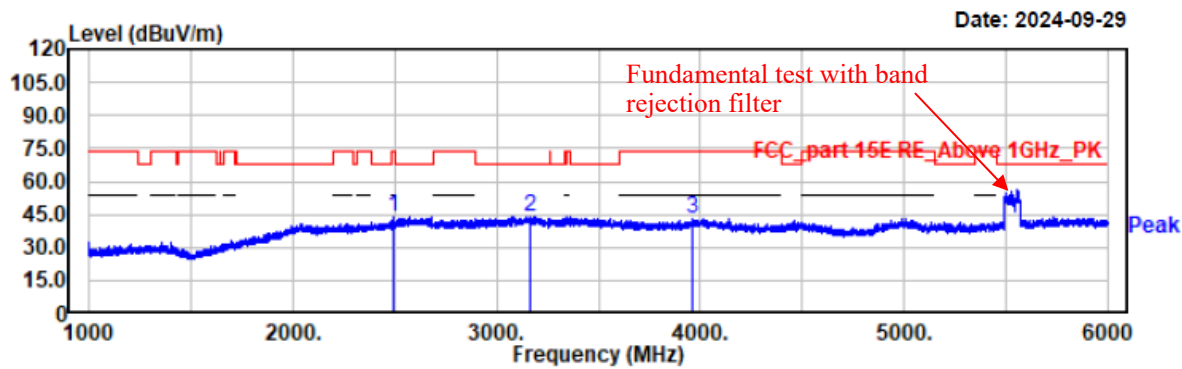

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2491.50	48.16	-4.30	43.86	74.00	30.14	horizontal	Peak
3163.50	46.96	-2.94	44.02	68.20	24.18	horizontal	Peak
3957.50	47.60	-4.36	43.24	74.00	30.76	horizontal	Peak


Project No.: 2407V20721E-RF
Test Mode: 11ac80-5530
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.2℃/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

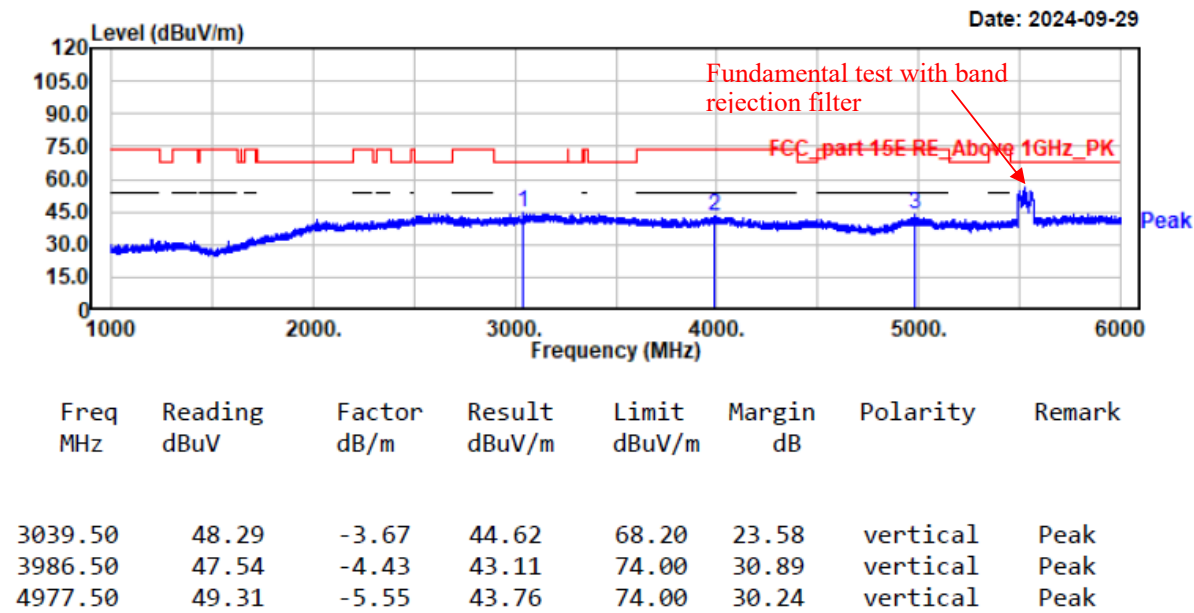

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5610
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 24.2℃/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

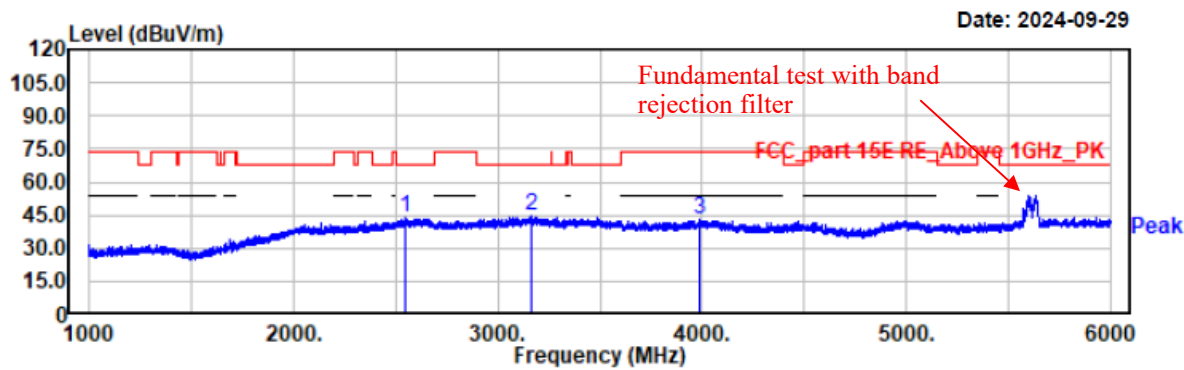

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2544.00	47.26	-3.55	43.71	68.20	24.49	horizontal	Peak
3165.00	47.24	-2.94	44.30	68.20	23.90	horizontal	Peak
3988.00	47.17	-4.44	42.73	74.00	31.27	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5610
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.2℃/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

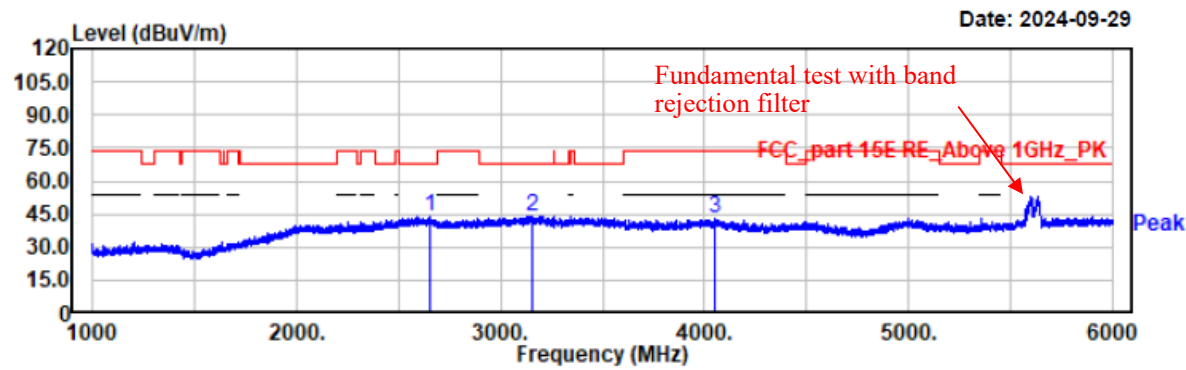

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2652.00	47.15	-3.42	43.73	68.20	24.47	vertical	Peak
3159.00	47.06	-2.94	44.12	68.20	24.08	vertical	Peak
4052.00	46.91	-4.21	42.70	74.00	31.30	vertical	Peak

Band 4

Project No.: 2407V20721E-RF

Test Mode: 11a-5745


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 24.2℃/54%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

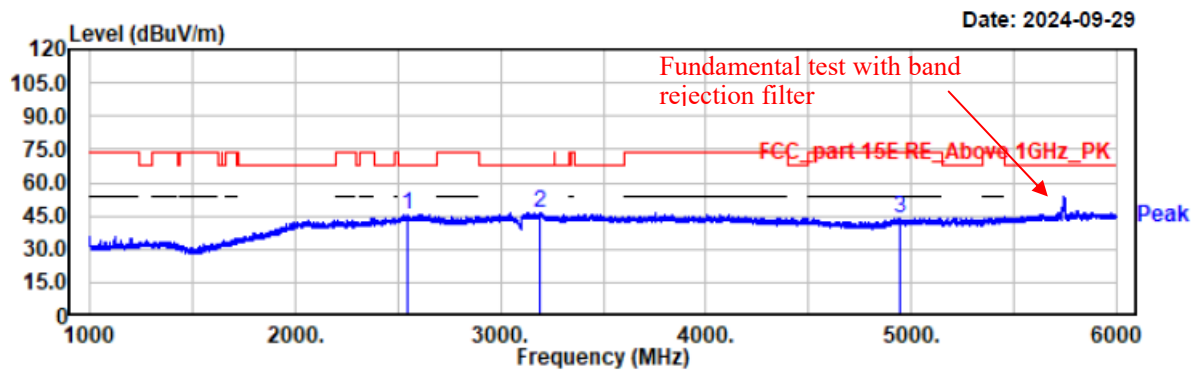

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2544.00	49.37	-3.55	45.82	68.20	22.38	horizontal	Peak
3193.50	49.50	-2.94	46.56	68.20	21.64	horizontal	Peak
4947.50	49.80	-5.71	44.09	74.00	29.91	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5745
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 24.2℃/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

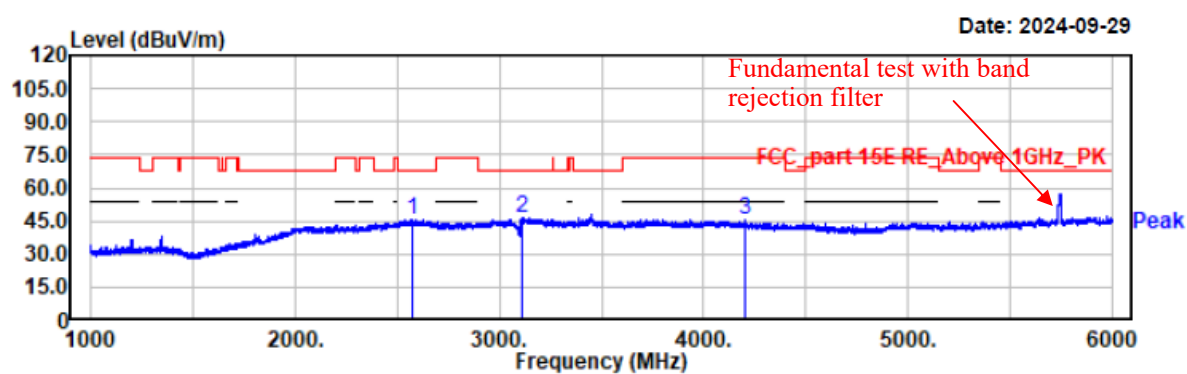

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2571.00	49.05	-3.40	45.65	68.20	22.55	vertical	Peak
3109.00	49.38	-3.02	46.36	68.20	21.84	vertical	Peak
4203.00	50.15	-4.99	45.16	74.00	28.84	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5785
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 24.2℃/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

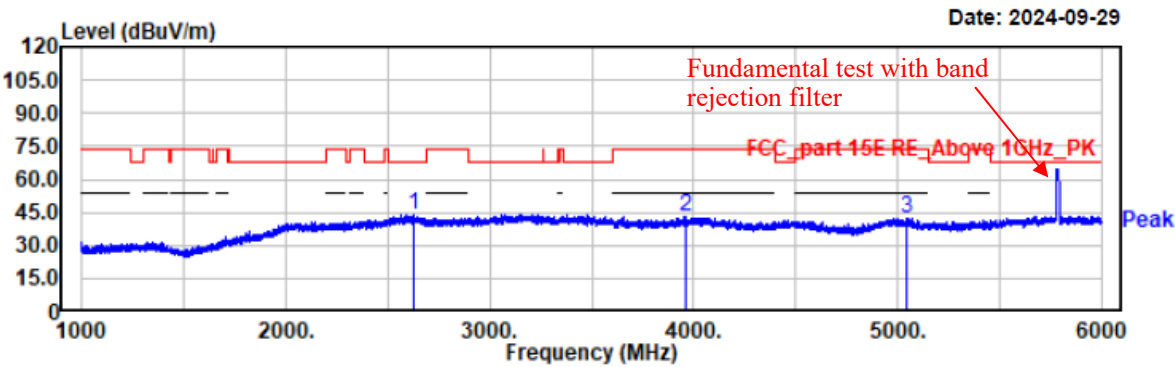

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2629.50	47.20	-3.34	43.86	68.20	24.34	horizontal	Peak
3960.00	47.36	-4.36	43.00	74.00	31.00	horizontal	Peak
5045.50	47.47	-5.38	42.09	74.00	31.91	horizontal	Peak

Project No.: 2407V20721E-RF
 Test Mode: 11a-5785
 EUT Model: NLS-NQuire1500
 Test distance: 3m


Temp/Humi/ATM: 24.2°C/54%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC120V/60Hz

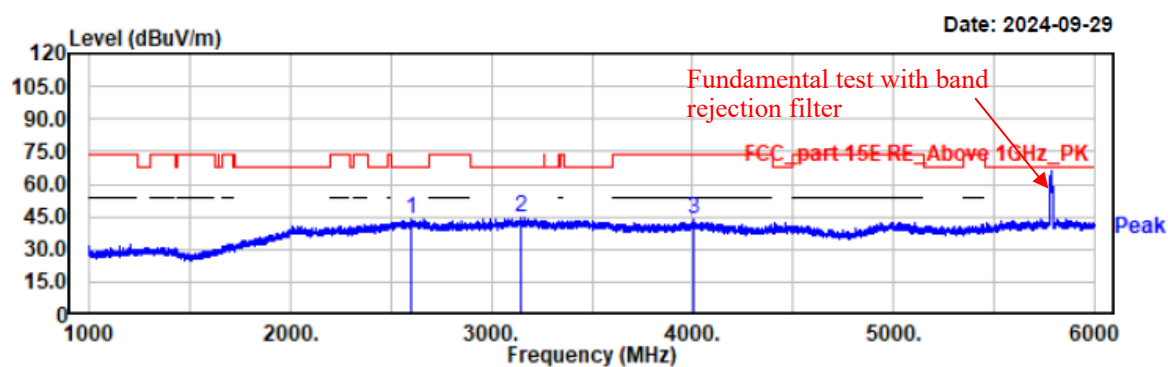

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2604.50	47.15	-3.31	43.84	68.20	24.36	vertical	Peak
3147.50	47.34	-2.94	44.40	68.20	23.80	vertical	Peak
4005.00	48.13	-4.44	43.69	74.00	30.31	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5825
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 24.2°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

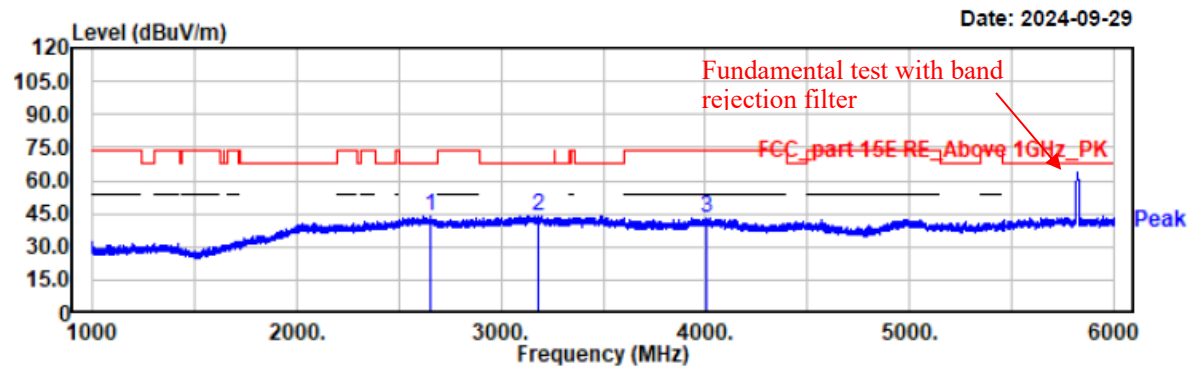

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2656.50	47.69	-3.54	44.15	68.20	24.05	horizontal	Peak
3183.00	47.16	-2.94	44.22	68.20	23.98	horizontal	Peak
4005.50	47.62	-4.44	43.18	74.00	30.82	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5825
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 24.2℃/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

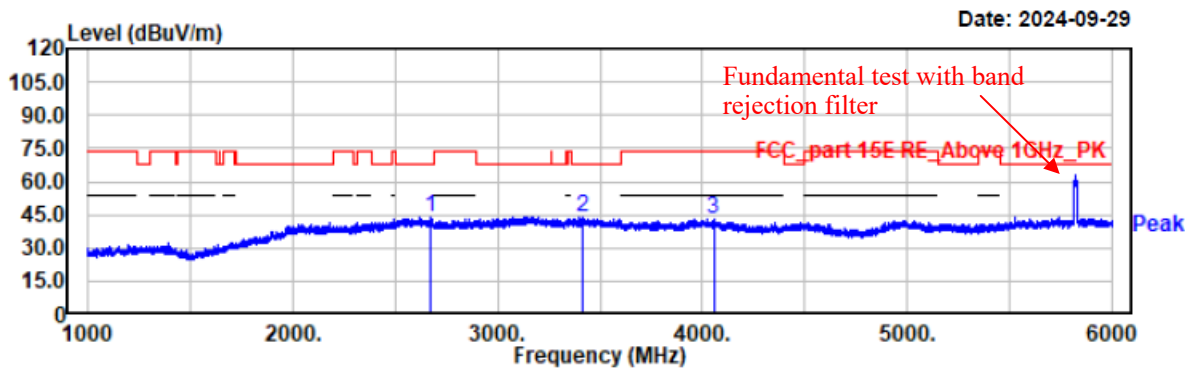

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2675.00	47.52	-4.01	43.51	68.20	24.69	vertical	Peak
3415.50	47.28	-3.61	43.67	68.20	24.53	vertical	Peak
4055.00	47.36	-4.21	43.15	74.00	30.85	vertical	Peak


Project No.: 2407V20721E-RF
Test Mode: 11n20-5745
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.2℃/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

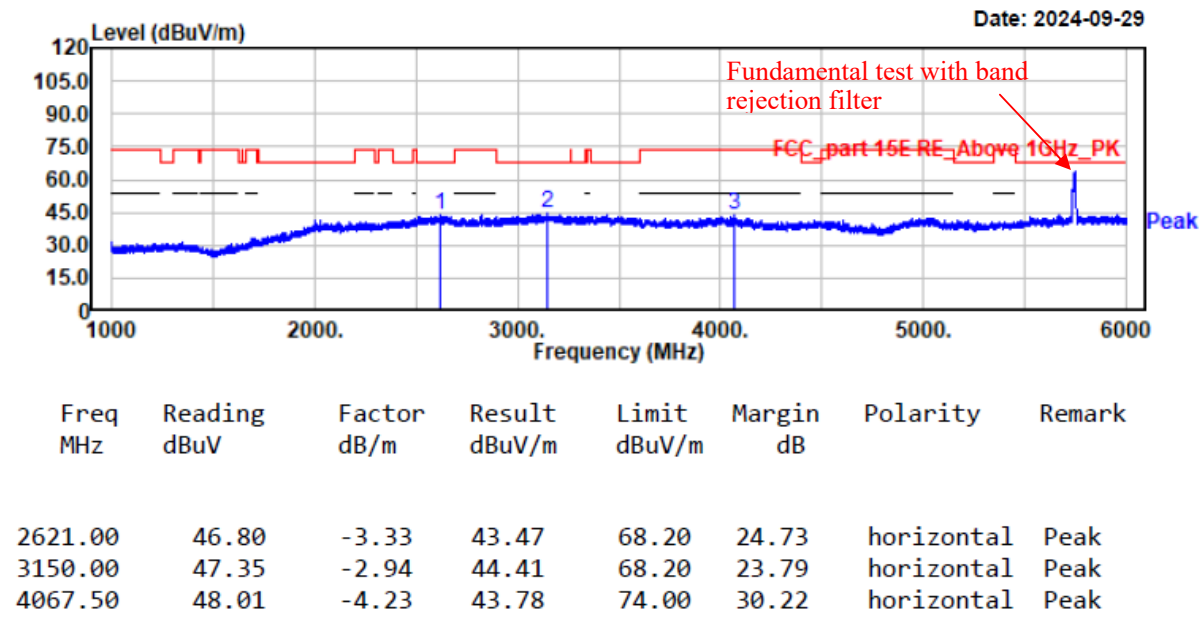

Project No.: 2407V20721E-RF
Test Mode: 11n20-5745
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 24.2℃/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

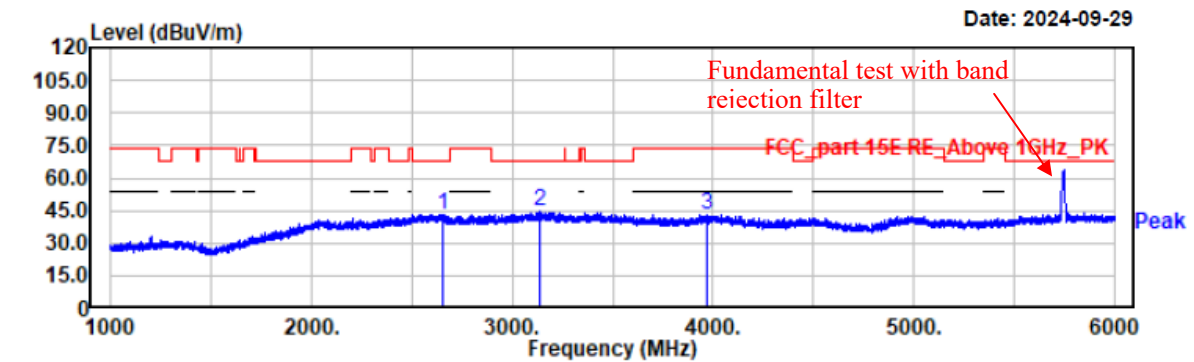

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2655.50	46.56	-3.51	43.05	68.20	25.15	vertical	Peak
3140.00	47.27	-2.96	44.31	68.20	23.89	vertical	Peak
3966.00	47.32	-4.38	42.94	74.00	31.06	vertical	Peak


Project No.: 2407V20721E-RF
Test Mode: 11n20-5785
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.2℃/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

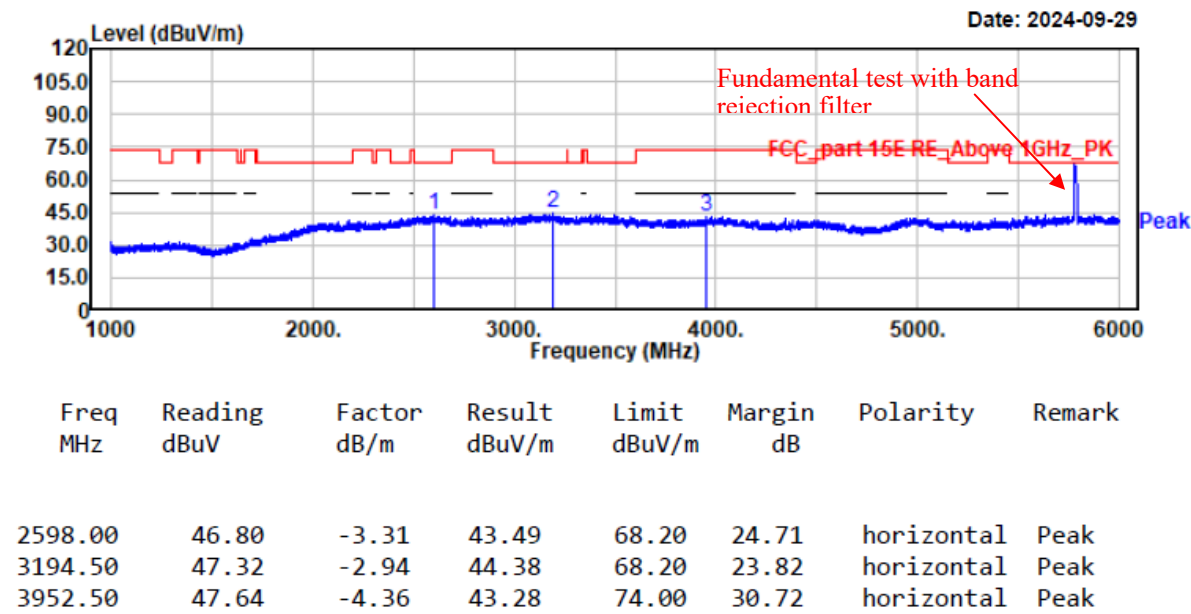

Project No.: 2407V20721E-RF
Test Mode: 11n20-5785
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 24.2°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

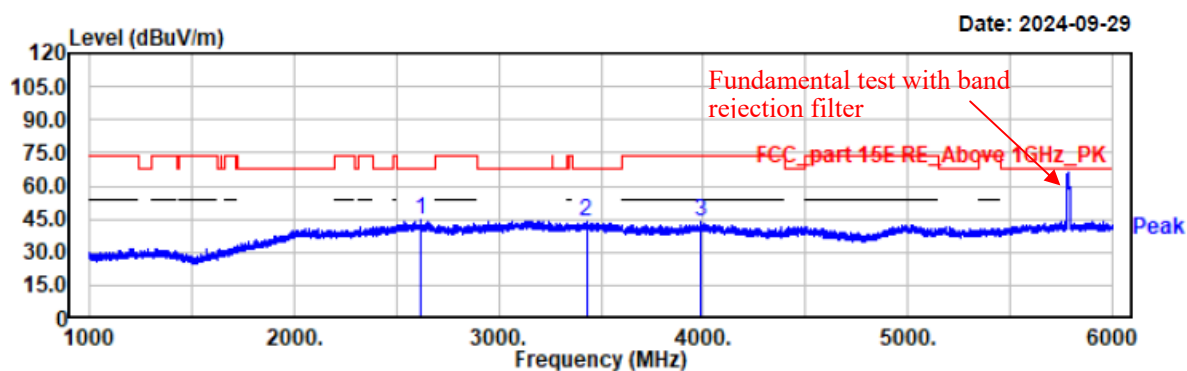

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2618.50	47.94	-3.33	44.61	68.20	23.59	vertical	Peak
3428.50	47.30	-3.63	43.67	68.20	24.53	vertical	Peak
3987.50	47.92	-4.43	43.49	74.00	30.51	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5825
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 24.2°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

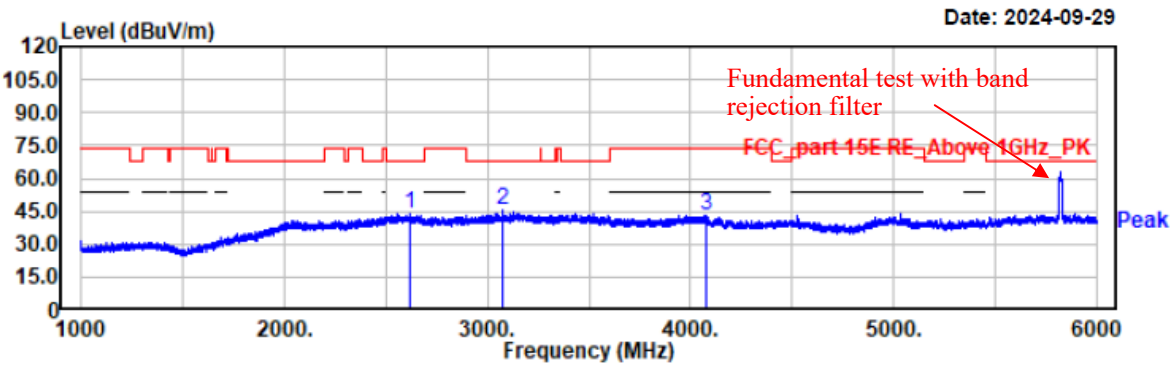

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2616.50	46.95	-3.32	43.63	68.20	24.57	horizontal	Peak
3077.00	48.75	-3.28	45.47	68.20	22.73	horizontal	Peak
4075.50	47.18	-4.22	42.96	74.00	31.04	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5825
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 24.2℃/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

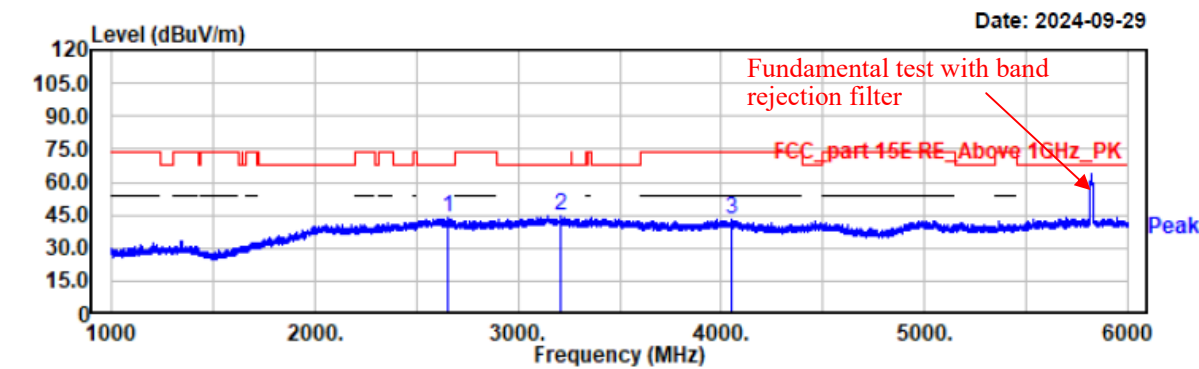

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2653.00	46.96	-3.45	43.51	68.20	24.69	vertical	Peak
3208.50	48.02	-3.07	44.95	68.20	23.25	vertical	Peak
4049.00	47.06	-4.21	42.85	74.00	31.15	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5755
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 23.9°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

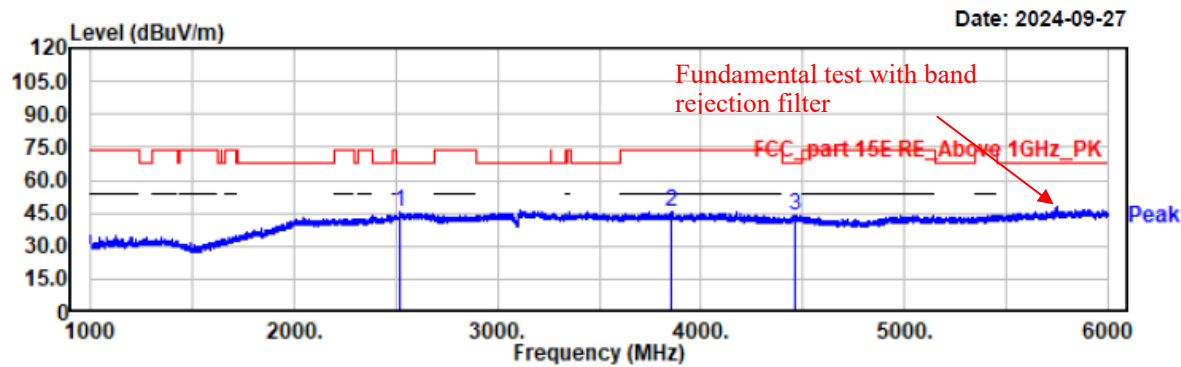

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2521.00	49.20	-3.86	45.34	68.20	22.86	horizontal	Peak
3856.50	49.87	-4.44	45.43	74.00	28.57	horizontal	Peak
4460.00	49.71	-5.69	44.02	68.20	24.18	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5755
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 23.9°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

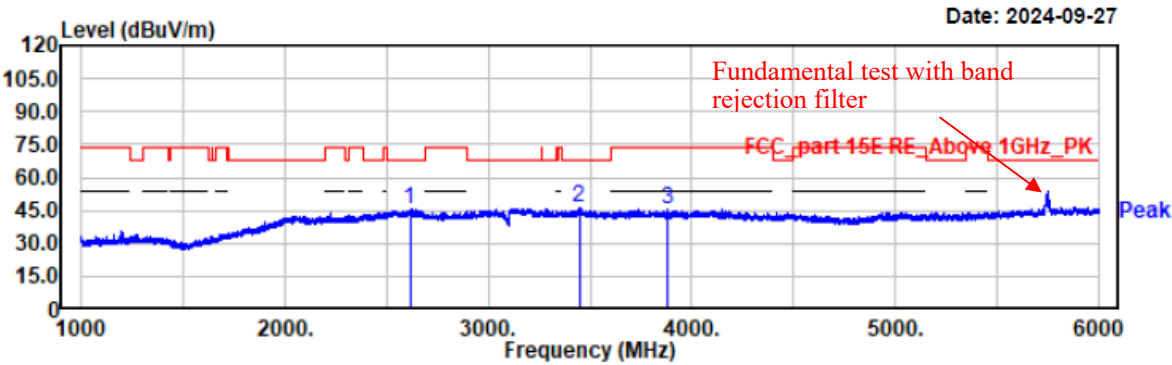

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2614.00	48.47	-3.32	45.15	68.20	23.05	vertical	Peak
3446.50	49.69	-3.64	46.05	68.20	22.15	vertical	Peak
3879.50	50.02	-4.48	45.54	74.00	28.46	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5795
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 23.9°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

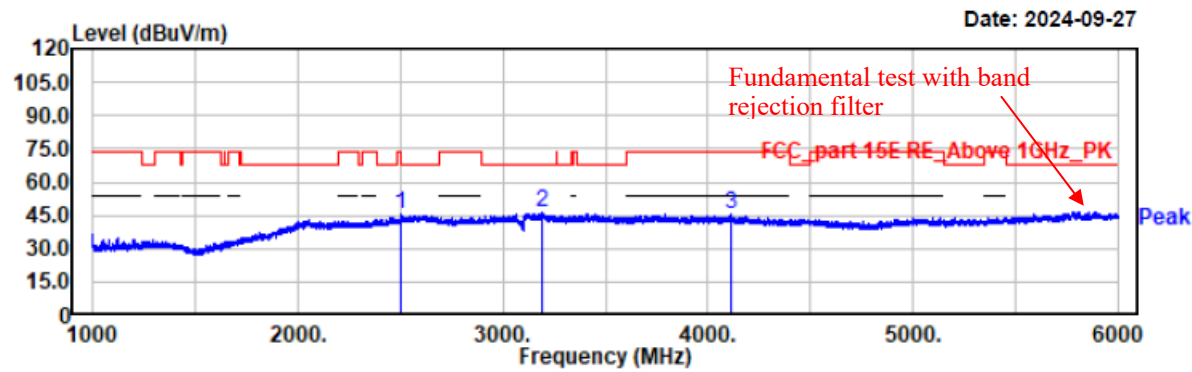

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2500.00	49.27	-4.14	45.13	68.20	23.07	horizontal	Peak
3188.50	48.95	-2.94	46.01	68.20	22.19	horizontal	Peak
4113.00	49.83	-4.40	45.43	74.00	28.57	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5795
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 23.9°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

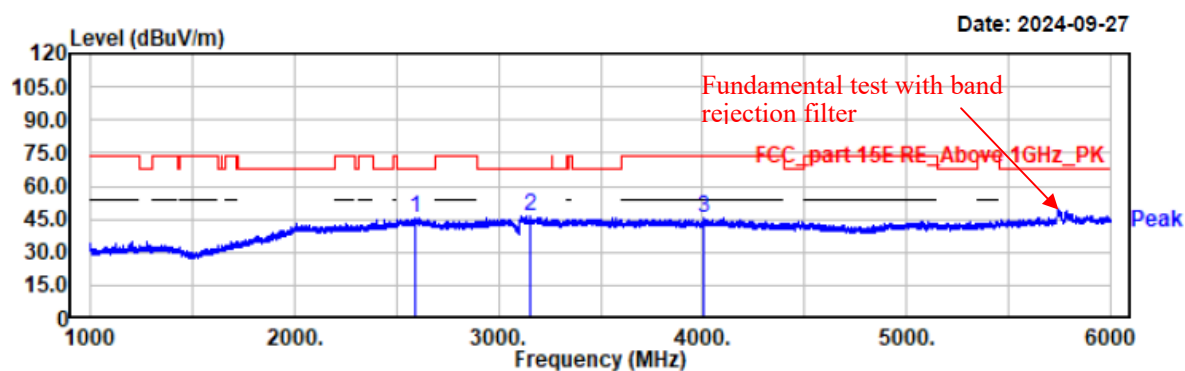

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2588.50	48.69	-3.34	45.35	68.20	22.85	vertical	Peak
3159.50	49.23	-2.94	46.29	68.20	21.91	vertical	Peak
4004.00	49.91	-4.45	45.46	74.00	28.54	vertical	Peak


Project No.: 2407V20721E-RF
Test Mode: 11ac80-5775
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.2℃/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

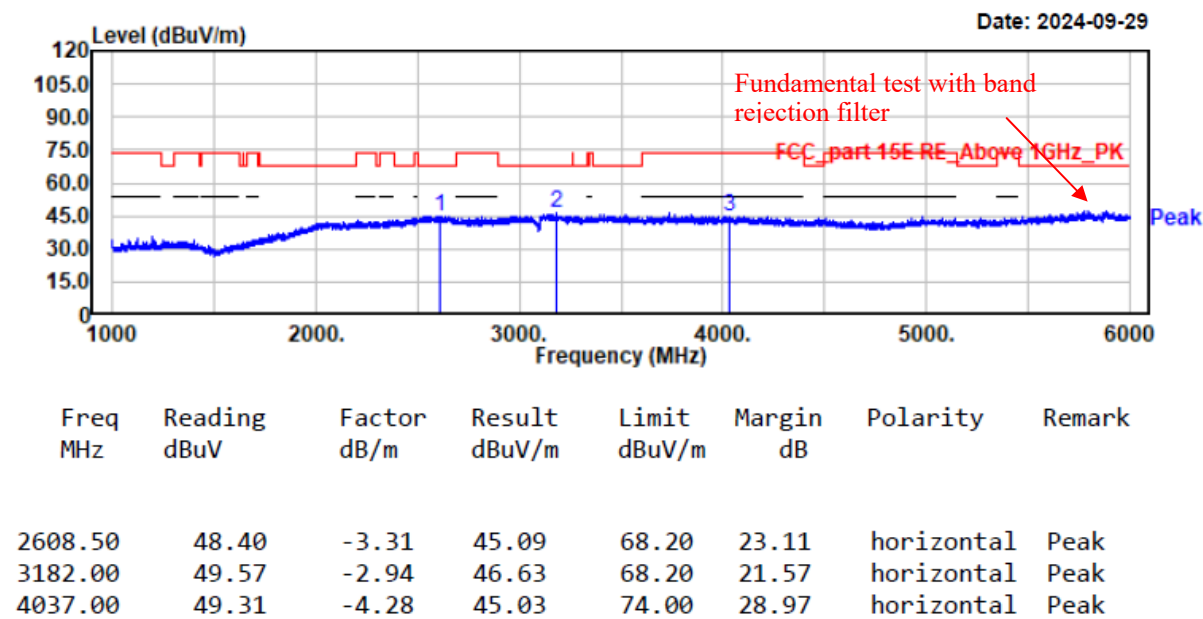

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5775
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 24.2°C/54%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

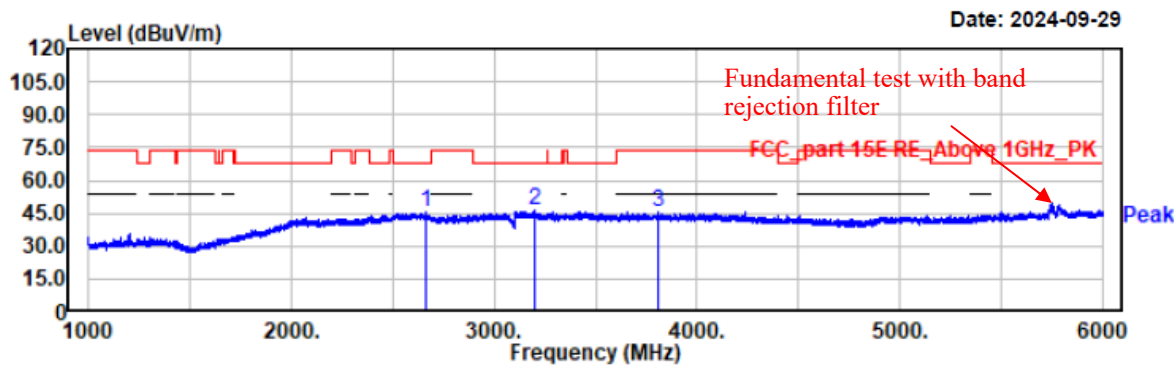


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2660.00	49.08	-3.63	45.45	68.20	22.75	vertical	Peak
3197.50	49.09	-2.94	46.15	68.20	22.05	vertical	Peak
3809.00	49.78	-4.20	45.58	74.00	28.42	vertical	Peak

EUT Model: NLS-Nquire500

B1

Project No.: 2407V20721E-RF
Test Mode: 11a-5180
EUT Model: NLS-Nquire500
Test distance: 3m


Temp/Humi/ATM: 24.0°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

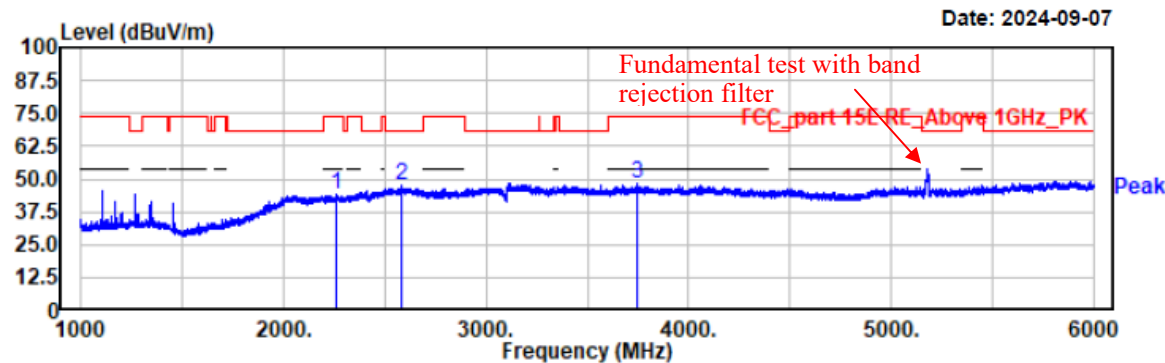

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2263.00	49.24	-5.02	44.22	74.00	29.78	horizontal	Peak
2581.50	49.34	-2.02	47.32	68.20	20.88	horizontal	Peak
3750.50	50.87	-2.40	48.47	74.00	25.53	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5180
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.0°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

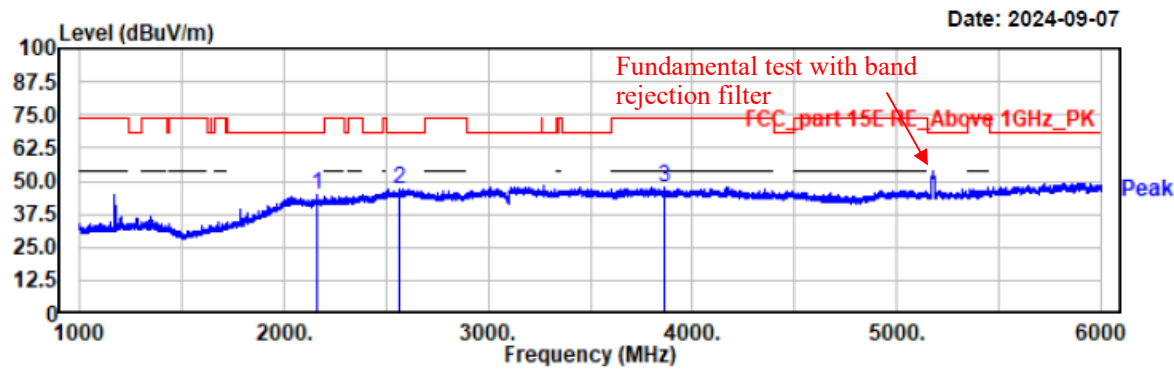

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2165.00	49.92	-5.38	44.54	68.20	23.66	vertical	Peak
2568.50	49.23	-2.07	47.16	68.20	21.04	vertical	Peak
3860.00	50.25	-2.71	47.54	74.00	26.46	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5200
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.0°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

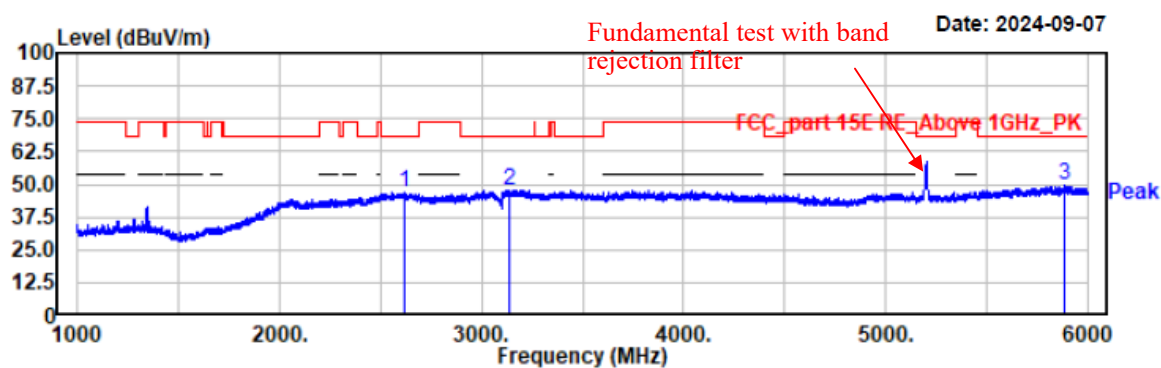

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2620.50	48.66	-1.98	46.68	68.20	21.52	horizontal	Peak
3136.00	49.25	-1.47	47.78	68.20	20.42	horizontal	Peak
5887.50	50.29	-0.46	49.83	68.20	18.37	horizontal	Peak

Project No.: 2407V20721E-RF
 Test Mode: 11a-5200
 EUT Model: NLS-NQuire500
 Test distance: 3m


Temp/Humi/ATM: 24.0°C/52%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC120V/60Hz

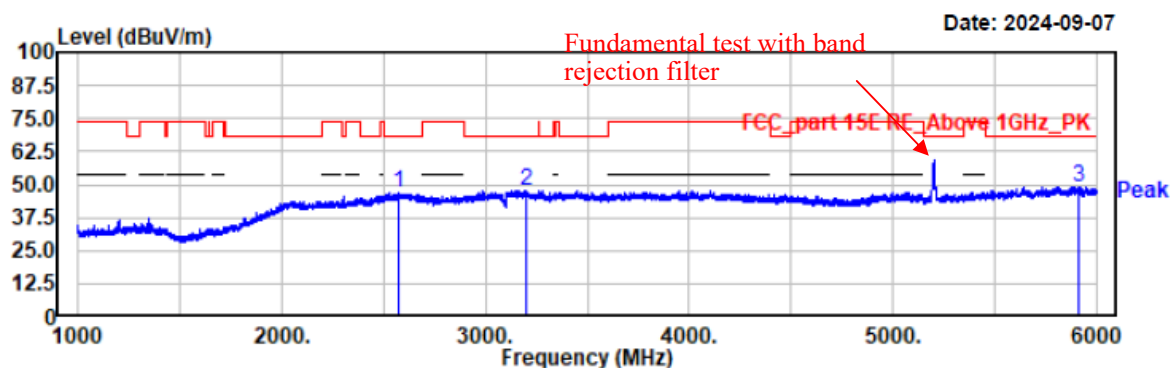

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2576.50	48.92	-2.03	46.89	68.20	21.31	vertical	Peak
3199.50	49.26	-1.43	47.83	68.20	20.37	vertical	Peak
5908.50	49.60	-0.49	49.11	68.20	19.09	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5240
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.0°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

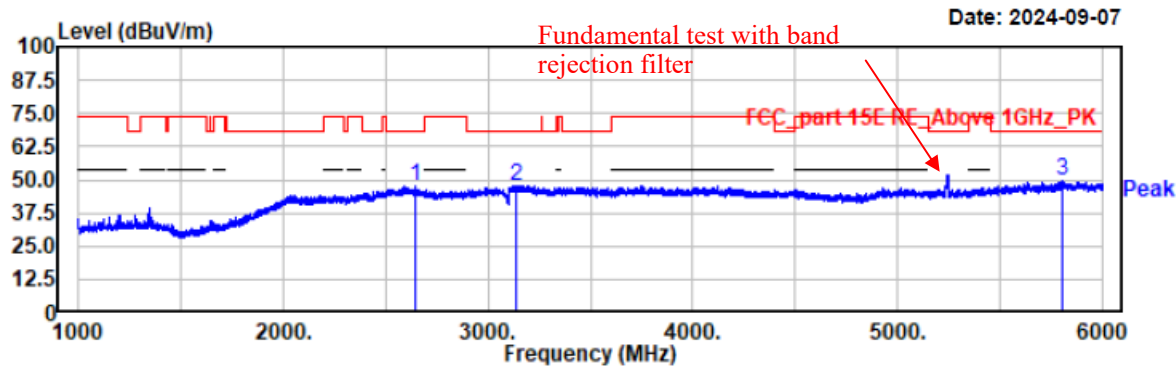

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2649.00	49.29	-2.01	47.28	68.20	20.92	horizontal	Peak
3141.00	49.28	-1.46	47.82	68.20	20.38	horizontal	Peak
5807.50	49.94	-0.48	49.46	68.20	18.74	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5240
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.0°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

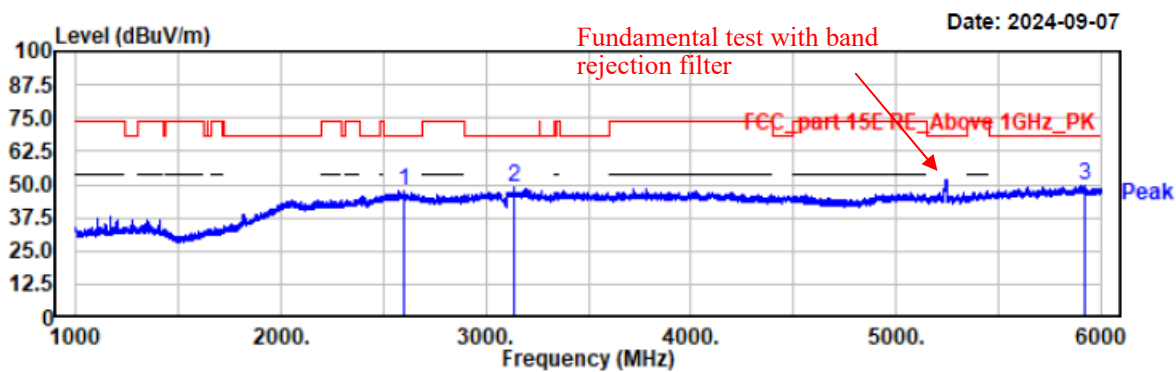

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2602.50	49.64	-1.96	47.68	68.20	20.52	vertical	Peak
3139.00	50.29	-1.46	48.83	68.20	19.37	vertical	Peak
5923.00	50.16	-0.69	49.47	68.20	18.73	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5180
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.0°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

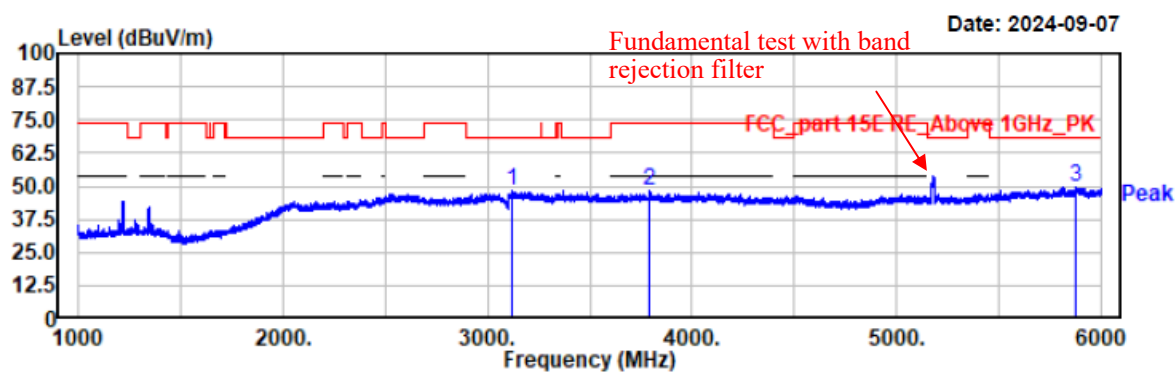

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
3118.50	49.53	-1.51	48.02	68.20	20.18	horizontal	Peak
3791.50	50.66	-2.44	48.22	74.00	25.78	horizontal	Peak
5879.50	49.91	-0.51	49.40	68.20	18.80	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5180
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.0°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

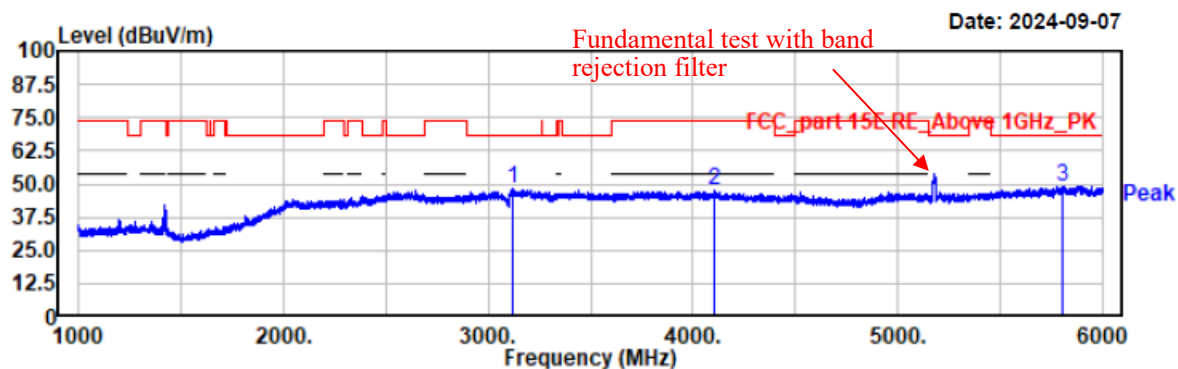

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
3123.00	49.92	-1.50	48.42	68.20	19.78	vertical	Peak
4104.50	49.78	-2.47	47.31	74.00	26.69	vertical	Peak
5802.50	49.69	-0.45	49.24	68.20	18.96	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5200
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.0°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

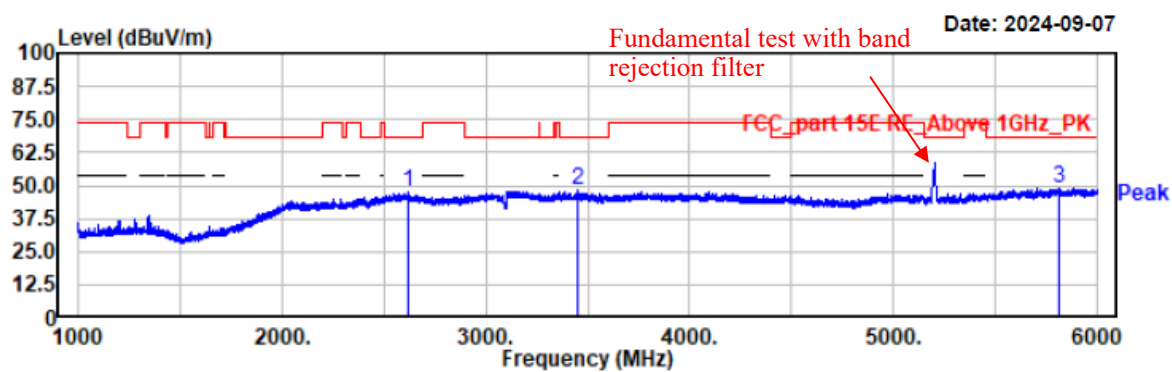

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2614.50	49.76	-1.97	47.79	68.20	20.41	horizontal	Peak
3454.00	50.15	-2.11	48.04	68.20	20.16	horizontal	Peak
5817.50	49.69	-0.55	49.14	68.20	19.06	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5200
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.0°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

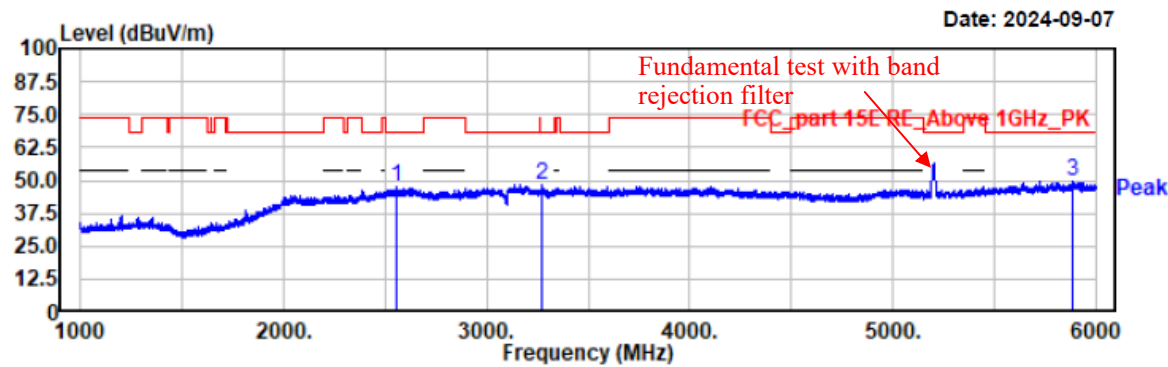

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2554.00	49.36	-2.11	47.25	68.20	20.95	vertical	Peak
3271.00	50.49	-2.32	48.17	68.20	20.03	vertical	Peak
5884.00	50.20	-0.49	49.71	68.20	18.49	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5240
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.0°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

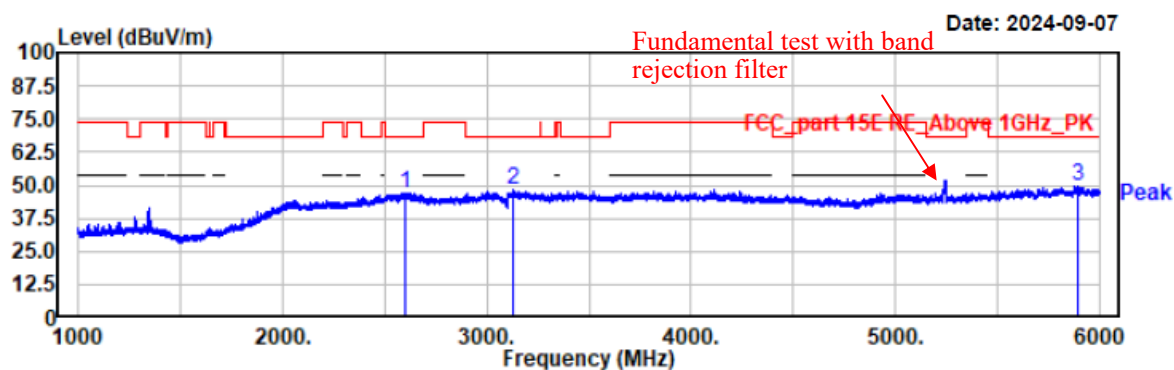

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2597.50	49.10	-1.96	47.14	68.20	21.06	horizontal	Peak
3128.50	49.60	-1.49	48.11	68.20	20.09	horizontal	Peak
5890.50	50.24	-0.44	49.80	68.20	18.40	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5240
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.0°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

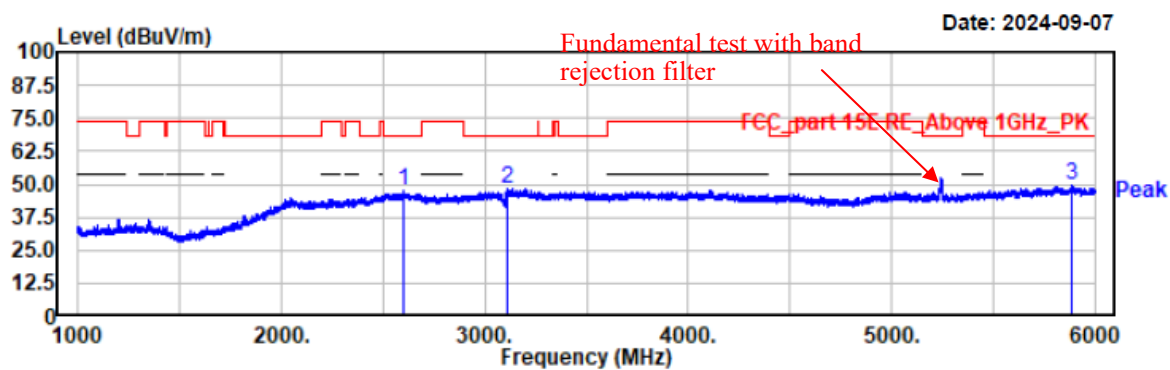

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2597.00	49.30	-1.96	47.34	68.20	20.86	vertical	Peak
3114.50	49.62	-1.52	48.10	68.20	20.10	vertical	Peak
5882.50	50.11	-0.50	49.61	68.20	18.59	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5190
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.0°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

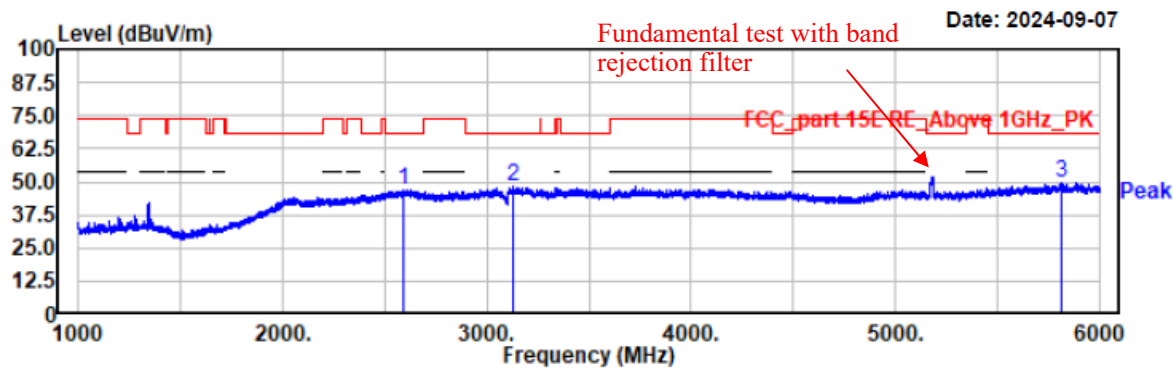

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2588.50	48.89	-2.00	46.89	68.20	21.31	horizontal	Peak
3124.50	49.97	-1.50	48.47	68.20	19.73	horizontal	Peak
5810.00	50.00	-0.49	49.51	68.20	18.69	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5190
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.0°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

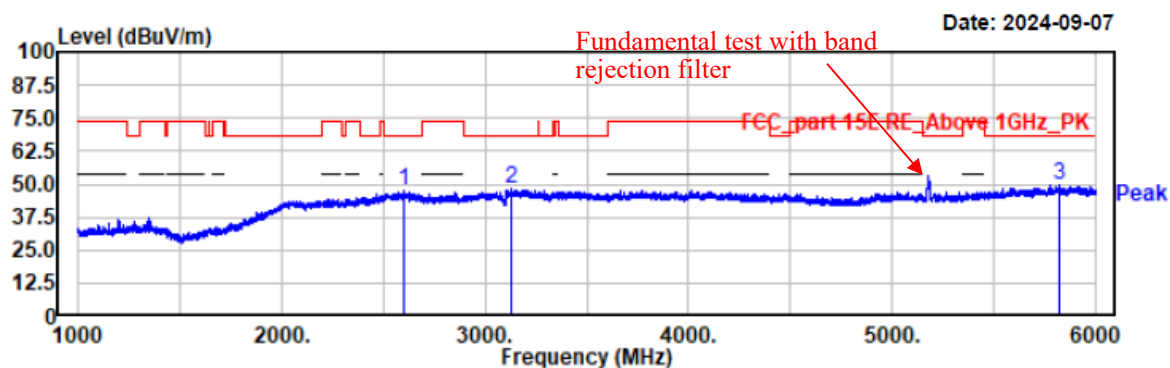

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2600.50	49.60	-1.95	47.65	68.20	20.55	vertical	Peak
3129.00	49.78	-1.49	48.29	68.20	19.91	vertical	Peak
5820.50	50.26	-0.56	49.70	68.20	18.50	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5230
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.0°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

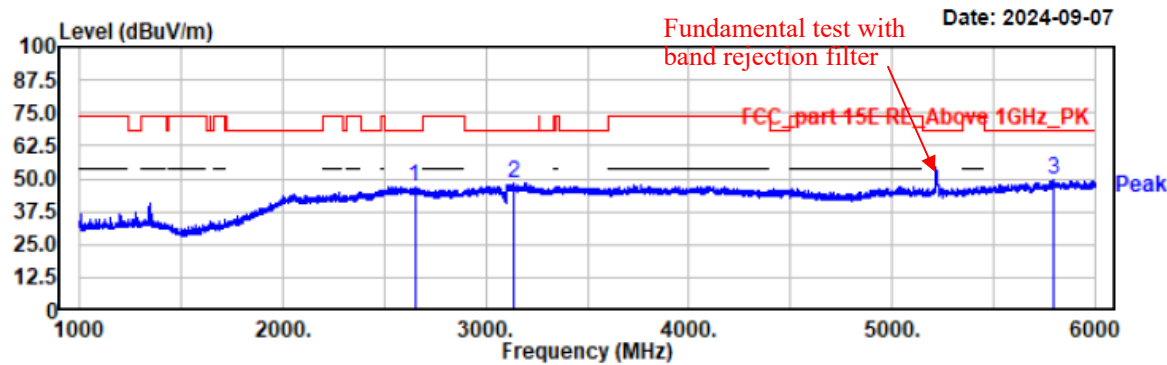

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2650.00	48.90	-2.01	46.89	68.20	21.31	horizontal	Peak
3134.50	50.04	-1.48	48.56	68.20	19.64	horizontal	Peak
5799.50	50.06	-0.43	49.63	68.20	18.57	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5230
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.0°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

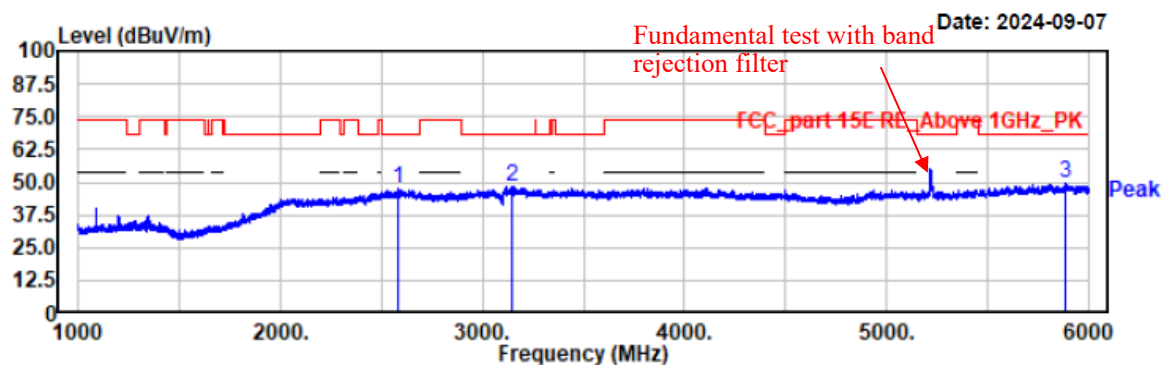

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2587.00	49.38	-2.00	47.38	68.20	20.82	vertical	Peak
3143.00	49.71	-1.45	48.26	68.20	19.94	vertical	Peak
5884.50	50.02	-0.48	49.54	68.20	18.66	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5210
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.0°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

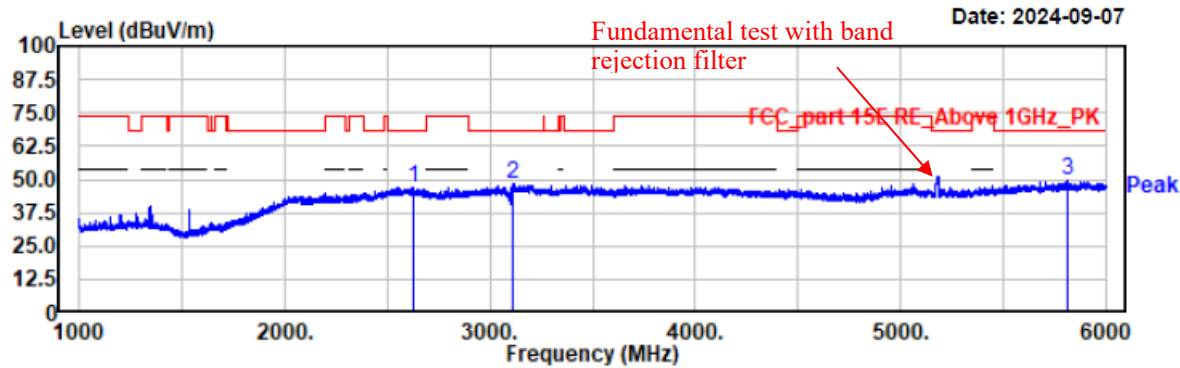

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2628.00	49.00	-1.98	47.02	68.20	21.18	horizontal	Peak
3107.50	49.94	-1.54	48.40	68.20	19.80	horizontal	Peak
5817.50	50.01	-0.55	49.46	68.20	18.74	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5210
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.0°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

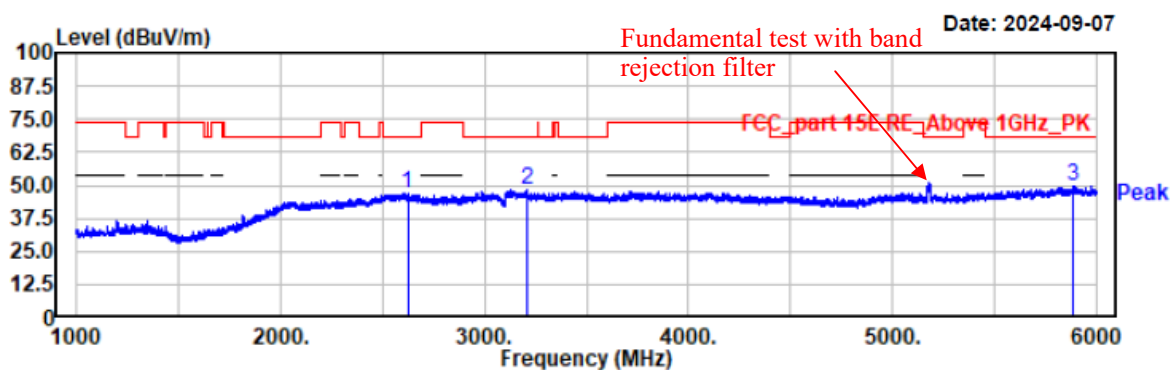


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2623.00	49.13	-1.99	47.14	68.20	21.06	vertical	Peak
3211.00	49.84	-1.60	48.24	68.20	19.96	vertical	Peak
5885.00	49.98	-0.48	49.50	68.20	18.70	vertical	Peak

B2

Project No.: 2407V20721E-RF
Test Mode: 11a-5260
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

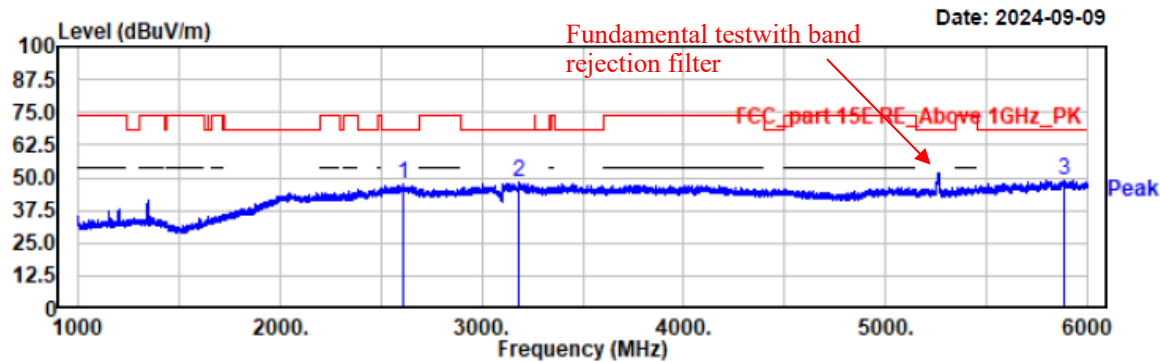

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2607.50	49.22	-1.96	47.26	68.20	20.94	horizontal	Peak
3183.00	49.36	-1.43	47.93	68.20	20.27	horizontal	Peak
5882.00	49.38	-0.50	48.88	68.20	19.32	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5260
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

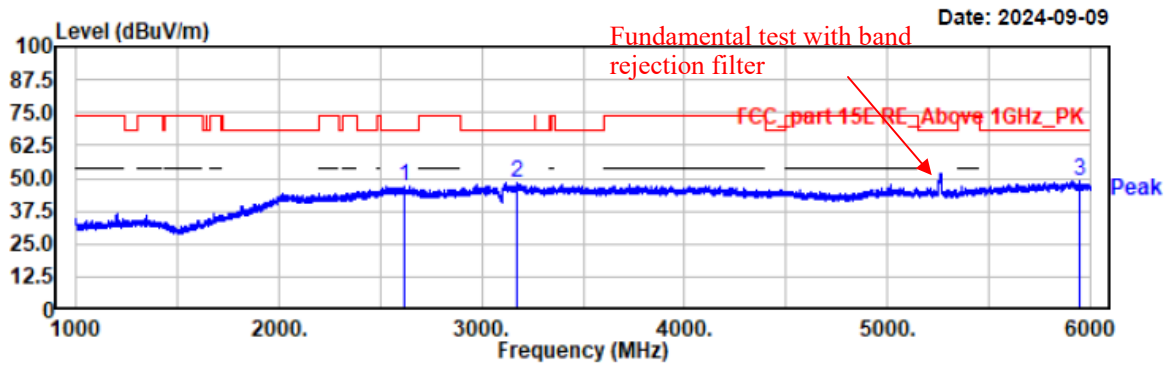

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2618.00	49.20	-1.98	47.22	68.20	20.98	vertical	Peak
3175.50	49.61	-1.43	48.18	68.20	20.02	vertical	Peak
5951.50	49.94	-1.07	48.87	68.20	19.33	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5280
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

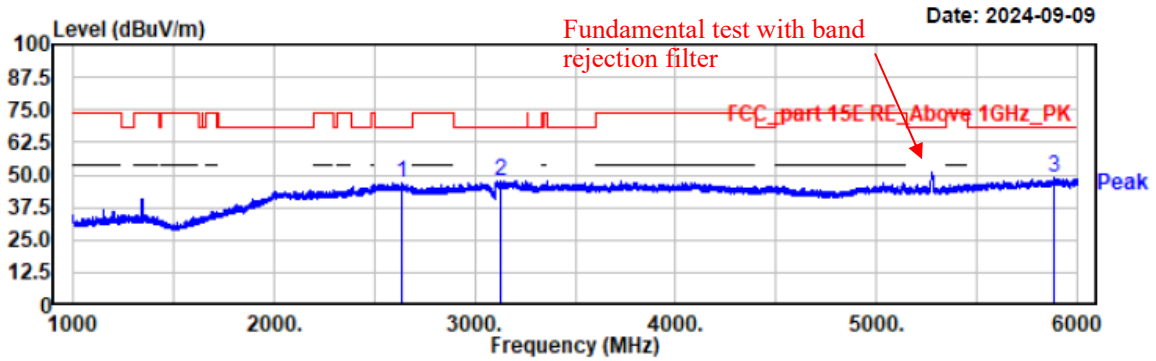

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2638.50	48.96	-2.00	46.96	68.20	21.24	horizontal	Peak
3126.50	49.01	-1.50	47.51	68.20	20.69	horizontal	Peak
5888.00	49.20	-0.45	48.75	68.20	19.45	horizontal	Peak


Project No.: 2407V20721E-RF
Test Mode: 11a-5280
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

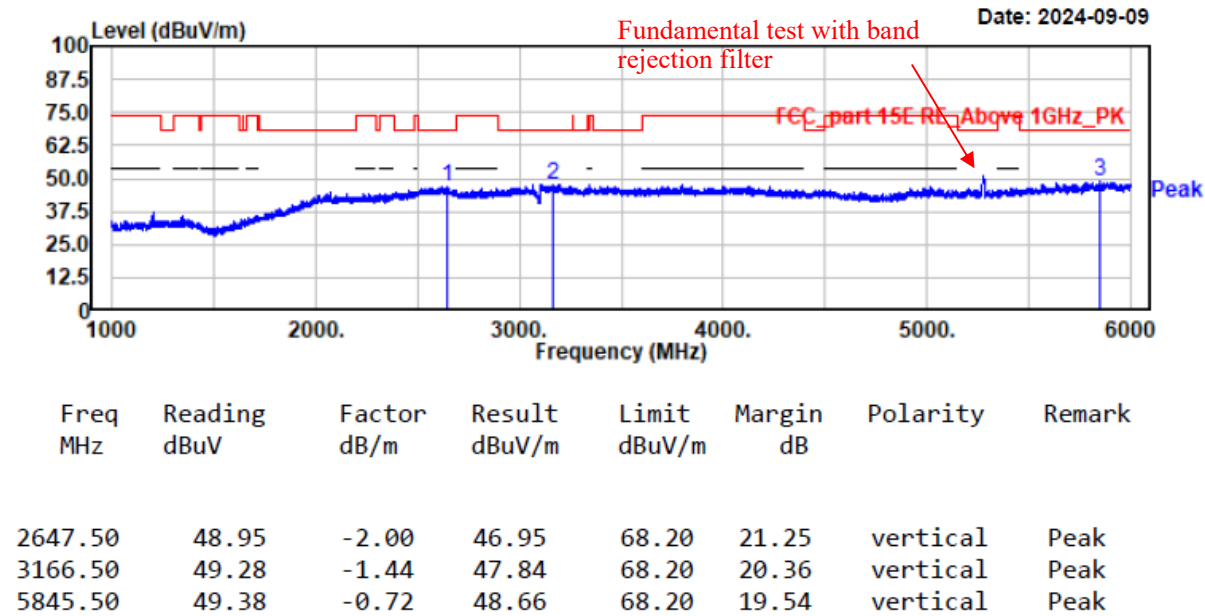

Project No.: 2407V20721E-RF
Test Mode: 11a-5320
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

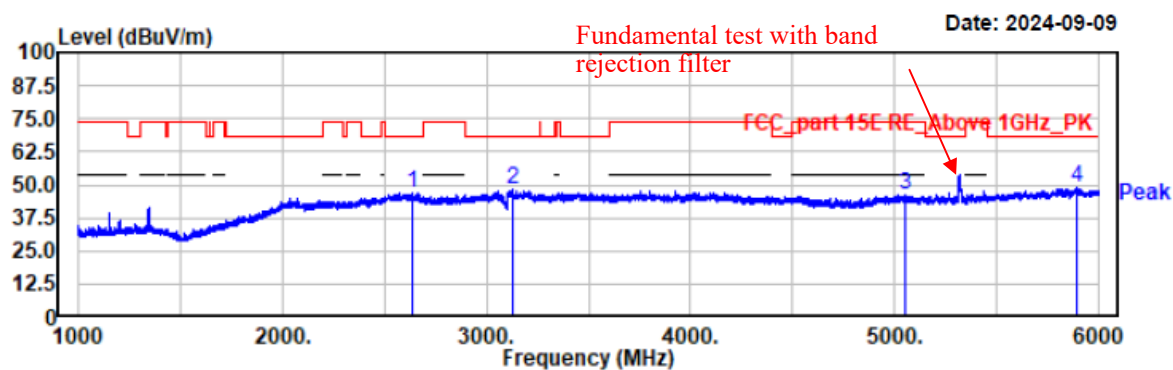

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2633.50	48.92	-1.99	46.93	68.20	21.27	horizontal	Peak
3130.50	50.11	-1.49	48.62	68.20	19.58	horizontal	Peak
5055.00	49.45	-3.18	46.27	74.00	27.73	horizontal	Peak
5891.00	49.16	-0.42	48.74	68.20	19.46	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5320
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

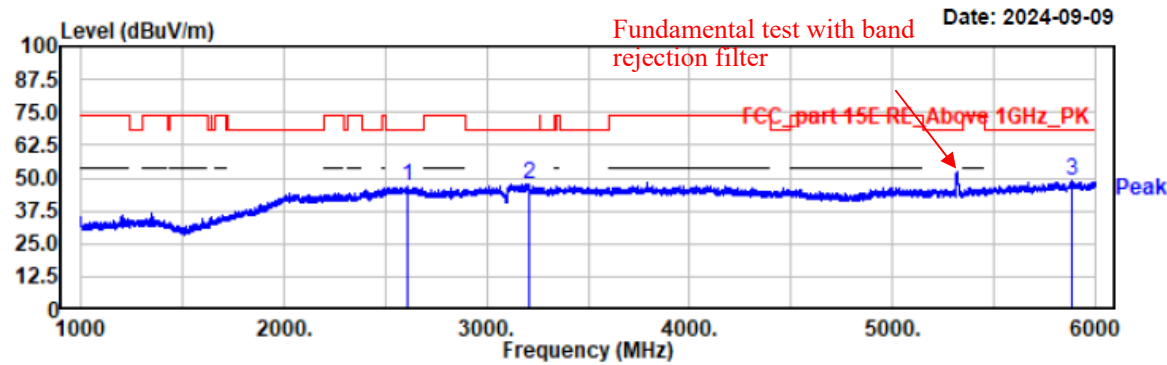

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2610.00	48.67	-1.96	46.71	68.20	21.49	vertical	Peak
3208.50	49.13	-1.56	47.57	68.20	20.63	vertical	Peak
5886.50	49.30	-0.46	48.84	68.20	19.36	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5260
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

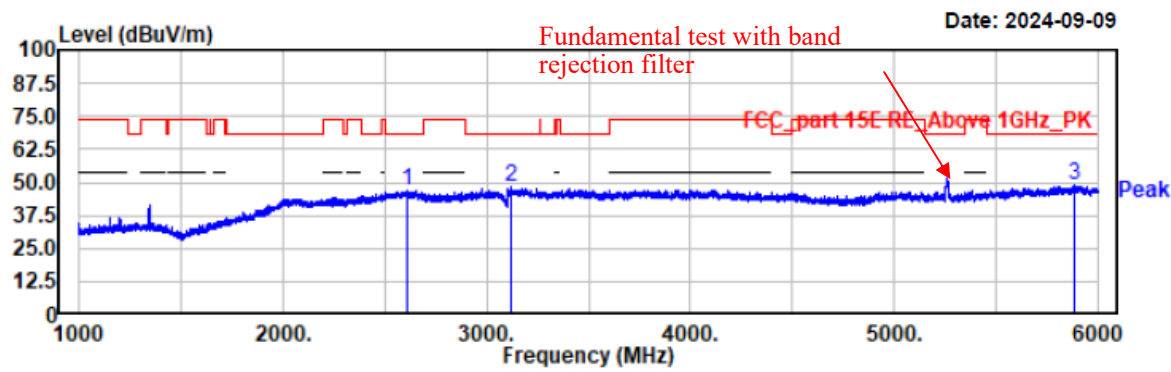

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2609.50	48.72	-1.96	46.76	68.20	21.44	horizontal	Peak
3121.00	49.49	-1.51	47.98	68.20	20.22	horizontal	Peak
5884.00	49.67	-0.49	49.18	68.20	19.02	horizontal	Peak


Project No.: 2407V20721E-RF
Test Mode: 11n20-5260
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

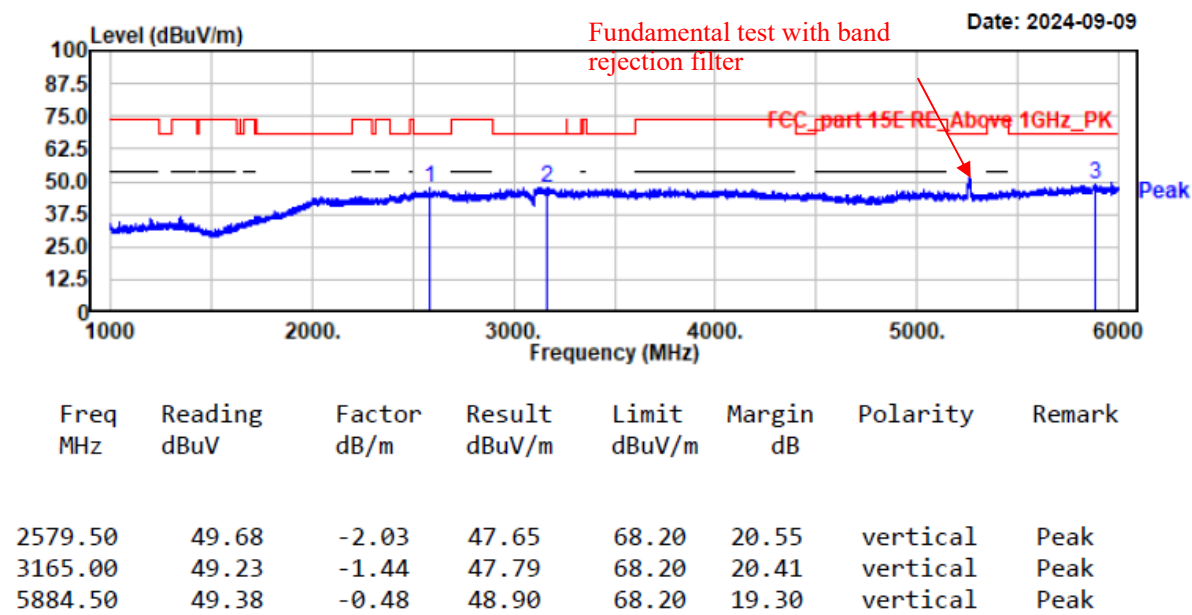

Project No.: 2407V20721E-RF
Test Mode: 11n20-5280
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

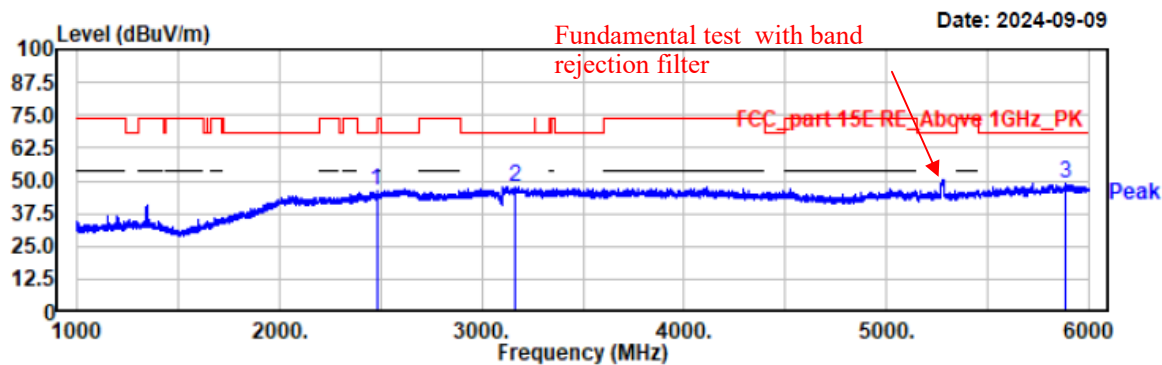

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2480.00	49.67	-3.22	46.45	68.20	21.75	horizontal	Peak
3165.50	49.00	-1.44	47.56	68.20	20.64	horizontal	Peak
5886.50	49.46	-0.46	49.00	68.20	19.20	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5280
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

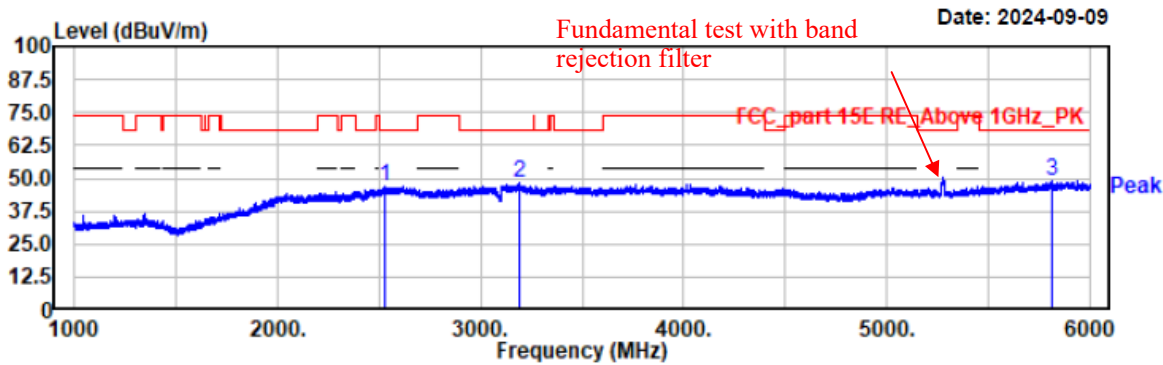

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2532.00	49.25	-2.38	46.87	68.20	21.33	vertical	Peak
3194.50	49.50	-1.43	48.07	68.20	20.13	vertical	Peak
5810.50	49.36	-0.49	48.87	68.20	19.33	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5320
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

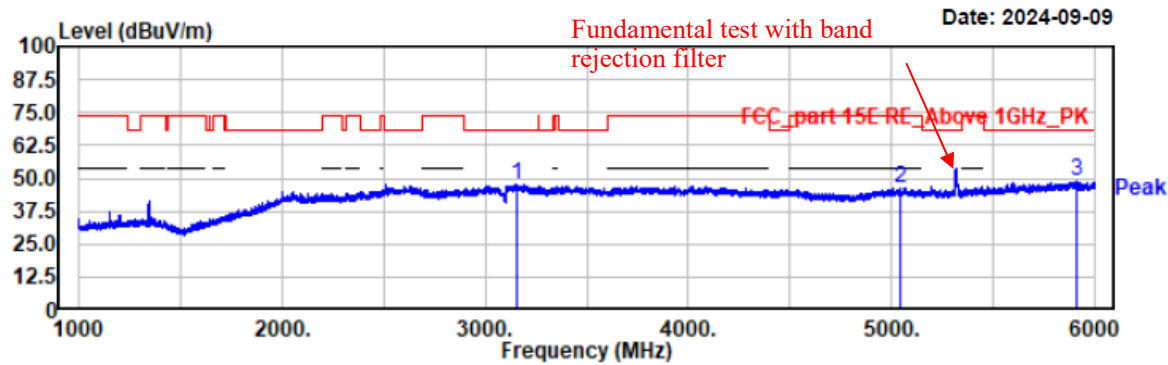

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
3157.50	49.02	-1.44	47.58	68.20	20.62	horizontal	Peak
5047.00	49.63	-3.17	46.46	74.00	27.54	horizontal	Peak
5913.00	49.64	-0.55	49.09	68.20	19.11	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5320
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

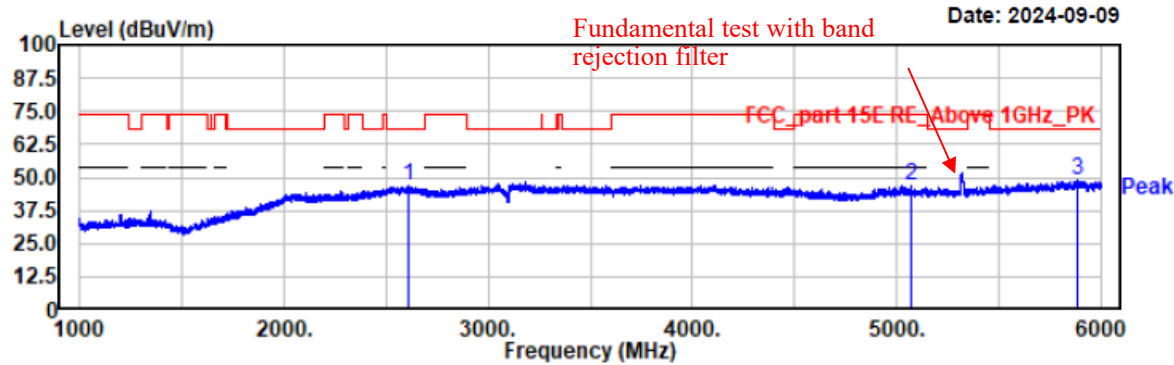

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2611.00	48.87	-1.96	46.91	68.20	21.29	vertical	Peak
5072.50	50.33	-3.24	47.09	74.00	26.91	vertical	Peak
5882.00	49.56	-0.50	49.06	68.20	19.14	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5270
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

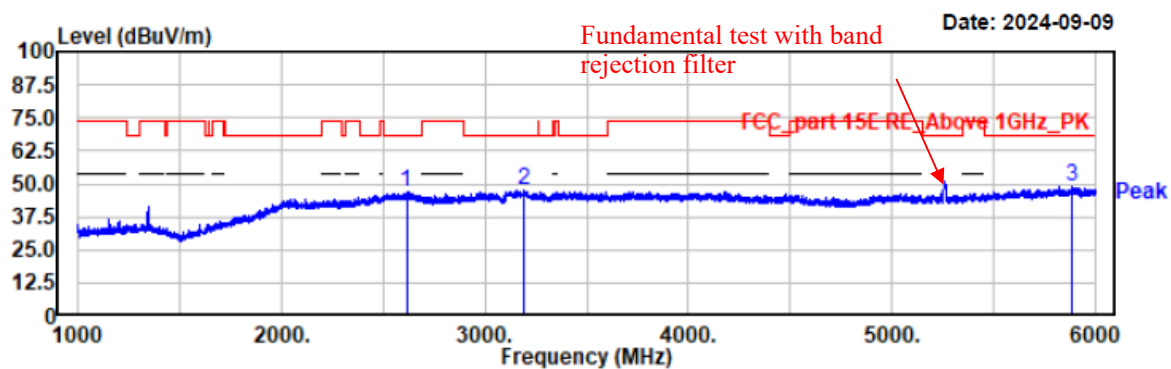

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2614.00	48.93	-1.97	46.96	68.20	21.24	horizontal	Peak
3195.50	48.97	-1.43	47.54	68.20	20.66	horizontal	Peak
5885.50	49.43	-0.48	48.95	68.20	19.25	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5270
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

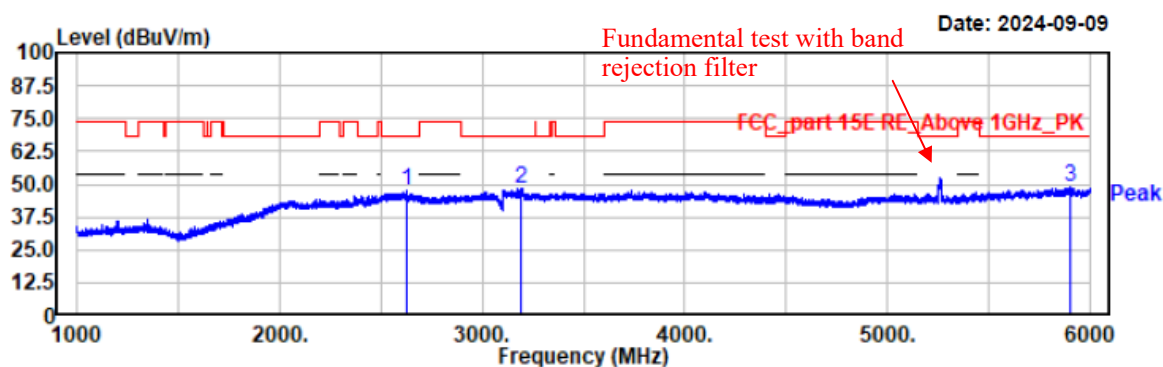

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2627.00	49.24	-1.97	47.27	68.20	20.93	vertical	Peak
3195.50	49.77	-1.43	48.34	68.20	19.86	vertical	Peak
5906.50	49.15	-0.45	48.70	68.20	19.50	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5310
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

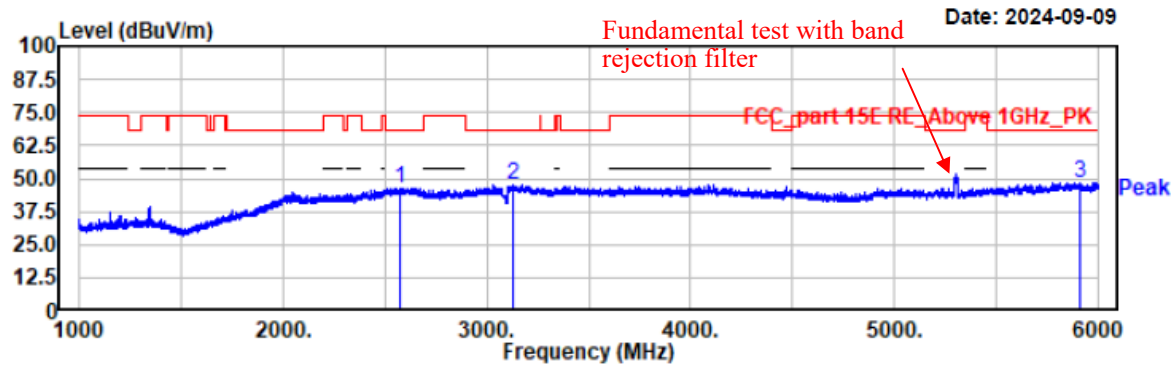

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2576.00	48.58	-2.04	46.54	68.20	21.66	horizontal	Peak
3128.50	48.97	-1.49	47.48	68.20	20.72	horizontal	Peak
5913.50	48.96	-0.56	48.40	68.20	19.80	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5310
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

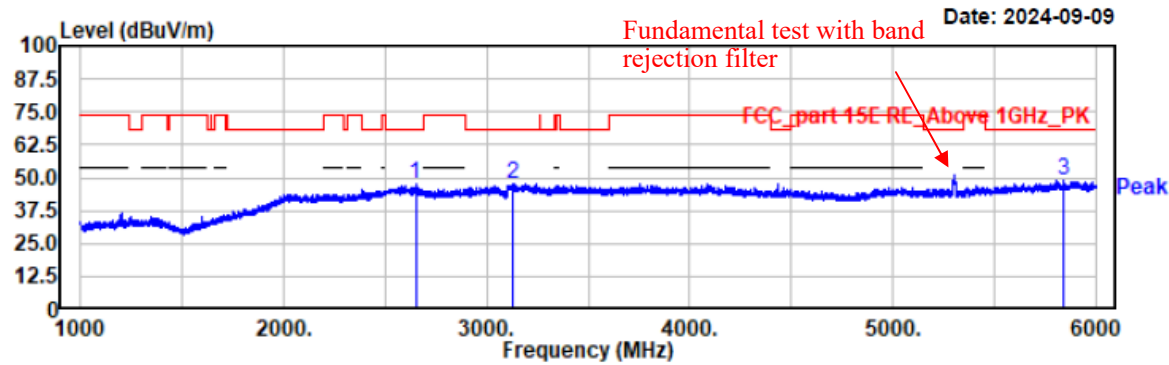

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2650.00	49.47	-2.01	47.46	68.20	20.74	vertical	Peak
3129.50	49.39	-1.49	47.90	68.20	20.30	vertical	Peak
5841.00	49.63	-0.70	48.93	68.20	19.27	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5290
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

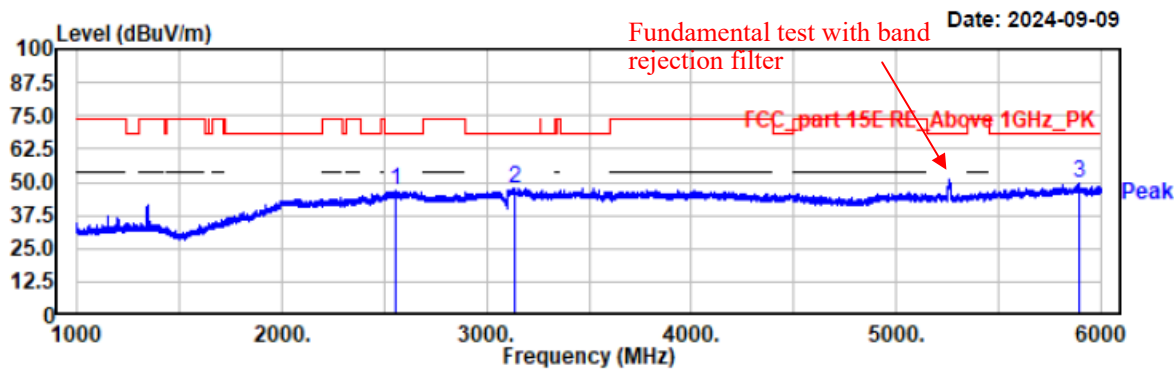

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2556.50	48.69	-2.10	46.59	68.20	21.61	horizontal	Peak
3140.50	49.36	-1.46	47.90	68.20	20.30	horizontal	Peak
5891.00	49.94	-0.42	49.52	68.20	18.68	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5290
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

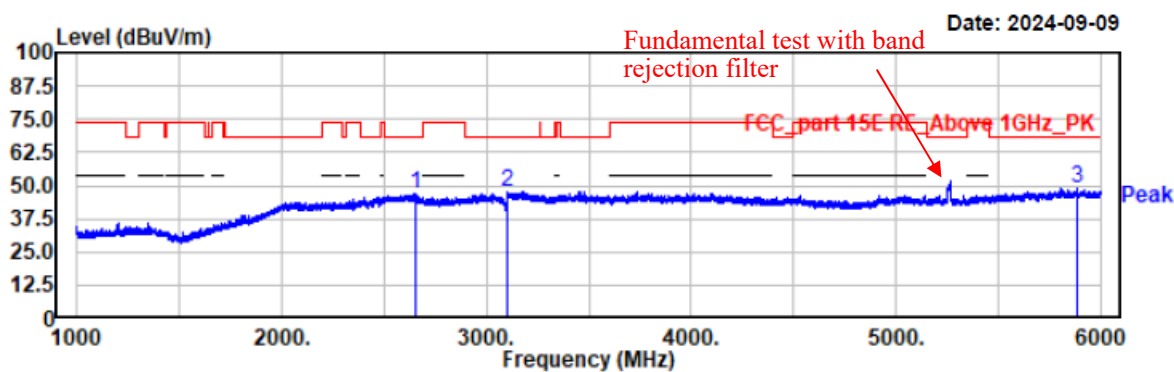

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2657.00	48.90	-2.19	46.71	68.20	21.49	vertical	Peak
3104.00	49.09	-1.54	47.55	68.20	20.65	vertical	Peak
5886.00	49.68	-0.46	49.22	68.20	18.98	vertical	Peak

B3

Project No.: 2407V20721E-RF

Test Mode: 11a-5500


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.1°C/55%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

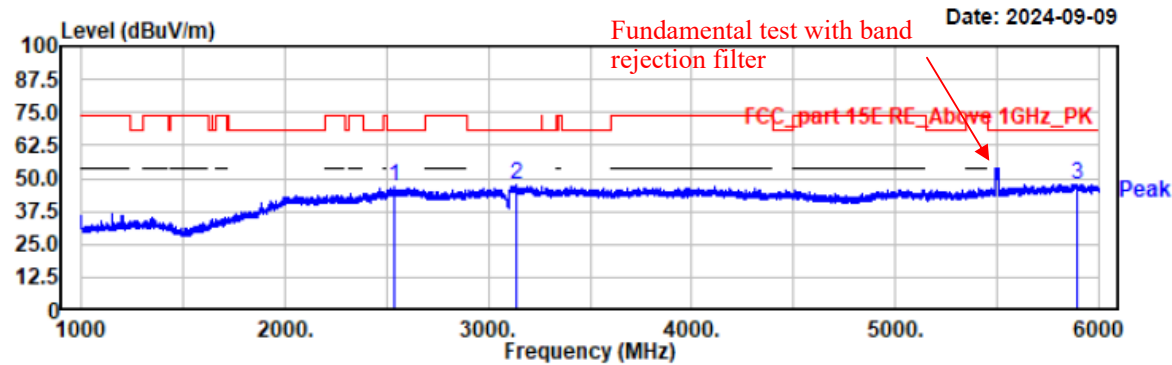

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2535.00	49.46	-2.34	47.12	68.20	21.08	horizontal	Peak
3137.00	48.82	-1.47	47.35	68.20	20.85	horizontal	Peak
5895.50	48.25	-0.40	47.85	68.20	20.35	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5500
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1℃/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

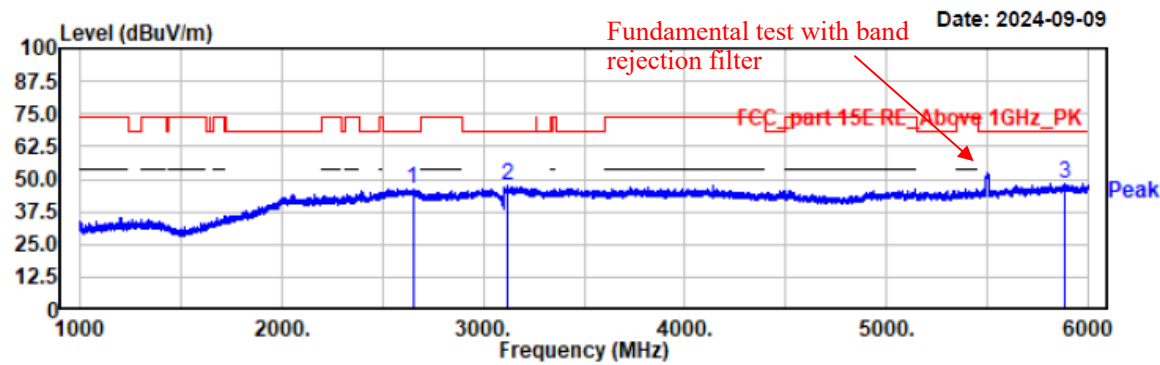

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2650.00	48.53	-2.01	46.52	68.20	21.68	vertical	Peak
3116.00	48.82	-1.52	47.30	68.20	20.90	vertical	Peak
5888.00	48.80	-0.45	48.35	68.20	19.85	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5580
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

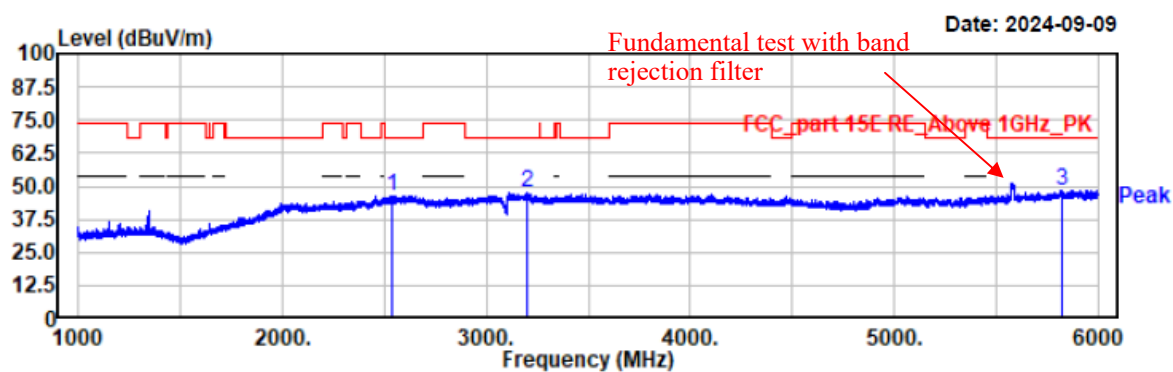

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2537.00	48.57	-2.31	46.26	68.20	21.94	horizontal	Peak
3204.00	48.93	-1.49	47.44	68.20	20.76	horizontal	Peak
5822.50	48.86	-0.58	48.28	68.20	19.92	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5580
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.1℃/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

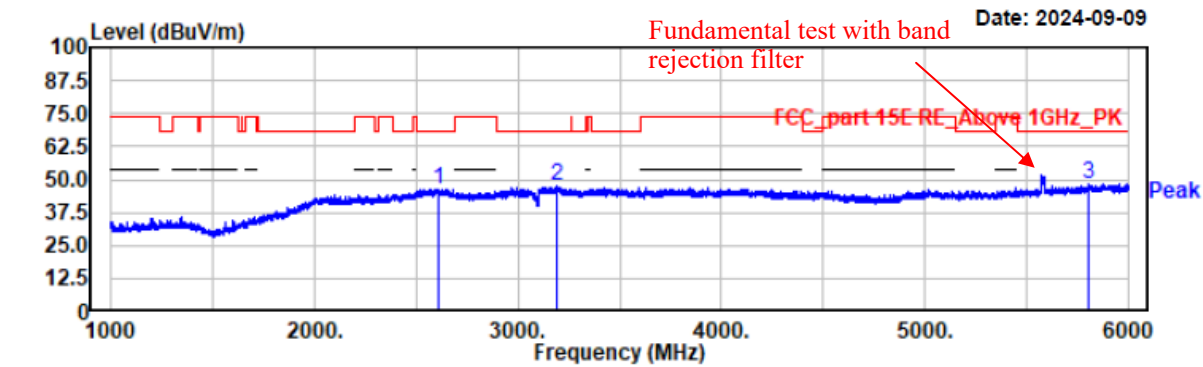

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2610.00	48.50	-1.96	46.54	68.20	21.66	vertical	Peak
3192.00	49.30	-1.43	47.87	68.20	20.33	vertical	Peak
5806.50	49.06	-0.47	48.59	68.20	19.61	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5700


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.1°C/55%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

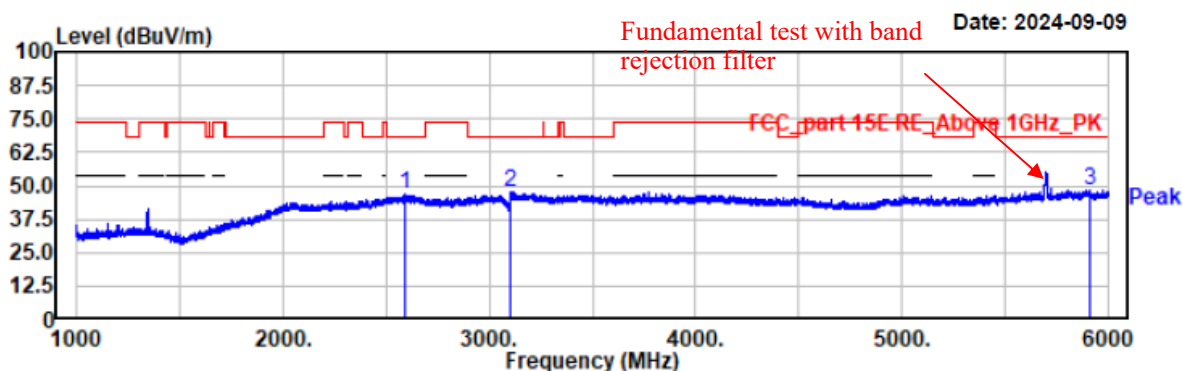

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2590.50	48.56	-1.98	46.58	68.20	21.62	horizontal	Peak
3105.00	48.97	-1.54	47.43	68.20	20.77	horizontal	Peak
5909.00	48.63	-0.49	48.14	68.20	20.06	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5700
EUT Model: NLS-NQuire500
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

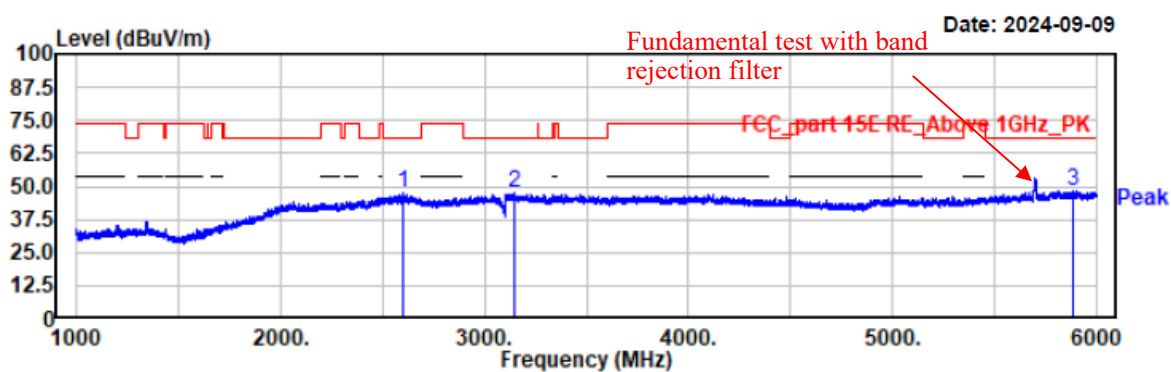

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2596.50	49.24	-1.96	47.28	68.20	20.92	vertical	Peak
3144.50	48.94	-1.45	47.49	68.20	20.71	vertical	Peak
5881.50	48.55	-0.50	48.05	68.20	20.15	vertical	Peak


Project No.: 2407V20721E-RF
Test Mode: 11n20-5500
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.1℃/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

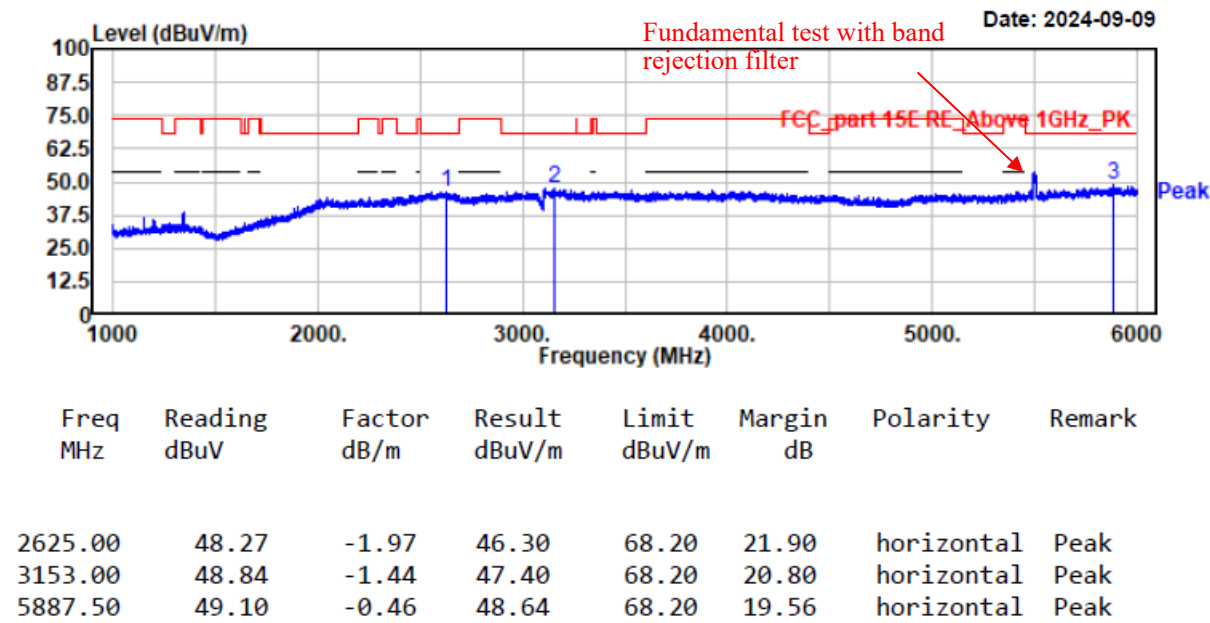

Project No.: 2407V20721E-RF
Test Mode: 11n20-5500
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.1℃/55%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

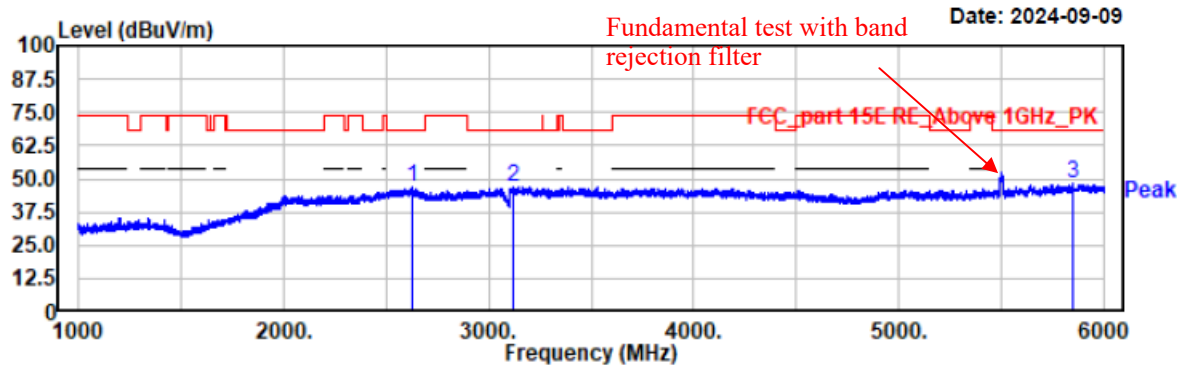

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2631.50	48.54	-1.98	46.56	68.20	21.64	vertical	Peak
3123.50	48.70	-1.50	47.20	68.20	21.00	vertical	Peak
5848.00	48.69	-0.73	47.96	68.20	20.24	vertical	Peak