


Project No.: 2407V20721E-RF  
Test Mode: 11n20-5580  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1℃/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

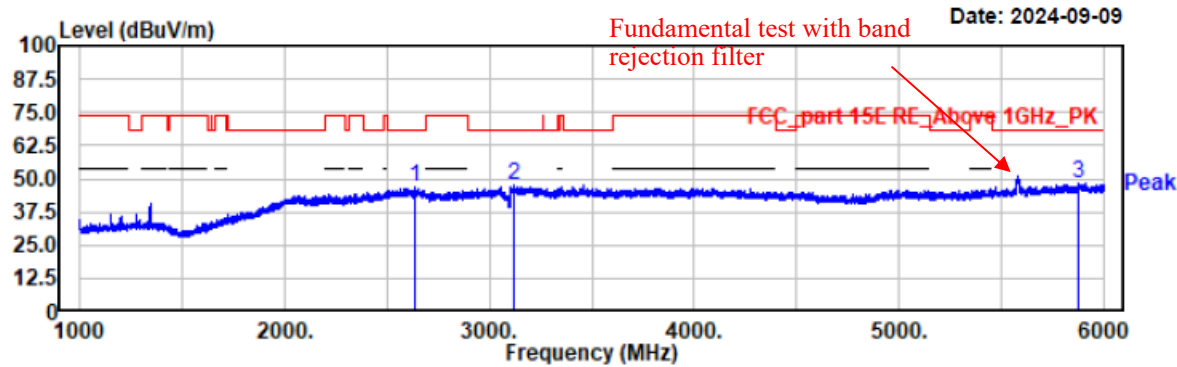

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2633.00     | 48.60           | -1.99          | 46.61            | 68.20           | 21.59        | horizontal | Peak   |
| 3121.50     | 49.37           | -1.51          | 47.86            | 68.20           | 20.34        | horizontal | Peak   |
| 5880.50     | 49.07           | -0.52          | 48.55            | 68.20           | 19.65        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5580  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1℃/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

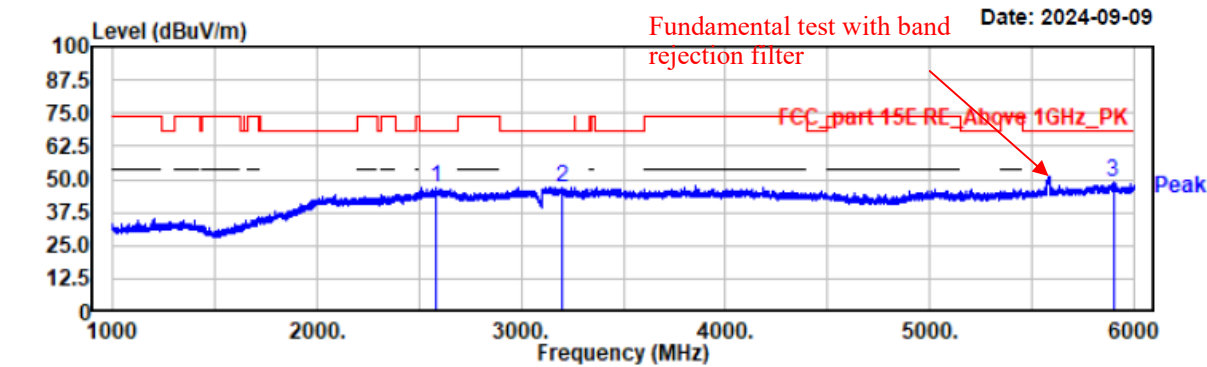

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2580.50     | 49.07           | -2.03          | 47.04            | 68.20           | 21.16        | vertical | Peak   |
| 3204.00     | 48.63           | -1.49          | 47.14            | 68.20           | 21.06        | vertical | Peak   |
| 5899.00     | 49.14           | -0.37          | 48.77            | 68.20           | 19.43        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5700  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1℃/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

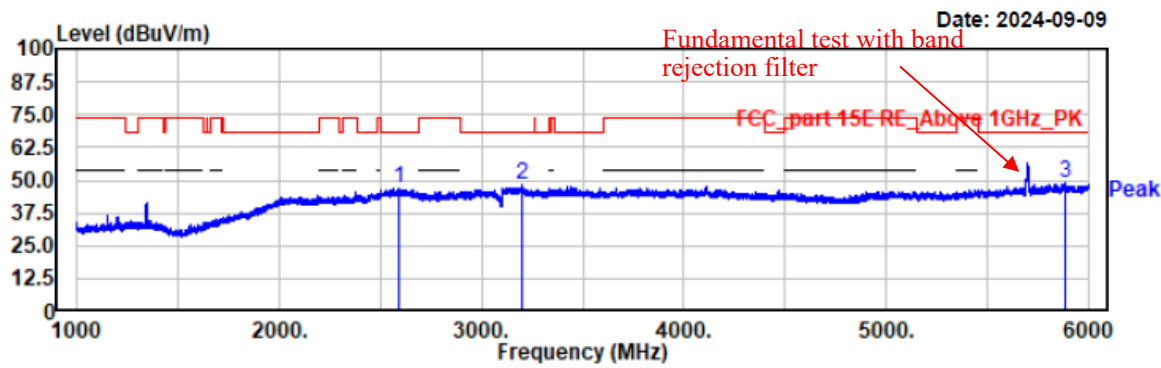

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2588.00     | 48.74           | -2.00          | 46.74            | 68.20           | 21.46        | horizontal | Peak   |
| 3202.00     | 49.58           | -1.46          | 48.12            | 68.20           | 20.08        | horizontal | Peak   |
| 5886.50     | 49.20           | -0.46          | 48.74            | 68.20           | 19.46        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5700  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1℃/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

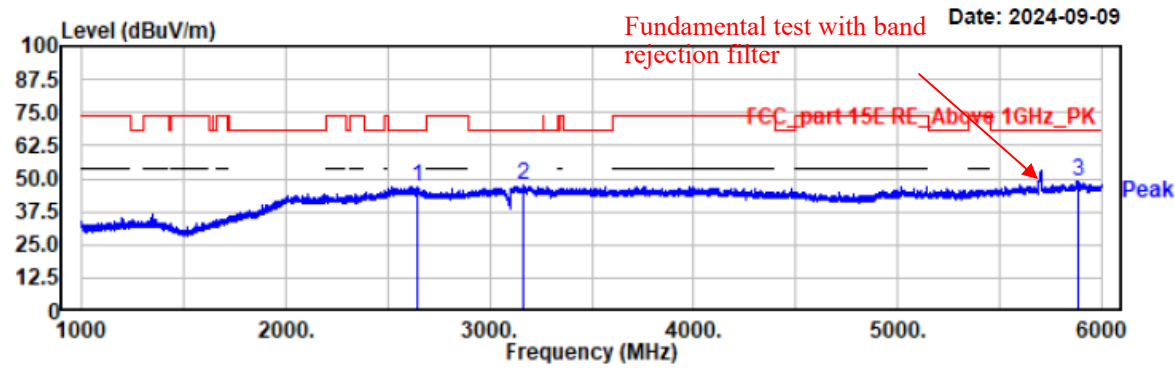

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2641.50     | 48.77           | -2.00          | 46.77            | 68.20           | 21.43        | vertical | Peak   |
| 3167.00     | 48.84           | -1.44          | 47.40            | 68.20           | 20.80        | vertical | Peak   |
| 5889.50     | 49.18           | -0.44          | 48.74            | 68.20           | 19.46        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n40-5510  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

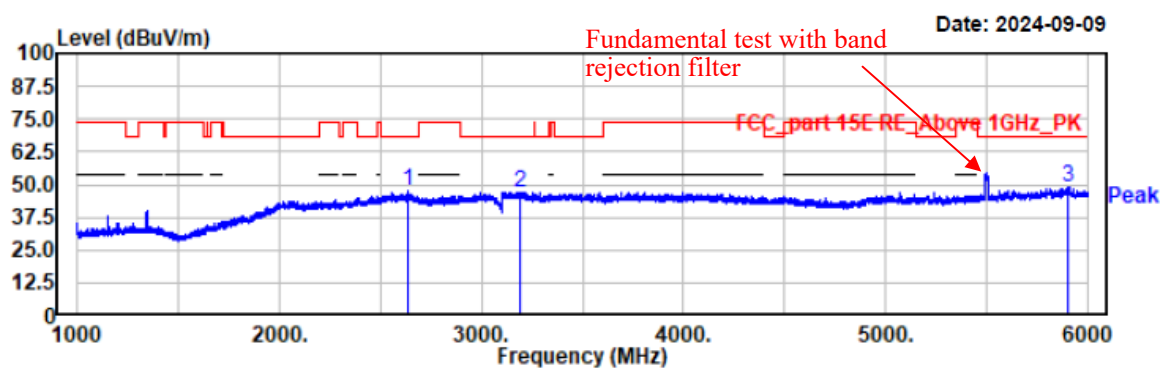

| Freq MHz | Reading dBuV | Factor dB/m | Result dBuV/m | Limit dBuV/m | Margin dB | Polarity   | Remark |
|----------|--------------|-------------|---------------|--------------|-----------|------------|--------|
| 2636.00  | 49.71        | -1.99       | 47.72         | 68.20        | 20.48     | horizontal | Peak   |
| 3189.50  | 48.61        | -1.43       | 47.18         | 68.20        | 21.02     | horizontal | Peak   |
| 5900.50  | 49.24        | -0.36       | 48.88         | 68.20        | 19.32     | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n40-5510  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

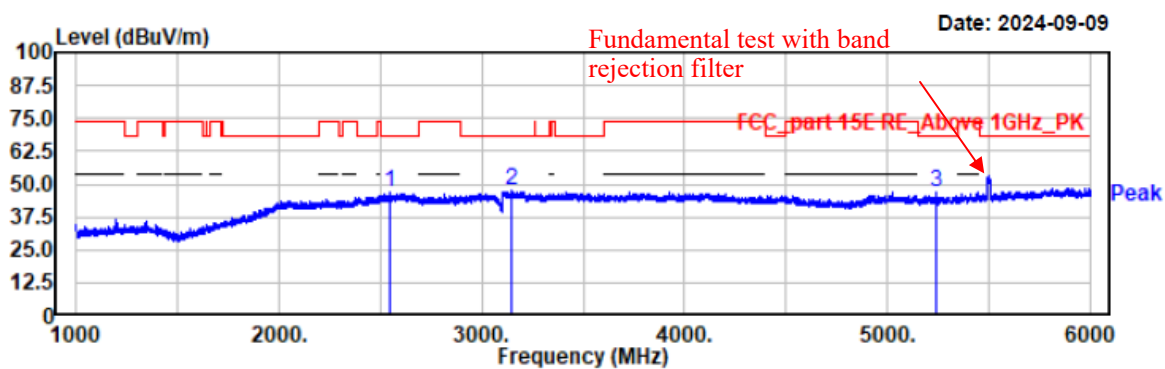

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2543.00     | 49.06           | -2.24          | 46.82            | 68.20           | 21.38        | vertical | Peak   |
| 3149.00     | 48.75           | -1.44          | 47.31            | 68.20           | 20.89        | vertical | Peak   |
| 5241.50     | 49.94           | -3.16          | 46.78            | 68.20           | 21.42        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n40-5550  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1℃/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

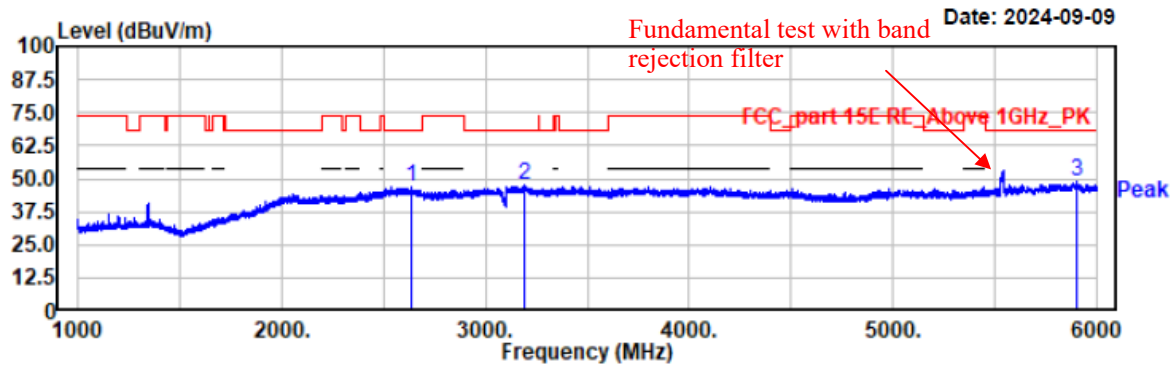

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2640.00     | 48.88           | -2.00          | 46.88            | 68.20           | 21.32        | horizontal | Peak   |
| 3189.50     | 49.03           | -1.43          | 47.60            | 68.20           | 20.60        | horizontal | Peak   |
| 5907.00     | 49.33           | -0.46          | 48.87            | 68.20           | 19.33        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n40-5550  
EUT Model: NLS-NQuire500  
Test distance: 3m

Temp/Humi/ATM: 24.1℃/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

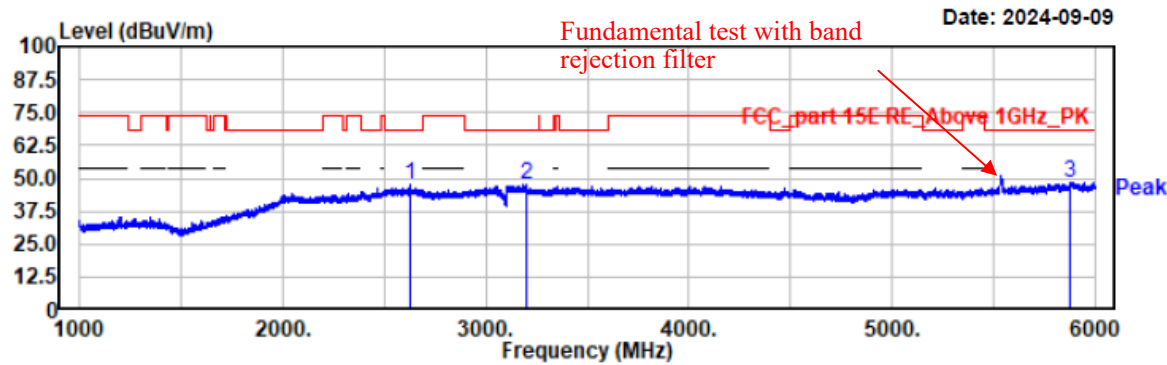

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2628.50     | 49.30           | -1.98          | 47.32            | 68.20           | 20.88        | vertical | Peak   |
| 3202.00     | 48.85           | -1.46          | 47.39            | 68.20           | 20.81        | vertical | Peak   |
| 5878.50     | 49.10           | -0.52          | 48.58            | 68.20           | 19.62        | vertical | Peak   |

Project No.: 2407V20721E-RF

Test Mode: 11n40-5670


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.1°C/55%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

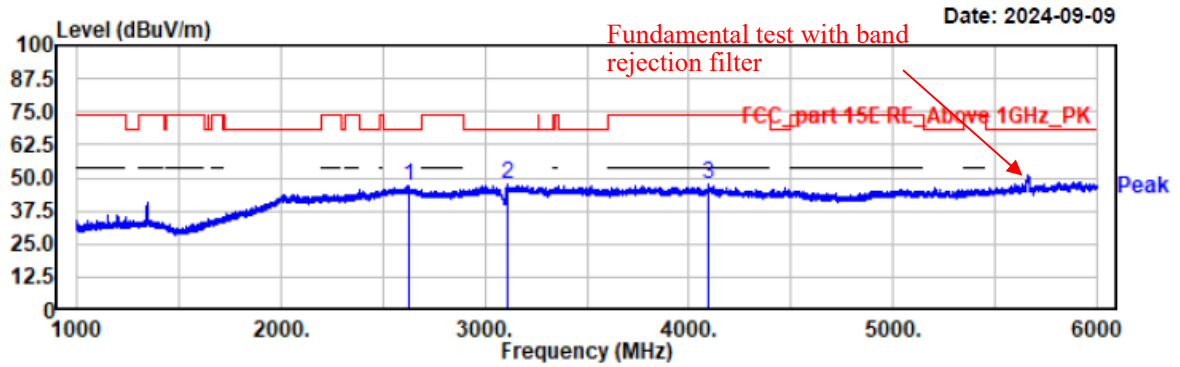

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2628.00     | 48.93           | -1.98          | 46.95            | 68.20           | 21.25        | horizontal | Peak   |
| 3109.50     | 49.03           | -1.53          | 47.50            | 68.20           | 20.70        | horizontal | Peak   |
| 4095.50     | 49.91           | -2.41          | 47.50            | 74.00           | 26.50        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n40-5670  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

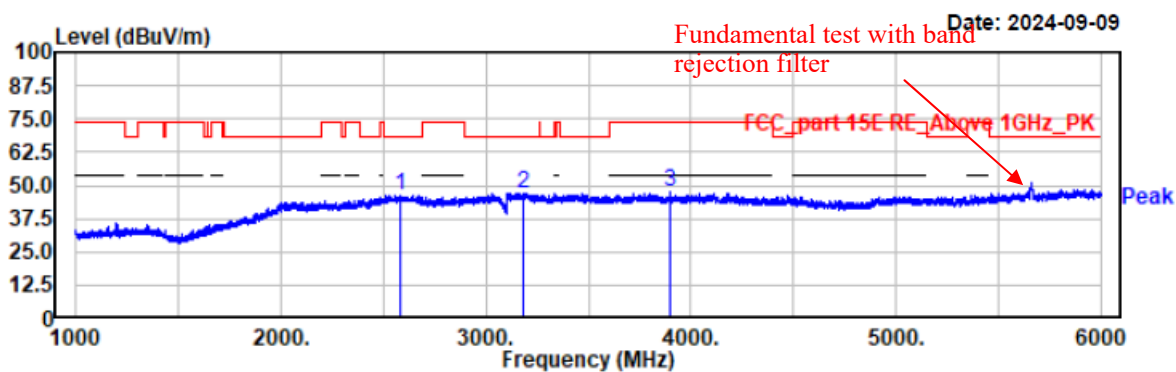

| Freq MHz | Reading dBuV | Factor dB/m | Result dBuV/m | Limit dBuV/m | Margin dB | Polarity | Remark |
|----------|--------------|-------------|---------------|--------------|-----------|----------|--------|
| 2581.50  | 48.47        | -2.02       | 46.45         | 68.20        | 21.75     | vertical | Peak   |
| 3182.50  | 48.51        | -1.43       | 47.08         | 68.20        | 21.12     | vertical | Peak   |
| 3894.50  | 50.08        | -2.75       | 47.33         | 74.00        | 26.67     | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11ac80-5530  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1℃/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

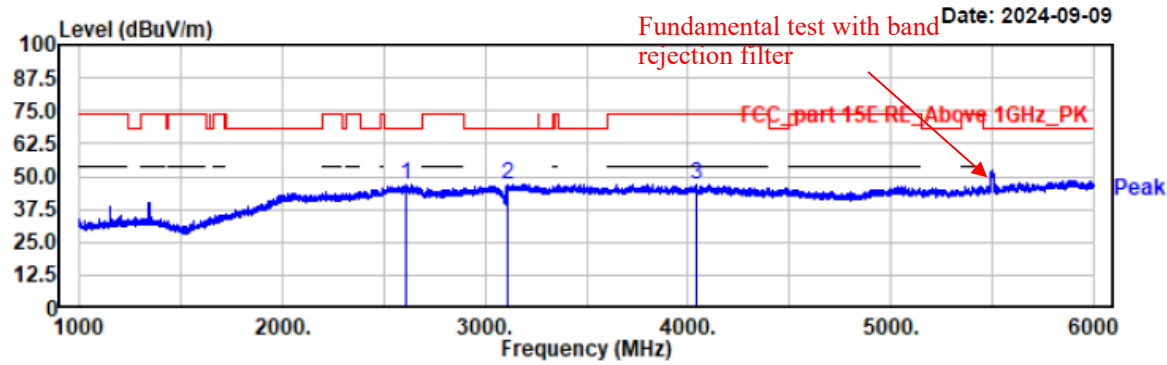

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2609.50     | 48.77           | -1.96          | 46.81            | 68.20           | 21.39        | horizontal | Peak   |
| 3109.00     | 48.77           | -1.53          | 47.24            | 68.20           | 20.96        | horizontal | Peak   |
| 4040.00     | 49.57           | -2.45          | 47.12            | 74.00           | 26.88        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11ac80-5530  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

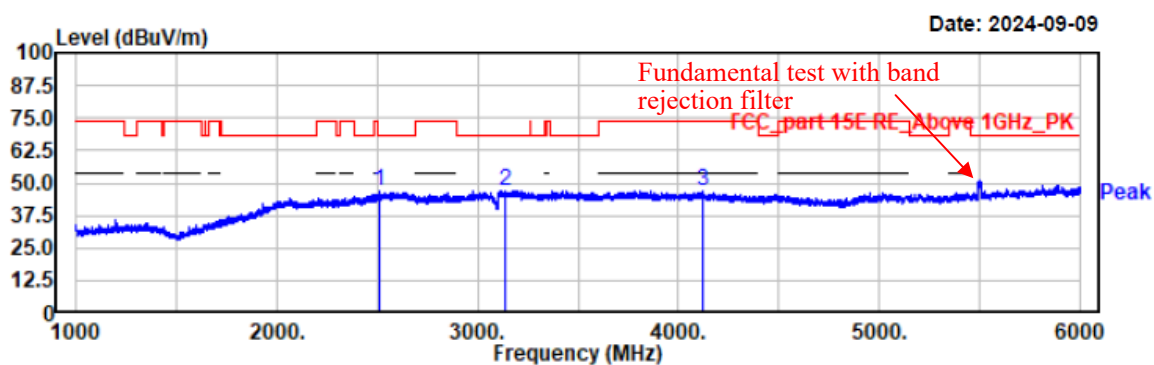

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2510.00     | 49.34           | -2.68          | 46.66            | 68.20           | 21.54        | vertical | Peak   |
| 3141.50     | 48.46           | -1.46          | 47.00            | 68.20           | 21.20        | vertical | Peak   |
| 4121.00     | 49.38           | -2.65          | 46.73            | 74.00           | 27.27        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11ac80-5610  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1℃/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

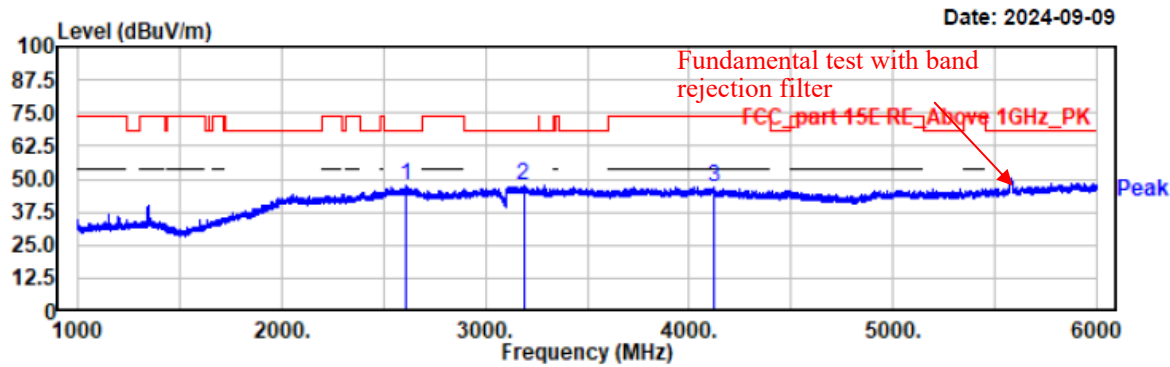

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2609.00     | 49.43           | -1.96          | 47.47            | 68.20           | 20.73        | horizontal | Peak   |
| 3187.00     | 48.99           | -1.43          | 47.56            | 68.20           | 20.64        | horizontal | Peak   |
| 4126.50     | 49.62           | -2.70          | 46.92            | 74.00           | 27.08        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11ac80-5610  
EUT Model: NLS-NQuire500  
Test distance: 3m

Temp/Humi/ATM: 24.1°C/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

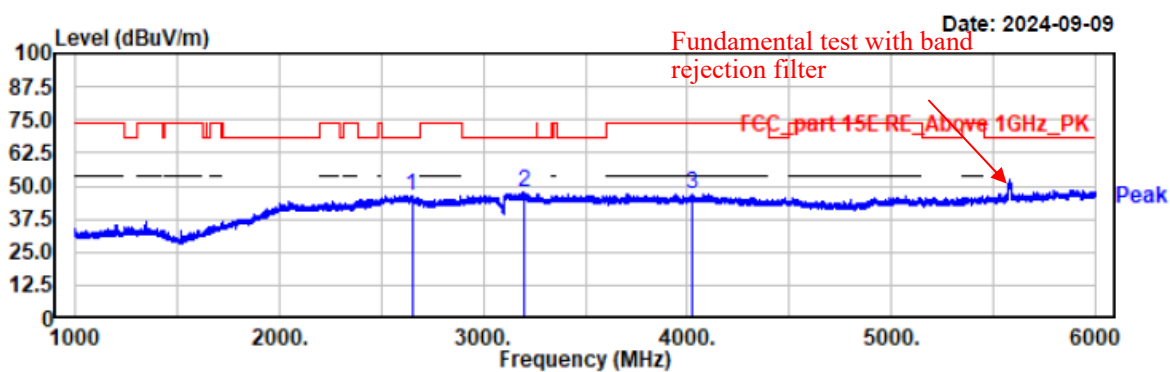

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2650.00     | 48.51           | -2.01          | 46.50            | 68.20           | 21.70        | vertical | Peak   |
| 3198.00     | 49.09           | -1.43          | 47.66            | 68.20           | 20.54        | vertical | Peak   |
| 4025.00     | 49.55           | -2.53          | 47.02            | 74.00           | 26.98        | vertical | Peak   |

B4

Project No.: 2407V20721E-RF

Test Mode: 11a-5745


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.1°C/55%/100.1kPa


Tested by: Wlif Wu

Power Source: AC120V/60Hz

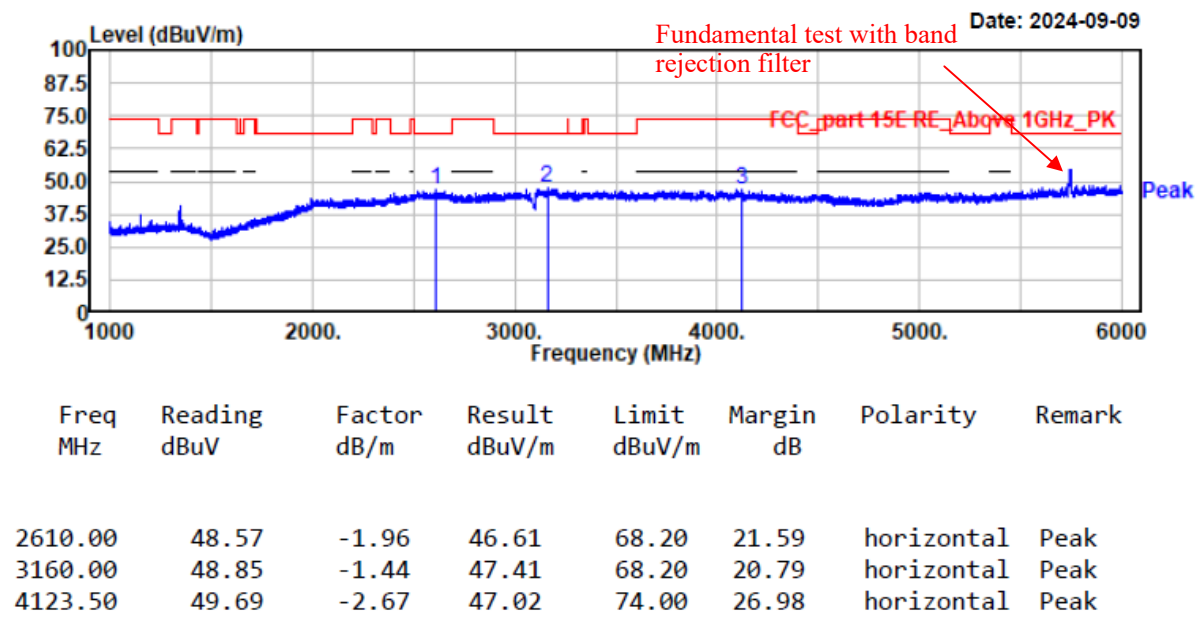

Project No.: 2407V20721E-RF  
Test Mode: 11a-5745  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

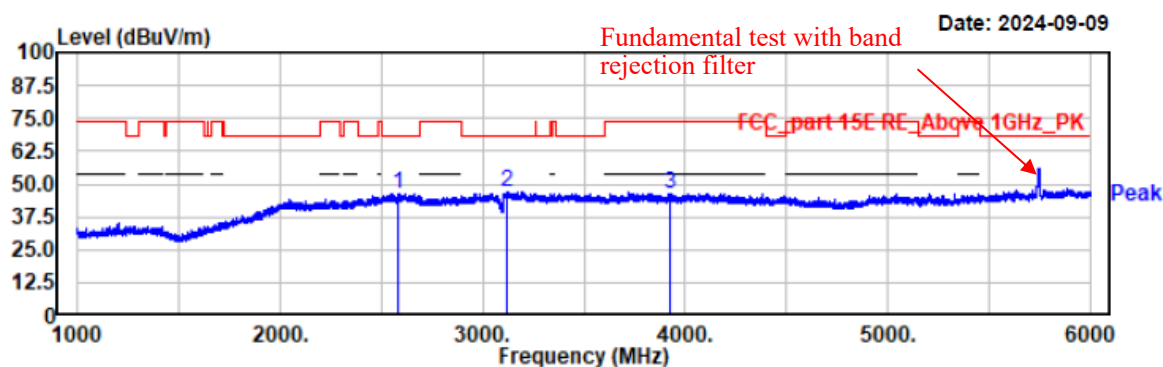

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2583.50     | 48.55           | -2.02          | 46.53            | 68.20           | 21.67        | vertical | Peak   |
| 3121.50     | 48.52           | -1.51          | 47.01            | 68.20           | 21.19        | vertical | Peak   |
| 3928.00     | 49.04           | -2.66          | 46.38            | 74.00           | 27.62        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11a-5785  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

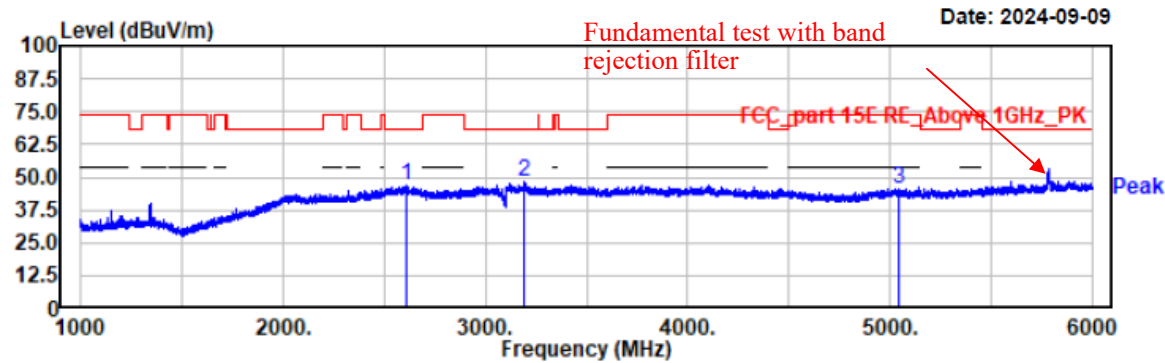

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2613.00     | 48.97           | -1.97          | 47.00            | 68.20           | 21.20        | horizontal | Peak   |
| 3192.00     | 49.86           | -1.43          | 48.43            | 68.20           | 19.77        | horizontal | Peak   |
| 5045.50     | 48.64           | -3.17          | 45.47            | 74.00           | 28.53        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11a-5785  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

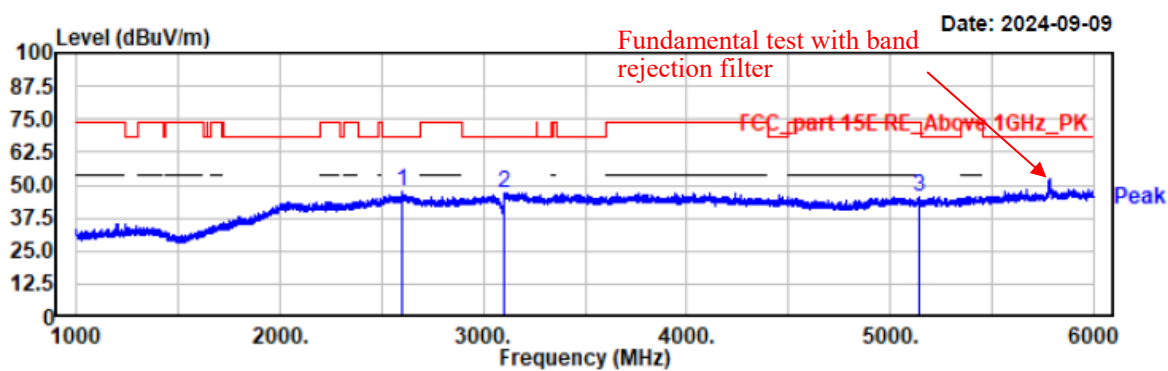

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2599.50     | 49.44           | -1.95          | 47.49            | 68.20           | 20.71        | vertical | Peak   |
| 3105.50     | 48.69           | -1.54          | 47.15            | 68.20           | 21.05        | vertical | Peak   |
| 5142.00     | 48.56           | -3.15          | 45.41            | 74.00           | 28.59        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11a-5825  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

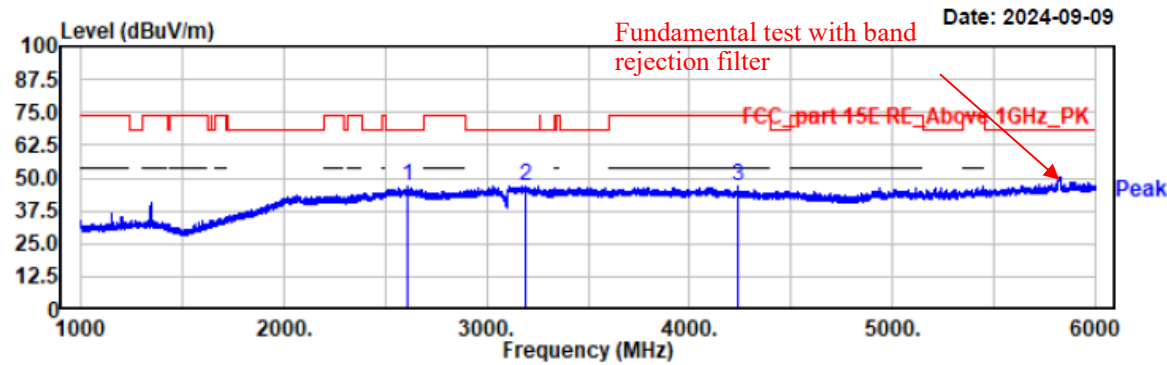

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2610.00     | 48.60           | -1.96          | 46.64            | 68.20           | 21.56        | horizontal | Peak   |
| 3194.00     | 48.53           | -1.43          | 47.10            | 68.20           | 21.10        | horizontal | Peak   |
| 4236.50     | 50.04           | -3.41          | 46.63            | 74.00           | 27.37        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
 Test Mode: 11a-5825  
 EUT Model: NLS-NQuire500  
 Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa  
 Tested by: Wlif Wu  
 Power Source: AC120V/60Hz

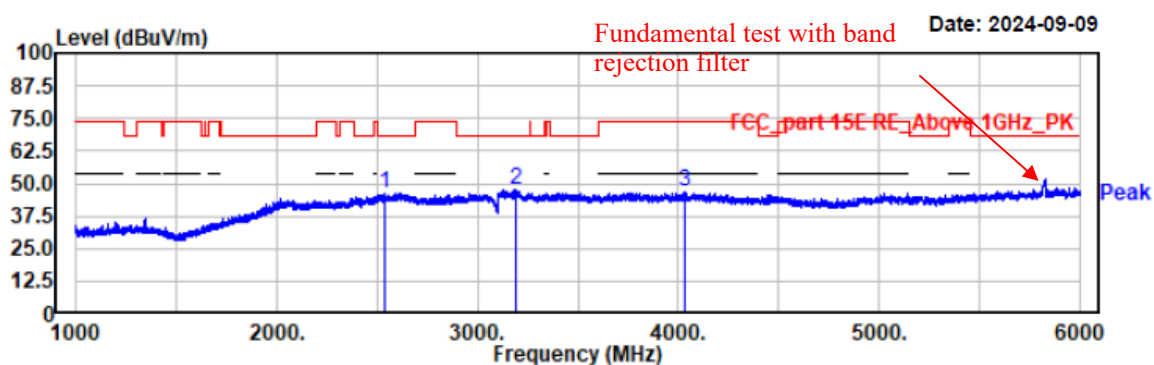

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2539.00     | 48.55           | -2.28          | 46.27            | 68.20           | 21.93        | vertical | Peak   |
| 3195.50     | 48.85           | -1.43          | 47.42            | 68.20           | 20.78        | vertical | Peak   |
| 4033.50     | 49.60           | -2.49          | 47.11            | 74.00           | 26.89        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5745  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

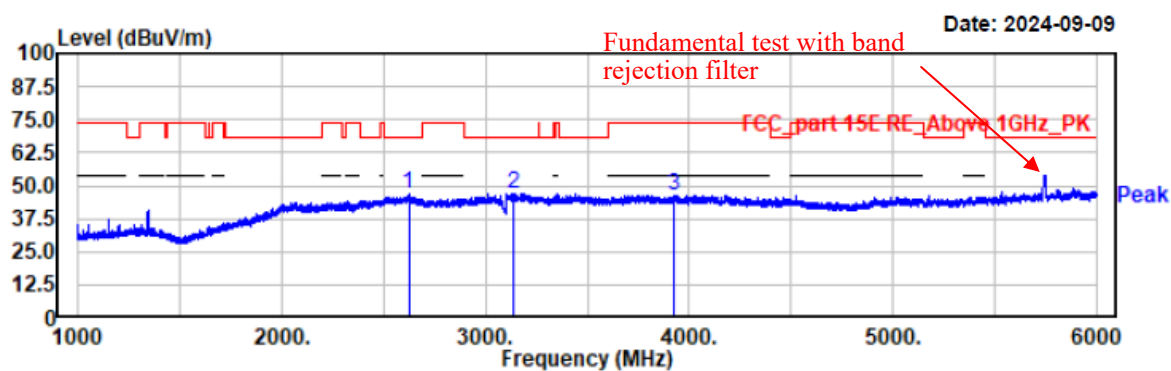

| Freq MHz | Reading dBuV | Factor dB/m | Result dBuV/m | Limit dBuV/m | Margin dB | Polarity   | Remark |
|----------|--------------|-------------|---------------|--------------|-----------|------------|--------|
| 2623.00  | 49.06        | -1.99       | 47.07         | 68.20        | 21.13     | horizontal | Peak   |
| 3137.50  | 48.50        | -1.46       | 47.04         | 68.20        | 21.16     | horizontal | Peak   |
| 3927.50  | 49.06        | -2.65       | 46.41         | 74.00        | 27.59     | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5745  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

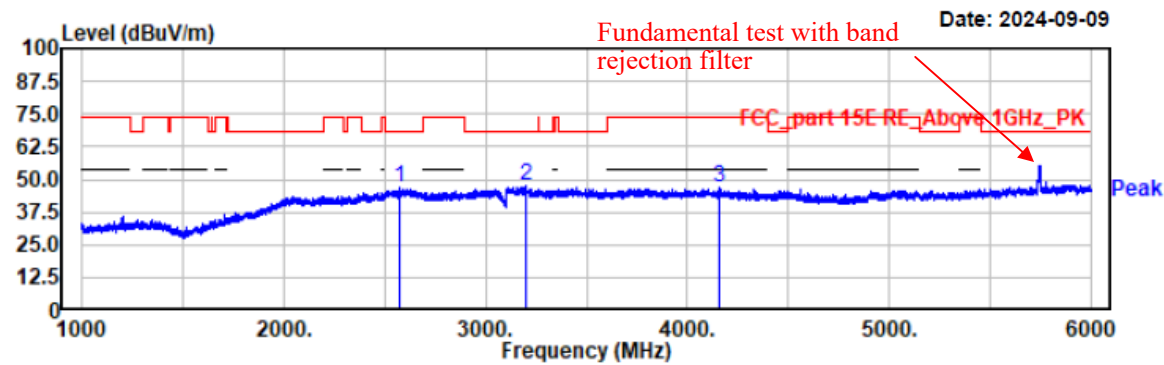

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2578.00     | 48.64           | -2.04          | 46.60            | 68.20           | 21.60        | vertical | Peak   |
| 3204.00     | 48.73           | -1.49          | 47.24            | 68.20           | 20.96        | vertical | Peak   |
| 4157.00     | 49.78           | -2.97          | 46.81            | 74.00           | 27.19        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5785  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

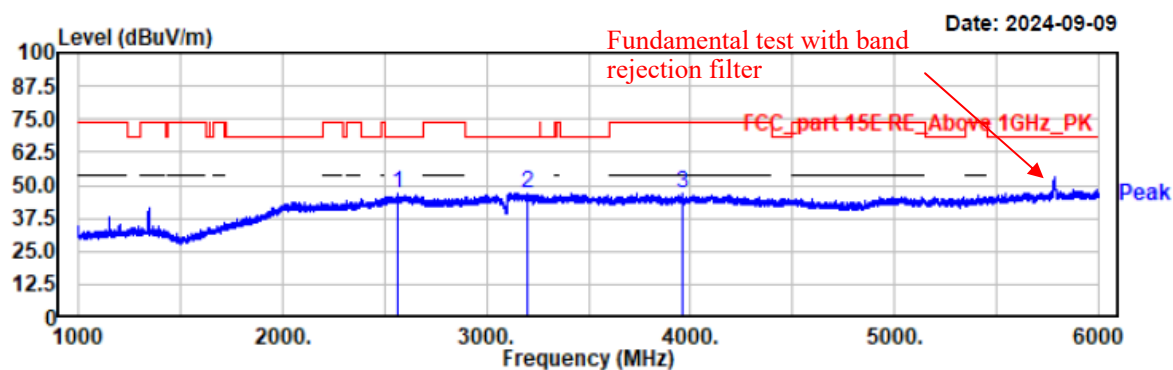

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2567.00     | 48.77           | -2.07          | 46.70            | 68.20           | 21.50        | horizontal | Peak   |
| 3197.00     | 48.27           | -1.43          | 46.84            | 68.20           | 21.36        | horizontal | Peak   |
| 3964.50     | 49.31           | -2.60          | 46.71            | 74.00           | 27.29        | horizontal | Peak   |


Project No.: 2407V20721E-RF  
Test Mode: 11n20-5785  
EUT Model: NLS-NQuire500  
Test distance: 3m

Temp/Humi/ATM: 24.1°C/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

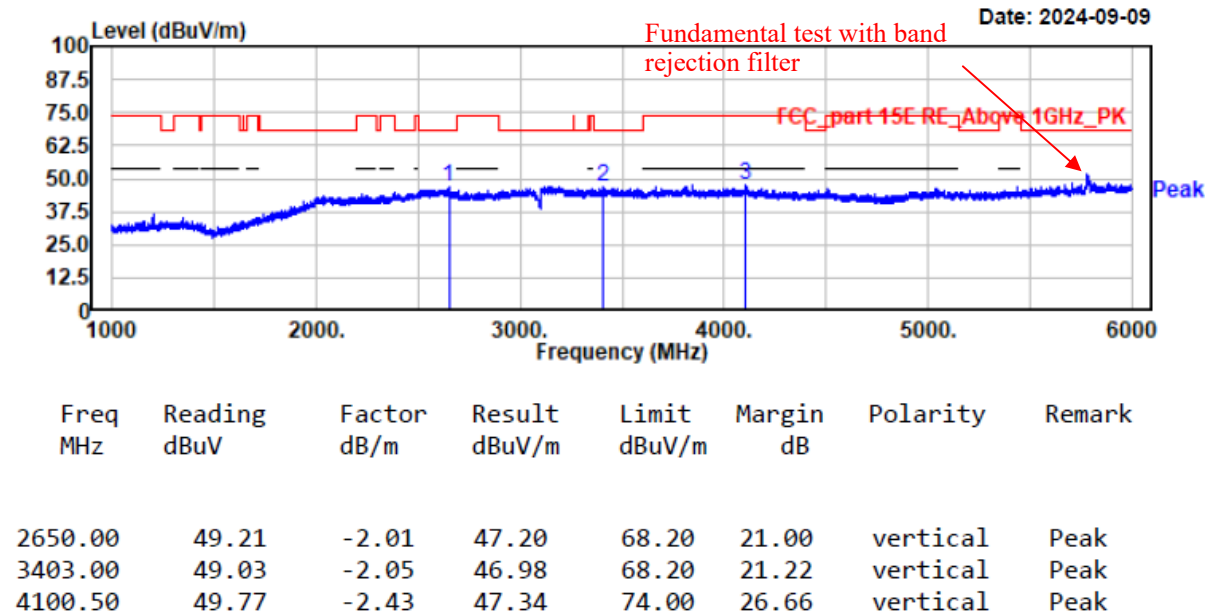

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5825  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

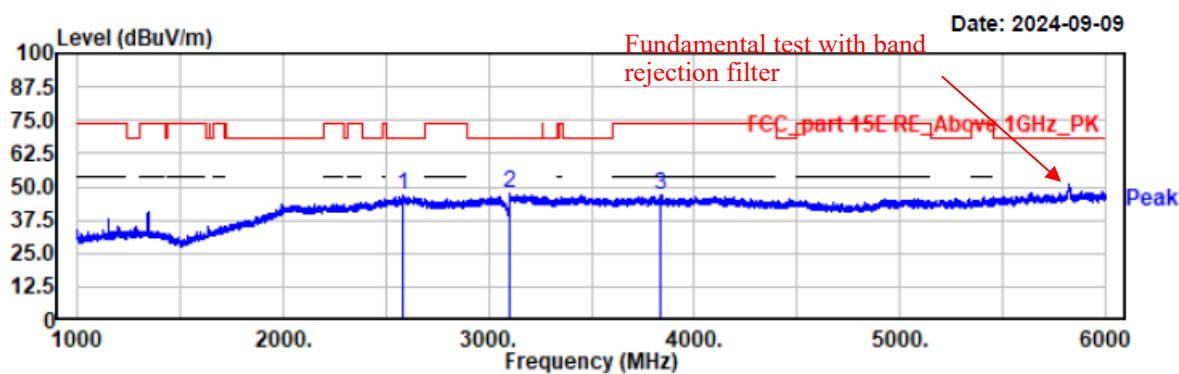

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2586.50     | 48.67           | -2.01          | 46.66            | 68.20           | 21.54        | horizontal | Peak   |
| 3101.50     | 49.22           | -1.55          | 47.67            | 68.20           | 20.53        | horizontal | Peak   |
| 3836.00     | 49.64           | -2.64          | 47.00            | 74.00           | 27.00        | horizontal | Peak   |


Project No.: 2407V20721E-RF  
Test Mode: 11n20-5825  
EUT Model: NLS-NQuire500  
Test distance: 3m

Temp/Humi/ATM: 24.1°C/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

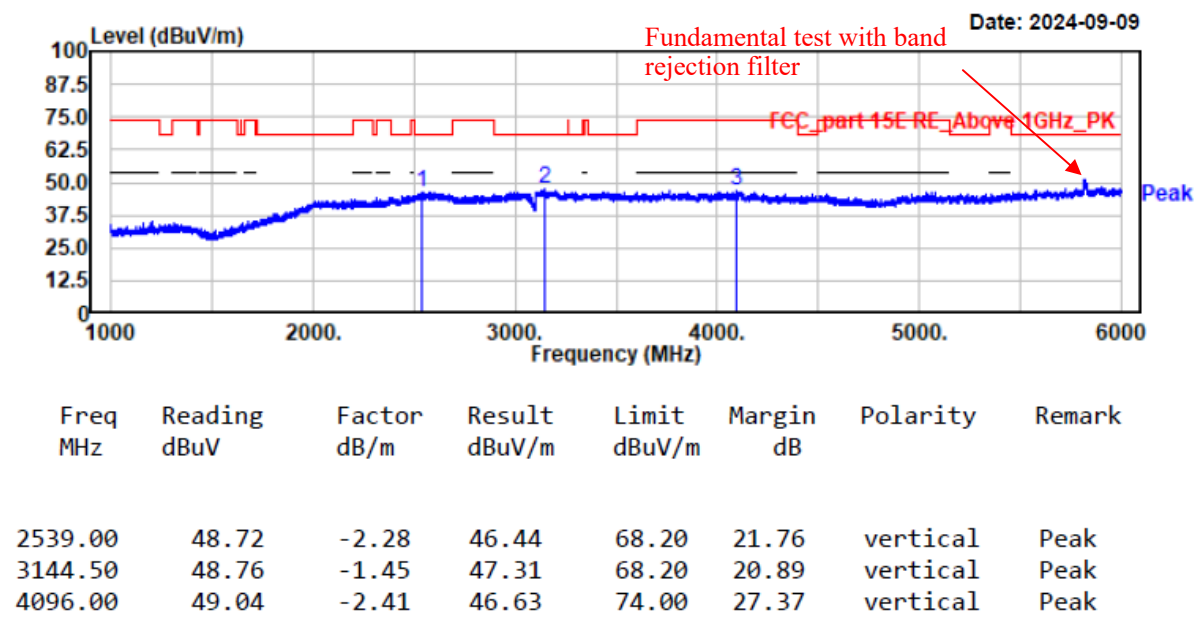

Project No.: 2407V20721E-RF  
Test Mode: 11n40-5755  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

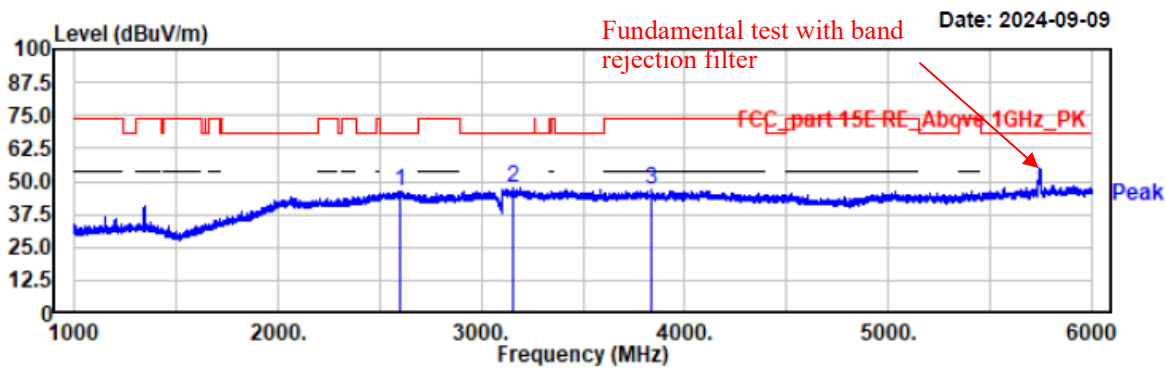

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2600.50     | 48.12           | -1.95          | 46.17            | 68.20           | 22.03        | horizontal | Peak   |
| 3158.00     | 48.85           | -1.44          | 47.41            | 68.20           | 20.79        | horizontal | Peak   |
| 3839.50     | 49.60           | -2.65          | 46.95            | 74.00           | 27.05        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n40-5755  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

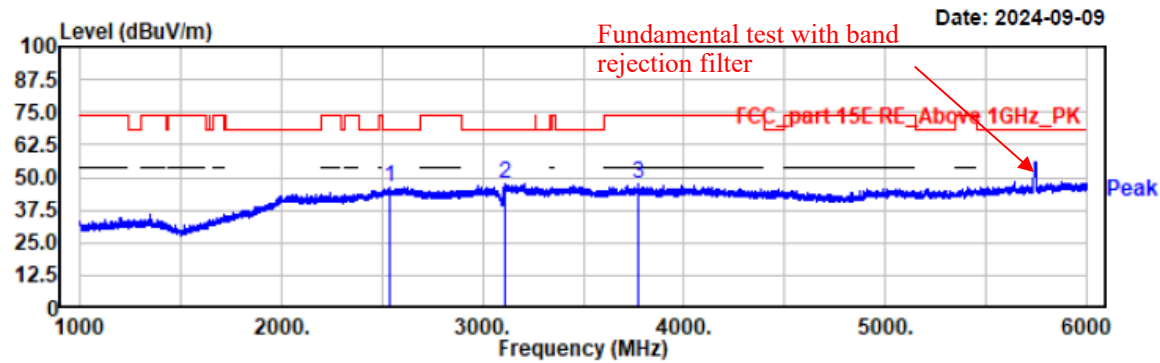

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2542.00     | 48.79           | -2.25          | 46.54            | 68.20           | 21.66        | vertical | Peak   |
| 3108.00     | 49.29           | -1.53          | 47.76            | 68.20           | 20.44        | vertical | Peak   |
| 3774.50     | 50.09           | -2.42          | 47.67            | 74.00           | 26.33        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n40-5795  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

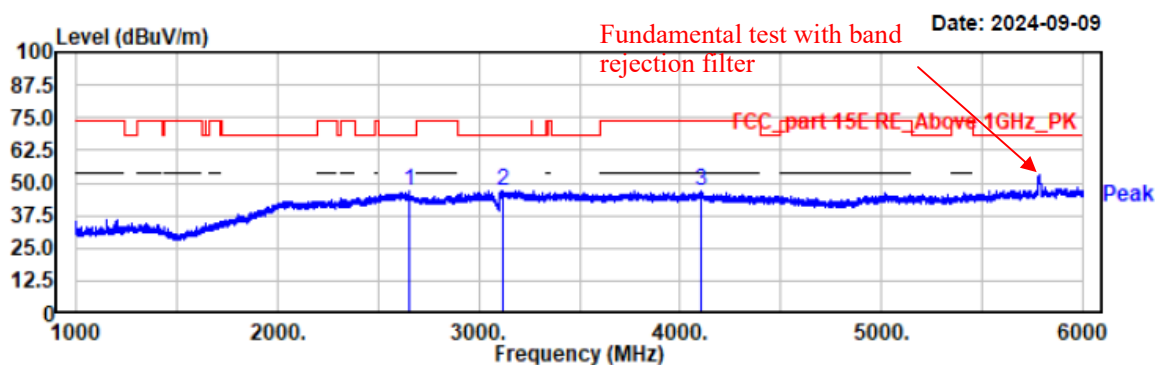

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2655.00     | 49.08           | -2.14          | 46.94            | 68.20           | 21.26        | horizontal | Peak   |
| 3116.50     | 48.46           | -1.52          | 46.94            | 68.20           | 21.26        | horizontal | Peak   |
| 4105.50     | 49.22           | -2.49          | 46.73            | 74.00           | 27.27        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n40-5795  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

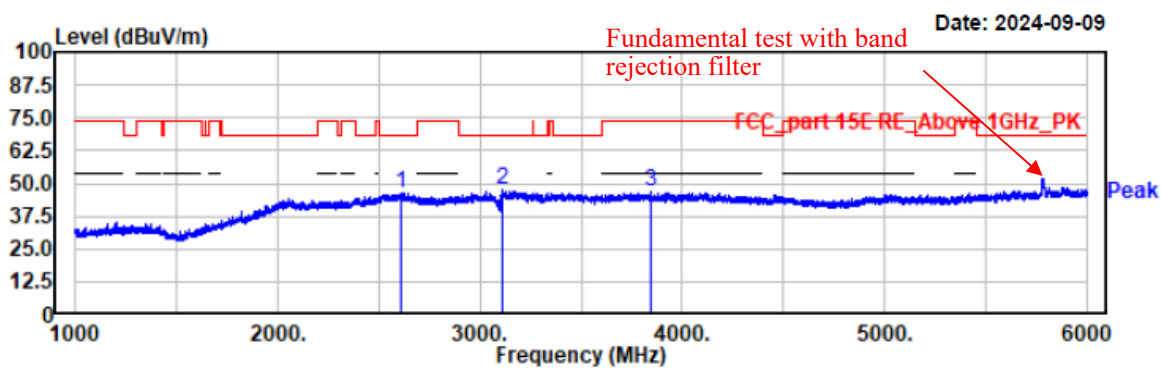

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2609.00     | 47.94           | -1.96          | 45.98            | 68.20           | 22.22        | vertical | Peak   |
| 3108.00     | 48.78           | -1.53          | 47.25            | 68.20           | 20.95        | vertical | Peak   |
| 3849.00     | 49.84           | -2.70          | 47.14            | 74.00           | 26.86        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11ac80-5775  
EUT Model: NLS-NQuire500  
Test distance: 3m


Temp/Humi/ATM: 24.1°C/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

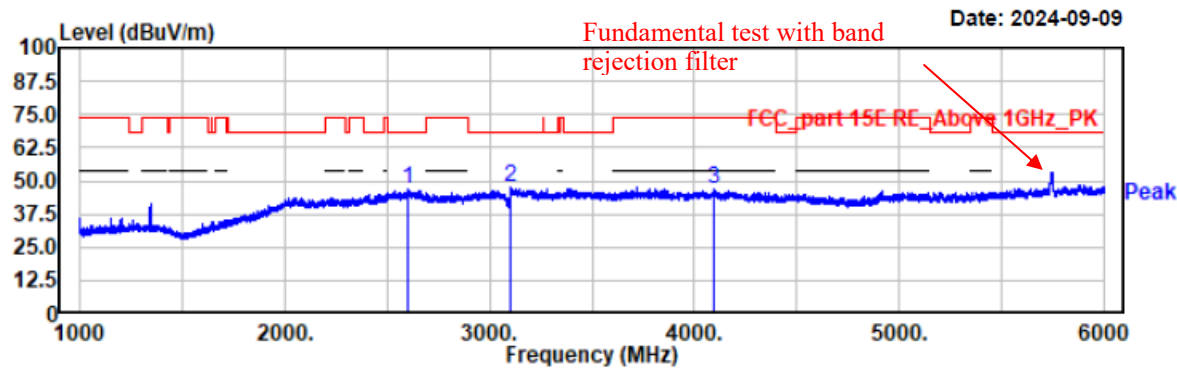

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2597.00     | 49.15           | -1.96          | 47.19            | 68.20           | 21.01        | horizontal | Peak   |
| 3104.50     | 48.89           | -1.54          | 47.35            | 68.20           | 20.85        | horizontal | Peak   |
| 4099.50     | 49.09           | -2.42          | 46.67            | 74.00           | 27.33        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11ac80-5775  
EUT Model: NLS-NQuire500  
Test distance: 3m

Temp/Humi/ATM: 24.1°C/55%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

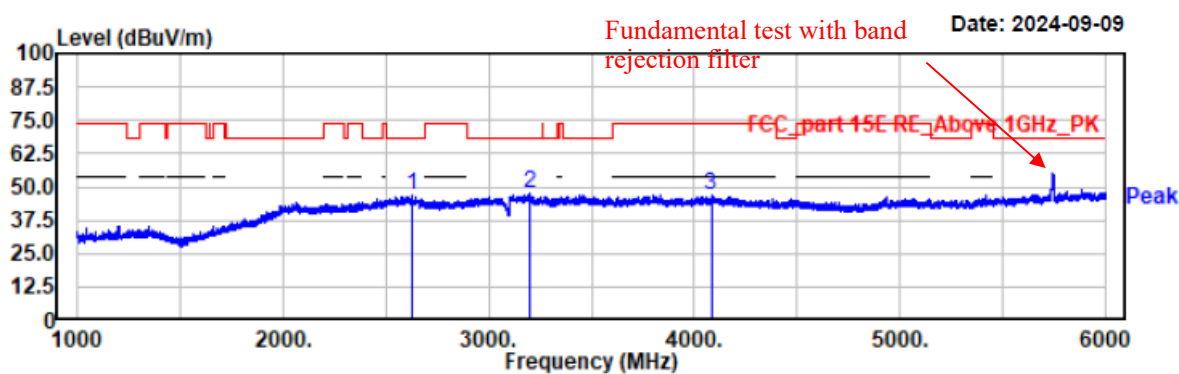


| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2623.50     | 48.60           | -1.99          | 46.61            | 68.20           | 21.59        | vertical | Peak   |
| 3198.00     | 48.71           | -1.43          | 47.28            | 68.20           | 20.92        | vertical | Peak   |
| 4082.00     | 49.12           | -2.41          | 46.71            | 74.00           | 27.29        | vertical | Peak   |

EUT Model: NLS-NQuire700

B1

Project No.: 2407V20721E-RF  
Test Mode: 11a-5180  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8°C /51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

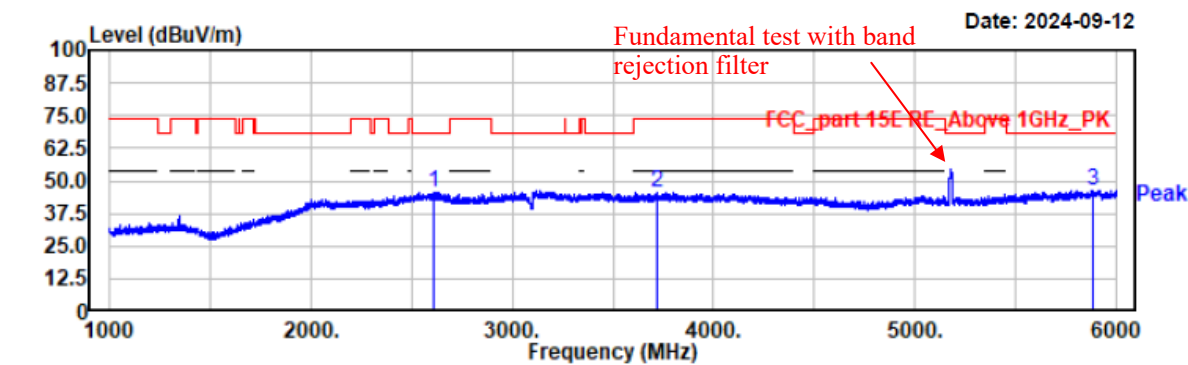

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2610.50     | 49.06           | -3.31          | 45.75            | 68.20           | 22.45        | horizontal | Peak   |
| 3718.00     | 49.96           | -4.17          | 45.79            | 74.00           | 28.21        | horizontal | Peak   |
| 5883.50     | 49.26           | -2.73          | 46.53            | 68.20           | 21.67        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11a-5180  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

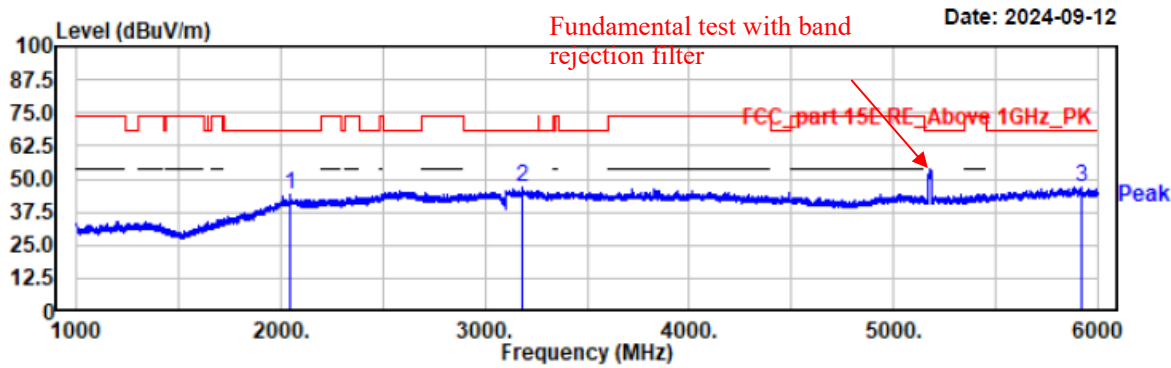

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2049.50     | 50.04           | -6.00          | 44.04            | 68.20           | 24.16        | vertical | Peak   |
| 3183.00     | 49.69           | -2.94          | 46.75            | 68.20           | 21.45        | vertical | Peak   |
| 5921.00     | 49.71           | -2.90          | 46.81            | 68.20           | 21.39        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11a-5200  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8°C/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

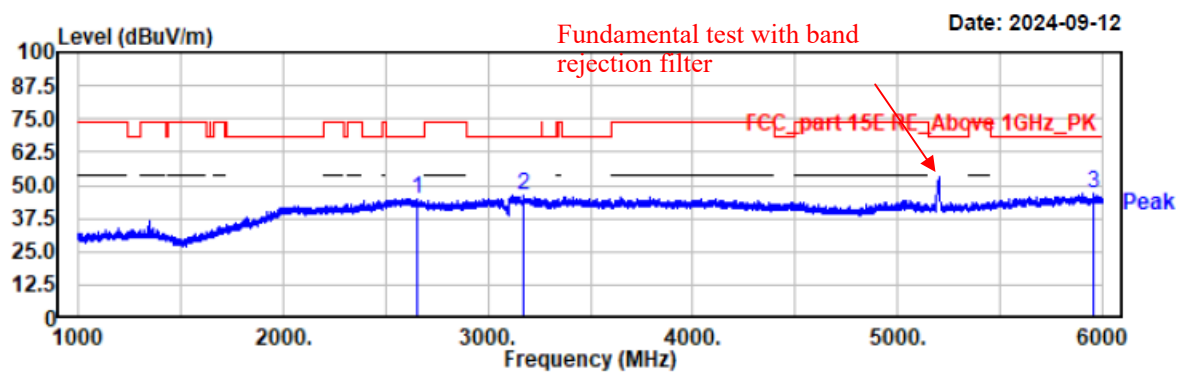

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2656.00     | 48.39           | -3.53          | 44.86            | 68.20           | 23.34        | horizontal | Peak   |
| 3171.50     | 48.96           | -2.94          | 46.02            | 68.20           | 22.18        | horizontal | Peak   |
| 5954.50     | 50.00           | -3.27          | 46.73            | 68.20           | 21.47        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11a-5200  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

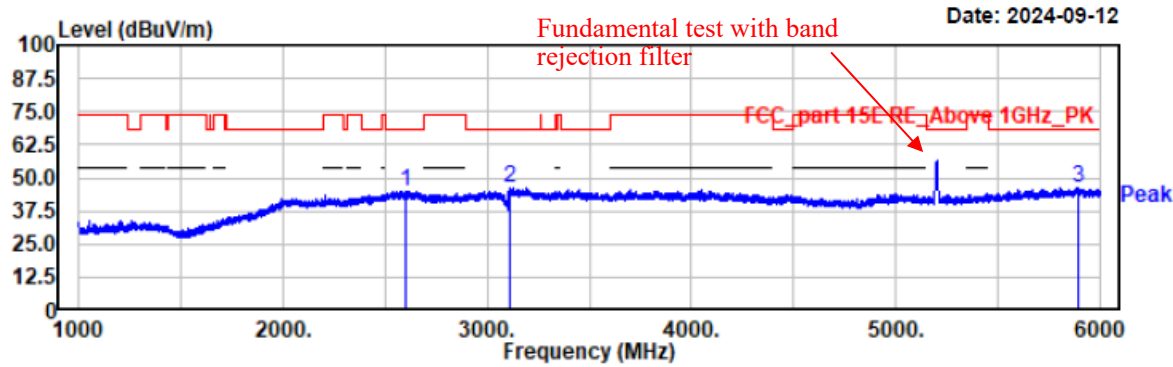

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2601.00     | 48.36           | -3.30          | 45.06            | 68.20           | 23.14        | vertical | Peak   |
| 3115.00     | 49.09           | -3.01          | 46.08            | 68.20           | 22.12        | vertical | Peak   |
| 5896.50     | 48.85           | -2.62          | 46.23            | 68.20           | 21.97        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11a-5240  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8°C/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

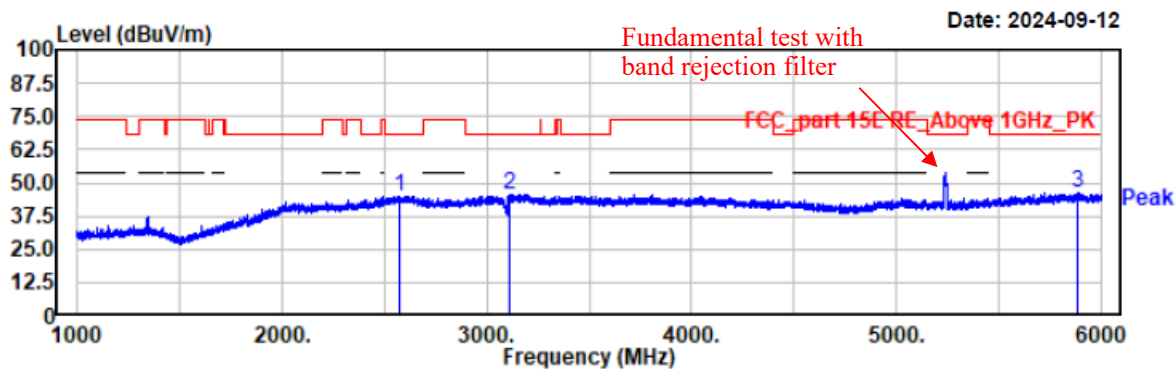

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2574.50     | 48.47           | -3.38          | 45.09            | 68.20           | 23.11        | horizontal | Peak   |
| 3108.00     | 48.45           | -3.02          | 45.43            | 68.20           | 22.77        | horizontal | Peak   |
| 5886.50     | 49.21           | -2.70          | 46.51            | 68.20           | 21.69        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11a-5240  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

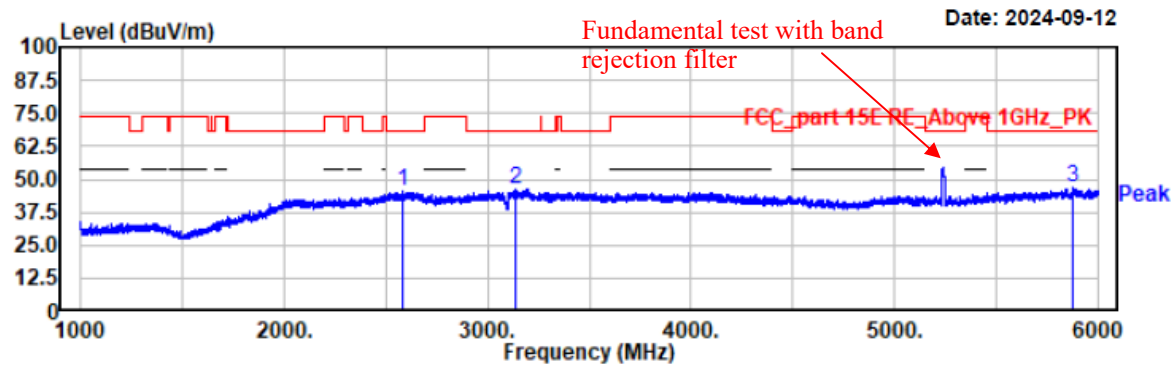

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2587.00     | 48.54           | -3.34          | 45.20            | 68.20           | 23.00        | vertical | Peak   |
| 3134.00     | 49.12           | -2.97          | 46.15            | 68.20           | 22.05        | vertical | Peak   |
| 5880.50     | 49.80           | -2.76          | 47.04            | 68.20           | 21.16        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5180  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

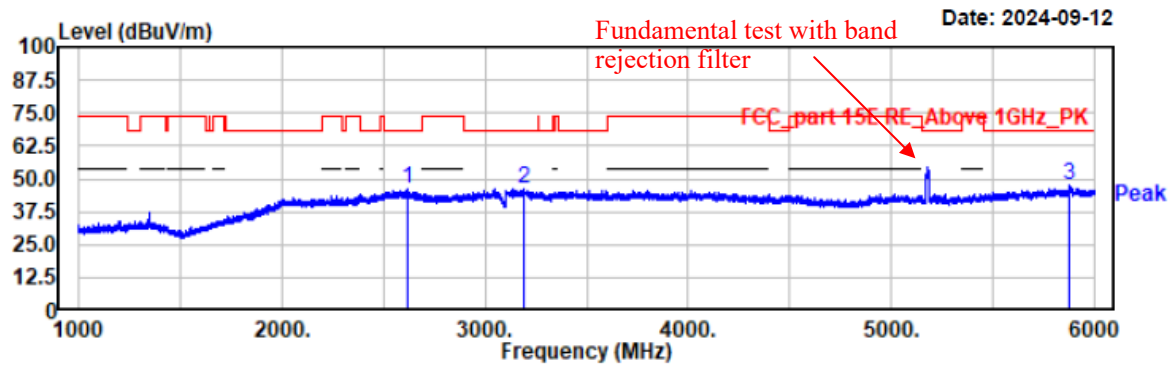

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2615.50     | 49.21           | -3.32          | 45.89            | 68.20           | 22.31        | horizontal | Peak   |
| 3192.50     | 48.91           | -2.94          | 45.97            | 68.20           | 22.23        | horizontal | Peak   |
| 5880.00     | 50.35           | -2.75          | 47.60            | 68.20           | 20.60        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5180  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

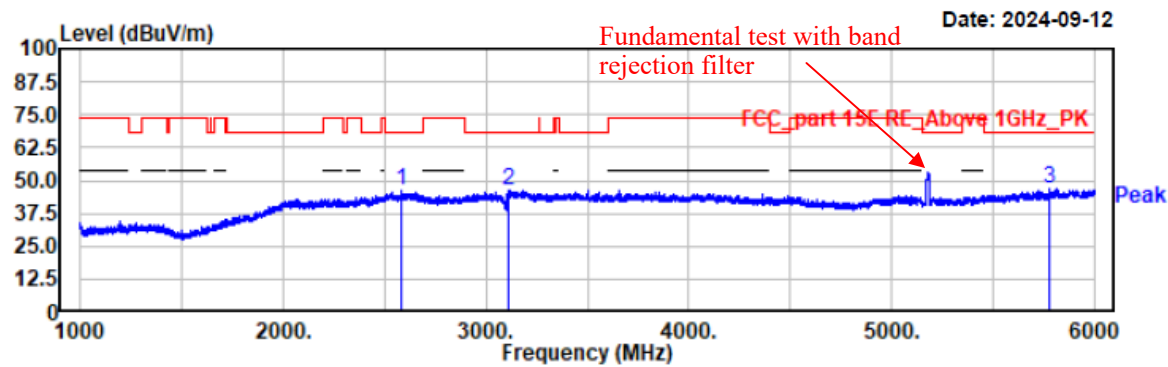

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2584.00     | 49.32           | -3.35          | 45.97            | 68.20           | 22.23        | vertical | Peak   |
| 3113.50     | 49.19           | -3.01          | 46.18            | 68.20           | 22.02        | vertical | Peak   |
| 5778.00     | 49.75           | -2.88          | 46.87            | 68.20           | 21.33        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5200  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

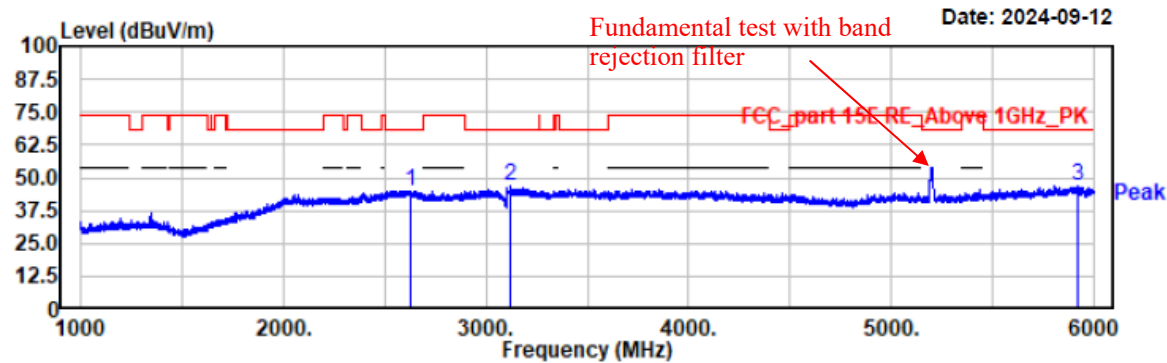

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2626.00     | 48.39           | -3.33          | 45.06            | 68.20           | 23.14        | horizontal | Peak   |
| 3119.00     | 49.90           | -3.00          | 46.90            | 68.20           | 21.30        | horizontal | Peak   |
| 5917.00     | 49.59           | -2.84          | 46.75            | 68.20           | 21.45        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5200  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

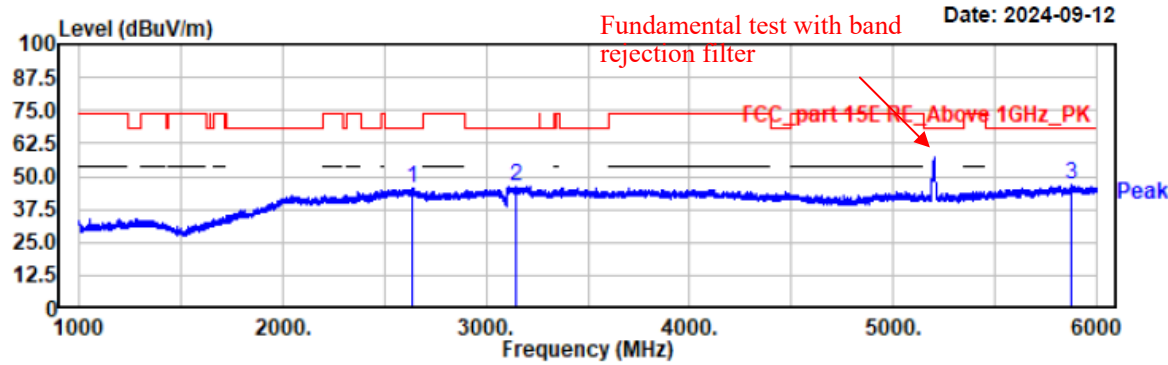

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2634.50     | 48.56           | -3.35          | 45.21            | 68.20           | 22.99        | vertical | Peak   |
| 3143.00     | 48.91           | -2.95          | 45.96            | 68.20           | 22.24        | vertical | Peak   |
| 5880.00     | 49.61           | -2.75          | 46.86            | 68.20           | 21.34        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5240  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

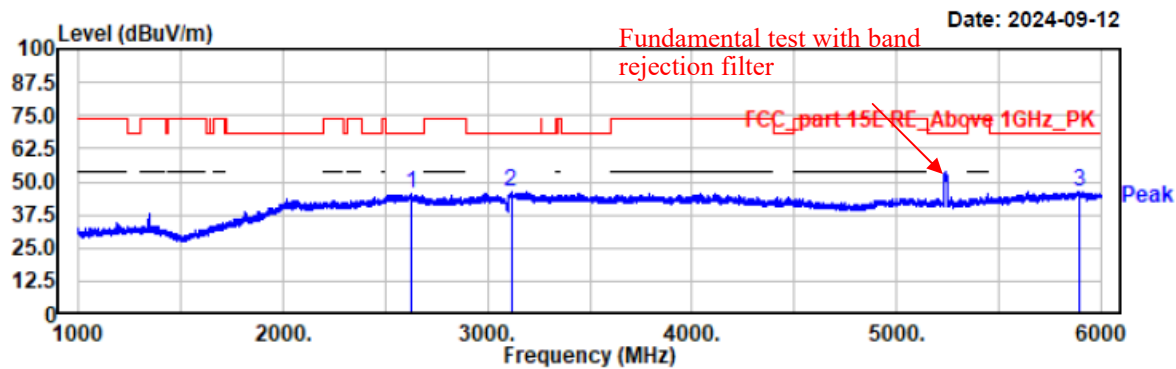

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2630.50     | 48.59           | -3.34          | 45.25            | 68.20           | 22.95        | horizontal | Peak   |
| 3115.50     | 48.93           | -3.01          | 45.92            | 68.20           | 22.28        | horizontal | Peak   |
| 5894.00     | 49.16           | -2.65          | 46.51            | 68.20           | 21.69        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5240  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8°C/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

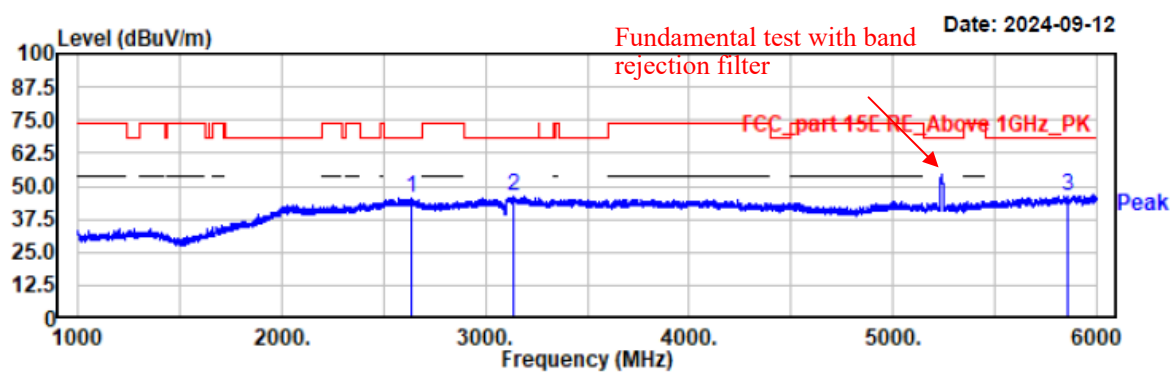

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2640.50     | 48.79           | -3.36          | 45.43            | 68.20           | 22.77        | vertical | Peak   |
| 3137.00     | 49.12           | -2.97          | 46.15            | 68.20           | 22.05        | vertical | Peak   |
| 5855.50     | 49.45           | -2.94          | 46.51            | 68.20           | 21.69        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n40-5190  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

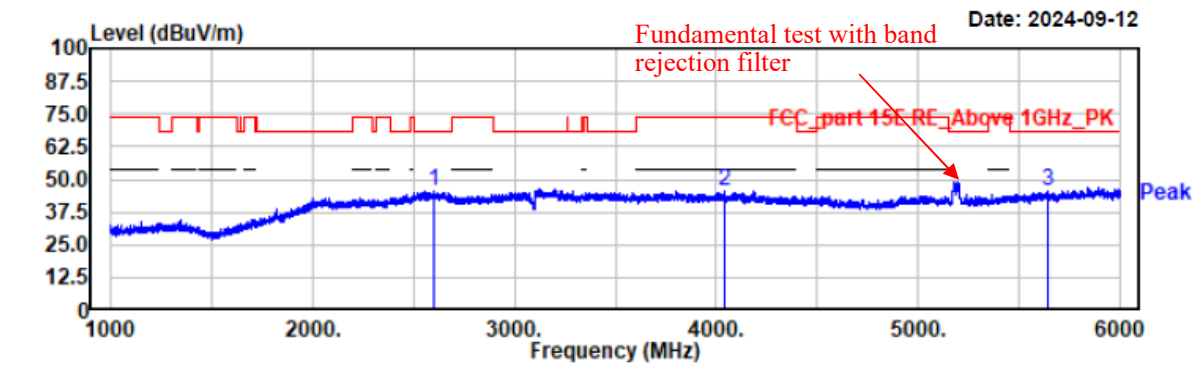

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2600.50     | 48.64           | -3.30          | 45.34            | 68.20           | 22.86        | horizontal | Peak   |
| 4043.00     | 49.91           | -4.24          | 45.67            | 74.00           | 28.33        | horizontal | Peak   |
| 5643.50     | 49.30           | -3.72          | 45.58            | 68.20           | 22.62        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n40-5190  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8°C/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

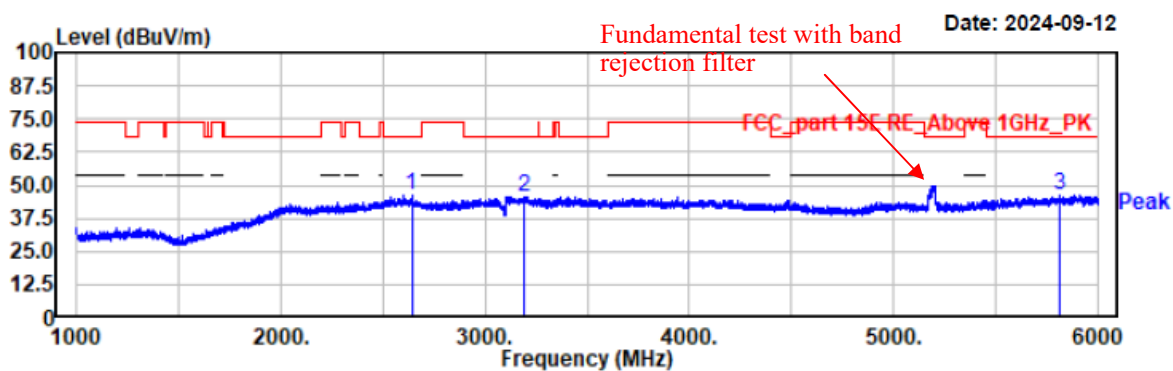

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2641.00     | 49.42           | -3.36          | 46.06            | 68.20           | 22.14        | vertical | Peak   |
| 3194.50     | 48.71           | -2.94          | 45.77            | 68.20           | 22.43        | vertical | Peak   |
| 5810.50     | 49.15           | -2.72          | 46.43            | 68.20           | 21.77        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n40-5230  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8°C/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

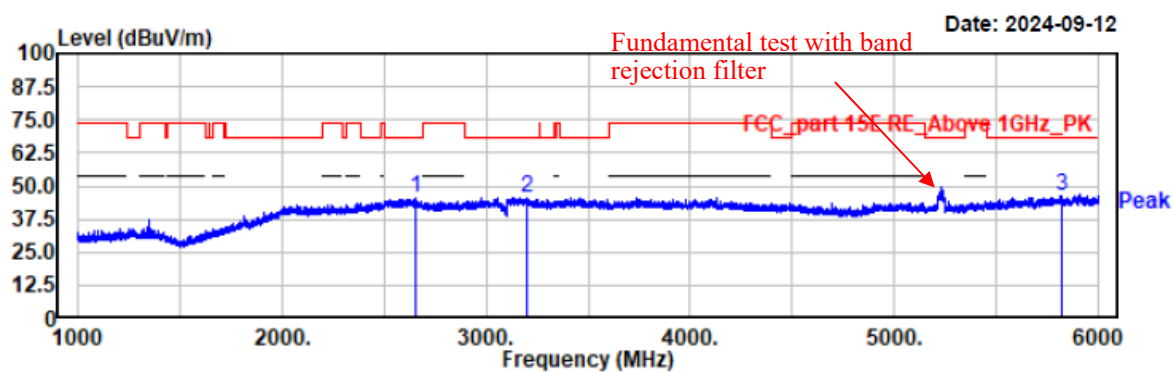

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2653.00     | 48.83           | -3.45          | 45.38            | 68.20           | 22.82        | horizontal | Peak   |
| 3202.50     | 48.67           | -2.98          | 45.69            | 68.20           | 22.51        | horizontal | Peak   |
| 5819.00     | 49.22           | -2.78          | 46.44            | 68.20           | 21.76        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n40-5230  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

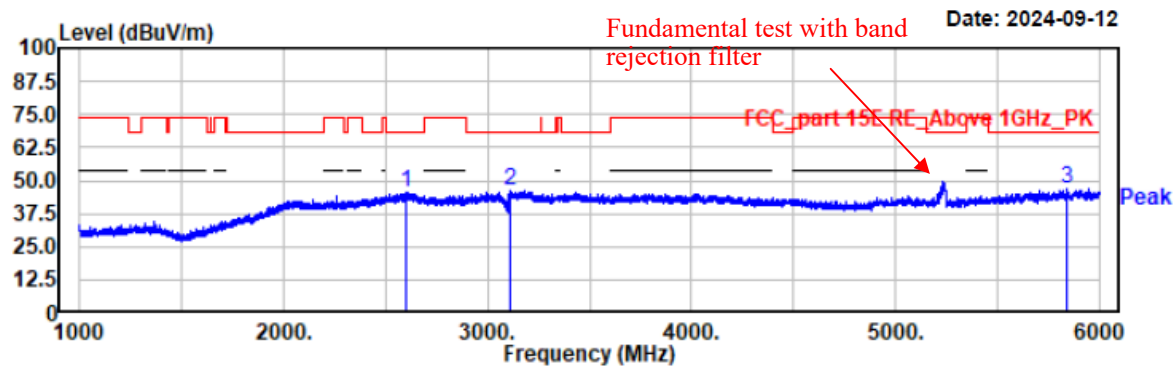

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2600.50     | 48.79           | -3.30          | 45.49            | 68.20           | 22.71        | vertical | Peak   |
| 3110.00     | 49.23           | -3.02          | 46.21            | 68.20           | 21.99        | vertical | Peak   |
| 5838.50     | 50.08           | -2.91          | 47.17            | 68.20           | 21.03        | vertical | Peak   |


Project No.: 2407V20721E-RF  
Test Mode: 11ac80-5210  
EUT Model: NLS-NQuire700  
Test distance: 3m

Temp/Humi/ATM: 23.8℃/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

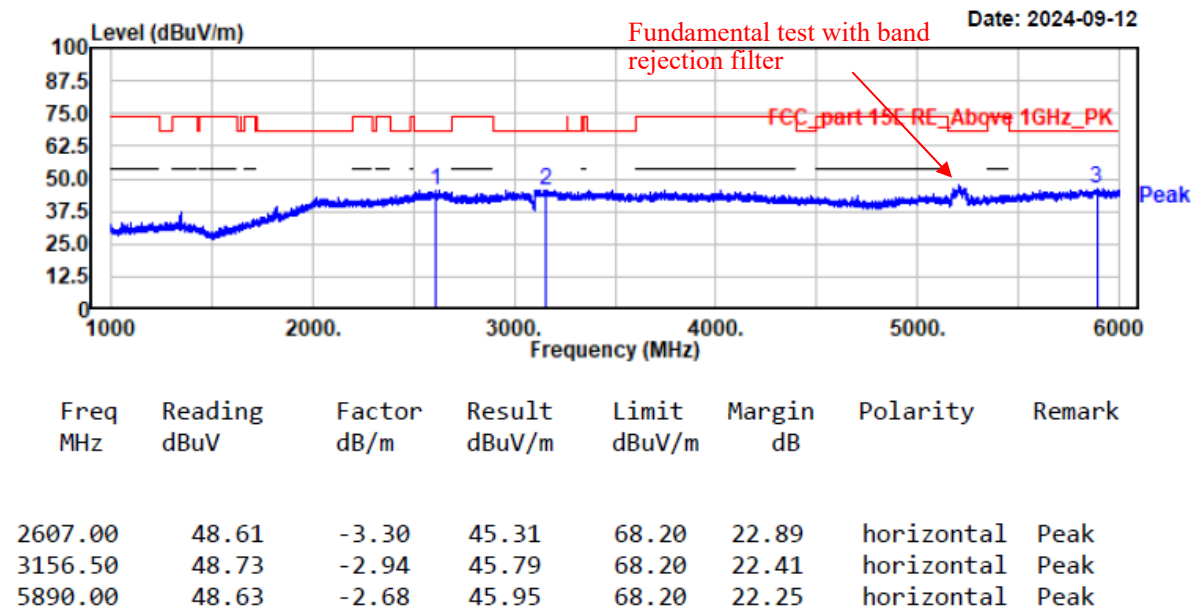

Project No.: 2407V20721E-RF  
Test Mode: 11ac80-5210  
EUT Model: NLS-NQuire700  
Test distance: 3m

Temp/Humi/ATM: 23.8℃/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

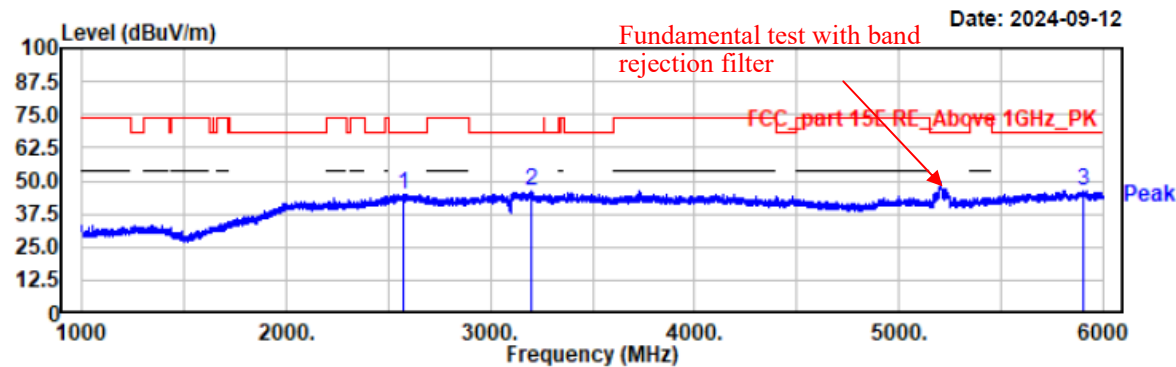

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2574.50     | 48.26           | -3.38          | 44.88            | 68.20           | 23.32        | vertical | Peak   |
| 3202.50     | 49.02           | -2.98          | 46.04            | 68.20           | 22.16        | vertical | Peak   |
| 5905.00     | 48.97           | -2.68          | 46.29            | 68.20           | 21.91        | vertical | Peak   |

B2

Project No.: 2407V20721E-RF

Test Mode: 11a-5260


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 23.8℃/51%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

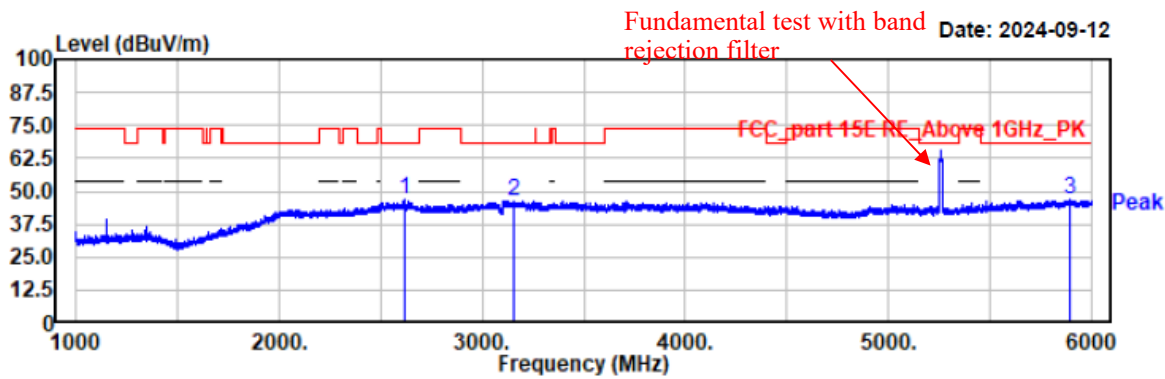

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2614.50     | 50.26           | -3.32          | 46.94            | 68.20           | 21.26        | horizontal | Peak   |
| 3153.50     | 49.44           | -2.94          | 46.50            | 68.20           | 21.70        | horizontal | Peak   |
| 5891.00     | 49.63           | -2.66          | 46.97            | 68.20           | 21.23        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11a-5260  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

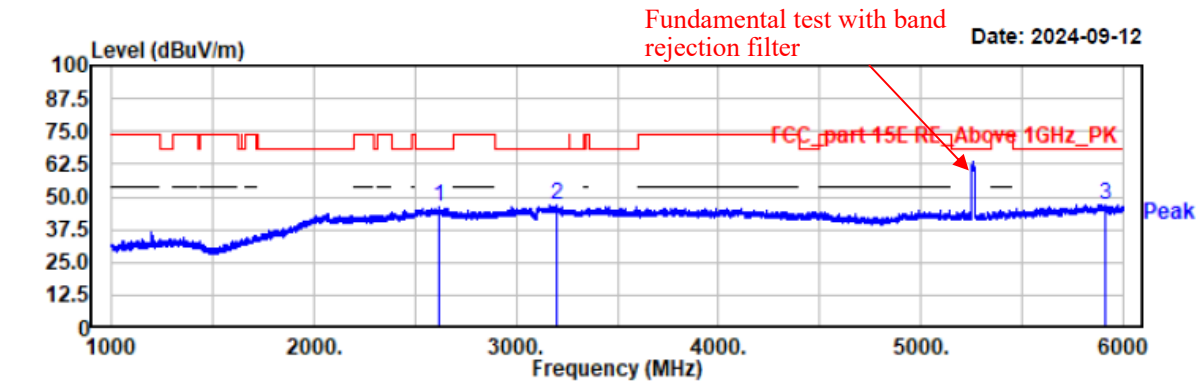

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2616.50     | 49.40           | -3.32          | 46.08            | 68.20           | 22.12        | vertical | Peak   |
| 3202.00     | 49.76           | -2.97          | 46.79            | 68.20           | 21.41        | vertical | Peak   |
| 5914.50     | 49.95           | -2.81          | 47.14            | 68.20           | 21.06        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11a-5280  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8°C/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

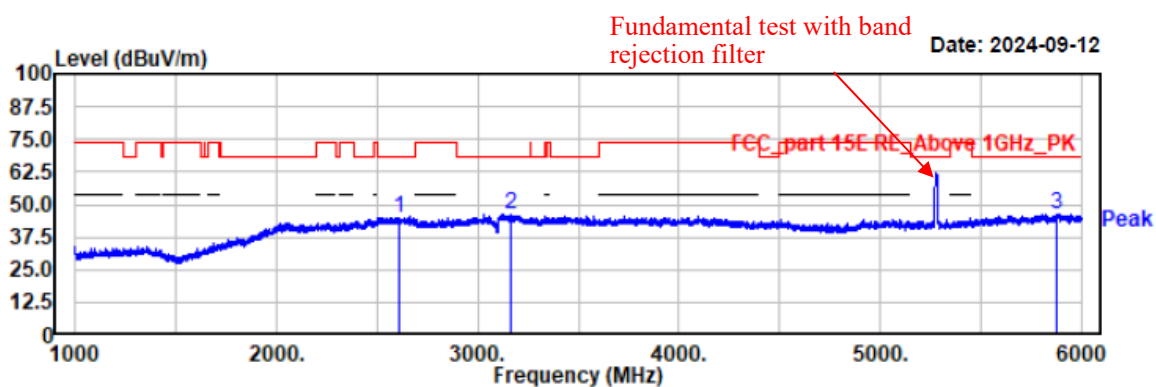

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2612.00     | 48.35           | -3.31          | 45.04            | 68.20           | 23.16        | horizontal | Peak   |
| 3168.00     | 49.34           | -2.94          | 46.40            | 68.20           | 21.80        | horizontal | Peak   |
| 5880.50     | 49.12           | -2.76          | 46.36            | 68.20           | 21.84        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11a-5280  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8°C/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

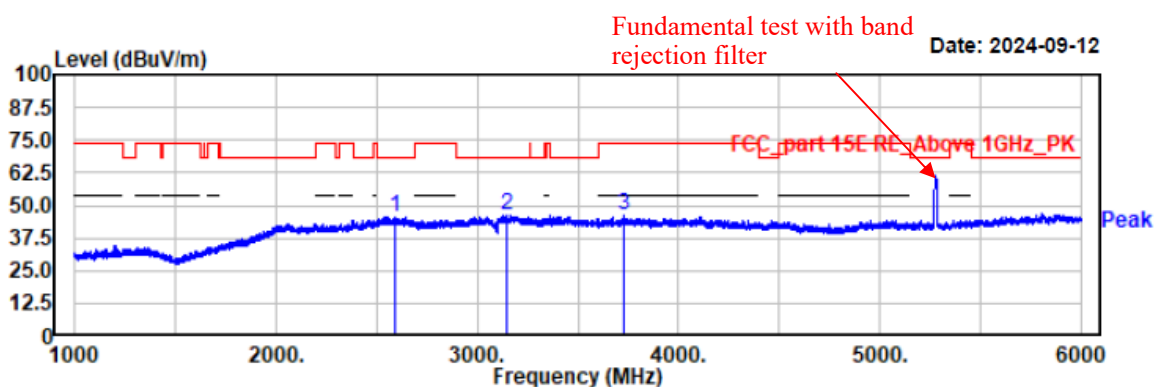

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2587.50     | 49.11           | -3.34          | 45.77            | 68.20           | 22.43        | vertical | Peak   |
| 3145.00     | 48.92           | -2.95          | 45.97            | 68.20           | 22.23        | vertical | Peak   |
| 3724.50     | 50.54           | -4.15          | 46.39            | 74.00           | 27.61        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11a-5320  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

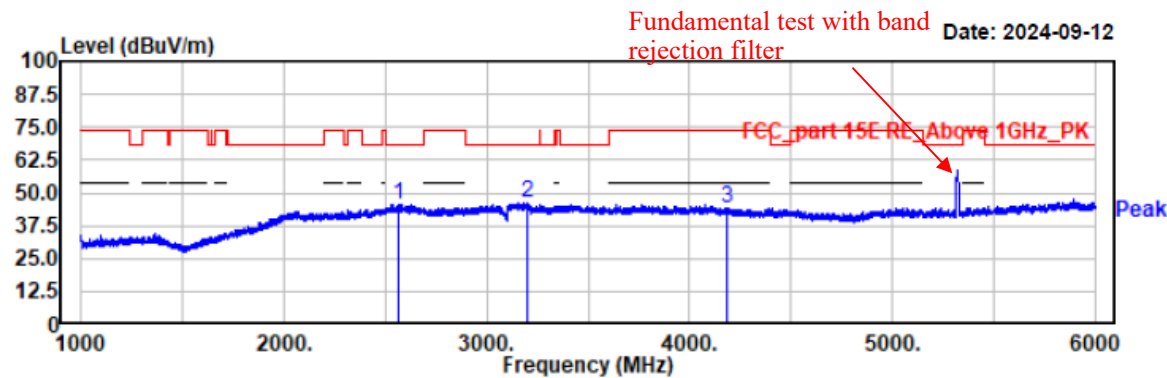

| Freq MHz | Reading dBuV | Factor dB/m | Result dBuV/m | Limit dBuV/m | Margin dB | Polarity   | Remark |
|----------|--------------|-------------|---------------|--------------|-----------|------------|--------|
| 2566.50  | 49.03        | -3.41       | 45.62         | 68.20        | 22.58     | horizontal | Peak   |
| 3200.00  | 49.19        | -2.94       | 46.25         | 68.20        | 21.95     | horizontal | Peak   |
| 4187.00  | 49.34        | -4.92       | 44.42         | 74.00        | 29.58     | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11a-5320  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

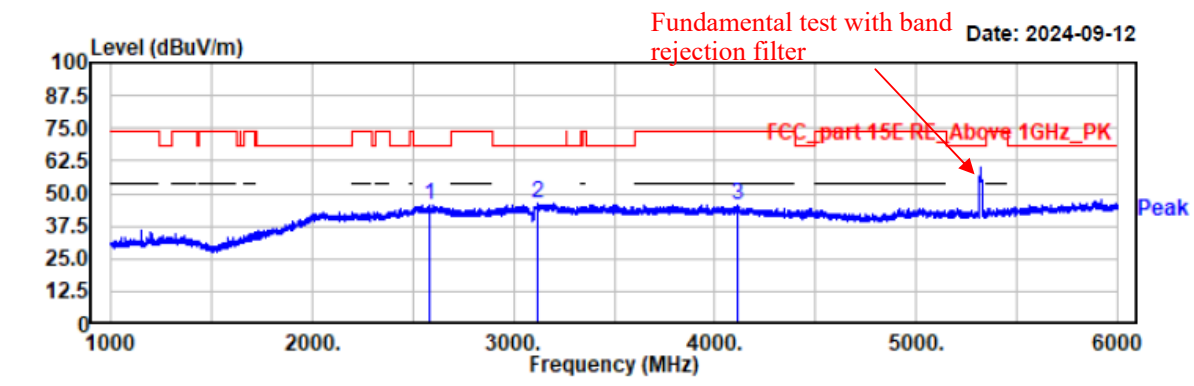

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2586.50     | 48.98           | -3.35          | 45.63            | 68.20           | 22.57        | vertical | Peak   |
| 3122.50     | 49.48           | -2.99          | 46.49            | 68.20           | 21.71        | vertical | Peak   |
| 4113.50     | 49.60           | -4.40          | 45.20            | 74.00           | 28.80        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5260  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8°C/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

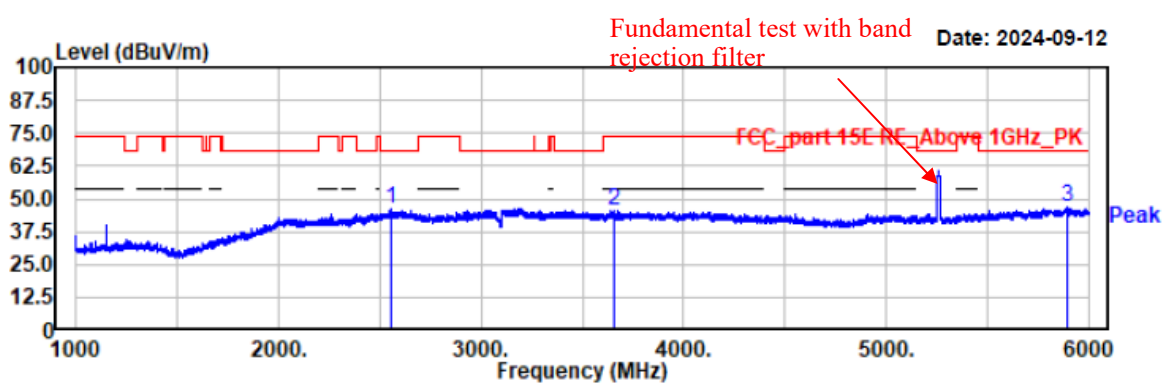

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2556.00     | 49.40           | -3.45          | 45.95            | 68.20           | 22.25        | horizontal | Peak   |
| 3659.50     | 49.89           | -4.36          | 45.53            | 74.00           | 28.47        | horizontal | Peak   |
| 5898.00     | 49.36           | -2.61          | 46.75            | 68.20           | 21.45        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5260  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8°C/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

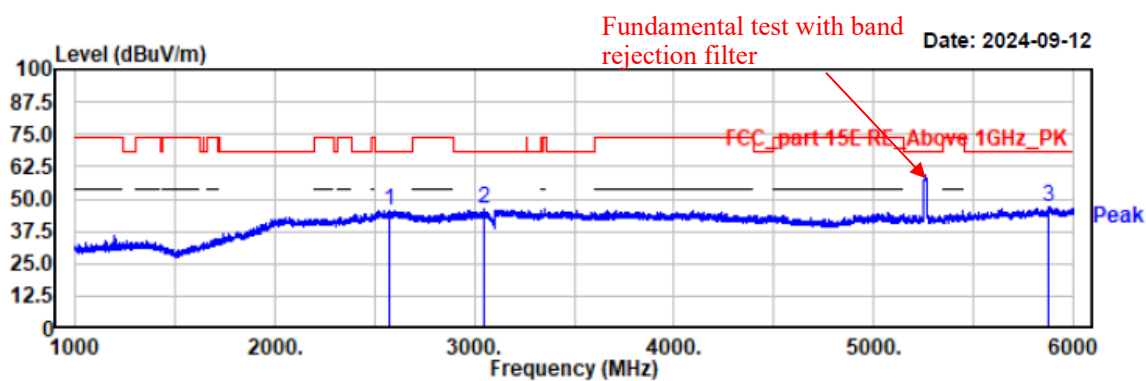

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2575.00     | 49.03           | -3.38          | 45.65            | 68.20           | 22.55        | vertical | Peak   |
| 3047.50     | 49.94           | -3.60          | 46.34            | 68.20           | 21.86        | vertical | Peak   |
| 5878.00     | 49.48           | -2.76          | 46.72            | 68.20           | 21.48        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5280  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

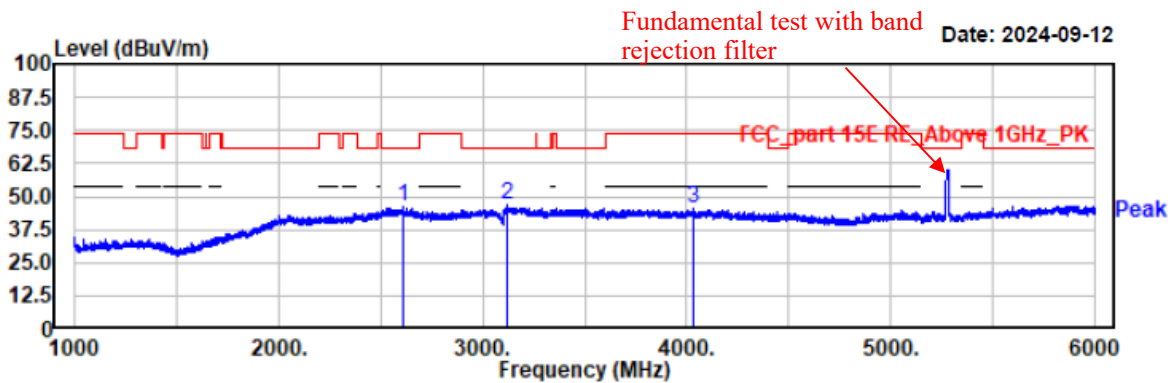

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2606.00     | 49.25           | -3.30          | 45.95            | 68.20           | 22.25        | horizontal | Peak   |
| 3121.50     | 49.72           | -3.00          | 46.72            | 68.20           | 21.48        | horizontal | Peak   |
| 4030.00     | 49.52           | -4.31          | 45.21            | 74.00           | 28.79        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5280  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

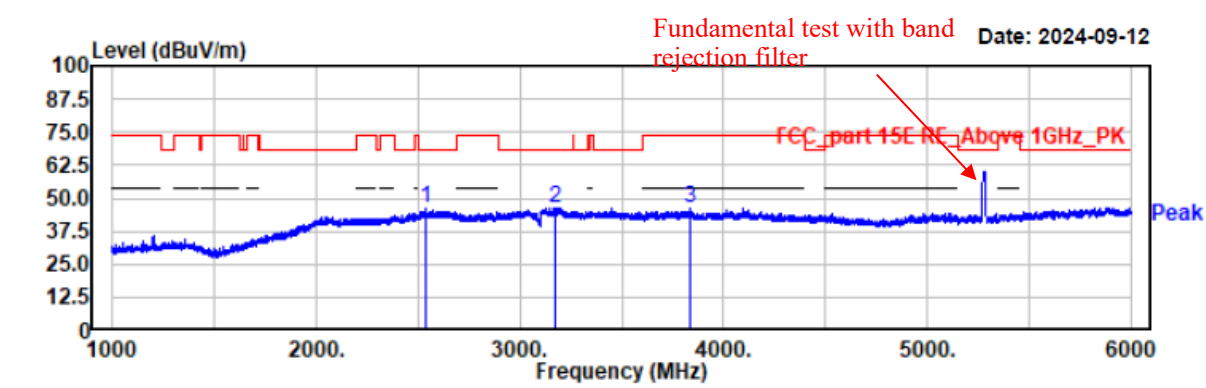

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2537.50     | 49.84           | -3.64          | 46.20            | 68.20           | 22.00        | vertical | Peak   |
| 3170.00     | 49.41           | -2.94          | 46.47            | 68.20           | 21.73        | vertical | Peak   |
| 3837.00     | 50.40           | -4.36          | 46.04            | 74.00           | 27.96        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5320  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

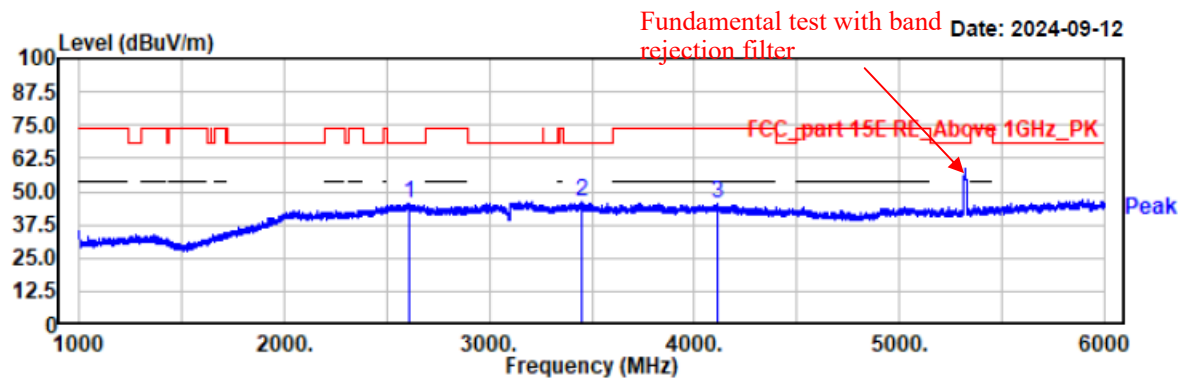

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2607.00     | 48.63           | -3.30          | 45.33            | 68.20           | 22.87        | horizontal | Peak   |
| 3450.00     | 49.96           | -3.65          | 46.31            | 68.20           | 21.89        | horizontal | Peak   |
| 4113.50     | 49.59           | -4.40          | 45.19            | 74.00           | 28.81        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5320  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

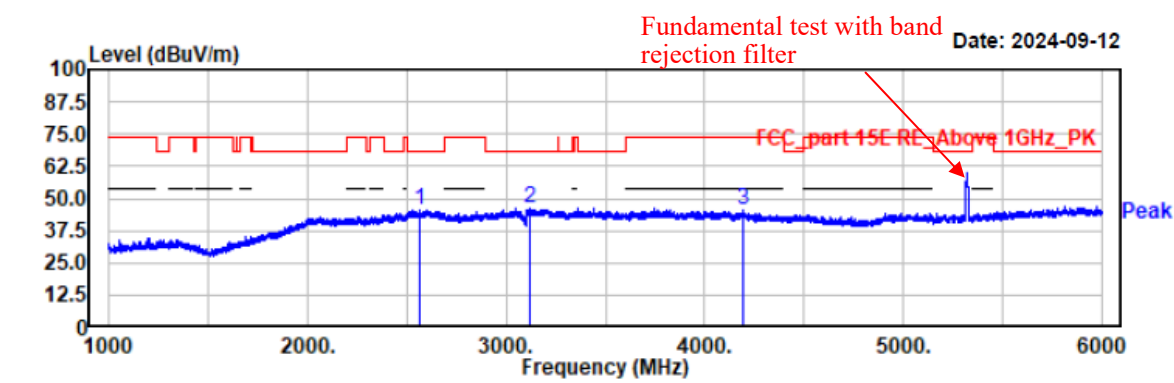

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2564.50     | 49.03           | -3.42          | 45.61            | 68.20           | 22.59        | vertical | Peak   |
| 3119.00     | 49.35           | -3.00          | 46.35            | 68.20           | 21.85        | vertical | Peak   |
| 4190.00     | 50.18           | -4.93          | 45.25            | 74.00           | 28.75        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n40-5270  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8°C/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

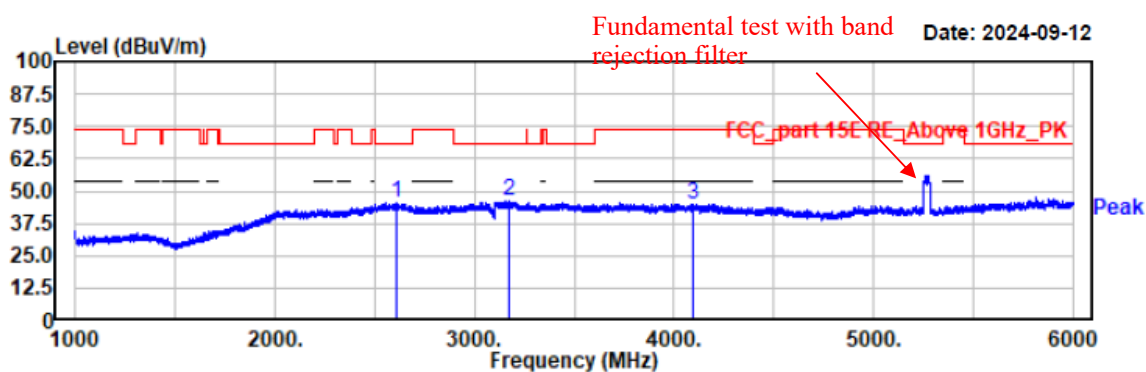

| Freq<br>MHz | Reading<br>dBUV | Factor<br>dB/m | Result<br>dBUV/m | Limit<br>dBUV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2608.50     | 48.74           | -3.31          | 45.43            | 68.20           | 22.77        | horizontal | Peak   |
| 3175.50     | 49.17           | -2.94          | 46.23            | 68.20           | 21.97        | horizontal | Peak   |
| 4096.00     | 49.40           | -4.24          | 45.16            | 74.00           | 28.84        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n40-5270  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8°C/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

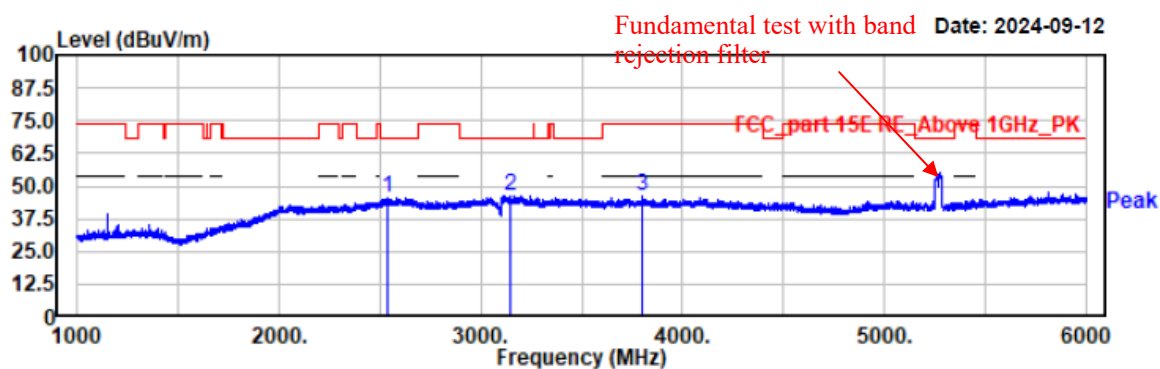

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2541.00     | 49.20           | -3.60          | 45.60            | 68.20           | 22.60        | vertical | Peak   |
| 3149.00     | 49.22           | -2.94          | 46.28            | 68.20           | 21.92        | vertical | Peak   |
| 3801.50     | 50.27           | -4.16          | 46.11            | 74.00           | 27.89        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n40-5310  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8°C/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

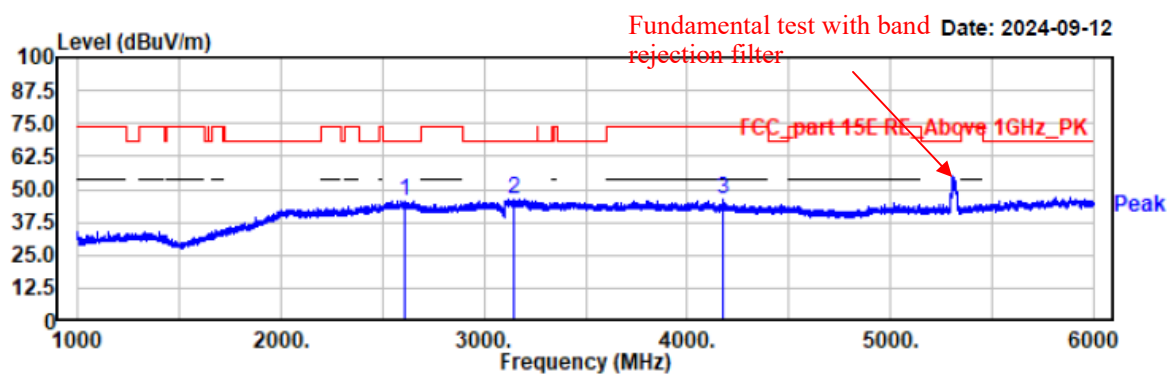

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2610.50     | 48.97           | -3.31          | 45.66            | 68.20           | 22.54        | horizontal | Peak   |
| 3147.00     | 49.10           | -2.95          | 46.15            | 68.20           | 22.05        | horizontal | Peak   |
| 4178.00     | 50.81           | -4.89          | 45.92            | 74.00           | 28.08        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n40-5310  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8°C/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

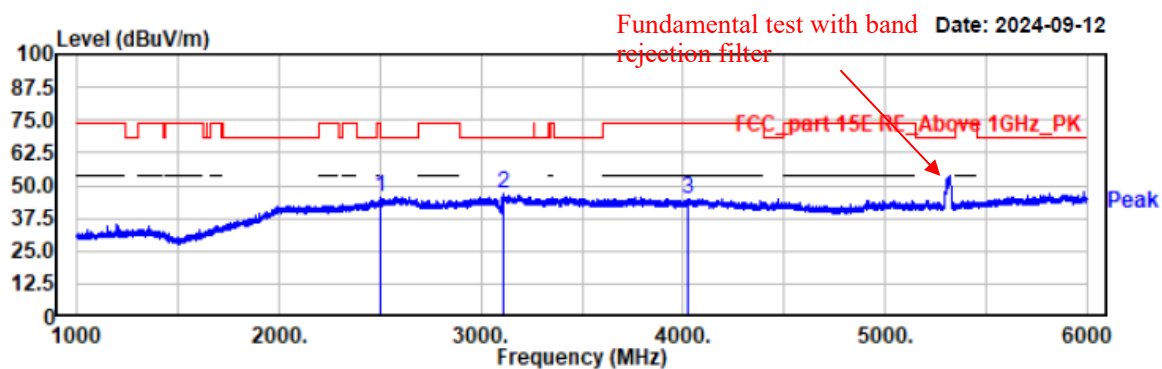

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2506.50     | 49.36           | -4.06          | 45.30            | 68.20           | 22.90        | vertical | Peak   |
| 3111.00     | 49.69           | -3.02          | 46.67            | 68.20           | 21.53        | vertical | Peak   |
| 4020.00     | 49.36           | -4.37          | 44.99            | 74.00           | 29.01        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11ac80-5290  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.8℃/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

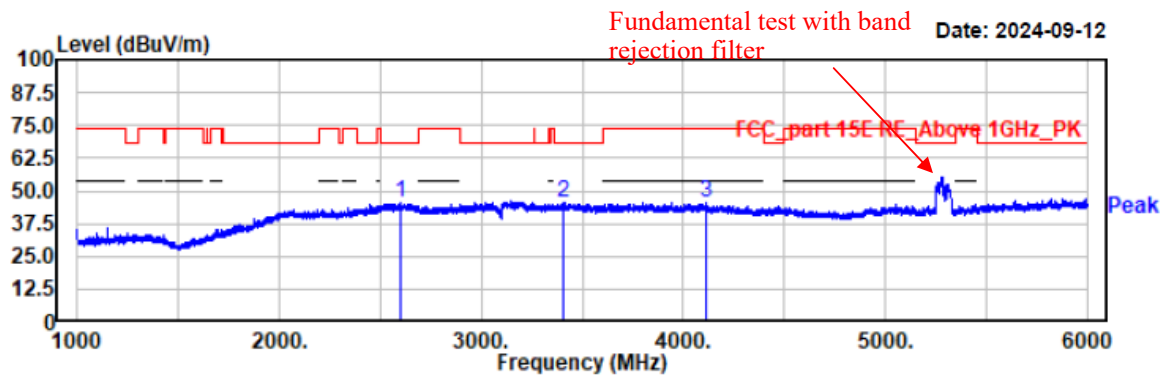

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2597.50     | 48.91           | -3.31          | 45.60            | 68.20           | 22.60        | horizontal | Peak   |
| 3408.50     | 49.36           | -3.61          | 45.75            | 68.20           | 22.45        | horizontal | Peak   |
| 4115.50     | 49.66           | -4.43          | 45.23            | 74.00           | 28.77        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11ac80-5290  
EUT Model: NLS-NQuire700  
Test distance: 3m

Temp/Humi/ATM: 23.8°C/51%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

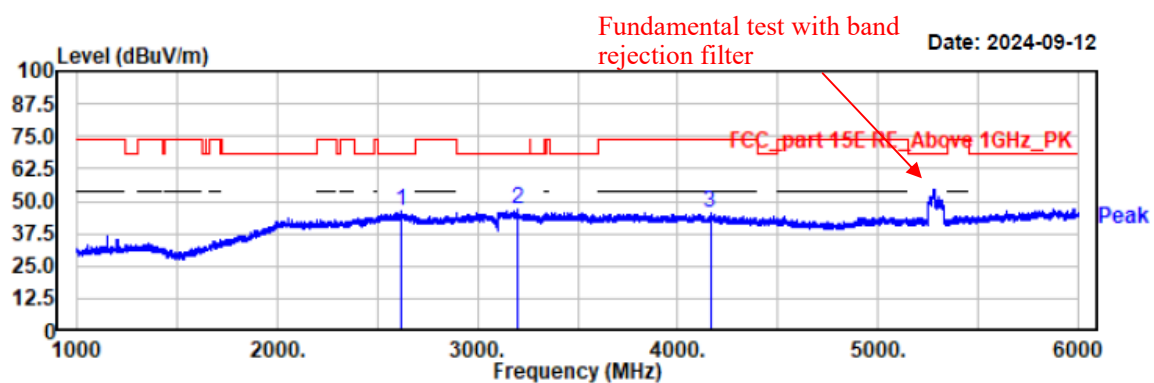

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2615.50     | 49.36           | -3.32          | 46.04            | 68.20           | 22.16        | vertical | Peak   |
| 3202.00     | 49.59           | -2.97          | 46.62            | 68.20           | 21.58        | vertical | Peak   |
| 4162.50     | 50.09           | -4.85          | 45.24            | 74.00           | 28.76        | vertical | Peak   |

B3

Project No.: 2407V20721E-RF

Test Mode: 11a-5500


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 23.3°C/50%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

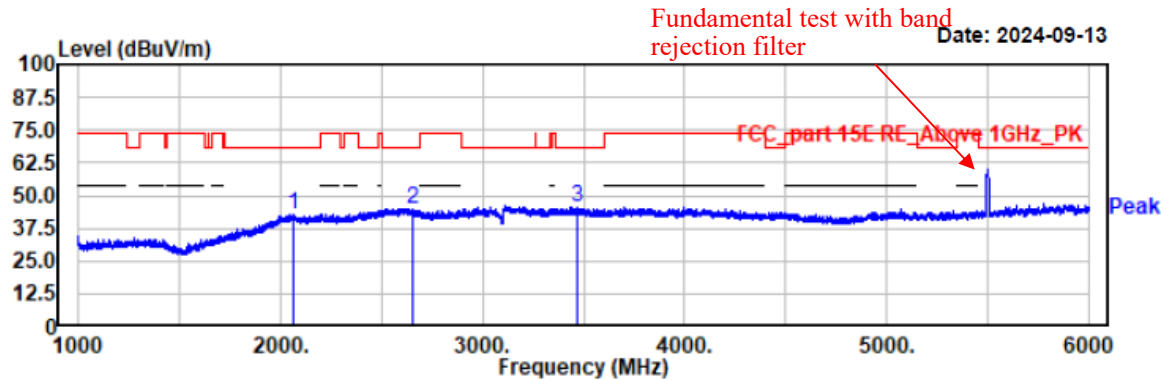

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2059.50     | 48.89           | -6.12          | 42.77            | 68.20           | 25.43        | horizontal | Peak   |
| 2653.00     | 48.58           | -3.45          | 45.13            | 68.20           | 23.07        | horizontal | Peak   |
| 3473.00     | 49.25           | -3.86          | 45.39            | 68.20           | 22.81        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11a-5500  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

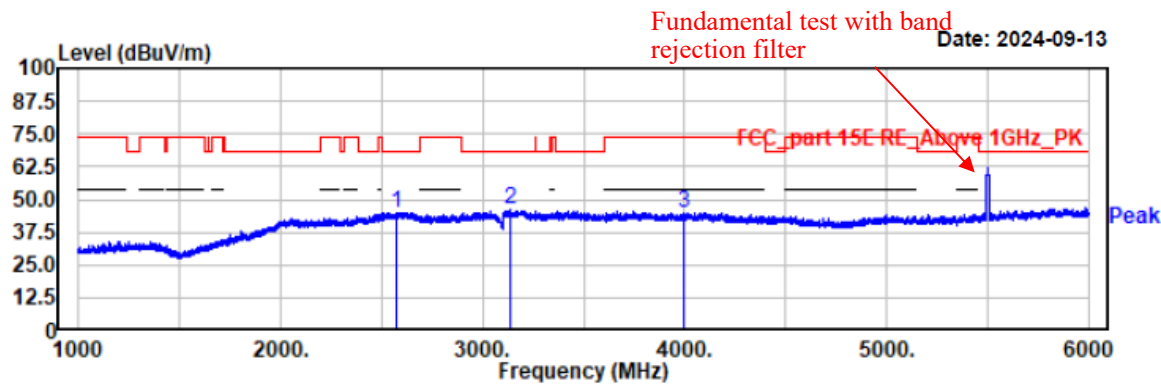

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2574.50     | 48.52           | -3.38          | 45.14            | 68.20           | 23.06        | vertical | Peak   |
| 3137.50     | 49.27           | -2.96          | 46.31            | 68.20           | 21.89        | vertical | Peak   |
| 4001.00     | 49.52           | -4.47          | 45.05            | 74.00           | 28.95        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11a-5580  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

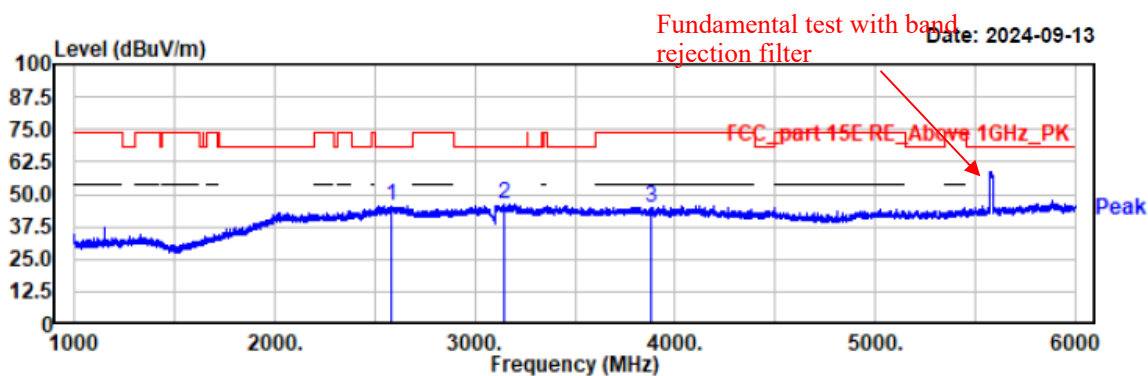

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2579.50     | 48.68           | -3.37          | 45.31            | 68.20           | 22.89        | horizontal | Peak   |
| 3148.00     | 49.02           | -2.94          | 46.08            | 68.20           | 22.12        | horizontal | Peak   |
| 3877.50     | 49.60           | -4.48          | 45.12            | 74.00           | 28.88        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11a-5580  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

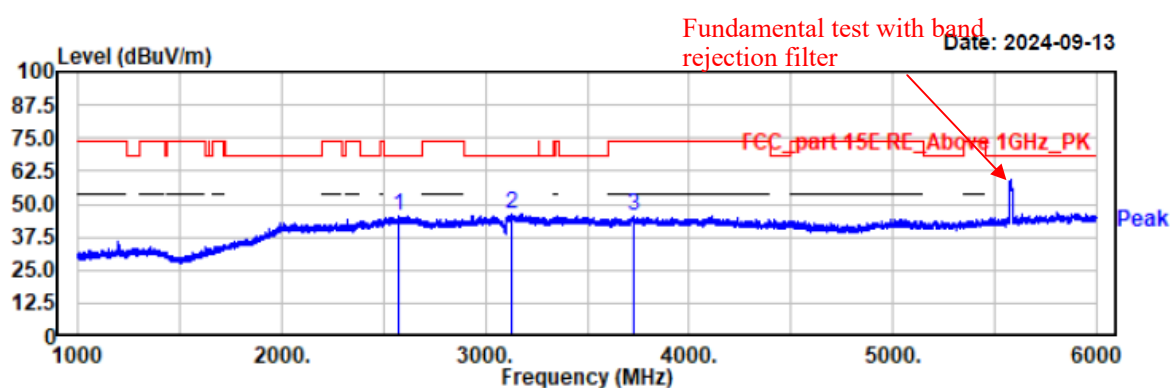

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2573.50     | 48.94           | -3.39          | 45.55            | 68.20           | 22.65        | vertical | Peak   |
| 3126.00     | 49.20           | -2.99          | 46.21            | 68.20           | 21.99        | vertical | Peak   |
| 3728.50     | 49.44           | -4.15          | 45.29            | 74.00           | 28.71        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11a-5700  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

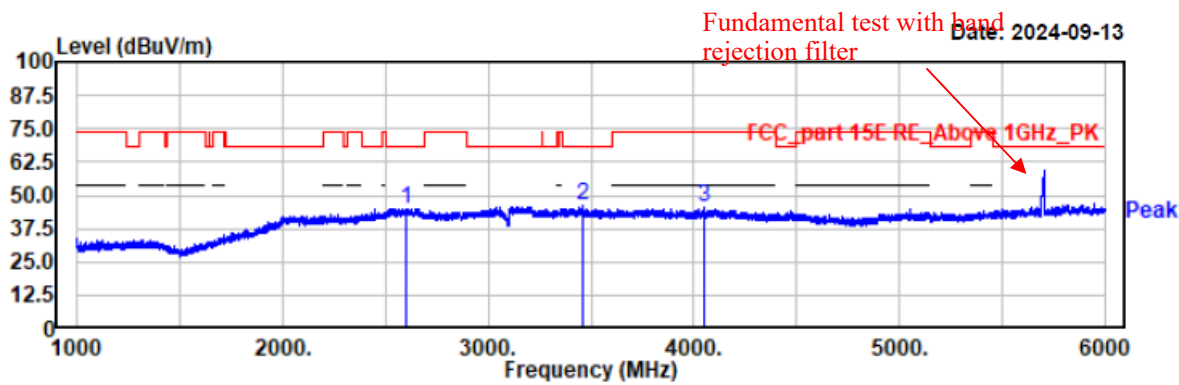

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2601.50     | 48.26           | -3.30          | 44.96            | 68.20           | 23.24        | horizontal | Peak   |
| 3459.00     | 49.63           | -3.73          | 45.90            | 68.20           | 22.30        | horizontal | Peak   |
| 4053.00     | 49.86           | -4.21          | 45.65            | 74.00           | 28.35        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11a-5700  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

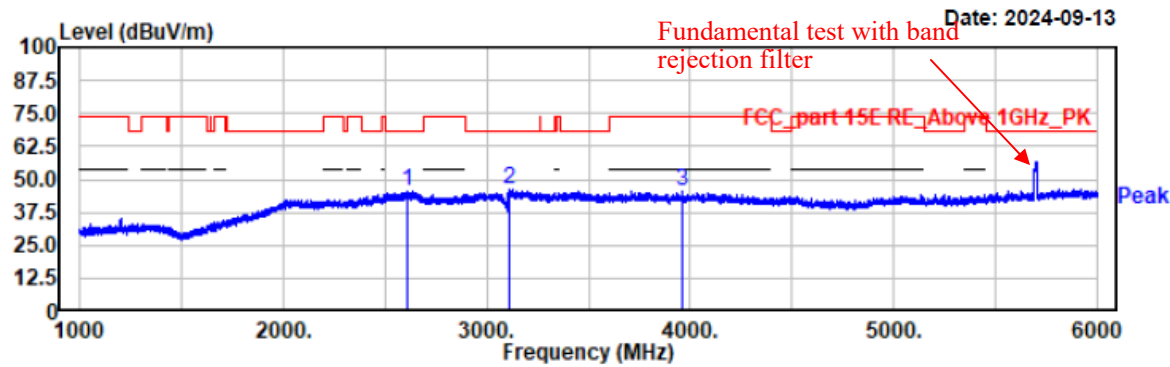

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2611.50     | 49.04           | -3.31          | 45.73            | 68.20           | 22.47        | vertical | Peak   |
| 3111.00     | 49.14           | -3.02          | 46.12            | 68.20           | 22.08        | vertical | Peak   |
| 3958.00     | 50.02           | -4.36          | 45.66            | 74.00           | 28.34        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5500  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

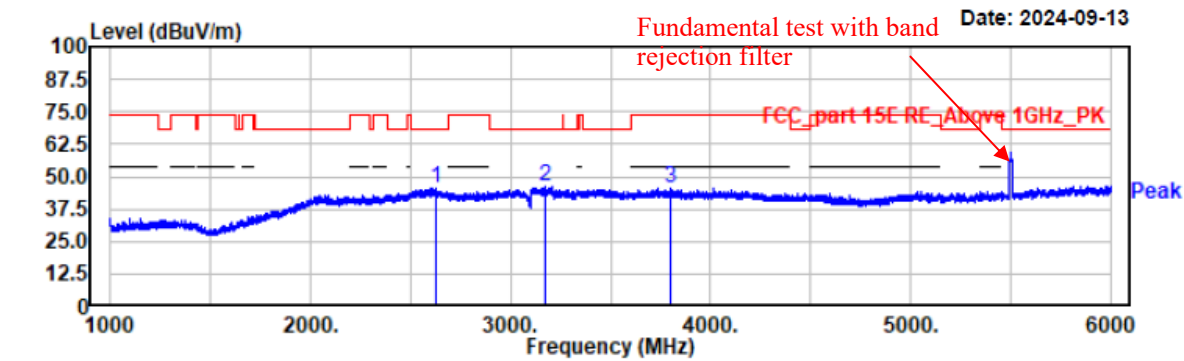

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2631.50     | 48.66           | -3.34          | 45.32            | 68.20           | 22.88        | horizontal | Peak   |
| 3177.50     | 49.38           | -2.94          | 46.44            | 68.20           | 21.76        | horizontal | Peak   |
| 3796.50     | 49.64           | -4.15          | 45.49            | 74.00           | 28.51        | horizontal | Peak   |


Project No.: 2407V20721E-RF  
Test Mode: 11n20-5500  
EUT Model: NLS-NQuire700  
Test distance: 3m

Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

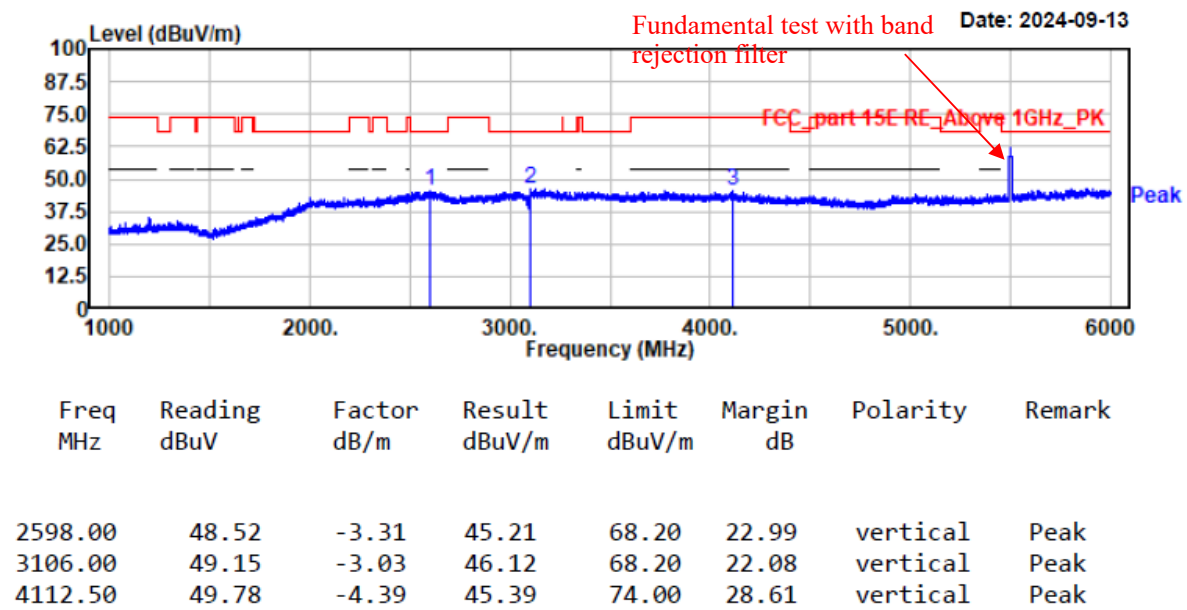

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5580  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

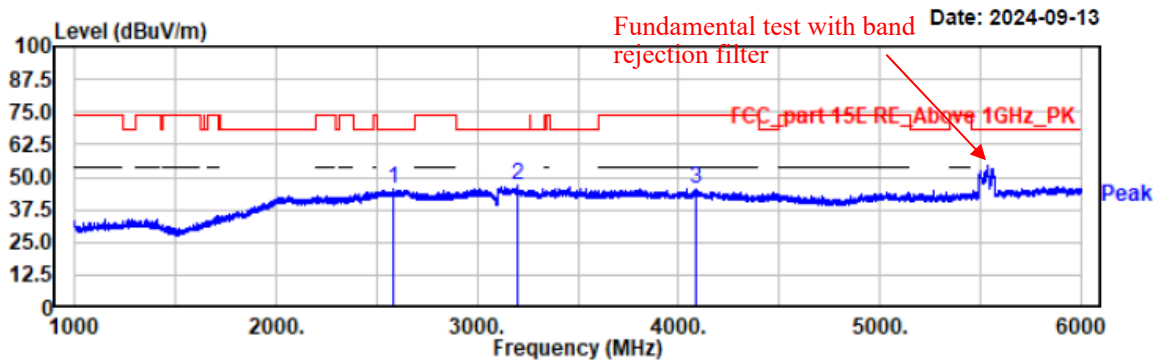

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2584.00     | 48.62           | -3.35          | 45.27            | 68.20           | 22.93        | horizontal | Peak   |
| 3202.50     | 49.64           | -2.98          | 46.66            | 68.20           | 21.54        | horizontal | Peak   |
| 4089.00     | 49.83           | -4.24          | 45.59            | 74.00           | 28.41        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5580  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

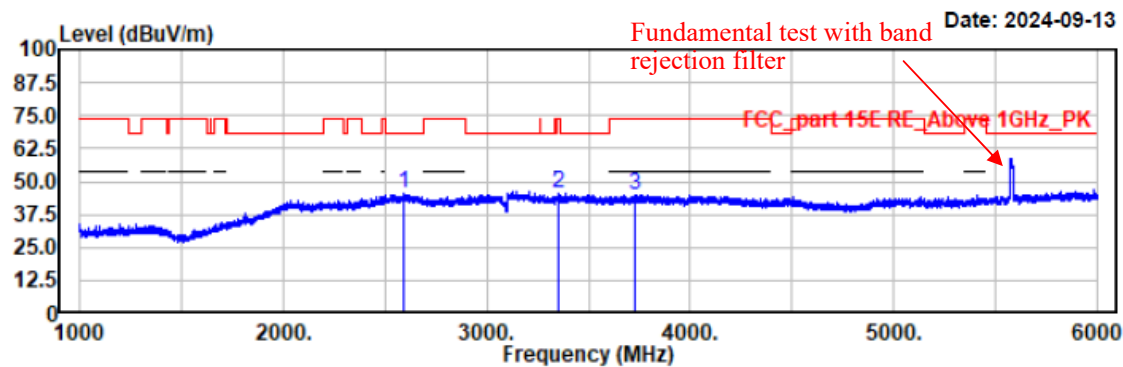

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2592.00     | 48.65           | -3.32          | 45.33            | 68.20           | 22.87        | vertical | Peak   |
| 3352.00     | 49.38           | -3.77          | 45.61            | 74.00           | 28.39        | vertical | Peak   |
| 3725.50     | 49.24           | -4.15          | 45.09            | 74.00           | 28.91        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5700  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

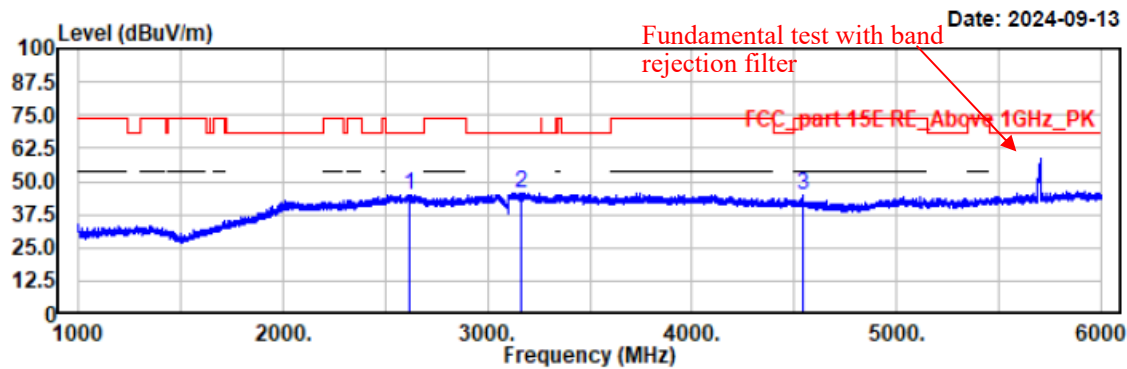

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2618.00     | 48.26           | -3.33          | 44.93            | 68.20           | 23.27        | horizontal | Peak   |
| 3166.00     | 48.74           | -2.94          | 45.80            | 68.20           | 22.40        | horizontal | Peak   |
| 4540.50     | 50.90           | -5.94          | 44.96            | 74.00           | 29.04        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n20-5700  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

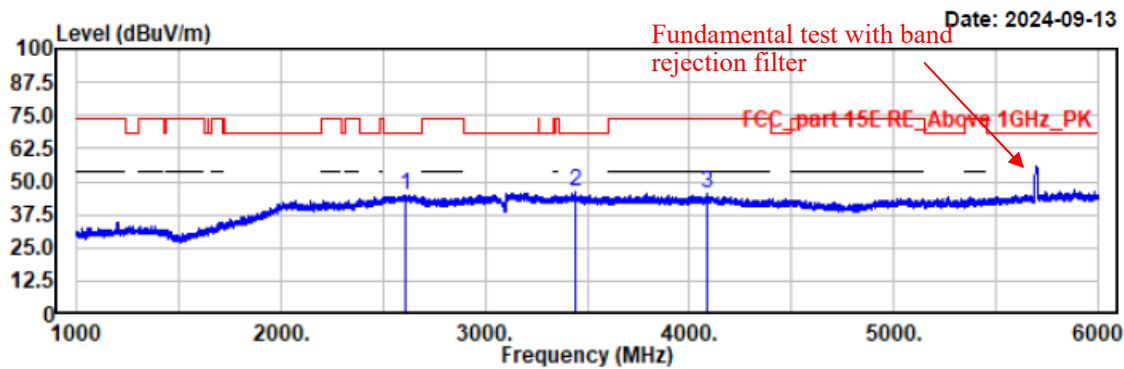

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2611.50     | 48.28           | -3.31          | 44.97            | 68.20           | 23.23        | vertical | Peak   |
| 3440.50     | 49.81           | -3.64          | 46.17            | 68.20           | 22.03        | vertical | Peak   |
| 4089.50     | 49.48           | -4.24          | 45.24            | 74.00           | 28.76        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n40-5510  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

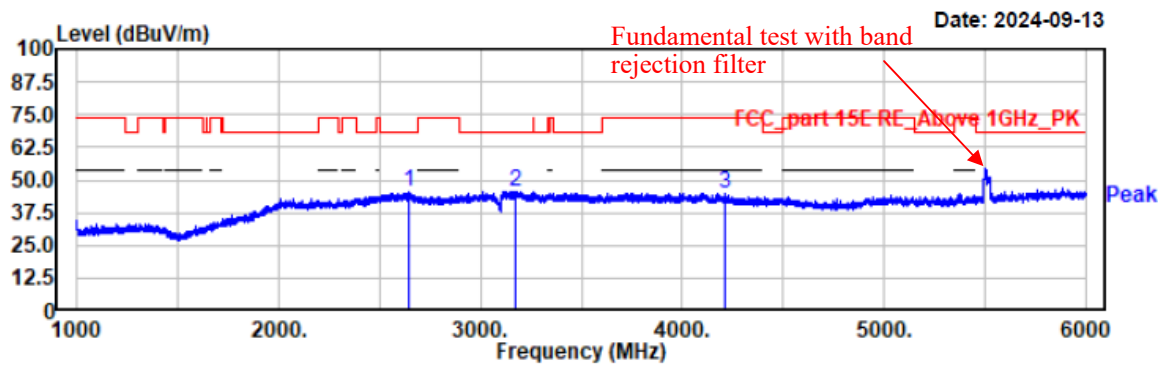

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2643.50     | 48.56           | -3.37          | 45.19            | 68.20           | 23.01        | horizontal | Peak   |
| 3169.50     | 48.68           | -2.94          | 45.74            | 68.20           | 22.46        | horizontal | Peak   |
| 4214.00     | 49.90           | -5.09          | 44.81            | 74.00           | 29.19        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n40-5510  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

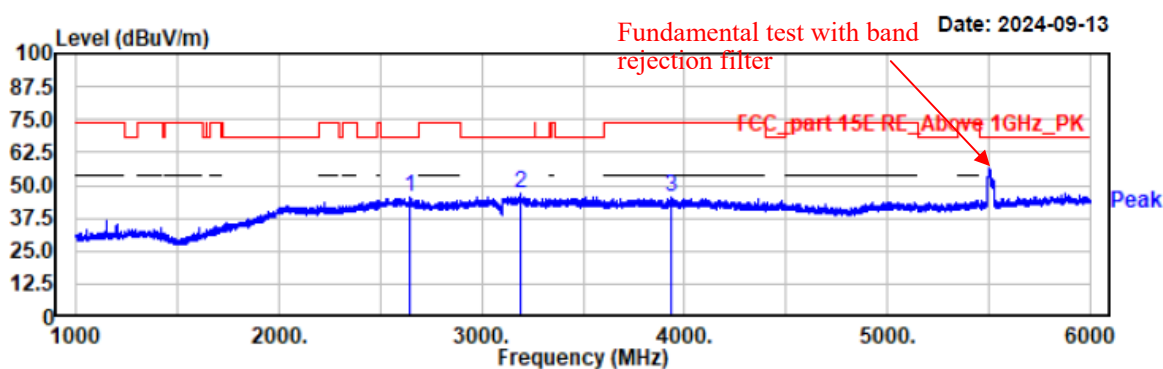

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2644.50     | 48.99           | -3.36          | 45.63            | 68.20           | 22.57        | vertical | Peak   |
| 3195.50     | 49.56           | -2.94          | 46.62            | 68.20           | 21.58        | vertical | Peak   |
| 3934.00     | 49.67           | -4.39          | 45.28            | 74.00           | 28.72        | vertical | Peak   |


Project No.: 2407V20721E-RF  
Test Mode: 11n40-5550  
EUT Model: NLS-NQuire700  
Test distance: 3m

Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

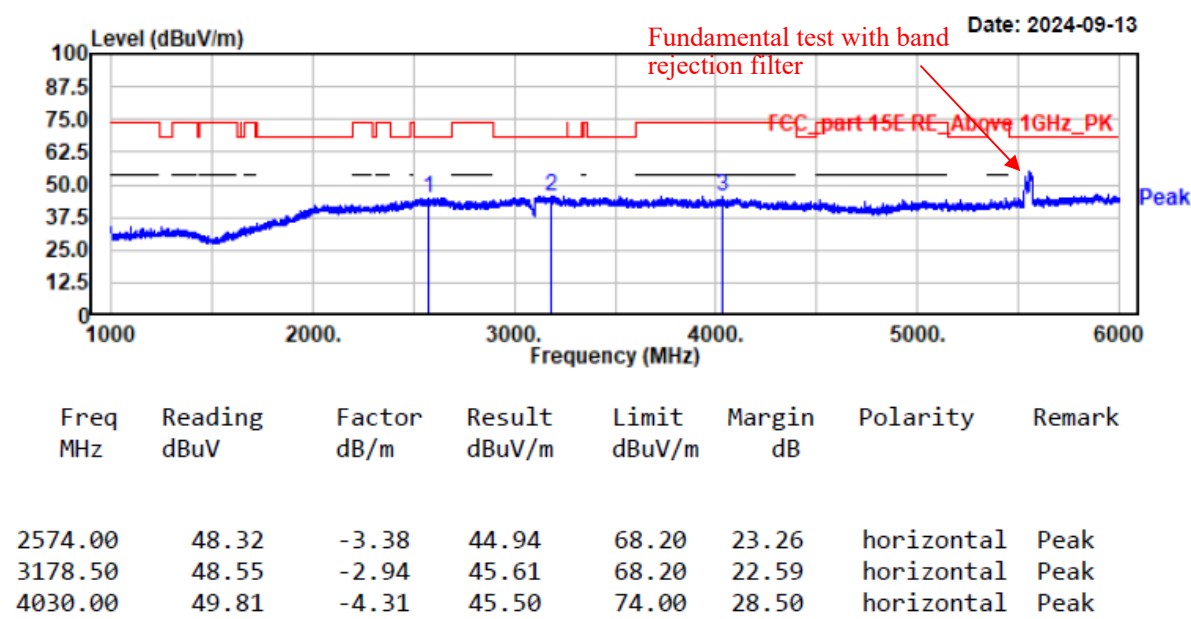

Project No.: 2407V20721E-RF  
Test Mode: 11n40-5550  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

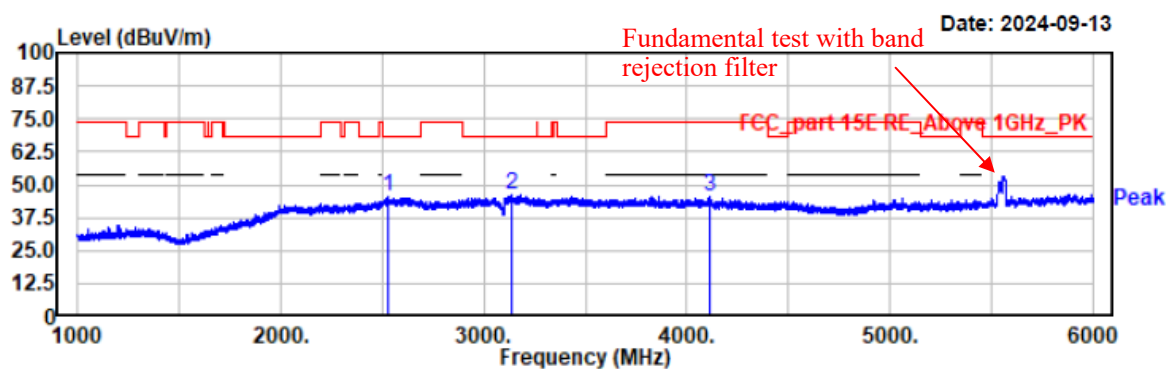

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2528.50     | 49.09           | -3.76          | 45.33            | 68.20           | 22.87        | vertical | Peak   |
| 3136.00     | 49.49           | -2.97          | 46.52            | 68.20           | 21.68        | vertical | Peak   |
| 4112.50     | 49.80           | -4.39          | 45.41            | 74.00           | 28.59        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n40-5670  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

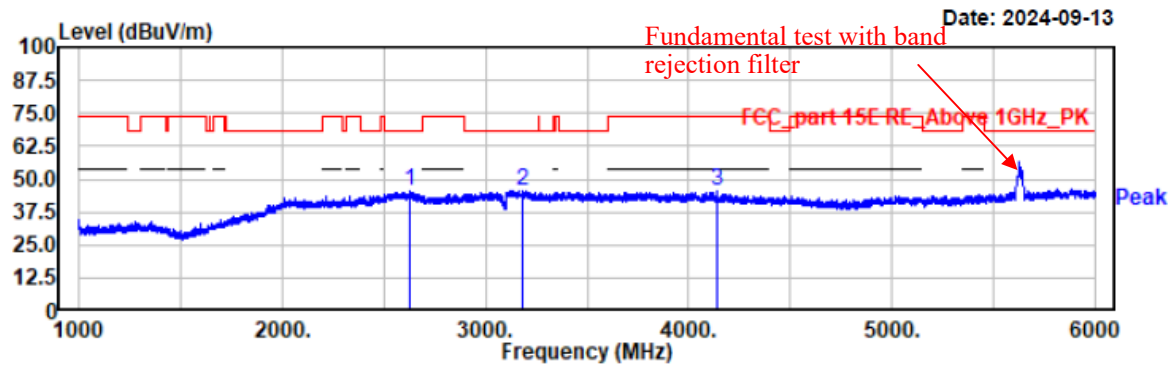

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2631.00     | 49.18           | -3.34          | 45.84            | 68.20           | 22.36        | horizontal | Peak   |
| 3181.00     | 48.38           | -2.94          | 45.44            | 68.20           | 22.76        | horizontal | Peak   |
| 4140.50     | 49.96           | -4.70          | 45.26            | 74.00           | 28.74        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11n40-5670  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

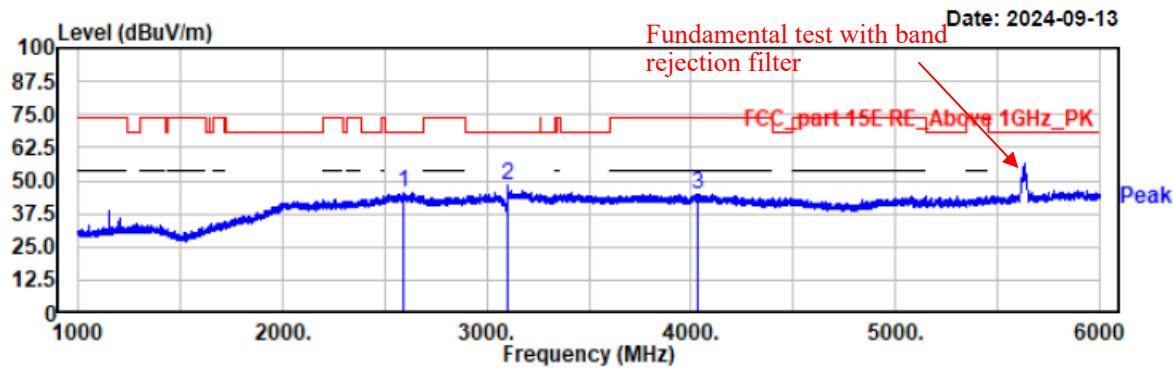

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2588.00     | 48.67           | -3.34          | 45.33            | 68.20           | 22.87        | vertical | Peak   |
| 3106.00     | 51.09           | -3.03          | 48.06            | 68.20           | 20.14        | vertical | Peak   |
| 4037.00     | 49.39           | -4.28          | 45.11            | 74.00           | 28.89        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11ac80-5530  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

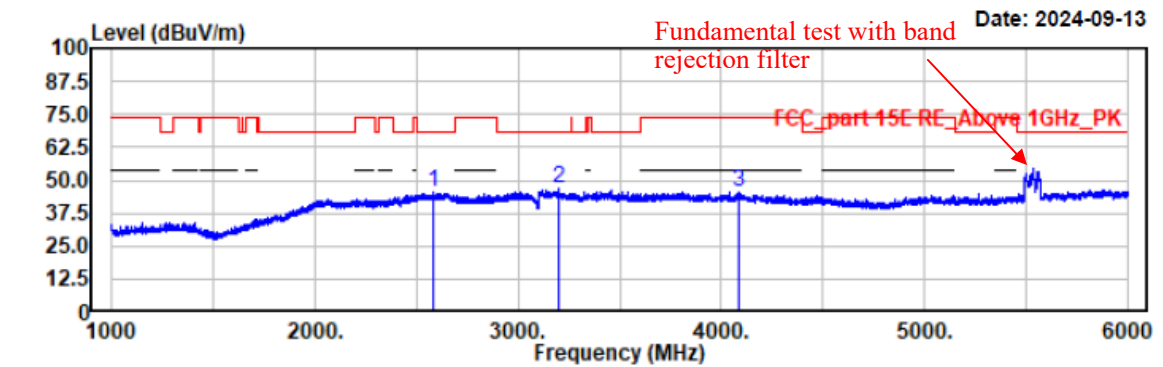

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2584.00     | 48.62           | -3.35          | 45.27            | 68.20           | 22.93        | horizontal | Peak   |
| 3202.50     | 49.64           | -2.98          | 46.66            | 68.20           | 21.54        | horizontal | Peak   |
| 4089.00     | 49.83           | -4.24          | 45.59            | 74.00           | 28.41        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11ac80-5530  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.3℃/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

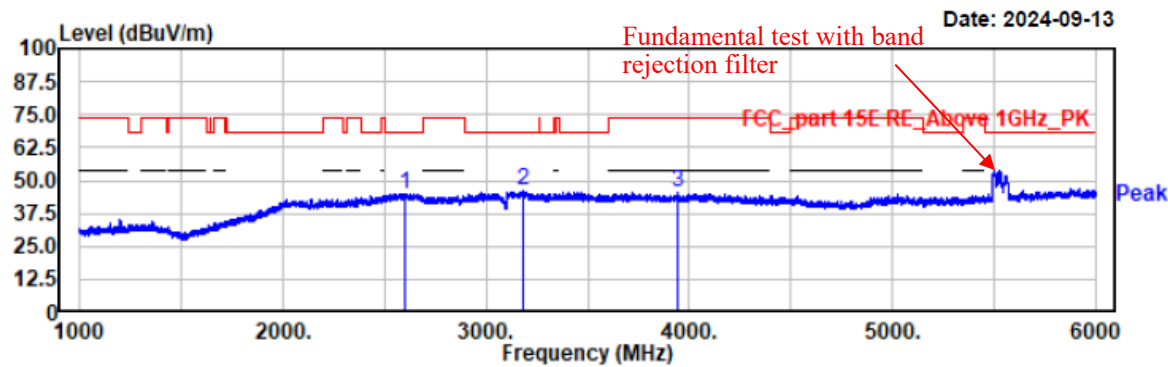

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2600.50     | 48.45           | -3.30          | 45.15            | 68.20           | 23.05        | vertical | Peak   |
| 3181.50     | 48.82           | -2.94          | 45.88            | 68.20           | 22.32        | vertical | Peak   |
| 3947.50     | 49.52           | -4.35          | 45.17            | 74.00           | 28.83        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11ac80-5610  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

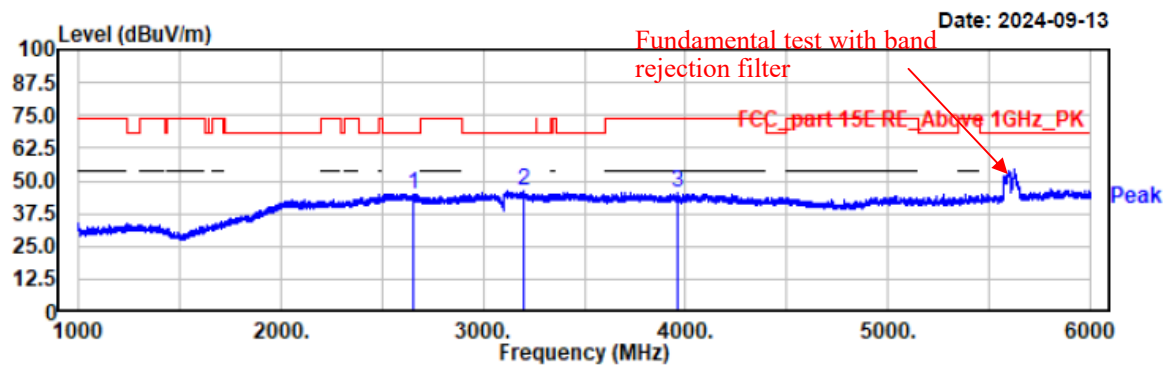

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2651.50     | 48.52           | -3.41          | 45.11            | 68.20           | 23.09        | horizontal | Peak   |
| 3200.50     | 49.14           | -2.95          | 46.19            | 68.20           | 22.01        | horizontal | Peak   |
| 3959.00     | 49.85           | -4.36          | 45.49            | 74.00           | 28.51        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11ac80-5610  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

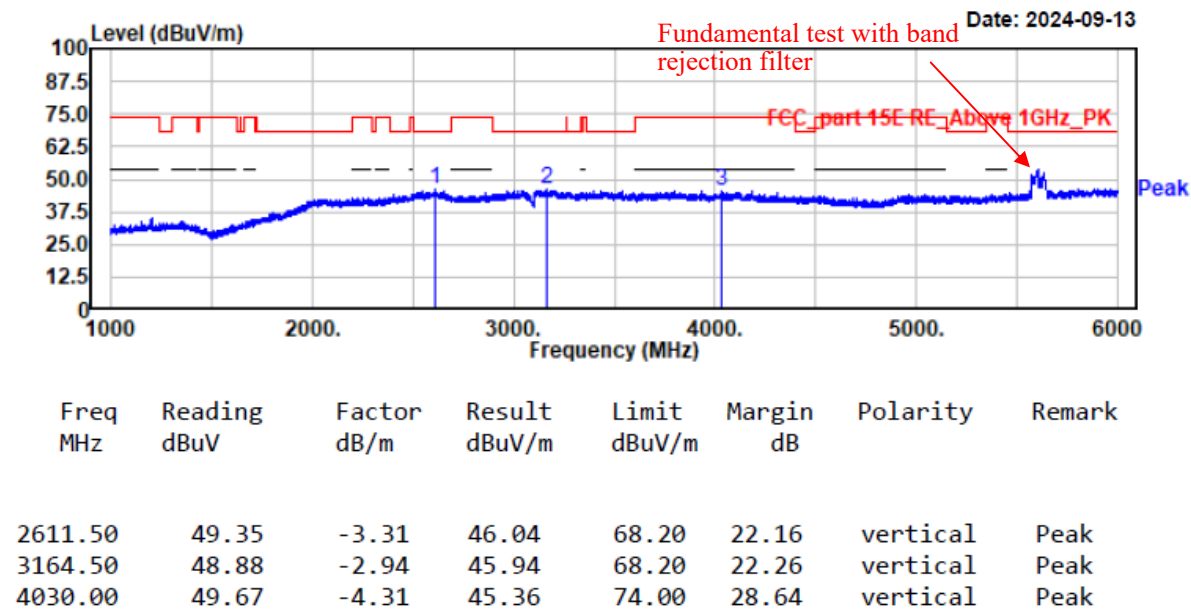

B4

Project No.: 2407V20721E-RF  
Test Mode: 11a-5745  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

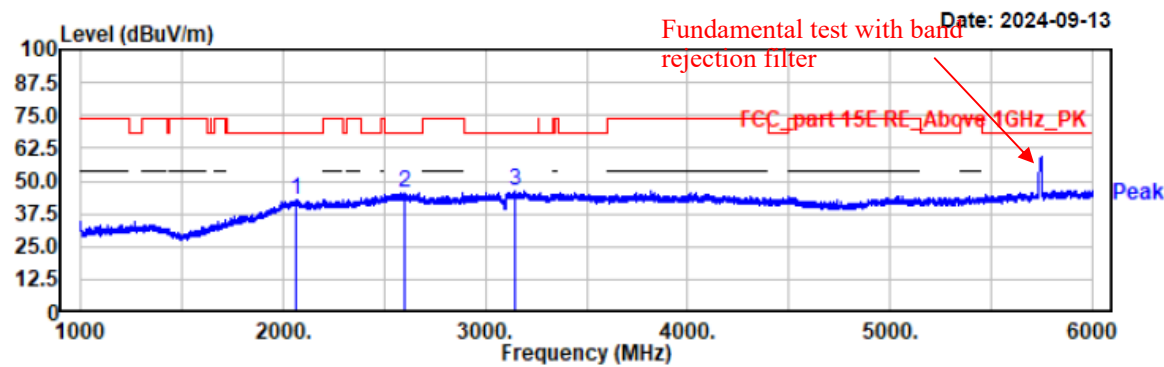

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2066.00     | 48.98           | -6.23          | 42.75            | 68.20           | 25.45        | horizontal | Peak   |
| 2599.50     | 49.06           | -3.30          | 45.76            | 68.20           | 22.44        | horizontal | Peak   |
| 3148.50     | 49.05           | -2.94          | 46.11            | 68.20           | 22.09        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11a-5745  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

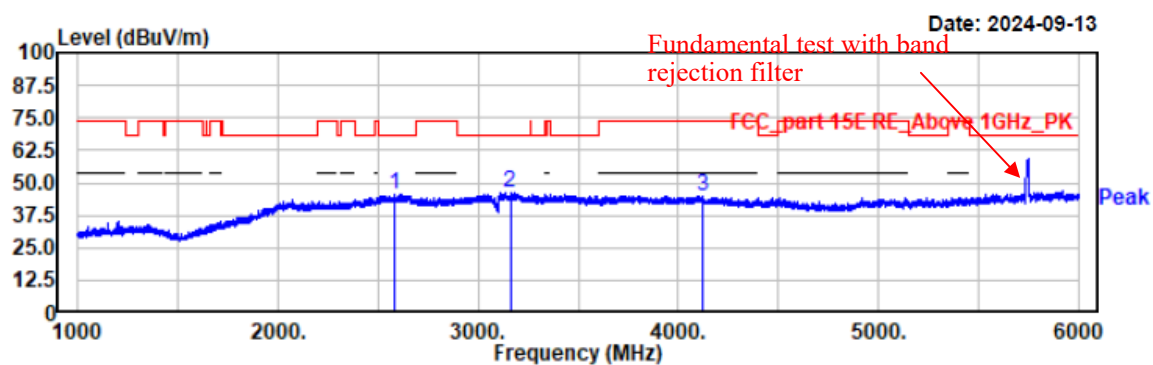

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2586.50     | 48.89           | -3.35          | 45.54            | 68.20           | 22.66        | vertical | Peak   |
| 3160.00     | 49.26           | -2.94          | 46.32            | 68.20           | 21.88        | vertical | Peak   |
| 4120.50     | 49.34           | -4.49          | 44.85            | 74.00           | 29.15        | vertical | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11a-5785  
EUT Model: NLS-NQuire700  
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

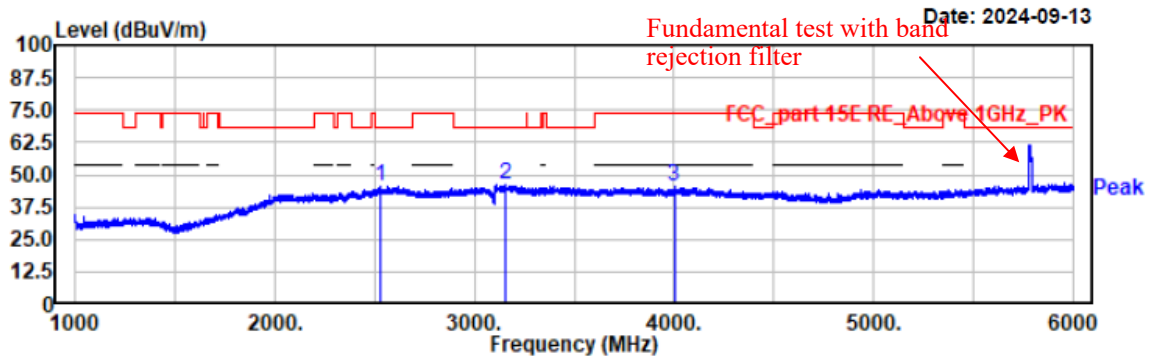

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity   | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|------------|--------|
| 2532.50     | 49.17           | -3.71          | 45.46            | 68.20           | 22.74        | horizontal | Peak   |
| 3158.50     | 49.08           | -2.94          | 46.14            | 68.20           | 22.06        | horizontal | Peak   |
| 4001.50     | 50.03           | -4.47          | 45.56            | 74.00           | 28.44        | horizontal | Peak   |

Project No.: 2407V20721E-RF  
Test Mode: 11a-5785  
EUT Model: NLS-NQuire700  
Test distance: 3m

Temp/Humi/ATM: 23.3°C/50%/100.1kPa  
Tested by: Wlif Wu  
Power Source: AC120V/60Hz

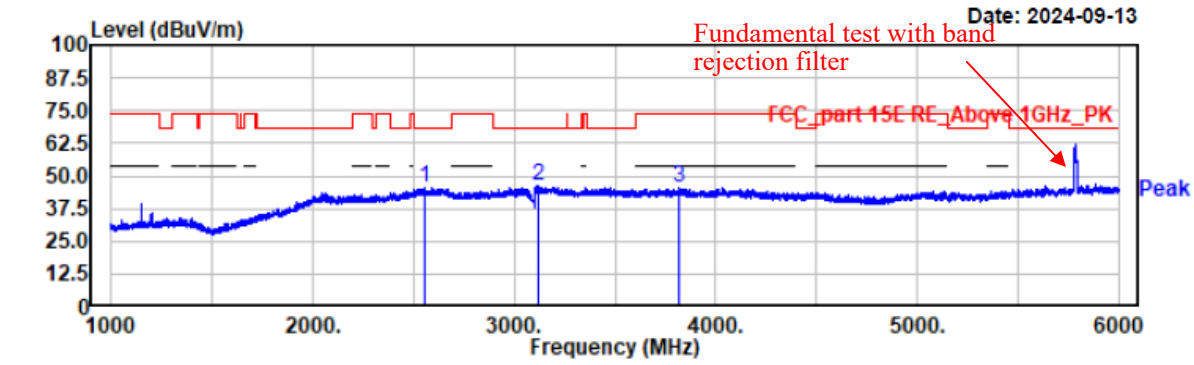

| Freq<br>MHz | Reading<br>dBuV | Factor<br>dB/m | Result<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Polarity | Remark |
|-------------|-----------------|----------------|------------------|-----------------|--------------|----------|--------|
| 2557.00     | 49.08           | -3.44          | 45.64            | 68.20           | 22.56        | vertical | Peak   |
| 3116.00     | 49.56           | -3.01          | 46.55            | 68.20           | 21.65        | vertical | Peak   |
| 3814.00     | 49.61           | -4.23          | 45.38            | 74.00           | 28.62        | vertical | Peak   |