


Project No.: 2407V20721E-RF
Test Mode: 11a-5825
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

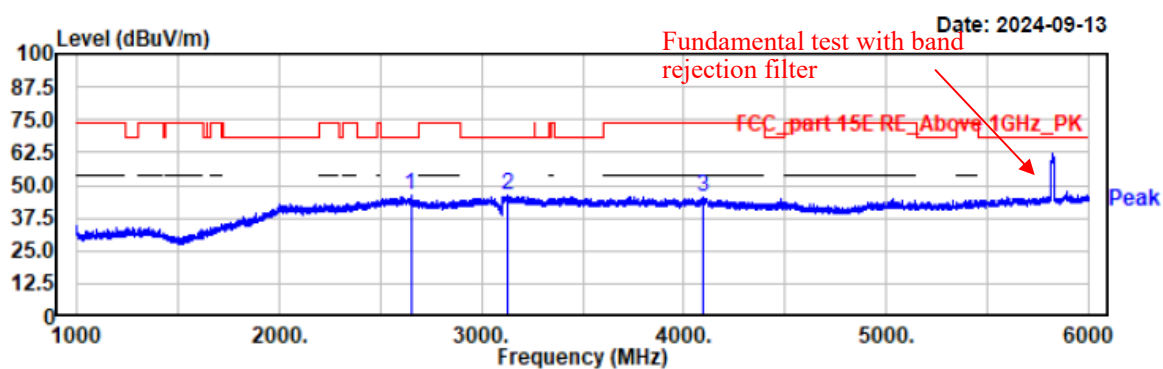

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2650.00	49.75	-3.37	46.38	68.20	21.82	horizontal	Peak
3126.00	49.00	-2.99	46.01	68.20	22.19	horizontal	Peak
4094.00	49.90	-4.25	45.65	74.00	28.35	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5825
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

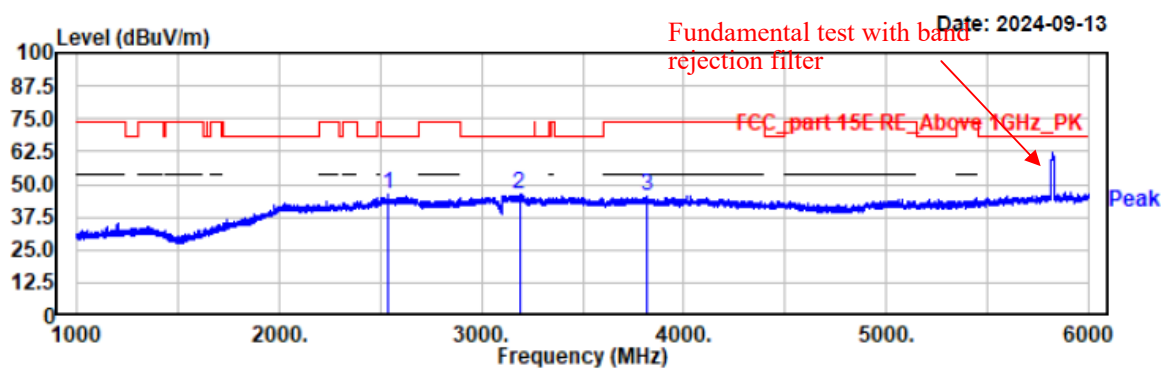

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2534.50	49.63	-3.68	45.95	68.20	22.25	vertical	Peak
3187.00	48.89	-2.94	45.95	68.20	22.25	vertical	Peak
3815.00	49.72	-4.24	45.48	74.00	28.52	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5745
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

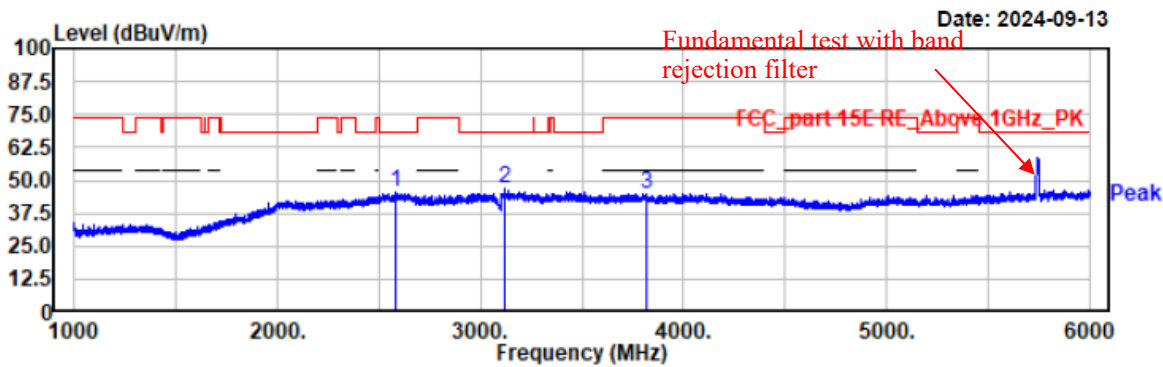

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2582.00	48.78	-3.36	45.42	68.20	22.78	horizontal	Peak
3118.50	49.74	-3.00	46.74	68.20	21.46	horizontal	Peak
3817.00	49.04	-4.25	44.79	74.00	29.21	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5745
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

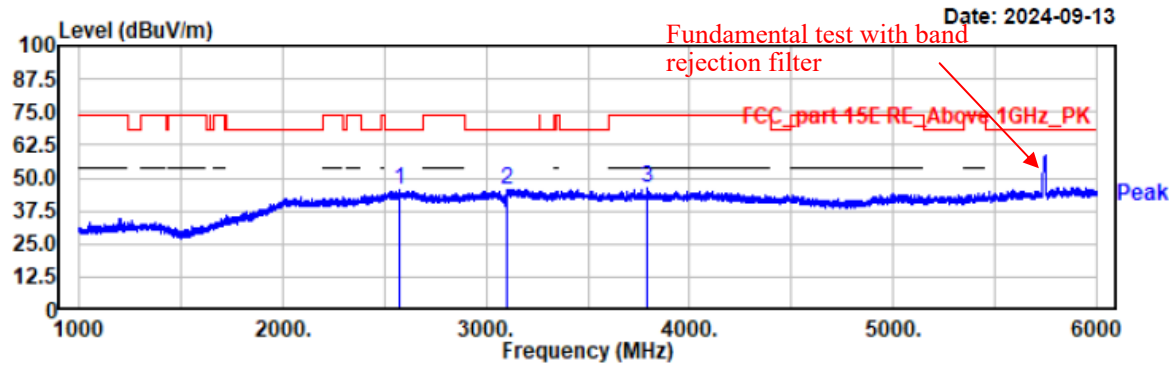

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2578.00	49.11	-3.38	45.73	68.20	22.47	vertical	Peak
3100.50	48.85	-3.04	45.81	68.20	22.39	vertical	Peak
3790.00	50.03	-4.14	45.89	74.00	28.11	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5785
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

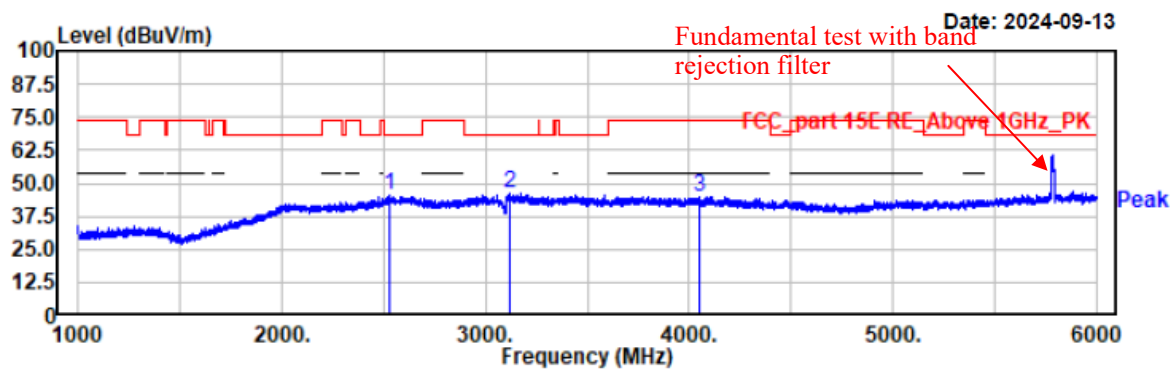

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2526.50	49.57	-3.79	45.78	68.20	22.42	horizontal	Peak
3118.00	49.01	-3.00	46.01	68.20	22.19	horizontal	Peak
4049.00	48.95	-4.21	44.74	74.00	29.26	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5785
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

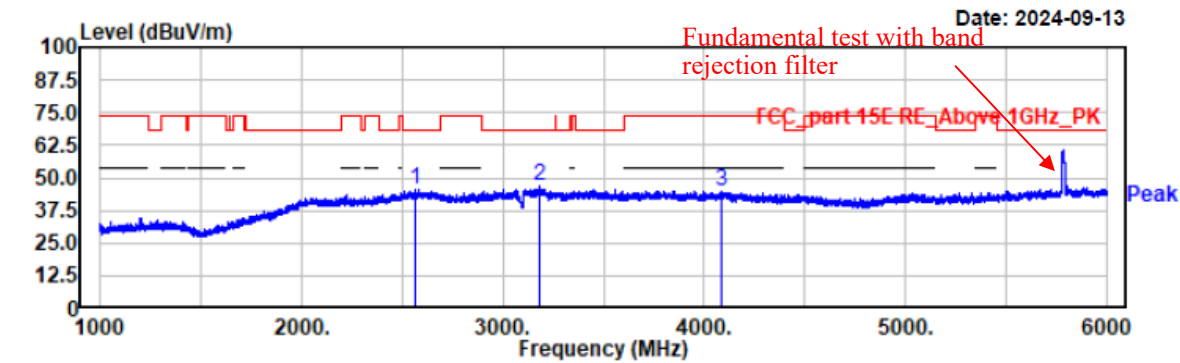

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2567.50	49.06	-3.40	45.66	68.20	22.54	vertical	Peak
3184.50	49.84	-2.94	46.90	68.20	21.30	vertical	Peak
4086.00	49.28	-4.23	45.05	74.00	28.95	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5825
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

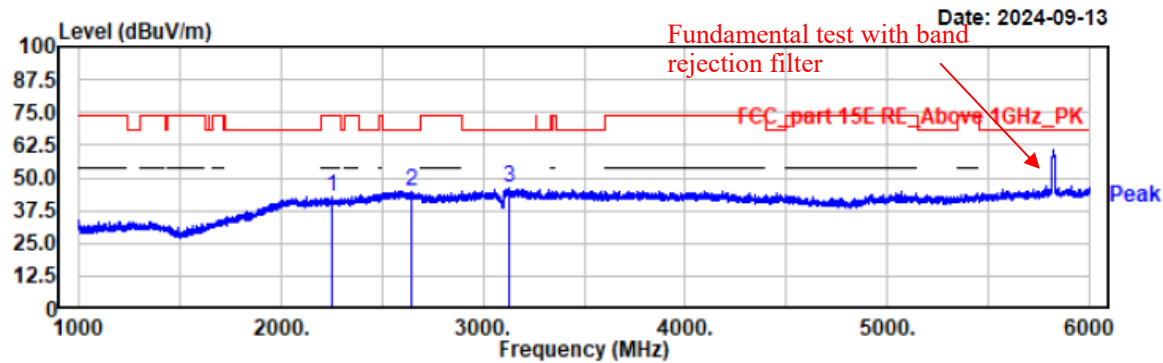

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2249.00	48.85	-6.23	42.62	74.00	31.38	horizontal	Peak
2643.50	48.47	-3.37	45.10	68.20	23.10	horizontal	Peak
3132.00	48.87	-2.98	45.89	68.20	22.31	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5825
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

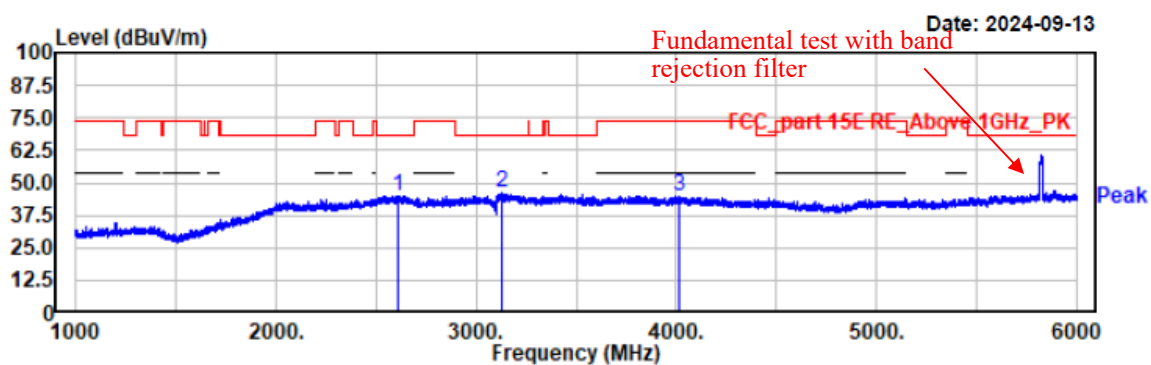

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2611.00	48.37	-3.31	45.06	68.20	23.14	vertical	Peak
3131.00	48.98	-2.98	46.00	68.20	22.20	vertical	Peak
4013.50	49.33	-4.40	44.93	74.00	29.07	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5755
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

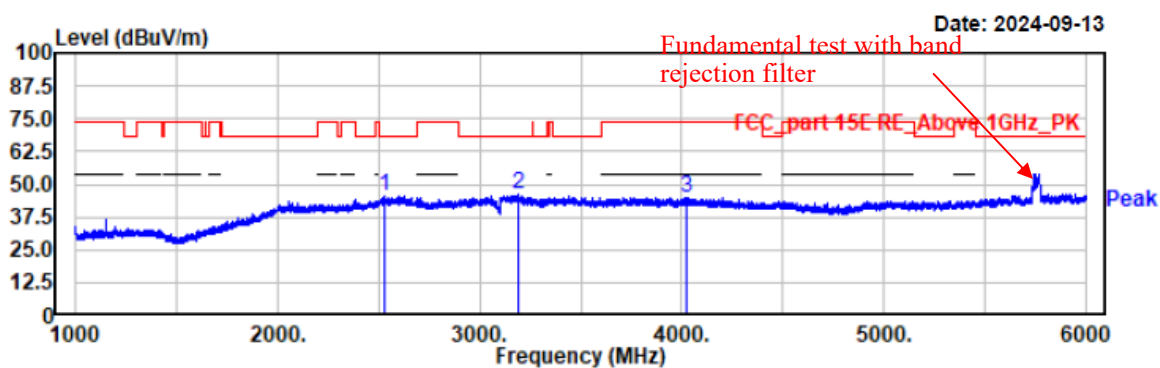

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2533.00	49.54	-3.70	45.84	68.20	22.36	horizontal	Peak
3191.50	48.82	-2.94	45.88	68.20	22.32	horizontal	Peak
4020.50	49.54	-4.37	45.17	74.00	28.83	horizontal	Peak


Project No.: 2407V20721E-RF
Test Mode: 11n40-5755
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

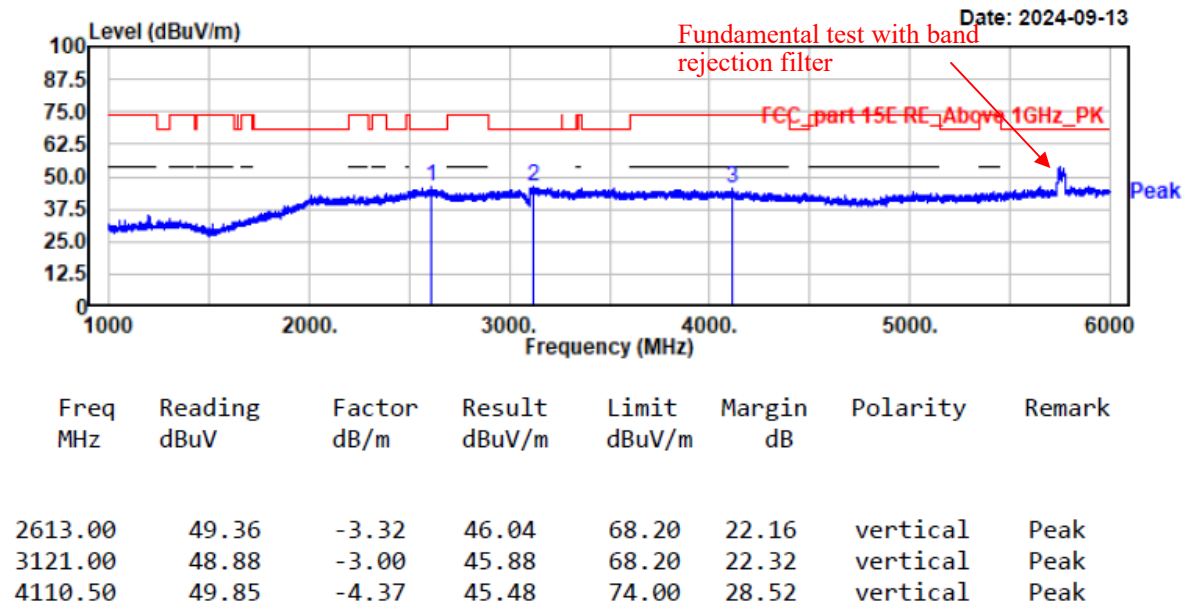


Project No.: 2407V20721E-RF
Test Mode: 11n40-5795
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

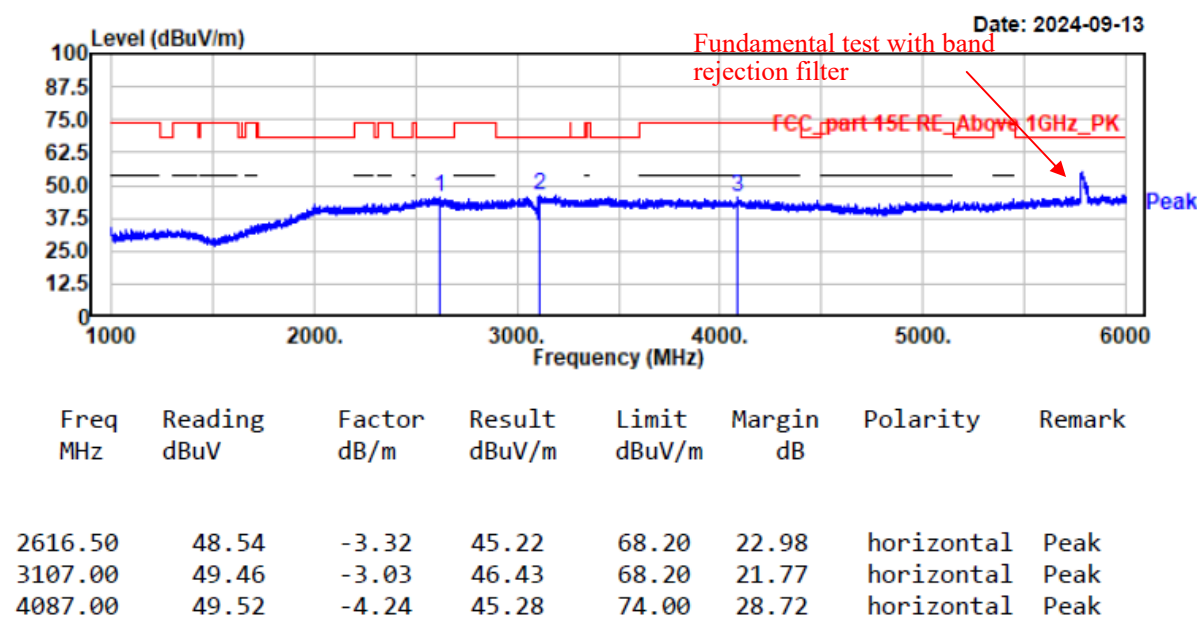

Project No.: 2407V20721E-RF
Test Mode: 11n40-5795
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

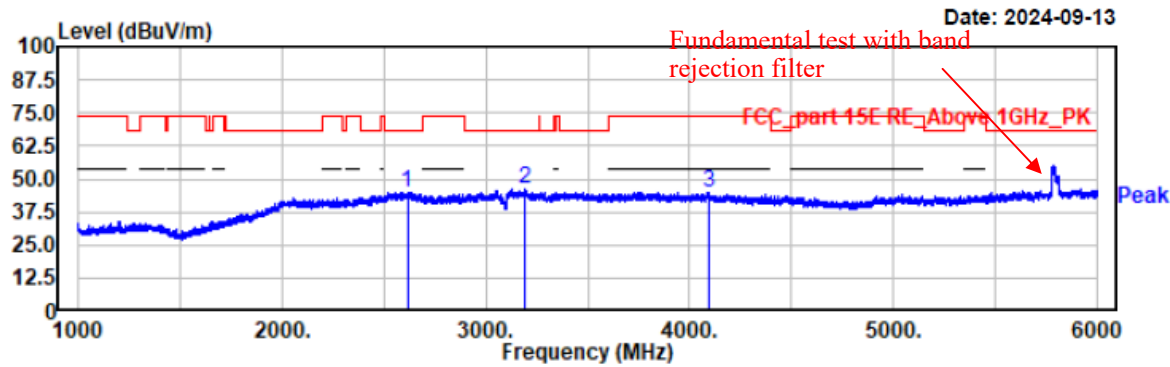

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2614.00	48.35	-3.32	45.03	68.20	23.17	vertical	Peak
3192.00	49.40	-2.94	46.46	68.20	21.74	vertical	Peak
4096.00	49.14	-4.24	44.90	74.00	29.10	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5775
EUT Model: NLS-NQuire700
Test distance: 3m


Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

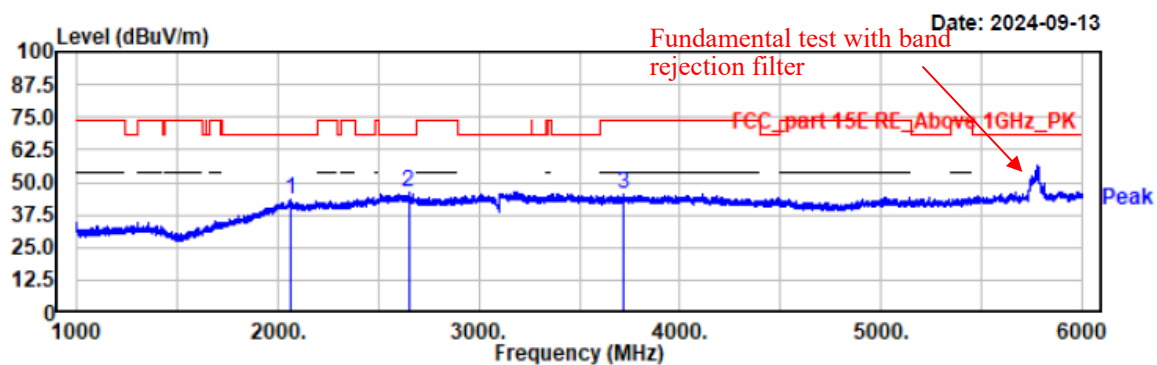

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2063.50	49.91	-6.18	43.73	68.20	24.47	horizontal	Peak
2650.00	49.46	-3.37	46.09	68.20	22.11	horizontal	Peak
3717.50	49.92	-4.17	45.75	74.00	28.25	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5775
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 23.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

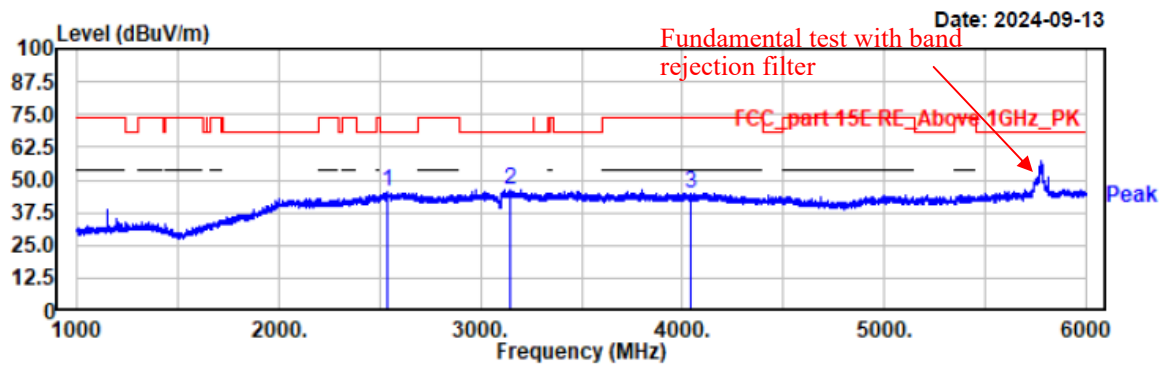


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2534.00	48.98	-3.68	45.30	68.20	22.90	vertical	Peak
3148.50	49.40	-2.94	46.46	68.20	21.74	vertical	Peak
4038.00	49.38	-4.27	45.11	74.00	28.89	vertical	Peak

EUT Model: NLS-NQuire1000

B1


Project No.: 2407V20721E-RF
Test Mode: 11a-5180
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

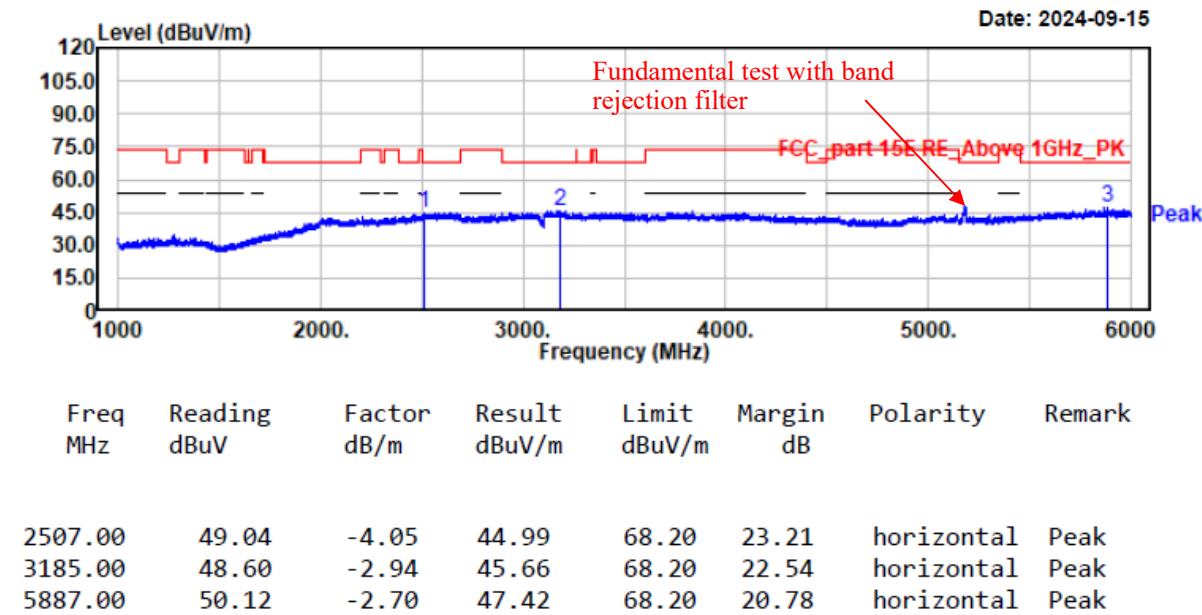

Project No.: 2407V20721E-RF
Test Mode: 11a-5180
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

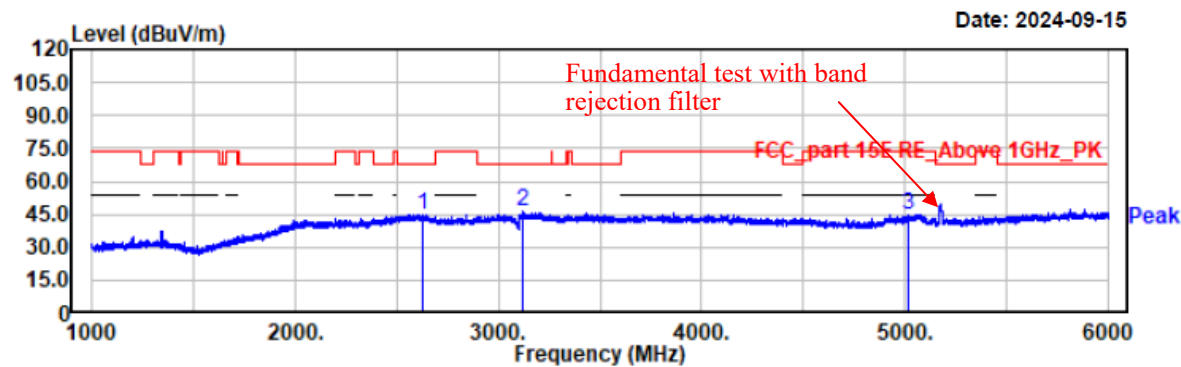

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2625.00	48.13	-3.33	44.80	68.20	23.40	vertical	Peak
3119.50	49.39	-3.00	46.39	68.20	21.81	vertical	Peak
5020.50	50.16	-5.42	44.74	74.00	29.26	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5200
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C /53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

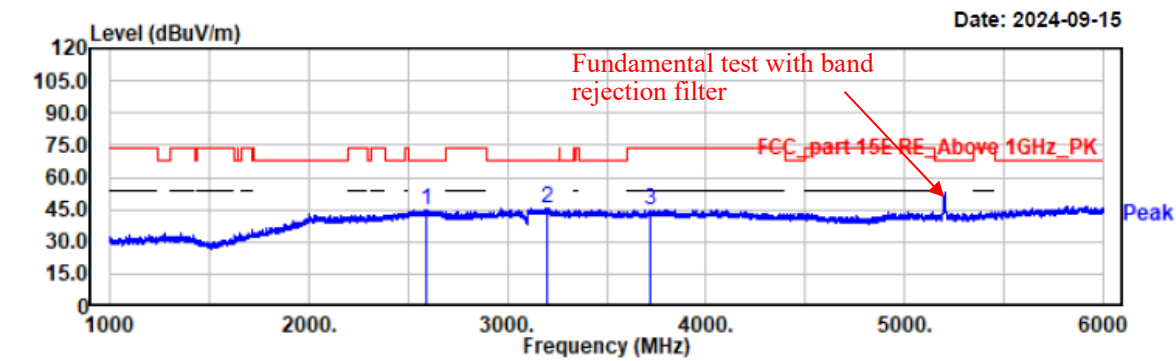

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2590.00	47.99	-3.33	44.66	68.20	23.54	horizontal	Peak
3203.50	48.52	-3.00	45.52	68.20	22.68	horizontal	Peak
3723.00	49.07	-4.16	44.91	74.00	29.09	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5200
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

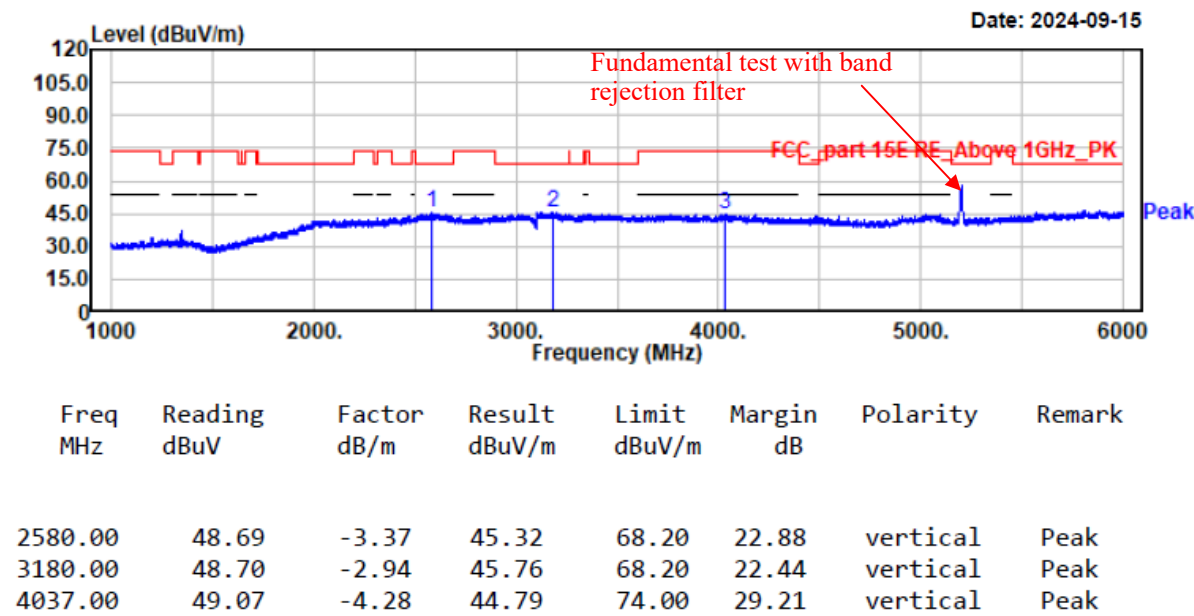

Project No.: 2407V20721E-RF

Test Mode: 11a-5240


EUT Model: NLS-NQuire1000

Test distance: 3m

Temp/Humi/ATM: 24.5°C/53%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

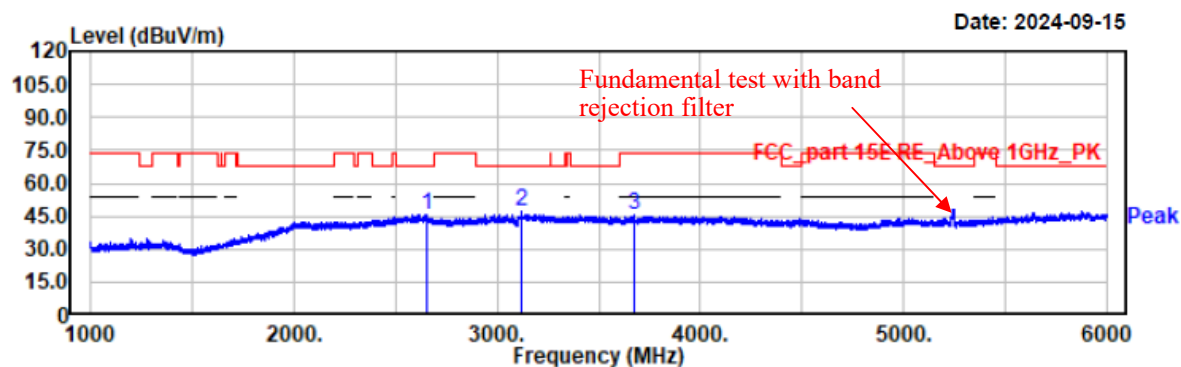

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2651.50	49.05	-3.41	45.64	68.20	22.56	horizontal	Peak
3120.50	49.86	-3.00	46.86	68.20	21.34	horizontal	Peak
3676.50	49.42	-4.29	45.13	74.00	28.87	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5240
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

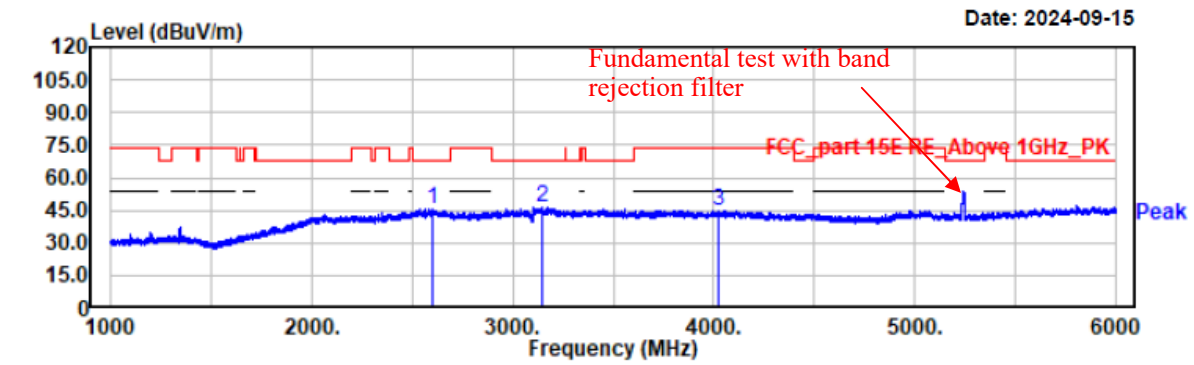

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2598.00	49.22	-3.31	45.91	68.20	22.29	vertical	Peak
3144.00	49.47	-2.95	46.52	68.20	21.68	vertical	Peak
4022.00	49.23	-4.36	44.87	74.00	29.13	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5180
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

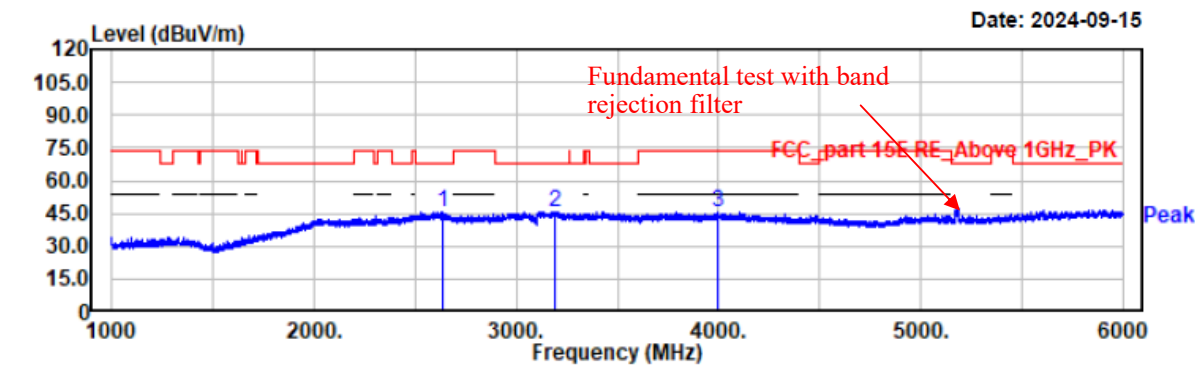

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2634.50	49.14	-3.35	45.79	68.20	22.41	horizontal	Peak
3192.00	48.87	-2.94	45.93	68.20	22.27	horizontal	Peak
3999.00	49.65	-4.47	45.18	74.00	28.82	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5180
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

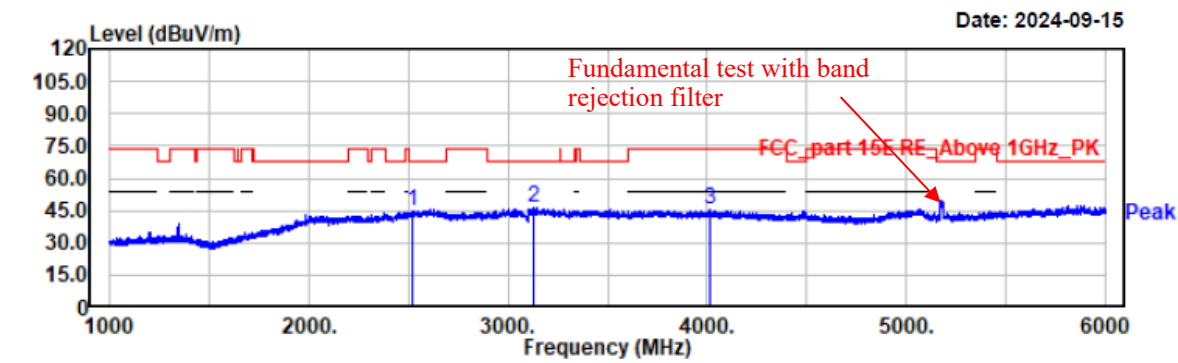

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2520.50	48.54	-3.86	44.68	68.20	23.52	vertical	Peak
3131.50	49.73	-2.98	46.75	68.20	21.45	vertical	Peak
4011.00	49.63	-4.42	45.21	74.00	28.79	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5200
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

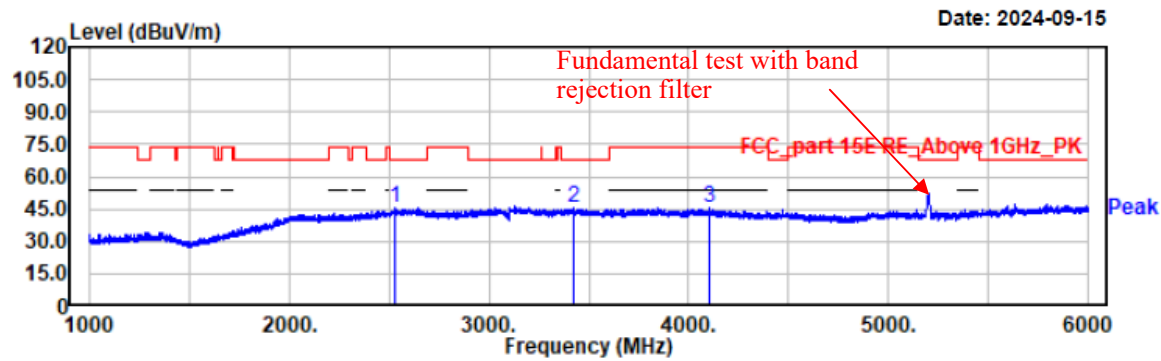

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2527.50	49.09	-3.78	45.31	68.20	22.89	horizontal	Peak
3426.50	48.89	-3.62	45.27	68.20	22.93	horizontal	Peak
4106.00	49.71	-4.32	45.39	74.00	28.61	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5200
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

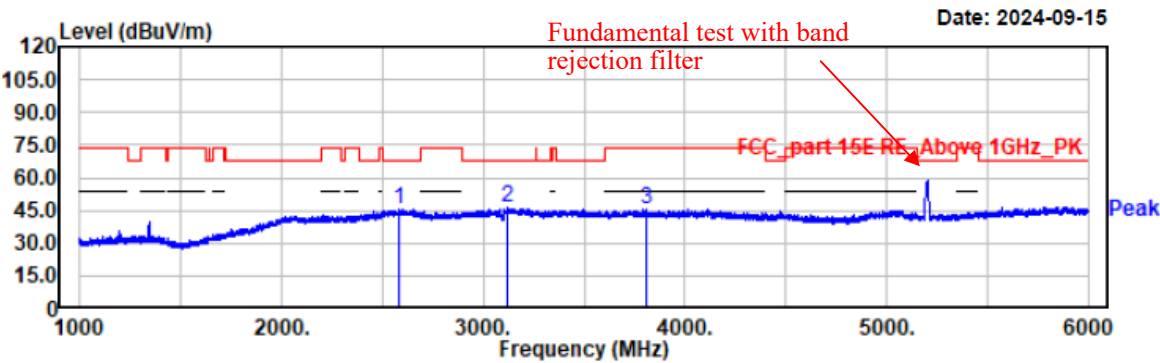

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2586.50	48.65	-3.35	45.30	68.20	22.90	vertical	Peak
3121.50	49.10	-3.00	46.10	68.20	22.10	vertical	Peak
3809.00	50.07	-4.20	45.87	74.00	28.13	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5240
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

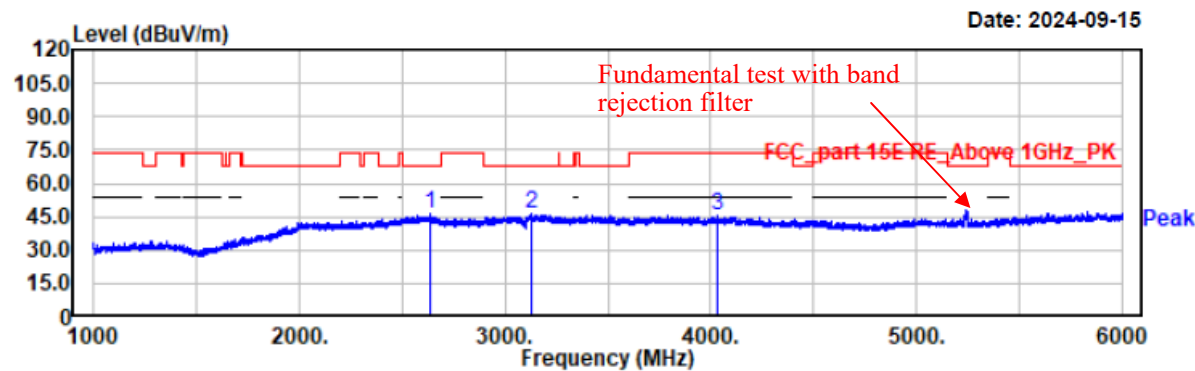

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2639.50	49.77	-3.36	46.41	68.20	21.79	horizontal	Peak
3132.00	49.17	-2.98	46.19	68.20	22.01	horizontal	Peak
4030.50	49.58	-4.31	45.27	74.00	28.73	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5240
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

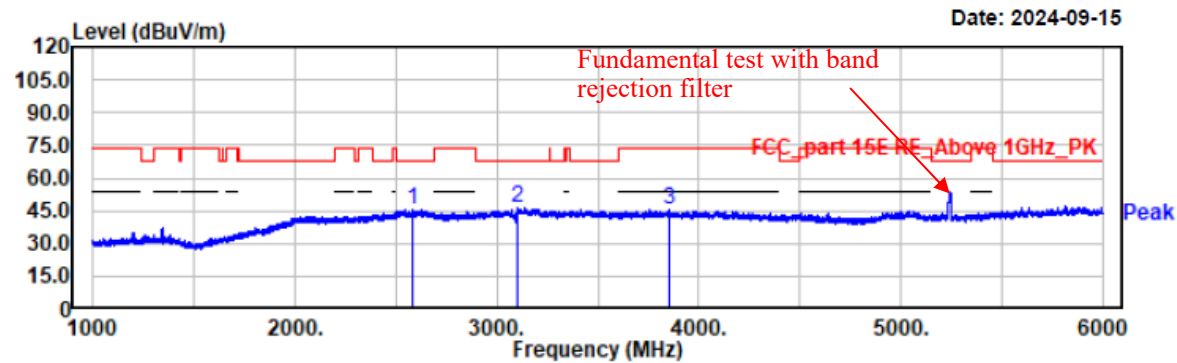

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2585.50	48.77	-3.35	45.42	68.20	22.78	vertical	Peak
3100.50	49.28	-3.04	46.24	68.20	21.96	vertical	Peak
3851.50	49.90	-4.43	45.47	74.00	28.53	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5190
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

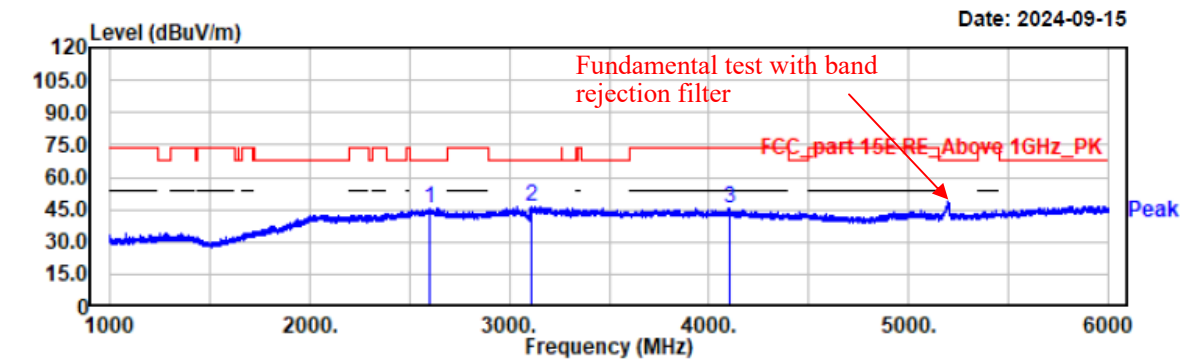

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2600.50	48.84	-3.30	45.54	68.20	22.66	horizontal	Peak
3111.00	49.27	-3.02	46.25	68.20	21.95	horizontal	Peak
4107.50	49.72	-4.33	45.39	74.00	28.61	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5190
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

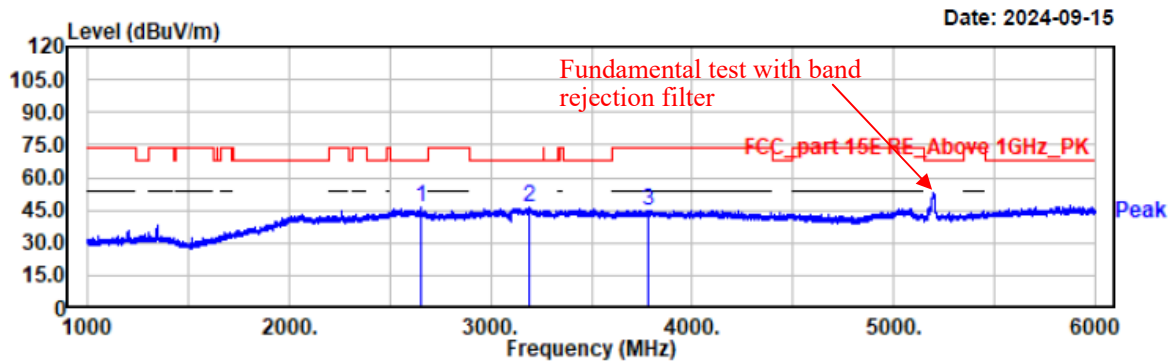

Freq MHz	Reading dBUV	Factor dB/m	Result dBUV/m	Limit dBUV/m	Margin dB	Polarity	Remark
2653.50	49.48	-3.46	46.02	68.20	22.18	vertical	Peak
3194.00	49.26	-2.94	46.32	68.20	21.88	vertical	Peak
3784.00	49.22	-4.13	45.09	74.00	28.91	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5230
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C /53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

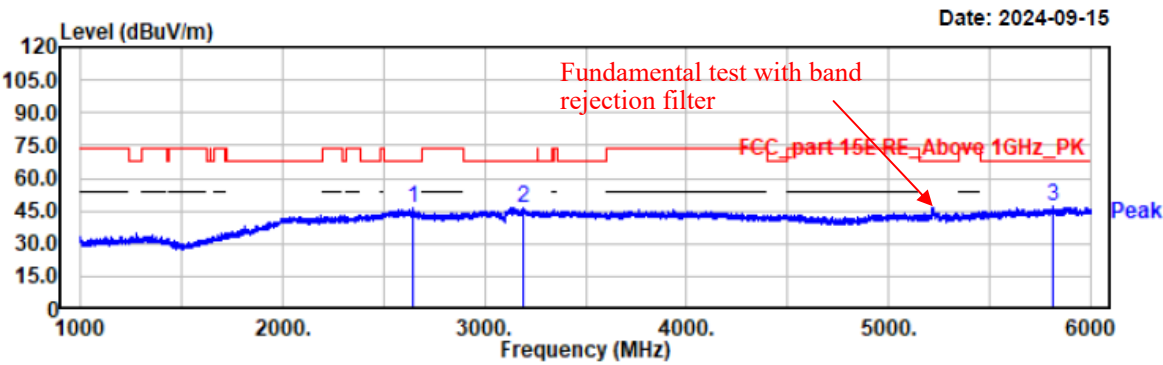

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2646.50	49.51	-3.36	46.15	68.20	22.05	horizontal	Peak
3189.00	49.19	-2.94	46.25	68.20	21.95	horizontal	Peak
5811.00	50.11	-2.73	47.38	68.20	20.82	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5230
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

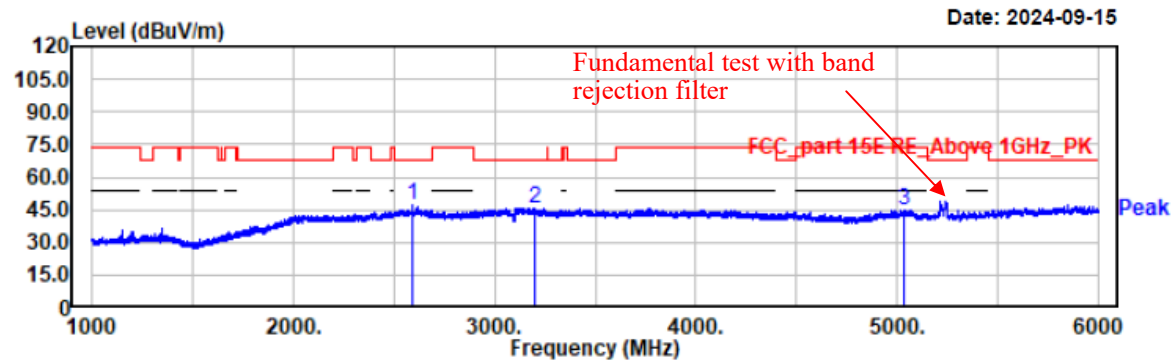

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2590.00	50.34	-3.33	47.01	68.20	21.19	vertical	Peak
3200.00	48.70	-2.94	45.76	68.20	22.44	vertical	Peak
5035.00	50.13	-5.40	44.73	74.00	29.27	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5210
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 23.4℃/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

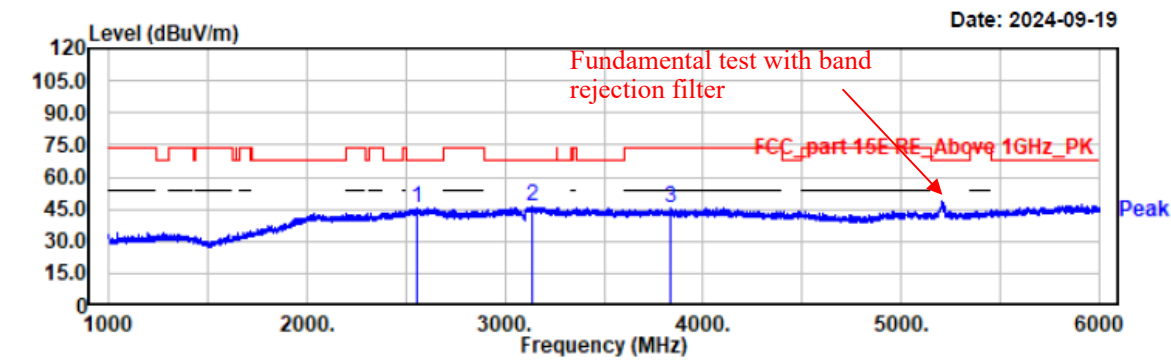

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2552.00	49.22	-3.46	45.76	68.20	22.44	horizontal	Peak
3139.50	49.06	-2.96	46.10	68.20	22.10	horizontal	Peak
3840.00	50.27	-4.38	45.89	74.00	28.11	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5210
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.4°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

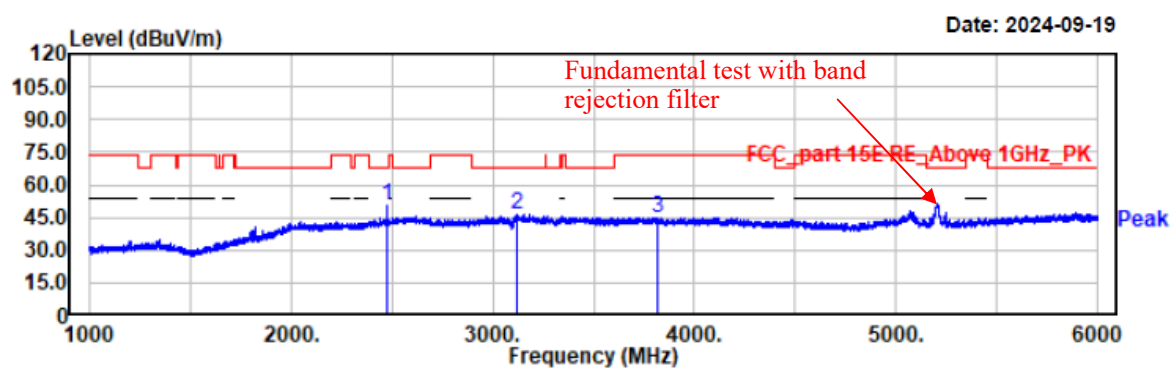

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2474.00	55.28	-4.64	50.64	68.20	17.56	vertical	Peak
3118.00	49.36	-3.00	46.36	68.20	21.84	vertical	Peak
3816.00	49.35	-4.25	45.10	74.00	28.90	vertical	Peak

B2

Project No.: 2407V20721E-RF

Test Mode: 11a-5260


EUT Model: NLS-NQuire1000

Test distance: 3m

Temp/Humi/ATM: 24.5℃/53%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

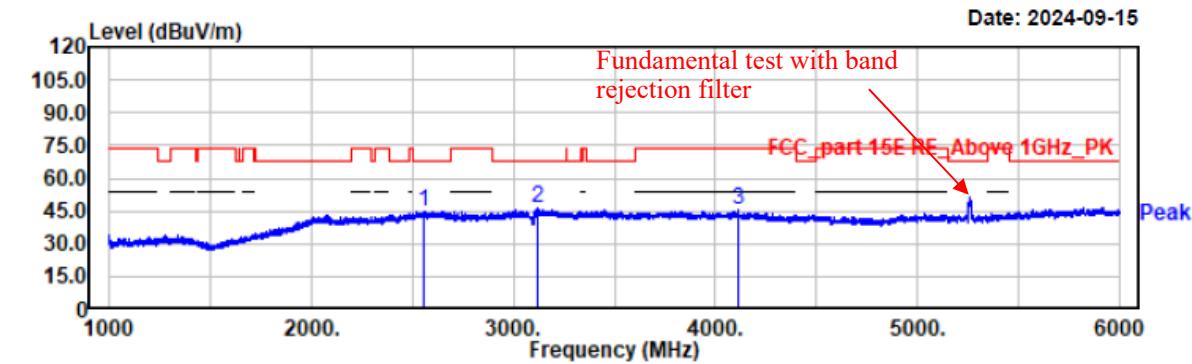

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2555.50	48.55	-3.45	45.10	68.20	23.10	horizontal	Peak
3123.00	48.94	-2.99	45.95	68.20	22.25	horizontal	Peak
4109.00	49.50	-4.35	45.15	74.00	28.85	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5260
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

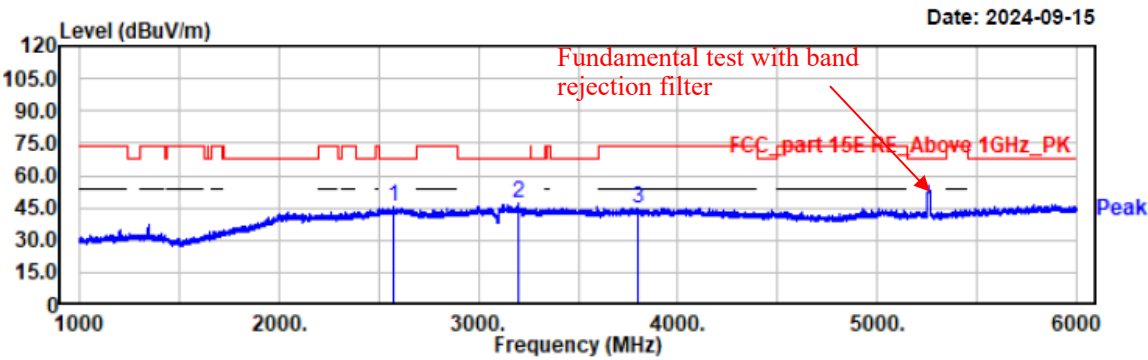

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2575.50	48.63	-3.38	45.25	68.20	22.95	vertical	Peak
3201.50	49.95	-2.96	46.99	68.20	21.21	vertical	Peak
3797.50	49.24	-4.15	45.09	74.00	28.91	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5280
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

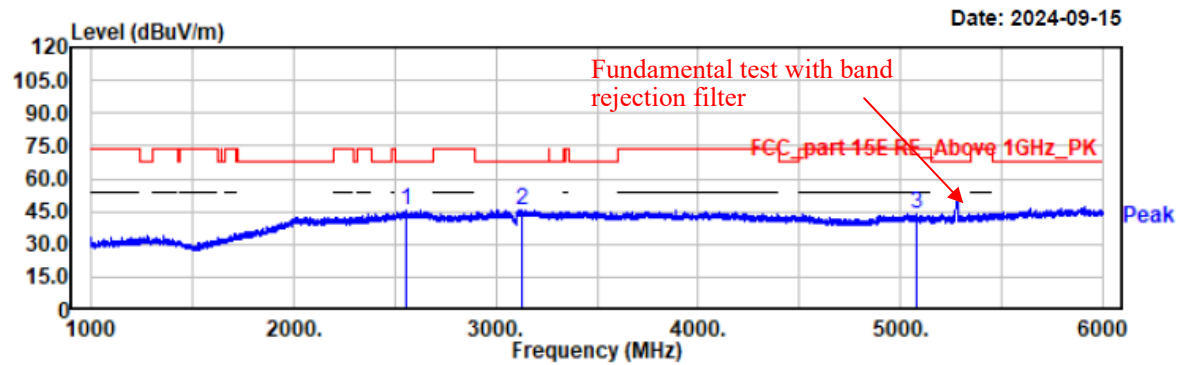

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2553.00	49.18	-3.46	45.72	68.20	22.48	horizontal	Peak
3128.00	48.71	-2.98	45.73	68.20	22.47	horizontal	Peak
5079.00	49.70	-5.45	44.25	74.00	29.75	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5280
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

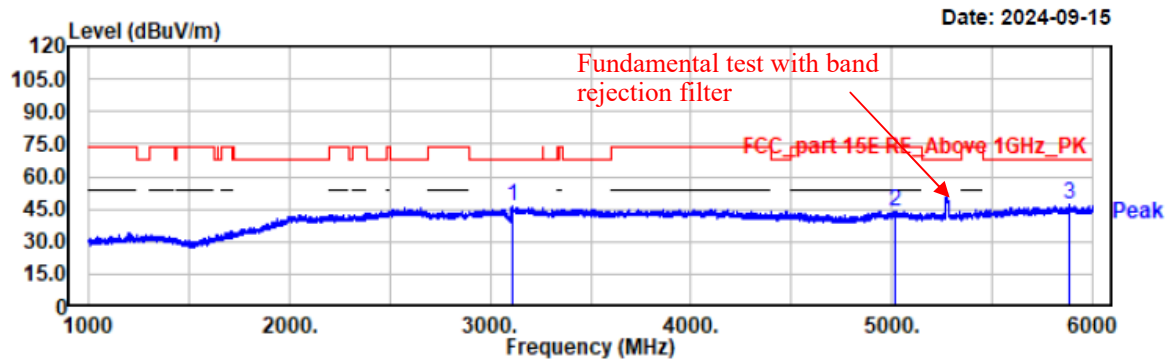

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
3109.50	49.13	-3.02	46.11	68.20	22.09	vertical	Peak
5021.00	49.49	-5.42	44.07	74.00	29.93	vertical	Peak
5885.00	50.15	-2.72	47.43	68.20	20.77	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5320
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C /53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

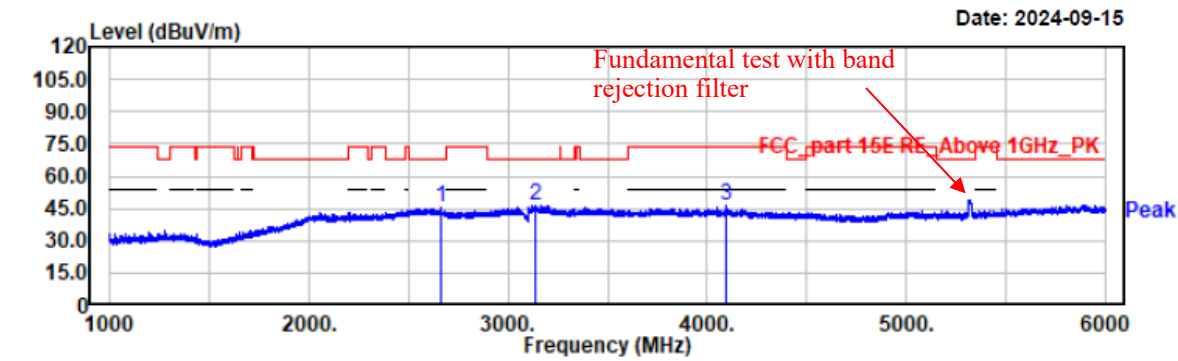

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2660.00	49.13	-3.63	45.50	68.20	22.70	horizontal	Peak
3137.50	49.31	-2.96	46.35	68.20	21.85	horizontal	Peak
4092.50	50.35	-4.24	46.11	74.00	27.89	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5320
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

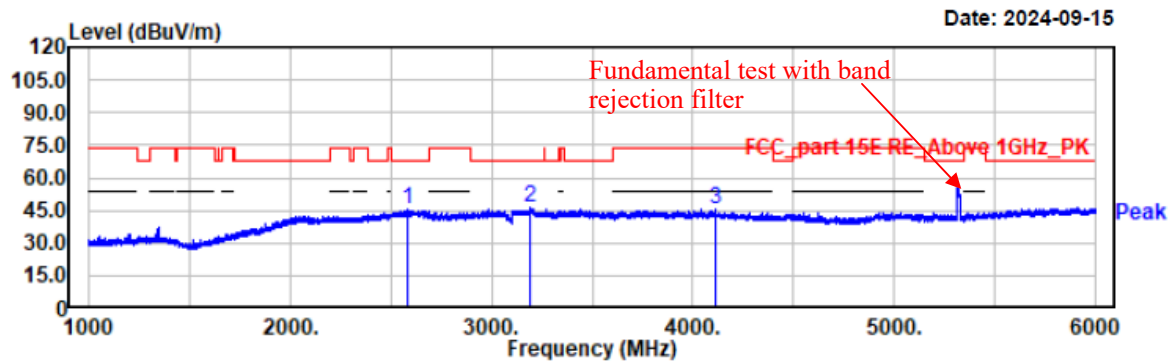

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2585.50	49.28	-3.35	45.93	68.20	22.27	vertical	Peak
3195.50	48.90	-2.94	45.96	68.20	22.24	vertical	Peak
4114.50	49.69	-4.41	45.28	74.00	28.72	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5260
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

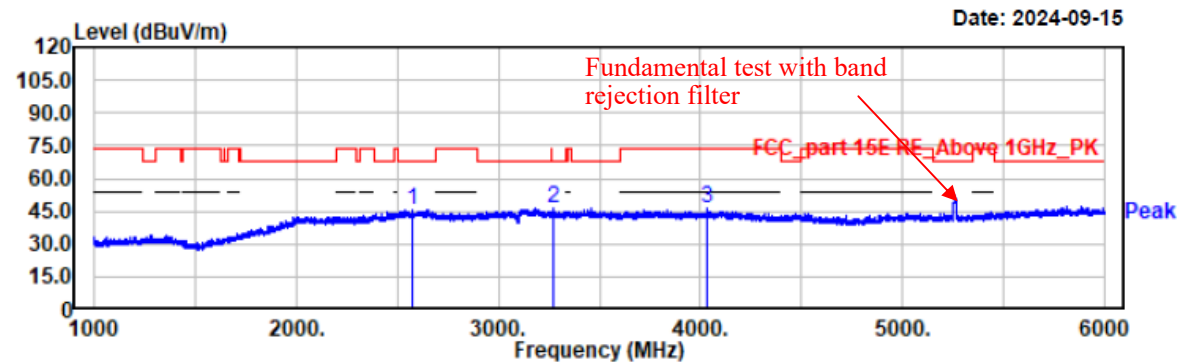

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2577.50	48.79	-3.38	45.41	68.20	22.79	horizontal	Peak
3271.00	50.09	-3.85	46.24	68.20	21.96	horizontal	Peak
4034.50	50.68	-4.29	46.39	74.00	27.61	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5260
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

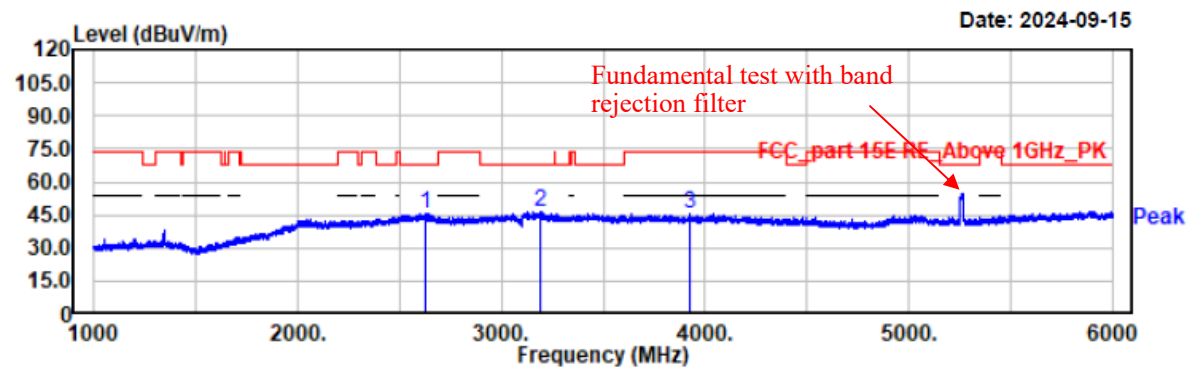

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2625.50	49.08	-3.33	45.75	68.20	22.45	vertical	Peak
3193.50	49.65	-2.94	46.71	68.20	21.49	vertical	Peak
3928.50	49.77	-4.42	45.35	74.00	28.65	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5280
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

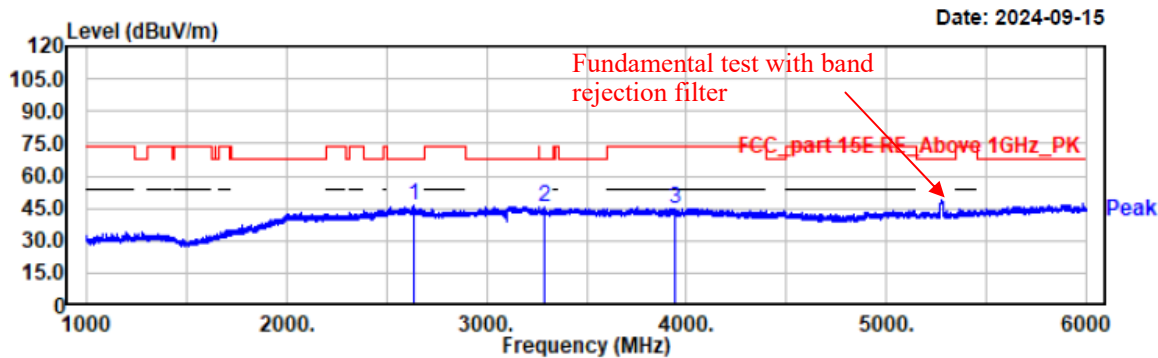

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2638.50	49.35	-3.36	45.99	68.20	22.21	horizontal	Peak
3287.50	49.66	-3.96	45.70	68.20	22.50	horizontal	Peak
3940.00	49.48	-4.38	45.10	74.00	28.90	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5280
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

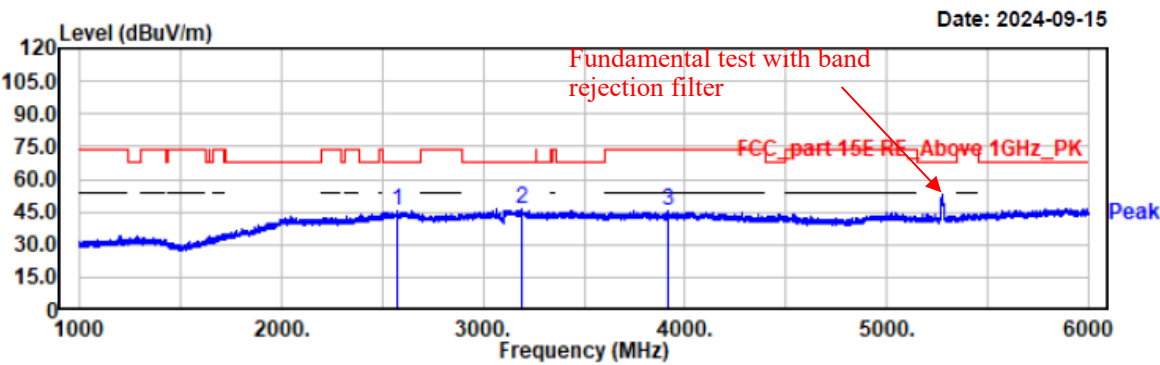

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2577.00	48.58	-3.37	45.21	68.20	22.99	vertical	Peak
3193.50	48.91	-2.94	45.97	68.20	22.23	vertical	Peak
3915.50	49.73	-4.46	45.27	74.00	28.73	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5320
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

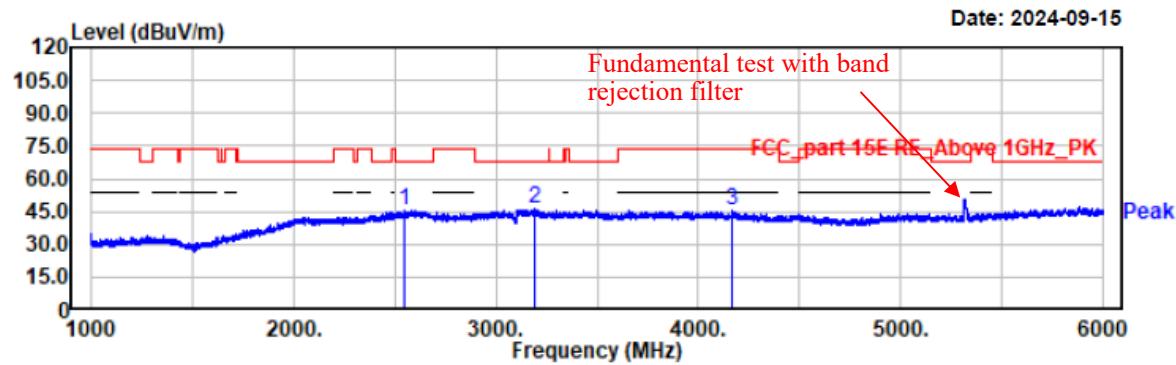

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2544.00	48.96	-3.55	45.41	68.20	22.79	horizontal	Peak
3188.00	49.69	-2.94	46.75	68.20	21.45	horizontal	Peak
4169.00	50.06	-4.87	45.19	74.00	28.81	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5320
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C /53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

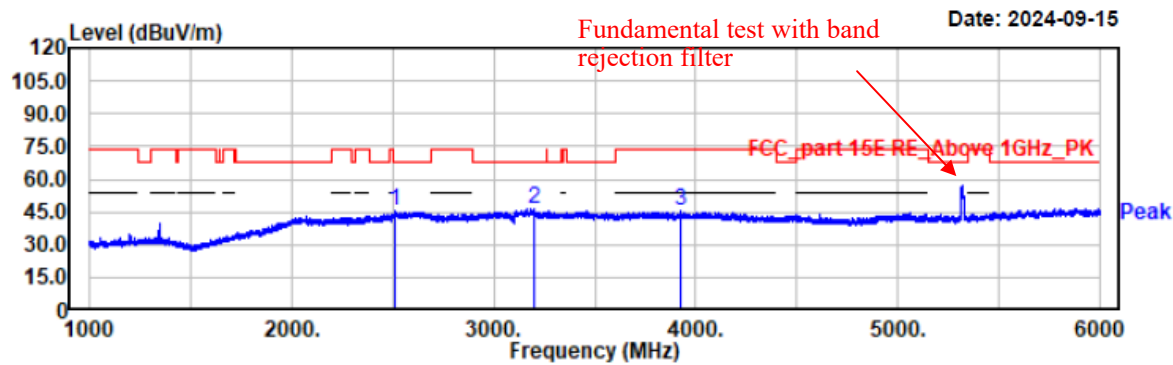

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2511.00	49.20	-3.99	45.21	68.20	22.99	vertical	Peak
3198.50	49.68	-2.94	46.74	68.20	21.46	vertical	Peak
3924.50	49.73	-4.42	45.31	74.00	28.69	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5270
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

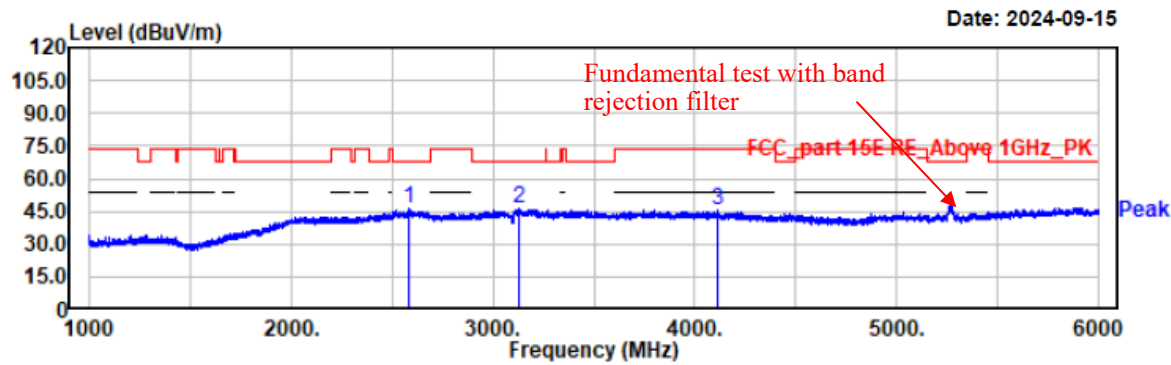

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2581.00	49.35	-3.37	45.98	68.20	22.22	horizontal	Peak
3130.50	49.47	-2.98	46.49	68.20	21.71	horizontal	Peak
4112.00	49.59	-4.38	45.21	74.00	28.79	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5270
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

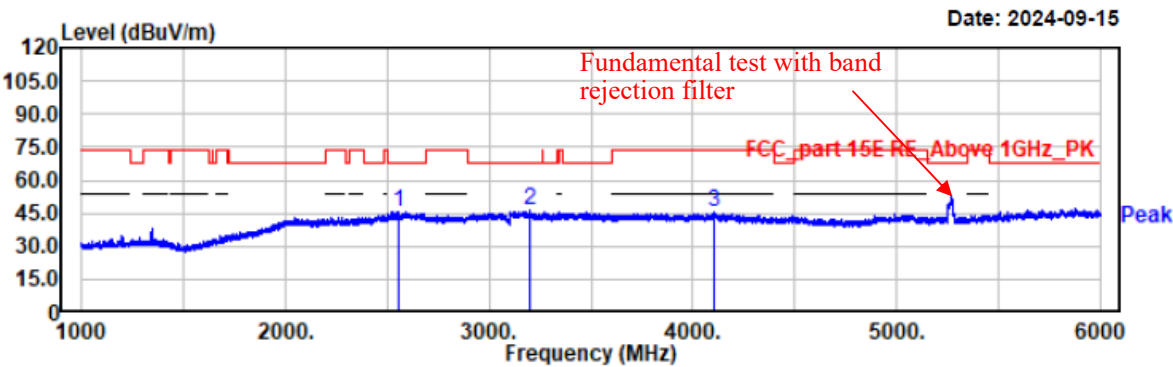

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2554.50	49.21	-3.45	45.76	68.20	22.44	vertical	Peak
3199.50	49.27	-2.94	46.33	68.20	21.87	vertical	Peak
4102.00	49.51	-4.27	45.24	74.00	28.76	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5310
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

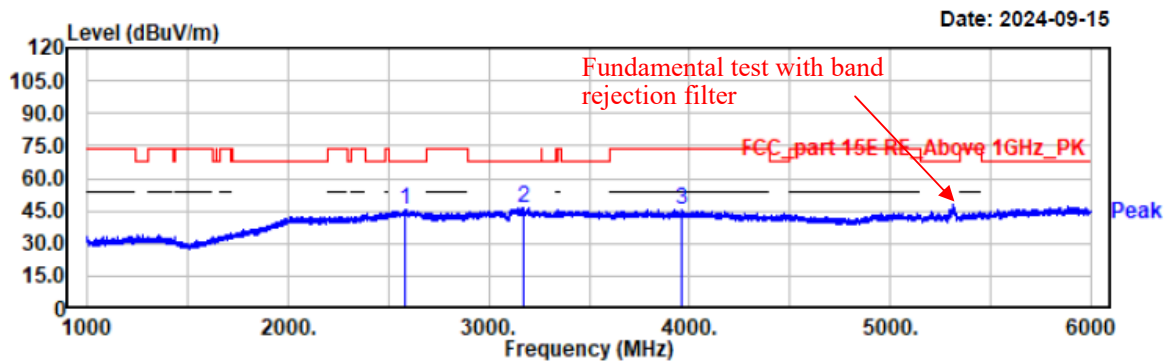

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2585.50	48.90	-3.35	45.55	68.20	22.65	horizontal	Peak
3173.50	49.20	-2.94	46.26	68.20	21.94	horizontal	Peak
3960.50	49.89	-4.36	45.53	74.00	28.47	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5310
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

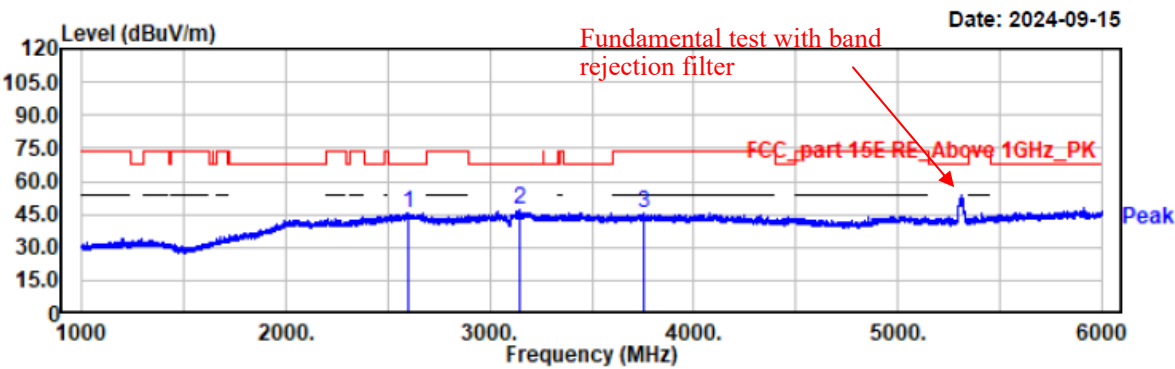

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2603.50	48.80	-3.31	45.49	68.20	22.71	vertical	Peak
3146.00	50.01	-2.95	47.06	68.20	21.14	vertical	Peak
3757.00	50.01	-4.10	45.91	74.00	28.09	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5290
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 23.4°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

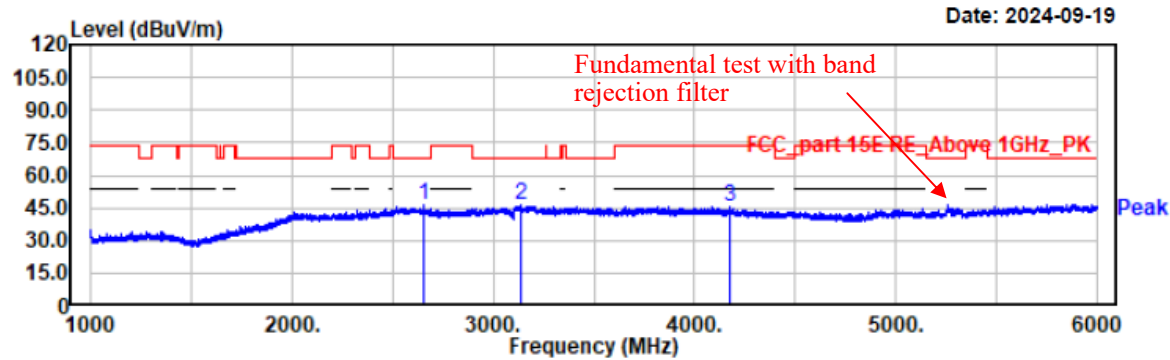

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2652.00	49.81	-3.42	46.39	68.20	21.81	horizontal	Peak
3140.50	48.90	-2.96	45.94	68.20	22.26	horizontal	Peak
4172.50	50.05	-4.88	45.17	74.00	28.83	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5290
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.4°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

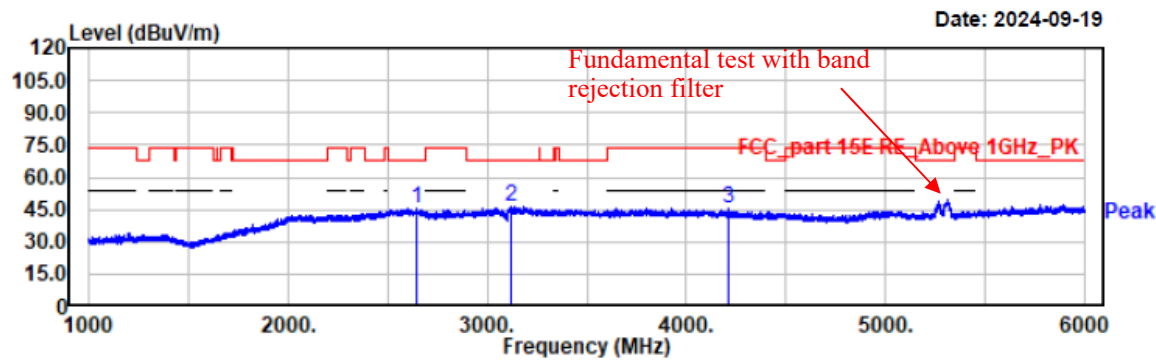


Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2642.00	48.70	-3.36	45.34	68.20	22.86	vertical	Peak
3116.50	49.13	-3.01	46.12	68.20	22.08	vertical	Peak
4211.00	50.84	-5.07	45.77	74.00	28.23	vertical	Peak

B3

Project No.: 2407V20721E-RF
Test Mode: 11a-5500
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

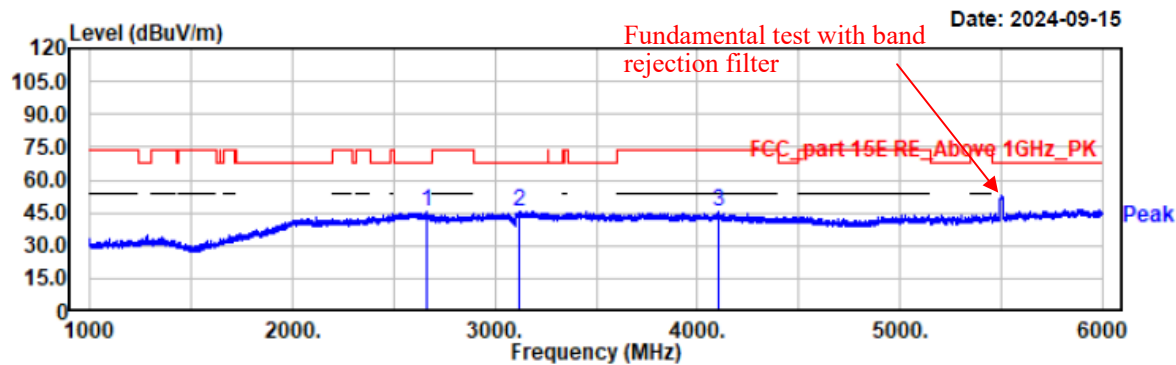

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2660.50	48.97	-3.64	45.33	68.20	22.87	horizontal	Peak
3118.50	48.91	-3.00	45.91	68.20	22.29	horizontal	Peak
4101.00	49.88	-4.26	45.62	74.00	28.38	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5500
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

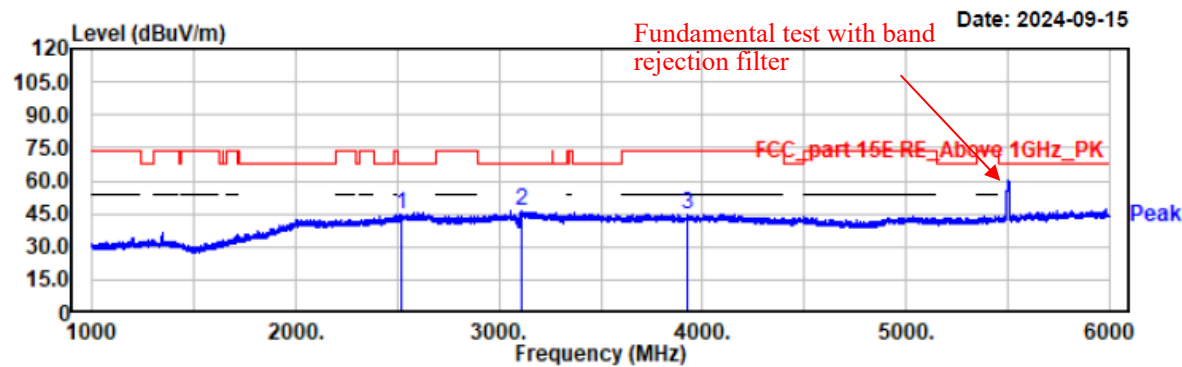

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2522.00	48.79	-3.84	44.95	68.20	23.25	vertical	Peak
3111.50	49.57	-3.02	46.55	68.20	21.65	vertical	Peak
3924.50	49.27	-4.42	44.85	74.00	29.15	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5580
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

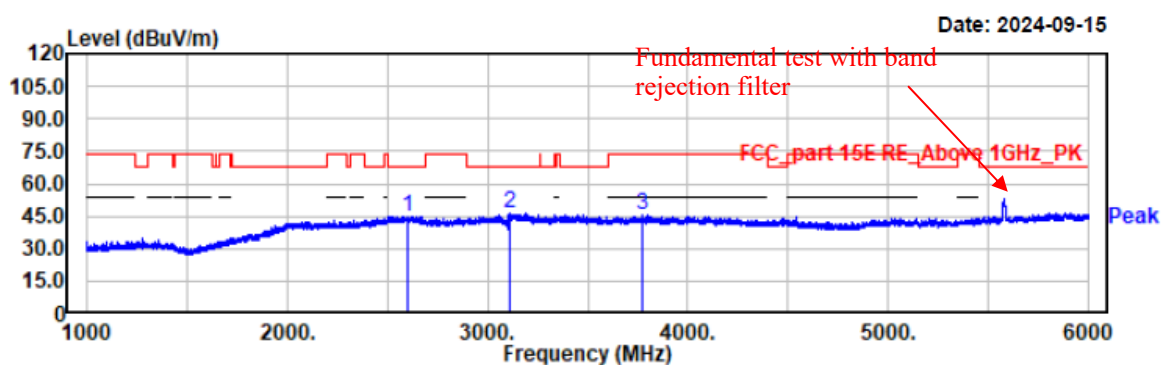

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2600.50	48.29	-3.30	44.99	68.20	23.21	horizontal	Peak
3107.50	49.15	-3.03	46.12	68.20	22.08	horizontal	Peak
3774.50	49.90	-4.12	45.78	74.00	28.22	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5580
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

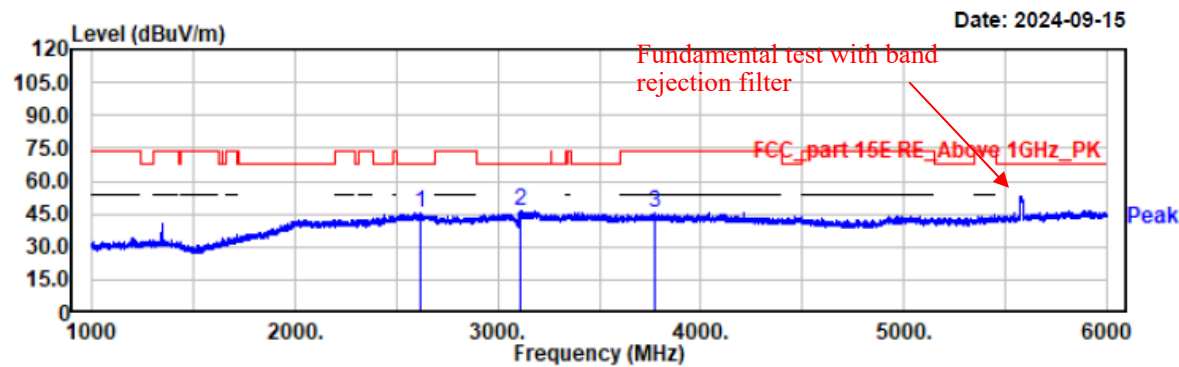

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2615.00	49.14	-3.32	45.82	68.20	22.38	vertical	Peak
3111.00	49.03	-3.02	46.01	68.20	22.19	vertical	Peak
3772.50	49.35	-4.11	45.24	74.00	28.76	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5700
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

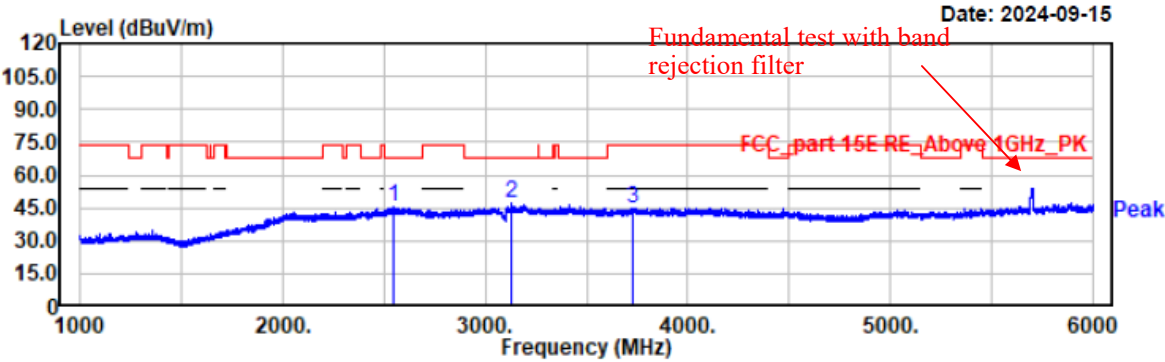

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2545.00	48.77	-3.54	45.23	68.20	22.97	horizontal	Peak
3131.00	50.48	-2.98	47.50	68.20	20.70	horizontal	Peak
3730.50	49.09	-4.14	44.95	74.00	29.05	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5700
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

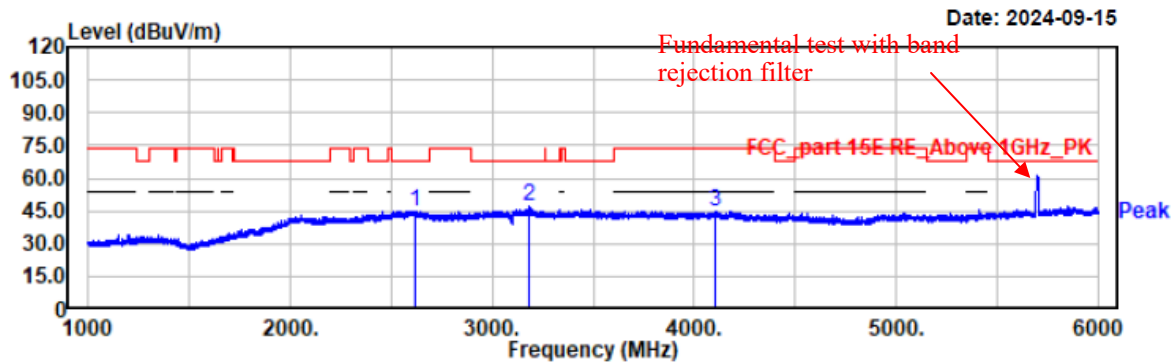

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2617.00	48.24	-3.32	44.92	68.20	23.28	vertical	Peak
3178.50	49.91	-2.94	46.97	68.20	21.23	vertical	Peak
4107.00	49.19	-4.33	44.86	74.00	29.14	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5500
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

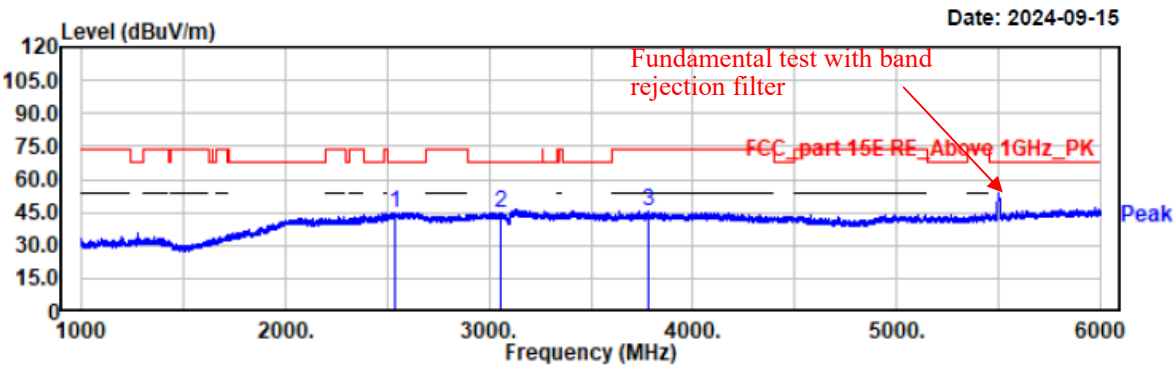

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2538.00	48.62	-3.63	44.99	68.20	23.21	horizontal	Peak
3054.50	48.64	-3.54	45.10	68.20	23.10	horizontal	Peak
3785.00	49.42	-4.13	45.29	74.00	28.71	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5500
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

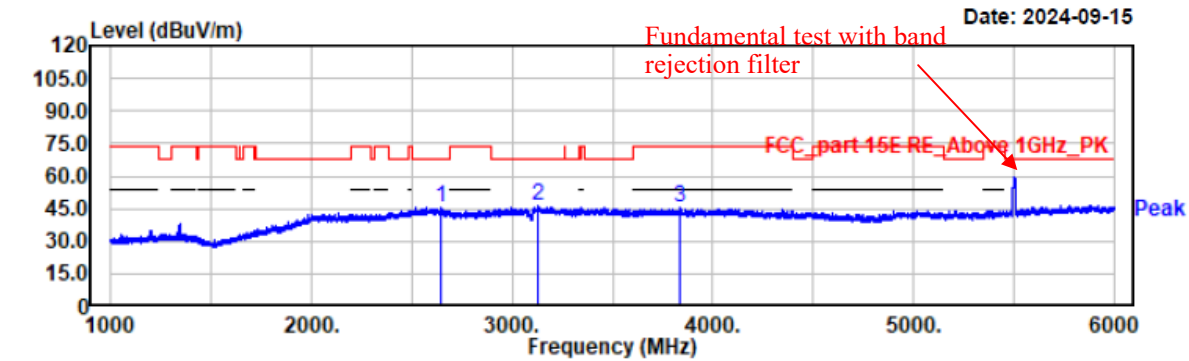

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2642.50	48.65	-3.36	45.29	68.20	22.91	vertical	Peak
3125.00	48.97	-2.98	45.99	68.20	22.21	vertical	Peak
3832.00	49.46	-4.33	45.13	74.00	28.87	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5580
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

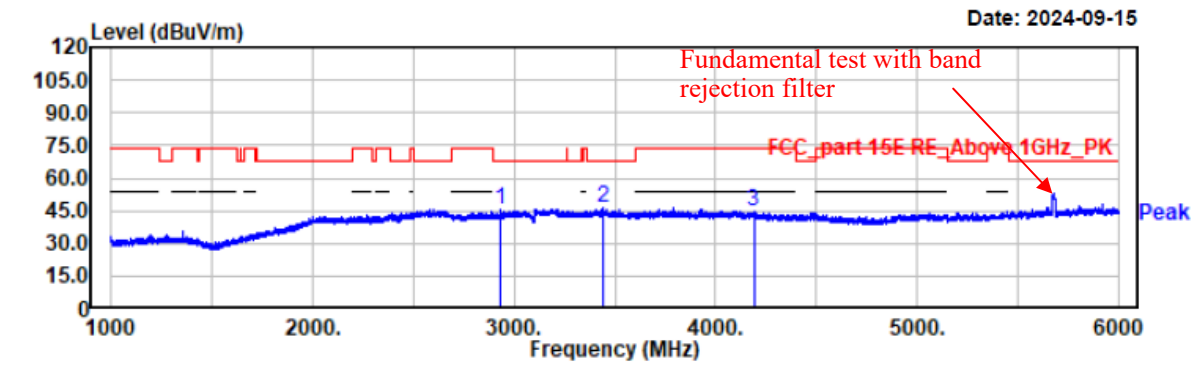

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2933.50	49.77	-4.27	45.50	68.20	22.70	horizontal	Peak
3445.00	49.94	-3.64	46.30	68.20	21.90	horizontal	Peak
4189.50	49.82	-4.93	44.89	74.00	29.11	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5580
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

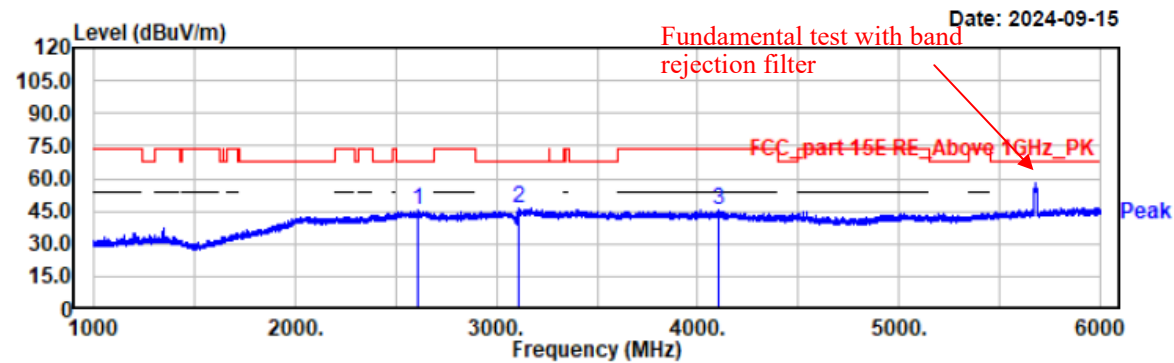

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2610.50	48.97	-3.31	45.66	68.20	22.54	vertical	Peak
3109.00	49.66	-3.02	46.64	68.20	21.56	vertical	Peak
4103.50	49.83	-4.29	45.54	74.00	28.46	vertical	Peak


Project No.: 2407V20721E-RF
Test Mode: 11n20-5700
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

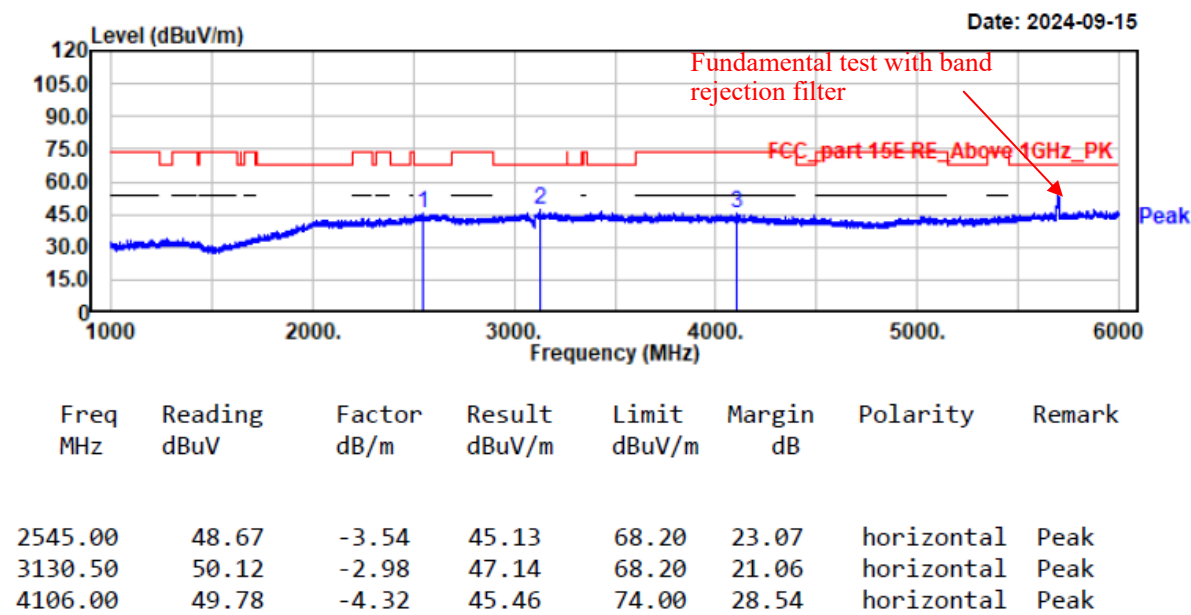

Project No.: 2407V20721E-RF
Test Mode: 11n20-5700
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

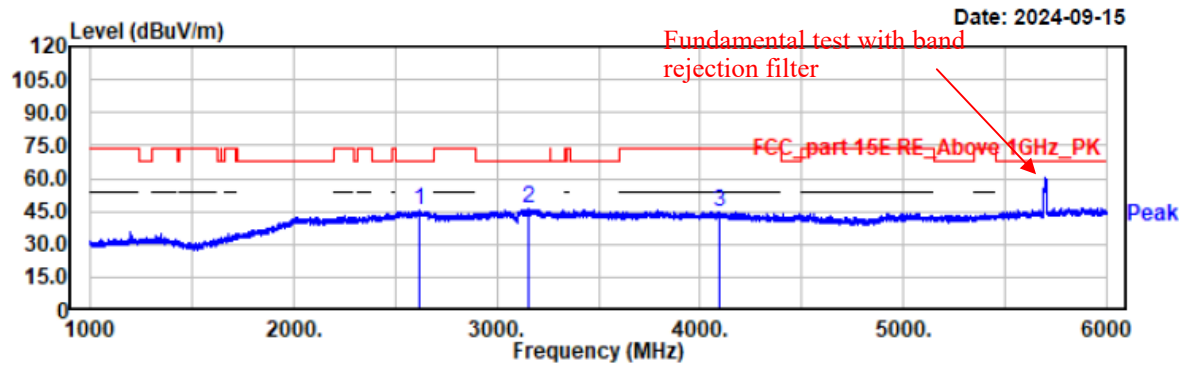

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2615.50	48.60	-3.32	45.28	68.20	22.92	vertical	Peak
3153.00	49.26	-2.94	46.32	68.20	21.88	vertical	Peak
4095.00	49.10	-4.24	44.86	74.00	29.14	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5510
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C /53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

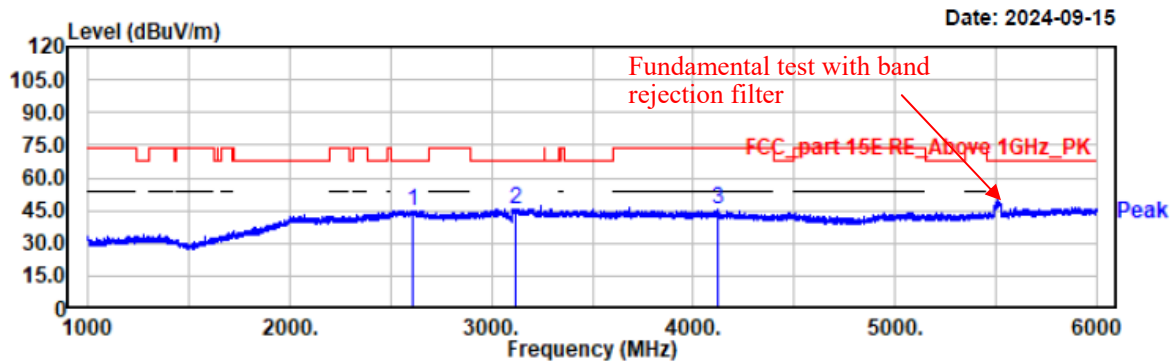

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2612.50	48.39	-3.31	45.08	68.20	23.12	horizontal	Peak
3117.50	48.81	-3.01	45.80	68.20	22.40	horizontal	Peak
4122.50	49.80	-4.50	45.30	74.00	28.70	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5510
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

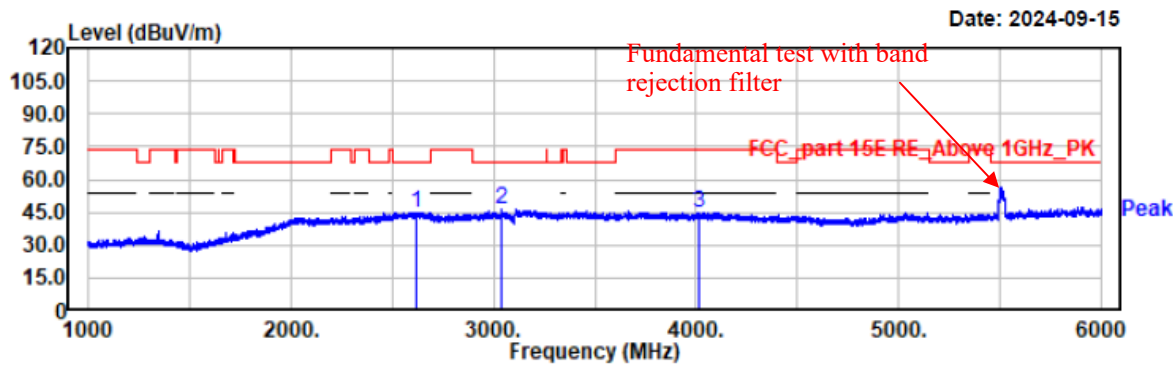

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2619.00	48.36	-3.33	45.03	68.20	23.17	vertical	Peak
3042.50	49.67	-3.64	46.03	68.20	22.17	vertical	Peak
4017.50	49.46	-4.39	45.07	74.00	28.93	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5550
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

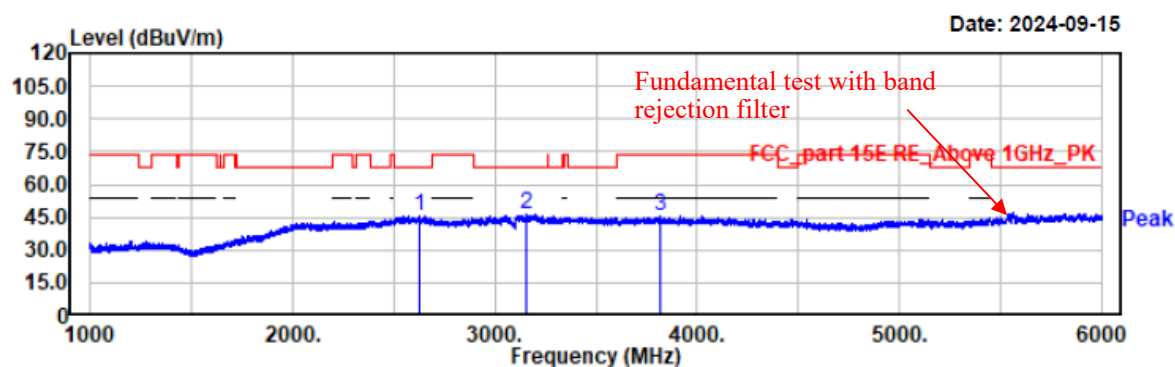

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2628.50	48.58	-3.34	45.24	68.20	22.96	horizontal	Peak
3154.00	49.01	-2.94	46.07	68.20	22.13	horizontal	Peak
3819.50	49.97	-4.27	45.70	74.00	28.30	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5550
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

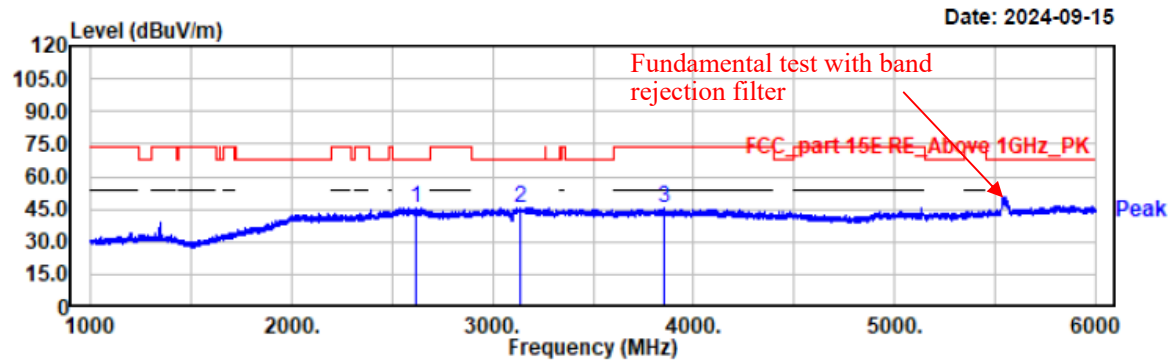

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2621.50	48.79	-3.33	45.46	68.20	22.74	vertical	Peak
3140.00	48.56	-2.96	45.60	68.20	22.60	vertical	Peak
3851.50	50.21	-4.43	45.78	74.00	28.22	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5670
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

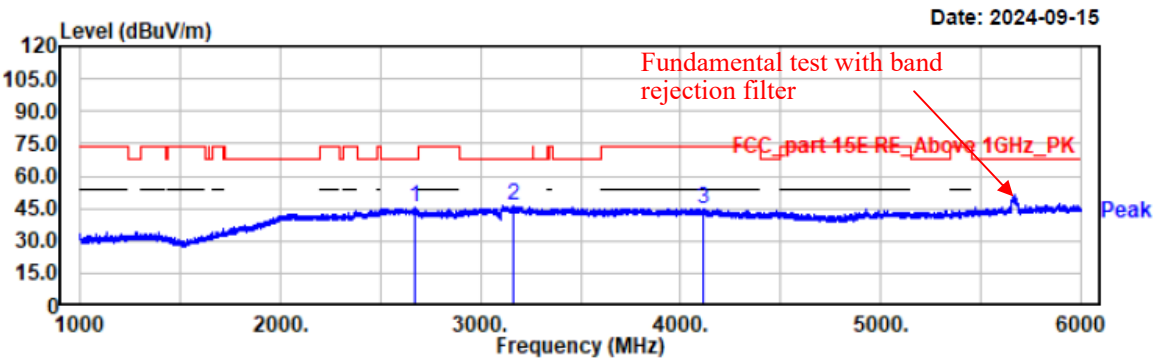

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2672.50	49.05	-3.94	45.11	68.20	23.09	horizontal	Peak
3166.50	49.39	-2.94	46.45	68.20	21.75	horizontal	Peak
4116.00	49.52	-4.43	45.09	74.00	28.91	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5670
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

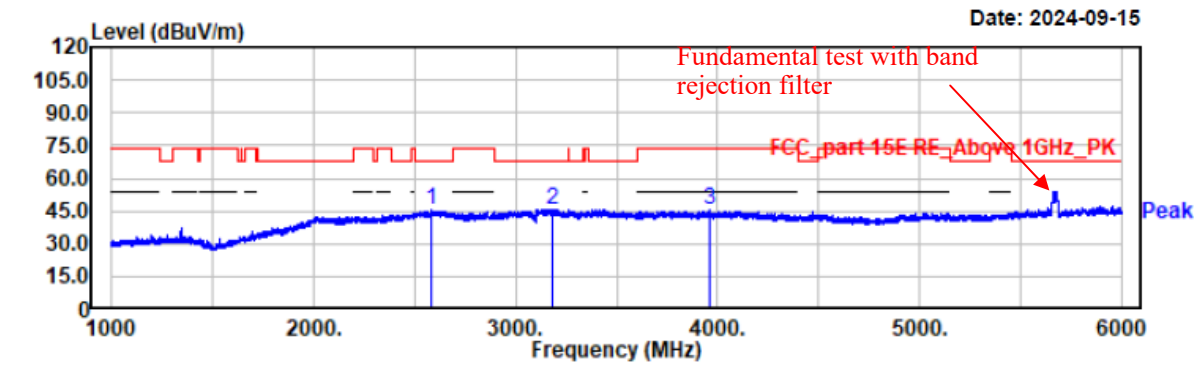

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2579.50	48.70	-3.37	45.33	68.20	22.87	vertical	Peak
3184.50	48.80	-2.94	45.86	68.20	22.34	vertical	Peak
3961.50	49.55	-4.37	45.18	74.00	28.82	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5530
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

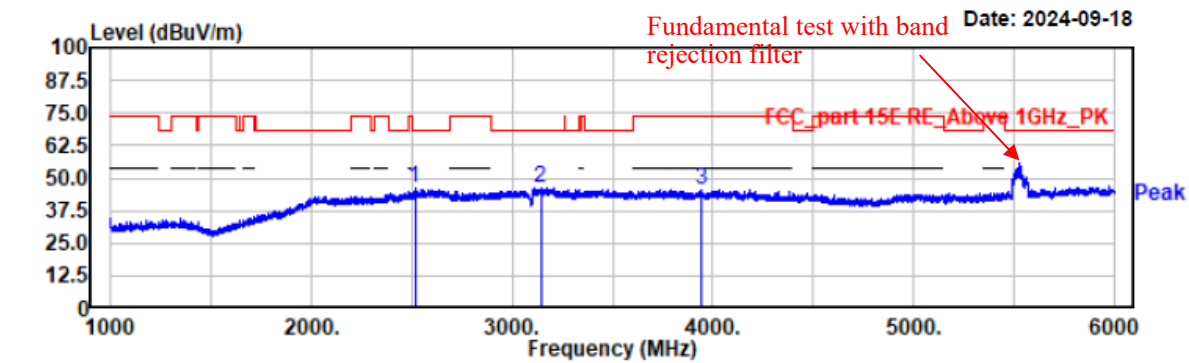

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2515.50	50.02	-3.93	46.09	68.20	22.11	horizontal	Peak
3142.00	49.13	-2.96	46.17	68.20	22.03	horizontal	Peak
3944.00	49.90	-4.36	45.54	74.00	28.46	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5530
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

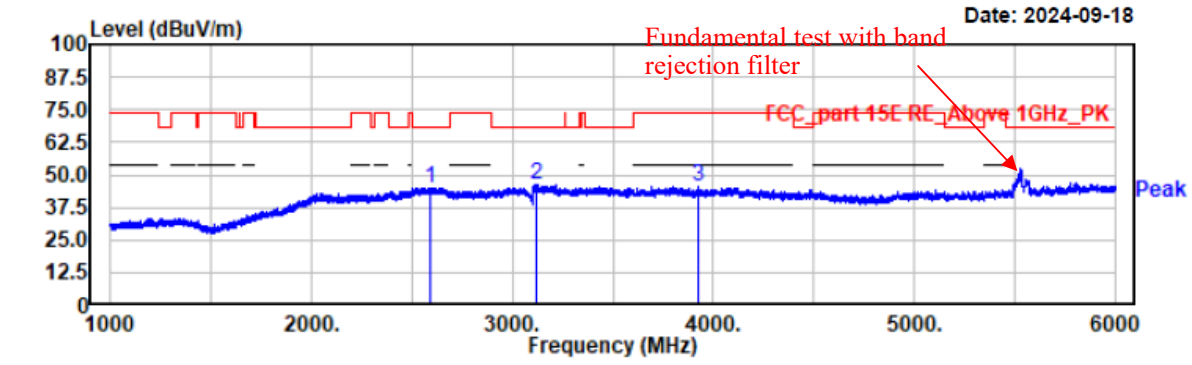

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2593.50	48.30	-3.32	44.98	68.20	23.22	vertical	Peak
3121.00	49.23	-3.00	46.23	68.20	21.97	vertical	Peak
3926.00	50.02	-4.42	45.60	74.00	28.40	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5610
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

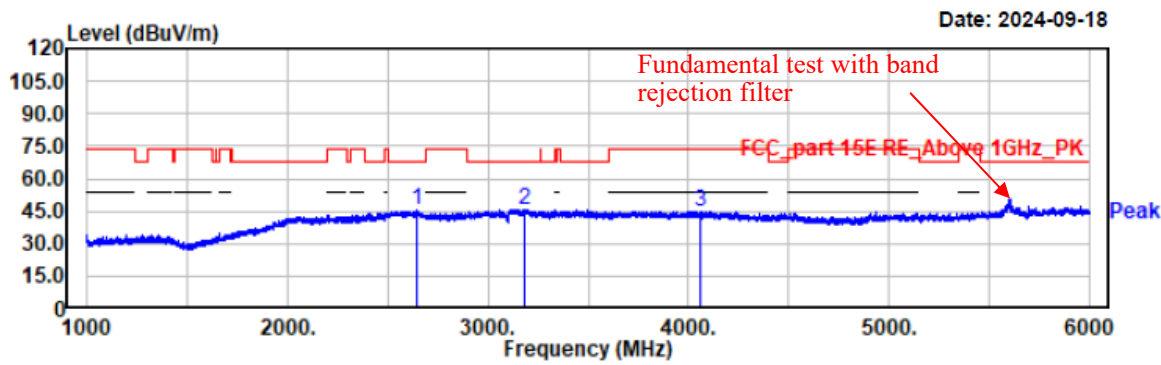

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2643.00	48.55	-3.37	45.18	68.20	23.02	horizontal	Peak
3182.00	48.86	-2.94	45.92	68.20	22.28	horizontal	Peak
4056.00	49.15	-4.21	44.94	74.00	29.06	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5610
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

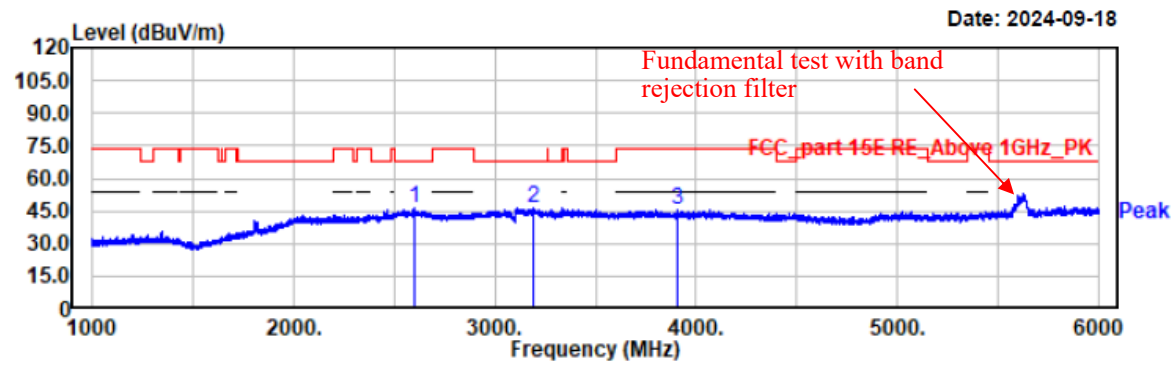

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2601.00	49.46	-3.30	46.16	68.20	22.04	vertical	Peak
3193.50	49.19	-2.94	46.25	68.20	21.95	vertical	Peak
3911.50	49.82	-4.47	45.35	74.00	28.65	vertical	Peak

B4

Project No.: 2407V20721E-RF

Test Mode: 11a-5745


EUT Model: NLS-NQuire1000

Test distance: 3m

Temp/Humi/ATM: 24.5℃/53%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

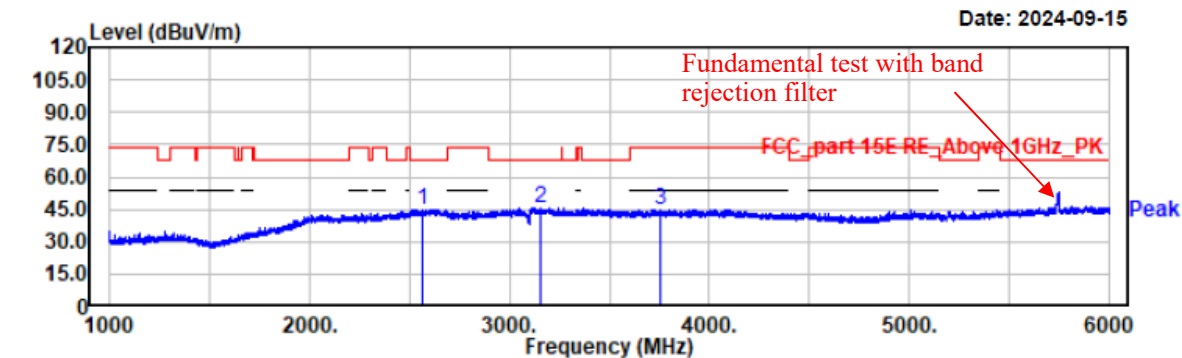

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2566.50	48.39	-3.41	44.98	68.20	23.22	horizontal	Peak
3153.00	48.52	-2.94	45.58	68.20	22.62	horizontal	Peak
3754.00	49.12	-4.09	45.03	74.00	28.97	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5745
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

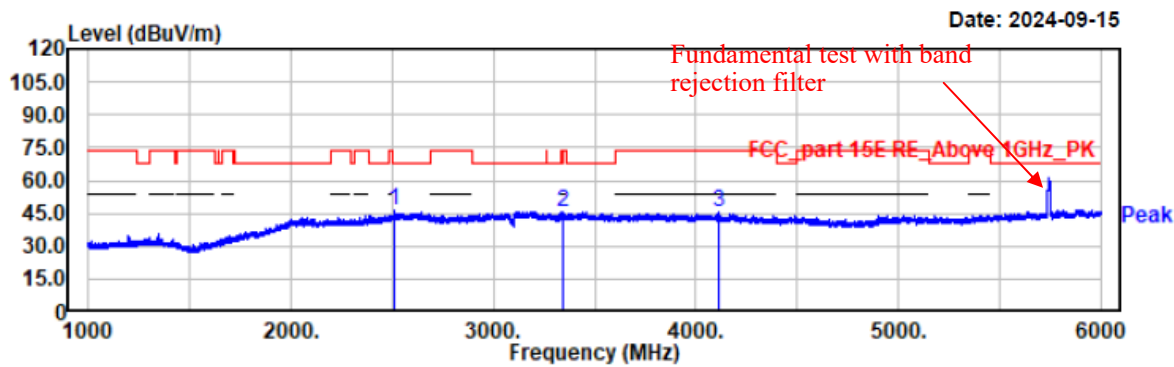

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2513.50	50.04	-3.95	46.09	68.20	22.11	vertical	Peak
3345.50	49.68	-3.80	45.88	68.20	22.32	vertical	Peak
4111.00	49.61	-4.37	45.24	74.00	28.76	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5785


EUT Model: NLS-NQuire1000

Test distance: 3m

Temp/Humi/ATM: 24.5℃/53%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

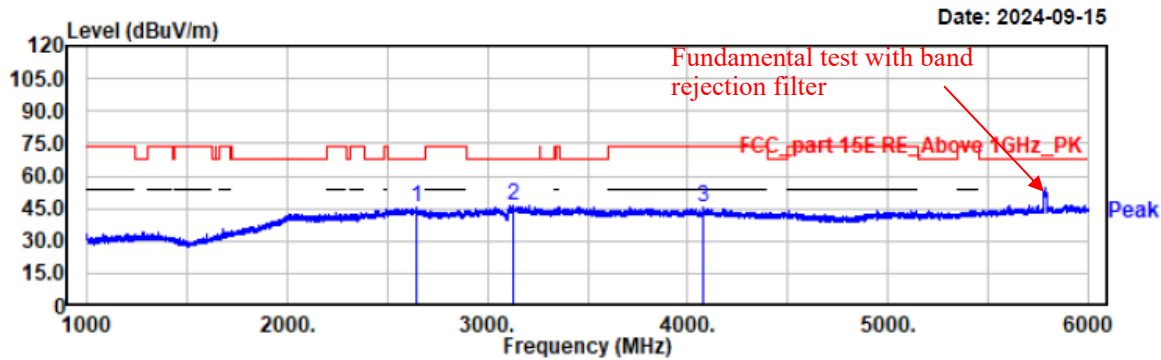

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2644.50	48.51	-3.36	45.15	68.20	23.05	horizontal	Peak
3124.50	49.24	-2.99	46.25	68.20	21.95	horizontal	Peak
4081.50	49.76	-4.24	45.52	74.00	28.48	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5785
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

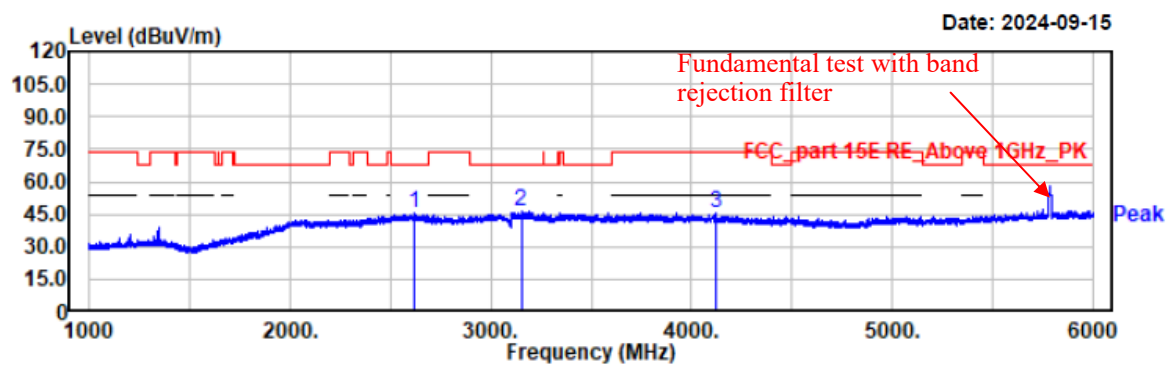

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2621.50	49.16	-3.33	45.83	68.20	22.37	vertical	Peak
3151.00	49.26	-2.94	46.32	68.20	21.88	vertical	Peak
4119.00	49.65	-4.47	45.18	74.00	28.82	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5825
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5°C /53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

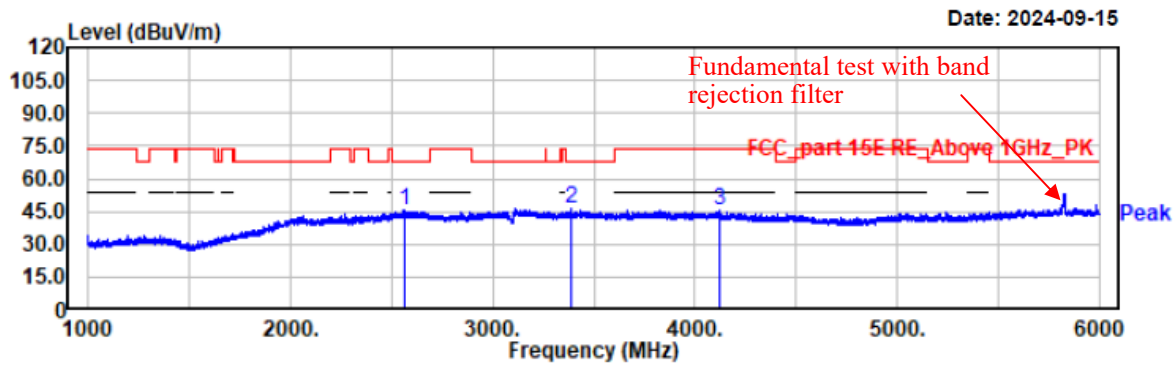

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2563.00	48.86	-3.43	45.43	68.20	22.77	horizontal	Peak
3388.00	49.90	-3.65	46.25	68.20	21.95	horizontal	Peak
4121.50	49.73	-4.49	45.24	74.00	28.76	horizontal	Peak

Project No.: 2407V20721E-RF
 Test Mode: 11a-5825
 EUT Model: NLS-NQuire1000
 Test distance: 3m


Temp/Humi/ATM: 24.5°C/53%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC120V/60Hz

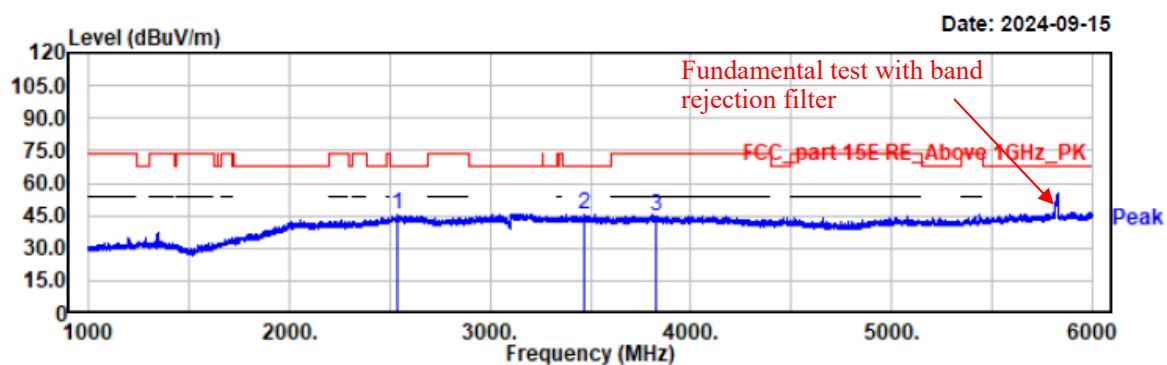

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2537.00	48.78	-3.64	45.14	68.20	23.06	vertical	Peak
3470.50	49.39	-3.84	45.55	68.20	22.65	vertical	Peak
3829.00	49.07	-4.31	44.76	74.00	29.24	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5745
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

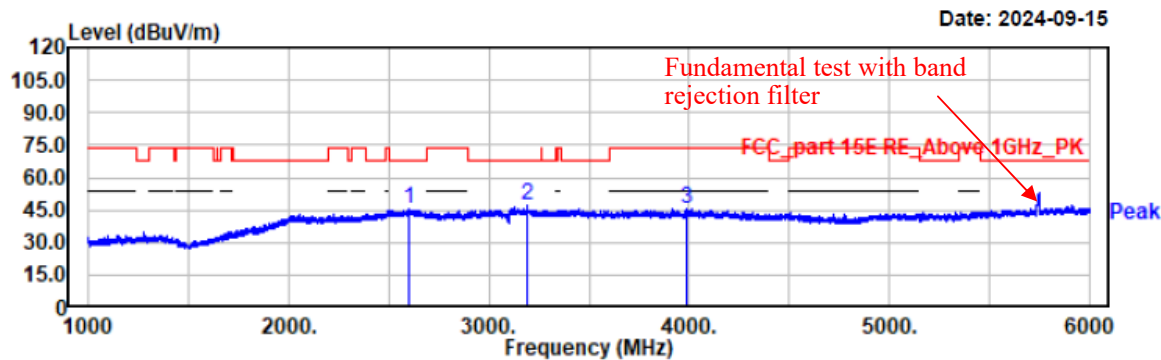

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2598.50	48.79	-3.31	45.48	68.20	22.72	horizontal	Peak
3193.00	49.70	-2.94	46.76	68.20	21.44	horizontal	Peak
3987.00	50.22	-4.43	45.79	74.00	28.21	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5745
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

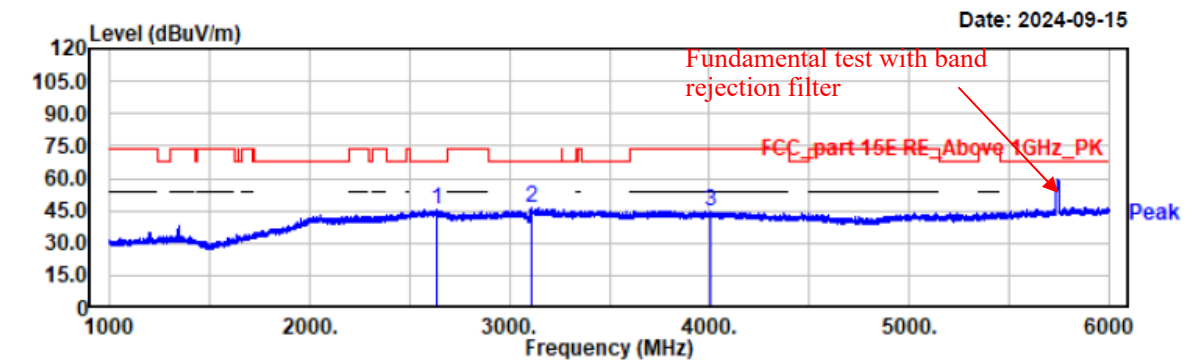

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2639.50	48.83	-3.36	45.47	68.20	22.73	vertical	Peak
3110.50	49.53	-3.02	46.51	68.20	21.69	vertical	Peak
4008.00	49.47	-4.43	45.04	74.00	28.96	vertical	Peak


Project No.: 2407V20721E-RF
Test Mode: 11n20-5785
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

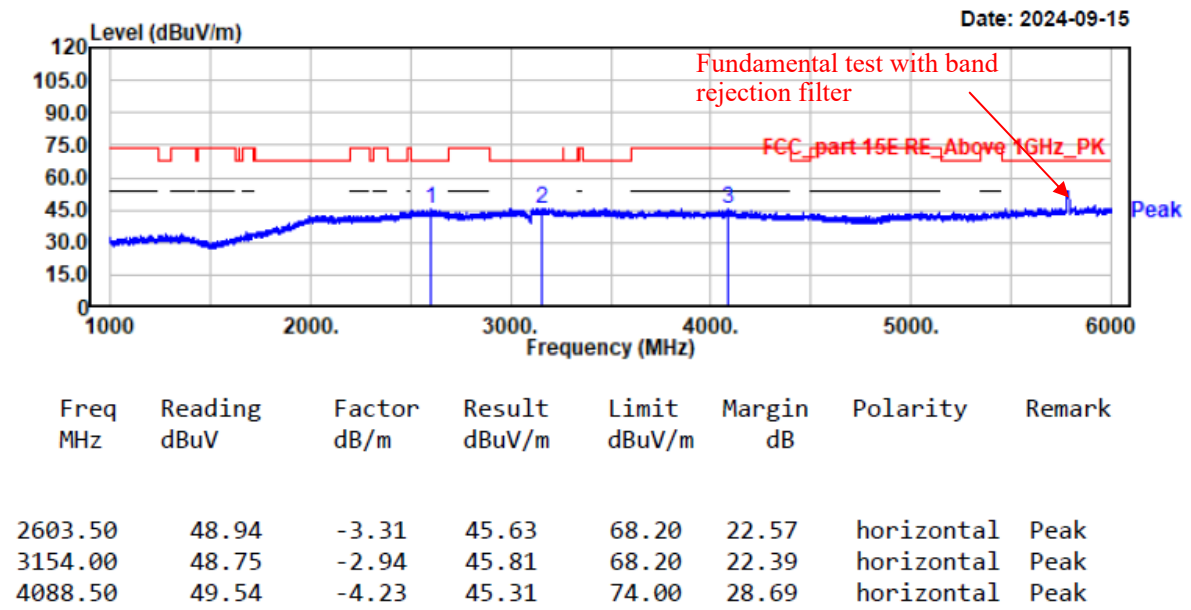

Project No.: 2407V20721E-RF
Test Mode: 11n20-5785
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

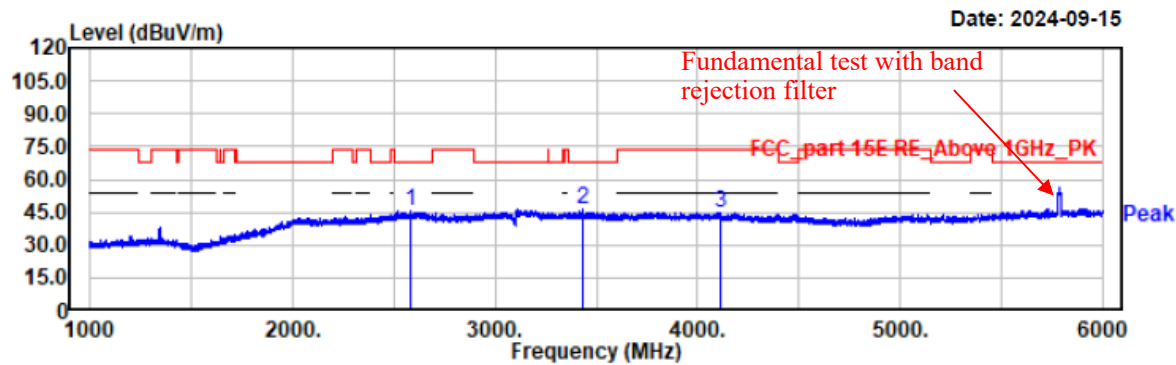

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2579.50	48.63	-3.37	45.26	68.20	22.94	vertical	Peak
3435.00	49.83	-3.64	46.19	68.20	22.01	vertical	Peak
4115.50	49.16	-4.43	44.73	74.00	29.27	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20-5825


EUT Model: NLS-NQuire1000

Test distance: 3m

Temp/Humi/ATM: 24.5℃/53%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

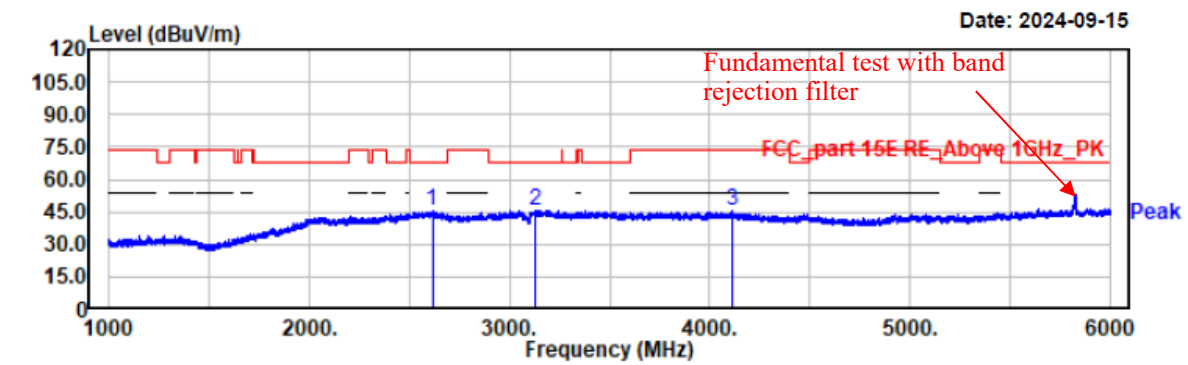

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2614.00	49.25	-3.32	45.93	68.20	22.27	horizontal	Peak
3133.00	48.59	-2.97	45.62	68.20	22.58	horizontal	Peak
4109.00	49.72	-4.35	45.37	74.00	28.63	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5825
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.5℃/53%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

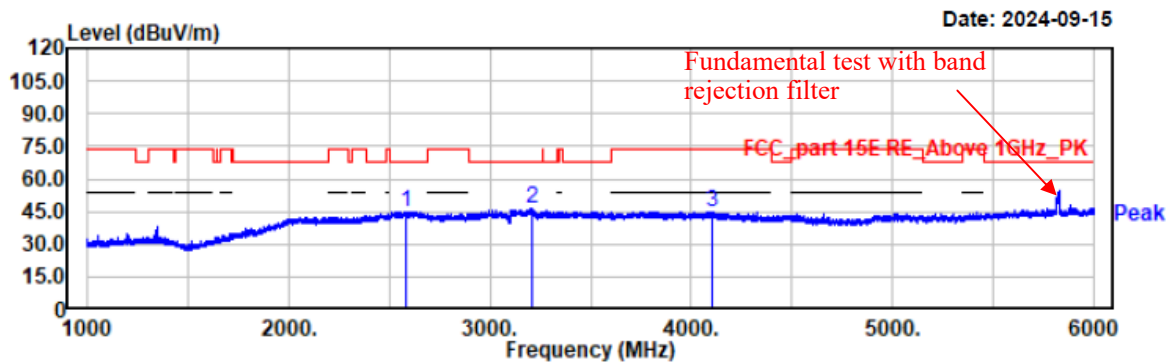

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2579.00	48.36	-3.37	44.99	68.20	23.21	vertical	Peak
3208.00	49.36	-3.07	46.29	68.20	21.91	vertical	Peak
4105.50	49.17	-4.32	44.85	74.00	29.15	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5755
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 23.4°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

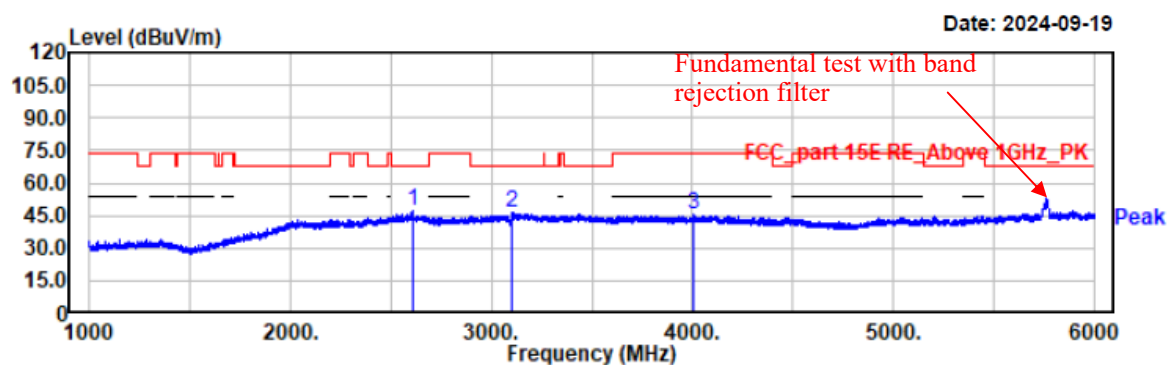

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2610.50	50.27	-3.31	46.96	68.20	21.24	horizontal	Peak
3102.00	49.11	-3.04	46.07	68.20	22.13	horizontal	Peak
4009.50	49.72	-4.42	45.30	74.00	28.70	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5755
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 23.4°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

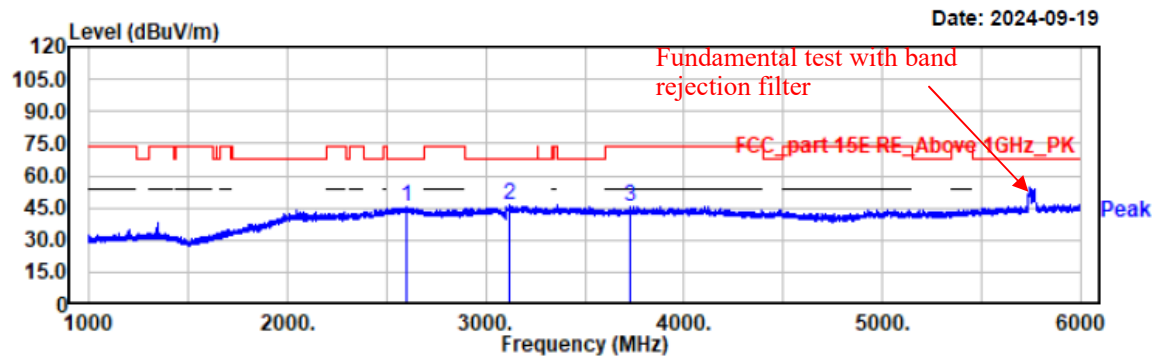

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2604.00	48.64	-3.31	45.33	68.20	22.87	vertical	Peak
3120.00	49.68	-3.00	46.68	68.20	21.52	vertical	Peak
3725.00	50.02	-4.15	45.87	74.00	28.13	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5795
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 23.4°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

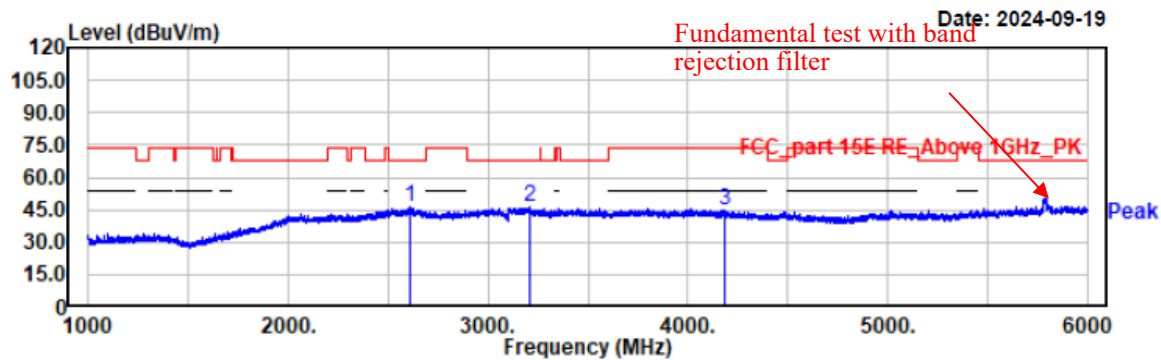

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2610.50	49.49	-3.31	46.18	68.20	22.02	horizontal	Peak
3205.50	49.12	-3.03	46.09	68.20	22.11	horizontal	Peak
4188.50	49.80	-4.92	44.88	74.00	29.12	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5795
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 23.4°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

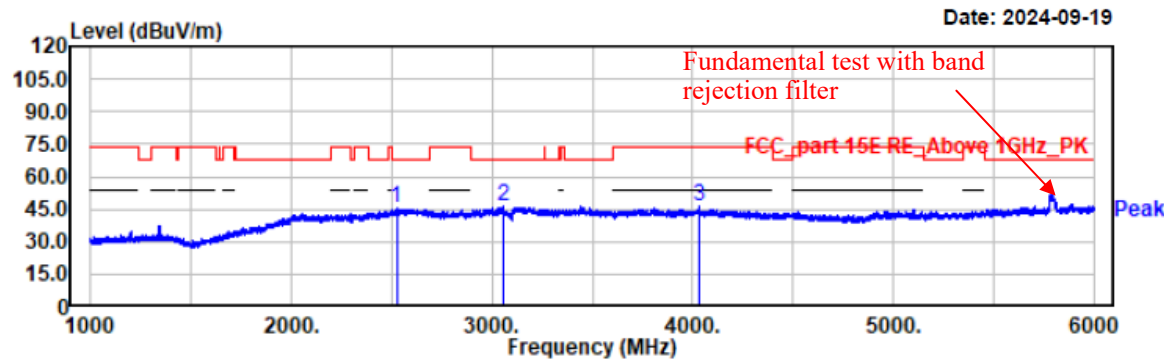

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2524.50	49.43	-3.82	45.61	68.20	22.59	vertical	Peak
3054.00	49.97	-3.54	46.43	68.20	21.77	vertical	Peak
4032.50	50.82	-4.30	46.52	74.00	27.48	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5775
EUT Model: NLS-NQuire1000
Test distance: 3m


Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

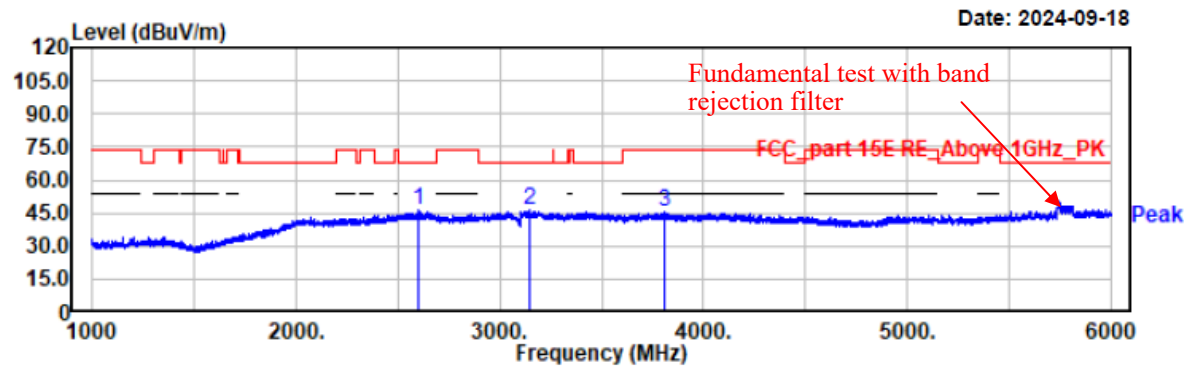

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
2601.50	49.29	-3.30	45.99	68.20	22.21	horizontal	Peak
3150.50	48.94	-2.94	46.00	68.20	22.20	horizontal	Peak
3807.50	49.57	-4.19	45.38	74.00	28.62	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5775
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

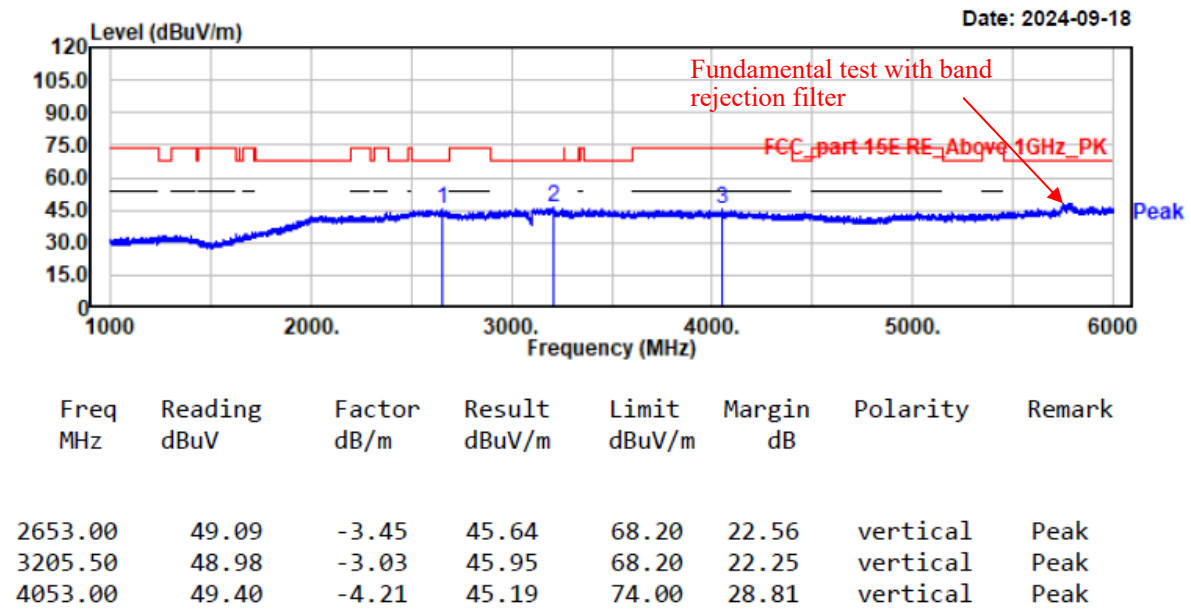


4) 6GHz ~18GHz

EUT Model: NLS-NQuire1500

B1

Project No.: 2407V20721E-RF
Test Mode: 11a-5180
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

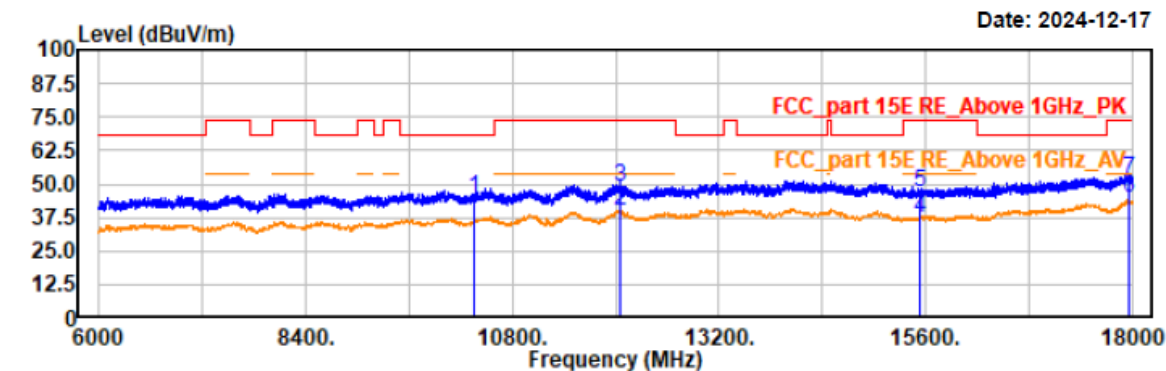


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10359.60	43.48	1.62	45.10	68.20	23.10	horizontal	Peak
12058.80	35.98	4.14	40.12	54.00	13.88	horizontal	Average
12058.80	44.59	4.14	48.73	74.00	25.27	horizontal	Peak
15540.00	34.96	2.61	37.57	54.00	16.43	horizontal	Average
15540.00	44.38	2.61	46.99	74.00	27.01	horizontal	Peak
17965.20	36.91	7.69	44.60	54.00	9.40	horizontal	Average
17965.20	43.81	7.69	51.50	74.00	22.50	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5180
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

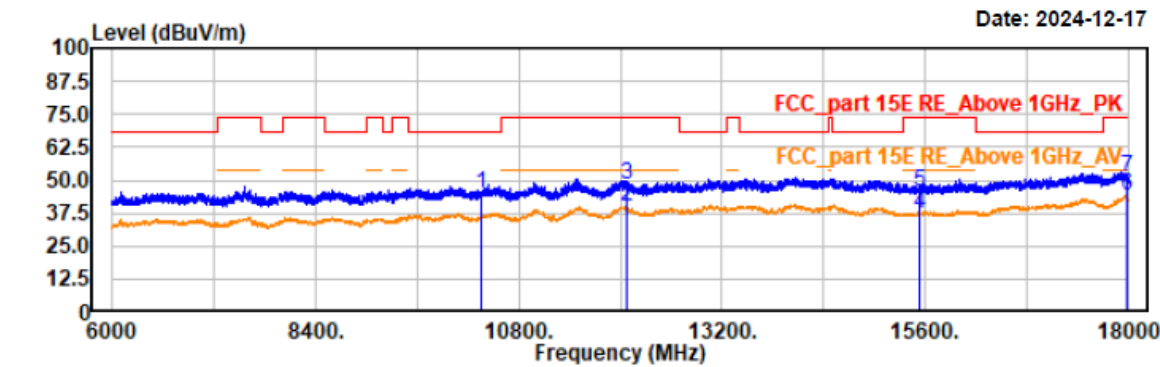

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10360.00	43.04	1.62	44.66	68.20	23.54	vertical	Peak
12067.20	35.61	4.13	39.74	54.00	14.26	vertical	Average
12067.20	43.89	4.13	48.02	74.00	25.98	vertical	Peak
15540.00	34.47	2.61	37.08	54.00	16.92	vertical	Average
15540.00	42.67	2.61	45.28	74.00	28.72	vertical	Peak
17986.80	36.19	7.72	43.91	54.00	10.09	vertical	Average
17986.80	43.12	7.72	50.84	74.00	23.16	vertical	Peak