


Project No.: 2407V20721E-RF
Test Mode: 11a-5200
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

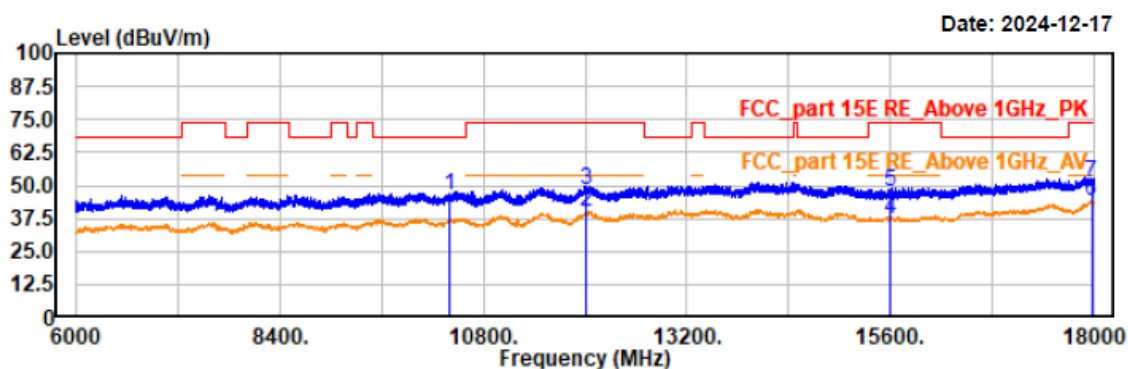

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.40	44.67	1.69	46.36	68.20	21.84	horizontal	Peak
12006.00	35.71	4.24	39.95	54.00	14.05	horizontal	Average
12006.00	44.24	4.24	48.48	74.00	25.52	horizontal	Peak
15600.00	34.82	2.51	37.33	54.00	16.67	horizontal	Average
15600.00	45.09	2.51	47.60	74.00	26.40	horizontal	Peak
17972.40	36.47	7.70	44.17	54.00	9.83	horizontal	Average
17972.40	43.31	7.70	51.01	74.00	22.99	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5200
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

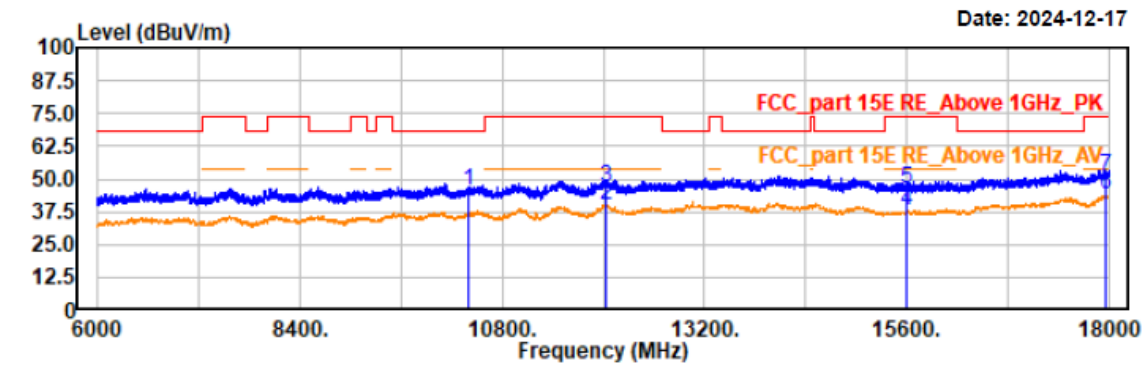

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.00	43.98	1.69	45.67	68.20	22.53	vertical	Peak
12036.00	35.74	4.19	39.93	54.00	14.07	vertical	Average
12036.00	42.88	4.19	47.07	74.00	26.93	vertical	Peak
15600.00	35.20	2.51	37.71	54.00	16.29	vertical	Average
15600.00	43.94	2.51	46.45	74.00	27.55	vertical	Peak
17955.60	36.42	7.68	44.10	54.00	9.90	vertical	Average
17955.60	43.37	7.68	51.05	74.00	22.95	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5240


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

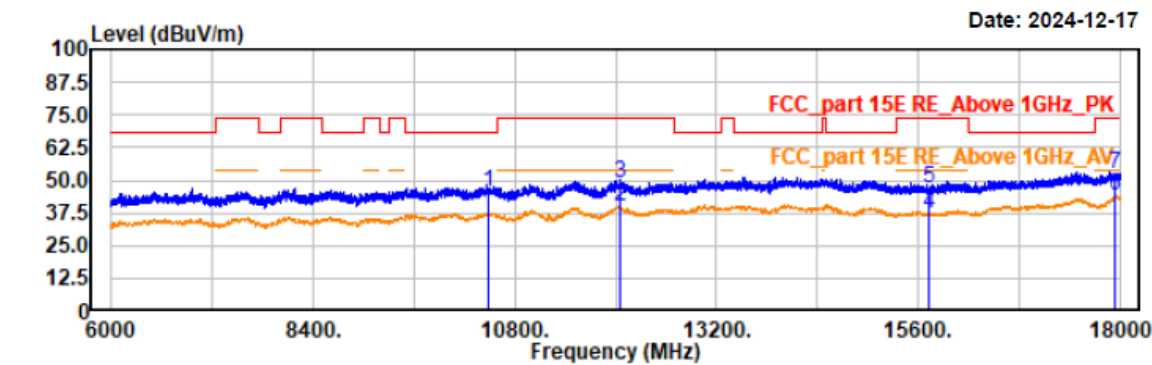

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10479.60	43.62	1.73	45.35	68.20	22.85	horizontal	Peak
12052.80	35.79	4.16	39.95	54.00	14.05	horizontal	Average
12052.80	44.68	4.16	48.84	74.00	25.16	horizontal	Peak
15720.00	34.55	2.35	36.90	54.00	17.10	horizontal	Average
15720.00	44.33	2.35	46.68	74.00	27.32	horizontal	Peak
17944.80	36.28	7.65	43.93	54.00	10.07	horizontal	Average
17944.80	44.59	7.65	52.24	74.00	21.76	horizontal	Peak

Project No.: 2407V20721E-RF

Temp/Humi/ATM: 21.5℃/46%/100.1kPa


Test Mode: 11a-5240

Tested by: Wlif Wu

EUT Model: NLS-NQuire1500


Power Source: AC120V/60Hz

Test distance: 3m

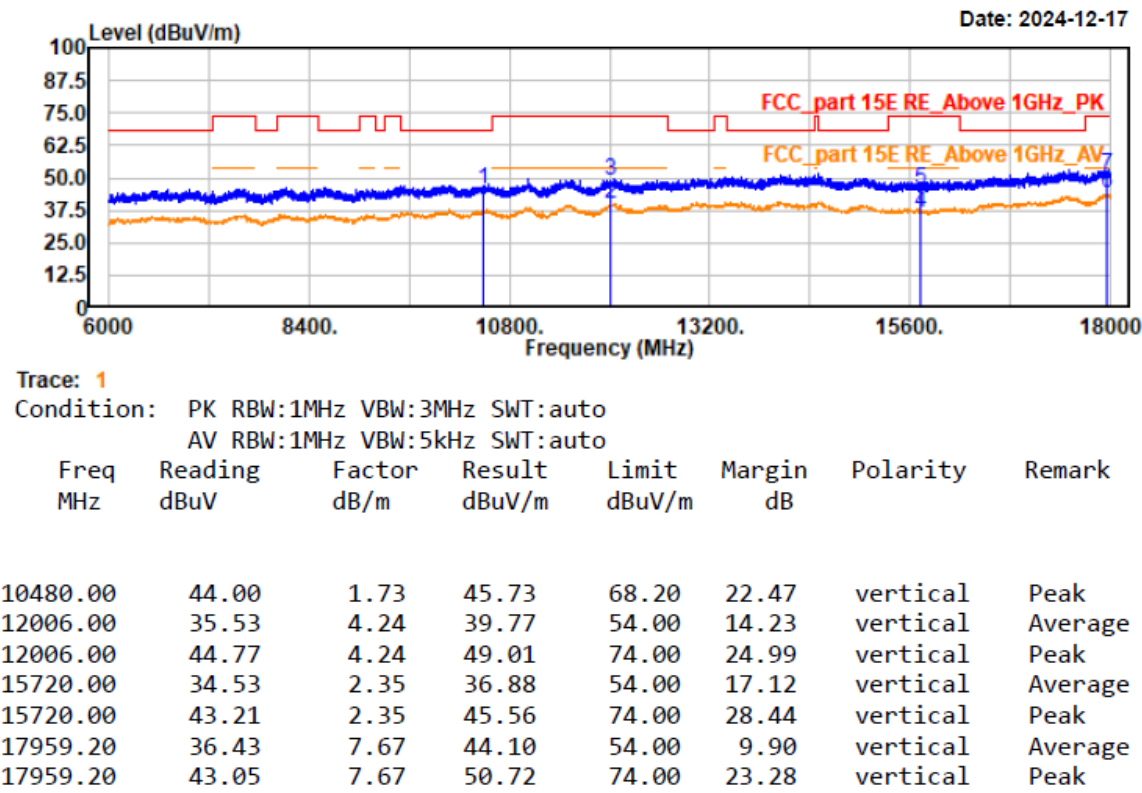

Project No.: 2407V20721E-RF
Test Mode: 11n20-5180
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

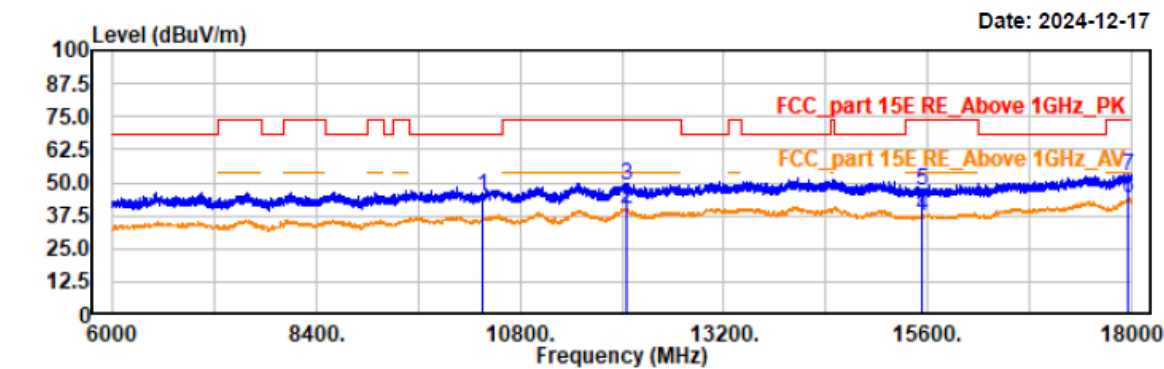


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10359.60	42.96	1.62	44.58	68.20	23.62	horizontal	Peak
12054.00	35.91	4.15	40.06	54.00	13.94	horizontal	Average
12054.00	45.07	4.15	49.22	74.00	24.78	horizontal	Peak
15540.00	34.39	2.61	37.00	54.00	17.00	horizontal	Average
15540.00	44.21	2.61	46.82	74.00	27.18	horizontal	Peak
17955.60	36.38	7.68	44.06	54.00	9.94	horizontal	Average
17955.60	44.98	7.68	52.66	74.00	21.34	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5180
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

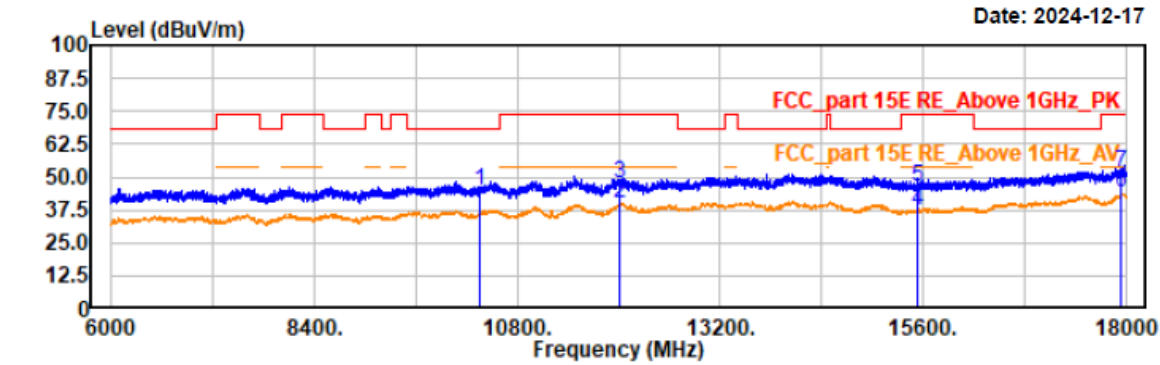


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10360.00	43.01	1.62	44.63	68.20	23.57	vertical	Peak
12019.20	35.95	4.21	40.16	54.00	13.84	vertical	Average
12019.20	43.49	4.21	47.70	74.00	26.30	vertical	Peak
15540.00	34.83	2.61	37.44	54.00	16.56	vertical	Average
15540.00	43.66	2.61	46.27	74.00	27.73	vertical	Peak
17944.80	36.30	7.65	43.95	54.00	10.05	vertical	Average
17944.80	43.84	7.65	51.49	74.00	22.51	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5200
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

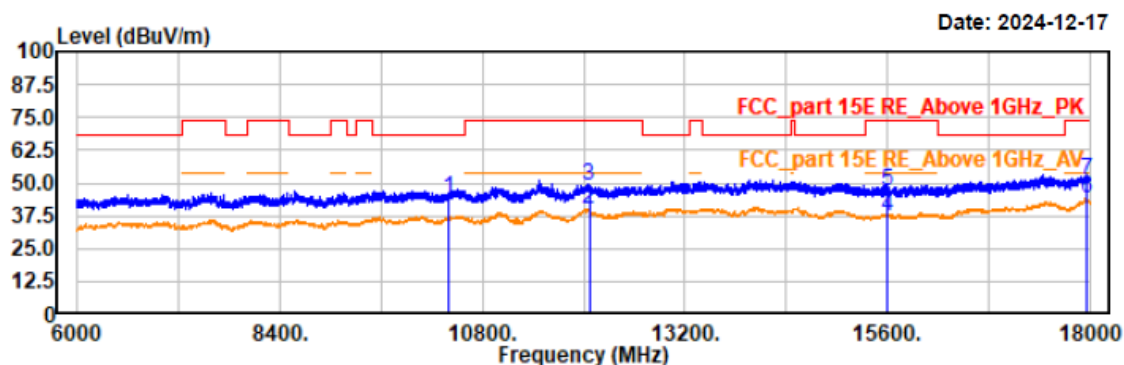

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.40	42.60	1.69	44.29	68.20	23.91	horizontal	Peak
12064.80	36.20	4.13	40.33	54.00	13.67	horizontal	Average
12064.80	44.70	4.13	48.83	74.00	25.17	horizontal	Peak
15600.00	35.03	2.51	37.54	54.00	16.46	horizontal	Average
15600.00	44.33	2.51	46.84	74.00	27.16	horizontal	Peak
17958.00	36.23	7.68	43.91	54.00	10.09	horizontal	Average
17958.00	43.33	7.68	51.01	74.00	22.99	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5200
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

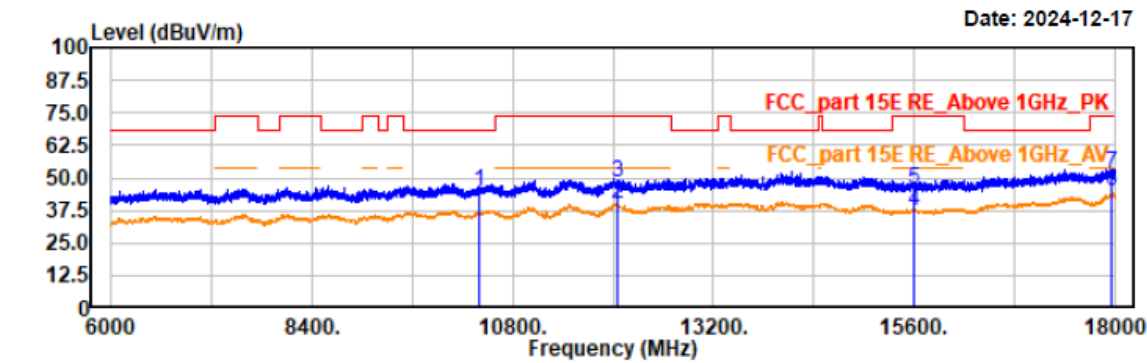


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.00	42.97	1.69	44.66	68.20	23.54	vertical	Peak
12055.20	35.98	4.15	40.13	54.00	13.87	vertical	Average
12055.20	43.89	4.15	48.04	74.00	25.96	vertical	Peak
15600.00	34.96	2.51	37.47	54.00	16.53	vertical	Average
15600.00	43.33	2.51	45.84	74.00	28.16	vertical	Peak
17965.20	36.84	7.69	44.53	54.00	9.47	vertical	Average
17965.20	43.75	7.69	51.44	74.00	22.56	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5240
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

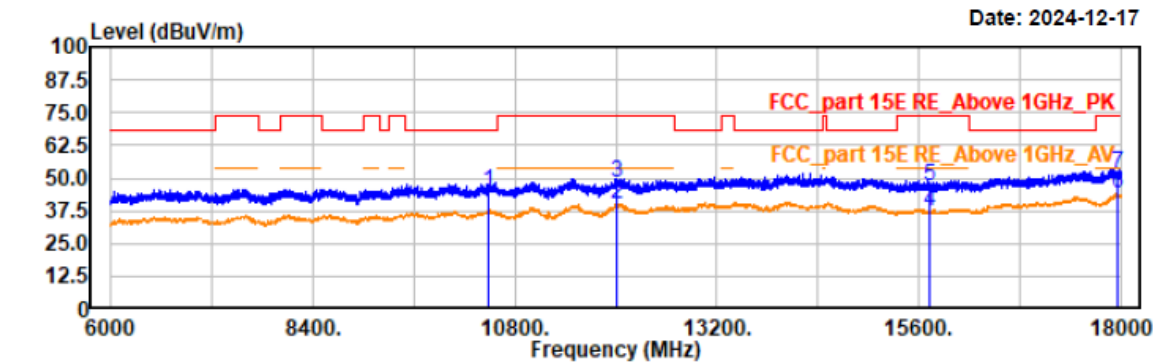


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10479.60	42.99	1.73	44.72	68.20	23.48	horizontal	Peak
12008.40	35.75	4.23	39.98	54.00	14.02	horizontal	Average
12008.40	43.84	4.23	48.07	74.00	25.93	horizontal	Peak
15720.00	34.77	2.35	37.12	54.00	16.88	horizontal	Average
15720.00	44.22	2.35	46.57	74.00	27.43	horizontal	Peak
17955.60	36.35	7.68	44.03	54.00	9.97	horizontal	Average
17955.60	43.95	7.68	51.63	74.00	22.37	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5240
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

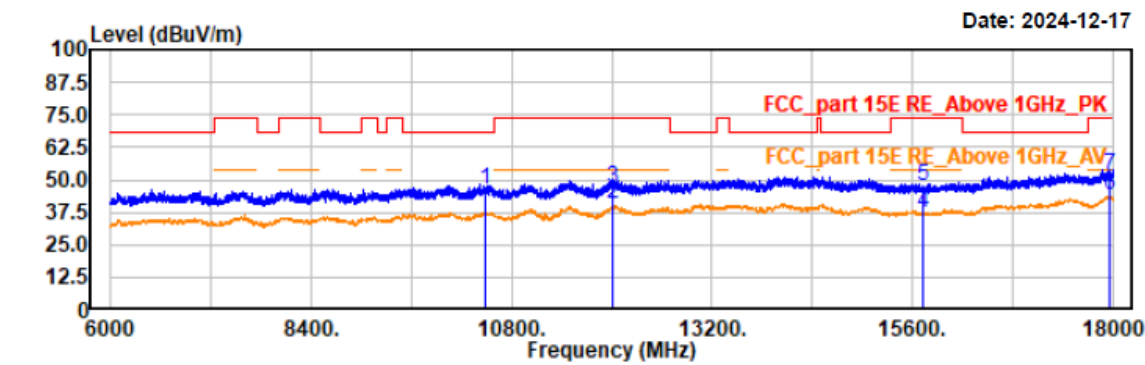


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10480.00	44.75	1.73	46.48	68.20	21.72	vertical	Peak
12008.40	36.12	4.23	40.35	54.00	13.65	vertical	Average
12008.40	42.73	4.23	46.96	74.00	27.04	vertical	Peak
15720.00	34.90	2.35	37.25	54.00	16.75	vertical	Average
15720.00	45.46	2.35	47.81	74.00	26.19	vertical	Peak
17965.20	36.37	7.69	44.06	54.00	9.94	vertical	Average
17965.20	43.71	7.69	51.40	74.00	22.60	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5190
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

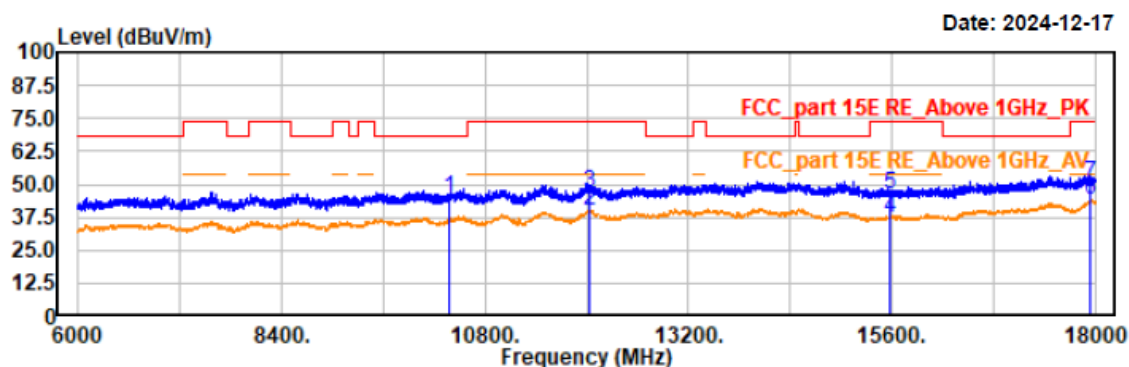

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10380.00	42.88	1.65	44.53	68.20	23.67	horizontal	Peak
12037.20	35.81	4.19	40.00	54.00	14.00	horizontal	Average
12037.20	42.64	4.19	46.83	74.00	27.17	horizontal	Peak
15570.00	34.59	2.55	37.14	54.00	16.86	horizontal	Average
15570.00	43.93	2.55	46.48	74.00	27.52	horizontal	Peak
17946.00	36.36	7.66	44.02	54.00	9.98	horizontal	Average
17946.00	42.60	7.66	50.26	74.00	23.74	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5190
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

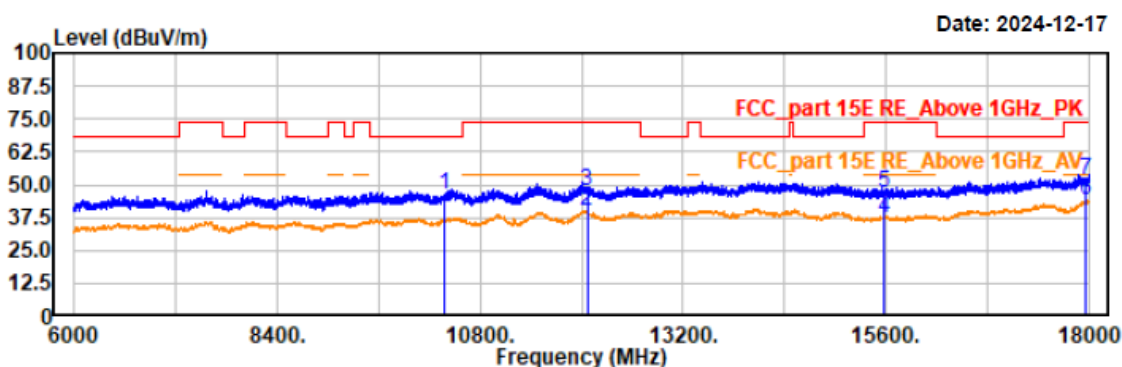

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10380.00	44.80	1.65	46.45	68.20	21.75	vertical	Peak
12064.80	35.70	4.13	39.83	54.00	14.17	vertical	Average
12064.80	43.74	4.13	47.87	74.00	26.13	vertical	Peak
15570.00	34.72	2.55	37.27	54.00	16.73	vertical	Average
15570.00	44.08	2.55	46.63	74.00	27.37	vertical	Peak
17965.20	36.46	7.69	44.15	54.00	9.85	vertical	Average
17965.20	43.73	7.69	51.42	74.00	22.58	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40-5230


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

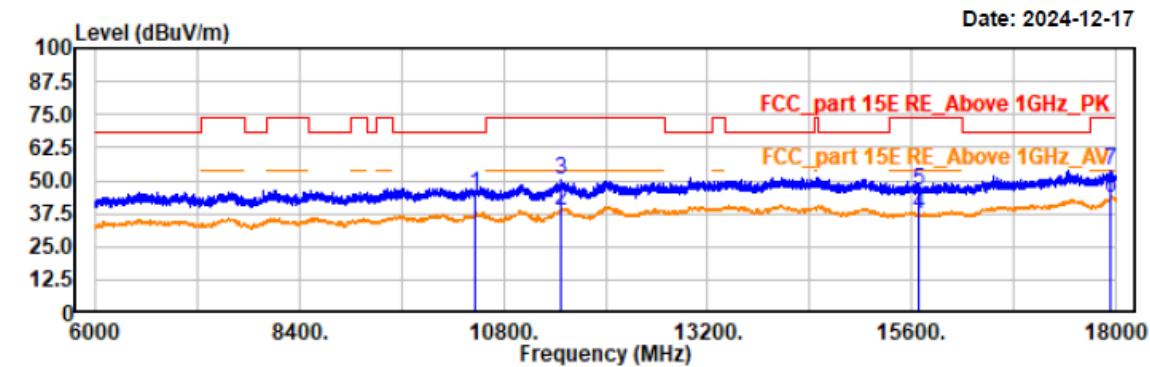

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10460.00	43.33	1.72	45.05	68.20	23.15	horizontal	Peak
11484.00	35.84	3.11	38.95	54.00	15.05	horizontal	Average
11484.00	47.08	3.11	50.19	74.00	23.81	horizontal	Peak
15690.00	34.86	2.37	37.23	54.00	16.77	horizontal	Average
15690.00	43.58	2.37	45.95	74.00	28.05	horizontal	Peak
17949.60	36.07	7.67	43.74	54.00	10.26	horizontal	Average
17949.60	45.98	7.67	53.65	74.00	20.35	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5230
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

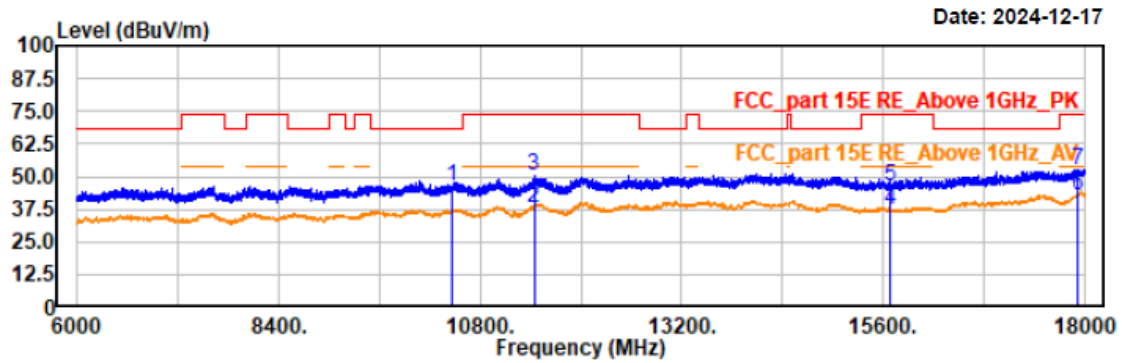

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10460.40	44.42	1.72	46.14	68.20	22.06	vertical	Peak
11442.00	34.84	3.06	37.90	54.00	16.10	vertical	Average
11442.00	47.46	3.06	50.52	74.00	23.48	vertical	Peak
15690.00	34.81	2.37	37.18	54.00	16.82	vertical	Average
15690.00	43.82	2.37	46.19	74.00	27.81	vertical	Peak
17925.60	35.04	7.63	42.67	54.00	11.33	vertical	Average
17925.60	45.12	7.63	52.75	74.00	21.25	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5210
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

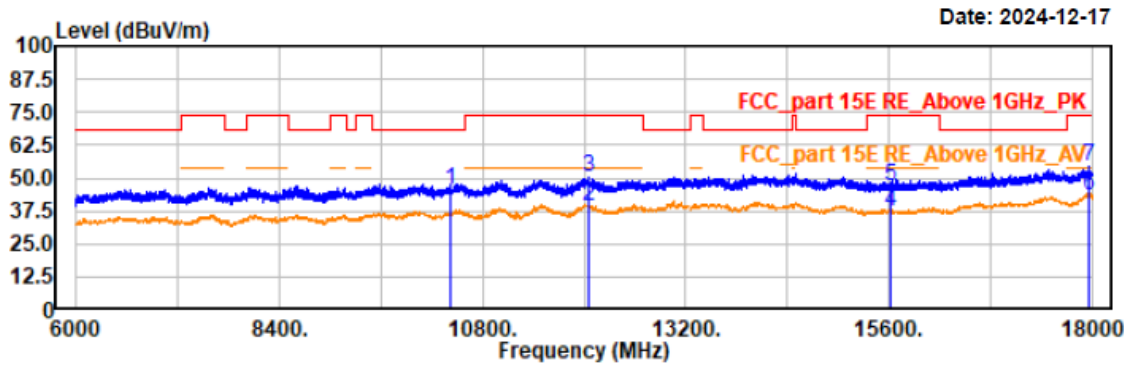


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10419.60	43.67	1.69	45.36	68.20	22.84	horizontal	Peak
12060.00	35.34	4.14	39.48	54.00	14.52	horizontal	Average
12060.00	46.26	4.14	50.40	74.00	23.60	horizontal	Peak
15630.00	34.78	2.47	37.25	54.00	16.75	horizontal	Average
15630.00	44.74	2.47	47.21	74.00	26.79	horizontal	Peak
17960.40	35.91	7.68	43.59	54.00	10.41	horizontal	Average
17960.40	46.88	7.68	54.56	74.00	19.44	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5210
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

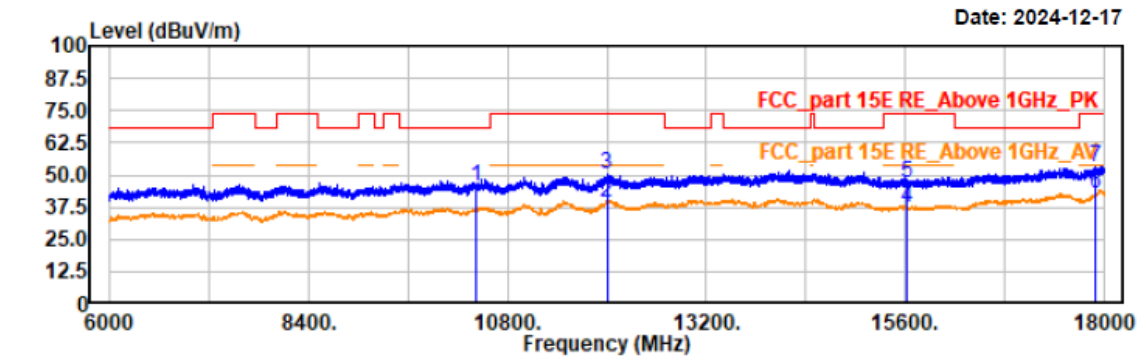

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10420.00	43.66	1.69	45.35	68.20	22.85	vertical	Peak
12000.00	35.23	4.25	39.48	54.00	14.52	vertical	Average
12000.00	46.13	4.25	50.38	74.00	23.62	vertical	Peak
15630.00	34.63	2.47	37.10	54.00	16.90	vertical	Average
15630.00	44.53	2.47	47.00	74.00	27.00	vertical	Peak
17889.60	34.88	7.55	42.43	54.00	11.57	vertical	Average
17889.60	45.31	7.55	52.86	74.00	21.14	vertical	Peak

B2

Project No.: 2407V20721E-RF
Test Mode: 11a-5260
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

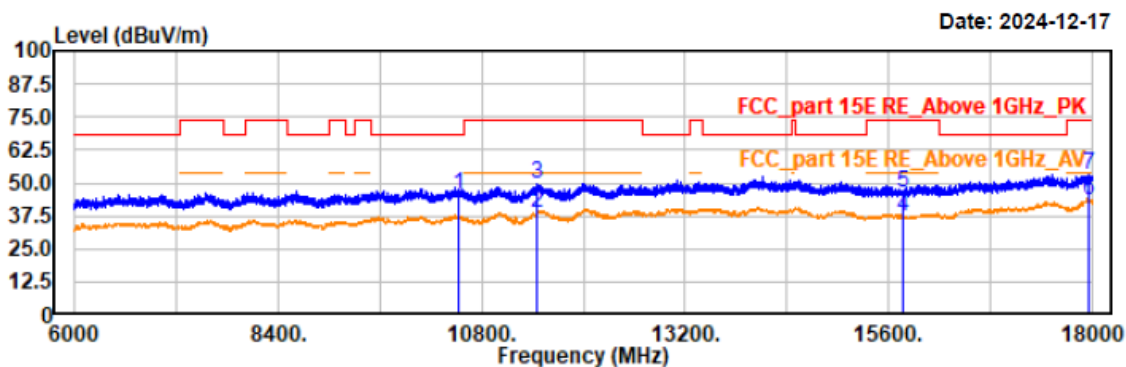

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.40	43.62	1.77	45.39	68.20	22.81	horizontal	Peak
11448.00	35.57	3.07	38.64	54.00	15.36	horizontal	Average
11448.00	46.79	3.07	49.86	74.00	24.14	horizontal	Peak
15780.00	34.72	2.39	37.11	54.00	16.89	horizontal	Average
15780.00	43.54	2.39	45.93	74.00	28.07	horizontal	Peak
17962.80	36.08	7.68	43.76	54.00	10.24	horizontal	Average
17962.80	45.41	7.68	53.09	74.00	20.91	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5260
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

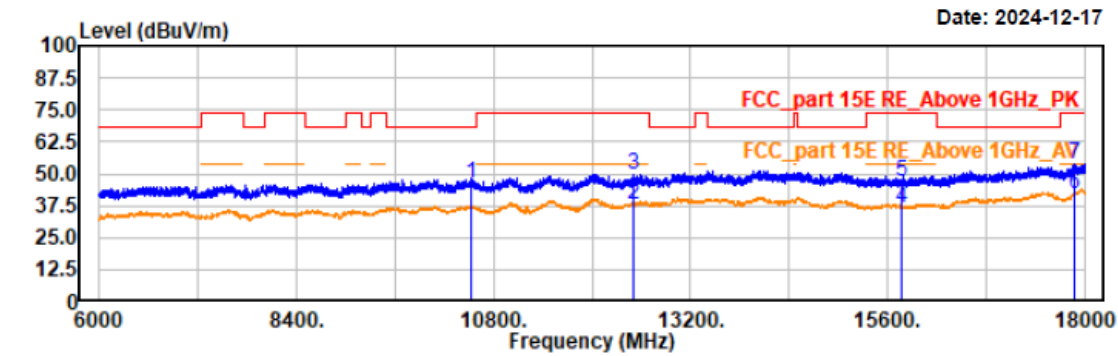


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.00	44.16	1.77	45.93	68.20	22.27	vertical	Peak
12510.00	34.14	3.60	37.74	54.00	16.26	vertical	Average
12510.00	46.27	3.60	49.87	74.00	24.13	vertical	Peak
15780.00	34.48	2.39	36.87	54.00	17.13	vertical	Average
15780.00	44.25	2.39	46.64	74.00	27.36	vertical	Peak
17874.00	34.29	7.50	41.79	54.00	12.21	vertical	Average
17874.00	46.02	7.50	53.52	74.00	20.48	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5280
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

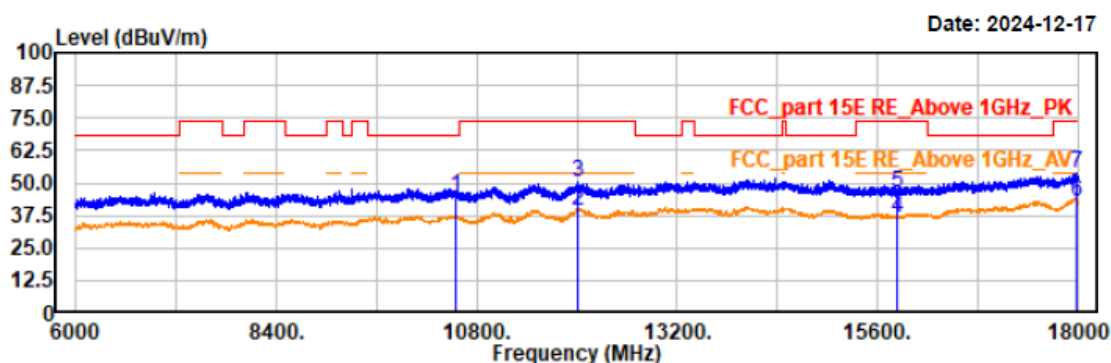

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	43.32	1.83	45.15	68.20	23.05	horizontal	Peak
12003.60	35.16	4.24	39.40	54.00	14.60	horizontal	Average
12003.60	46.22	4.24	50.46	74.00	23.54	horizontal	Peak
15840.00	34.06	2.37	36.43	54.00	17.57	horizontal	Average
15840.00	43.54	2.37	45.91	74.00	28.09	horizontal	Peak
17986.80	35.37	7.72	43.09	54.00	10.91	horizontal	Average
17986.80	46.25	7.72	53.97	74.00	20.03	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5280
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

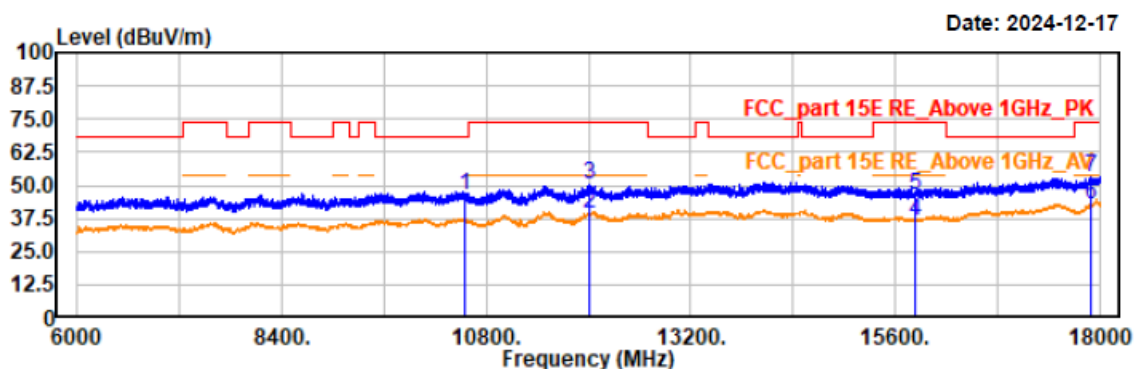

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	44.50	1.83	46.33	68.20	21.87	vertical	Peak
12014.40	34.94	4.22	39.16	54.00	14.84	vertical	Average
12014.40	45.89	4.22	50.11	74.00	23.89	vertical	Peak
15840.00	34.24	2.37	36.61	54.00	17.39	vertical	Average
15840.00	44.00	2.37	46.37	74.00	27.63	vertical	Peak
17900.40	35.35	7.59	42.94	54.00	11.06	vertical	Average
17900.40	45.40	7.59	52.99	74.00	21.01	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5320
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

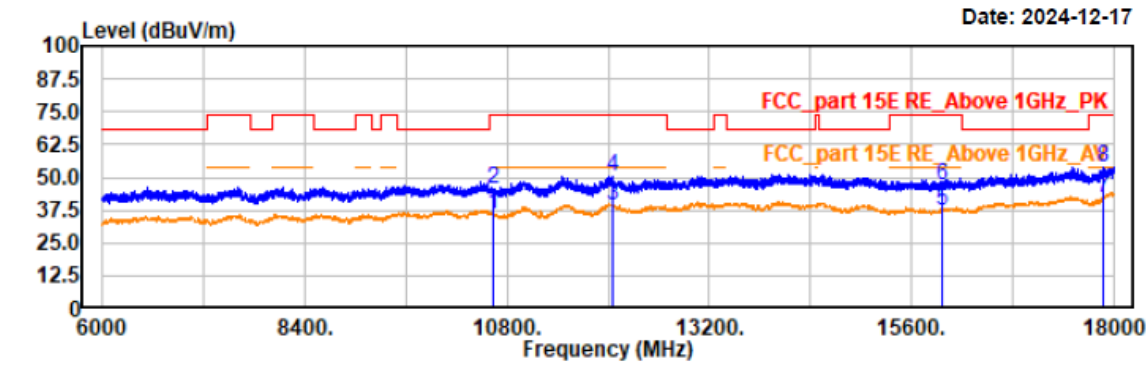

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10640.00	33.76	1.94	35.70	54.00	18.30	horizontal	Average
10640.00	43.89	1.94	45.83	74.00	28.17	horizontal	Peak
12057.60	35.27	4.15	39.42	54.00	14.58	horizontal	Average
12057.60	46.14	4.15	50.29	74.00	23.71	horizontal	Peak
15960.00	34.89	2.41	37.30	54.00	16.70	horizontal	Average
15960.00	44.68	2.41	47.09	74.00	26.91	horizontal	Peak
17876.40	34.38	7.50	41.88	54.00	12.12	horizontal	Average
17876.40	45.95	7.50	53.45	74.00	20.55	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5320


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

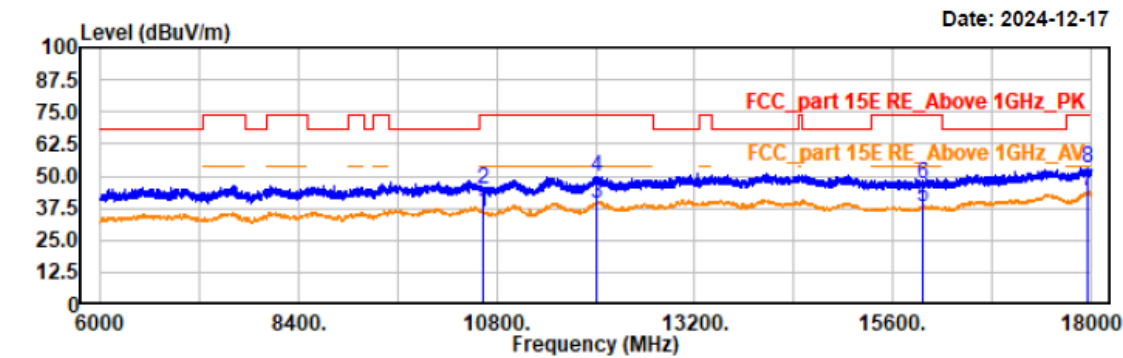

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10640.40	33.62	1.94	35.56	54.00	18.44	vertical	Average
10640.40	43.10	1.94	45.04	74.00	28.96	vertical	Peak
12012.00	35.12	4.23	39.35	54.00	14.65	vertical	Average
12012.00	45.74	4.23	49.97	74.00	24.03	vertical	Peak
15960.00	35.21	2.41	37.62	54.00	16.38	vertical	Average
15960.00	44.34	2.41	46.75	74.00	27.25	vertical	Peak
17953.20	36.33	7.67	44.00	54.00	10.00	vertical	Average
17953.20	45.75	7.67	53.42	74.00	20.58	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5260
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

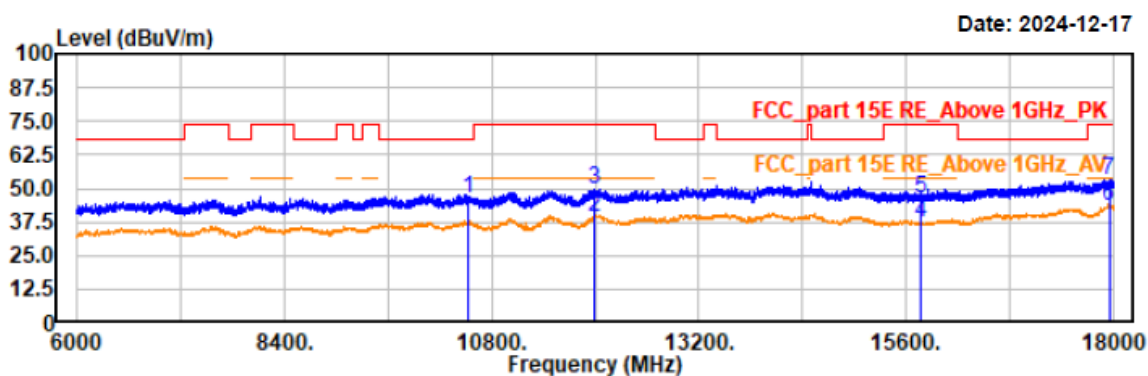


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.00	44.70	1.77	46.47	68.20	21.73	horizontal	Peak
11991.60	34.85	4.23	39.08	54.00	14.92	horizontal	Average
11991.60	45.53	4.23	49.76	74.00	24.24	horizontal	Peak
15780.00	34.56	2.39	36.95	54.00	17.05	horizontal	Average
15780.00	43.71	2.39	46.10	74.00	27.90	horizontal	Peak
17950.80	35.86	7.67	43.53	54.00	10.47	horizontal	Average
17950.80	45.41	7.67	53.08	74.00	20.92	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5260
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

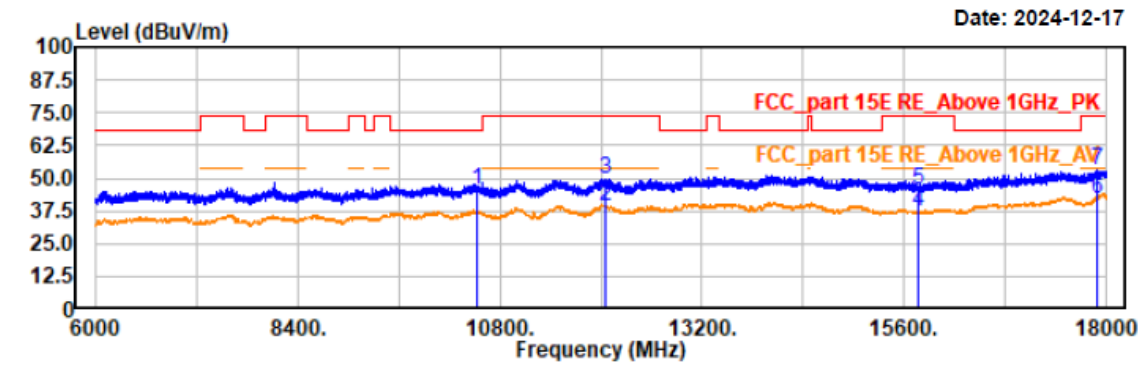


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.40	43.91	1.77	45.68	68.20	22.52	vertical	Peak
12057.60	35.39	4.15	39.54	54.00	14.46	vertical	Average
12057.60	45.77	4.15	49.92	74.00	24.08	vertical	Peak
15780.00	34.65	2.39	37.04	54.00	16.96	vertical	Average
15780.00	43.35	2.39	45.74	74.00	28.26	vertical	Peak
17894.40	34.34	7.57	41.91	54.00	12.09	vertical	Average
17894.40	45.43	7.57	53.00	74.00	21.00	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5280
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

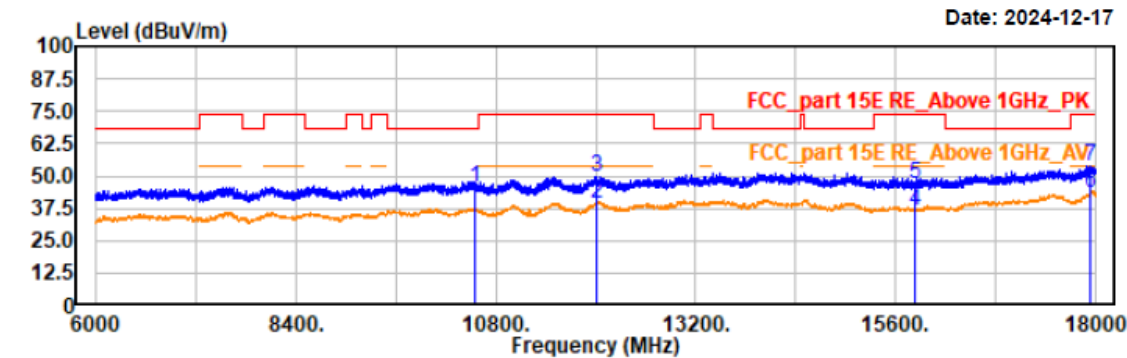


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	43.79	1.83	45.62	68.20	22.58	horizontal	Peak
12007.20	35.31	4.24	39.55	54.00	14.45	horizontal	Average
12007.20	45.27	4.24	49.51	74.00	24.49	horizontal	Peak
15840.00	34.35	2.37	36.72	54.00	17.28	horizontal	Average
15840.00	44.47	2.37	46.84	74.00	27.16	horizontal	Peak
17946.00	35.53	7.66	43.19	54.00	10.81	horizontal	Average
17946.00	46.05	7.66	53.71	74.00	20.29	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5280
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

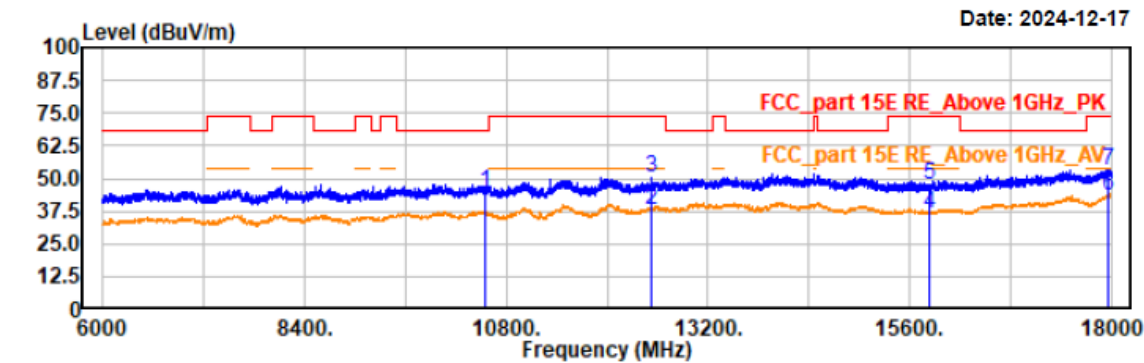

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	43.04	1.83	44.87	68.20	23.33	vertical	Peak
12529.20	34.31	3.67	37.98	54.00	16.02	vertical	Average
12529.20	46.59	3.67	50.26	74.00	23.74	vertical	Peak
15840.00	34.42	2.37	36.79	54.00	17.21	vertical	Average
15840.00	45.30	2.37	47.67	74.00	26.33	vertical	Peak
17953.20	36.12	7.67	43.79	54.00	10.21	vertical	Average
17953.20	45.61	7.67	53.28	74.00	20.72	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20-5320


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

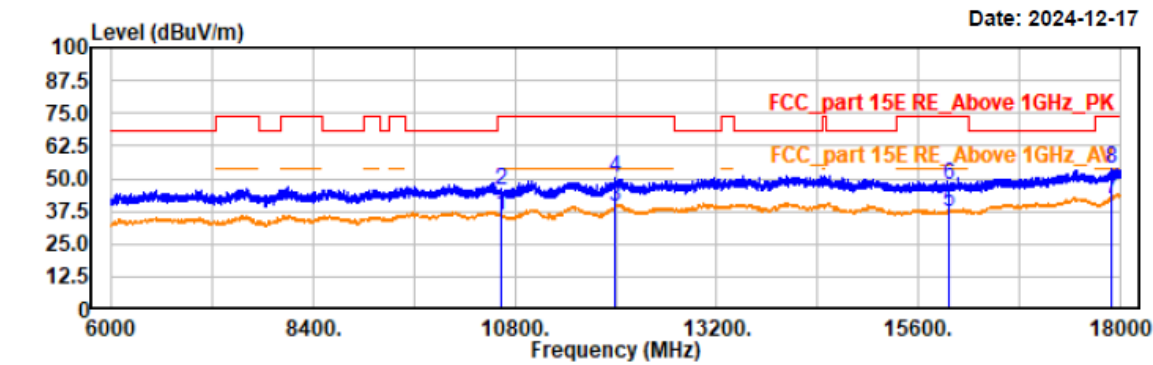

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10640.00	33.70	1.94	35.64	54.00	18.36	horizontal	Average
10640.00	43.32	1.94	45.26	74.00	28.74	horizontal	Peak
11986.80	34.88	4.22	39.10	54.00	14.90	horizontal	Average
11986.80	45.93	4.22	50.15	74.00	23.85	horizontal	Peak
15960.00	35.13	2.41	37.54	54.00	16.46	horizontal	Average
15960.00	44.87	2.41	47.28	74.00	26.72	horizontal	Peak
17905.20	34.61	7.60	42.21	54.00	11.79	horizontal	Average
17905.20	46.15	7.60	53.75	74.00	20.25	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5320
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

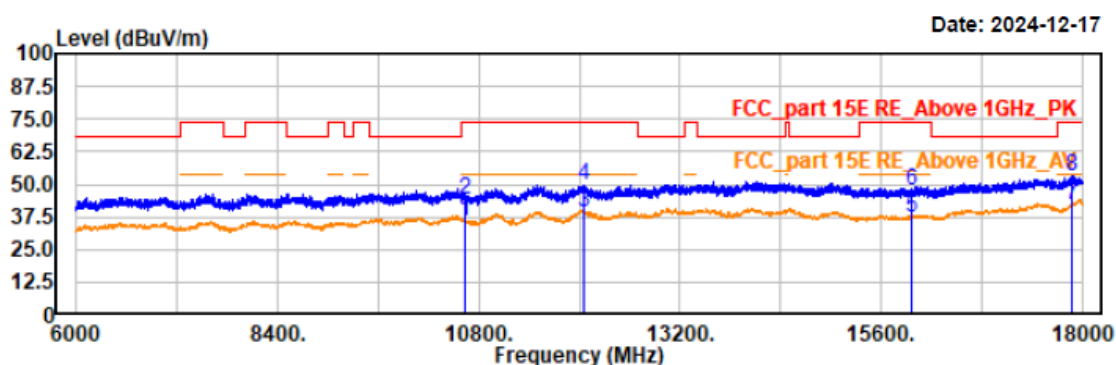

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10640.40	33.68	1.94	35.62	54.00	18.38	vertical	Average
10640.40	41.92	1.94	43.86	74.00	30.14	vertical	Peak
12048.00	34.93	4.16	39.09	54.00	14.91	vertical	Average
12048.00	45.20	4.16	49.36	74.00	24.64	vertical	Peak
15960.00	34.88	2.41	37.29	54.00	16.71	vertical	Average
15960.00	44.93	2.41	47.34	74.00	26.66	vertical	Peak
17872.80	34.46	7.50	41.96	54.00	12.04	vertical	Average
17872.80	45.60	7.50	53.10	74.00	20.90	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40-5270


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

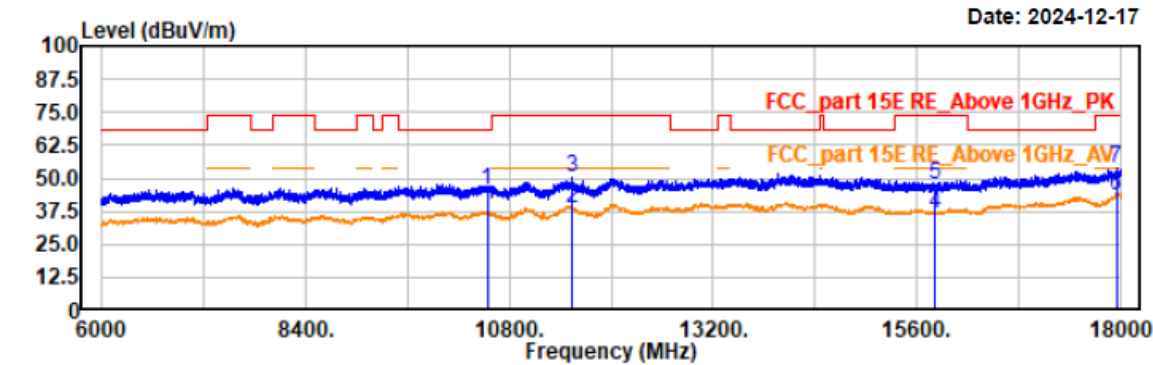


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10540.00	43.99	1.80	45.79	68.20	22.41	horizontal	Peak
11536.80	35.46	3.25	38.71	54.00	15.29	horizontal	Average
11536.80	47.05	3.25	50.30	74.00	23.70	horizontal	Peak
15810.00	34.04	2.38	36.42	54.00	17.58	horizontal	Average
15810.00	45.45	2.38	47.83	74.00	26.17	horizontal	Peak
17950.80	35.85	7.67	43.52	54.00	10.48	horizontal	Average
17950.80	46.02	7.67	53.69	74.00	20.31	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5270
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

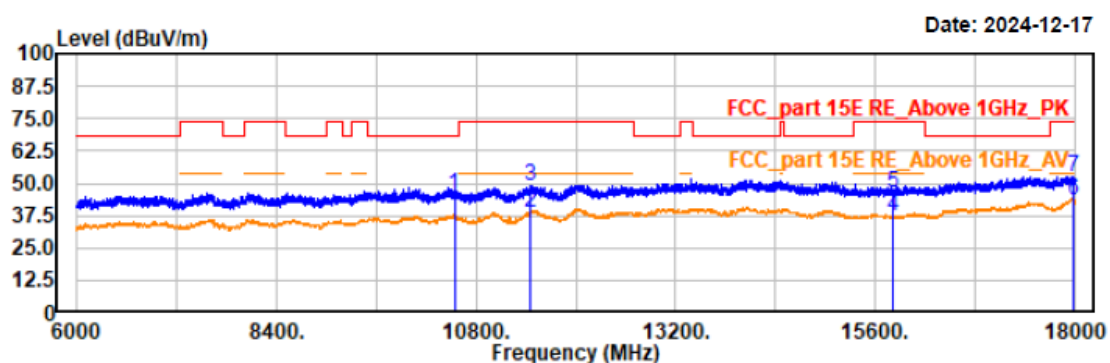


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10540.00	43.61	1.80	45.41	68.20	22.79	vertical	Peak
11456.40	35.40	3.07	38.47	54.00	15.53	vertical	Average
11456.40	46.13	3.07	49.20	74.00	24.80	vertical	Peak
15810.00	34.54	2.38	36.92	54.00	17.08	vertical	Average
15810.00	44.02	2.38	46.40	74.00	27.60	vertical	Peak
17980.80	35.46	7.71	43.17	54.00	10.83	vertical	Average
17980.80	44.85	7.71	52.56	74.00	21.44	vertical	Peak

Project No.: 2407V20721E-RF
 Test Mode: 11n40-5310
 EUT Model: NLS-NQuire1500
 Test distance: 3m


Temp/Humi/ATM: 21.5℃/46%/100.1kPa
 Tested by: Wlif Wu
 Power Source: AC120V/60Hz

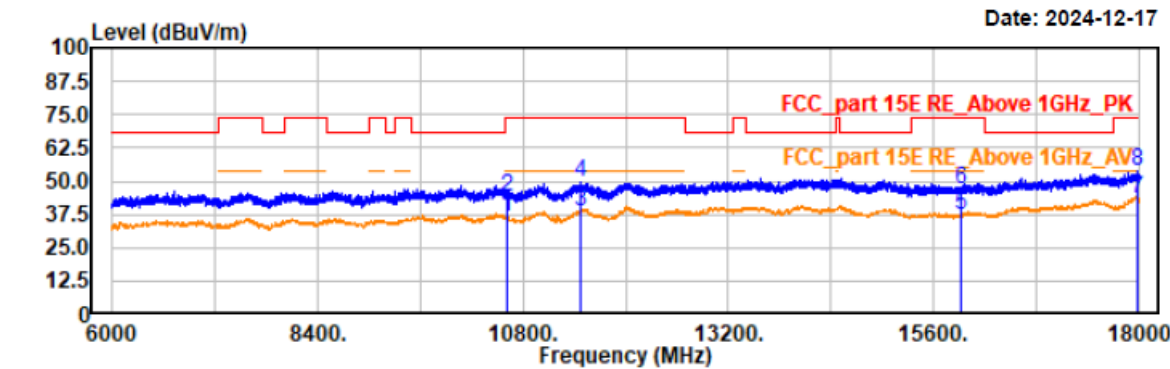

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10620.00	34.52	1.91	36.43	54.00	17.57	horizontal	Average
10620.00	42.45	1.91	44.36	74.00	29.64	horizontal	Peak
11474.40	35.50	3.10	38.60	54.00	15.40	horizontal	Average
11474.40	46.35	3.10	49.45	74.00	24.55	horizontal	Peak
15930.00	34.59	2.38	36.97	54.00	17.03	horizontal	Average
15930.00	44.23	2.38	46.61	74.00	27.39	horizontal	Peak
17973.60	35.52	7.70	43.22	54.00	10.78	horizontal	Average
17973.60	45.96	7.70	53.66	74.00	20.34	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5310
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

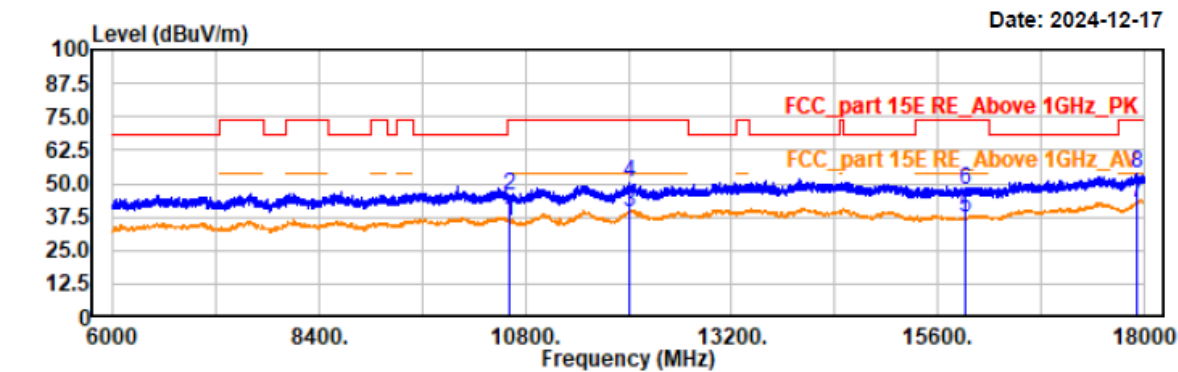


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10620.00	34.12	1.91	36.03	54.00	17.97	vertical	Average
10620.00	43.79	1.91	45.70	74.00	28.30	vertical	Peak
12019.20	34.89	4.21	39.10	54.00	14.90	vertical	Average
12019.20	45.89	4.21	50.10	74.00	23.90	vertical	Peak
15930.00	34.82	2.38	37.20	54.00	16.80	vertical	Average
15930.00	45.06	2.38	47.44	74.00	26.56	vertical	Peak
17916.00	34.82	7.62	42.44	54.00	11.56	vertical	Average
17916.00	46.27	7.62	53.89	74.00	20.11	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5290
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

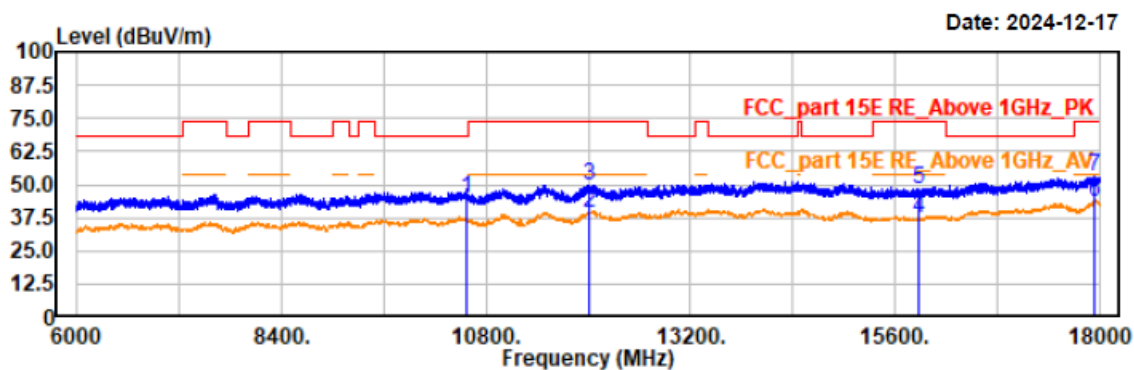

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10580.00	43.28	1.85	45.13	68.20	23.07	horizontal	Peak
12007.20	35.08	4.24	39.32	54.00	14.68	horizontal	Average
12007.20	45.66	4.24	49.90	74.00	24.10	horizontal	Peak
15870.00	34.71	2.34	37.05	54.00	16.95	horizontal	Average
15870.00	45.71	2.34	48.05	74.00	25.95	horizontal	Peak
17941.20	35.90	7.65	43.55	54.00	10.45	horizontal	Average
17941.20	45.19	7.65	52.84	74.00	21.16	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5290
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

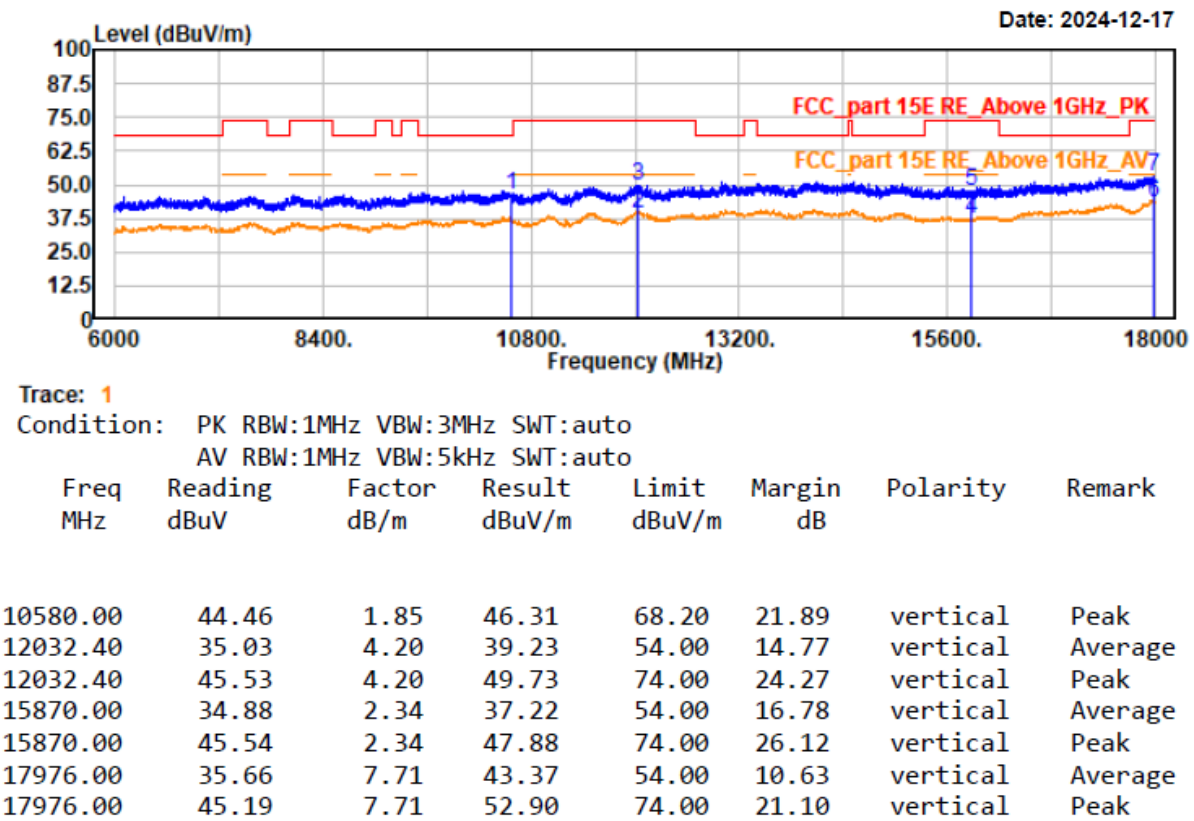

B3

Project No.: 2407V20721E-RF
Test Mode: 11a-5500
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

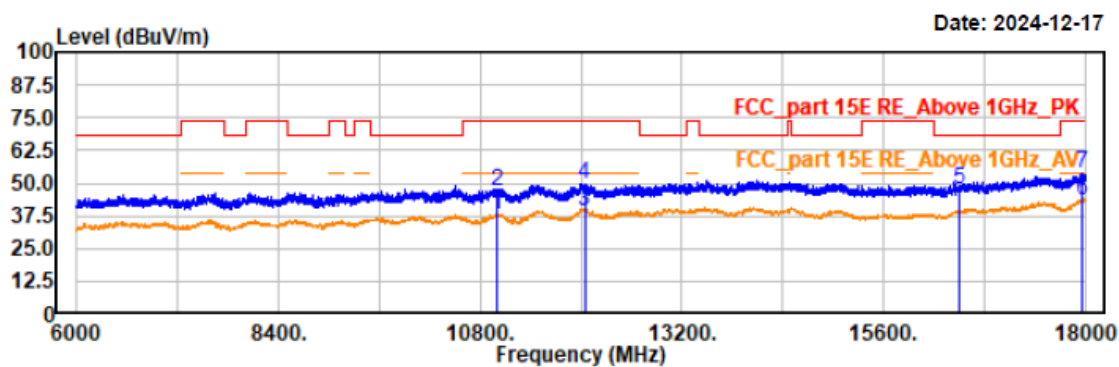

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.40	35.62	2.54	38.16	54.00	15.84	horizontal	Average
11000.40	44.49	2.54	47.03	74.00	26.97	horizontal	Peak
12043.20	35.04	4.17	39.21	54.00	14.79	horizontal	Average
12043.20	45.74	4.17	49.91	74.00	24.09	horizontal	Peak
16500.00	43.94	3.50	47.44	68.20	20.76	horizontal	Peak
17958.00	35.87	7.68	43.55	54.00	10.45	horizontal	Average
17958.00	46.34	7.68	54.02	74.00	19.98	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5500
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

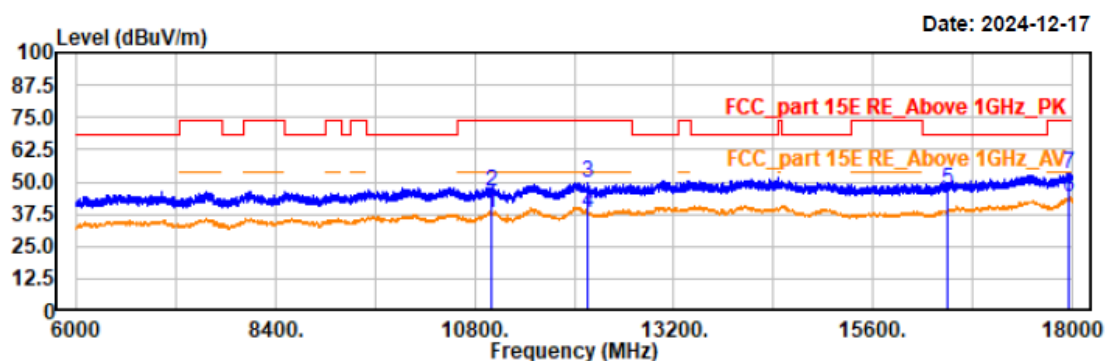

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.40	35.48	2.54	38.02	54.00	15.98	vertical	Average
11000.40	43.89	2.54	46.43	74.00	27.57	vertical	Peak
12154.80	45.92	3.97	49.89	74.00	24.11	vertical	Peak
12154.81	33.71	3.97	37.68	54.00	16.32	vertical	Average
16500.00	43.44	3.50	46.94	68.20	21.26	vertical	Peak
17956.80	36.14	7.68	43.82	54.00	10.18	vertical	Average
17956.80	45.46	7.68	53.14	74.00	20.86	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5580


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

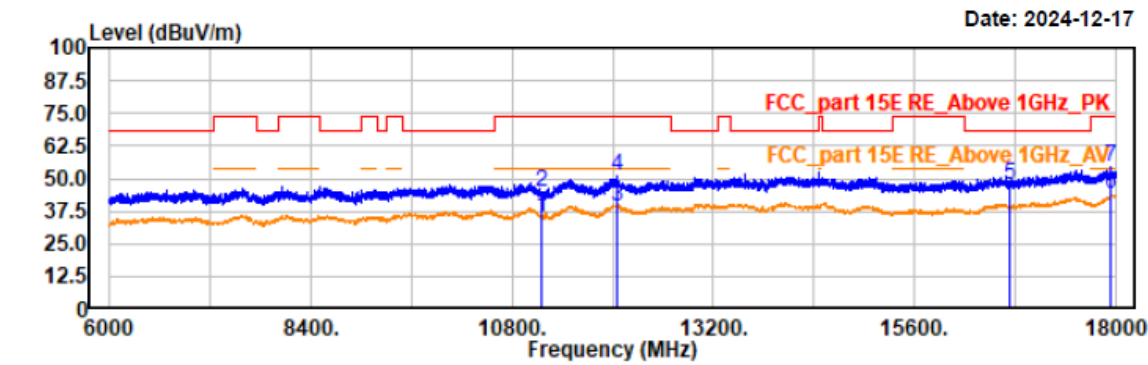

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	32.48	2.73	35.21	54.00	18.79	horizontal	Average
11160.00	42.32	2.73	45.05	74.00	28.95	horizontal	Peak
12058.80	35.16	4.14	39.30	54.00	14.70	horizontal	Average
12058.80	46.60	4.14	50.74	74.00	23.26	horizontal	Peak
16740.00	43.55	4.15	47.70	68.20	20.50	horizontal	Peak
17949.60	36.12	7.67	43.79	54.00	10.21	horizontal	Average
17949.60	46.79	7.67	54.46	74.00	19.54	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5580
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

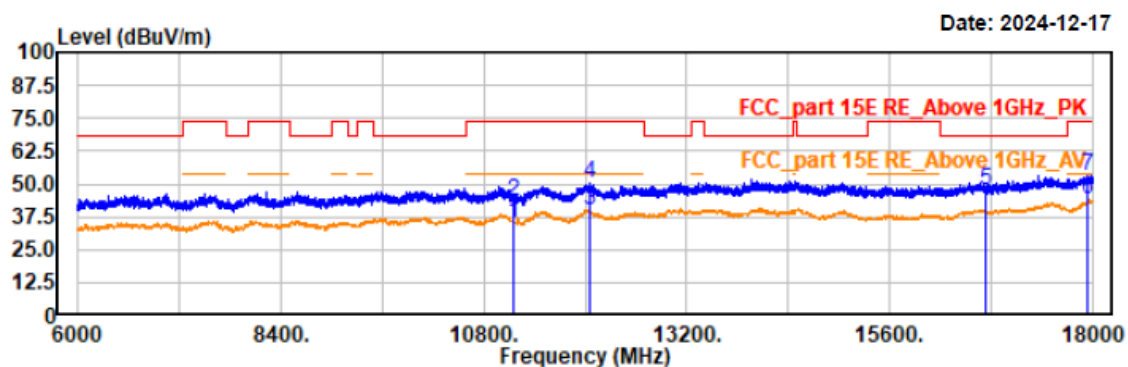

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	32.71	2.73	35.44	54.00	18.56	vertical	Average
11160.00	41.03	2.73	43.76	74.00	30.24	vertical	Peak
12060.00	35.78	4.14	39.92	54.00	14.08	vertical	Average
12060.00	46.30	4.14	50.44	74.00	23.56	vertical	Peak
16740.00	43.70	4.15	47.85	68.20	20.35	vertical	Peak
17936.40	36.20	7.64	43.84	54.00	10.16	vertical	Average
17936.40	45.45	7.64	53.09	74.00	20.91	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5700
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

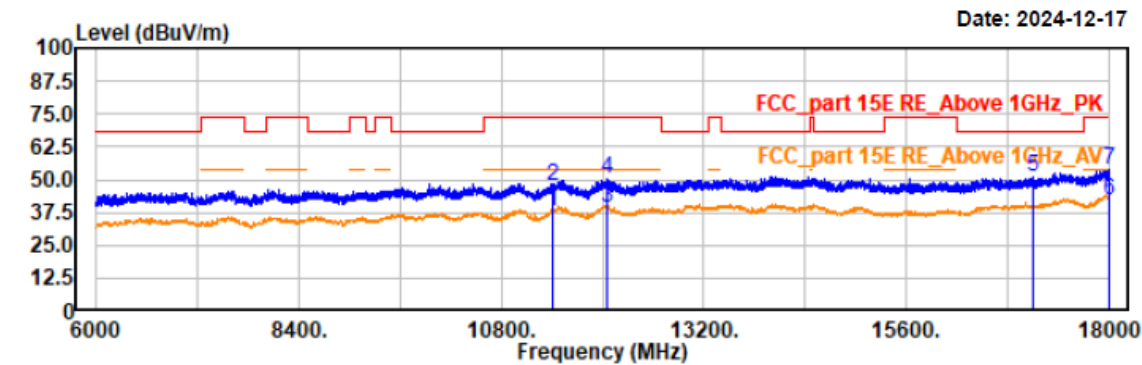


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	34.71	3.02	37.73	54.00	16.27	horizontal	Average
11400.00	44.56	3.02	47.58	74.00	26.42	horizontal	Peak
12051.60	35.13	4.16	39.29	54.00	14.71	horizontal	Average
12051.60	46.06	4.16	50.22	74.00	23.78	horizontal	Peak
17100.00	45.94	5.17	51.11	68.20	17.09	horizontal	Peak
17997.60	34.65	7.74	42.39	54.00	11.61	horizontal	Average
17997.60	46.08	7.74	53.82	74.00	20.18	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5700
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

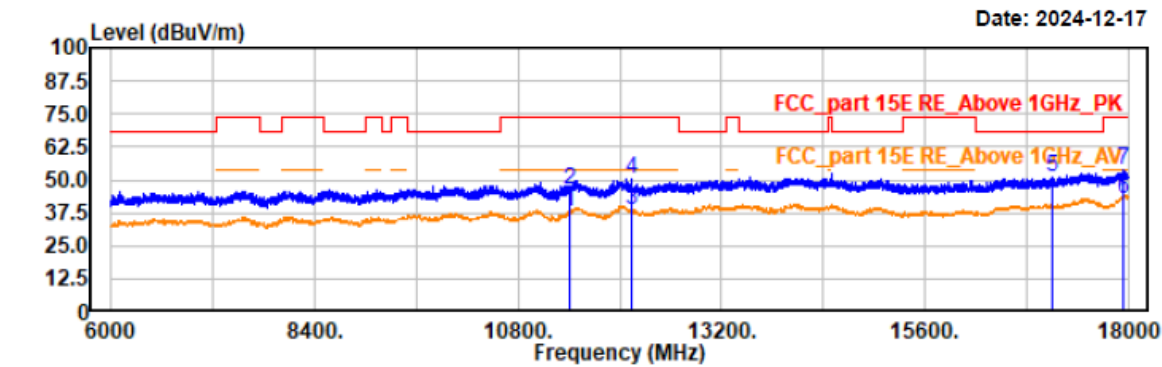


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	34.72	3.02	37.74	54.00	16.26	vertical	Average
11400.00	43.45	3.02	46.47	74.00	27.53	vertical	Peak
12140.40	34.47	4.00	38.47	54.00	15.53	vertical	Average
12140.40	46.57	4.00	50.57	74.00	23.43	vertical	Peak
17100.00	45.64	5.17	50.81	68.20	17.39	vertical	Peak
17944.80	35.30	7.65	42.95	54.00	11.05	vertical	Average
17944.80	45.81	7.65	53.46	74.00	20.54	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5500
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

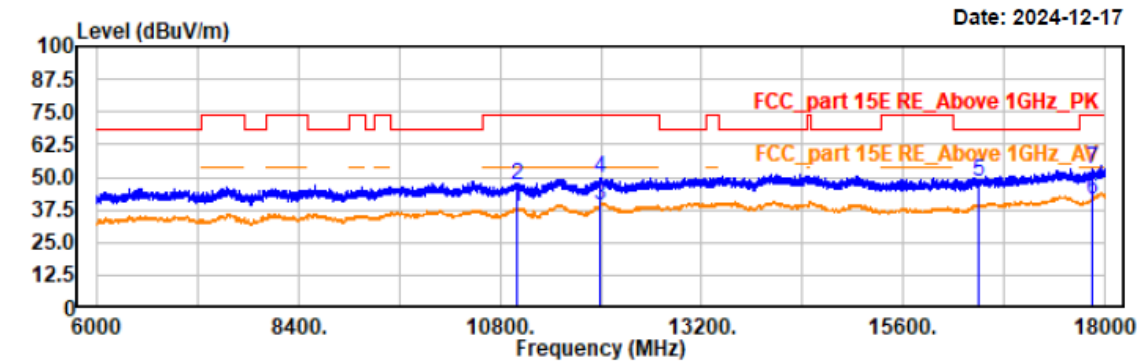


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.40	35.95	2.54	38.49	54.00	15.51	horizontal	Average
11000.40	44.18	2.54	46.72	74.00	27.28	horizontal	Peak
11998.80	34.86	4.25	39.11	54.00	14.89	horizontal	Average
11998.80	45.63	4.25	49.88	74.00	24.12	horizontal	Peak
16500.00	44.78	3.50	48.28	68.20	19.92	horizontal	Peak
17850.00	34.00	7.41	41.41	54.00	12.59	horizontal	Average
17850.00	45.84	7.41	53.25	74.00	20.75	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5500
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

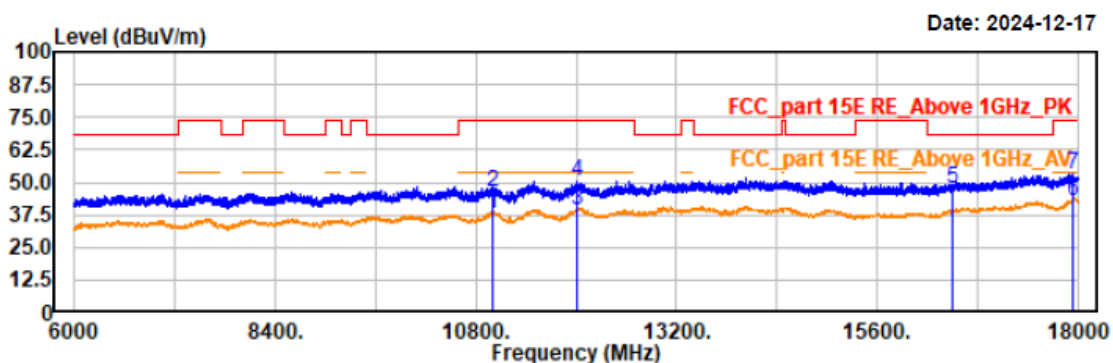


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.40	35.32	2.54	37.86	54.00	16.14	vertical	Average
11000.40	43.39	2.54	45.93	74.00	28.07	vertical	Peak
12010.80	34.91	4.23	39.14	54.00	14.86	vertical	Average
12010.80	46.09	4.23	50.32	74.00	23.68	vertical	Peak
16500.00	44.35	3.50	47.85	68.20	20.35	vertical	Peak
17937.60	35.30	7.65	42.95	54.00	11.05	vertical	Average
17937.60	45.50	7.65	53.15	74.00	20.85	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5580
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

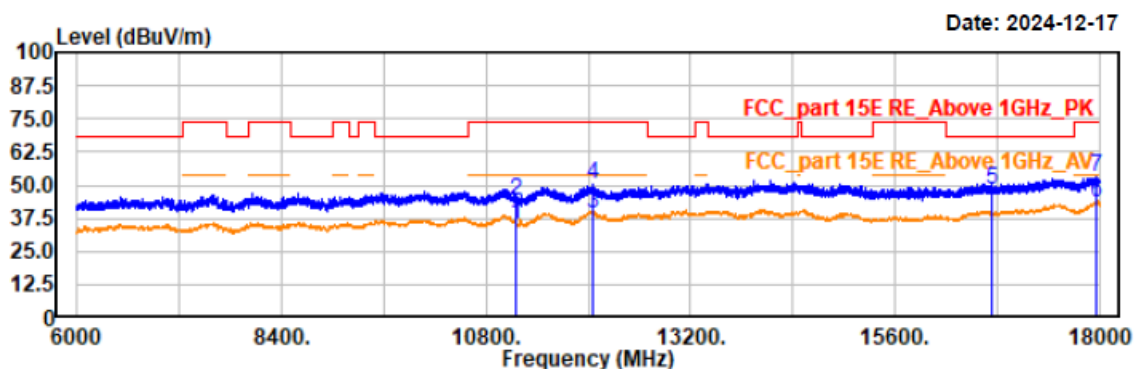

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	32.65	2.73	35.38	54.00	18.62	horizontal	Average
11160.00	41.07	2.73	43.80	74.00	30.20	horizontal	Peak
12060.00	35.45	4.14	39.59	54.00	14.41	horizontal	Average
12060.00	46.06	4.14	50.20	74.00	23.80	horizontal	Peak
16740.00	44.38	4.15	48.53	68.20	19.67	horizontal	Peak
17966.40	35.66	7.69	43.35	54.00	10.65	horizontal	Average
17966.40	45.59	7.69	53.28	74.00	20.72	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20-5580


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

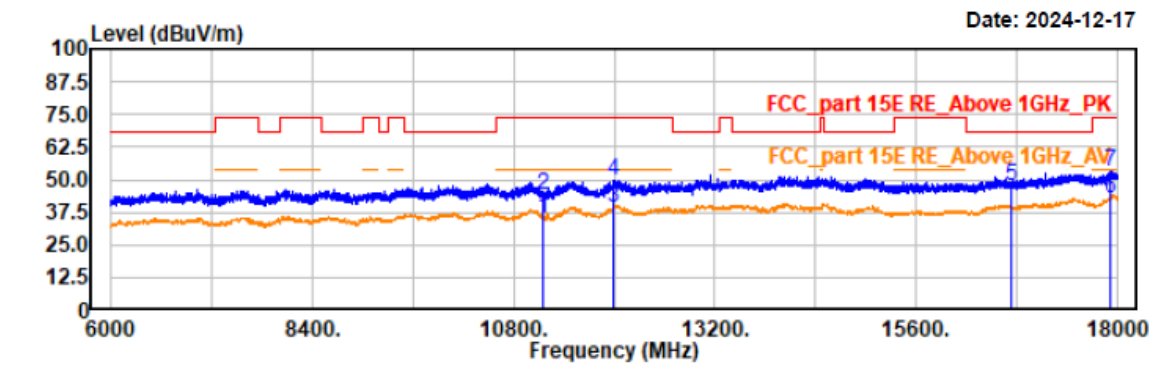

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	32.45	2.73	35.18	54.00	18.82	vertical	Average
11160.00	41.72	2.73	44.45	74.00	29.55	vertical	Peak
11988.00	34.85	4.22	39.07	54.00	14.93	vertical	Average
11988.00	45.59	4.22	49.81	74.00	24.19	vertical	Peak
16740.00	43.72	4.15	47.87	68.20	20.33	vertical	Peak
17923.20	34.95	7.62	42.57	54.00	11.43	vertical	Average
17923.20	45.29	7.62	52.91	74.00	21.09	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5700
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

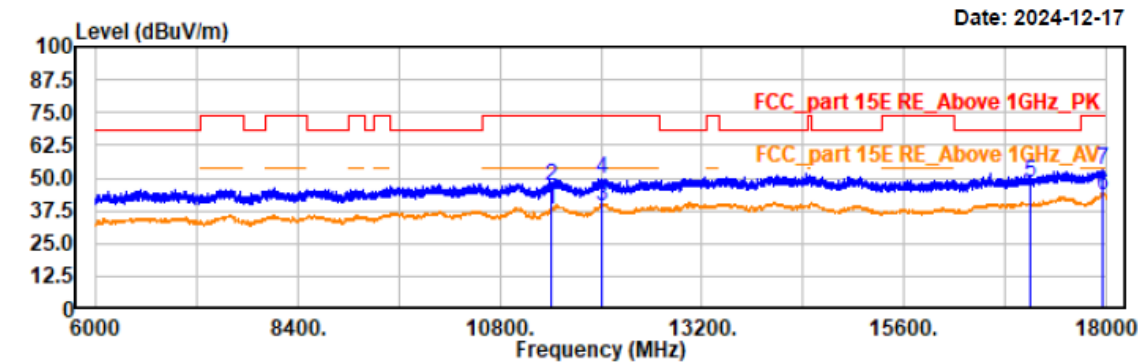


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	34.77	3.02	37.79	54.00	16.21	horizontal	Average
11400.00	43.72	3.02	46.74	74.00	27.26	horizontal	Peak
12018.00	35.19	4.21	39.40	54.00	14.60	horizontal	Average
12018.00	45.42	4.21	49.63	74.00	24.37	horizontal	Peak
17100.00	43.30	5.17	48.47	68.20	19.73	horizontal	Peak
17954.40	35.92	7.67	43.59	54.00	10.41	horizontal	Average
17954.40	45.71	7.67	53.38	74.00	20.62	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5700
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

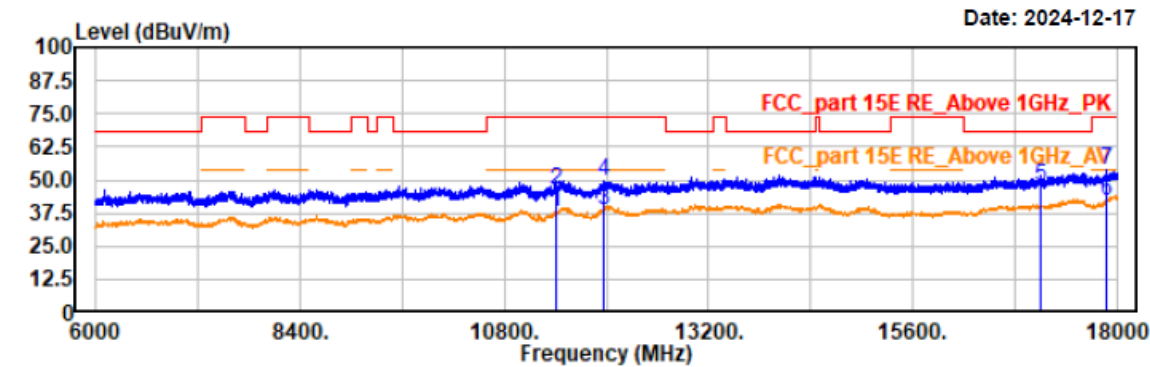


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	34.88	3.02	37.90	54.00	16.10	vertical	Average
11400.00	43.08	3.02	46.10	74.00	27.90	vertical	Peak
11962.80	34.19	4.17	38.36	54.00	15.64	vertical	Average
11962.80	45.40	4.17	49.57	74.00	24.43	vertical	Peak
17100.00	42.73	5.17	47.90	68.20	20.30	vertical	Peak
17884.80	34.48	7.53	42.01	54.00	11.99	vertical	Average
17884.80	46.36	7.53	53.89	74.00	20.11	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5510
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

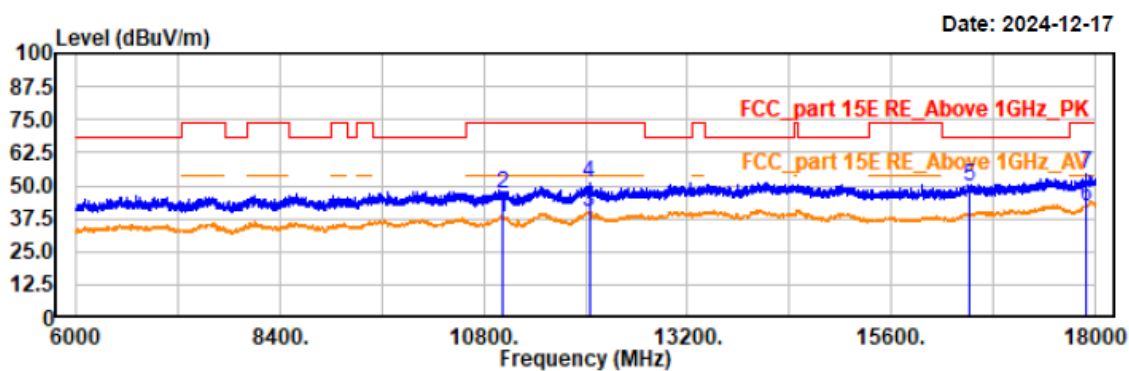

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11019.60	35.34	2.56	37.90	54.00	16.10	horizontal	Average
11019.60	44.07	2.56	46.63	74.00	27.37	horizontal	Peak
12043.20	35.49	4.17	39.66	54.00	14.34	horizontal	Average
12043.20	46.56	4.17	50.73	74.00	23.27	horizontal	Peak
16530.00	46.28	3.58	49.86	68.20	18.34	horizontal	Peak
17889.60	34.61	7.55	42.16	54.00	11.84	horizontal	Average
17889.60	46.60	7.55	54.15	74.00	19.85	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5510
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

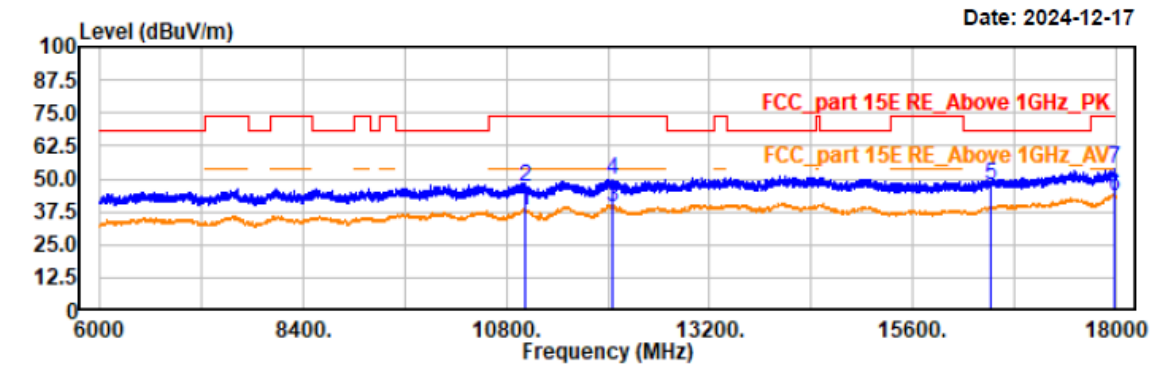


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11019.60	35.18	2.56	37.74	54.00	16.26	vertical	Average
11019.60	44.25	2.56	46.81	74.00	27.19	vertical	Peak
12060.00	35.16	4.14	39.30	54.00	14.70	vertical	Average
12060.00	45.85	4.14	49.99	74.00	24.01	vertical	Peak
16530.00	44.13	3.58	47.71	68.20	20.49	vertical	Peak
17980.80	35.87	7.71	43.58	54.00	10.42	vertical	Average
17980.80	45.86	7.71	53.57	74.00	20.43	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5550
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

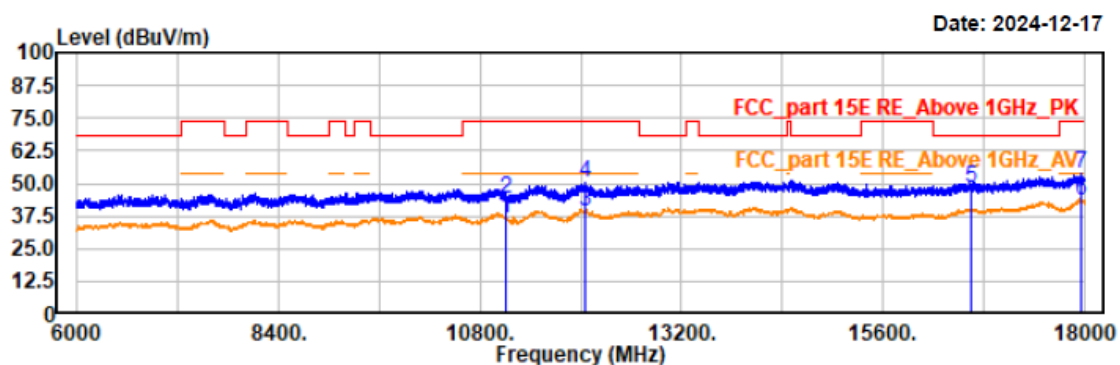


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11100.00	33.92	2.65	36.57	54.00	17.43	horizontal	Average
11100.00	41.78	2.65	44.43	74.00	29.57	horizontal	Peak
12044.40	35.46	4.17	39.63	54.00	14.37	horizontal	Average
12044.40	45.85	4.17	50.02	74.00	23.98	horizontal	Peak
16650.00	44.09	3.90	47.99	68.20	20.21	horizontal	Peak
17954.40	35.95	7.67	43.62	54.00	10.38	horizontal	Average
17954.40	45.90	7.67	53.57	74.00	20.43	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5550
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

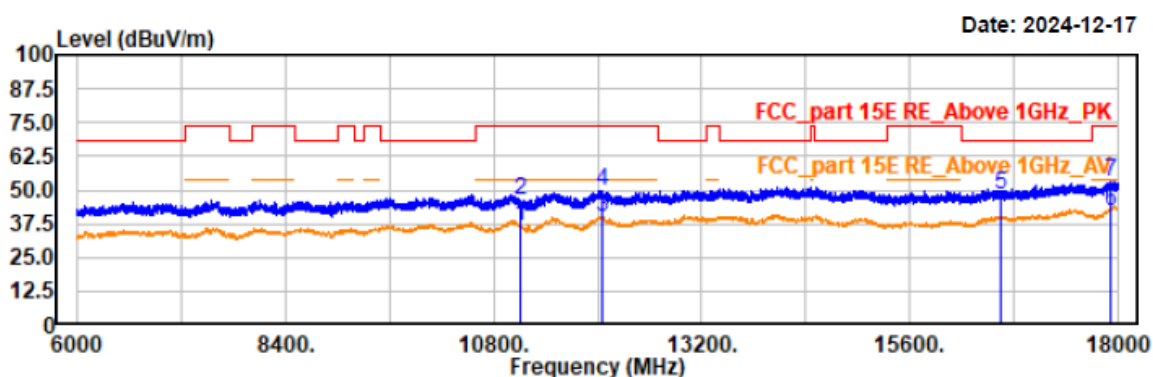


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11100.00	33.87	2.65	36.52	54.00	17.48	vertical	Average
11100.00	43.36	2.65	46.01	74.00	27.99	vertical	Peak
12061.20	35.77	4.14	39.91	54.00	14.09	vertical	Average
12061.20	45.62	4.14	49.76	74.00	24.24	vertical	Peak
16650.00	44.53	3.90	48.43	68.20	19.77	vertical	Peak
17917.20	34.74	7.62	42.36	54.00	11.64	vertical	Average
17917.20	45.46	7.62	53.08	74.00	20.92	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5670
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

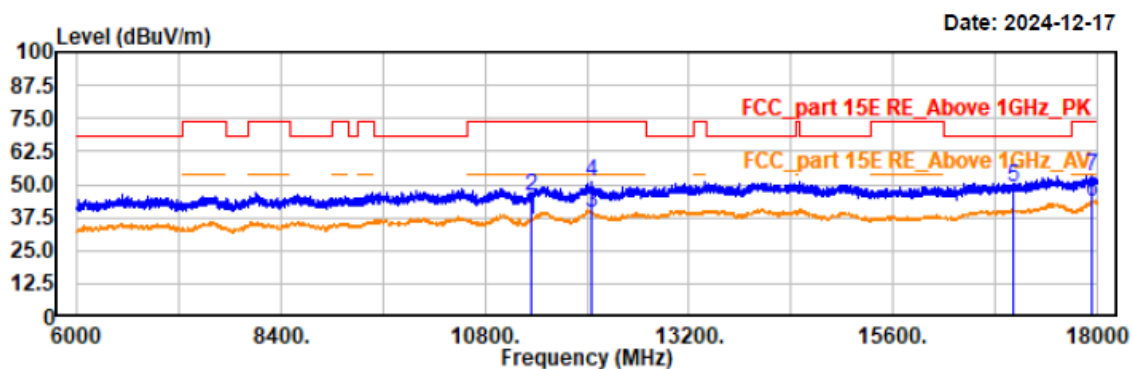

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11340.00	33.71	2.94	36.65	54.00	17.35	horizontal	Average
11340.00	42.25	2.94	45.19	74.00	28.81	horizontal	Peak
12049.20	35.08	4.16	39.24	54.00	14.76	horizontal	Average
12049.20	46.60	4.16	50.76	74.00	23.24	horizontal	Peak
17010.00	44.15	4.98	49.13	68.20	19.07	horizontal	Peak
17943.60	35.67	7.65	43.32	54.00	10.68	horizontal	Average
17943.60	45.64	7.65	53.29	74.00	20.71	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5670
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

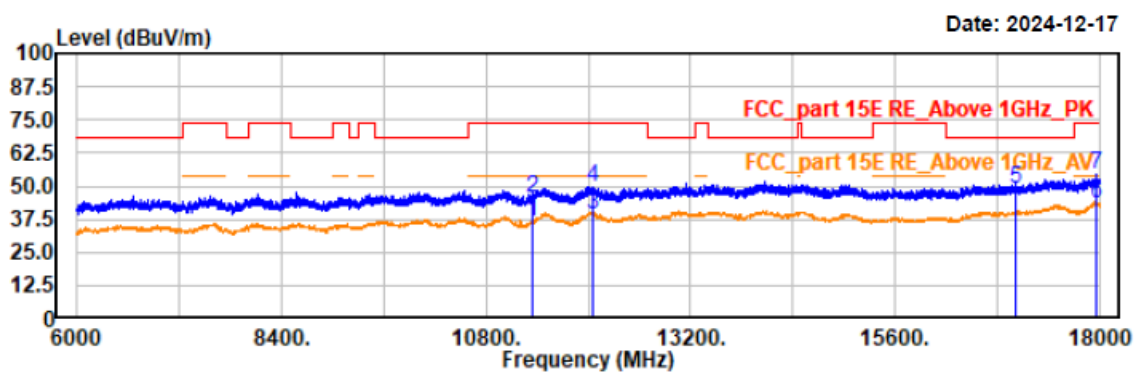

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11340.00	33.33	2.94	36.27	54.00	17.73	vertical	Average
11340.00	42.71	2.94	45.65	74.00	28.35	vertical	Peak
12044.40	35.48	4.17	39.65	54.00	14.35	vertical	Average
12044.40	45.71	4.17	49.88	74.00	24.12	vertical	Peak
17010.00	44.15	4.98	49.13	68.20	19.07	vertical	Peak
17960.40	36.03	7.68	43.71	54.00	10.29	vertical	Average
17960.40	46.58	7.68	54.26	74.00	19.74	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5530
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

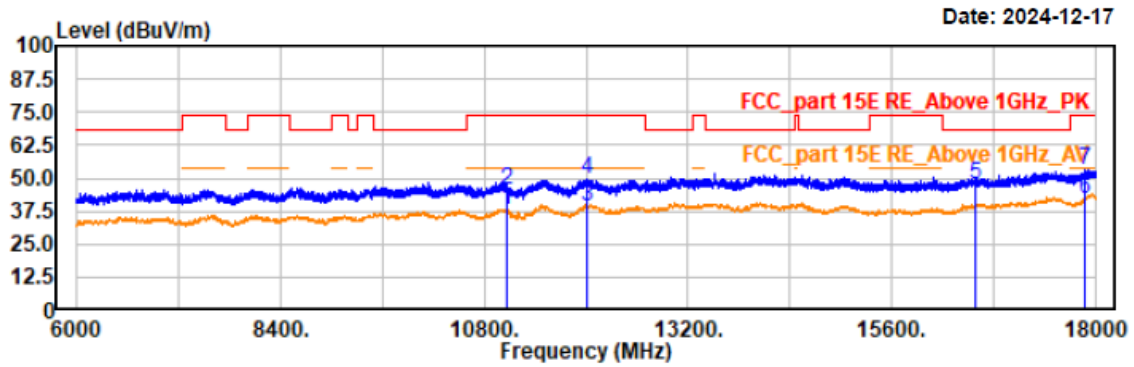

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11060.40	34.97	2.62	37.59	54.00	16.41	horizontal	Average
11060.40	42.95	2.62	45.57	74.00	28.43	horizontal	Peak
12012.00	35.21	4.23	39.44	54.00	14.56	horizontal	Average
12012.00	45.45	4.23	49.68	74.00	24.32	horizontal	Peak
16590.00	43.66	3.74	47.40	68.20	20.80	horizontal	Peak
17875.20	34.28	7.50	41.78	54.00	12.22	horizontal	Average
17875.20	45.68	7.50	53.18	74.00	20.82	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5530
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

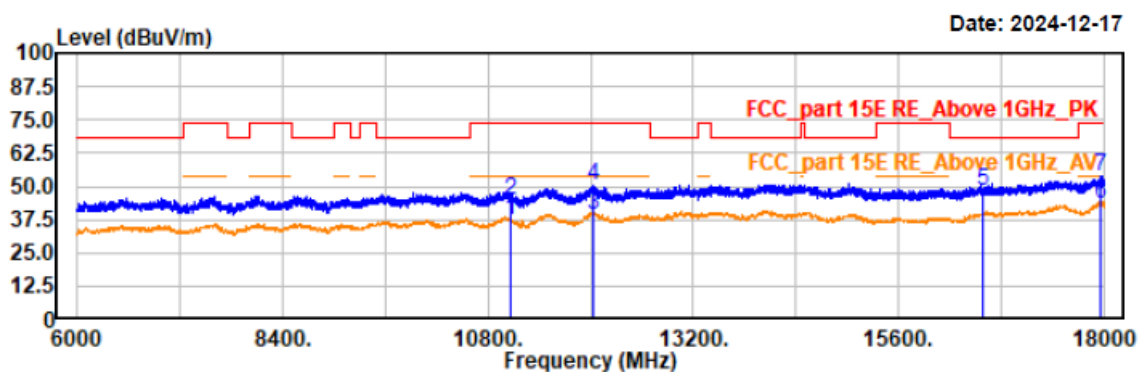

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11060.40	34.78	2.62	37.40	54.00	16.60	vertical	Average
11060.40	42.50	2.62	45.12	74.00	28.88	vertical	Peak
12026.40	34.92	4.21	39.13	54.00	14.87	vertical	Average
12026.40	45.86	4.21	50.07	74.00	23.93	vertical	Peak
16590.00	44.58	3.74	48.32	68.20	19.88	vertical	Peak
17967.60	35.99	7.69	43.68	54.00	10.32	vertical	Average
17967.60	46.02	7.69	53.71	74.00	20.29	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5610
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

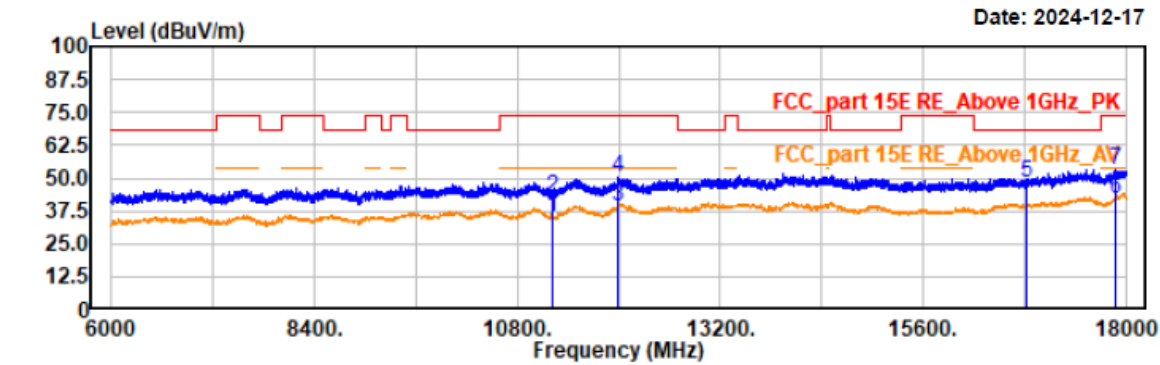


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11220.00	32.15	2.80	34.95	54.00	19.05	horizontal	Average
11220.00	40.30	2.80	43.10	74.00	30.90	horizontal	Peak
11995.20	35.10	4.24	39.34	54.00	14.66	horizontal	Average
11995.20	46.00	4.24	50.24	74.00	23.76	horizontal	Peak
16830.00	43.55	4.42	47.97	68.20	20.23	horizontal	Peak
17878.80	34.68	7.51	42.19	54.00	11.81	horizontal	Average
17878.80	45.74	7.51	53.25	74.00	20.75	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5610
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

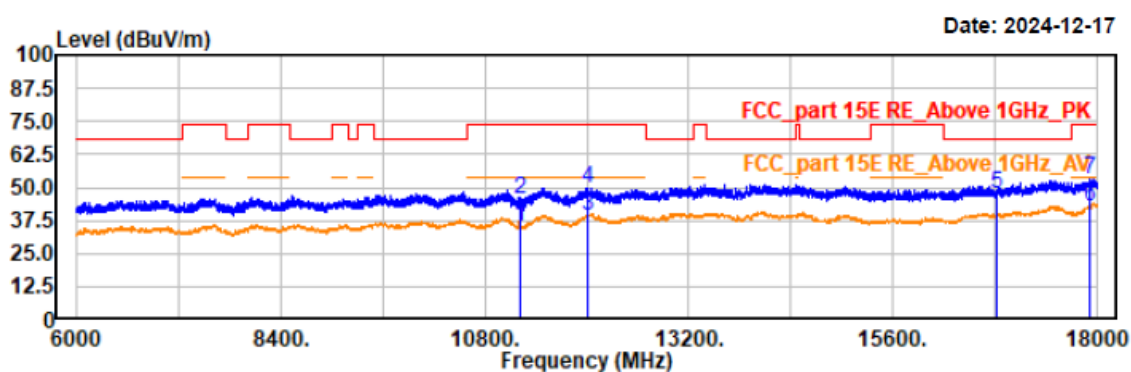

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11220.00	32.58	2.80	35.38	54.00	18.62	vertical	Average
11220.00	42.41	2.80	45.21	74.00	28.79	vertical	Peak
12004.80	35.13	4.24	39.37	54.00	14.63	vertical	Average
12004.80	45.43	4.24	49.67	74.00	24.33	vertical	Peak
16830.00	43.33	4.42	47.75	68.20	20.45	vertical	Peak
17917.20	35.16	7.62	42.78	54.00	11.22	vertical	Average
17917.20	45.62	7.62	53.24	74.00	20.76	vertical	Peak

B4

Project No.: 2407V20721E-RF

Test Mode: 11a-5745


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

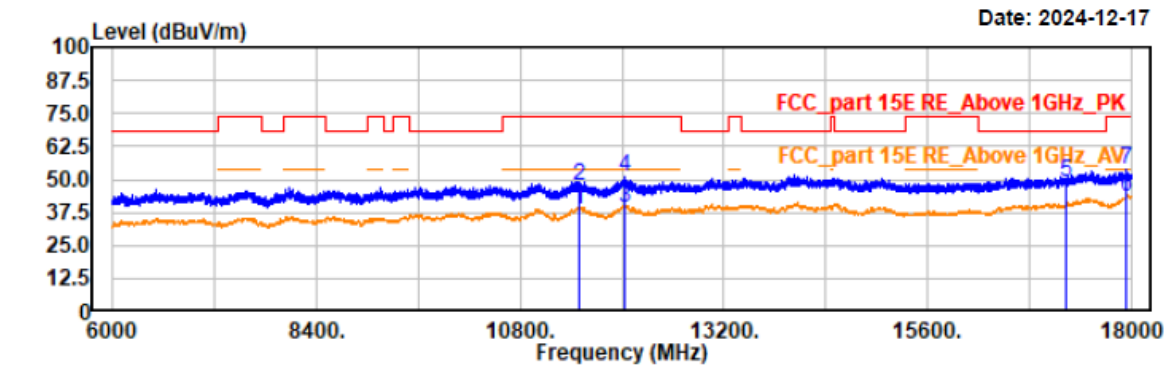


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	35.82	3.12	38.94	54.00	15.06	horizontal	Average
11490.00	44.65	3.12	47.77	74.00	26.23	horizontal	Peak
12040.80	34.89	4.18	39.07	54.00	14.93	horizontal	Average
12040.80	47.05	4.18	51.23	74.00	22.77	horizontal	Peak
17235.00	43.07	5.59	48.66	68.20	19.54	horizontal	Peak
17941.20	35.61	7.65	43.26	54.00	10.74	horizontal	Average
17941.20	46.26	7.65	53.91	74.00	20.09	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5745
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

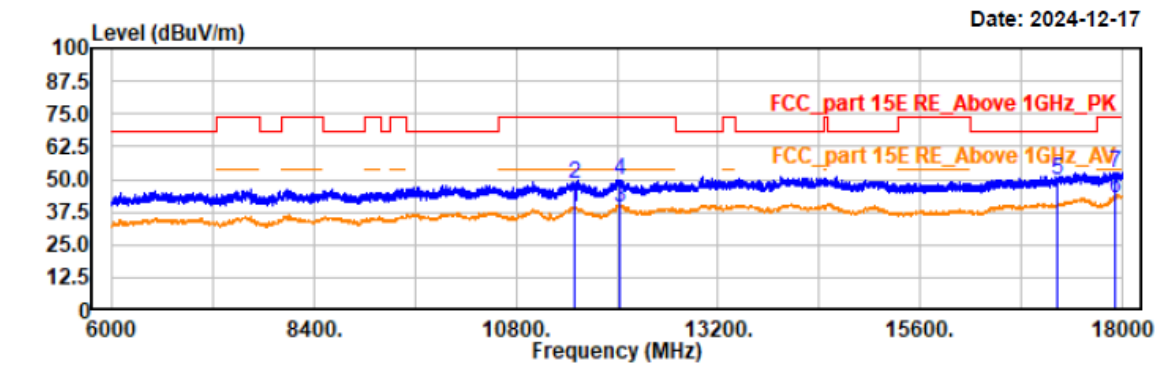

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	36.45	3.12	39.57	54.00	14.43	vertical	Average
11490.00	45.27	3.12	48.39	74.00	25.61	vertical	Peak
12039.60	35.18	4.18	39.36	54.00	14.64	vertical	Average
12039.60	45.65	4.18	49.83	74.00	24.17	vertical	Peak
17235.00	43.91	5.59	49.50	68.20	18.70	vertical	Peak
17917.20	35.08	7.62	42.70	54.00	11.30	vertical	Average
17917.20	45.12	7.62	52.74	74.00	21.26	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5785


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 21.5°C /46%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

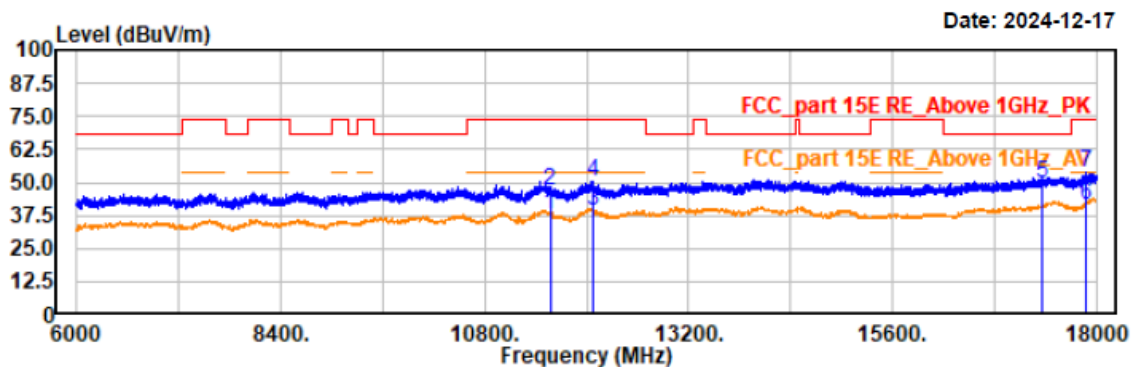

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.40	34.93	3.34	38.27	54.00	15.73	horizontal	Average
11570.40	43.54	3.34	46.88	74.00	27.12	horizontal	Peak
12070.80	35.02	4.12	39.14	54.00	14.86	horizontal	Average
12070.80	46.35	4.12	50.47	74.00	23.53	horizontal	Peak
17355.00	43.95	5.91	49.86	68.20	18.34	horizontal	Peak
17872.80	33.93	7.50	41.43	54.00	12.57	horizontal	Average
17872.80	46.51	7.50	54.01	74.00	19.99	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5785


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

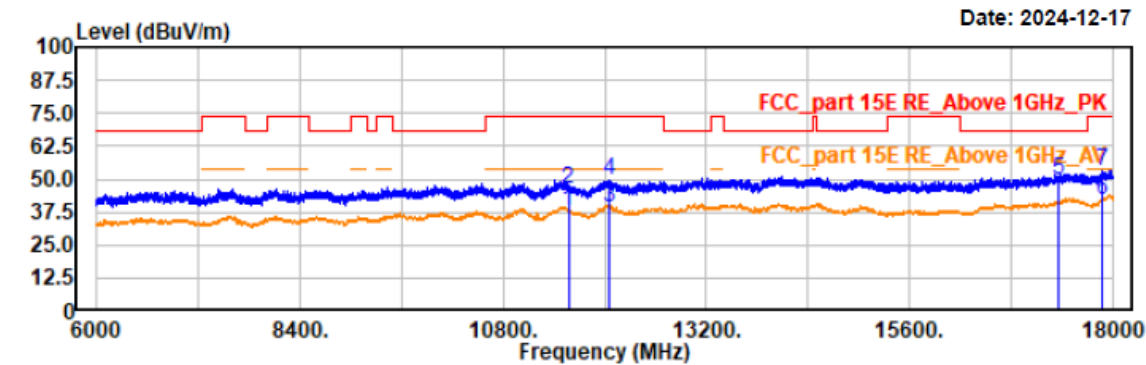

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.40	34.72	3.34	38.06	54.00	15.94	vertical	Average
11570.40	42.57	3.34	45.91	74.00	28.09	vertical	Peak
12058.80	35.31	4.14	39.45	54.00	14.55	vertical	Average
12058.80	45.29	4.14	49.43	74.00	24.57	vertical	Peak
17355.00	43.44	5.91	49.35	68.20	18.85	vertical	Peak
17881.20	34.39	7.52	41.91	54.00	12.09	vertical	Average
17881.20	45.63	7.52	53.15	74.00	20.85	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5825
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

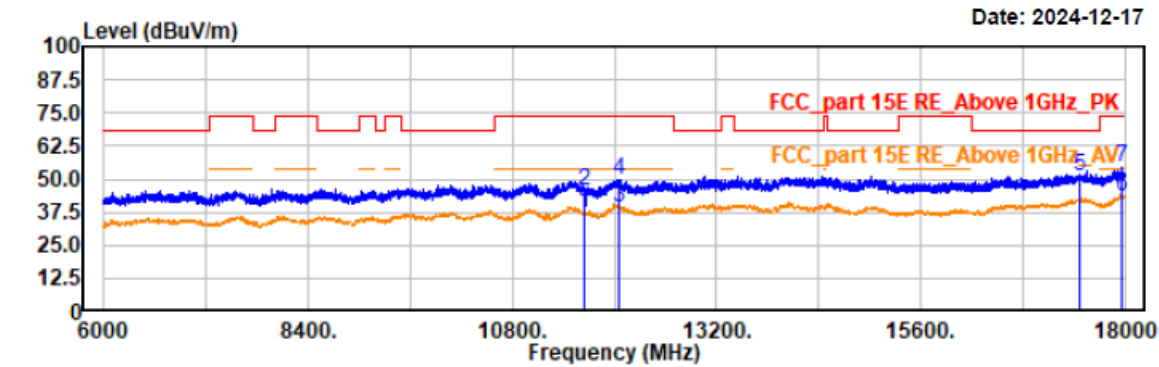


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11649.60	33.42	3.53	36.95	54.00	17.05	horizontal	Average
11649.60	41.99	3.53	45.52	74.00	28.48	horizontal	Peak
12061.20	35.33	4.14	39.47	54.00	14.53	horizontal	Average
12061.20	45.73	4.14	49.87	74.00	24.13	horizontal	Peak
17475.00	44.99	6.23	51.22	68.20	16.98	horizontal	Peak
17960.40	35.78	7.68	43.46	54.00	10.54	horizontal	Average
17960.40	46.54	7.68	54.22	74.00	19.78	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5825
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

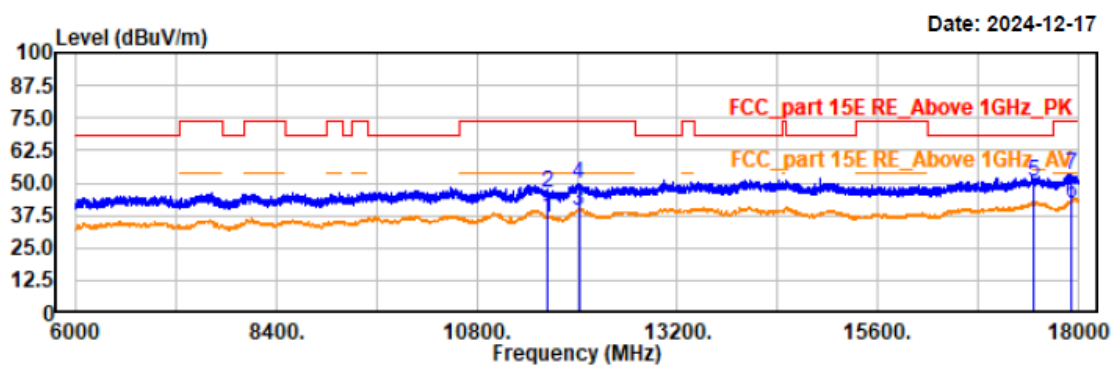

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11649.60	33.25	3.53	36.78	54.00	17.22	vertical	Average
11649.60	42.42	3.53	45.95	74.00	28.05	vertical	Peak
12021.60	35.06	4.21	39.27	54.00	14.73	vertical	Average
12021.60	45.48	4.21	49.69	74.00	24.31	vertical	Peak
17475.00	44.25	6.23	50.48	68.20	17.72	vertical	Peak
17913.60	34.75	7.60	42.35	54.00	11.65	vertical	Average
17913.60	45.48	7.60	53.08	74.00	20.92	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5745
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

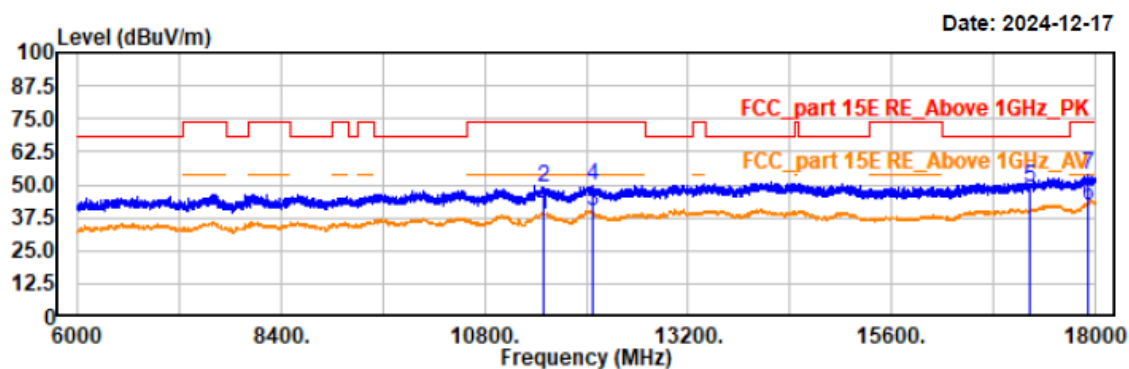


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	35.66	3.12	38.78	54.00	15.22	horizontal	Average
11490.00	45.59	3.12	48.71	74.00	25.29	horizontal	Peak
12066.00	35.65	4.13	39.78	54.00	14.22	horizontal	Average
12066.00	45.83	4.13	49.96	74.00	24.04	horizontal	Peak
17235.00	43.21	5.59	48.80	68.20	19.40	horizontal	Peak
17916.00	34.66	7.62	42.28	54.00	11.72	horizontal	Average
17916.00	46.09	7.62	53.71	74.00	20.29	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5745
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

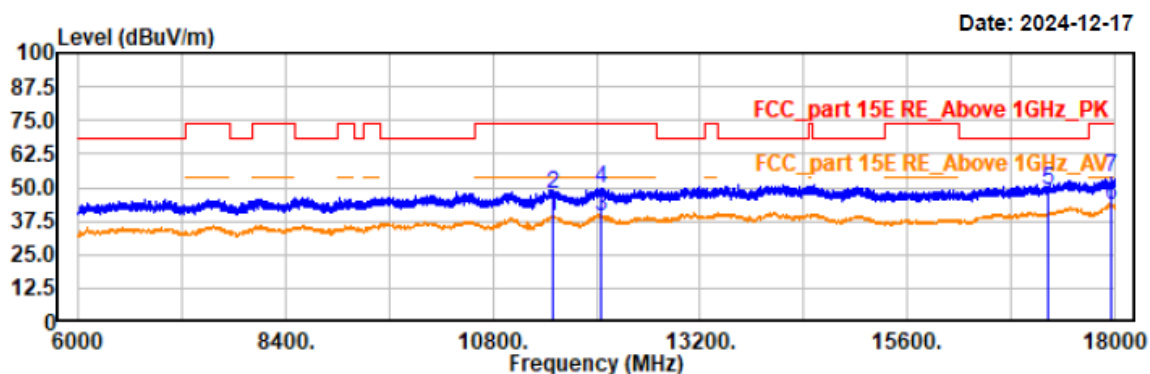

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	35.95	3.12	39.07	54.00	14.93	vertical	Average
11490.00	44.48	3.12	47.60	74.00	26.40	vertical	Peak
12055.20	35.43	4.15	39.58	54.00	14.42	vertical	Average
12055.20	45.67	4.15	49.82	74.00	24.18	vertical	Peak
17234.40	43.60	5.58	49.18	68.20	19.02	vertical	Peak
17962.80	35.80	7.68	43.48	54.00	10.52	vertical	Average
17962.80	45.87	7.68	53.55	74.00	20.45	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20-5785


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa


Tested by: Wlif Wu

Power Source: AC120V/60Hz

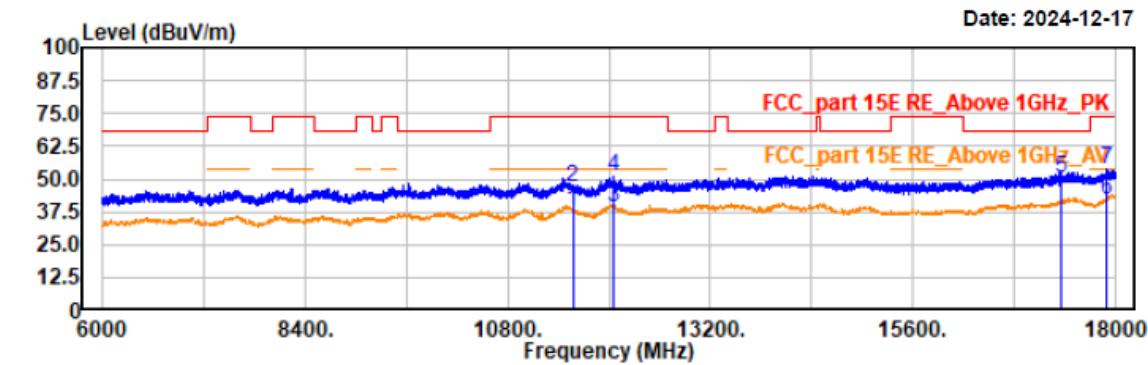

Project No.: 2407V20721E-RF
Test Mode: 11n20-5785
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

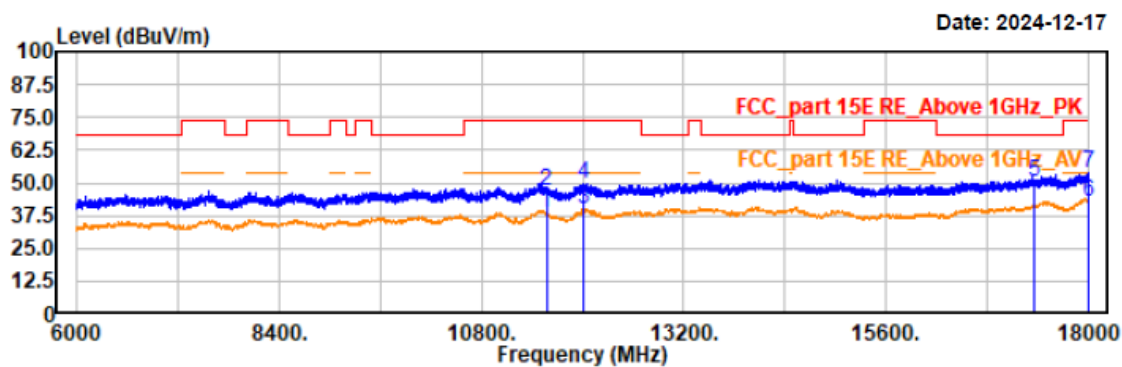

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.40	35.05	3.34	38.39	54.00	15.61	vertical	Average
11570.40	43.39	3.34	46.73	74.00	27.27	vertical	Peak
12012.00	35.53	4.23	39.76	54.00	14.24	vertical	Average
12012.00	45.19	4.23	49.42	74.00	24.58	vertical	Peak
17355.00	44.15	5.91	50.06	68.20	18.14	vertical	Peak
17997.60	34.97	7.74	42.71	54.00	11.29	vertical	Average
17997.60	45.79	7.74	53.53	74.00	20.47	vertical	Peak