

Project No.: 2407V20721E-RF

Test Mode: 11n20-5825


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

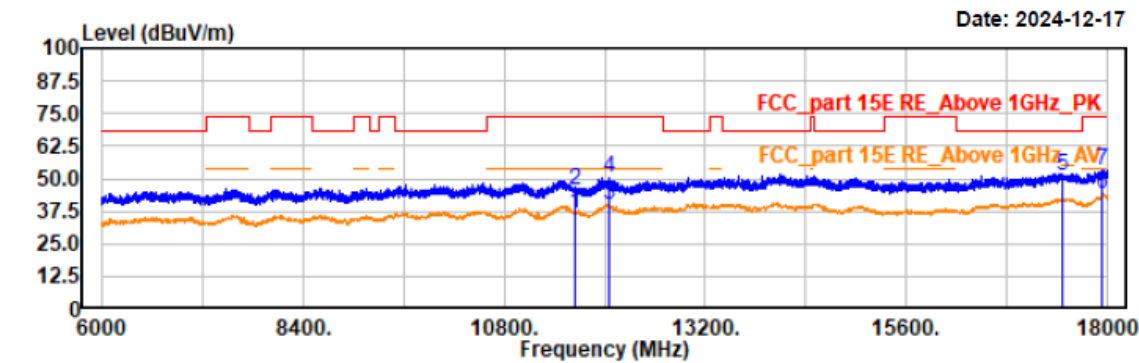


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11649.60	33.35	3.53	36.88	54.00	17.12	horizontal	Average
11649.60	41.83	3.53	45.36	74.00	28.64	horizontal	Peak
12045.60	35.50	4.17	39.67	54.00	14.33	horizontal	Average
12045.60	45.90	4.17	50.07	74.00	23.93	horizontal	Peak
17475.00	44.86	6.23	51.09	68.20	17.11	horizontal	Peak
17948.40	36.20	7.66	43.86	54.00	10.14	horizontal	Average
17948.40	45.53	7.66	53.19	74.00	20.81	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5825
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

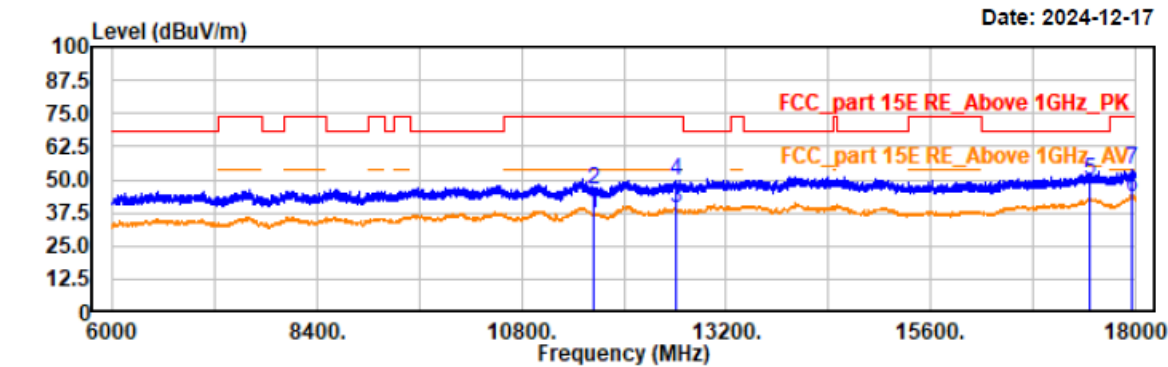

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11649.60	33.61	3.53	37.14	54.00	16.86	vertical	Average
11649.60	42.55	3.53	46.08	74.00	27.92	vertical	Peak
12606.00	35.33	3.96	39.29	54.00	14.71	vertical	Average
12606.00	45.81	3.96	49.77	74.00	24.23	vertical	Peak
17475.00	43.71	6.23	49.94	68.20	18.26	vertical	Peak
17962.80	35.91	7.68	43.59	54.00	10.41	vertical	Average
17962.80	46.16	7.68	53.84	74.00	20.16	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40-5755


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

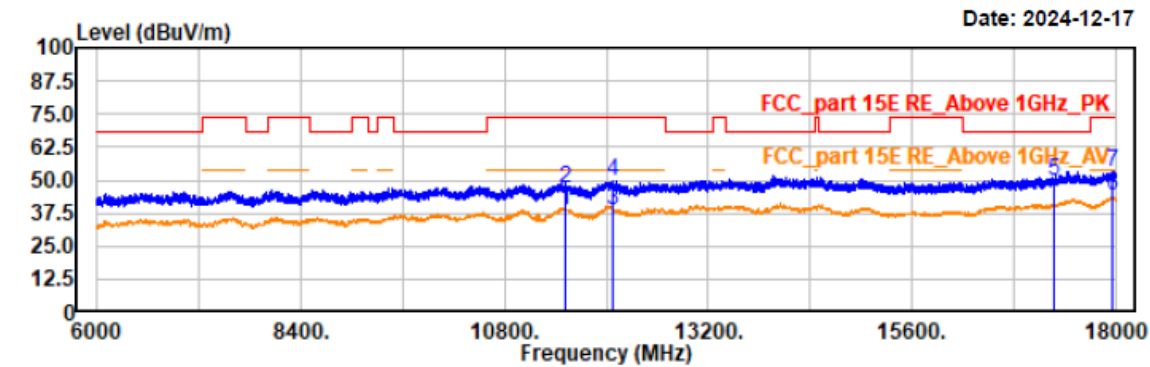


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11510.40	35.74	3.16	38.90	54.00	15.10	horizontal	Average
11510.40	44.00	3.16	47.16	74.00	26.84	horizontal	Peak
12074.40	34.60	4.11	38.71	54.00	15.29	horizontal	Average
12074.40	45.35	4.11	49.46	74.00	24.54	horizontal	Peak
17265.00	43.90	5.65	49.55	68.20	18.65	horizontal	Peak
17961.60	36.19	7.68	43.87	54.00	10.13	horizontal	Average
17961.60	45.46	7.68	53.14	74.00	20.86	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5755
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

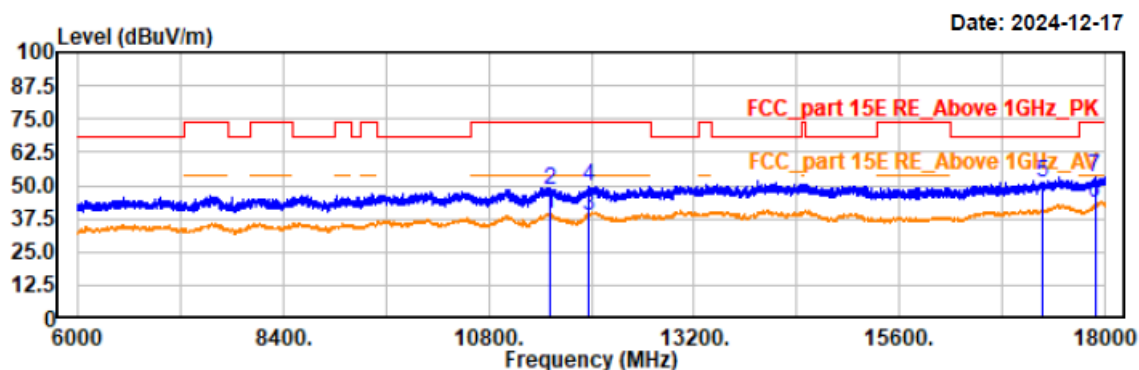

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11510.40	35.81	3.16	38.97	54.00	15.03	vertical	Average
11510.40	45.15	3.16	48.31	74.00	25.69	vertical	Peak
11962.80	34.13	4.17	38.30	54.00	15.70	vertical	Average
11962.80	45.21	4.17	49.38	74.00	24.62	vertical	Peak
17265.00	45.07	5.65	50.72	68.20	17.48	vertical	Peak
17886.00	35.66	7.54	43.20	54.00	10.80	vertical	Average
17886.00	45.33	7.54	52.87	74.00	21.13	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5795
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5℃/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

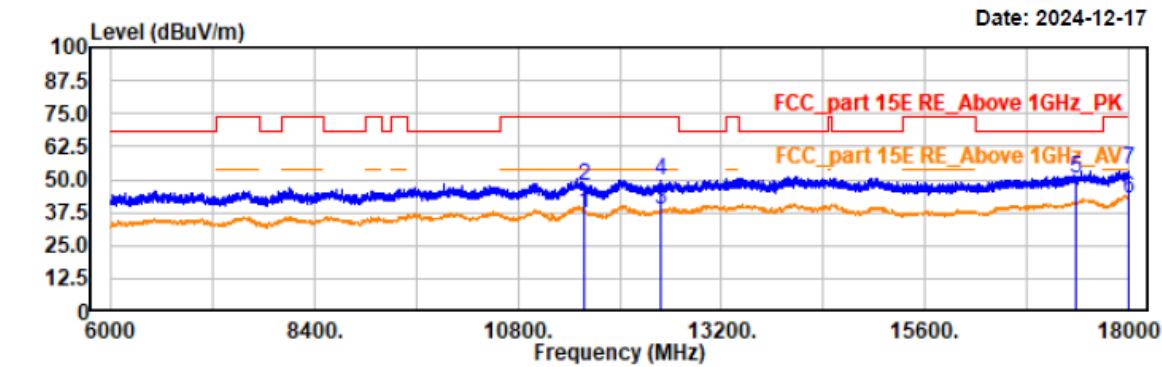


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11589.60	34.12	3.40	37.52	54.00	16.48	horizontal	Average
11589.60	44.43	3.40	47.83	74.00	26.17	horizontal	Peak
12486.00	34.96	3.58	38.54	54.00	15.46	horizontal	Average
12486.00	45.93	3.58	49.51	74.00	24.49	horizontal	Peak
17385.00	44.23	6.00	50.23	68.20	17.97	horizontal	Peak
18000.00	35.33	7.74	43.07	54.00	10.93	horizontal	Average
18000.00	45.92	7.74	53.66	74.00	20.34	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5795
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

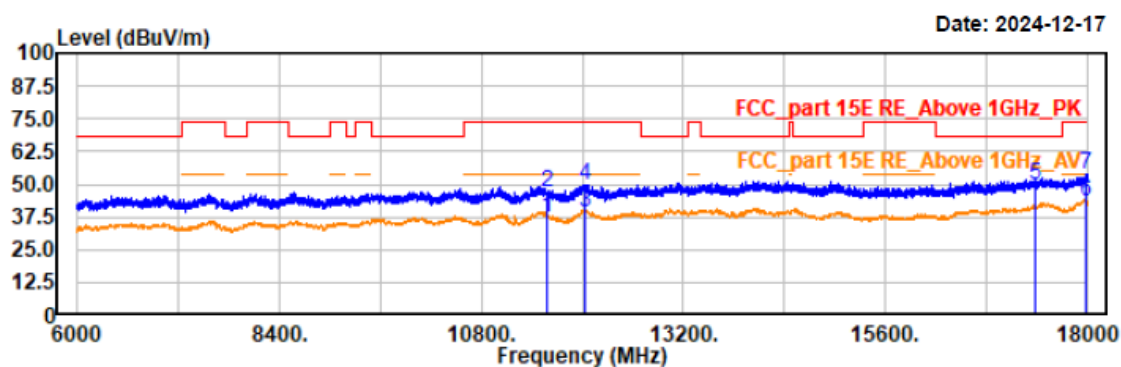

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11589.60	34.06	3.40	37.46	54.00	16.54	vertical	Average
11589.60	43.76	3.40	47.16	74.00	26.84	vertical	Peak
12036.00	34.94	4.19	39.13	54.00	14.87	vertical	Average
12036.00	45.68	4.19	49.87	74.00	24.13	vertical	Peak
17385.00	43.51	6.00	49.51	68.20	18.69	vertical	Peak
17983.20	35.48	7.72	43.20	54.00	10.80	vertical	Average
17983.20	45.79	7.72	53.51	74.00	20.49	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5775
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

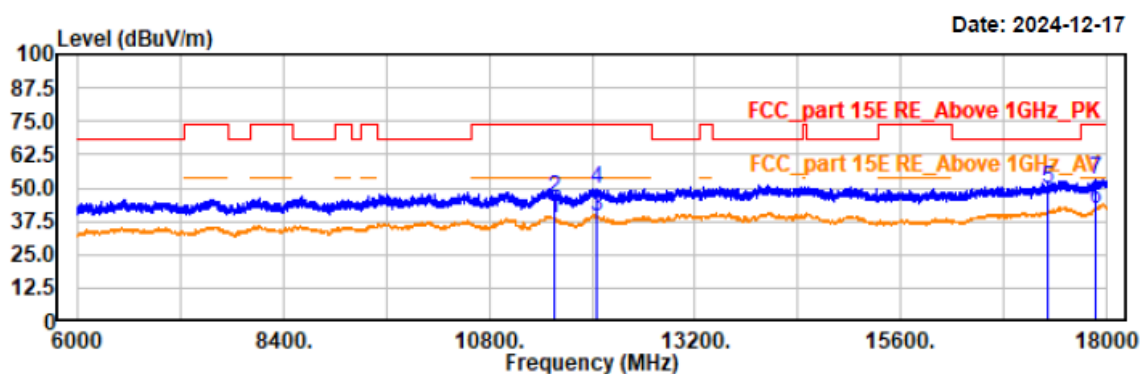

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11550.00	35.22	3.28	38.50	54.00	15.50	horizontal	Average
11550.00	42.86	3.28	46.14	74.00	27.86	horizontal	Peak
12056.40	35.12	4.15	39.27	54.00	14.73	horizontal	Average
12056.40	45.71	4.15	49.86	74.00	24.14	horizontal	Peak
17325.00	43.67	5.81	49.48	68.20	18.72	horizontal	Peak
17880.00	34.69	7.51	42.20	54.00	11.80	horizontal	Average
17880.00	45.88	7.51	53.39	74.00	20.61	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5775
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 21.5°C/46%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

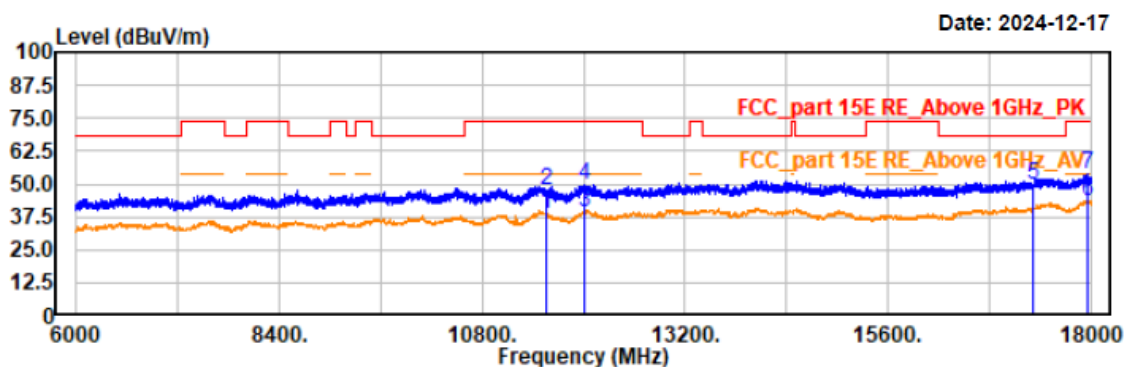

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11550.00	35.24	3.28	38.52	54.00	15.48	vertical	Average
11550.00	44.30	3.28	47.58	74.00	26.42	vertical	Peak
12018.00	34.99	4.21	39.20	54.00	14.80	vertical	Average
12018.00	45.79	4.21	50.00	74.00	24.00	vertical	Peak
17325.00	43.51	5.81	49.32	68.20	18.88	vertical	Peak
17964.00	35.92	7.68	43.60	54.00	10.40	vertical	Average
17964.00	46.17	7.68	53.85	74.00	20.15	vertical	Peak

EUT Model: NLS-NQuire500

B1

Project No.: 2407V20721E-RF

Test Mode: 11a-5180


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

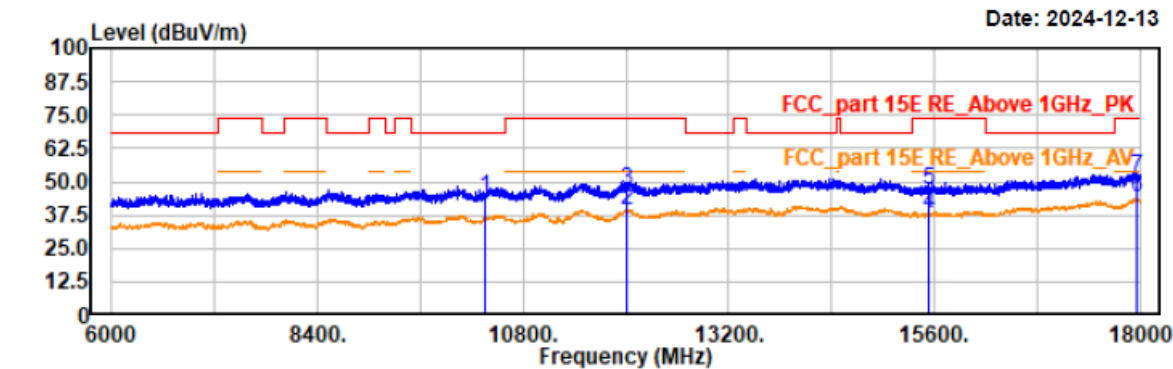

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Condition: AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10360.50	42.52	1.62	44.14	68.20	24.06	horizontal	Peak
12015.00	35.12	4.22	39.34	54.00	14.66	horizontal	Average
12015.00	42.56	4.22	46.78	74.00	27.22	horizontal	Peak
15540.00	35.07	2.61	37.68	54.00	16.32	horizontal	Average
15540.00	44.26	2.61	46.87	74.00	27.13	horizontal	Peak
17958.00	36.16	7.68	43.84	54.00	10.16	horizontal	Average
17958.00	44.03	7.68	51.71	74.00	22.29	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5180
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

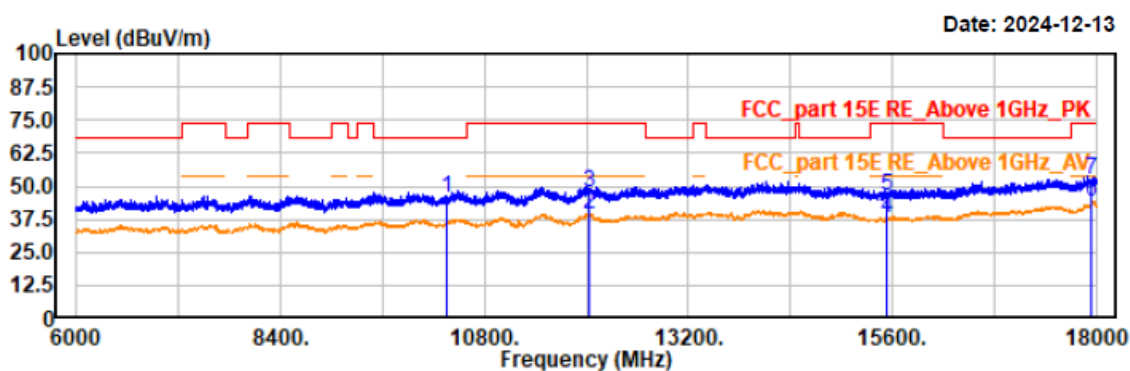

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10360.00	43.71	1.62	45.33	68.20	22.87	vertical	Peak
12040.50	35.27	4.18	39.45	54.00	14.55	vertical	Average
12040.50	43.74	4.18	47.92	74.00	26.08	vertical	Peak
15540.00	35.16	2.61	37.77	54.00	16.23	vertical	Average
15540.00	43.80	2.61	46.41	74.00	27.59	vertical	Peak
17949.00	36.31	7.67	43.98	54.00	10.02	vertical	Average
17949.00	44.64	7.67	52.31	74.00	21.69	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5200


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

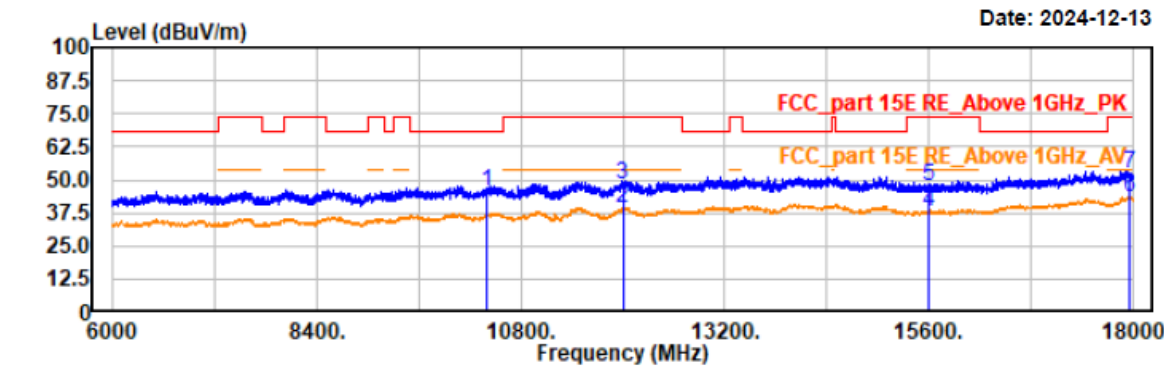


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10399.50	43.91	1.69	45.60	68.20	22.60	horizontal	Peak
12000.00	35.20	4.25	39.45	54.00	14.55	horizontal	Average
12000.00	44.12	4.25	48.37	74.00	25.63	horizontal	Peak
15600.00	35.40	2.51	37.91	54.00	16.09	horizontal	Average
15600.00	44.97	2.51	47.48	74.00	26.52	horizontal	Peak
17961.00	36.08	7.68	43.76	54.00	10.24	horizontal	Average
17961.00	44.90	7.68	52.58	74.00	21.42	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5200
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

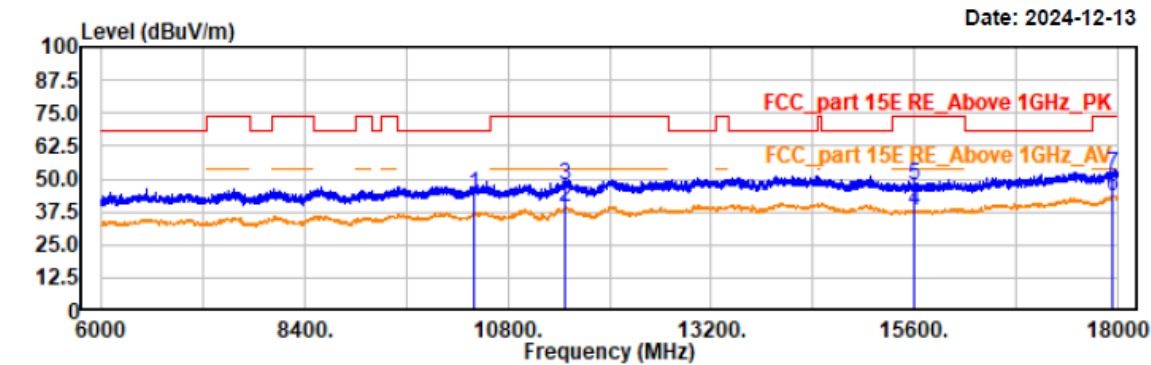

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.00	42.71	1.69	44.40	68.20	23.80	vertical	Peak
11475.00	36.54	3.10	39.64	54.00	14.36	vertical	Average
11475.00	44.75	3.10	47.85	74.00	26.15	vertical	Peak
15600.00	35.38	2.51	37.89	54.00	16.11	vertical	Average
15600.00	45.13	2.51	47.64	74.00	26.36	vertical	Peak
17949.00	36.00	7.67	43.67	54.00	10.33	vertical	Average
17949.00	44.33	7.67	52.00	74.00	22.00	vertical	Peak

Project No.: 2407V20721E-RF

Temp/Humi/ATM: 23.9℃/52%/100.1kPa


Test Mode: 11a-5240

Tested by: Wlif Wu

EUT Model: NLS-NQuire500

Power Source: AC120V/60Hz

Test distance: 3m

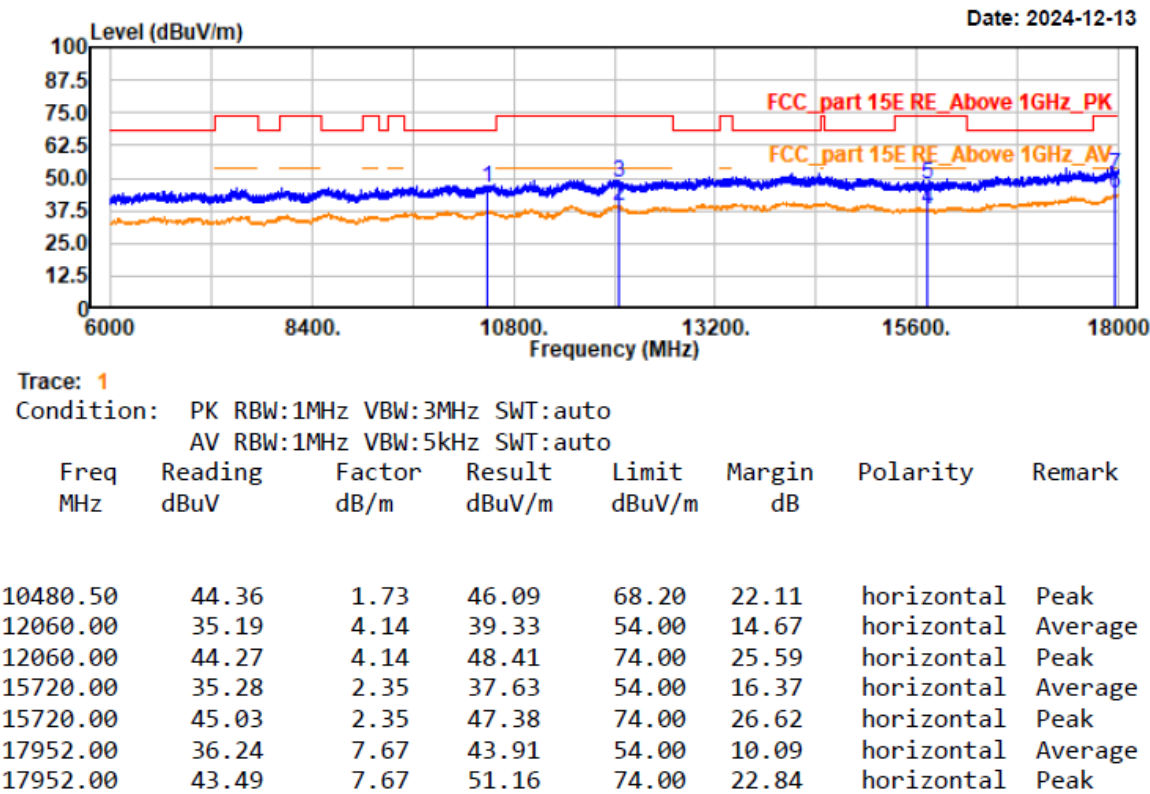

Project No.: 2407V20721E-RF

Test Mode: 11a-5240


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

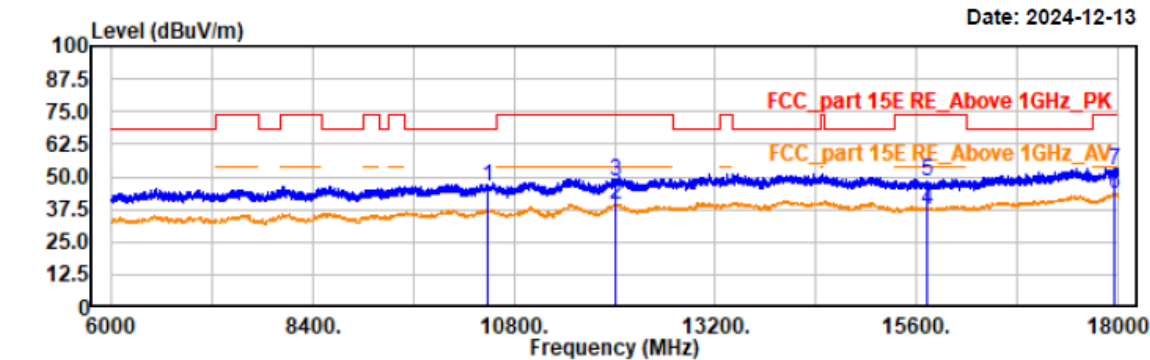


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10480.00	44.55	1.73	46.28	68.20	21.92	vertical	Peak
12001.50	35.10	4.25	39.35	54.00	14.65	vertical	Average
12001.50	44.25	4.25	48.50	74.00	25.50	vertical	Peak
15720.00	35.19	2.35	37.54	54.00	16.46	vertical	Average
15720.00	46.07	2.35	48.42	74.00	25.58	vertical	Peak
17964.00	36.03	7.68	43.71	54.00	10.29	vertical	Average
17964.00	44.63	7.68	52.31	74.00	21.69	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5180
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

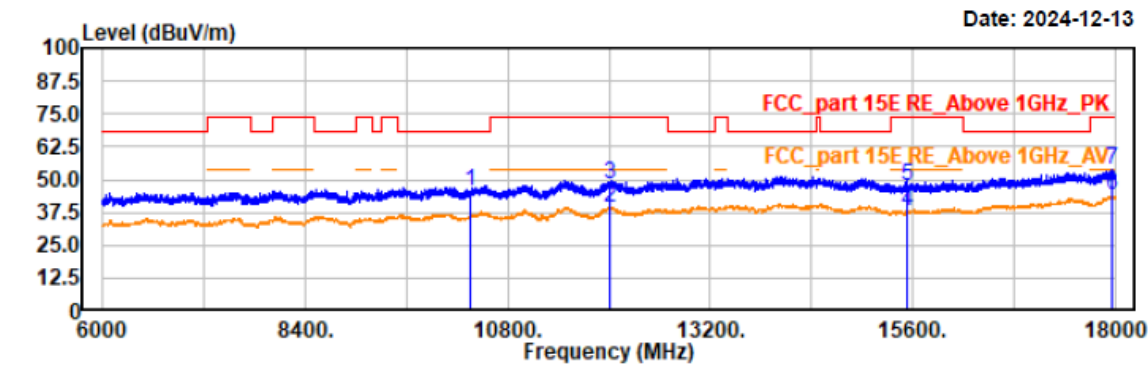


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10360.00	43.85	1.62	45.47	68.20	22.73	horizontal	Peak
12009.00	35.35	4.23	39.58	54.00	14.42	horizontal	Average
12009.00	44.02	4.23	48.25	74.00	25.75	horizontal	Peak
15540.00	35.25	2.61	37.86	54.00	16.14	horizontal	Average
15540.00	44.84	2.61	47.45	74.00	26.55	horizontal	Peak
17959.50	36.20	7.67	43.87	54.00	10.13	horizontal	Average
17959.50	45.79	7.67	53.46	74.00	20.54	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5180
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

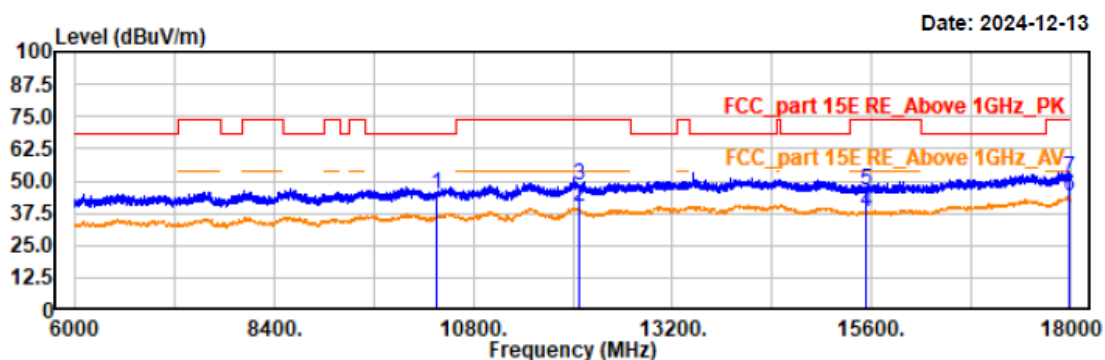


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10360.50	42.93	1.62	44.55	68.20	23.65	vertical	Peak
12069.00	35.76	4.12	39.88	54.00	14.12	vertical	Average
12069.00	44.24	4.12	48.36	74.00	25.64	vertical	Peak
15540.00	35.27	2.61	37.88	54.00	16.12	vertical	Average
15540.00	43.91	2.61	46.52	74.00	27.48	vertical	Peak
17973.00	36.18	7.70	43.88	54.00	10.12	vertical	Average
17973.00	43.59	7.70	51.29	74.00	22.71	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5200
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

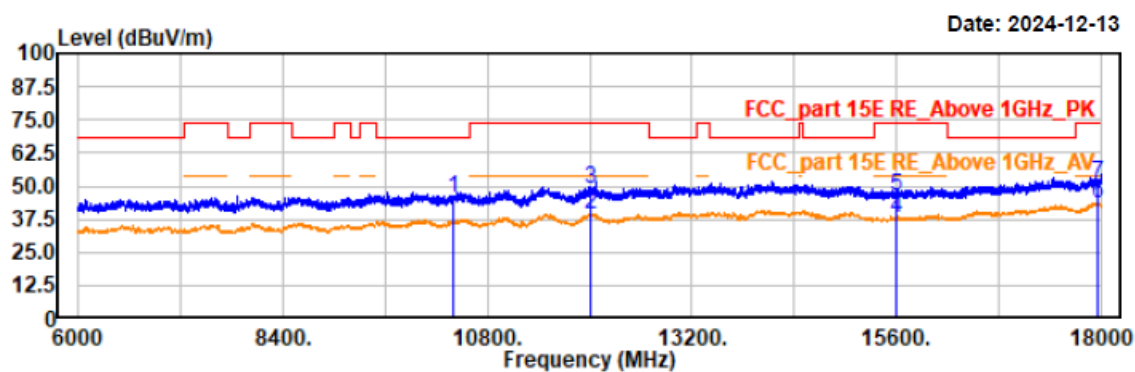

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10399.50	43.79	1.69	45.48	68.20	22.72	horizontal	Peak
12004.50	35.27	4.24	39.51	54.00	14.49	horizontal	Average
12004.50	44.80	4.24	49.04	74.00	24.96	horizontal	Peak
15600.00	35.43	2.51	37.94	54.00	16.06	horizontal	Average
15600.00	44.00	2.51	46.51	74.00	27.49	horizontal	Peak
17959.50	36.08	7.67	43.75	54.00	10.25	horizontal	Average
17959.50	43.14	7.67	50.81	74.00	23.19	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5200
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

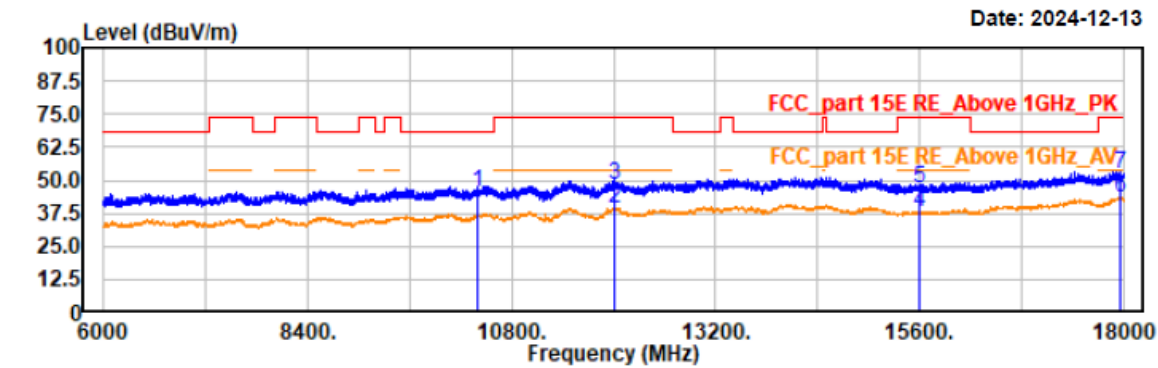


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.00	43.57	1.69	45.26	68.20	22.94	vertical	Peak
12004.50	35.23	4.24	39.47	54.00	14.53	vertical	Average
12004.50	44.17	4.24	48.41	74.00	25.59	vertical	Peak
15600.00	35.42	2.51	37.93	54.00	16.07	vertical	Average
15600.00	44.44	2.51	46.95	74.00	27.05	vertical	Peak
17959.50	36.11	7.67	43.78	54.00	10.22	vertical	Average
17959.50	44.92	7.67	52.59	74.00	21.41	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5240
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

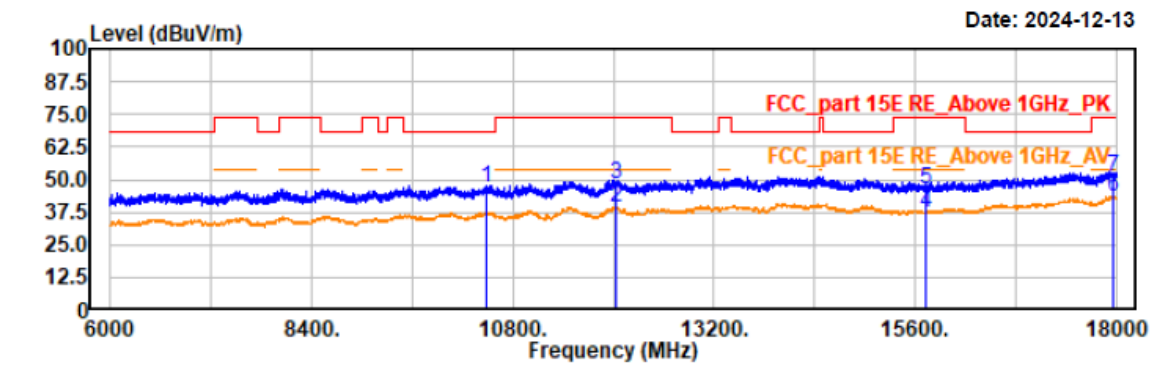


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10480.50	45.11	1.73	46.84	68.20	21.36	horizontal	Peak
12022.50	35.22	4.21	39.43	54.00	14.57	horizontal	Average
12022.50	43.86	4.21	48.07	74.00	25.93	horizontal	Peak
15720.00	34.87	2.35	37.22	54.00	16.78	horizontal	Average
15720.00	43.98	2.35	46.33	74.00	27.67	horizontal	Peak
17952.00	35.96	7.67	43.63	54.00	10.37	horizontal	Average
17952.00	43.37	7.67	51.04	74.00	22.96	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5240
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

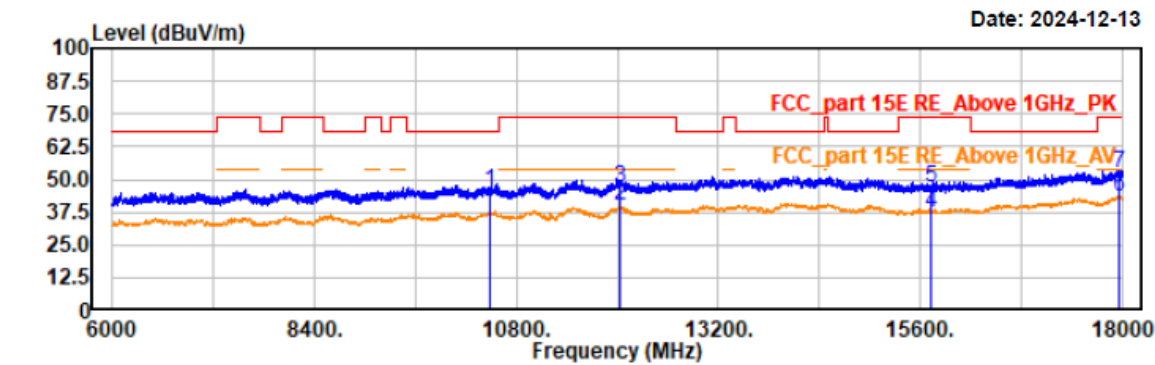

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10480.00	44.03	1.73	45.76	68.20	22.44	vertical	Peak
12030.00	35.56	4.20	39.76	54.00	14.24	vertical	Average
12030.00	43.00	4.20	47.20	74.00	26.80	vertical	Peak
15720.00	34.96	2.35	37.31	54.00	16.69	vertical	Average
15720.00	44.39	2.35	46.74	74.00	27.26	vertical	Peak
17956.50	36.01	7.68	43.69	54.00	10.31	vertical	Average
17956.50	44.51	7.68	52.19	74.00	21.81	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40-5190


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

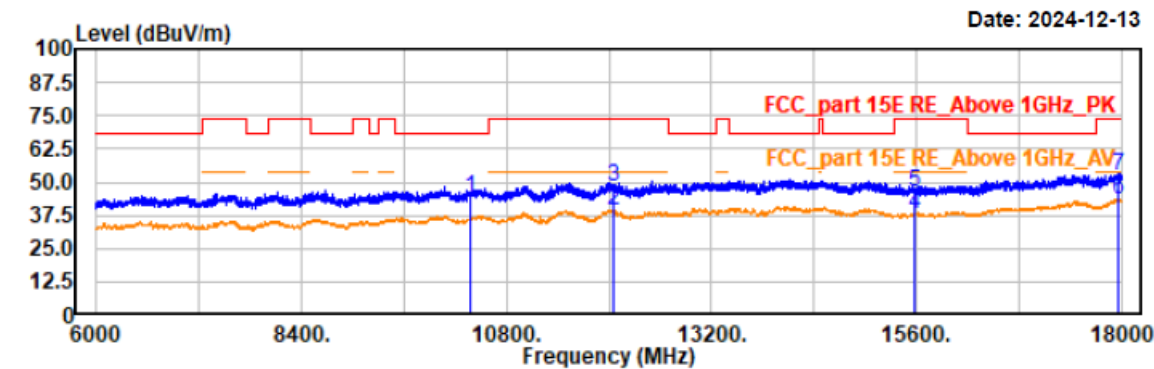

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10380.00	42.74	1.65	44.39	68.20	23.81	horizontal	Peak
12061.50	35.25	4.14	39.39	54.00	14.61	horizontal	Average
12061.50	44.47	4.14	48.61	74.00	25.39	horizontal	Peak
15570.00	35.59	2.55	38.14	54.00	15.86	horizontal	Average
15570.00	43.93	2.55	46.48	74.00	27.52	horizontal	Peak
17959.50	36.08	7.67	43.75	54.00	10.25	horizontal	Average
17959.50	44.43	7.67	52.10	74.00	21.90	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5190
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

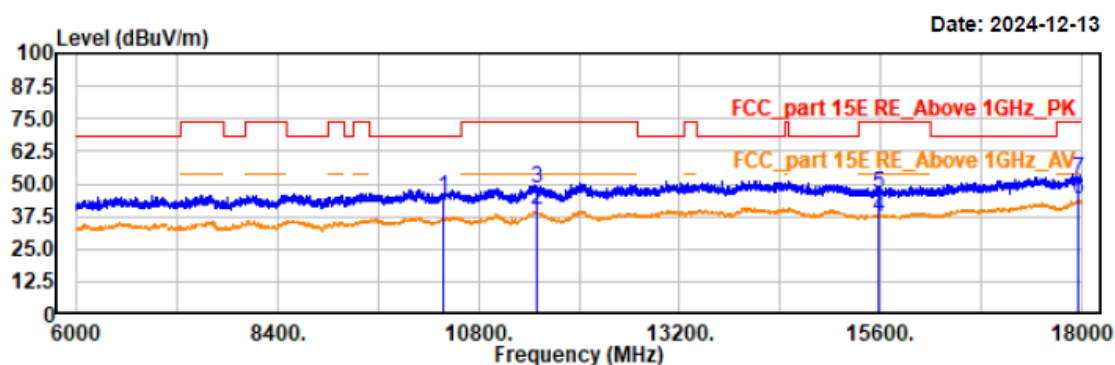

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10380.00	43.31	1.65	44.96	68.20	23.24	vertical	Peak
11491.50	36.73	3.12	39.85	54.00	14.15	vertical	Average
11491.50	44.84	3.12	47.96	74.00	26.04	vertical	Peak
15570.00	34.87	2.55	37.42	54.00	16.58	vertical	Average
15570.00	43.81	2.55	46.36	74.00	27.64	vertical	Peak
17955.00	36.61	7.68	44.29	54.00	9.71	vertical	Average
17955.00	44.20	7.68	51.88	74.00	22.12	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5230
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

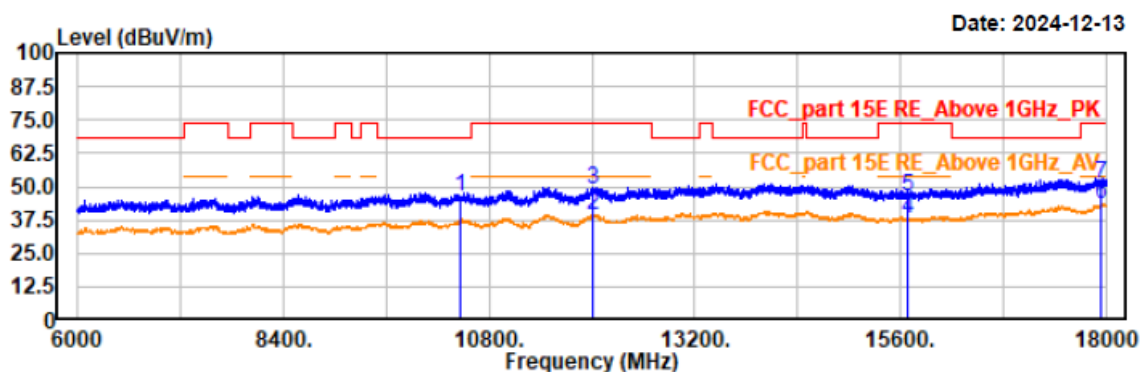

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10459.50	44.29	1.72	46.01	68.20	22.19	horizontal	Peak
12009.00	35.18	4.23	39.41	54.00	14.59	horizontal	Average
12009.00	44.51	4.23	48.74	74.00	25.26	horizontal	Peak
15690.00	35.39	2.37	37.76	54.00	16.24	horizontal	Average
15690.00	43.70	2.37	46.07	74.00	27.93	horizontal	Peak
17949.00	35.90	7.67	43.57	54.00	10.43	horizontal	Average
17949.00	43.22	7.67	50.89	74.00	23.11	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5230
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

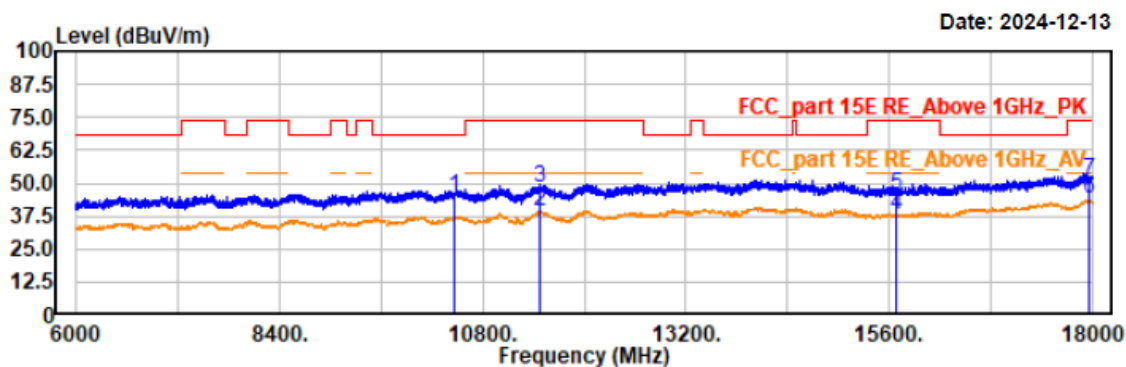

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SwT:auto

AV RBW:1MHz VBW:5kHz SwT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10460.00	43.18	1.72	44.90	68.20	23.30	vertical	Peak
11478.00	36.25	3.10	39.35	54.00	14.65	vertical	Average
11478.00	45.15	3.10	48.25	74.00	25.75	vertical	Peak
15690.00	35.33	2.37	37.70	54.00	16.30	vertical	Average
15690.00	43.18	2.37	45.55	74.00	28.45	vertical	Peak
17958.00	36.38	7.68	44.06	54.00	9.94	vertical	Average
17958.00	43.27	7.68	50.95	74.00	23.05	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11ac80-5210


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

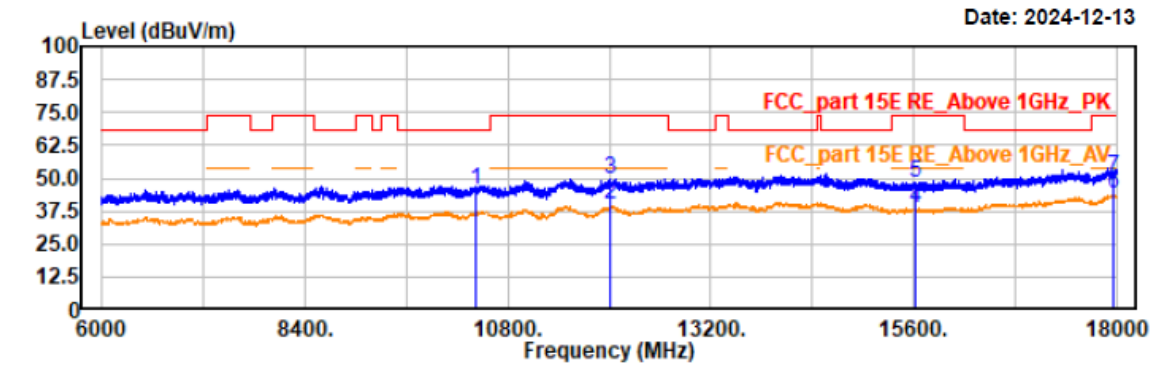


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10420.50	44.13	1.69	45.82	68.20	22.38	horizontal	Peak
12012.00	35.53	4.23	39.76	54.00	14.24	horizontal	Average
12012.00	45.11	4.23	49.34	74.00	24.66	horizontal	Peak
15630.00	35.81	2.47	38.28	54.00	15.72	horizontal	Average
15630.00	45.78	2.47	48.25	74.00	25.75	horizontal	Peak
17965.50	36.28	7.69	43.97	54.00	10.03	horizontal	Average
17965.50	42.74	7.69	50.43	74.00	23.57	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5210
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

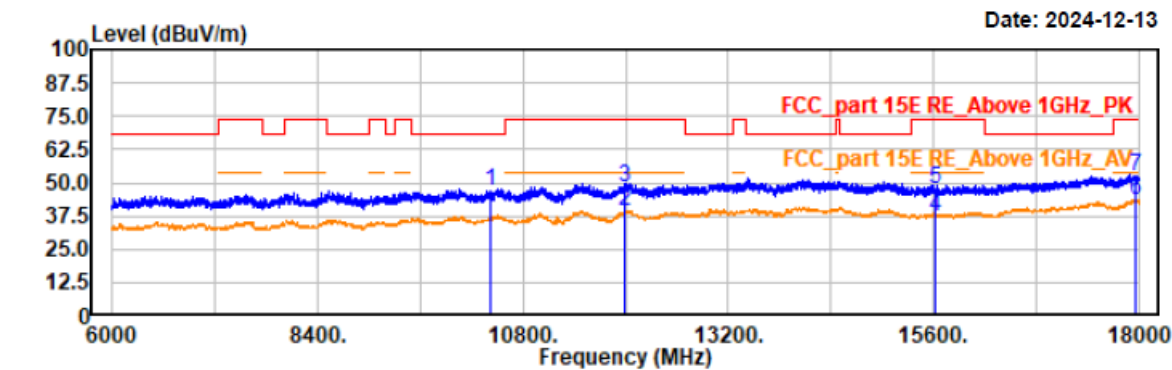

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10420.00	45.05	1.69	46.74	68.20	21.46	vertical	Peak
11998.50	35.18	4.25	39.43	54.00	14.57	vertical	Average
11998.50	44.32	4.25	48.57	74.00	25.43	vertical	Peak
15630.00	34.88	2.47	37.35	54.00	16.65	vertical	Average
15630.00	45.06	2.47	47.53	74.00	26.47	vertical	Peak
17970.00	36.06	7.69	43.75	54.00	10.25	vertical	Average
17970.00	44.99	7.69	52.68	74.00	21.32	vertical	Peak

B2

Project No.: 2407V20721E-RF
Test Mode: 11a-5260
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

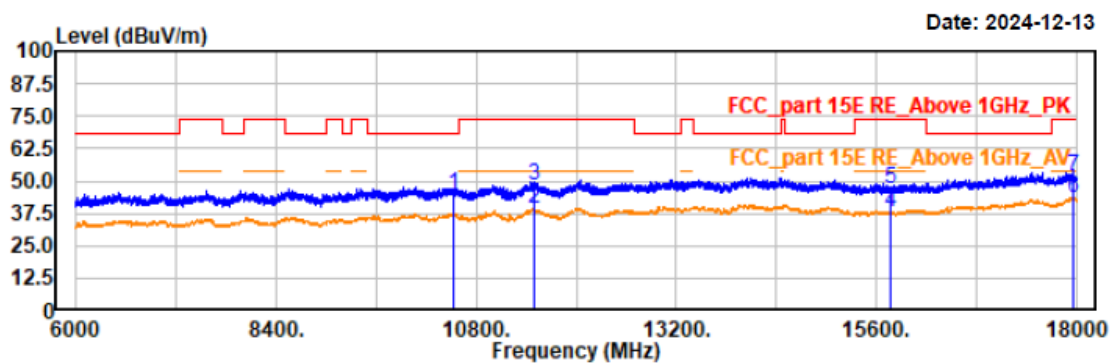

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10519.50	42.83	1.77	44.60	68.20	23.60	horizontal	Peak
11491.50	36.13	3.12	39.25	54.00	14.75	horizontal	Average
11491.50	44.88	3.12	48.00	74.00	26.00	horizontal	Peak
15780.00	35.34	2.39	37.73	54.00	16.27	horizontal	Average
15780.00	44.51	2.39	46.90	74.00	27.10	horizontal	Peak
17956.50	36.02	7.68	43.70	54.00	10.30	horizontal	Average
17956.50	43.74	7.68	51.42	74.00	22.58	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5260
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

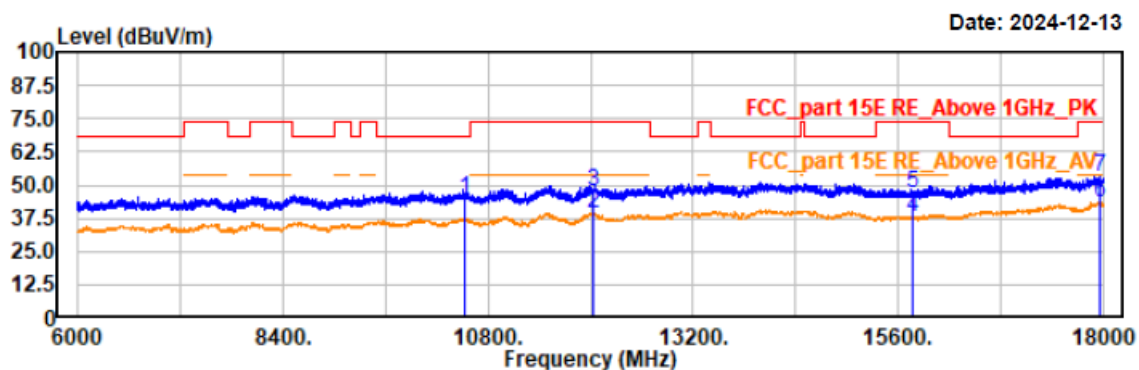

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.00	42.86	1.77	44.63	68.20	23.57	vertical	Peak
12025.50	35.17	4.21	39.38	54.00	14.62	vertical	Average
12025.50	43.65	4.21	47.86	74.00	26.14	vertical	Peak
15780.00	35.32	2.39	37.71	54.00	16.29	vertical	Average
15780.00	44.37	2.39	46.76	74.00	27.24	vertical	Peak
17955.00	36.07	7.68	43.75	54.00	10.25	vertical	Average
17955.00	45.26	7.68	52.94	74.00	21.06	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5280
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C /52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

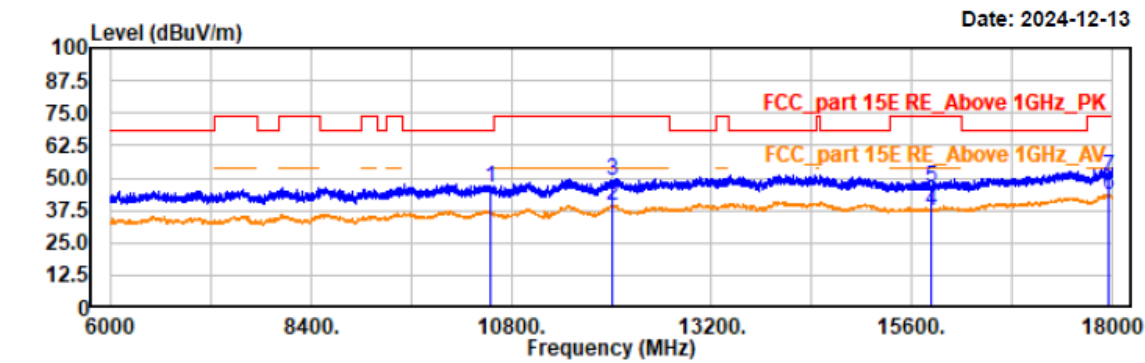

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	44.59	1.83	46.42	68.20	21.78	horizontal	Peak
12001.50	35.40	4.25	39.65	54.00	14.35	horizontal	Average
12001.50	44.77	4.25	49.02	74.00	24.98	horizontal	Peak
15840.00	34.54	2.37	36.91	54.00	17.09	horizontal	Average
15840.00	43.87	2.37	46.24	74.00	27.76	horizontal	Peak
17958.00	36.05	7.68	43.73	54.00	10.27	horizontal	Average
17958.00	42.84	7.68	50.52	74.00	23.48	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5280


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

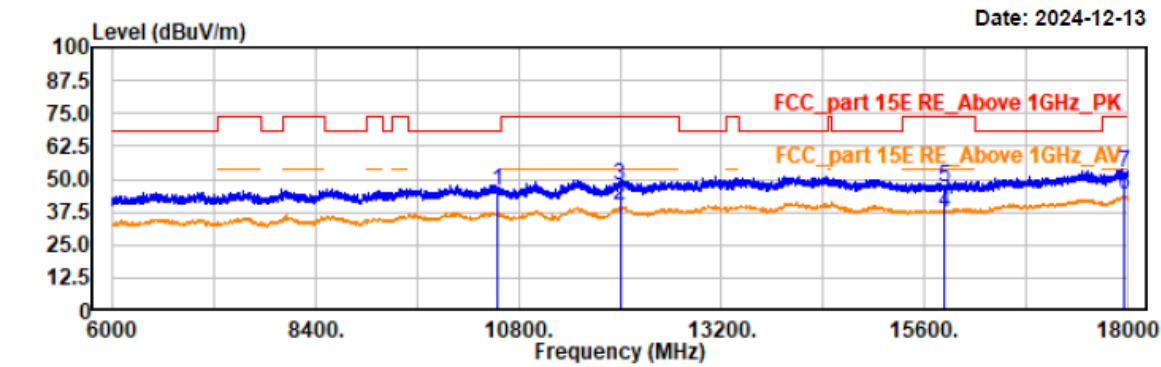

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SwT:auto

AV RBW:1MHz VBW:5kHz SwT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	43.83	1.83	45.66	68.20	22.54	vertical	Peak
12000.00	35.51	4.25	39.76	54.00	14.24	vertical	Average
12000.00	43.63	4.25	47.88	74.00	26.12	vertical	Peak
15840.00	34.85	2.37	37.22	54.00	16.78	vertical	Average
15840.00	44.55	2.37	46.92	74.00	27.08	vertical	Peak
17959.50	36.38	7.67	44.05	54.00	9.95	vertical	Average
17959.50	44.64	7.67	52.31	74.00	21.69	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5320


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

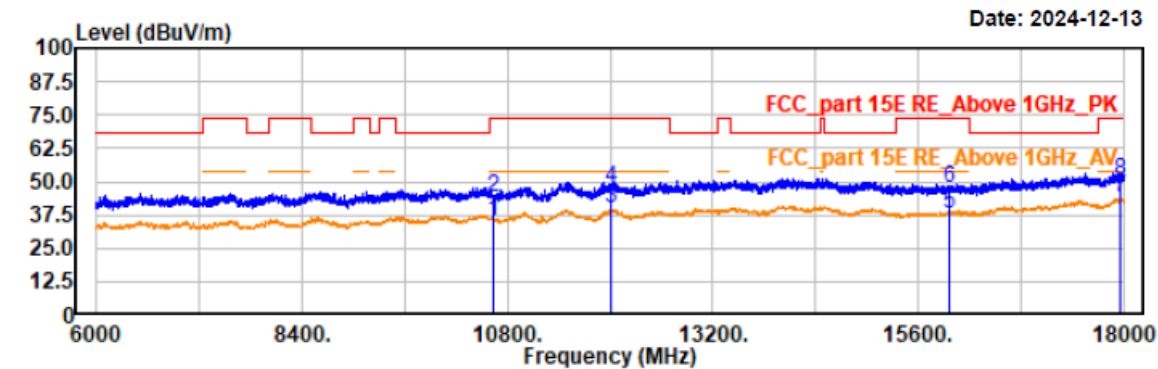

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10639.50	33.46	1.94	35.40	54.00	18.60	horizontal	Average
10639.50	41.93	1.94	43.87	74.00	30.13	horizontal	Peak
12010.50	35.63	4.23	39.86	54.00	14.14	horizontal	Average
12010.50	43.38	4.23	47.61	74.00	26.39	horizontal	Peak
15960.00	35.49	2.41	37.90	54.00	16.10	horizontal	Average
15960.00	44.99	2.41	47.40	74.00	26.60	horizontal	Peak
17953.50	36.25	7.67	43.92	54.00	10.08	horizontal	Average
17953.50	42.90	7.67	50.57	74.00	23.43	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5320
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

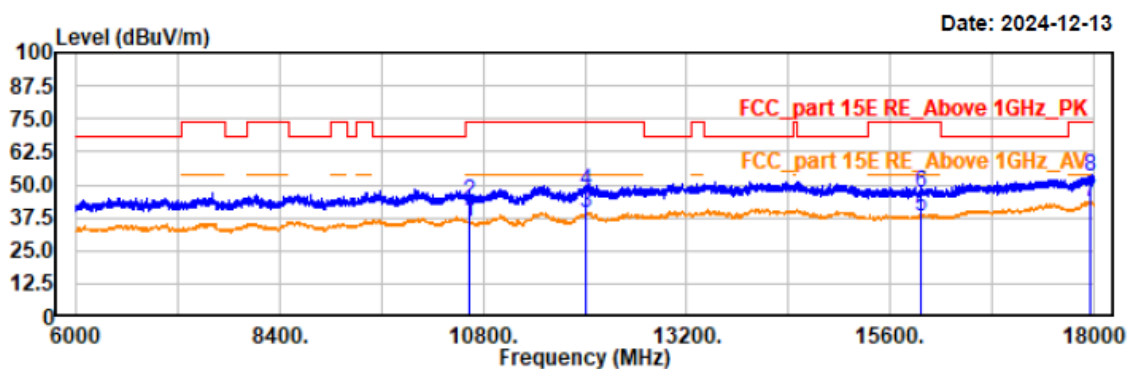

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10639.50	33.76	1.94	35.70	54.00	18.30	vertical	Average
10640.00	41.40	1.94	43.34	74.00	30.66	vertical	Peak
12007.50	35.34	4.24	39.58	54.00	14.42	vertical	Average
12007.50	43.43	4.24	47.67	74.00	26.33	vertical	Peak
15960.00	35.31	2.41	37.72	54.00	16.28	vertical	Average
15960.00	44.69	2.41	47.10	74.00	26.90	vertical	Peak
17953.50	36.06	7.67	43.73	54.00	10.27	vertical	Average
17953.50	45.49	7.67	53.16	74.00	20.84	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5260
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

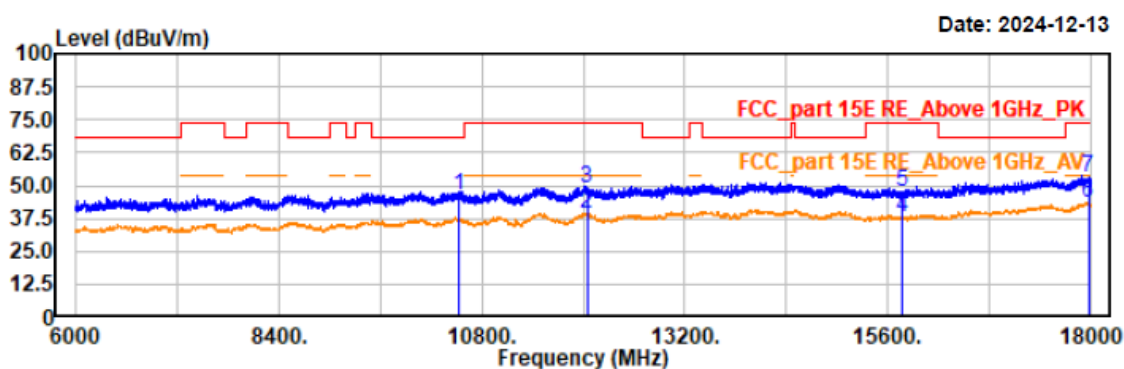


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10519.50	44.23	1.77	46.00	68.20	22.20	horizontal	Peak
12043.50	35.41	4.17	39.58	54.00	14.42	horizontal	Average
12043.50	44.69	4.17	48.86	74.00	25.14	horizontal	Peak
15780.00	35.31	2.39	37.70	54.00	16.30	horizontal	Average
15780.00	45.40	2.39	47.79	74.00	26.21	horizontal	Peak
17971.50	35.89	7.69	43.58	54.00	10.42	horizontal	Average
17971.50	45.32	7.69	53.01	74.00	20.99	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5260
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

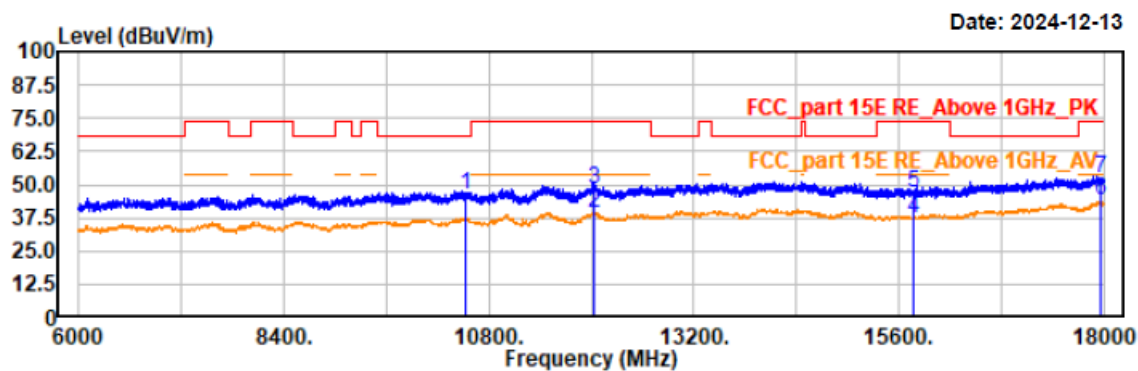

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.00	44.16	1.77	45.93	68.20	22.27	vertical	Peak
12022.50	35.28	4.21	39.49	54.00	14.51	vertical	Average
12022.50	44.19	4.21	48.40	74.00	25.60	vertical	Peak
15780.00	35.10	2.39	37.49	54.00	16.51	vertical	Average
15780.00	44.82	2.39	47.21	74.00	26.79	vertical	Peak
17961.00	36.26	7.68	43.94	54.00	10.06	vertical	Average
17961.00	44.51	7.68	52.19	74.00	21.81	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20-5280


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

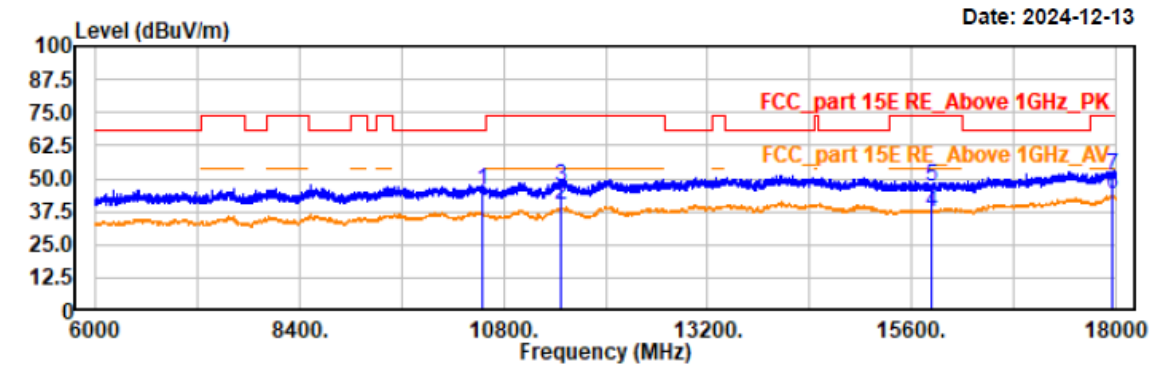

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	43.98	1.83	45.81	68.20	22.39	horizontal	Peak
11473.50	36.80	3.09	39.89	54.00	14.11	horizontal	Average
11473.50	44.00	3.09	47.09	74.00	26.91	horizontal	Peak
15840.00	35.10	2.37	37.47	54.00	16.53	horizontal	Average
15840.00	44.59	2.37	46.96	74.00	27.04	horizontal	Peak
17956.50	36.18	7.68	43.86	54.00	10.14	horizontal	Average
17956.50	43.59	7.68	51.27	74.00	22.73	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5280
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

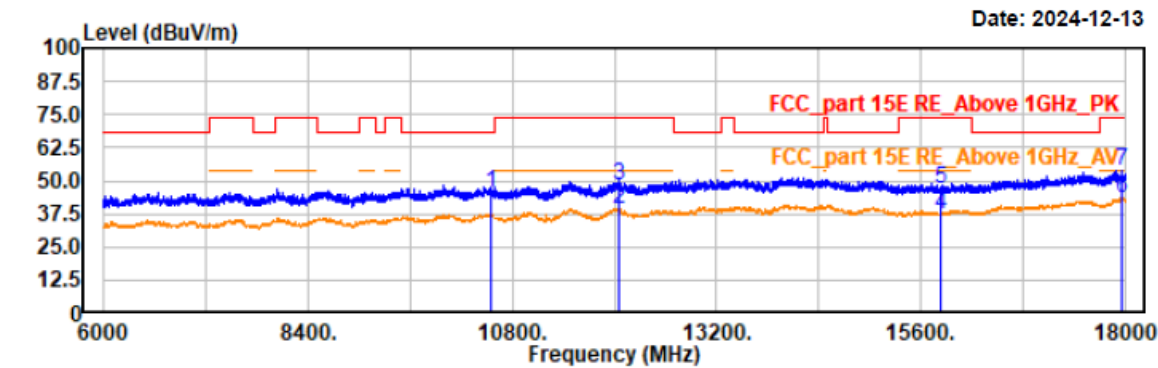

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	43.39	1.83	45.22	68.20	22.98	vertical	Peak
12063.00	35.43	4.14	39.57	54.00	14.43	vertical	Average
12063.00	44.40	4.14	48.54	74.00	25.46	vertical	Peak
15840.00	34.87	2.37	37.24	54.00	16.76	vertical	Average
15840.00	44.46	2.37	46.83	74.00	27.17	vertical	Peak
17962.50	35.93	7.68	43.61	54.00	10.39	vertical	Average
17962.50	46.01	7.68	53.69	74.00	20.31	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20-5320


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

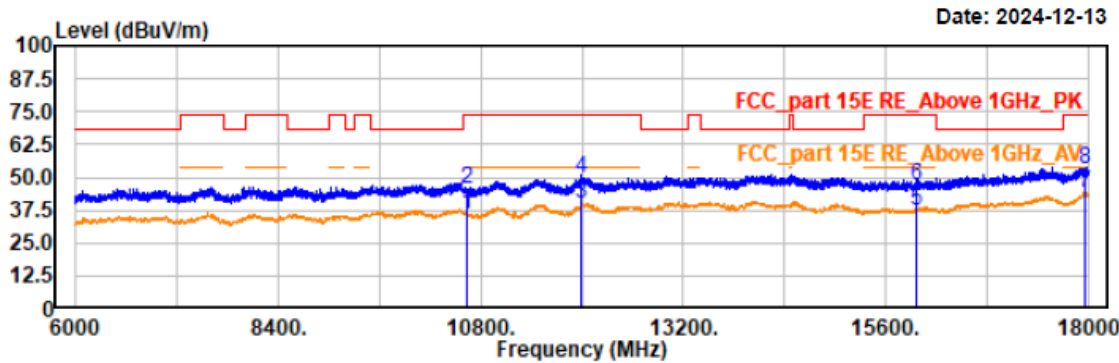


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10640.40	33.76	1.94	35.70	54.00	18.30	horizontal	Average
10640.40	43.52	1.94	45.46	74.00	28.54	horizontal	Peak
11992.80	35.97	4.23	40.20	54.00	13.80	horizontal	Average
11992.80	45.55	4.23	49.78	74.00	24.22	horizontal	Peak
15960.00	34.99	2.41	37.40	54.00	16.60	horizontal	Average
15960.00	44.56	2.41	46.97	74.00	27.03	horizontal	Peak
17961.60	36.58	7.68	44.26	54.00	9.74	horizontal	Average
17961.60	45.67	7.68	53.35	74.00	20.65	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5320
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

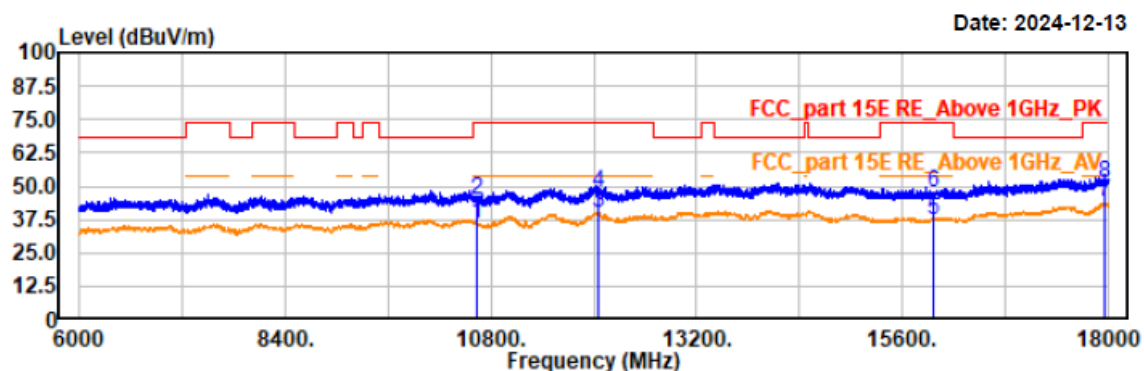

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10640.00	34.02	1.94	35.96	54.00	18.04	vertical	Average
10640.00	42.71	1.94	44.65	74.00	29.35	vertical	Peak
12046.80	35.74	4.17	39.91	54.00	14.09	vertical	Average
12046.80	43.38	4.17	47.55	74.00	26.45	vertical	Peak
15960.00	34.72	2.41	37.13	54.00	16.87	vertical	Average
15960.00	45.29	2.41	47.70	74.00	26.30	vertical	Peak
17956.80	36.61	7.68	44.29	54.00	9.71	vertical	Average
17956.80	43.68	7.68	51.36	74.00	22.64	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40-5270


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

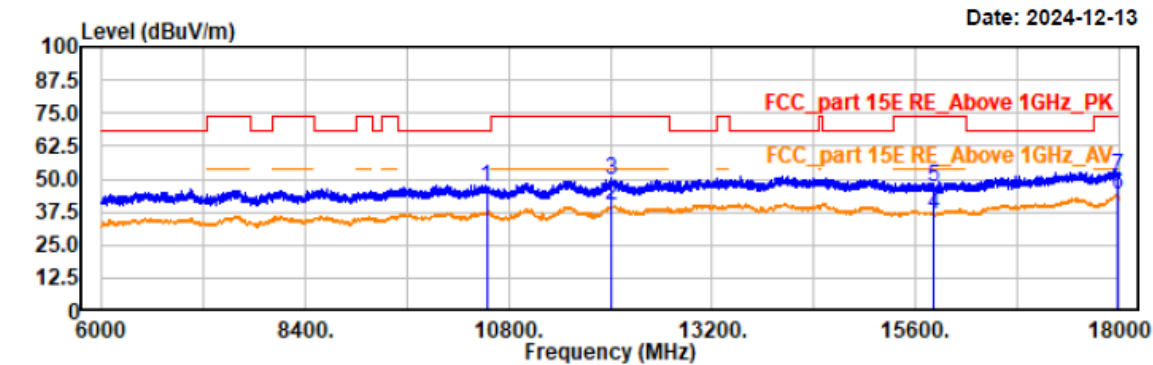


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10539.60	45.00	1.80	46.80	68.20	21.40	horizontal	Peak
12001.20	35.98	4.25	40.23	54.00	13.77	horizontal	Average
12001.20	45.35	4.25	49.60	74.00	24.40	horizontal	Peak
15810.00	34.49	2.38	36.87	54.00	17.13	horizontal	Average
15810.00	44.70	2.38	47.08	74.00	26.92	horizontal	Peak
17978.40	36.31	7.71	44.02	54.00	9.98	horizontal	Average
17978.40	43.28	7.71	50.99	74.00	23.01	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5270
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

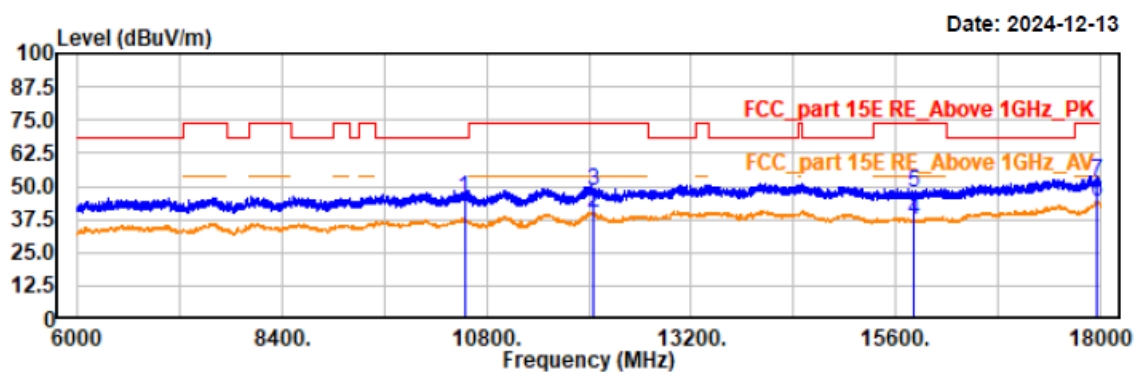

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10540.00	43.83	1.80	45.63	68.20	22.57	vertical	Peak
12063.60	35.93	4.13	40.06	54.00	13.94	vertical	Average
12063.60	43.98	4.13	48.11	74.00	25.89	vertical	Peak
15810.00	34.69	2.38	37.07	54.00	16.93	vertical	Average
15810.00	45.21	2.38	47.59	74.00	26.41	vertical	Peak
17962.80	36.56	7.68	44.24	54.00	9.76	vertical	Average
17962.80	44.09	7.68	51.77	74.00	22.23	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5310
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

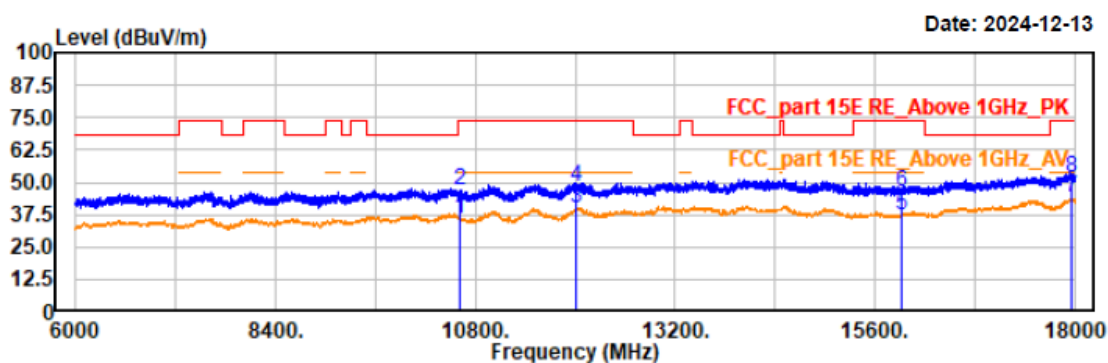


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10620.00	34.26	1.91	36.17	54.00	17.83	horizontal	Average
10620.00	44.89	1.91	46.80	74.00	27.20	horizontal	Peak
12007.20	35.80	4.24	40.04	54.00	13.96	horizontal	Average
12007.20	44.10	4.24	48.34	74.00	25.66	horizontal	Peak
15930.00	34.57	2.38	36.95	54.00	17.05	horizontal	Average
15930.00	43.65	2.38	46.03	74.00	27.97	horizontal	Peak
17961.60	36.29	7.68	43.97	54.00	10.03	horizontal	Average
17961.60	43.81	7.68	51.49	74.00	22.51	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5310
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

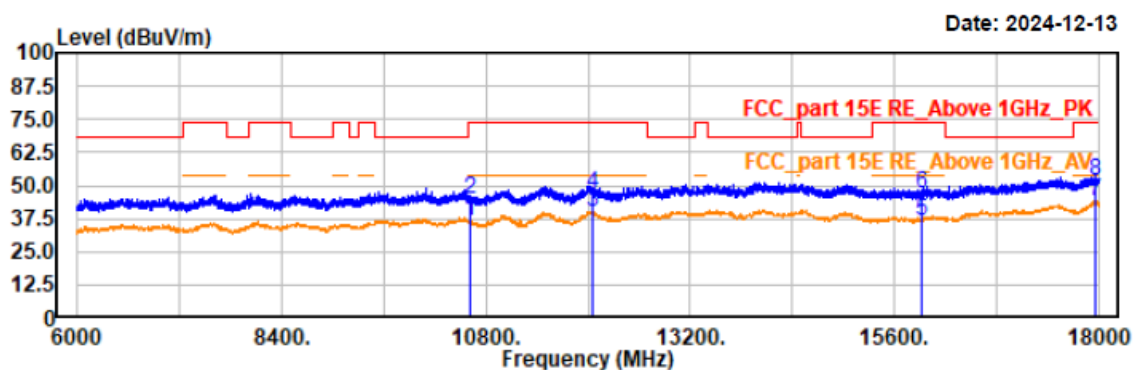

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10620.00	34.31	1.91	36.22	54.00	17.78	vertical	Average
10620.00	42.64	1.91	44.55	74.00	29.45	vertical	Peak
12054.00	35.90	4.15	40.05	54.00	13.95	vertical	Average
12054.00	42.94	4.15	47.09	74.00	26.91	vertical	Peak
15930.00	34.24	2.38	36.62	54.00	17.38	vertical	Average
15930.00	44.27	2.38	46.65	74.00	27.35	vertical	Peak
17958.00	36.31	7.68	43.99	54.00	10.01	vertical	Average
17958.00	44.17	7.68	51.85	74.00	22.15	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5290
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

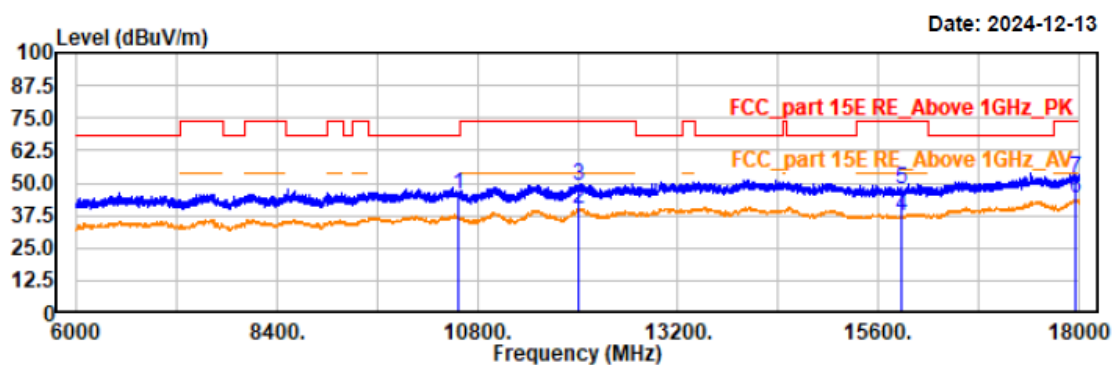

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10580.40	43.51	1.85	45.36	68.20	22.84	horizontal	Peak
12013.20	35.90	4.22	40.12	54.00	13.88	horizontal	Average
12013.20	44.67	4.22	48.89	74.00	25.11	horizontal	Peak
15870.00	34.67	2.34	37.01	54.00	16.99	horizontal	Average
15870.00	45.31	2.34	47.65	74.00	26.35	horizontal	Peak
17959.20	36.21	7.67	43.88	54.00	10.12	horizontal	Average
17959.20	43.87	7.67	51.54	74.00	22.46	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5290
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

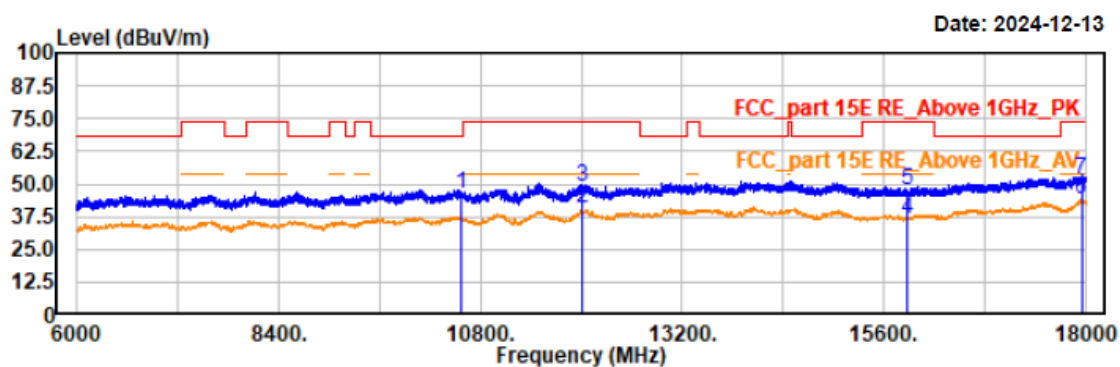

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10580.00	44.46	1.85	46.31	68.20	21.89	vertical	Peak
12008.40	36.21	4.23	40.44	54.00	13.56	vertical	Average
12008.40	45.02	4.23	49.25	74.00	24.75	vertical	Peak
15870.00	34.52	2.34	36.86	54.00	17.14	vertical	Average
15870.00	45.38	2.34	47.72	74.00	26.28	vertical	Peak
17950.80	36.37	7.67	44.04	54.00	9.96	vertical	Average
17950.80	43.79	7.67	51.46	74.00	22.54	vertical	Peak

B3

Project No.: 2407V20721E-RF

Test Mode: 11a-5500


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

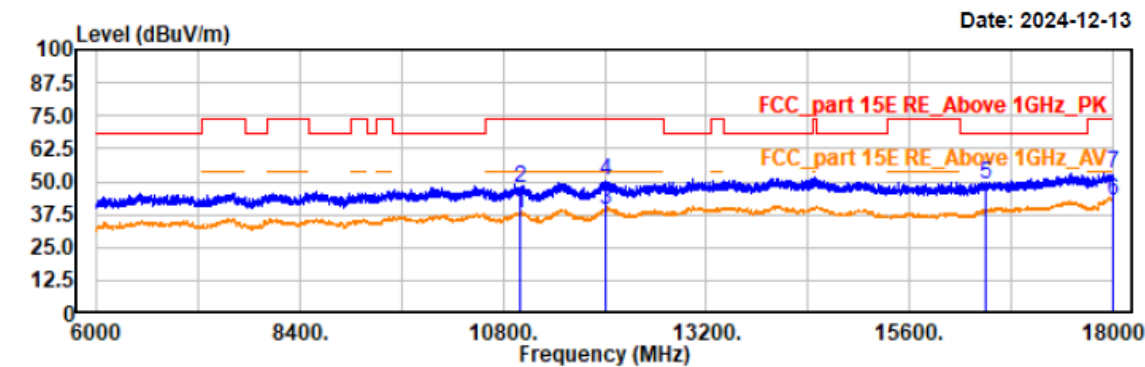

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.40	35.54	2.54	38.08	54.00	15.92	horizontal	Average
11000.40	44.89	2.54	47.43	74.00	26.57	horizontal	Peak
12004.80	35.02	4.24	39.26	54.00	14.74	horizontal	Average
12004.80	45.99	4.24	50.23	74.00	23.77	horizontal	Peak
16500.00	45.25	3.50	48.75	68.20	19.45	horizontal	Peak
18000.00	35.03	7.74	42.77	54.00	11.23	horizontal	Average
18000.00	45.60	7.74	53.34	74.00	20.66	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5500
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

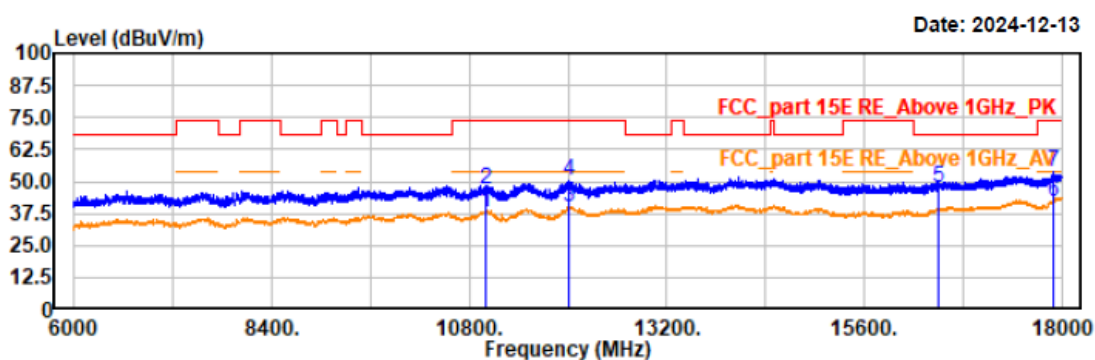

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.40	35.42	2.54	37.96	54.00	16.04	vertical	Average
11000.40	44.33	2.54	46.87	74.00	27.13	vertical	Peak
12014.40	35.48	4.22	39.70	54.00	14.30	vertical	Average
12014.40	46.40	4.22	50.62	74.00	23.38	vertical	Peak
16500.00	44.05	3.50	47.55	68.20	20.65	vertical	Peak
17890.80	34.51	7.55	42.06	54.00	11.94	vertical	Average
17890.80	46.50	7.55	54.05	74.00	19.95	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5580


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

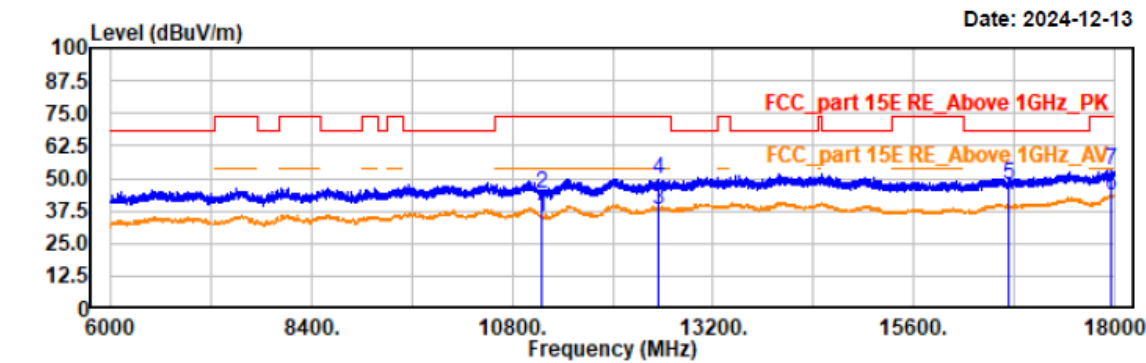

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	32.44	2.73	35.17	54.00	18.83	horizontal	Average
11160.00	41.31	2.73	44.04	74.00	29.96	horizontal	Peak
12550.80	34.40	3.76	38.16	54.00	15.84	horizontal	Average
12550.80	46.22	3.76	49.98	74.00	24.02	horizontal	Peak
16740.00	43.34	4.15	47.49	68.20	20.71	horizontal	Peak
17966.40	35.69	7.69	43.38	54.00	10.62	horizontal	Average
17966.40	45.60	7.69	53.29	74.00	20.71	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5580


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

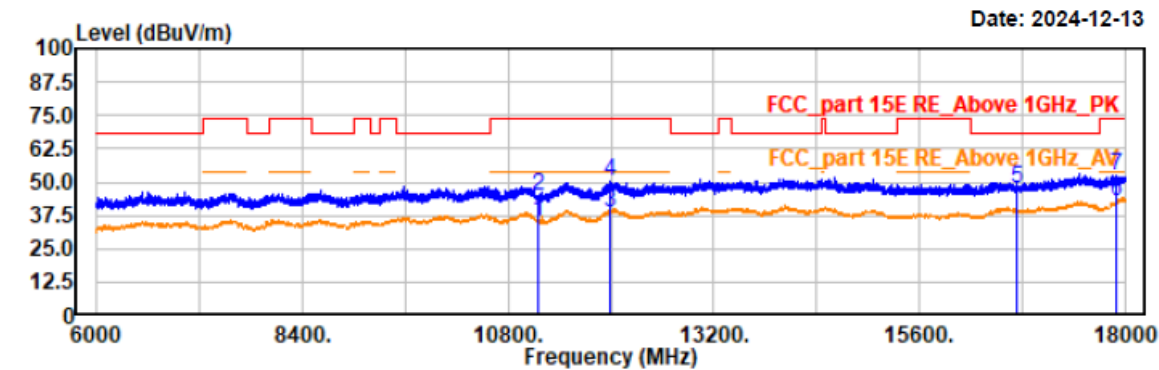

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	32.76	2.73	35.49	54.00	18.51	vertical	Average
11160.00	42.22	2.73	44.95	74.00	29.05	vertical	Peak
11979.60	34.34	4.21	38.55	54.00	15.45	vertical	Average
11979.60	45.90	4.21	50.11	74.00	23.89	vertical	Peak
16740.00	43.71	4.15	47.86	68.20	20.34	vertical	Peak
17902.80	35.20	7.58	42.78	54.00	11.22	vertical	Average
17902.80	45.09	7.58	52.67	74.00	21.33	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5700
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

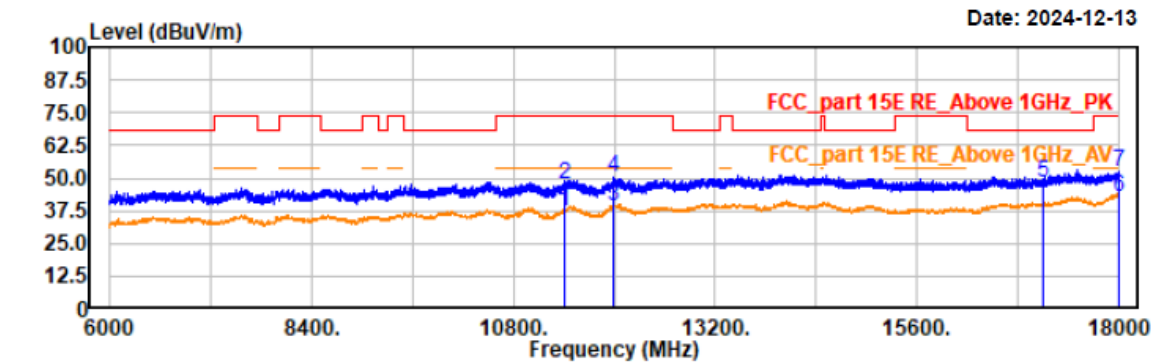


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	34.25	3.02	37.27	54.00	16.73	horizontal	Average
11400.00	44.77	3.02	47.79	74.00	26.21	horizontal	Peak
11996.40	34.85	4.24	39.09	54.00	14.91	horizontal	Average
11996.40	45.89	4.24	50.13	74.00	23.87	horizontal	Peak
17100.00	43.18	5.17	48.35	68.20	19.85	horizontal	Peak
18000.00	35.15	7.74	42.89	54.00	11.11	horizontal	Average
18000.00	44.75	7.74	52.49	74.00	21.51	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5700
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

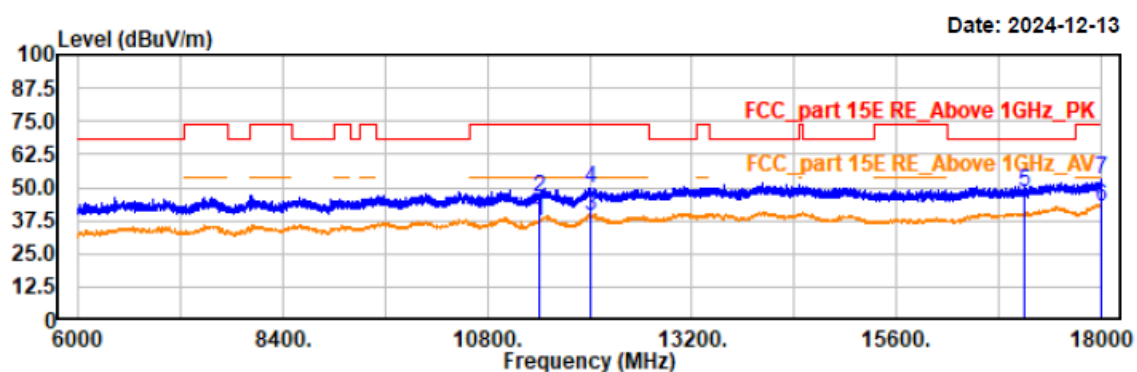

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	34.31	3.02	37.33	54.00	16.67	vertical	Average
11400.00	43.34	3.02	46.36	74.00	27.64	vertical	Peak
12006.00	35.12	4.24	39.36	54.00	14.64	vertical	Average
12006.00	45.48	4.24	49.72	74.00	24.28	vertical	Peak
17100.00	42.78	5.17	47.95	68.20	20.25	vertical	Peak
17998.80	35.22	7.74	42.96	54.00	11.04	vertical	Average
17998.80	45.10	7.74	52.84	74.00	21.16	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5500
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

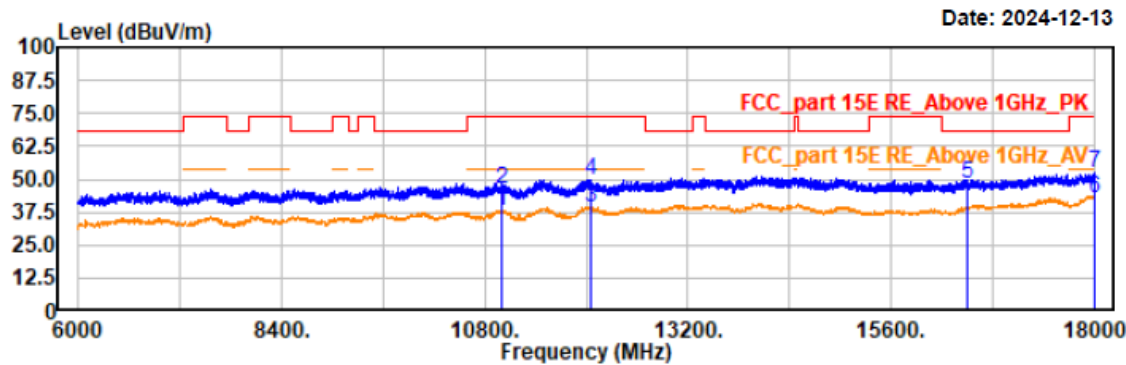

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SwT:auto
AV RBW:1MHz VBW:5kHz SwT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.40	35.13	2.54	37.67	54.00	16.33	horizontal	Average
11000.40	43.91	2.54	46.45	74.00	27.55	horizontal	Peak
12058.80	35.15	4.14	39.29	54.00	14.71	horizontal	Average
12058.80	45.58	4.14	49.72	74.00	24.28	horizontal	Peak
16500.00	44.89	3.50	48.39	68.20	19.81	horizontal	Peak
18000.00	34.96	7.74	42.70	54.00	11.30	horizontal	Average
18000.00	44.78	7.74	52.52	74.00	21.48	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20-5500


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

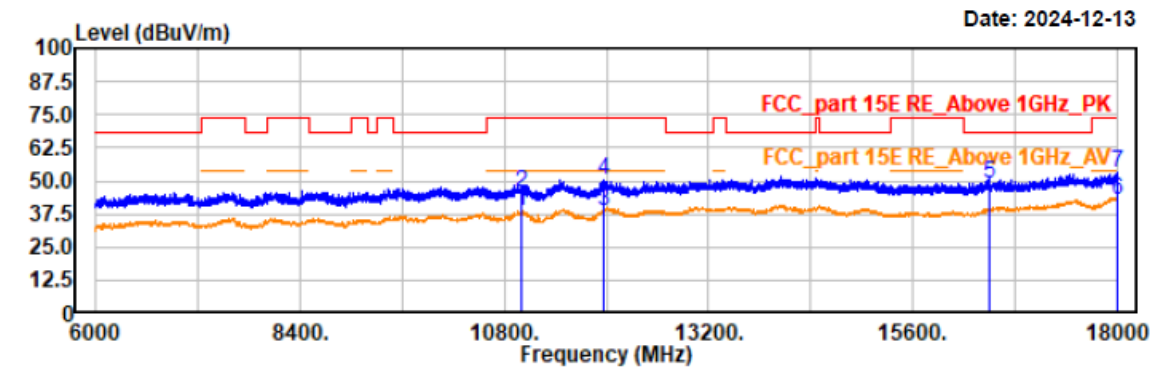


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.40	35.81	2.54	38.35	54.00	15.65	vertical	Average
11000.40	43.21	2.54	45.75	74.00	28.25	vertical	Peak
11977.20	34.50	4.20	38.70	54.00	15.30	vertical	Average
11977.20	46.42	4.20	50.62	74.00	23.38	vertical	Peak
16500.00	45.40	3.50	48.90	68.20	19.30	vertical	Peak
17997.60	35.14	7.74	42.88	54.00	11.12	vertical	Average
17997.60	45.52	7.74	53.26	74.00	20.74	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5580
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

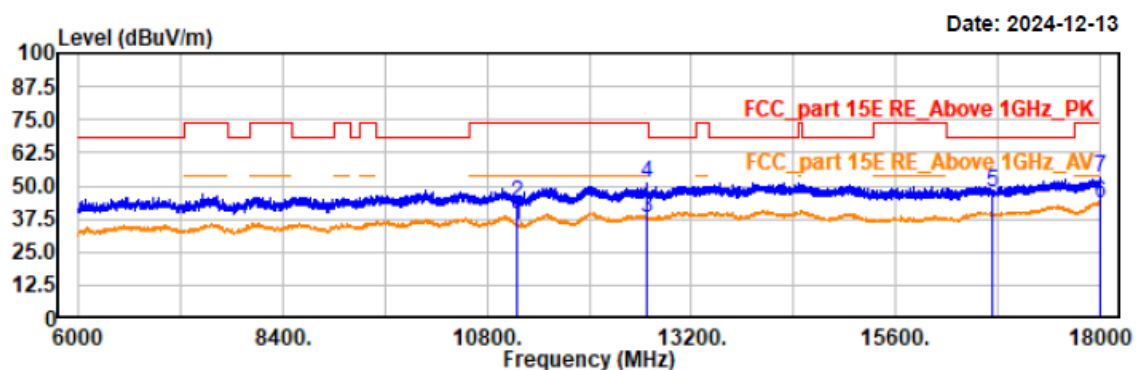

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	32.20	2.73	34.93	54.00	19.07	horizontal	Average
11160.00	40.95	2.73	43.68	74.00	30.32	horizontal	Peak
12685.20	33.51	4.19	37.70	54.00	16.30	horizontal	Average
12685.20	46.85	4.19	51.04	74.00	22.96	horizontal	Peak
16740.00	43.18	4.15	47.33	68.20	20.87	horizontal	Peak
17997.60	35.74	7.74	43.48	54.00	10.52	horizontal	Average
17997.60	45.25	7.74	52.99	74.00	21.01	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5580
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

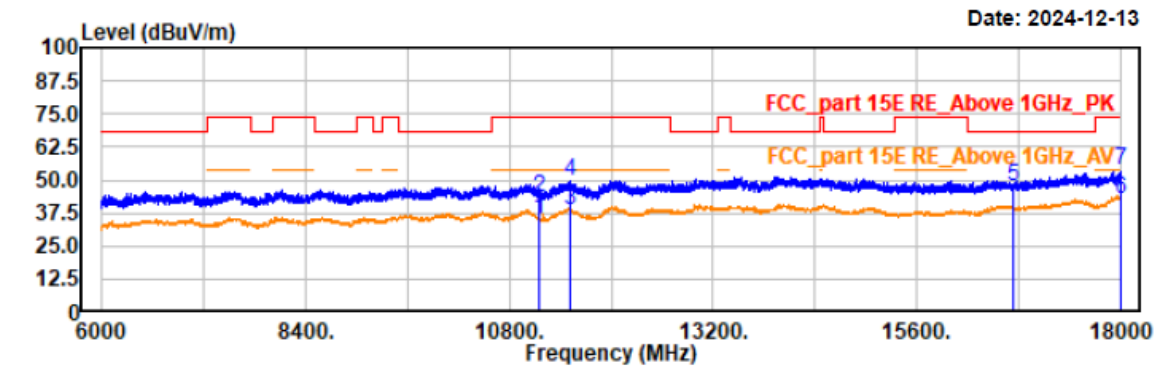

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	32.50	2.73	35.23	54.00	18.77	vertical	Average
11160.00	40.96	2.73	43.69	74.00	30.31	vertical	Peak
11508.00	35.41	3.16	38.57	54.00	15.43	vertical	Average
11508.00	46.22	3.16	49.38	74.00	24.62	vertical	Peak
16740.00	43.18	4.15	47.33	68.20	20.87	vertical	Peak
18000.00	35.12	7.74	42.86	54.00	11.14	vertical	Average
18000.00	46.12	7.74	53.86	74.00	20.14	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20-5700


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

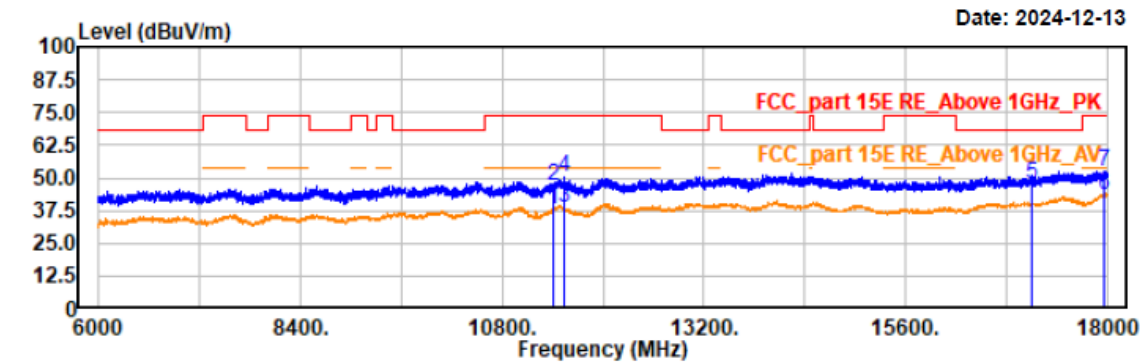


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	34.64	3.02	37.66	54.00	16.34	horizontal	Average
11400.00	43.90	3.02	46.92	74.00	27.08	horizontal	Peak
11538.00	35.22	3.25	38.47	54.00	15.53	horizontal	Average
11538.00	46.83	3.25	50.08	74.00	23.92	horizontal	Peak
17100.00	42.63	5.17	47.80	68.20	20.40	horizontal	Peak
17960.40	35.53	7.68	43.21	54.00	10.79	horizontal	Average
17960.40	44.92	7.68	52.60	74.00	21.40	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5700
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

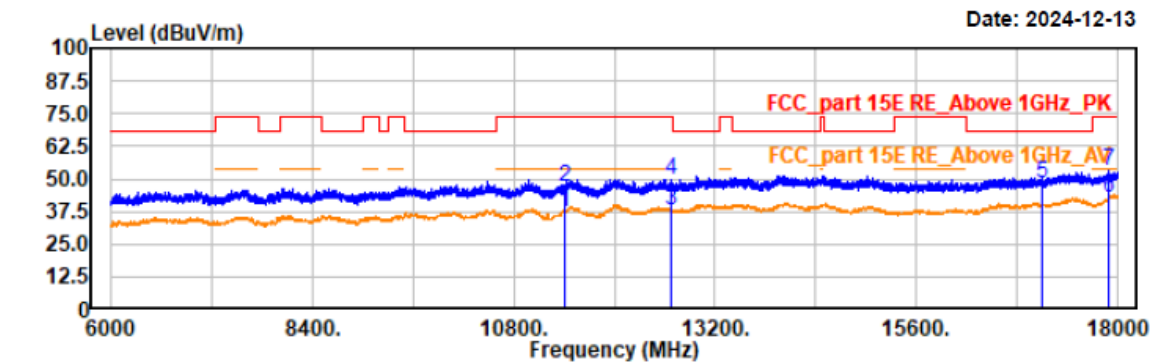

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	34.30	3.02	37.32	54.00	16.68	vertical	Average
11400.00	44.21	3.02	47.23	74.00	26.77	vertical	Peak
12680.40	33.91	4.18	38.09	54.00	15.91	vertical	Average
12680.40	45.62	4.18	49.80	74.00	24.20	vertical	Peak
17100.00	43.16	5.17	48.33	68.20	19.87	vertical	Peak
17901.60	34.96	7.59	42.55	54.00	11.45	vertical	Average
17901.60	45.78	7.59	53.37	74.00	20.63	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40-5510


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

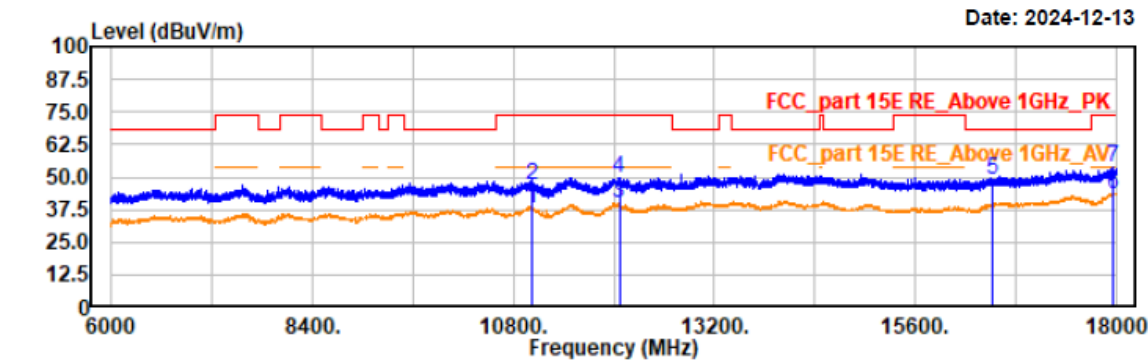

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11019.60	35.64	2.56	38.20	54.00	15.80	horizontal	Average
11019.60	44.61	2.56	47.17	74.00	26.83	horizontal	Peak
12064.80	35.57	4.13	39.70	54.00	14.30	horizontal	Average
12064.80	45.81	4.13	49.94	74.00	24.06	horizontal	Peak
16530.00	45.63	3.58	49.21	68.20	18.99	horizontal	Peak
17955.60	35.86	7.68	43.54	54.00	10.46	horizontal	Average
17955.60	45.96	7.68	53.64	74.00	20.36	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5510
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

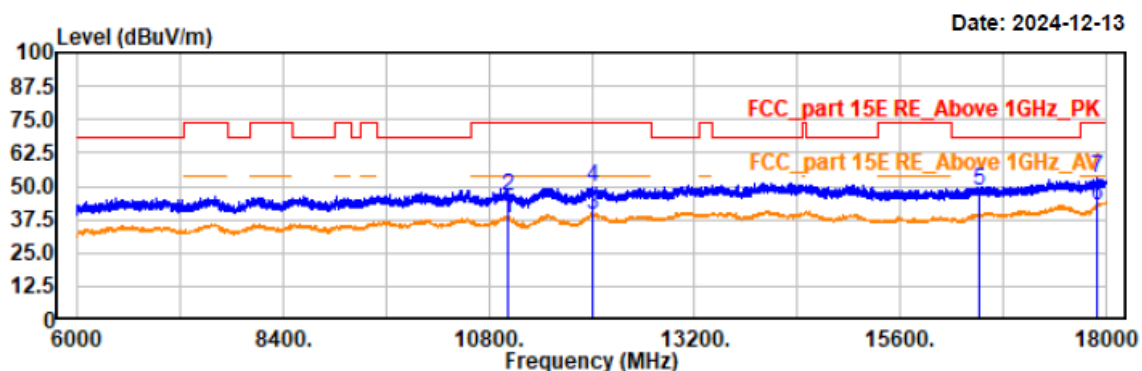


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11019.60	35.47	2.56	38.03	54.00	15.97	vertical	Average
11019.60	43.48	2.56	46.04	74.00	27.96	vertical	Peak
12009.60	35.22	4.23	39.45	54.00	14.55	vertical	Average
12009.60	45.52	4.23	49.75	74.00	24.25	vertical	Peak
16530.00	44.51	3.58	48.09	68.20	20.11	vertical	Peak
17898.00	35.10	7.58	42.68	54.00	11.32	vertical	Average
17898.00	45.45	7.58	53.03	74.00	20.97	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5550
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

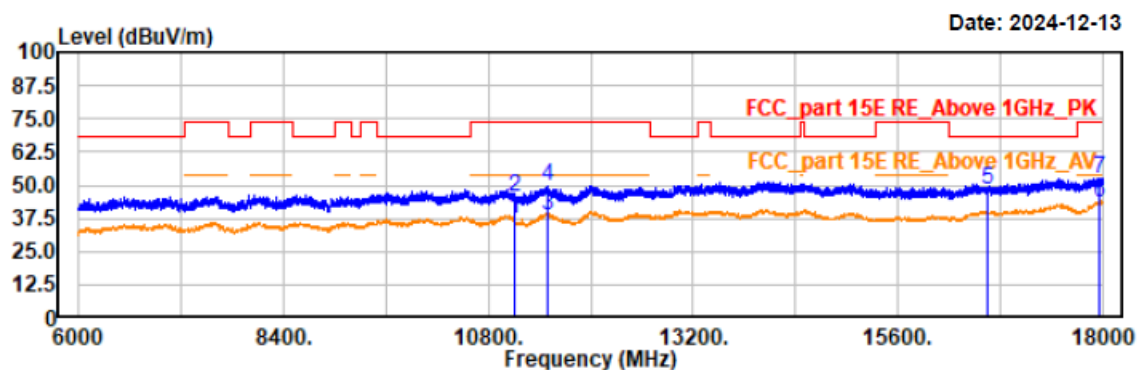


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11100.00	34.71	2.65	37.36	54.00	16.64	horizontal	Average
11100.00	42.64	2.65	45.29	74.00	28.71	horizontal	Peak
11493.60	35.43	3.12	38.55	54.00	15.45	horizontal	Average
11493.60	46.69	3.12	49.81	74.00	24.19	horizontal	Peak
16650.00	44.26	3.90	48.16	68.20	20.04	horizontal	Peak
17962.80	35.46	7.68	43.14	54.00	10.86	horizontal	Average
17962.80	44.75	7.68	52.43	74.00	21.57	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5550
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

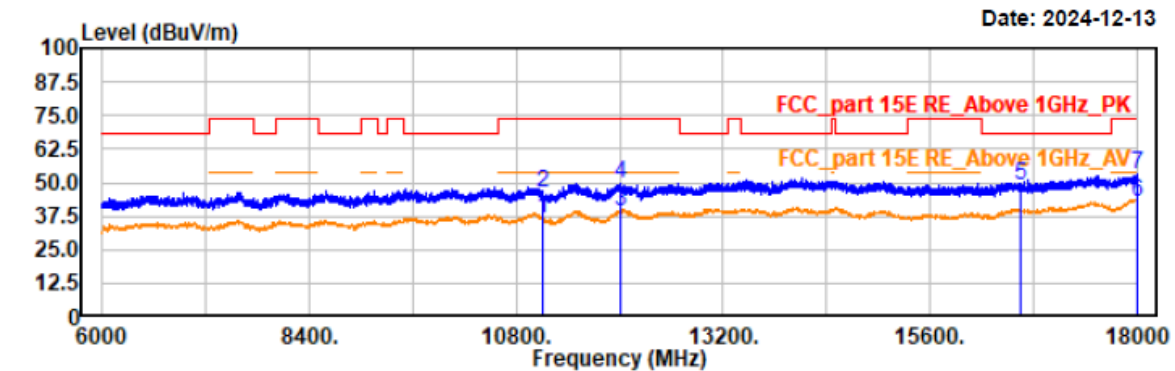

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11100.00	34.12	2.65	36.77	54.00	17.23	vertical	Average
11100.00	43.86	2.65	46.51	74.00	27.49	vertical	Peak
12012.00	35.32	4.23	39.55	54.00	14.45	vertical	Average
12012.00	45.56	4.23	49.79	74.00	24.21	vertical	Peak
16650.00	45.10	3.90	49.00	68.20	19.20	vertical	Peak
17997.60	35.01	7.74	42.75	54.00	11.25	vertical	Average
17997.60	45.18	7.74	52.92	74.00	21.08	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40-5670


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

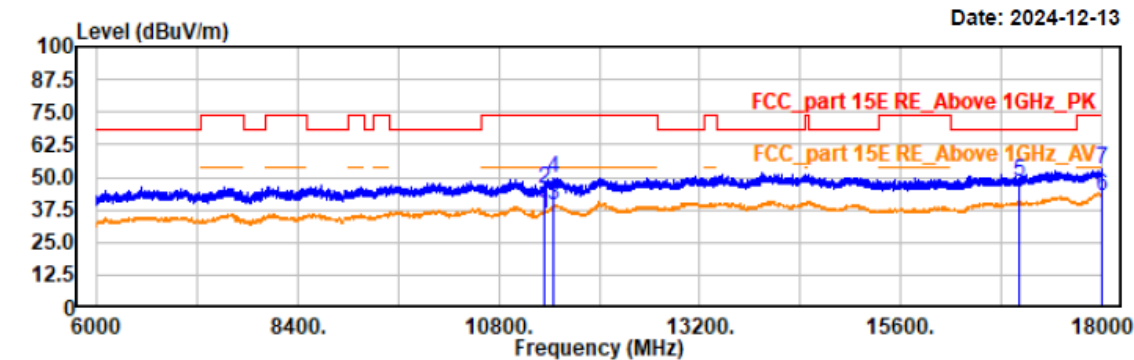


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11340.00	33.16	2.94	36.10	54.00	17.90	horizontal	Average
11340.00	42.84	2.94	45.78	74.00	28.22	horizontal	Peak
11460.00	35.98	3.08	39.06	54.00	14.94	horizontal	Average
11460.00	46.62	3.08	49.70	74.00	24.30	horizontal	Peak
17010.00	43.57	4.98	48.55	68.20	19.65	horizontal	Peak
17997.60	34.86	7.74	42.60	54.00	11.40	horizontal	Average
17997.60	45.24	7.74	52.98	74.00	21.02	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5670
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

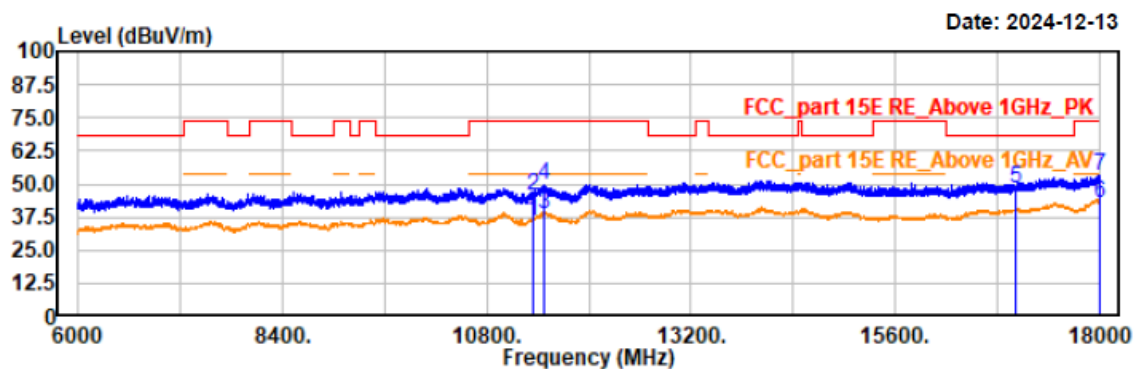

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11340.00	33.23	2.94	36.17	54.00	17.83	vertical	Average
11340.00	42.92	2.94	45.86	74.00	28.14	vertical	Peak
11468.40	35.80	3.10	38.90	54.00	15.10	vertical	Average
11468.40	46.81	3.10	49.91	74.00	24.09	vertical	Peak
17010.00	43.48	4.98	48.46	68.20	19.74	vertical	Peak
17996.40	34.69	7.74	42.43	54.00	11.57	vertical	Average
17996.40	45.17	7.74	52.91	74.00	21.09	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11ac80-5530


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

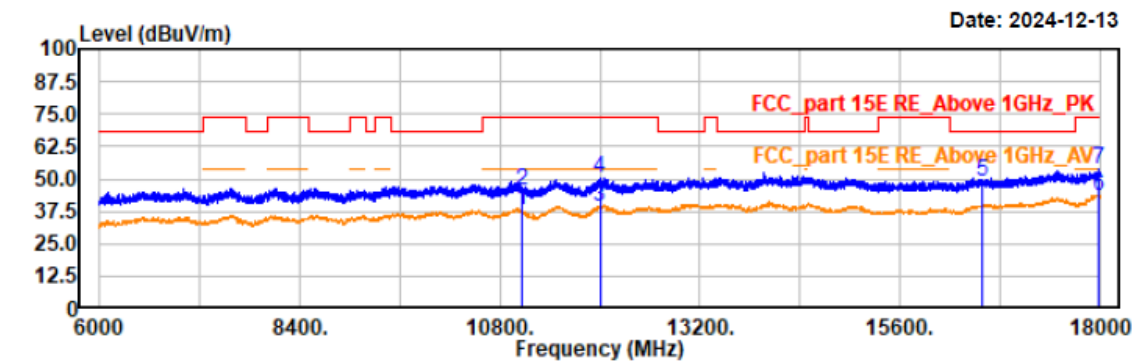


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11060.40	35.11	2.62	37.73	54.00	16.27	horizontal	Average
11060.40	42.95	2.62	45.57	74.00	28.43	horizontal	Peak
12000.00	35.31	4.25	39.56	54.00	14.44	horizontal	Average
12000.00	46.15	4.25	50.40	74.00	23.60	horizontal	Peak
16590.00	45.30	3.74	49.04	68.20	19.16	horizontal	Peak
17992.80	35.79	7.72	43.51	54.00	10.49	horizontal	Average
17992.80	45.96	7.72	53.68	74.00	20.32	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5530
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

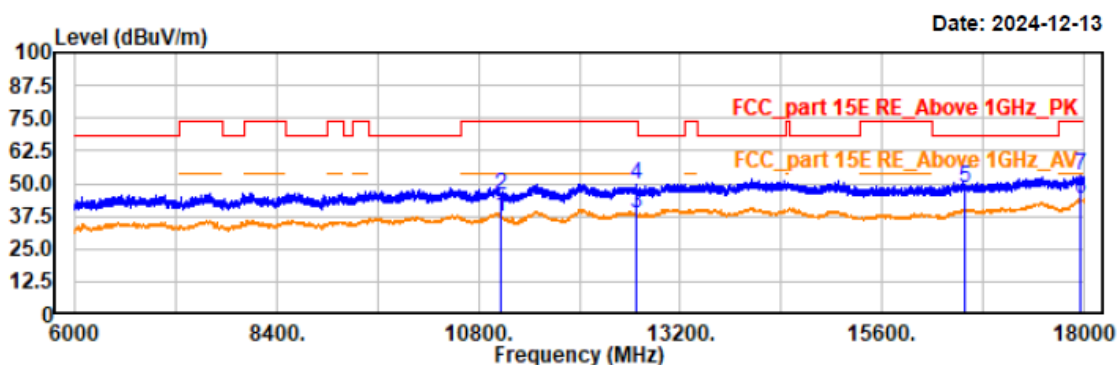

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11060.40	34.44	2.62	37.06	54.00	16.94	vertical	Average
11060.40	42.89	2.62	45.51	74.00	28.49	vertical	Peak
12672.00	34.20	4.14	38.34	54.00	15.66	vertical	Average
12672.00	45.67	4.14	49.81	74.00	24.19	vertical	Peak
16590.00	44.56	3.74	48.30	68.20	19.90	vertical	Peak
17964.00	36.36	7.68	44.04	54.00	9.96	vertical	Average
17964.00	45.20	7.68	52.88	74.00	21.12	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11ac80-5610


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

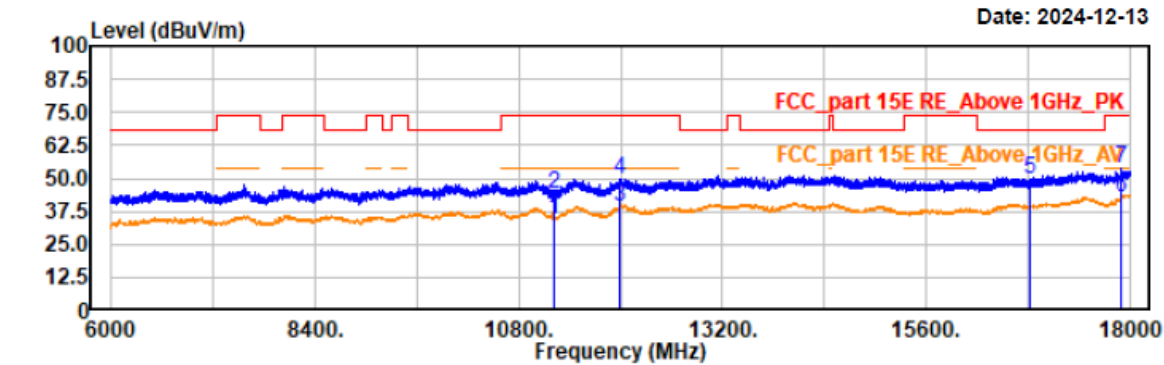


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11220.00	31.93	2.80	34.73	54.00	19.27	horizontal	Average
11220.00	41.46	2.80	44.26	74.00	29.74	horizontal	Peak
11996.40	35.11	4.24	39.35	54.00	14.65	horizontal	Average
11996.40	45.74	4.24	49.98	74.00	24.02	horizontal	Peak
16830.00	44.93	4.42	49.35	68.20	18.85	horizontal	Peak
17895.60	34.88	7.58	42.46	54.00	11.54	horizontal	Average
17895.60	45.88	7.58	53.46	74.00	20.54	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5610
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

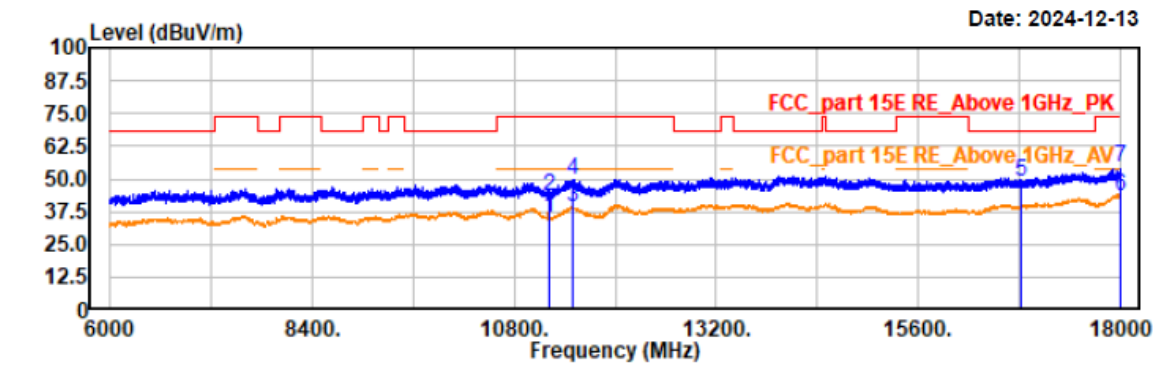

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11220.00	32.35	2.80	35.15	54.00	18.85	vertical	Average
11220.00	40.90	2.80	43.70	74.00	30.30	vertical	Peak
11492.40	35.86	3.12	38.98	54.00	15.02	vertical	Average
11492.40	46.79	3.12	49.91	74.00	24.09	vertical	Peak
16830.00	44.89	4.42	49.31	68.20	18.89	vertical	Peak
18000.00	35.39	7.74	43.13	54.00	10.87	vertical	Average
18000.00	46.67	7.74	54.41	74.00	19.59	vertical	Peak