

B4

Project No.: 2407V20721E-RF

Test Mode: 11a-5745


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

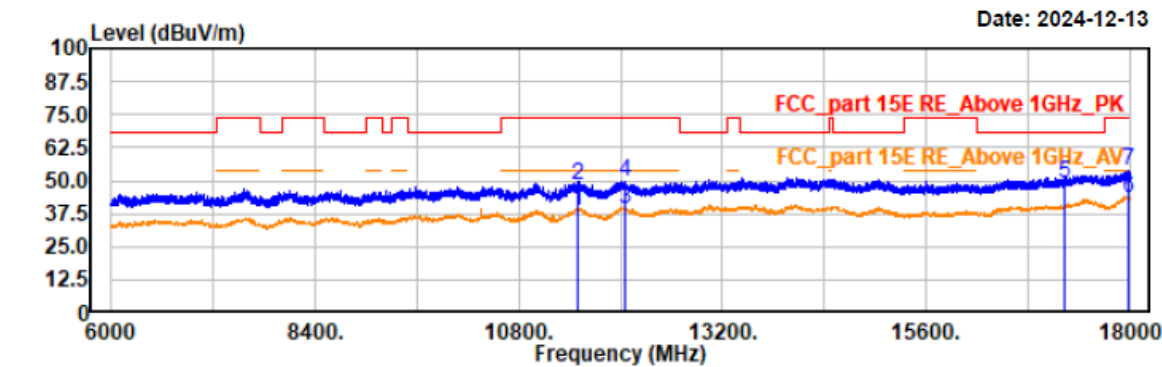

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	35.63	3.12	38.75	54.00	15.25	horizontal	Average
11490.00	45.24	3.12	48.36	74.00	25.64	horizontal	Peak
12063.60	35.18	4.13	39.31	54.00	14.69	horizontal	Average
12063.60	45.86	4.13	49.99	74.00	24.01	horizontal	Peak
17235.00	43.04	5.59	48.63	68.20	19.57	horizontal	Peak
17974.80	35.89	7.70	43.59	54.00	10.41	horizontal	Average
17974.80	46.34	7.70	54.04	74.00	19.96	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5745
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

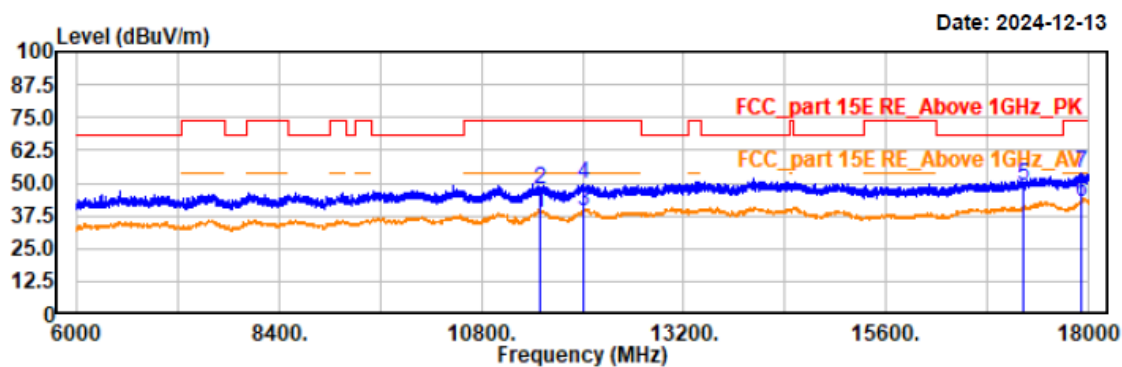

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	35.70	3.12	38.82	54.00	15.18	vertical	Average
11490.00	44.75	3.12	47.87	74.00	26.13	vertical	Peak
12001.20	35.33	4.25	39.58	54.00	14.42	vertical	Average
12001.20	45.58	4.25	49.83	74.00	24.17	vertical	Peak
17235.00	43.58	5.59	49.17	68.20	19.03	vertical	Peak
17908.80	34.87	7.60	42.47	54.00	11.53	vertical	Average
17908.80	45.97	7.60	53.57	74.00	20.43	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5785
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

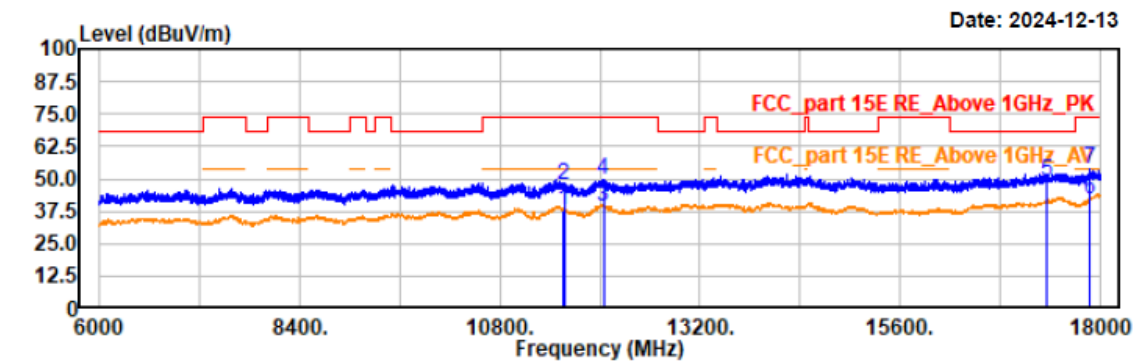


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.00	34.74	3.34	38.08	54.00	15.92	horizontal	Average
11570.40	44.10	3.34	47.44	74.00	26.56	horizontal	Peak
12043.20	35.12	4.17	39.29	54.00	14.71	horizontal	Average
12043.20	45.72	4.17	49.89	74.00	24.11	horizontal	Peak
17355.00	43.00	5.91	48.91	68.20	19.29	horizontal	Peak
17883.60	34.85	7.53	42.38	54.00	11.62	horizontal	Average
17883.60	46.47	7.53	54.00	74.00	20.00	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5785
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

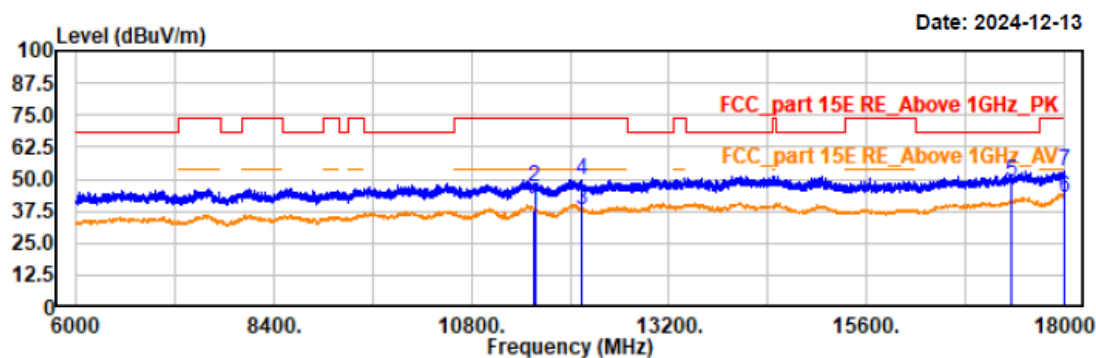

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.00	34.88	3.34	38.22	54.00	15.78	vertical	Average
11570.40	43.73	3.34	47.07	74.00	26.93	vertical	Peak
12135.60	34.25	4.01	38.26	54.00	15.74	vertical	Average
12135.60	45.66	4.01	49.67	74.00	24.33	vertical	Peak
17355.00	43.32	5.91	49.23	68.20	18.97	vertical	Peak
17997.60	34.88	7.74	42.62	54.00	11.38	vertical	Average
17997.60	45.59	7.74	53.33	74.00	20.67	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5825


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

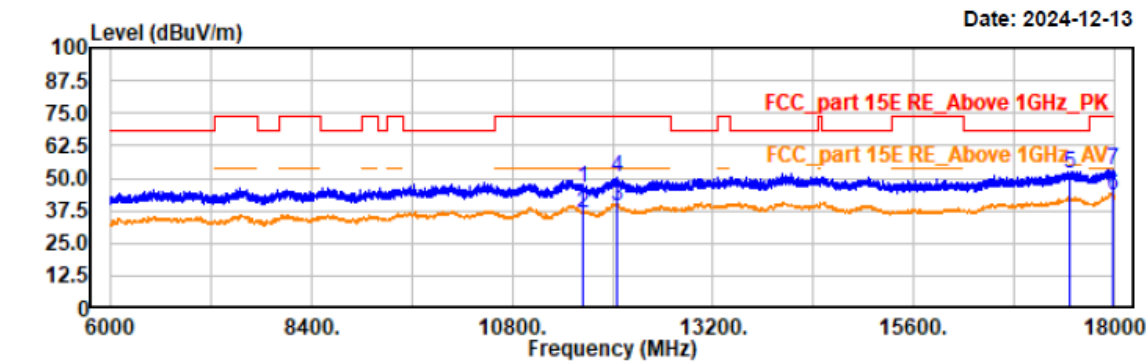


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11649.60	42.41	3.53	45.94	74.00	28.06	horizontal	Peak
11650.00	33.26	3.53	36.79	54.00	17.21	horizontal	Average
12062.40	35.50	4.14	39.64	54.00	14.36	horizontal	Average
12062.40	46.18	4.14	50.32	74.00	23.68	horizontal	Peak
17475.00	45.36	6.23	51.59	68.20	16.61	horizontal	Peak
17983.20	35.54	7.72	43.26	54.00	10.74	horizontal	Average
17983.20	45.69	7.72	53.41	74.00	20.59	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5825
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

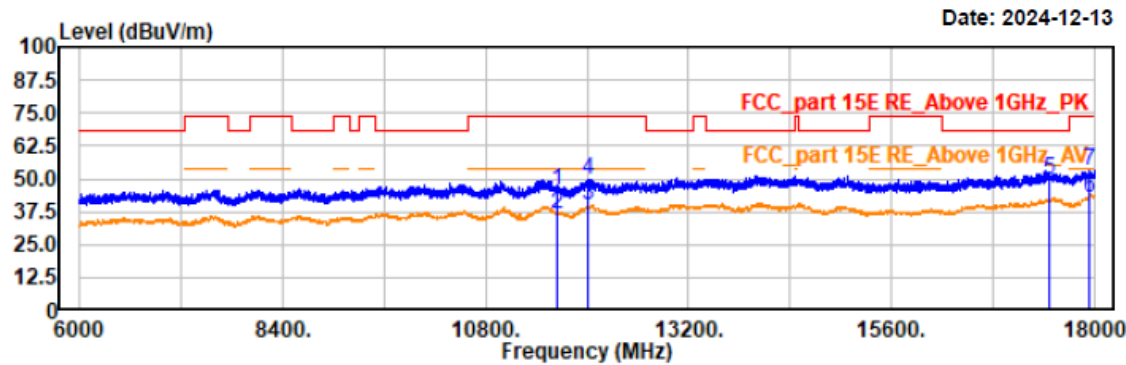


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SwT:auto
AV RBW:1MHz VBW:5kHz SwT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11649.60	42.16	3.53	45.69	74.00	28.31	vertical	Peak
11650.00	33.32	3.53	36.85	54.00	17.15	vertical	Average
12007.20	35.54	4.24	39.78	54.00	14.22	vertical	Average
12007.20	45.56	4.24	49.80	74.00	24.20	vertical	Peak
17475.00	43.75	6.23	49.98	68.20	18.22	vertical	Peak
17941.20	35.35	7.65	43.00	54.00	11.00	vertical	Average
17941.20	45.24	7.65	52.89	74.00	21.11	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5745
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

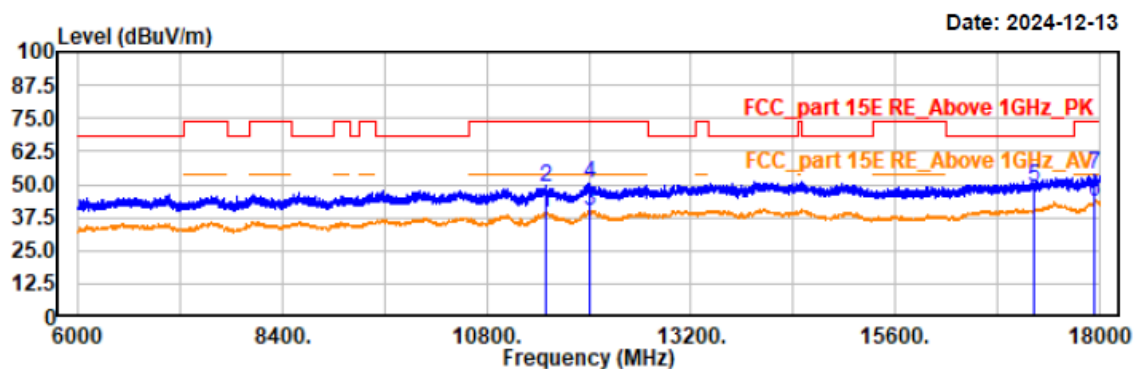

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	36.37	3.12	39.49	54.00	14.51	horizontal	Average
11490.00	45.66	3.12	48.78	74.00	25.22	horizontal	Peak
12003.60	35.51	4.24	39.75	54.00	14.25	horizontal	Average
12003.60	46.30	4.24	50.54	74.00	23.46	horizontal	Peak
17235.00	43.66	5.59	49.25	68.20	18.95	horizontal	Peak
17942.40	35.74	7.65	43.39	54.00	10.61	horizontal	Average
17942.40	46.12	7.65	53.77	74.00	20.23	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5745
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

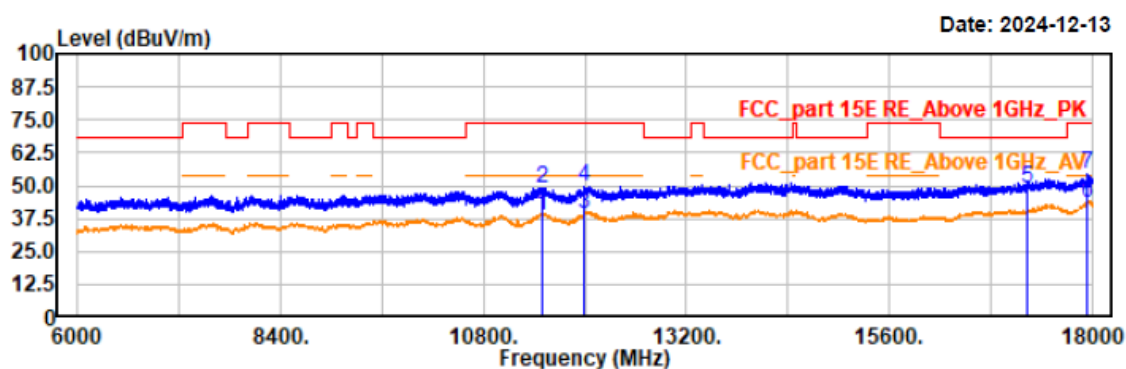

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	35.83	3.12	38.95	54.00	15.05	vertical	Average
11490.00	45.77	3.12	48.89	74.00	25.11	vertical	Peak
11997.60	35.20	4.24	39.44	54.00	14.56	vertical	Average
11997.60	45.40	4.24	49.64	74.00	24.36	vertical	Peak
17235.00	43.28	5.59	48.87	68.20	19.33	vertical	Peak
17947.20	35.93	7.66	43.59	54.00	10.41	vertical	Average
17947.20	46.62	7.66	54.28	74.00	19.72	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5785
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

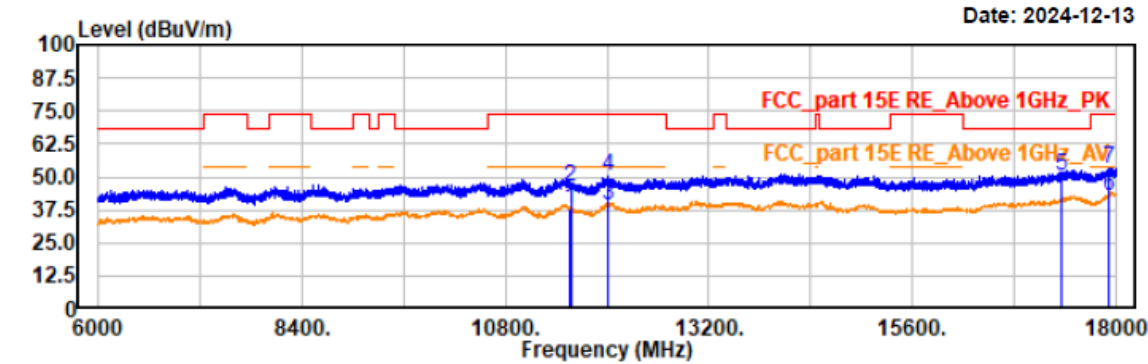


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.00	34.84	3.34	38.18	54.00	15.82	horizontal	Average
11570.40	42.90	3.34	46.24	74.00	27.76	horizontal	Peak
12004.80	35.21	4.24	39.45	54.00	14.55	horizontal	Average
12004.80	46.28	4.24	50.52	74.00	23.48	horizontal	Peak
17355.00	44.15	5.91	50.06	68.20	18.14	horizontal	Peak
17924.40	35.10	7.62	42.72	54.00	11.28	horizontal	Average
17924.40	45.21	7.62	52.83	74.00	21.17	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5785
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

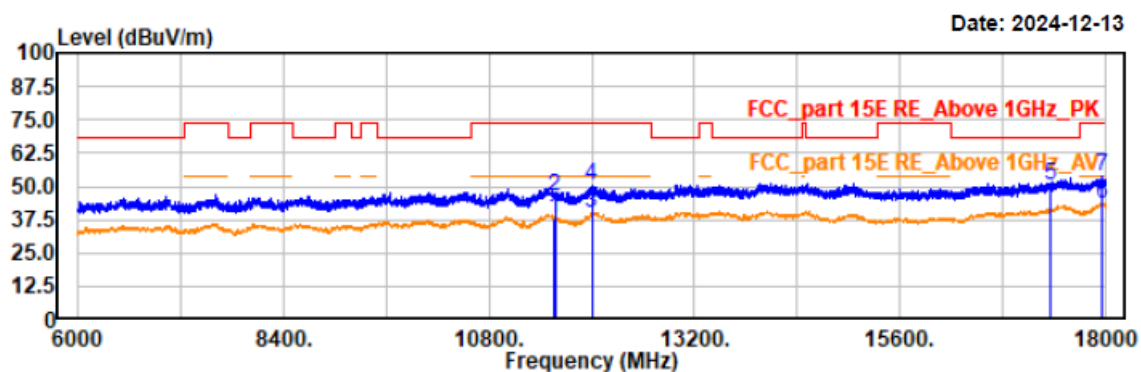

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.00	34.87	3.34	38.21	54.00	15.79	vertical	Average
11570.40	42.89	3.34	46.23	74.00	27.77	vertical	Peak
12000.00	35.43	4.25	39.68	54.00	14.32	vertical	Average
12000.00	45.89	4.25	50.14	74.00	23.86	vertical	Peak
17355.00	44.12	5.91	50.03	68.20	18.17	vertical	Peak
17971.20	35.68	7.69	43.37	54.00	10.63	vertical	Average
17971.20	45.91	7.69	53.60	74.00	20.40	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5825
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

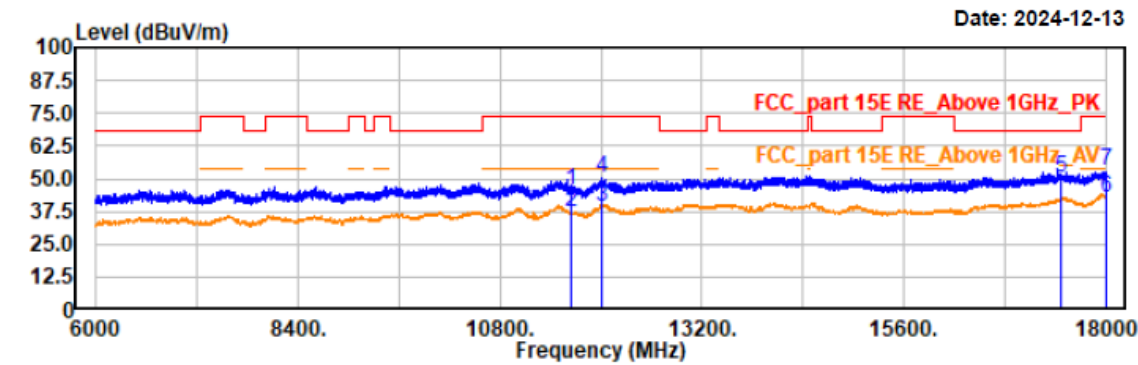


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11649.60	42.06	3.53	45.59	74.00	28.41	horizontal	Peak
11650.00	33.56	3.53	37.09	54.00	16.91	horizontal	Average
12018.00	35.11	4.21	39.32	54.00	14.68	horizontal	Average
12018.00	46.28	4.21	50.49	74.00	23.51	horizontal	Peak
17475.00	44.30	6.23	50.53	68.20	17.67	horizontal	Peak
17999.00	34.76	7.74	42.50	54.00	11.50	horizontal	Average
18000.00	45.56	7.74	53.30	74.00	20.70	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5825
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

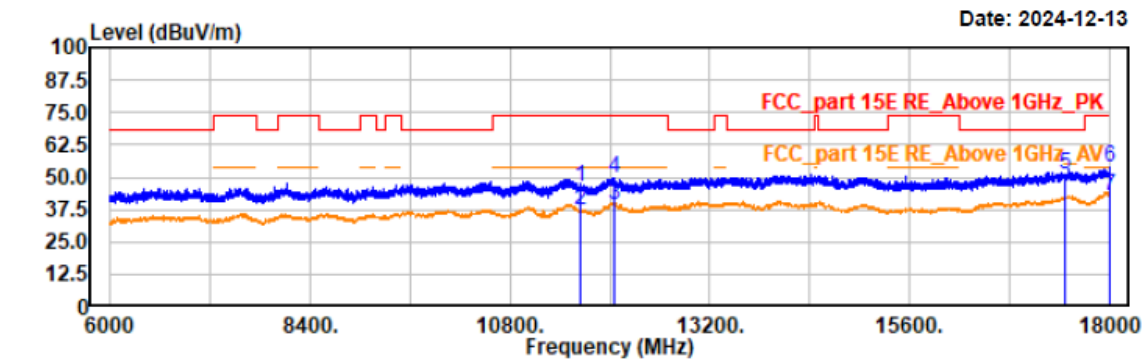


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11649.60	42.51	3.53	46.04	74.00	27.96	vertical	Peak
11650.00	33.67	3.53	37.20	54.00	16.80	vertical	Average
12051.60	35.24	4.16	39.40	54.00	14.60	vertical	Average
12051.60	45.65	4.16	49.81	74.00	24.19	vertical	Peak
17475.00	44.87	6.23	51.10	68.20	17.10	vertical	Peak
17998.80	45.98	7.74	53.72	74.00	20.28	vertical	Peak
17999.00	34.76	7.74	42.50	54.00	11.50	vertical	Average

Project No.: 2407V20721E-RF
Test Mode: 11n40-5755
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

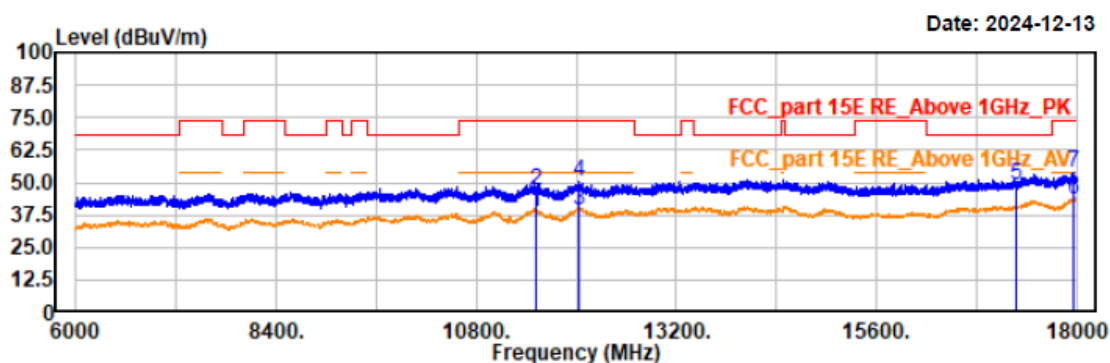

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11510.00	35.32	3.16	38.48	54.00	15.52	horizontal	Average
11510.40	43.93	3.16	47.09	74.00	26.91	horizontal	Peak
12034.80	35.43	4.19	39.62	54.00	14.38	horizontal	Average
12034.80	46.22	4.19	50.41	74.00	23.59	horizontal	Peak
17265.00	43.19	5.65	48.84	68.20	19.36	horizontal	Peak
17967.60	35.49	7.69	43.18	54.00	10.82	horizontal	Average
17967.60	46.19	7.69	53.88	74.00	20.12	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5755
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

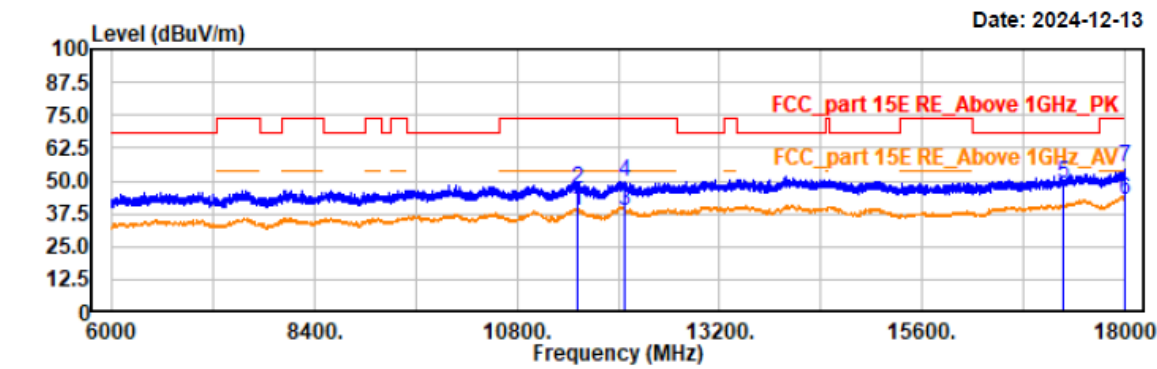

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11510.00	35.68	3.16	38.84	54.00	15.16	vertical	Average
11510.40	43.83	3.16	46.99	74.00	27.01	vertical	Peak
12079.20	34.59	4.11	38.70	54.00	15.30	vertical	Average
12079.20	45.64	4.11	49.75	74.00	24.25	vertical	Peak
17265.00	43.55	5.65	49.20	68.20	19.00	vertical	Peak
17999.00	35.26	7.74	43.00	54.00	11.00	vertical	Average
18000.00	47.29	7.74	55.03	74.00	18.97	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40-5795


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 23.9℃/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

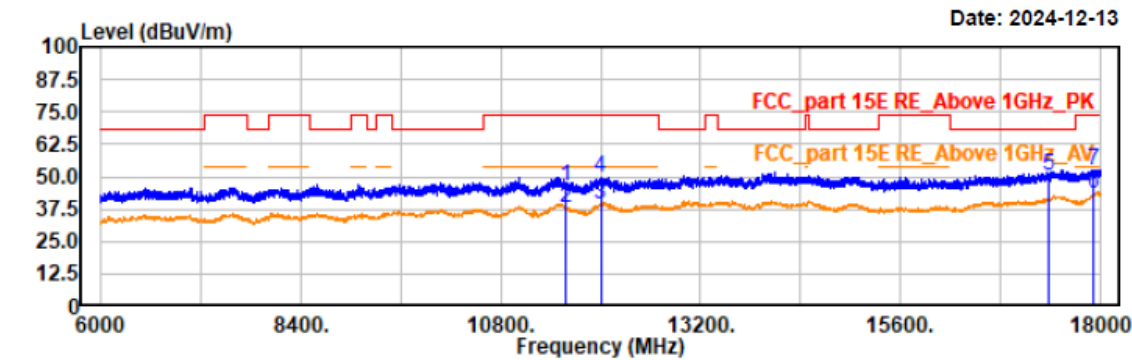


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11589.60	42.84	3.40	46.24	74.00	27.76	horizontal	Peak
11590.00	34.51	3.40	37.91	54.00	16.09	horizontal	Average
12000.00	35.16	4.25	39.41	54.00	14.59	horizontal	Average
12000.00	45.24	4.25	49.49	74.00	24.51	horizontal	Peak
17385.00	44.33	6.00	50.33	68.20	17.87	horizontal	Peak
17911.20	35.54	7.60	43.14	54.00	10.86	horizontal	Average
17911.20	45.00	7.60	52.60	74.00	21.40	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5795
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

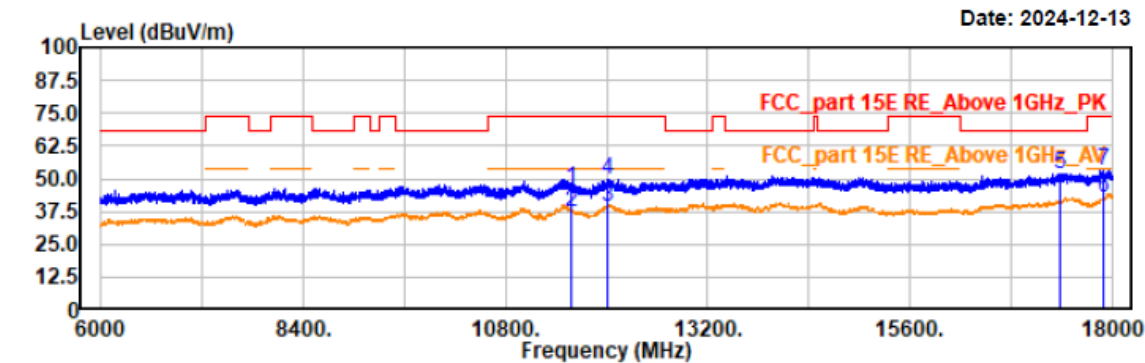


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11589.60	42.49	3.40	45.89	74.00	28.11	vertical	Peak
11590.00	34.19	3.40	37.59	54.00	16.41	vertical	Average
12016.80	34.83	4.22	39.05	54.00	14.95	vertical	Average
12016.80	45.69	4.22	49.91	74.00	24.09	vertical	Peak
17385.00	45.45	6.00	51.45	68.20	16.75	vertical	Peak
17906.40	35.27	7.60	42.87	54.00	11.13	vertical	Average
17906.40	45.45	7.60	53.05	74.00	20.95	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5775
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

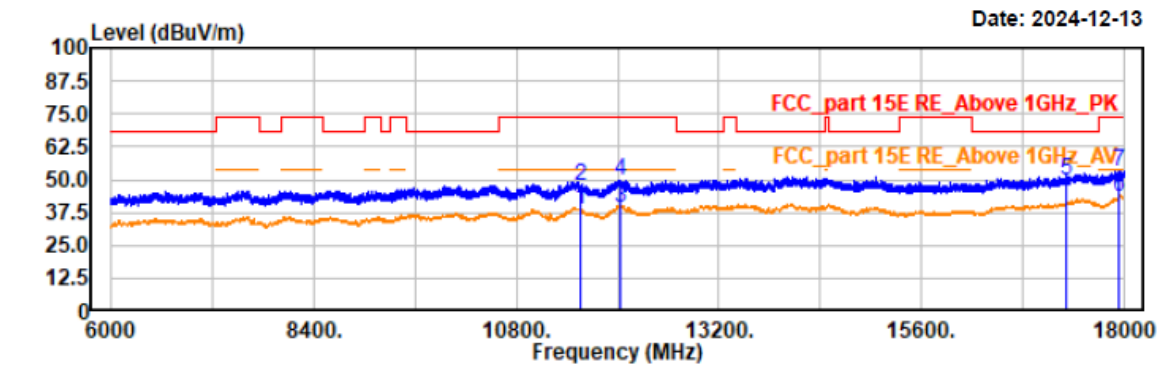


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11550.00	35.28	3.28	38.56	54.00	15.44	horizontal	Average
11550.00	44.15	3.28	47.43	74.00	26.57	horizontal	Peak
12039.60	35.42	4.18	39.60	54.00	14.40	horizontal	Average
12039.60	45.30	4.18	49.48	74.00	24.52	horizontal	Peak
17325.00	44.00	5.81	49.81	68.20	18.39	horizontal	Peak
17941.20	35.78	7.65	43.43	54.00	10.57	horizontal	Average
17941.20	45.52	7.65	53.17	74.00	20.83	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5775
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 23.9°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

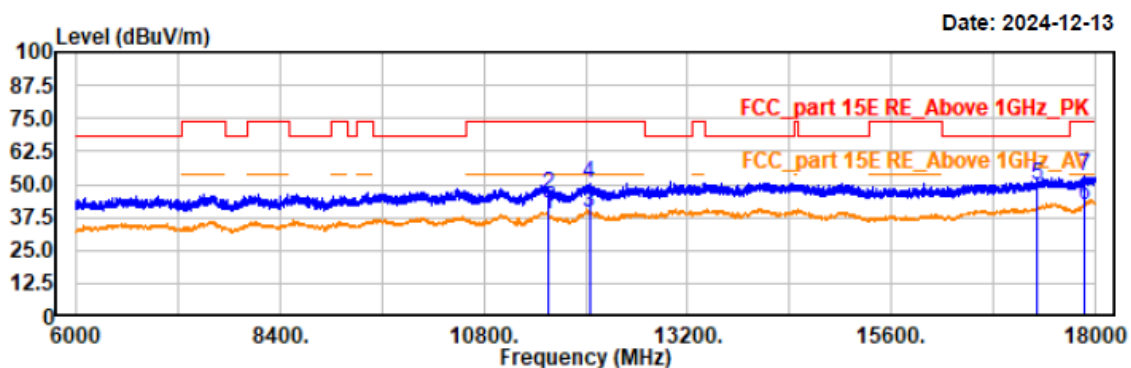

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11550.00	35.18	3.28	38.46	54.00	15.54	vertical	Average
11550.00	42.90	3.28	46.18	74.00	27.82	vertical	Peak
12043.20	35.08	4.17	39.25	54.00	14.75	vertical	Average
12043.20	46.05	4.17	50.22	74.00	23.78	vertical	Peak
17325.00	43.57	5.81	49.38	68.20	18.82	vertical	Peak
17865.60	34.74	7.47	42.21	54.00	11.79	vertical	Average
17865.60	45.55	7.47	53.02	74.00	20.98	vertical	Peak

EUT Model: NLS-NQuire700

B1

Project No.: 2407V20721E-RF

Test Mode: 11a-5180


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

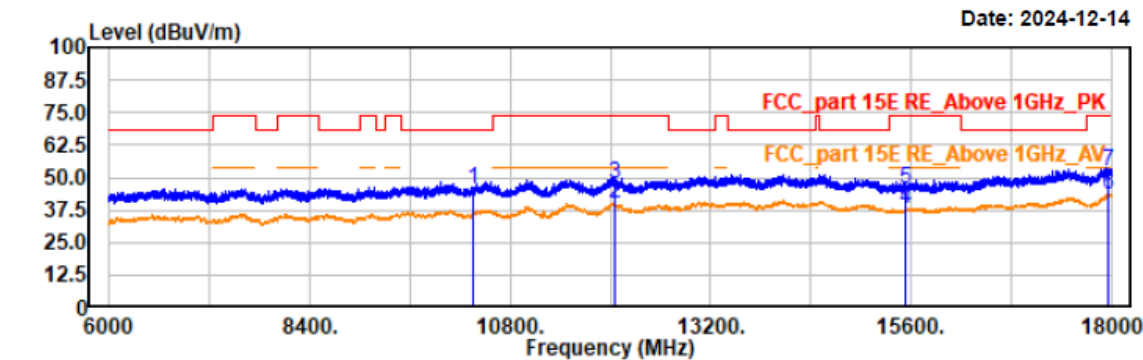

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10359.60	43.84	1.62	45.46	68.20	22.74	horizontal	Peak
12048.00	36.07	4.16	40.23	54.00	13.77	horizontal	Average
12048.00	43.42	4.16	47.58	74.00	26.42	horizontal	Peak
15540.00	35.19	2.61	37.80	54.00	16.20	horizontal	Average
15540.00	43.21	2.61	45.82	74.00	28.18	horizontal	Peak
17959.20	35.99	7.67	43.66	54.00	10.34	horizontal	Average
17959.20	44.47	7.67	52.14	74.00	21.86	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5180
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

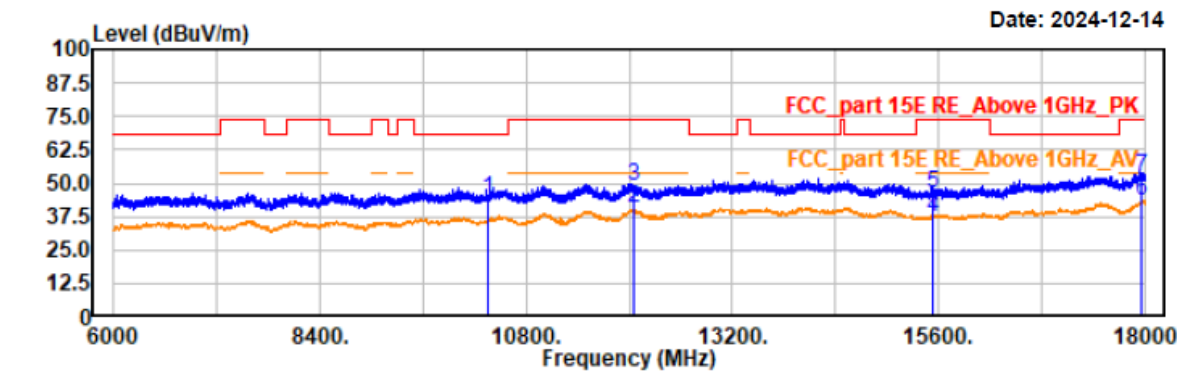


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10360.00	42.62	1.62	44.24	68.20	23.96	vertical	Peak
12061.20	36.44	4.14	40.58	54.00	13.42	vertical	Average
12061.20	44.49	4.14	48.63	74.00	25.37	vertical	Peak
15540.00	34.75	2.61	37.36	54.00	16.64	vertical	Average
15540.00	43.36	2.61	45.97	74.00	28.03	vertical	Peak
17960.40	35.94	7.68	43.62	54.00	10.38	vertical	Average
17960.40	45.00	7.68	52.68	74.00	21.32	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5200
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

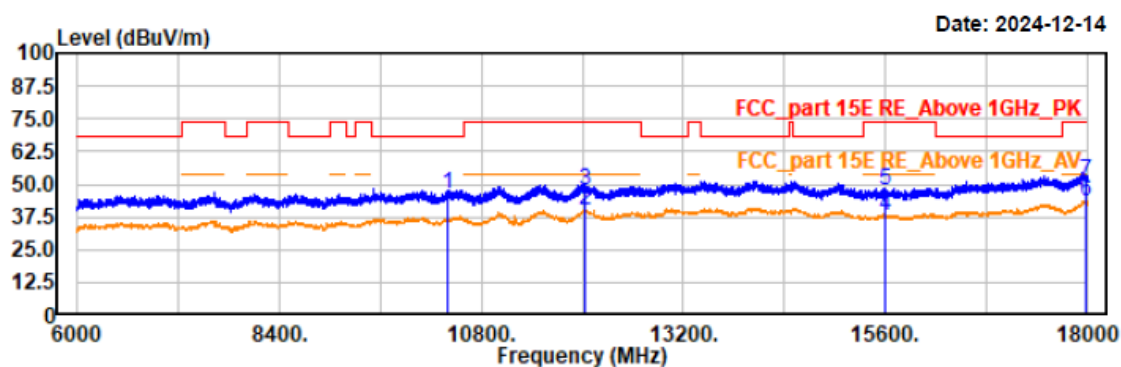

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.40	44.38	1.69	46.07	68.20	22.13	horizontal	Peak
12036.00	35.82	4.19	40.01	54.00	13.99	horizontal	Average
12036.00	43.40	4.19	47.59	74.00	26.41	horizontal	Peak
15600.00	35.24	2.51	37.75	54.00	16.25	horizontal	Average
15600.00	45.14	2.51	47.65	74.00	26.35	horizontal	Peak
17973.60	36.06	7.70	43.76	54.00	10.24	horizontal	Average
17973.60	43.48	7.70	51.18	74.00	22.82	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5200


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

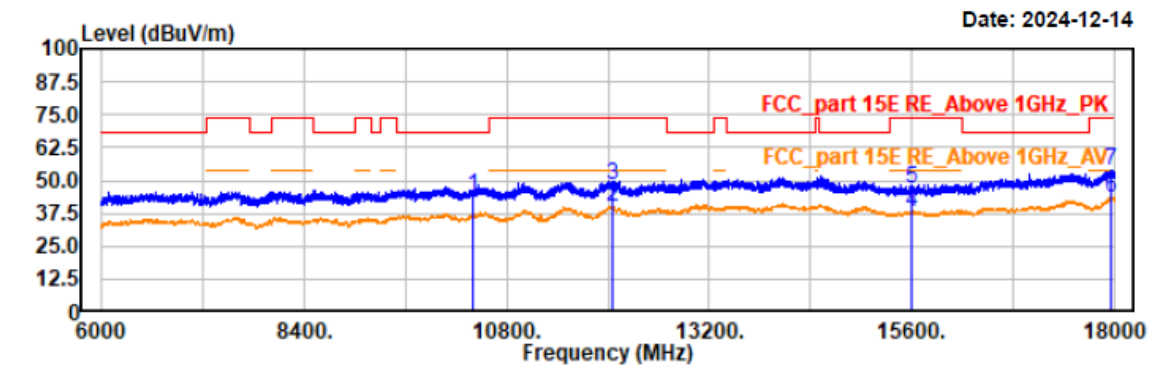

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.00	42.70	1.69	44.39	68.20	23.81	vertical	Peak
12049.20	35.97	4.16	40.13	54.00	13.87	vertical	Average
12049.20	44.23	4.16	48.39	74.00	25.61	vertical	Peak
15600.00	35.35	2.51	37.86	54.00	16.14	vertical	Average
15600.00	44.58	2.51	47.09	74.00	26.91	vertical	Peak
17962.80	35.99	7.68	43.67	54.00	10.33	vertical	Average
17962.80	45.95	7.68	53.63	74.00	20.37	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5240


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

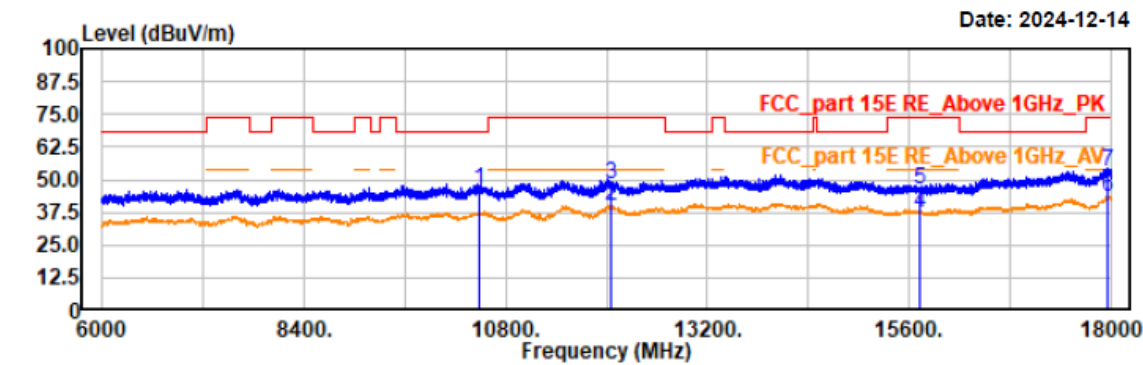


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10479.60	44.22	1.73	45.95	68.20	22.25	horizontal	Peak
12049.20	35.86	4.16	40.02	54.00	13.98	horizontal	Average
12049.20	43.87	4.16	48.03	74.00	25.97	horizontal	Peak
15720.00	34.80	2.35	37.15	54.00	16.85	horizontal	Average
15720.00	44.05	2.35	46.40	74.00	27.60	horizontal	Peak
17971.20	35.88	7.69	43.57	54.00	10.43	horizontal	Average
17971.20	45.16	7.69	52.85	74.00	21.15	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5240
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

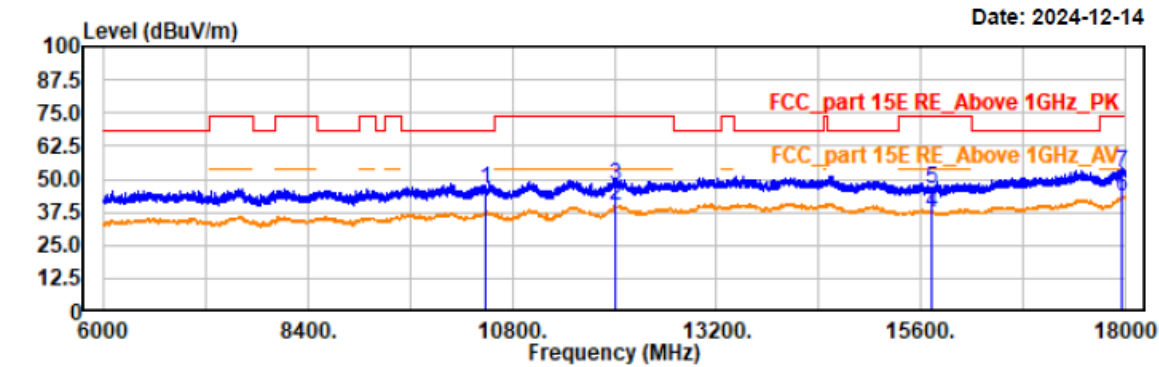


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10480.00	44.14	1.73	45.87	68.20	22.33	vertical	Peak
12010.80	35.91	4.23	40.14	54.00	13.86	vertical	Average
12010.80	43.07	4.23	47.30	74.00	26.70	vertical	Peak
15720.00	35.18	2.35	37.53	54.00	16.47	vertical	Average
15720.00	43.95	2.35	46.30	74.00	27.70	vertical	Peak
17958.00	36.00	7.68	43.68	54.00	10.32	vertical	Average
17958.00	44.63	7.68	52.31	74.00	21.69	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5180
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

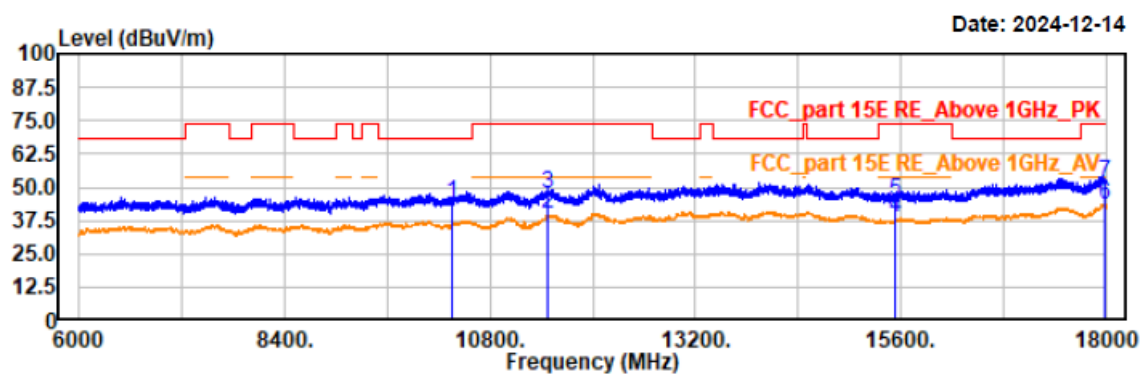

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10359.60	42.54	1.62	44.16	68.20	24.04	horizontal	Peak
11481.60	37.17	3.11	40.28	54.00	13.72	horizontal	Average
11481.60	44.74	3.11	47.85	74.00	26.15	horizontal	Peak
15540.00	35.78	2.61	38.39	54.00	15.61	horizontal	Average
15540.00	42.47	2.61	45.08	74.00	28.92	horizontal	Peak
17974.80	35.95	7.70	43.65	54.00	10.35	horizontal	Average
17974.80	44.31	7.70	52.01	74.00	21.99	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5180
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

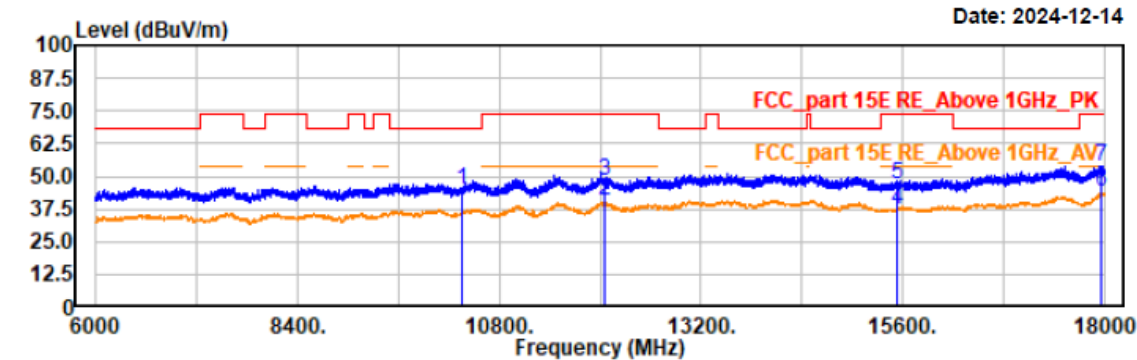

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10360.00	43.15	1.62	44.77	68.20	23.43	vertical	Peak
12062.40	36.21	4.14	40.35	54.00	13.65	vertical	Average
12062.40	44.19	4.14	48.33	74.00	25.67	vertical	Peak
15540.00	34.95	2.61	37.56	54.00	16.44	vertical	Average
15540.00	43.95	2.61	46.56	74.00	27.44	vertical	Peak
17960.40	36.16	7.68	43.84	54.00	10.16	vertical	Average
17960.40	45.82	7.68	53.50	74.00	20.50	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20-5200


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

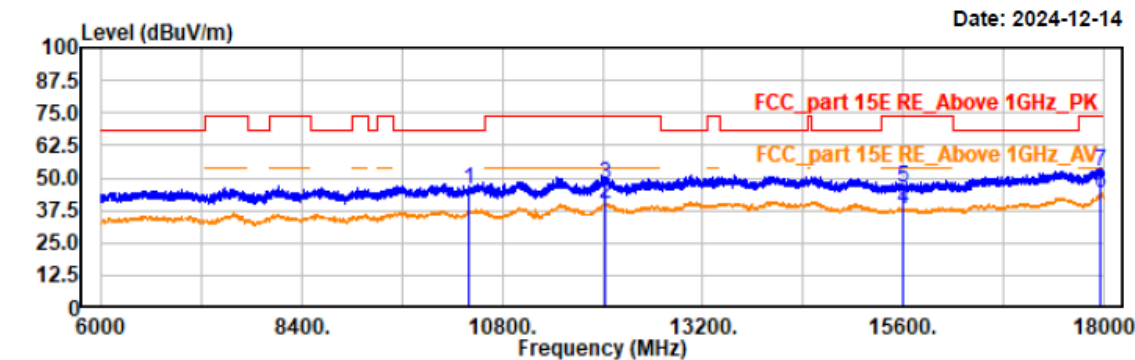

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.40	43.74	1.69	45.43	68.20	22.77	horizontal	Peak
12040.80	35.85	4.18	40.03	54.00	13.97	horizontal	Average
12040.80	43.70	4.18	47.88	74.00	26.12	horizontal	Peak
15600.00	35.31	2.51	37.82	54.00	16.18	horizontal	Average
15600.00	43.70	2.51	46.21	74.00	27.79	horizontal	Peak
17971.20	36.60	7.69	44.29	54.00	9.71	horizontal	Average
17971.20	45.02	7.69	52.71	74.00	21.29	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20-5200


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

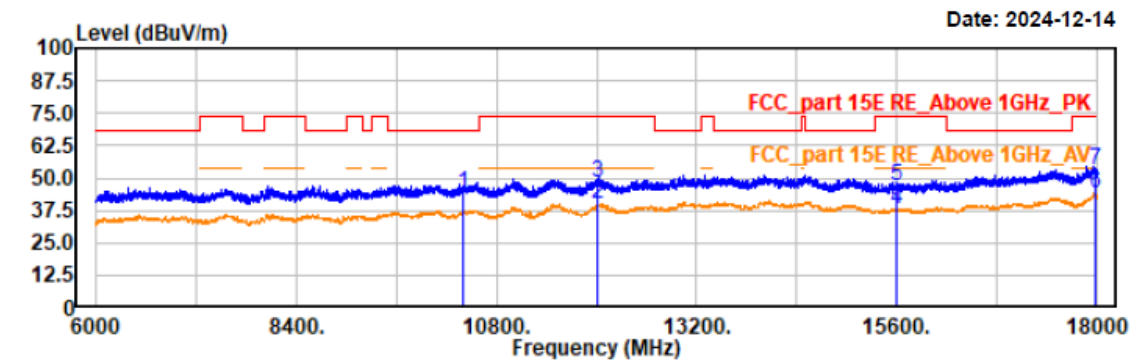

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10400.00	42.58	1.69	44.27	68.20	23.93	vertical	Peak
12006.00	35.67	4.24	39.91	54.00	14.09	vertical	Average
12006.00	44.13	4.24	48.37	74.00	25.63	vertical	Peak
15600.00	35.27	2.51	37.78	54.00	16.22	vertical	Average
15600.00	44.57	2.51	47.08	74.00	26.92	vertical	Peak
17974.80	36.34	7.70	44.04	54.00	9.96	vertical	Average
17974.80	45.37	7.70	53.07	74.00	20.93	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5240
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

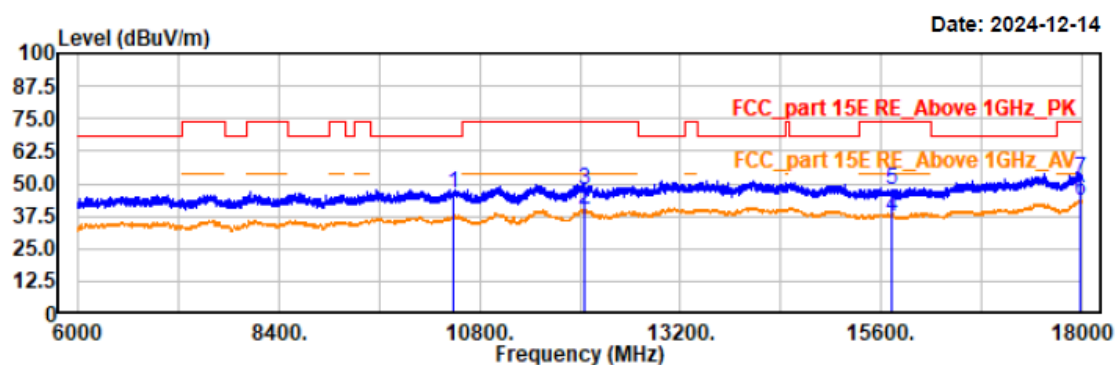

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10479.60	44.78	1.73	46.51	68.20	21.69	horizontal	Peak
12056.40	35.73	4.15	39.88	54.00	14.12	horizontal	Average
12056.40	43.15	4.15	47.30	74.00	26.70	horizontal	Peak
15720.00	35.07	2.35	37.42	54.00	16.58	horizontal	Average
15720.00	45.11	2.35	47.46	74.00	26.54	horizontal	Peak
17977.20	35.84	7.71	43.55	54.00	10.45	horizontal	Average
17977.20	44.22	7.71	51.93	74.00	22.07	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5240
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

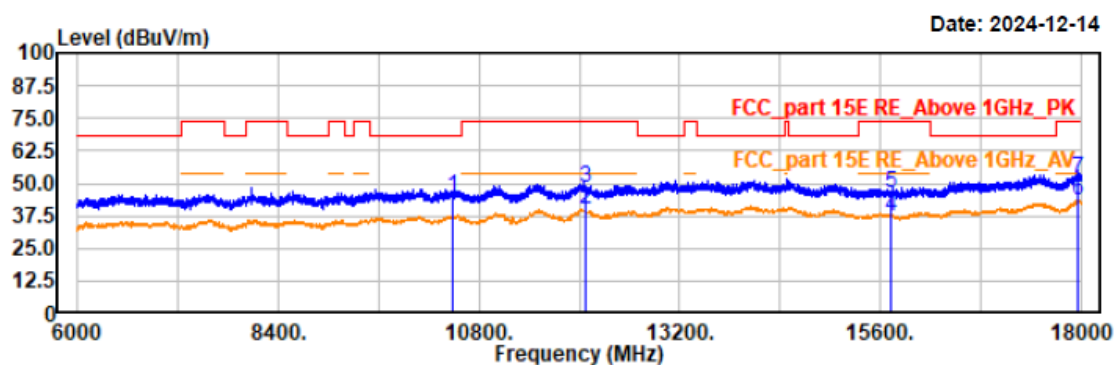

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10479.60	43.32	1.73	45.05	68.20	23.15	vertical	Peak
12067.20	35.94	4.13	40.07	54.00	13.93	vertical	Average
12067.20	44.35	4.13	48.48	74.00	25.52	vertical	Peak
15720.00	35.03	2.35	37.38	54.00	16.62	vertical	Average
15720.00	44.18	2.35	46.53	74.00	27.47	vertical	Peak
17971.20	35.94	7.69	43.63	54.00	10.37	vertical	Average
17971.20	44.32	7.69	52.01	74.00	21.99	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5190
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

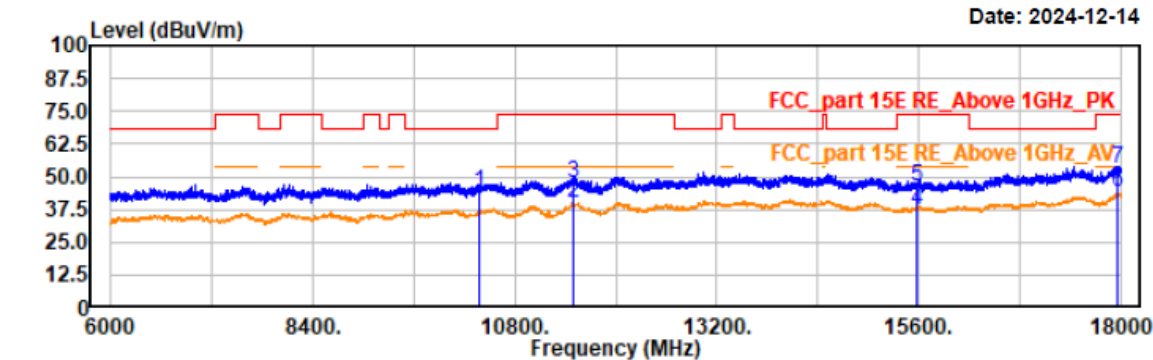

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10380.00	42.34	1.65	43.99	68.20	24.21	horizontal	Peak
11496.00	36.98	3.12	40.10	54.00	13.90	horizontal	Average
11496.00	44.65	3.12	47.77	74.00	26.23	horizontal	Peak
15570.00	34.94	2.55	37.49	54.00	16.51	horizontal	Average
15570.00	43.84	2.55	46.39	74.00	27.61	horizontal	Peak
17962.80	36.15	7.68	43.83	54.00	10.17	horizontal	Average
17962.80	45.62	7.68	53.30	74.00	20.70	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40-5190


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

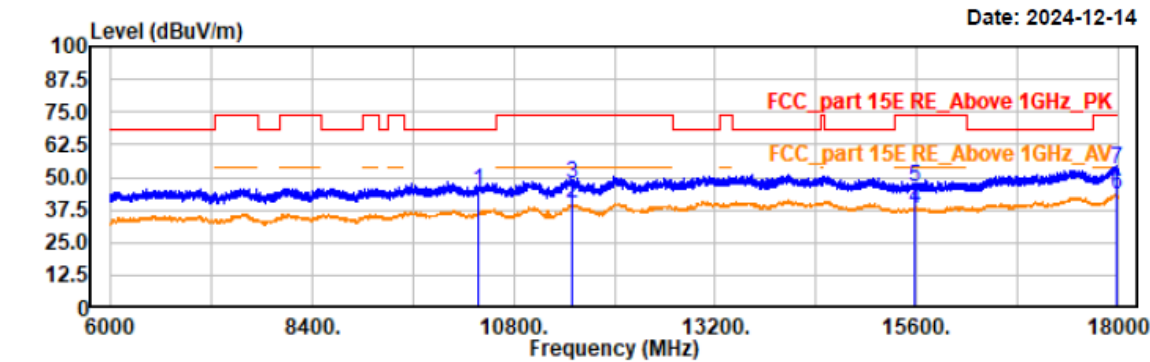

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10380.00	43.07	1.65	44.72	68.20	23.48	vertical	Peak
11494.80	36.91	3.12	40.03	54.00	13.97	vertical	Average
11494.80	44.19	3.12	47.31	74.00	26.69	vertical	Peak
15570.00	35.21	2.55	37.76	54.00	16.24	vertical	Average
15570.00	43.64	2.55	46.19	74.00	27.81	vertical	Peak
17973.60	35.99	7.70	43.69	54.00	10.31	vertical	Average
17973.60	45.34	7.70	53.04	74.00	20.96	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5230
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

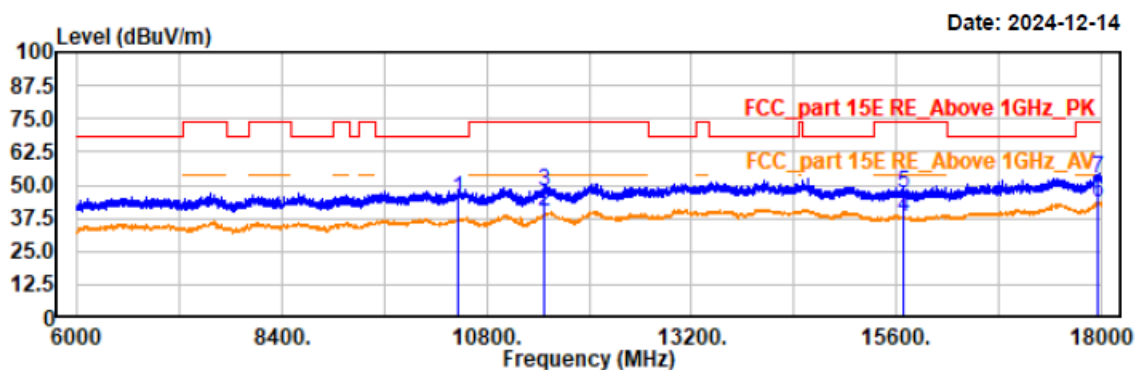

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10460.40	42.87	1.72	44.59	68.20	23.61	horizontal	Peak
11472.00	37.06	3.10	40.16	54.00	13.84	horizontal	Average
11472.00	44.81	3.10	47.91	74.00	26.09	horizontal	Peak
15690.00	35.35	2.37	37.72	54.00	16.28	horizontal	Average
15690.00	44.58	2.37	46.95	74.00	27.05	horizontal	Peak
17968.80	35.94	7.69	43.63	54.00	10.37	horizontal	Average
17968.80	44.62	7.69	52.31	74.00	21.69	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5230
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

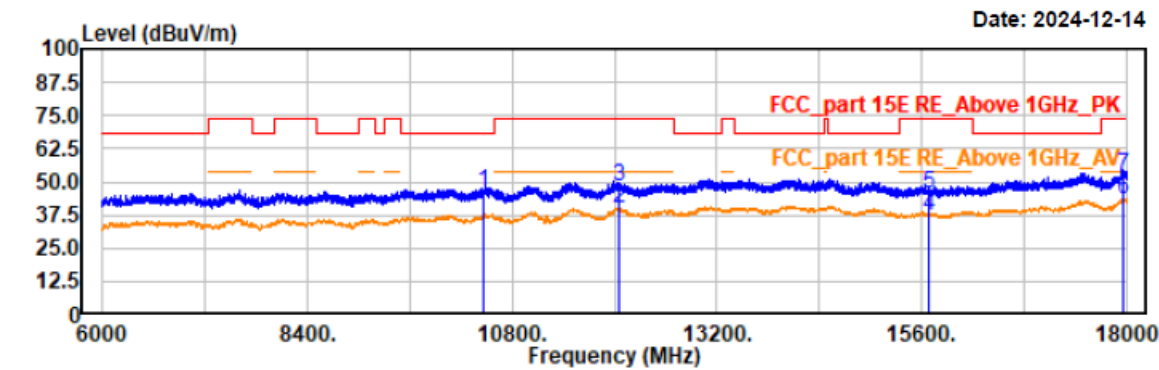


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10460.00	44.23	1.72	45.95	68.20	22.25	vertical	Peak
12048.00	35.90	4.16	40.06	54.00	13.94	vertical	Average
12048.00	44.28	4.16	48.44	74.00	25.56	vertical	Peak
15690.00	35.15	2.37	37.52	54.00	16.48	vertical	Average
15690.00	43.21	2.37	45.58	74.00	28.42	vertical	Peak
17970.00	36.00	7.69	43.69	54.00	10.31	vertical	Average
17970.00	44.62	7.69	52.31	74.00	21.69	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5210
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

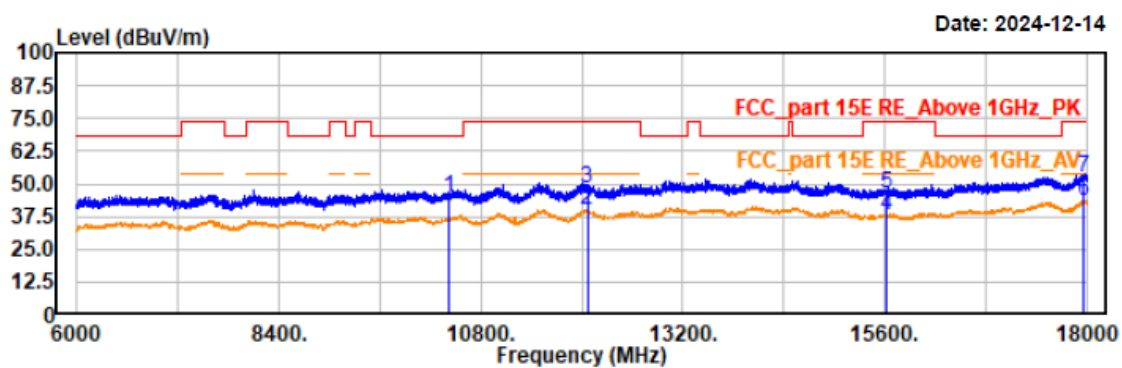

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10419.60	43.23	1.69	44.92	68.20	23.28	horizontal	Peak
12064.80	35.98	4.13	40.11	54.00	13.89	horizontal	Average
12064.80	44.15	4.13	48.28	74.00	25.72	horizontal	Peak
15630.00	35.43	2.47	37.90	54.00	16.10	horizontal	Average
15630.00	43.74	2.47	46.21	74.00	27.79	horizontal	Peak
17959.20	36.09	7.67	43.76	54.00	10.24	horizontal	Average
17959.20	44.89	7.67	52.56	74.00	21.44	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5210
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

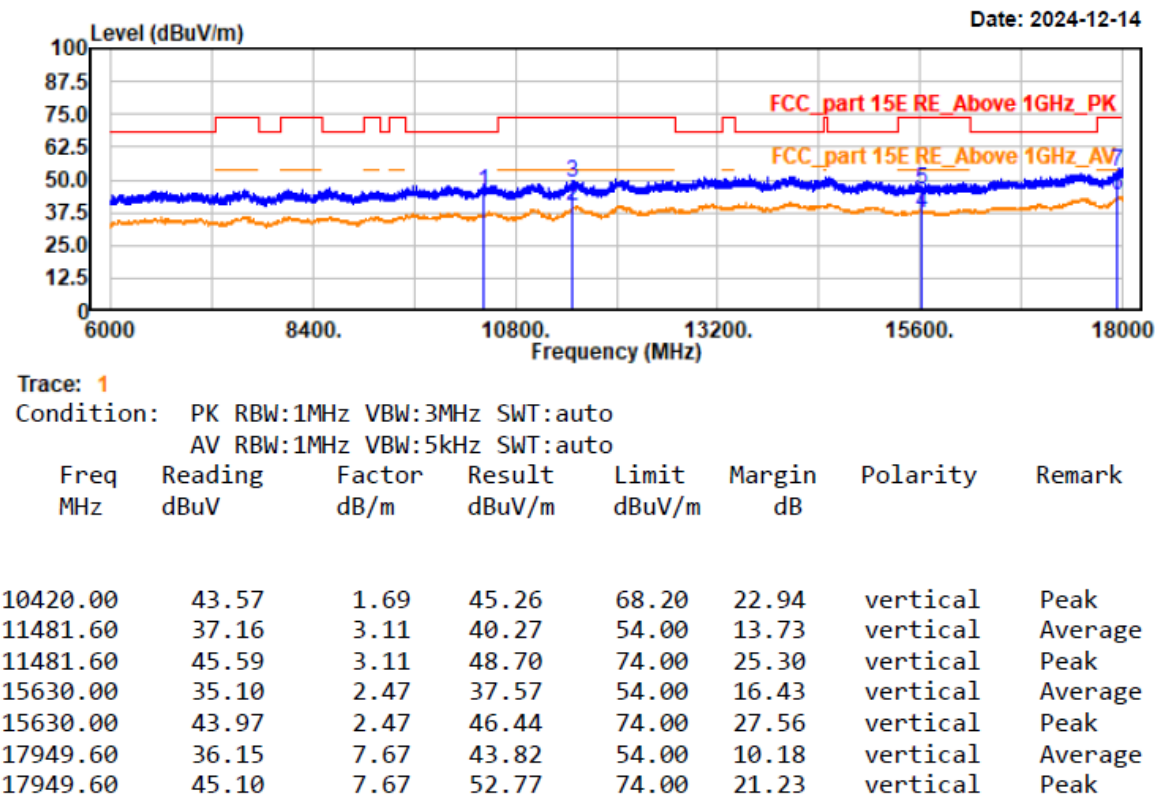

B2

Project No.: 2407V20721E-RF

Test Mode: 11a-5260


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

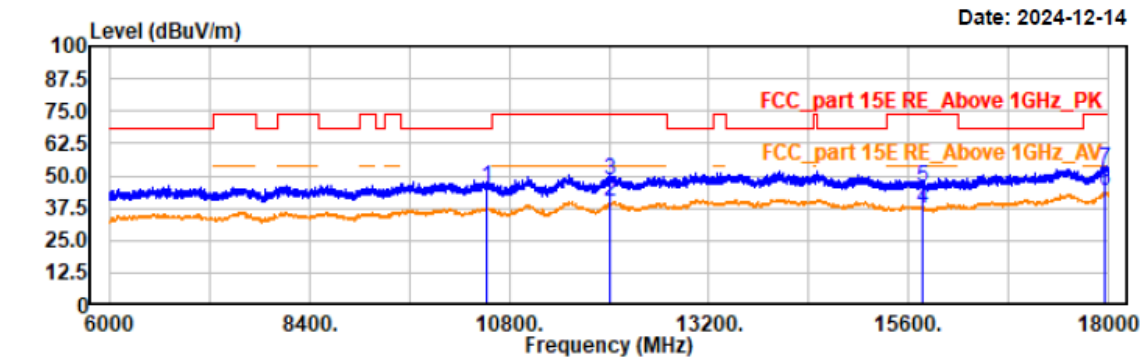

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.40	43.87	1.77	45.64	68.20	22.56	horizontal	Peak
12013.20	35.99	4.22	40.21	54.00	13.79	horizontal	Average
12013.20	43.88	4.22	48.10	74.00	25.90	horizontal	Peak
15780.00	34.60	2.39	36.99	54.00	17.01	horizontal	Average
15780.00	43.44	2.39	45.83	74.00	28.17	horizontal	Peak
17960.40	36.17	7.68	43.85	54.00	10.15	horizontal	Average
17960.40	44.91	7.68	52.59	74.00	21.41	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5260


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

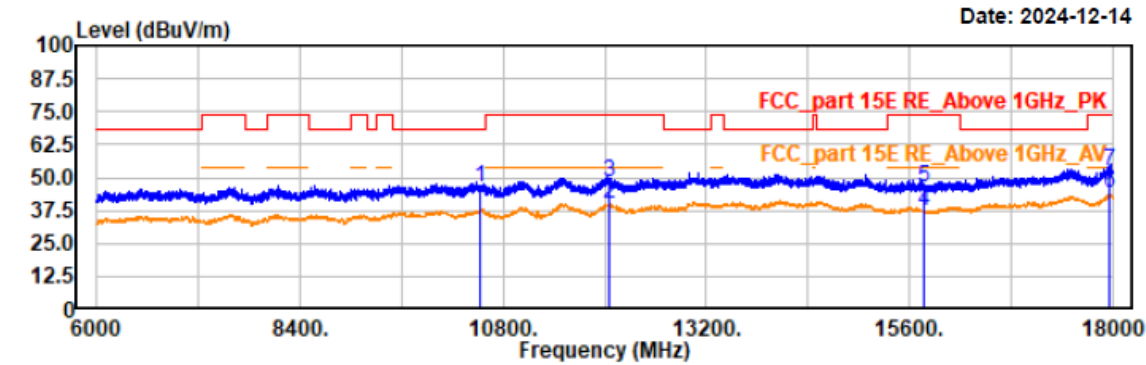

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.00	44.20	1.77	45.97	68.20	22.23	vertical	Peak
12056.40	36.02	4.15	40.17	54.00	13.83	vertical	Average
12056.40	43.87	4.15	48.02	74.00	25.98	vertical	Peak
15780.00	34.59	2.39	36.98	54.00	17.02	vertical	Average
15780.00	43.91	2.39	46.30	74.00	27.70	vertical	Peak
17966.40	36.24	7.69	43.93	54.00	10.07	vertical	Average
17966.40	44.65	7.69	52.34	74.00	21.66	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5280


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

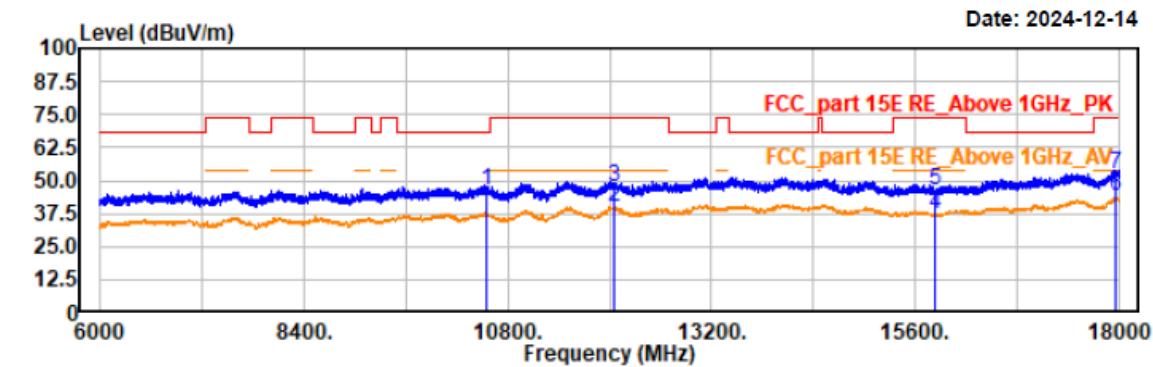


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	44.26	1.83	46.09	68.20	22.11	horizontal	Peak
12055.20	35.96	4.15	40.11	54.00	13.89	horizontal	Average
12055.20	43.66	4.15	47.81	74.00	26.19	horizontal	Peak
15840.00	34.64	2.37	37.01	54.00	16.99	horizontal	Average
15840.00	43.70	2.37	46.07	74.00	27.93	horizontal	Peak
17962.80	36.27	7.68	43.95	54.00	10.05	horizontal	Average
17962.80	44.44	7.68	52.12	74.00	21.88	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5280
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

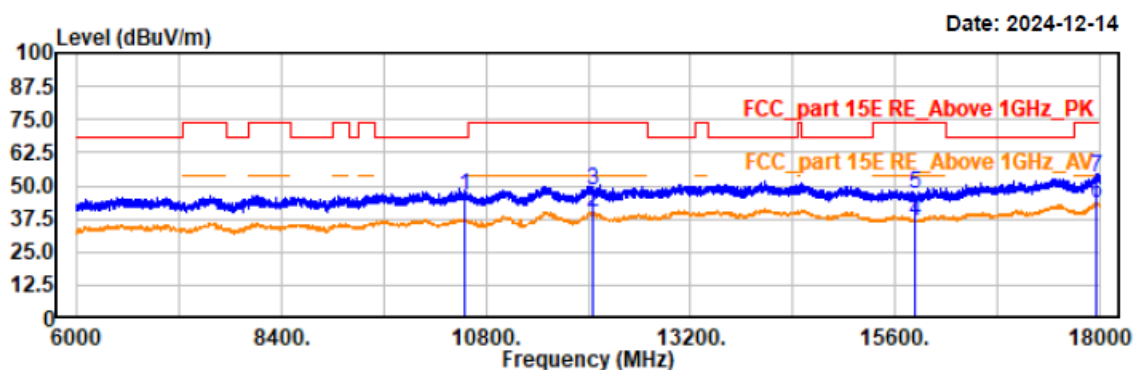

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	44.47	1.83	46.30	68.20	21.90	vertical	Peak
12049.20	35.85	4.16	40.01	54.00	13.99	vertical	Average
12049.20	43.82	4.16	47.98	74.00	26.02	vertical	Peak
15840.00	34.23	2.37	36.60	54.00	17.40	vertical	Average
15840.00	44.45	2.37	46.82	74.00	27.18	vertical	Peak
17955.60	35.74	7.68	43.42	54.00	10.58	vertical	Average
17955.60	45.40	7.68	53.08	74.00	20.92	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5320
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

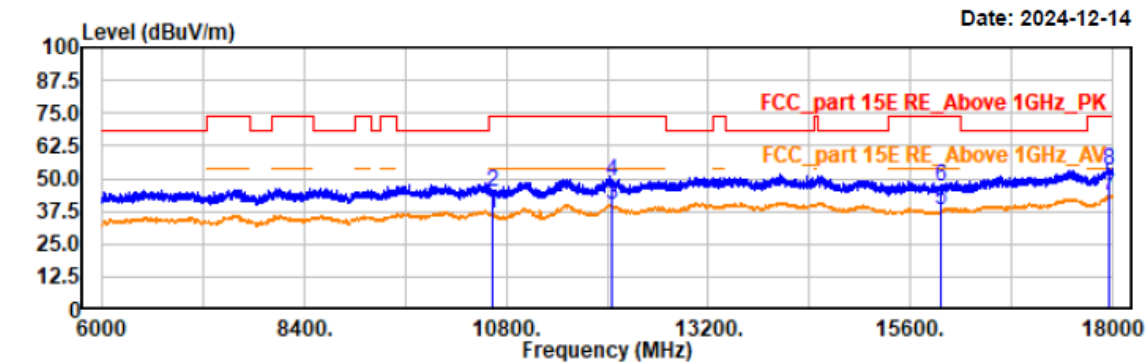


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10640.40	34.54	1.94	36.48	54.00	17.52	horizontal	Average
10640.40	43.01	1.94	44.95	74.00	29.05	horizontal	Peak
12061.20	35.92	4.14	40.06	54.00	13.94	horizontal	Average
12061.20	45.16	4.14	49.30	74.00	24.70	horizontal	Peak
15960.00	35.47	2.41	37.88	54.00	16.12	horizontal	Average
15960.00	44.28	2.41	46.69	74.00	27.31	horizontal	Peak
17958.00	36.07	7.68	43.75	54.00	10.25	horizontal	Average
17958.00	45.16	7.68	52.84	74.00	21.16	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5320
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

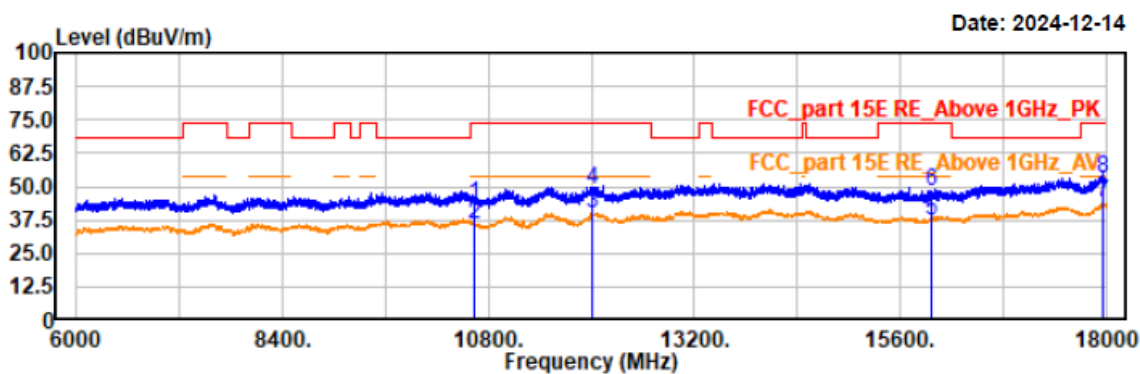


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10640.00	41.72	1.94	43.66	74.00	30.34	vertical	Peak
10640.40	34.05	1.94	35.99	54.00	18.01	vertical	Average
12009.60	35.67	4.23	39.90	54.00	14.10	vertical	Average
12009.60	44.41	4.23	48.64	74.00	25.36	vertical	Peak
15960.00	35.16	2.41	37.57	54.00	16.43	vertical	Average
15960.00	45.71	2.41	48.12	74.00	25.88	vertical	Peak
17966.40	36.16	7.69	43.85	54.00	10.15	vertical	Average
17966.40	45.27	7.69	52.96	74.00	21.04	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5260
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

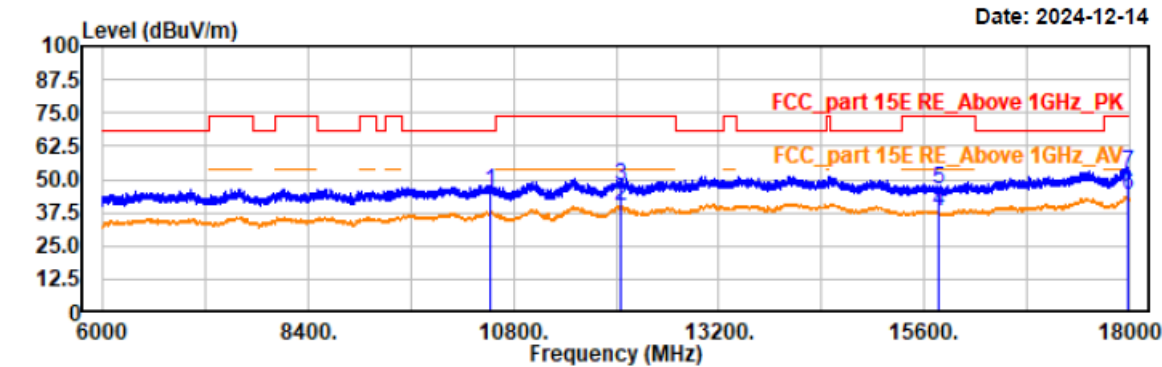


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.40	43.92	1.77	45.69	68.20	22.51	horizontal	Peak
12049.20	35.99	4.16	40.15	54.00	13.85	horizontal	Average
12049.20	43.57	4.16	47.73	74.00	26.27	horizontal	Peak
15780.00	35.30	2.39	37.69	54.00	16.31	horizontal	Average
15780.00	43.97	2.39	46.36	74.00	27.64	horizontal	Peak
17980.80	36.24	7.71	43.95	54.00	10.05	horizontal	Average
17980.80	44.77	7.71	52.48	74.00	21.52	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5260
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

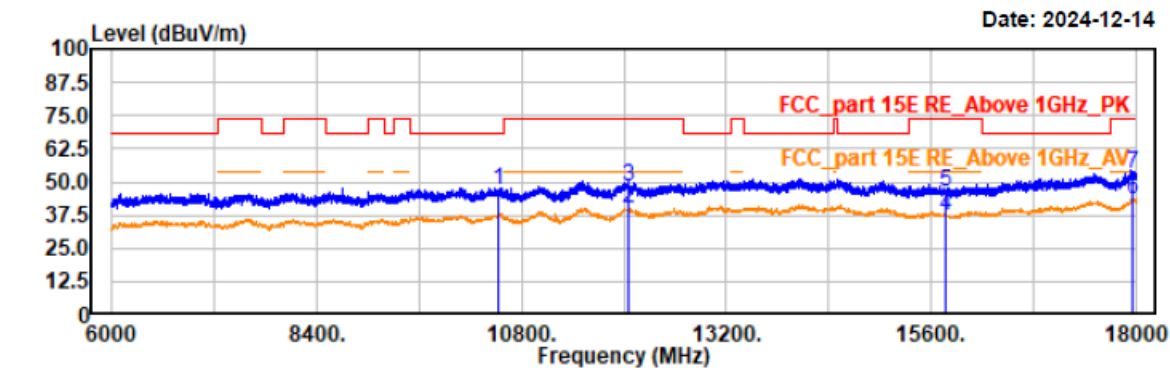


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10520.00	45.13	1.77	46.90	68.20	21.30	vertical	Peak
12061.20	36.06	4.14	40.20	54.00	13.80	vertical	Average
12061.20	44.09	4.14	48.23	74.00	25.77	vertical	Peak
15780.00	34.69	2.39	37.08	54.00	16.92	vertical	Average
15780.00	44.14	2.39	46.53	74.00	27.47	vertical	Peak
17965.20	36.01	7.69	43.70	54.00	10.30	vertical	Average
17965.20	45.53	7.69	53.22	74.00	20.78	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5280
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

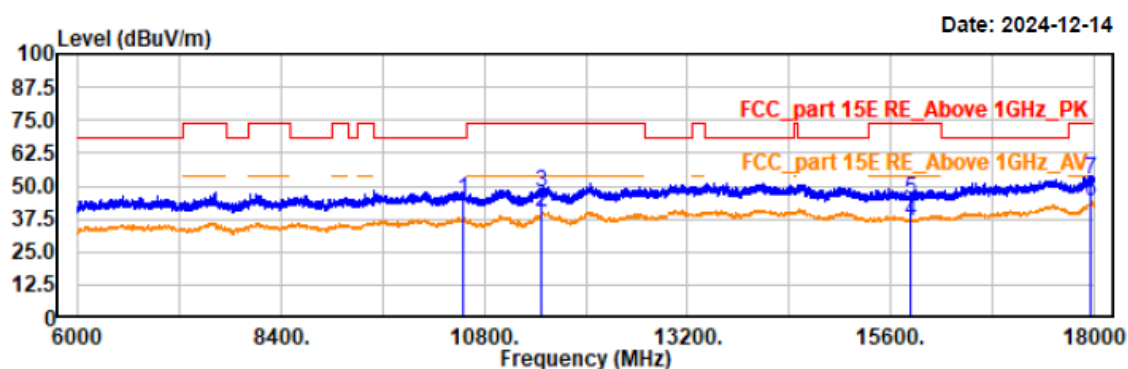

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	43.25	1.83	45.08	68.20	23.12	horizontal	Peak
11479.20	36.82	3.10	39.92	54.00	14.08	horizontal	Average
11479.20	44.36	3.10	47.46	74.00	26.54	horizontal	Peak
15840.00	34.43	2.37	36.80	54.00	17.20	horizontal	Average
15840.00	42.24	2.37	44.61	74.00	29.39	horizontal	Peak
17958.00	36.43	7.68	44.11	54.00	9.89	horizontal	Average
17958.00	44.40	7.68	52.08	74.00	21.92	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5280
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

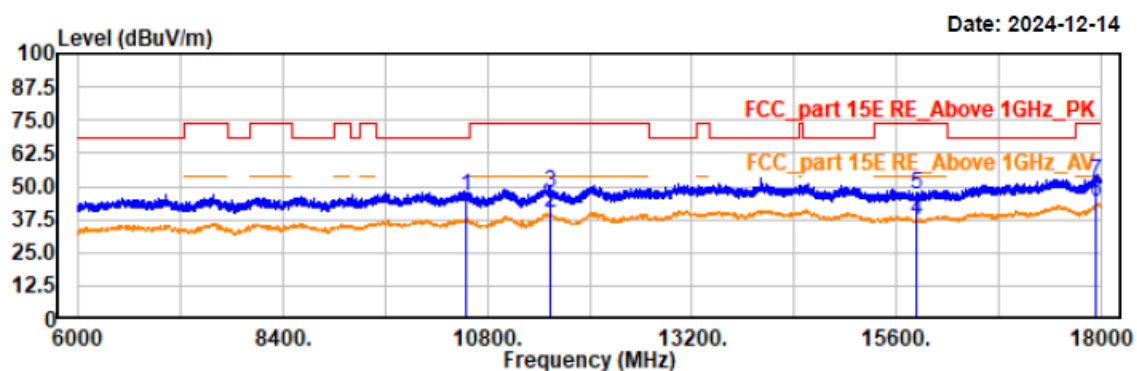

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10560.00	44.63	1.83	46.46	68.20	21.74	vertical	Peak
11544.00	36.76	3.26	40.02	54.00	13.98	vertical	Average
11544.00	44.13	3.26	47.39	74.00	26.61	vertical	Peak
15840.00	34.75	2.37	37.12	54.00	16.88	vertical	Average
15840.00	44.87	2.37	47.24	74.00	26.76	vertical	Peak
17948.40	36.22	7.66	43.88	54.00	10.12	vertical	Average
17948.40	44.12	7.66	51.78	74.00	22.22	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20-5320


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

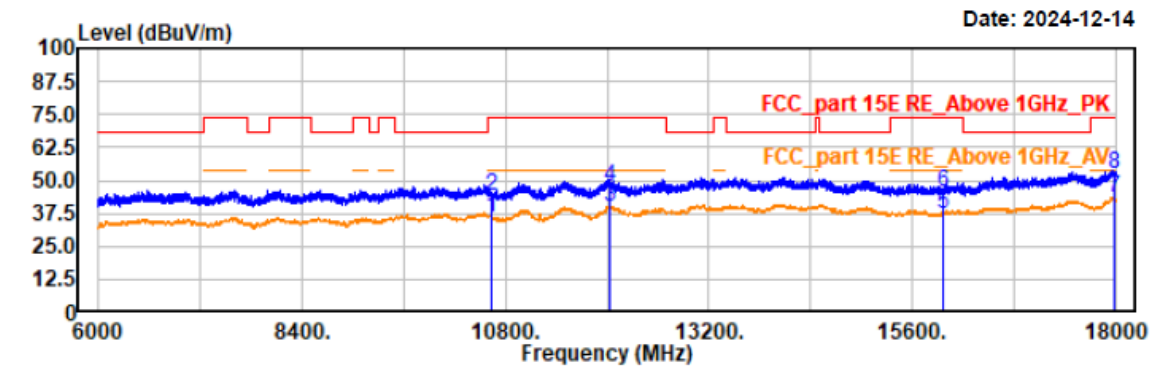

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10640.00	34.13	1.94	36.07	54.00	17.93	horizontal	Average
10640.00	41.89	1.94	43.83	74.00	30.17	horizontal	Peak
12026.40	36.08	4.21	40.29	54.00	13.71	horizontal	Average
12026.40	43.53	4.21	47.74	74.00	26.26	horizontal	Peak
15960.00	35.13	2.41	37.54	54.00	16.46	horizontal	Average
15960.00	43.39	2.41	45.80	74.00	28.20	horizontal	Peak
17989.20	35.87	7.72	43.59	54.00	10.41	horizontal	Average
17989.20	44.90	7.72	52.62	74.00	21.38	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5320
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

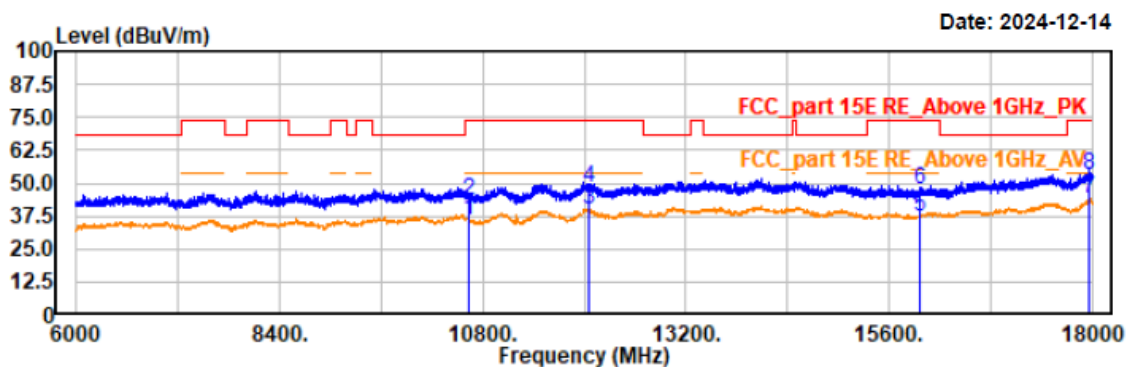

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SwT:auto

AV RBW:1MHz VBW:5kHz SwT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10640.40	33.86	1.94	35.80	54.00	18.20	vertical	Average
10640.40	41.75	1.94	43.69	74.00	30.31	vertical	Peak
12062.40	35.94	4.14	40.08	54.00	13.92	vertical	Average
12062.40	44.05	4.14	48.19	74.00	25.81	vertical	Peak
15960.00	35.10	2.41	37.51	54.00	16.49	vertical	Average
15960.00	44.90	2.41	47.31	74.00	26.69	vertical	Peak
17955.60	36.40	7.68	44.08	54.00	9.92	vertical	Average
17955.60	45.16	7.68	52.84	74.00	21.16	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5270
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

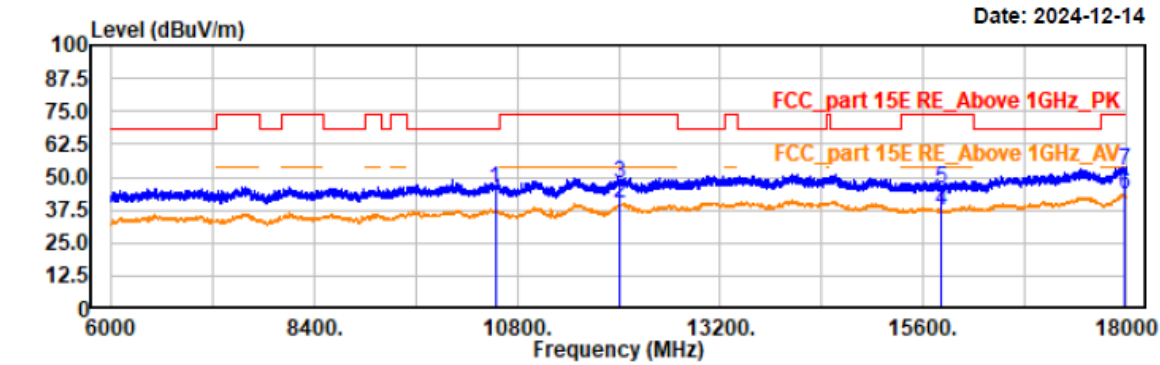

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10539.60	43.43	1.80	45.23	68.20	22.97	horizontal	Peak
12009.60	36.00	4.23	40.23	54.00	13.77	horizontal	Average
12009.60	43.07	4.23	47.30	74.00	26.70	horizontal	Peak
15810.00	34.76	2.38	37.14	54.00	16.86	horizontal	Average
15810.00	43.24	2.38	45.62	74.00	28.38	horizontal	Peak
17979.60	35.82	7.71	43.53	54.00	10.47	horizontal	Average
17979.60	44.75	7.71	52.46	74.00	21.54	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40-5270


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

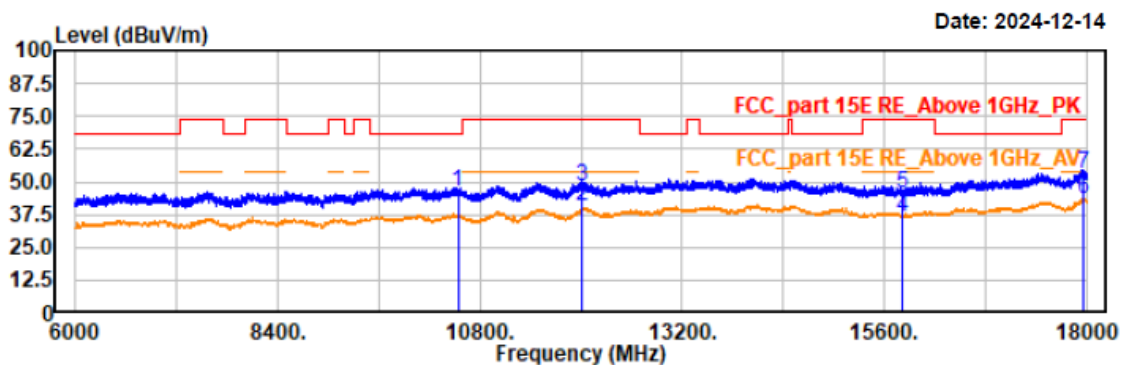

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10540.00	44.44	1.80	46.24	68.20	21.96	vertical	Peak
12012.00	36.14	4.23	40.37	54.00	13.63	vertical	Average
12012.00	44.35	4.23	48.58	74.00	25.42	vertical	Peak
15810.00	34.50	2.38	36.88	54.00	17.12	vertical	Average
15810.00	43.09	2.38	45.47	74.00	28.53	vertical	Peak
17960.40	36.01	7.68	43.69	54.00	10.31	vertical	Average
17960.40	45.38	7.68	53.06	74.00	20.94	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5310
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

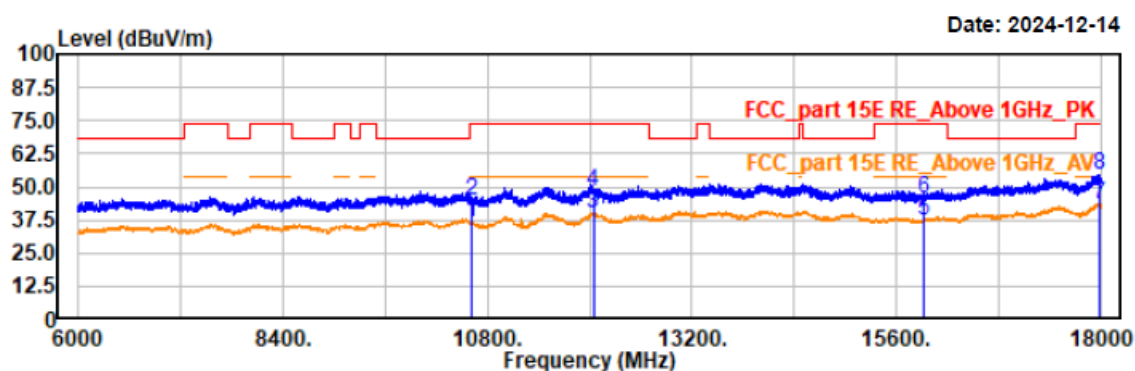

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10620.00	34.32	1.91	36.23	54.00	17.77	horizontal	Average
10620.00	43.26	1.91	45.17	74.00	28.83	horizontal	Peak
12043.20	35.72	4.17	39.89	54.00	14.11	horizontal	Average
12043.20	44.21	4.17	48.38	74.00	25.62	horizontal	Peak
15930.00	34.73	2.38	37.11	54.00	16.89	horizontal	Average
15930.00	43.03	2.38	45.41	74.00	28.59	horizontal	Peak
17991.60	35.45	7.72	43.17	54.00	10.83	horizontal	Average
17991.60	46.87	7.72	54.59	74.00	19.41	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5310
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

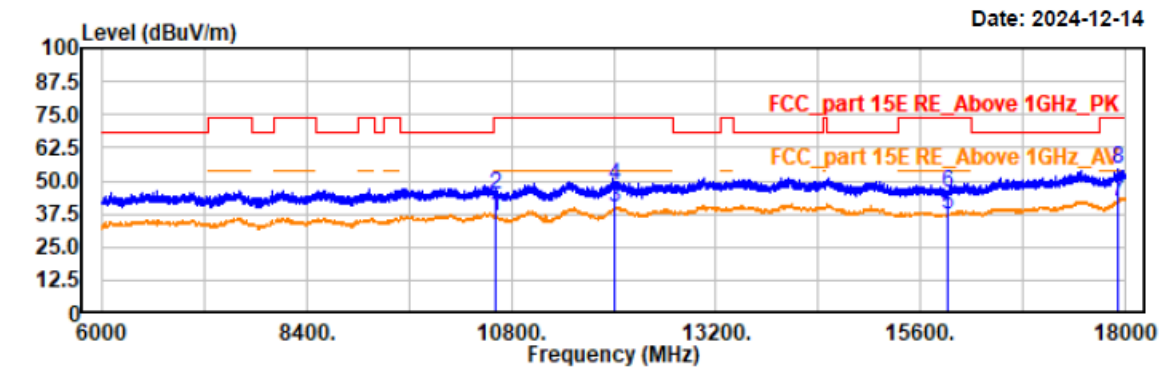


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10620.00	34.54	1.91	36.45	54.00	17.55	vertical	Average
10620.00	43.17	1.91	45.08	74.00	28.92	vertical	Peak
12009.60	35.87	4.23	40.10	54.00	13.90	vertical	Average
12009.60	43.81	4.23	48.04	74.00	25.96	vertical	Peak
15930.00	34.83	2.38	37.21	54.00	16.79	vertical	Average
15930.00	43.46	2.38	45.84	74.00	28.16	vertical	Peak
17925.60	34.73	7.63	42.36	54.00	11.64	vertical	Average
17925.60	46.71	7.63	54.34	74.00	19.66	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5290
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3°C /51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

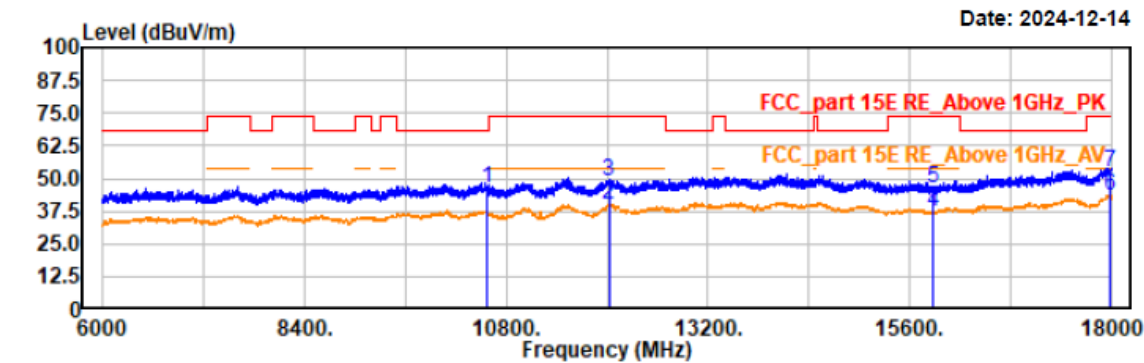


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10580.40	44.62	1.85	46.47	68.20	21.73	horizontal	Peak
12021.60	35.91	4.21	40.12	54.00	13.88	horizontal	Average
12021.60	44.58	4.21	48.79	74.00	25.21	horizontal	Peak
15870.00	34.75	2.34	37.09	54.00	16.91	horizontal	Average
15870.00	44.05	2.34	46.39	74.00	27.61	horizontal	Peak
17992.80	36.05	7.72	43.77	54.00	10.23	horizontal	Average
17992.80	44.63	7.72	52.35	74.00	21.65	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5290
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

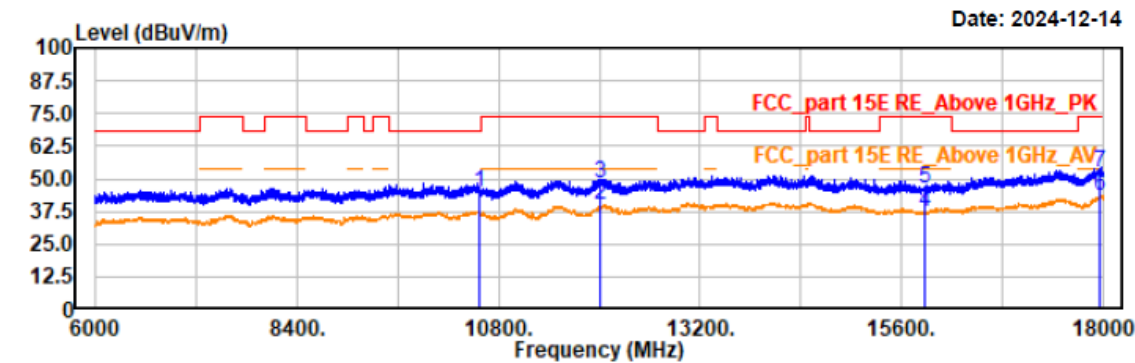

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
10580.00	43.10	1.85	44.95	68.20	23.25	vertical	Peak
12012.00	35.82	4.23	40.05	54.00	13.95	vertical	Average
12012.00	43.89	4.23	48.12	74.00	25.88	vertical	Peak
15870.00	34.76	2.34	37.10	54.00	16.90	vertical	Average
15870.00	43.66	2.34	46.00	74.00	28.00	vertical	Peak
17962.80	36.00	7.68	43.68	54.00	10.32	vertical	Average
17962.80	44.99	7.68	52.67	74.00	21.33	vertical	Peak

B3

Project No.: 2407V20721E-RF

Test Mode: 11a-5500


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3°C/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

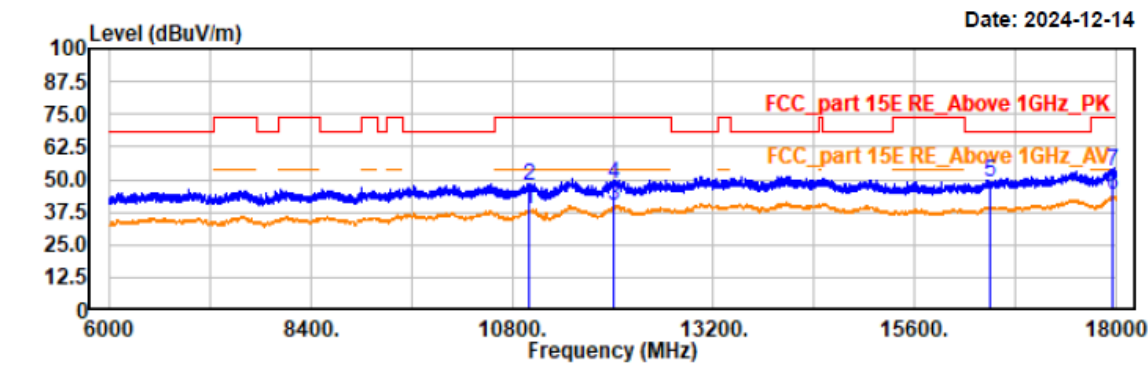

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.00	35.86	2.54	38.40	54.00	15.60	horizontal	Average
11000.00	45.34	2.54	47.88	74.00	26.12	horizontal	Peak
12016.80	35.75	4.22	39.97	54.00	14.03	horizontal	Average
12016.80	43.88	4.22	48.10	74.00	25.90	horizontal	Peak
16500.00	45.72	3.50	49.22	68.20	18.98	horizontal	Peak
17959.20	36.76	7.67	44.43	54.00	9.57	horizontal	Average
17959.20	45.63	7.67	53.30	74.00	20.70	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5500


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

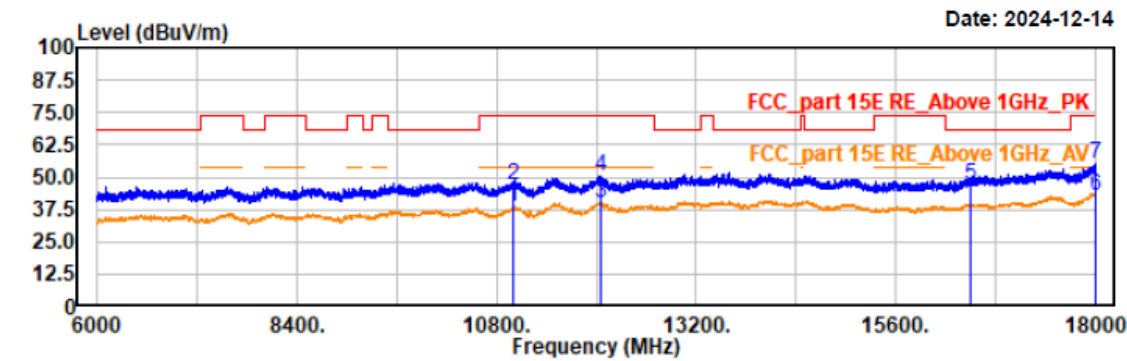


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.40	35.89	2.54	38.43	54.00	15.57	vertical	Average
11000.40	44.55	2.54	47.09	74.00	26.91	vertical	Peak
12056.40	35.95	4.15	40.10	54.00	13.90	vertical	Average
12056.40	46.25	4.15	50.40	74.00	23.60	vertical	Peak
16500.00	43.14	3.50	46.64	68.20	21.56	vertical	Peak
17994.00	35.32	7.72	43.04	54.00	10.96	vertical	Average
17994.00	47.27	7.72	54.99	74.00	19.01	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5580
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

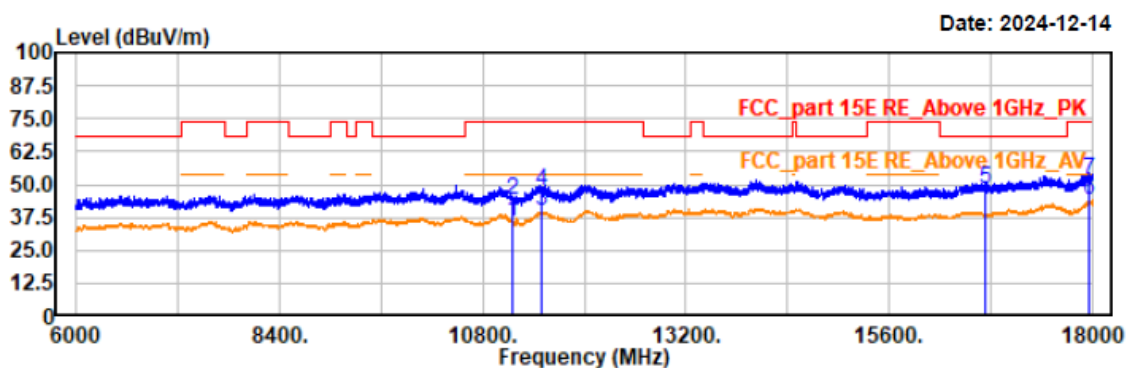

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	32.87	2.73	35.60	54.00	18.40	horizontal	Average
11160.00	41.30	2.73	44.03	74.00	29.97	horizontal	Peak
11490.00	36.90	3.12	40.02	54.00	13.98	horizontal	Average
11490.00	44.19	3.12	47.31	74.00	26.69	horizontal	Peak
16740.00	43.89	4.15	48.04	68.20	20.16	horizontal	Peak
17961.60	36.36	7.68	44.04	54.00	9.96	horizontal	Average
17961.60	44.34	7.68	52.02	74.00	21.98	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5580


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

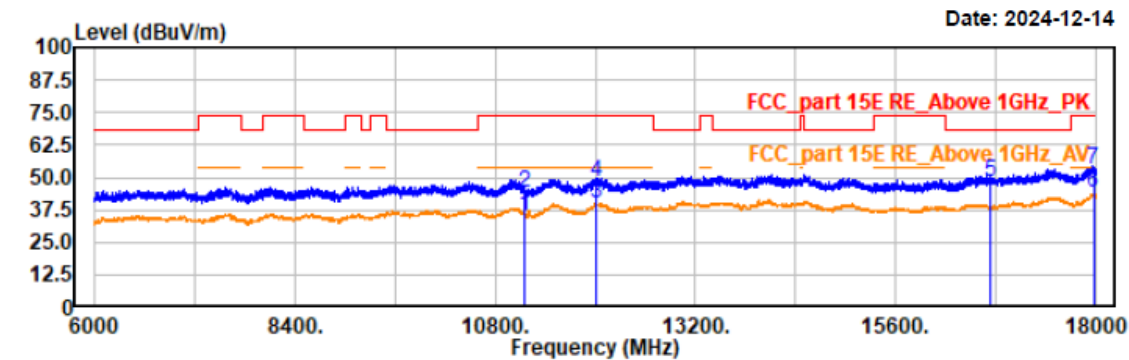

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	32.79	2.73	35.52	54.00	18.48	vertical	Average
11160.00	41.27	2.73	44.00	74.00	30.00	vertical	Peak
12010.80	35.77	4.23	40.00	54.00	14.00	vertical	Average
12010.80	43.77	4.23	48.00	74.00	26.00	vertical	Peak
16740.00	44.09	4.15	48.24	68.20	19.96	vertical	Peak
17972.40	36.36	7.70	44.06	54.00	9.94	vertical	Average
17972.40	45.53	7.70	53.23	74.00	20.77	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a-5700


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

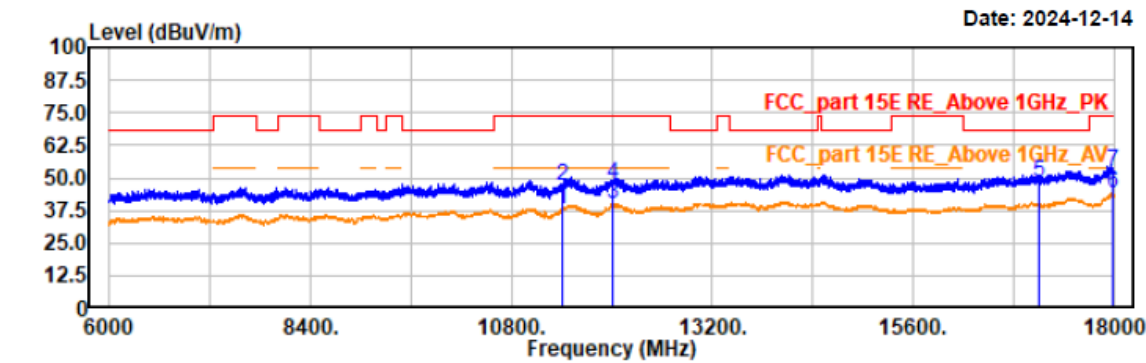

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	34.72	3.02	37.74	54.00	16.26	horizontal	Average
11400.00	44.08	3.02	47.10	74.00	26.90	horizontal	Peak
12015.60	35.80	4.22	40.02	54.00	13.98	horizontal	Average
12015.60	43.64	4.22	47.86	74.00	26.14	horizontal	Peak
17100.00	43.05	5.17	48.22	68.20	19.98	horizontal	Peak
17979.60	36.10	7.71	43.81	54.00	10.19	horizontal	Average
17979.60	44.62	7.71	52.33	74.00	21.67	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5700
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

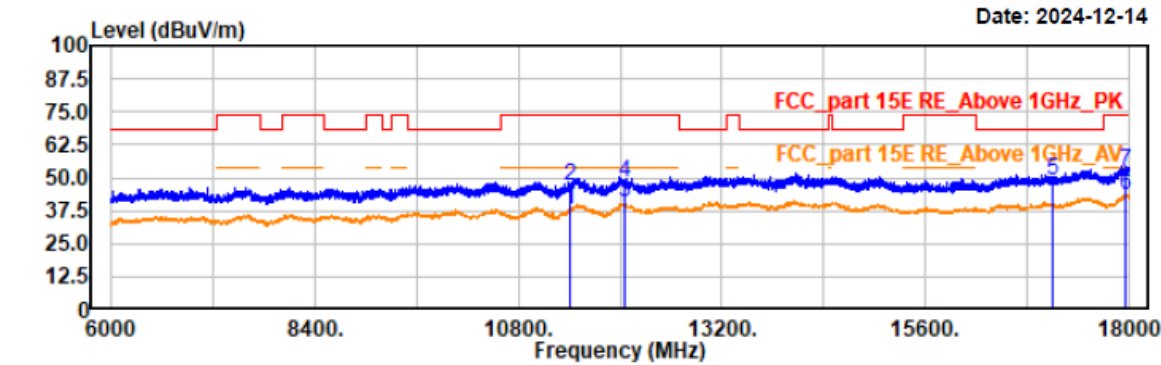


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	34.60	3.02	37.62	54.00	16.38	vertical	Average
11400.00	44.04	3.02	47.06	74.00	26.94	vertical	Peak
12050.40	36.24	4.16	40.40	54.00	13.60	vertical	Average
12050.40	44.42	4.16	48.58	74.00	25.42	vertical	Peak
17100.00	43.96	5.17	49.13	68.20	19.07	vertical	Peak
17970.00	36.10	7.69	43.79	54.00	10.21	vertical	Average
17970.00	44.86	7.69	52.55	74.00	21.45	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5500
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

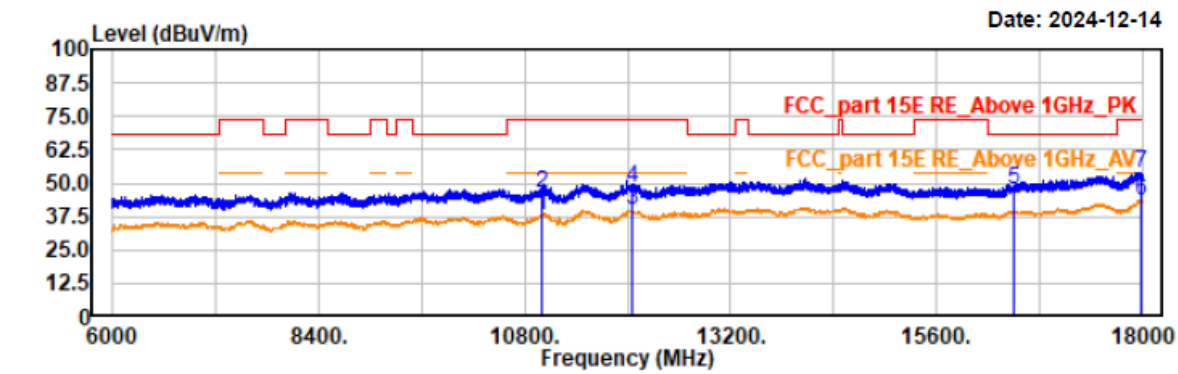

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.00	35.25	2.54	37.79	54.00	16.21	horizontal	Average
11000.00	43.87	2.54	46.41	74.00	27.59	horizontal	Peak
12046.80	35.96	4.17	40.13	54.00	13.87	horizontal	Average
12046.80	43.94	4.17	48.11	74.00	25.89	horizontal	Peak
16500.00	44.31	3.50	47.81	68.20	20.39	horizontal	Peak
17979.60	36.03	7.71	43.74	54.00	10.26	horizontal	Average
17979.60	46.42	7.71	54.13	74.00	19.87	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20-5500


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

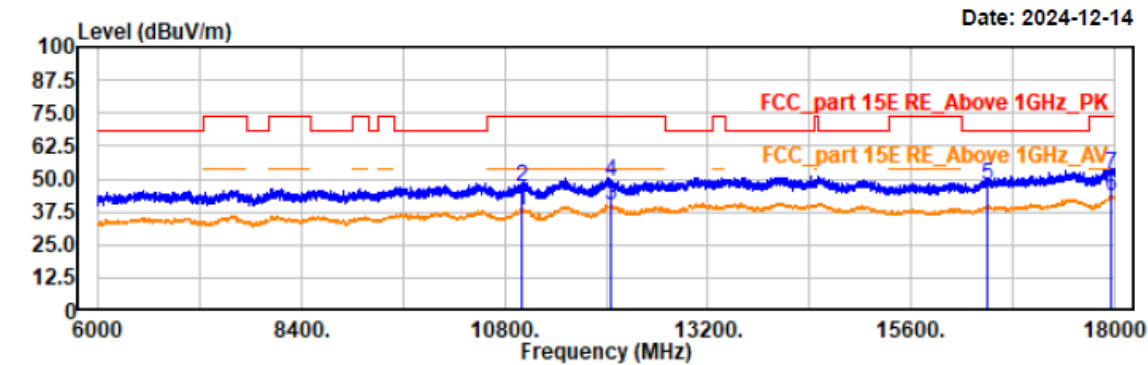

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.40	35.23	2.54	37.77	54.00	16.23	vertical	Average
11000.40	44.12	2.54	46.66	74.00	27.34	vertical	Peak
12061.20	36.12	4.14	40.26	54.00	13.74	vertical	Average
12061.20	45.04	4.14	49.18	74.00	24.82	vertical	Peak
16500.00	44.14	3.50	47.64	68.20	20.56	vertical	Peak
17959.20	35.94	7.67	43.61	54.00	10.39	vertical	Average
17959.20	44.39	7.67	52.06	74.00	21.94	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20-5580


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

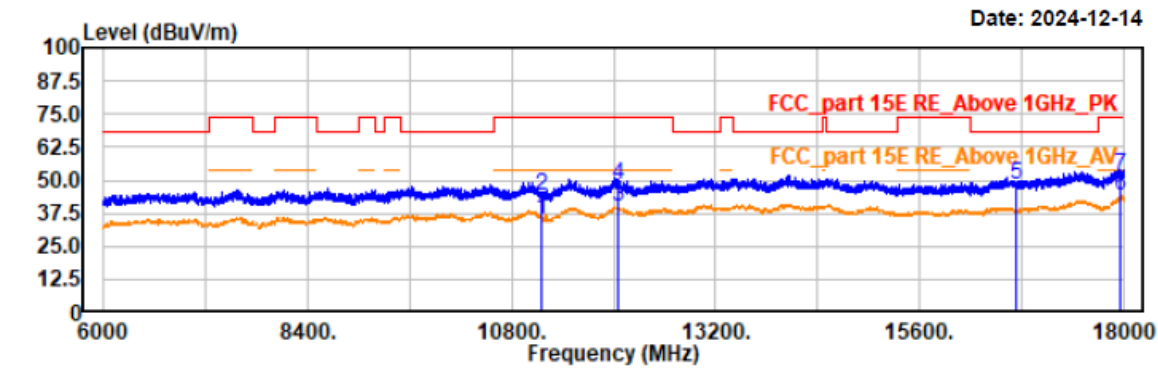

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	32.76	2.73	35.49	54.00	18.51	horizontal	Average
11160.00	41.41	2.73	44.14	74.00	29.86	horizontal	Peak
12062.40	35.84	4.14	39.98	54.00	14.02	horizontal	Average
12062.40	43.91	4.14	48.05	74.00	25.95	horizontal	Peak
16740.00	44.42	4.15	48.57	68.20	19.63	horizontal	Peak
17967.60	36.57	7.69	44.26	54.00	9.74	horizontal	Average
17967.60	44.08	7.69	51.77	74.00	22.23	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20-5580


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

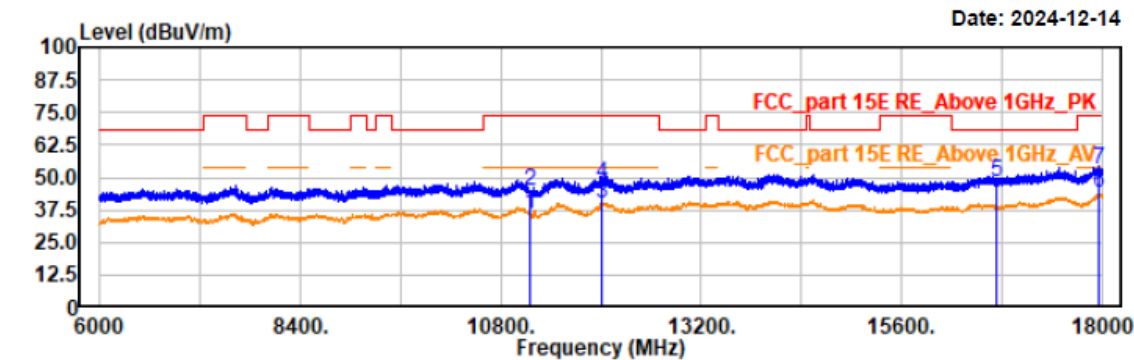

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	33.40	2.73	36.13	54.00	17.87	vertical	Average
11160.00	42.21	2.73	44.94	74.00	29.06	vertical	Peak
12007.20	35.88	4.24	40.12	54.00	13.88	vertical	Average
12007.20	43.66	4.24	47.90	74.00	26.10	vertical	Peak
16740.00	44.08	4.15	48.23	68.20	19.97	vertical	Peak
17961.60	36.23	7.68	43.91	54.00	10.09	vertical	Average
17961.60	45.68	7.68	53.36	74.00	20.64	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20-5700


EUT Model: NLS-NQuire700

Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

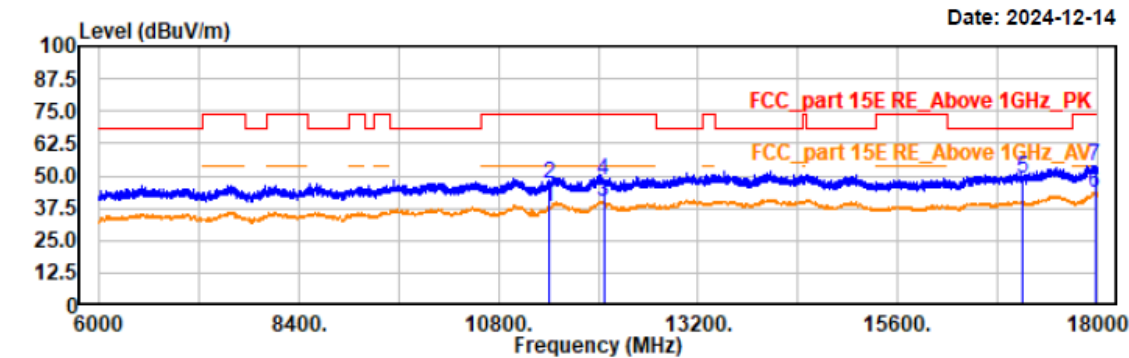

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	35.13	3.02	38.15	54.00	15.85	horizontal	Average
11400.00	44.14	3.02	47.16	74.00	26.84	horizontal	Peak
12064.80	35.99	4.13	40.12	54.00	13.88	horizontal	Average
12064.80	43.94	4.13	48.07	74.00	25.93	horizontal	Peak
17100.00	43.80	5.17	48.97	68.20	19.23	horizontal	Peak
17972.40	36.09	7.70	43.79	54.00	10.21	horizontal	Average
17972.40	46.13	7.70	53.83	74.00	20.17	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5700
EUT Model: NLS-NQuire700
Test distance: 3m

Temp/Humi/ATM: 24.3℃/51%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

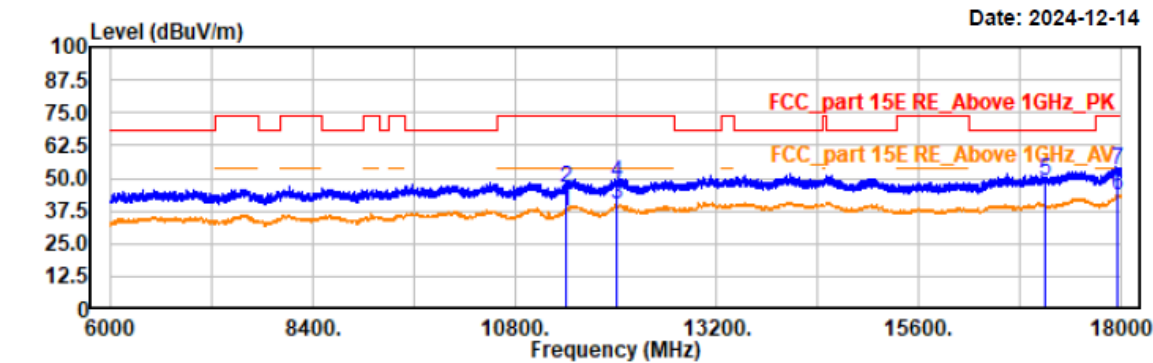

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	34.47	3.02	37.49	54.00	16.51	vertical	Average
11400.00	43.36	3.02	46.38	74.00	27.62	vertical	Peak
12016.80	35.88	4.22	40.10	54.00	13.90	vertical	Average
12016.80	43.73	4.22	47.95	74.00	26.05	vertical	Peak
17100.00	43.80	5.17	48.97	68.20	19.23	vertical	Peak
17956.80	36.08	7.68	43.76	54.00	10.24	vertical	Average
17956.80	45.73	7.68	53.41	74.00	20.59	vertical	Peak