


Project No.: 2407V20721E-RF
Test Mode: 11a-5580
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

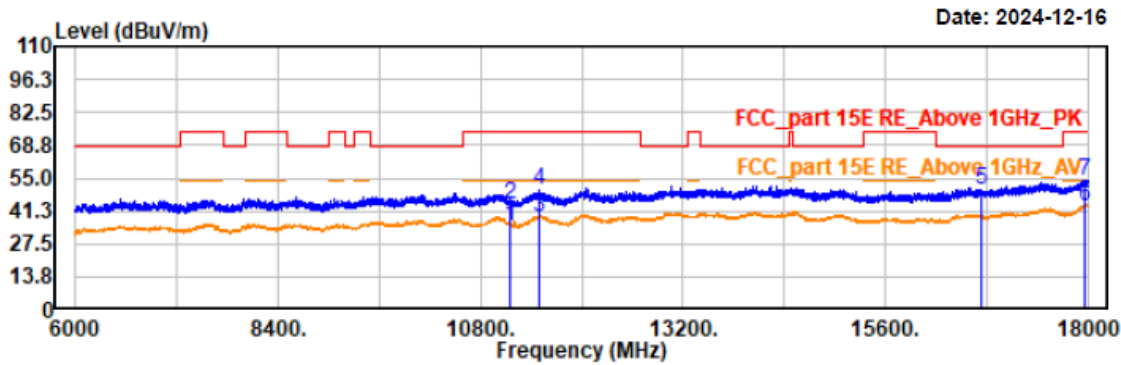


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	32.52	2.73	35.25	54.00	18.75	horizontal	Average
11160.00	41.56	2.73	44.29	74.00	29.71	horizontal	Peak
11497.20	35.45	3.13	38.58	54.00	15.42	horizontal	Average
11497.20	46.59	3.13	49.72	74.00	24.28	horizontal	Peak
16740.00	45.71	4.15	49.86	68.20	18.34	horizontal	Peak
17955.60	35.69	7.68	43.37	54.00	10.63	horizontal	Average
17955.60	46.50	7.68	54.18	74.00	19.82	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5580
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

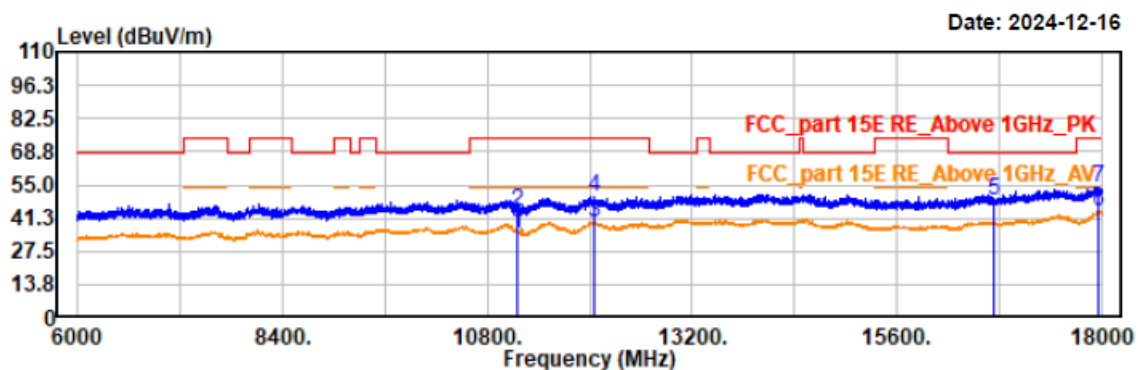

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	32.33	2.73	35.06	54.00	18.94	vertical	Average
11160.00	41.58	2.73	44.31	74.00	29.69	vertical	Peak
12060.00	35.16	4.14	39.30	54.00	14.70	vertical	Average
12060.00	45.69	4.14	49.83	74.00	24.17	vertical	Peak
16740.00	44.08	4.15	48.23	68.20	19.97	vertical	Peak
17964.00	36.07	7.68	43.75	54.00	10.25	vertical	Average
17964.00	46.47	7.68	54.15	74.00	19.85	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5700
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

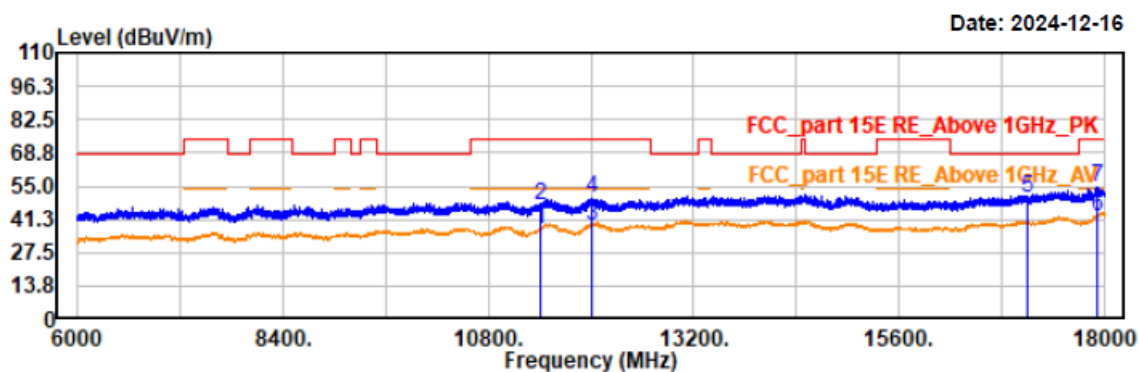

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	34.17	3.02	37.19	54.00	16.81	horizontal	Average
11400.00	43.77	3.02	46.79	74.00	27.21	horizontal	Peak
12013.20	34.58	4.22	38.80	54.00	15.20	horizontal	Average
12013.20	46.09	4.22	50.31	74.00	23.69	horizontal	Peak
17100.00	44.82	5.17	49.99	68.20	18.21	horizontal	Peak
17923.20	34.96	7.62	42.58	54.00	11.42	horizontal	Average
17923.20	46.70	7.62	54.32	74.00	19.68	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5700
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

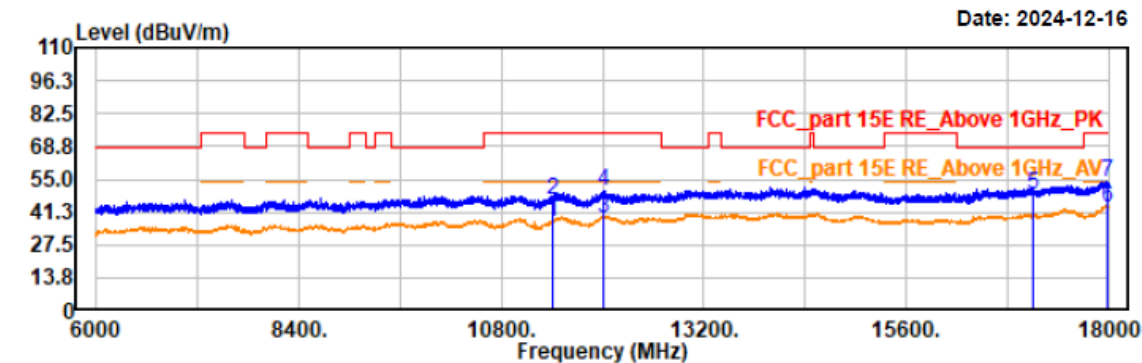

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	34.31	3.02	37.33	54.00	16.67	vertical	Average
11400.00	43.54	3.02	46.56	74.00	27.44	vertical	Peak
12020.40	34.31	4.21	38.52	54.00	15.48	vertical	Average
12020.40	45.89	4.21	50.10	74.00	23.90	vertical	Peak
17100.00	43.64	5.17	48.81	68.20	19.39	vertical	Peak
17989.20	35.84	7.72	43.56	54.00	10.44	vertical	Average
17989.20	46.52	7.72	54.24	74.00	19.76	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5500
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

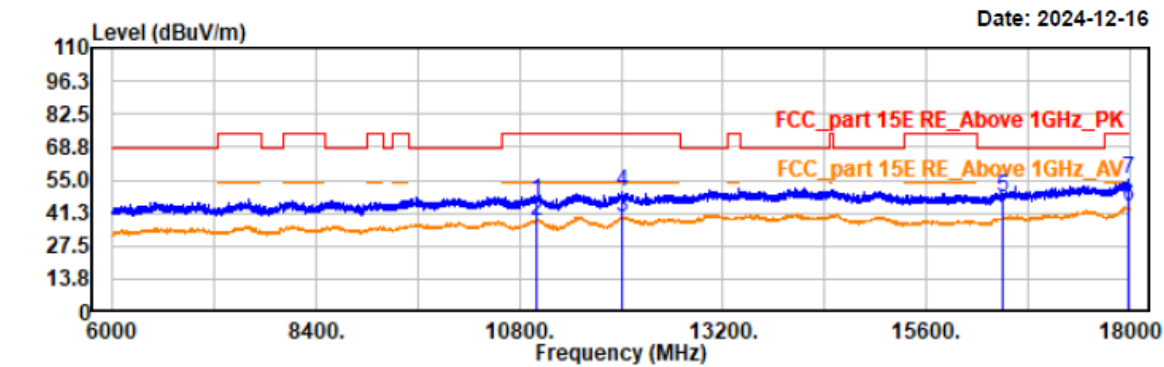


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.00	43.80	2.54	46.34	74.00	27.66	horizontal	Peak
11000.40	35.41	2.54	37.95	54.00	16.05	horizontal	Average
12001.20	34.94	4.25	39.19	54.00	14.81	horizontal	Average
12001.20	45.64	4.25	49.89	74.00	24.11	horizontal	Peak
16500.00	43.96	3.50	47.46	68.20	20.74	horizontal	Peak
17984.40	36.42	7.72	44.14	54.00	9.86	horizontal	Average
17984.40	47.73	7.72	55.45	74.00	18.55	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5500
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

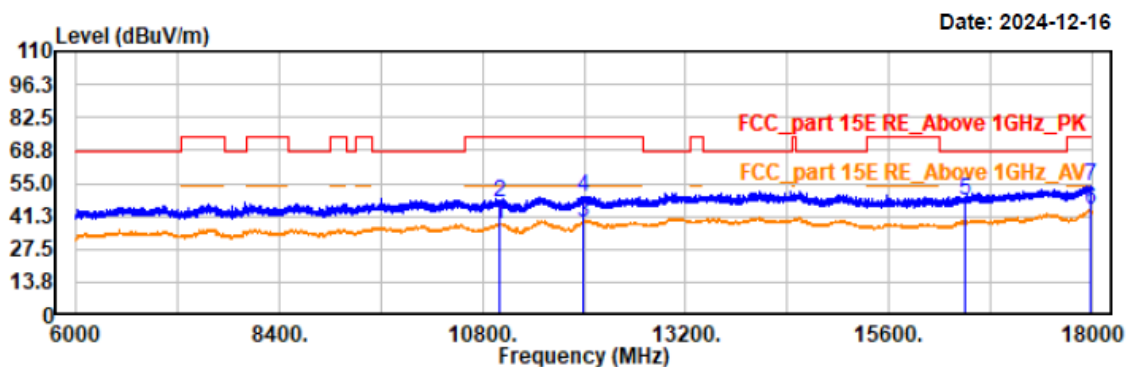

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11000.40	35.41	2.54	37.95	54.00	16.05	vertical	Average
11000.40	44.69	2.54	47.23	74.00	26.77	vertical	Peak
11985.60	34.38	4.22	38.60	54.00	15.40	vertical	Average
11985.60	45.42	4.22	49.64	74.00	24.36	vertical	Peak
16500.00	44.59	3.50	48.09	68.20	20.11	vertical	Peak
17973.60	36.15	7.70	43.85	54.00	10.15	vertical	Average
17973.60	46.08	7.70	53.78	74.00	20.22	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5580
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

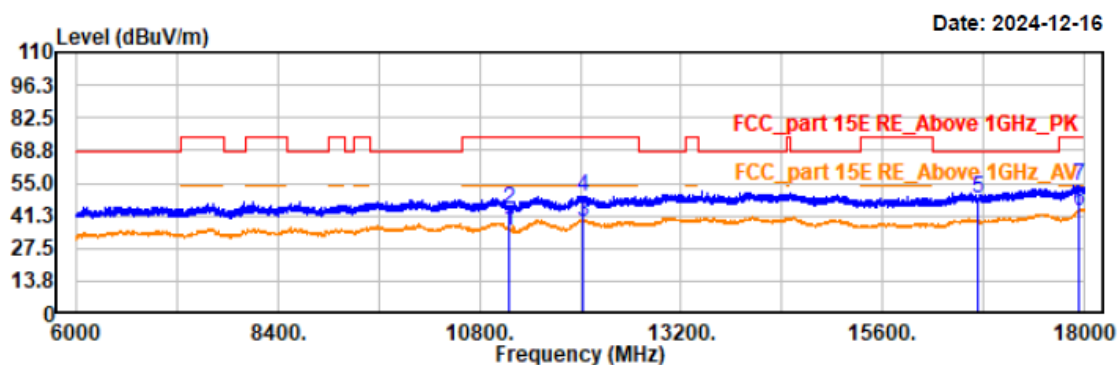

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	32.31	2.73	35.04	54.00	18.96	horizontal	Average
11160.00	40.99	2.73	43.72	74.00	30.28	horizontal	Peak
12027.60	34.71	4.21	38.92	54.00	15.08	horizontal	Average
12027.60	45.18	4.21	49.39	74.00	24.61	horizontal	Peak
16740.00	44.64	4.15	48.79	68.20	19.41	horizontal	Peak
17940.00	35.41	7.65	43.06	54.00	10.94	horizontal	Average
17940.00	46.39	7.65	54.04	74.00	19.96	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5580
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

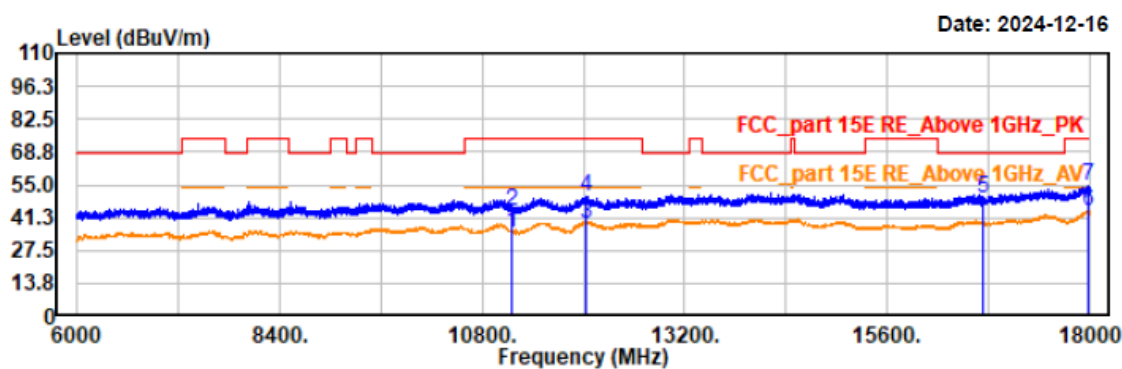

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11160.00	32.46	2.73	35.19	54.00	18.81	vertical	Average
11160.00	41.11	2.73	43.84	74.00	30.16	vertical	Peak
12027.60	34.40	4.21	38.61	54.00	15.39	vertical	Average
12027.60	46.09	4.21	50.30	74.00	23.70	vertical	Peak
16740.00	44.93	4.15	49.08	68.20	19.12	vertical	Peak
17982.00	36.26	7.71	43.97	54.00	10.03	vertical	Average
17982.00	47.21	7.71	54.92	74.00	19.08	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5700
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

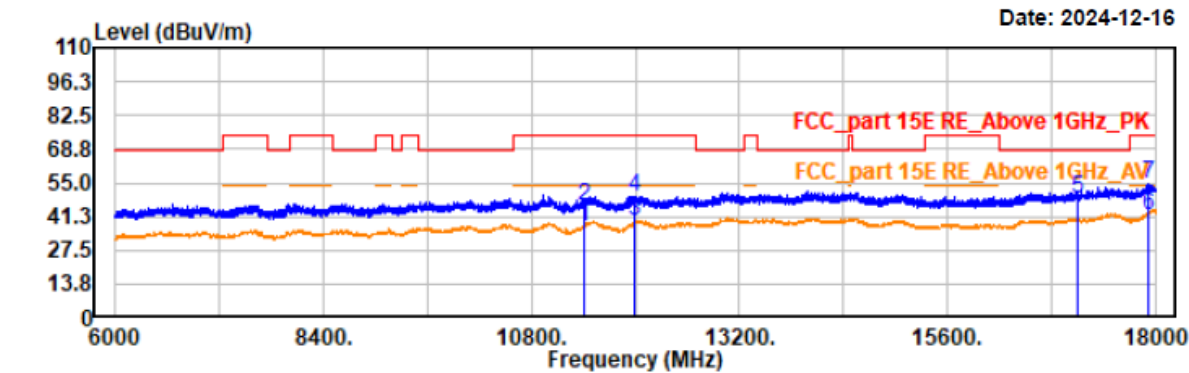

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	34.18	3.02	37.20	54.00	16.80	horizontal	Average
11400.00	42.66	3.02	45.68	74.00	28.32	horizontal	Peak
11996.40	34.85	4.24	39.09	54.00	14.91	horizontal	Average
11996.40	45.45	4.24	49.69	74.00	24.31	horizontal	Peak
17100.00	43.07	5.17	48.24	68.20	19.96	horizontal	Peak
17912.40	34.47	7.60	42.07	54.00	11.93	horizontal	Average
17912.40	46.80	7.60	54.40	74.00	19.60	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20-5700


EUT Model: NLS-NQuire1000

Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

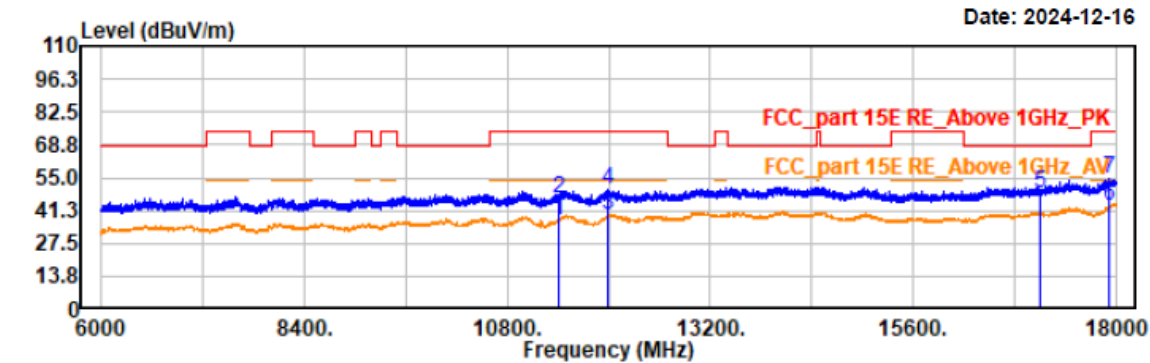


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11400.00	34.26	3.02	37.28	54.00	16.72	vertical	Average
11400.00	43.45	3.02	46.47	74.00	27.53	vertical	Peak
11994.00	34.93	4.24	39.17	54.00	14.83	vertical	Average
11994.00	45.57	4.24	49.81	74.00	24.19	vertical	Peak
17100.00	43.62	5.17	48.79	68.20	19.41	vertical	Peak
17923.20	35.60	7.62	43.22	54.00	10.78	vertical	Average
17923.20	46.93	7.62	54.55	74.00	19.45	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5510
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

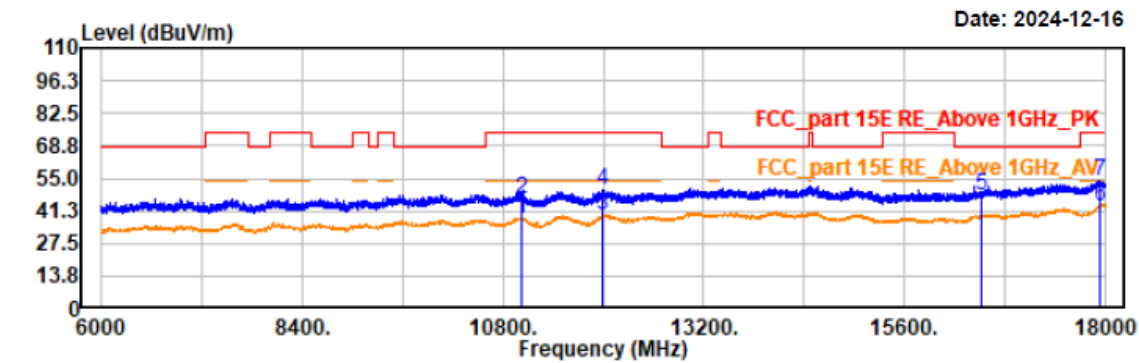

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11019.60	35.38	2.56	37.94	54.00	16.06	horizontal	Average
11020.00	43.55	2.56	46.11	74.00	27.89	horizontal	Peak
11997.60	35.01	4.24	39.25	54.00	14.75	horizontal	Average
11997.60	45.83	4.24	50.07	74.00	23.93	horizontal	Peak
16530.00	43.98	3.58	47.56	68.20	20.64	horizontal	Peak
17934.00	35.33	7.63	42.96	54.00	11.04	horizontal	Average
17934.00	46.12	7.63	53.75	74.00	20.25	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40-5510


EUT Model: NLS-NQuire1000

Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

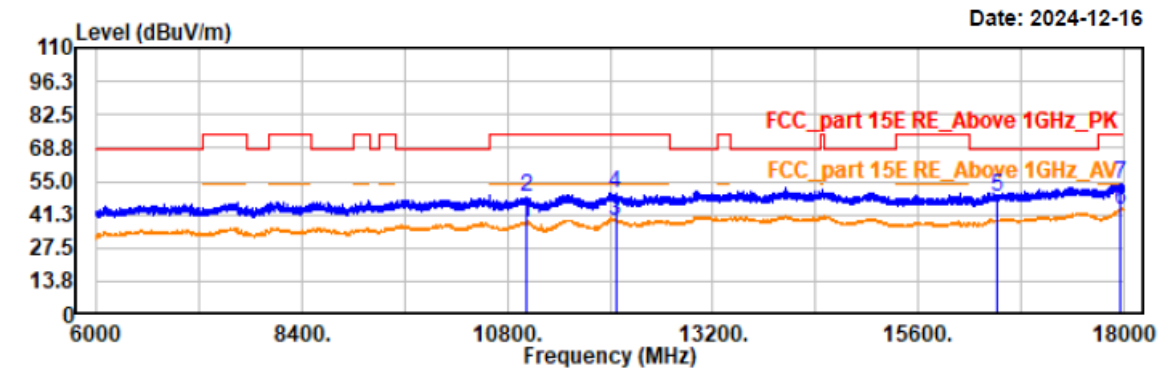

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11019.60	35.66	2.56	38.22	54.00	15.78	vertical	Average
11019.60	45.64	2.56	48.20	74.00	25.80	vertical	Peak
12064.80	34.85	4.13	38.98	54.00	15.02	vertical	Average
12064.80	45.83	4.13	49.96	74.00	24.04	vertical	Peak
16530.00	45.01	3.58	48.59	68.20	19.61	vertical	Peak
17956.80	35.42	7.68	43.10	54.00	10.90	vertical	Average
17956.80	46.28	7.68	53.96	74.00	20.04	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5550
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

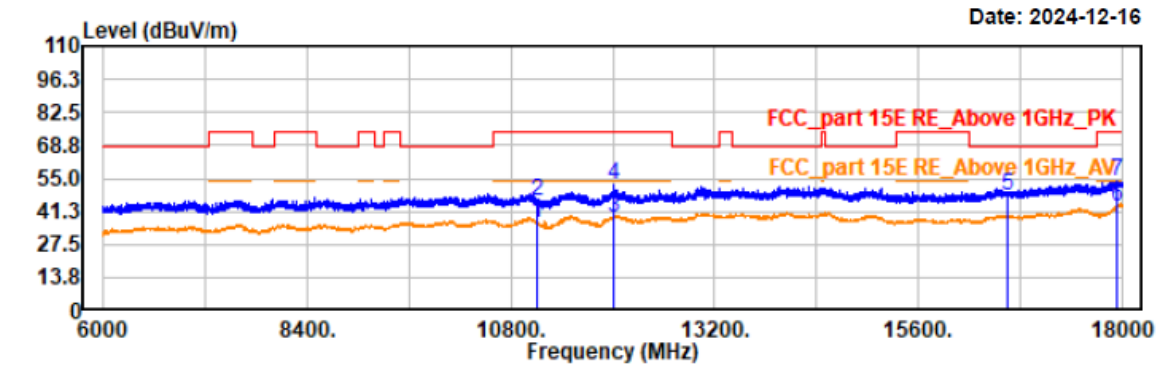


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11100.00	33.83	2.65	36.48	54.00	17.52	horizontal	Average
11100.00	43.05	2.65	45.70	74.00	28.30	horizontal	Peak
12003.60	34.51	4.24	38.75	54.00	15.25	horizontal	Average
12003.60	47.95	4.24	52.19	74.00	21.81	horizontal	Peak
16650.00	44.01	3.90	47.91	68.20	20.29	horizontal	Peak
17940.00	35.30	7.65	42.95	54.00	11.05	horizontal	Average
17940.00	45.95	7.65	53.60	74.00	20.40	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5550
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

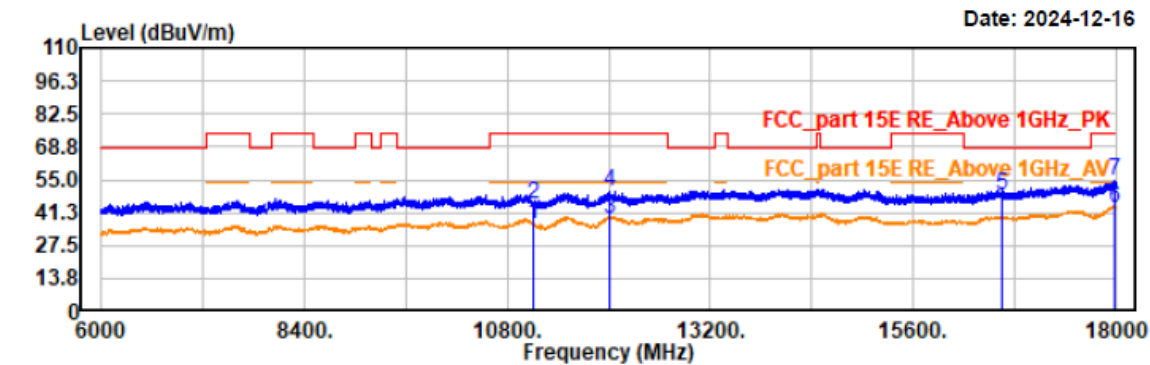


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11100.00	33.80	2.65	36.45	54.00	17.55	vertical	Average
11100.00	42.29	2.65	44.94	74.00	29.06	vertical	Peak
12018.00	34.71	4.21	38.92	54.00	15.08	vertical	Average
12018.00	45.97	4.21	50.18	74.00	23.82	vertical	Peak
16650.00	44.56	3.90	48.46	68.20	19.74	vertical	Peak
17989.20	35.72	7.72	43.44	54.00	10.56	vertical	Average
17989.20	46.54	7.72	54.26	74.00	19.74	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5670
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

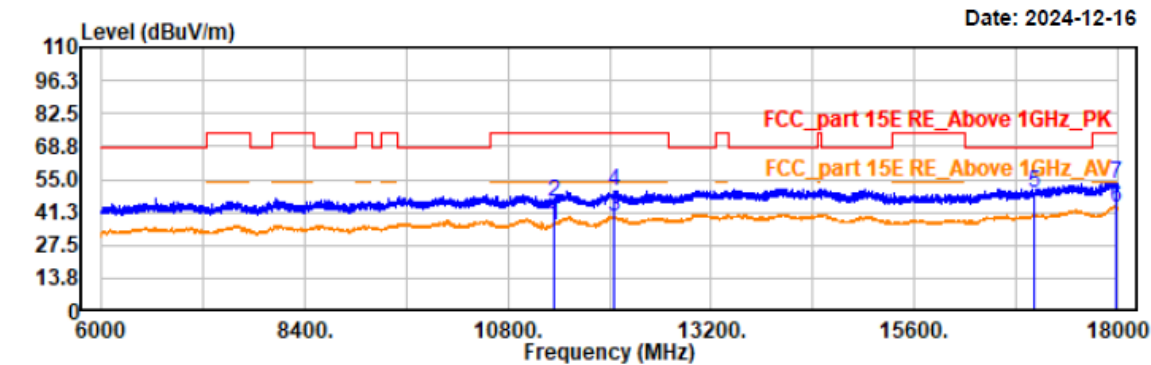


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11340.00	33.00	2.94	35.94	54.00	18.06	horizontal	Average
11340.00	42.59	2.94	45.53	74.00	28.47	horizontal	Peak
12061.20	35.23	4.14	39.37	54.00	14.63	horizontal	Average
12061.20	46.01	4.14	50.15	74.00	23.85	horizontal	Peak
17010.00	44.03	4.98	49.01	68.20	19.19	horizontal	Peak
17973.60	35.77	7.70	43.47	54.00	10.53	horizontal	Average
17973.60	45.69	7.70	53.39	74.00	20.61	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5670
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

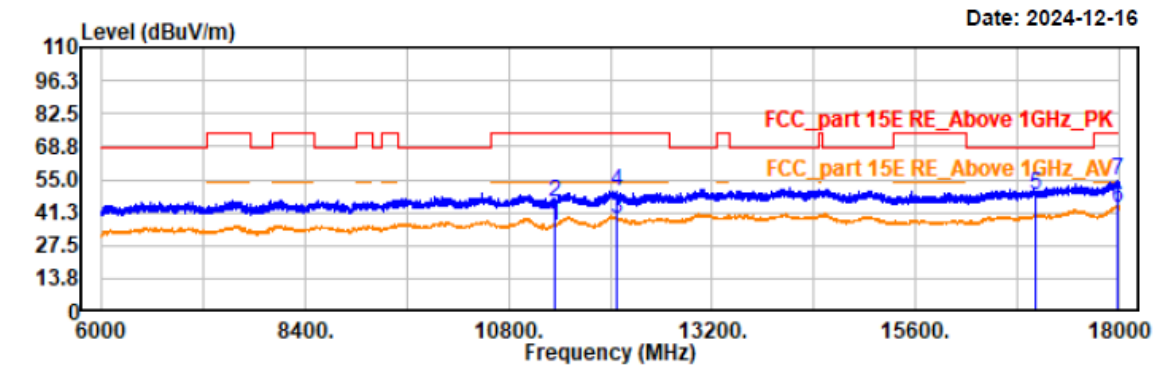


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11340.00	32.91	2.94	35.85	54.00	18.15	vertical	Average
11340.00	42.61	2.94	45.55	74.00	28.45	vertical	Peak
12067.20	34.93	4.13	39.06	54.00	14.94	vertical	Average
12067.20	45.95	4.13	50.08	74.00	23.92	vertical	Peak
17010.00	43.38	4.98	48.36	68.20	19.84	vertical	Peak
17989.20	35.85	7.72	43.57	54.00	10.43	vertical	Average
17989.20	46.55	7.72	54.27	74.00	19.73	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5530
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

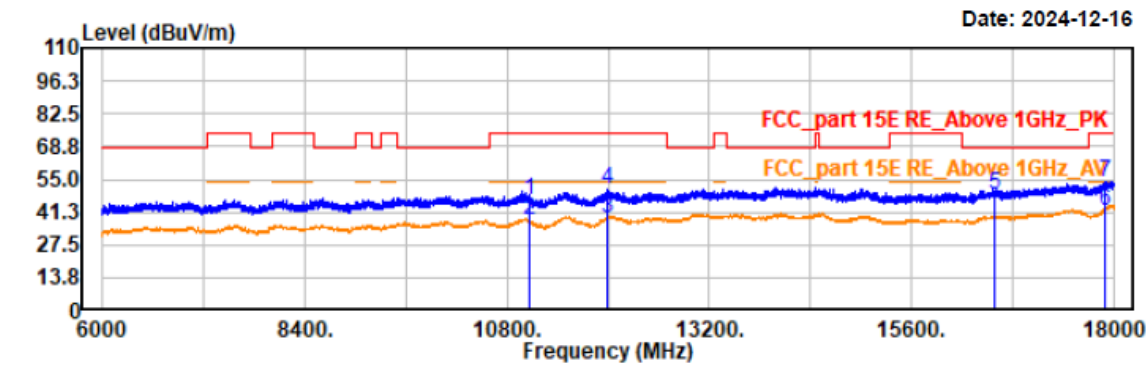


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11060.00	43.35	2.61	45.96	74.00	28.04	horizontal	Peak
11060.40	35.07	2.62	37.69	54.00	16.31	horizontal	Average
11994.00	34.74	4.24	38.98	54.00	15.02	horizontal	Average
11994.00	46.64	4.24	50.88	74.00	23.12	horizontal	Peak
16590.00	45.14	3.74	48.88	68.20	19.32	horizontal	Peak
17902.80	34.33	7.58	41.91	54.00	12.09	horizontal	Average
17902.80	46.16	7.58	53.74	74.00	20.26	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5530
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

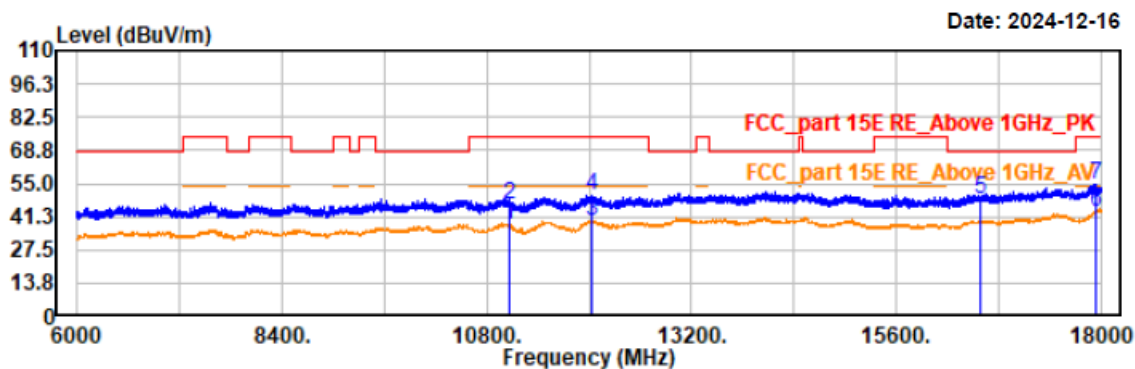

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11060.40	35.08	2.62	37.70	54.00	16.30	vertical	Average
11060.40	43.32	2.62	45.94	74.00	28.06	vertical	Peak
12033.60	35.56	4.19	39.75	54.00	14.25	vertical	Average
12033.60	46.07	4.19	50.26	74.00	23.74	vertical	Peak
16590.00	44.56	3.74	48.30	68.20	19.90	vertical	Peak
17937.60	35.28	7.65	42.93	54.00	11.07	vertical	Average
17937.60	46.98	7.65	54.63	74.00	19.37	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5610
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

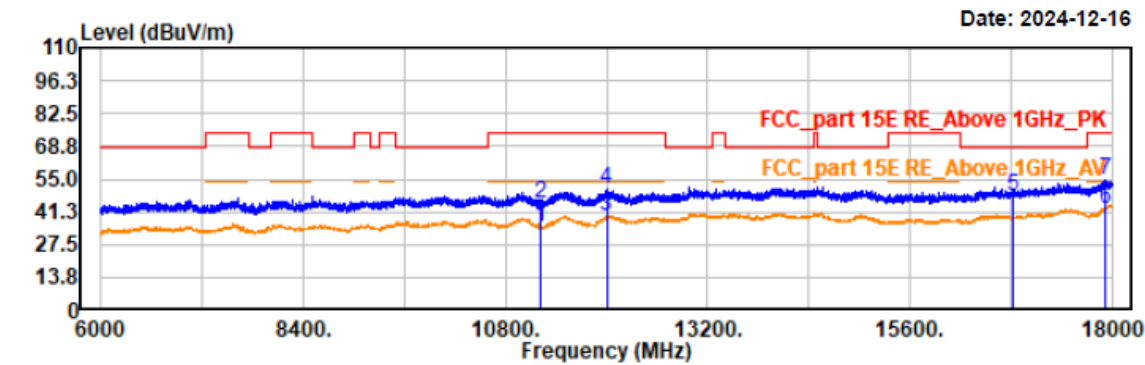


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11220.00	31.81	2.80	34.61	54.00	19.39	horizontal	Average
11220.00	41.74	2.80	44.54	74.00	29.46	horizontal	Peak
12000.00	35.13	4.25	39.38	54.00	14.62	horizontal	Average
12000.00	46.22	4.25	50.47	74.00	23.53	horizontal	Peak
16830.00	43.74	4.42	48.16	68.20	20.04	horizontal	Peak
17917.20	34.62	7.62	42.24	54.00	11.76	horizontal	Average
17917.20	46.67	7.62	54.29	74.00	19.71	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5610
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

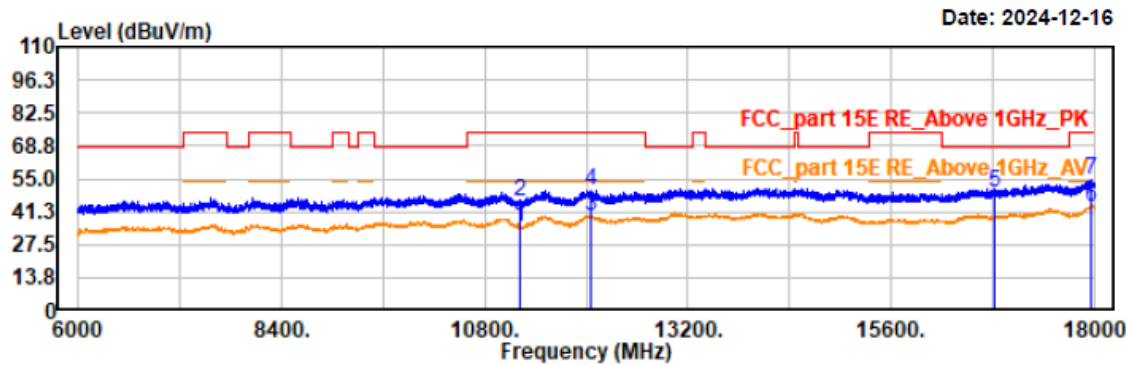


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11220.00	31.77	2.80	34.57	54.00	19.43	vertical	Average
11220.00	42.75	2.80	45.55	74.00	28.45	vertical	Peak
12054.00	35.51	4.15	39.66	54.00	14.34	vertical	Average
12054.00	46.24	4.15	50.39	74.00	23.61	vertical	Peak
16830.00	44.59	4.42	49.01	68.20	19.19	vertical	Peak
17960.40	35.43	7.68	43.11	54.00	10.89	vertical	Average
17960.40	46.74	7.68	54.42	74.00	19.58	vertical	Peak

B4

Project No.: 2407V20721E-RF
Test Mode: 11a-5745
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

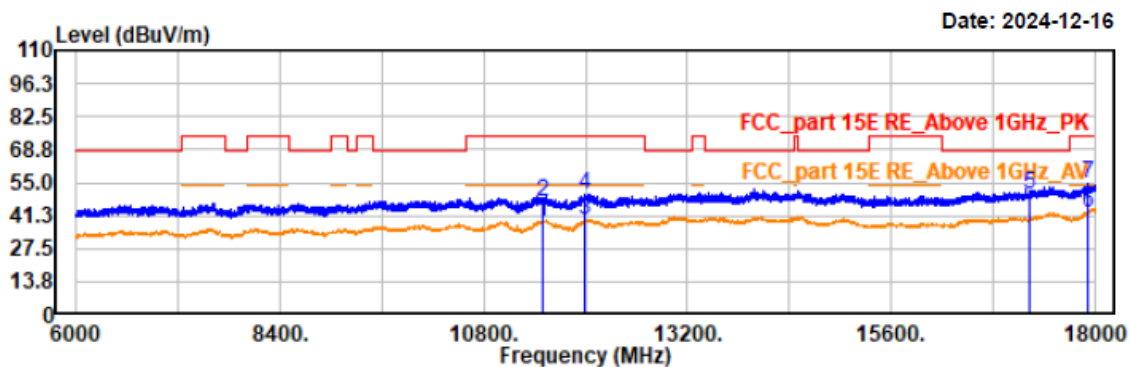

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	35.77	3.12	38.89	54.00	15.11	horizontal	Average
11490.00	43.88	3.12	47.00	74.00	27.00	horizontal	Peak
11992.80	35.10	4.23	39.33	54.00	14.67	horizontal	Average
11992.80	45.93	4.23	50.16	74.00	23.84	horizontal	Peak
17234.40	44.72	5.58	50.30	68.20	17.90	horizontal	Peak
17912.40	35.01	7.60	42.61	54.00	11.39	horizontal	Average
17912.40	46.76	7.60	54.36	74.00	19.64	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5745
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

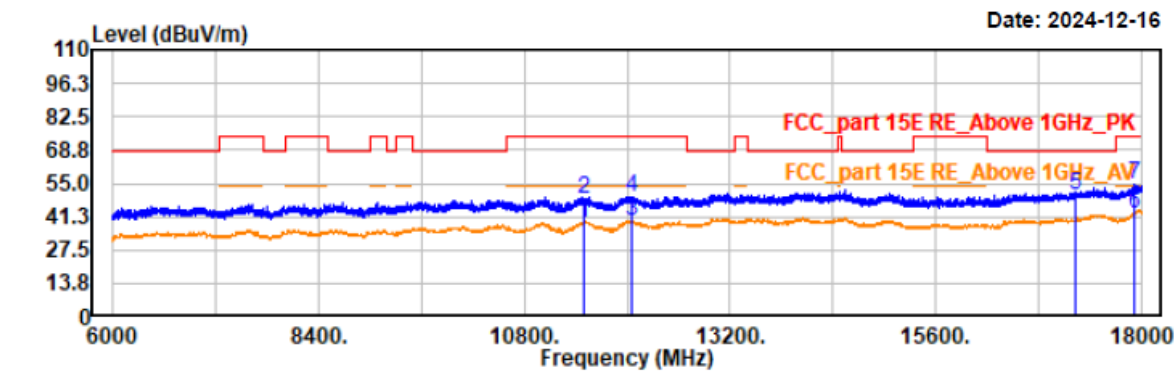


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	35.38	3.12	38.50	54.00	15.50	vertical	Average
11490.00	45.37	3.12	48.49	74.00	25.51	vertical	Peak
12052.80	35.13	4.16	39.29	54.00	14.71	vertical	Average
12052.80	45.47	4.16	49.63	74.00	24.37	vertical	Peak
17235.00	44.51	5.59	50.10	68.20	18.10	vertical	Peak
17920.80	34.58	7.62	42.20	54.00	11.80	vertical	Average
17920.80	46.78	7.62	54.40	74.00	19.60	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5785
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

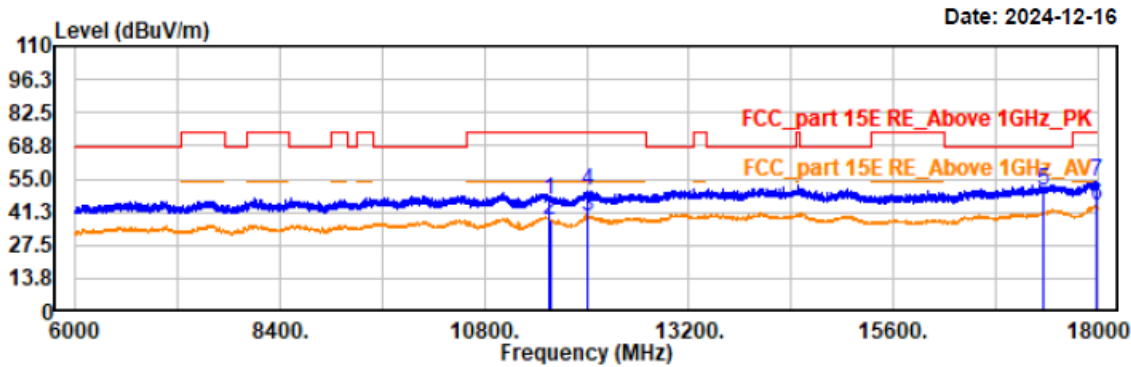


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.00	43.20	3.34	46.54	74.00	27.46	horizontal	Peak
11570.40	34.75	3.34	38.09	54.00	15.91	horizontal	Average
12002.40	35.33	4.25	39.58	54.00	14.42	horizontal	Average
12002.40	46.00	4.25	50.25	74.00	23.75	horizontal	Peak
17354.40	44.10	5.91	50.01	68.20	18.19	horizontal	Peak
17977.20	36.28	7.71	43.99	54.00	10.01	horizontal	Average
17977.20	46.16	7.71	53.87	74.00	20.13	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5785
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

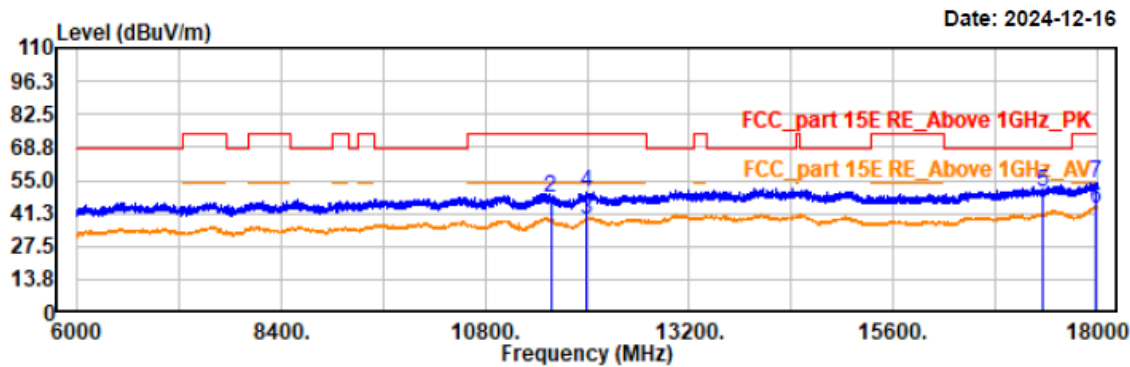


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.40	34.93	3.34	38.27	54.00	15.73	vertical	Average
11570.40	44.40	3.34	47.74	74.00	26.26	vertical	Peak
11989.20	34.74	4.23	38.97	54.00	15.03	vertical	Average
11989.20	46.17	4.23	50.40	74.00	23.60	vertical	Peak
17355.00	44.01	5.91	49.92	68.20	18.28	vertical	Peak
17974.80	35.63	7.70	43.33	54.00	10.67	vertical	Average
17974.80	46.21	7.70	53.91	74.00	20.09	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5825
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

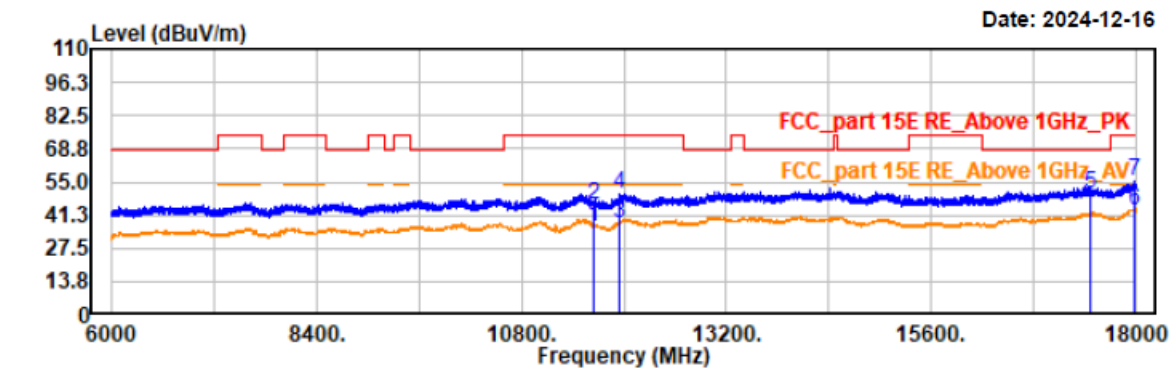


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11649.60	33.20	3.53	36.73	54.00	17.27	horizontal	Average
11650.00	42.02	3.53	45.55	74.00	28.45	horizontal	Peak
11948.40	33.75	4.15	37.90	54.00	16.10	horizontal	Average
11948.40	45.90	4.15	50.05	74.00	23.95	horizontal	Peak
17474.40	44.08	6.22	50.30	68.20	17.90	horizontal	Peak
17990.40	35.70	7.72	43.42	54.00	10.58	horizontal	Average
17990.40	47.99	7.72	55.71	74.00	18.29	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a-5825
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

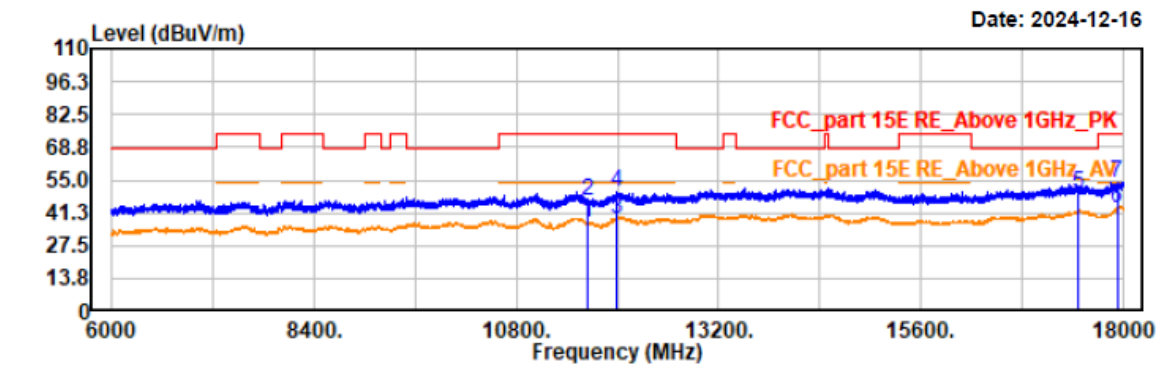

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11649.60	33.40	3.53	36.93	54.00	17.07	vertical	Average
11649.60	42.71	3.53	46.24	74.00	27.76	vertical	Peak
11991.60	34.73	4.23	38.96	54.00	15.04	vertical	Average
11991.60	45.57	4.23	49.80	74.00	24.20	vertical	Peak
17475.00	43.39	6.23	49.62	68.20	18.58	vertical	Peak
17929.20	35.24	7.64	42.88	54.00	11.12	vertical	Average
17929.20	46.34	7.64	53.98	74.00	20.02	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20-5745


EUT Model: NLS-NQuire1000

Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

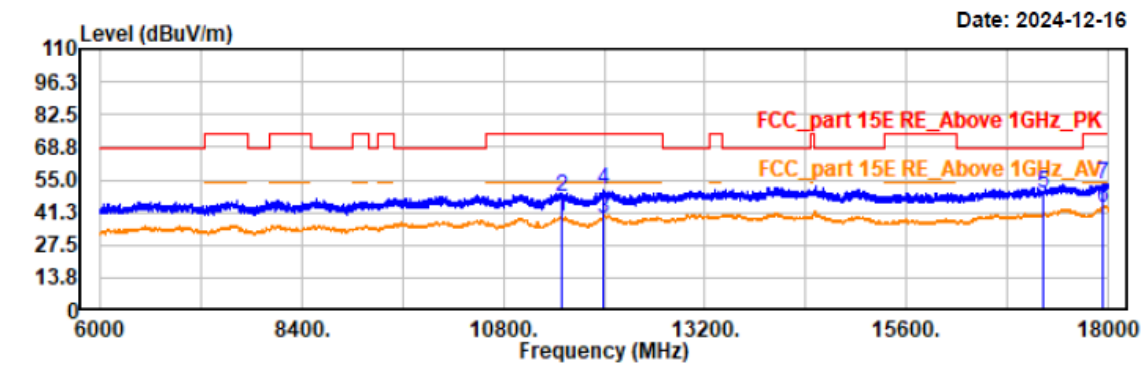


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	36.12	3.12	39.24	54.00	14.76	horizontal	Average
11490.00	44.57	3.12	47.69	74.00	26.31	horizontal	Peak
11995.20	34.80	4.24	39.04	54.00	14.96	horizontal	Average
11995.20	46.21	4.24	50.45	74.00	23.55	horizontal	Peak
17235.00	43.41	5.59	49.00	68.20	19.20	horizontal	Peak
17935.20	35.45	7.64	43.09	54.00	10.91	horizontal	Average
17935.20	45.82	7.64	53.46	74.00	20.54	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5745
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

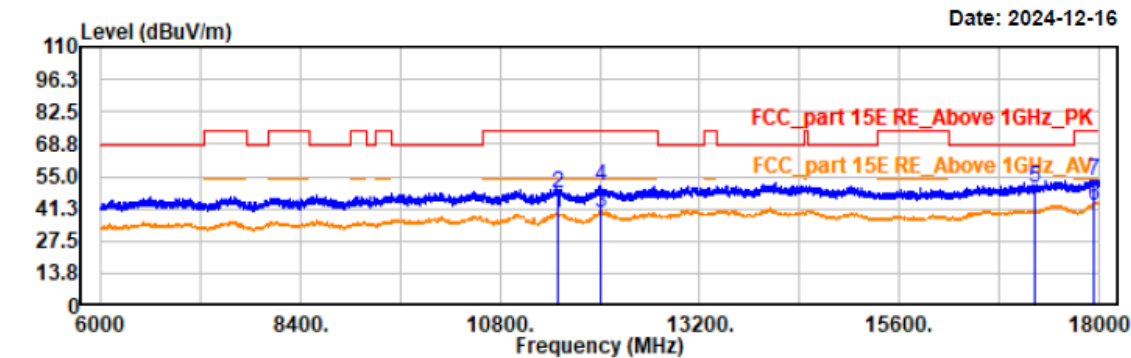


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11490.00	36.09	3.12	39.21	54.00	14.79	vertical	Average
11490.00	44.60	3.12	47.72	74.00	26.28	vertical	Peak
12014.40	35.41	4.22	39.63	54.00	14.37	vertical	Average
12014.40	46.36	4.22	50.58	74.00	23.42	vertical	Peak
17235.00	44.46	5.59	50.05	68.20	18.15	vertical	Peak
17935.20	35.16	7.64	42.80	54.00	11.20	vertical	Average
17935.20	45.82	7.64	53.46	74.00	20.54	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5785
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

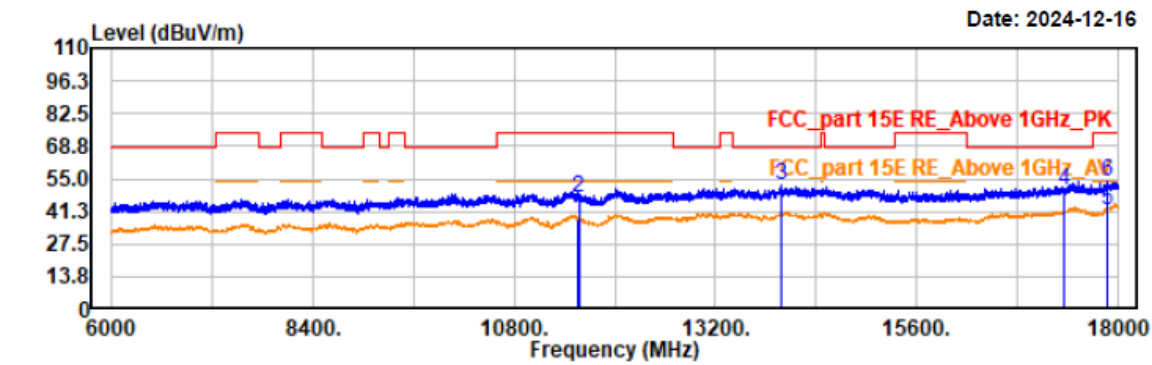

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.00	34.47	3.34	37.81	54.00	16.19	horizontal	Average
11570.40	44.05	3.34	47.39	74.00	26.61	horizontal	Peak
13981.20	47.15	5.10	52.25	68.20	15.95	horizontal	Peak
17355.00	44.10	5.91	50.01	68.20	18.19	horizontal	Peak
17877.60	34.56	7.50	42.06	54.00	11.94	horizontal	Average
17877.60	46.09	7.50	53.59	74.00	20.41	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20-5785


EUT Model: NLS-NQuire1000

Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

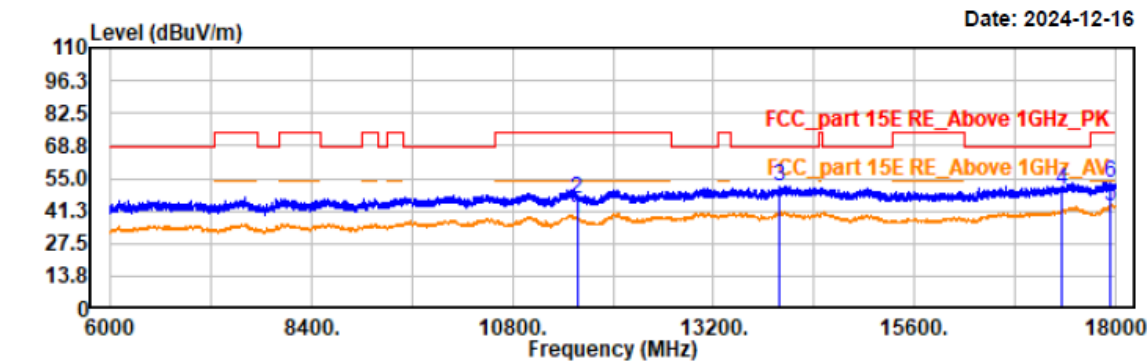


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11570.40	34.38	3.34	37.72	54.00	16.28	vertical	Average
11570.40	43.27	3.34	46.61	74.00	27.39	vertical	Peak
13989.60	46.51	5.09	51.60	68.20	16.60	vertical	Peak
17355.00	44.06	5.91	49.97	68.20	18.23	vertical	Peak
17942.40	35.82	7.65	43.47	54.00	10.53	vertical	Average
17942.40	45.82	7.65	53.47	74.00	20.53	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5825
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

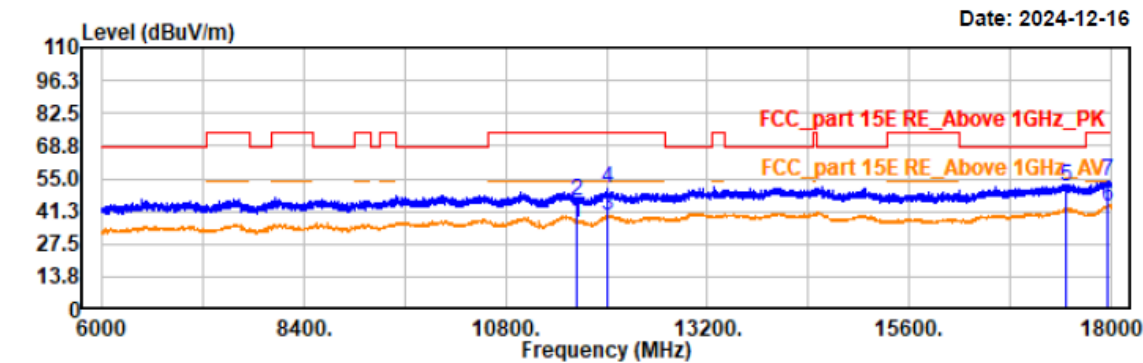


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11649.60	33.10	3.53	36.63	54.00	17.37	horizontal	Average
11650.00	42.31	3.53	45.84	74.00	28.16	horizontal	Peak
12012.00	35.25	4.23	39.48	54.00	14.52	horizontal	Average
12012.00	46.64	4.23	50.87	74.00	23.13	horizontal	Peak
17474.40	45.34	6.22	51.56	68.20	16.64	horizontal	Peak
17954.40	35.85	7.67	43.52	54.00	10.48	horizontal	Average
17954.40	46.39	7.67	54.06	74.00	19.94	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20-5825
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

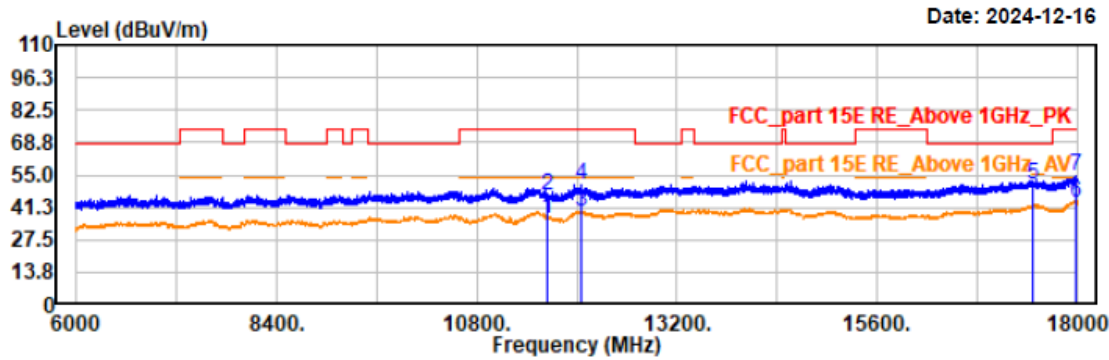


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11649.60	33.18	3.53	36.71	54.00	17.29	vertical	Average
11649.60	42.78	3.53	46.31	74.00	27.69	vertical	Peak
12063.60	34.99	4.13	39.12	54.00	14.88	vertical	Average
12063.60	46.79	4.13	50.92	74.00	23.08	vertical	Peak
17475.00	44.53	6.23	50.76	68.20	17.44	vertical	Peak
17976.00	35.84	7.71	43.55	54.00	10.45	vertical	Average
17976.00	46.91	7.71	54.62	74.00	19.38	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5755
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

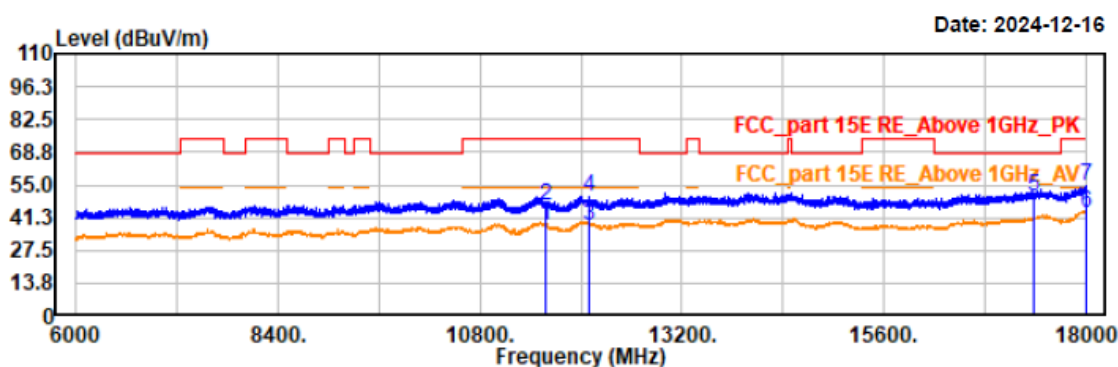

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11589.60	34.36	3.40	37.76	54.00	16.24	horizontal	Average
11590.00	42.64	3.40	46.04	74.00	27.96	horizontal	Peak
12092.40	34.20	4.09	38.29	54.00	15.71	horizontal	Average
12092.40	46.32	4.09	50.41	74.00	23.59	horizontal	Peak
17385.60	44.43	6.00	50.43	68.20	17.77	horizontal	Peak
17995.20	35.79	7.74	43.53	54.00	10.47	horizontal	Average
17995.20	46.52	7.74	54.26	74.00	19.74	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40-5755


EUT Model: NLS-NQuire1000

Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

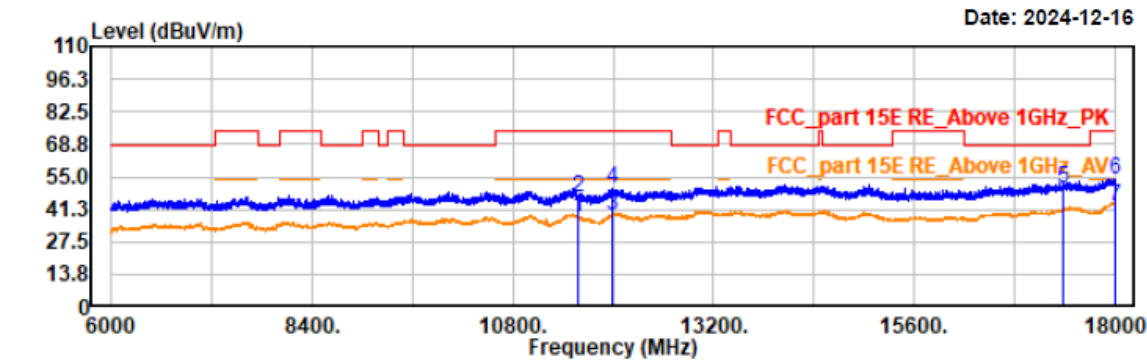

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11589.60	34.69	3.40	38.09	54.00	15.91	vertical	Average
11589.60	42.88	3.40	46.28	74.00	27.72	vertical	Peak
11991.60	34.74	4.23	38.97	54.00	15.03	vertical	Average
11991.60	45.69	4.23	49.92	74.00	24.08	vertical	Peak
17385.00	44.07	6.00	50.07	68.20	18.13	vertical	Peak
17999.99	46.35	7.74	54.09	74.00	19.91	vertical	Peak
18000.00	34.99	7.74	42.73	54.00	11.27	vertical	Average

Project No.: 2407V20721E-RF
Test Mode: 11n40-5795
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1°C/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

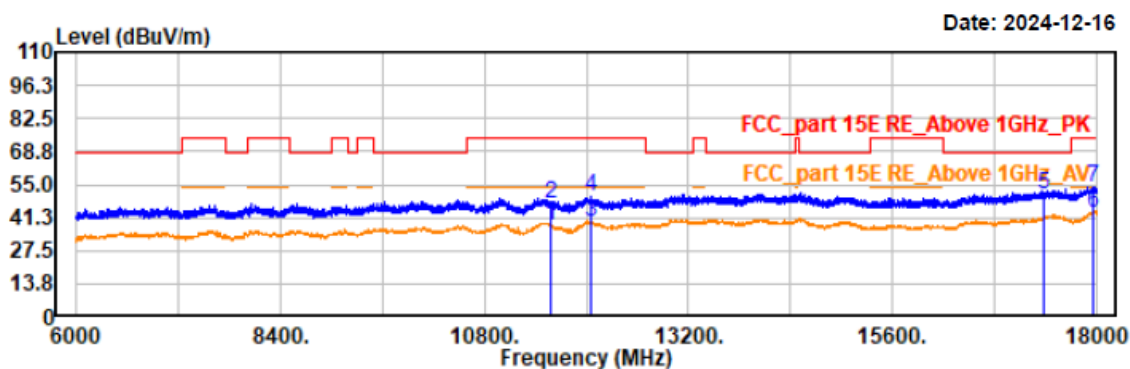

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11589.60	34.85	3.40	38.25	54.00	15.75	horizontal	Average
11590.00	43.51	3.40	46.91	74.00	27.09	horizontal	Peak
12054.00	34.99	4.15	39.14	54.00	14.86	horizontal	Average
12054.00	45.81	4.15	49.96	74.00	24.04	horizontal	Peak
17385.60	44.68	6.00	50.68	68.20	17.52	horizontal	Peak
17968.80	35.69	7.69	43.38	54.00	10.62	horizontal	Average
17968.80	46.37	7.69	54.06	74.00	19.94	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40-5795
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

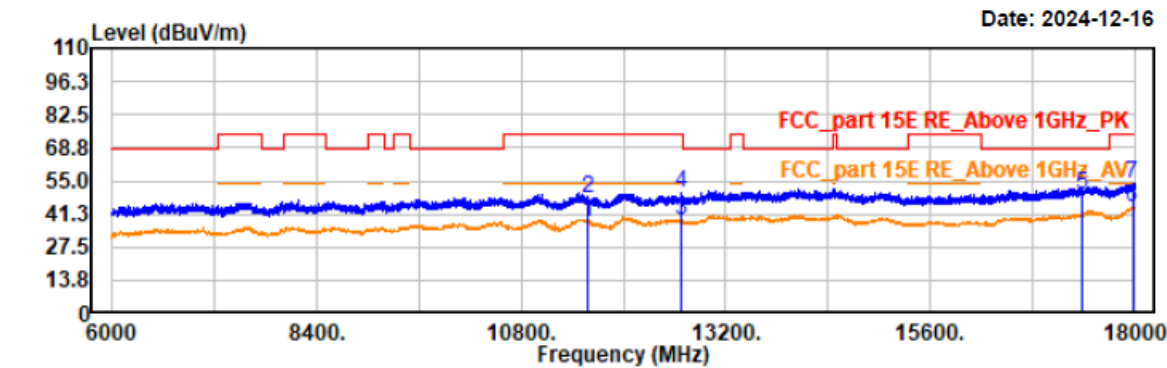


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11589.60	34.90	3.40	38.30	54.00	15.70	vertical	Average
11589.60	44.44	3.40	47.84	74.00	26.16	vertical	Peak
12676.80	34.25	4.16	38.41	54.00	15.59	vertical	Average
12676.80	45.56	4.16	49.72	74.00	24.28	vertical	Peak
17385.00	43.29	6.00	49.29	68.20	18.91	vertical	Peak
17972.40	36.04	7.70	43.74	54.00	10.26	vertical	Average
17972.40	46.38	7.70	54.08	74.00	19.92	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5775
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

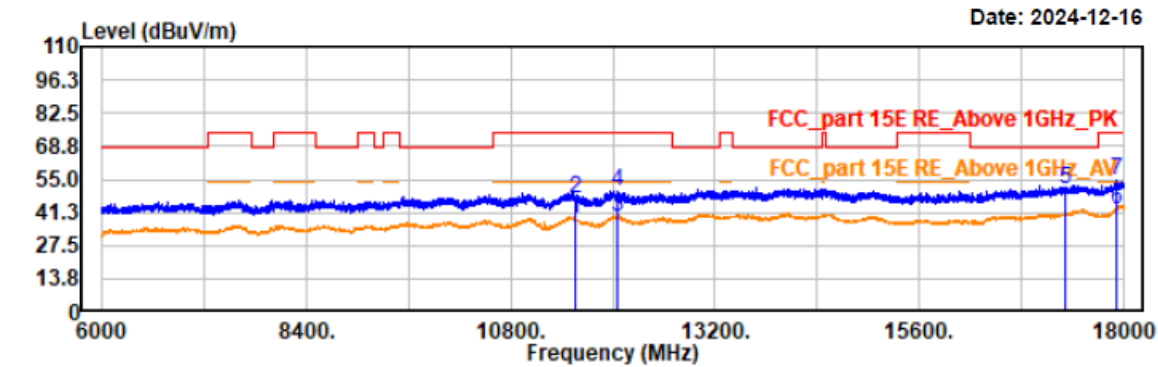


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11550.00	35.04	3.28	38.32	54.00	15.68	horizontal	Average
11550.00	43.50	3.28	46.78	74.00	27.22	horizontal	Peak
12056.40	35.59	4.15	39.74	54.00	14.26	horizontal	Average
12056.40	45.98	4.15	50.13	74.00	23.87	horizontal	Peak
17325.60	44.73	5.81	50.54	68.20	17.66	horizontal	Peak
17910.00	34.65	7.60	42.25	54.00	11.75	horizontal	Average
17910.00	46.80	7.60	54.40	74.00	19.60	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80-5775
EUT Model: NLS-NQuire1000
Test distance: 3m

Temp/Humi/ATM: 23.1℃/48%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

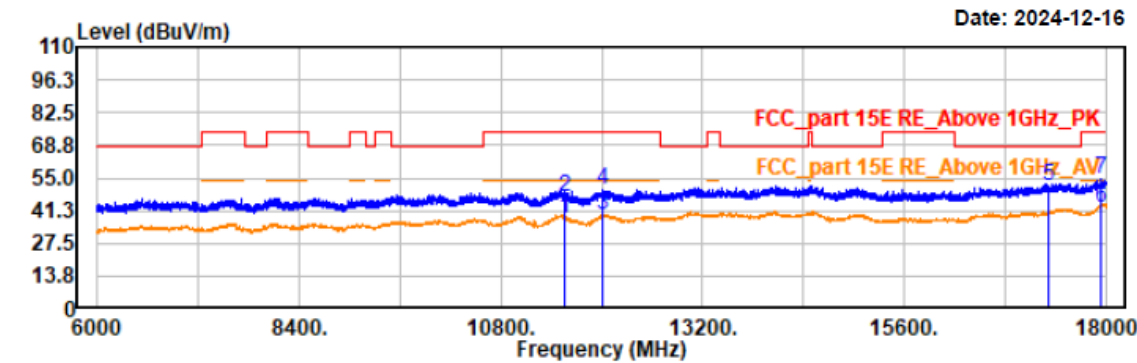

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
11550.00	35.01	3.28	38.29	54.00	15.71	vertical	Average
11550.00	44.12	3.28	47.40	74.00	26.60	vertical	Peak
12019.20	34.91	4.21	39.12	54.00	14.88	vertical	Average
12019.20	45.83	4.21	50.04	74.00	23.96	vertical	Peak
17325.00	45.79	5.81	51.60	68.20	16.60	vertical	Peak
17932.80	35.21	7.63	42.84	54.00	11.16	vertical	Average
17932.80	46.66	7.63	54.29	74.00	19.71	vertical	Peak

5) 18GHz~40GHz

Note: The maximum output power mode: 802.11a mode high channel was tested.

EUT Model: NLS-NQuire1500

Project No.: 2407V20721E-RF

Temp/Humi/ATM: 21.5°C /52%/100.1kPa


Test Mode: 802.11a-5240

Tested by: Wlif Wu

EUT Model: NLS-NQuire1500

Power Source: AC 120V/60Hz

Test distance: 1.5m

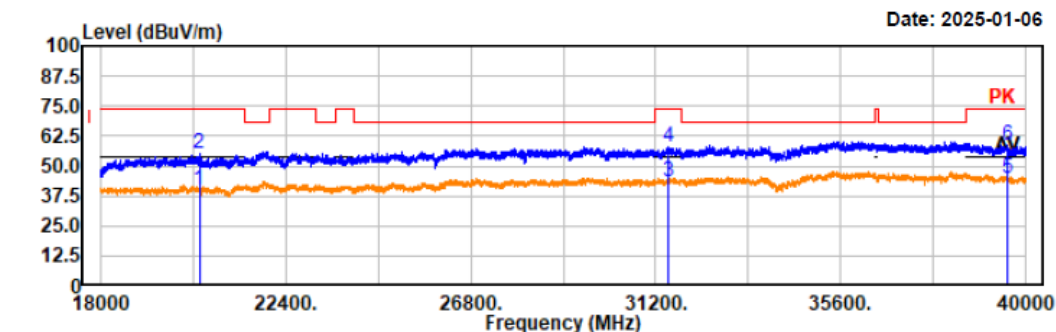

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq	Reading	Factor	Result	Limit	Margin	Polarity	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
20336.40	36.04	4.08	40.12	54.00	13.88	horizontal	Average
20336.40	51.02	4.08	55.10	74.00	18.90	horizontal	Peak
31488.20	35.52	7.75	43.27	54.00	10.73	horizontal	Average
31488.20	49.87	7.75	57.62	74.00	16.38	horizontal	Peak
39560.00	35.83	8.86	44.69	54.00	9.31	horizontal	Average
39560.00	49.94	8.86	58.80	74.00	15.20	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 802.11a-5240
EUT Model: NLS-NQuire1500
Test distance: 1.5m

Temp/Humi/ATM: 21.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

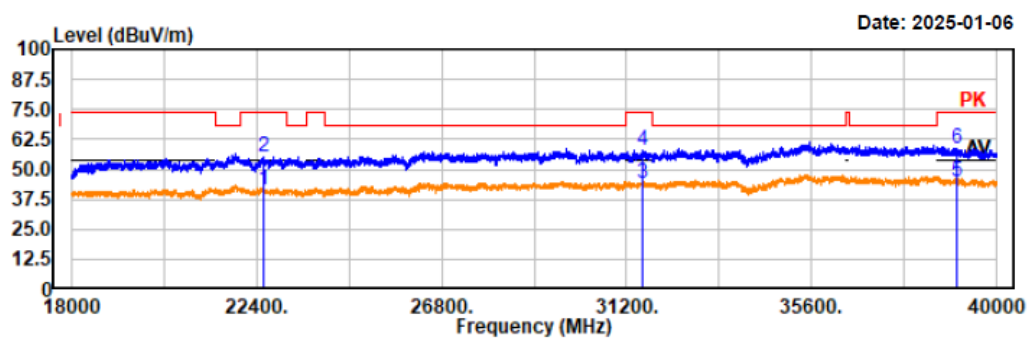

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
22567.20	36.33	5.07	41.40	54.00	12.60	vertical	Average
22567.20	50.33	5.07	55.40	74.00	18.60	vertical	Peak
31580.60	36.78	7.61	44.39	54.00	9.61	vertical	Average
31580.60	50.22	7.61	57.83	74.00	16.17	vertical	Peak
39049.60	35.99	9.16	45.15	54.00	8.85	vertical	Average
39049.60	49.71	9.16	58.87	74.00	15.13	vertical	Peak

EUT Model: NLS-NQuire500

Project No.: 2407V20721E-RF

Test Mode: 802.11a-5240


EUT Model: NLS-NQuire500

Test distance: 1.5m

Temp/Humi/ATM: 21.5°C/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

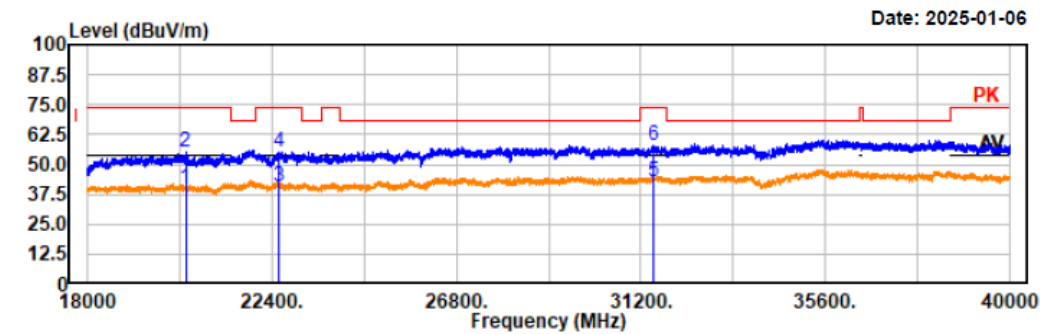

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
20336.40	35.70	4.08	39.78	54.00	14.22	horizontal	Average
20336.40	51.02	4.08	55.10	74.00	18.90	horizontal	Peak
22580.40	35.75	5.07	40.82	54.00	13.18	horizontal	Average
22580.40	50.13	5.07	55.20	74.00	18.80	horizontal	Peak
31488.20	35.09	7.75	42.84	54.00	11.16	horizontal	Average
31488.20	49.87	7.75	57.62	74.00	16.38	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 802.11a-5240


EUT Model: NLS-NQuire500

Test distance: 1.5m

Temp/Humi/ATM: 21.5°C/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

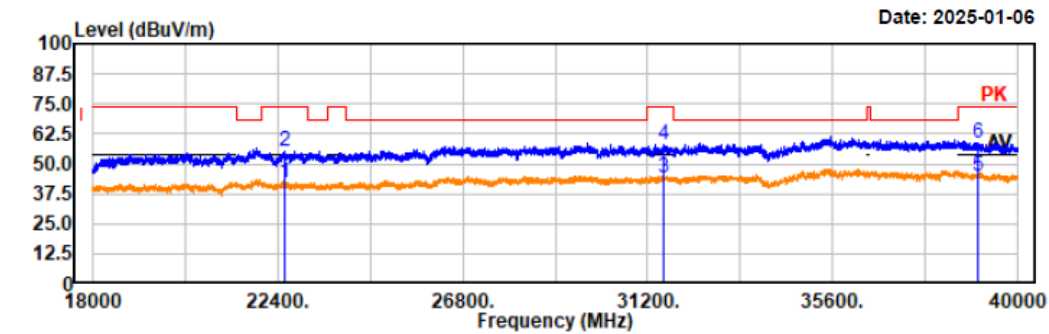

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
22567.20	37.03	5.07	42.10	54.00	11.90	vertical	Average
22567.20	50.33	5.07	55.40	74.00	18.60	vertical	Peak
31580.60	36.55	7.61	44.16	54.00	9.84	vertical	Average
31580.60	50.22	7.61	57.83	74.00	16.17	vertical	Peak
39049.60	35.86	9.16	45.02	54.00	8.98	vertical	Average
39049.60	49.71	9.16	58.87	74.00	15.13	vertical	Peak

EUT Model: NLS-NQuire700

Project No.: 2407V20721E-RF

Test Mode: 802.11a-5240


EUT Model: NLS-NQuire700

Test distance: 1.5m

Temp/Humi/ATM: 21.5°C/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

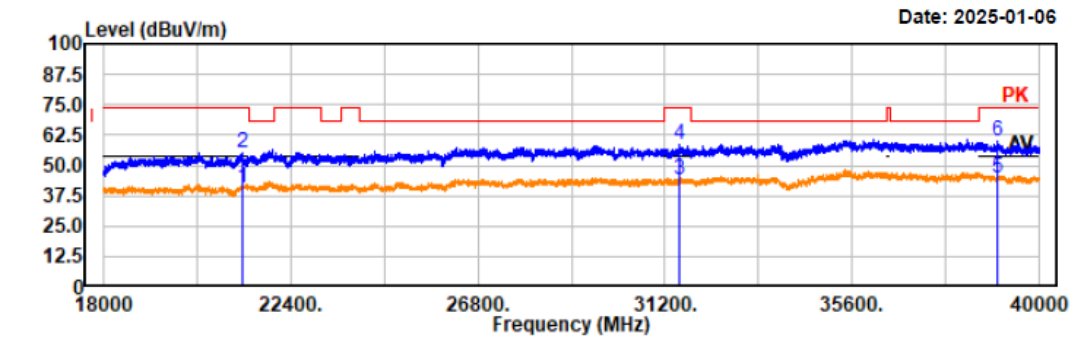


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
21260.40	36.49	4.25	40.74	54.00	13.26	horizontal	Average
21260.40	50.62	4.25	54.87	74.00	19.13	horizontal	Peak
31554.20	36.14	7.67	43.81	54.00	10.19	horizontal	Average
31554.20	50.68	7.67	58.35	74.00	15.65	horizontal	Peak
39027.60	35.95	9.16	45.11	54.00	8.89	horizontal	Average
39027.60	50.64	9.16	59.80	74.00	14.20	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 802.11a-5240
EUT Model: NLS-NQuire700
Test distance: 1.5m

Temp/Humi/ATM: 21.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

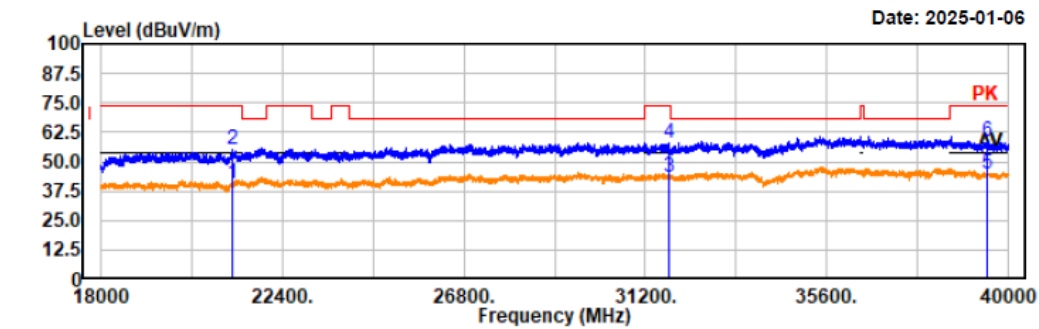

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
21170.20	36.37	4.00	40.37	54.00	13.63	vertical	Average
21170.20	51.49	4.00	55.49	74.00	18.51	vertical	Peak
31780.80	36.22	7.24	43.46	54.00	10.54	vertical	Average
31780.80	50.64	7.24	57.88	74.00	16.12	vertical	Peak
39509.40	36.08	8.95	45.03	54.00	8.97	vertical	Average
39509.40	49.96	8.95	58.91	74.00	15.09	vertical	Peak

EUT Model: NLS-NQuire1000

Project No.: 2407V20721E-RF

Test Mode: 802.11a-5240


EUT Model: NLS-NQuire1000

Test distance: 1.5m

Temp/Humi/ATM: 21.5°C/52%/100.1kPa

Tested by: Wlif Wu

Power Source: AC 120V/60Hz

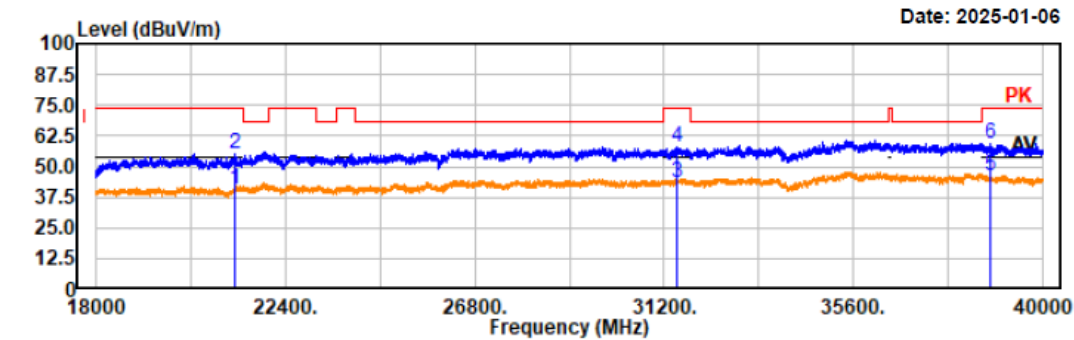

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
21234.00	36.72	4.20	40.92	54.00	13.08	horizontal	Average
21234.00	50.80	4.20	55.00	74.00	19.00	horizontal	Peak
31497.00	35.51	7.77	43.28	54.00	10.72	horizontal	Average
31497.00	50.00	7.77	57.77	74.00	16.23	horizontal	Peak
38803.20	36.55	9.38	45.93	54.00	8.07	horizontal	Average
38803.20	49.77	9.38	59.15	74.00	14.85	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 802.11a-5240
EUT Model: NLS-NQuire1000
Test distance: 1.5m

Temp/Humi/ATM: 21.5°C/52%/100.1kPa
Tested by: Wlif Wu
Power Source: AC 120V/60Hz

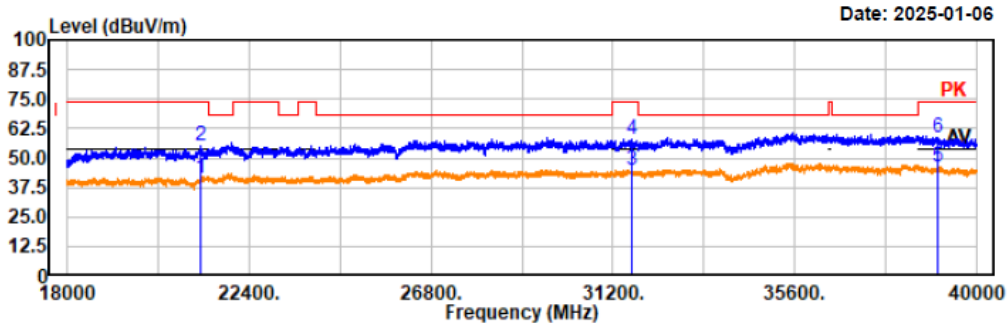

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
21234.00	37.30	4.20	41.50	54.00	12.50	vertical	Average
21234.00	50.87	4.20	55.07	74.00	18.93	vertical	Peak
31642.20	37.18	7.50	44.68	54.00	9.32	vertical	Average
31642.20	50.24	7.50	57.74	74.00	16.26	vertical	Peak
39056.20	36.75	9.15	45.90	54.00	8.10	vertical	Average
39056.20	49.57	9.15	58.72	74.00	15.28	vertical	Peak


Restricted Bands Emissions:

EUT Model: NLS-NQuire1500

B1

Project No.: 2407V20721E-RF
Test Mode: 11a 5180
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

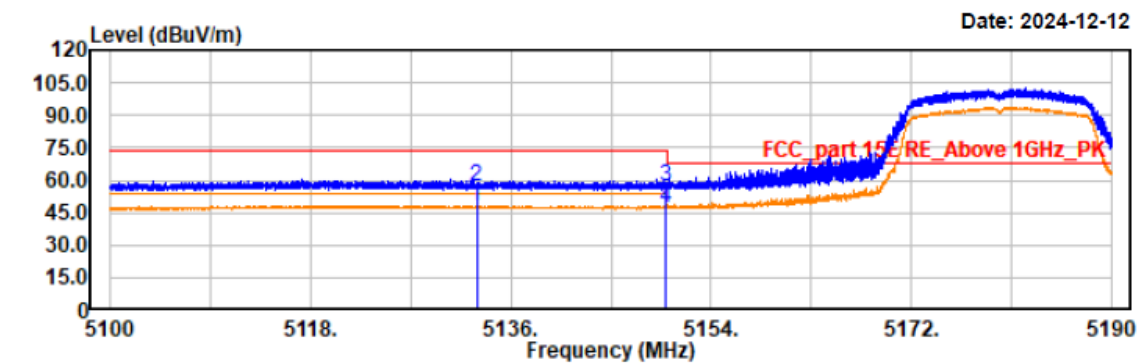


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5132.92	35.59	12.30	47.89	54.00	6.11	horizontal	Average
5132.92	44.72	12.30	57.02	74.00	16.98	horizontal	Peak
5149.99	45.02	12.32	57.34	74.00	16.66	horizontal	Peak
5149.99	35.16	12.32	47.48	54.00	6.52	horizontal	Average

Project No.: 2407V20721E-RF
Test Mode: 11a 5180
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

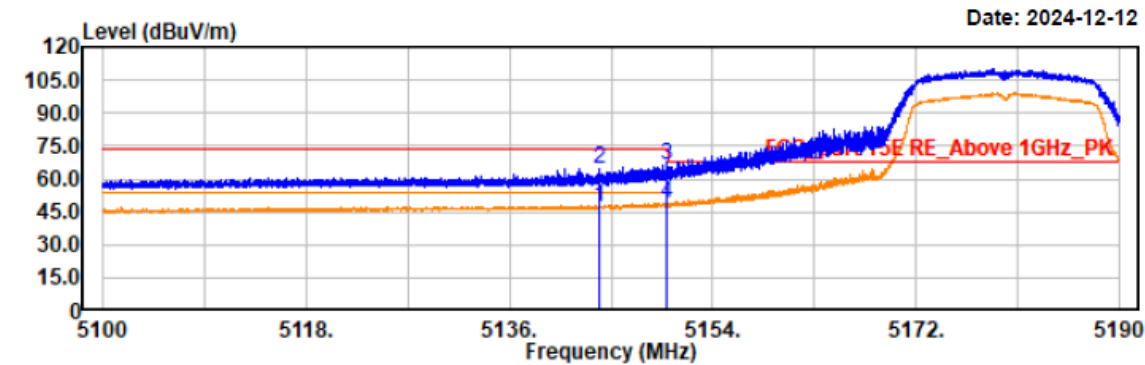

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5143.88	35.17	12.32	47.49	54.00	6.51	vertical	Average
5143.88	52.45	12.32	64.77	74.00	9.23	vertical	Peak
5149.99	54.27	12.32	66.59	74.00	7.41	vertical	Peak
5149.99	36.51	12.32	48.83	54.00	5.17	vertical	Average

Project No.: 2407V20721E-RF

Test Mode: 11a 5240


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

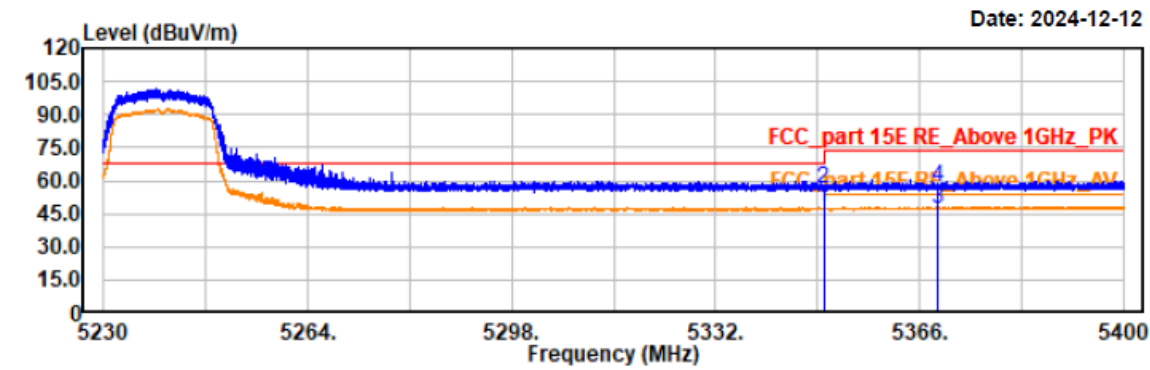

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

 AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	35.15	12.75	47.90	54.00	6.10	horizontal	Average
5350.00	43.59	12.75	56.34	74.00	17.66	horizontal	Peak
5369.09	34.39	12.79	47.18	54.00	6.82	horizontal	Average
5369.09	44.60	12.79	57.39	74.00	16.61	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5240
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

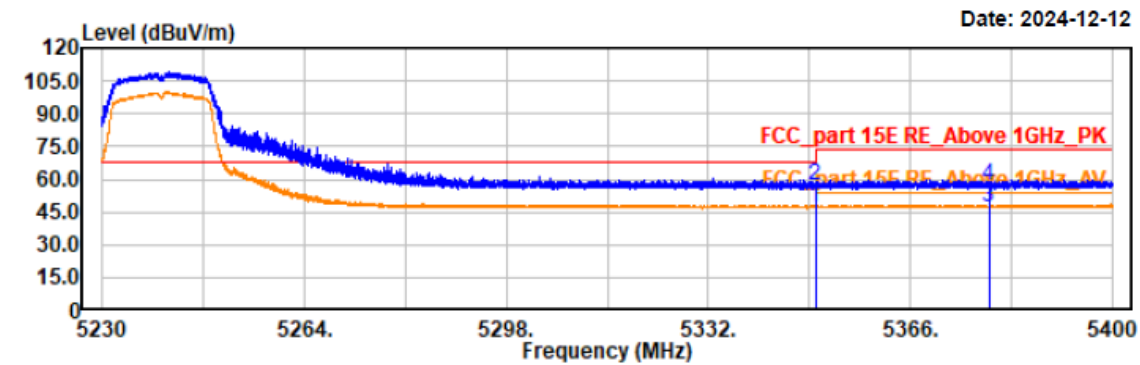


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	34.55	12.75	47.30	54.00	6.70	vertical	Average
5350.00	44.43	12.75	57.18	74.00	16.82	vertical	Peak
5379.21	34.50	12.81	47.31	54.00	6.69	vertical	Average
5379.21	44.31	12.81	57.12	74.00	16.88	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5180
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

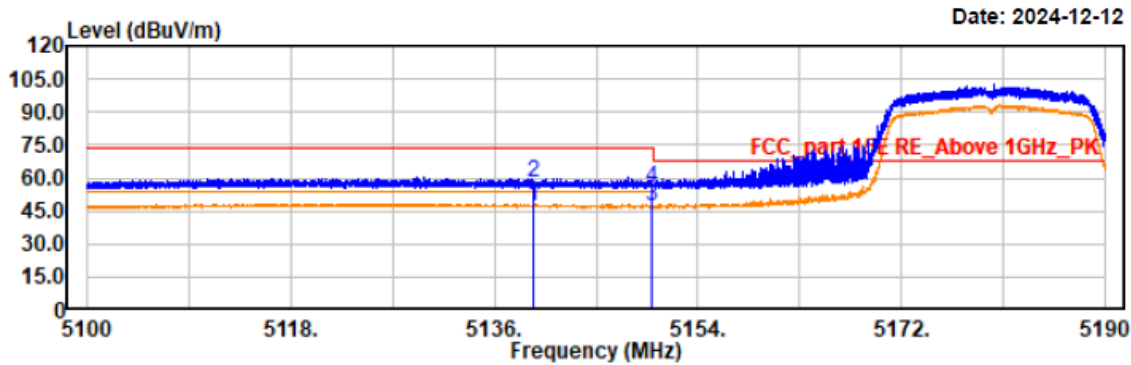


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5139.49	34.98	12.31	47.29	54.00	6.71	horizontal	Average
5139.49	45.69	12.31	58.00	74.00	16.00	horizontal	Peak
5149.99	34.73	12.32	47.05	54.00	6.95	horizontal	Average
5149.99	43.44	12.32	55.76	74.00	18.24	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5180
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

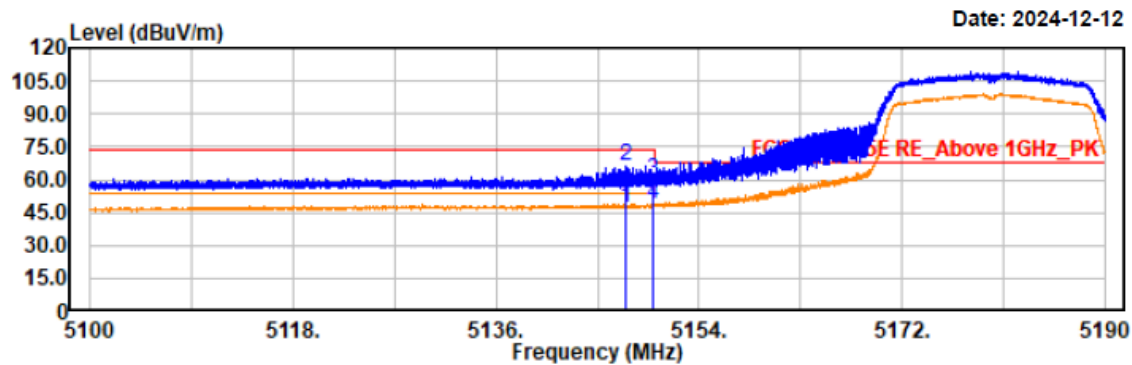

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5147.46	35.17	12.31	47.48	54.00	6.52	vertical	Average
5147.46	53.67	12.31	65.98	74.00	8.02	vertical	Peak
5149.99	47.20	12.32	59.52	74.00	14.48	vertical	Peak
5149.99	35.67	12.32	47.99	54.00	6.01	vertical	Average

Project No.: 2407V20721E-RF

Test Mode: 11n20 5240


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

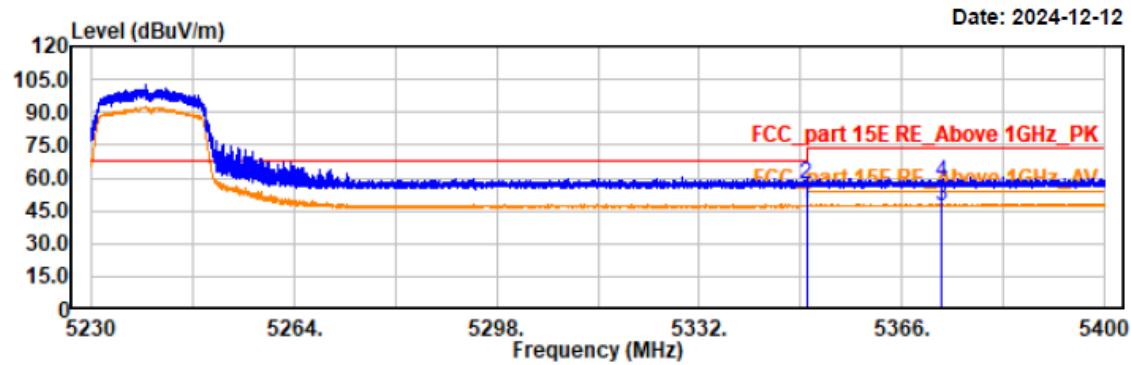


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	35.09	12.75	47.84	54.00	6.16	horizontal	Average
5350.00	44.32	12.75	57.07	74.00	16.93	horizontal	Peak
5372.72	34.59	12.80	47.39	54.00	6.61	horizontal	Average
5372.72	45.25	12.80	58.05	74.00	15.95	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5240
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

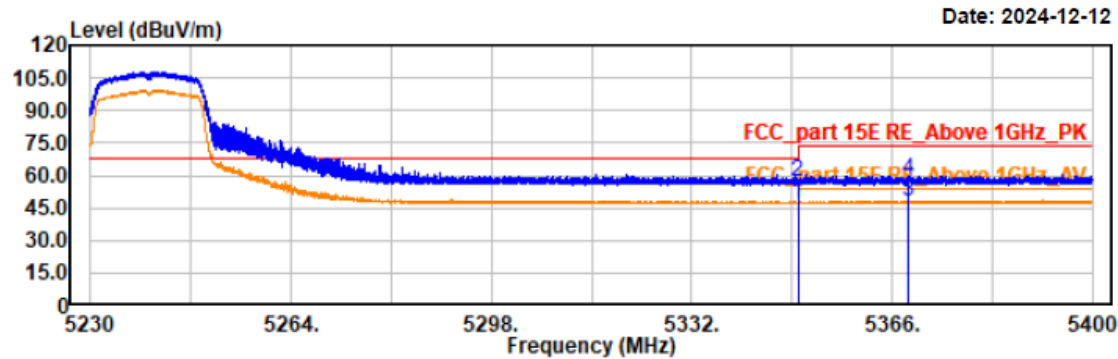


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	34.41	12.75	47.16	54.00	6.84	vertical	Average
5350.00	44.07	12.75	56.82	74.00	17.18	vertical	Peak
5368.74	34.91	12.79	47.70	54.00	6.30	vertical	Average
5368.74	45.15	12.79	57.94	74.00	16.06	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5190
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

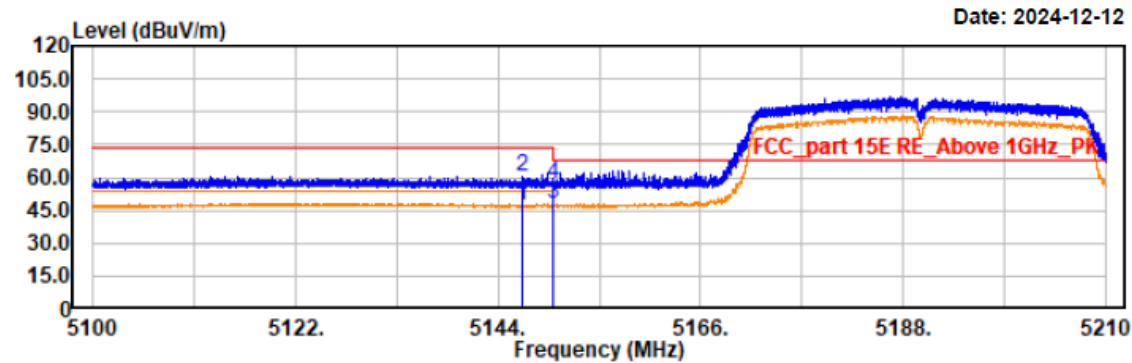


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5146.71	34.59	12.31	46.90	54.00	7.10	horizontal	Average
5146.71	47.79	12.31	60.10	74.00	13.90	horizontal	Peak
5150.00	35.68	12.32	48.00	54.00	6.00	horizontal	Average
5150.00	44.72	12.32	57.04	74.00	16.96	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5190
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

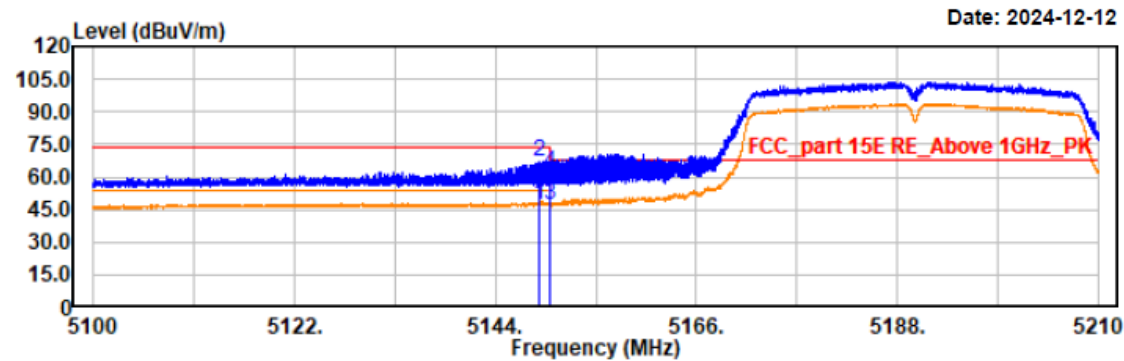


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5148.73	34.94	12.32	47.26	54.00	6.74	vertical	Average
5148.73	54.91	12.32	67.23	74.00	6.77	vertical	Peak
5149.99	35.17	12.32	47.49	54.00	6.51	vertical	Average
5150.00	49.66	12.32	61.98	74.00	12.02	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5230
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

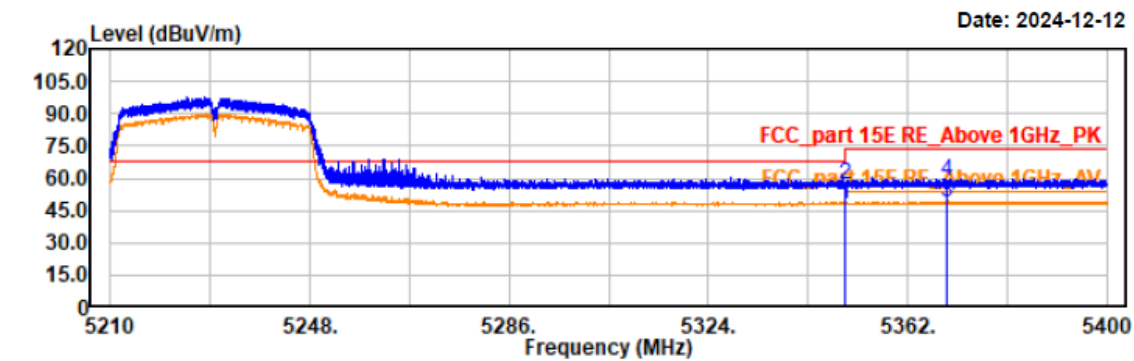


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.01	34.41	12.75	47.16	54.00	6.84	horizontal	Average
5350.01	44.61	12.75	57.36	74.00	16.64	horizontal	Peak
5369.37	35.15	12.79	47.94	54.00	6.06	horizontal	Average
5369.37	45.56	12.79	58.35	74.00	15.65	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5230
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

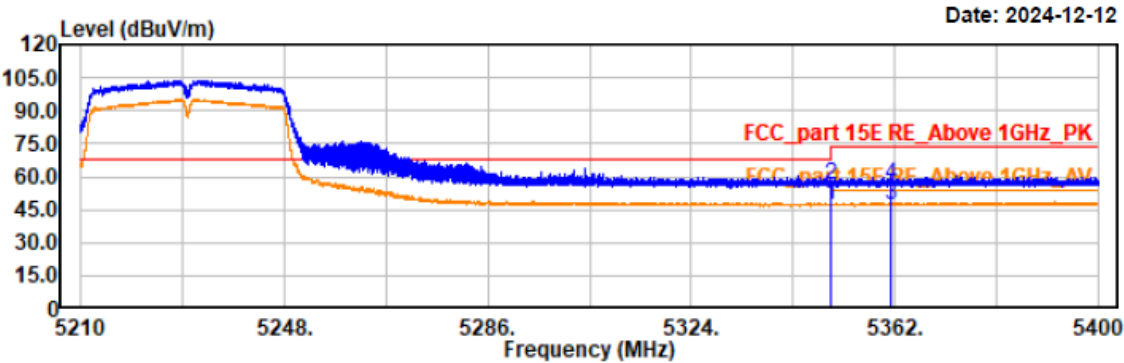

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	34.61	12.75	47.36	54.00	6.64	vertical	Average
5350.01	43.42	12.75	56.17	74.00	17.83	vertical	Peak
5361.30	34.49	12.76	47.25	54.00	6.75	vertical	Average
5361.30	43.67	12.76	56.43	74.00	17.57	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11ac80 5210


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

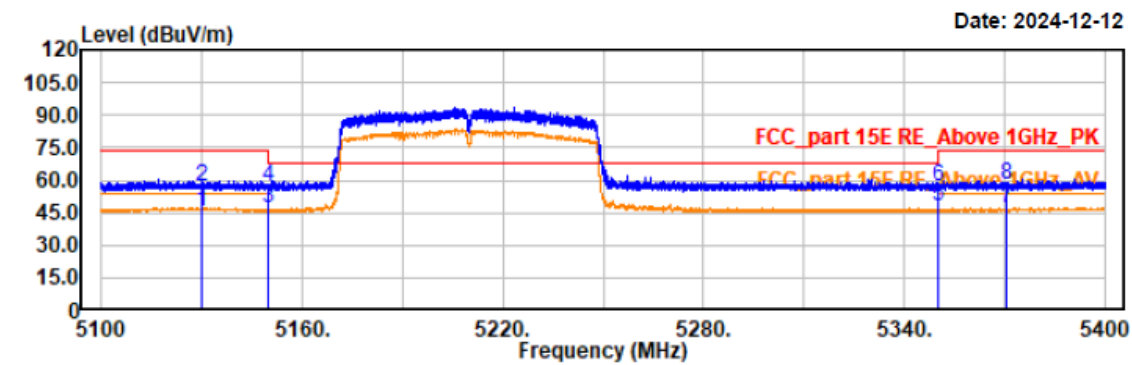


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5130.12	33.62	12.28	45.90	54.00	8.10	horizontal	Average
5130.12	45.21	12.28	57.49	74.00	16.51	horizontal	Peak
5149.98	34.79	12.32	47.11	54.00	6.89	horizontal	Average
5149.98	44.56	12.32	56.88	74.00	17.12	horizontal	Peak
5350.00	35.01	12.75	47.76	54.00	6.24	horizontal	Average
5350.00	44.31	12.75	57.06	74.00	16.94	horizontal	Peak
5370.75	34.13	12.79	46.92	54.00	7.08	horizontal	Average
5370.75	45.51	12.79	58.30	74.00	15.70	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80 5210
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

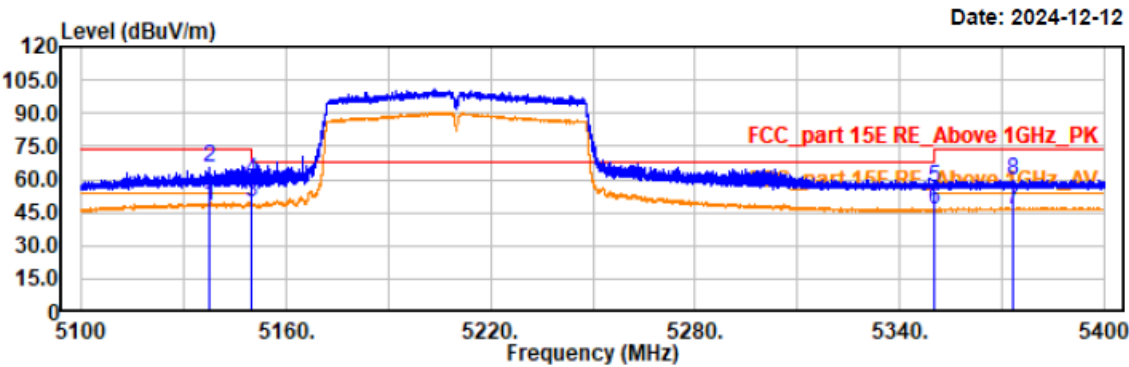

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5137.74	35.95	12.31	48.26	54.00	5.74	vertical	Average
5137.74	52.69	12.31	65.00	74.00	9.00	vertical	Peak
5149.99	37.07	12.32	49.39	54.00	4.61	vertical	Average
5149.99	46.86	12.32	59.18	74.00	14.82	vertical	Peak
5349.99	43.64	12.75	56.39	74.00	17.61	vertical	Peak
5350.00	33.36	12.75	46.11	54.00	7.89	vertical	Average
5373.30	33.42	12.80	46.22	54.00	7.78	vertical	Average
5373.30	47.18	12.80	59.98	74.00	14.02	vertical	Peak

B2

Project No.: 2407V20721E-RF

Test Mode: 11a 5260


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

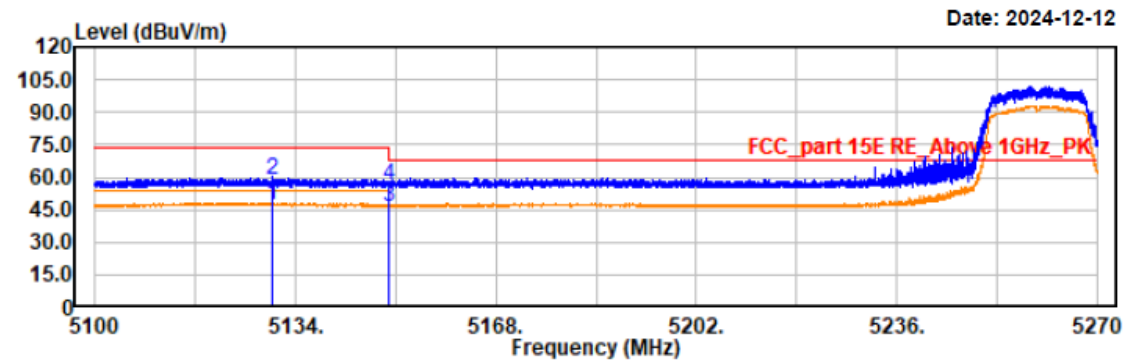


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5130.06	35.16	12.28	47.44	54.00	6.56	horizontal	Average
5130.06	46.77	12.28	59.05	74.00	14.95	horizontal	Peak
5149.99	34.29	12.32	46.61	54.00	7.39	horizontal	Average
5150.00	43.83	12.32	56.15	74.00	17.85	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5260
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

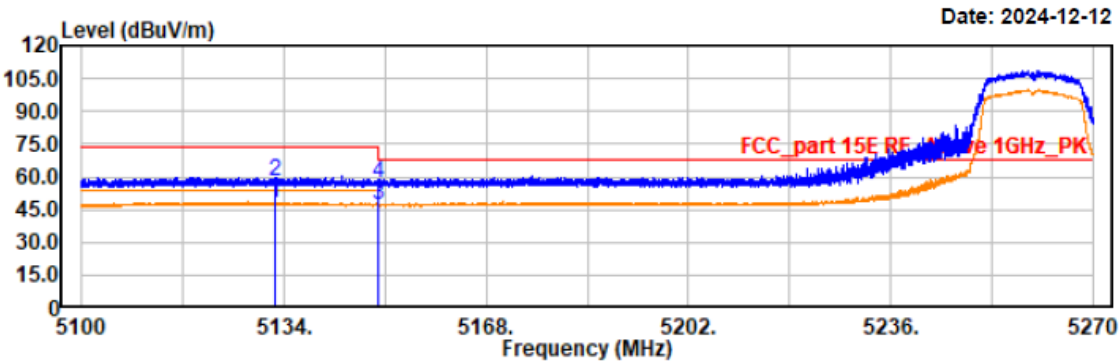


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5132.59	35.29	12.30	47.59	54.00	6.41	vertical	Average
5132.59	45.26	12.30	57.56	74.00	16.44	vertical	Peak
5150.00	34.78	12.32	47.10	54.00	6.90	vertical	Average
5150.00	44.88	12.32	57.20	74.00	16.80	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5320
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

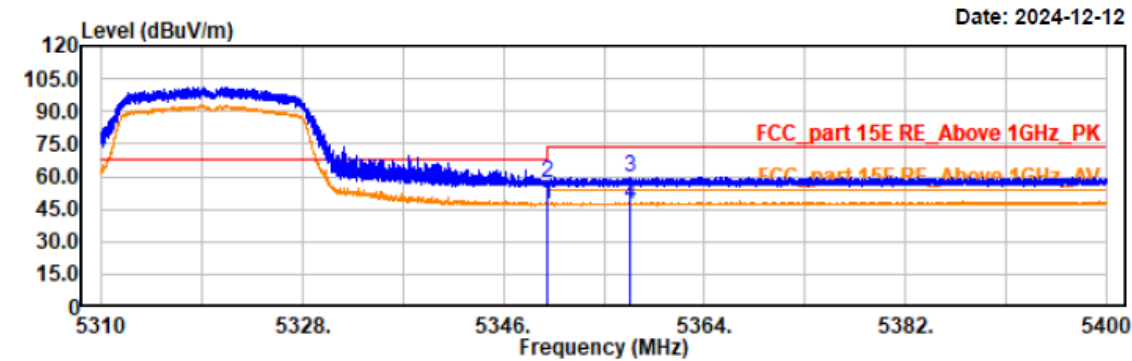

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	34.33	12.75	47.08	54.00	6.92	horizontal	Average
5350.01	44.51	12.75	57.26	74.00	16.74	horizontal	Peak
5357.37	47.14	12.75	59.89	74.00	14.11	horizontal	Peak
5357.41	34.68	12.75	47.43	54.00	6.57	horizontal	Average

Project No.: 2407V20721E-RF

Test Mode: 11a 5320


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

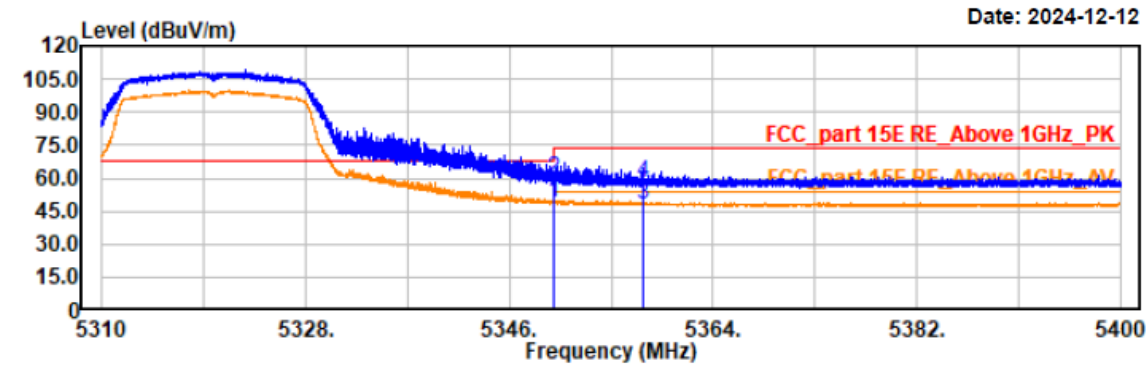

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	36.10	12.75	48.85	54.00	5.15	vertical	Average
5350.01	46.56	12.75	59.31	74.00	14.69	vertical	Peak
5357.90	35.37	12.76	48.13	54.00	5.87	vertical	Average
5357.90	45.25	12.76	58.01	74.00	15.99	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5260
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

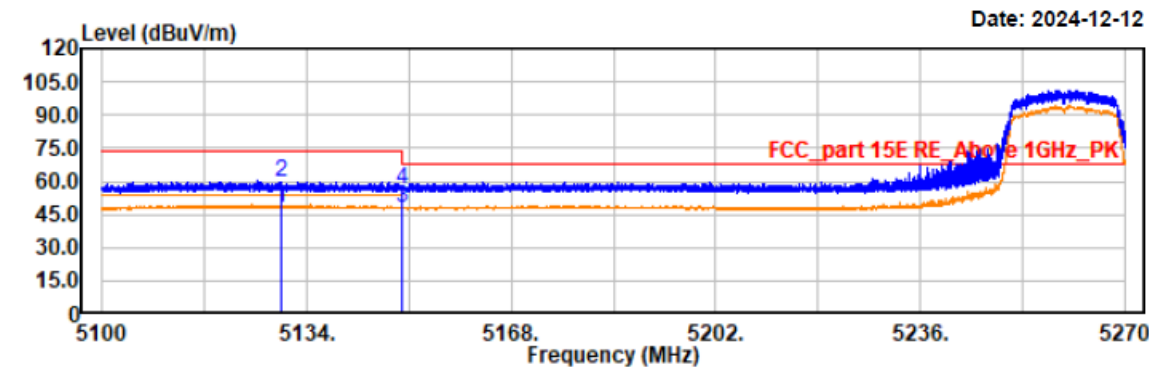


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5129.70	35.12	12.28	47.40	54.00	6.60	horizontal	Average
5129.70	47.59	12.28	59.87	74.00	14.13	horizontal	Peak
5150.00	35.58	12.32	47.90	54.00	6.10	horizontal	Average
5150.00	43.62	12.32	55.94	74.00	18.06	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5260
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

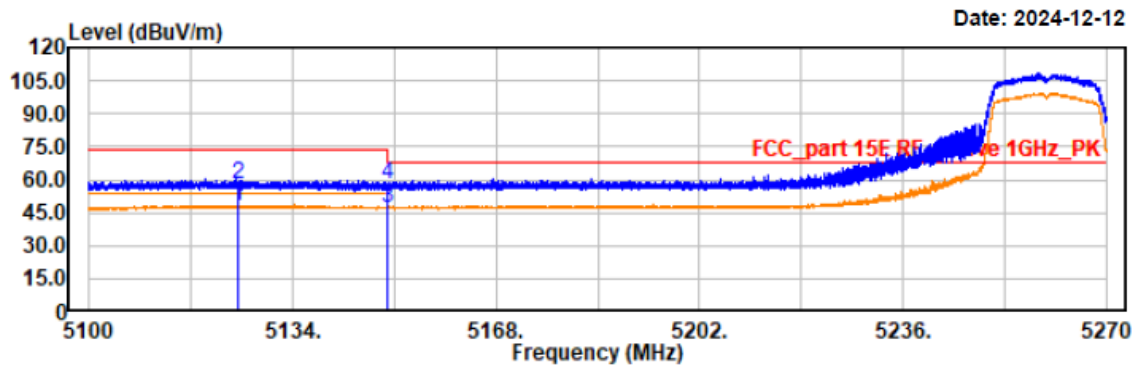


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5124.77	35.43	12.27	47.70	54.00	6.30	vertical	Average
5124.77	45.70	12.27	57.97	74.00	16.03	vertical	Peak
5149.99	34.92	12.32	47.24	54.00	6.76	vertical	Average
5150.00	45.39	12.32	57.71	74.00	16.29	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5320
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

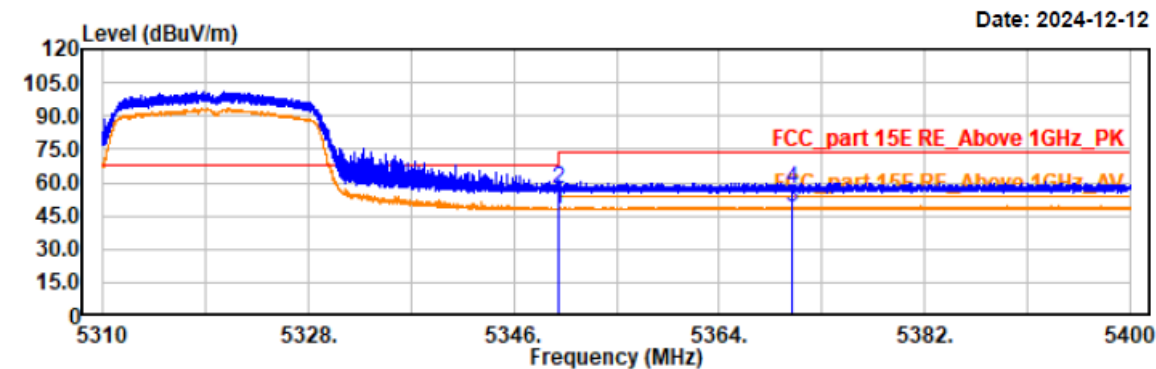


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.01	35.01	12.75	47.76	54.00	6.24	horizontal	Average
5350.01	44.47	12.75	57.22	74.00	16.78	horizontal	Peak
5370.39	35.07	12.79	47.86	54.00	6.14	horizontal	Average
5370.39	44.26	12.79	57.05	74.00	16.95	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5320
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

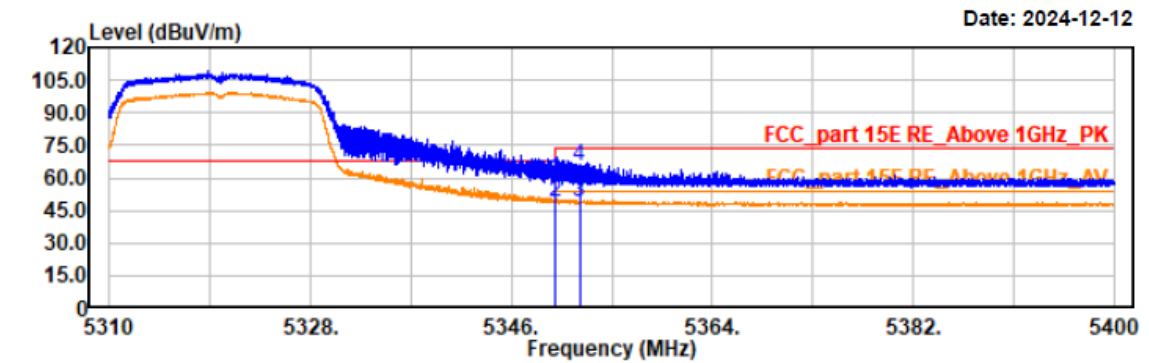

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	47.19	12.75	59.94	74.00	14.06	vertical	Peak
5350.00	36.39	12.75	49.14	54.00	4.86	vertical	Average
5352.10	36.43	12.75	49.18	54.00	4.82	vertical	Average
5352.10	52.22	12.75	64.97	74.00	9.03	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40 5270


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

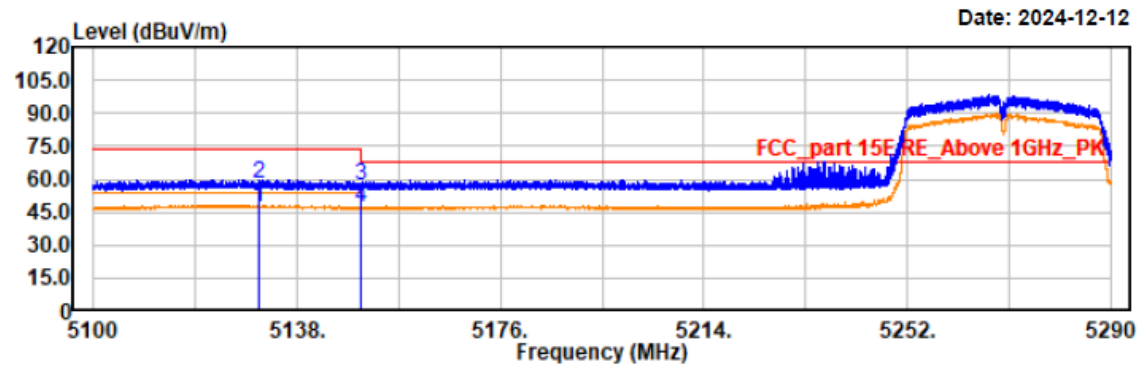

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5130.76	34.88	12.28	47.16	54.00	6.84	horizontal	Average
5130.76	45.32	12.28	57.60	74.00	16.40	horizontal	Peak
5149.99	44.49	12.32	56.81	74.00	17.19	horizontal	Peak
5149.99	34.47	12.32	46.79	54.00	7.21	horizontal	Average

Project No.: 2407V20721E-RF
Test Mode: 11n40 5270
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

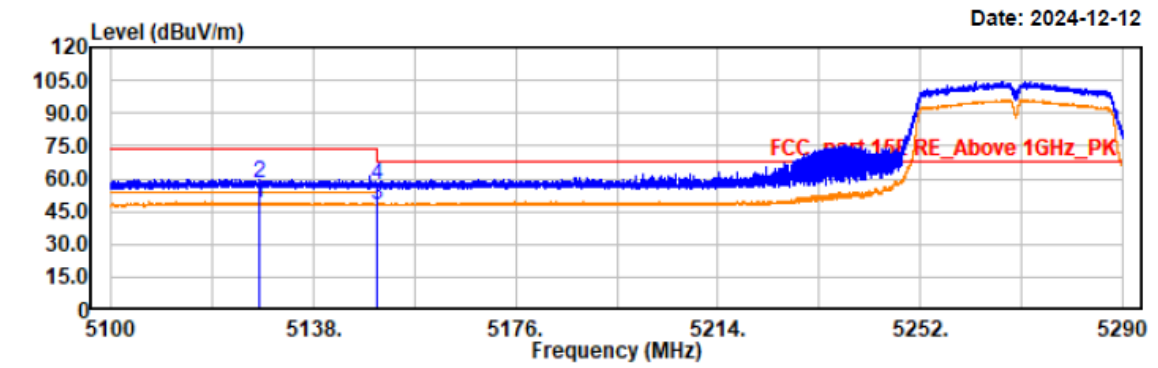

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5127.95	35.17	12.28	47.45	54.00	6.55	vertical	Average
5127.95	45.43	12.28	57.71	74.00	16.29	vertical	Peak
5149.99	35.59	12.32	47.91	54.00	6.09	vertical	Average
5149.99	44.49	12.32	56.81	74.00	17.19	vertical	Peak