


Project No.: 2407V20721E-RF
Test Mode: 11n40 5310
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

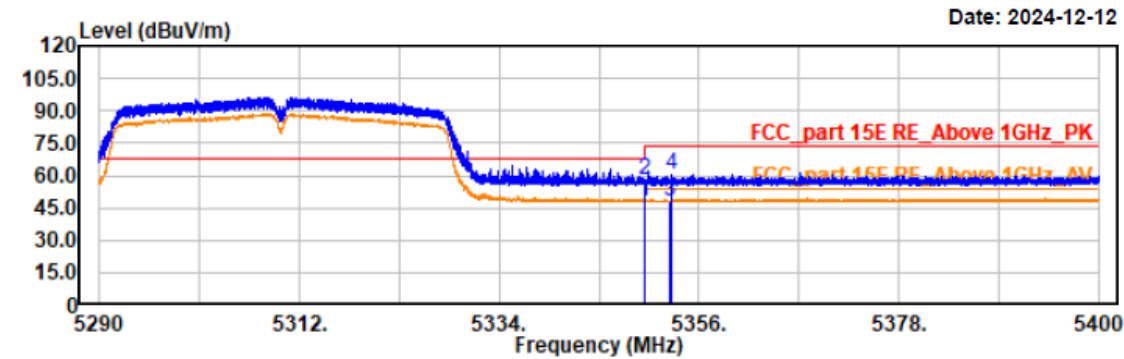

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.01	35.19	12.75	47.94	54.00	6.06	horizontal	Average
5350.01	45.36	12.75	58.11	74.00	15.89	horizontal	Peak
5352.85	34.59	12.76	47.35	54.00	6.65	horizontal	Average
5352.90	48.04	12.76	60.80	74.00	13.20	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40 5310


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

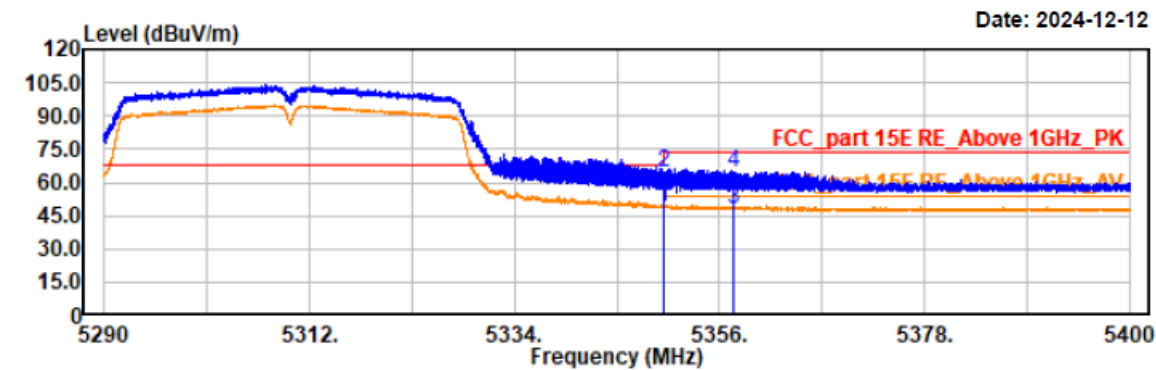


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	36.23	12.75	48.98	54.00	5.02	vertical	Average
5350.01	52.20	12.75	64.95	74.00	9.05	vertical	Peak
5357.42	35.04	12.75	47.79	54.00	6.21	vertical	Average
5357.42	51.91	12.75	64.66	74.00	9.34	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80 5290
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

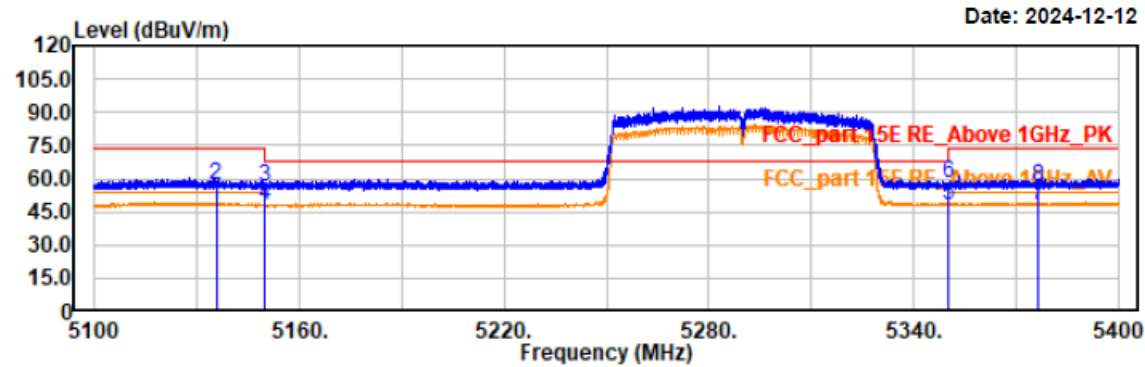


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5135.64	35.47	12.30	47.77	54.00	6.23	horizontal	Average
5135.64	45.04	12.30	57.34	74.00	16.66	horizontal	Peak
5149.98	43.75	12.32	56.07	74.00	17.93	horizontal	Peak
5149.99	35.46	12.32	47.78	54.00	6.22	horizontal	Average
5349.99	35.09	12.75	47.84	54.00	6.16	horizontal	Average
5350.00	45.22	12.75	57.97	74.00	16.03	horizontal	Peak
5376.69	35.05	12.80	47.85	54.00	6.15	horizontal	Average
5376.69	43.73	12.80	56.53	74.00	17.47	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80 5290
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

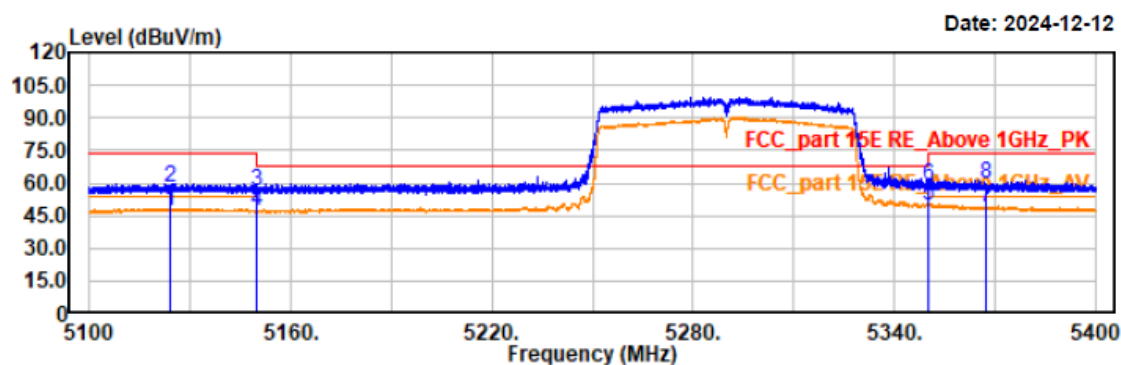

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5124.15	35.31	12.27	47.58	54.00	6.42	vertical	Average
5124.15	45.87	12.27	58.14	74.00	15.86	vertical	Peak
5149.98	43.69	12.32	56.01	74.00	17.99	vertical	Peak
5149.99	34.67	12.32	46.99	54.00	7.01	vertical	Average
5350.00	37.08	12.75	49.83	54.00	4.17	vertical	Average
5350.00	45.62	12.75	58.37	74.00	15.63	vertical	Peak
5367.12	35.83	12.77	48.60	54.00	5.40	vertical	Average
5367.12	46.92	12.77	59.69	74.00	14.31	vertical	Peak

B3

Project No.: 2407V20721E-RF

Test Mode: 11a 5500


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

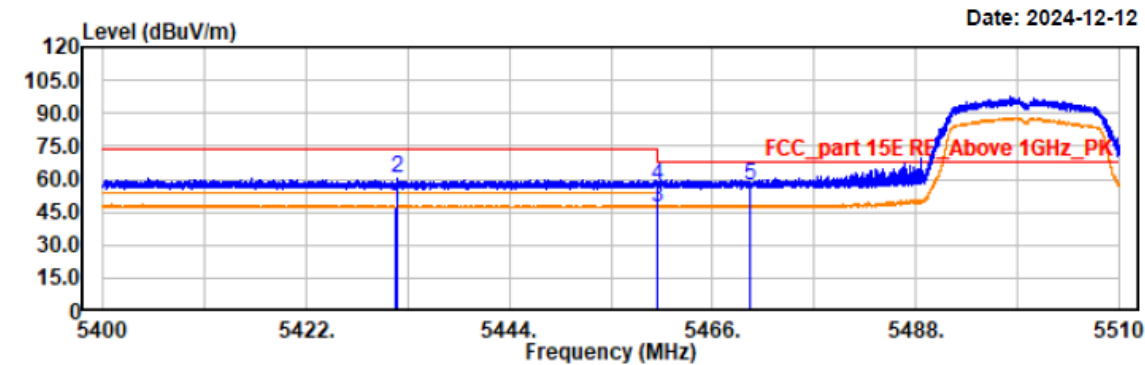


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5431.68	34.56	12.92	47.48	54.00	6.52	horizontal	Average
5431.78	47.47	12.92	60.39	74.00	13.61	horizontal	Peak
5459.99	34.62	12.96	47.58	54.00	6.42	horizontal	Average
5459.99	43.80	12.96	56.76	74.00	17.24	horizontal	Peak
5470.00	43.96	12.96	56.92	68.20	11.28	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5500
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

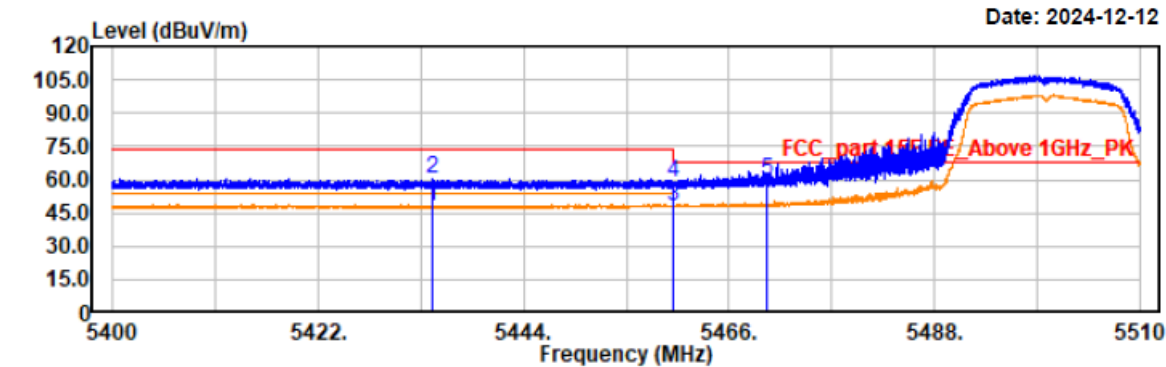


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5434.19	35.03	12.93	47.96	54.00	6.04	vertical	Average
5434.20	47.59	12.93	60.52	74.00	13.48	vertical	Peak
5459.99	35.02	12.96	47.98	54.00	6.02	vertical	Average
5459.99	45.74	12.96	58.70	74.00	15.30	vertical	Peak
5470.00	46.26	12.96	59.22	68.20	8.98	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5700
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

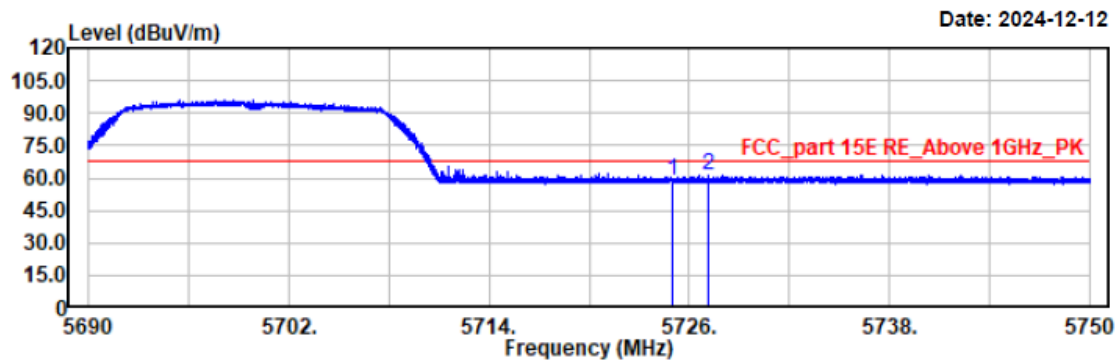


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	44.97	13.45	58.42	68.20	9.78	horizontal	Peak
5727.13	47.82	13.45	61.27	68.20	6.93	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5700
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

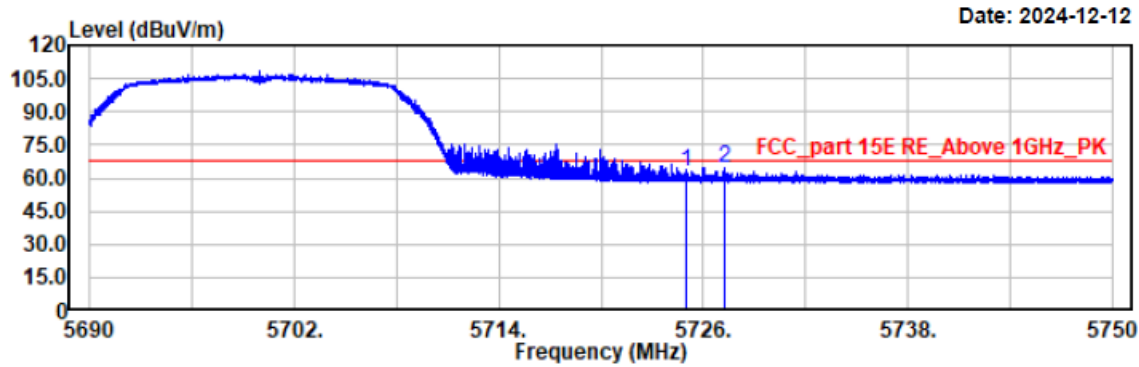


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	49.41	13.45	62.86	68.20	5.34	vertical	Peak
5727.25	50.75	13.45	64.20	68.20	4.00	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5500
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

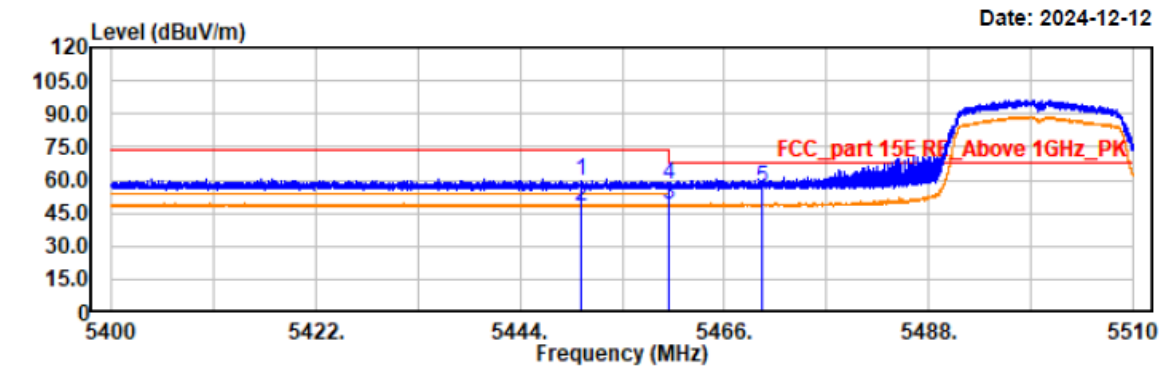

Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5450.51	47.02	12.95	59.97	74.00	14.03	horizontal	Peak
5450.59	34.44	12.95	47.39	54.00	6.61	horizontal	Average
5459.99	34.47	12.96	47.43	54.00	6.57	horizontal	Average
5459.99	45.03	12.96	57.99	74.00	16.01	horizontal	Peak
5470.00	43.67	12.96	56.63	68.20	11.57	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20 5500


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

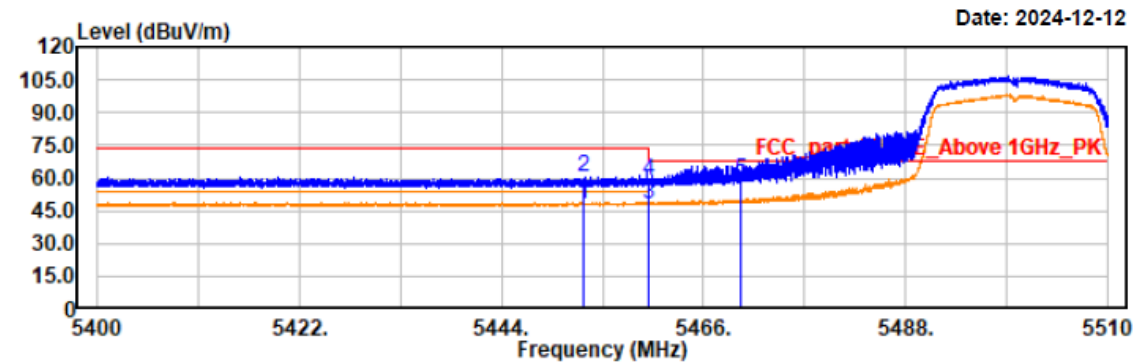

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5453.03	34.84	12.95	47.79	54.00	6.21	vertical	Average
5453.03	47.29	12.95	60.24	74.00	13.76	vertical	Peak
5459.99	35.03	12.96	47.99	54.00	6.01	vertical	Average
5459.99	46.00	12.96	58.96	74.00	15.04	vertical	Peak
5470.00	45.93	12.96	58.89	68.20	9.31	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5700
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

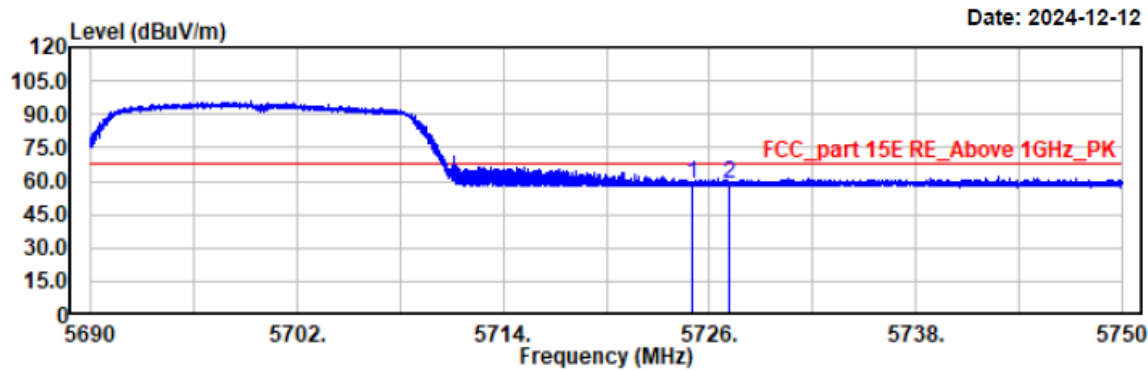


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	45.14	13.45	58.59	68.20	9.61	horizontal	Peak
5727.16	45.38	13.45	58.83	68.20	9.37	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5700
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

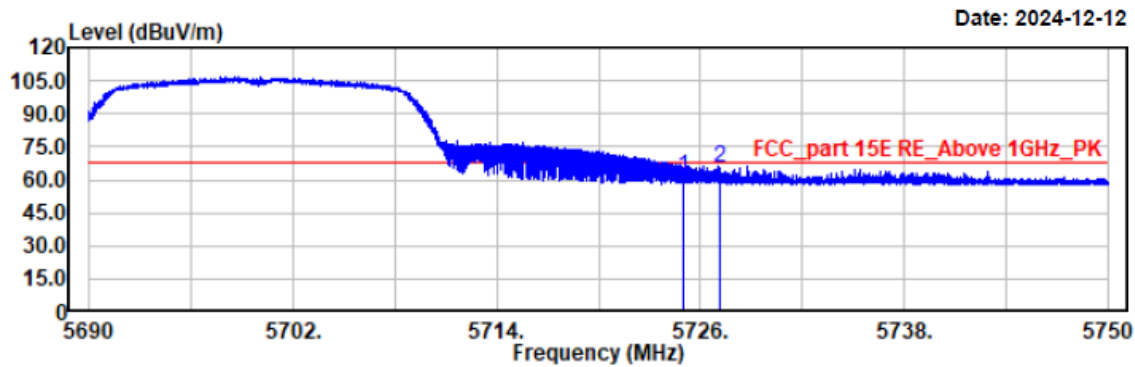


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	48.10	13.45	61.55	68.20	6.65	vertical	Peak
5727.16	52.22	13.45	65.67	68.20	2.53	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5510
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

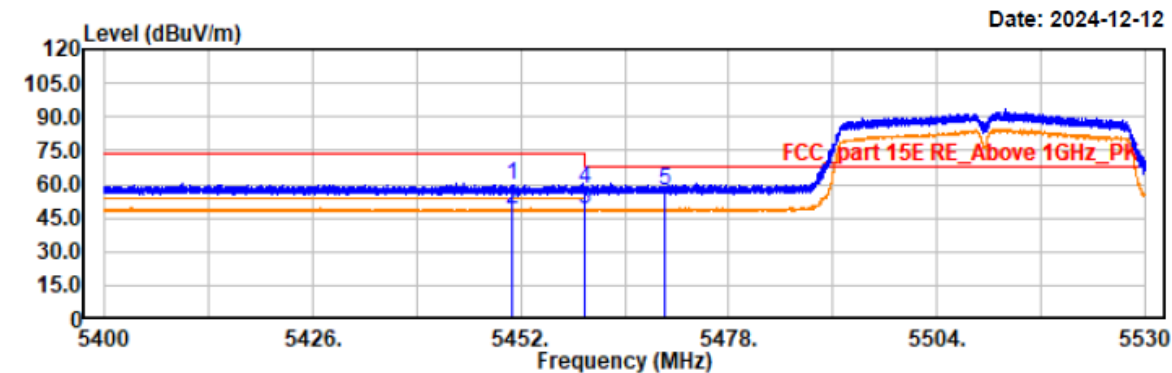


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5450.83	47.00	12.95	59.95	74.00	14.05	horizontal	Peak
5450.84	34.59	12.95	47.54	54.00	6.46	horizontal	Average
5459.99	34.50	12.96	47.46	54.00	6.54	horizontal	Average
5460.00	45.19	12.96	58.15	74.00	15.85	horizontal	Peak
5470.01	44.47	12.96	57.43	68.20	10.77	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5510
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

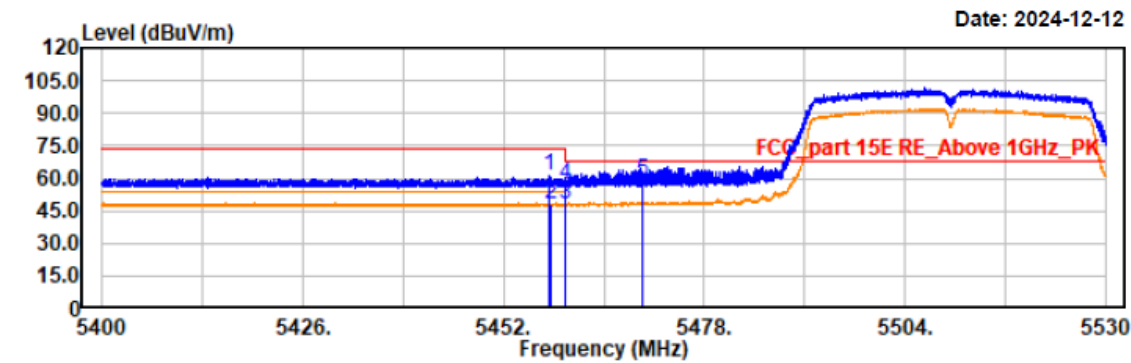


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5458.01	48.51	12.96	61.47	74.00	12.53	vertical	Peak
5458.05	34.76	12.96	47.72	54.00	6.28	vertical	Average
5459.99	34.67	12.96	47.63	54.00	6.37	vertical	Average
5460.00	43.98	12.96	56.94	74.00	17.06	vertical	Peak
5470.01	45.43	12.96	58.39	68.20	9.81	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5670
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

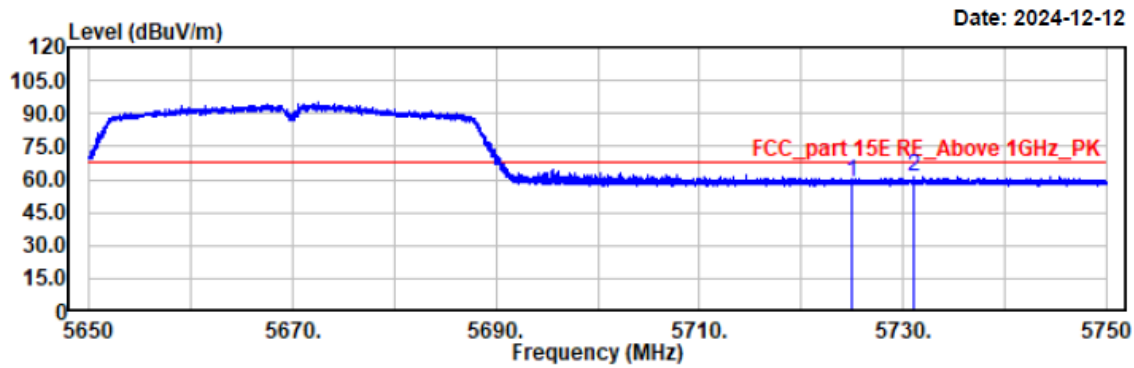


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	45.68	13.45	59.13	68.20	9.07	horizontal	Peak
5730.98	47.58	13.45	61.03	68.20	7.17	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5670
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

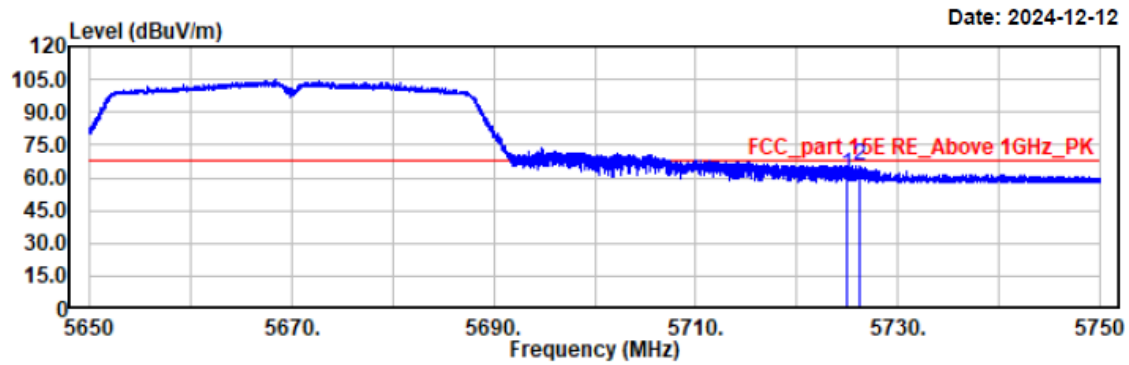


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	47.72	13.45	61.17	68.20	7.03	vertical	Peak
5726.25	51.87	13.45	65.32	68.20	2.88	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80 5530
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

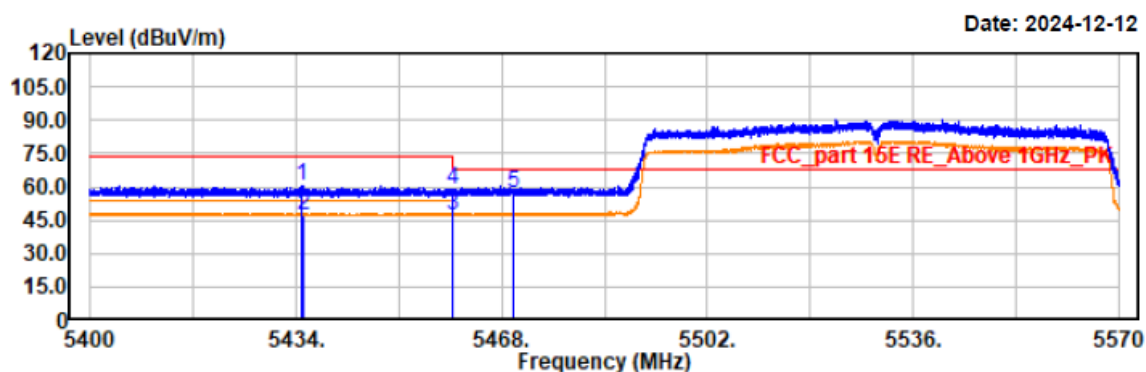


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5435.09	47.72	12.93	60.65	74.00	13.35	horizontal	Peak
5435.12	34.65	12.93	47.58	54.00	6.42	horizontal	Average
5459.99	34.44	12.96	47.40	54.00	6.60	horizontal	Average
5459.99	45.59	12.96	58.55	74.00	15.45	horizontal	Peak
5470.01	44.23	12.96	57.19	68.20	11.01	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80 5530
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

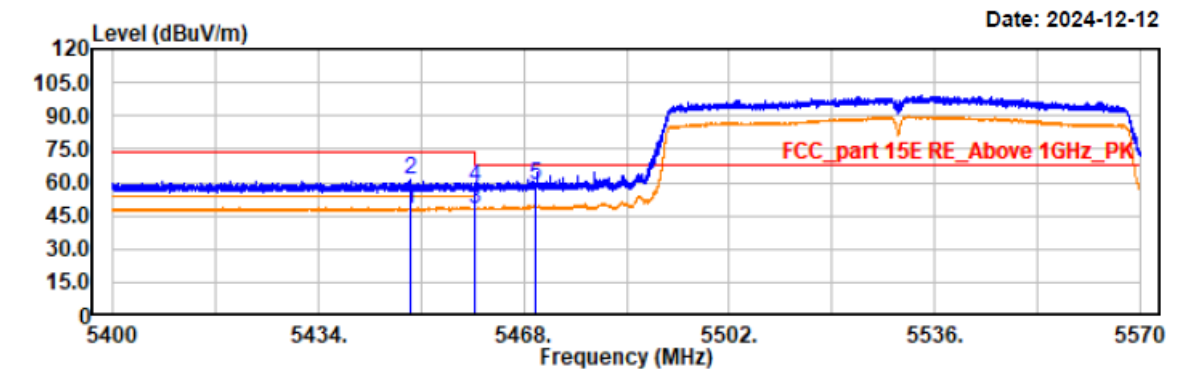


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5449.20	35.03	12.95	47.98	54.00	6.02	vertical	Average
5449.20	47.96	12.95	60.91	74.00	13.09	vertical	Peak
5459.99	34.99	12.96	47.95	54.00	6.05	vertical	Average
5459.99	44.95	12.96	57.91	74.00	16.09	vertical	Peak
5470.01	45.96	12.96	58.92	68.20	9.28	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80 5610
EUT Model: NLS-NQuire1500
Test distance: 3m


Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

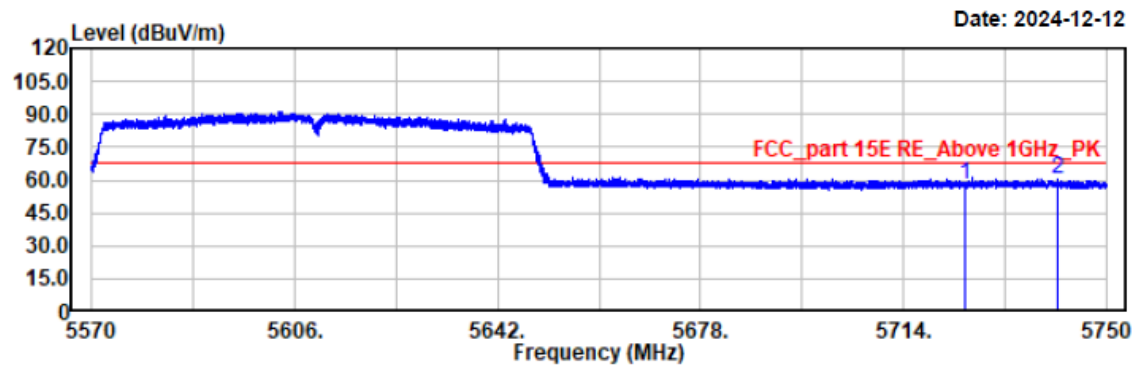

Condition: PK RBW:1MHz VBW:3MHz SWT:auto							
Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	44.48	13.45	57.93	68.20	10.27	horizontal	Peak
5741.49	46.57	13.46	60.03	68.20	8.17	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80 5610
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

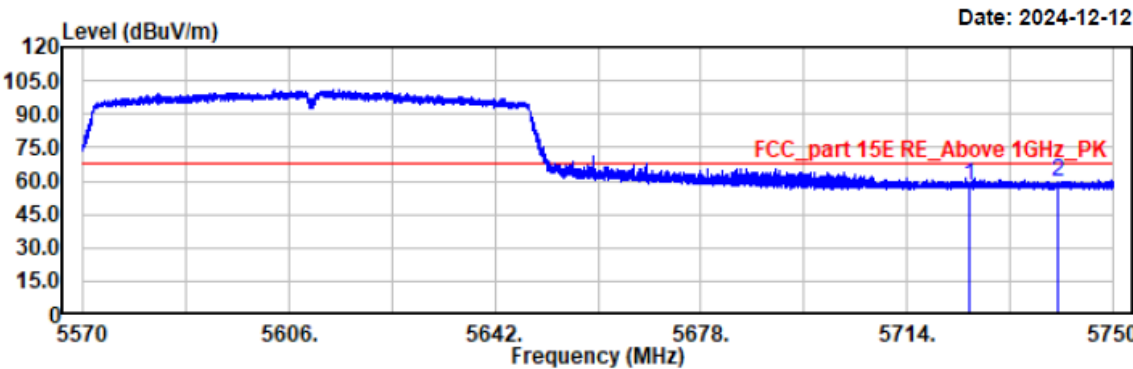


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	44.32	13.45	57.77	68.20	10.43	vertical	Peak
5740.44	46.53	13.46	59.99	68.20	8.21	vertical	Peak

B4

Project No.: 2407V20721E-RF
Test Mode: 11a 5745
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

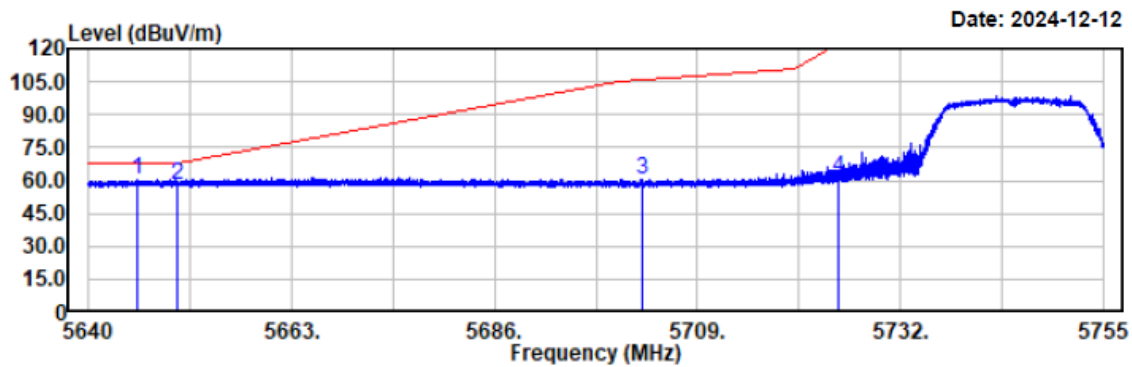


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5645.57	46.75	13.28	60.03	68.20	8.17	horizontal	Peak
5649.99	44.39	13.28	57.67	68.20	10.53	horizontal	Peak
5702.84	47.05	13.43	60.48	105.99	45.51	horizontal	Peak
5725.00	48.05	13.45	61.50	122.20	60.70	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5745
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

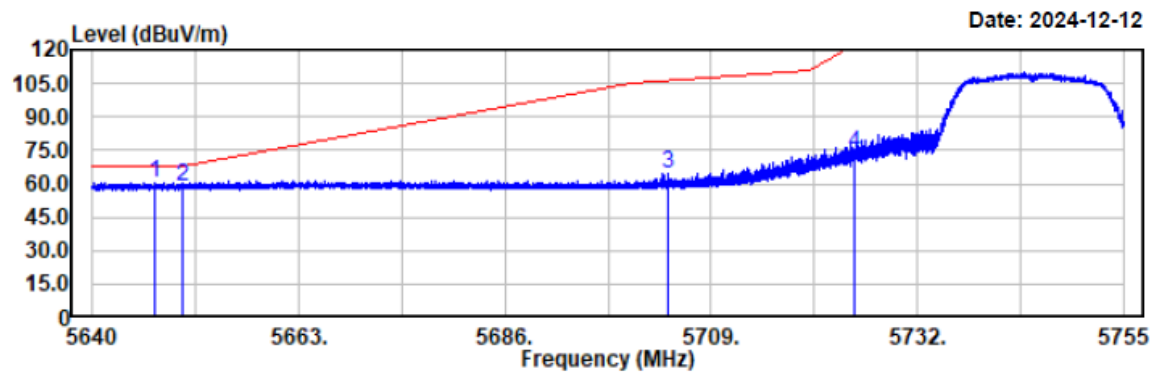


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5647.03	46.92	13.28	60.20	68.20	8.00	vertical	Peak
5649.99	45.19	13.28	58.47	68.20	9.73	vertical	Peak
5704.26	51.28	13.43	64.71	106.39	41.68	vertical	Peak
5725.00	60.32	13.45	73.77	122.20	48.43	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5825
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

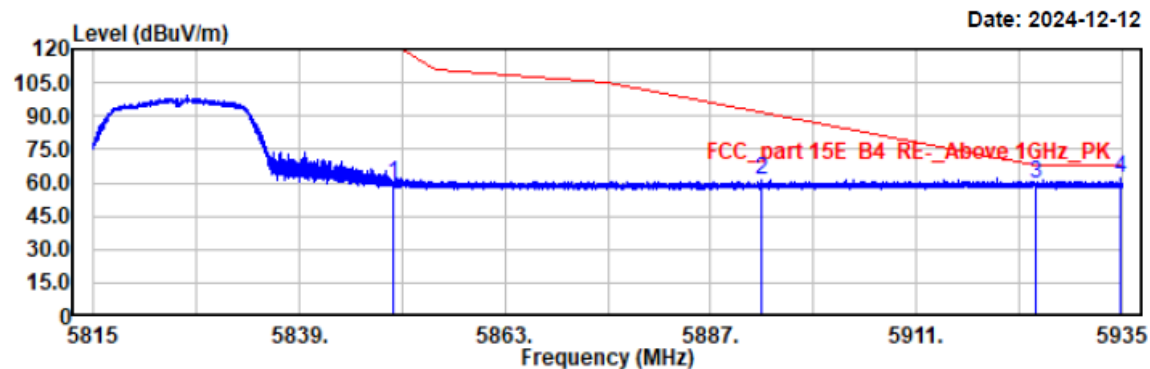

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5850.02	46.32	13.65	59.97	122.16	62.19	horizontal	Peak
5892.93	47.67	13.68	61.35	91.93	30.58	horizontal	Peak
5925.00	45.68	13.75	59.43	68.20	8.77	horizontal	Peak
5934.81	48.44	13.79	62.23	68.20	5.97	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a 5825


EUT Model: NLS-NQuire1500

Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

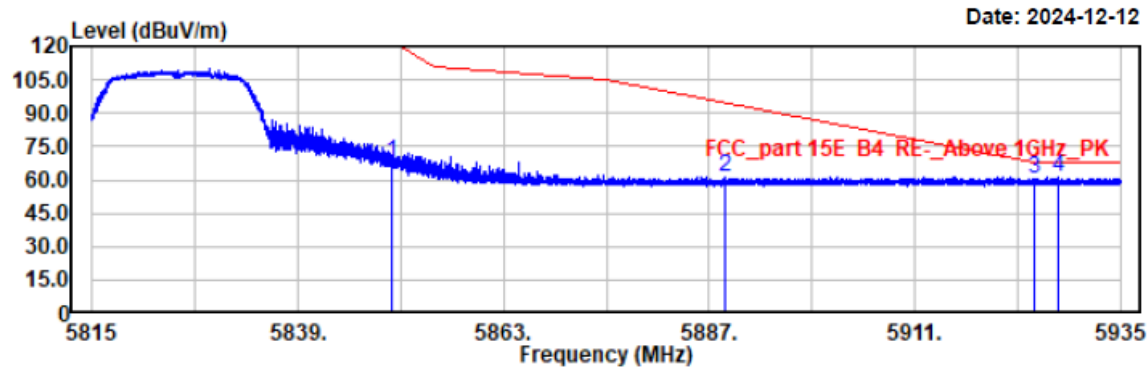


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5850.02	54.23	13.65	67.88	122.16	54.28	vertical	Peak
5888.92	47.93	13.68	61.61	94.90	33.29	vertical	Peak
5925.00	46.31	13.75	60.06	68.20	8.14	vertical	Peak
5927.66	47.54	13.77	61.31	68.20	6.89	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5745
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

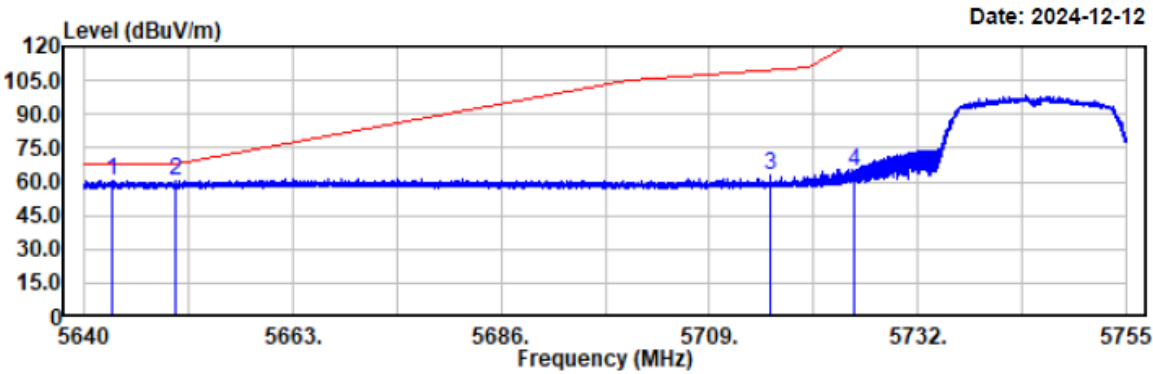


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5643.08	46.80	13.27	60.07	68.20	8.13	horizontal	Peak
5649.99	46.83	13.28	60.11	68.20	8.09	horizontal	Peak
5715.76	49.86	13.44	63.30	109.61	46.31	horizontal	Peak
5725.00	51.26	13.45	64.71	122.20	57.49	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5745
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

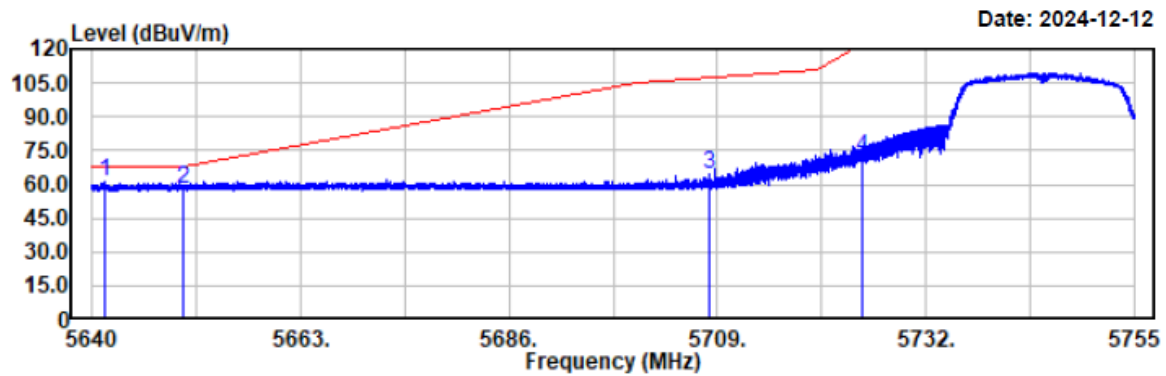


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5641.35	47.70	13.27	60.97	68.20	7.23	vertical	Peak
5649.99	44.61	13.28	57.89	68.20	10.31	vertical	Peak
5708.11	51.48	13.43	64.91	107.47	42.56	vertical	Peak
5725.00	58.92	13.45	72.37	122.20	49.83	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5825
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

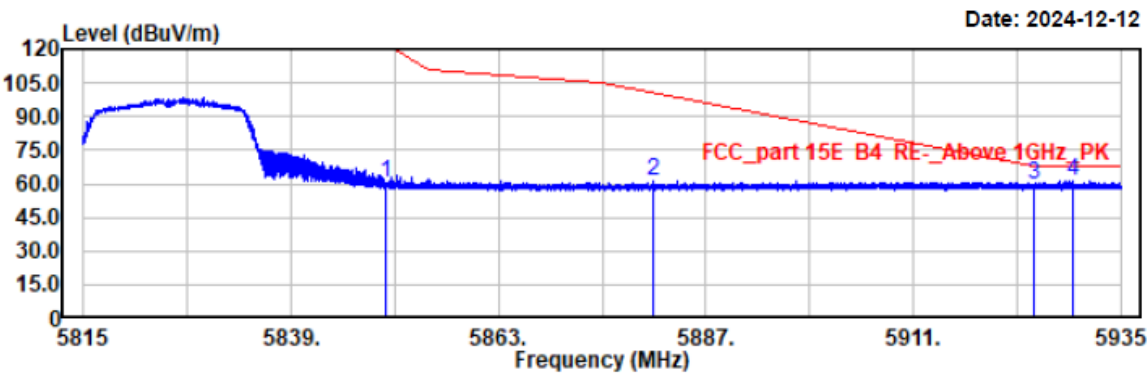


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5850.02	46.68	13.65	60.33	122.16	61.83	horizontal	Peak
5880.86	47.65	13.67	61.32	100.87	39.55	horizontal	Peak
5925.00	45.57	13.75	59.32	68.20	8.88	horizontal	Peak
5929.47	47.73	13.77	61.50	68.20	6.70	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5825
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

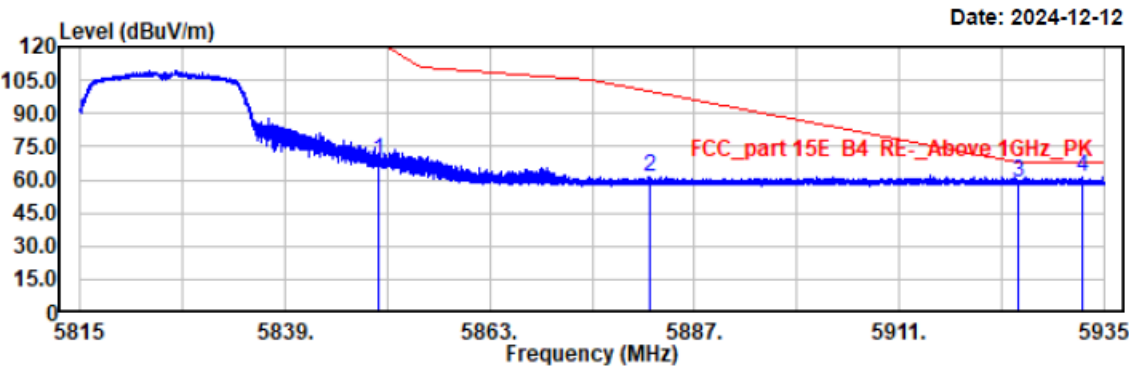


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5850.02	54.74	13.65	68.39	122.16	53.77	vertical	Peak
5881.72	47.89	13.67	61.56	100.23	38.67	vertical	Peak
5925.00	44.75	13.75	58.50	68.20	9.70	vertical	Peak
5932.44	47.53	13.77	61.30	68.20	6.90	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5755
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

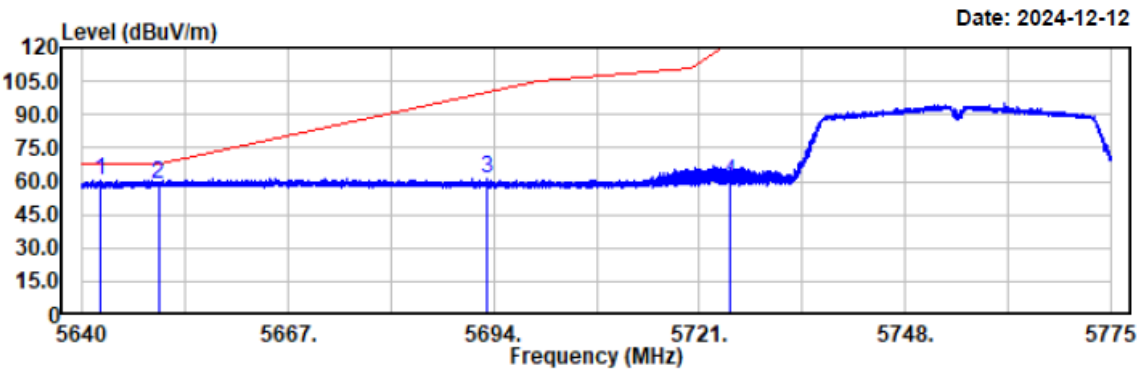


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5642.31	47.46	13.27	60.73	68.20	7.47	horizontal	Peak
5649.99	45.09	13.28	58.37	68.20	9.83	horizontal	Peak
5693.16	48.09	13.41	61.50	100.14	38.64	horizontal	Peak
5725.00	46.45	13.45	59.90	122.20	62.30	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5755
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

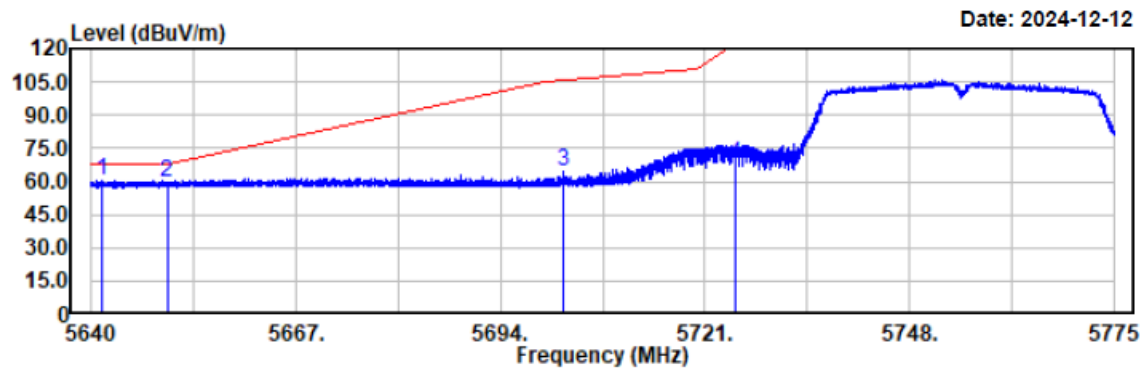


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5641.34	47.04	13.27	60.31	68.20	7.89	vertical	Peak
5649.99	46.03	13.28	59.31	68.20	8.89	vertical	Peak
5702.30	50.90	13.43	64.33	105.84	41.51	vertical	Peak
5725.00	54.03	13.45	67.48	122.20	54.72	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5795
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

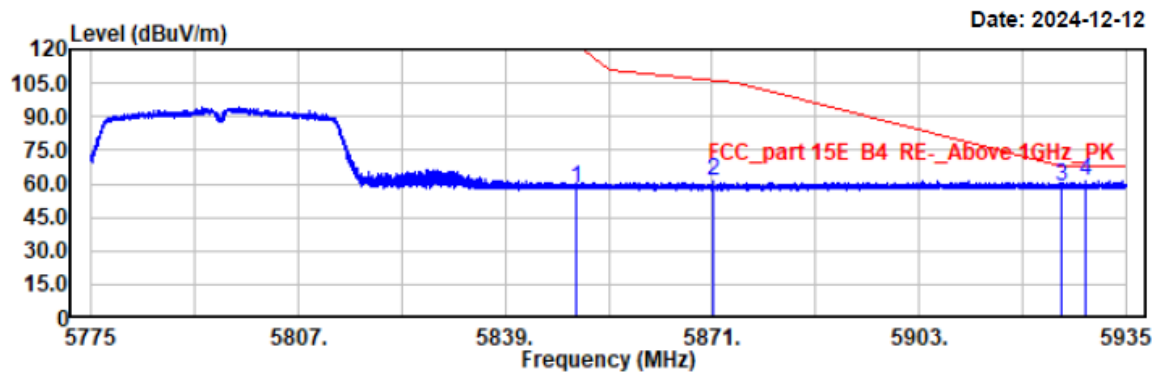


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5850.01	44.56	13.65	58.21	122.18	63.97	horizontal	Peak
5871.21	47.75	13.67	61.42	106.26	44.84	horizontal	Peak
5925.00	44.70	13.75	58.45	68.20	9.75	horizontal	Peak
5928.79	47.46	13.77	61.23	68.20	6.97	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5795
EUT Model: NLS-NQuire1500
Test distance: 3m

Temp/Humi/ATM: 23.5°C/49%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

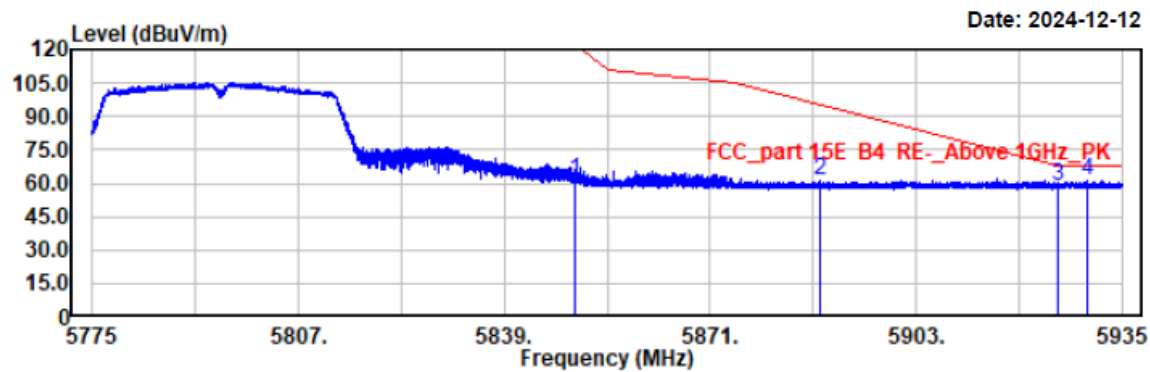


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5850.01	47.41	13.65	61.06	122.18	61.12	vertical	Peak
5887.99	47.89	13.68	61.57	95.59	34.02	vertical	Peak
5925.00	45.00	13.75	58.75	68.20	9.45	vertical	Peak
5929.53	47.16	13.77	60.93	68.20	7.27	vertical	Peak

EUT Model: NLS-NQuire500

Project No.: 2407V20721E-RF
Test Mode: 11a 5180
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

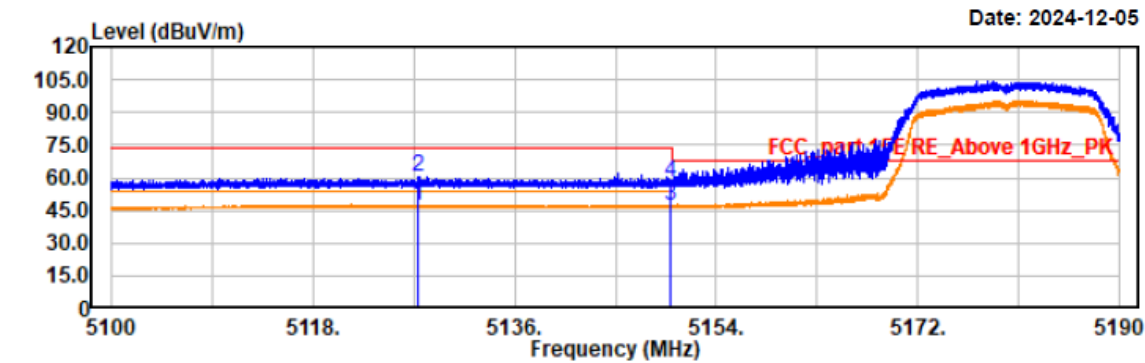


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5127.43	34.65	12.27	46.92	54.00	7.08	horizontal	Average
5127.43	48.34	12.27	60.61	74.00	13.39	horizontal	Peak
5149.99	35.21	12.32	47.53	54.00	6.47	horizontal	Average
5149.99	45.71	12.32	58.03	74.00	15.97	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5180
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

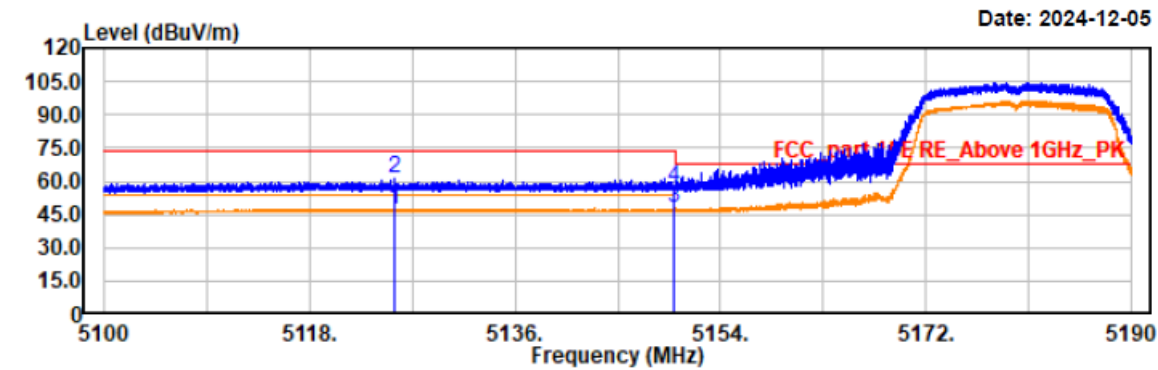


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5125.38	34.82	12.27	47.09	54.00	6.91	vertical	Average
5125.38	48.58	12.27	60.85	74.00	13.15	vertical	Peak
5149.99	35.43	12.32	47.75	54.00	6.25	vertical	Average
5149.99	44.67	12.32	56.99	74.00	17.01	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5240
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

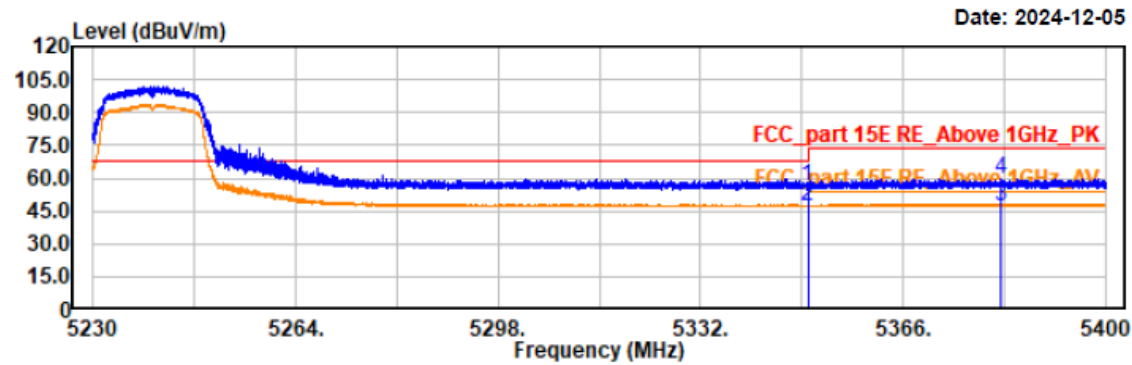

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	43.83	12.75	56.58	74.00	17.42	horizontal	Peak
5350.00	34.46	12.75	47.21	54.00	6.79	horizontal	Average
5382.27	34.64	12.81	47.45	54.00	6.55	horizontal	Average
5382.27	46.47	12.81	59.28	74.00	14.72	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5240
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

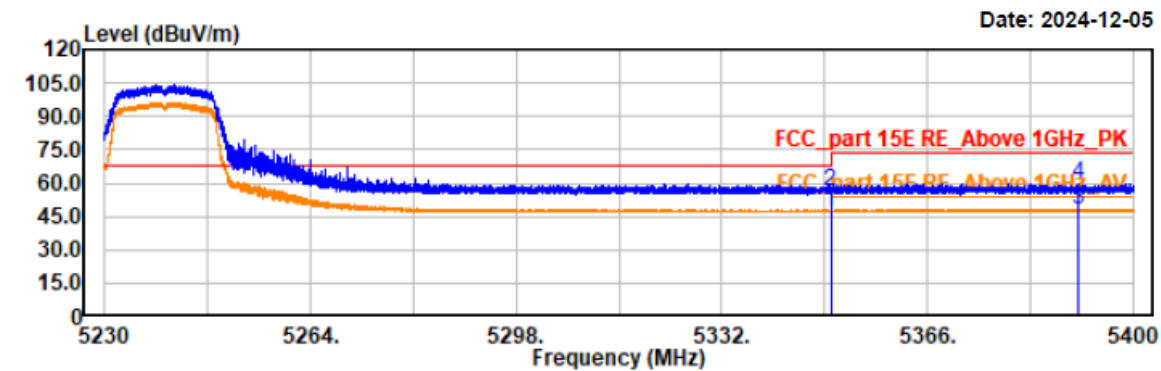

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	34.65	12.75	47.40	54.00	6.60	vertical	Average
5350.00	43.71	12.75	56.46	74.00	17.54	vertical	Peak
5390.97	34.85	12.83	47.68	54.00	6.32	vertical	Average
5390.97	46.95	12.83	59.78	74.00	14.22	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20 5180


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

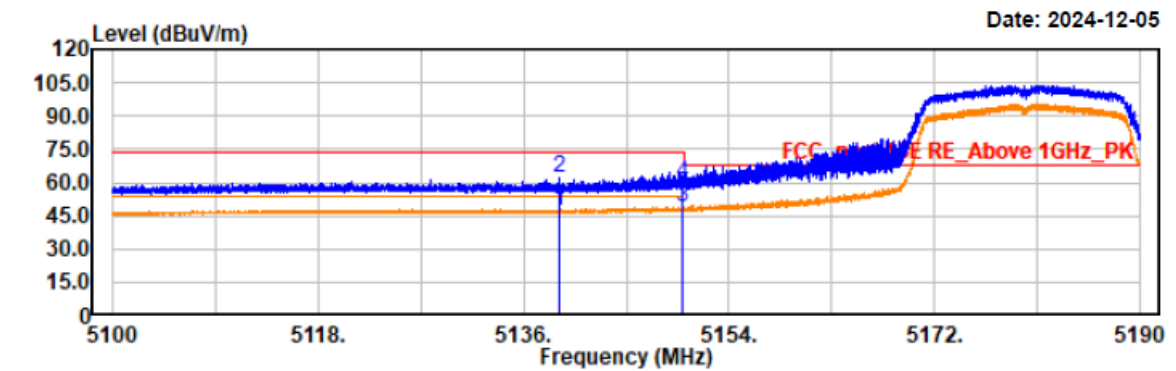

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5139.07	34.55	12.31	46.86	54.00	7.14	horizontal	Average
5139.07	49.43	12.31	61.74	74.00	12.26	horizontal	Peak
5149.99	36.32	12.32	48.64	54.00	5.36	horizontal	Average
5149.99	47.17	12.32	59.49	74.00	14.51	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5180
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

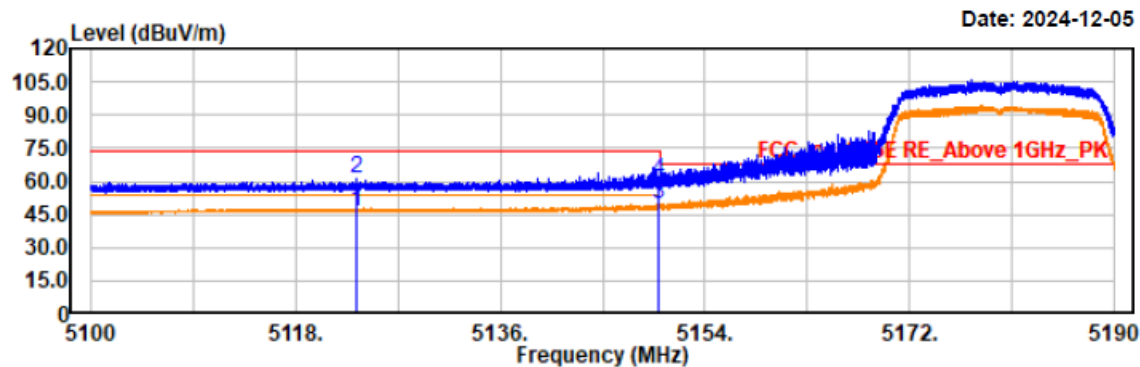

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5123.33	34.30	12.27	46.57	54.00	7.43	vertical	Average
5123.33	48.74	12.27	61.01	74.00	12.99	vertical	Peak
5149.99	37.49	12.32	49.81	54.00	4.19	vertical	Average
5149.99	47.70	12.32	60.02	74.00	13.98	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20 5240


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

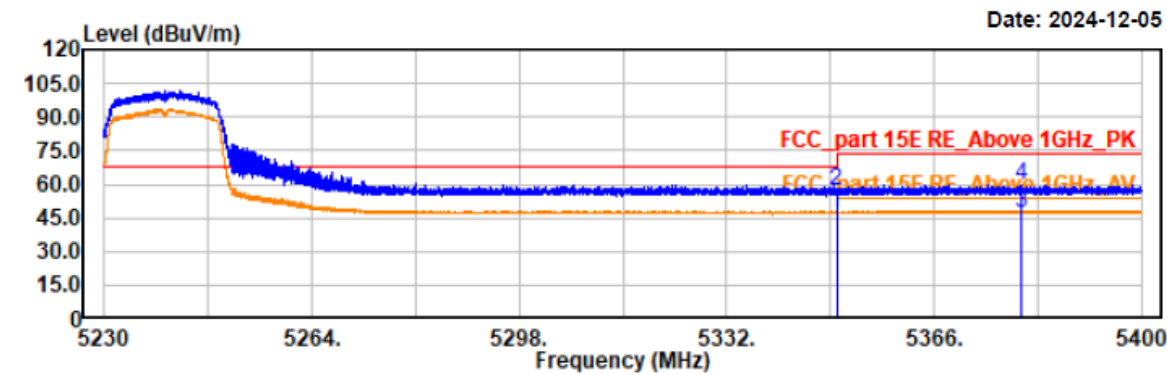

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	34.62	12.75	47.37	54.00	6.63	horizontal	Average
5350.00	44.34	12.75	57.09	74.00	16.91	horizontal	Peak
5380.26	34.61	12.81	47.42	54.00	6.58	horizontal	Average
5380.26	47.11	12.81	59.92	74.00	14.08	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5240
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

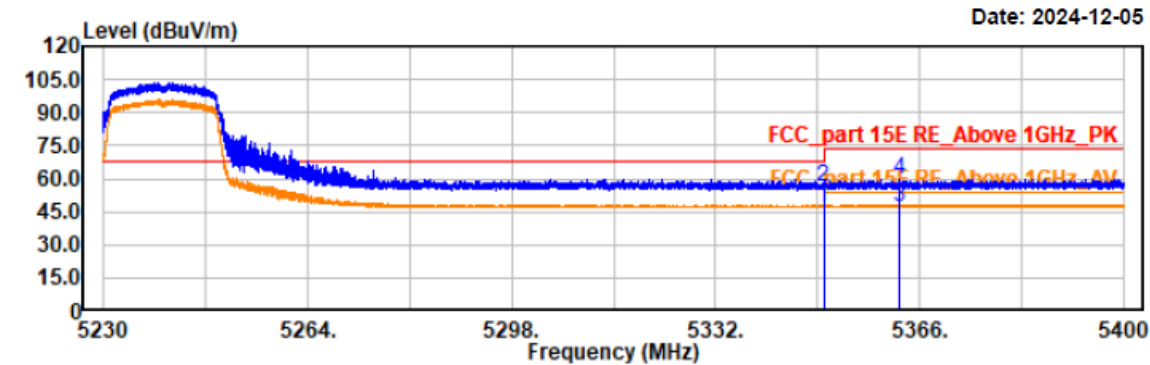


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	34.79	12.75	47.54	54.00	6.46	vertical	Average
5350.00	43.43	12.75	56.18	74.00	17.82	vertical	Peak
5362.60	34.57	12.77	47.34	54.00	6.66	vertical	Average
5362.60	47.23	12.77	60.00	74.00	14.00	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5190
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

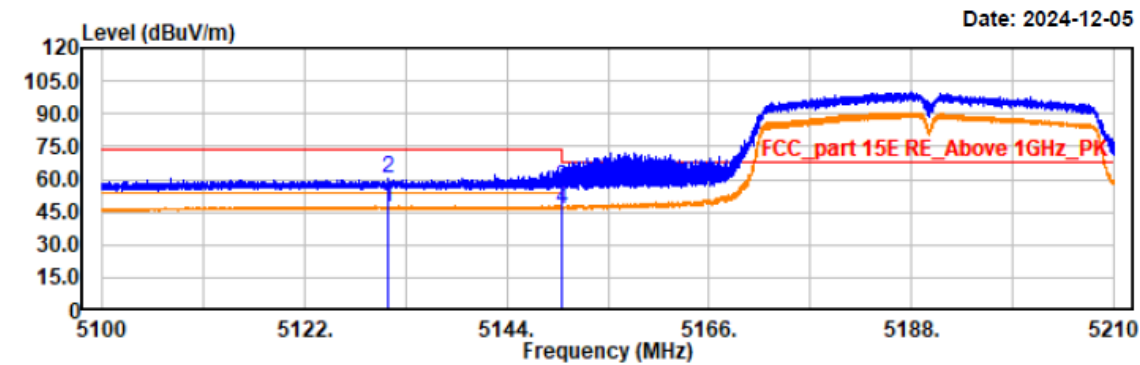


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5131.10	35.23	12.28	47.51	54.00	6.49	horizontal	Average
5131.10	47.74	12.28	60.02	74.00	13.98	horizontal	Peak
5149.99	44.29	12.32	56.61	74.00	17.39	horizontal	Peak
5150.00	34.31	12.32	46.63	54.00	7.37	horizontal	Average

Project No.: 2407V20721E-RF
Test Mode: 11n40 5190
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

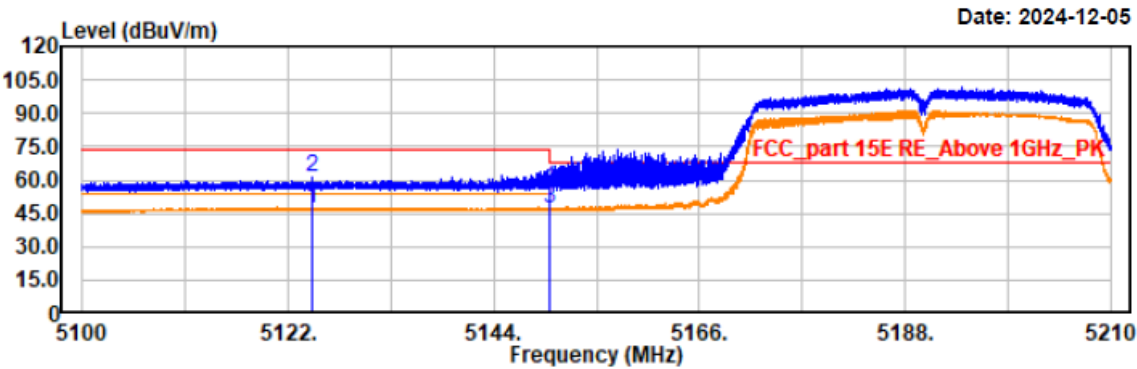

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5124.62	34.54	12.27	46.81	54.00	7.19	vertical	Average
5124.62	49.28	12.27	61.55	74.00	12.45	vertical	Peak
5150.00	34.64	12.32	46.96	54.00	7.04	vertical	Average
5150.00	44.10	12.32	56.42	74.00	17.58	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40 5230


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

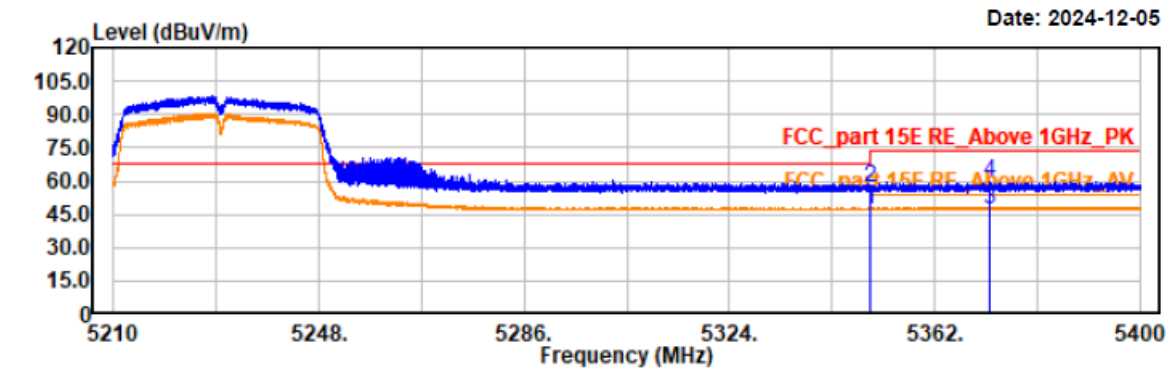

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.01	34.64	12.75	47.39	54.00	6.61	horizontal	Average
5350.01	44.66	12.75	57.41	74.00	16.59	horizontal	Peak
5372.34	34.76	12.79	47.55	54.00	6.45	horizontal	Average
5372.34	47.20	12.79	59.99	74.00	14.01	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5230
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

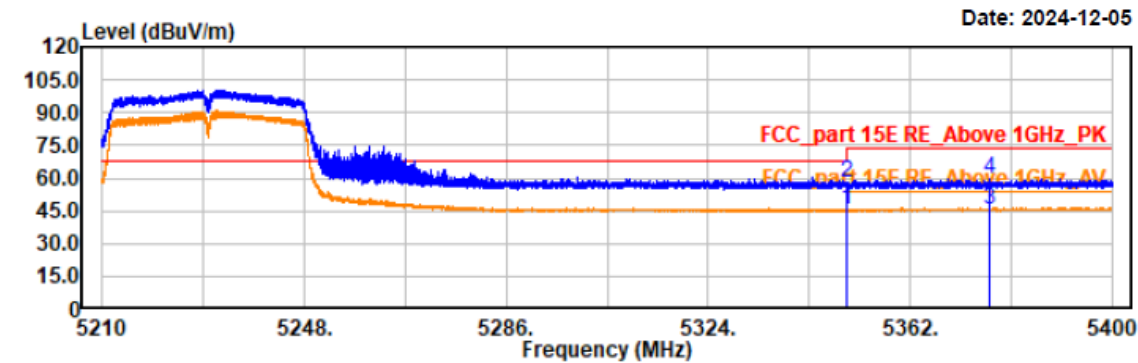


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.01	34.80	12.75	47.55	54.00	6.45	vertical	Average
5350.01	44.79	12.75	57.54	74.00	16.46	vertical	Peak
5377.03	34.58	12.80	47.38	54.00	6.62	vertical	Average
5377.03	46.46	12.80	59.26	74.00	14.74	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80 5210
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

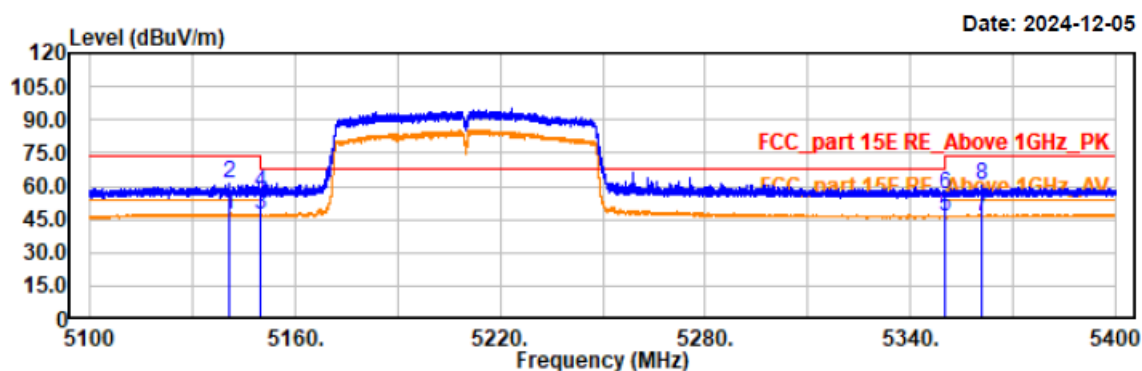

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5140.83	34.76	12.31	47.07	54.00	6.93	horizontal	Average
5140.83	48.95	12.31	61.26	74.00	12.74	horizontal	Peak
5149.98	34.61	12.32	46.93	54.00	7.07	horizontal	Average
5149.98	45.05	12.32	57.37	74.00	16.63	horizontal	Peak
5350.00	33.29	12.75	46.04	54.00	7.96	horizontal	Average
5350.00	43.81	12.75	56.56	74.00	17.44	horizontal	Peak
5360.76	33.51	12.76	46.27	54.00	7.73	horizontal	Average
5360.76	47.67	12.76	60.43	74.00	13.57	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11ac80 5210


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

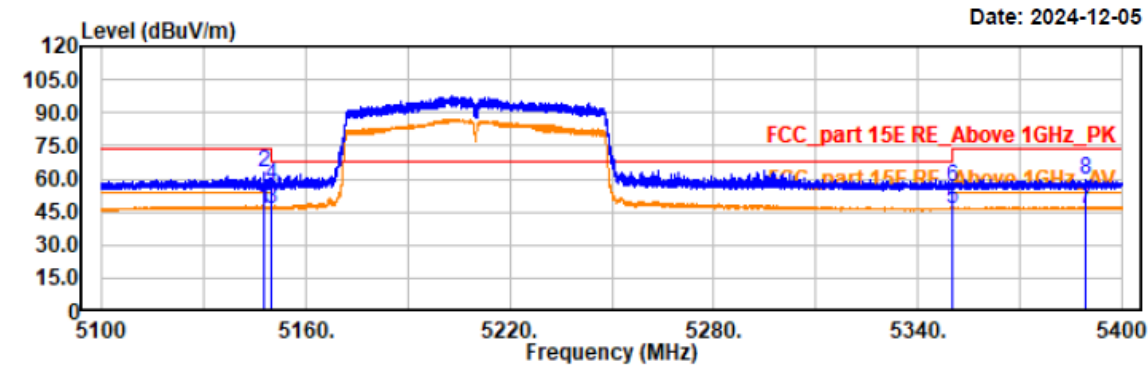

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5147.58	34.12	12.32	46.44	54.00	7.56	vertical	Average
5147.58	50.37	12.32	62.69	74.00	11.31	vertical	Peak
5149.99	34.35	12.32	46.67	54.00	7.33	vertical	Average
5149.99	44.96	12.32	57.28	74.00	16.72	vertical	Peak
5350.01	33.53	12.75	46.28	54.00	7.72	vertical	Average
5350.01	43.63	12.75	56.38	74.00	17.62	vertical	Peak
5389.17	33.89	12.83	46.72	54.00	7.28	vertical	Average
5389.17	46.76	12.83	59.59	74.00	14.41	vertical	Peak

B2

Project No.: 2407V20721E-RF

Test Mode: 11a 5260


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

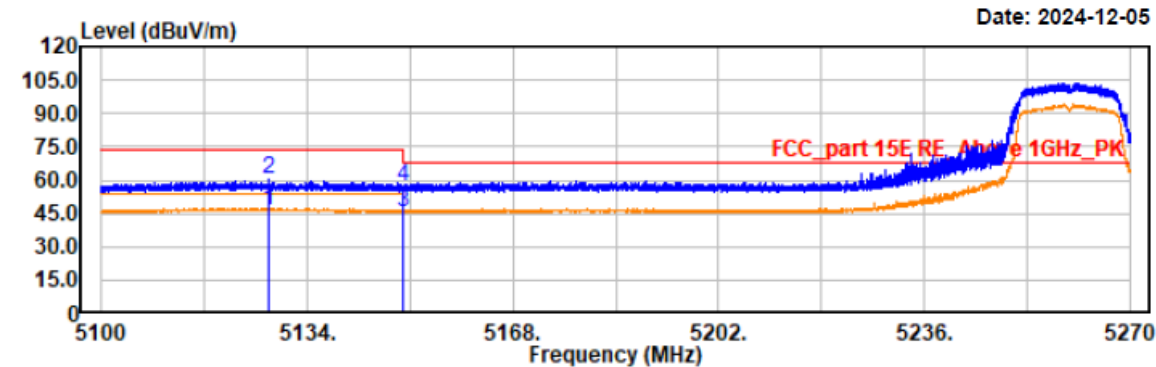


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5127.74	34.24	12.28	46.52	54.00	7.48	horizontal	Average
5127.74	47.85	12.28	60.13	74.00	13.87	horizontal	Peak
5149.99	33.58	12.32	45.90	54.00	8.10	horizontal	Average
5150.00	44.39	12.32	56.71	74.00	17.29	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5260
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

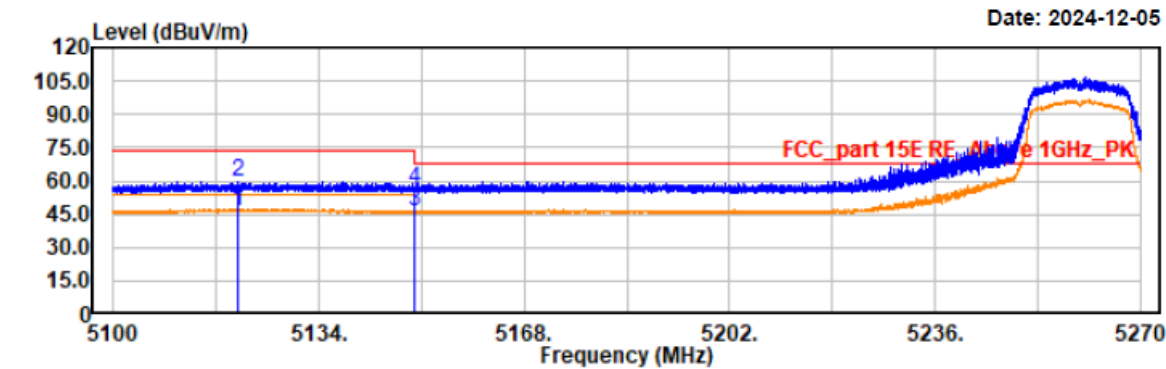


Trace: 1
Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5120.69	34.09	12.26	46.35	54.00	7.65	vertical	Average
5120.69	47.21	12.26	59.47	74.00	14.53	vertical	Peak
5149.99	33.92	12.32	46.24	54.00	7.76	vertical	Average
5150.00	43.77	12.32	56.09	74.00	17.91	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a20 5320
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

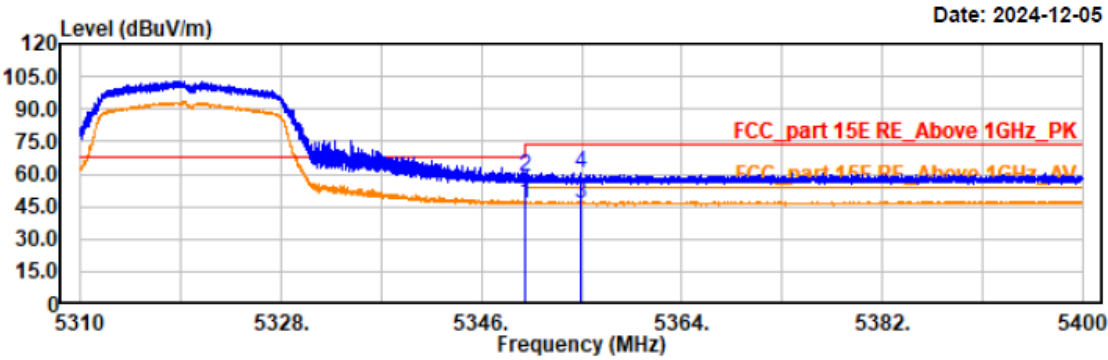

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	33.85	12.75	46.60	54.00	7.40	horizontal	Average
5350.01	46.01	12.75	58.76	74.00	15.24	horizontal	Peak
5354.98	33.90	12.75	46.65	54.00	7.35	horizontal	Average
5354.98	47.73	12.75	60.48	74.00	13.52	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a20 5320


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

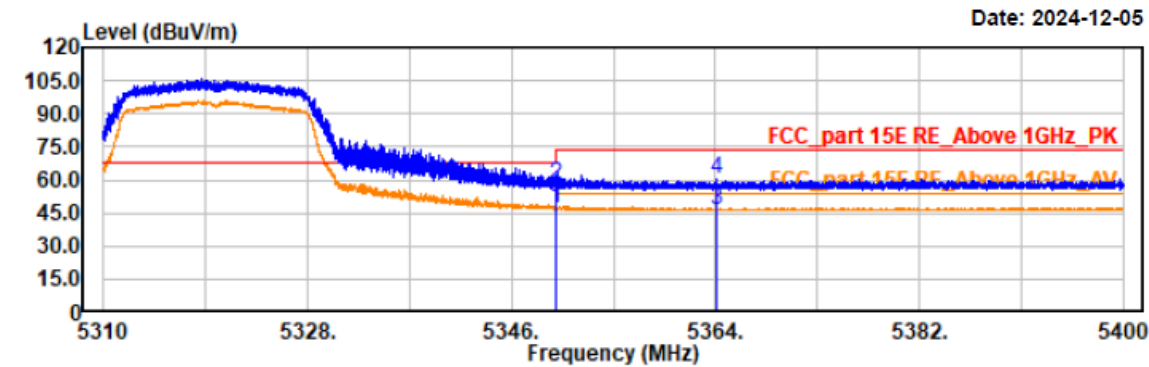


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	34.17	12.75	46.92	54.00	7.08	vertical	Average
5350.01	45.58	12.75	58.33	74.00	15.67	vertical	Peak
5364.08	33.88	12.77	46.65	54.00	7.35	vertical	Average
5364.08	47.36	12.77	60.13	74.00	13.87	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5260
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

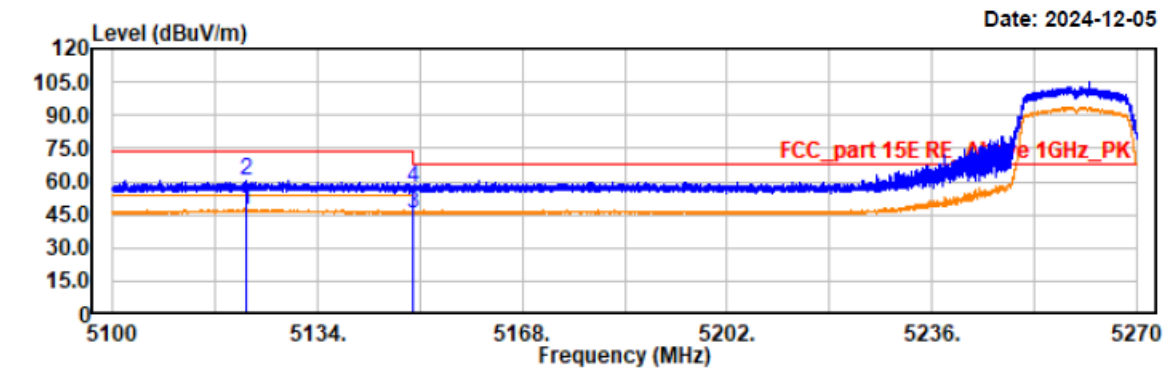


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5122.12	34.74	12.26	47.00	54.00	7.00	horizontal	Average
5122.12	48.55	12.26	60.81	74.00	13.19	horizontal	Peak
5149.99	33.46	12.32	45.78	54.00	8.22	horizontal	Average
5150.00	44.63	12.32	56.95	74.00	17.05	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5260
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

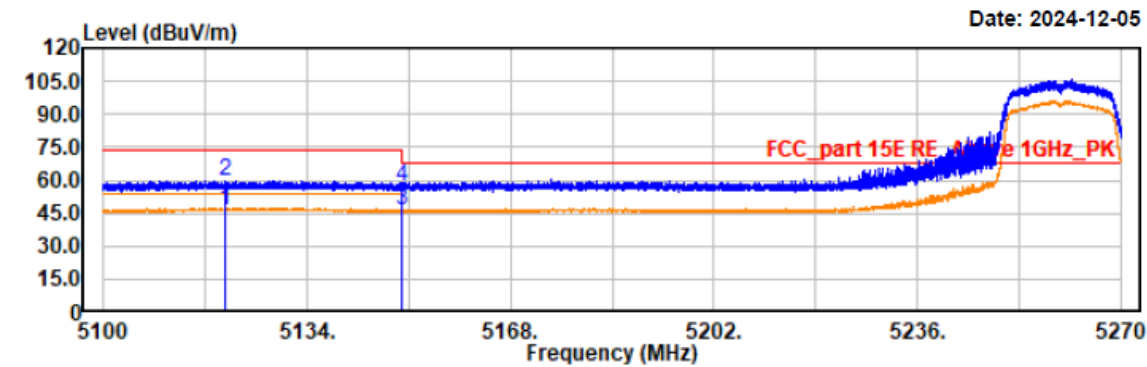


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5120.23	34.42	12.26	46.68	54.00	7.32	vertical	Average
5120.23	47.50	12.26	59.76	74.00	14.24	vertical	Peak
5150.00	33.80	12.32	46.12	54.00	7.88	vertical	Average
5150.00	44.47	12.32	56.79	74.00	17.21	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5320
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

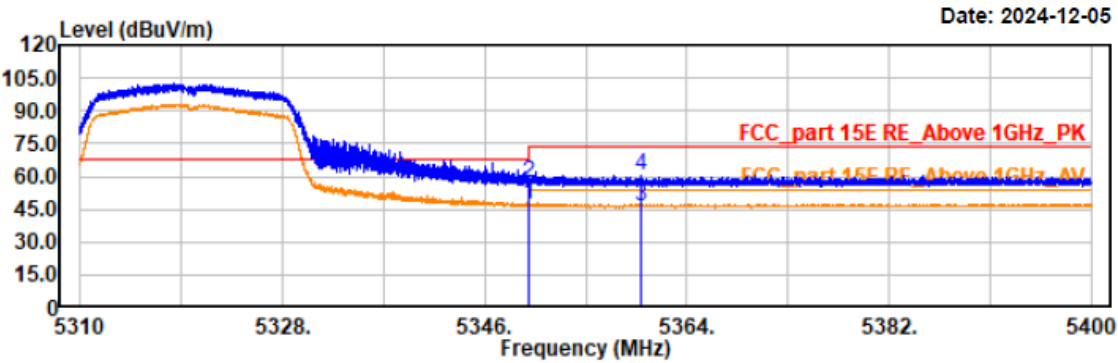

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	34.33	12.75	47.08	54.00	6.92	horizontal	Average
5350.01	44.46	12.75	57.21	74.00	16.79	horizontal	Peak
5359.99	33.35	12.76	46.11	54.00	7.89	horizontal	Average
5359.99	47.82	12.76	60.58	74.00	13.42	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n20 5320


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa

Tested by: Wlif Wu


Power Source: AC120V/60Hz

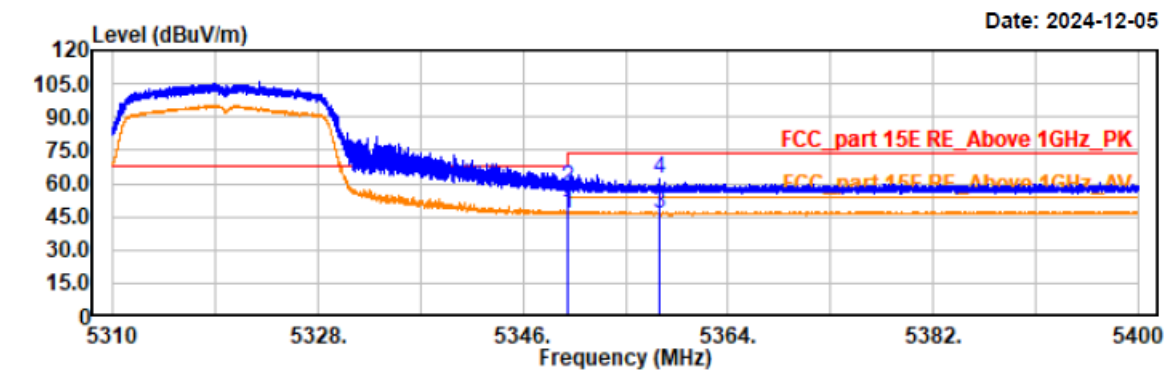

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	33.55	12.75	46.30	54.00	7.70	vertical	Average
5350.01	44.78	12.75	57.53	74.00	16.47	vertical	Peak
5357.92	33.50	12.76	46.26	54.00	7.74	vertical	Average
5357.92	49.45	12.76	62.21	74.00	11.79	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5270
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

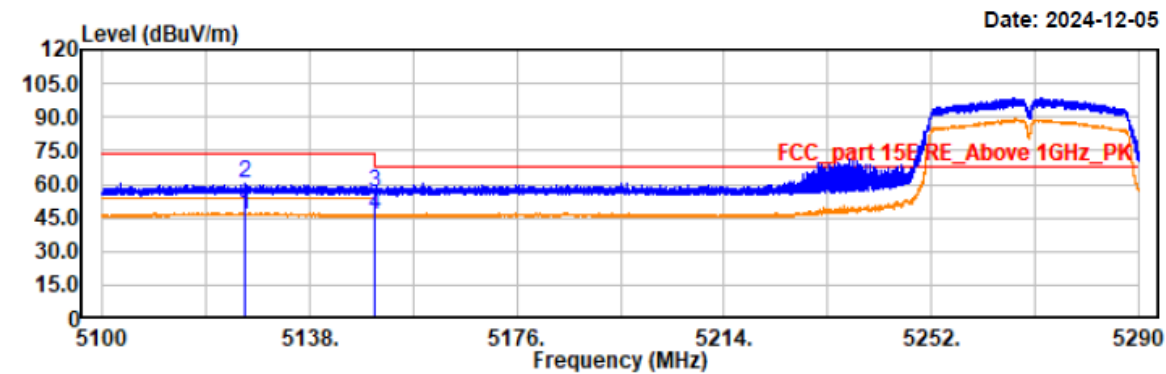


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5126.01	34.09	12.27	46.36	54.00	7.64	horizontal	Average
5126.01	48.26	12.27	60.53	74.00	13.47	horizontal	Peak
5149.99	43.90	12.32	56.22	74.00	17.78	horizontal	Peak
5149.99	33.72	12.32	46.04	54.00	7.96	horizontal	Average

Project No.: 2407V20721E-RF
Test Mode: 11n40 5270
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

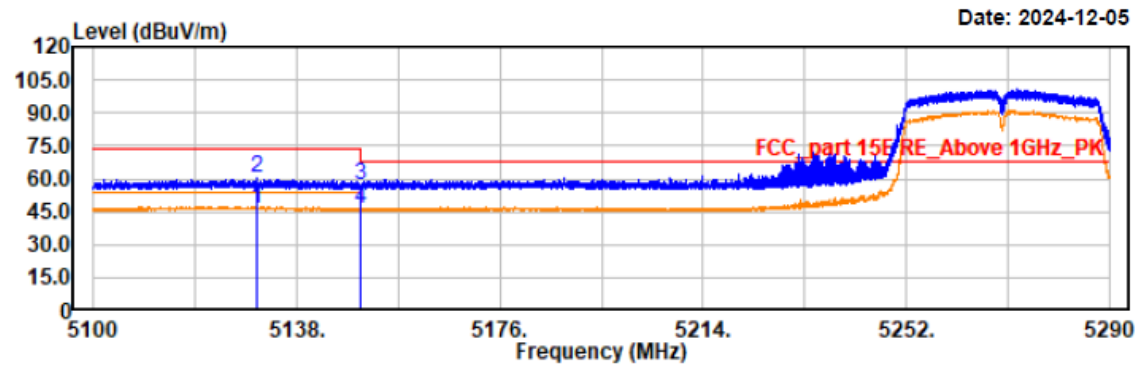

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5130.69	34.20	12.28	46.48	54.00	7.52	vertical	Average
5130.69	48.04	12.28	60.32	74.00	13.68	vertical	Peak
5149.99	44.38	12.32	56.70	74.00	17.30	vertical	Peak
5149.99	33.73	12.32	46.05	54.00	7.95	vertical	Average

Project No.: 2407V20721E-RF

Test Mode: 11n40 5310


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

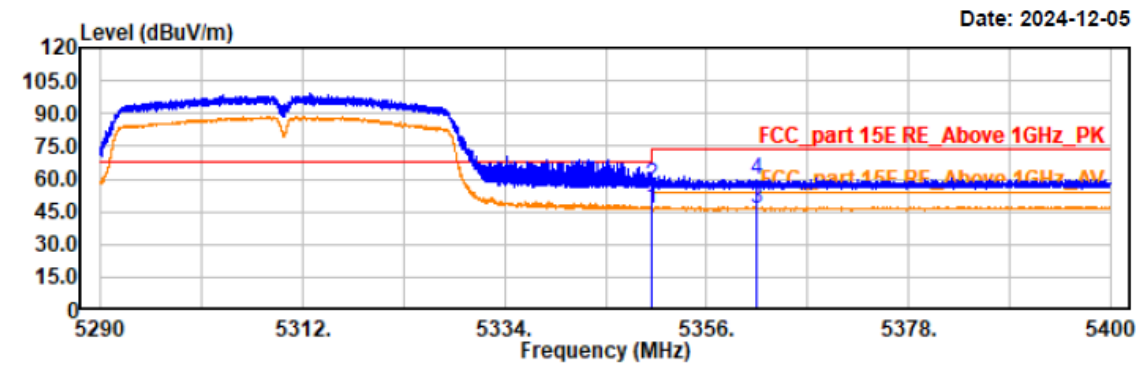


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.01	33.63	12.75	46.38	54.00	7.62	horizontal	Average
5350.01	44.15	12.75	56.90	74.00	17.10	horizontal	Peak
5361.41	34.00	12.76	46.76	54.00	7.24	horizontal	Average
5361.41	47.10	12.76	59.86	74.00	14.14	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5310
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

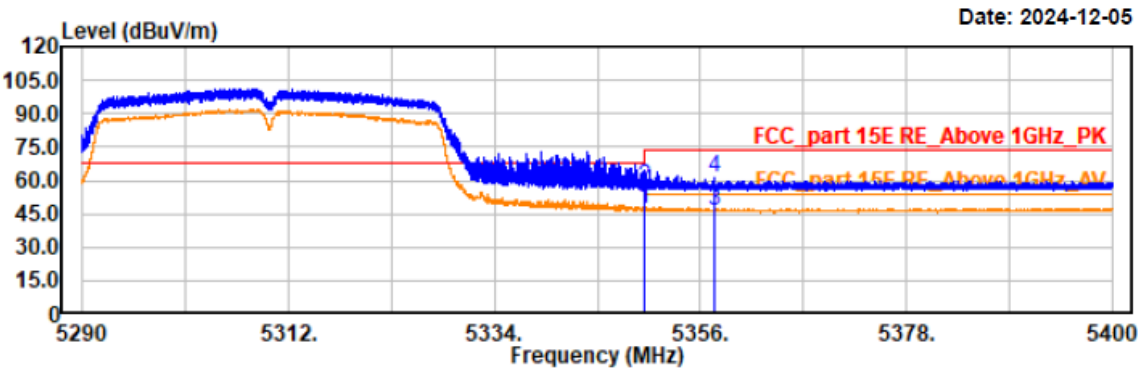


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5350.00	34.51	12.75	47.26	54.00	6.74	vertical	Average
5350.01	44.76	12.75	57.51	74.00	16.49	vertical	Peak
5357.44	33.94	12.75	46.69	54.00	7.31	vertical	Average
5357.44	48.80	12.75	61.55	74.00	12.45	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80 5290
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

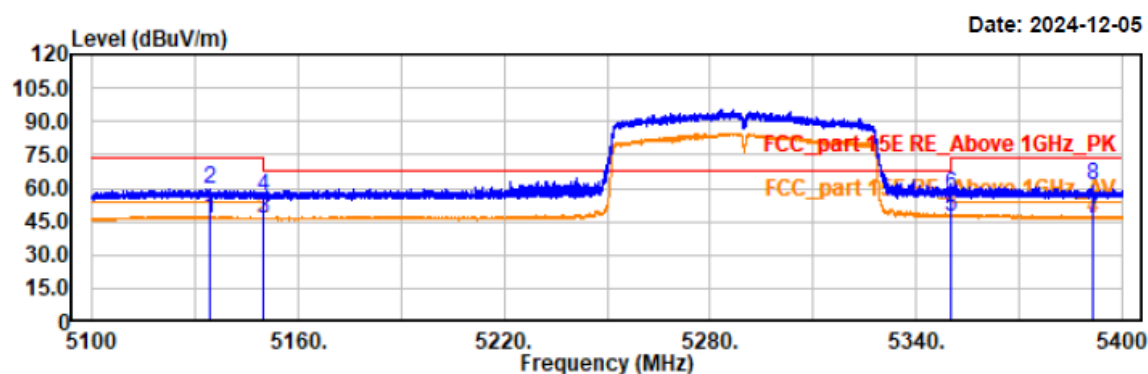

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5134.23	34.22	12.30	46.52	54.00	7.48	horizontal	Average
5134.23	47.14	12.30	59.44	74.00	14.56	horizontal	Peak
5149.99	34.14	12.32	46.46	54.00	7.54	horizontal	Average
5149.99	43.68	12.32	56.00	74.00	18.00	horizontal	Peak
5350.00	34.77	12.75	47.52	54.00	6.48	horizontal	Average
5350.00	43.96	12.75	56.71	74.00	17.29	horizontal	Peak
5391.51	33.72	12.83	46.55	54.00	7.45	horizontal	Average
5391.51	48.31	12.83	61.14	74.00	12.86	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11ac80 5290


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

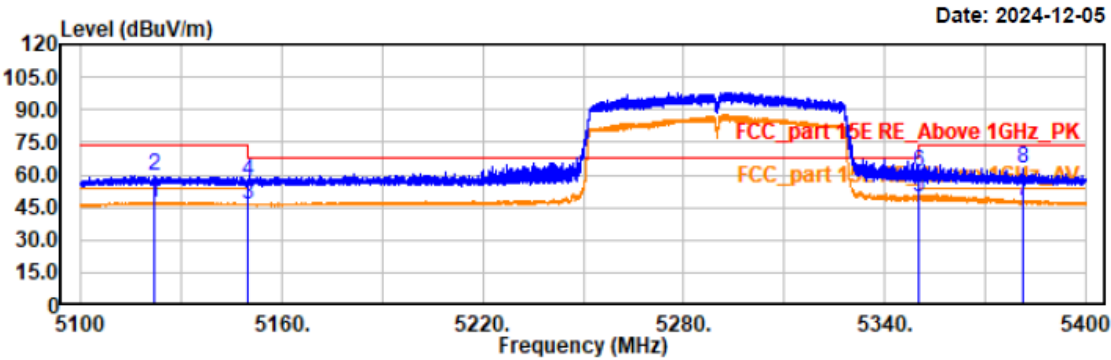

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5121.75	34.64	12.26	46.90	54.00	7.10	vertical	Average
5121.75	47.43	12.26	59.69	74.00	14.31	vertical	Peak
5149.98	33.71	12.32	46.03	54.00	7.97	vertical	Average
5149.98	44.97	12.32	57.29	74.00	16.71	vertical	Peak
5350.01	37.23	12.75	49.98	54.00	4.02	vertical	Average
5350.01	48.21	12.75	60.96	74.00	13.04	vertical	Peak
5381.46	34.88	12.81	47.69	54.00	6.31	vertical	Average
5381.46	49.79	12.81	62.60	74.00	11.40	vertical	Peak

B3

Project No.: 2407V20721E-RF

Test Mode: 11a 5500


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

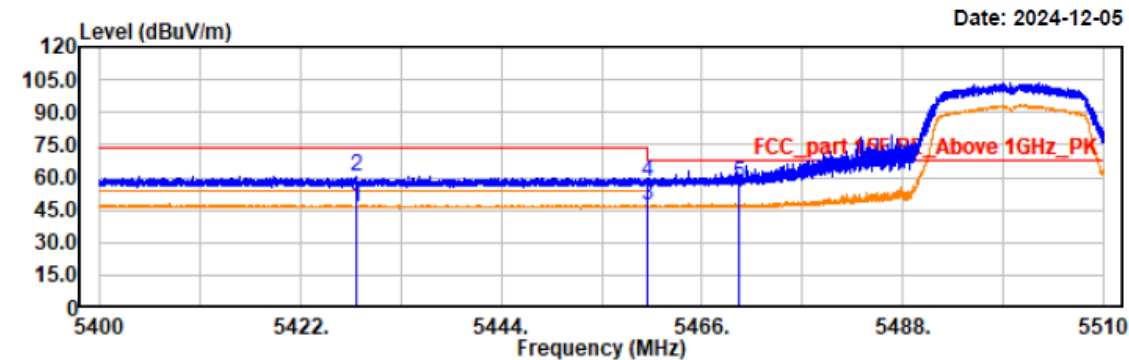

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5428.07	33.61	12.92	46.53	54.00	7.47	horizontal	Average
5428.07	47.69	12.92	60.61	74.00	13.39	horizontal	Peak
5459.99	33.85	12.96	46.81	54.00	7.19	horizontal	Average
5459.99	44.56	12.96	57.52	74.00	16.48	horizontal	Peak
5470.00	44.15	12.96	57.11	68.20	11.09	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5500
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

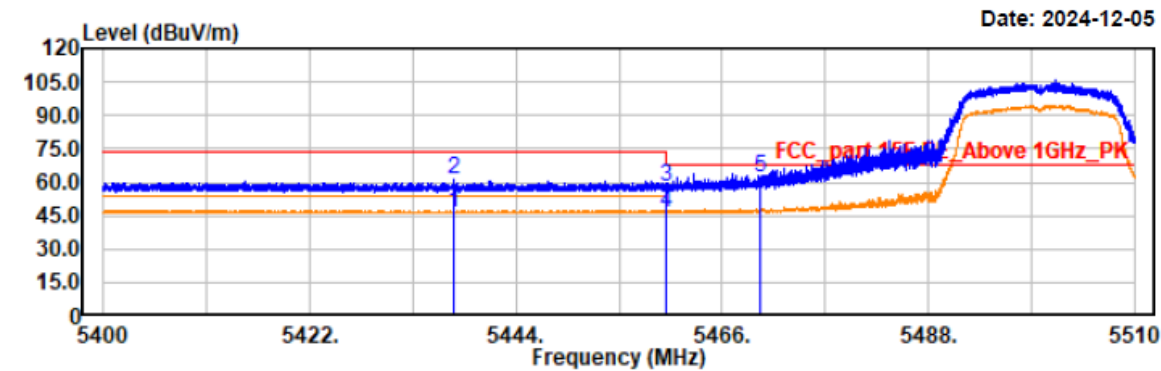


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5437.39	33.50	12.93	46.43	54.00	7.57	vertical	Average
5437.39	47.95	12.93	60.88	74.00	13.12	vertical	Peak
5459.99	45.18	12.96	58.14	74.00	15.86	vertical	Peak
5459.99	33.55	12.96	46.51	54.00	7.49	vertical	Average
5470.00	48.76	12.96	61.72	68.20	6.48	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5700
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

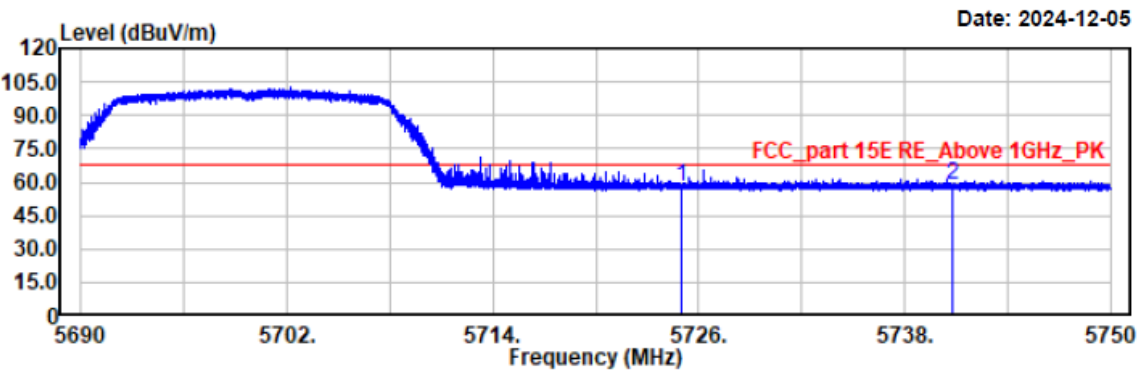


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	44.41	13.45	57.86	68.20	10.34	horizontal	Peak
5740.82	45.02	13.46	58.48	68.20	9.72	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5700
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

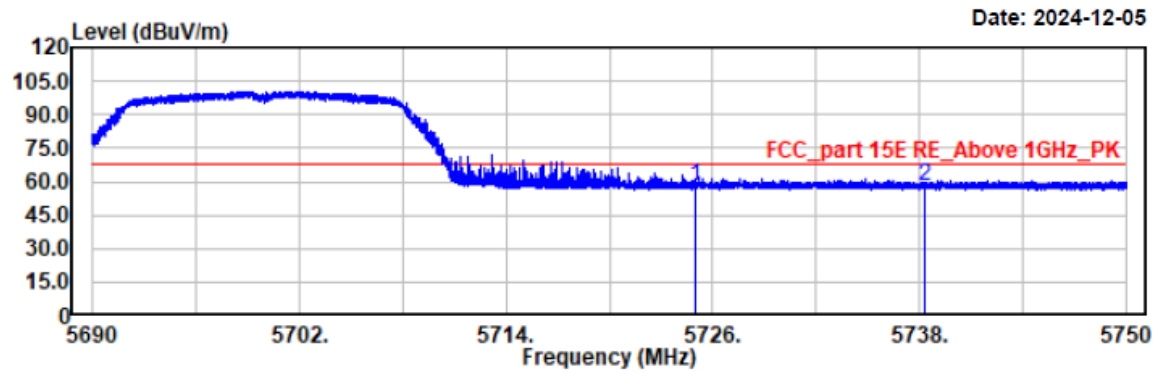


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	44.35	13.45	57.80	68.20	10.40	vertical	Peak
5738.28	44.60	13.46	58.06	68.20	10.14	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5500
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

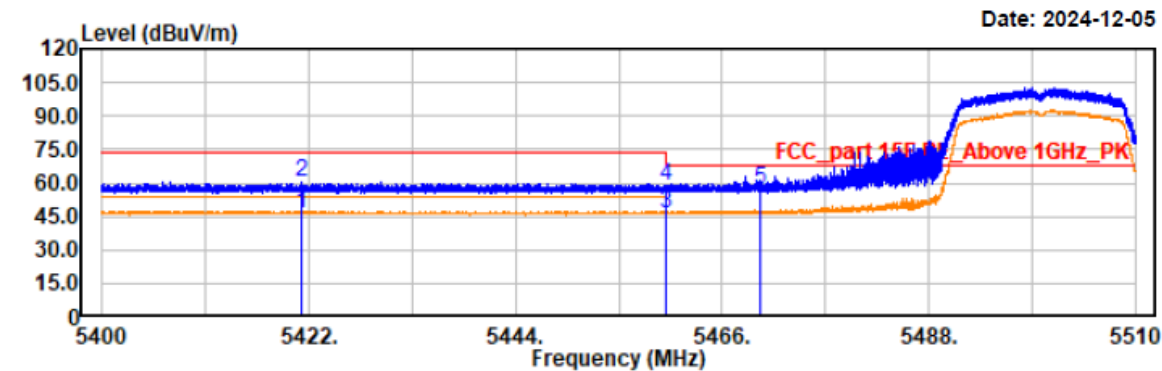


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5421.27	33.79	12.89	46.68	54.00	7.32	horizontal	Average
5421.27	47.86	12.89	60.75	74.00	13.25	horizontal	Peak
5459.99	33.57	12.96	46.53	54.00	7.47	horizontal	Average
5459.99	45.71	12.96	58.67	74.00	15.33	horizontal	Peak
5470.00	44.17	12.96	57.13	68.20	11.07	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5500
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

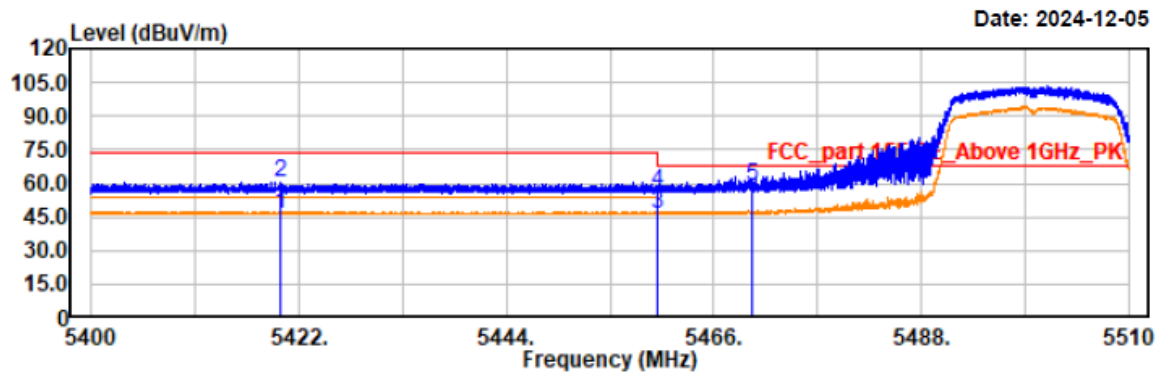


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5420.03	33.42	12.89	46.31	54.00	7.69	vertical	Average
5420.03	47.27	12.89	60.16	74.00	13.84	vertical	Peak
5459.99	33.33	12.96	46.29	54.00	7.71	vertical	Average
5459.99	43.62	12.96	56.58	74.00	17.42	vertical	Peak
5470.00	45.69	12.96	58.65	68.20	9.55	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5700
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

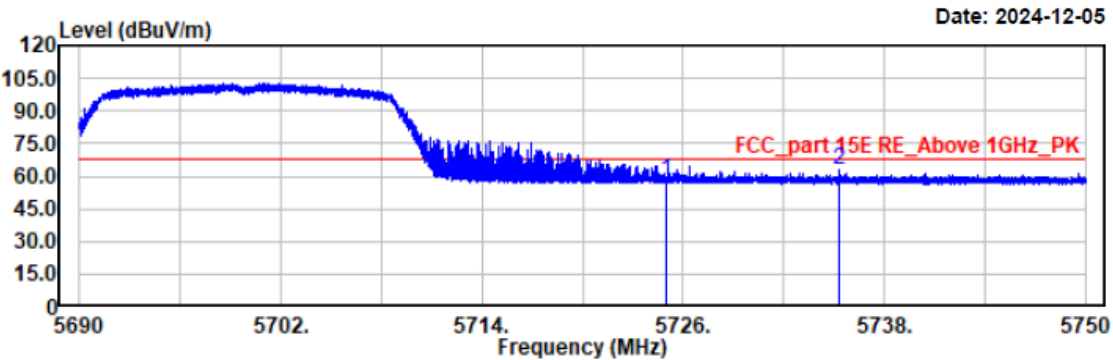


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	44.80	13.45	58.25	68.20	9.95	horizontal	Peak
5735.28	49.21	13.45	62.66	68.20	5.54	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5700
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

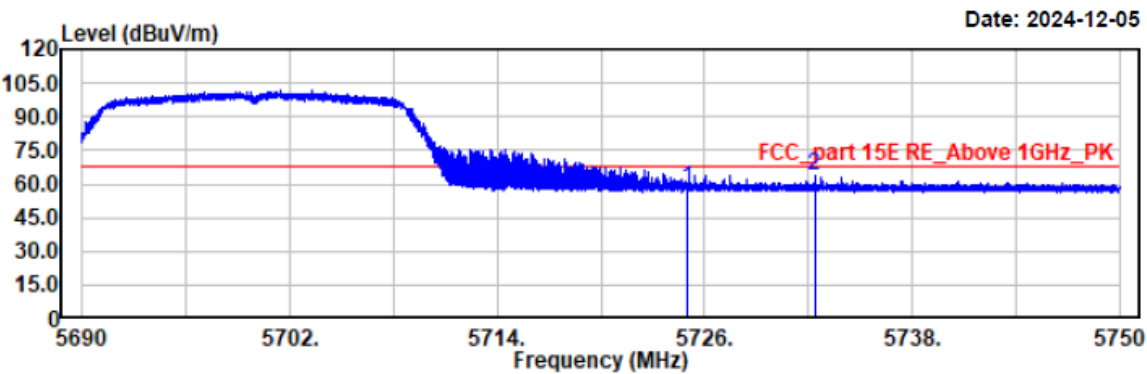

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	44.32	13.45	57.77	68.20	10.43	vertical	Peak
5732.35	50.27	13.45	63.72	68.20	4.48	vertical	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40 5510


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

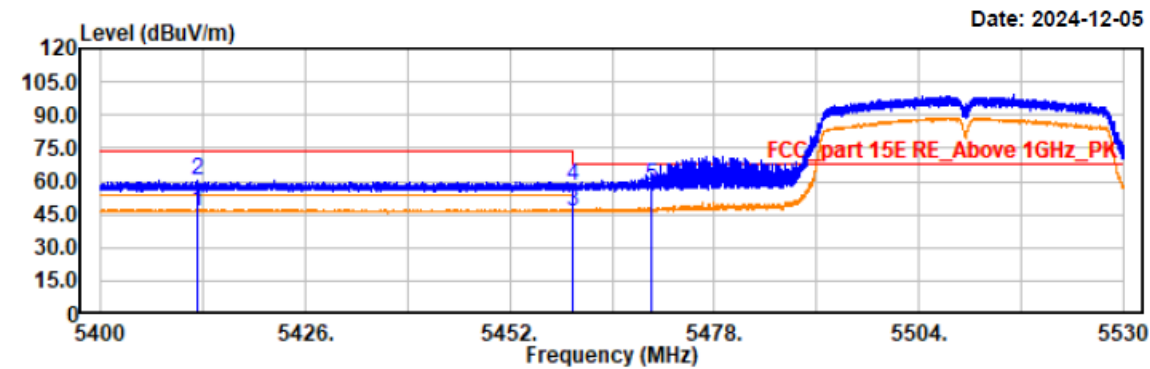

Trace: 1


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5412.30	33.64	12.87	46.51	54.00	7.49	horizontal	Average
5412.30	47.75	12.87	60.62	74.00	13.38	horizontal	Peak
5459.99	33.66	12.96	46.62	54.00	7.38	horizontal	Average
5460.00	44.71	12.96	57.67	74.00	16.33	horizontal	Peak
5470.00	44.84	12.96	57.80	68.20	10.40	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5510
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

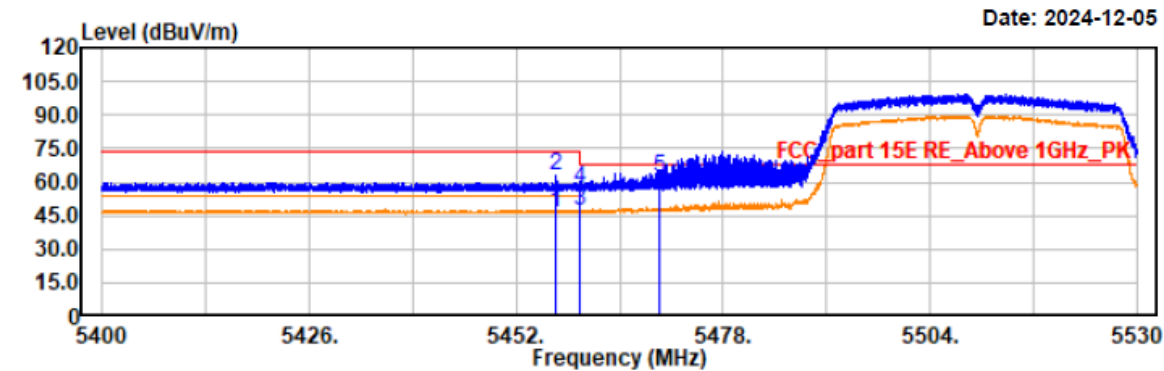


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5457.01	33.49	12.96	46.45	54.00	7.55	vertical	Average
5457.01	50.13	12.96	63.09	74.00	10.91	vertical	Peak
5459.99	33.95	12.96	46.91	54.00	7.09	vertical	Average
5460.00	43.74	12.96	56.70	74.00	17.30	vertical	Peak
5470.00	49.41	12.96	62.37	68.20	5.83	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n40 5670
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

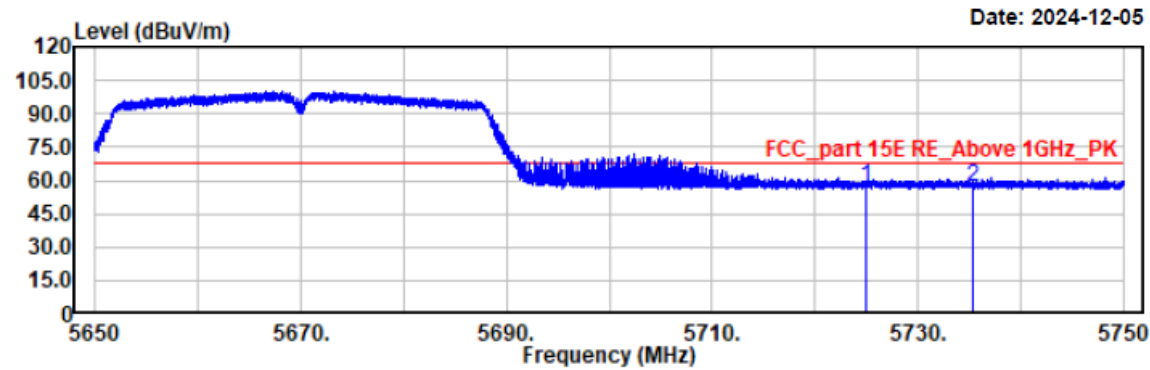

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	43.56	13.45	57.01	68.20	11.19	horizontal	Peak
5735.28	43.88	13.45	57.33	68.20	10.87	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11n40 5670


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

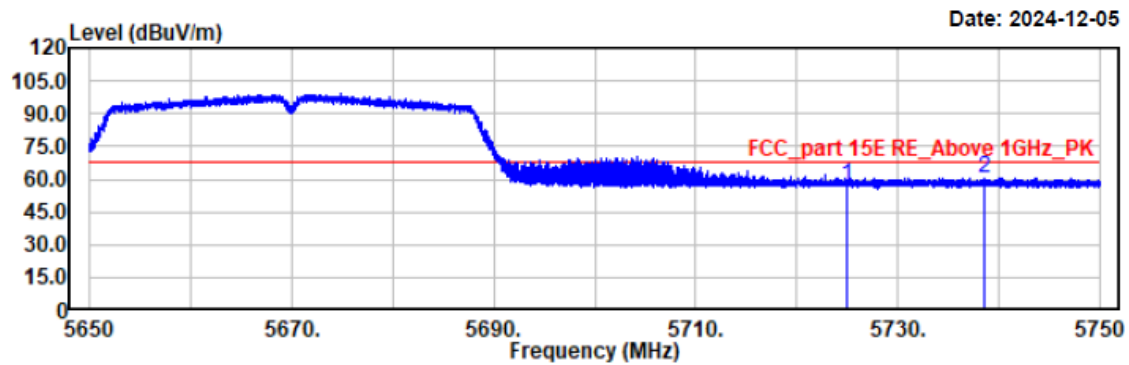


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	44.06	13.45	57.51	68.20	10.69	vertical	Peak
5738.53	46.98	13.46	60.44	68.20	7.76	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80 5530
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3℃/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

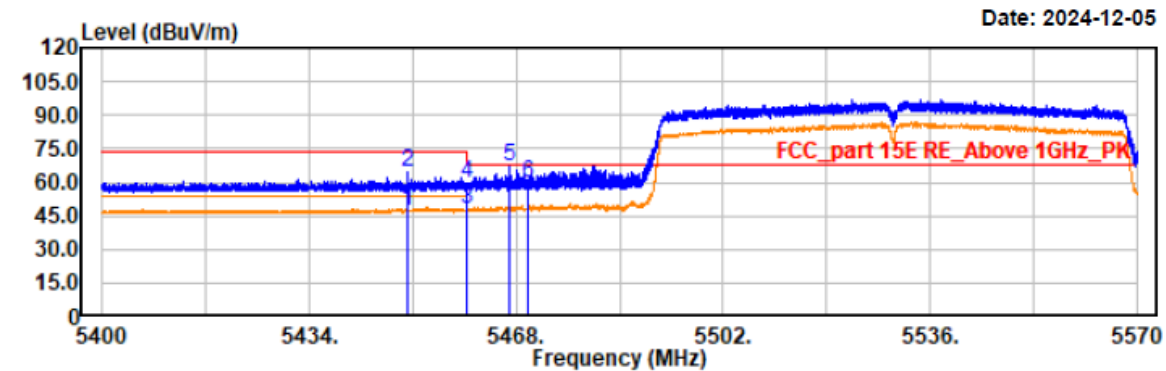

Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5450.17	33.90	12.95	46.85	54.00	7.15	horizontal	Average
5450.17	51.24	12.95	64.19	74.00	9.81	horizontal	Peak
5459.99	34.79	12.96	47.75	54.00	6.25	horizontal	Average
5459.99	47.02	12.96	59.98	74.00	14.02	horizontal	Peak
5466.98	53.69	12.96	66.65	68.20	1.55	horizontal	Peak
5470.01	46.60	12.96	59.56	68.20	8.64	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11ac80 5530


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

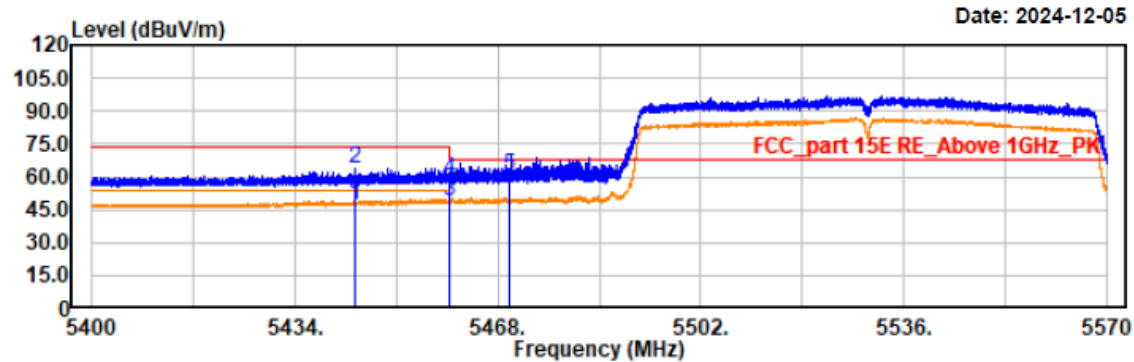


Trace: 1

Condition: PK RBW:1MHz VBW:3MHz SWT:auto
AV RBW:1MHz VBW:5kHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5444.03	34.31	12.94	47.25	54.00	6.75	vertical	Average
5444.03	50.74	12.94	63.68	74.00	10.32	vertical	Peak
5459.99	36.12	12.96	49.08	54.00	4.92	vertical	Average
5459.99	45.41	12.96	58.37	74.00	15.63	vertical	Peak
5470.00	47.45	12.96	60.41	68.20	7.79	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11ac80 5610
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

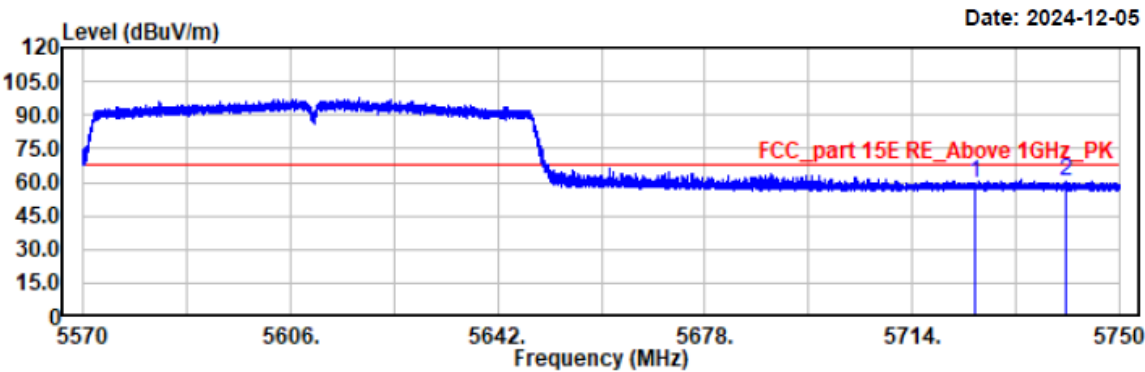

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	45.79	13.45	59.24	68.20	8.96	horizontal	Peak
5740.82	46.85	13.46	60.31	68.20	7.89	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11ac80 5610


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

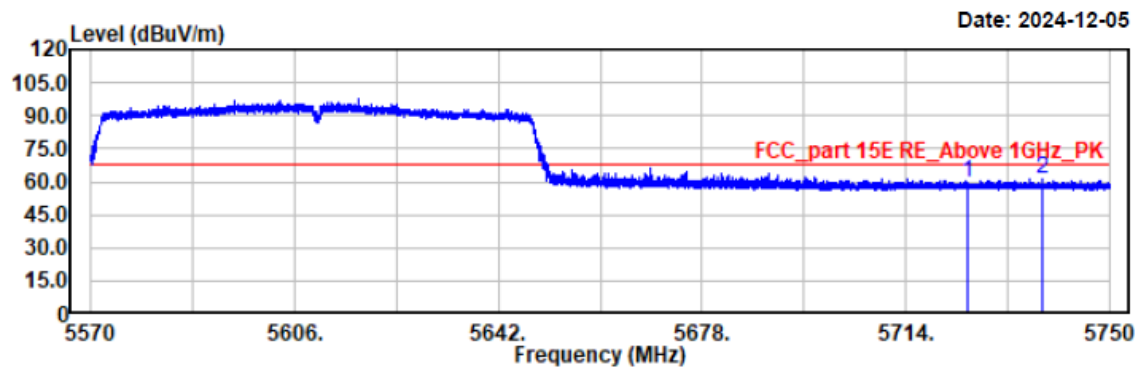


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5725.00	45.85	13.45	59.30	68.20	8.90	vertical	Peak
5738.28	47.60	13.46	61.06	68.20	7.14	vertical	Peak

B4

Project No.: 2407V20721E-RF
Test Mode: 11a 5745
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

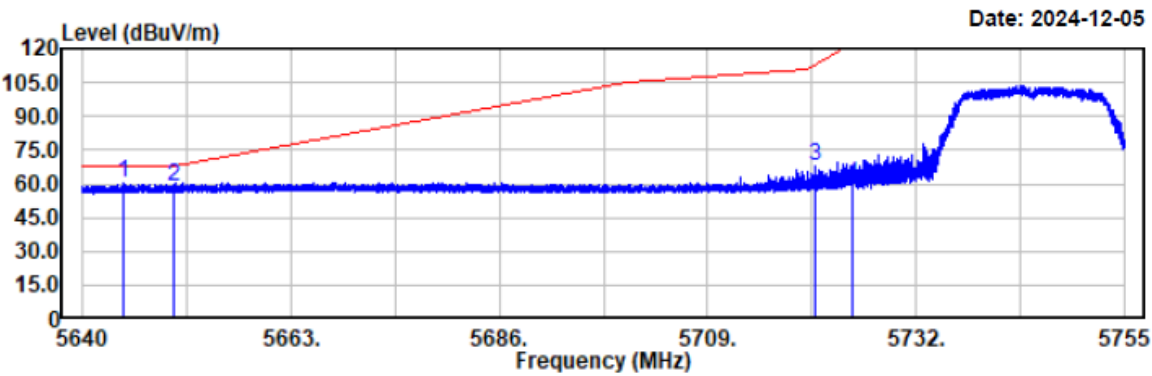

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5644.50	46.83	13.27	60.10	68.20	8.10	horizontal	Peak
5650.00	45.78	13.28	59.06	68.20	9.14	horizontal	Peak
5720.78	54.34	13.44	67.78	112.57	44.79	horizontal	Peak
5725.00	45.83	13.45	59.28	122.19	62.91	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a 5745


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

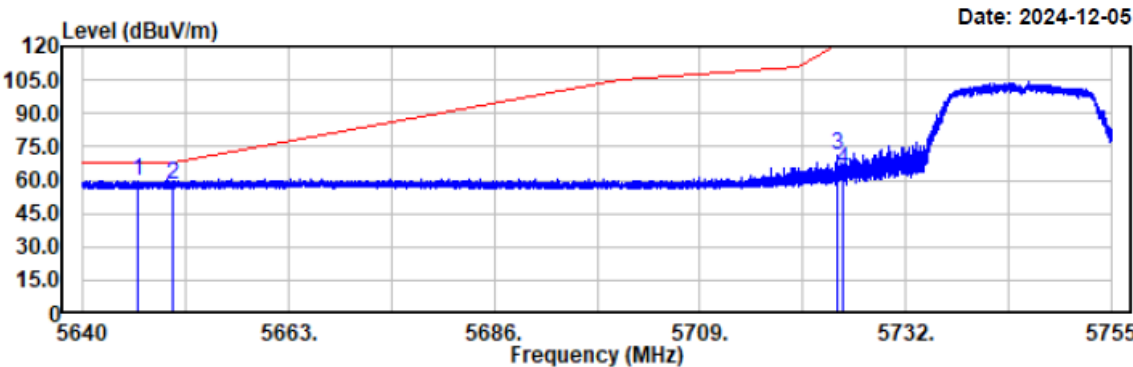


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5646.05	46.60	13.28	59.88	68.20	8.32	vertical	Peak
5650.00	44.37	13.28	57.65	68.20	10.55	vertical	Peak
5724.34	57.94	13.45	71.39	120.70	49.31	vertical	Peak
5725.00	51.43	13.45	64.88	122.19	57.31	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11a 5825
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

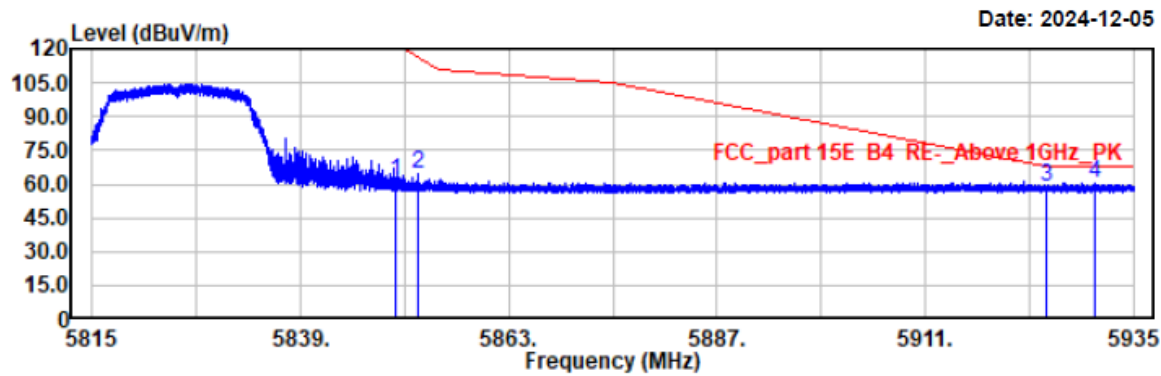

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5850.00	47.54	13.65	61.19	122.19	61.00	horizontal	Peak
5852.50	51.04	13.65	64.69	116.50	51.81	horizontal	Peak
5925.00	44.74	13.75	58.49	68.20	9.71	horizontal	Peak
5930.51	46.43	13.77	60.20	68.20	8.00	horizontal	Peak

Project No.: 2407V20721E-RF

Test Mode: 11a 5825


EUT Model: NLS-NQuire500

Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa

Tested by: Wlif Wu

Power Source: AC120V/60Hz

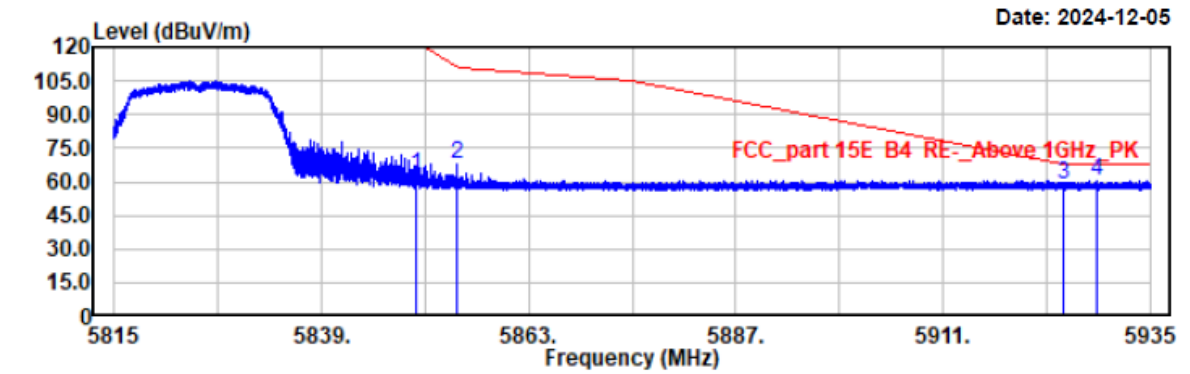


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5850.00	49.49	13.65	63.14	122.19	59.05	vertical	Peak
5854.64	54.20	13.65	67.85	111.63	43.78	vertical	Peak
5925.00	45.29	13.75	59.04	68.20	9.16	vertical	Peak
5928.90	47.02	13.77	60.79	68.20	7.41	vertical	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5745
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

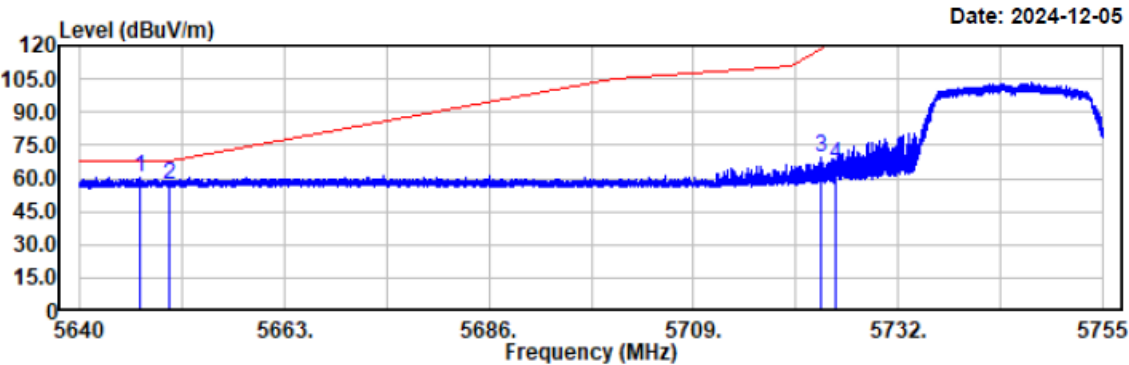


Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5646.79	47.38	13.28	60.66	68.20	7.54	horizontal	Peak
5650.00	44.23	13.28	57.51	68.20	10.69	horizontal	Peak
5723.36	56.15	13.45	69.60	118.47	48.87	horizontal	Peak
5725.00	52.60	13.45	66.05	122.19	56.14	horizontal	Peak

Project No.: 2407V20721E-RF
Test Mode: 11n20 5745
EUT Model: NLS-NQuire500
Test distance: 3m

Temp/Humi/ATM: 24.3°C/50%/100.1kPa
Tested by: Wlif Wu
Power Source: AC120V/60Hz

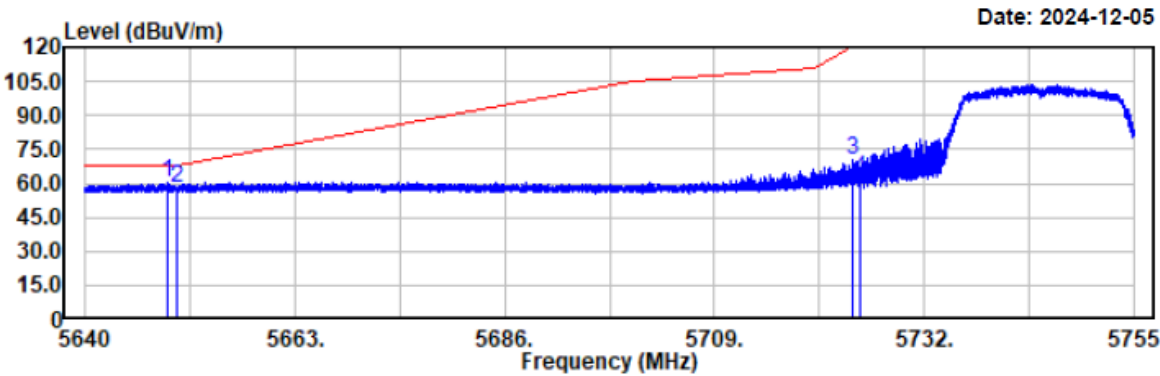

Condition: PK RBW:1MHz VBW:3MHz SWT:auto

Freq MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Polarity	Remark
5648.97	46.99	13.28	60.27	68.20	7.93	vertical	Peak
5650.00	44.77	13.28	58.05	68.20	10.15	vertical	Peak
5724.11	56.84	13.45	70.29	120.17	49.88	vertical	Peak
5725.00	48.81	13.45	62.26	122.19	59.93	vertical	Peak