



Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V03

Report Template Revision Date: Mar.1st, 2017

Test Report

Report No. : CQASZ20180900208EW-01

Applicant: Fujian Newland Auto-ID Tech. Co.,Ltd.

Address of Applicant: Newland Science & Technology Park, No.1 Rujiang West Rd, Mawei, Fuzhou, P.R.China

Manufacturer: Fujian Newland Auto-ID Tech. Co.,Ltd.

Address of Manufacturer: Newland Science & Technology Park, No.1 Rujiang West Rd, Mawei, Fuzhou, P.R.China

Equipment Under Test (EUT):

Product: Information Terminal

Model No.: NLS-NQuire300

Brand Name: Newland

FCC ID: SL9NLS-NQUIRE300

Standards: 47 CFR Part 15, Subpart C

Date of Test: 2018-10-29 to 2018-11-02

Date of Issue: 2018-11-02

Test Result : **PASS***

Tested By :

Daisy Qin

(Daisy Qin)

Reviewed By:

Aaron Ma

(Aaron Ma)

Approved By:

Jack Ai

(Jack Ai)



* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

2 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20180900208EW-01	Rev.01	Initial report	2018-11-02

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Conducted Peak & Average Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS

4 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENTS	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST ENVIRONMENT AND MODE	7
5.4 DESCRIPTION OF SUPPORT UNITS	10
5.5 TEST LOCATION	10
5.6 TEST FACILITY	10
5.7 STATEMENT OF THE MEASUREMENT UNCERTAINTY	11
5.8 DEVIATION FROM STANDARDS	11
5.9 ABNORMALITIES FROM STANDARD CONDITIONS	11
5.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	11
5.11 EQUIPMENT LIST	12
6 TEST RESULTS AND MEASUREMENT DATA.....	13
6.1 ANTENNA REQUIREMENT	13
6.2 CONDUCTED EMISSIONS	14
6.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER	18
6.4 6dB OCCUPY BANDWIDTH	20
6.5 POWER SPECTRAL DENSITY	32
6.6 BAND-EDGE FOR RF CONDUCTED EMISSIONS	39
6.7 RF CONDUCTED SPURIOUS EMISSIONS	44
6.8 RADIATED SPURIOUS EMISSIONS.....	59
6.8.1 Radiated emission below 1GHz.....	62
6.8.2 Transmitter emission above 1GHz	64
6.9 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	82

5 General Information

5.1 Client Information

Applicant:	Fujian Newland Auto-ID Tech. Co.,Ltd.
Address of Applicant:	Newland Science & Technology Park, No.1 Rujiang West Rd,Mawei,Fuzhou, P.R.China
Manufacturer:	Fujian Newland Auto-ID Tech. Co.,Ltd.
Address of Manufacturer:	Newland Science & Technology Park, No.1 Rujiang West Rd,Mawei,Fuzhou, P.R.China

5.2 General Description of EUT

Product Name:	Information Terminal
Model No.:	NLS-NQuire300
Trade Mark:	Newland
Hardware version:	V1.1
Software version:	V1.00.009
Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20) : OFDM (64QAM, 16QAM,QPSK,BPSK)
Transfer Rate:	IEEE for 802.11b: 1Mbps/2Mbps/5.5Mbps/11Mbps IEEE for 802.11g : 6Mbps/9Mbps/12Mbps/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps IEEE for 802.11n(HT20) : 6.5Mbps/13Mbps/19.5Mbps/26Mbps/39Mbps/52Mbps/58.5Mbps/65Mbps
Product Type:	☒ Mobile ☐ Portable ☐ Fix Location
Test Software of EUT:	Wifi Authentication (manufacturer declare)
Antenna Type:	integral antenna
Antenna Gain:	3.7dBi
Power Supply:	Switching Adapter: Model: SYS1541-2412 Input:100-240V~, 1.0A MAX, 50-60Hz Output: DC12V 2.0A

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:


For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

Note:

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.


5.3 Test Environment and Mode

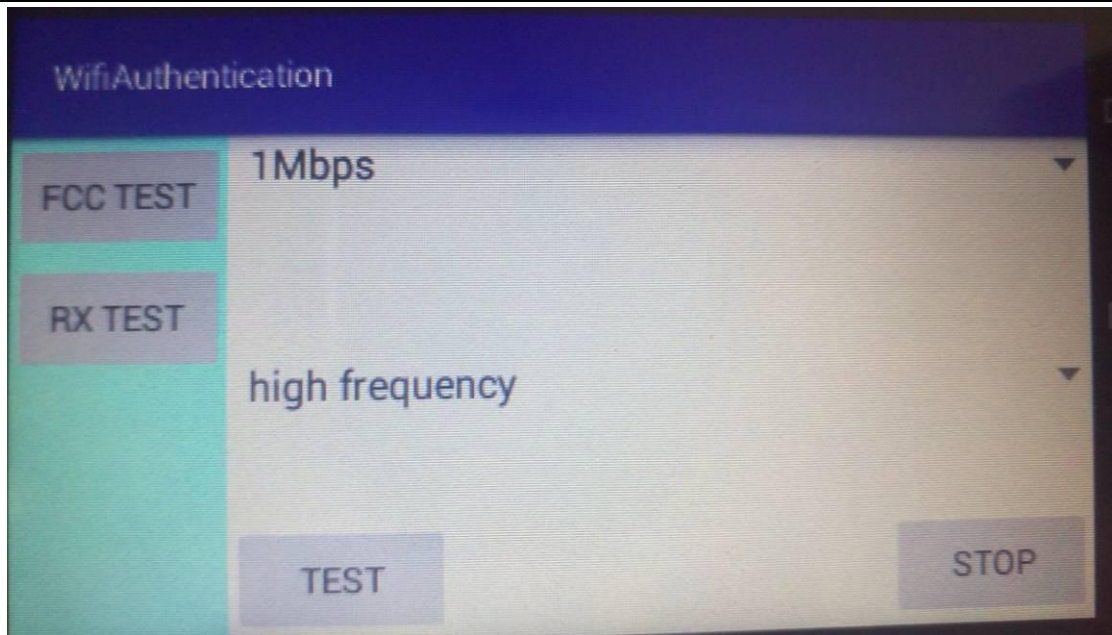Operating Environment:		
Temperature:	24.0 °C	
Humidity:	52 % RH	
Atmospheric Pressure:	1008 mbar	
Test mode:		
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.	
Run Software:		
		
Operated Mode for Worst Duty Cycle:		
Test Mode	Duty Cycle(x)	Average correction factor(dB)
IEEE802.11b	100%	0
IEEE802.11g	98.21%	0.078
IEEE802.11n (HT20)	91.3%	0.395

Remark:


- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;

Test Graph_ IEEE802.11b Duty Cycle:

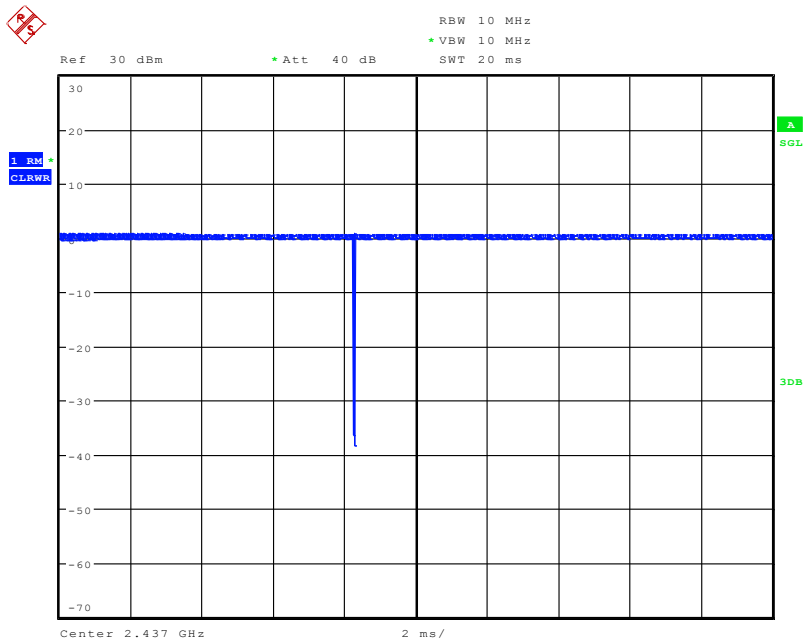


Date: 30.OCT.2018 08:58:25

Test Graph_ IEEE802.11g Duty Cycle:

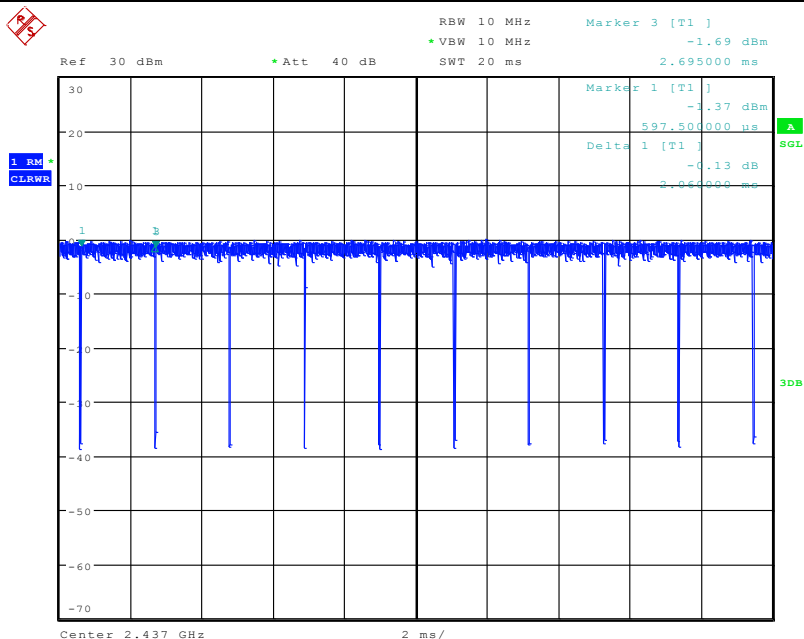

Date: 30.OCT.2018 09:12:16


Test Graph_ IEEE802.11 n (HT20) Duty Cycle:

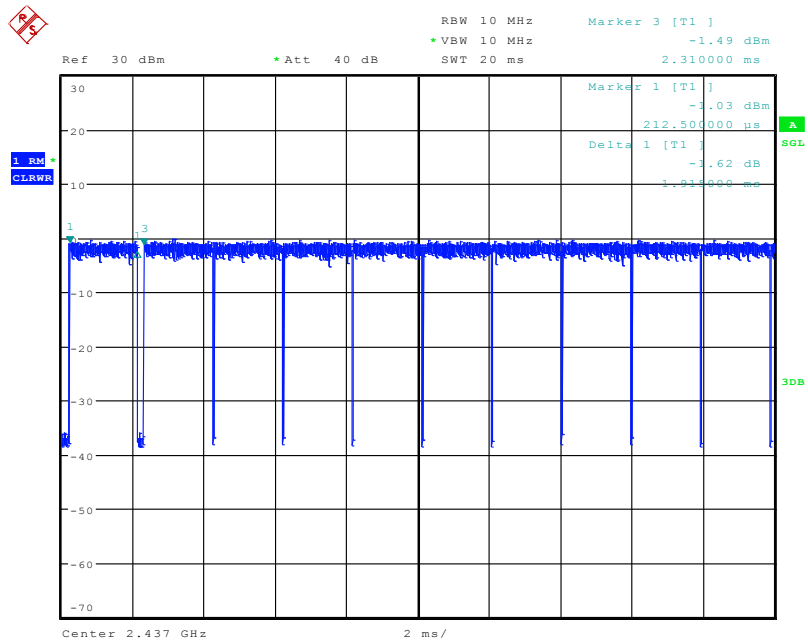

Date: 30.OCT.2018 09:30:30

5.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
Adapter		SYS1541-2412	Provide by client	Verification

5.5 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.,

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L5785)**

CNAS has accredited Shenzhen Huaxia Testing Technology Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **ISED Registration No.: 22984-1**

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

5.7 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	±5.12dB	(1)
2	Radiated Emission (Above 1GHz)	±4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	±3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8℃	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	time	0.6 %.	(1)
14	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5.8 Deviation from Standards

None.

5.9 Abnormalities from Standard Conditions

None.

5.10 Other Information Requested by the Customer

None.

5.11 Equipment List


Item	Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Due Date
1	EMI Test Receiver	R&S	ESR7	CQA-005	2019/10/28
2	Spectrum analyzer	R&S	FSU26	CQA-038	2019/10/28
3	Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2019/9/25
4	Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2019/11/01
5	Loop antenna	Schwarzbeck	FMZB1516	CQA-087	2019/10/28
6	Bilog Antenna	R&S	HL562	CQA-011	2019/10/28
7	Horn Antenna	R&S	HF906	CQA-012	2019/10/28
8	Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2019/10/28
9	Coaxial Cable (Above 1GHz)	CQA	N/A	C019	2019/9/25
10	Coaxial Cable (Below 1GHz)	CQA	N/A	C020	2019/9/25
11	Antenna Connector	CQA	RFC-01	CQA-080	2019/9/25
12	RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2019/9/25
13	Power Sensor	KEYSIGHT	U2021XA	CQA-30	2019/9/25
14	N1918A Power Analysis Manager Power Panel	Agilent	N1918A	CQA-074	2019/9/25
15	Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2019/9/25
16	LISN	R&S	ENV216	CQA-003	2019/9/25
17	Coaxial cable	CQA	N/A	CQA-C009	2019/9/25

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	
The antenna is integral antenna. The best case gain of the antenna is 3.7dBi.	


6.2 Conducted Emissions

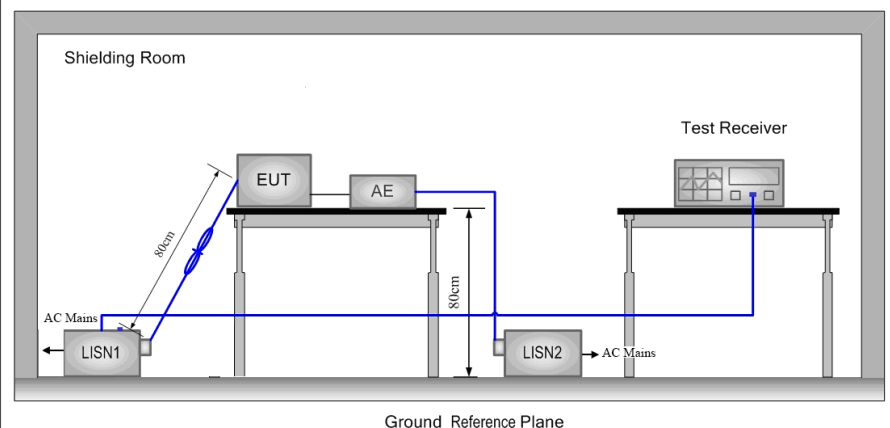Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		
Test Setup:			

Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate of 802.11b at highest channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC120V/60Hz
Test Results:	Pass

Measurement Data

Live Line:

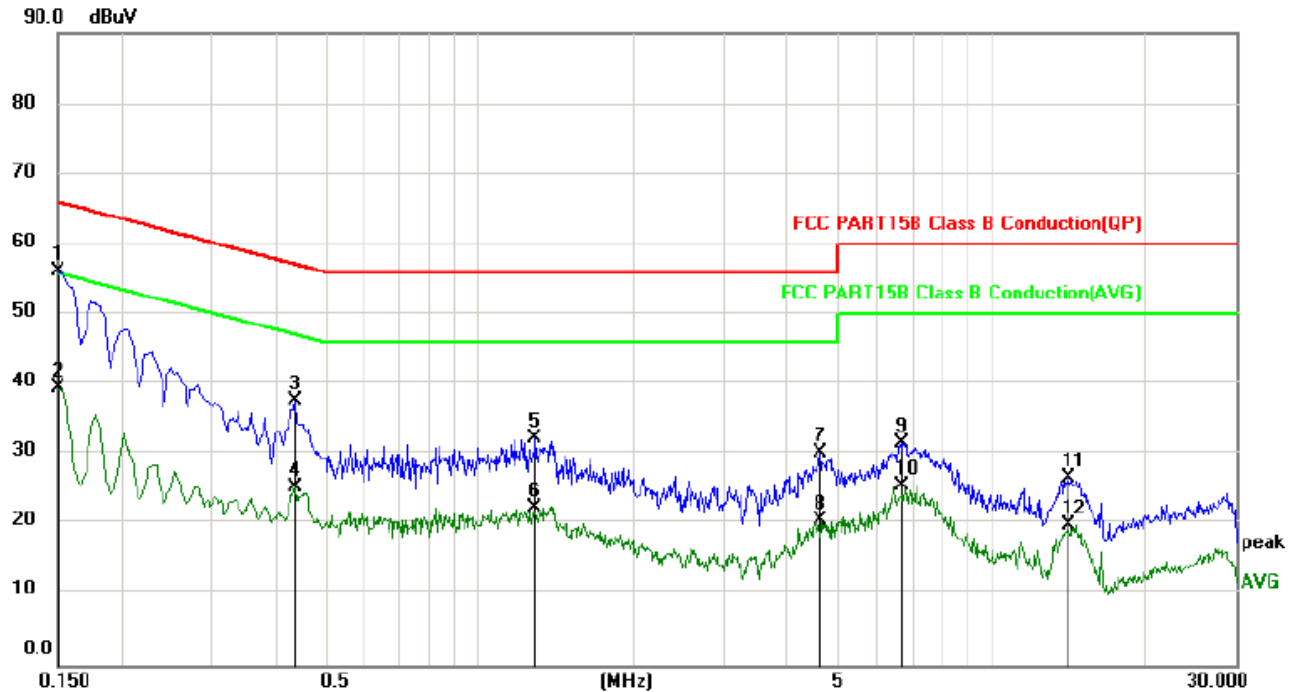


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	46.47	9.73	56.20	66.00	-9.80	QP
2		0.1500	24.60	9.73	34.33	56.00	-21.67	AVG
3	*	0.1620	46.86	9.73	56.59	65.36	-8.77	QP
4		0.1620	30.29	9.73	40.02	55.36	-15.34	AVG
5		0.1860	43.07	9.74	52.81	64.21	-11.40	QP
6		0.1860	27.89	9.74	37.63	54.21	-16.58	AVG
7		0.2029	39.72	9.74	49.46	63.49	-14.03	QP
8		0.2029	23.40	9.74	33.14	53.49	-20.35	AVG
9		0.4420	28.00	9.74	37.74	57.02	-19.28	QP
10		0.4420	17.92	9.74	27.66	47.02	-19.36	AVG
11		1.0580	21.86	9.75	31.61	56.00	-24.39	QP
12		1.0580	12.18	9.75	21.93	46.00	-24.07	AVG

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

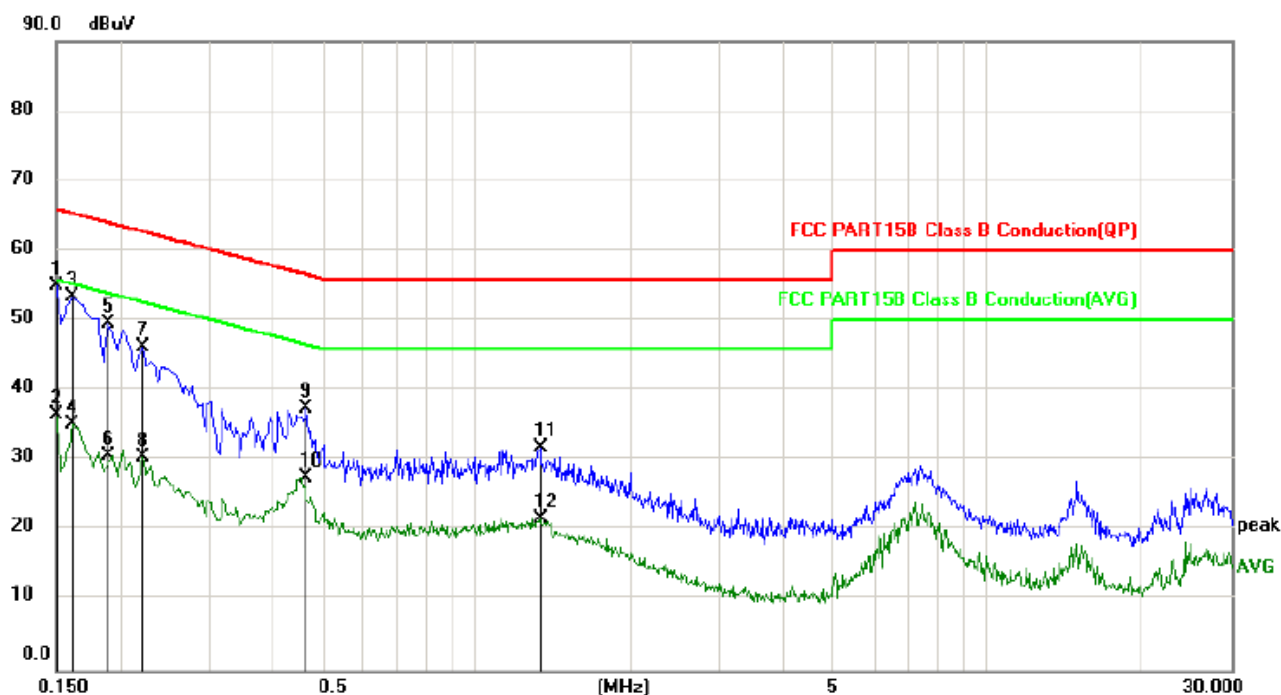


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1500	45.20	9.79	54.99	66.00	-11.01	QP
2		0.1500	26.66	9.79	36.45	56.00	-19.55	AVG
3		0.1620	43.66	9.79	53.45	65.36	-11.91	QP
4		0.1620	25.38	9.79	35.17	55.36	-20.19	AVG
5		0.1900	39.90	9.80	49.70	64.04	-14.34	QP
6		0.1900	20.95	9.80	30.75	54.04	-23.29	AVG
7		0.2220	36.50	9.80	46.30	62.74	-16.44	QP
8		0.2220	20.69	9.80	30.49	52.74	-22.25	AVG
9		0.4660	27.66	9.80	37.46	56.58	-19.12	QP
10		0.4660	17.84	9.80	27.64	46.58	-18.94	AVG
11		1.3340	22.02	9.83	31.85	56.00	-24.15	QP
12		1.3340	11.91	9.83	21.74	46.00	-24.26	AVG

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.


6.3 Conducted Peak & Average Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <pre> graph LR EUT[EUT] --- PM[Power Meter] </pre>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) . Only the worst case is recorded in the report.
Limit:	30dBm
Test Results:	Pass

Measurement Data

802.11b mode				
Test channel	Peak Output Power (dBm)	Average Output Power (dBm)	Limit (dBm)	Result
Lowest	13.01	9.89	30.00	Pass
Middle	13.53	10.87	30.00	Pass
Highest	14.77	11.71	30.00	Pass
802.11g mode				
Test channel	Peak Output Power (dBm)	Average Output Power (dBm)	Limit (dBm)	Result
Lowest	18.09	10.16	30.00	Pass
Middle	18.41	10.83	30.00	Pass
Highest	19.33	11.38	30.00	Pass
802.11n(HT20)mode				
Test channel	Peak Output Power (dBm)	Average Output Power (dBm)	Limit (dBm)	Result
Lowest	18.17	10	30.00	Pass
Middle	18.7	11.07	30.00	Pass
Highest	19.54	11.37	30.00	Pass
Remark:				
1. Average Output Power was for reference only				
2. Average Output Power had added duty cycle factor				


6.4 6dB Occupy Bandwidth

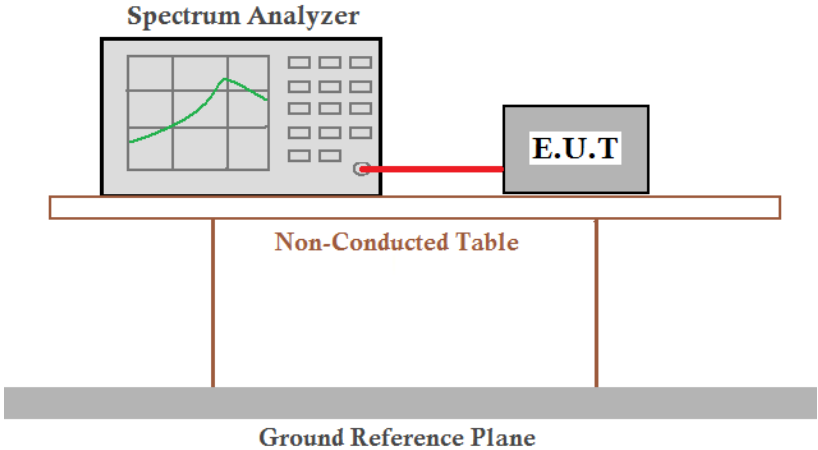
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) . Only the worst case is recorded in the report.
Limit:	≥ 500 kHz
Test Results:	Pass


Measurement Data

802.11b mode				
Test channel	6dB Occupy Bandwidth (MHz)	99% OBW [MHz]	Limit (kHz)	Result
Lowest	10.120	14.040	≥500	Pass
Middle	10.160	13.960	≥500	Pass
Highest	10.160	14.080	≥500	Pass
802.11g mode				
Test channel	6dB Occupy Bandwidth (MHz)	99% OBW [MHz]	Limit (kHz)	Result
Lowest	16.440	16.520	≥500	Pass
Middle	16.400	16.480	≥500	Pass
Highest	16.400	16.520	≥500	Pass
802.11n(HT20) mode				
Test channel	6dB Occupy Bandwidth (MHz)	99% OBW [MHz]	Limit (kHz)	Result
Lowest	17.360	17.720	≥500	Pass
Middle	17.120	17.720	≥500	Pass
Highest	17.400	17.720	≥500	Pass
Remark:				
1. 99% OBW was for reference only				


Test plot as follows:

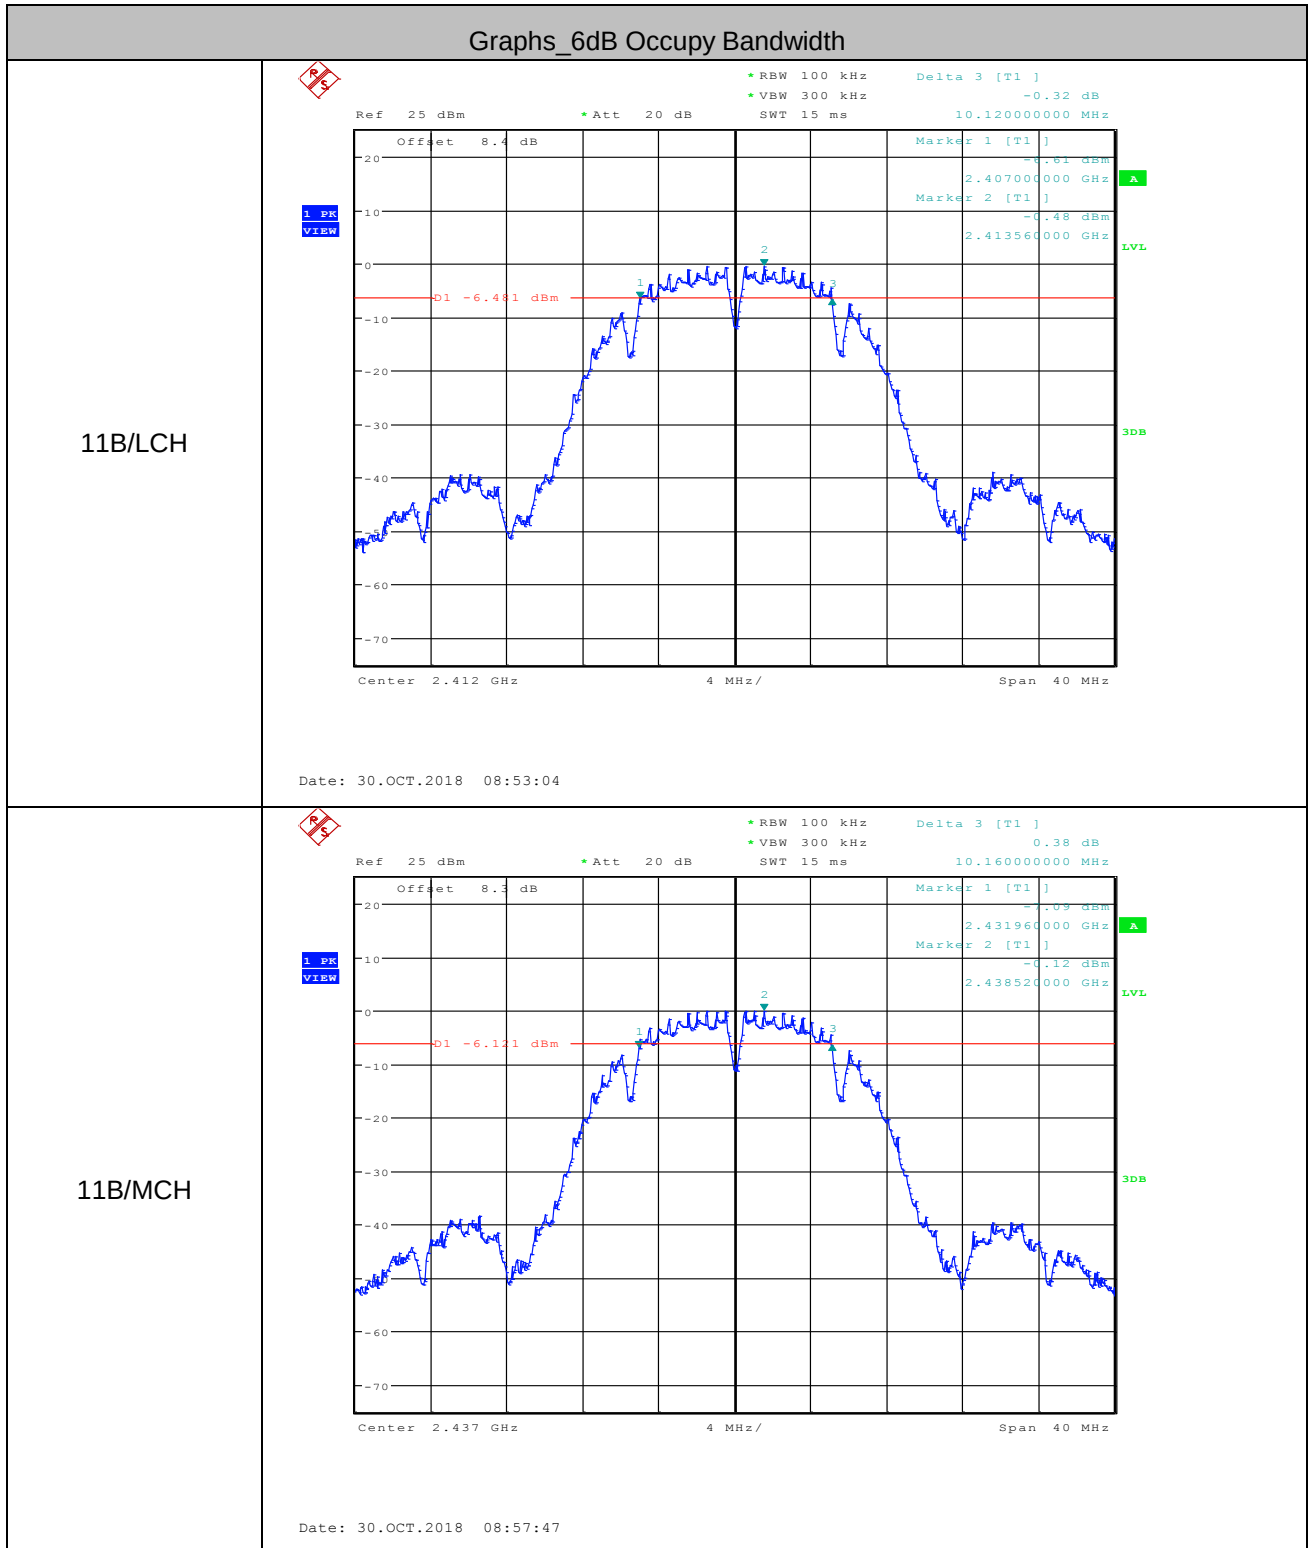

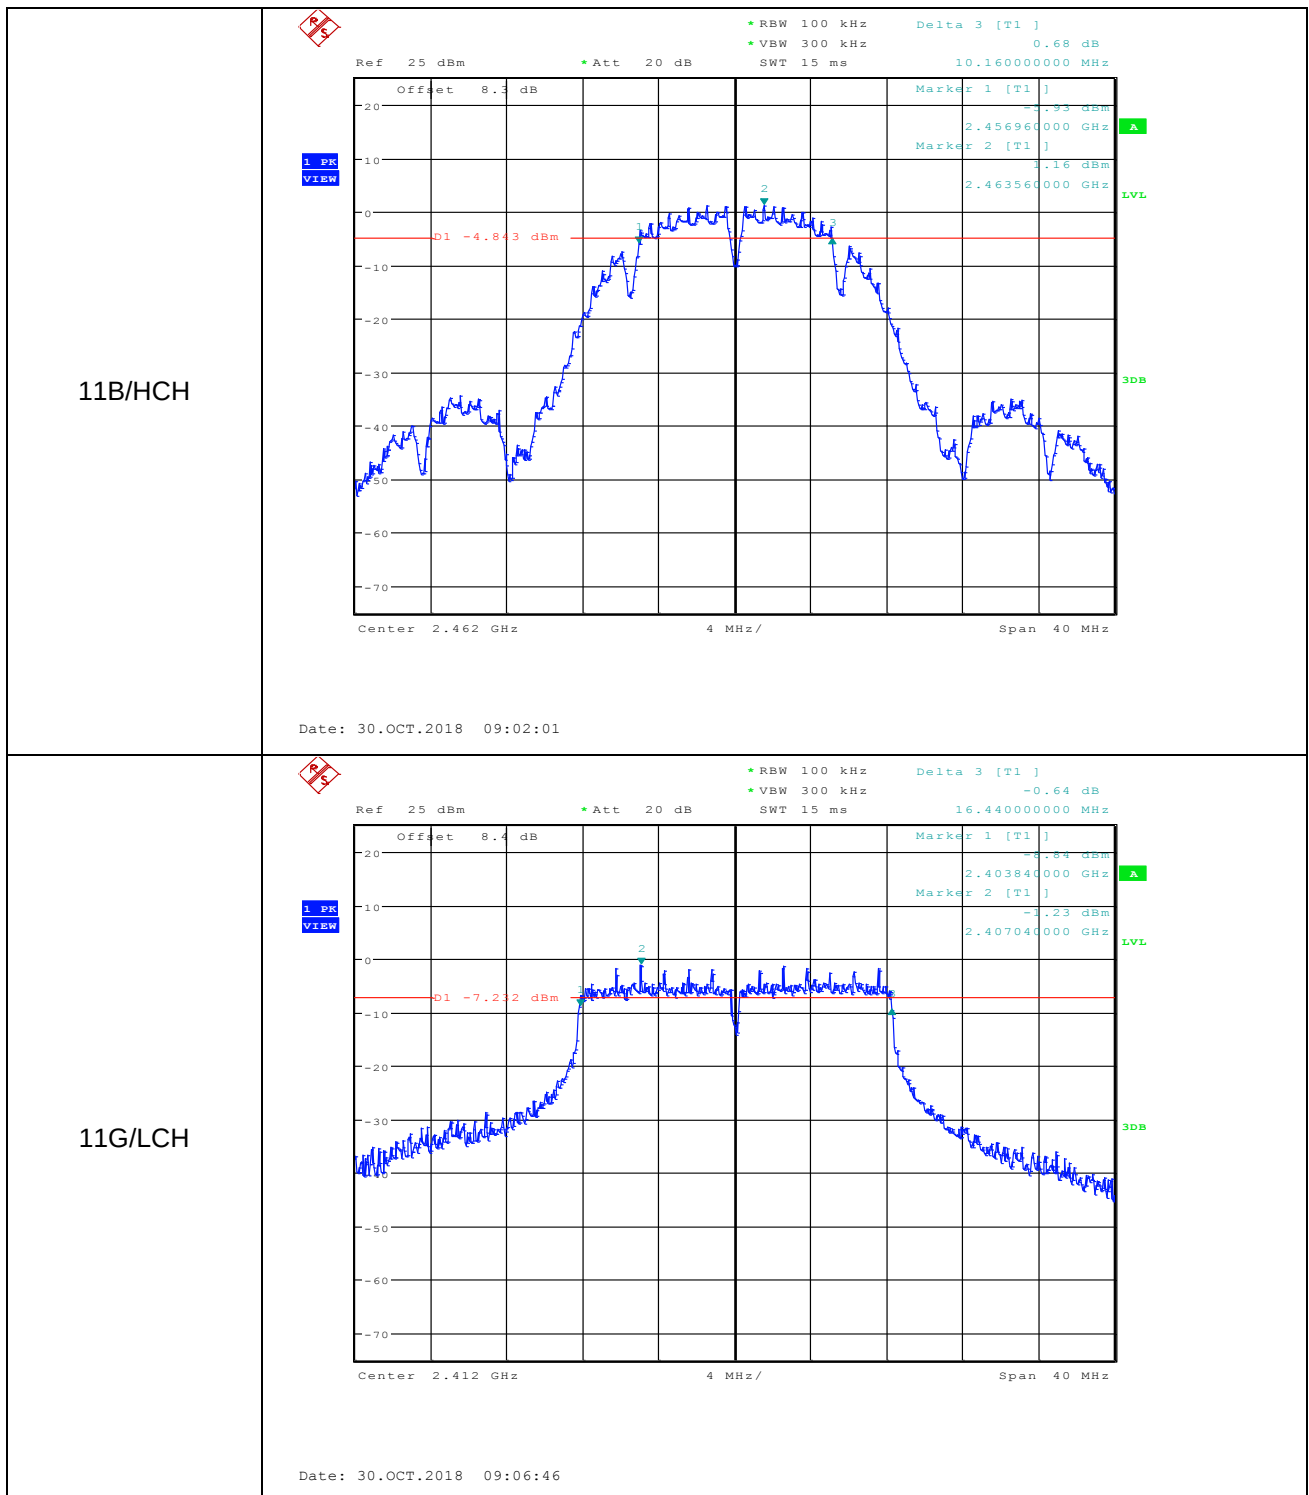

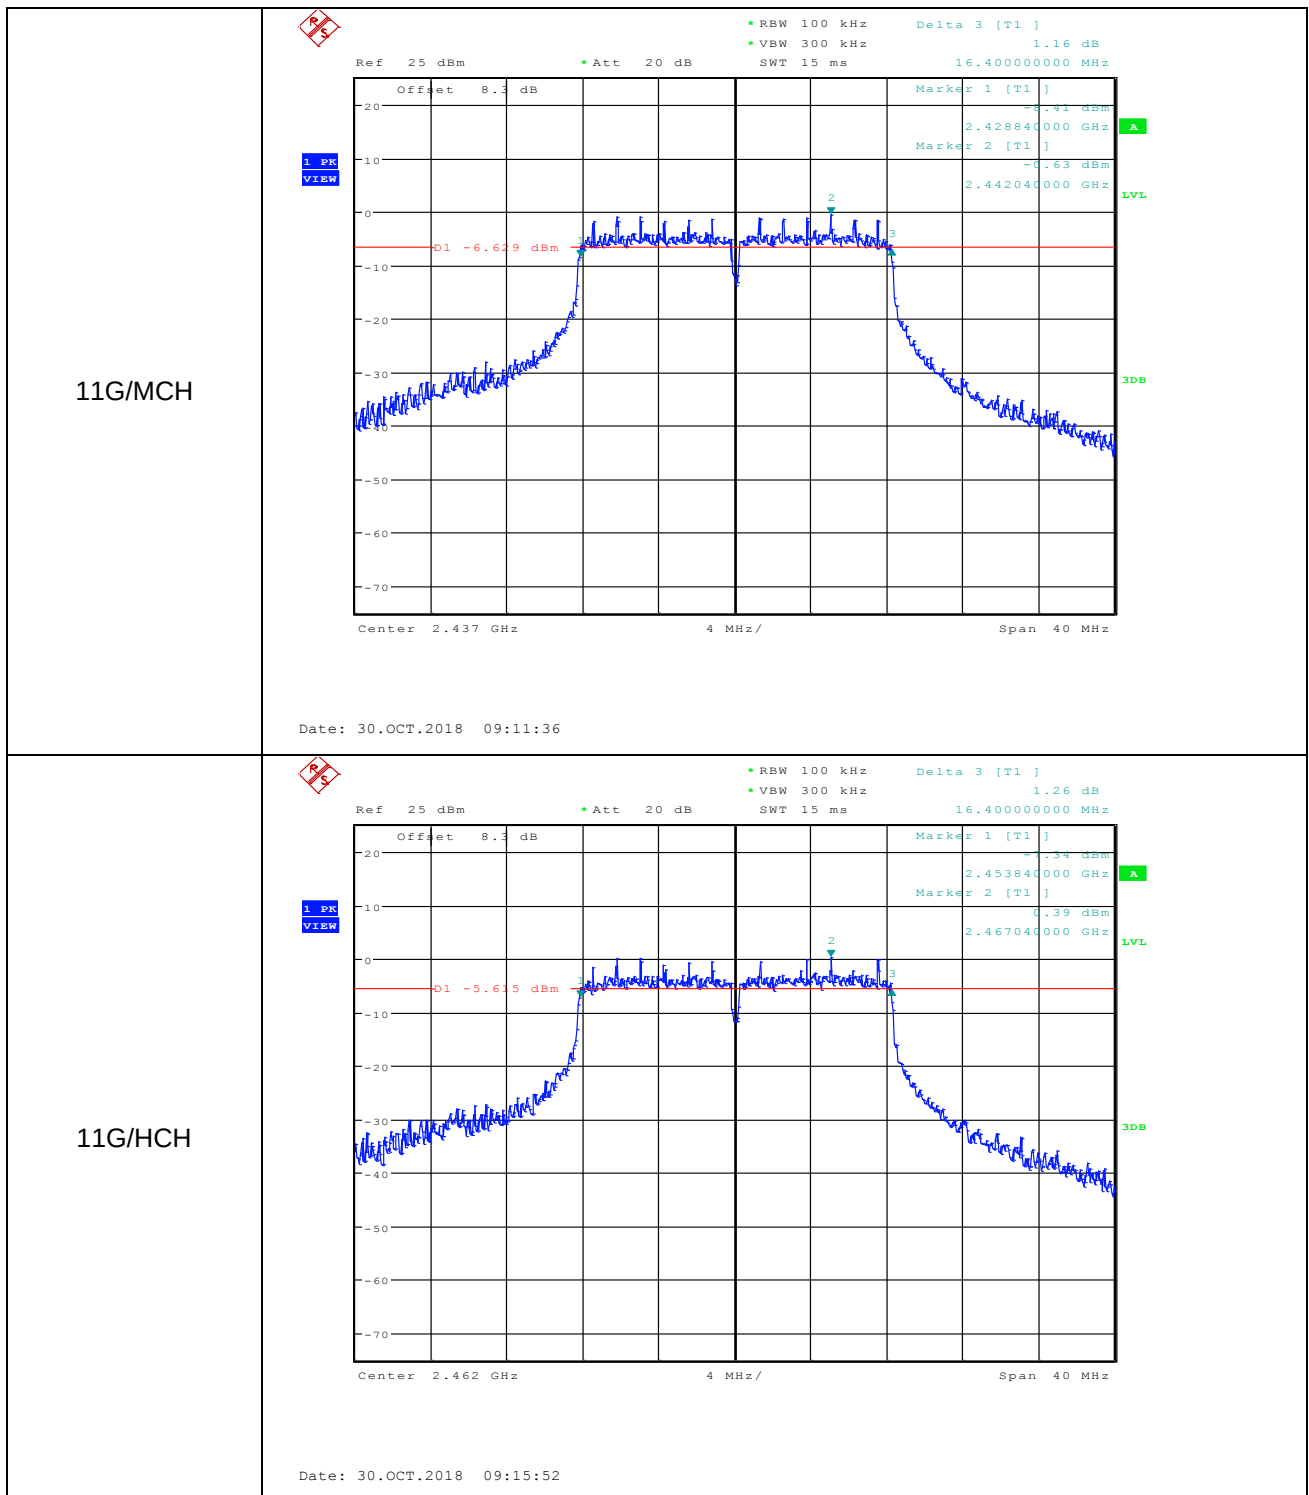


11N20SISO/LCH

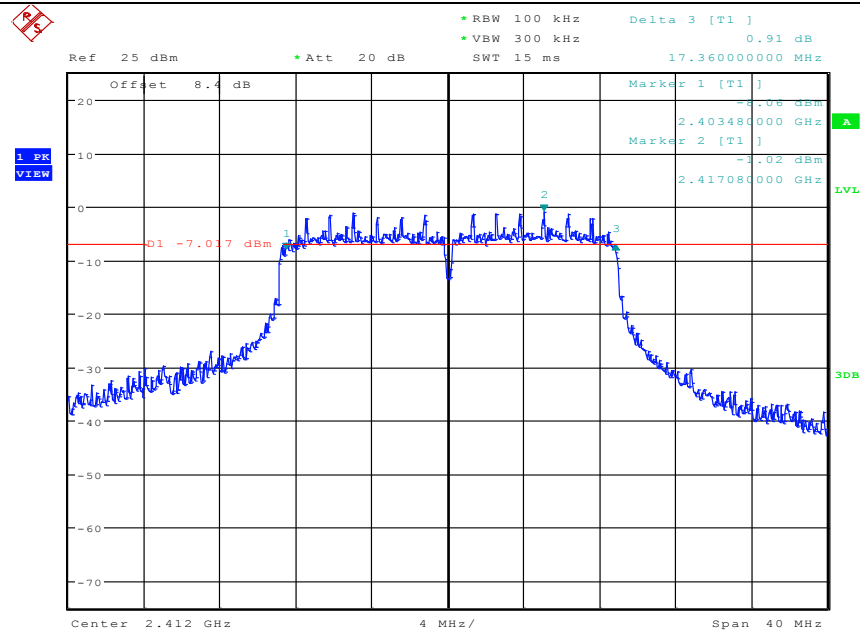


Date: 30.OCT.2018 09:21:21

11N20SISO/MCH

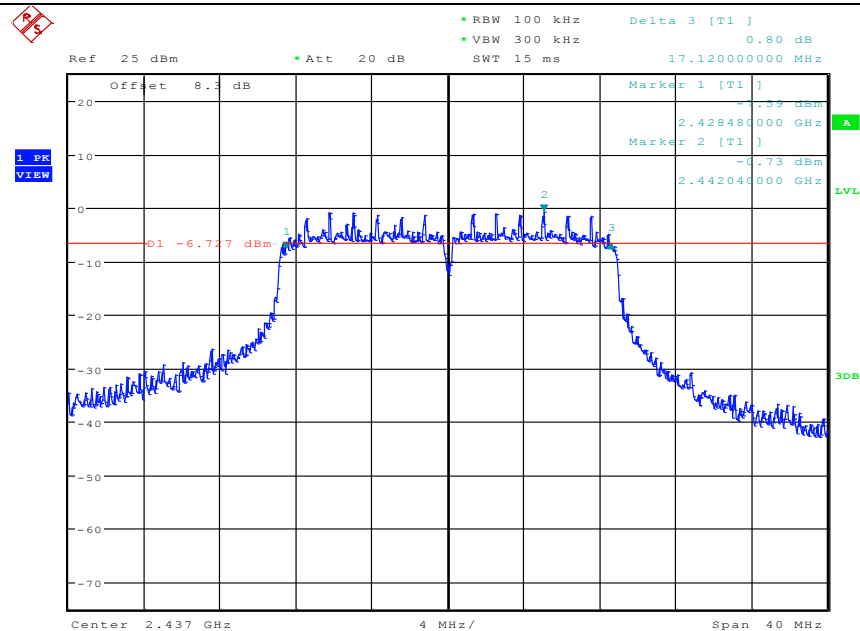

Date: 30.OCT.2018 09:29:31


11N20SISO/HCH

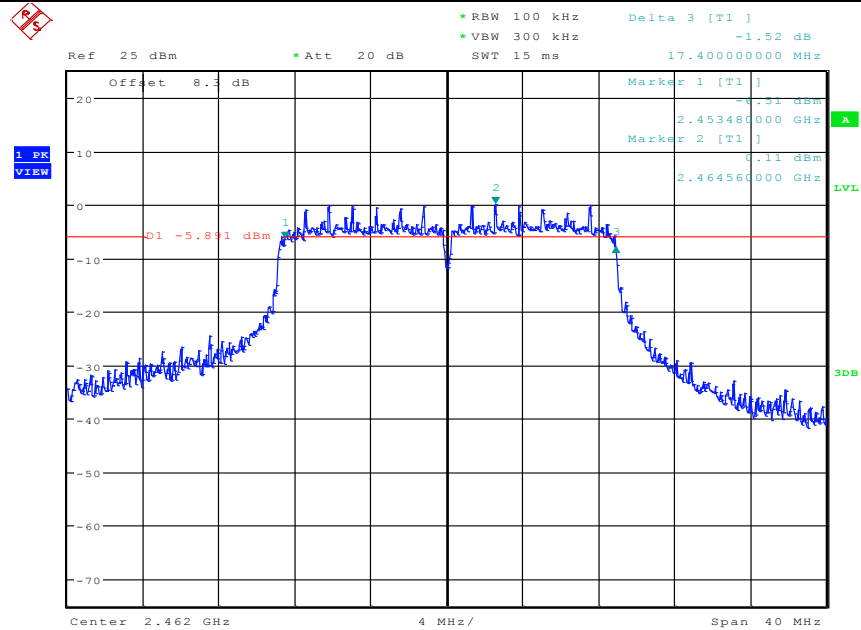

Date: 30.OCT.2018 09:36:47


Graphs_99% OBW

11B/LCH

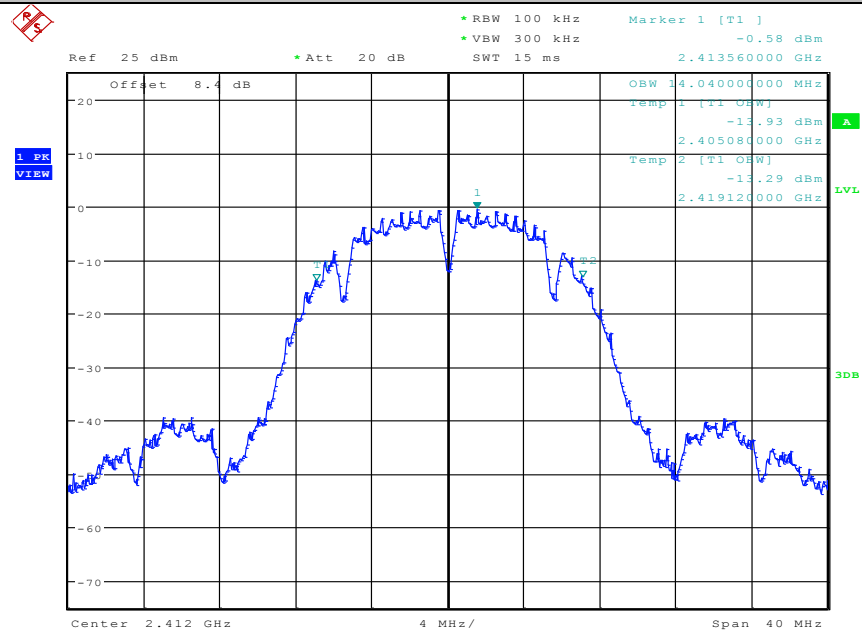



Date: 30.OCT.2018 08:53:29

11B/MCH

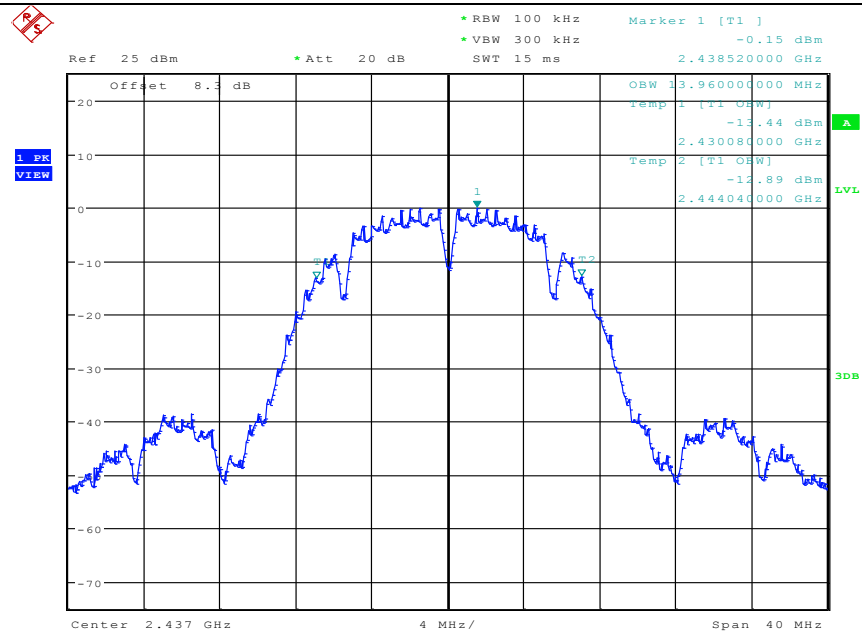


Date: 30.OCT.2018 08:58:11

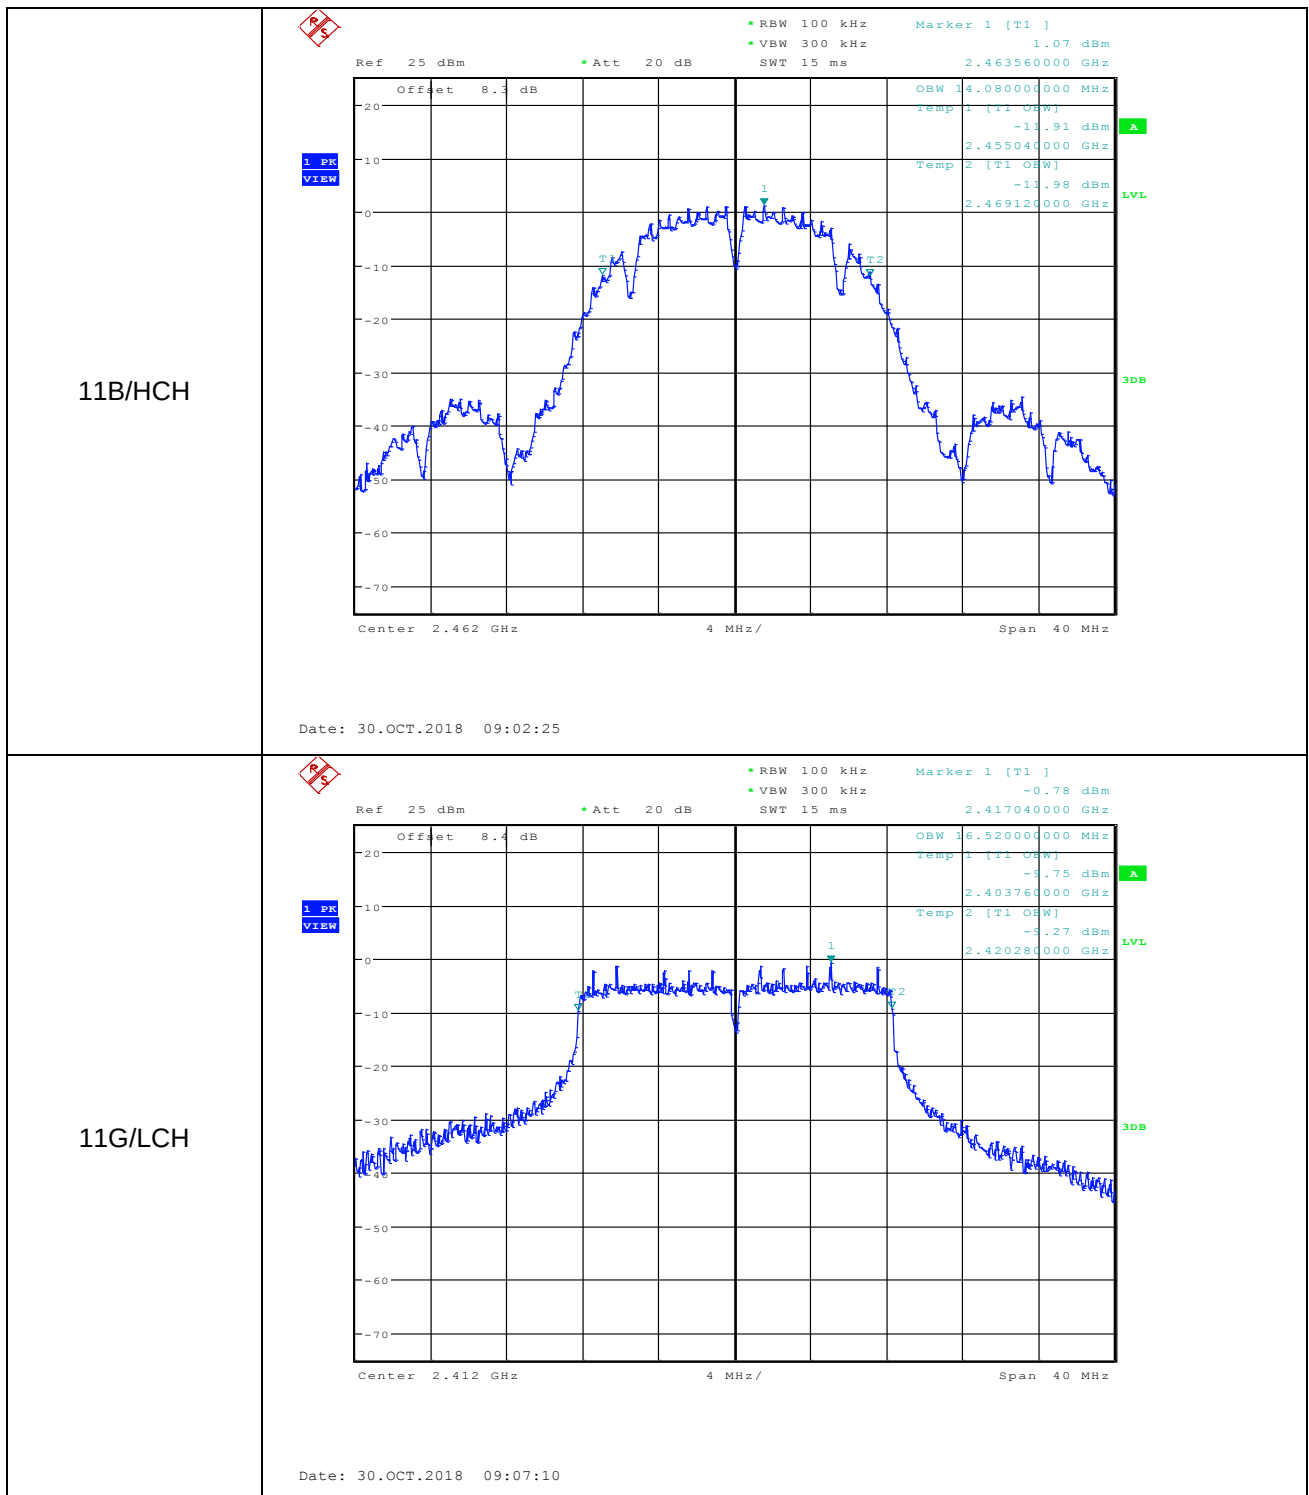

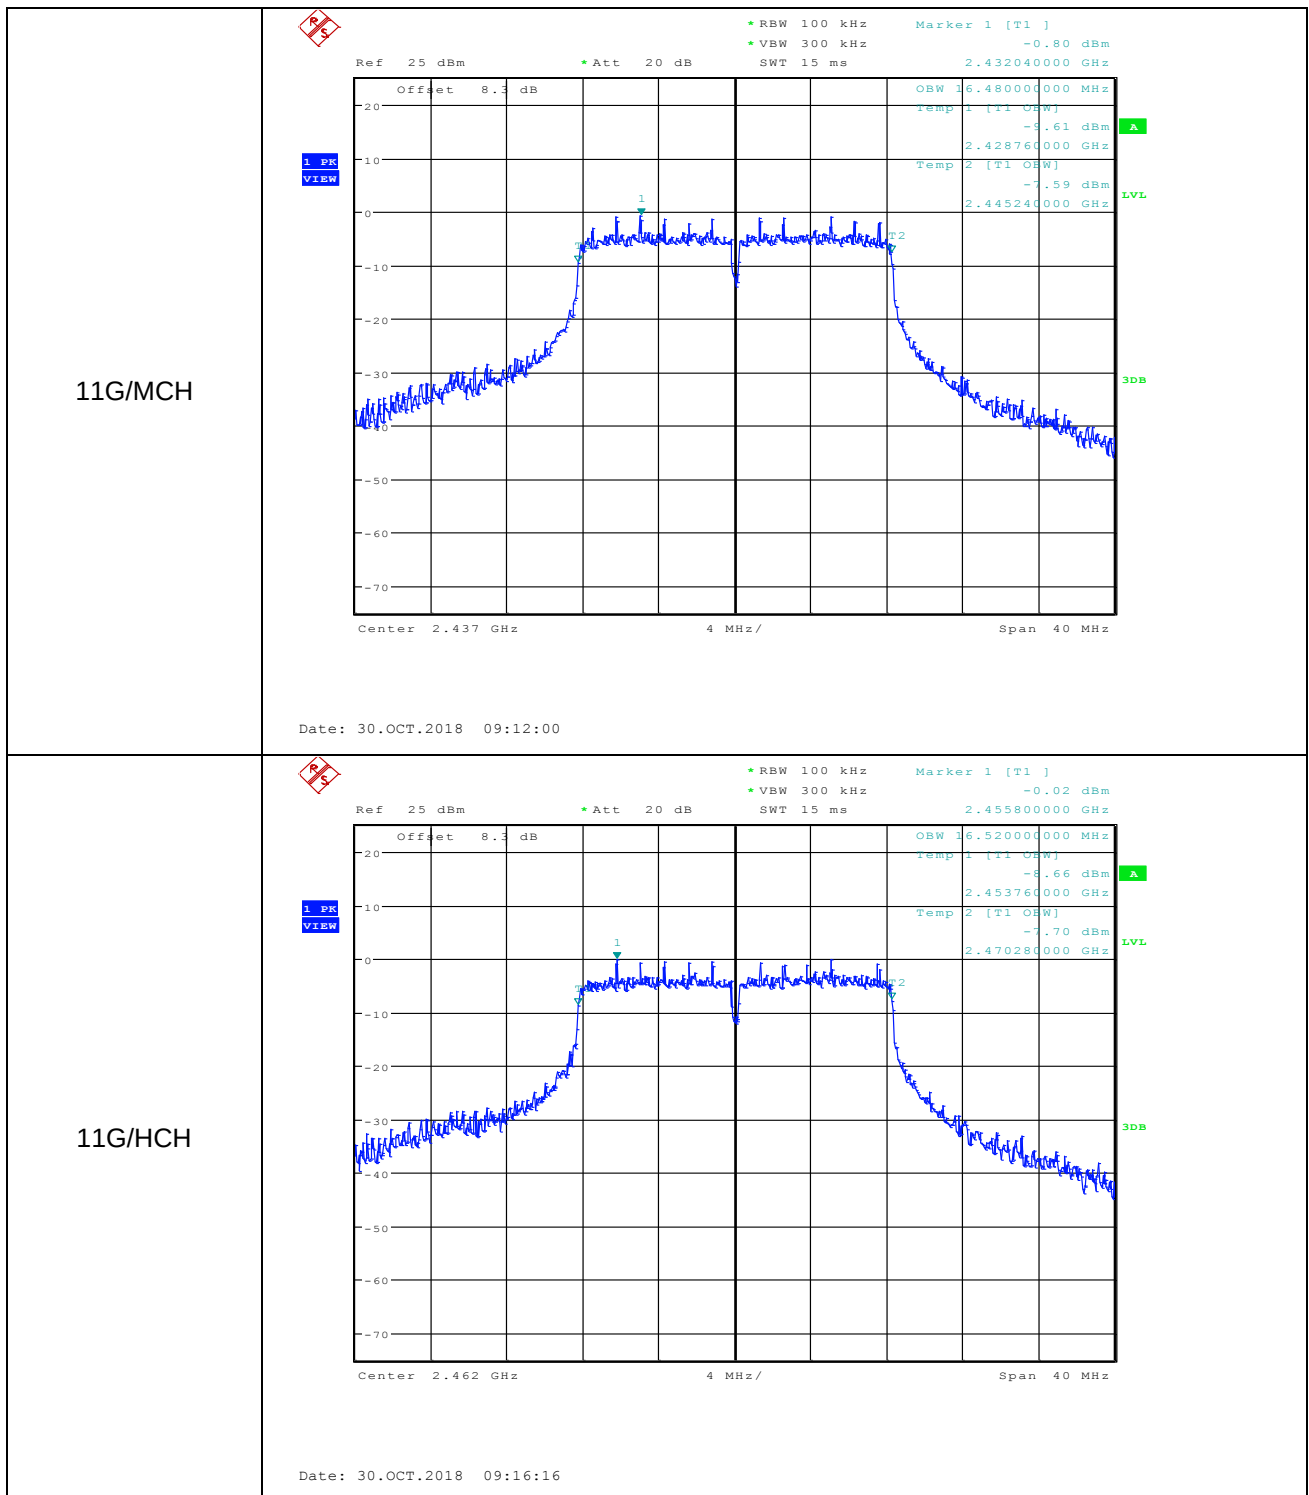


11N20SISO/LCH

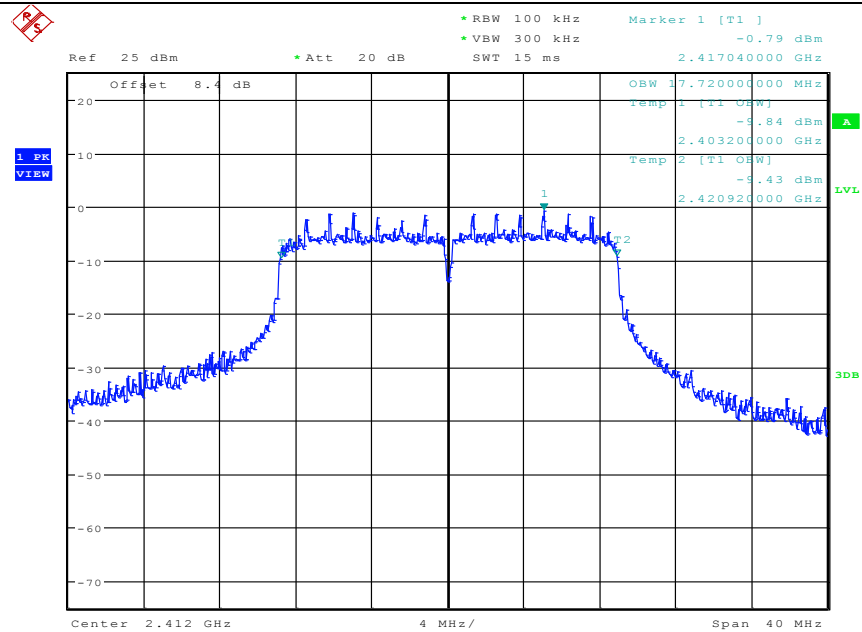


Date: 30.OCT.2018 09:22:05

11N20SISO/MCH

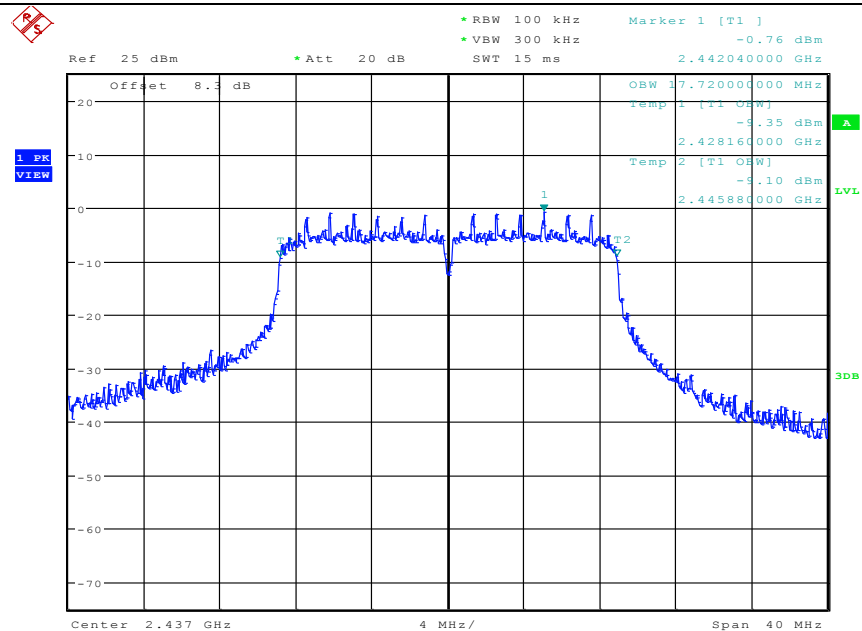


Date: 30.OCT.2018 09:30:15

11N20SISO/HCH

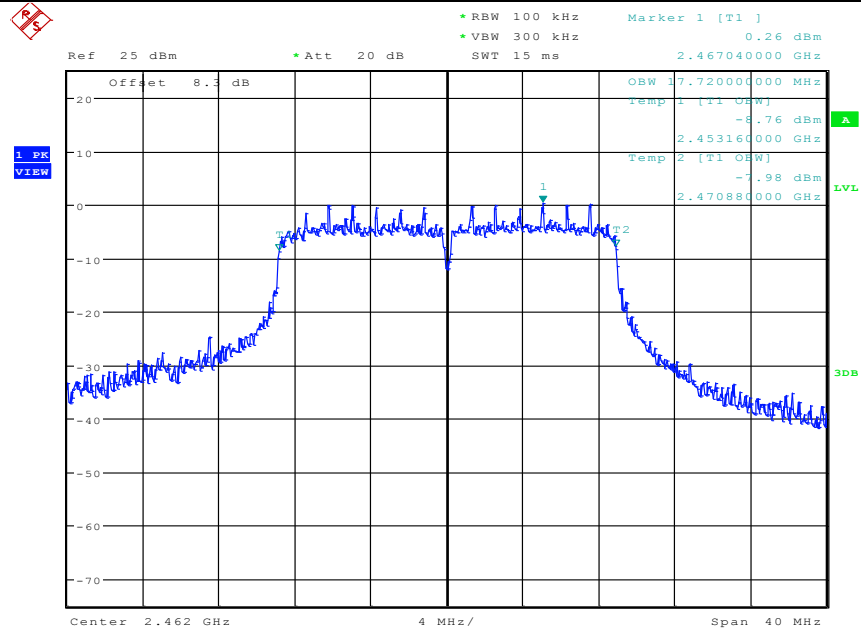

Date: 30.OCT.2018 09:37:31


6.5 Power Spectral Density

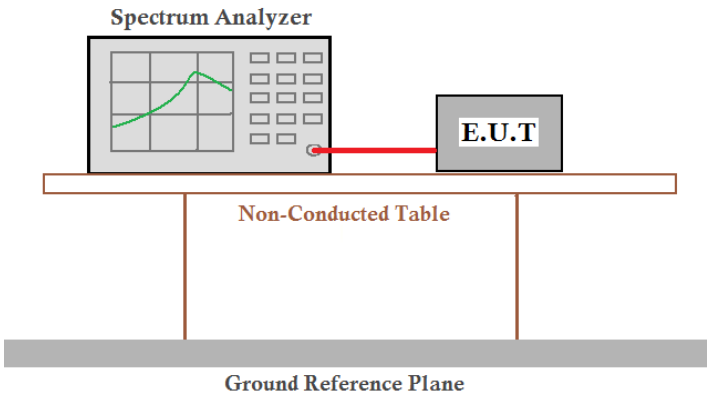
Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) . Only the worst case is recorded in the report.
Limit:	≤8.00dBm/3kHz
Test Results:	Pass


Measurement Data

802.11b mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-16.790	≤ 8.00	Pass
Middle	-15.190	≤ 8.00	Pass
Highest	-14.420	≤ 8.00	Pass
802.11g mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-16.650	≤ 8.00	Pass
Middle	-16.340	≤ 8.00	Pass
Highest	-15.490	≤ 8.00	Pass
802.11n(HT20) mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-16.830	≤ 8.00	Pass
Middle	-15.830	≤ 8.00	Pass
Highest	-15.210	≤ 8.00	Pass


Test plot as follows:

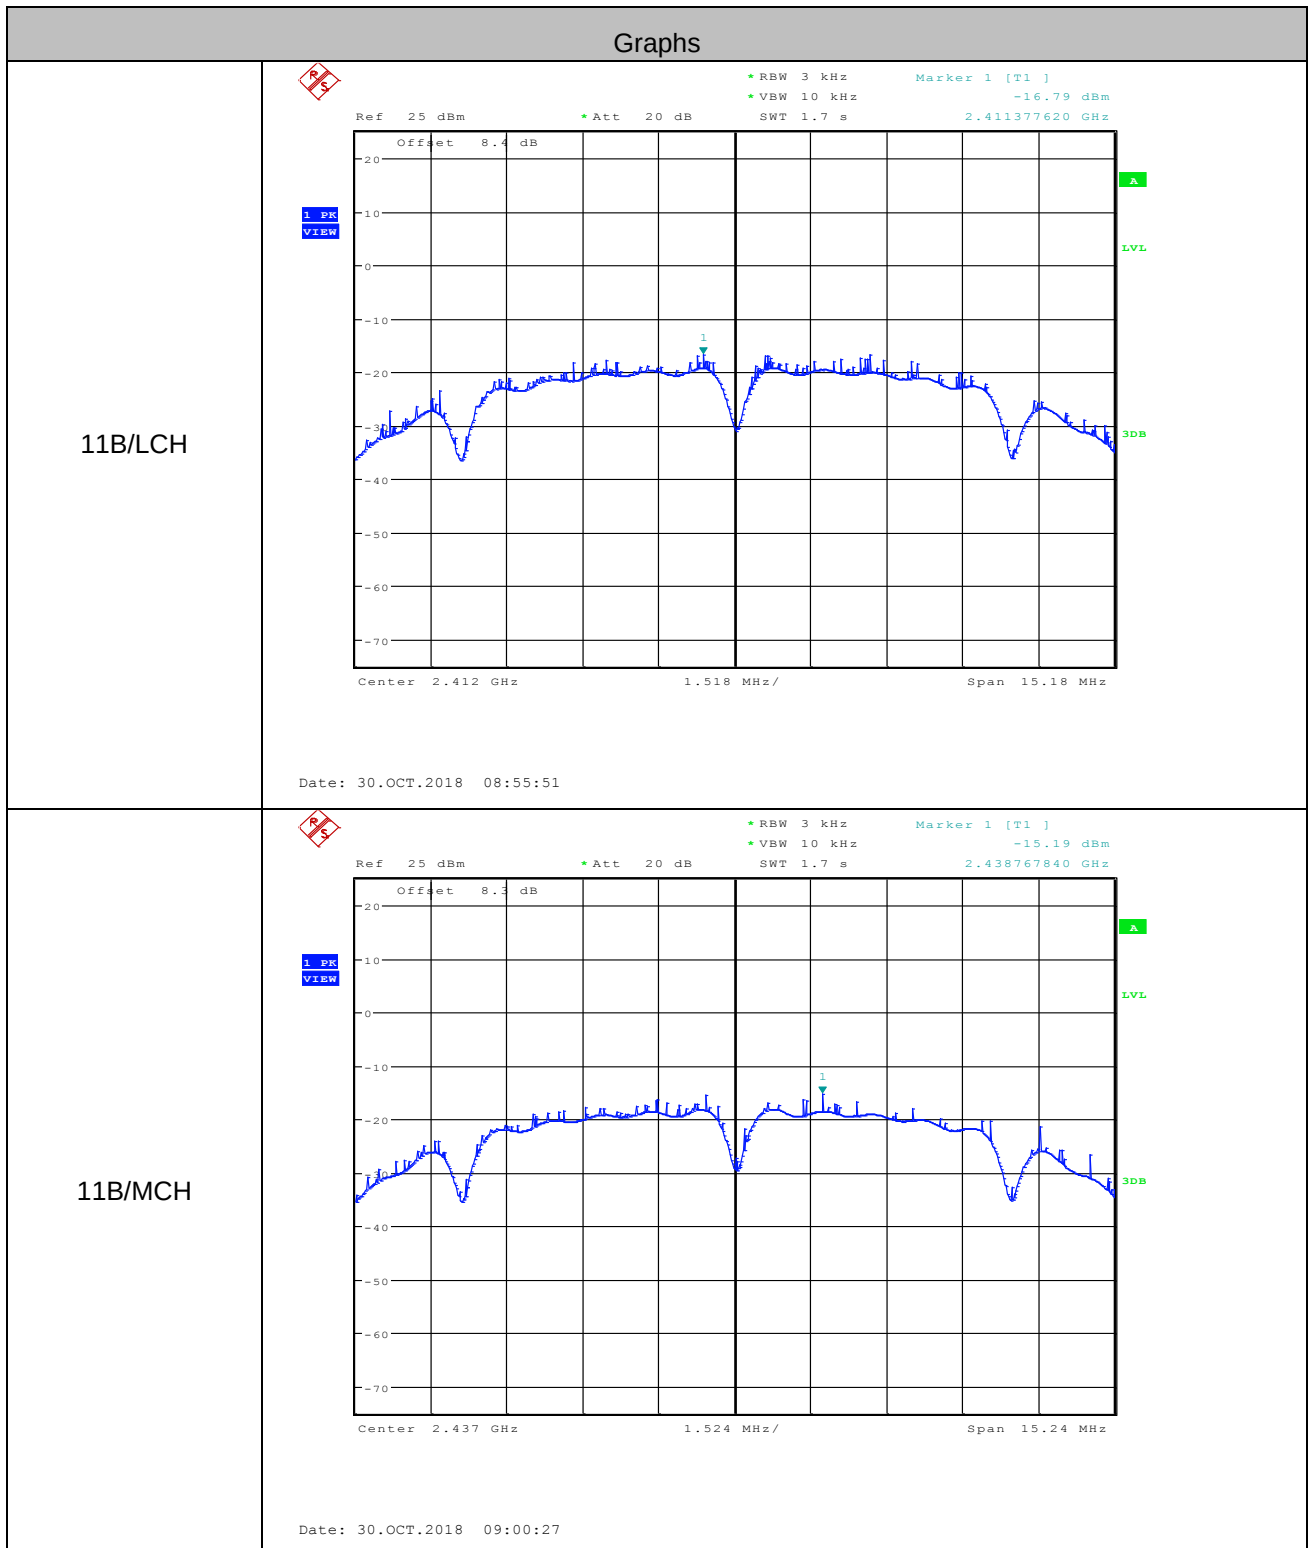

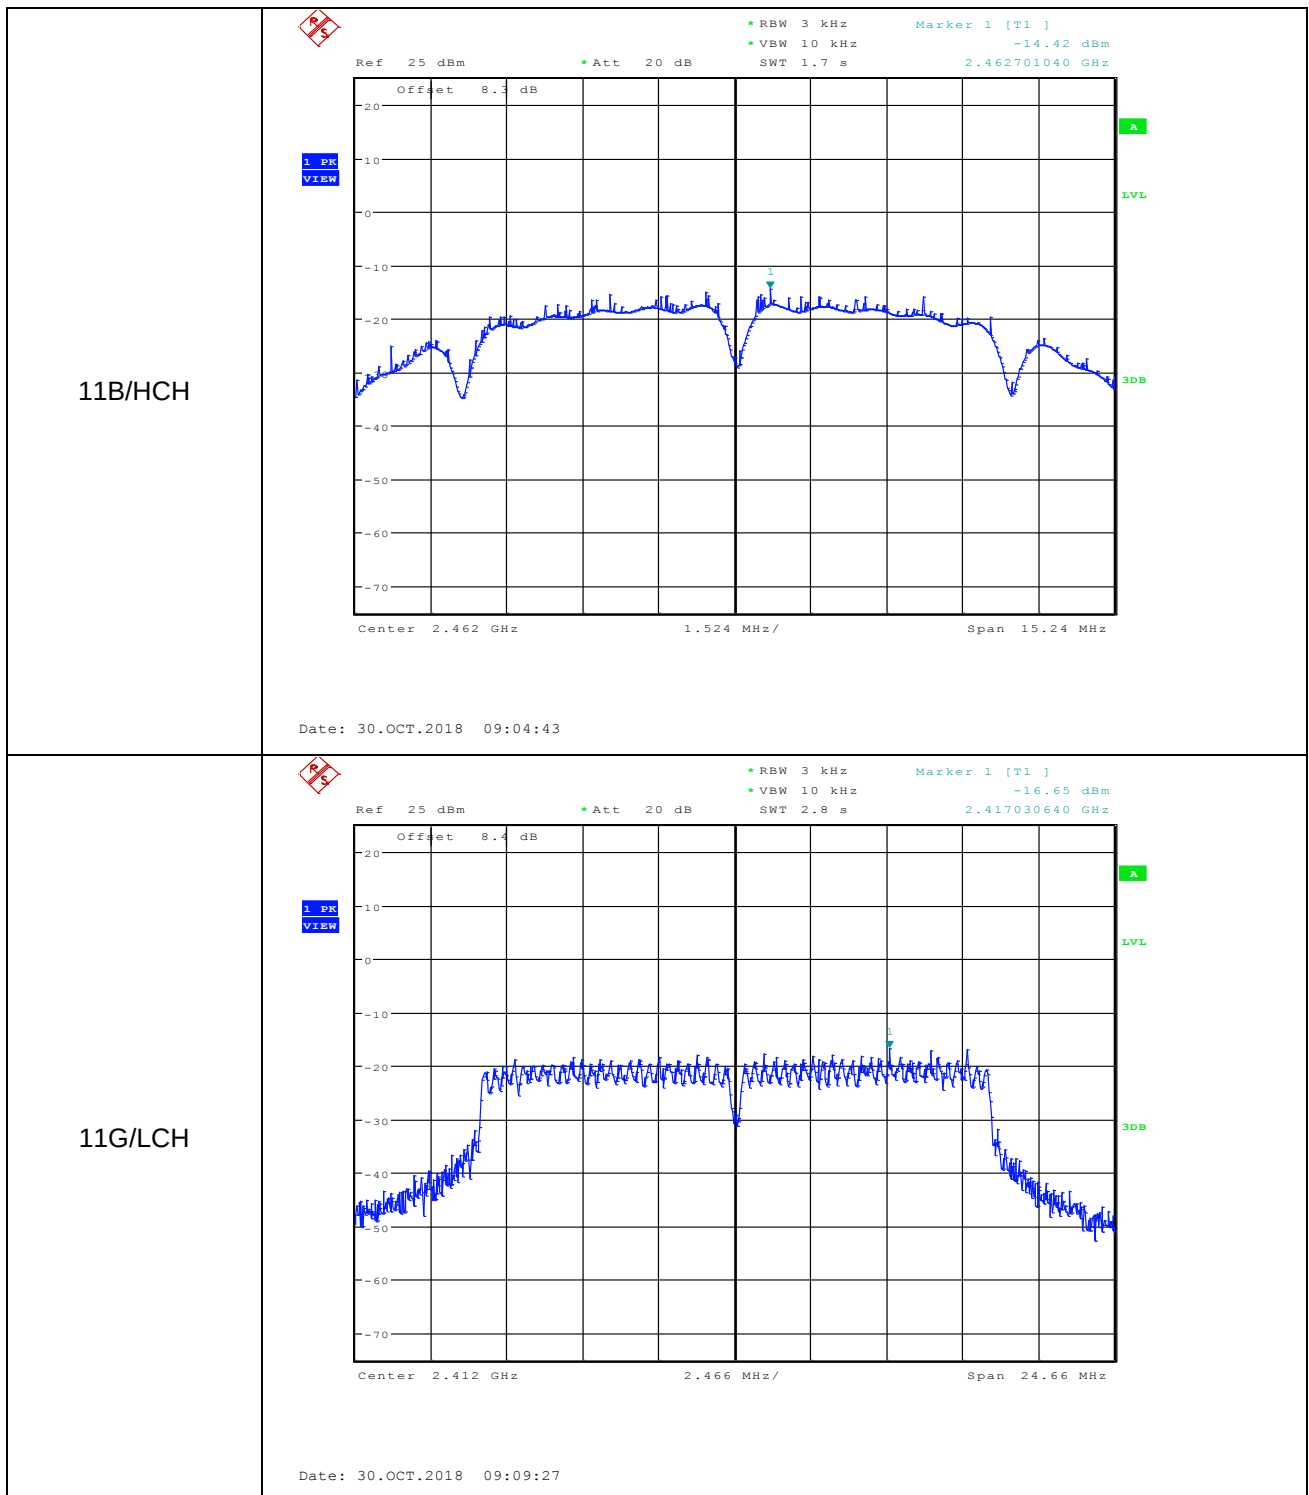

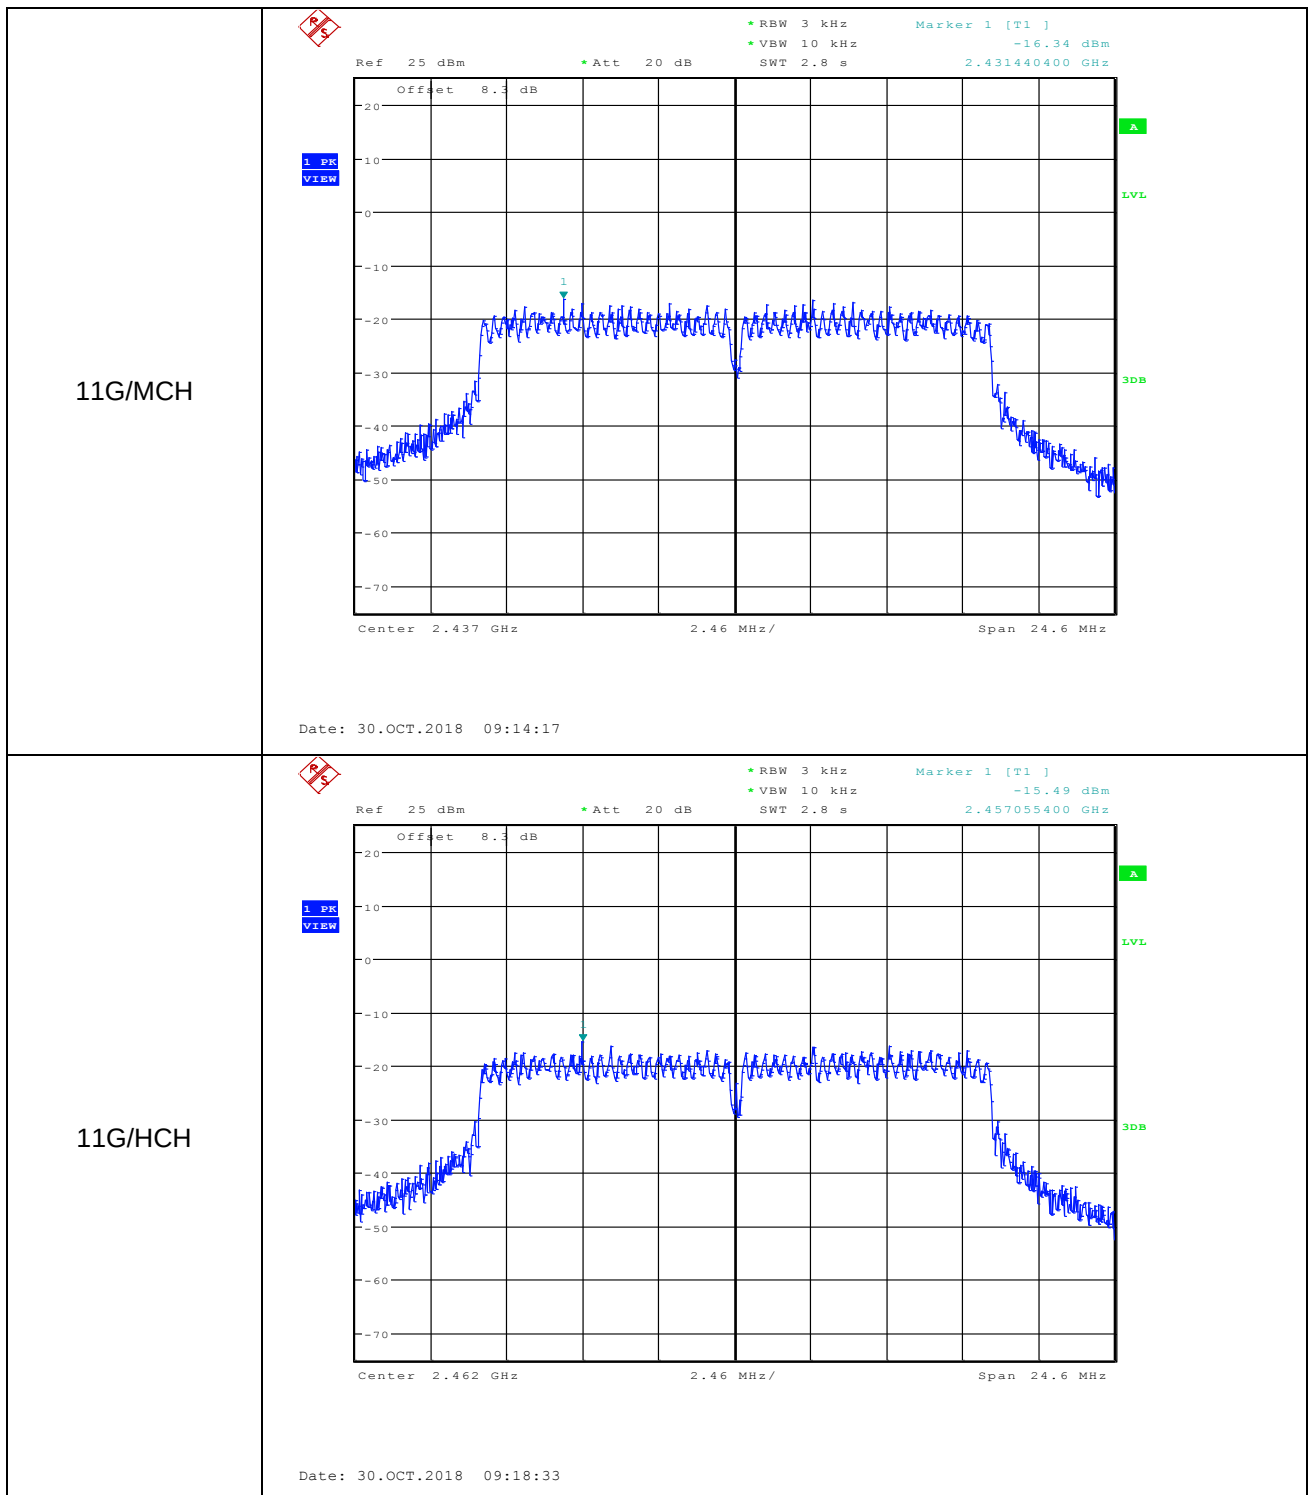


11N20SISO/LCH

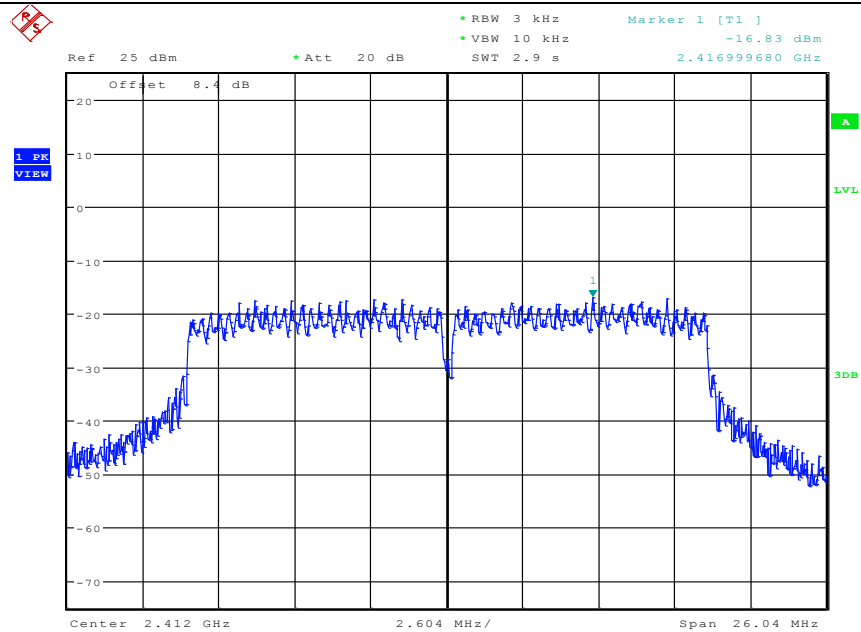


Date: 30.OCT.2018 09:26:02

11N20SISO/MCH

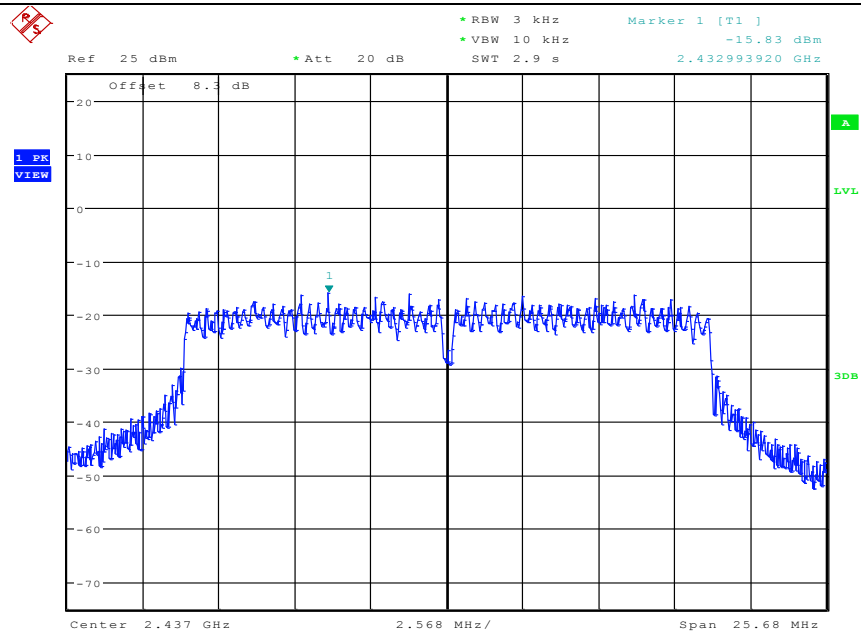


Date: 30.OCT.2018 09:34:12

11N20SISO/HCH

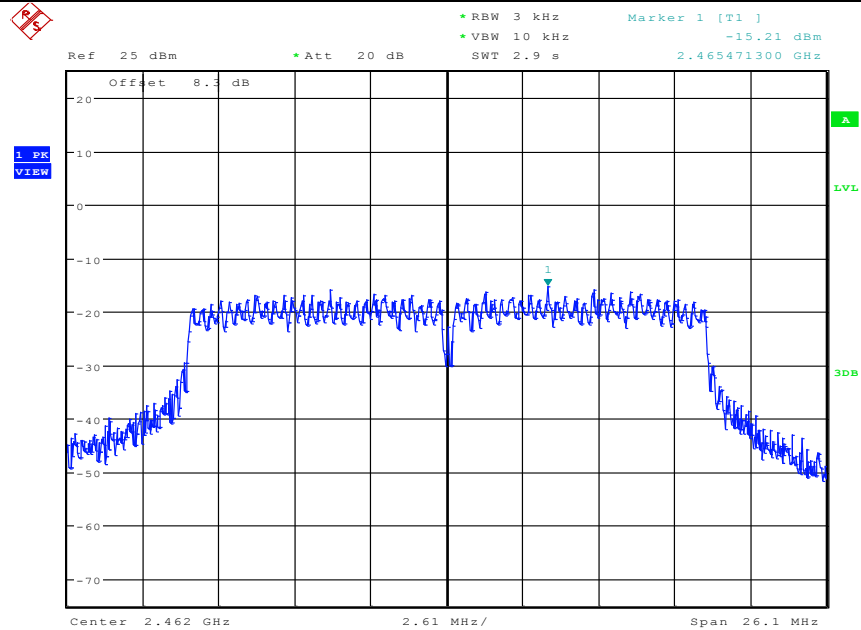

Date: 30.OCT.2018 09:41:28


6.6 Band-edge for RF Conducted Emissions

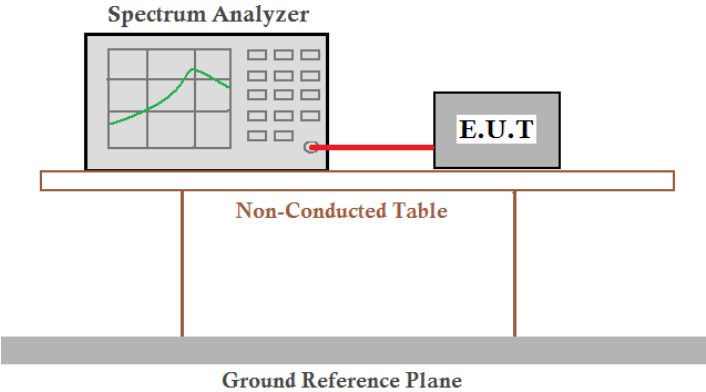
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) . Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

Test Data:


Test mode: 802.11b				
Test channel	Frequency(MHz)	Emission Level(dBm)	Limit(dBm)	Result
Lowest	2400	-38.990	-20.95	Pass
Highest	2483.5	-50.440	-19.07	Pass
Test mode: 802.11g				
Test channel	Frequency(MHz)	Emission Level(dBm)	Limit(dBm)	Result
Lowest	2400	-30.740	-20.93	Pass
Highest	2483.5	-43.210	-19.75	Pass
Test mode: 802.11n(HT20)				
Test channel	Frequency(MHz)	Emission Level(dBm)	Limit(dBm)	Result
Lowest	2400	-28.760	-21.13	Pass
Highest	2483.5	-42.900	-20.03	Pass

Test plot as follows:

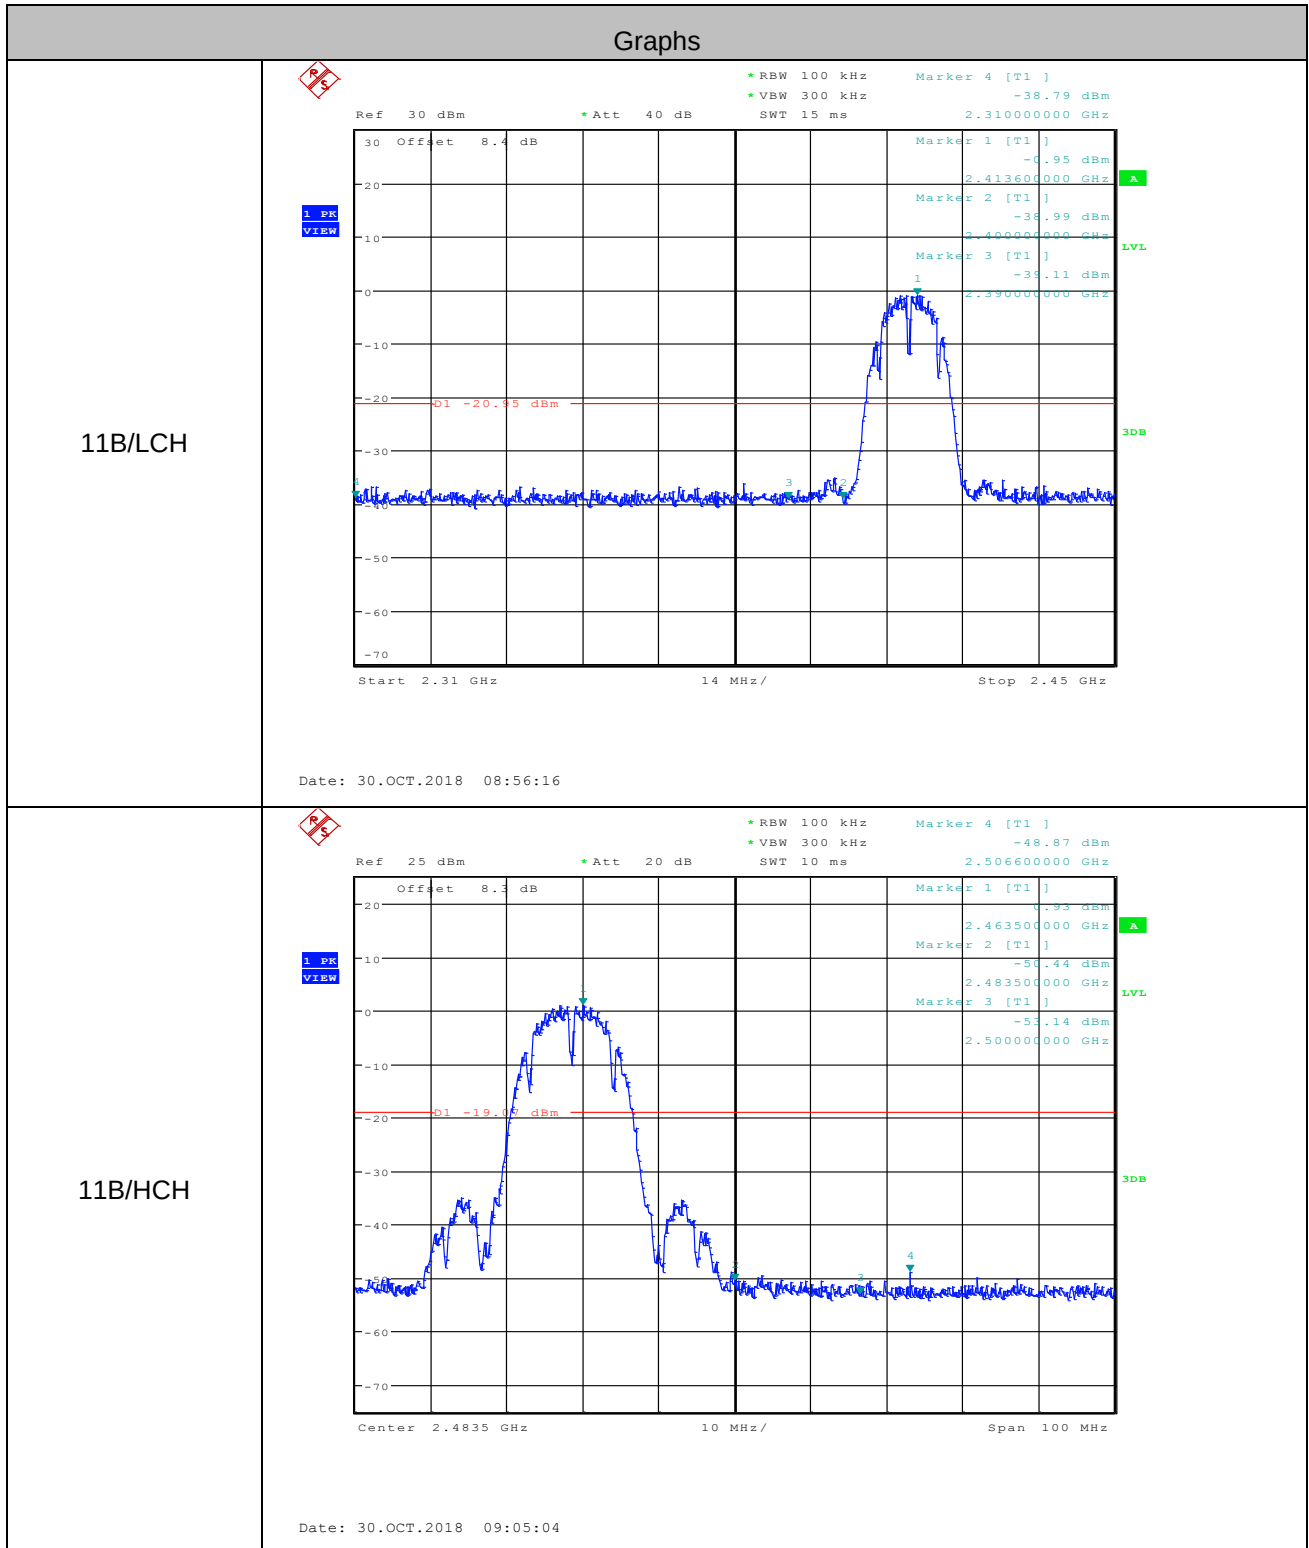

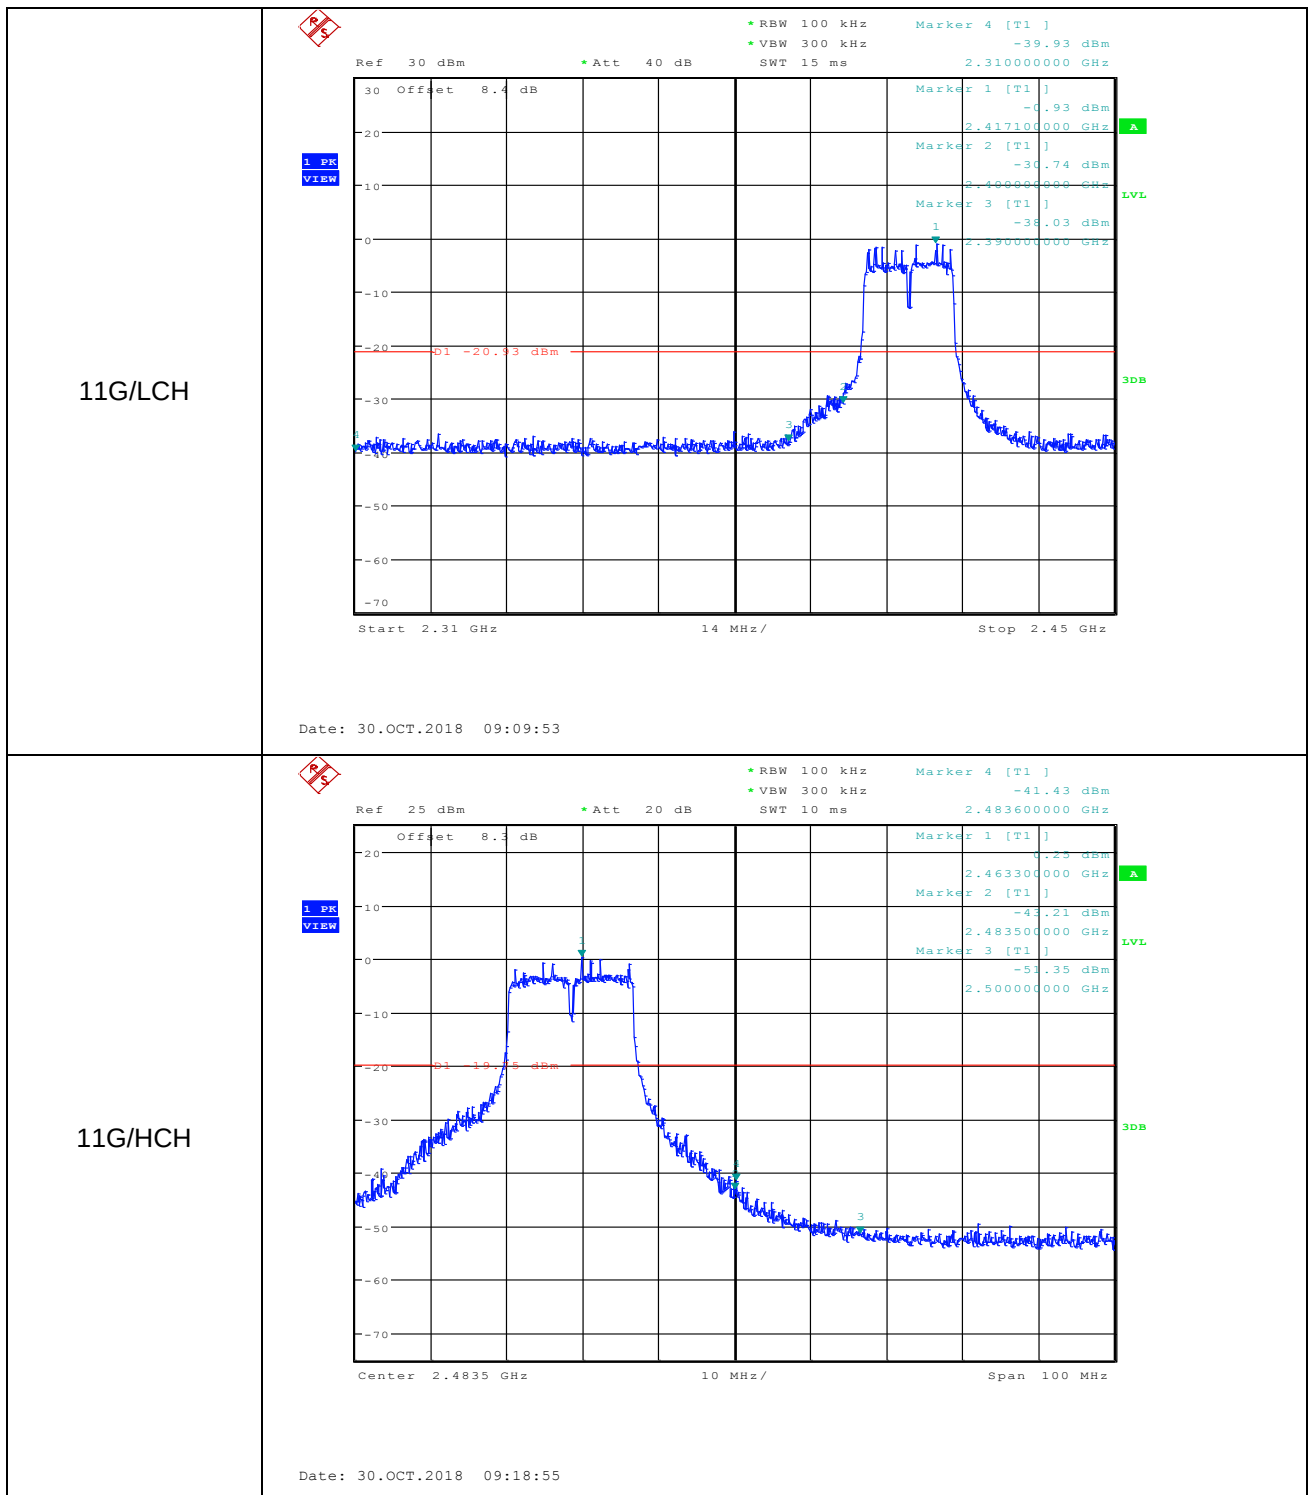


11N20SISO/LCH

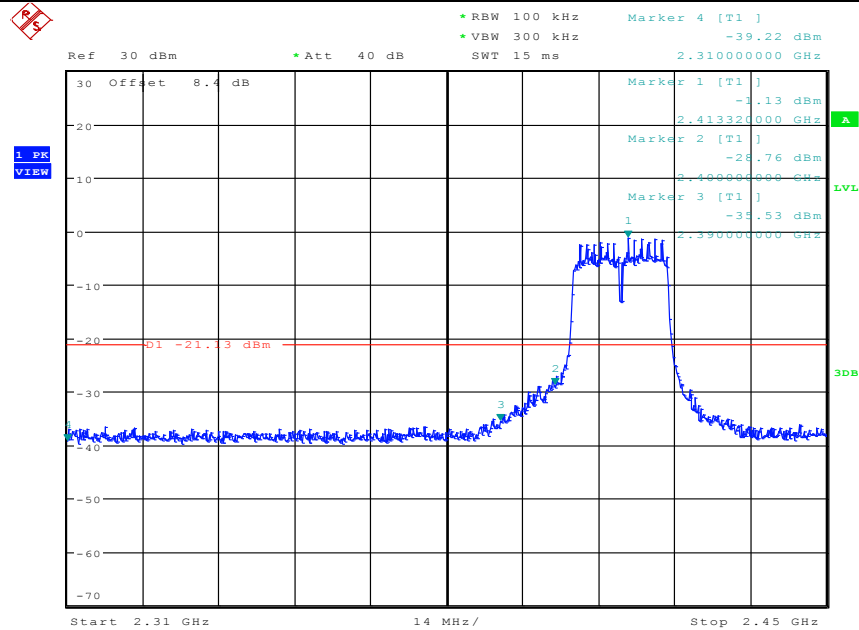


Date: 30.OCT.2018 09:26:48

11N20SISO/HCH

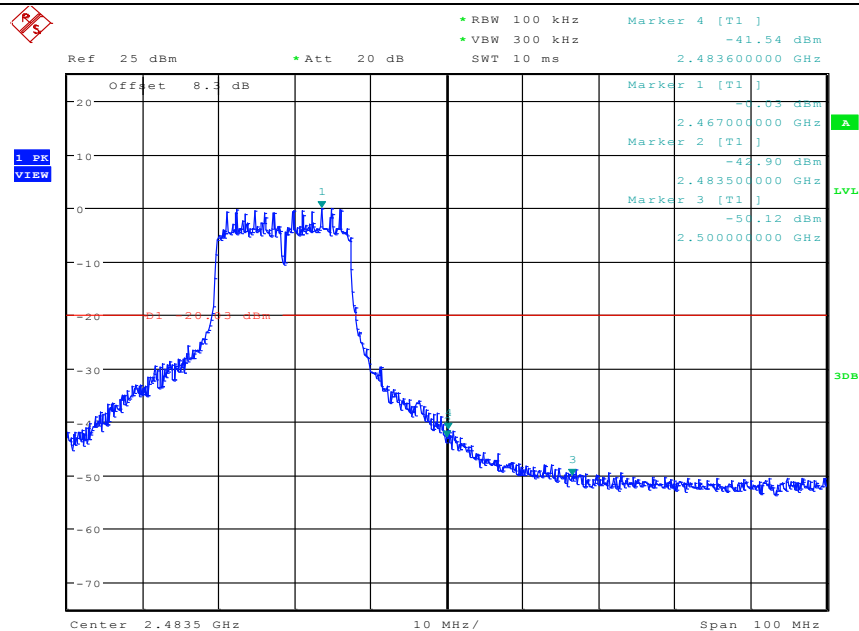




Date: 30.OCT.2018 09:42:09

6.7 RF Conducted Spurious Emissions

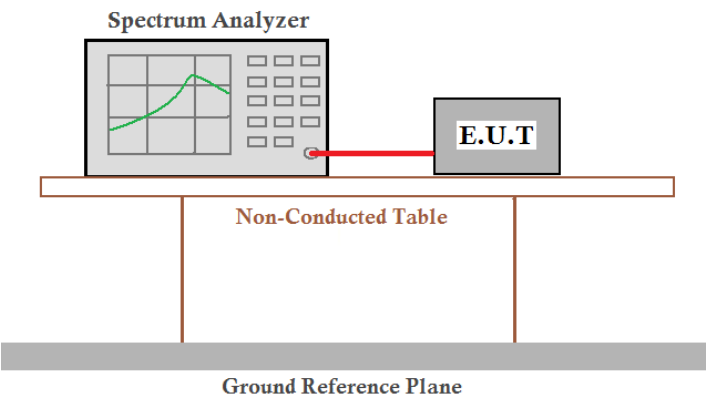
Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 Offset=cable loss+ attenuation factor
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

Test plot as follows:

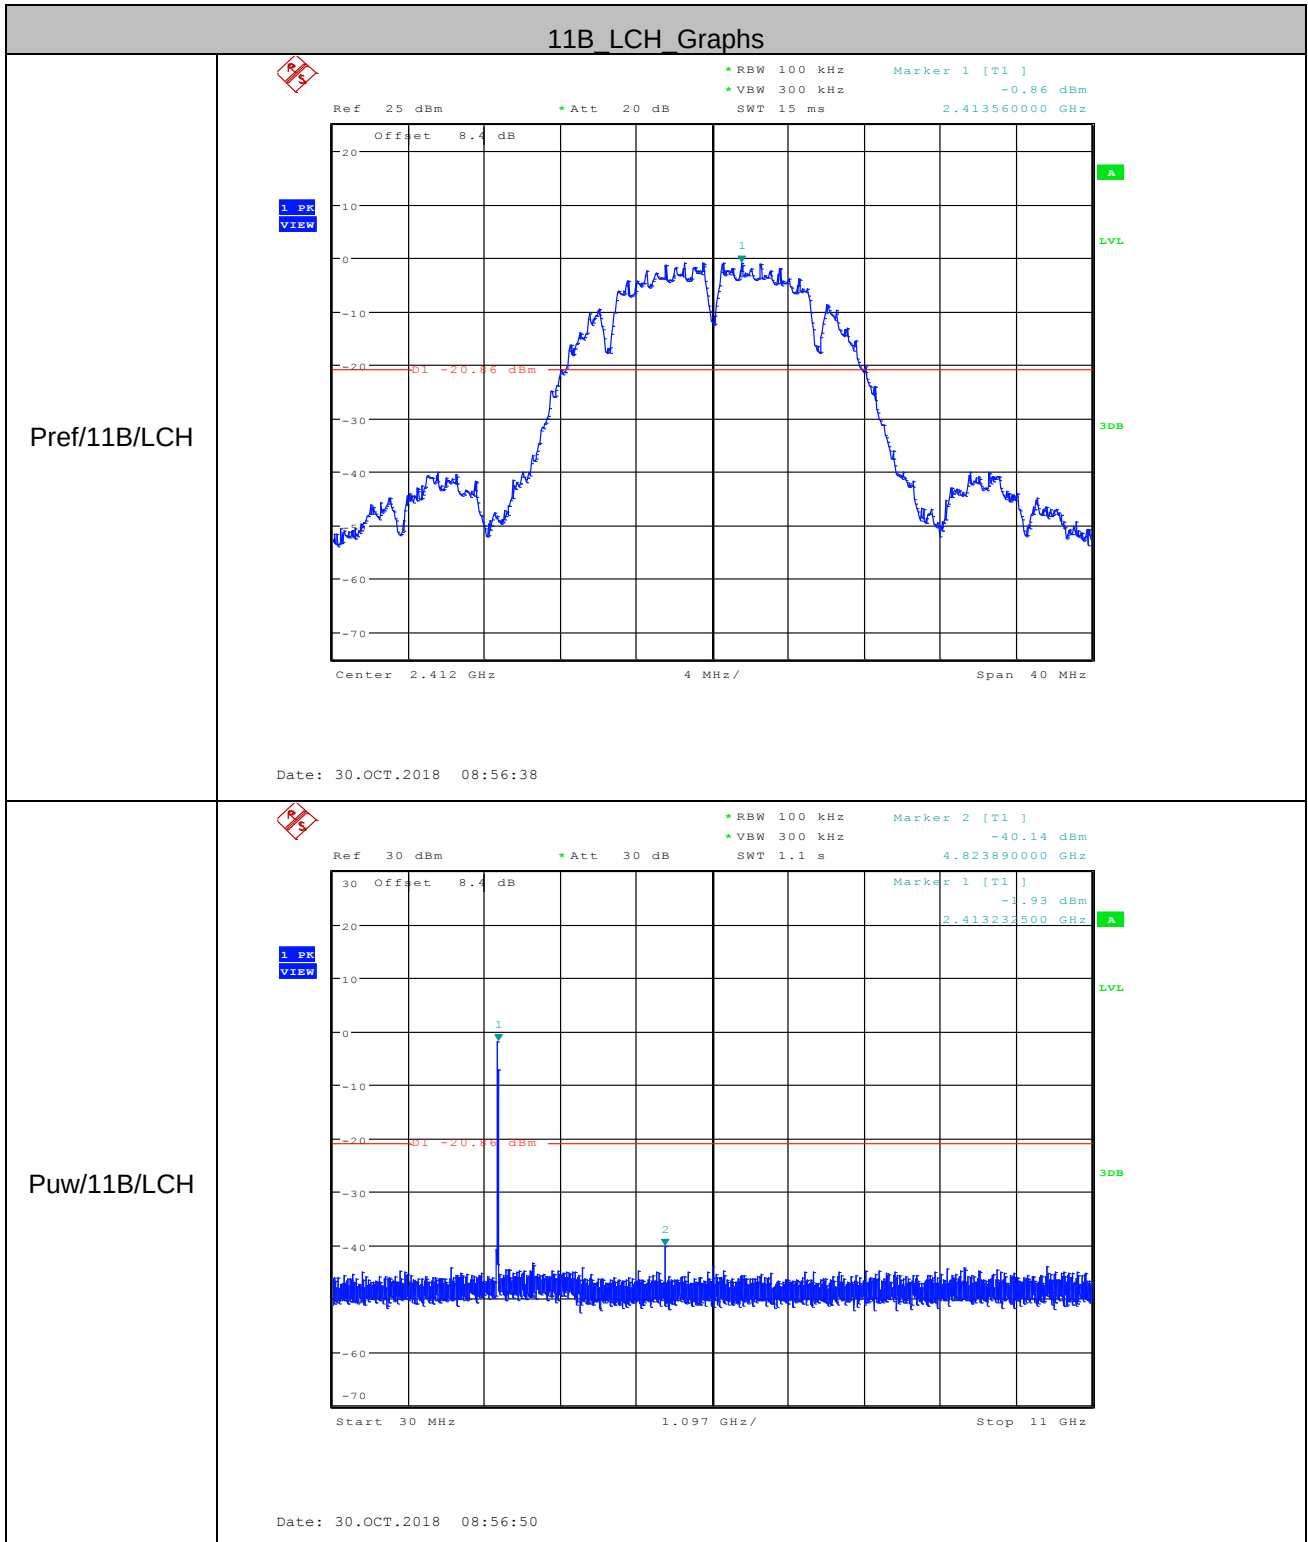


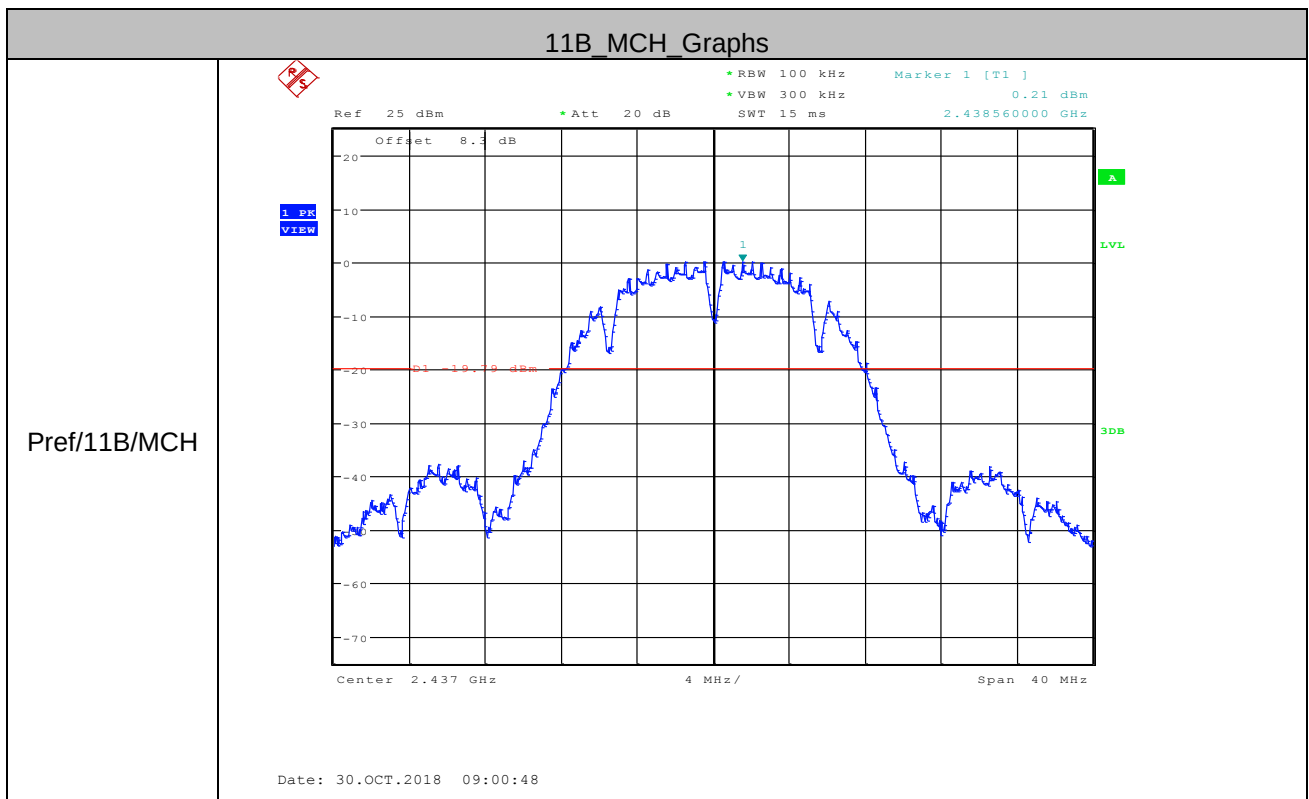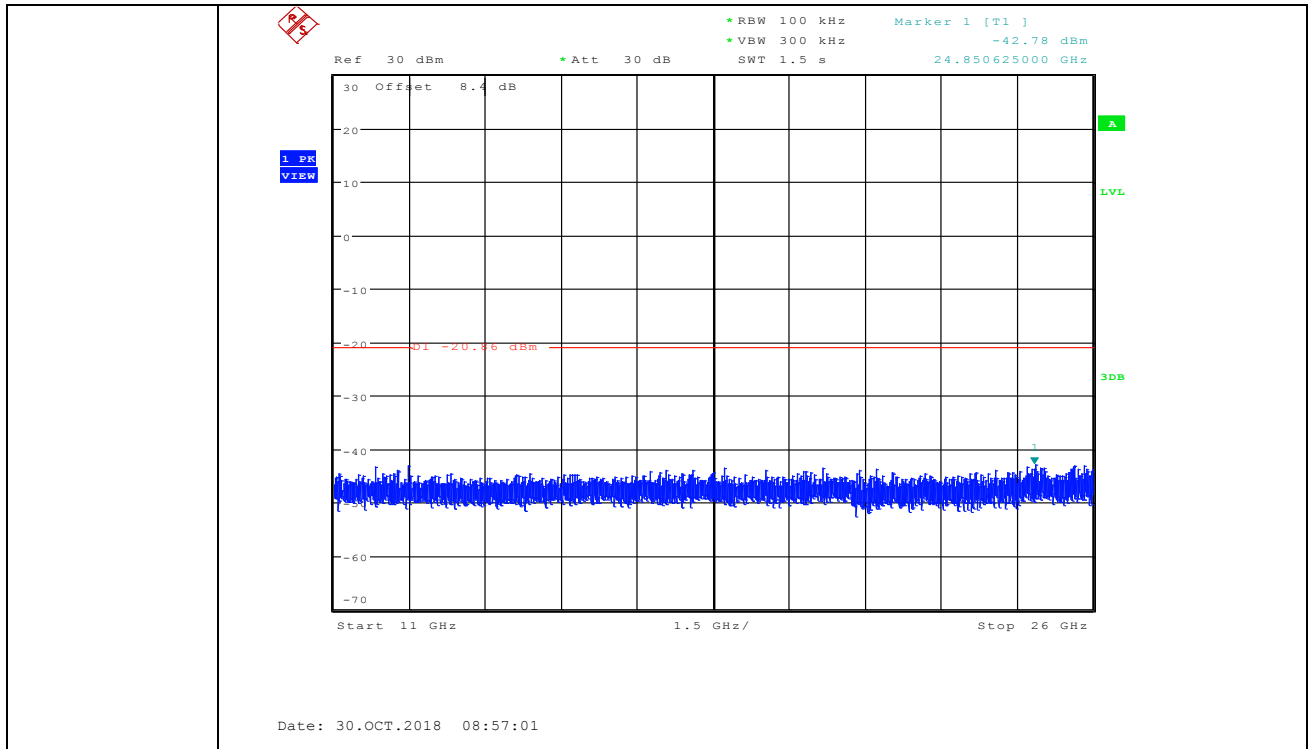


Puw/11B/MCH


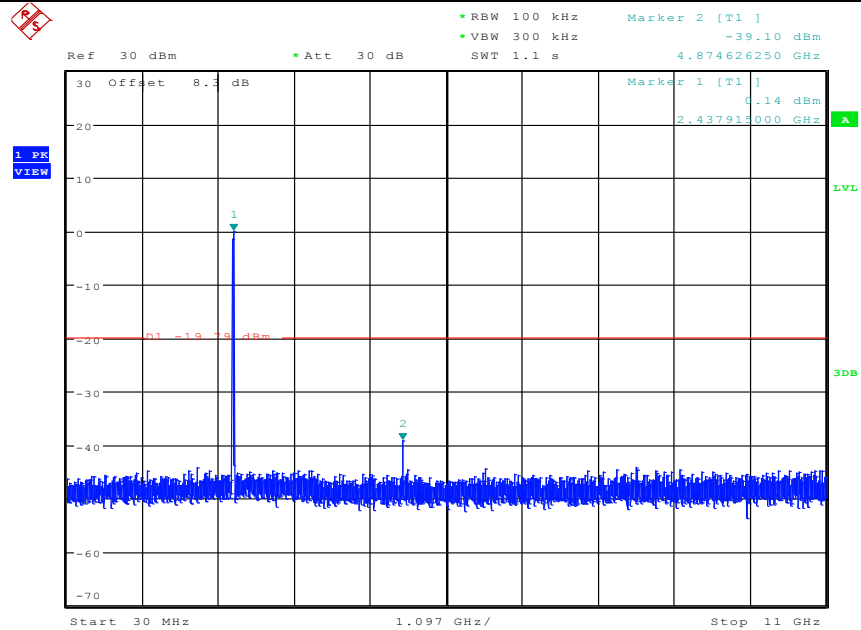


Date: 30.OCT.2018 09:01:01

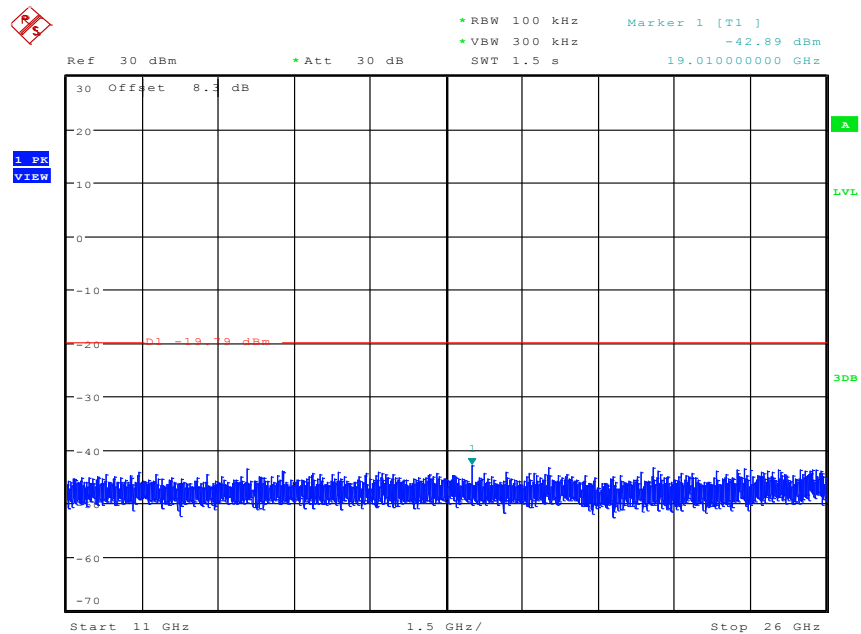


Date: 30.OCT.2018 09:01:12

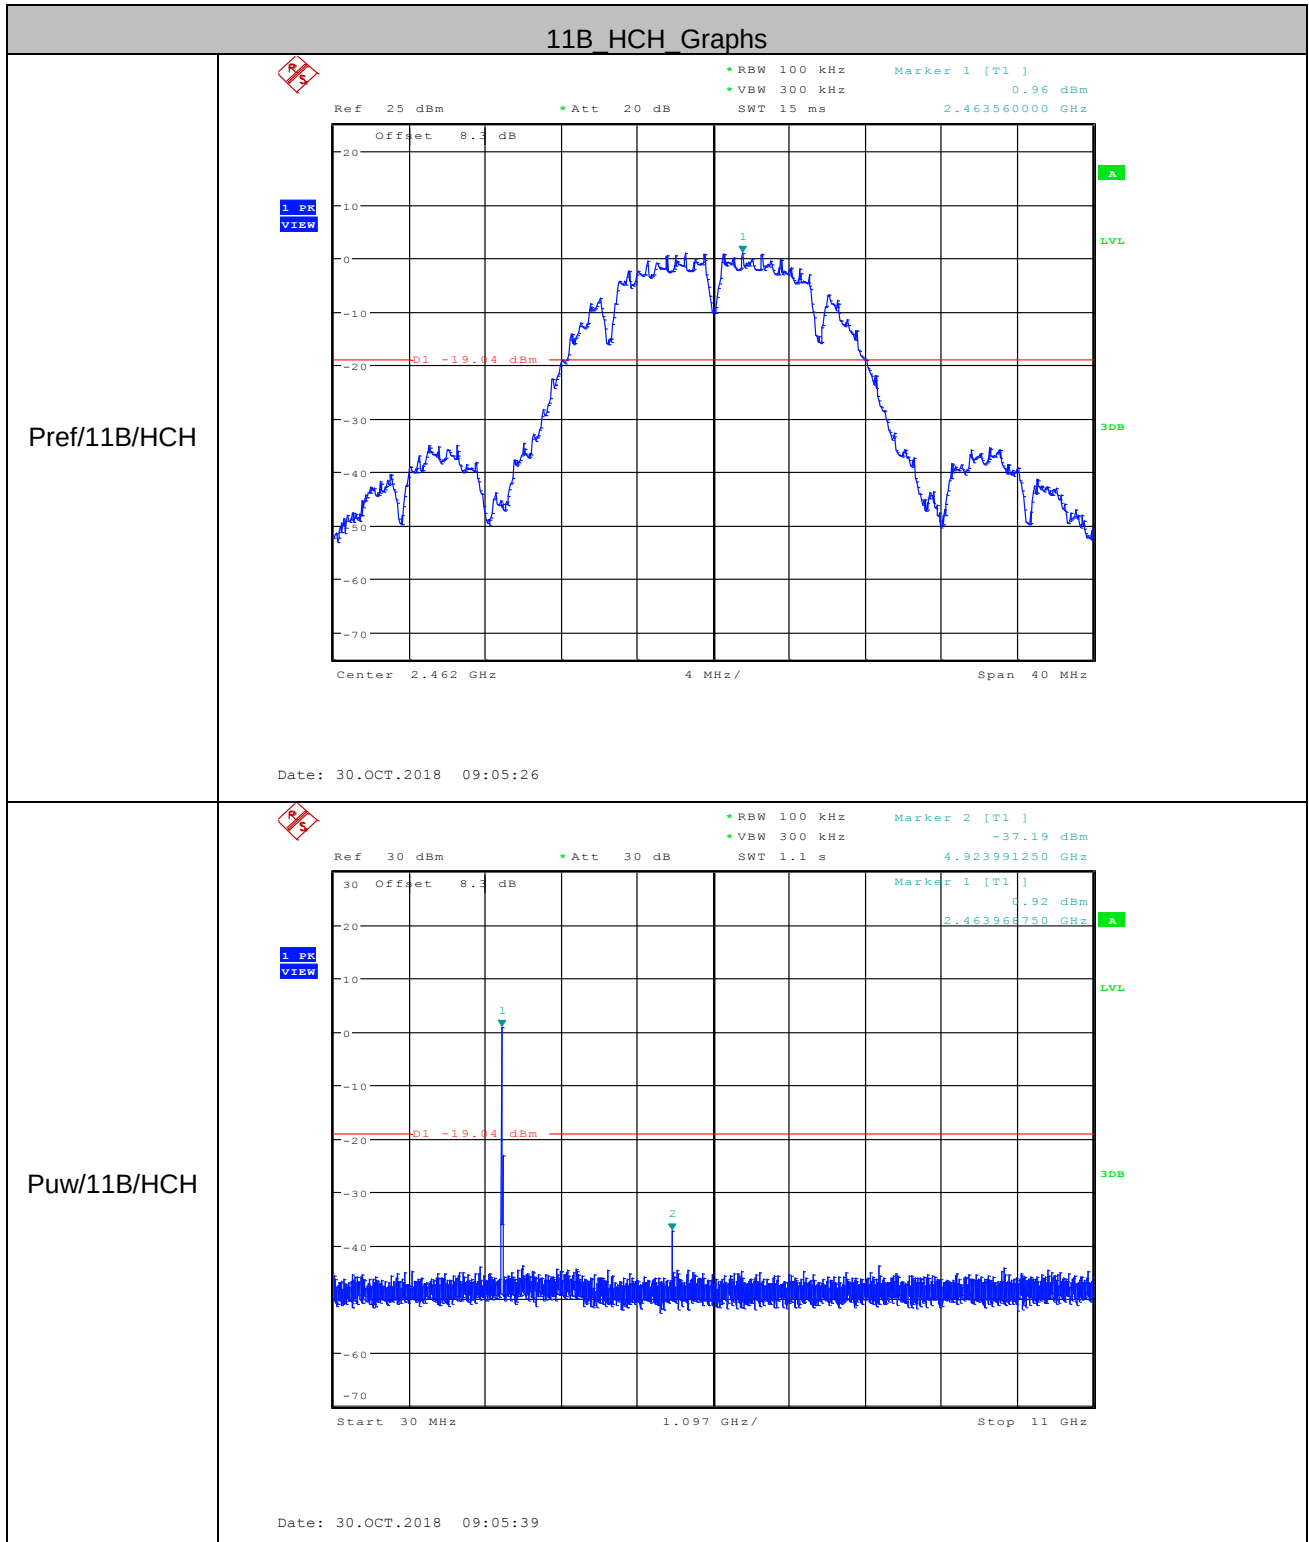

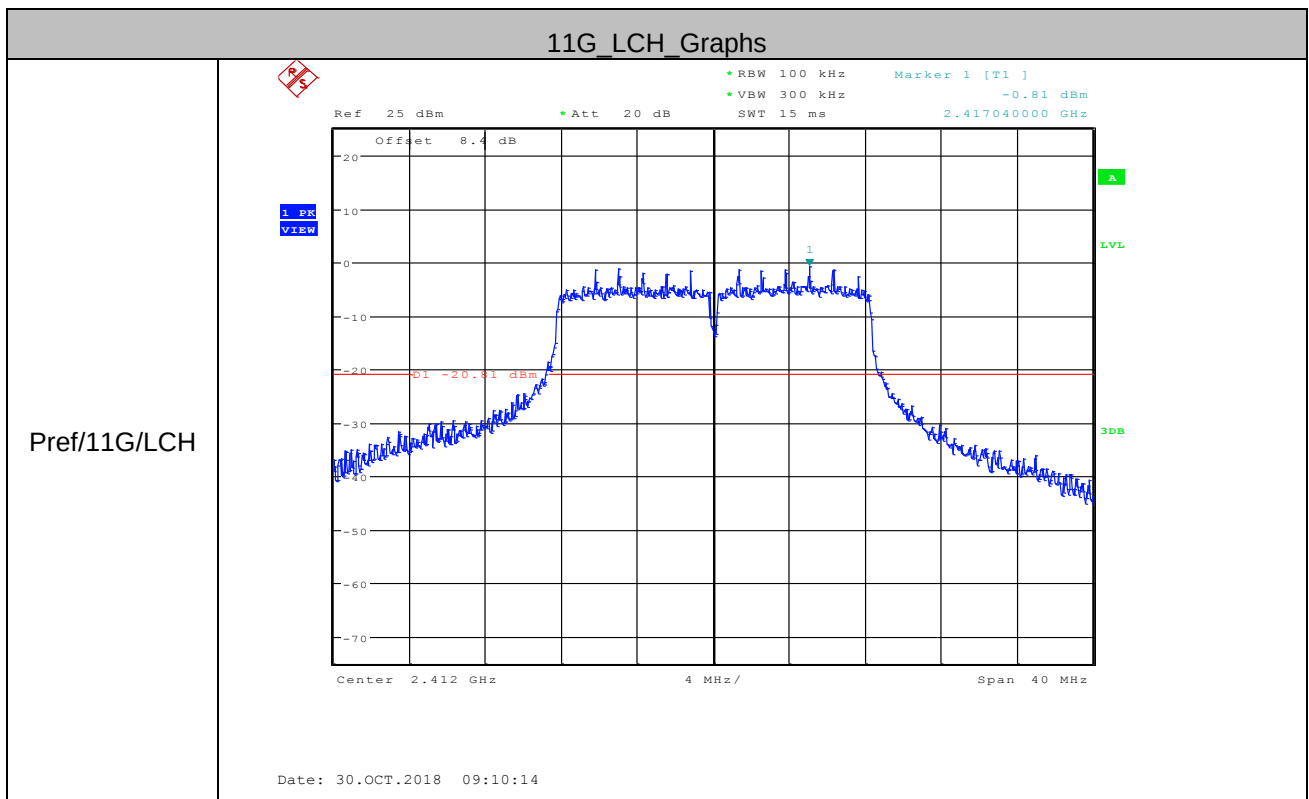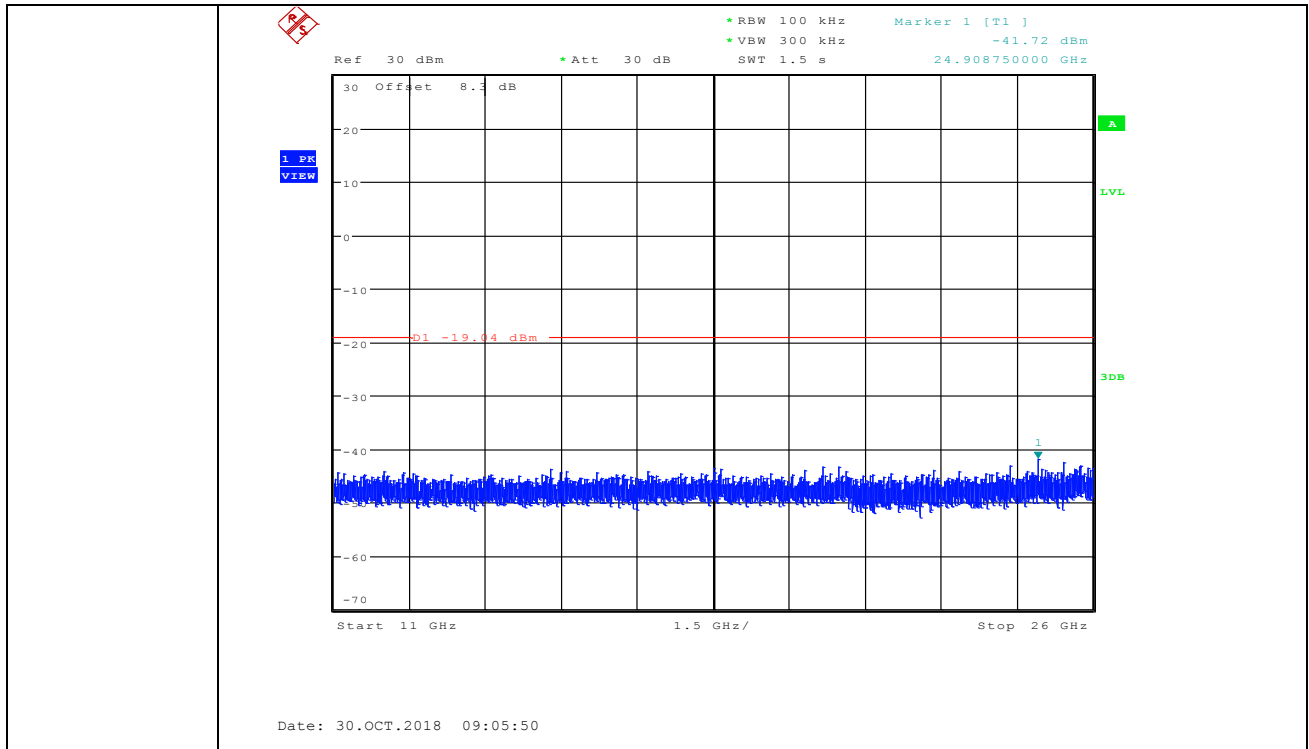


Pref/11G/LCH


Puw/11G/LCH


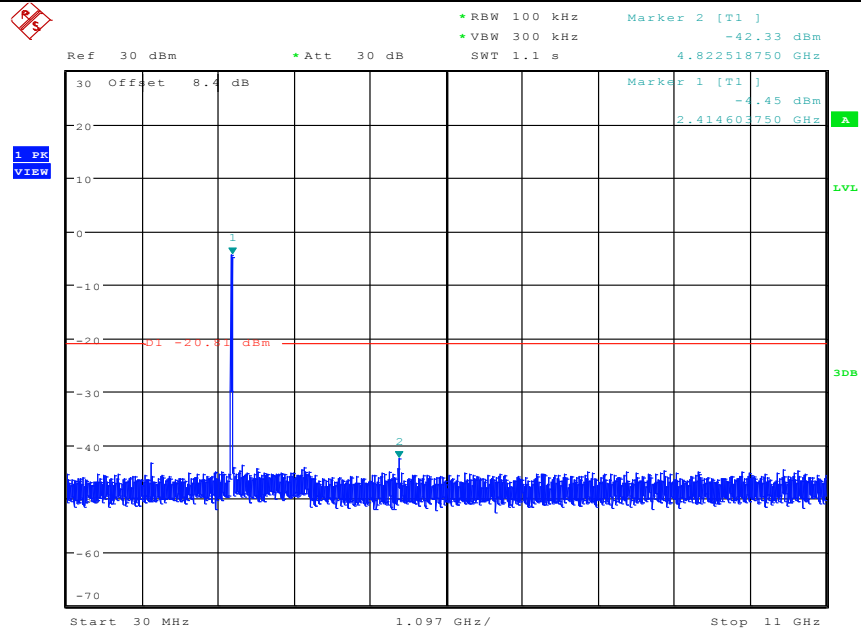


Date: 30.OCT.2018 09:10:27

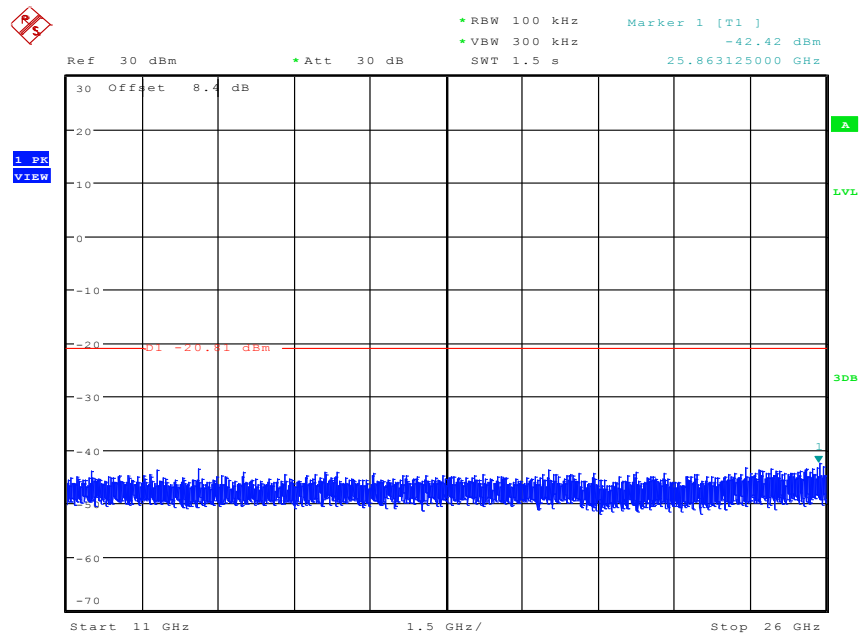


Date: 30.OCT.2018 09:10:38

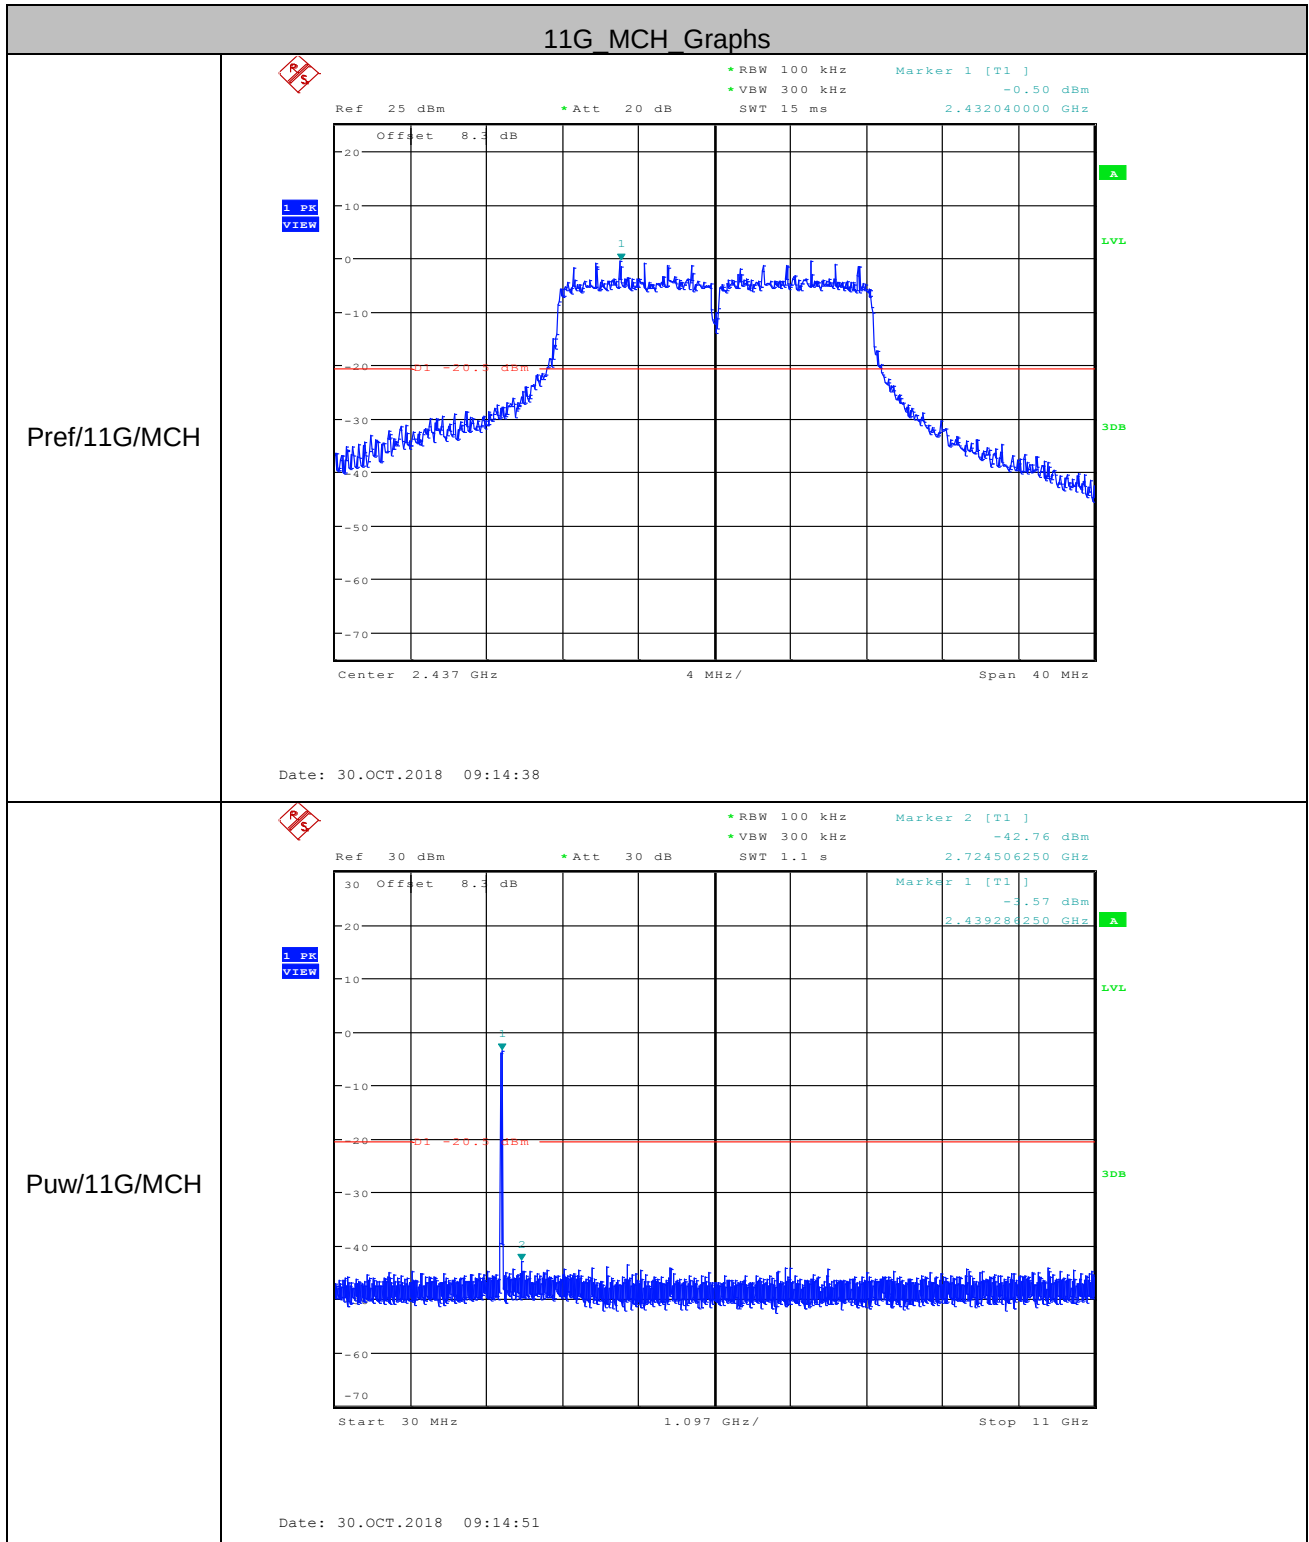


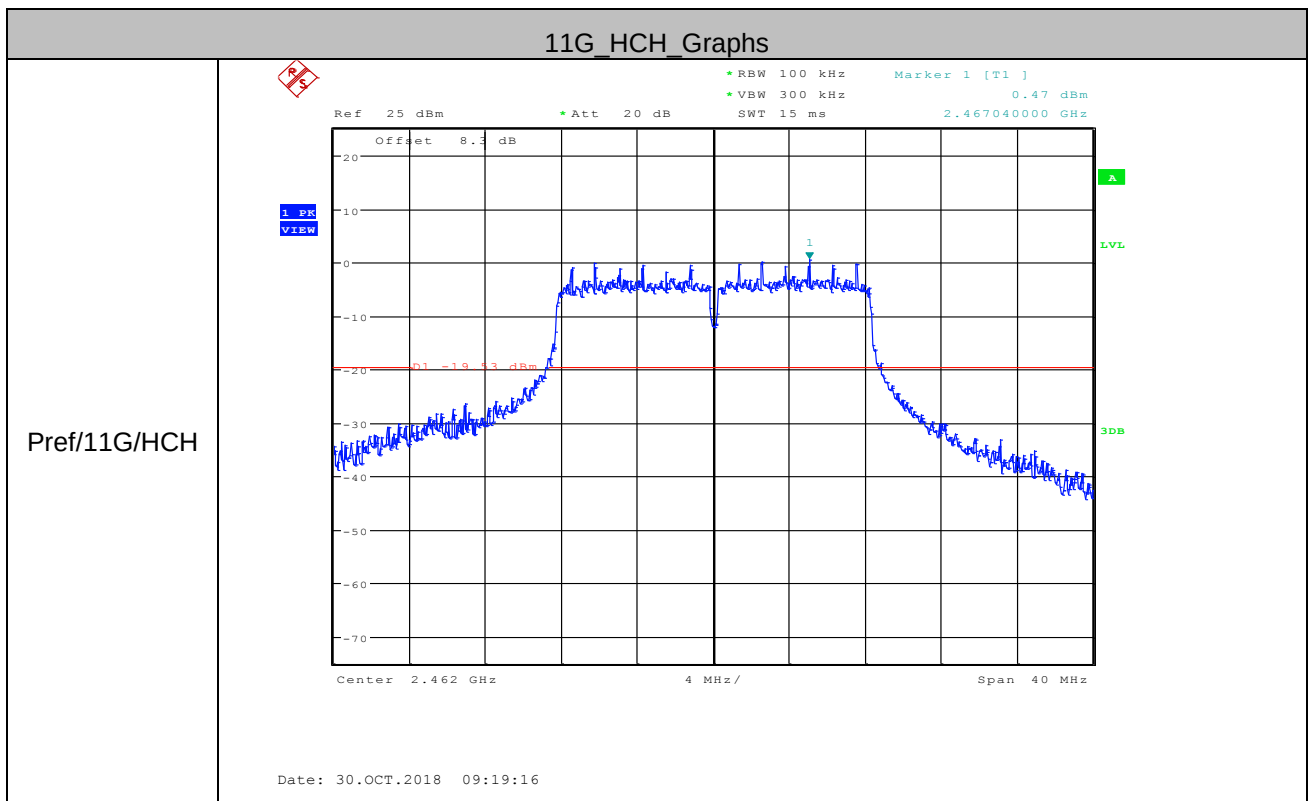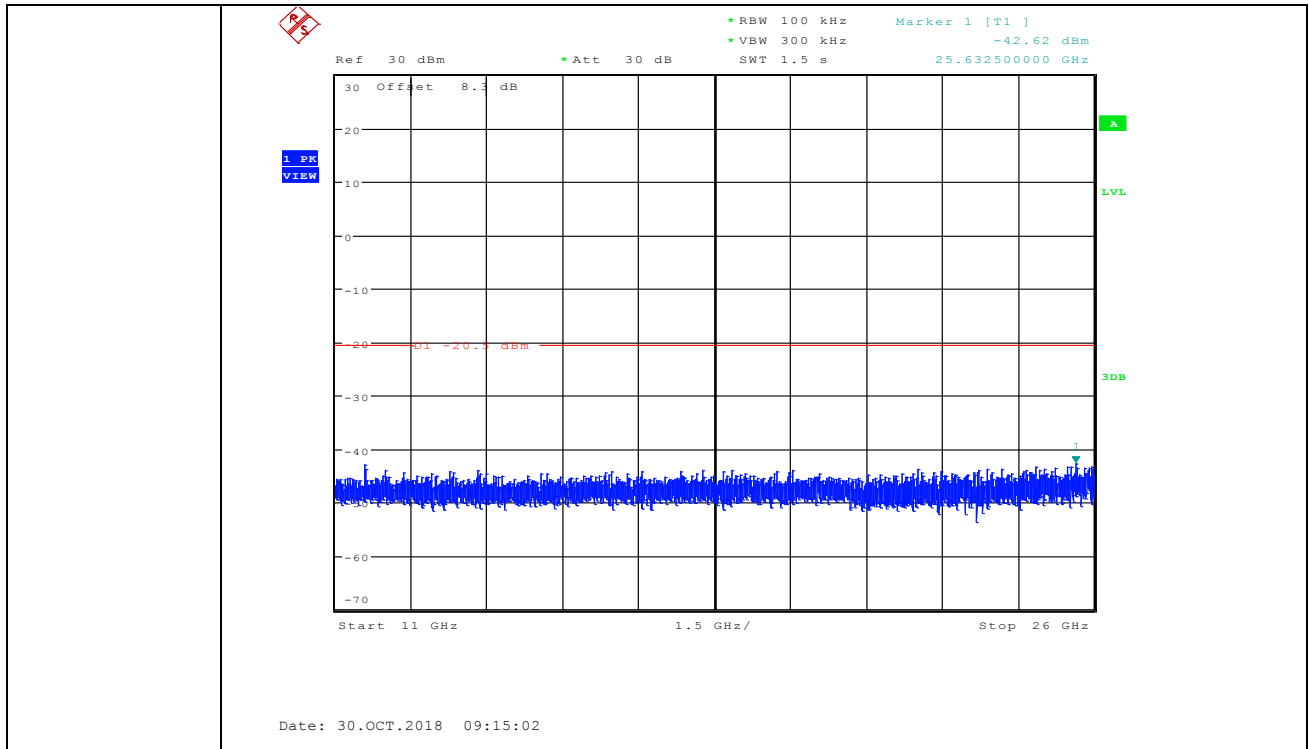


Puw/11G/HCH


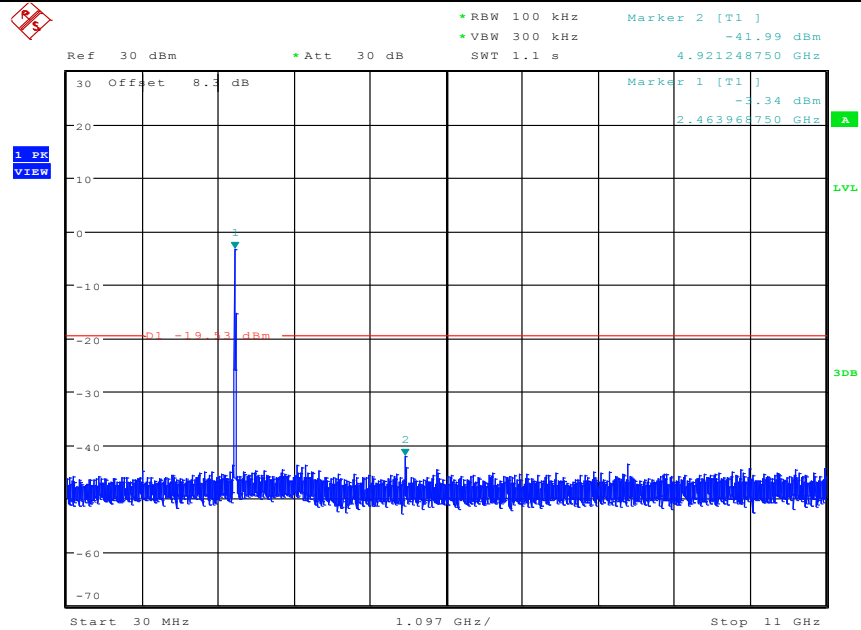


Date: 30.OCT.2018 09:19:29

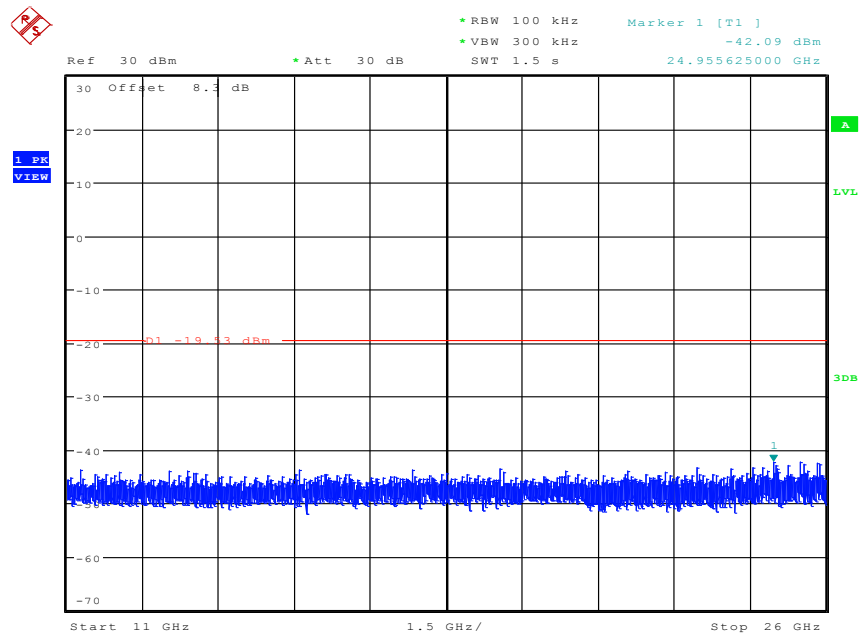


Date: 30.OCT.2018 09:19:40

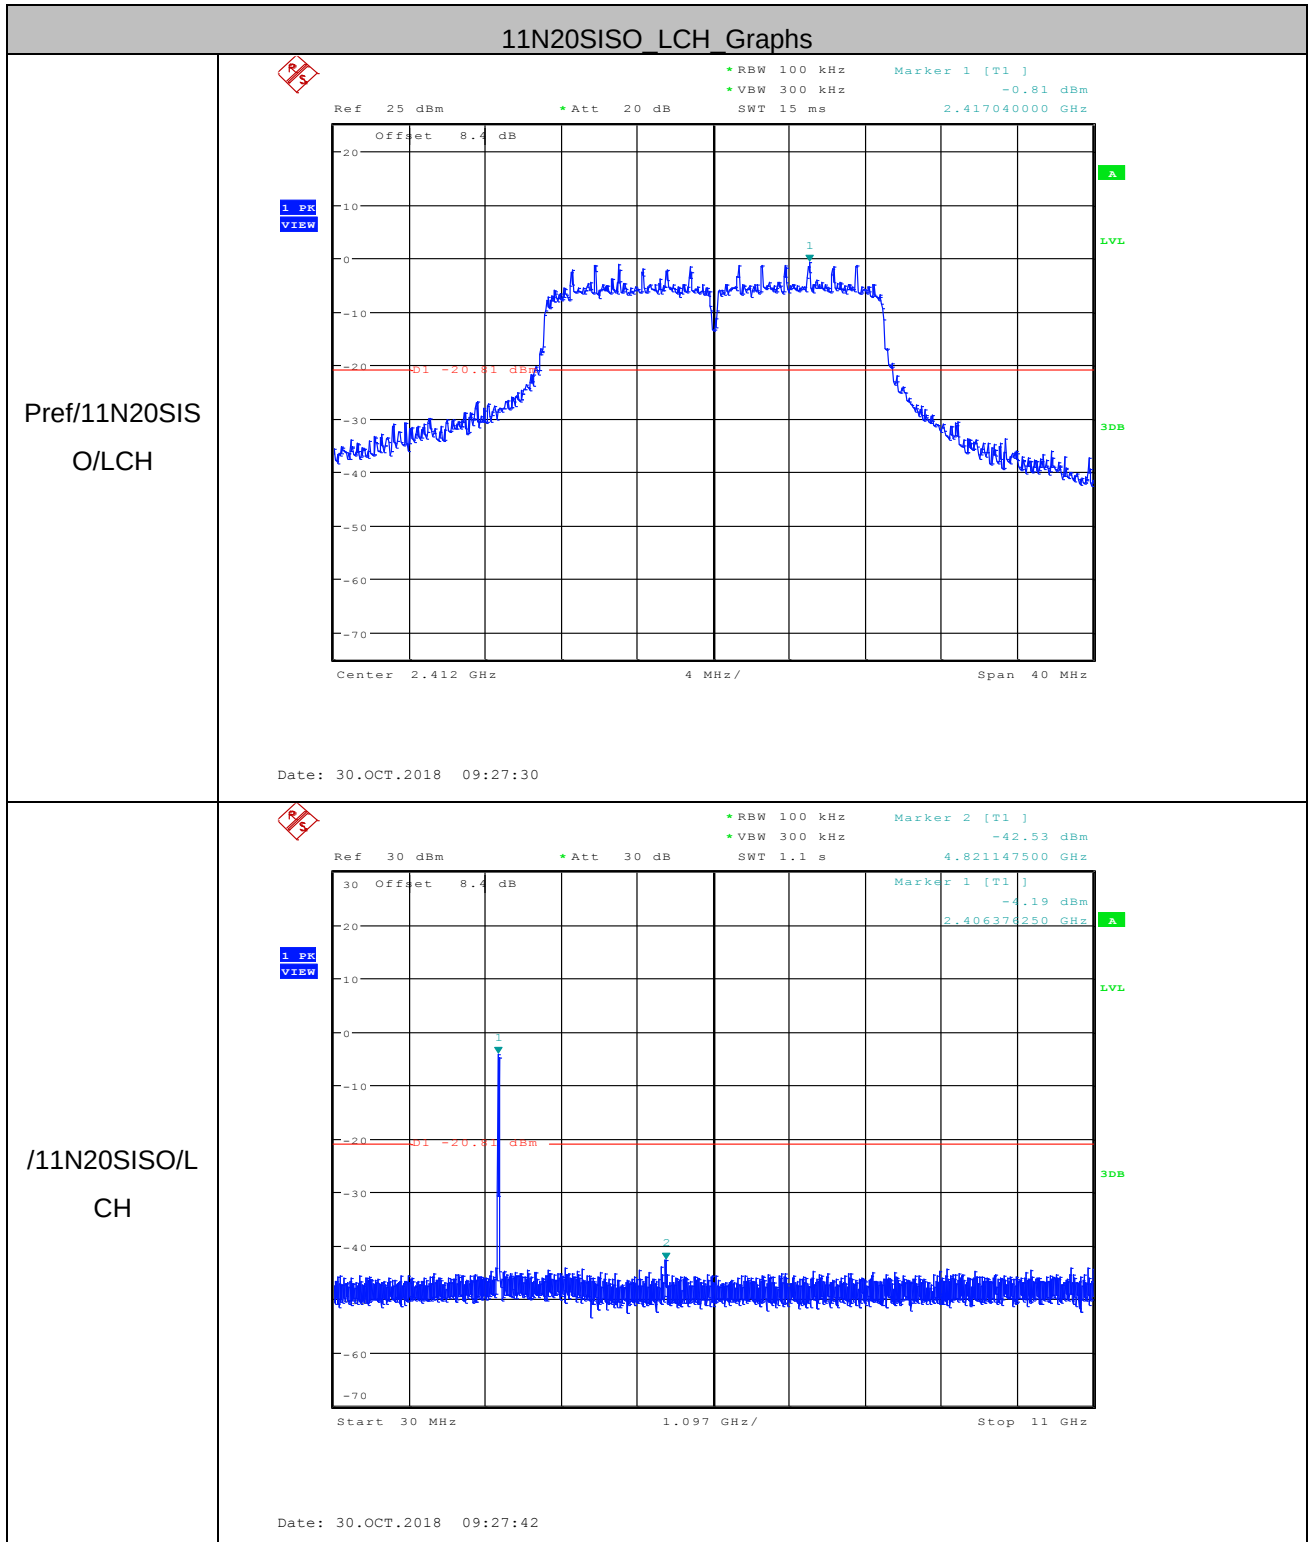


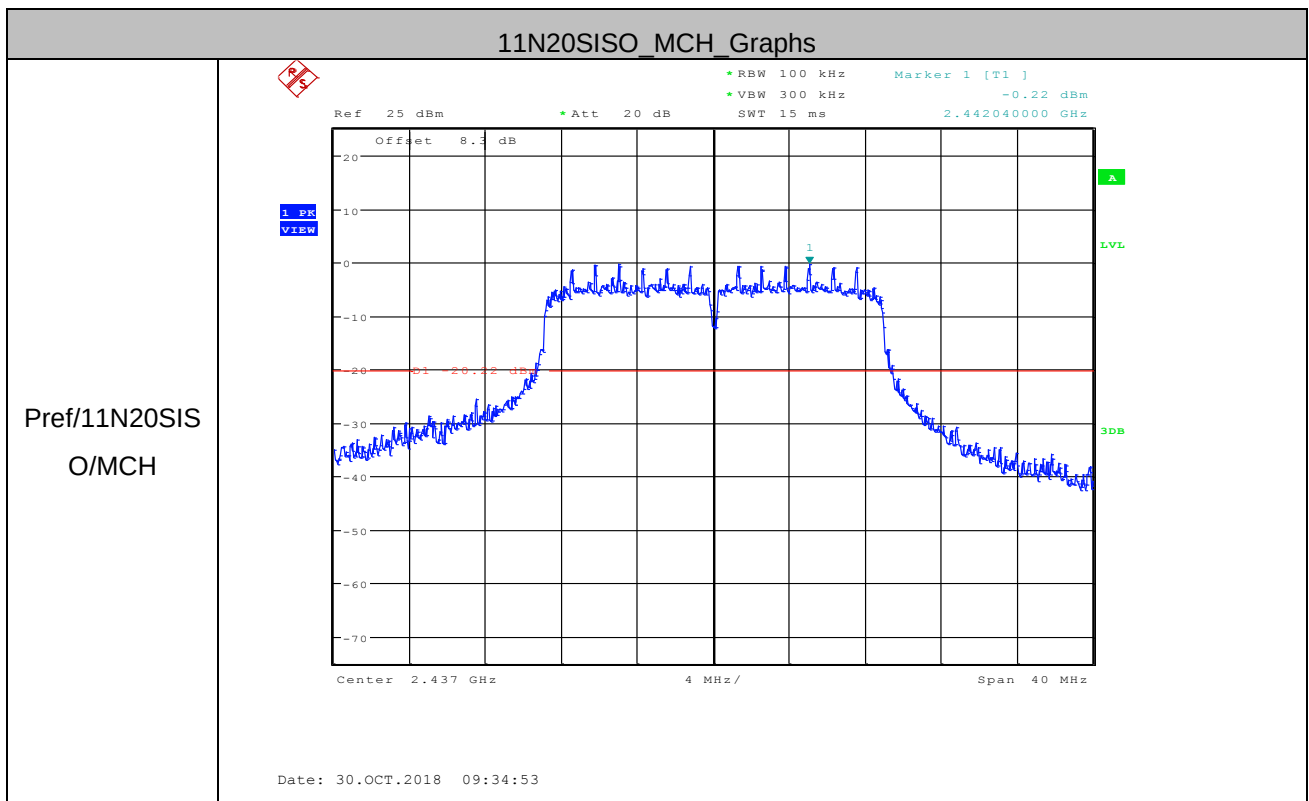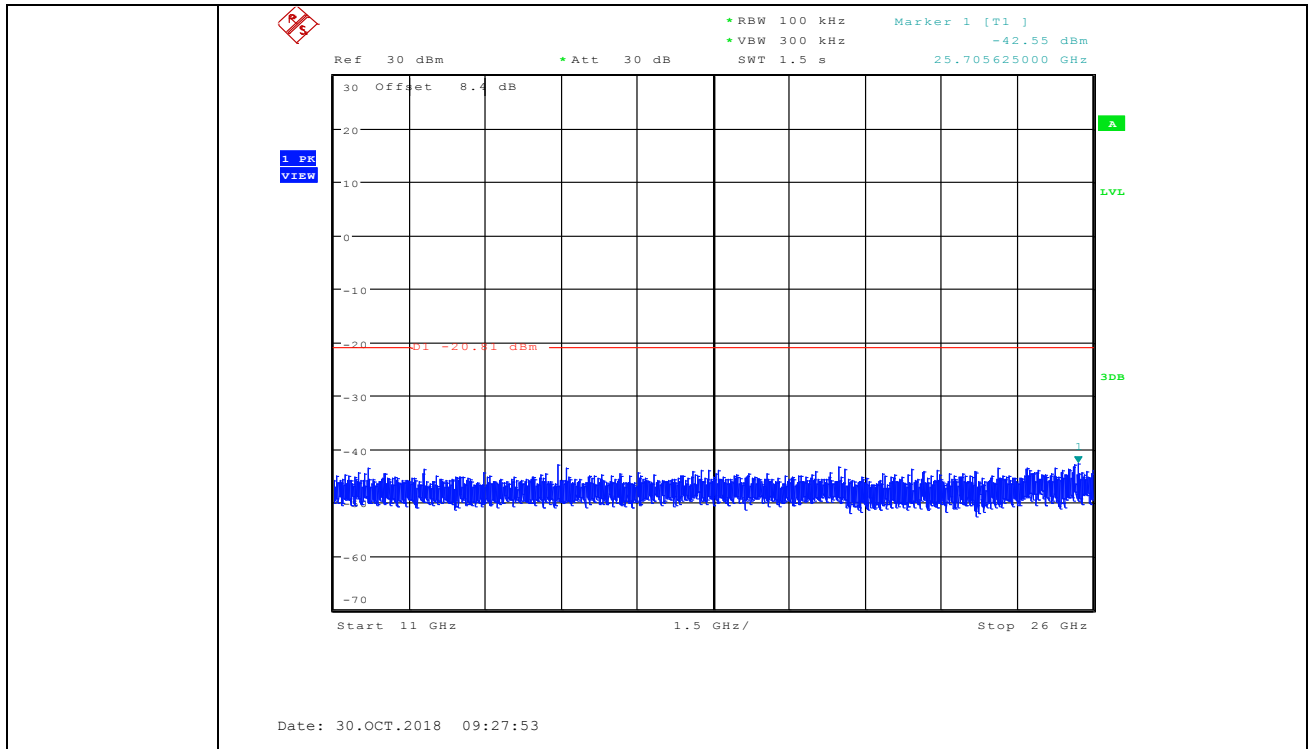


Puw/11N20SIS
O/MCH

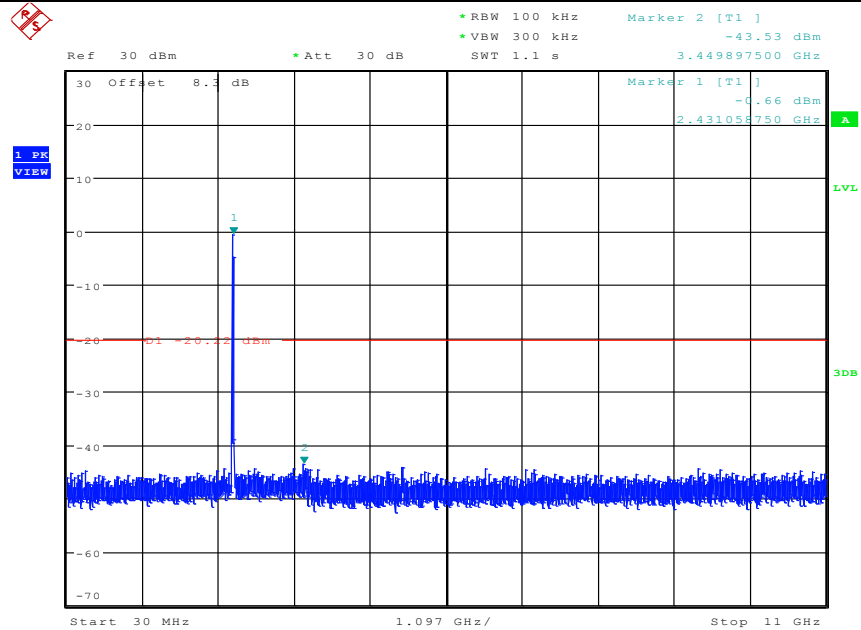


Date: 30.OCT.2018 09:35:06

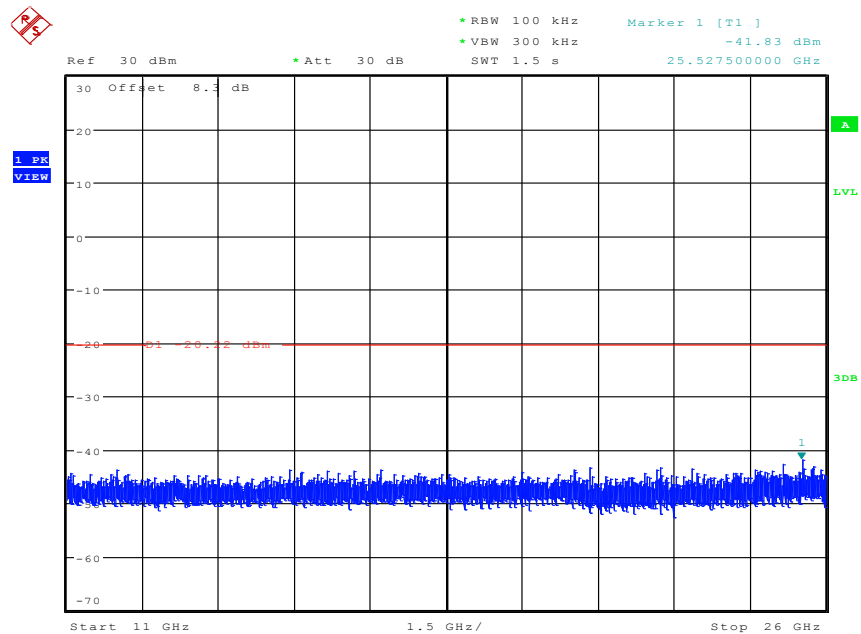

Date: 30.OCT.2018 09:35:16

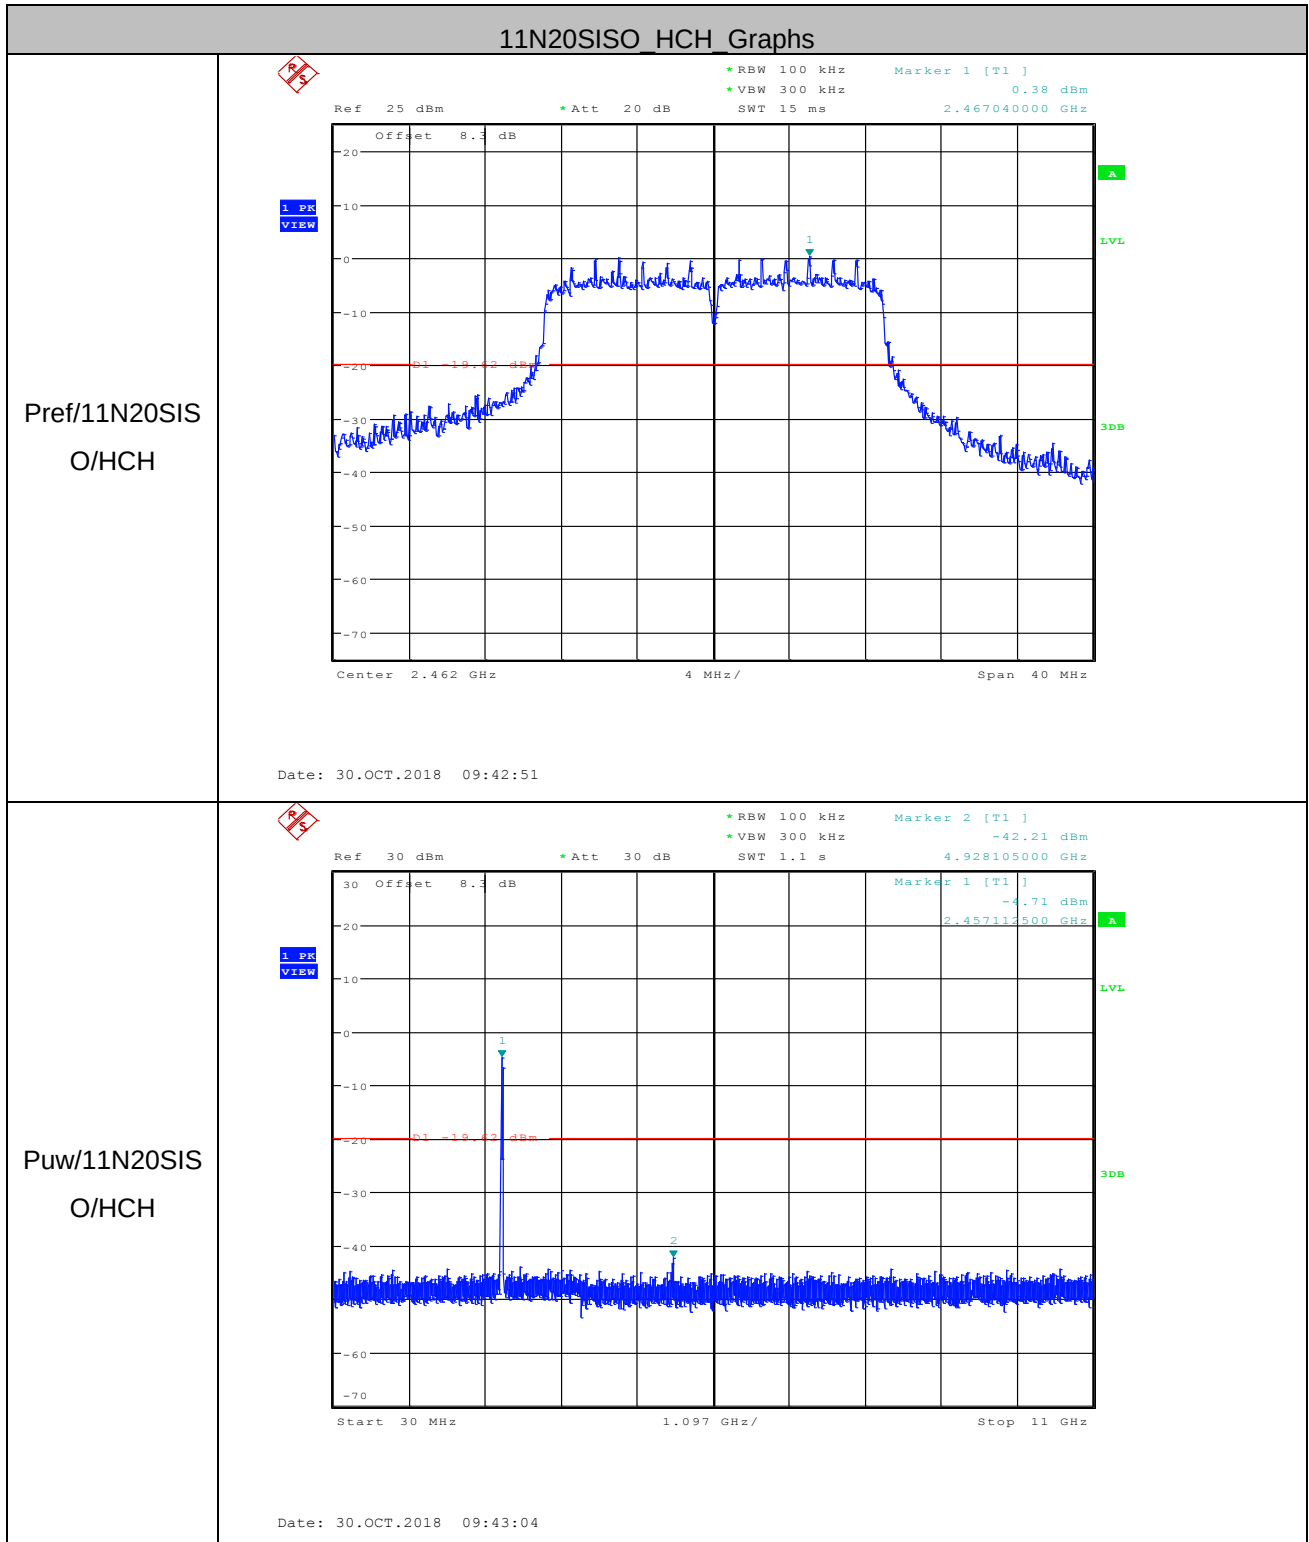



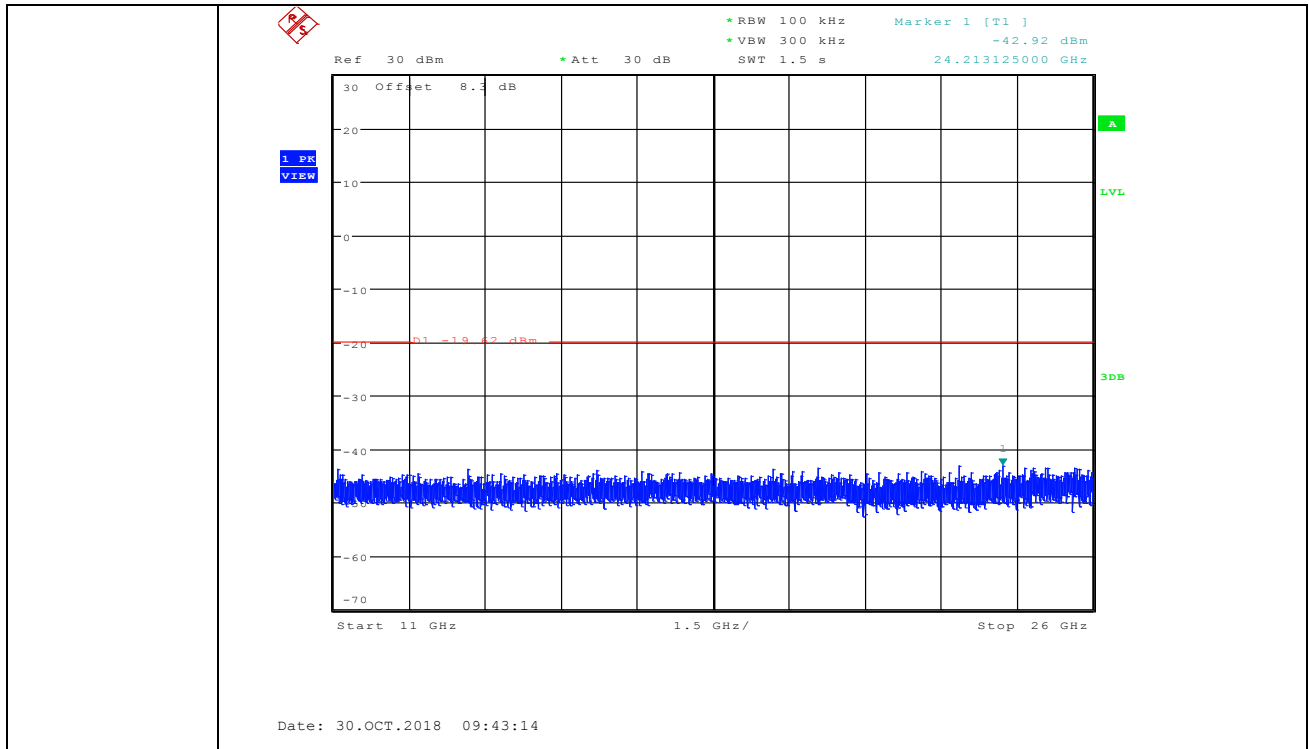


Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

6.8 Radiated Spurious Emissions


Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

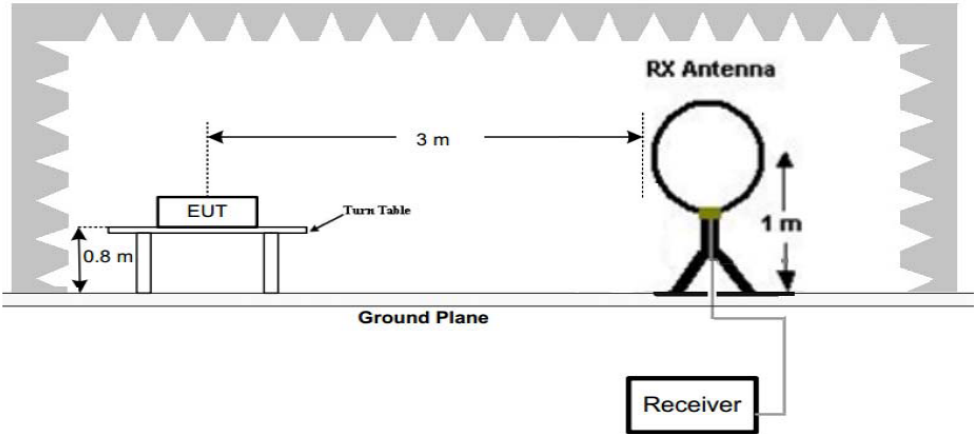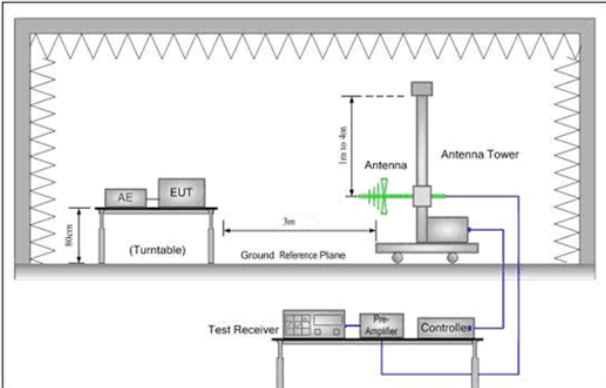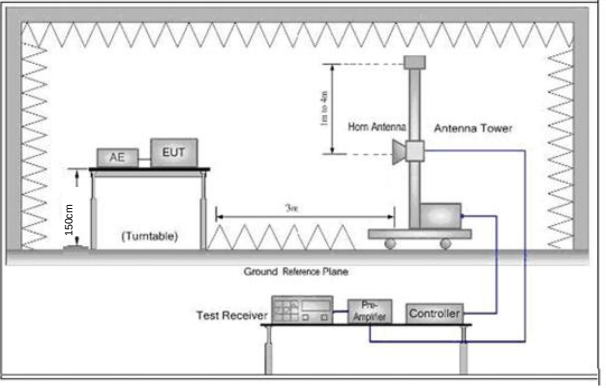Test Setup:	
	 Figure 1. Below 30MHz
 Figure 2. 30MHz to 1GHz	 Figure 3. Above 1 GHz
Test Procedure:	1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel ,the middle channel ,the Highest channel h. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode
Final Test Mode:	Pretest the EUT at Transmitting mode, found the Charge +Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) . For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at highest channel is the worst case. Only the worst case is recorded in the report.
Test Results:	Pass

6.8.1 Radiated emission below 1GHz

30MHz~1GHz		
The worst case test mode:	11b_1Mbps_2462MHz	Vertical

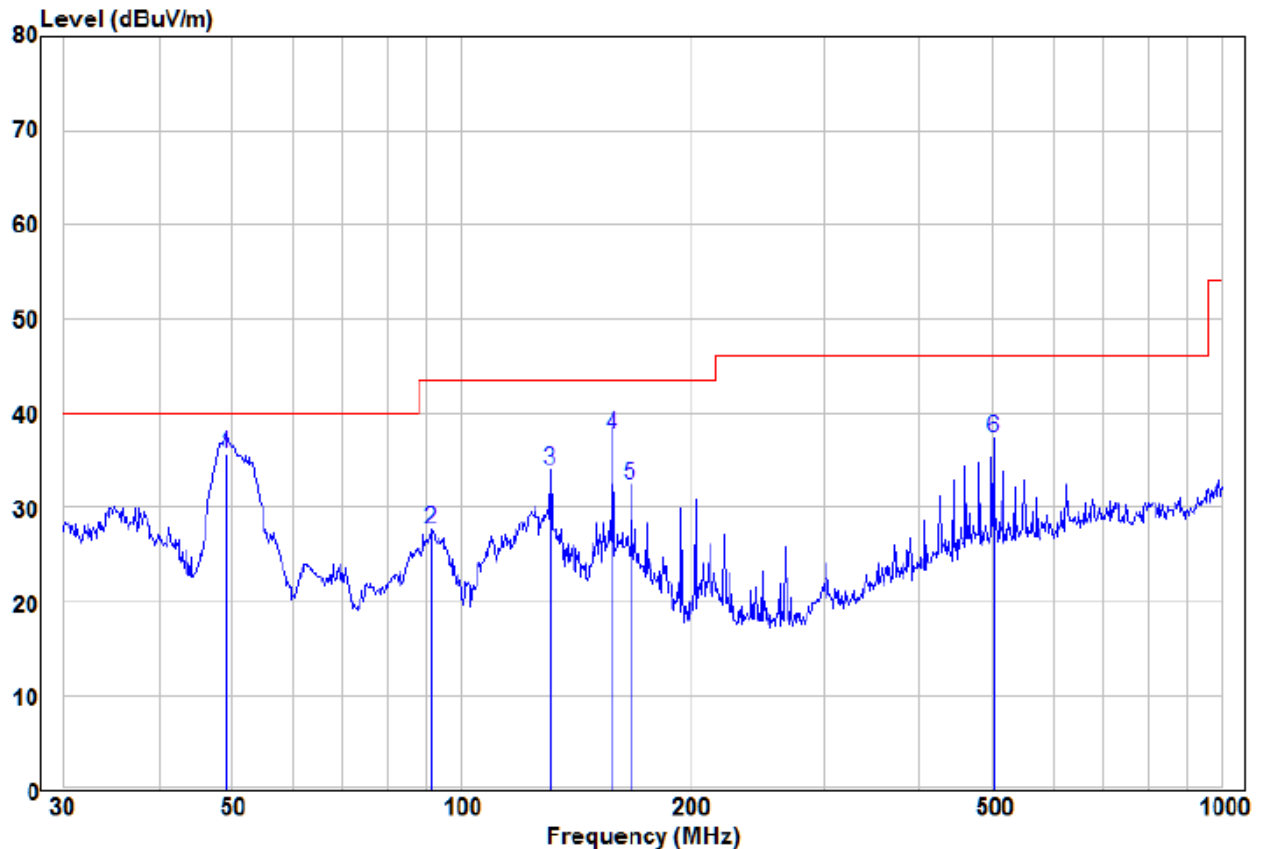

	Freq	Read Level	Ant Factor	Cable Loss	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dB	dB/m	dBuV/m	dBuV/m	dB		
1 pp	49.19	25.79	9.51	0.29	9.80	35.59	40.00	-4.41	QP	VERTICAL
2	91.17	17.49	9.75	0.42	10.17	27.66	43.50	-15.84	Peak	VERTICAL
3	130.84	23.98	9.45	0.52	9.97	33.95	43.50	-9.55	Peak	VERTICAL
4	158.11	29.78	7.31	0.59	7.90	37.68	43.50	-5.82	QP	VERTICAL
5	167.24	24.71	7.06	0.61	7.67	32.38	43.50	-11.12	Peak	VERTICAL
6 pk	501.18	20.11	16.00	1.18	17.18	37.29	46.00	-8.71	Peak	VERTICAL

Remark:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

The worst case test mode:	11b_1Mbps_2462MHz	Horizontal
---------------------------	-------------------	------------

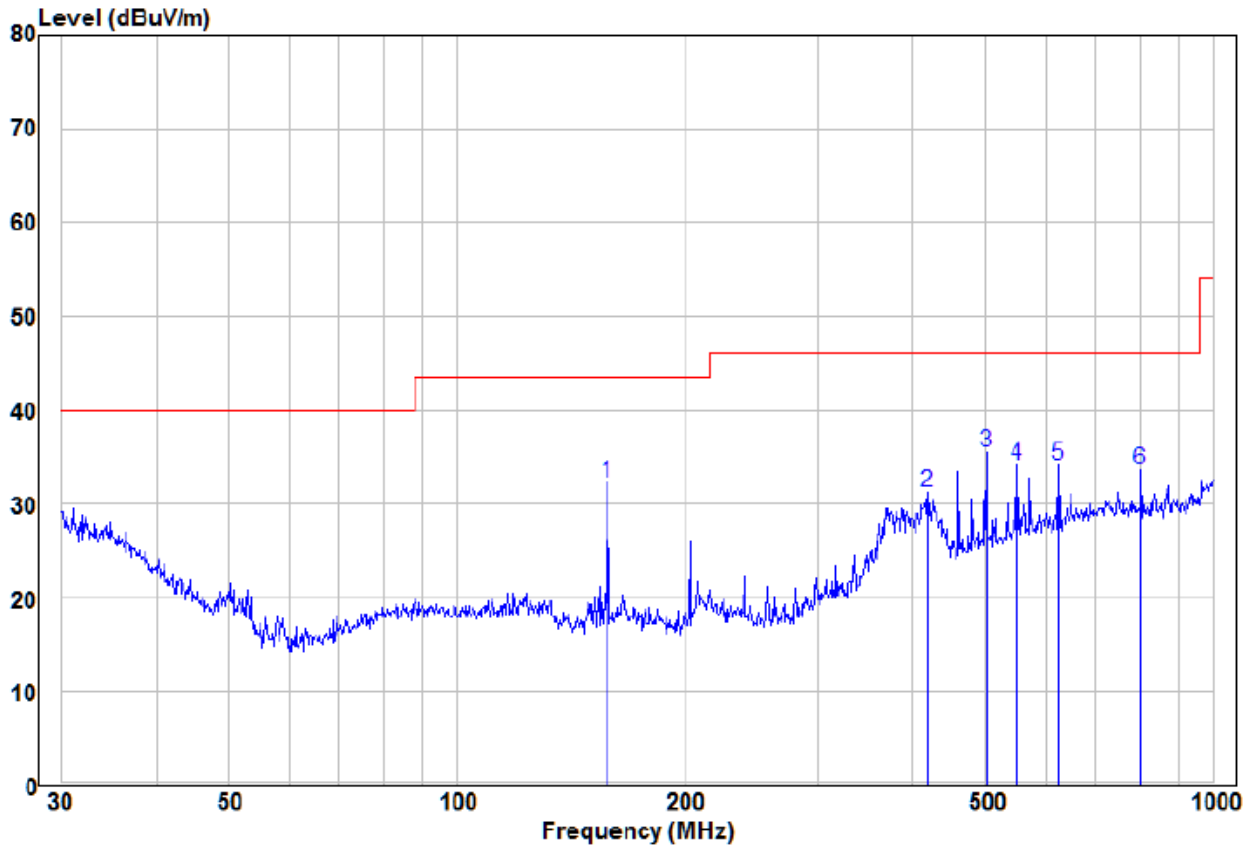

	Freq	Read Level	Ant Factor	Cable Loss	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dB	dB/m	dBuV/m	dBuV/m	dB		
1	158.11	24.32	7.31	0.59	7.90	32.22	43.50	-11.28	Peak	HORIZONTAL
2	419.11	16.58	13.67	1.00	14.67	31.25	46.00	-14.75	Peak	HORIZONTAL
3 pp	501.18	18.25	16.00	1.18	17.18	35.43	46.00	-10.57	Peak	HORIZONTAL
4	550.95	16.69	16.21	1.25	17.46	34.15	46.00	-11.85	Peak	HORIZONTAL
5	625.08	15.25	17.50	1.32	18.82	34.07	46.00	-11.93	Peak	HORIZONTAL
6	801.79	12.93	19.19	1.52	20.71	33.64	46.00	-12.36	Peak	HORIZONTAL

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.


6.8.2 Transmitter emission above 1GHz

Test mode:	802.11b(1Mbps)	Test channel:	Lowest
------------	----------------	---------------	--------

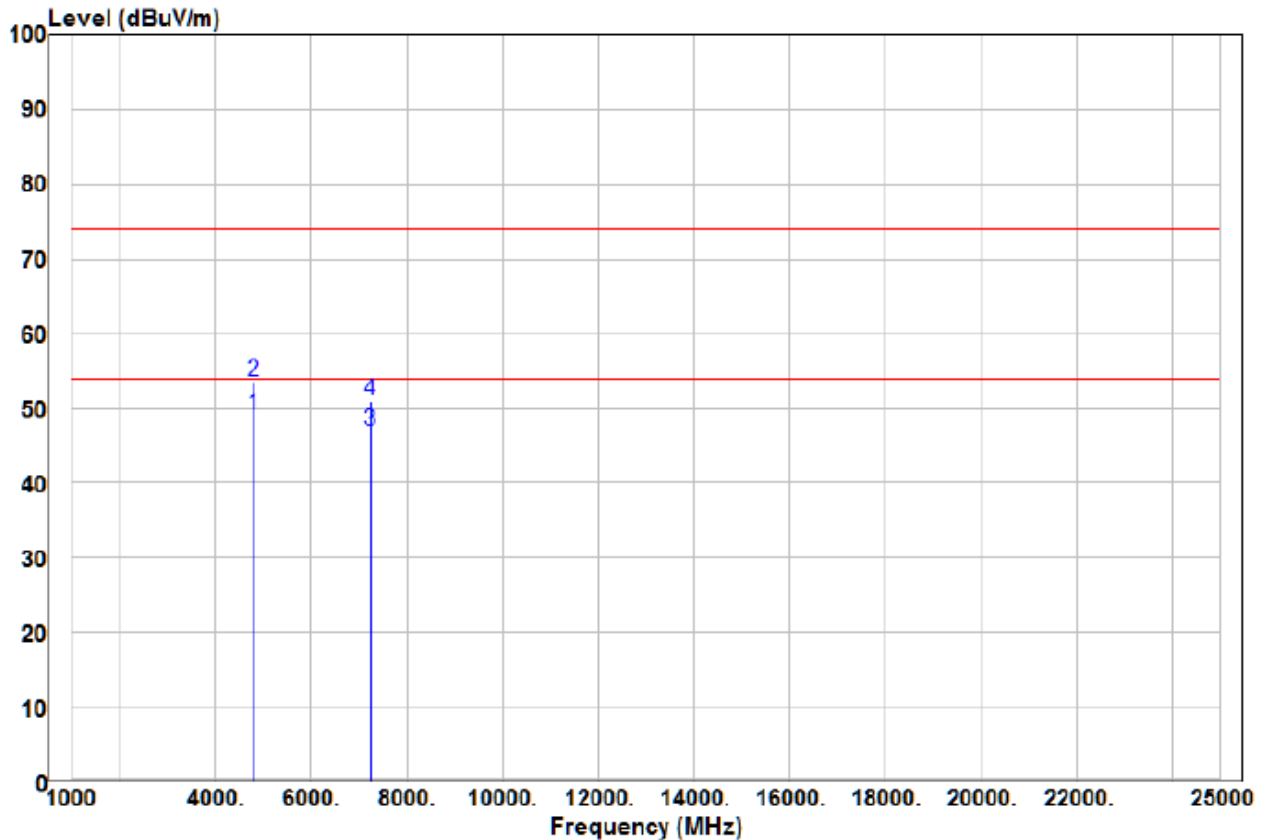


		Read		Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Pol/Phase
1	pp	4824.00	50.33	-1.18	49.15	54.00	-4.85 Average
2	pk	4824.00	54.74	-1.18	53.56	74.00	-20.44 Peak
3		7236.00	41.00	5.98	46.98	54.00	-7.02 Average
4		7236.00	45.00	5.98	50.98	74.00	-23.02 Peak

Test mode:	802.11b(1Mbps)	Test channel:	Lowest
------------	----------------	---------------	--------

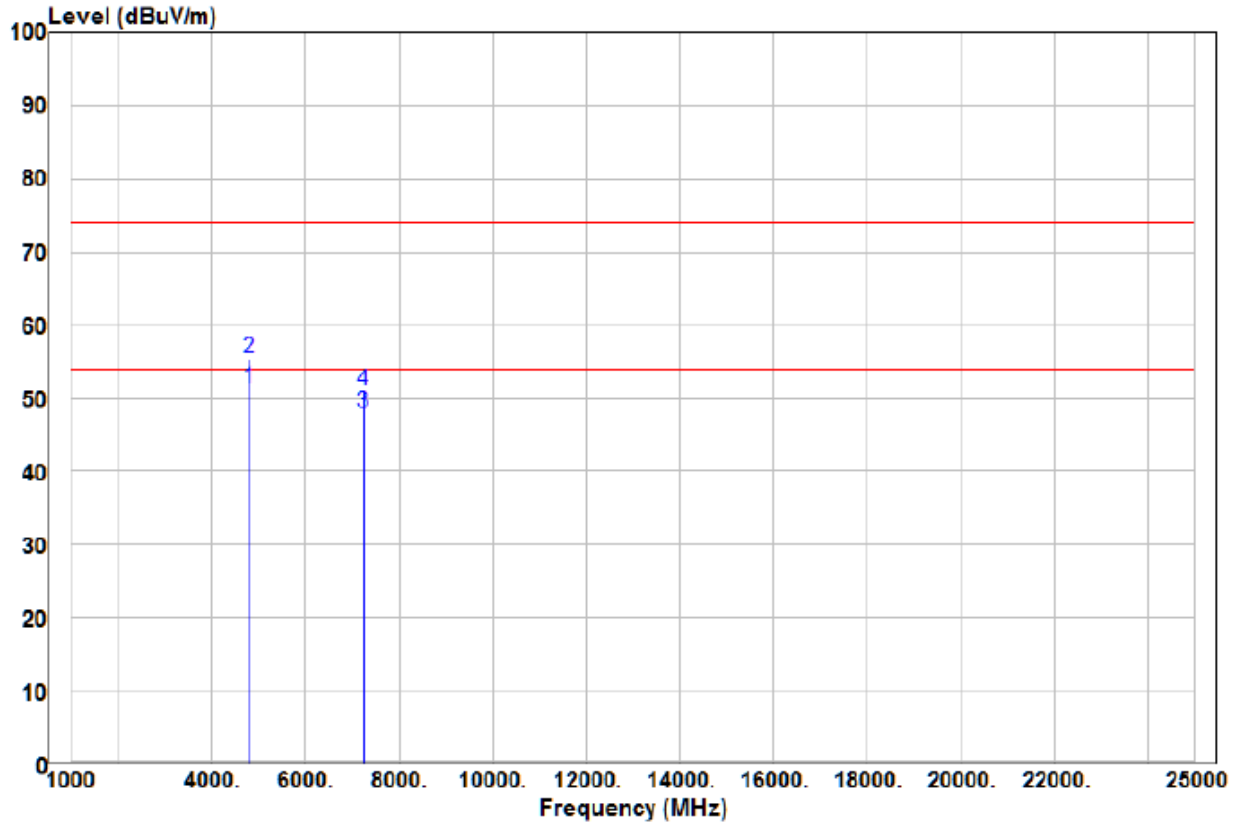


	Read			Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Pol/Phase
1 pp	4824.00	52.58	-1.18	51.40	54.00	-2.60	Average
2 pk	4824.00	56.58	-1.18	55.40	74.00	-18.60	Peak
3	7236.00	42.00	5.98	47.98	54.00	-6.02	Average
4	7236.00	45.00	5.98	50.98	74.00	-23.02	Peak

Test mode:	802.11b(1Mbps)	Test channel:	Middle
------------	----------------	---------------	--------

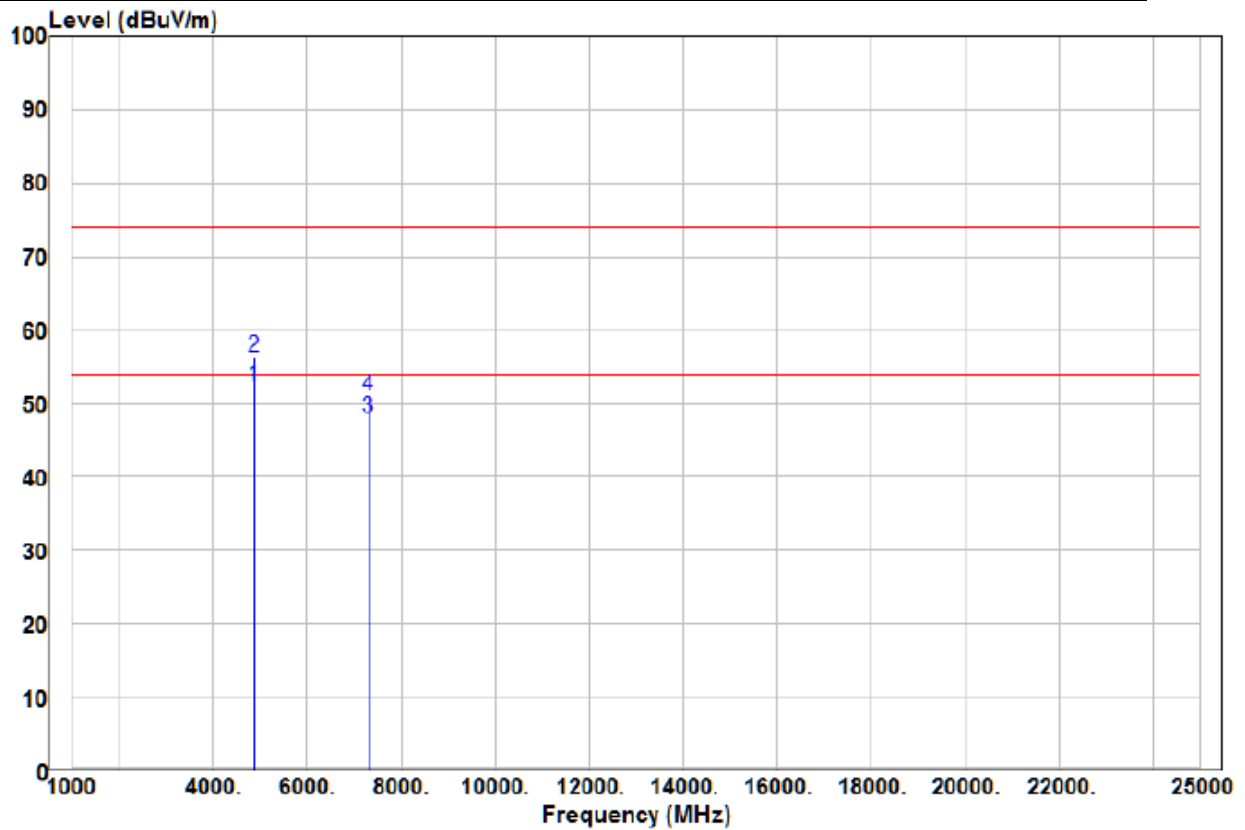


		Read		Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Pol/Phase
1 pp	4874.00	53.15	-0.86	52.29	54.00	-1.71	Average HORIZONTAL
2 pk	4874.00	57.24	-0.86	56.38	74.00	-17.62	Peak HORIZONTAL
3	7311.00	42.01	5.90	47.91	54.00	-6.09	Average HORIZONTAL
4	7311.00	45.01	5.90	50.91	74.00	-23.09	Peak HORIZONTAL

Test mode:	802.11b(1Mbps)	Test channel:	Middle
------------	----------------	---------------	--------

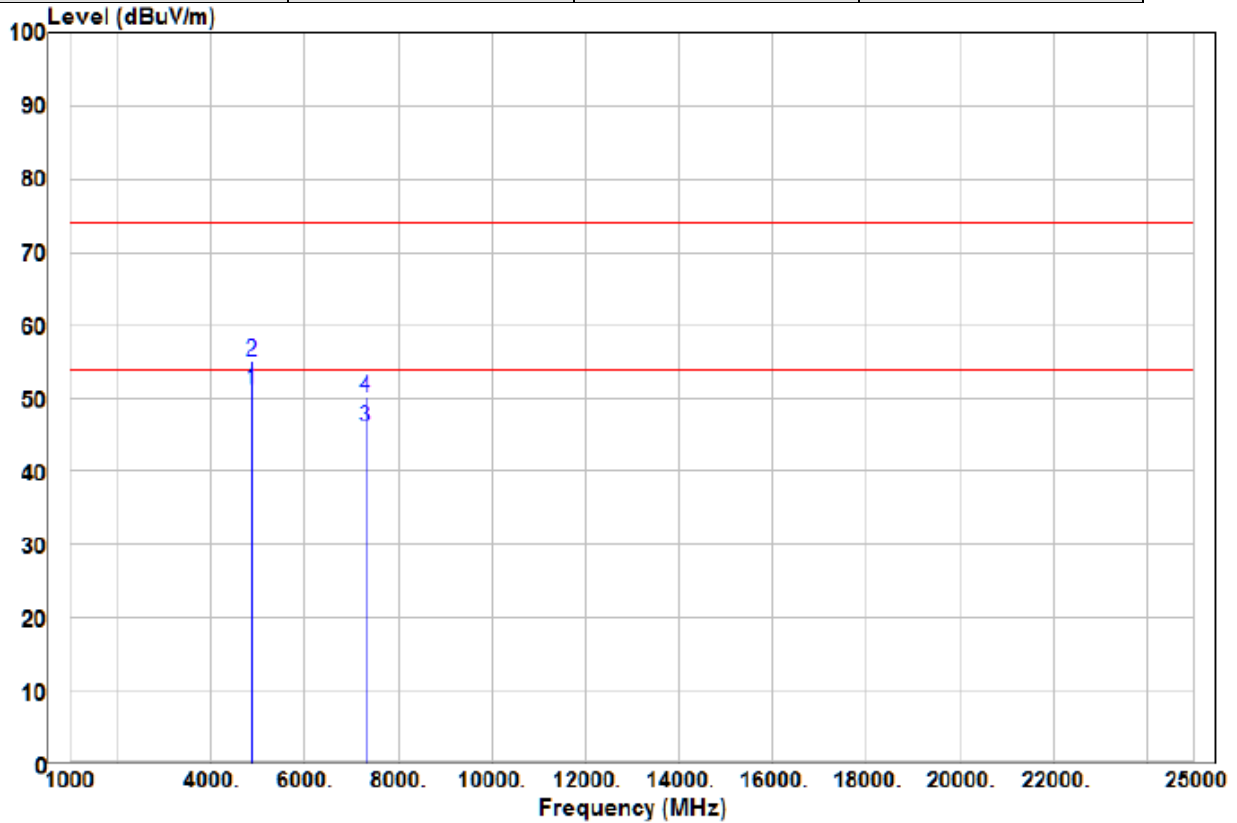


		Read		Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	pol/Phase
1	pp	4874.00	52.14	-0.86	51.28	54.00	-2.72 Average
2	pk	4874.00	55.88	-0.86	55.02	74.00	-18.98 Peak
3		7311.00	40.15	5.90	46.05	54.00	-7.95 Average
4		7311.00	44.15	5.90	50.05	74.00	-23.95 Peak

Test mode:	802.11b(1Mbps)	Test channel:	Highest
------------	----------------	---------------	---------

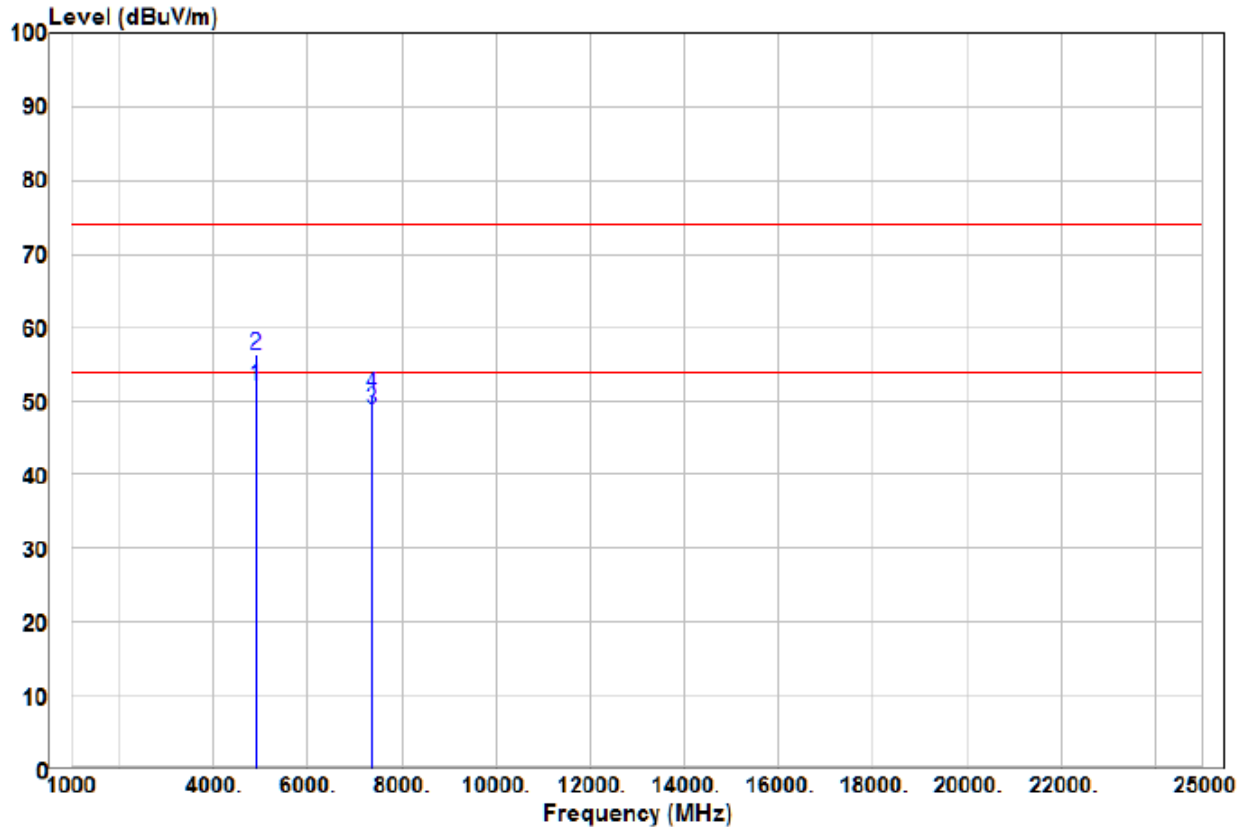


		Read		Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Pol/Phase
1	pp	4924.00	52.55	-0.58	51.97	54.00	-2.03 Average
2	pk	4924.00	56.78	-0.58	56.20	74.00	-17.80 Peak
3		7386.00	43.01	5.73	48.74	54.00	-5.26 Average
4		7386.00	45.17	5.73	50.90	74.00	-23.10 Peak

Test mode:	802.11b(1Mbps)	Test channel:	Highest
------------	----------------	---------------	---------

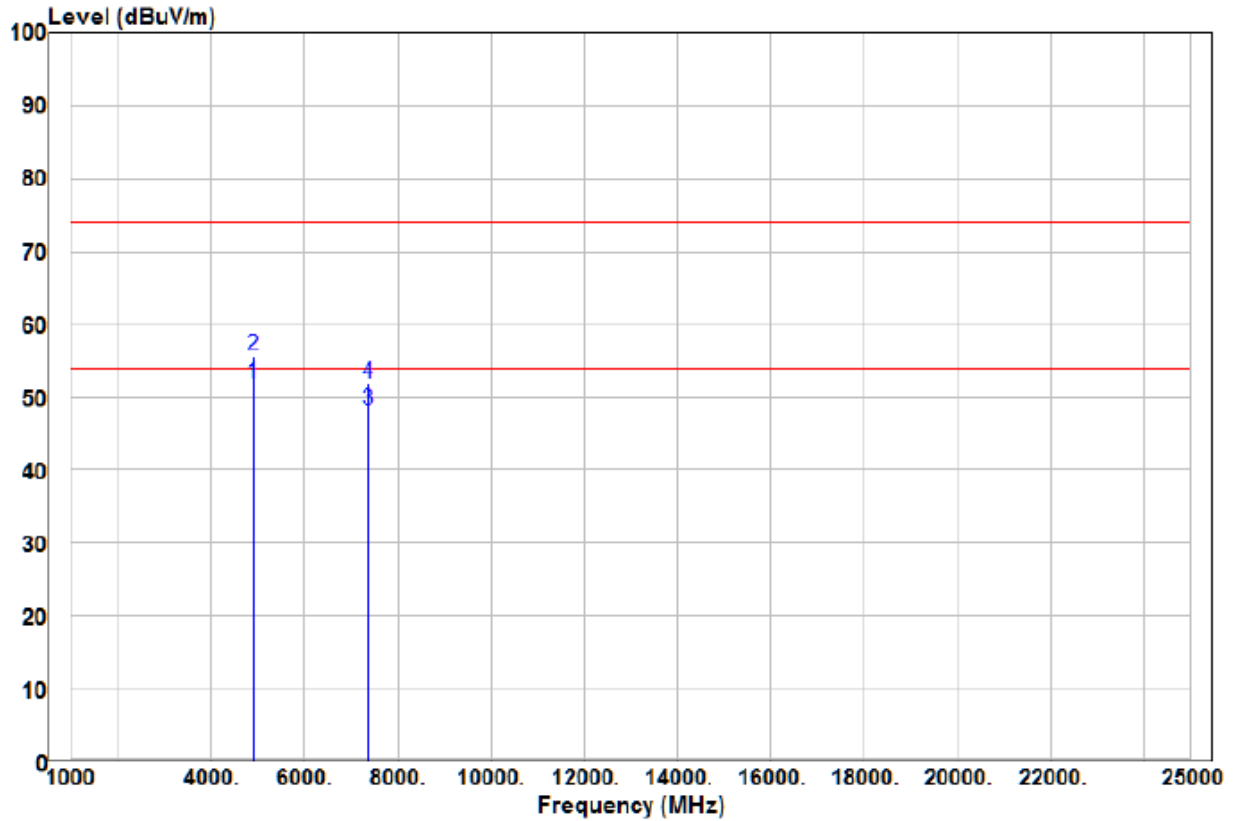


		Read		Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Pol/Phase
1 pp	4924.00	52.44	-0.58	51.86	54.00	-2.14	Average
2 pk	4924.00	56.16	-0.58	55.58	74.00	-18.42	Peak
3	7386.00	42.38	5.73	48.11	54.00	-5.89	Average
4	7386.00	46.00	5.73	51.73	74.00	-22.27	Peak

Test mode:	802.11g(6Mbps)	Test channel:	Lowest
------------	----------------	---------------	--------

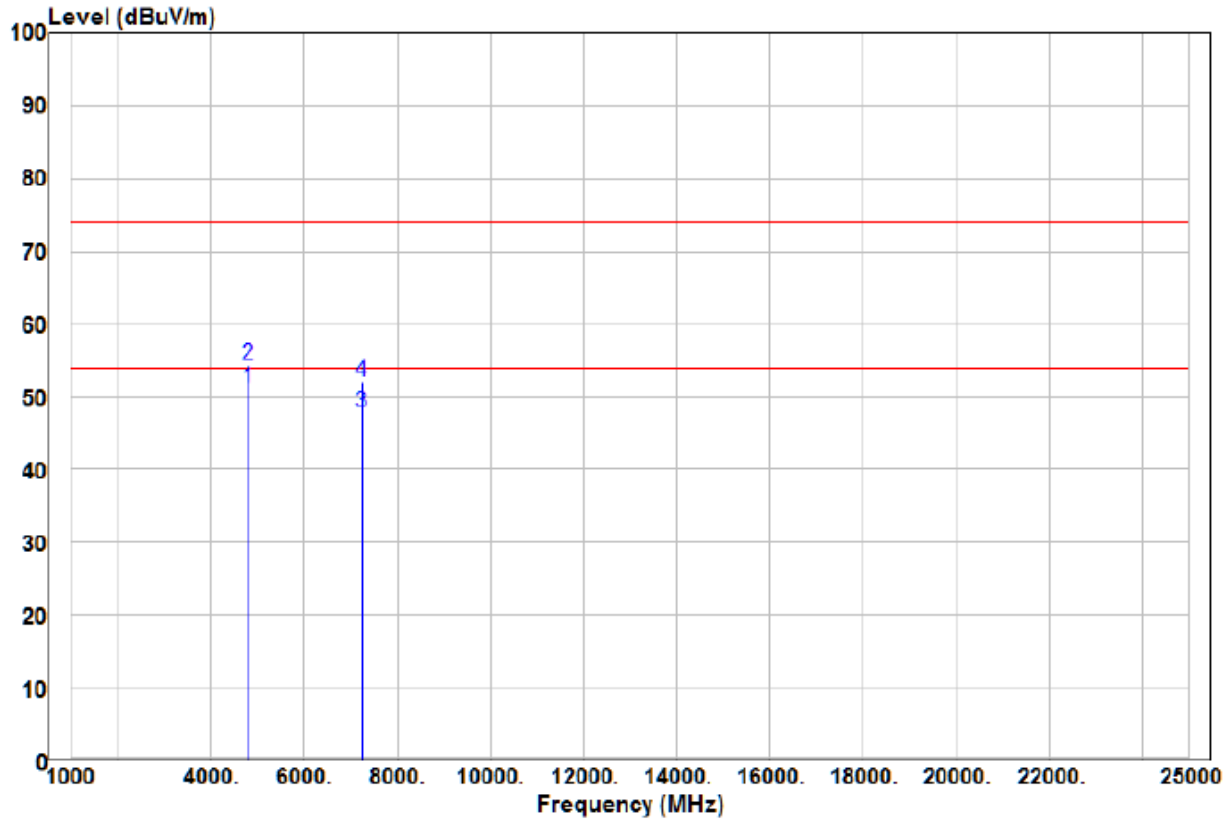


		Read			Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp	4824.00	52.33	-1.18	51.15	54.00	-2.85	Average	VERTICAL
2 pk	4824.00	55.63	-1.18	54.45	74.00	-19.55	Peak	VERTICAL
3	7236.00	41.87	5.98	47.85	54.00	-6.15	Average	VERTICAL
4	7236.00	45.97	5.98	51.95	74.00	-22.05	Peak	VERTICAL

Test mode:	802.11g(6Mbps)	Test channel:	Lowest
------------	----------------	---------------	--------

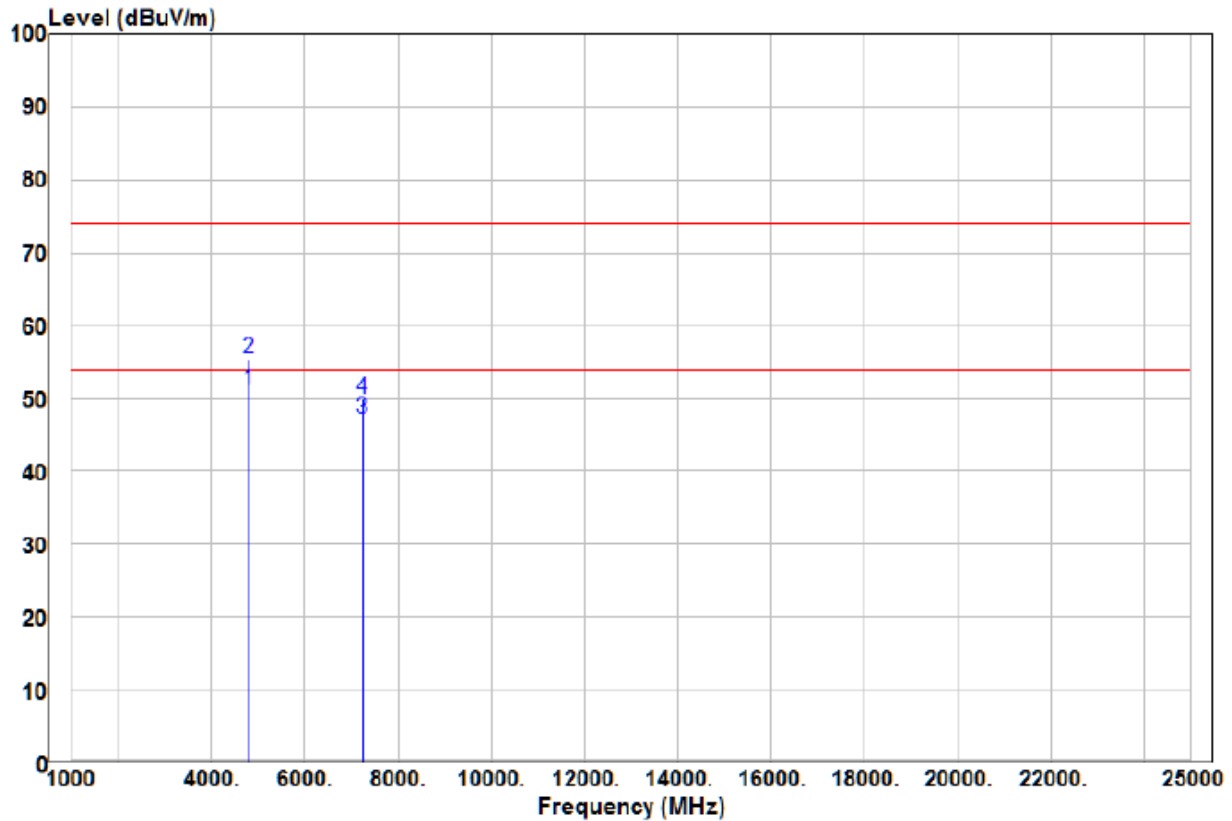


		Read		Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Pol/Phase
1	pp	4824.00	52.39	-1.18	51.21	54.00	-2.79 Average
2	pk	4824.00	56.56	-1.18	55.38	74.00	-18.62 Peak
3		7236.00	41.05	5.98	47.03	54.00	-6.97 Average
4		7236.00	43.98	5.98	49.96	74.00	-24.04 Peak

Test mode:	802.11g(6Mbps)	Test channel:	Middle
------------	----------------	---------------	--------

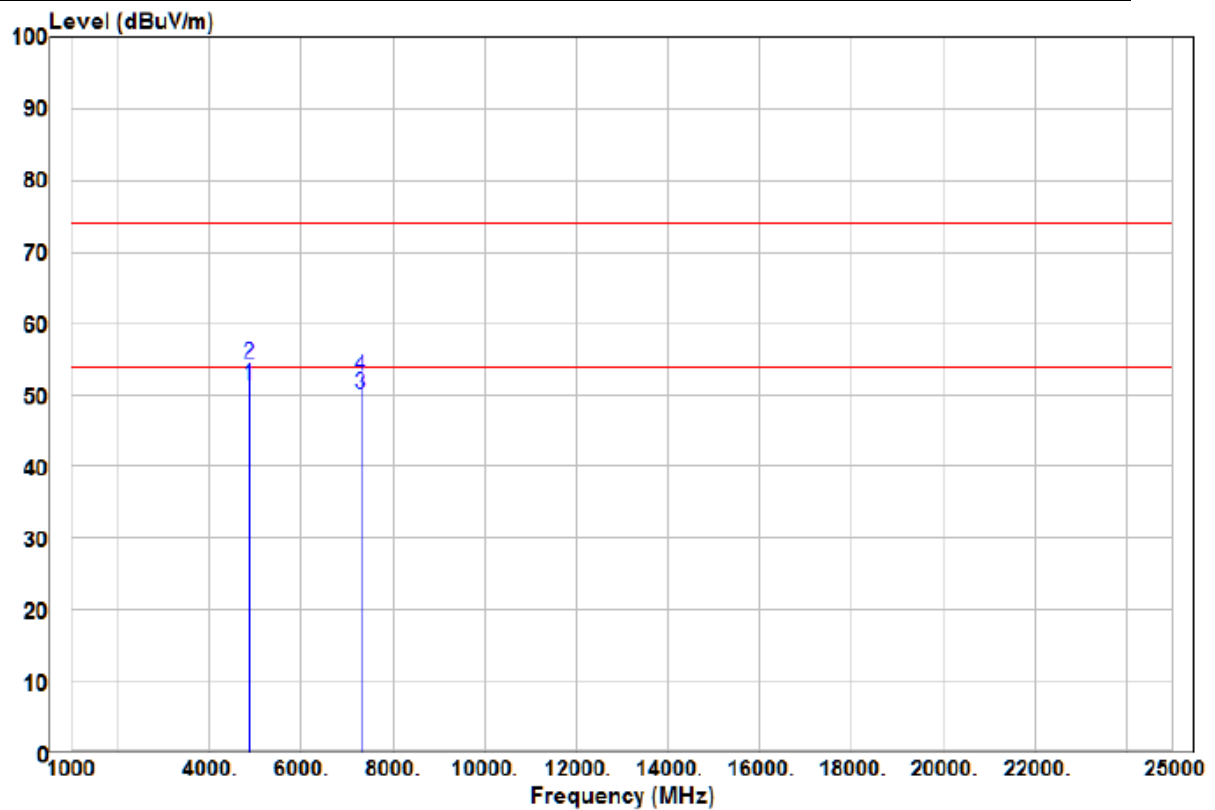


		Read		Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Pol/Phase
1	pp	4874.00	52.15	-0.86	51.29	54.00	-2.71 Average
2	pk	4874.00	55.30	-0.86	54.44	74.00	-19.56 Peak
3		7311.00	44.22	5.90	50.12	54.00	-3.88 Average
4		7311.00	46.78	5.90	52.68	74.00	-21.32 Peak

Test mode:	802.11g(6Mbps)	Test channel:	Middle
------------	----------------	---------------	--------

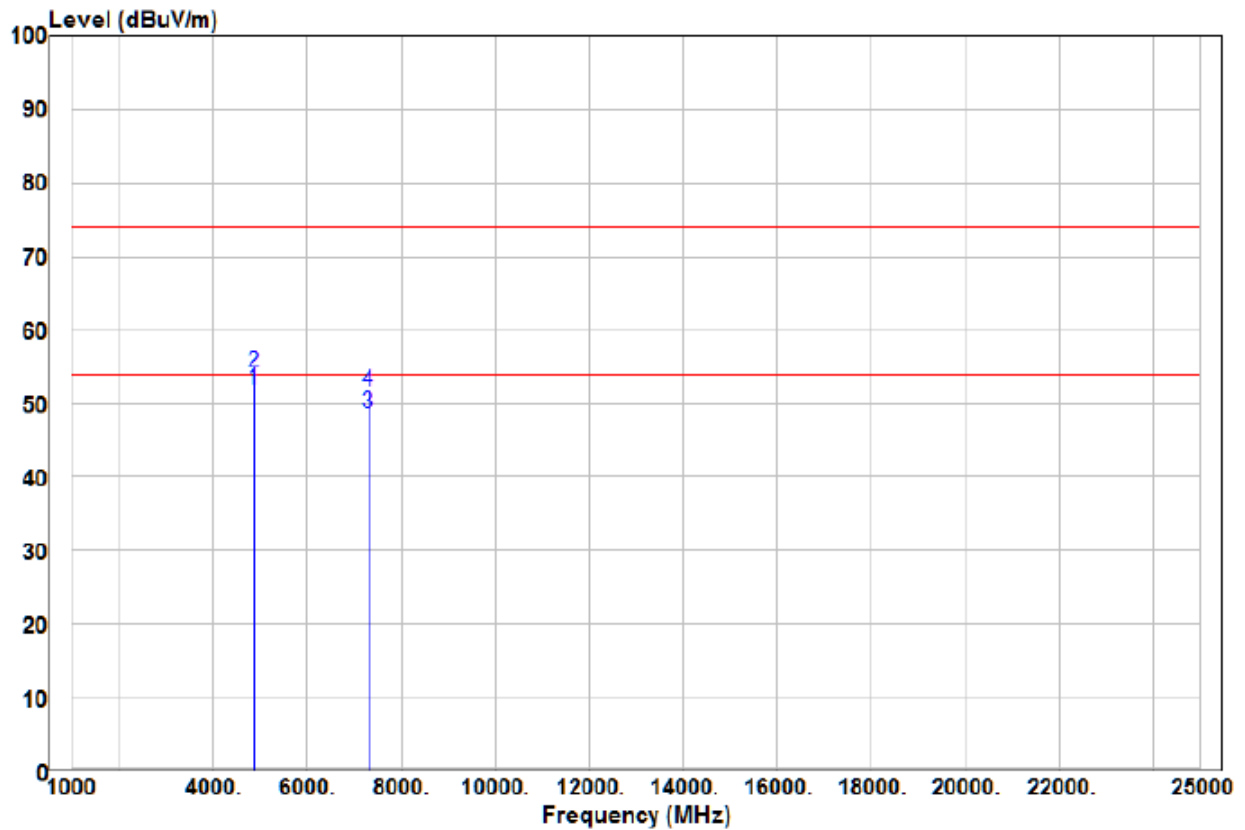


	Read	Limit	Over					
	Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp	4874.00	52.64	-0.86	51.78	54.00	-2.22	Average	VERTICAL
2 pk	4874.00	55.05	-0.86	54.19	74.00	-19.81	Peak	VERTICAL
3	7311.00	42.65	5.90	48.55	54.00	-5.45	Average	VERTICAL
4	7311.00	45.72	5.90	51.62	74.00	-22.38	Peak	VERTICAL

Test mode:	802.11g(6Mbps)	Test channel:	Highest
------------	----------------	---------------	---------

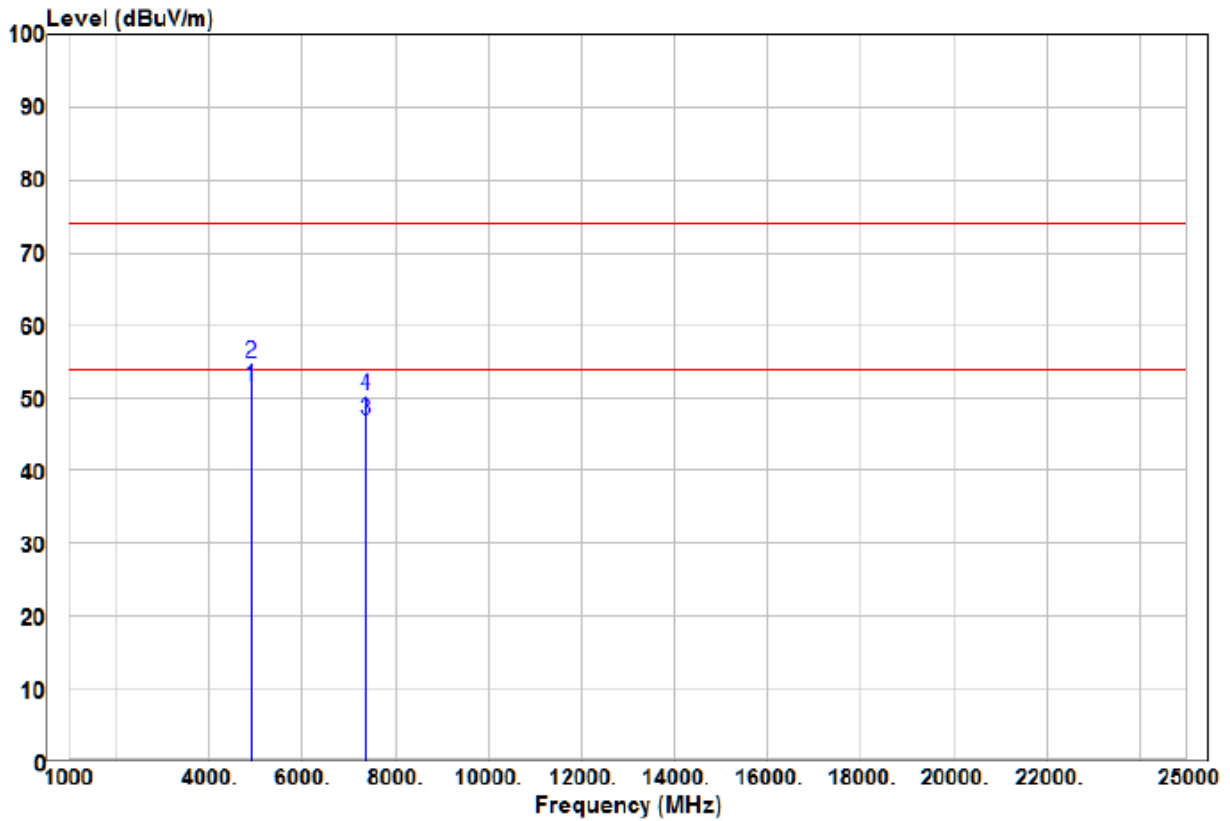


		Read		Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Pol/Phase
1	pp	4924.00	52.26	-0.58	51.68	54.00	-2.32 Average
2	pk	4924.00	55.46	-0.58	54.88	74.00	-19.12 Peak
3		7386.00	41.25	5.73	46.98	54.00	-7.02 Average
4		7386.00	44.64	5.73	50.37	74.00	-23.63 Peak

Test mode:	802.11g(6Mbps)	Test channel:	Highest
------------	----------------	---------------	---------

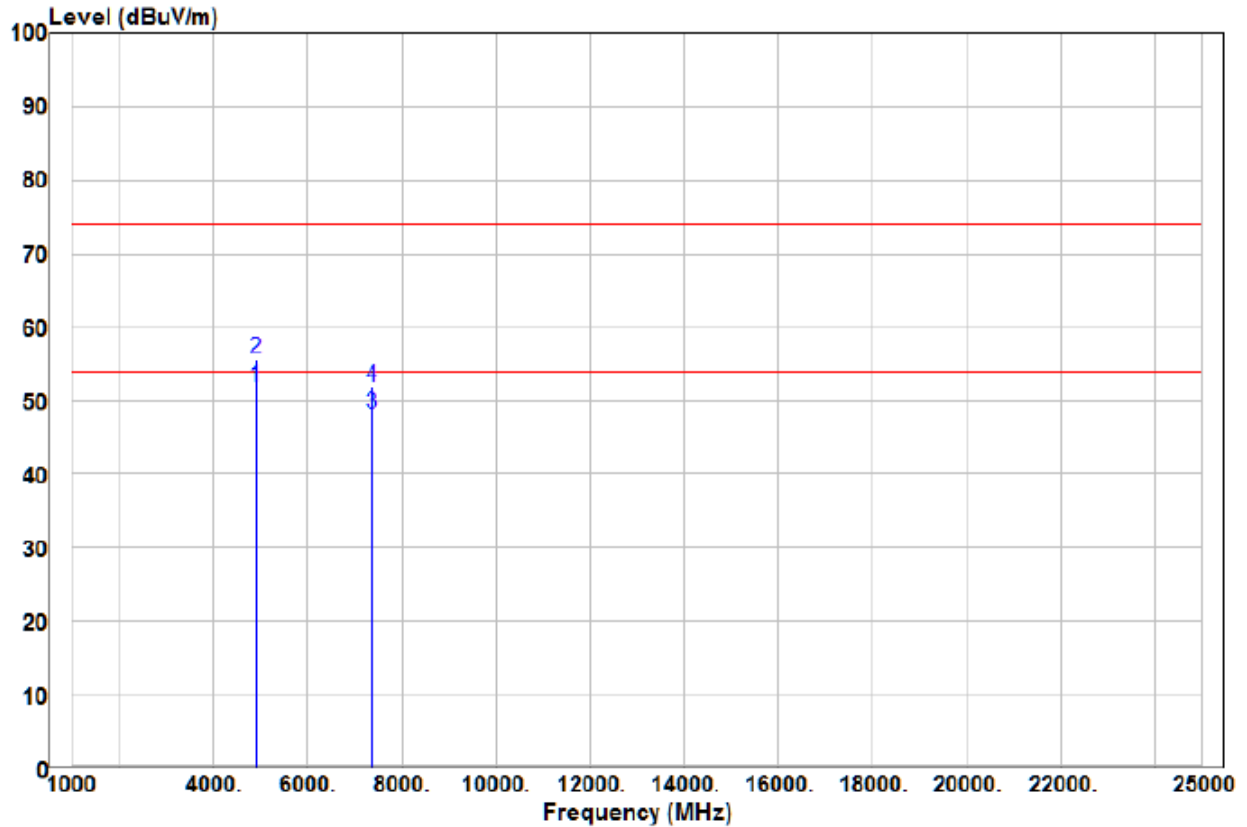


	Read	Limit	Over				
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp	4924.00	52.44	-0.58	51.86	54.00	-2.14 Average	HORIZONTAL
2 pk	4924.00	56.16	-0.58	55.58	74.00	-18.42 Peak	HORIZONTAL
3	7386.00	42.38	5.73	48.11	54.00	-5.89 Average	HORIZONTAL
4	7386.00	46.00	5.73	51.73	74.00	-22.27 Peak	HORIZONTAL

Test mode:	802.11n HT20 (6.5Mbps)	Test channel:	Lowest
------------	---------------------------	---------------	--------

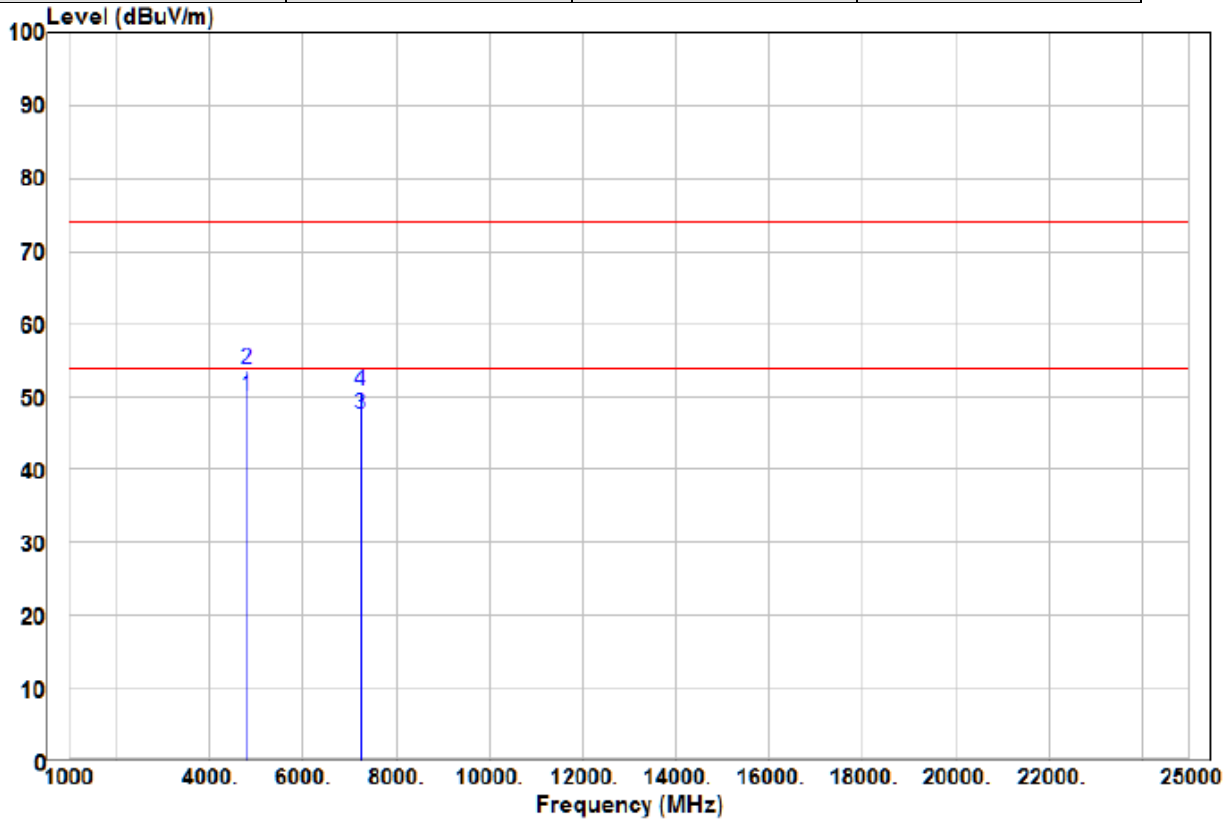


		Read			Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp	4824.00	51.22	-1.18	50.04	54.00	-3.96	Average	VERTICAL
2 pk	4824.00	54.88	-1.18	53.70	74.00	-20.30	Peak	VERTICAL
3	7236.00	41.49	5.98	47.47	54.00	-6.53	Average	VERTICAL
4	7236.00	44.74	5.98	50.72	74.00	-23.28	Peak	VERTICAL

Test mode:	802.11n HT20 (6.5Mbps)	Test channel:	Lowest
------------	---------------------------	---------------	--------

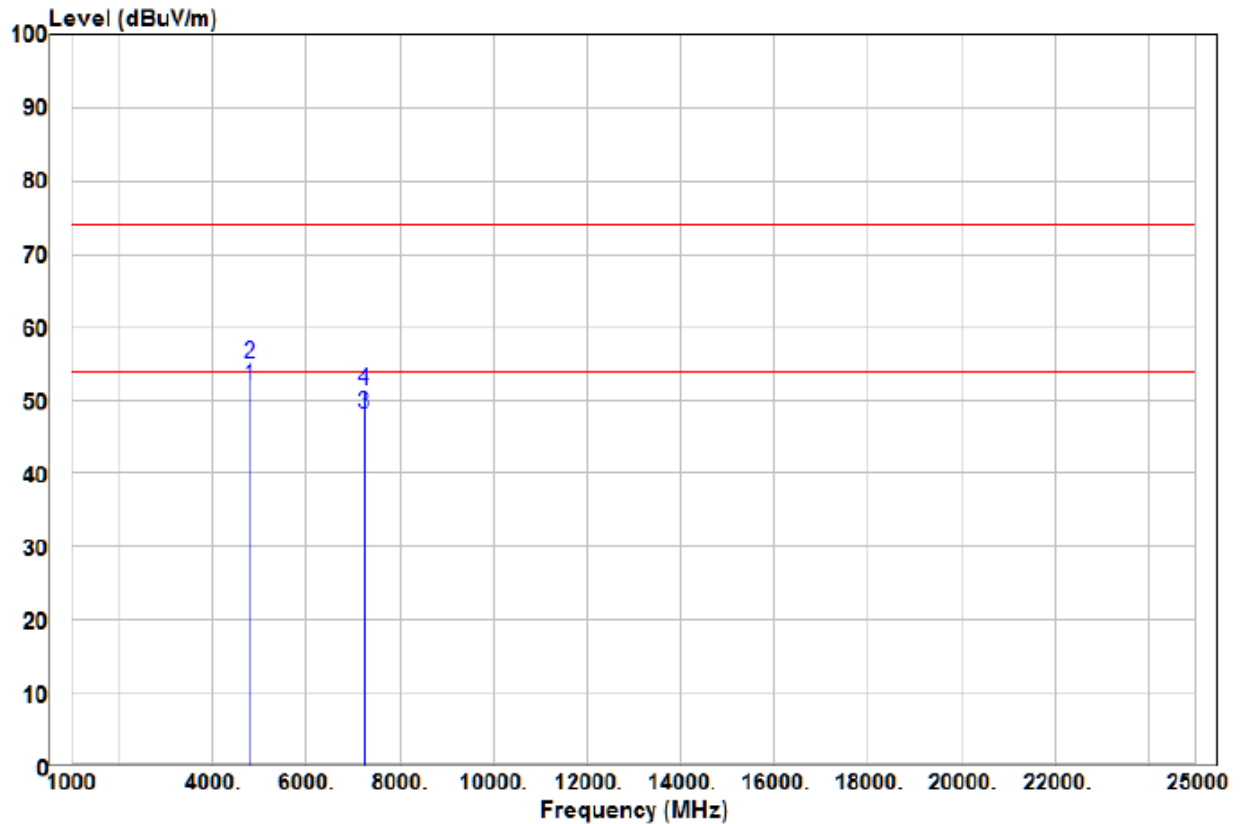


	Read			Limit	Over			
	Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp	4824.00	53.22	-1.18	52.04	54.00	-1.96	Average	HORIZONTAL
2 pk	4824.00	56.22	-1.18	55.04	74.00	-18.96	Peak	HORIZONTAL
3	7236.00	42.27	5.98	48.25	54.00	-5.75	Average	HORIZONTAL
4	7236.00	45.31	5.98	51.29	74.00	-22.71	Peak	HORIZONTAL

Test mode:	802.11n HT20 (6.5Mbps)	Test channel:	Middle
------------	---------------------------	---------------	--------

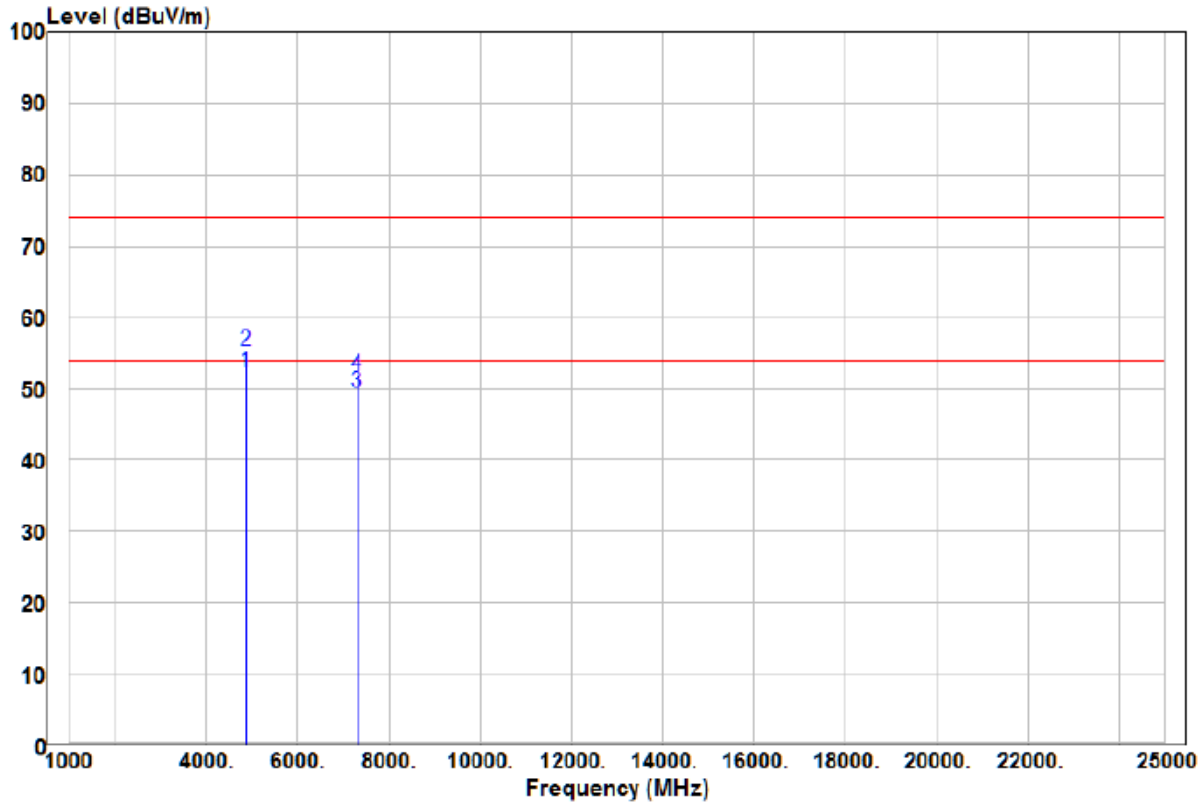


	Read			Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp	4874.00	53.00	-0.86	52.14	54.00	-1.86 Average	HORIZONTAL
2 pk	4874.00	56.15	-0.86	55.29	74.00	-18.71 Peak	HORIZONTAL
3	7311.00	43.55	5.90	49.45	54.00	-4.55 Average	HORIZONTAL
4	7311.00	46.03	5.90	51.93	74.00	-22.07 Peak	HORIZONTAL

Test mode:	802.11n HT20 (6.5Mbps)	Test channel:	Middle
------------	---------------------------	---------------	--------

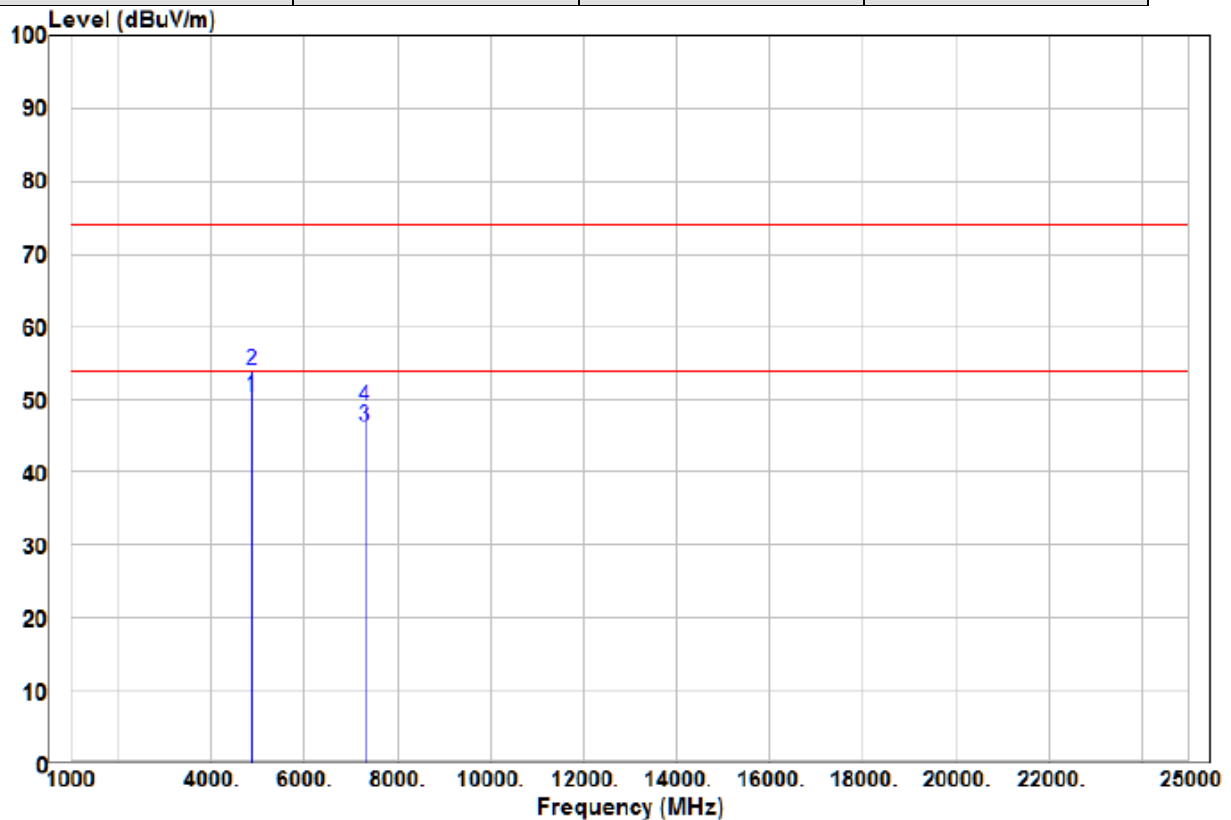


	Read			Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp	4874.00	51.24	-0.86	50.38	54.00	-3.62 Average	VERTICAL
2 pk	4874.00	54.80	-0.86	53.94	74.00	-20.06 Peak	VERTICAL
3	7311.00	40.34	5.90	46.24	54.00	-7.76 Average	VERTICAL
4	7311.00	43.25	5.90	49.15	74.00	-24.85 Peak	VERTICAL

Test mode:	802.11n HT20 (6.5Mbps)	Test channel:	Highest
------------	---------------------------	---------------	---------

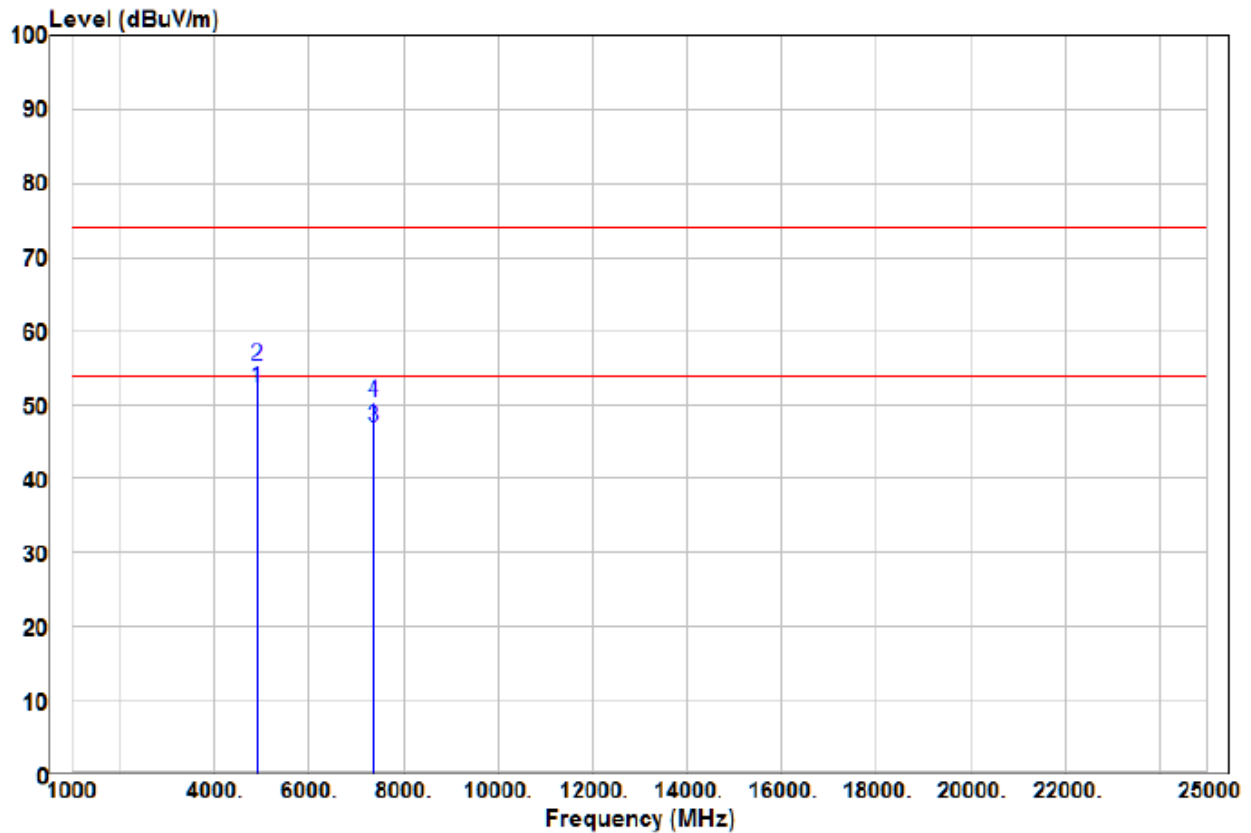

	Read			Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp	4924.00	52.77	-0.58	52.19	54.00	-1.81	Average
2 pk	4924.00	55.84	-0.58	55.26	74.00	-18.74	Peak
3	7386.00	41.25	5.73	46.98	54.00	-7.02	Average
4	7386.00	44.64	5.73	50.37	74.00	-23.63	Peak

Test mode:	802.11n HT20 (6.5Mbps)	Test channel:	Highest
------------	---------------------------	---------------	---------

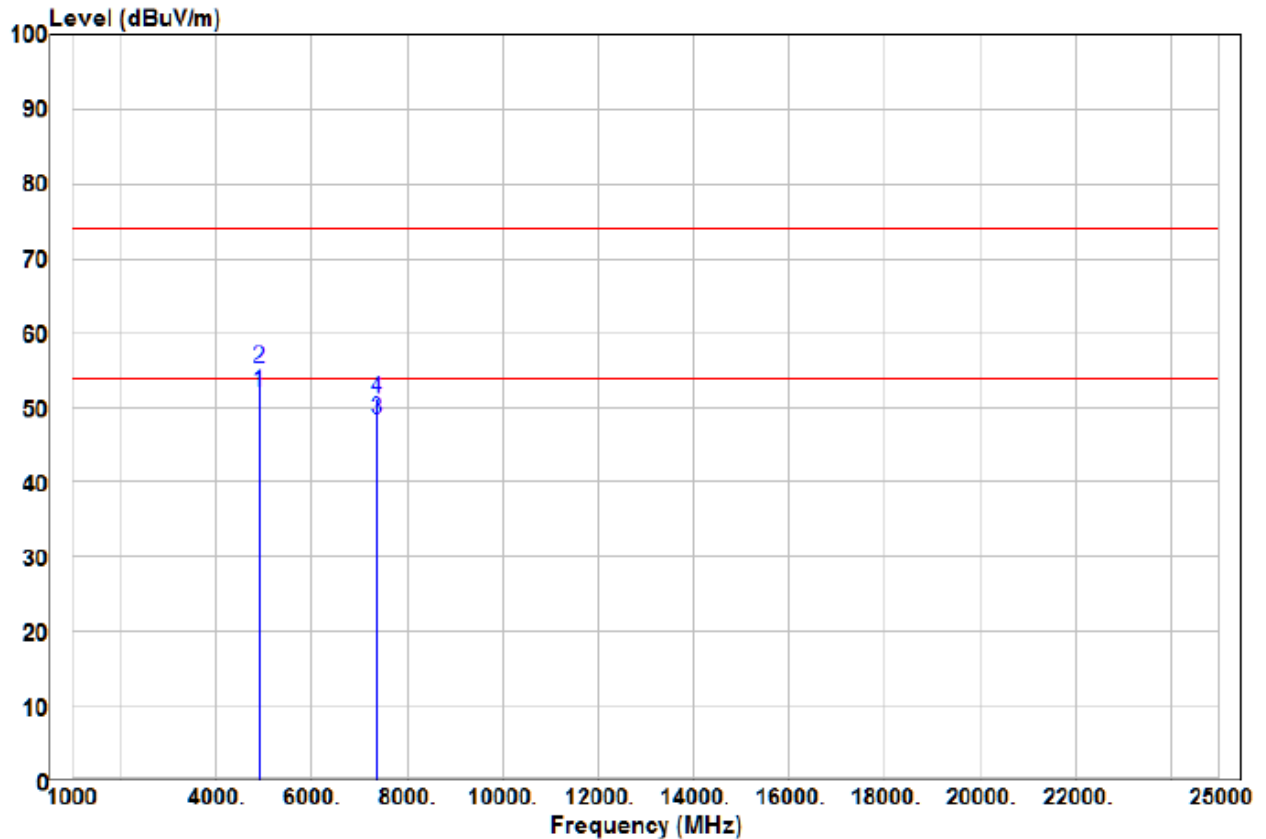

		Read		Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Pol/Phase
1	pp	4924.00	52.56	-0.58	51.98	54.00	-2.02 Average
2	pk	4924.00	55.84	-0.58	55.26	74.00	-18.74 Peak
3		7386.00	42.61	5.73	48.34	54.00	-5.66 Average
4		7386.00	45.49	5.73	51.22	74.00	-22.78 Peak

Remark:

- 1) The 1Mbps of rate of 802.11b is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

6.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10 2013		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value

Test Setup:

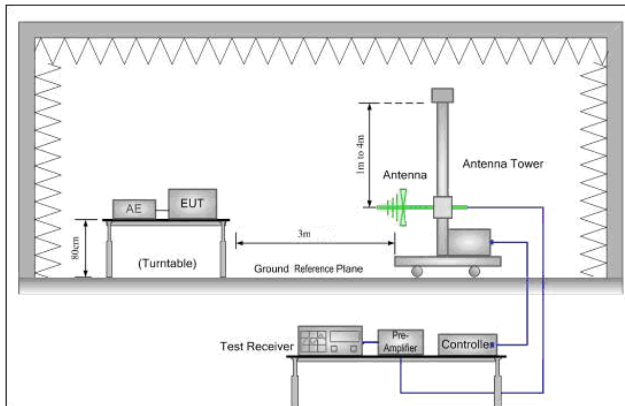


Figure 1. 30MHz to 1GHz

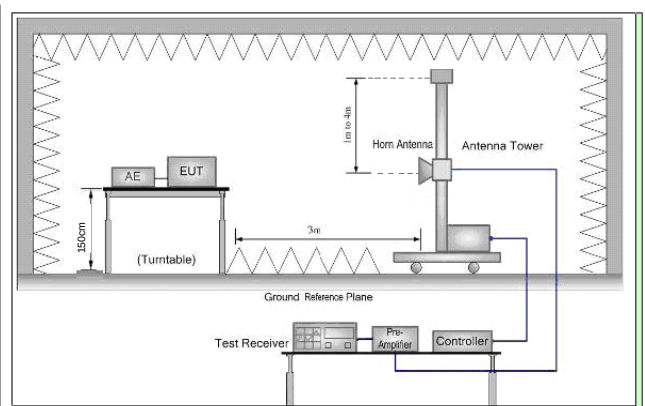


Figure 2. Above 1GHz


Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the

	measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel , the Highest channel h. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g ; 6.5Mbps of rate is the worst case of 802.11n(HT20) .Only the worst case is recorded in the report.
Test Results:	Pass


Test data:

Worse case mode:	802.11b(1Mbps)	Test channel:	Lowest
------------------	----------------	---------------	--------

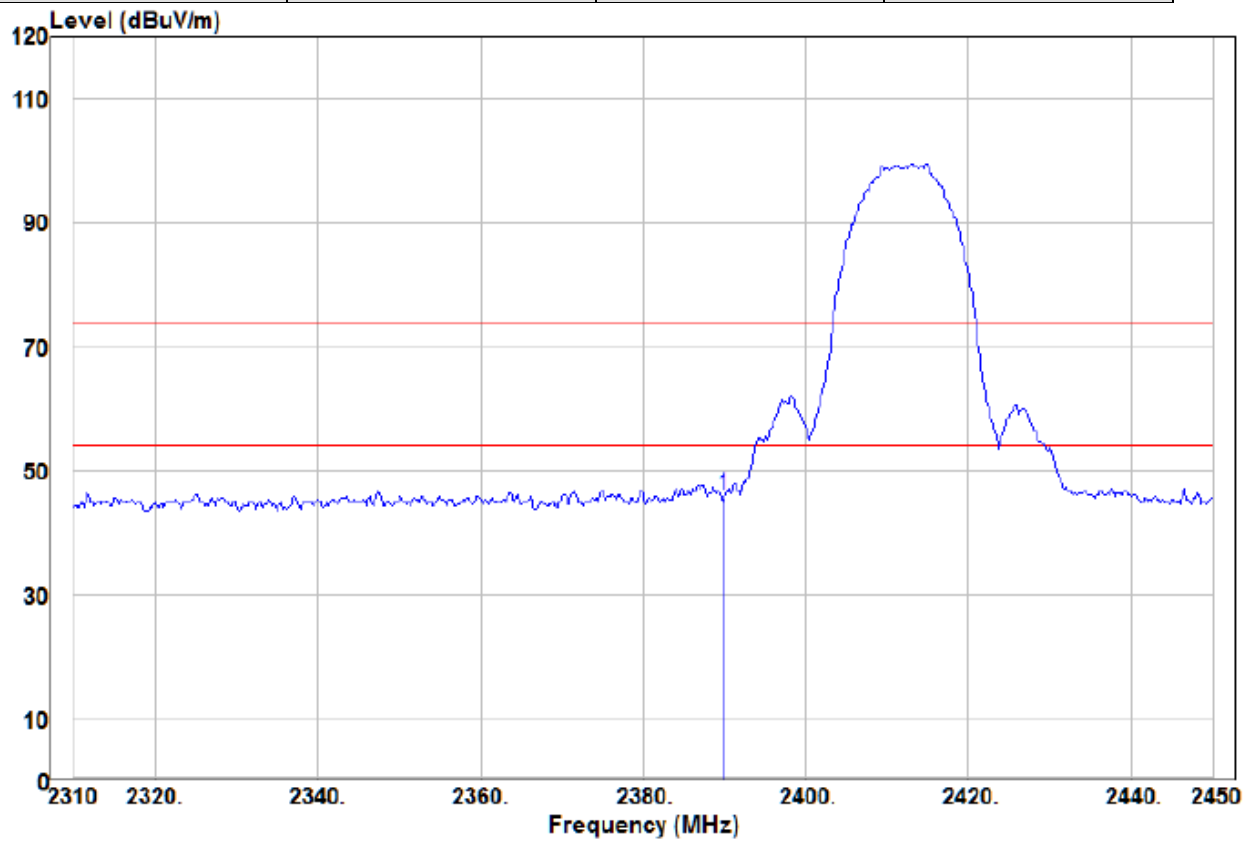


	Read			Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp 2390.00	54.96	-8.89	46.07	74.00	-27.93	Peak	VERTICAL

Worse case mode:	802.11b(1Mbps)	Test channel:	Lowest
------------------	----------------	---------------	--------

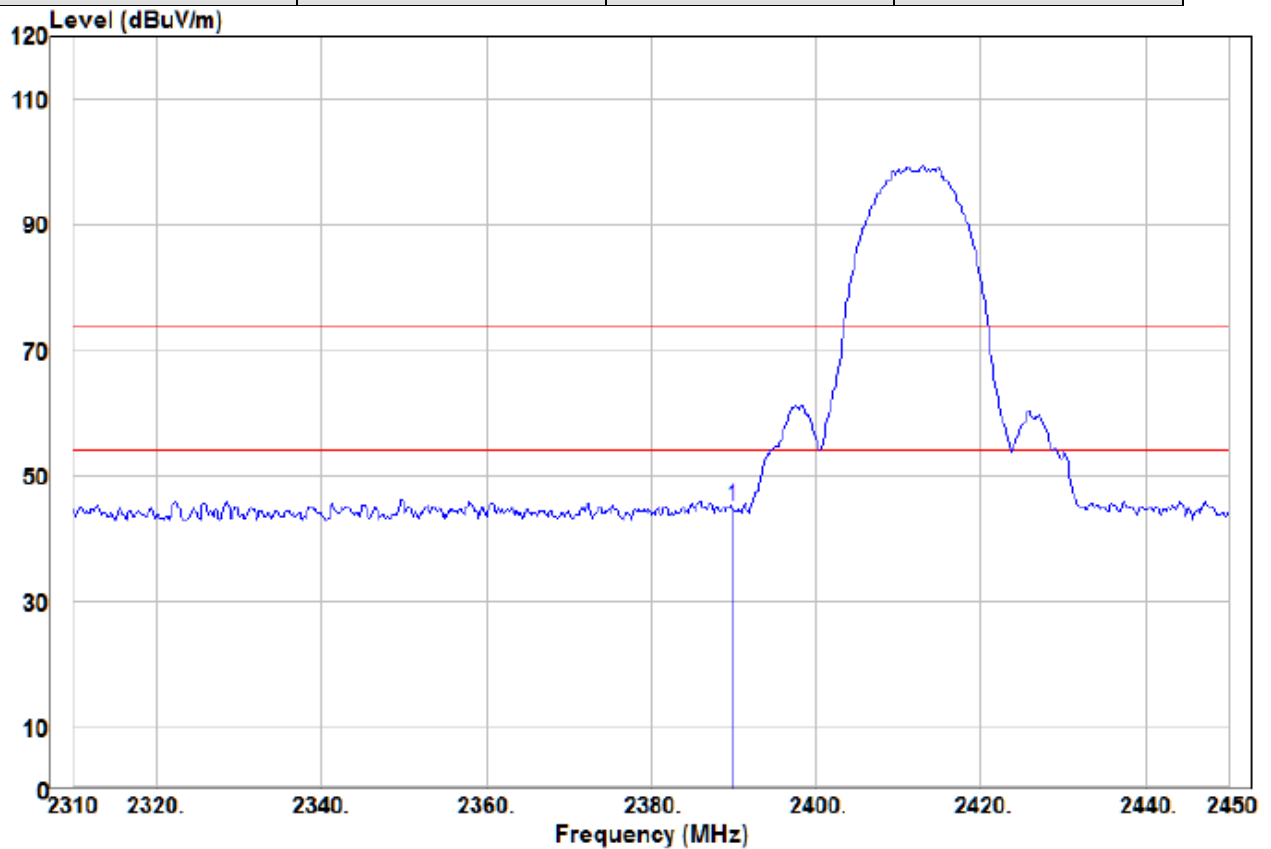


	Read		Limit	Over			
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp 2390.00	53.97	-8.89	45.08	74.00	-28.92	Peak	HORIZONTAL

Worse case mode:	802.11b(1Mbps)	Test channel:	Highest
------------------	----------------	---------------	---------

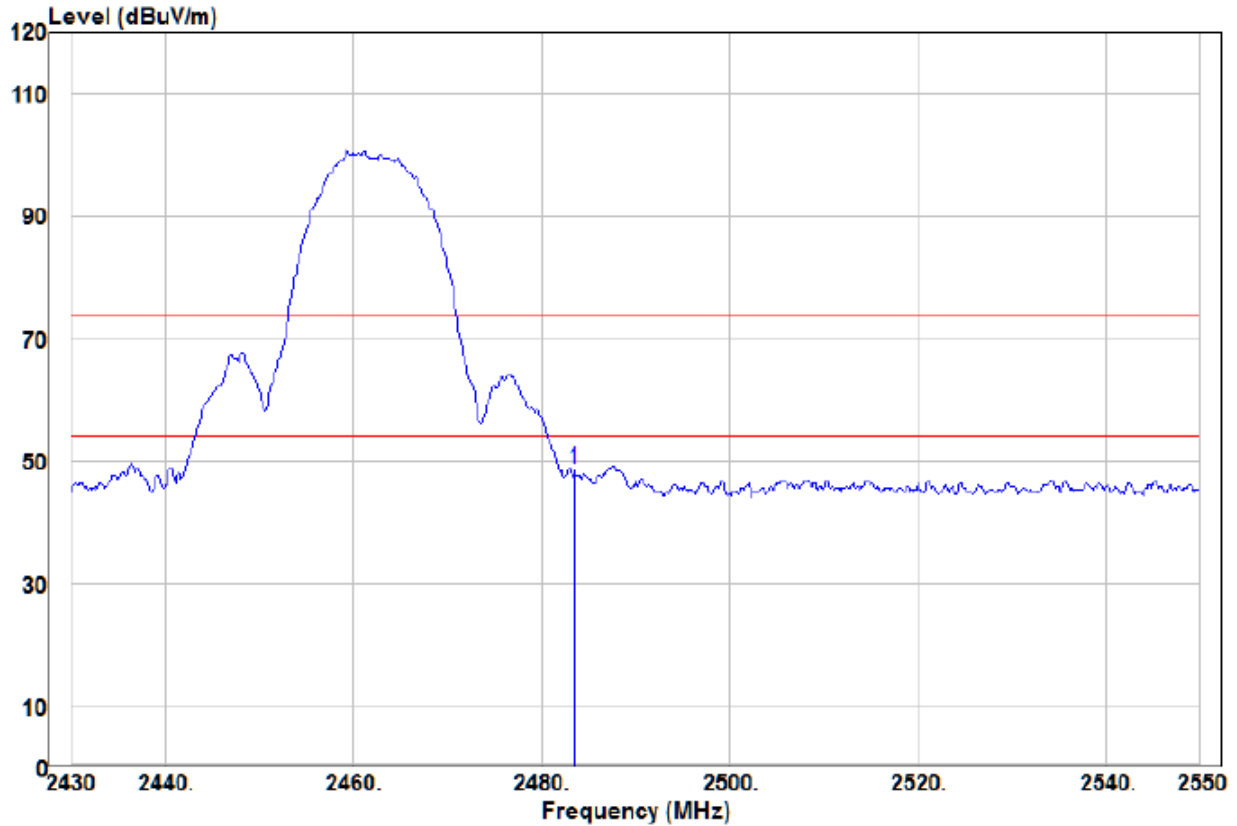


	Read		Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Pol/Phase
1 pp 2483.50	57.21	-8.68	48.53	74.00	-25.47	Peak
						VERTICAL

Worse case mode:	802.11b(1Mbps)	Test channel:	Highest
------------------	----------------	---------------	---------

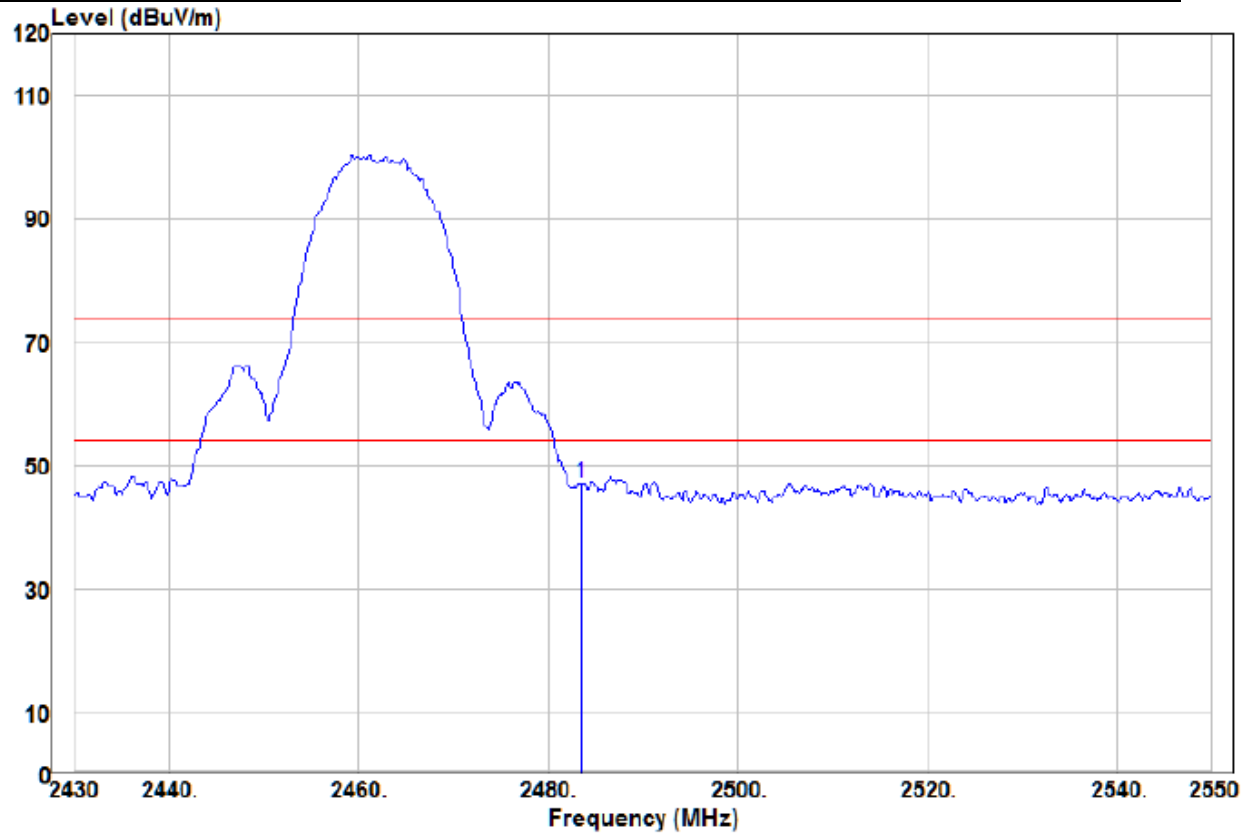


	Read			Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp 2483.50	55.87	-8.68	47.19	74.00	-26.81	Peak	HORIZONTAL

Worse case mode:	802.11g(6Mbps)	Test channel:	Lowest
------------------	----------------	---------------	--------

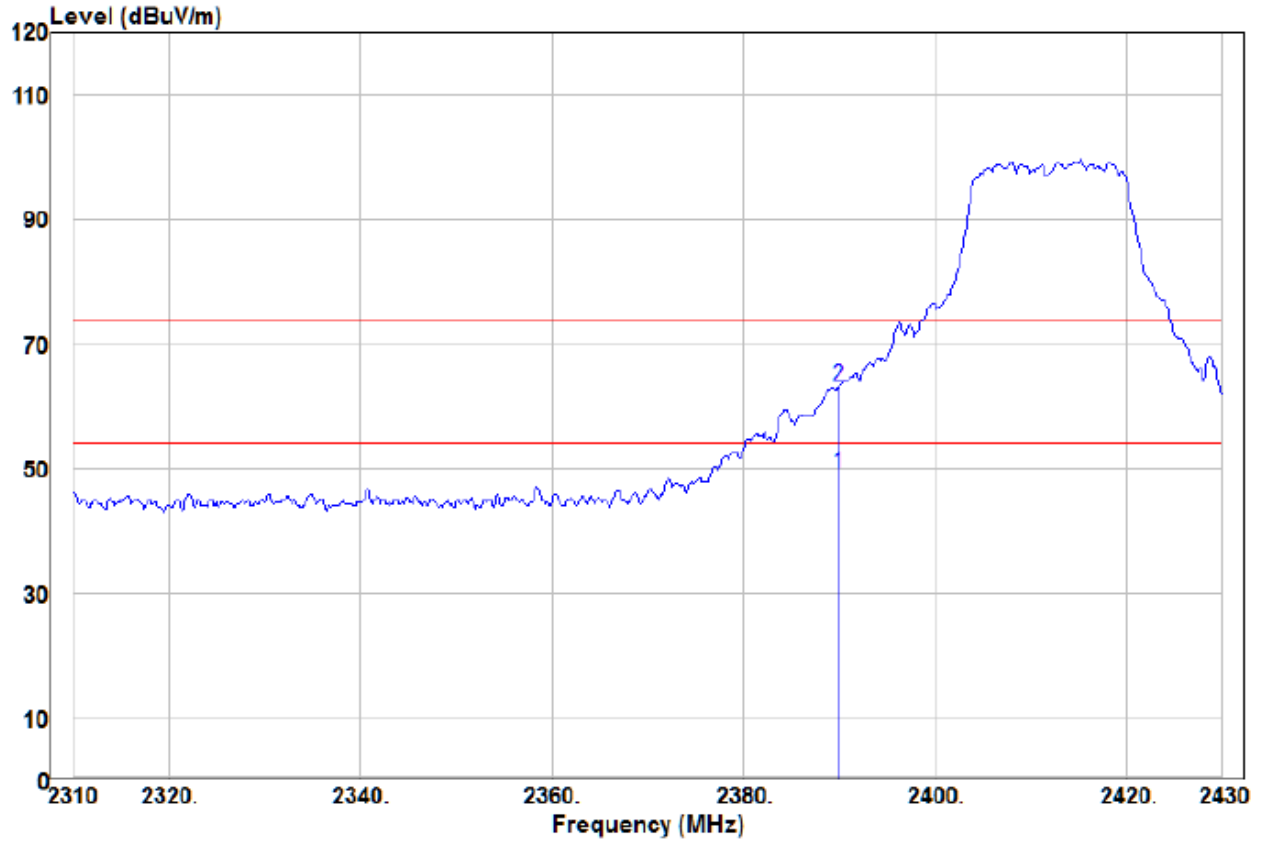


	Read	Limit	Over					
	Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp	2390.00	57.99	-8.89	49.10	54.00	-4.90	Average	HORIZONTAL
2 pk	2390.00	72.07	-8.89	63.18	74.00	-10.82	Peak	HORIZONTAL

Worse case mode:	802.11g(6Mbps)	Test channel:	Lowest
------------------	----------------	---------------	--------

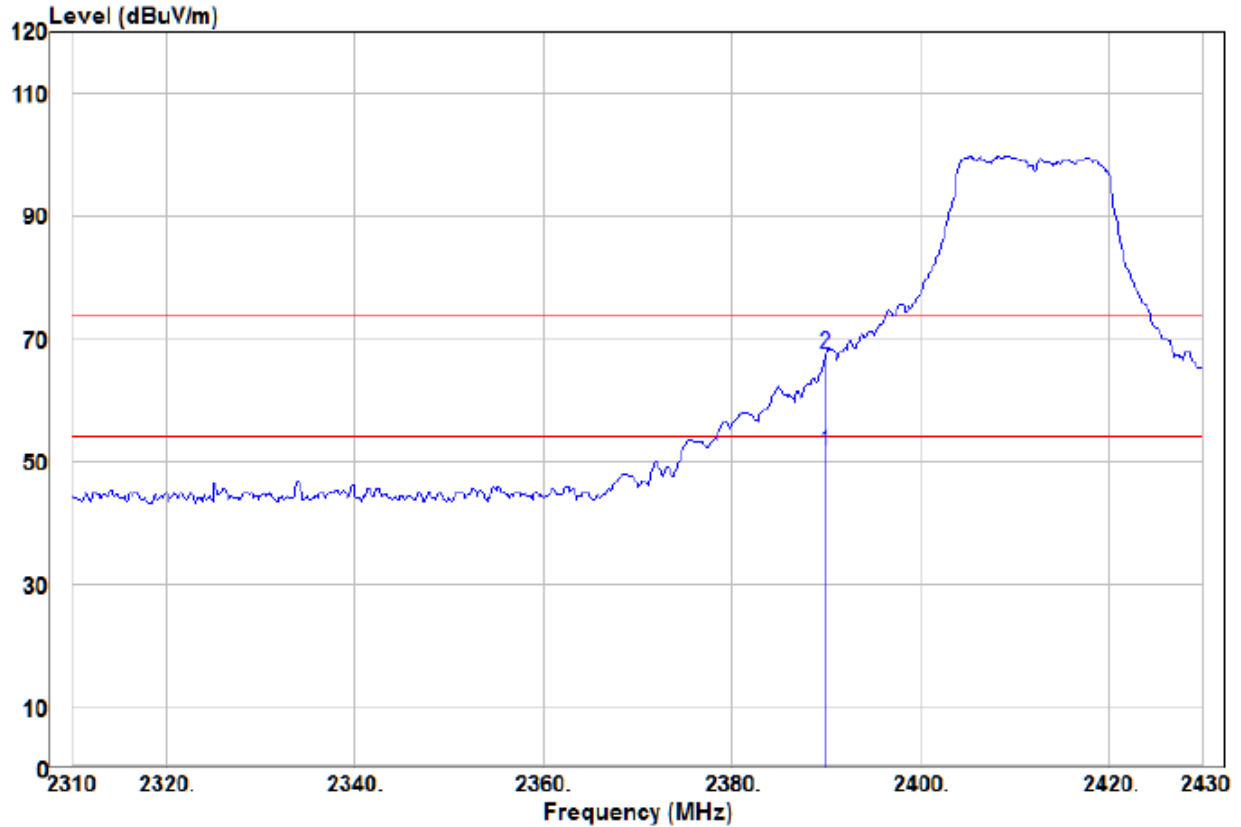


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp	2390.00	60.63	-8.89	51.74	54.00	-2.26	Average	VERTICAL
2 pk	2390.00	76.37	-8.89	67.48	74.00	-6.52	Peak	VERTICAL

Worse case mode:	802.11g(6Mbps)	Test channel:	Highest
------------------	----------------	---------------	---------

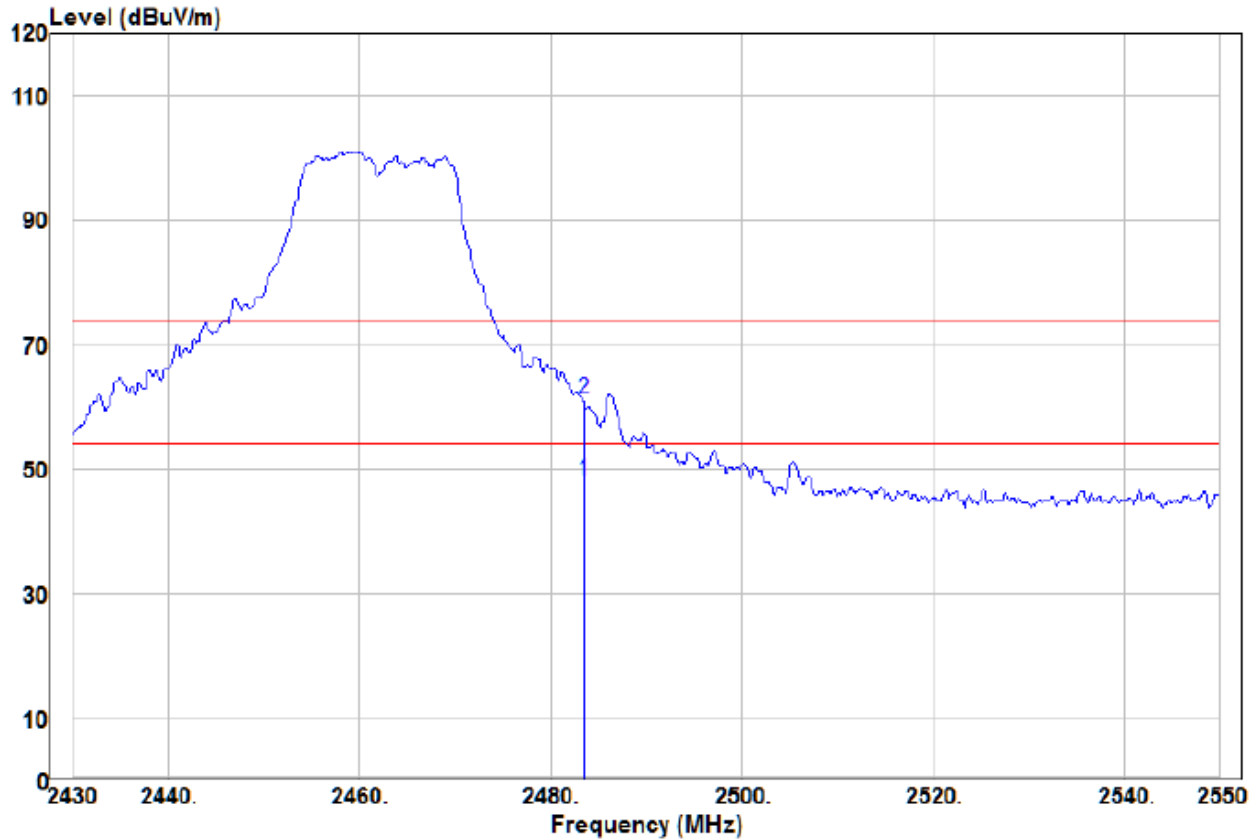


		Read		Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	pol/Phase
1 pp	2483.50	56.87	-8.68	48.19	54.00	-5.81	Average
2 pk	2483.50	69.87	-8.68	61.19	74.00	-12.81	Peak

Worse case mode:	802.11g(6Mbps)	Test channel:	Highest
------------------	----------------	---------------	---------

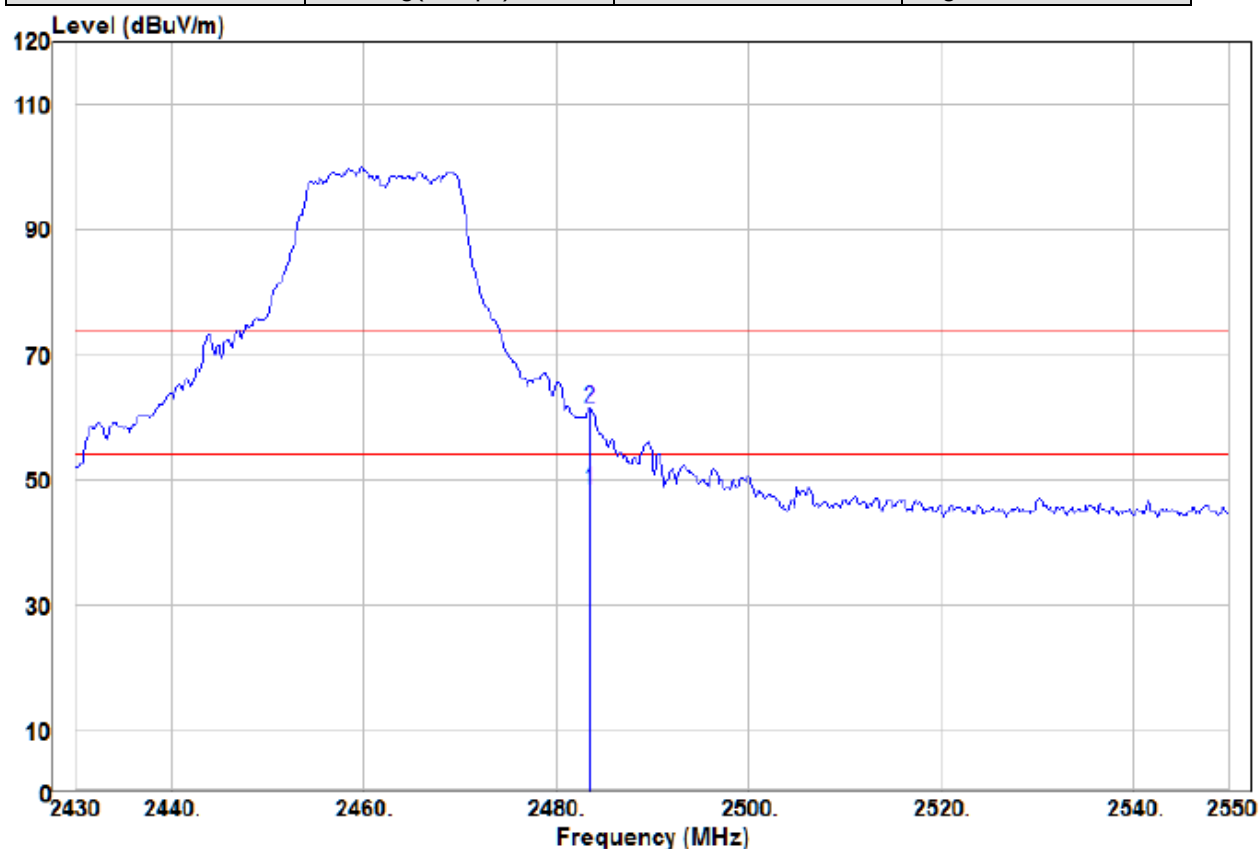


		Read		Limit	Over		
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Pol/Phase
1 pp	2483.50	57.00	-8.68	48.32	54.00	-5.68	Average
2 pk	2483.50	70.20	-8.68	61.52	74.00	-12.48	Peak

Worse case mode:	802.11n(HT20)(6.5Mbps)	Test channel:	Lowest
------------------	------------------------	---------------	--------

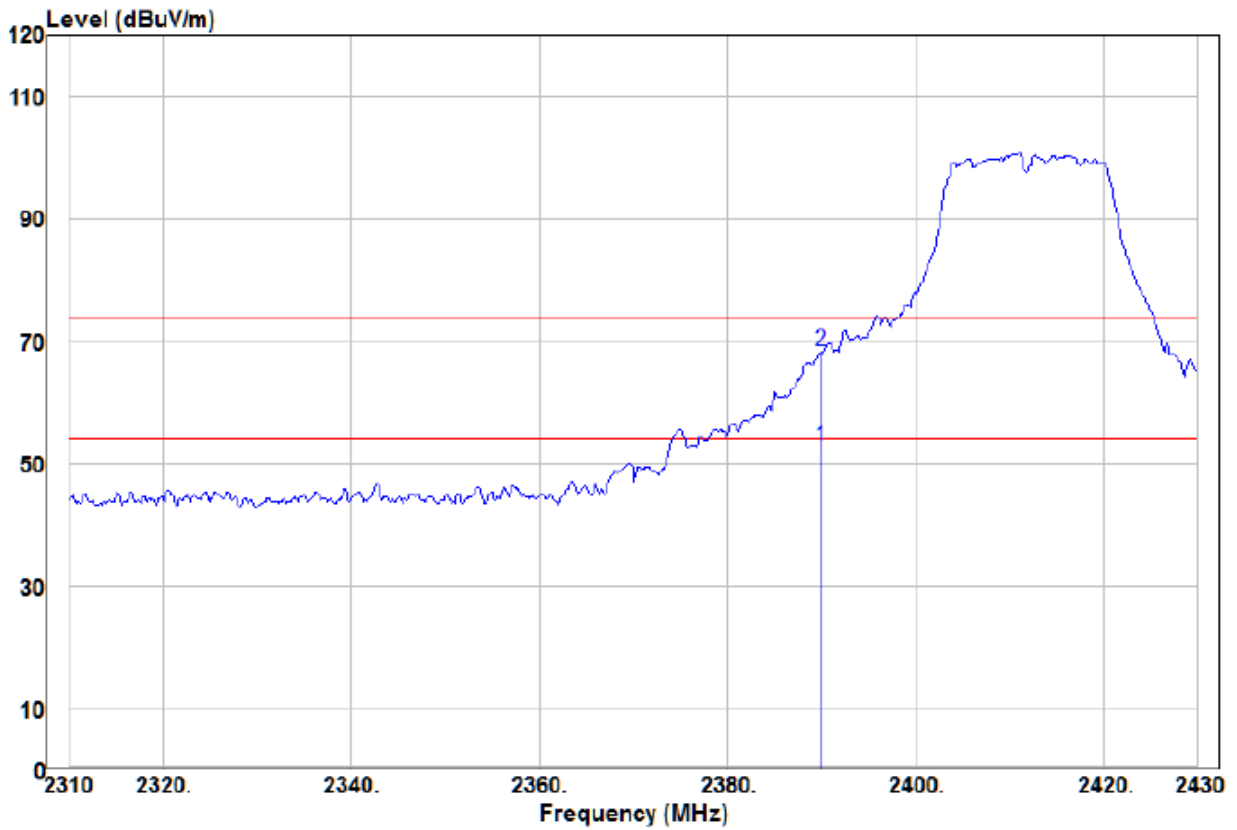


	Read			Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp	2390.00	61.68	-8.89	52.79	54.00	-1.21	Average
2 pk	2390.00	77.15	-8.89	68.26	74.00	-5.74	Peak

Worse case mode:	802.11n(HT20)(6.5Mbps)	Test channel:	Lowest
------------------	------------------------	---------------	--------

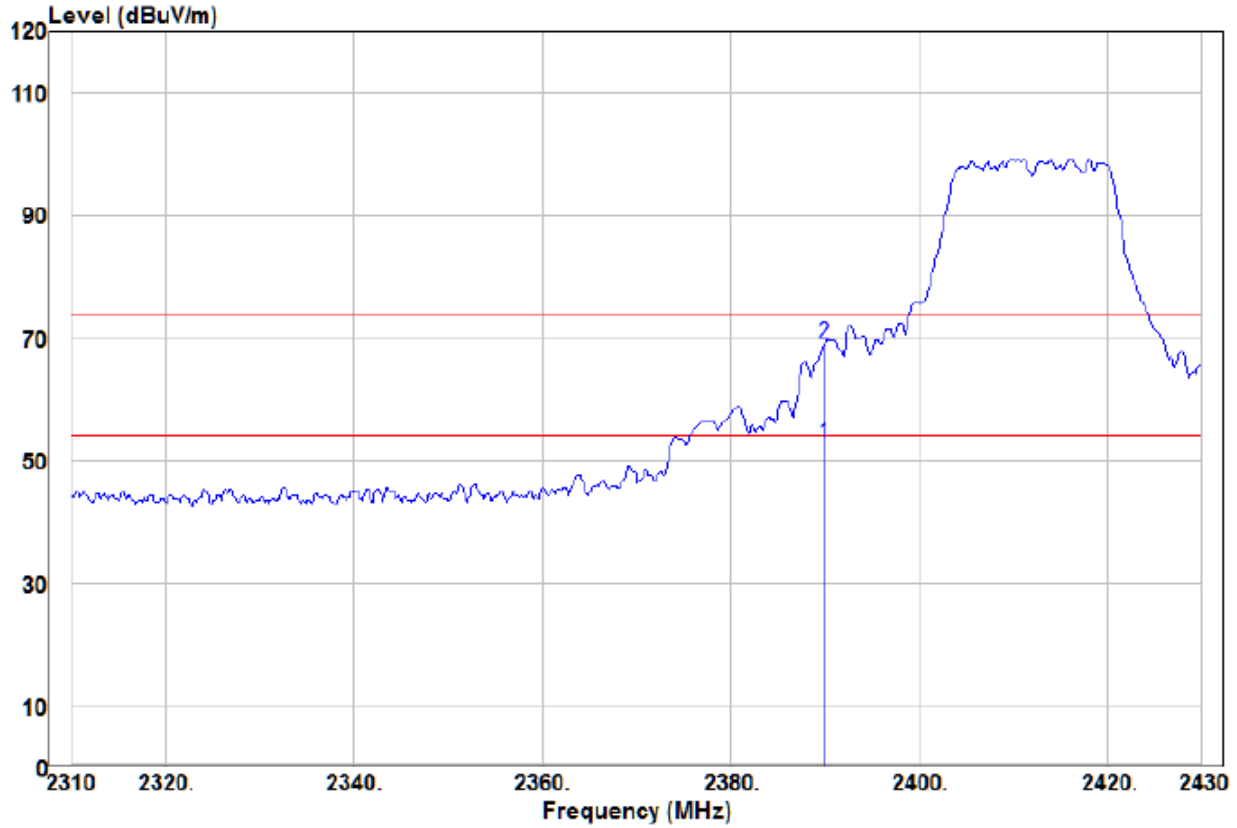


	Read	Limit	Over				
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp 2390.00	61.66	-8.89	52.77	54.00	-1.23	Average	HORIZONTAL
2 pk 2390.00	78.02	-8.89	69.13	74.00	-4.87	Peak	HORIZONTAL

Worse case mode:	802.11n(HT20)(6.5Mbps)	Test channel:	Highest
------------------	------------------------	---------------	---------

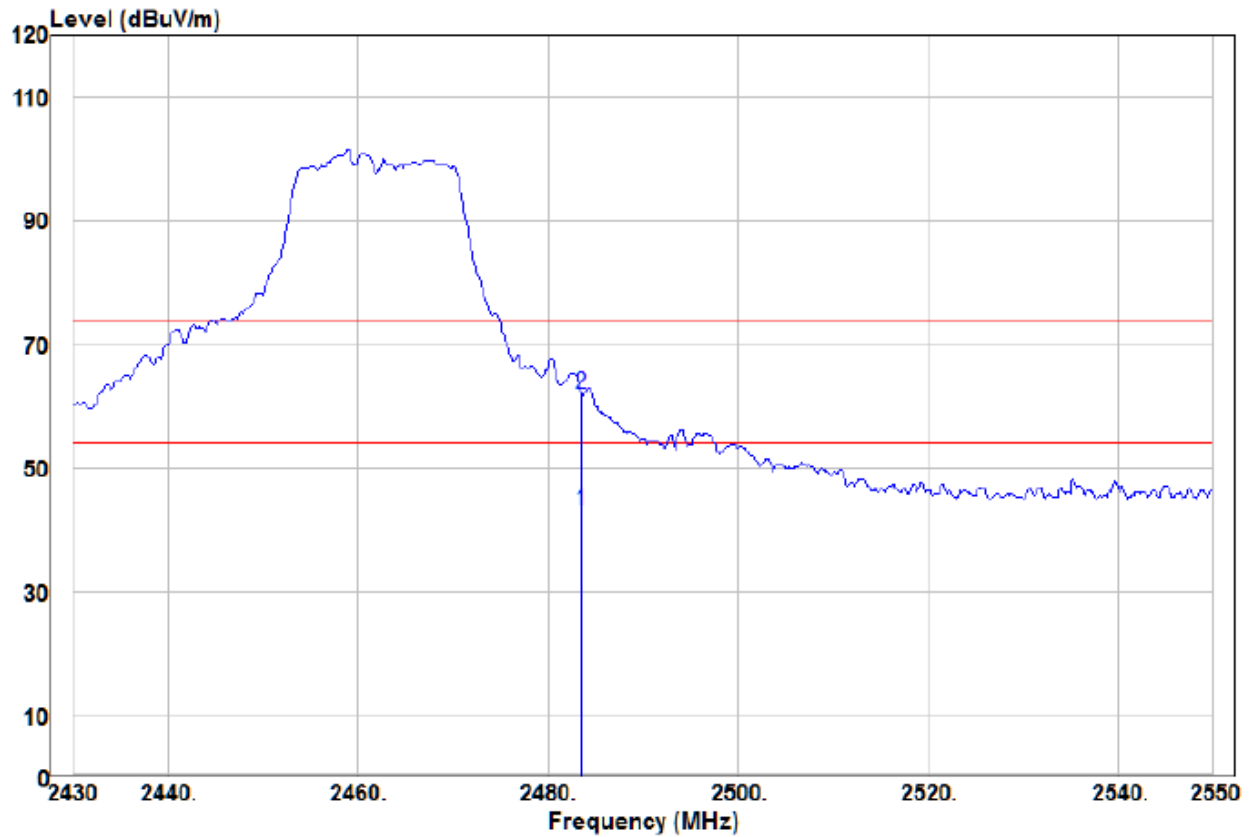

	Read	Limit	Over					
	Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp	2483.50	51.59	-8.68	42.91	54.00	-11.09	Average	VERTICAL
2 pk	2483.50	70.57	-8.68	61.89	74.00	-12.11	Peak	VERTICAL

Worse case mode:	802.11n(HT20)(6.5Mbps)	Test channel:	Highest
------------------	------------------------	---------------	---------

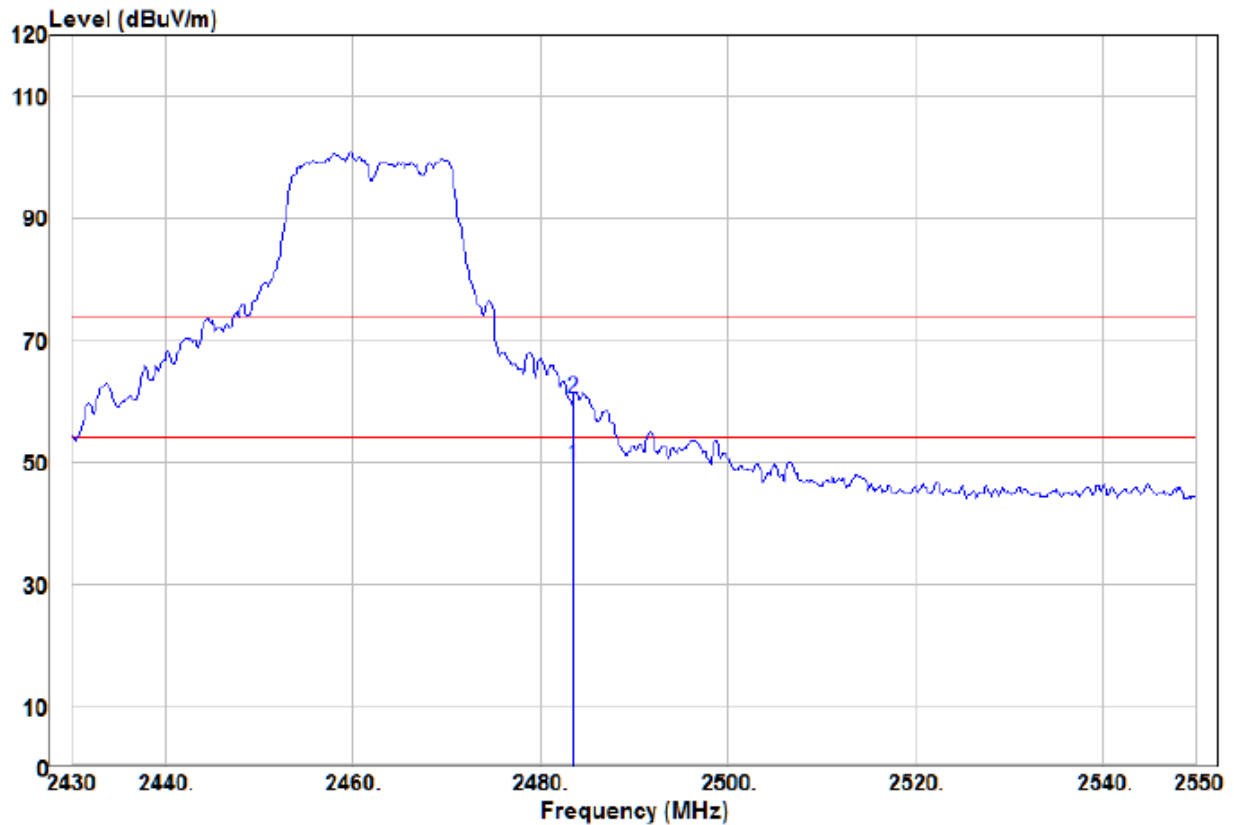

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp	2483.50	58.10	-8.68	49.42	54.00	-4.58	Average	HORIZONTAL
2 pk	2483.50	69.00	-8.68	60.32	74.00	-13.68	Peak	HORIZONTAL

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

THE END