

## Partial FCC Test Report

### (Part 24 – WCDMA Band 2, LTE Band 2)

**Report No.:** RFBBNT-WTW-P21040202A-1

**FCC ID:** SLE-UC8112A

**Test Model:** UC-8112A-ME-T-LX

**Received Date:** Apr. 09, 2021

**Test Date:** Aug. 20, 2021 ~ Apr. 19, 2022

**Issued Date:** Apr. 20, 2022

**Applicant:** Moxa Inc.

**Address:** No. 1111, Heping Rd., Bade Dist., Taoyuan City 334004, Taiwan

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, TAIWAN

**FCC Registration / Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1      Certificate of Conformity.....</b>	<b>4</b>
<b>2      Summary of Test Results .....</b>	<b>5</b>
2.1    Measurement Uncertainty .....	5
2.2    Test Site and Instruments.....	6
<b>3      General Information.....</b>	<b>7</b>
3.1    General Description of EUT .....	7
3.2    Configuration of System under Test.....	8
3.2.1    Description of Support Units.....	8
3.3    Test Mode Applicability and Tested Channel Detail .....	9
3.4    EUT Operating Conditions .....	9
3.5    General Description of Applied Standards and References .....	9
<b>4      Test Types and Results .....</b>	<b>10</b>
4.1    Radiated Emission Measurement .....	10
4.1.1    Limits of Radiated Emission Measurement.....	10
4.1.2    Test Procedure .....	10
4.1.3    Deviation from Test Standard .....	10
4.1.4    Test Setup.....	11
4.1.5    Test Results .....	12
<b>5      Pictures of Test Arrangements.....</b>	<b>16</b>
<b>Appendix – Information of the Testing Laboratories .....</b>	<b>17</b>

### Release Control Record

Issue No.	Description	Date Issued
RFBBNT-WTW-P21040202A-1	Original release	Apr. 20, 2022

## 1 Certificate of Conformity

**Product:** Arm-based platform

**Brand:** MOXA

**Test Model:** UC-8112A-ME-T-LX

**Sample Status:** Engineering sample

**Applicant:** Moxa Inc.

**Test Date:** Aug. 20, 2021 ~ Apr. 19, 2022

**Standards:** FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :** Celine Chou, **Date:** Apr. 20, 2022  
Celine Chou / Senior Specialist

**Approved by :** Jeremy Lin, **Date:** Apr. 20, 2022  
Jeremy Lin / Project Engineer

## 2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Effective Isotropically Radiated Power	N/A	Refer to Note
2.1047	Modulation Characteristics	N/A	Refer to Note
2.1046 24.232 (d)	Peak To Average Ratio	N/A	Refer to Note
2.1055 24.235	Frequency Stability	N/A	Refer to Note
2.1049	Occupied Bandwidth	N/A	Refer to Note
24.238	Band Edge Measurements	N/A	Refer to Note
2.1051 24.238	Conducted Spurious Emissions	N/A	Refer to Note
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -20.36dB at 30.00MHz.

Note:

1. This report is a partial report, only test item of radiated spurious emissions below 1GHz test was performed for this report, other test data please refer to SGS report no.: T190304W05-RP.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.04 dB
	30MHz ~ 200MHz	3.63 dB
	200MHz ~1000MHz	3.64 dB

## 2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Dec. 31, 2020	Dec. 30, 2021
			Dec. 30, 2021	Dec. 29, 2022
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Sep. 16, 2020	Sep. 15, 2021
			Sep. 15, 2021	Sep. 14, 2022
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Nov. 03, 2020	Nov. 02, 2021
			Nov. 01, 2021	Oct. 31, 2022
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-1170	Nov. 22, 2020	Nov. 21, 2021
			Nov. 14, 2021	Nov. 13, 2022
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Nov. 22, 2020	Nov. 21, 2021
			Oct. 26, 2021	Oct. 25, 2022
Loop Antenna TESEQ	HLA 6121	45745	Jul. 21, 2021	Jul. 20, 2022
Preamplifier Agilent (Below 1GHz)	8447D	2944A10631	Jun. 05, 2021	Jun. 04, 2022
Preamplifier KEYSIGHT (Above 1GHz)	83017A	MY53270295	Jun. 05, 2021	Jun. 04, 2022
RF Coaxial Cable WOKEN With 5dB PAD	8D-FB	Cable-CH4-01	Jul. 24, 2021	Jul. 23, 2022
RF Coaxial Cable EMCI	EMC102-KM-KM-3 000	150929	Jul. 24, 2021	Jul. 23, 2022
RF Coaxial Cable EMCI	EMC102-KM-KM-6 00	150928	Jul. 24, 2021	Jul. 23, 2022
RF signal cable HUBER+SUHNER	SUCOFLEX 104	MY 13380+295012/04	Jun. 05, 2021	Jun. 04, 2022
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH4-03 (250724)	Jun. 05, 2021	Jun. 04, 2022
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021703	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100	SC93021703	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in HwaYa Chamber 4.

### 3 General Information

#### 3.1 General Description of EUT

Product	Arm-based platform	
Brand	MOXA	
Test Model	UC-8112A-ME-T-LX	
Sample Status	Engineering sample	
Power Supply Rating	12Vdc from AC/DC Adapter	
Modulation Type	WCDMA: BPSK, QPSK HSDPA: BPSK HSUPA: QPSK LTE: QPSK, 16QAM	
Operating Frequency	WCDMA Band 2	1852.4MHz ~ 1907.6MHz
	LTE Band 2 (Channel Bandwidth 1.4MHz)	1850.7MHz ~ 1909.3MHz
	LTE Band 2 (Channel Bandwidth 3MHz)	1851.5MHz ~ 1908.5MHz
	LTE Band 2 (Channel Bandwidth 5MHz)	1852.5MHz ~ 1907.5MHz
	LTE Band 2 (Channel Bandwidth 10MHz)	1855.0MHz ~ 1905.0MHz
	LTE Band 2 (Channel Bandwidth 15MHz)	1857.5MHz ~ 1902.5MHz
	LTE Band 2 (Channel Bandwidth 20MHz)	1860.0MHz ~ 1900.0MHz
Antenna Type	Dipole antenna with 2.0dBi gain	
Accessory Device	NA	
Cable Supplied	NA	

Note:

1. This report is prepared for FCC class II permissive change. The difference compared with the original report (SGS report no.: T190304W05-RP) are changing duplexer (Band13), PA (Band17) and Firmware/Software update.

For change in duplexer and PA, it is meet section III. D of KDB 178919 D01 v06 requirements,


- The new chip component is pin-for-pin compatible.
- The new chip has the same basic function as the old chip.
- No change in radio parameters has occurred.

For Firmware/Software update, it is not impact in RF characteristics, for more detail please refer to operation description exhibit.

After engineering judgement, only test item of radiated spurious emissions below 1GHz test was performed for this report.

2. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
3. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

### 3.2 Configuration of System under Test

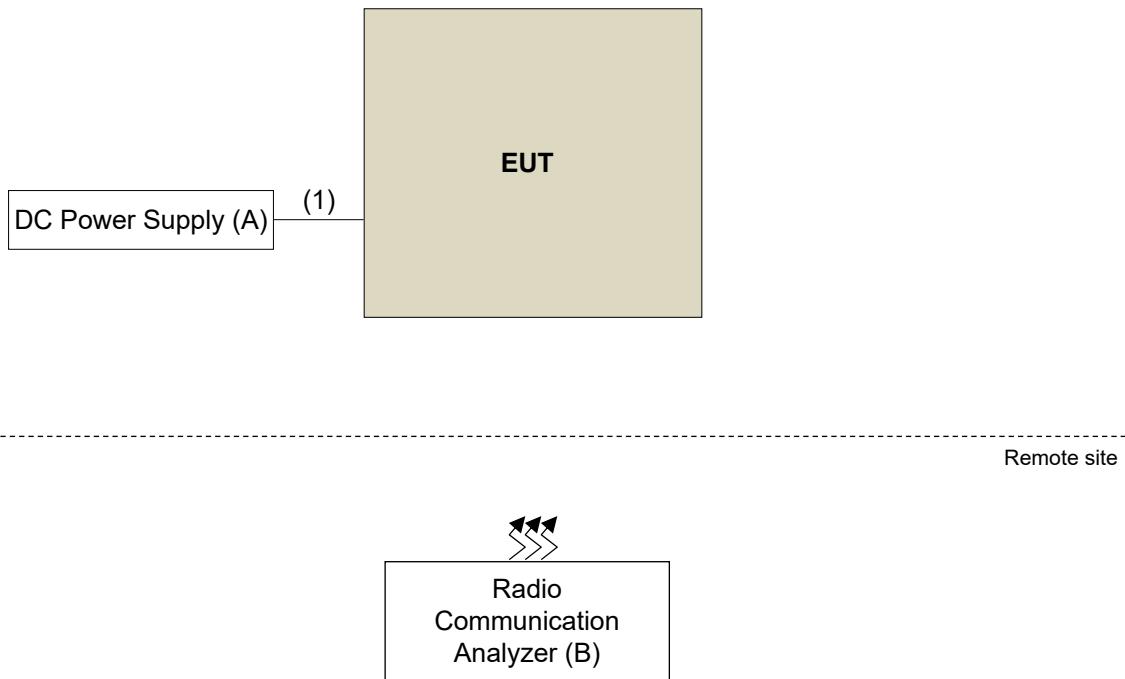

#### 3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	DC Power Supply	Topward	6306D	809760	NA	-
B.	Radio Communication Analyzer	Anritsu	MT8821C	6261806803	NA	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item B acted as a communication partner to transfer data.

### 3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	Radiated Emission
WCDMA Band 2	X-plane
LTE Band 2	X-plane

#### WCDMA Band 2

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	Radiated Emission Below 1GHz	9262 to 9538	9400 (1880.0MHz)	WCDMA

#### LTE Band 2

EUT Configure Mode	Test item	Available channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	Radiated Emission Below 1GHz	18607 to 19193	19193 (1909.3MHz)	1.4MHz	QPSK	1 RB / 0 RB Offset

#### Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
Radiated Emission Below 1GHz	21deg. C, 63%RH 22deg. C, 68%RH	120Vac, 60Hz	Vincent Chen Greg Lin

### 3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

### 3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

#### Test Standard:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 24**

**ANSI/TIA/EIA-603-E 2016**

ANSI 63.26-2015

#### References Test Guidance:

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Radiated Emission Measurement

#### 4.1.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

#### 4.1.2 Test Procedure

- a. In the semi-anechoic chamber, EUT placed on the 0.8m (below or equal 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5 and 5.2.7
  - $\text{EIRP (dBm)} = E (\text{dB}\mu\text{V/m}) + 20\log(D) - 104.8$ ; where D is the measurement distance (in the far field region) in m.
  - $\text{ERP (dBm)} = E (\text{dB}\mu\text{V/m}) + 20\log(D) - 104.8 - 2.15$ ; where D is the measurement distance (in the far field region) in m.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:  
The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

#### 4.1.3 Deviation from Test Standard

No deviation.

#### 4.1.4 Test Setup

For radiated emission 30MHz to 1GHz

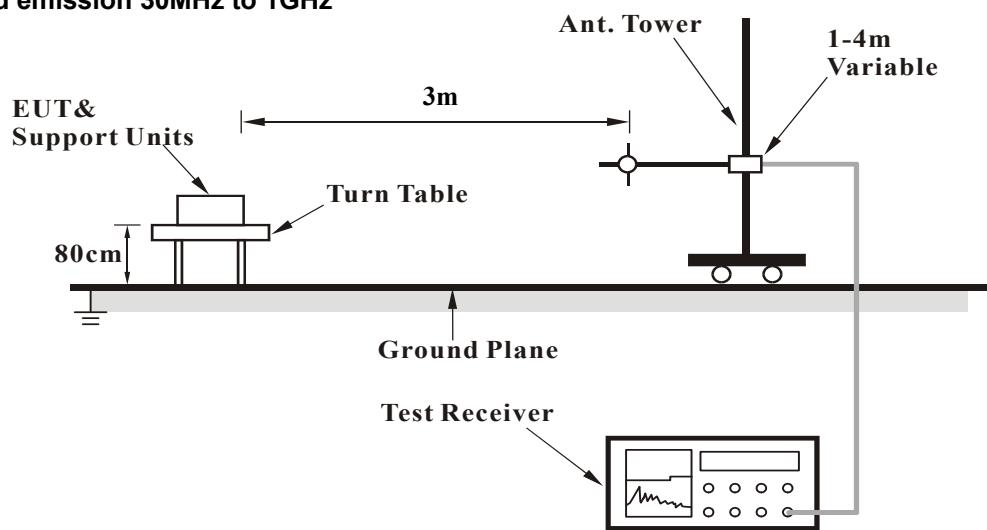

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.5 Test Results

Below 1GHz


WCDMA Band 2

Mode	TX channel 9400 (1880.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	21deg. C, 63%RH	Input Power	120Vac, 60Hz
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	82.38	-52.57	-13.00	-39.57	1.03 H	254	60.71	-113.28
2	194.90	-59.91	-13.00	-46.91	1.35 H	268	51.17	-111.08
3	280.26	-58.91	-13.00	-45.91	1.92 H	41	49.43	-108.34
4	442.25	-60.52	-13.00	-47.52	1.78 H	225	42.18	-102.70
5	647.89	-54.84	-13.00	-41.84	1.36 H	104	42.97	-97.81
6	901.06	-50.86	-13.00	-37.86	2.25 H	197	42.84	-93.70

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

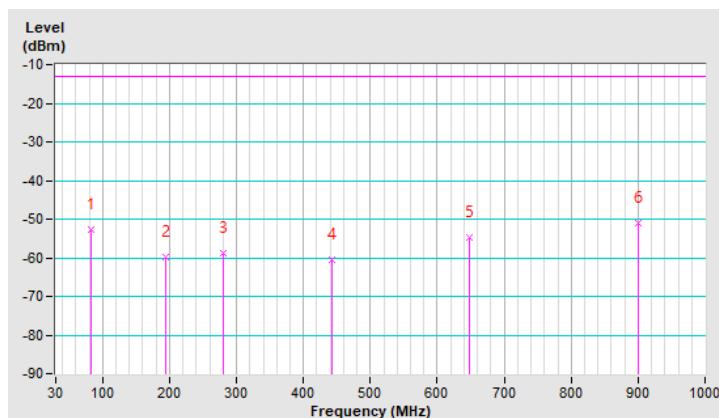


Mode	TX channel 9400 (1880.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	21deg. C, 63%RH	Input Power	120Vac, 60Hz
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	221.09	-55.37	-13.00	-42.37	1.23 V	235	56.27	-111.64
2	394.72	-62.09	-13.00	-49.09	3.45 V	165	42.54	-104.63
3	547.01	-57.73	-13.00	-44.73	1.10 V	287	42.76	-100.49
4	690.57	-54.23	-13.00	-41.23	1.96 V	232	42.96	-97.19
5	888.45	-50.93	-13.00	-37.93	2.74 V	142	42.78	-93.71
<b>6</b>	<b>943.74</b>	<b>-49.55</b>	<b>-13.00</b>	<b>-36.55</b>	<b>2.22 V</b>	<b>132</b>	<b>43.06</b>	<b>-92.61</b>

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) +  $20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

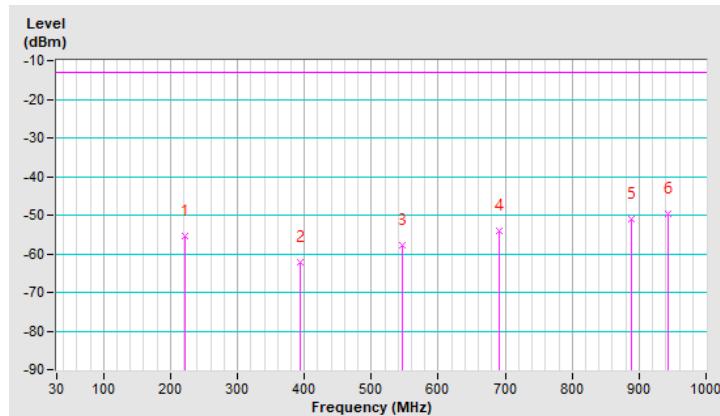


## LTE Band 2, Channel Bandwidth 1.4MHz

Mode	TX channel 19193 (1909.30MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	<b>30.00</b>	<b>-33.36</b>	<b>-13.00</b>	<b>-20.36</b>	<b>1.50 H</b>	<b>18</b>	<b>72.12</b>	<b>-105.48</b>
2	81.41	-47.67	-13.00	-34.67	1.00 H	279	61.38	-109.05
3	142.52	-47.92	-13.00	-34.92	1.25 H	162	56.28	-104.20
4	423.82	-53.30	-13.00	-40.30	1.25 H	108	45.89	-99.19
5	630.43	-49.35	-13.00	-36.35	1.00 H	177	45.53	-94.88
6	896.21	-42.83	-13.00	-29.83	1.00 H	258	47.09	-89.92

## Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + 20log(D) – 104.8
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

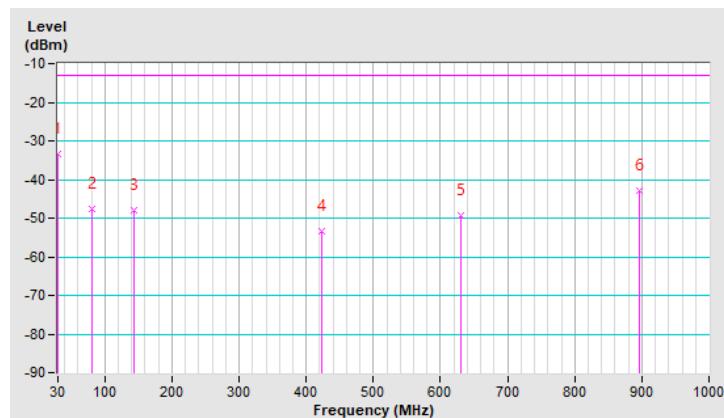


Mode	TX channel 19193 (1909.30MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 68%RH	Input Power	120Vac, 60Hz
Tested By	Greg Lin		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	78.50	-43.90	-13.00	-30.90	1.25 V	46	64.40	-108.30
2	140.58	-46.33	-13.00	-33.33	1.00 V	237	58.06	-104.39
3	288.99	-59.33	-13.00	-46.33	1.50 V	180	42.95	-102.28
4	518.88	-57.60	-13.00	-44.60	1.25 V	211	39.56	-97.16
5	765.26	-52.68	-13.00	-39.68	1.00 V	138	39.64	-92.32
6	927.25	-50.20	-13.00	-37.20	1.00 V	83	38.77	-88.97

Remarks:

1. EIRP(dBm) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) +  $20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

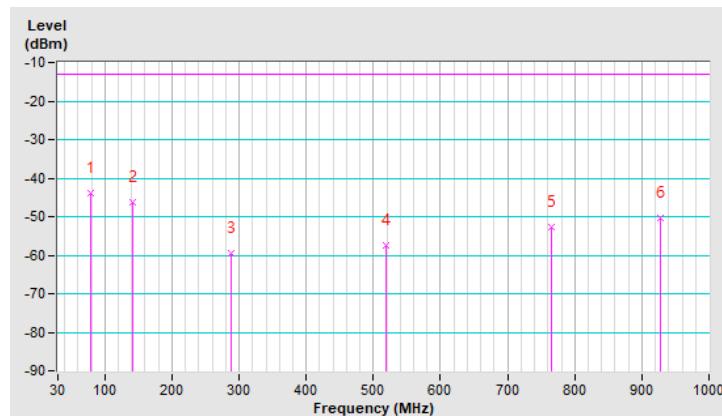

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### **Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

### **Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

### **Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---