

# FCC Test Report (Class II Permissive Change)

Product Name	MOXA IEEE802.11 a/b/g mini PCI module
Model No	WAPA004
FCC ID.	SLE-WAPA004

Applicant	MOXA Inc.
Address	FL.4, NO. 135. LANE 235, BAOQIAO RD. XINDIAN DIST., NEW TAIPEI CITY, TAIWAN

Date of Receipt	Sep. 22, 2015
Issue Date	Nov. 12, 2015
Report No.	1590605R-RFUSP02V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government. The test report shall not be reproduced without the written approval of QuieTek Corporation.

# Test Report

Issue Date: Nov. 12, 2015

Report No.: 1590605R-RFUSP02V00



Product Name	MOXA IEEE802.11 a/b/g mini PCI module
Applicant	MOXA Inc.
Address	FL.4, NO. 135. LANE 235, BAOQIAO RD. XINDIAN DIST., NEW TAIPEI CITY, TAIWAN
Manufacturer	MOXA Inc.
Model No.	WAPA004
EUT Rated Voltage	DC 3.3V (Power by PCI-E)
EUT Test Voltage	AC 120V/60Hz
Trade Name	MOXA
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2014 ANSI C63.4: 2014, ANSI C63.10: 2013 KDB 558074 D01 DTS Meas Guidance v03r03
Test Result	Complied

Documented By :

( Senior Adm. Specialist / Rita Huang )

Tested By :

( Engineer / Nova Chu )

Approved By :

( Director / Vincent Lin )

## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION</b>	<b>4</b>
1.1. EUT Description.....	4
1.2. Operational Description .....	6
1.3. Tested System Details.....	7
1.4. Configuration of Tested System .....	7
1.5. EUT Exercise Software .....	7
1.6. Test Facility .....	8
<b>2. Conducted Emission.....</b>	<b>9</b>
2.1. Test Equipment.....	9
2.2. Test Setup .....	9
2.3. Limits .....	10
2.4. Test Procedure .....	10
2.5. Uncertainty .....	10
2.6. Test Result of Conducted Emission.....	11
<b>3. Peak Power Output .....</b>	<b>13</b>
3.1. Test Equipment.....	13
3.2. Test Setup .....	13
3.3. Limits .....	13
3.4. Test Procedure .....	13
3.5. Uncertainty .....	13
3.6. Test Result of Peak Power Output.....	14
<b>4. Radiated Emission.....</b>	<b>16</b>
4.1. Test Equipment.....	16
4.2. Test Setup .....	17
4.3. Limits .....	18
4.4. Test Procedure .....	19
4.5. Uncertainty .....	19
4.6. Test Result of Radiated Emission.....	20
<b>5. Band Edge .....</b>	<b>28</b>
5.1. Test Equipment.....	28
5.2. Test Setup .....	29
5.3. Limits .....	29
5.4. Test Procedure .....	30
5.5. Uncertainty .....	30
5.6. Test Result of Band Edge .....	31
<b>6. EMI Reduction Method During Compliance Testing .....</b>	<b>39</b>

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

## 1. GENERAL INFORMATION

### 1.1. EUT Description

Product Name	MOXA IEEE802.11 a/b/g mini PCI module
Trade Name	MOXA
Model No.	WAPA004
FCC ID.	SLE-WAPA004
Frequency Range	802.11b/g: 2412-2462MHz
Number of Channels	802.11b/g: 11
Data Speed	802.11b: 1-11Mbps, 802.11g: 6-54Mbps
Channel separation	802.11b/g: 5 MHz
Type of Modulation	802.11b: DSSS, DBPSK, DQPSK, CCK 802.11g: OFDM, BPSK, QPSK, 16QAM, 64QAM
Antenna Type	Dipole
Antenna Gain	Refer to the table "Antenna List"
Channel Control	Auto

#### Antenna List

No.	Manufacturer	Model No.	Peak Gain
1	KINSUN	ANT-WDB-O-2 BK (main) ANT-WDB-O-2 BK (aux)	2.9dBi in 2.4GHz
2	KINSUN	ANT-WDB-ANM-0502 (main) ANT-WDB-ANM-0502 (aux)	4.62 dBi in 2.4GHz

Note:

1. The antenna of EUT is conform to FCC 15.203
2. Only the higher gain antenna was tested and recorded in this report.  
("ANT-WDB-ANM-0502" antenna is used for 2.4GHz band testing)

802.11b/g Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 01:	2412 MHz	Channel 02:	2417 MHz	Channel 03:	2422 MHz	Channel 04:	2427 MHz
Channel 05:	2432 MHz	Channel 06:	2437 MHz	Channel 07:	2442 MHz	Channel 08:	2447 MHz
Channel 09:	2452 MHz	Channel 10:	2457 MHz	Channel 11:	2462 MHz		

Note:

1. This device is a MOXA IEEE802.11 a/b/g mini PCI module with a built-in 2.4GHz and 5GHz WLAN transceiver, this report for 2.4GHz Band
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. The device is applied for modular approval.
4. At result of pretests, module supports dual-channel transmission, only the worst case is shown in the report. (802.11b is chain A 、 802.11g is chain A)
5. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report. (802.11b is 1Mbps 、 802.11g is 6Mbps).
6. These tests are conducted on a sample for the purpose of demonstrating compliance of 802.11b/g transmitter with Part 15 Subpart C Paragraph 15.247 of spread spectrum devices.
7. This is requesting a Class II permissive change for FCC ID: SLE-WAPA004. originally granted on 02/28/2013

The major change filed under this application is:

Change #1: Addition of new peripheral component:

(1) 2.4GHz Band Pass Filter:

RMSM2412MB10M01, RMSM2422MB10M01, RMSM2432MB10M01,  
RMSM2442MB10M01, RMSM2452MB10M01, RMSM2462MB10M01

(2) 50 Ohm Circulator: 2T2400NW

(3) LCX Cable: RCT6-S-1A-RNA

(4) Coaxial Cable: C-EF142-NP-QMAP-05M, C-EF142-NPP-05M

Test Mode:	Mode 1: Transmit (802.11b 1Mbps)
	Mode 2: Transmit (802.11g 6Mbps)


### 1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	DELL	PPT	N/A
2	Test Fixture	MOXA	N/A	Non-Shielded, 0.8m

Signal Cable Type	Signal cable Description
A LAN Cable	Shielded, 1.2m

### 1.4. Configuration of Tested System

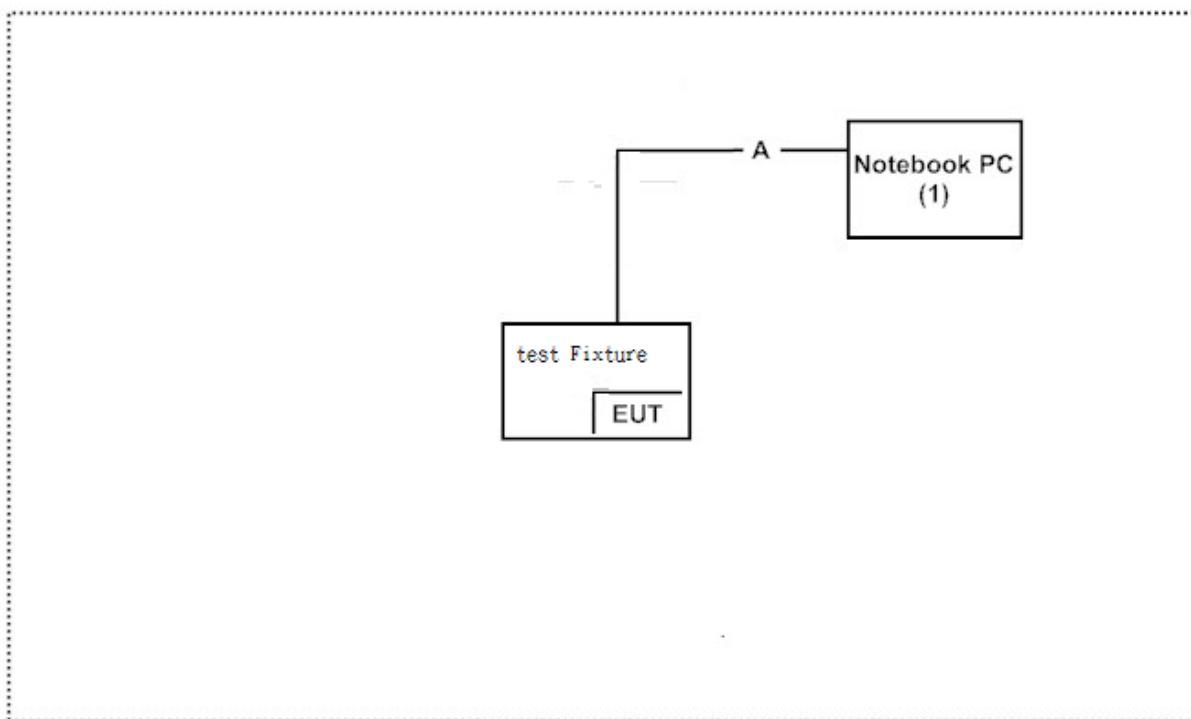

### 1.5. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.4
- (2) Execute program Telnet on the Notebook.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Press “OK” to start the continuous Transmit.
- (5) Verify that the EUT works properly.

## 1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from

QuieTek Corporation's Web Site : <http://www.quietek.com/chinese/about/certificates.aspx?bval=5>

The address and introduction of QuieTek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

Site Description: File on  
Federal Communications Commission  
FCC Engineering Laboratory  
7435 Oakland Mills Road  
Columbia, MD 21046  
Registration Number: 92195

Accreditation on NVLAP  
NVLAP Lab Code: 200533-0

Site Name: Quietek Corporation  
Site Address: No. 5-22, Rueishu Keng, Linkou Dist.,  
New Taipei City 24451  
Taiwan, R.O.C.  
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789  
E-Mail : [service@quietek.com](mailto:service@quietek.com)

FCC Accreditation Number: TW1014

## 2. Conducted Emission


### 2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2015	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2015	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2015	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar, 2015	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2015	
	No.1 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by “X” are used to measure the final test results.

### 2.2. Test Setup

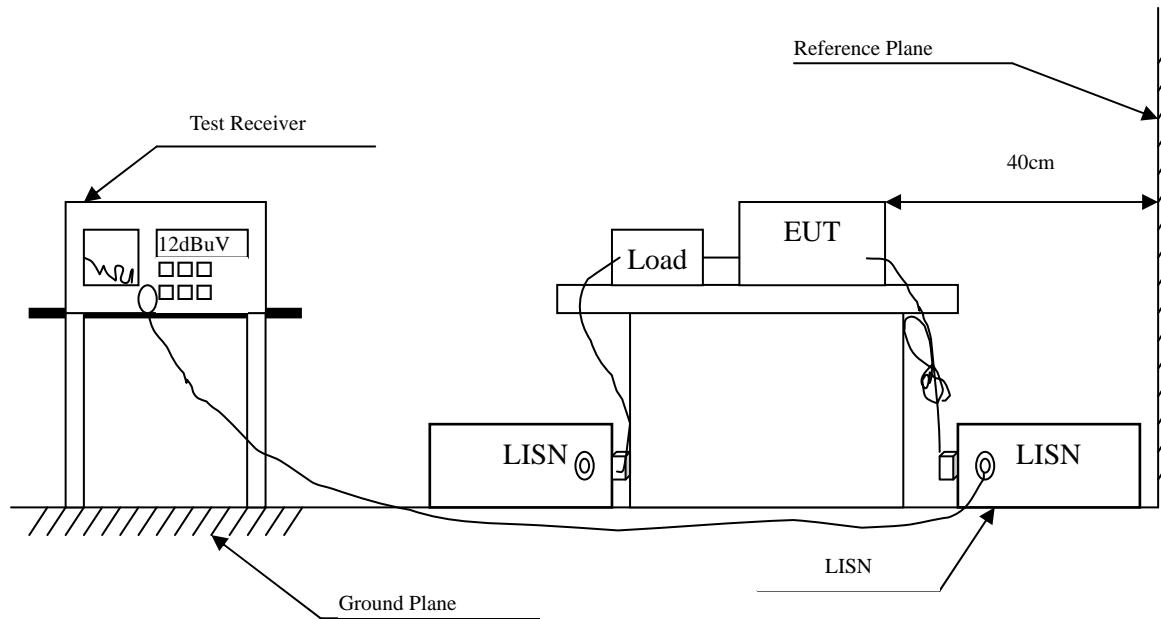

### 2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AVG
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

### 2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

### 2.5. Uncertainty

± 2.26 dB

## 2.6. Test Result of Conducted Emission

Product : MOXA IEEE802.11 a/b/g mini PCI module  
 Test Item : Conducted Emission Test  
 Power Line : Line 1  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV	dB	dBuV
<b>Line 1</b>					
<b>Quasi-Peak</b>					
0.150	9.671	36.490	46.161	-19.839	66.000
0.177	9.663	29.480	39.143	-26.086	65.229
0.240	9.663	26.150	35.813	-27.616	63.429
0.552	9.680	30.210	39.890	-16.110	56.000
2.080	9.773	18.240	28.013	-27.987	56.000
18.310	10.046	11.550	21.596	-38.404	60.000
<b>Average</b>					
0.150	9.671	20.430	30.101	-25.899	56.000
0.177	9.663	17.290	26.953	-28.276	55.229
0.240	9.663	16.470	26.133	-27.296	53.429
0.552	9.680	20.470	30.150	-15.850	46.000
2.080	9.773	11.660	21.433	-24.567	46.000
18.310	10.046	4.070	14.116	-35.884	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. ““ means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : MOXA IEEE802.11 a/b/g mini PCI module  
 Test Item : Conducted Emission Test  
 Power Line : Line 2  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV	dB	dBuV
<b>Line 2</b>					
<b>Quasi-Peak</b>					
0.154	9.670	35.720	45.390	-20.496	65.886
0.185	9.661	30.840	40.501	-24.499	65.000
0.212	9.661	28.870	38.531	-25.698	64.229
0.548	9.679	30.230	39.909	-16.091	56.000
2.349	9.783	21.160	30.943	-25.057	56.000
19.509	10.187	10.970	21.157	-38.843	60.000
<b>Average</b>					
0.154	9.670	28.800	38.470	-17.416	55.886
0.185	9.661	24.140	33.801	-21.199	55.000
0.212	9.661	17.140	26.801	-27.428	54.229
0.548	9.679	27.490	37.169	-8.831	46.000
2.349	9.783	16.170	25.953	-20.047	46.000
19.509	10.187	6.030	16.217	-33.783	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “  “ means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

### 3. Peak Power Output


#### 3.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Power Meter	Anritsu	ML2495A/6K00003357	May, 2015
X	Power Sensor	Anritsu	MA2411B/0738448	Jun, 2015
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2015
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2015
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

#### 3.2. Test Setup

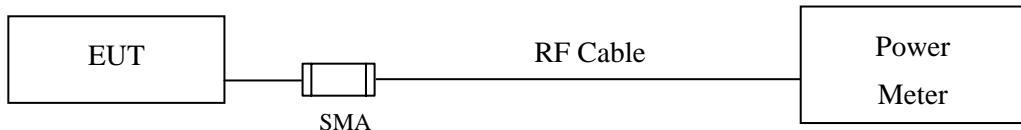

#### 3.3. Limits

The maximum peak power shall be less 1 Watt.

#### 3.4. Test Procedure

The EUT was tested according to DTS test procedure of ANSI C63.10: 2013 for compliance to FCC 47CFR 15.247 requirements.

#### 3.5. Uncertainty

± 1.27 dB

### 3.6. Test Result of Peak Power Output

Product : MOXA IEEE802.11 a/b/g mini PCI module  
 Test Item : Peak Power Output Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

(Chain A)

Channel No.	Data Rate	Frequency (MHz)	Measurement (dBm)	Required Limit (dBm)	Result
01	1Mbps	2412	18.32	<30	Pass
06	1Mbps	2437	18.23	<30	Pass
11	1Mbps	2462	18.02	<30	Pass

(Chain B)

Channel No.	Data Rate	Frequency (MHz)	Measurement (dBm)	Required Limit (dBm)	Result
01	1Mbps	2412	18.22	<30	Pass
06	1Mbps	2437	17.69	<30	Pass
11	1Mbps	2462	17.98	<30	Pass

Note:

1. Peak Power Output Value =Reading value on power meter + cable loss
2. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report. (802.11b is 1Mbps)

Product : MOXA IEEE802.11 a/b/g mini PCI module  
 Test Item : Peak Power Output Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

(Chain A)

Channel No.	Data Rate	Frequency (MHz)	Measurement (dBm)	Required Limit (dBm)	Result
01	6Mbps	2412	23.22	<30	Pass
06	6Mbps	2437	22.79	<30	Pass
11	6Mbps	2462	22.92	<30	Pass

(Chain B)

Channel No.	Data Rate	Frequency (MHz)	Measurement (dBm)	Required Limit (dBm)	Result
01	6Mbps	2412	22.79	<30	Pass
06	6Mbps	2437	22.59	<30	Pass
11	6Mbps	2462	22.85	<30	Pass

Note:

1. Peak Power Output Value =Reading value on power meter + cable loss
2. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report.  
(802.11g is 6Mbps)

## 4. Radiated Emission

### 4.1. Test Equipment


The following test equipment are used during the radiated emission test:

Test Site	Equipment		Manufacturer	Model No./Serial No.	Last Cal.
☒Site # 3	X	Loop Antenna	Teseq	HLA6120 / 26739	Jul., 2015
	X	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2015
	X	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2015
	X	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2015
	X	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2015
	X	Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2015
	X	Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P/925975	Mar, 2015
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2015
	X	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2015
	X	Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2015
	X	Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X	Coaxial Switch	Anritsu	MP59B/6200265729	N/A


Note: 1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.  
 2. The test instruments marked with "X" are used to measure the final test results.

## 4.2. Test Setup


Radiated Emission Below 30MHz

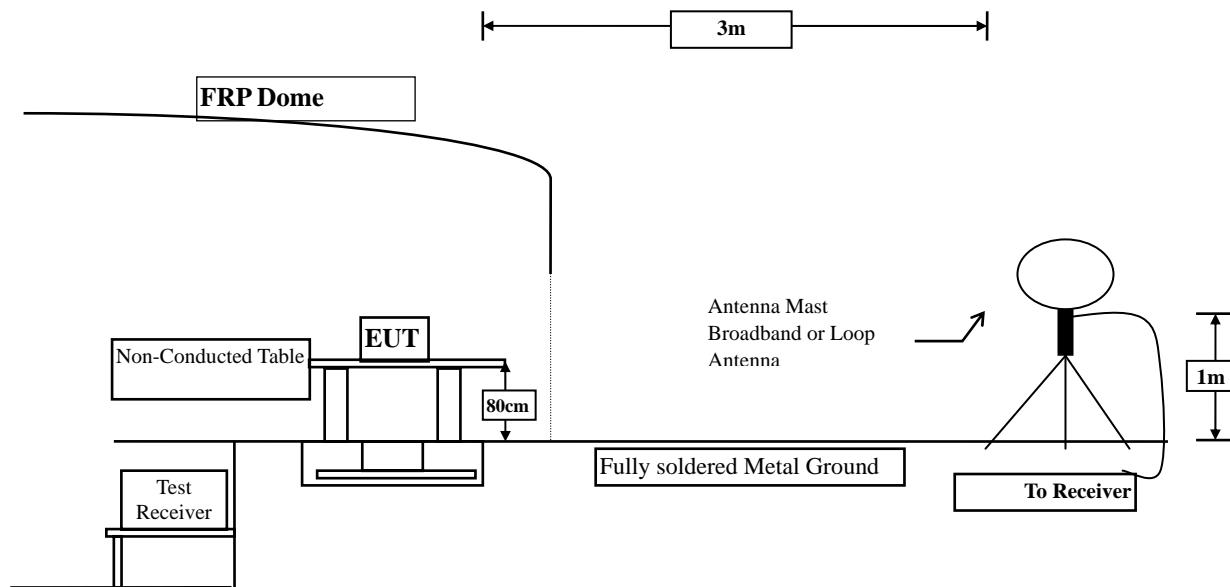

Radiated Emission Below 1GHz

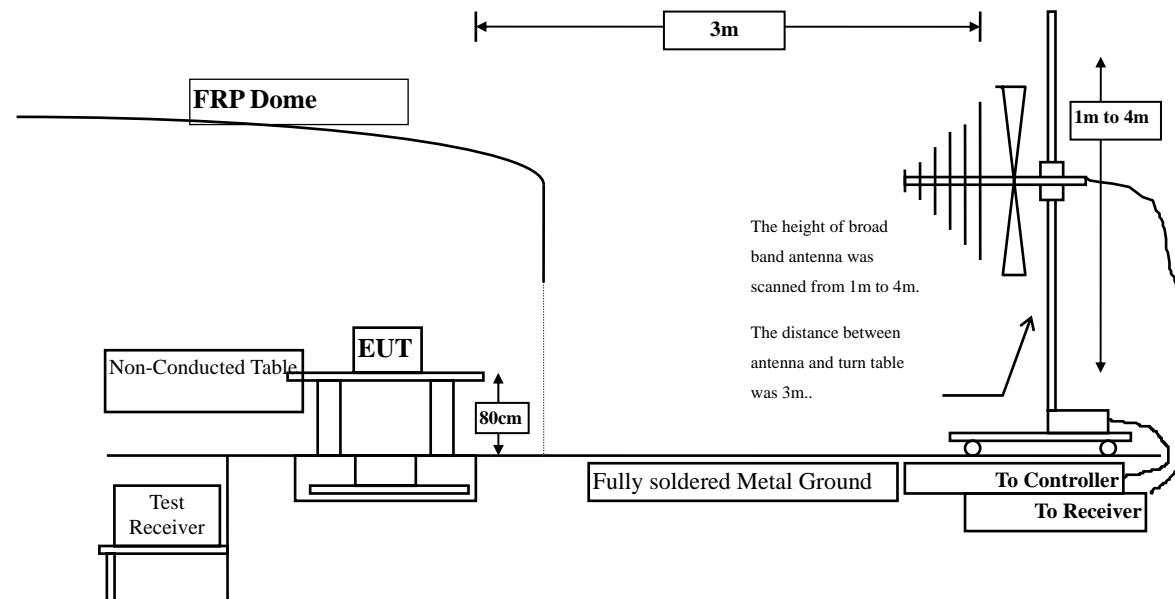

## Radiated Emission Above 1GHz

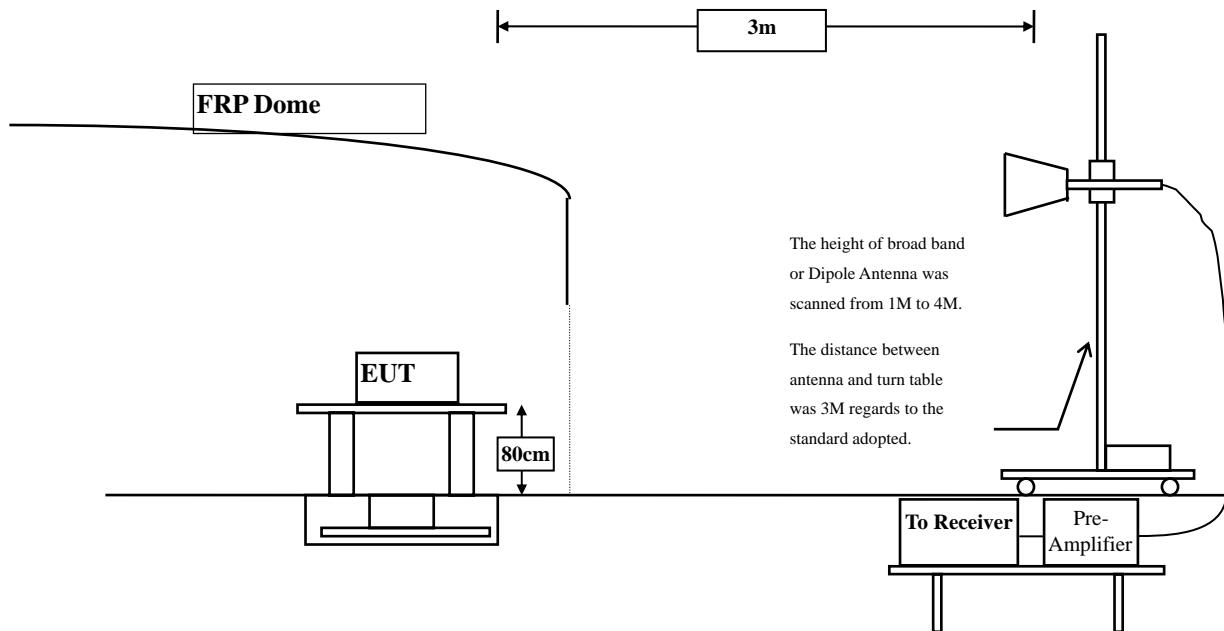

### 4.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remarks: E field strength (dBuV/m) =  $20 \log E$  field strength (uV/m)

#### **4.4. Test Procedure**

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of ANSI C63.10: 2013 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

Radiated emission measurements below 1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

#### **4.5. Uncertainty**

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

#### 4.6. Test Result of Radiated Emission

Product : MOXA IEEE802.11 a/b/g mini PCI module  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4824.000	3.261	39.560	42.821	-31.179	74.000
7236.000	10.650	37.150	47.800	-26.200	74.000
9648.000	13.337	37.360	50.696	-23.304	74.000
<b>Average Detector:</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4824.000	6.421	42.520	48.941	-25.059	74.000
7236.000	11.495	36.180	47.675	-26.325	74.000
9648.000	13.807	37.410	51.216	-22.784	74.000
<b>Average Detector:</b>					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE802.11 a/b/g mini PCI module  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

### Horizontal

#### Peak Detector:

4874.000	3.038	39.670	42.707	-31.293	74.000
7311.000	11.795	36.840	48.634	-25.366	74.000
9748.000	12.635	37.650	50.285	-23.715	74.000

#### Average

#### Detector:

--

### Vertical

#### Peak Detector:

4874.000	5.812	42.120	47.931	-26.069	74.000
7311.000	12.630	37.880	50.509	-23.491	74.000
9748.000	13.126	37.210	50.336	-23.664	74.000

#### Average

#### Detector:

--

### Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE802.11 a/b/g mini PCI module  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462 MHz)

Frequency MHz	Correct Factor	Reading Level dB	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4924.000	2.858	40.120	42.977	-31.023	74.000
7386.000	12.127	37.250	49.378	-24.622	74.000
9848.000	12.852	36.750	49.603	-24.397	74.000
<b>Average Detector:</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4924.000	5.521	41.870	47.390	-26.610	74.000
7386.000	13.254	37.680	50.934	-23.066	74.000
9848.000	13.367	37.460	50.827	-23.173	74.000
<b>Average Detector:</b>					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE802.11 a/b/g mini PCI module  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

### Horizontal

#### Peak Detector:

4824.000	3.261	39.840	43.101	-30.899	74.000
7236.000	10.650	39.450	50.100	-23.900	74.000
9648.000	13.337	37.260	50.596	-23.404	74.000

#### Average

#### Detector:

--

### Vertical

#### Peak Detector:

4824.000	6.421	41.260	47.681	-26.319	74.000
7236.000	11.495	39.120	50.615	-23.385	74.000
9648.000	13.807	36.840	50.646	-23.354	74.000

#### Average

#### Detector:

--

### Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE802.11 a/b/g mini PCI module  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

### Horizontal

#### Peak Detector:

4874.000	3.038	39.850	42.887	-31.113	74.000
7311.000	11.795	39.420	51.214	-22.786	74.000
9748.000	12.635	37.350	49.985	-24.015	74.000

#### Average

#### Detector:

--

### Vertical

#### Peak Detector:

4874.000	5.812	41.560	47.371	-26.629	74.000
7311.000	12.630	39.450	52.079	-21.921	74.000
9748.000	13.126	36.960	50.086	-23.914	74.000

#### Average

#### Detector:

--

### Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE802.11 a/b/g mini PCI module  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462 MHz)

Frequency MHz	Correct Factor	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4924.000	2.858	39.650	42.507	-31.493	74.000
7386.000	12.127	40.250	52.378	-21.622	74.000
9848.000	12.852	37.350	50.203	-23.797	74.000
<b>Average Detector:</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4924.000	5.521	41.360	46.880	-27.120	74.000
7386.000	13.254	39.680	52.934	-21.066	74.000
9848.000	13.367	37.150	50.517	-23.483	74.000
<b>Average Detector:</b>					
--					

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE802.11 a/b/g mini PCI module  
 Test Item : General Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
212.360	-10.540	39.660	29.120	-14.380	43.500
346.220	-1.490	36.651	35.160	-10.840	46.000
489.780	1.326	35.913	37.239	-8.761	46.000
619.760	1.866	36.205	38.071	-7.929	46.000
778.840	4.951	32.853	37.804	-8.196	46.000
906.880	5.880	24.870	30.750	-15.250	46.000
<b>Vertical</b>					
258.920	-5.029	37.115	32.086	-13.914	46.000
402.480	-3.650	37.009	33.359	-12.641	46.000
526.640	0.960	35.309	36.269	-9.731	46.000
687.660	2.124	35.863	37.987	-8.013	46.000
827.340	2.430	35.249	37.679	-8.321	46.000
961.200	3.110	30.341	33.451	-20.549	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of 9kHz~30MHz are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : MOXA IEEE802.11 a/b/g mini PCI module  
 Test Item : General Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
218.180	-10.376	41.317	30.941	-15.059	46.000
342.340	-2.710	39.136	36.426	-9.574	46.000
464.560	2.760	36.553	39.313	-6.687	46.000
588.720	3.060	36.057	39.117	-6.883	46.000
745.860	3.700	34.823	38.523	-7.477	46.000
918.520	6.468	26.429	32.897	-13.103	46.000
<b>Vertical</b>					
225.940	-6.410	36.393	29.983	-16.017	46.000
375.320	0.286	32.767	33.052	-12.948	46.000
547.980	0.030	37.341	37.371	-8.629	46.000
660.500	-1.267	38.380	37.113	-8.887	46.000
809.880	2.770	34.859	37.629	-8.371	46.000
968.960	3.740	28.249	31.989	-22.011	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of 9kHz~30MHz are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

## 5. Band Edge

### 5.1. Test Equipment

#### RF Conducted Measurement

The following test equipments are used during the band edge tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2015
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2015
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

#### RF Radiated Measurement:

The following test equipments are used during the band edge tests:


Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Site # 3	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2015
	X Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2015
	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2015
	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2015
	X Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2015
	Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P/925975	Mar, 2015
	X Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2015
	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2015
	X Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2015
	X Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X Coaxial Switch	Anritsu	MP59B/6200265729	N/A

Note:


1. All instruments are calibrated every one year.
2. The test instruments marked by “X” are used to measure the final test results.

## 5.2. Test Setup

### RF Conducted Measurement

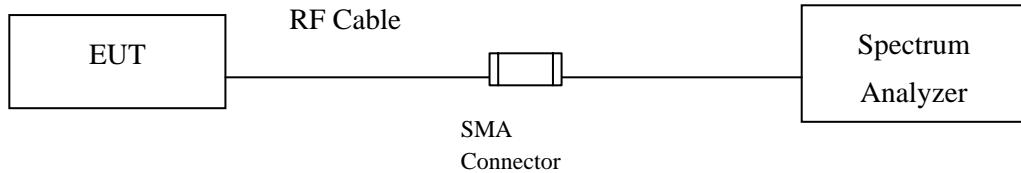

### RF Radiated Measurement:

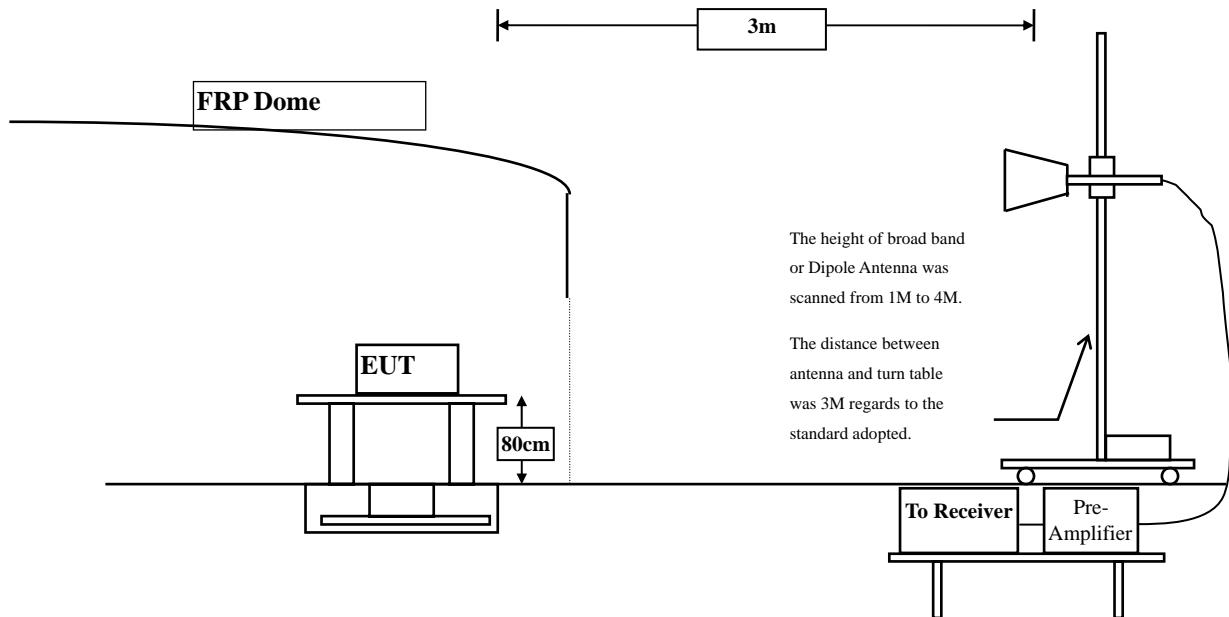

## 5.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

---

## 5.4. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of ANSI C63.10: 2013 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

## 5.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

## 5.6. Test Result of Band Edge

Product : MOXA IEEE802.11 a/b/g mini PCI module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

### RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	33.739	22.857	56.596	74.000	54.000	Pass
01 (Peak)	2400.000	33.752	22.809	56.560	--	--	--
01 (Peak)	2411.000	33.769	61.928	95.697	--	--	--
01 (Average)	2390.000	33.739	11.130	44.869	74.000	54.000	Pass
01 (Average)	2400.000	33.752	11.400	45.151	--	--	--
01 (Average)	2409.400	33.767	58.231	91.998	--	--	--

Figure Channel 01:

Horizontal (Peak)


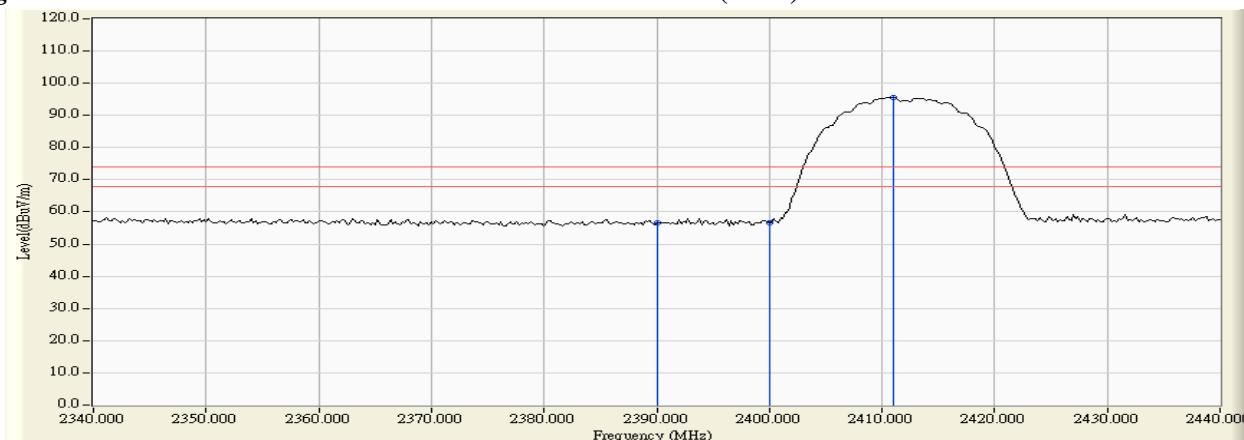


Figure Channel 01:

Horizontal (Average)

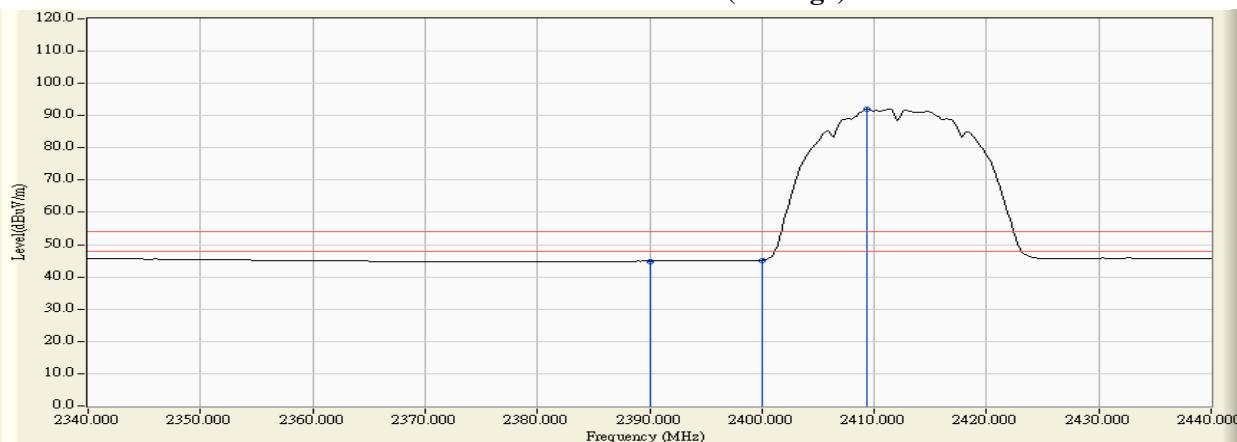

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : MOXA IEEE802.11 a/b/g mini PCI module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	32.267	22.638	54.905	74.000	54.000	Pass
01 (Peak)	2400.000	32.241	23.602	55.843	--	--	--
01 (Peak)	2411.000	32.244	74.032	106.276	--	--	--
01 (Average)	2390.000	32.267	11.215	43.482	74.000	54.000	Pass
01 (Average)	2400.000	32.241	12.475	44.716	--	--	--
01 (Average)	2411.200	32.245	69.929	102.174	--	--	--


**Figure Channel 01:**

**Vertical (Peak)**

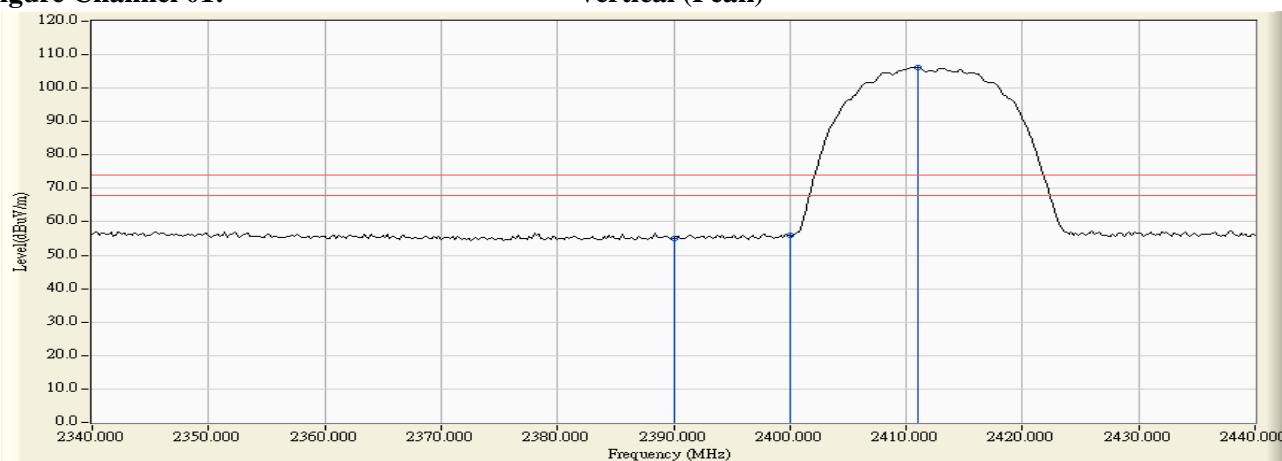

**Figure Channel 01:**

**Vertical (Average)**

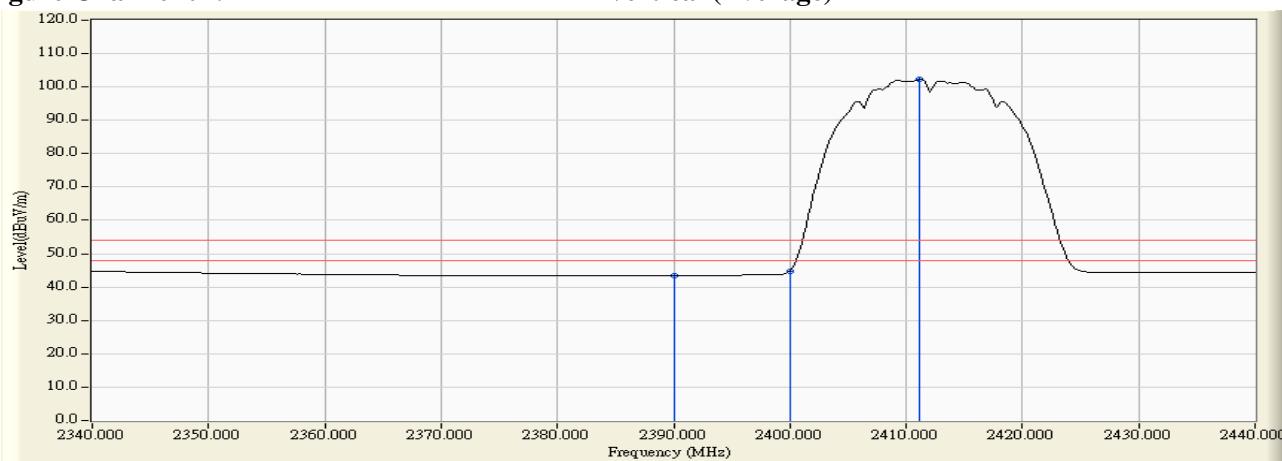

**Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : MOXA IEEE802.11 a/b/g mini PCI module  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2460.900	33.890	60.857	94.747	--	--	--
11 (Peak)	2483.500	33.951	23.132	57.082	74.000	54.000	Pass
11 (Average)	2461.100	33.890	57.330	91.220	--	--	--
11 (Average)	2483.500	33.951	11.621	45.571	74.000	54.000	Pass


**Figure Channel 11:**

**Horizontal (Peak)**

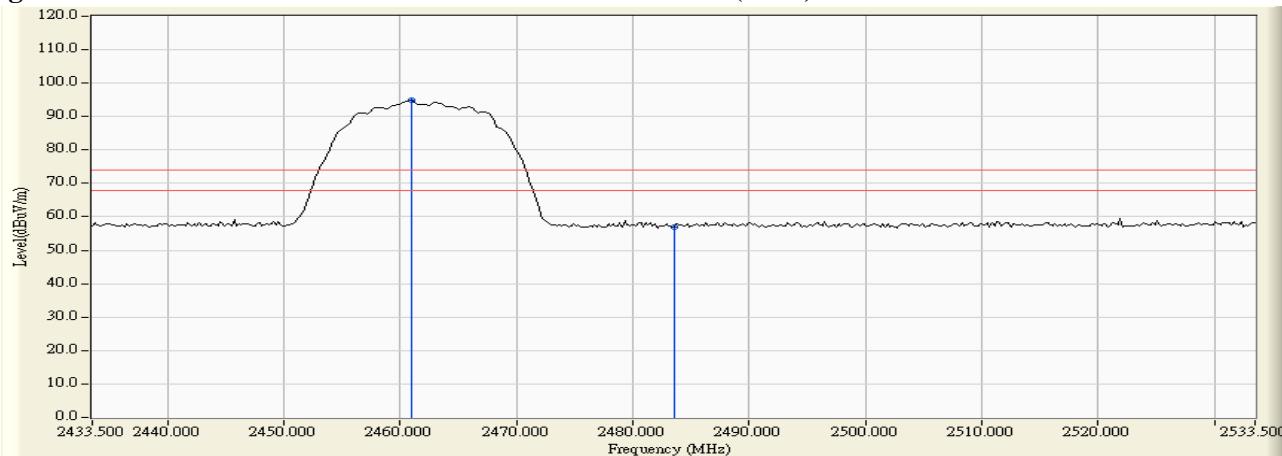

**Figure Channel 11:**

**Horizontal (Average)**

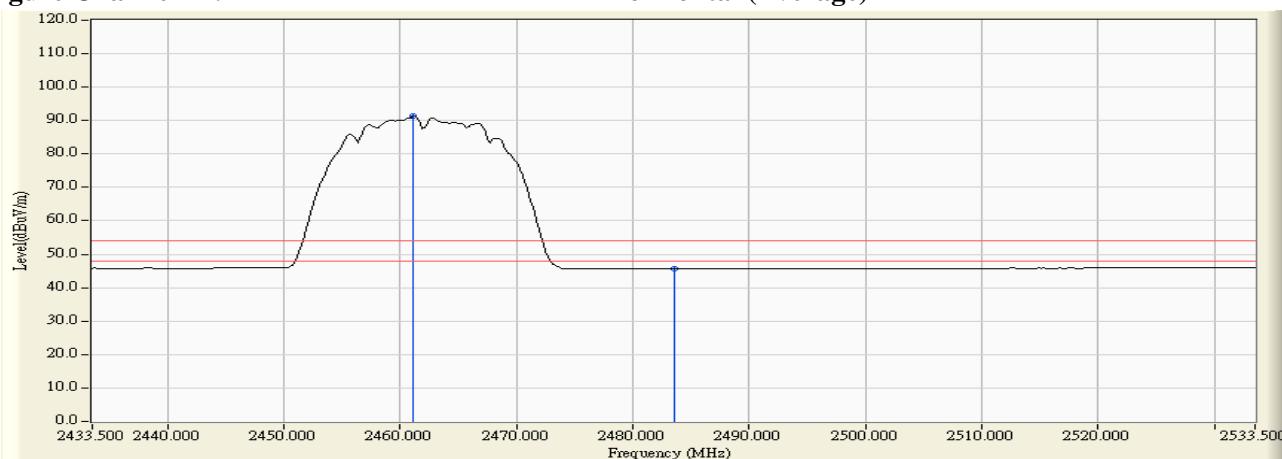

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE802.11 a/b/g mini PCI module  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

#### RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2460.900	32.476	73.084	105.559	--	--	--
11 (Peak)	2483.500	32.586	22.918	55.503	74.000	54.000	Pass
11 (Average)	2461.300	32.477	69.223	101.700	--	--	--
11 (Average)	2483.500	32.586	11.637	44.222	74.000	54.000	Pass

Figure Channel 11:

Vertical (Peak)


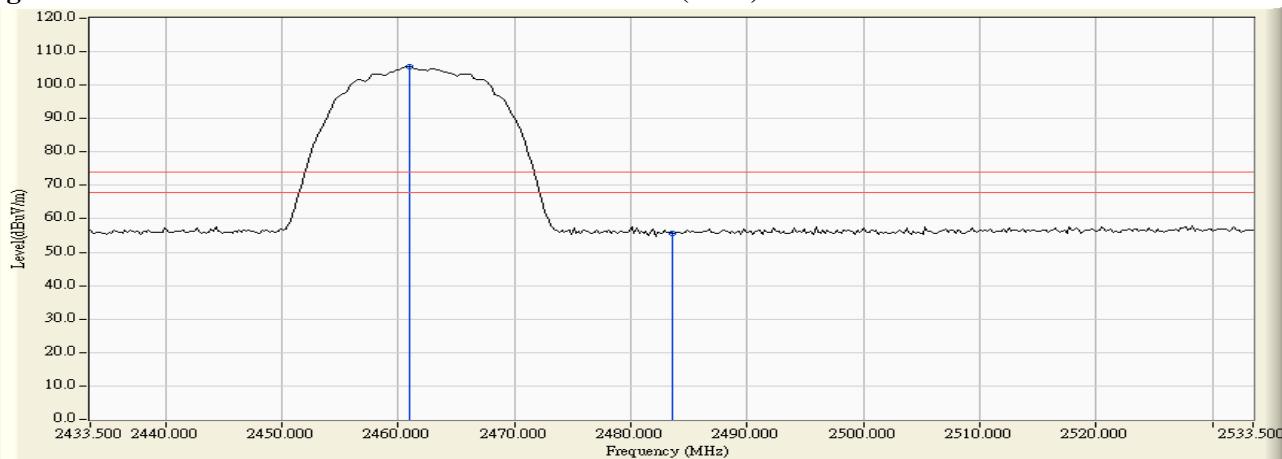


Figure Channel 11:

Vertical (Average)

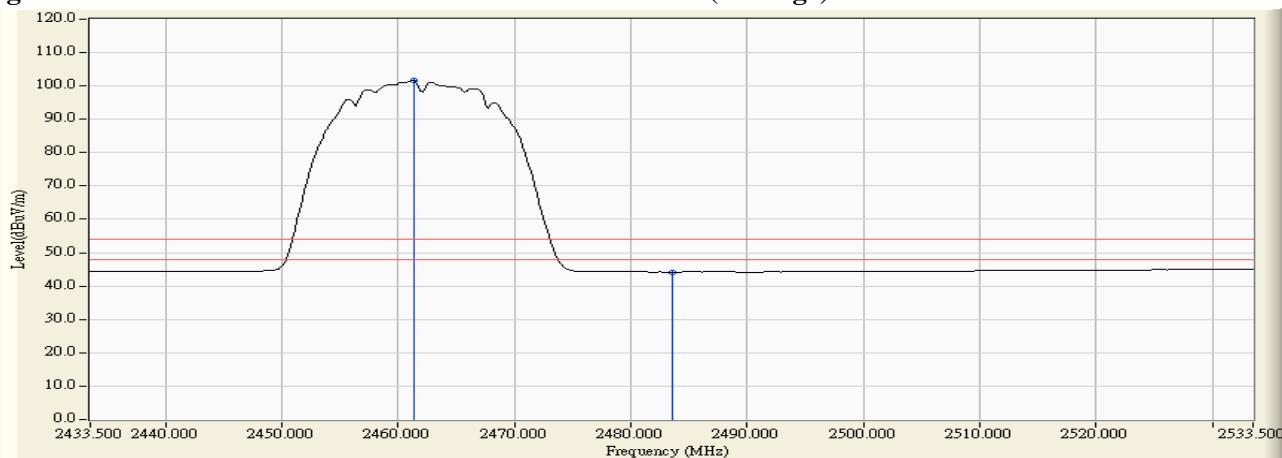



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	33.739	23.289	57.028	74.000	54.000	Pass
01 (Peak)	2400.000	33.752	23.250	57.001	--	--	--
01 (Peak)	2414.800	33.778	64.076	97.855	--	--	--
01 (Average)	2390.000	33.739	11.150	44.889	74.000	54.000	Pass
01 (Average)	2400.000	33.752	11.685	45.436	--	--	--
01 (Average)	2410.600	33.769	53.030	86.799	--	--	--

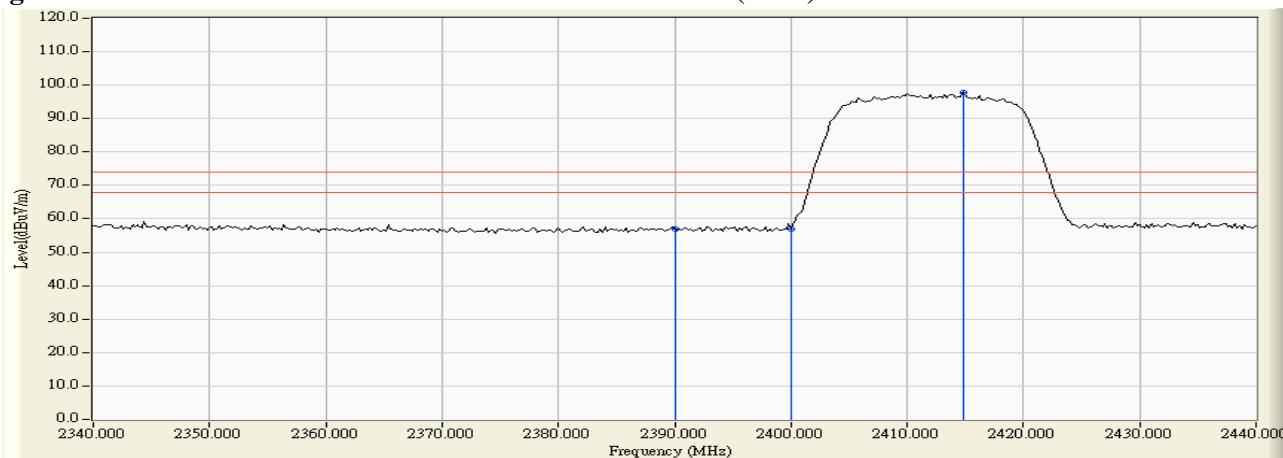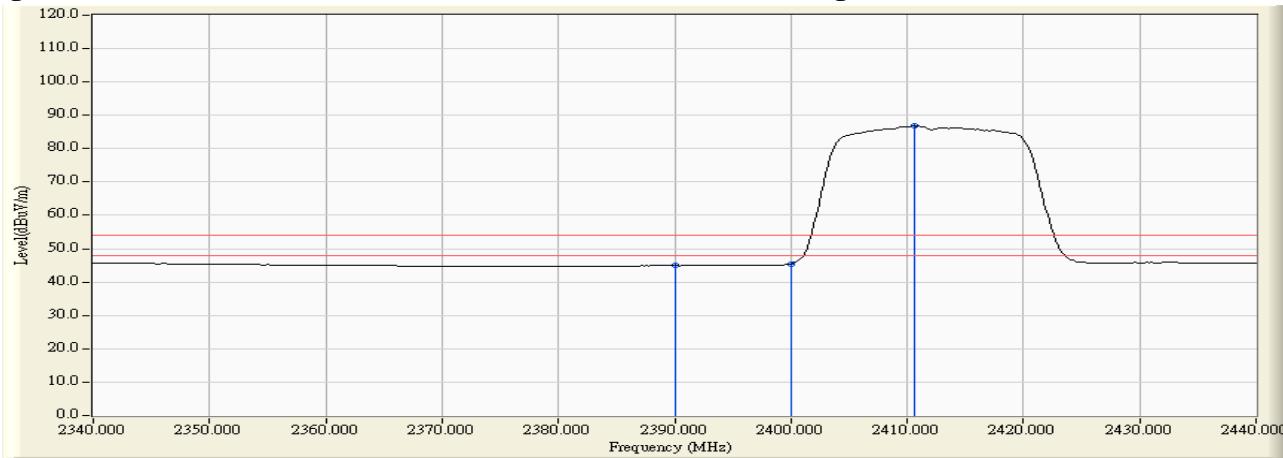**Figure Channel 01:****Horizontal (Peak)****Figure Channel 01:****Horizontal (Average)****Note:**

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : MOXA IEEE802.11 a/b/g mini PCI module  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	32.267	21.796	54.063	74.000	54.000	Pass
01 (Peak)	2400.000	32.241	25.301	57.542	--	--	--
01 (Peak)	2410.400	32.244	75.054	107.298	--	--	--
01 (Average)	2390.000	32.267	11.129	43.396	74.000	54.000	Pass
01 (Average)	2400.000	32.241	13.560	45.801	--	--	--
01 (Average)	2411.000	32.244	64.759	97.003	--	--	--


**Figure Channel 01:**

**Vertical (Peak)**

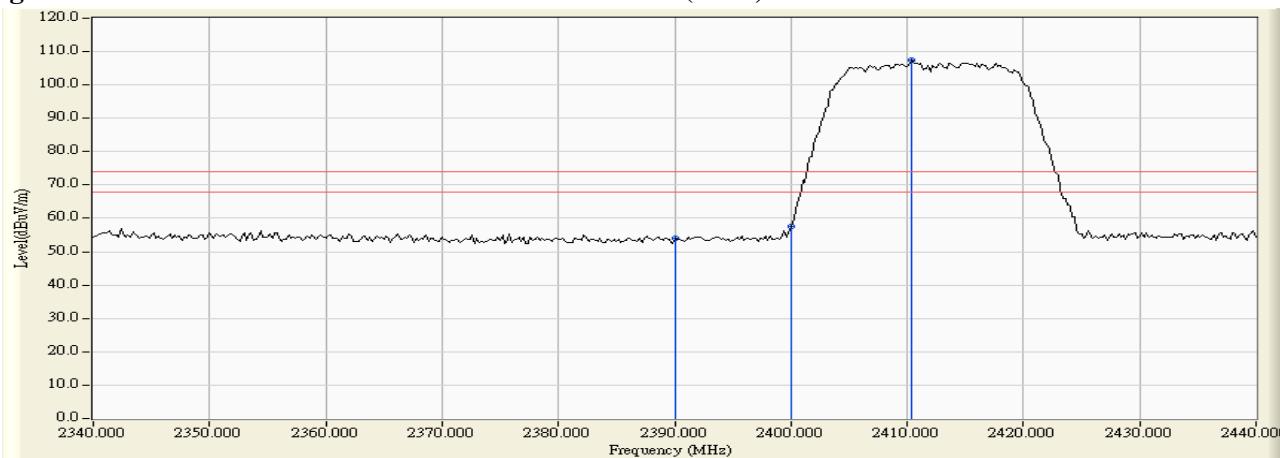

**Figure Channel 01:**

**Vertical (Average)**

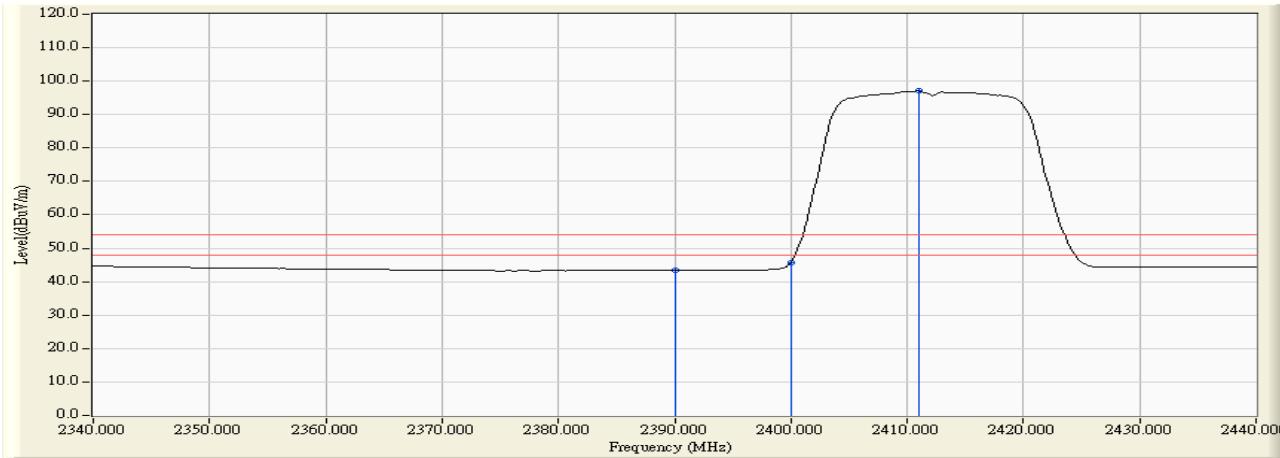

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : MOXA IEEE802.11 a/b/g mini PCI module  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2457.300	33.881	64.640	98.521	--	--	--
11 (Peak)	2483.500	33.951	23.820	57.770	74.000	54.000	Pass
11 (Average)	2460.700	33.890	54.108	87.997	--	--	--
11 (Average)	2483.500	33.951	11.602	45.552	74.000	54.000	Pass


**Figure Channel 11:**

**Horizontal (Peak)**

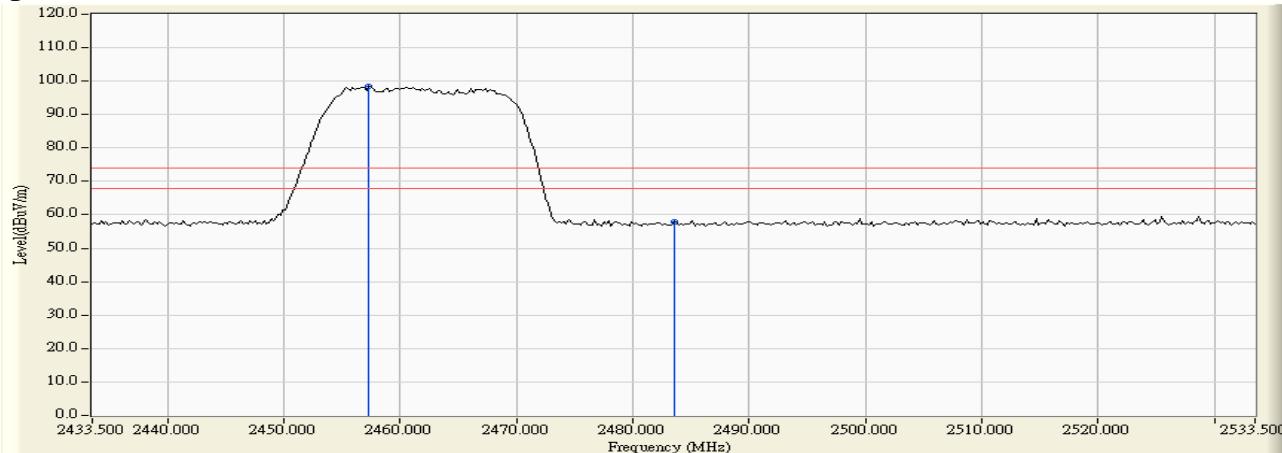

**Figure Channel 11:**

**Horizontal (Average)**

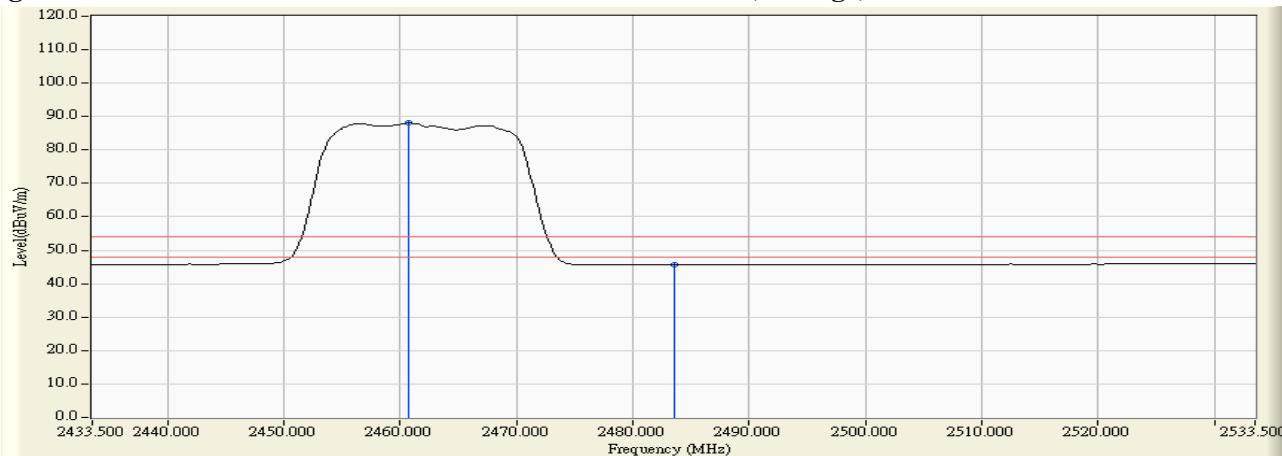

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : MOXA IEEE802.11 a/b/g mini PCI module  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2457.300	32.458	76.589	109.047	--	--	--
11 (Peak)	2483.500	32.586	23.485	56.070	74.000	54.000	Pass
11 (Average)	2461.100	32.476	66.061	98.537	--	--	--
11 (Average)	2483.500	32.586	11.668	44.253	74.000	54.000	Pass


**Figure Channel 11:**

**Vertical (Peak)**

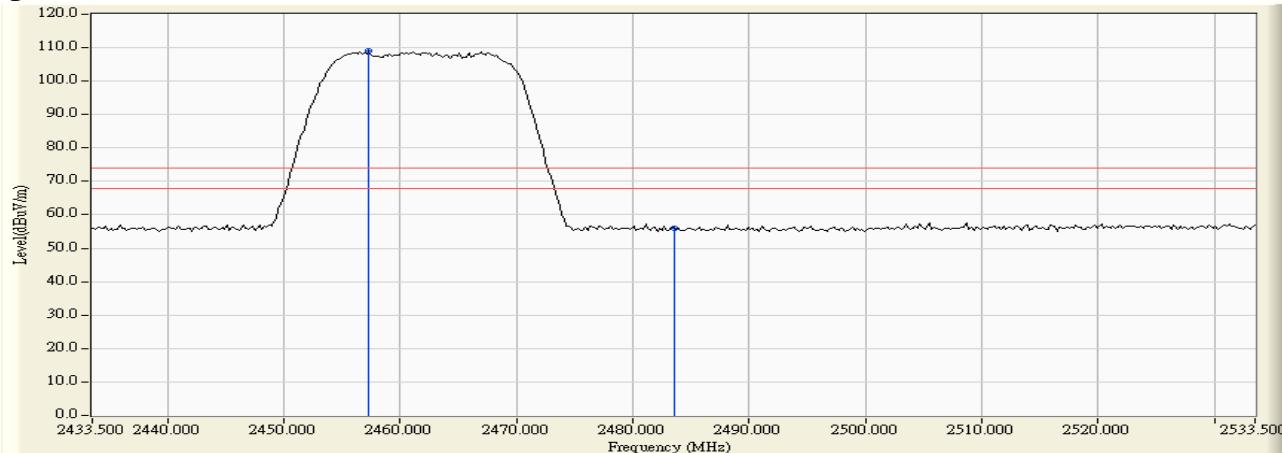

**Figure Channel 11:**

**Vertical (Average)**

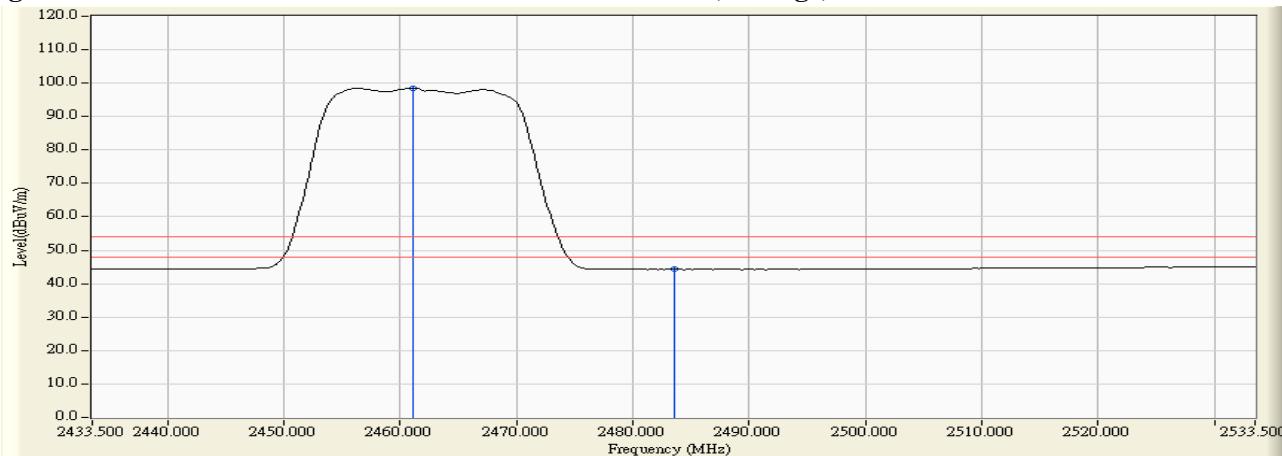

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

## **6. EMI Reduction Method During Compliance Testing**

No modification was made during testing.

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs