

# FCC Test Report

Product Name	MOXA IEEE 802.11 a/b/g/n
Model No	WAPN008
FCC ID.	SLE-WAPN008

Applicant	MOXA Inc.
Address	FL.4, NO. 135. LANE 235, BAOQIAO RD. XINDIAN DIST., NEW TAIPEI CITY, TAIWAN

Date of Receipt	June 11, 2015
Issue Date	Aug. 05, 2015
Report No.	1560344R-RFUSP26V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of QuieTek Corporation.

## Test Report

Issue Date: Aug. 05, 2015

Report No.: 1560344R-RFUSP26V00

QuieTek

a  DEKRA company

Product Name	MOXA IEEE 802.11 a/b/g/n
Applicant	MOXA Inc.
Address	FL.4, NO. 135. LANE 235, BAOQIAO RD. XINDIAN DIST., NEW TAIPEI CITY, TAIWAN
Manufacturer	MOXA Inc.
Model No.	WAPN008
EUT Rated Voltage	DC 3.3V
EUT Test Voltage	AC 120V/60Hz
Trade Name	MOXA
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2013 ANSI C63.4: 2014, ANSI C63.10: 2013 KDB 558074 D01 DTS Meas Guidance v03r03
Test Result	Complied

Documented By :

*Genie Chang*

( Senior Adm. Specialist / Genie Chang )

Tested By :

*Benjamin Pan*

( Engineer / Benjamin Pan )

Approved By :

*Vincent Lin*

( Director / Vincent Lin )

## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION</b>	<b>5</b>
1.1. EUT Description.....	5
1.2. Operational Description .....	7
1.3. Tested System Details.....	8
1.4. Configuration of Tested System .....	8
1.5. EUT Exercise Software .....	8
1.6. Test Facility .....	9
<b>2. Conducted Emission.....</b>	<b>10</b>
2.1. Test Equipment.....	10
2.2. Test Setup .....	10
2.3. Limits .....	11
2.4. Test Procedure .....	11
2.5. Uncertainty .....	11
2.6. Test Result of Conducted Emission.....	12
<b>3. Maximum Conducted Power.....</b>	<b>14</b>
3.1. Test Equipment.....	14
3.2. Test Setup .....	14
3.3. Limits .....	14
3.4. Test Procedure .....	14
3.5. Uncertainty .....	14
3.6. Test Result of Maximum Conducted Power.....	15
<b>4. Radiated Emission.....</b>	<b>19</b>
4.1. Test Equipment.....	19
4.2. Test Setup .....	20
4.3. Limits .....	21
4.4. Test Procedure .....	22
4.5. Uncertainty .....	22
4.6. Test Result of Radiated Emission.....	23
<b>5. RF Antenna conducted test.....</b>	<b>39</b>
5.1. Test Equipment.....	39
5.2. Test Setup .....	39
5.3. Limits .....	39
5.4. Test Procedure .....	40
5.5. Uncertainty .....	40
5.6. Test Result of RF antenna conducted test.....	41
<b>6. Band Edge .....</b>	<b>47</b>
6.1. Test Equipment.....	47
6.2. Test Setup .....	48
6.3. Limits .....	49
6.4. Test Procedure .....	49
6.5. Uncertainty .....	49
6.6. Test Result of Band Edge .....	50

---

<b>7.</b>	<b>Occupied Bandwidth .....</b>	<b>68</b>
7.1.	Test Equipment.....	68
7.2.	Test Setup .....	68
7.3.	Limits .....	68
7.4.	Test Procedure .....	68
7.5.	Uncertainty .....	68
7.6.	Test Result of Occupied Bandwidth .....	69
<b>8.</b>	<b>Power Density .....</b>	<b>81</b>
8.1.	Test Equipment.....	81
8.2.	Test Setup .....	81
8.3.	Limits .....	81
8.4.	Test Procedure .....	81
8.5.	Uncertainty .....	81
8.6.	Test Result of Power Density .....	82
<b>9.</b>	<b>EMI Reduction Method During Compliance Testing .....</b>	<b>94</b>

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

## 1. GENERAL INFORMATION

### 1.1. EUT Description

Product Name	MOXA IEEE 802.11 a/b/g/n
Trade Name	MOXA
Model No.	WAPN008
FCC ID.	SLE-WAPN008
Frequency Range	802.11b/g/n-20MHz: 2412-2462MHz, 802.11n-40MHz: 2422-2452MHz
Number of Channels	802.11b/g/n-20MHz: 11, n-40MHz: 7
Data Speed	802.11b: 1-11Mbps, 802.11a/g: 6-54Mbps, 802.11n: up to 300Mbps
Type of Modulation	802.11b: DSSS, DBPSK, DQPSK, CCK 802.11g/n: OFDM, BPSK, QPSK, 16QAM, 64QAM
Antenna Type	Dipole Antenna
Antenna Gain	Refer to the table “Antenna List”
Channel Control	Auto

#### Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	KINSUN	ANT-WDB-O-2 BK	Dipole	2.9dBi for 2.4 GHz 2.34dBi for 5GHz
2	KINSUN	ANT-WDB-ANM-0502	Dipole	4.62dBi for 2.4 GHz 1.41dBi for 5GHz

Note:

1. The antenna of EUT is conform to FCC 15.203.
2. Only the higher gain antenna was tested and recorded in this report.

## 802.11b/g/n-20MHz Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 01:	2412 MHz	Channel 02:	2417 MHz	Channel 03:	2422 MHz	Channel 04:	2427 MHz
Channel 05:	2432 MHz	Channel 06:	2437 MHz	Channel 07:	2442 MHz	Channel 08:	2447 MHz
Channel 09:	2452 MHz	Channel 10:	2457 MHz	Channel 11:	2462 MHz		

## 802.11n-40MHz (2.4G Band) Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 1:	2422 MHz	Channel 2:	2427 MHz	Channel 3:	2432 MHz	Channel 4:	2437 MHz
Channel 5:	2442 MHz	Channel 6:	2447 MHz	Channel 7:	2452 MHz		

## Note:

1. This device is a MOXA IEEE 802.11 a/b/g/n with a built-in WLAN transceiver.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report. (802.11b is 1Mbps 、 802.11g is 6Mbps 、 802.11n(20M-BW) is 14.4Mbps and, 802.11n(40M-BW) is 30Mbps).
4. At result of pretests, module supports dual-channel transmission, only the worst case is shown in the report. (802.11b is chain A, 802.11g is chain A)
5. These tests are conducted on a sample for the purpose of demonstrating compliance of 802.11b/g/n transmitter with Part 15 Subpart C Paragraph 15.247 of spread spectrum devices.
6. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

Test Mode:	Mode 1: Transmit (802.11b 1Mbps)
	Mode 2: Transmit (802.11g 6Mbps)
	Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band)
	Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band)


### 1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
(1) Notebook PC	DELL	PPT	N/A	Non-Shielded, 1.8m
(2) Test Fixture	MOXA	N/A	N/A	N/A

Signal Cable Type	Signal cable Description
A RJ-45 Cable	Shielded, 1.8m, three PCS.

### 1.4. Configuration of Tested System

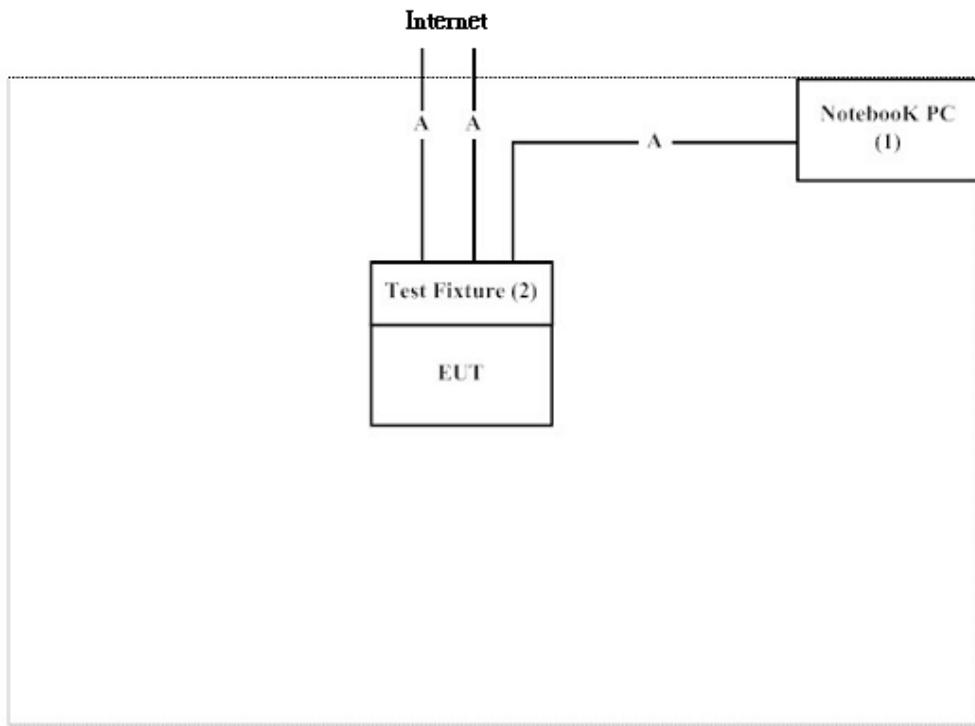

### 1.5. EUT Exercise Software

- (1) Setup the EUT as shown on 1.4
- (2) Execute “ART2-GUI 2.3” program on the Notebook PC.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Start the continuous transmission.
- (5) Verify that the EUT works properly.

## 1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from QuieTek Corporation's Web Site : <http://www.quietek.com/chinese/about/certificates.aspx?bval=5>

The address and introduction of QuieTek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

Site Description: File on  
Federal Communications Commission  
FCC Engineering Laboratory  
7435 Oakland Mills Road  
Columbia, MD 21046  
Registration Number: 92195

Site Name: Quietek Corporation  
Site Address: No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen,  
Lin-Kou Shiang, Taipei,  
Taiwan, R.O.C.  
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789  
E-Mail : [service@quietek.com](mailto:service@quietek.com)

FCC Accreditation Number: TW1014

## 2. Conducted Emission


### 2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2014	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2015	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2015	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar, 2015	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2015	
	No.1 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

### 2.2. Test Setup

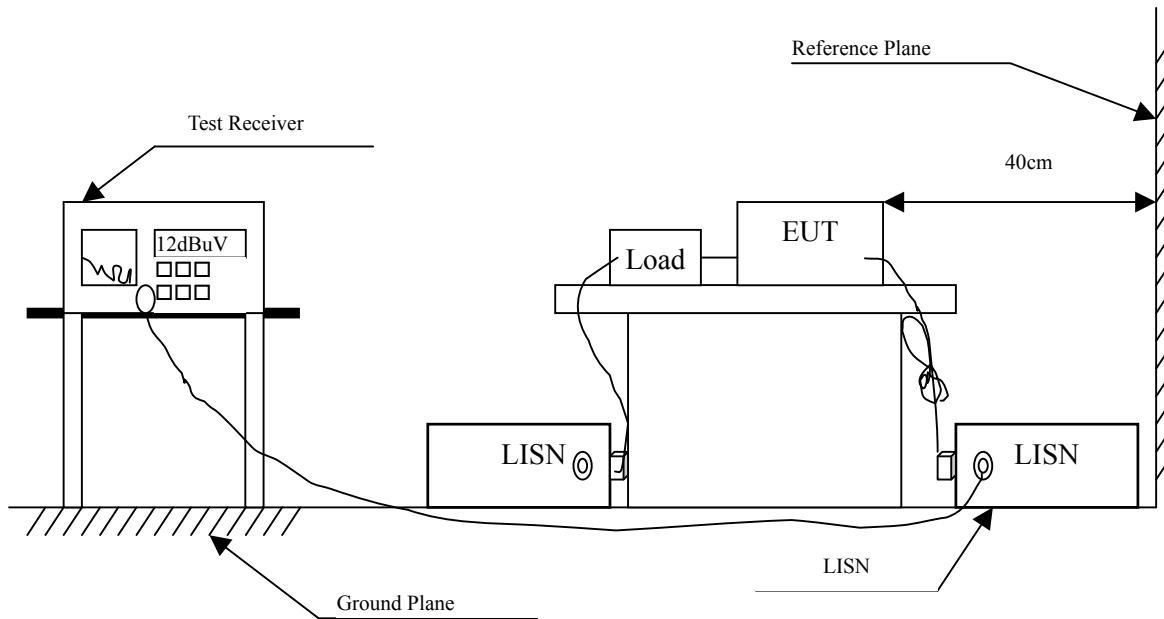

### 2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AVG
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

### 2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

### 2.5. Uncertainty

± 2.26 dB

## 2.6. Test Result of Conducted Emission

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Conducted Emission Test  
 Power Line : Line 1  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2437MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV	dB	dBuV
Line 1					
Quasi-Peak					
0.181	9.662	34.050	43.712	-21.402	65.114
0.209	9.661	28.080	37.741	-26.573	64.314
0.545	9.679	31.060	40.739	-15.261	56.000
0.576	9.681	30.760	40.441	-15.559	56.000
2.287	9.782	20.220	30.002	-25.998	56.000
19.306	10.055	13.040	23.095	-36.905	60.000
Average					
0.181	9.662	26.180	35.842	-19.272	55.114
0.209	9.661	20.360	30.021	-24.293	54.314
0.545	9.679	31.050	40.729	-5.271	46.000
0.576	9.681	29.900	39.581	-6.419	46.000
2.287	9.782	11.010	20.792	-25.208	46.000
19.306	10.055	7.480	17.535	-32.465	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “  “ means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Conducted Emission Test  
 Power Line : Line 2  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2437MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV	dB	dBuV
Line 2					
Quasi-Peak					
0.154	9.670	35.520	45.190	-20.696	65.886
0.185	9.661	30.360	40.021	-24.979	65.000
0.216	9.661	25.130	34.791	-29.323	64.114
0.548	9.679	30.190	39.869	-16.131	56.000
2.341	9.783	21.500	31.283	-24.717	56.000
18.974	10.182	12.060	22.242	-37.758	60.000
Average					
0.154	9.670	24.580	34.250	-21.636	55.886
0.185	9.661	14.080	23.741	-31.259	55.000
0.216	9.661	9.370	19.031	-35.083	54.114
0.548	9.679	29.640	39.319	-6.681	46.000
2.341	9.783	11.170	20.953	-25.047	46.000
18.974	10.182	3.060	13.242	-36.758	50.000

## Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “  “ means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

### 3. Maximum Conducted Power


#### 3.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Power Meter	Anritsu	ML2495A/6K00003357	May, 2015
X	Power Sensor	Anritsu	MA2411B/0738448	Jun, 2015
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2015
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2015
	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

#### 3.2. Test Setup

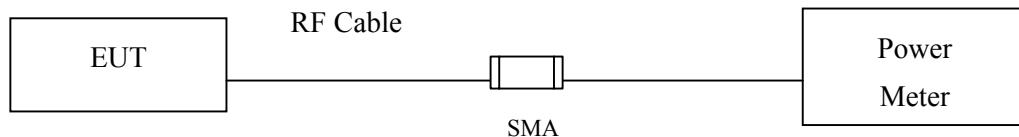

#### 3.3. Limits

The maximum average power shall be less 1 Watt. (Section 15.247 (b)(3))

#### 3.4. Test Procedure

The EUT was tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using KDB 558074 D01 DTS Meas Guidance v03r02 section 9.1.2 PKPM1 Peak power meter method.

#### 3.5. Uncertainty

± 1.27 dB

### 3.6. Test Result of Maximum Conducted Power

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Maximum Conducted Power  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)				Peak Power	Required Limit	Result
		1	2	5.5	11			
		Measurement Level (dBm)						
01	2412	20.01	19.99	19.94	19.87	21.87	<30dBm	Pass
06	2437	19.22	--	--	--	21.55	<30dBm	Pass
11	2462	19.01	--	--	--	21.28	<30dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Maximum Conducted Power  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		6	9	12	18	24	36	48	54			
		Measurement Level (dBm)										
01	2412	19.68	19.58	19.49	19.4	19.34	19.25	19.16	19.07	27.12	<30dBm	Pass
06	2437	18.62	--	--	--	--	--	--	--	26.81	<30dBm	Pass
11	2462	17.65	--	--	--	--	--	--	--	26.24	<30dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Maximum Conducted Power  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

### CHAIN A

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power
		14.4	28.9	43.3	57.8	86.7	115.6	130	144.4	
		Measurement Level (dBm)								
01	2412	14.62	--	--	--	--	--	--	--	24.32
06	2437	15.52	--	--	--	--	--	--	--	24.76
11	2462	16.54	16.42	16.34	16.22	16.08	15.84	15.62	15.48	25.08

Note: Peak Power Output Value =Reading value on power meter + cable loss

### CHAIN B

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power
		14.4	28.9	43.3	57.8	86.7	115.6	130	144.4	
		Measurement Level (dBm)								
01	2412	14.01	--	--	--	--	--	--	--	24.05
06	2437	15.12	--	--	--	--	--	--	--	24.14
11	2462	16.21	15.94	15.83	15.71	15.59	15.42	15.21	15.05	25.02

Note: Peak Power Output Value =Reading value on power meter + cable loss

### CHAIN A+B

Channel	Frequency (MHz)	Data Rata (Mbps)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
1	2412	14.4	24.32	24.05	27.20	<30dBm	Pass
6	2437	14.4	24.76	24.14	27.47	<30dBm	Pass
11	2462	14.4	25.08	25.02	28.06	<30dBm	Pass

Note: Peak Power Output Value (dBm) =  $10 \times \log (\text{Chain A (mW)} + \text{Chain B (mW)})$

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Maximum Conducted Power  
 Test Site : No.3 OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

### CHAIN A

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power
		30	60	90	120	180	240	270	300	
		Measurement Level (dBm)								
3	2422	14.08	--	--	--	--	--	--	--	24.04
6	2437	20.51	20.34	20.14	19.89	19.72	19.54	19.43	19.24	26.24
9	2452	16.15	--	--	--	--	--	--	--	24.56

Note: Peak Power Output Value =Reading value on power meter + cable loss

### CHAIN B

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power
		30	60	90	120	180	240	270	300	
		Measurement Level (dBm)								
3	2422	13.56	--	--	--	--	--	--	--	23.51
6	2437	20.02	19.88	19.72	19.54	19.42	19.24	19.05	18.92	25.88
9	2452	15.88	--	--	--	--	--	--	--	23.91

Note: Peak Power Output Value =Reading value on power meter + cable loss

### CHAIN A+B

Channel	Frequency (MHz)	Data Rata (Mbps)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
3	2422	30	24.04	23.51	26.79	<30dBm	Pass
6	2437	30	26.24	25.88	29.07	<30dBm	Pass
9	2452	30	24.56	23.91	27.26	<30dBm	Pass

Note: Peak Power Output Value (dBm) =  $10 \times \log_{10} (\text{Chain A (mW}) + \text{Chain B (mW)})$

## 4. Radiated Emission

### 4.1. Test Equipment


The following test equipments are used during the radiated emission test:

Test Site	Equipment		Manufacturer	Model No./Serial No.	Last Cal.
☒Site # 3	X	Magnetic Loop Antenna	Teseq	HLA6121/ 37133	Sep, 2014
	X	Bilog Antenna	Schaffner Chase	CBL6112B/ 2707	Jun, 2015
	X	EMI Test Receiver	R&S	ESCS 30/838251/ 001	Jun, 2015
	X	Coaxial Cable	QTK(Arnist)	RG 214/ LC003-RG	Jun, 2015
	X	Coaxial signal switch	Arnist	MP59B/ 6200798682	Jun, 2015


Note: 1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.  
2. The test instruments marked with "X" are used to measure the final test results.

## 4.2. Test Setup

### Radiated Emission Below 1GHz

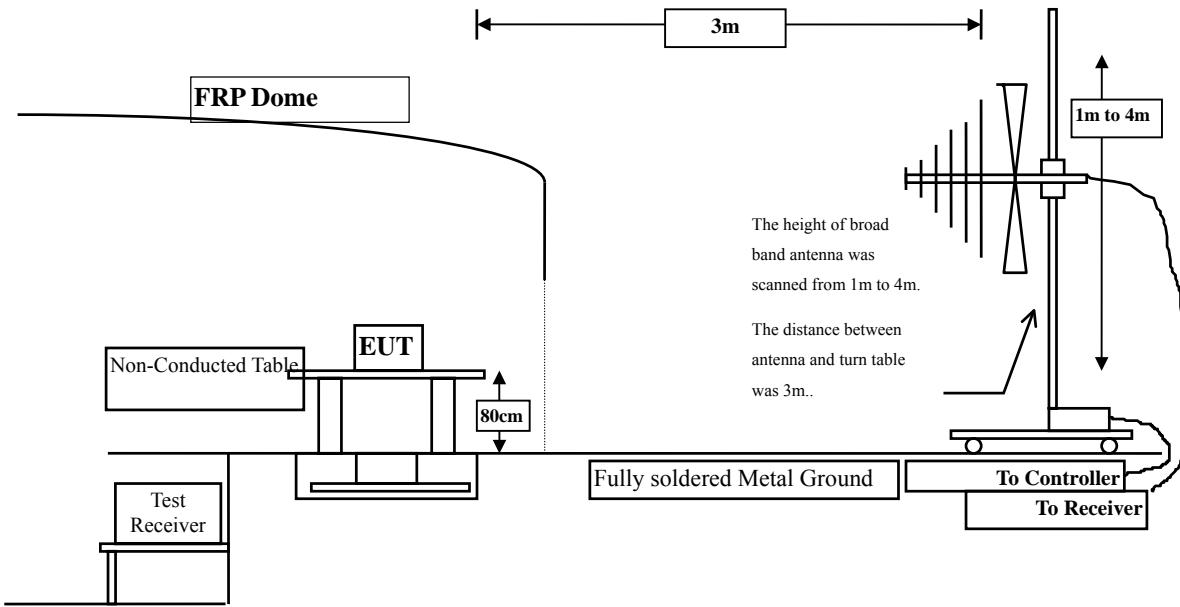

### Radiated Emission Above 1GHz

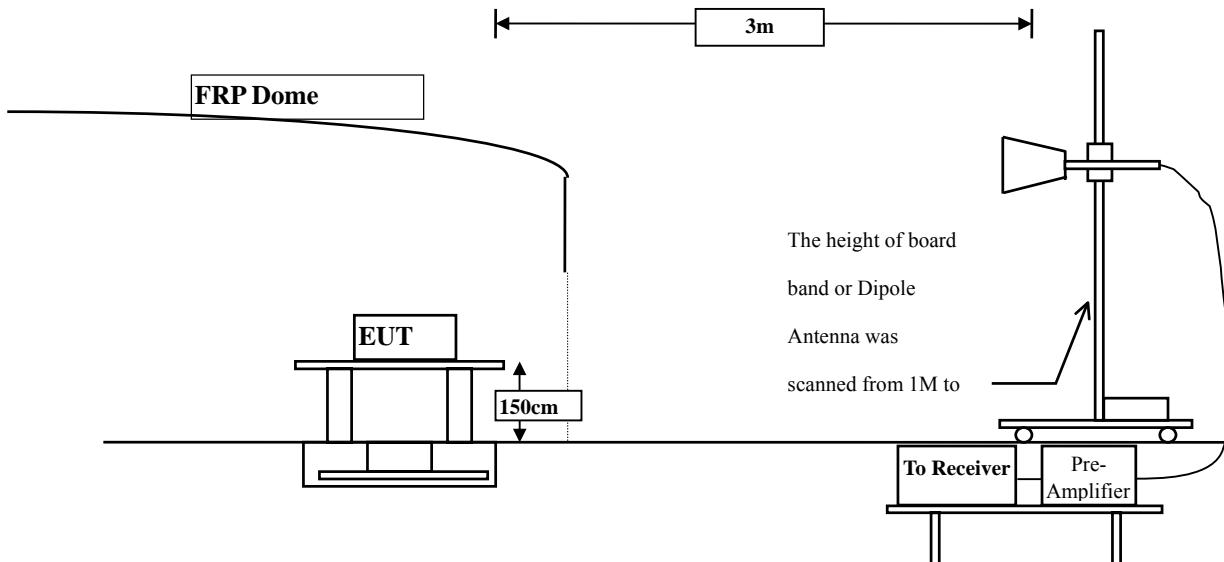

### 4.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 30dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

<b>FCC Part 15 Subpart C Paragraph 15.209(a) Limits</b>		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dBuV/m) = 20 log E field strength (uV/m)

#### 4.4. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

#### 4.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

#### 4.6. Test Result of Radiated Emission

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

##### Horizontal

###### Peak Detector:

4824.000	2.428	42.290	44.719	-29.281	74.000
7236.000	9.177	38.260	47.437	-26.563	74.000
9648.000	10.019	39.150	49.170	-24.830	74.000

###### Average

###### Detector:

--

##### Vertical

###### Peak Detector:

4824.000	2.836	48.590	51.427	-22.573	74.000
7236.000	9.676	43.290	52.966	-21.034	74.000
9648.000	10.556	38.150	48.707	-25.293	74.000

###### Average

###### Detector:

--

##### Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

### Horizontal

**Peak Detector:**

4874.000	2.076	42.590	44.667	-29.333	74.000
7311.000	9.512	38.590	48.102	-25.898	74.000
9748.000	9.630	38.690	48.320	-25.680	74.000

**Average**

**Detector:**

--

### Vertical

**Peak Detector:**

4874.000	2.532	48.690	51.222	-22.778	74.000
7311.000	10.089	42.110	52.199	-21.801	74.000
9748.000	10.266	38.690	48.957	-25.043	74.000

**Average**

**Detector:**

--

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

### Horizontal

#### Peak Detector:

4924.000	2.191	42.680	44.871	-29.129	74.000
7386.000	10.373	38.590	48.964	-25.036	74.000
9848.000	9.964	38.590	48.554	-25.446	74.000

#### Average

#### Detector:

--

### Vertical

#### Peak Detector:

4924.000	2.805	48.590	51.395	-22.605	74.000
7386.000	11.180	42.360	53.540	-20.460	74.000
9848.000	10.801	38.690	49.491	-24.509	74.000

#### Average

#### Detector:

--

#### Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

### Horizontal

**Peak Detector:**

4824.000	2.836	41.590	44.427	-29.573	74.000
7236.000	9.676	39.590	49.266	-24.734	74.000
9648.000	10.556	39.150	49.707	-24.293	74.000

**Average**

**Detector:**

--

### Vertical

**Peak Detector:**

4824.000	2.836	45.150	47.987	-26.013	74.000
7236.000	9.676	63.120	72.796	-1.204	74.000
9648.000	10.556	39.630	50.187	-23.813	74.000

**Average**

**Detector:**

7236.000	9.676	37.640	47.316	-6.684	54.000
----------	-------	--------	--------	--------	--------

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

### Horizontal

**Peak Detector:**

4874.000	2.076	42.590	44.667	-29.333	74.000
7311.000	9.512	39.150	48.662	-25.338	74.000
9748.000	9.630	39.150	48.780	-25.220	74.000

**Average**

**Detector:**

--

### Vertical

**Peak Detector:**

4874.000	2.532	45.290	47.822	-26.178	74.000
7311.000	10.089	60.870	70.959	-3.041	74.000
9748.000	10.266	39.630	49.897	-24.103	74.000

**Average**

**Detector:**

7311.000	10.089	36.850	46.939	-7.061	54.000
----------	--------	--------	--------	--------	--------

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4944.000	2.423	43.140	45.563	-28.437	74.000
7386.000	10.373	38.590	48.964	-25.036	74.000
9848.000	9.964	39.210	49.174	-24.826	74.000
<b>Average Detector:</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4924.000	2.805	45.850	48.655	-25.345	74.000
7386.000	11.180	59.990	71.170	-2.830	74.000
9848.000	10.801	39.160	49.961	-24.039	74.000
<b>Average Detector:</b>					
7386.000	11.180	34.520	45.700	-8.300	54.000

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band) (2412MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

### Horizontal

**Peak Detector:**

4824.000	2.428	42.590	45.019	-28.981	74.000
7236.000	9.177	39.510	48.687	-25.313	74.000
9648.000	10.019	39.520	49.540	-24.460	74.000

**Average**

**Detector:**

--

### Vertical

**Peak Detector:**

4824.000	2.836	45.290	48.127	-25.873	74.000
7236.000	9.676	53.150	62.826	-11.174	74.000
9648.000	10.556	39.630	50.187	-23.813	74.000

**Average**

**Detector:**

7236.000	9.676	30.290	39.966	-14.034	54.000
----------	-------	--------	--------	---------	--------

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band) (2437 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

### Horizontal

**Peak Detector:**

4874.000	2.076	43.290	45.367	-28.633	74.000
7311.000	9.512	39.520	49.032	-24.968	74.000
9748.000	9.630	39.530	49.160	-24.840	74.000

**Average**

**Detector:**

--

### Vertical

**Peak Detector:**

4874.000	2.532	45.580	48.112	-25.888	74.000
7311.000	10.089	52.960	63.049	-10.951	74.000
9748.000	10.266	39.520	49.787	-24.213	74.000

**Average**

**Detector:**

7311.000	10.089	31.260	41.349	-12.651	54.000
----------	--------	--------	--------	---------	--------

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band) (2462 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4924.000	2.191	42.540	44.731	-29.269	74.000
7386.000	10.373	39.510	49.884	-24.116	74.000
9848.000	9.964	39.150	49.114	-24.886	74.000
<b>Average Detector:</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4924.000	2.805	45.290	48.095	-25.905	74.000
7386.000	11.180	53.140	64.320	-9.680	74.000
9848.000	10.801	39.630	50.431	-23.569	74.000
<b>Average Detector:</b>					
7386.000	11.180	31.290	42.470	-11.530	54.000

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2422MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

### Horizontal

**Peak Detector:**

4844.000	2.280	40.290	42.571	-31.429	74.000
7266.000	9.106	38.590	47.696	-26.304	74.000
9688.000	9.663	39.260	48.923	-25.077	74.000

**Average**

**Detector:**

--

### Vertical

**Peak Detector:**

4844.000	2.707	42.550	45.258	-28.742	74.000
7266.000	9.626	39.150	48.776	-25.224	74.000
9688.000	10.284	39.150	49.434	-24.566	74.000

**Average**

**Detector:**

--

--

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2437 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

### Horizontal

**Peak Detector:**

4874.000	2.076	42.150	44.227	-29.773	74.000
7311.000	9.512	38.590	48.102	-25.898	74.000
9748.000	9.630	39.960	49.590	-24.410	74.000

**Average**

**Detector:**

--

### Vertical

**Peak Detector:**

4874.000	2.532	42.150	44.682	-29.318	74.000
7311.000	10.089	38.950	49.039	-24.961	74.000
9748.000	10.266	39.620	49.887	-24.113	74.000

**Average**

**Detector:**

--

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Harmonic Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2452 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

### Horizontal

#### Peak Detector:

4904.000	2.000	41.150	43.151	-30.849	74.000
7356.000	10.308	38.590	48.898	-25.102	74.000
9808.000	9.850	39.260	49.110	-24.890	74.000

#### Average

#### Detector:

--

### Vertical

#### Peak Detector:

4904.000	2.513	42.150	44.664	-29.336	74.000
7356.000	11.022	39.260	50.282	-23.718	74.000
9808.000	10.512	39.630	50.142	-23.858	74.000

#### Average

#### Detector:

--

### Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : General Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
249.220	-6.216	49.388	43.172	-2.828	46.000
375.320	0.918	43.439	44.357	-1.643	46.000
449.040	0.386	40.000	40.386	-5.614	46.000
625.580	1.419	42.792	44.212	-1.788	46.000
676.020	2.841	40.510	43.352	-2.648	46.000
806.000	6.206	35.331	41.537	-4.463	46.000
875.840	5.816	38.622	44.438	-1.562	46.000
<b>Vertical</b>					
179.380	-0.824	41.652	40.828	-2.672	43.500
353.980	-1.124	43.052	41.928	-4.072	46.000
499.480	-0.199	36.538	36.338	-9.662	46.000
660.500	-1.111	42.237	41.126	-4.874	46.000
697.360	0.691	42.941	43.632	-2.368	46.000
825.400	3.016	39.881	42.897	-3.103	46.000

## Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : General Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
249.220	-6.216	47.769	41.553	-4.447	46.000
375.320	0.918	43.408	44.326	-1.674	46.000
449.040	0.386	39.859	40.245	-5.755	46.000
625.580	1.419	43.217	44.637	-1.363	46.000
676.020	2.841	40.813	43.655	-2.345	46.000
875.840	5.816	38.509	44.325	-1.675	46.000
<b>Vertical</b>					
119.240	-3.571	44.331	40.761	-2.739	43.500
179.380	-0.824	40.791	39.967	-3.533	43.500
355.920	-0.972	44.620	43.648	-2.352	46.000
625.580	0.299	43.503	43.803	-2.197	46.000
699.300	-0.024	43.721	43.697	-2.303	46.000
844.800	2.462	37.466	39.928	-6.072	46.000

## Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : General Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level	dB	dBuV/m
MHz	dB	dBuV	dBuV/m		
<b>Horizontal</b>					
249.220	-6.216	49.633	43.417	-2.583	46.000
375.320	0.918	41.434	42.352	-3.648	46.000
449.040	0.386	39.917	40.303	-5.697	46.000
625.580	1.419	42.153	43.573	-2.427	46.000
676.020	2.841	39.635	42.477	-3.523	46.000
875.840	5.816	37.933	43.749	-2.251	46.000
<b>Vertical</b>					
119.240	-3.571	43.388	39.818	-3.682	43.500
179.380	-0.824	37.697	36.873	-6.627	43.500
249.220	-5.096	39.674	34.578	-11.422	46.000
361.740	-0.646	44.596	43.949	-2.051	46.000
697.360	0.691	42.657	43.348	-2.652	46.000
840.920	2.284	27.872	30.156	-15.844	46.000

## Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : General Radiated Emission Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2437 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
249.220	-6.216	48.749	42.533	-3.467	46.000
375.320	0.918	41.710	42.628	-3.372	46.000
449.040	0.386	39.178	39.564	-6.436	46.000
625.580	1.419	41.968	43.388	-2.612	46.000
676.020	2.841	39.919	42.761	-3.239	46.000
901.060	5.878	38.417	44.295	-1.705	46.000
<b>Vertical</b>					
179.380	-0.824	36.475	35.651	-7.849	43.500
375.320	0.388	39.345	39.733	-6.267	46.000
625.580	0.299	42.801	43.101	-2.899	46.000
676.020	0.451	43.591	44.043	-1.957	46.000
695.420	1.352	41.399	42.751	-3.249	46.000
840.920	2.284	39.186	41.470	-4.530	46.000

## Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

## 5. RF Antenna conducted test


### 5.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2015
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2015
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note: 1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.  
 2. The test instruments marked with “X” are used to measure the final test results.

### 5.2. Test Setup

#### RF antenna Conducted Measurement:

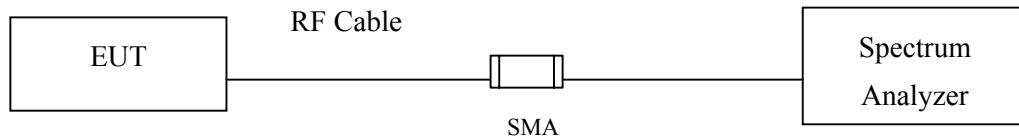

### 5.3. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

#### 5.4. Test Procedure

The EUT was tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

#### 5.5. Uncertainty


The measurement uncertainty

Conducted is defined as  $\pm 1.27\text{dB}$


## 5.6. Test Result of RF antenna conducted test

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : RF antenna conducted test  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)


**Channel 01 (2412MHz) 30MHz-25GHz**

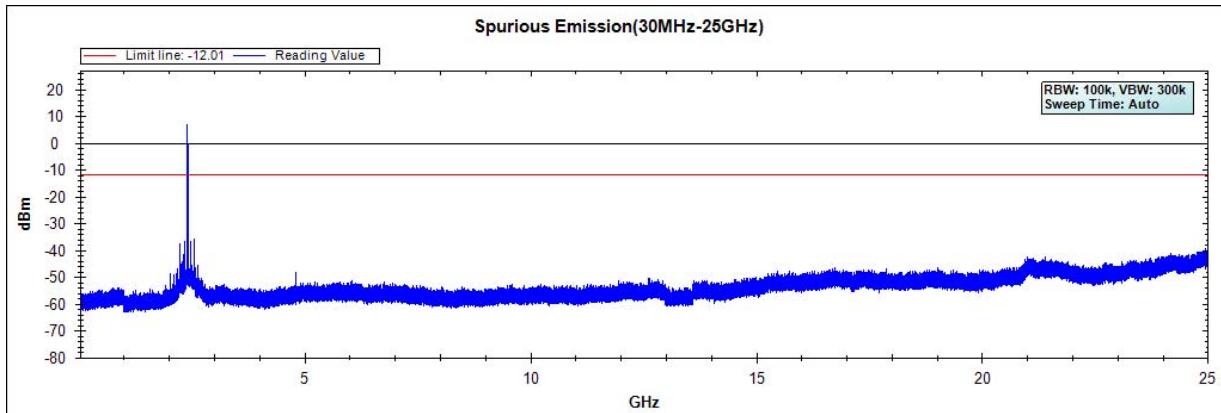

**Channel 06 (2437MHz) 30MHz -25GHz**

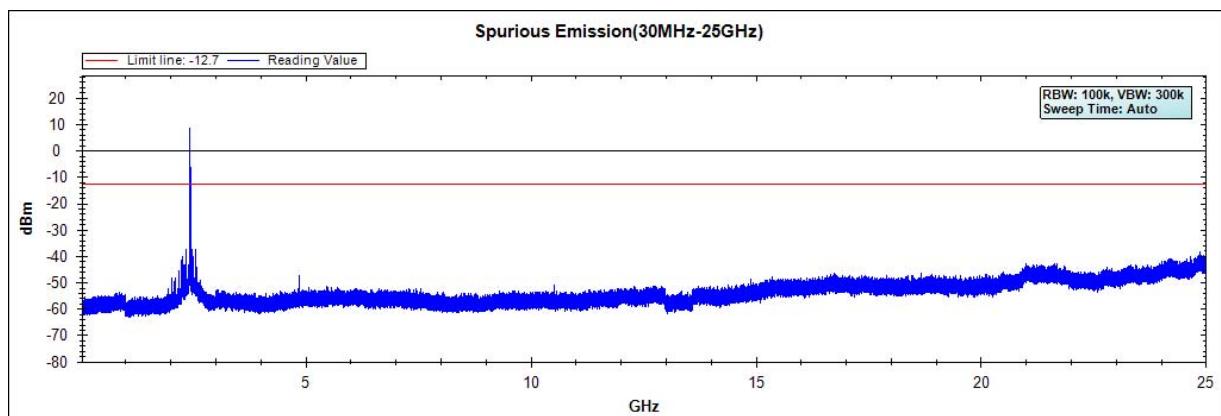


**Channel 11 (2462MHz) 30MHz -25GHz**

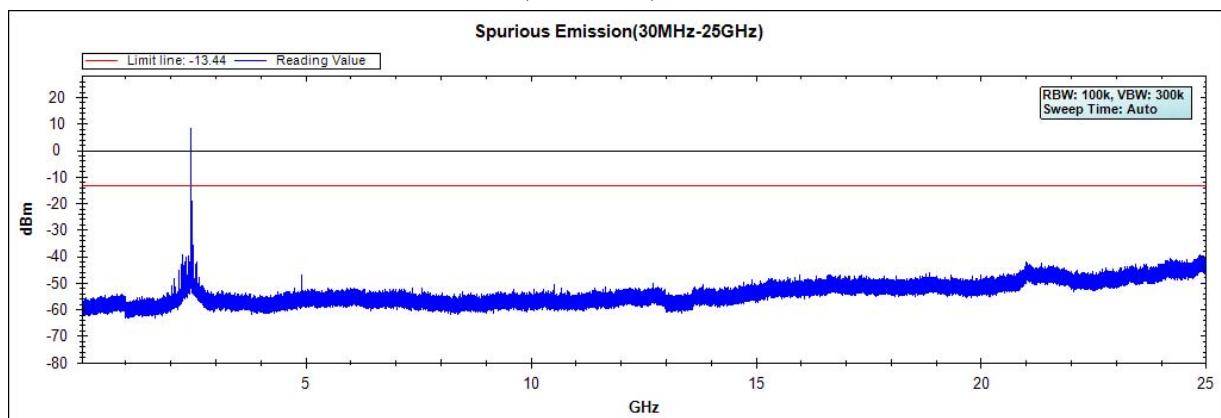


Note: The above test pattern is synthesized by multiple of the frequency range.

Product : MOXA IEEE 802.11 a/b/g/n  
Test Item : RF Antenna Conducted Spurious  
Test Site : No.3 OATS  
Test Mode : Mode 2: Transmit (802.11g 6Mbps)


### Channel 01 (2412MHz) 30MHz -25GHz

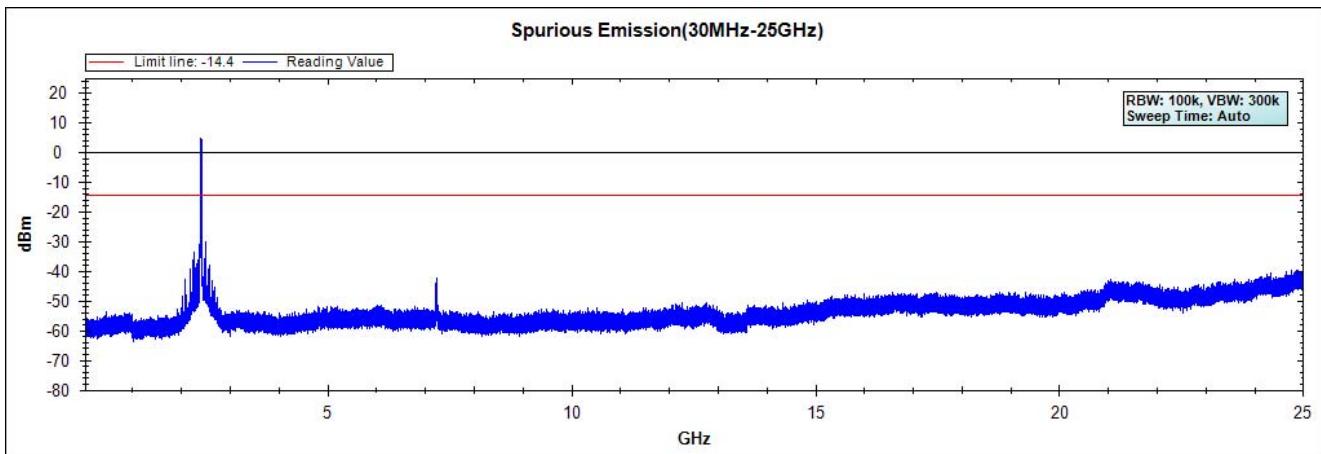

### Channel 06 (2437MHz) 30MHz -25GHz

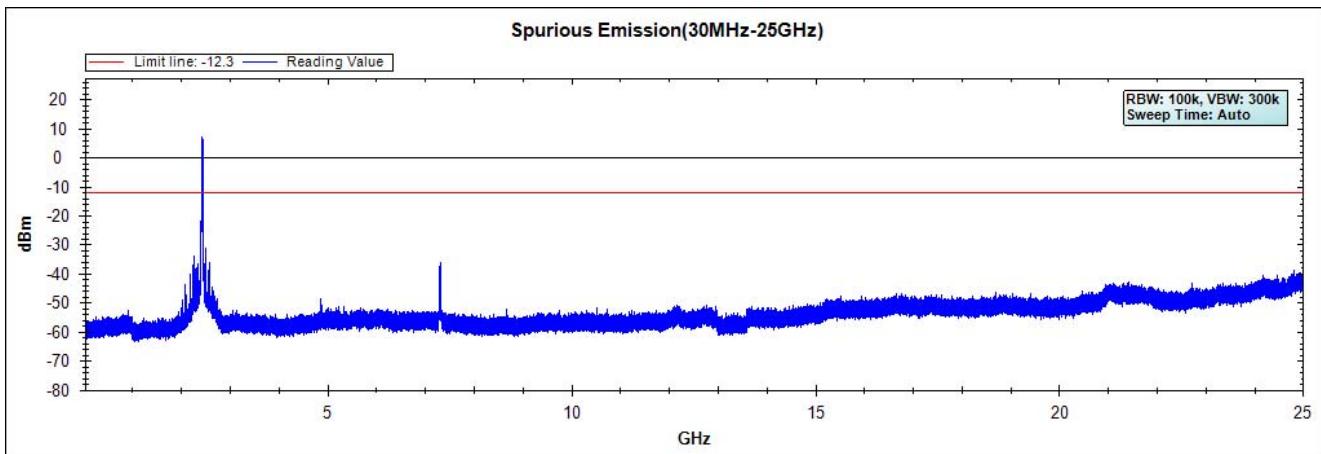


### Channel 11 (2462MHz) 30MHz -25GHz

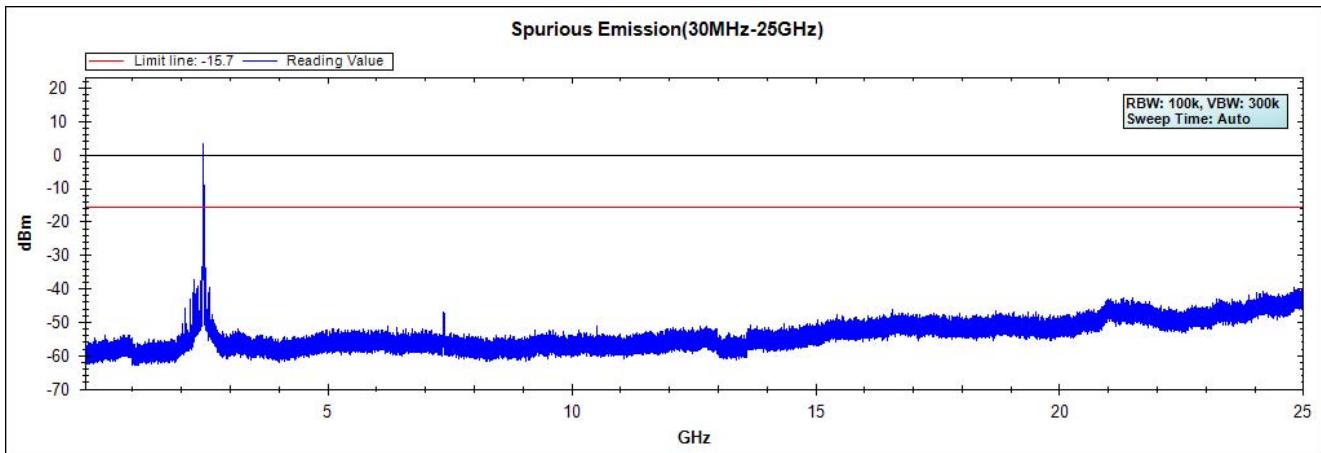


Note: The above test pattern is synthesized by multiple of the frequency range.

Product : MOXA IEEE 802.11 a/b/g/n  
Test Item : RF Antenna Conducted Spurious  
Test Site : No.3 OATS  
Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)


### Channel 01 (2412MHz) 30MHz -25GHz-Chain A

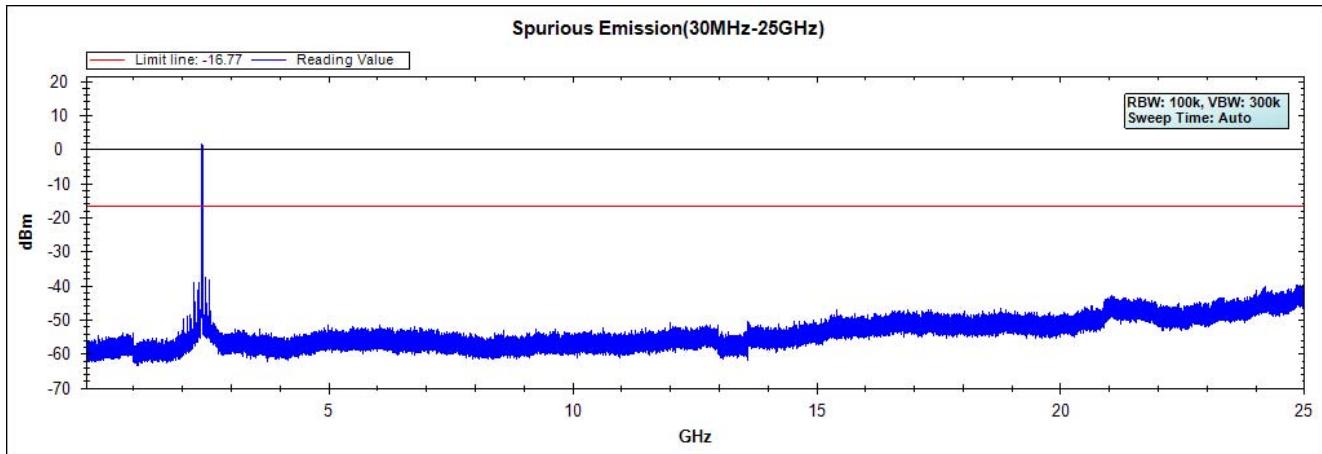




### Channel 06 (2437MHz) 30MHz -25GHz-Chain A

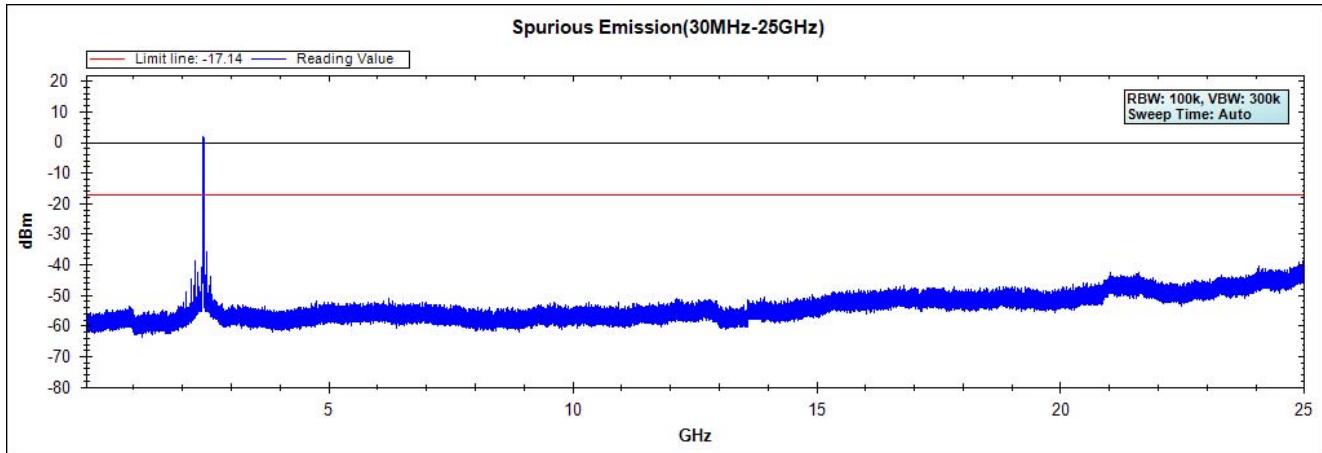

### Channel 11 (2462MHz) 30MHz -25GHz-Chain A

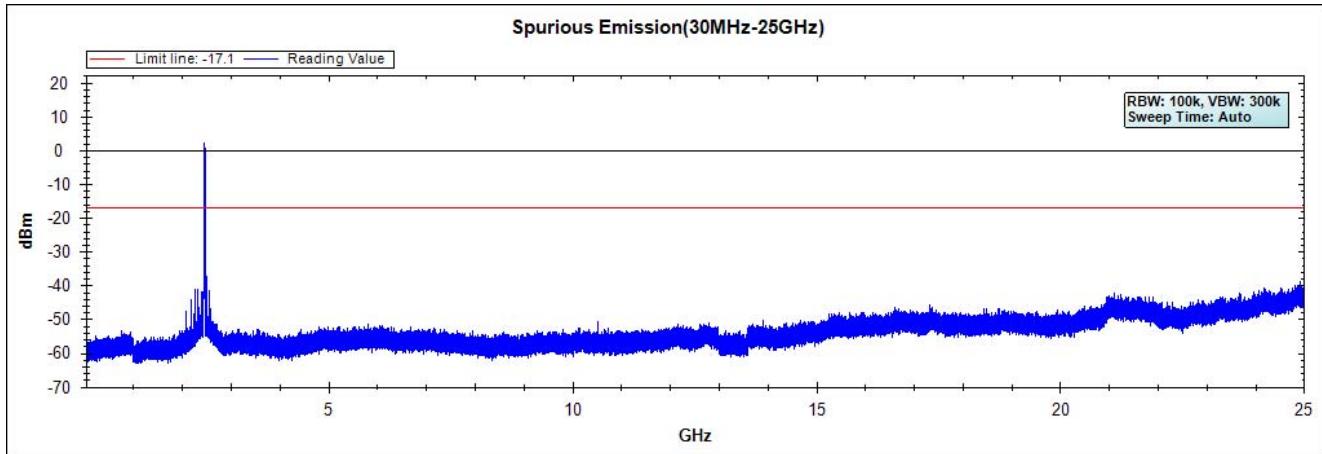


Note: The above test pattern is synthesized by multiple of the frequency range.

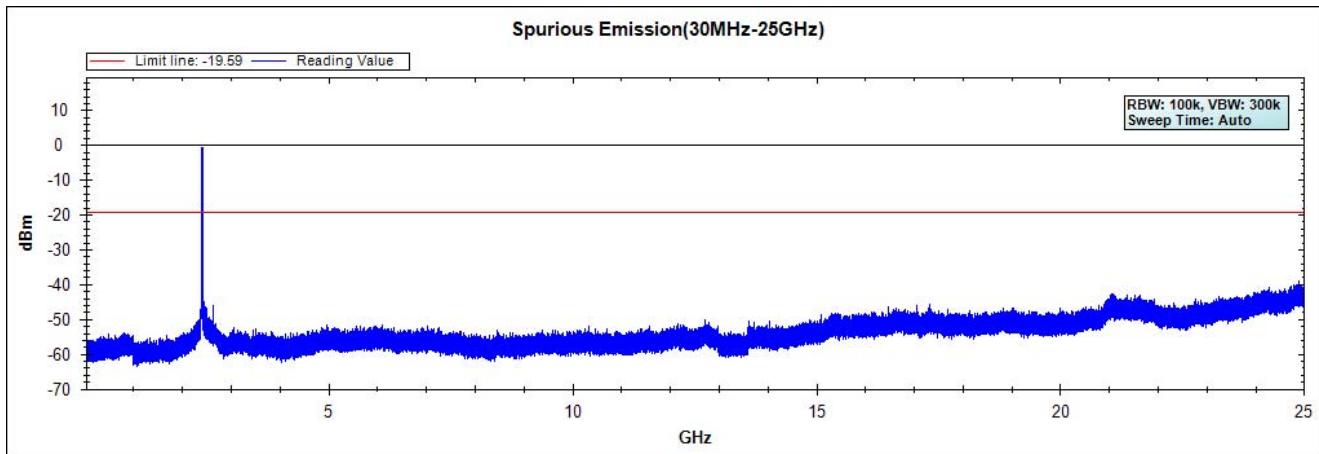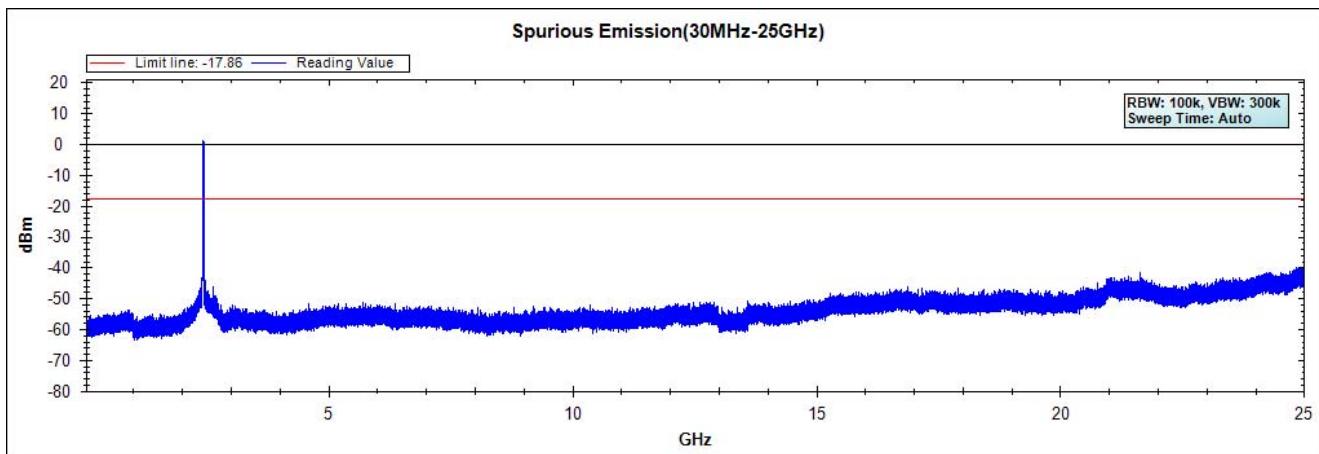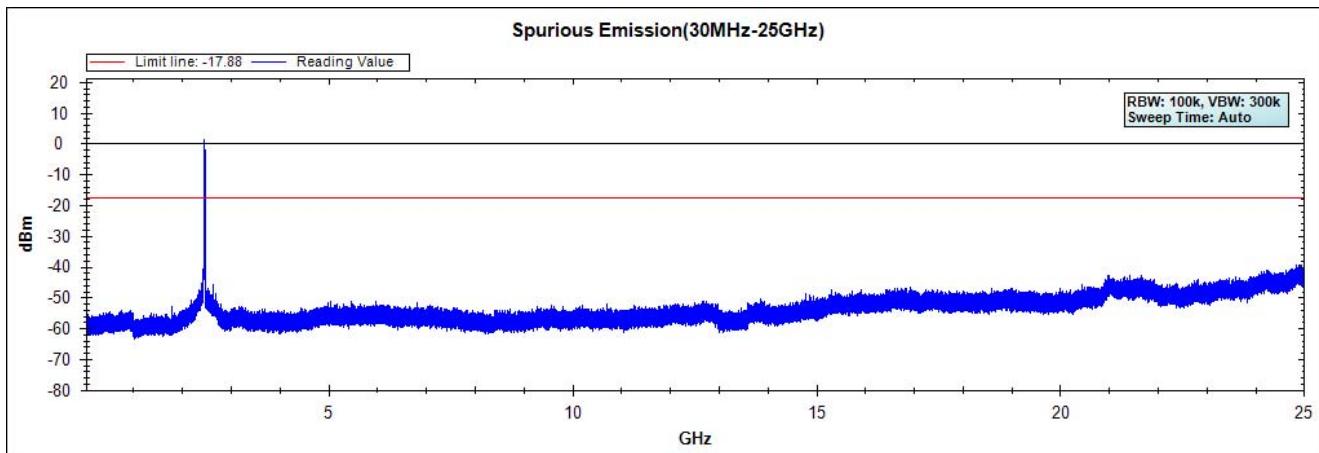**Channel 01 (2412MHz) 30MHz -25GHz-Chain B****Channel 06 (2437MHz) 30MHz -25GHz-Chain B****Channel 11 (2462MHz) 30MHz -25GHz-Chain B**


Note: The above test pattern is synthesized by multiple of the frequency range.

Product : MOXA IEEE 802.11 a/b/g/n  
Test Item : RF Antenna Conducted Spurious  
Test Site : No.3 OATS  
Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)


### Channel 03 (2422MHz) 30MHz -25GHz-Chain A

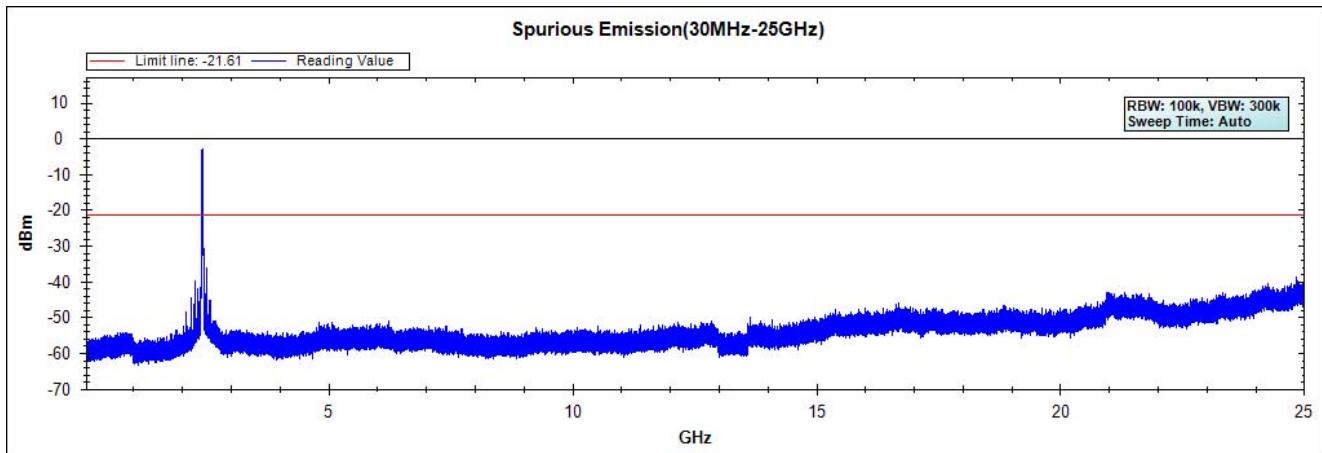




### Channel 06 (2437MHz) 30MHz -25GHz-Chain A

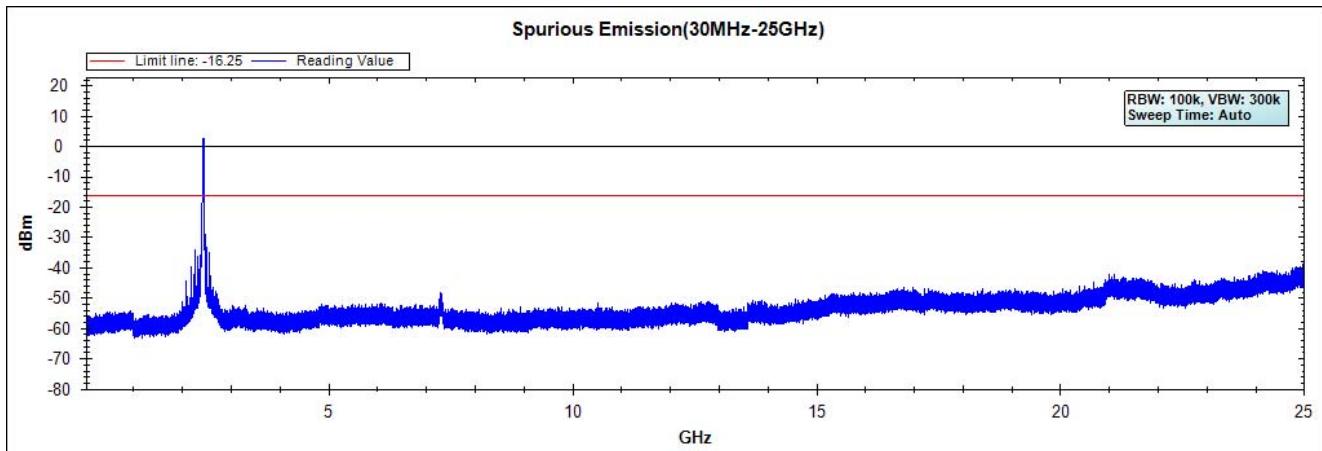

### Channel 09 (2452MHz) 30MHz -25GHz-Chain A

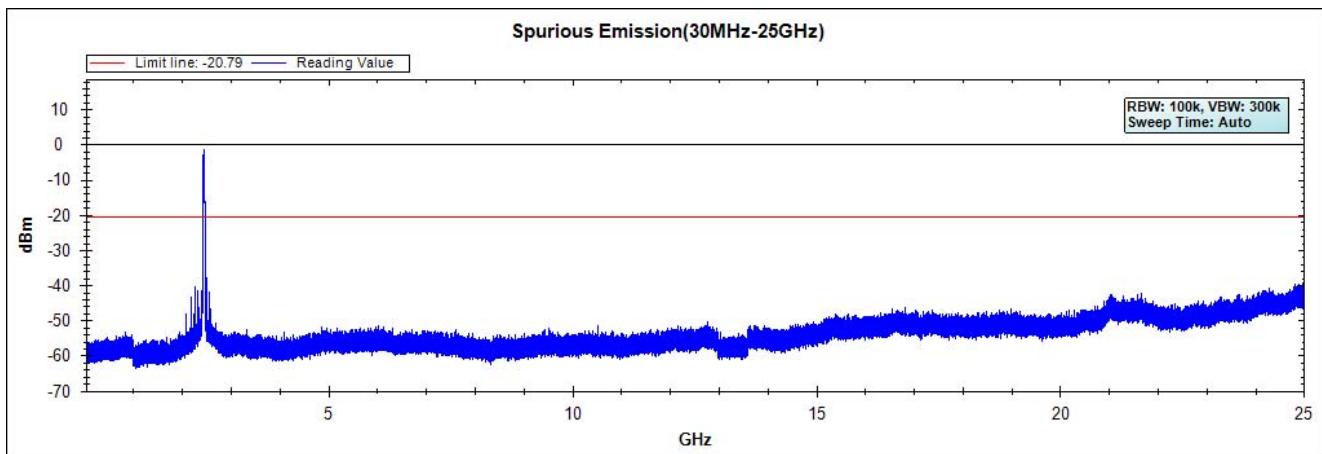

Note: The above test pattern is synthesized by multiple of the frequency range.

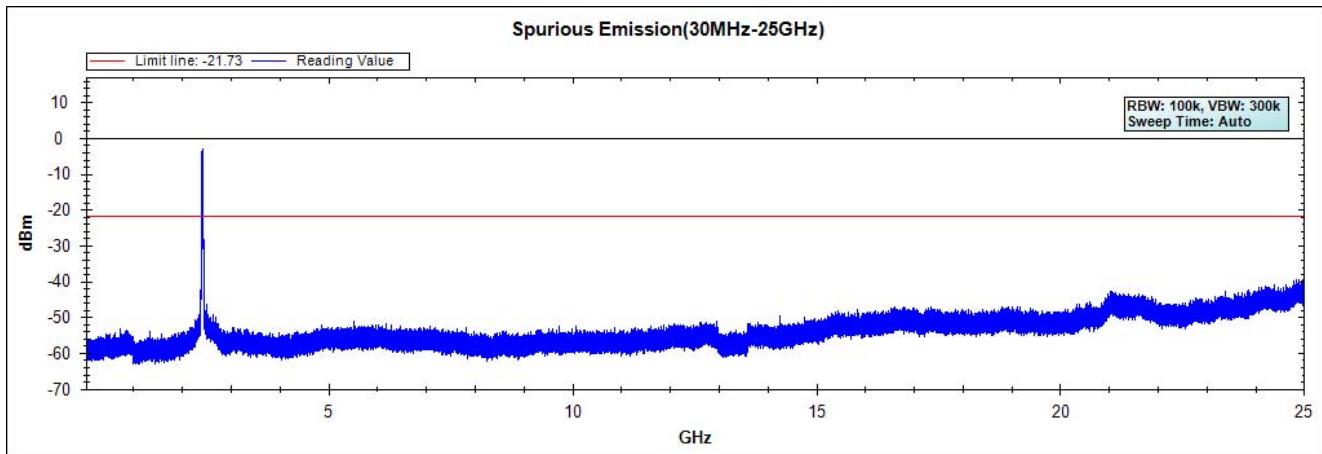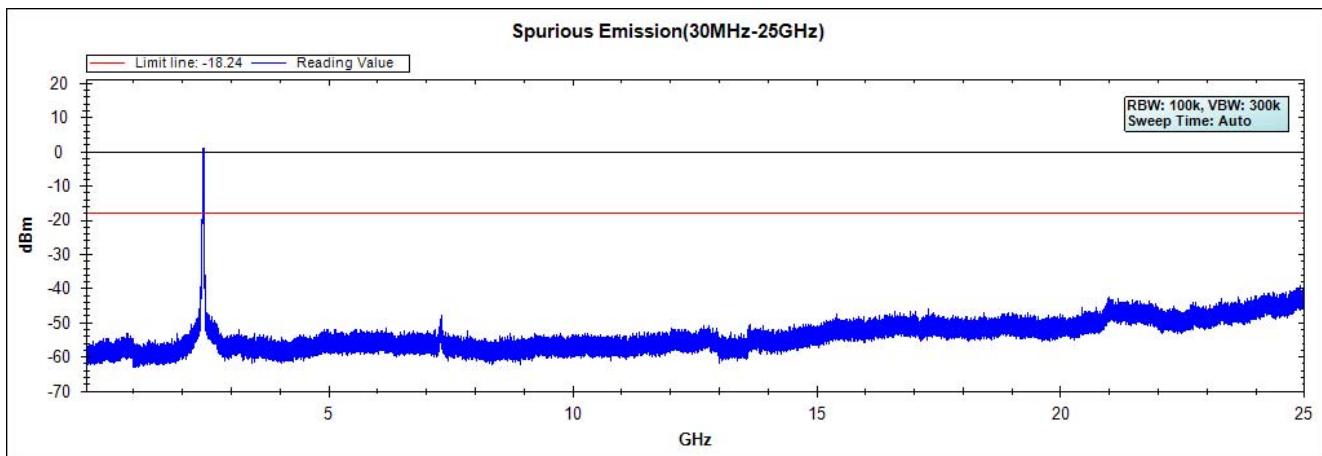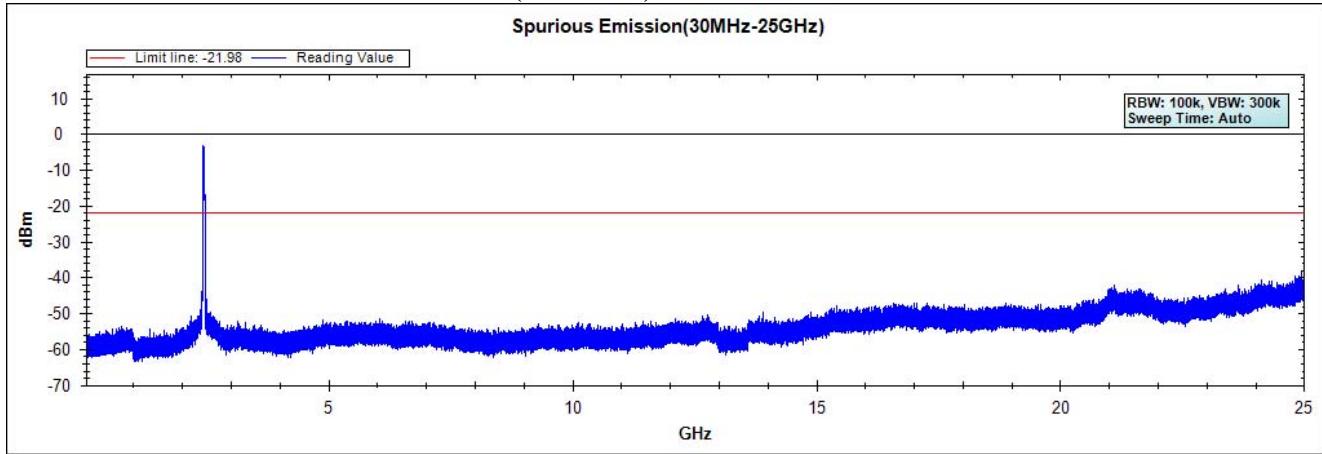**Channel 03 (2422MHz) 30MHz -25GHz-Chain B****Channel 06 (2437MHz) 30MHz -25GHz-Chain B****Channel 09 (2452MHz) 30MHz -25GHz-Chain B**

Note: The above test pattern is synthesized by multiple of the frequency range.

## 6. Band Edge

### 6.1. Test Equipment

#### RF Conducted Measurement

The following test equipments are used during the band edge tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2015
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2015
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

#### RF Radiated Measurement:


The following test equipments are used during the band edge tests:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
XCB # 8	X Spectrum Analyzer	R&S	FSP40/ 100339	Oct, 2014
	X Horn Antenna	ETS-Lindgren	3117/ 35205	Mar, 2015
	X Horn Antenna	Schwarzbeck	BBHA9170/209	Jan, 2015
	X Horn Antenna	TRC	AH-0801/95051	Aug, 2015
	X Pre-Amplifier	EMCI	EMC012630SE/980210	Jan, 2015
	X Pre-Amplifier	MITEQ	JS41-001040000-58-5P/153945	Jul, 2015
	X Pre-Amplifier	NARDA	DBL-1840N506/013	Jul, 2015


Note: 1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.  
 2. The test instruments marked with “X” are used to measure the final test results.

## 6.2. Test Setup

### RF Conducted Measurement

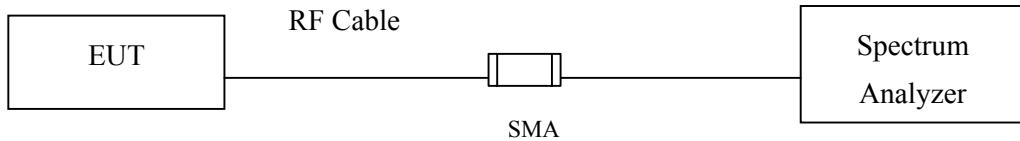

### RF Radiated Measurement:

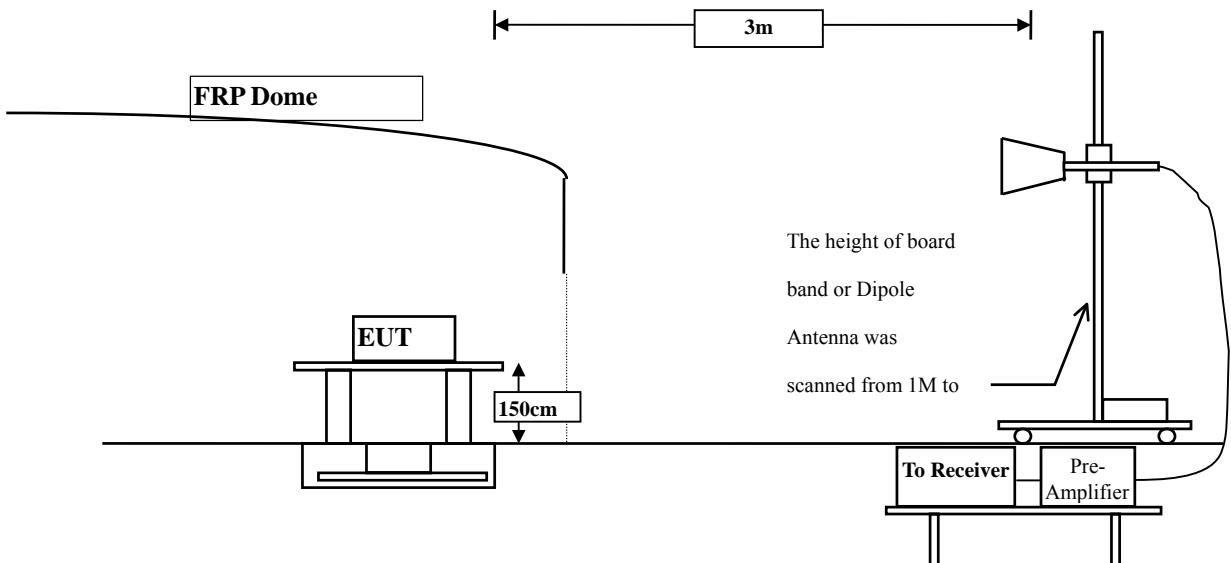

### **6.3. Limits**

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 30dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

### **6.4. Test Procedure**

The EUT was setup according to ANSI C63.10, 2013 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

### **6.5. Uncertainty**

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

## 6.6. Test Result of Band Edge

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

### RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2361.304	31.395	28.630	60.026	74.00	54.00	Pass
01 (Peak)	2390.000	31.509	27.052	58.561	74.00	54.00	Pass
01 (Peak)	2400.000	31.561	28.736	60.297	--	--	--
01 (Peak)	2413.188	31.647	65.723	97.370	--	--	--
01 (Average)	2390.000	31.509	13.793	45.302	74.00	54.00	Pass
01 (Average)	2400.000	31.561	15.394	46.955	--	--	--
01 (Average)	2412.754	31.644	62.580	94.224	--	--	--

Figure Channel 01:

Horizontal (Peak)


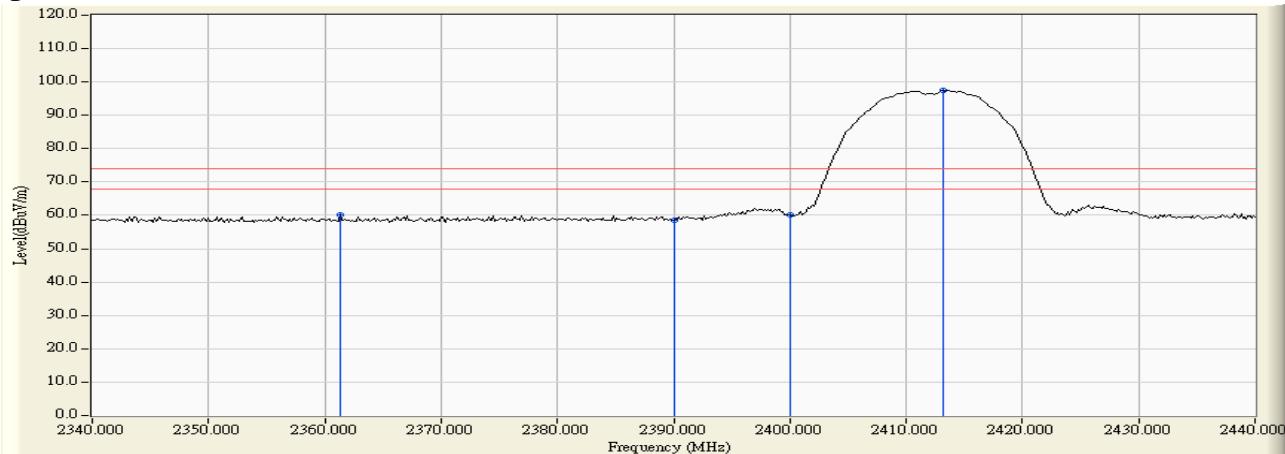


Figure Channel 01:

Horizontal (Average)

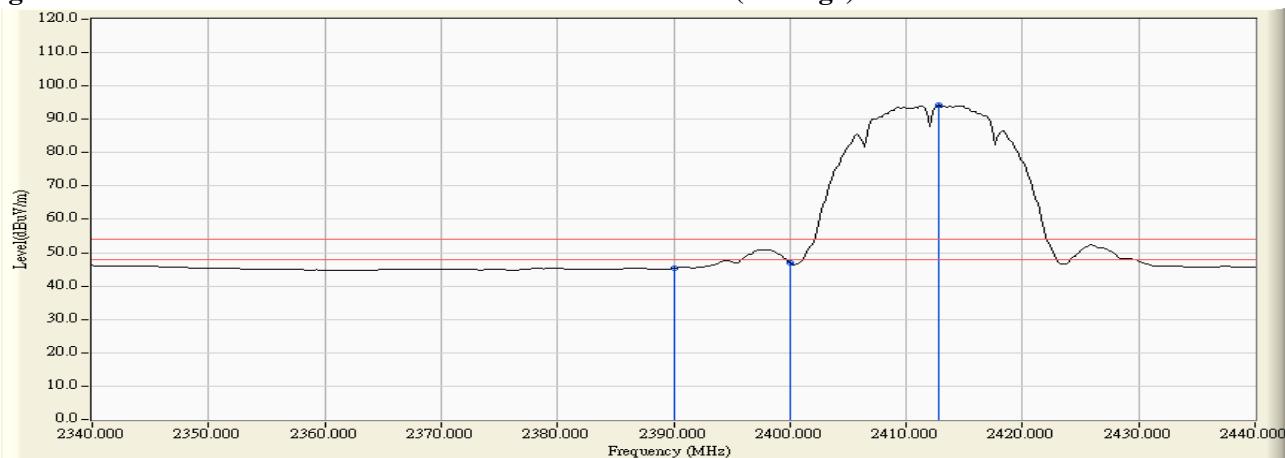

- 
- Note:1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
  3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
  4. “ \* ”, means this data is the worst emission level.
  5. Measurement Level = Reading Level + Correct Factor.
  6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

#### RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2389.420	30.918	33.675	64.593	74.00	54.00	Pass
01 (Peak)	2390.000	30.915	32.020	62.935	74.00	54.00	Pass
01 (Peak)	2400.000	30.912	38.982	69.894	--	--	--
01 (Peak)	2413.043	30.957	80.342	111.298	--	--	--
01 (Average)	2386.087	30.933	20.413	51.346	74.00	54.00	Pass
01 (Average)	2390.000	30.915	19.251	50.166	74.00	54.00	Pass
01 (Average)	2400.000	30.912	27.694	58.606	--	--	--
01 (Average)	2412.754	30.955	77.266	108.220	--	--	--

Figure Channel 01:

Vertical (Peak)


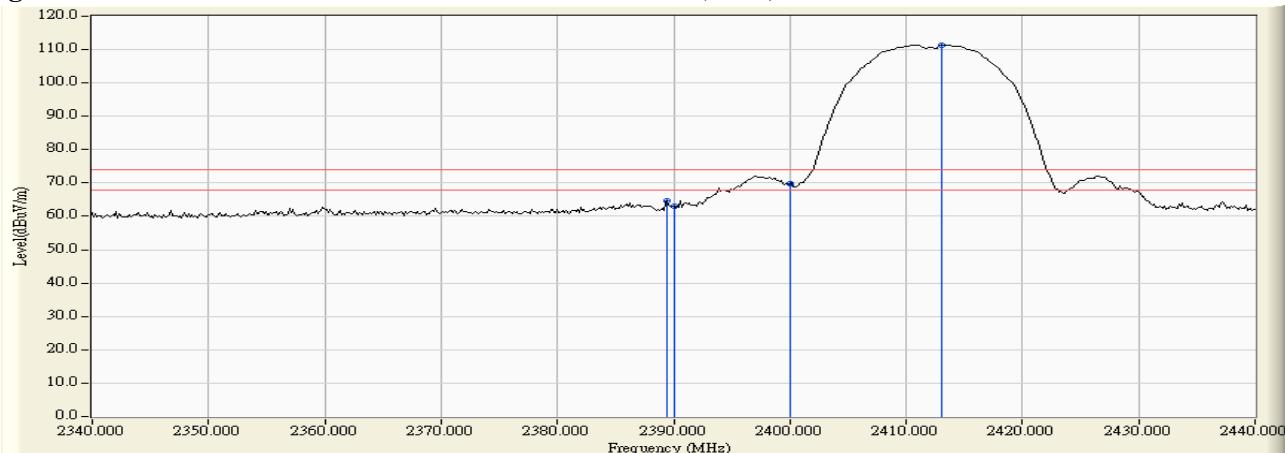


Figure Channel 01:

Vertical (Average)

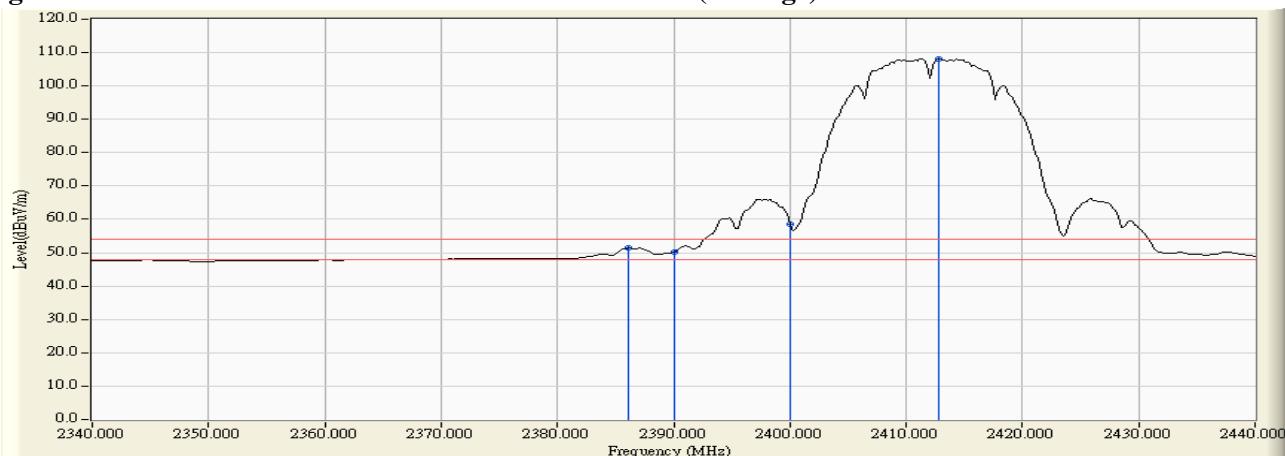

## Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ \* ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

#### RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2463.065	32.028	67.054	99.081	--	--	--
11 (Peak)	2483.500	32.182	27.625	59.807	74.00	54.00	Pass
11 (Peak)	2490.457	32.234	28.623	60.858	74.00	54.00	Pass
11 (Average)	2462.775	32.025	63.951	95.976	--	--	--
11 (Average)	2483.500	32.182	14.786	46.968	74.00	54.00	Pass
11 (Average)	2509.877	32.253	15.669	47.921	74.00	54.00	Pass

Figure Channel 11:

Horizontal (Peak)


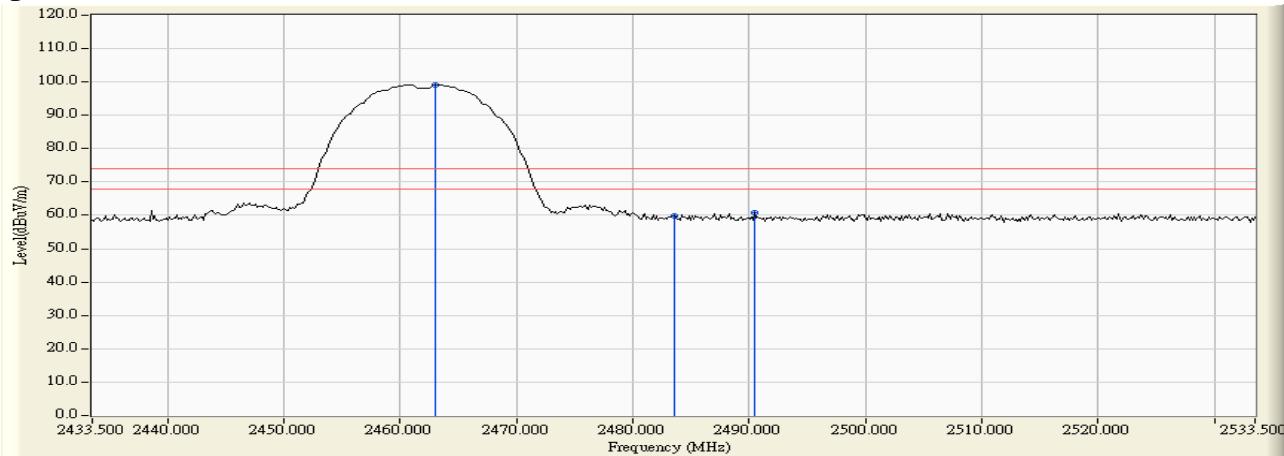


Figure Channel 11:

Horizontal (Average)

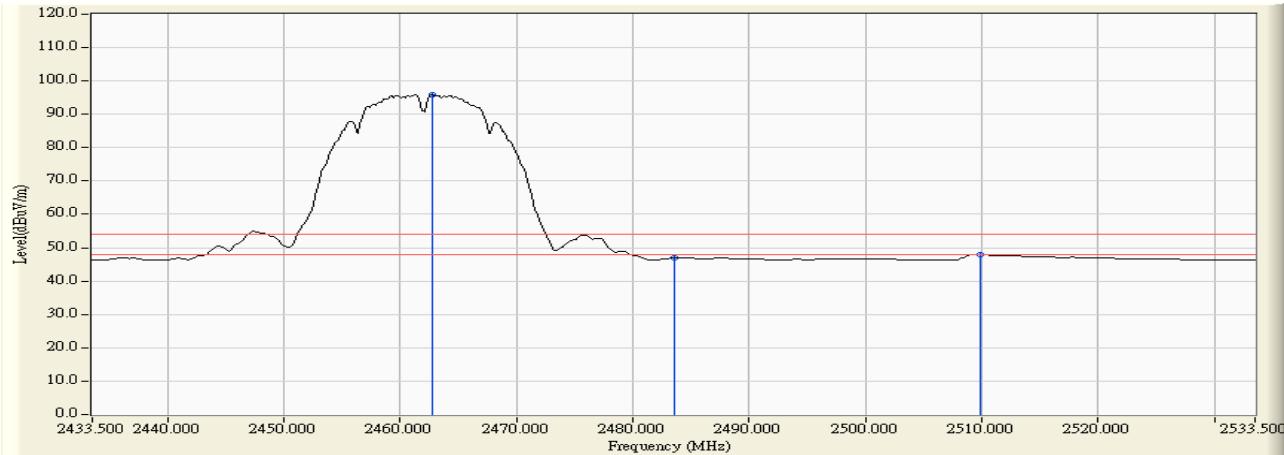

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

#### RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2460.891	31.283	79.676	110.959	--	--	--
11 (Peak)	2483.500	31.435	31.532	62.967	74.00	54.00	Pass
11 (Average)	2462.775	31.295	76.558	107.854	--	--	--
11 (Average)	2483.500	31.435	19.674	51.109	74.00	54.00	Pass

Figure Channel 11:

Vertical (Peak)


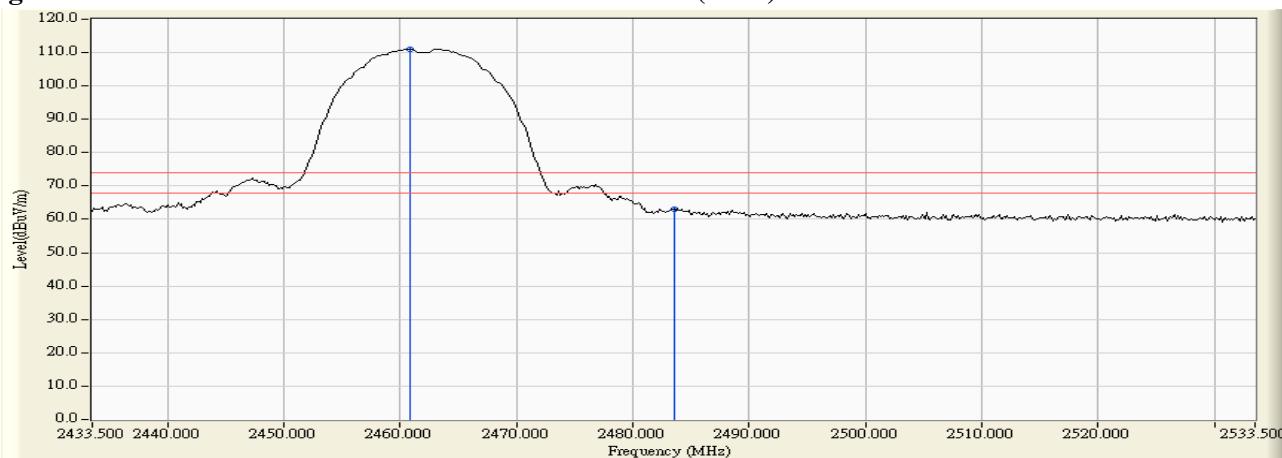


Figure Channel 11:

Vertical (Average)

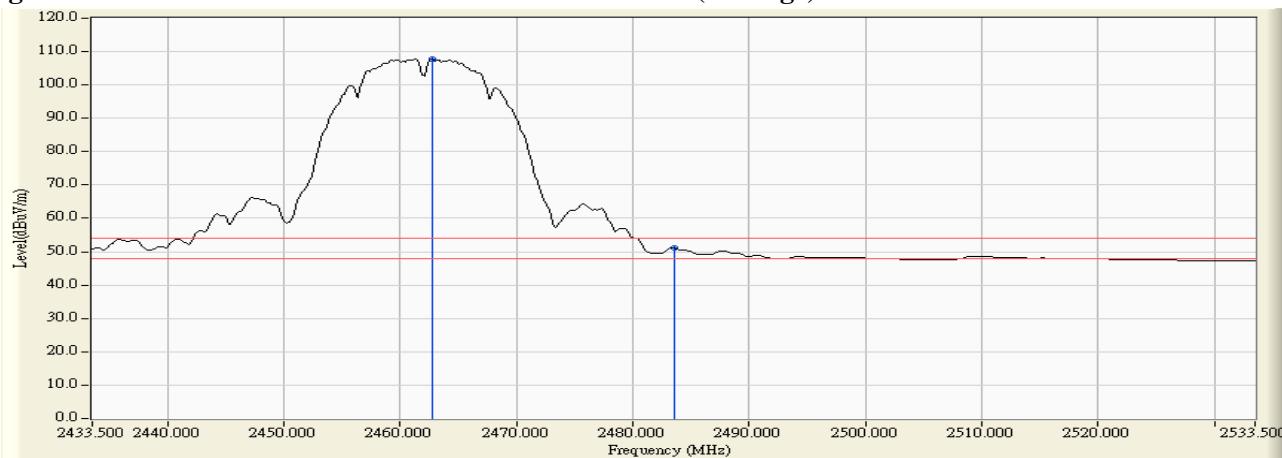

#### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

#### RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2389.420	31.507	29.596	61.103	74.00	54.00	Pass
01 (Peak)	2390.000	31.509	27.714	59.223	74.00	54.00	Pass
01 (Peak)	2400.000	31.561	42.047	73.608	--	--	--
01 (Peak)	2417.246	31.678	66.612	98.290	--	--	--
01(Average)	2390.000	31.509	14.552	46.061	74.00	54.00	Pass
01(Average)	2400.000	31.561	20.861	52.422	--	--	--
01(Average)	2417.971	31.685	55.472	87.156	--	--	--

Figure Channel 01:

Horizontal (Peak)


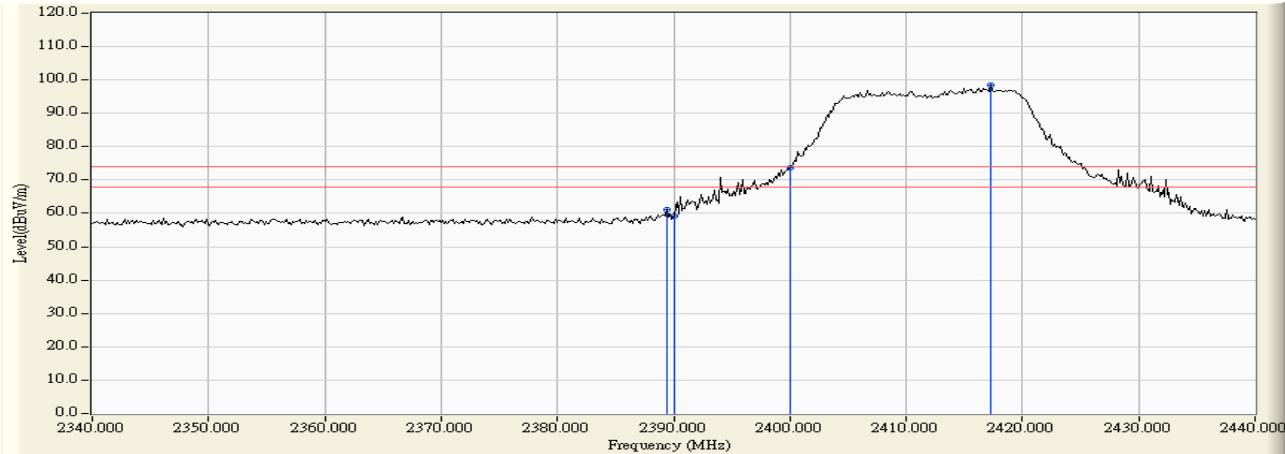


Figure Channel 01:

Horizontal (Average)

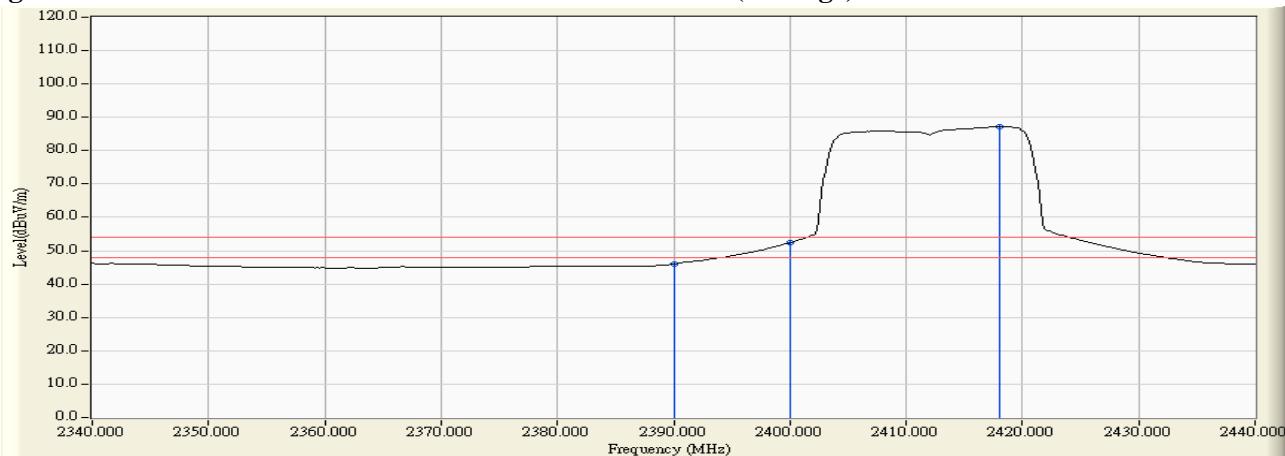

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

#### RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2389.710	30.917	41.565	72.482	74.00	54.00	Pass
01 (Peak)	2390.000	30.915	40.294	71.209	74.00	54.00	Pass
01 (Peak)	2400.000	30.912	58.154	89.066	--	--	--
01 (Peak)	2418.841	30.995	79.655	110.651	--	--	--
01 (Average)	2390.000	30.915	19.749	50.664	74.00	54.00	Pass
01 (Average)	2400.000	30.912	31.676	62.588	--	--	--
01 (Average)	2417.101	30.983	68.303	99.287	--	--	--

Figure Channel 01:

Vertical (Peak)


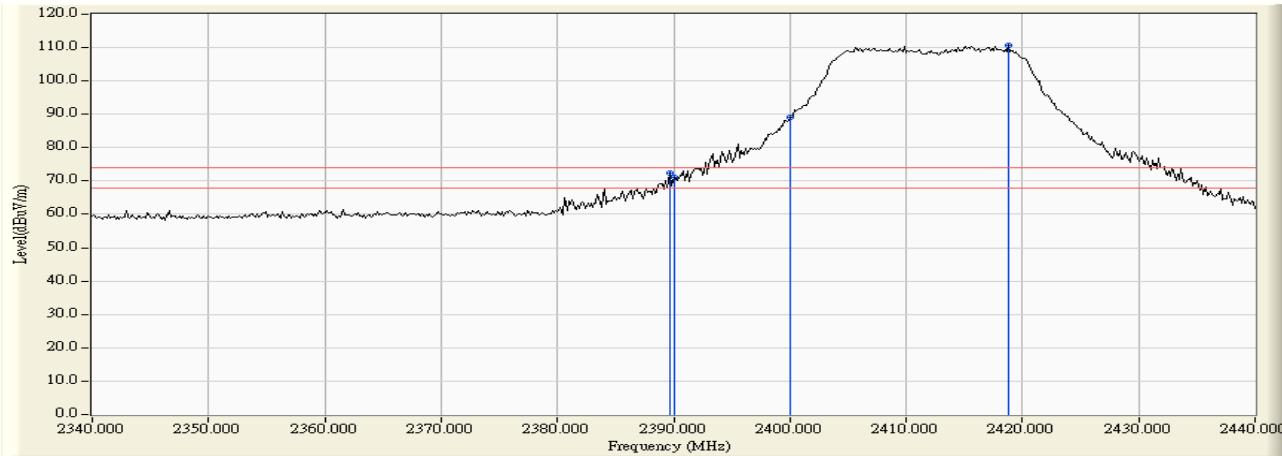


Figure Channel 01:

Vertical (Average)

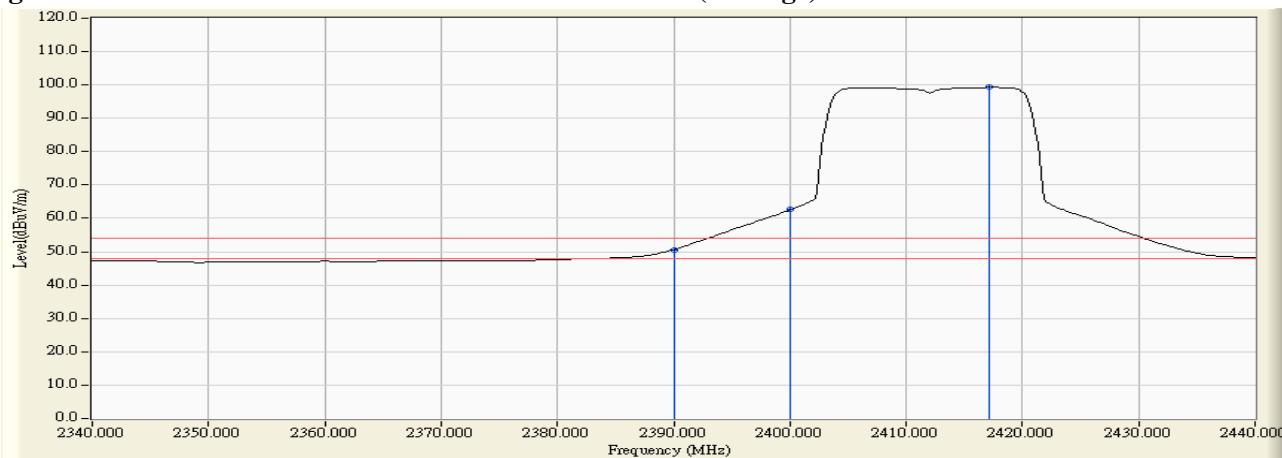

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

#### RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2466.399	32.052	65.760	97.813	--	--	--
11 (Peak)	2483.500	32.182	28.044	60.226	74.00	54.00	Pass
11 (Peak)	2484.659	32.192	28.111	60.302	74.00	54.00	Pass
11 (Average)	2456.254	31.975	54.054	86.030	--	--	--
11 (Average)	2483.500	32.182	14.449	46.631	74.00	54.00	Pass
11 (Average)	2509.877	32.253	15.577	47.829	74.00	54.00	Pass

Figure Channel 11:

Horizontal (Peak)


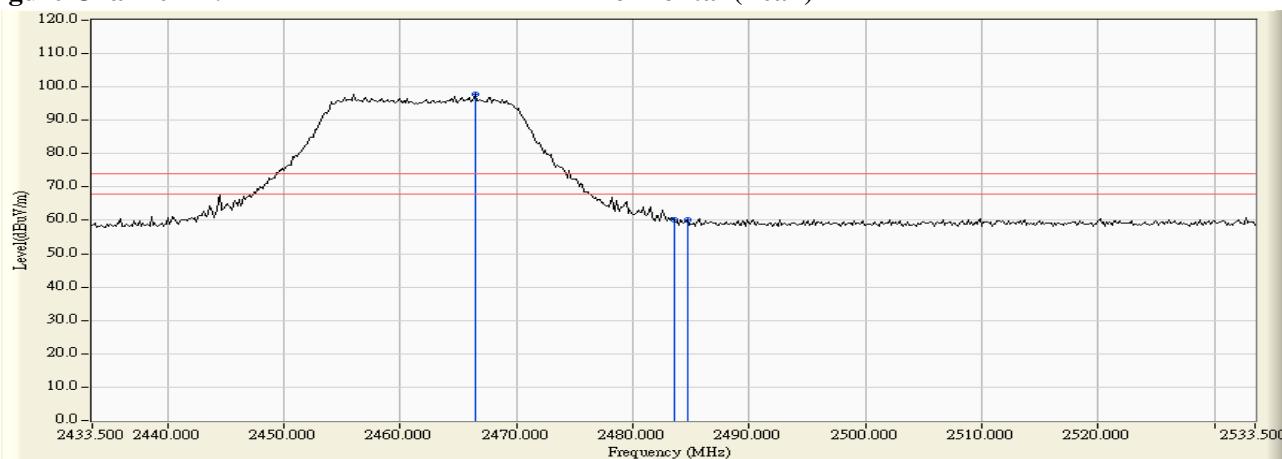


Figure Channel 11:

Horizontal (Average)

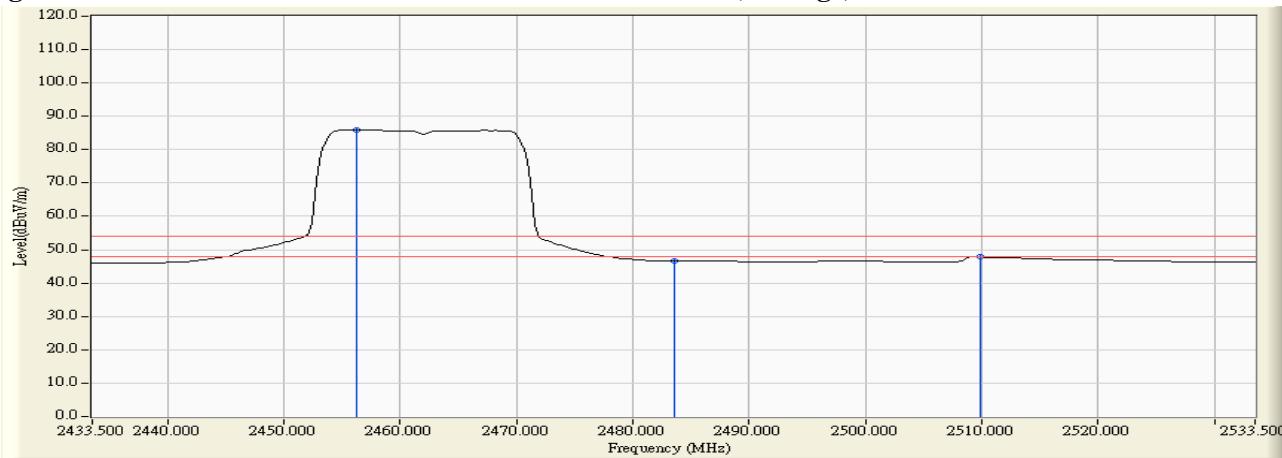

#### Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

#### RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2456.254	31.251	77.016	108.267	--	--	--
11 (Peak)	2483.500	31.435	35.189	66.624	74.00	54.00	Pass
11 (Peak)	2484.370	31.441	35.318	66.759	74.00	54.00	Pass
11 (Average)	2455.819	31.248	65.983	97.231	--	--	--
11 (Average)	2483.500	31.435	17.173	48.608	74.00	54.00	Pass

Figure Channel 11:

Vertical (Peak)


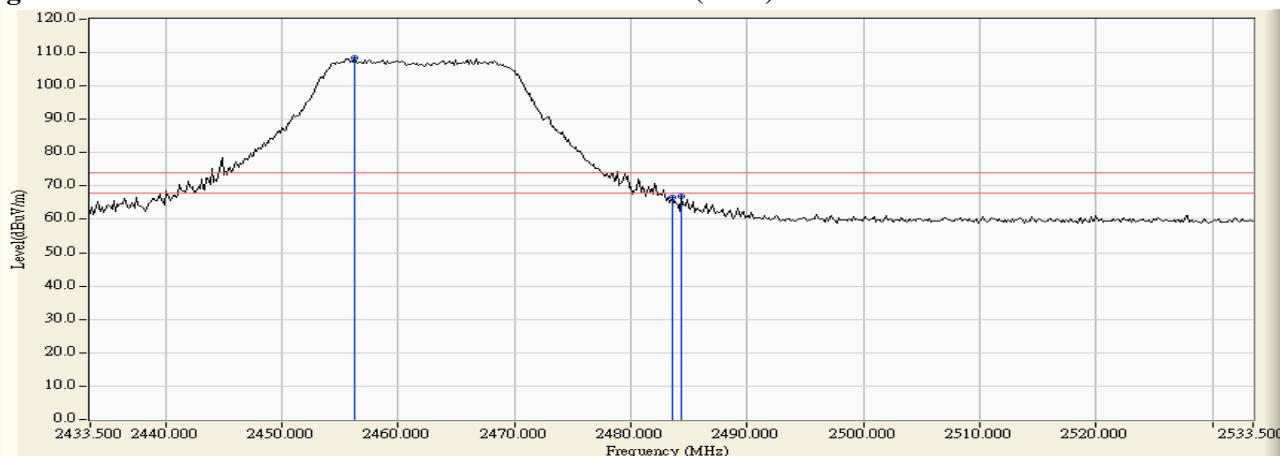


Figure Channel 11:

Vertical (Average)

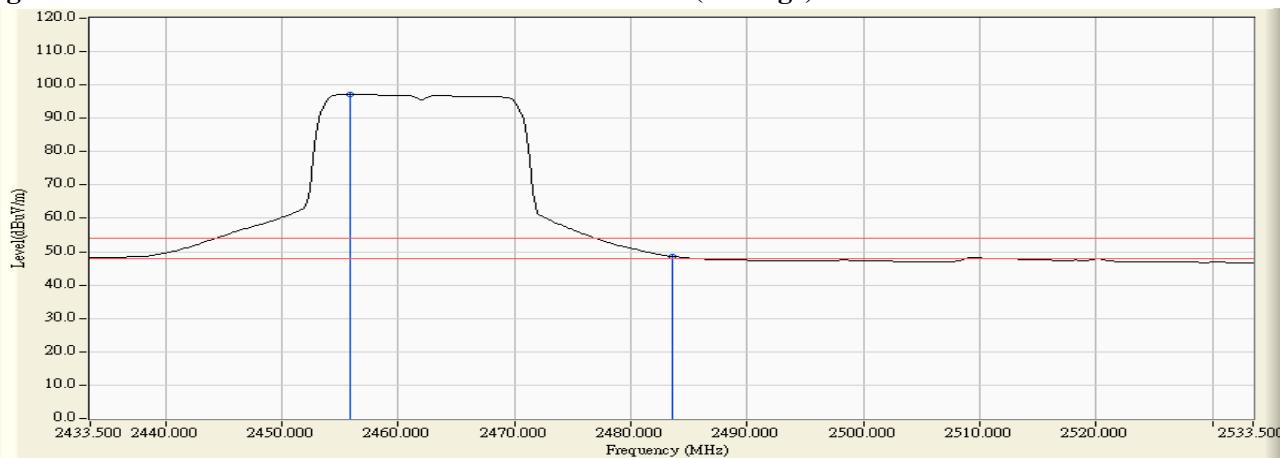

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

#### RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2388.696	31.504	27.620	59.124	74.00	54.00	Pass
01 (Peak)	2390.000	31.509	26.140	57.649	74.00	54.00	Pass
01 (Peak)	2400.000	31.561	42.171	73.732	--	--	--
01 (Peak)	2418.551	31.688	63.441	95.129	--	--	--
01 (Average)	2390.000	31.509	13.851	45.360	74.00	54.00	Pass
01 (Average)	2400.000	31.561	17.912	49.473	--	--	--
01 (Average)	2418.406	31.687	52.739	84.426	--	--	--

Figure Channel 01:

Horizontal (Peak)


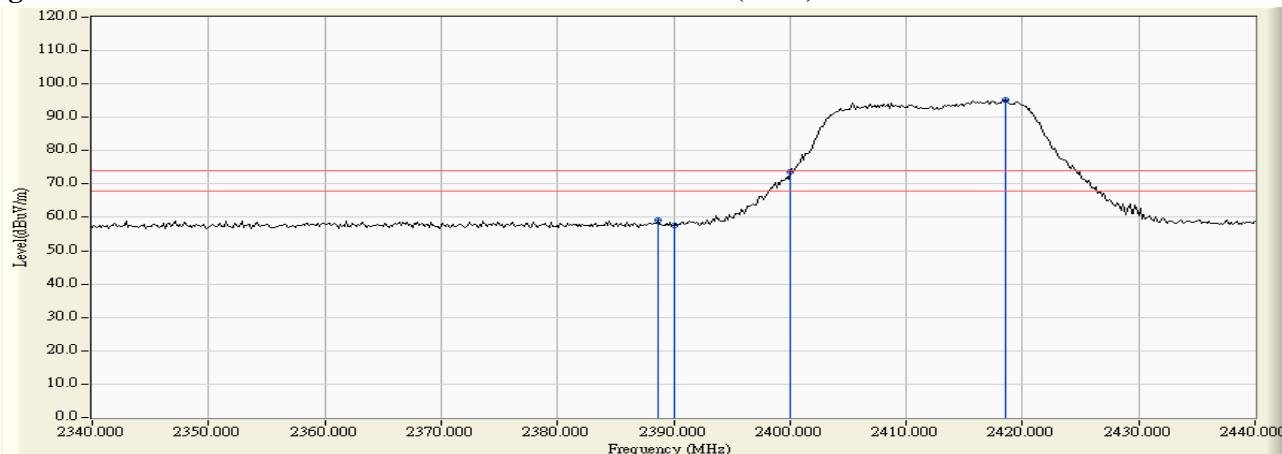


Figure Channel 01:

Horizontal (Average)

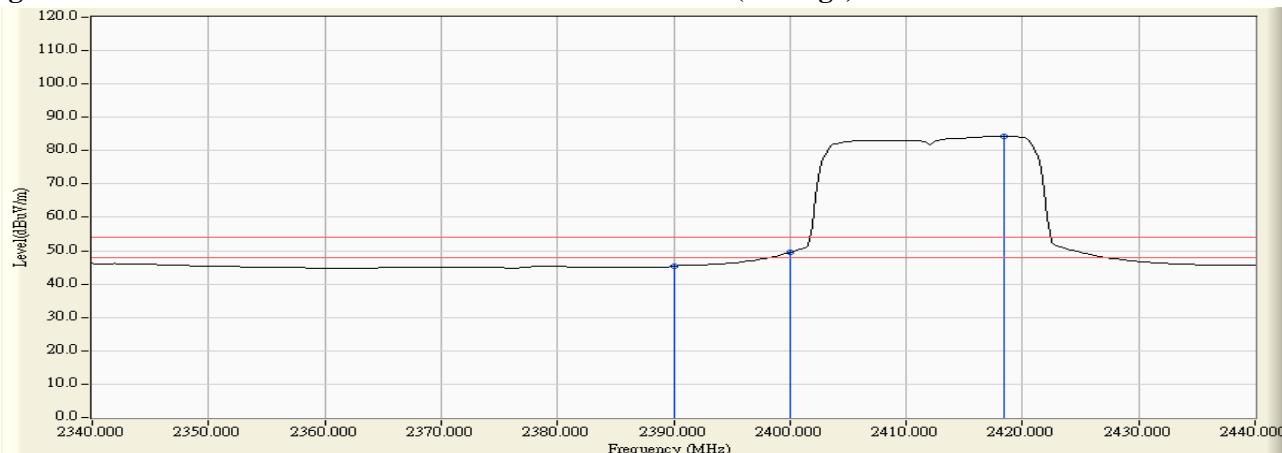

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

#### RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	30.915	38.244	69.159	74.00	54.00	Pass
01 (Peak)	2400.000	30.912	57.966	88.878	--	--	--
01 (Peak)	2418.986	30.996	80.956	111.953	--	--	--
01 (Average)	2360.000	31.054	21.634	52.688	74.00	54.00	Pass
01 (Average)	2390.000	30.915	21.055	51.970	74.00	54.00	Pass
01 (Average)	2400.000	30.912	32.730	63.642	--	--	--
01 (Average)	2418.406	30.993	68.258	99.251	--	--	--

Figure Channel 01:

Vertical (Peak)


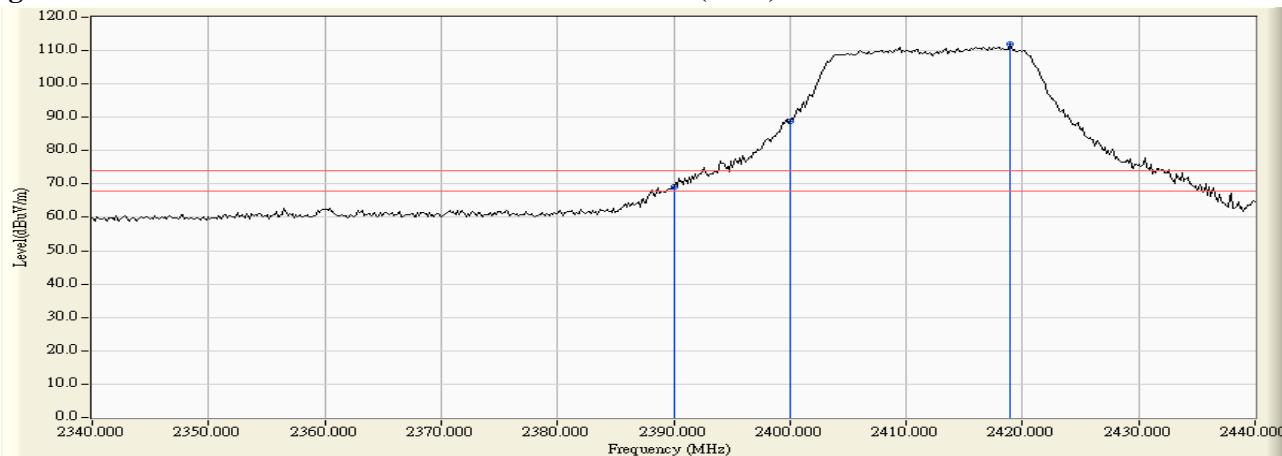


Figure Channel 01:

Vertical (Average)

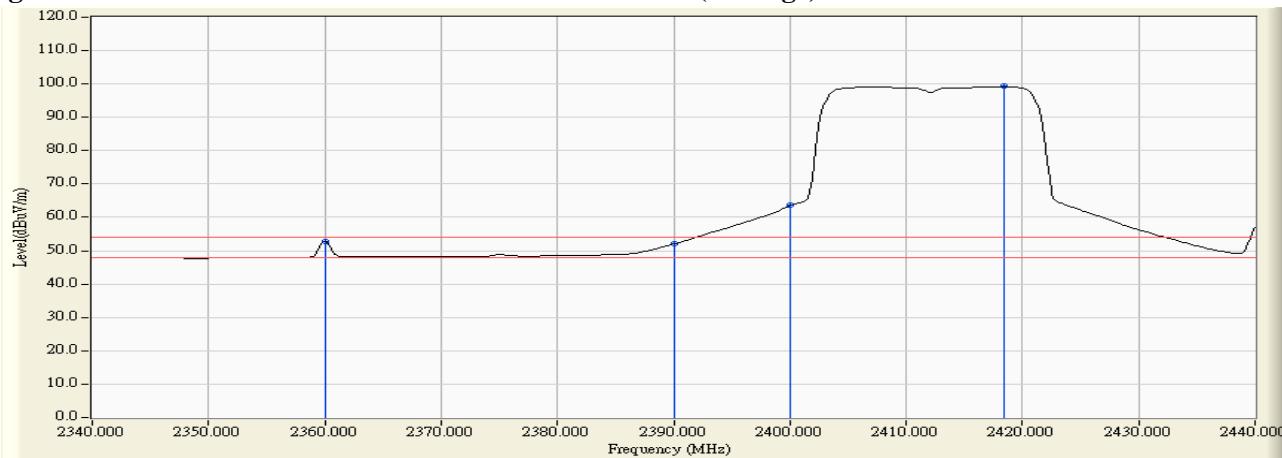

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

#### RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2455.529	31.971	63.129	95.099	--	--	--
11 (Peak)	2483.500	32.182	27.471	59.653	74.00	54.00	Pass
11 (Peak)	2484.080	32.186	29.332	61.518	74.00	54.00	Pass
11 (Average)	2455.674	31.972	51.671	83.643	--	--	--
11 (Average)	2483.500	32.182	14.303	46.485	74.00	54.00	Pass
11 (Average)	2509.442	32.253	15.609	47.862	74.00	54.00	Pass

Figure Channel 11:

Horizontal (Peak)


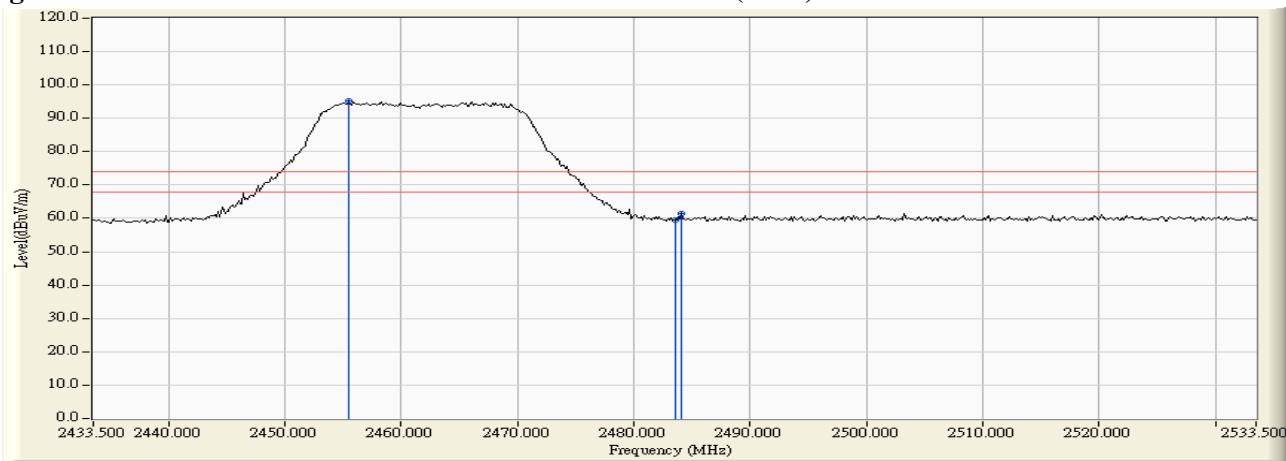


Figure Channel 11:

Horizontal (Average)

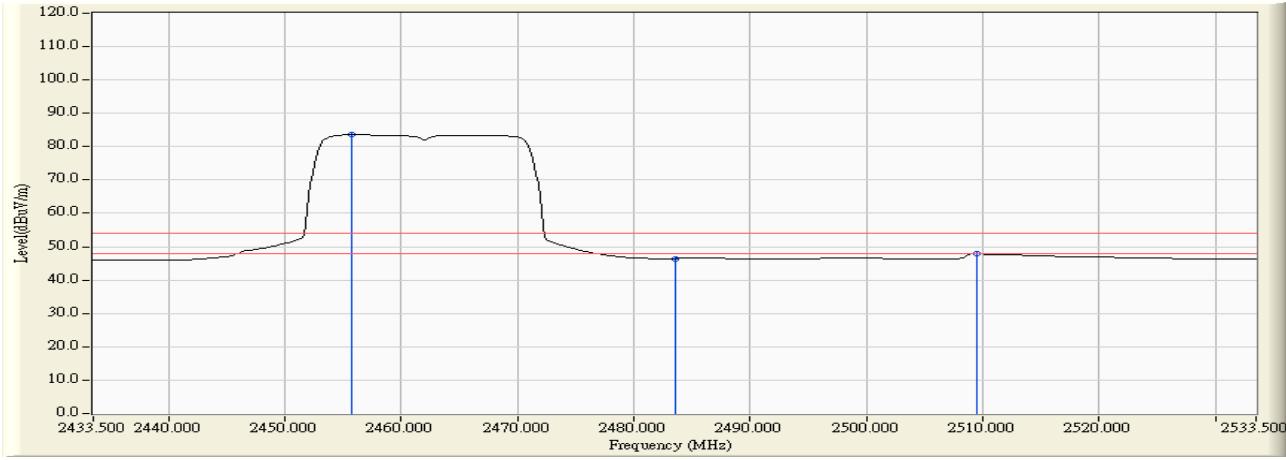

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

#### RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2457.703	31.261	80.255	111.516	--	--	--
11 (Peak)	2483.500	31.435	41.496	72.931	74.00	54.00	Pass
11 (Average)	2467.993	31.331	66.964	98.295	--	--	--
11 (Average)	2483.500	31.435	19.825	51.260	74.00	54.00	Pass
11 (Average)	2520.022	31.555	21.451	53.006	74.00	54.00	Pass

Figure Channel 11:

Vertical (Peak)


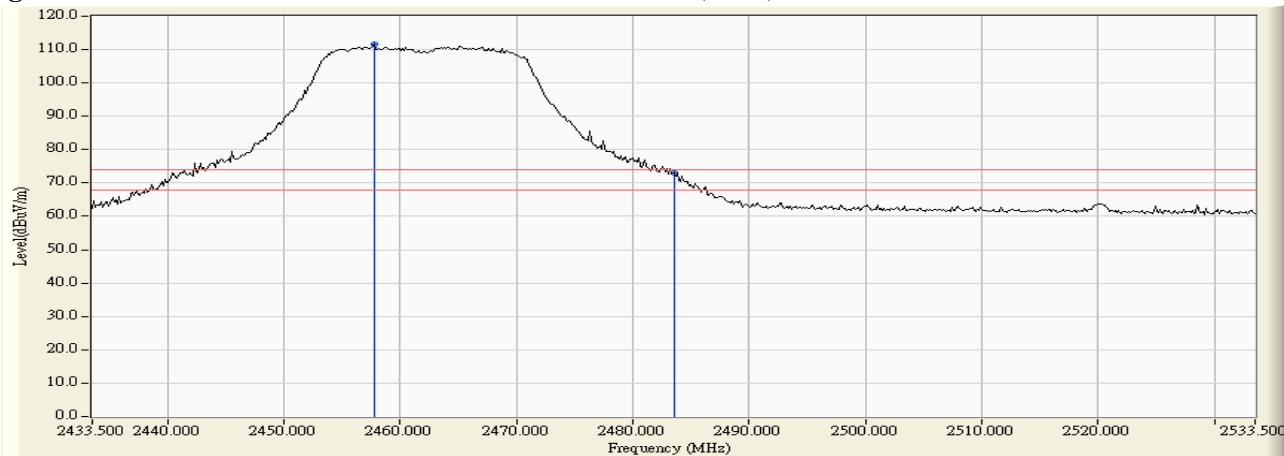


Figure Channel 11:

Vertical (Average)

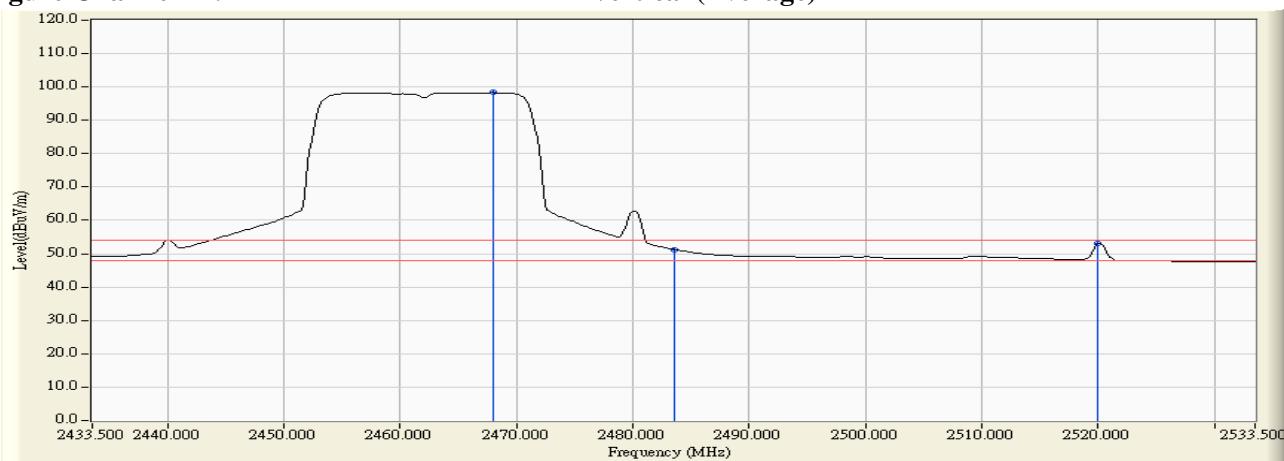

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

#### RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
03 (Peak)	2388.696	31.504	27.535	59.039	74.00	54.00	Pass
03 (Peak)	2390.000	31.509	26.341	57.850	74.00	54.00	Pass
03 (Peak)	2400.000	31.561	38.868	70.429	--	--	--
03 (Peak)	2430.000	31.776	58.700	90.476	--	--	--
03 (Average)	2390.000	31.509	13.975	45.484	74.00	54.00	Pass
03 (Average)	2400.000	31.561	16.275	47.836	--	--	--
03 (Average)	2436.377	31.824	47.361	79.186	--	--	--

Figure Channel 01:

Horizontal (Peak)


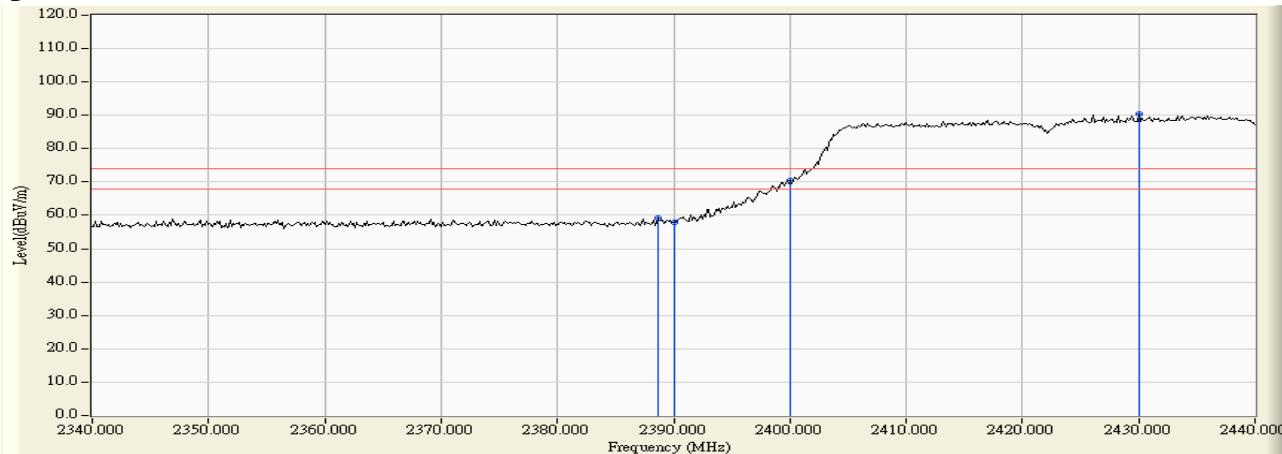


Figure Channel 01:

Horizontal (Average)

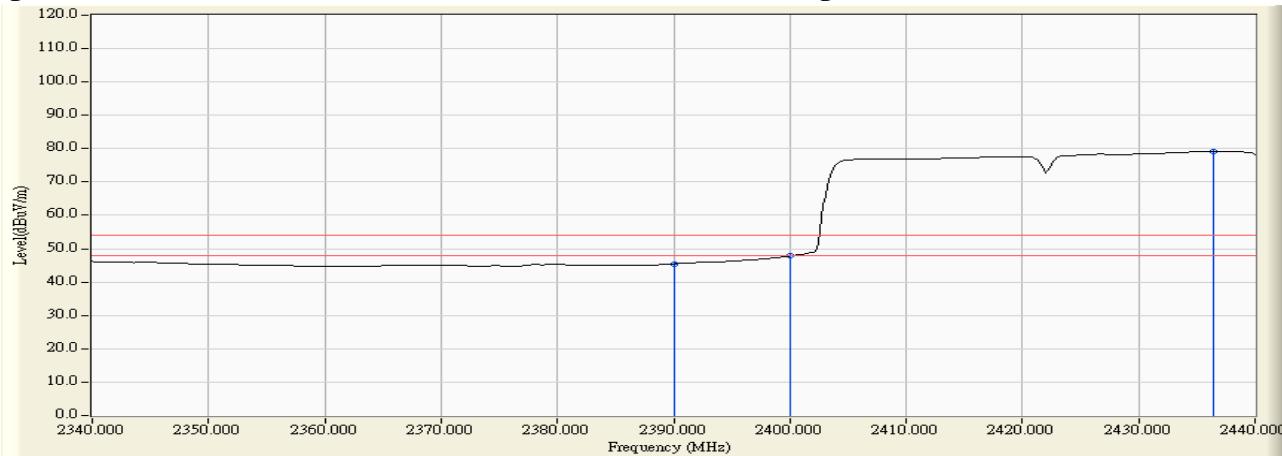

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

#### RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
03 (Peak)	2390.000	30.915	42.039	72.954	74.00	54.00	Pass
03 (Peak)	2400.000	30.912	54.335	85.247	--	--	--
03 (Peak)	2405.362	30.927	74.828	105.755	--	--	--
03 (Average)	2360.000	31.054	22.024	53.078	74.00	54.00	Pass
03 (Average)	2390.000	30.915	21.732	52.647	74.00	54.00	Pass
03 (Average)	2400.000	30.912	27.246	58.158	--	--	--
03 (Average)	2405.797	30.928	62.622	93.550	--	--	--

Figure Channel 01:

Vertical (Peak)


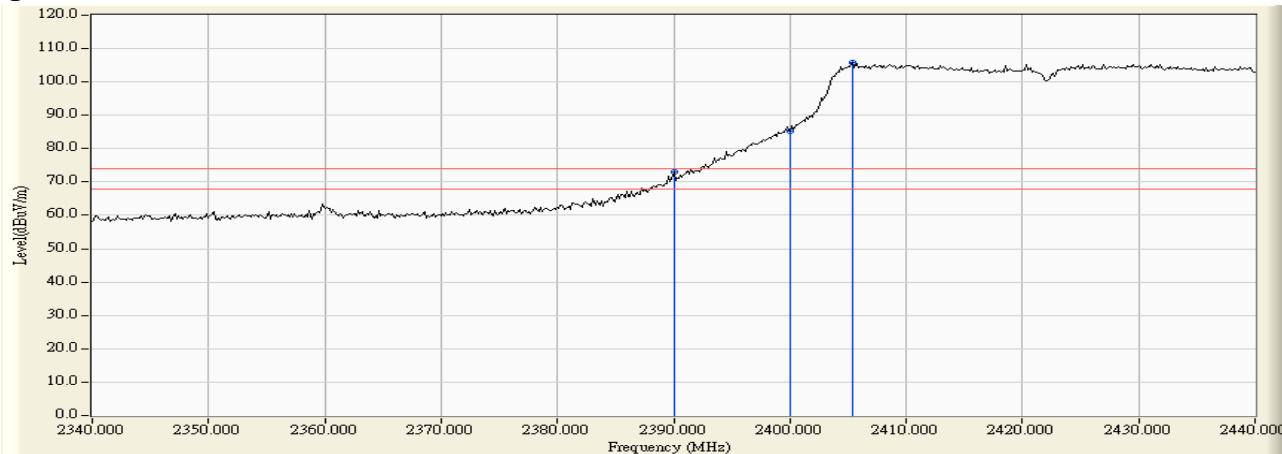


Figure Channel 01:

Vertical (Average)

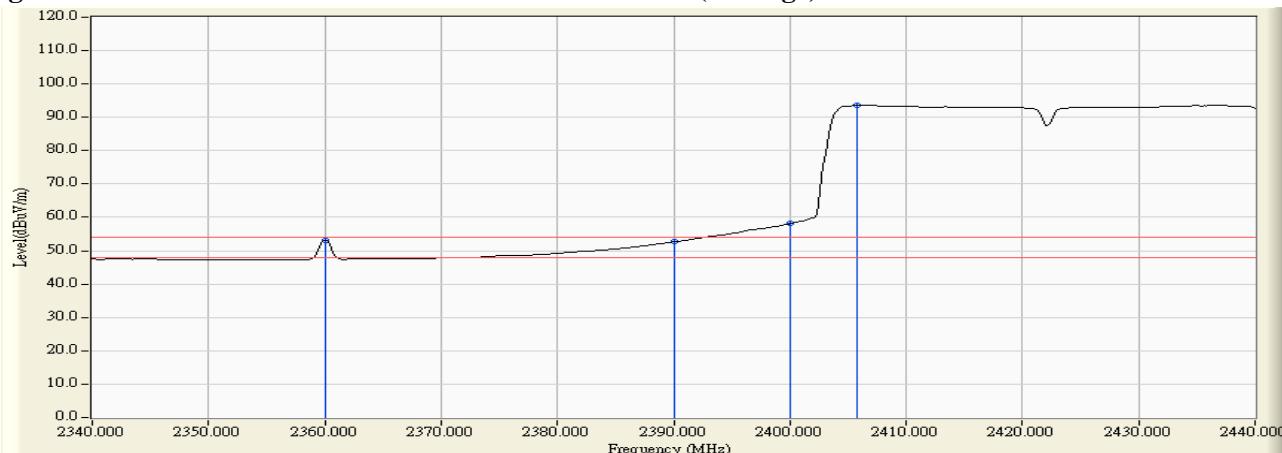

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

#### RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
09 (Peak)	2467.703	32.063	58.314	90.376	--	--	--
09 (Peak)	2483.500	32.182	28.654	60.836	74.00	54.00	Pass
09 (Peak)	2487.413	32.211	28.286	60.498	74.00	54.00	Pass
09 (Average)	2436.254	31.823	47.453	79.277	--	--	--
09 (Average)	2483.500	32.182	14.617	46.799	74.00	54.00	Pass
09 (Average)	2509.587	32.253	15.578	47.831	74.00	54.00	Pass

Figure Channel 07:

Horizontal (Peak)

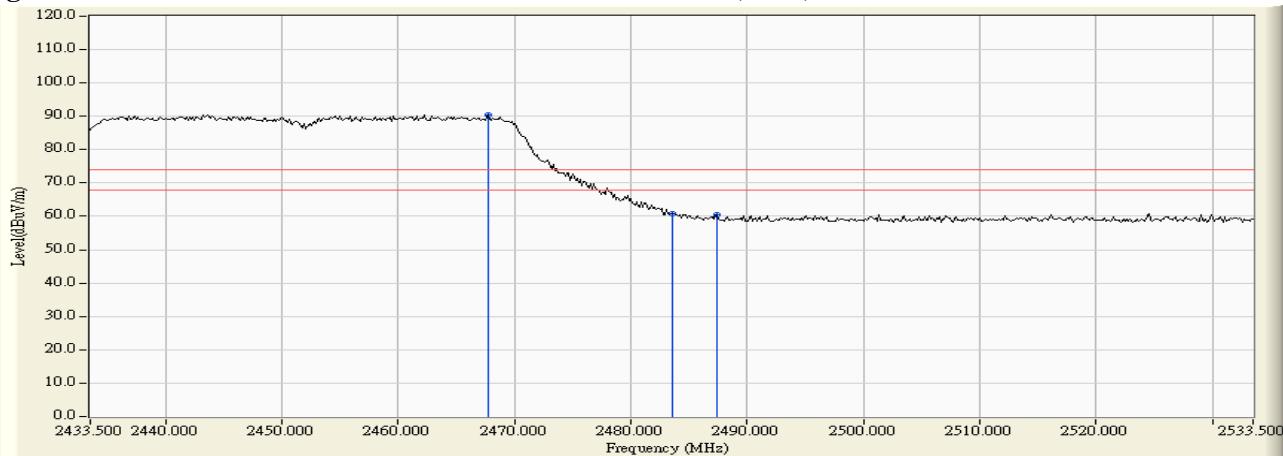


Figure Channel 07:

Horizontal (Average)



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

#### RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
09 (Peak)	2435.964	31.112	75.500	106.612	--	--	--
09 (Peak)	2483.500	31.435	40.673	72.108	74.00	54.00	Pass
09 (Average)	2435.819	31.111	62.993	94.104	--	--	--
09 (Average)	2483.500	31.435	21.244	52.679	74.00	54.00	Pass

Figure Channel 07:

Vertical (Peak)


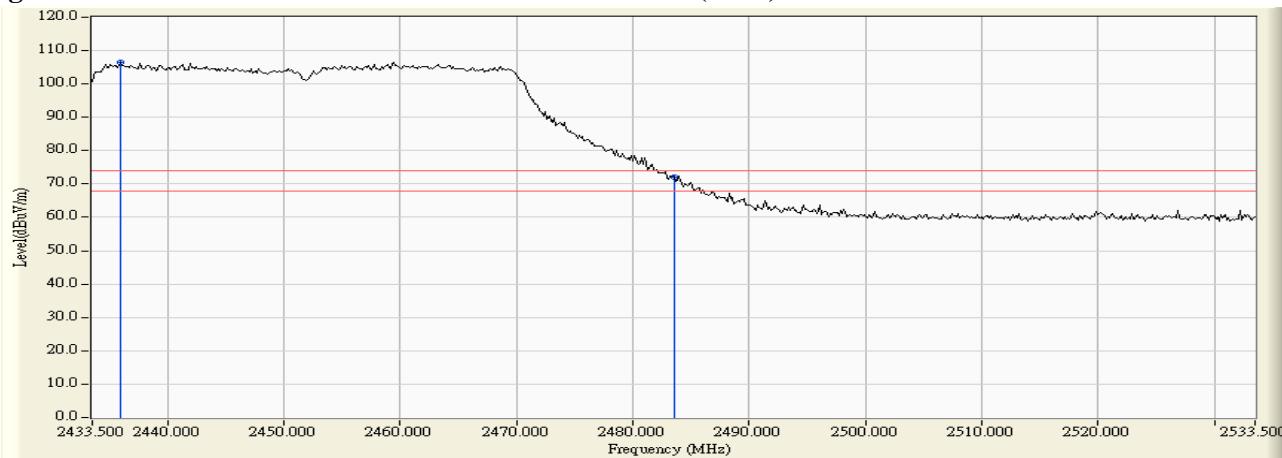


Figure Channel 07:

Vertical (Average)

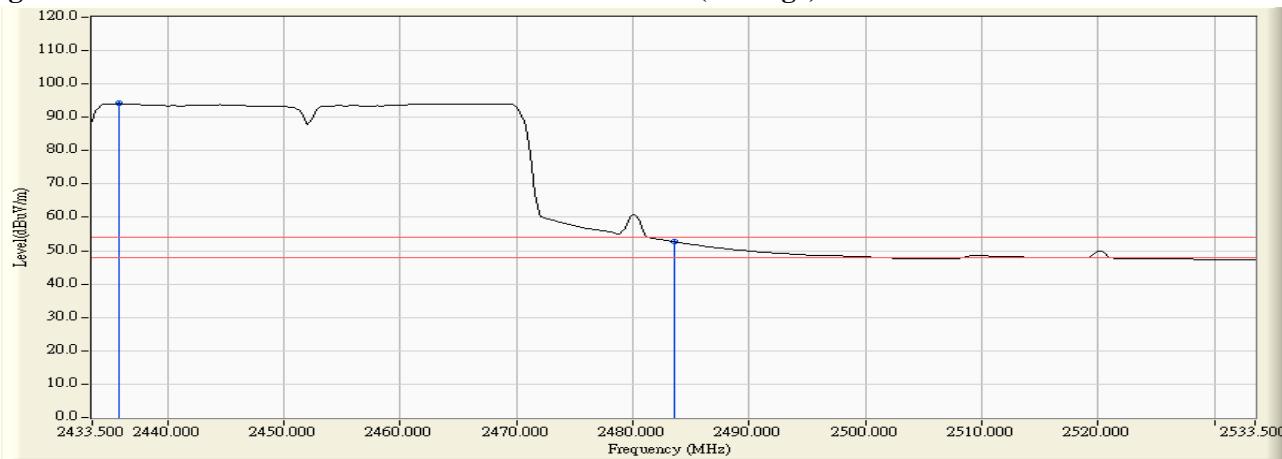

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

## 7. Occupied Bandwidth


### 7.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2015
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2015
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

### 7.2. Test Setup

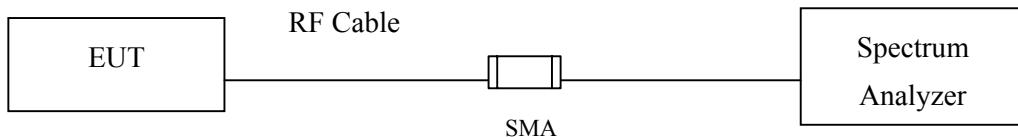

### 7.3. Limits

The minimum bandwidth shall be at least 500 kHz.

### 7.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2013; tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 1-5% of the emission bandwidth,  $VBW \geq 3 * RBW$

### 7.5. Uncertainty


$\pm 150\text{Hz}$

## 7.6. Test Result of Occupied Bandwidth

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	10200	>500	Pass


Figure Channel 1:

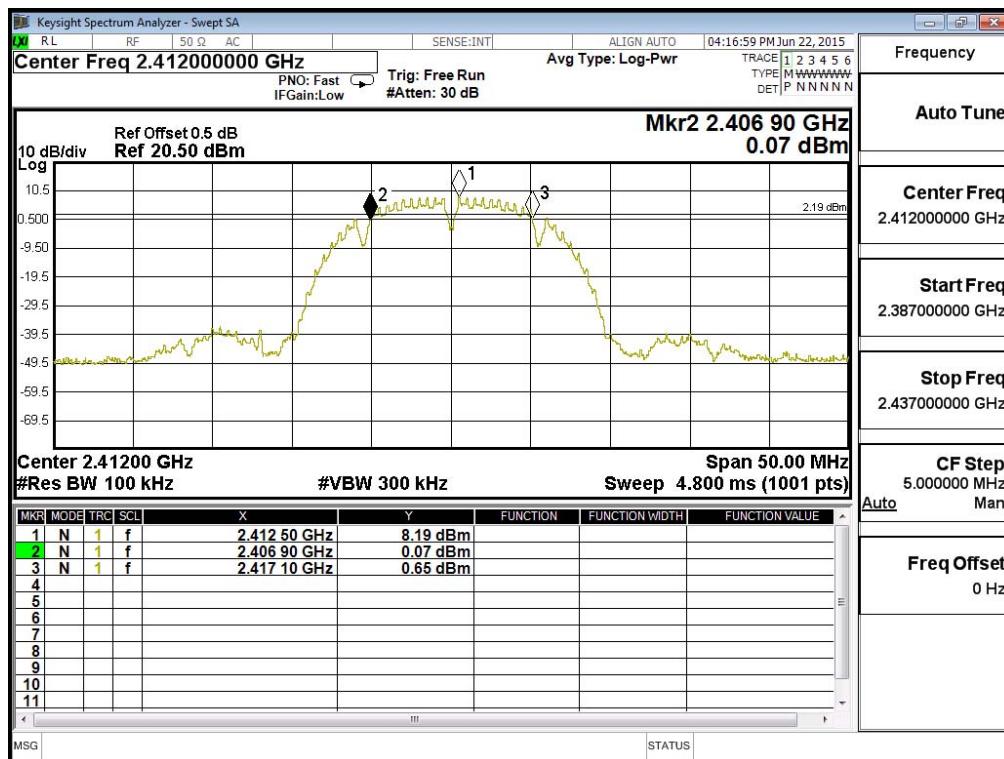

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	10200	>500	Pass


Figure Channel 6:

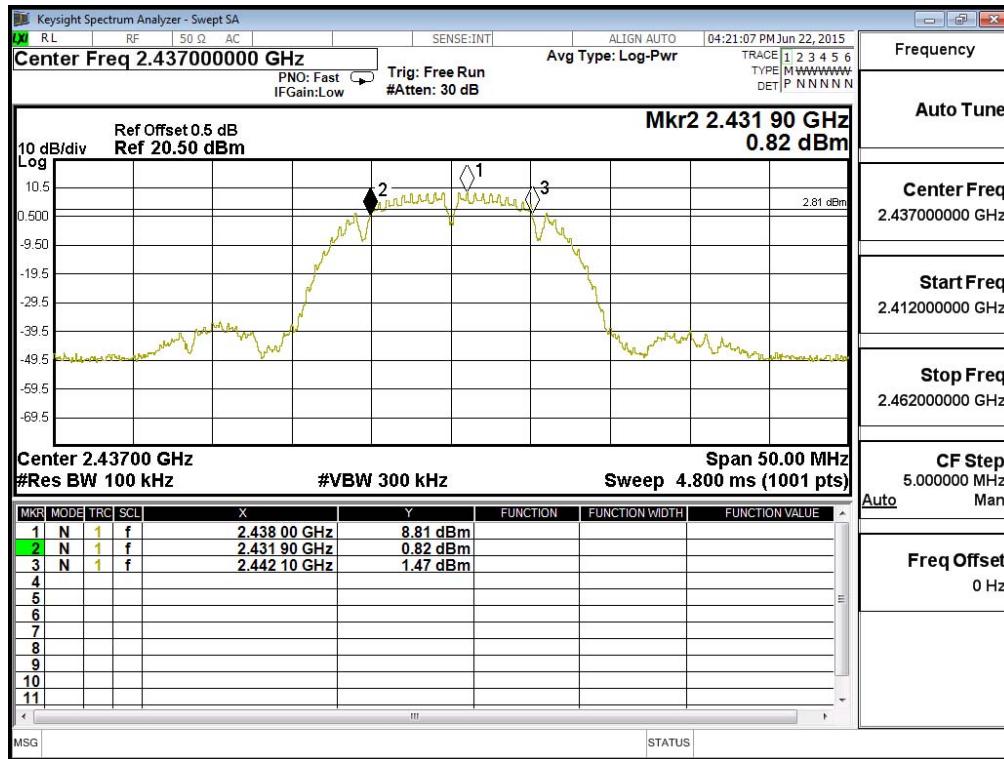

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	10200	>500	Pass


Figure Channel 11:

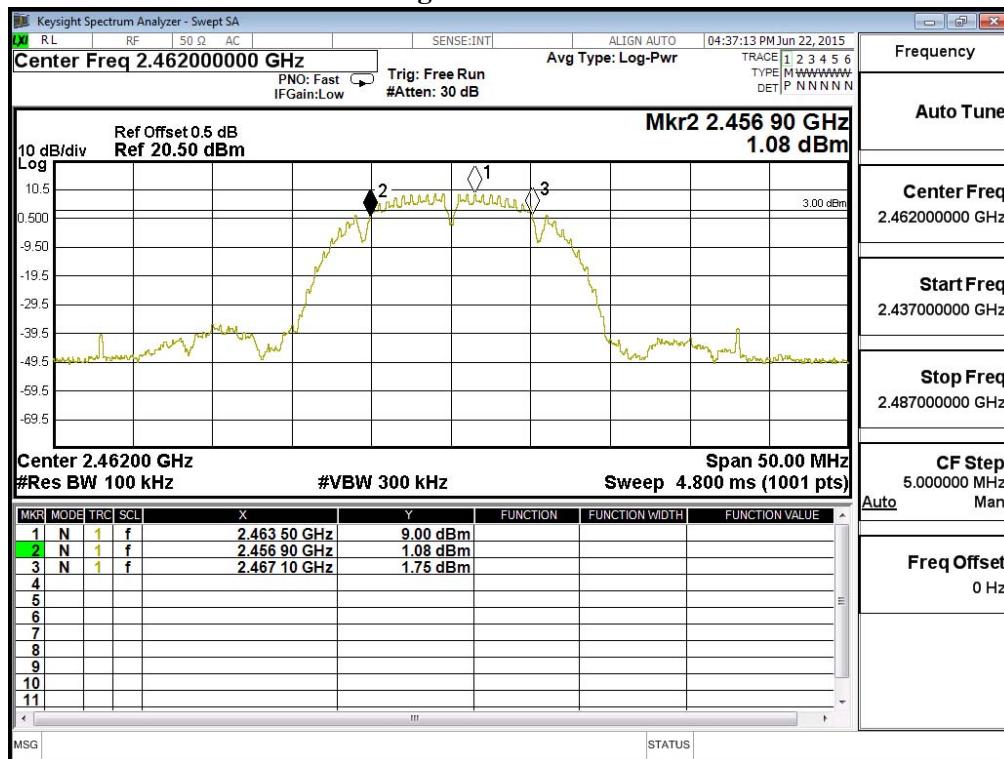

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	16700	>500	Pass


Figure Channel 1:

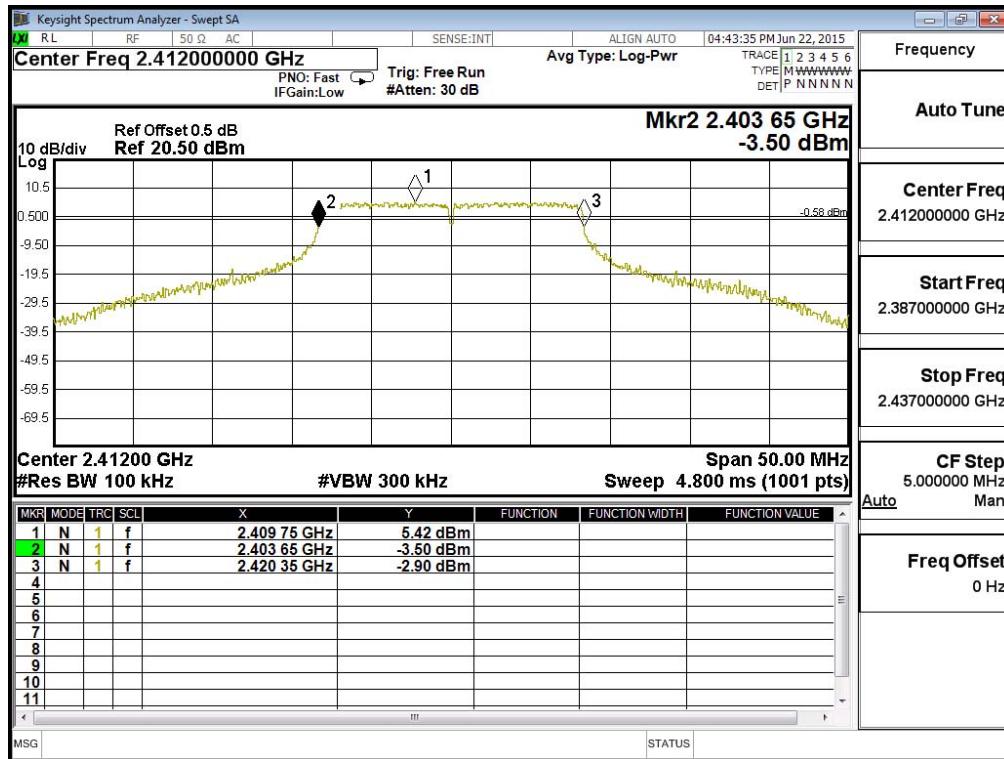

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	16650	>500	Pass


Figure Channel 6:

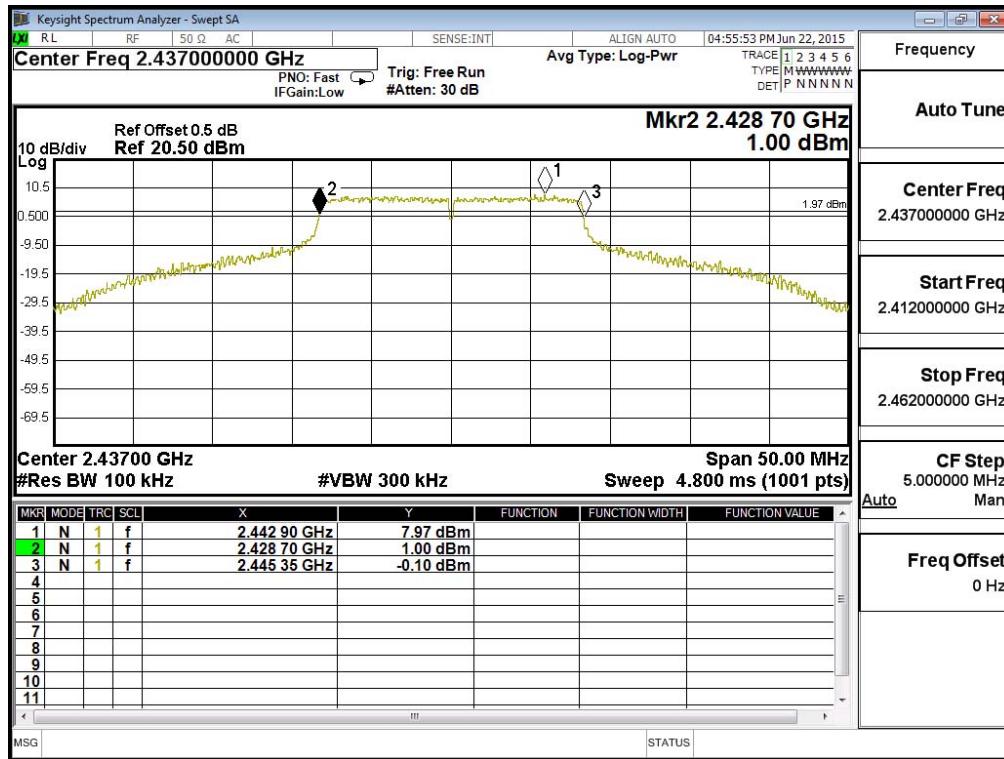

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	16700	>500	Pass


Figure Channel 11:

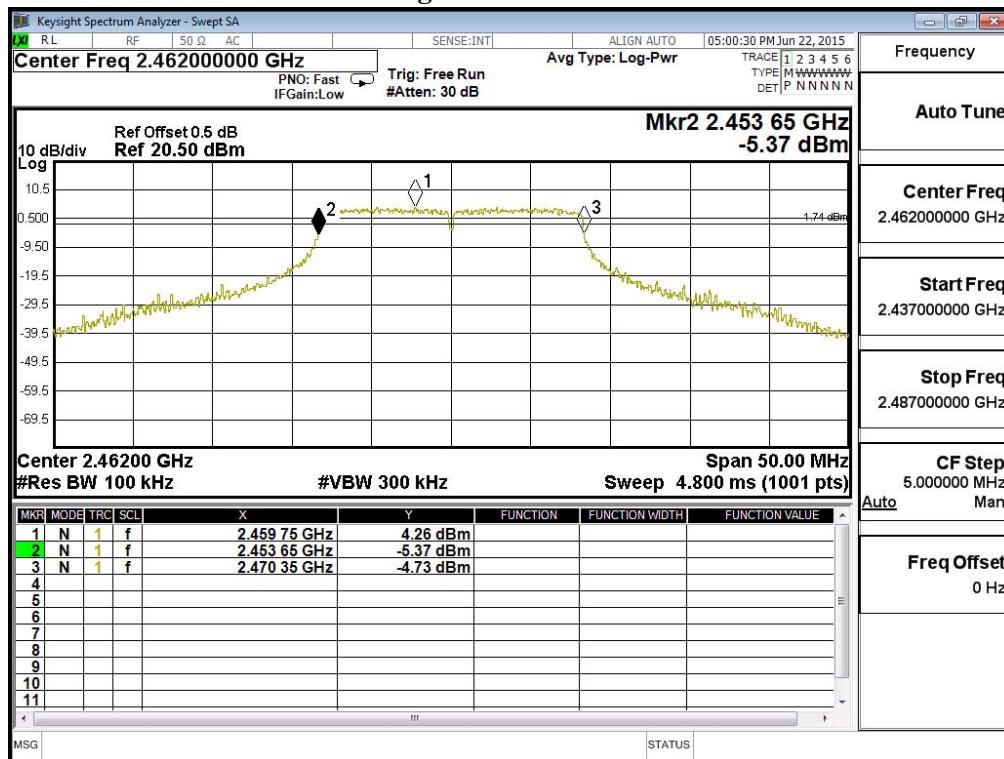

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band) (2412MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	17850	>500	Pass

Figure Channel 1: (Chain A)

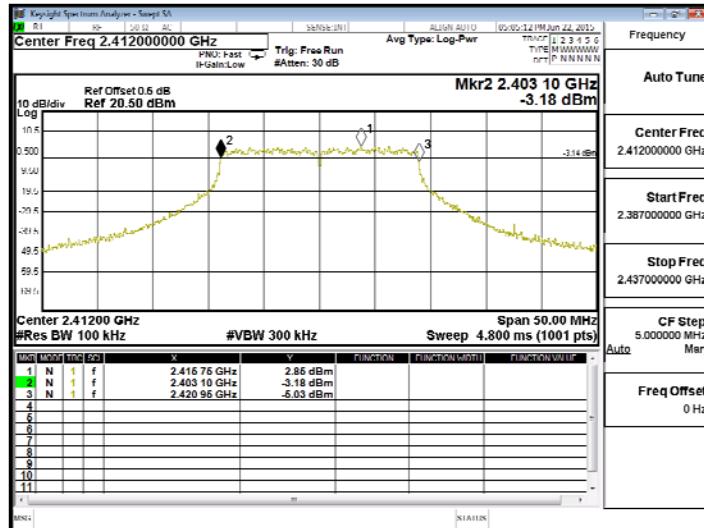

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	17800	>500	Pass


Figure Channel 1: (Chain B)

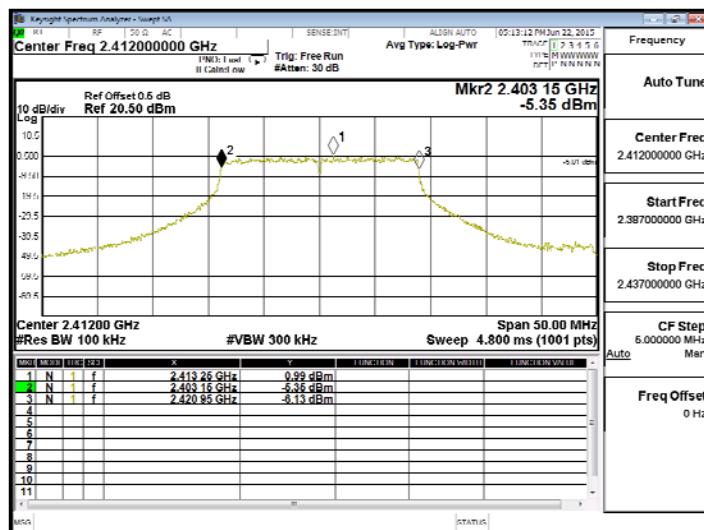

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band) (2437MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	17850	>500	Pass

Figure Channel 6: (Chain A)

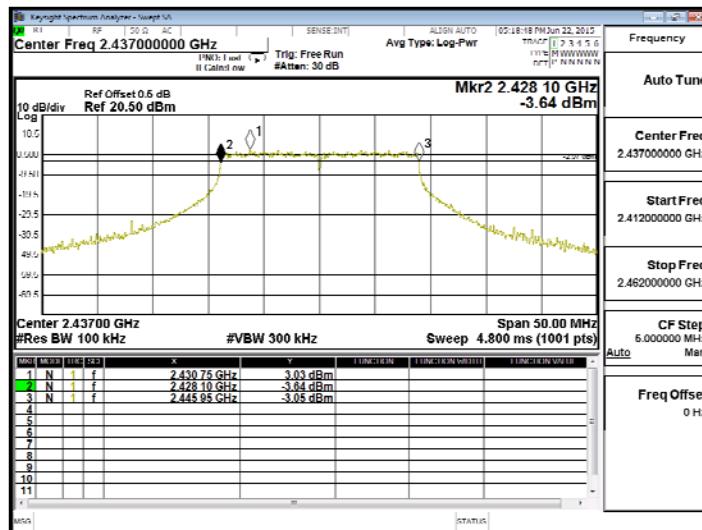

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	17850	>500	Pass


Figure Channel 6: (Chain B)

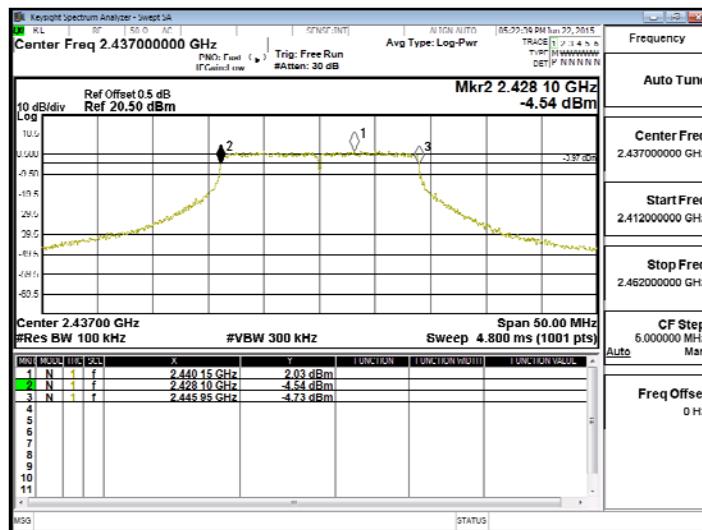

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band) (2462MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	17900	>500	Pass

Figure Channel 11: (Chain A)

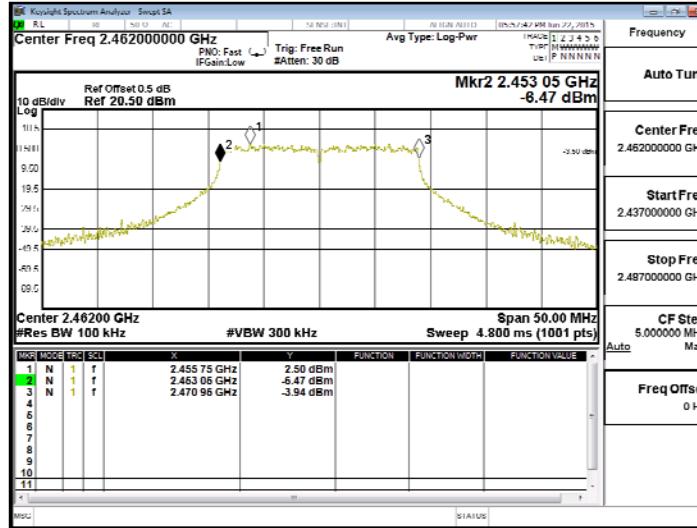

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	17850	>500	Pass


Figure Channel 11: (Chain B)

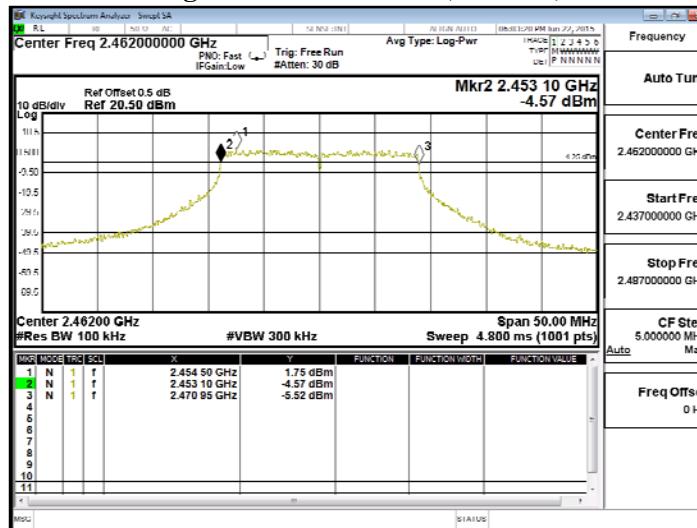

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2422MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
3	2422.00	36700	>500	Pass

Figure Channel 1: (Chain A)

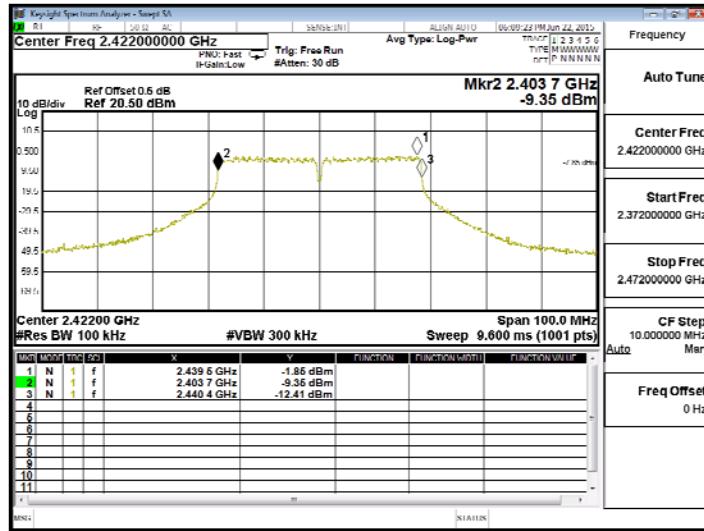

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
3	2422.00	36700	>500	Pass


Figure Channel 1: (Chain B)

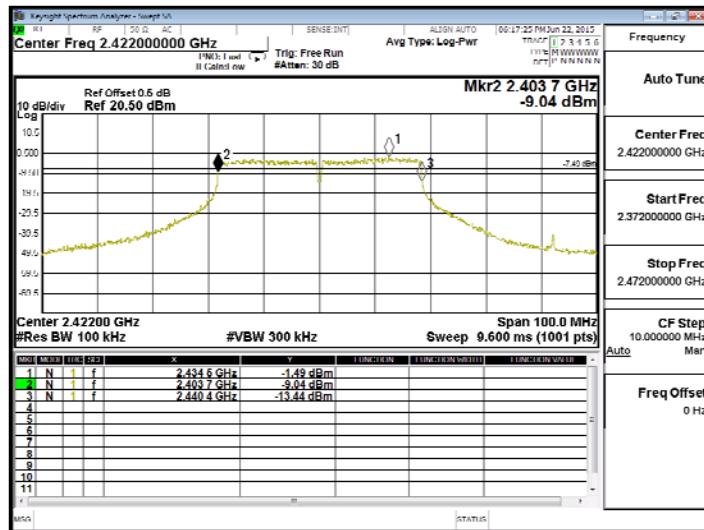

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2437MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	36600	>500	Pass

Figure Channel 4: (Chain A)

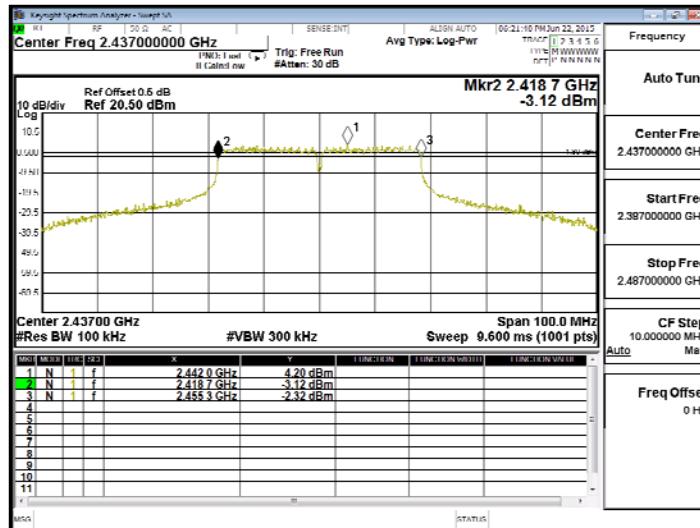

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	36600	>500	Pass


Figure Channel 4: (Chain B)

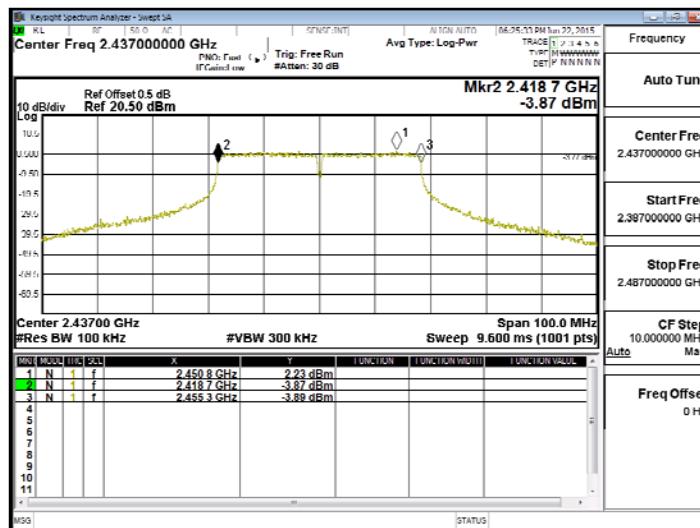

Product : MOXA IEEE 802.11 a/b/g/n  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2452MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
9	2452.00	36600	>500	Pass

Figure Channel 7: (Chain A)

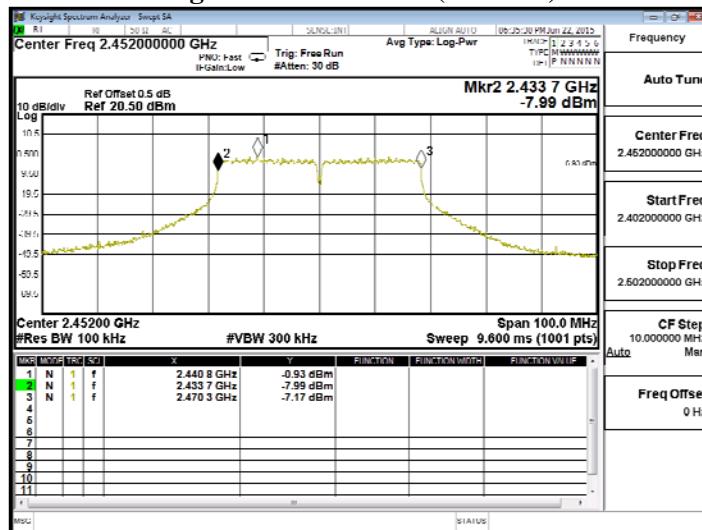

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
9	2452.00	36800	>500	Pass

Figure Channel 7: (Chain B)

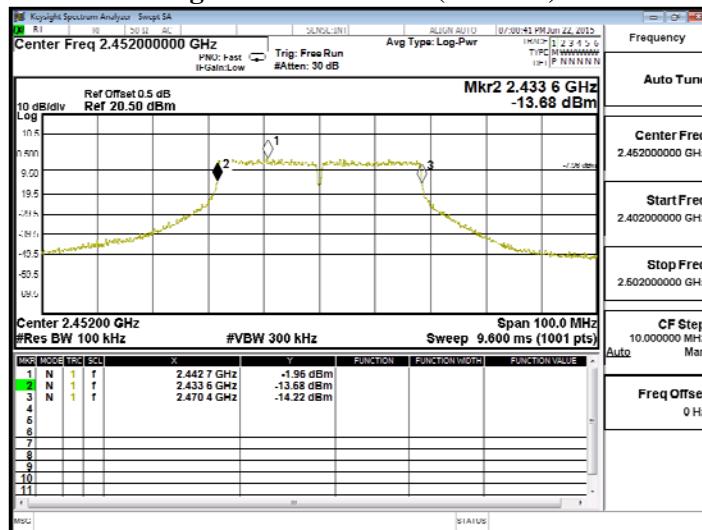

## 8. Power Density


### 8.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2015
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2015
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

### 8.2. Test Setup

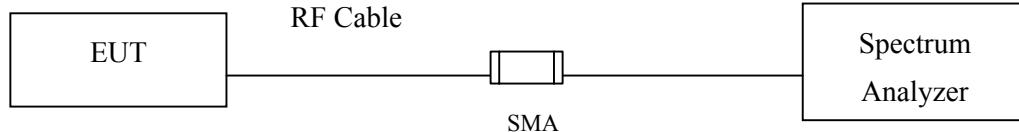

### 8.3. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

### 8.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2013; tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

The maximum power spectral density using KDB 558074 section 10.2 PKPSD (peak PSD) method.

### 8.5. Uncertainty

± 1.27 dB