

FCC Test Report

(Class II Permissive Change)

Product Name	MOXA IEEE 802.11 a/b/g/n
Model No	WAPN008
FCC ID.	SLE-WAPN008

Applicant	MOXA Inc.
Address	FL.4, NO. 135. LANE 235, BAOQIAO RD. XINDIAN DIST., NEW TAIPEI CITY, TAIWAN

Date of Receipt	Feb. 25, 2016
Issue Date	Mar. 14, 2016
Report No.	1620423R-RFUSP26V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of QuiTek Corporation.

Test Report

Issue Date: Mar. 14, 2016

Report No.: 1620423R-RFUSP26V00



Product Name	MOXA IEEE 802.11 a/b/g/n
Applicant	MOXA Inc.
Address	FL.4, NO. 135. LANE 235, BAOQIAO RD. XINDIAN DIST., NEW TAIPEI CITY, TAIWAN
Manufacturer	MOXA Inc.
Model No.	WAPN008
EUT Rated Voltage	DC 3.3V
EUT Test Voltage	AC 120V/60Hz
Trade Name	MOXA
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2014 ANSI C63.4: 2014, ANSI C63.10: 2013 KDB 558074 D01 DTS Meas Guidance v03r04
Test Result	Complied

Documented By :



(Senior Adm. Specialist / Genie Chang)

Tested By :



(Assistant Engineer / Yulin Chen)

Approved By :



(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	4
1.1. EUT Description.....	4
1.2. Operational Description	6
1.3. Tested System Details.....	7
1.4. Configuration of Tested System	7
1.5. EUT Exercise Software	7
1.6. Test Facility	8
2. Maximum Conducted Power.....	9
2.1. Test Equipment.....	9
2.2. Test Setup	9
2.3. Limits	9
2.4. Test Procedure	9
2.5. Uncertainty	9
2.6. Test Result of Maximum Conducted Power.....	10
3. Radiated Emission.....	14
3.1. Test Equipment.....	14
3.2. Test Setup	15
3.3. Limits	16
3.4. Test Procedure	17
3.5. Uncertainty	17
3.6. Test Result of Radiated Emission.....	18
4. Band Edge	34
4.1. Test Equipment.....	34
4.2. Test Setup	35
4.3. Limits	36
4.4. Test Procedure	36
4.5. Uncertainty	36
4.6. Test Result of Band Edge	37
5. EMI Reduction Method During Compliance Testing	57

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	MOXA IEEE 802.11 a/b/g/n
Trade Name	MOXA
Model No.	WAPN008
FCC ID.	SLE-WAPN008
Frequency Range	802.11b/g/n-20MHz: 2412-2462MHz, 802.11n-40MHz: 2422-2452MHz
Number of Channels	802.11b/g/n-20MHz: 11, n-40MHz: 7
Data Speed	802.11b: 1-11Mbps, 802.11g: 6-54Mbps, 802.11n: up to 300Mbps
Type of Modulation	802.11b: DSSS, DBPSK, DQPSK, CCK 802.11g/n: OFDM, BPSK, QPSK, 16QAM, 64QAM
Antenna Type	Directional panel Antenna
Antenna Gain	Refer to the table “Antenna List”
Channel Control	Auto

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	MOXA	ANT-WDB-PNF-1518	Directional panel	15dBi for 2.4 GHz

Note:

1. The antenna of EUT is conform to FCC 15.203.

802.11b/g/n-20MHz Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 01:	2412 MHz	Channel 02:	2417 MHz	Channel 03:	2422 MHz	Channel 04:	2427 MHz
Channel 05:	2432 MHz	Channel 06:	2437 MHz	Channel 07:	2442 MHz	Channel 08:	2447 MHz
Channel 09:	2452 MHz	Channel 10:	2457 MHz	Channel 11:	2462 MHz		

802.11n-40MHz (2.4G Band) Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 3:	2422 MHz	Channel 4:	2427 MHz	Channel 5:	2432 MHz	Channel 6:	2437 MHz
Channel 7:	2442 MHz	Channel 8:	2447 MHz	Channel 9:	2452 MHz		

Note:

1. This device is a MOXA IEEE 802.11 a/b/g/n with a built-in 2.4GHz and 5GHz WLAN transceiver, this report for 2.4GHz WLAN.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. This is requesting a Class II permissive change for FCC ID: SLE-WAPN008. Originally granted on 08/25/2015.

The major change filed under this application is:

Change #1: Addition of Directional panel type antenna.

Manufacturer : MOXA, Part No: ANT-WDB-PNF-1518.

Change #2: Reduce the Output Power through firmware filing to demonstrate compliance with the Part 15 Subpart C Paragraph 15.247 of spread spectrum devices.

4. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report. (802.11b is 1Mbps 、 802.11g is 6Mbps 、 802.11n(20M-BW) is 14.4Mbps and, 802.11n(40M-BW) is 30Mbps).
5. At result of pretests, module supports dual-channel transmission, only the worst case is shown in the report. (802.11b is chain A, 802.11g is chain A)
6. These tests are conducted on a sample for the purpose of demonstrating compliance of 802.11b/g/n transmitter with Part 15 Subpart C Paragraph 15.247 of spread spectrum devices.

Test Mode:	Mode 1: Transmit (802.11b 1Mbps)
	Mode 2: Transmit (802.11g 6Mbps)
	Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band)
	Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band)


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	DELL	Latitude E5440	HG26TZ1	Non-Shielded, 1.8m
2	Test Fixture	MOXA	N/A	N/A	N/A

Signal Cable Type	Signal cable Description
A LAN Cable	Shielded, 1.8m, three PCS.

1.4. Configuration of Tested System

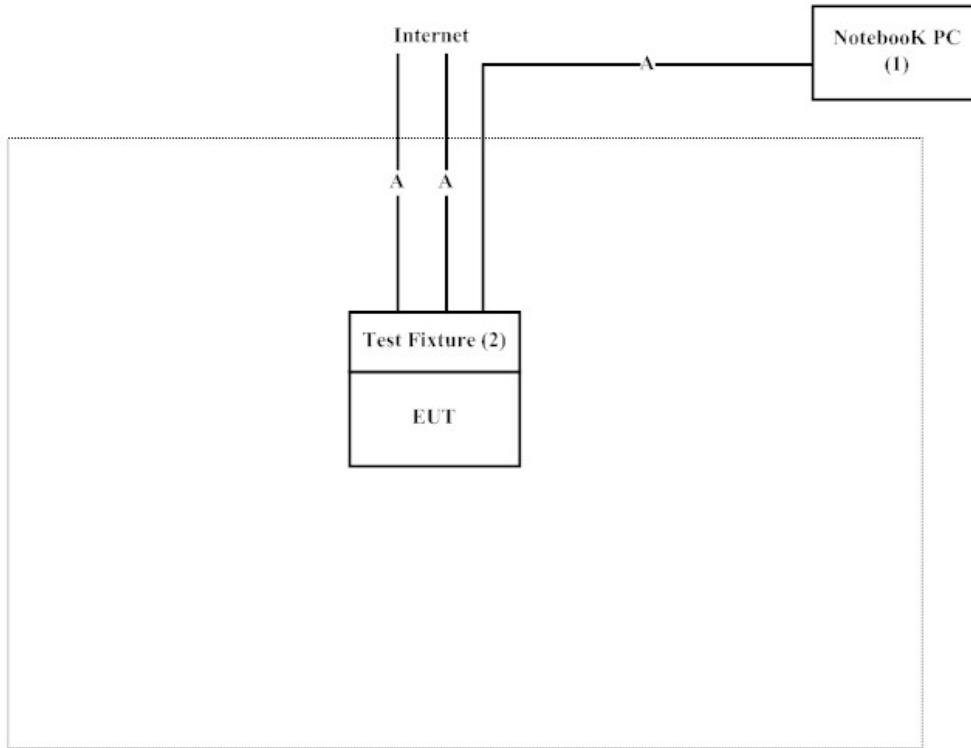

1.5. EUT Exercise Software

- (1) Setup the EUT as shown on 1.4
- (2) Execute “ART2-GUI 2.3” program on the Notebook PC.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Start the continuous transmission.
- (5) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from QuieTek Corporation's Web Site : <http://www.quietek.com/chinese/about/certificates.aspx?bval=5>

The address and introduction of QuieTek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

Site Description: File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Registration Number: 92195

Site Name: Quietek Corporation
Site Address: No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen,
Lin-Kou Shiang, Taipei,
Taiwan, R.O.C.
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com

FCC Accreditation Number: TW1014

2. Maximum Conducted Power


2.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Power Meter	Anritsu	ML2495A/6K00003357	May, 2015
X Power Sensor	Anritsu	MA2411B/0738448	Jun, 2015
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2015
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2015
Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

2.2. Test Setup

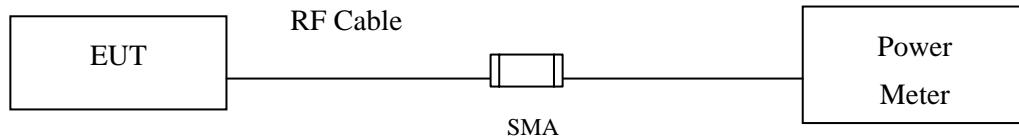

2.3. Limits

The maximum average power shall be less 1 Watt. (Section 15.247 (b)(3))

2.4. Test Procedure

The EUT was tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using KDB 558074 D01 DTS Meas Guidance v03r04 section 9.1.2 PKPM1 Peak power meter method.

2.5. Uncertainty

± 1.27 dB

2.6. Test Result of Maximum Conducted Power

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Maximum Conducted Power
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

CHAIN A

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)				Peak Power	Required Limit	Result
		1	2	5.5	11			
		Measurement Level (dBm)						
01	2412	17.22	--	--	--	19.35	<27dBm	Pass
06	2437	17.47	17.38	17.32	17.25	19.32	<27dBm	Pass
11	2462	15.69	--	--	--	17.44	<27dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

Note: Fixed, point-to-point operations, the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

CHAIN B

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)				Peak Power	Required Limit	Result
		1	2	5.5	11			
		Measurement Level (dBm)						
01	2412	17.18	--	--	--	19.31	<27dBm	Pass
06	2437	17.12	17.06	16.92	16.83	19.15	<27dBm	Pass
11	2462	15.35	--	--	--	17.02	<27dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

Note: Fixed, point-to-point operations, the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Maximum Conducted Power
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

CHAIN A

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		6	9	12	18	24	36	48	54			
		Measurement Level (dBm)										
01	2412	11.91	--	--	--	--	--	--	--	22.75	<27dBm	Pass
06	2437	17.32	17.25	17.14	17.06	16.97	16.88	16.79	16.70	24.98	<27dBm	Pass
11	2462	9.42	--	--	--	--	--	--	--	20.09	<27dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

Note: Fixed, point-to-point operations, the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

CHAIN B

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		6	9	12	18	24	36	48	54			
		Measurement Level (dBm)										
01	2412	11.88	--	--	--	--	--	--	--	22.64	<27dBm	Pass
06	2437	16.87	16.72	16.64	16.51	16.40	16.28	16.17	16.05	24.93	<27dBm	Pass
11	2462	9.34	--	--	--	--	--	--	--	20.03	<27dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

Note: Fixed, point-to-point operations, the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Maximum Conducted Power
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band)

CHAIN A

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power
		14.4	28.9	43.3	57.8	86.7	115.6	130	144.4	
		Measurement Level (dBm)								
01	2412	12.31	--	--	--	--	--	--	--	23.38
06	2437	14.56	14.48	14.43	14.36	14.30	14.23	14.17	14.1	22.35
11	2462	5.74	--	--	--	--	--	--	--	16.13

Note: Peak Power Output Value =Reading value on power meter + cable loss

CHAIN B

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power
		14.4	28.9	43.3	57.8	86.7	115.6	130	144.4	
		Measurement Level (dBm)								
01	2412	12.61	--	--	--	--	--	--	--	23.14
06	2437	13.89	13.78	13.72	13.63	13.54	13.46	13.37	13.29	23.03
11	2462	5.33	--	--	--	--	--	--	--	15.40

Note: Peak Power Output Value =Reading value on power meter + cable loss

CHAIN A+B

Channel	Frequency (MHz)	Data Rata (Mbps)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
1	2412	14.4	23.38	23.14	26.27	<27dBm	Pass
6	2437	14.4	22.35	23.03	25.71	<27dBm	Pass
11	2462	14.4	16.13	15.40	18.79	<27dBm	Pass

Note: Peak Power Output Value (dBm) = $10 \times \log_{10} (\text{Chain A (mW}) + \text{Chain B (mW)})$

Note: Fixed, point-to-point operations, the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Maximum Conducted Power
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band)

CHAIN A

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power
		30	60	90	120	180	240	270	300	
		Measurement Level (dBm)								
3	2422	6.22	--	--	--	--	--	--	--	17.19
6	2437	14.33	14.26	14.15	14.07	13.98	13.89	13.80	13.71	21.51
9	2452	1.87	--	--	--	--	--	--	--	12.34

Note: Peak Power Output Value =Reading value on power meter + cable loss

CHAIN B

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power
		30	60	90	120	180	240	270	300	
		Measurement Level (dBm)								
3	2422	7.26	--	--	--	--	--	--	--	18.08
6	2437	14.39	14.24	14.17	14.05	13.94	13.83	13.72	13.61	21.42
9	2452	2.12	--	--	--	--	--	--	--	12.32

Note: Peak Power Output Value =Reading value on power meter + cable loss

CHAIN A+B

Channel	Frequency (MHz)	Data Rata (Mbps)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
3	2422	30	17.19	18.08	20.67	<27dBm	Pass
6	2437	30	21.51	21.42	24.48	<27dBm	Pass
9	2452	30	12.34	12.32	15.34	<27dBm	Pass

Note: Peak Power Output Value (dBm) = $10 \cdot \log (\text{Chain A (mW)} + \text{Chain B (mW)})$

Note: Fixed, point-to-point operations, the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

3. Radiated Emission

3.1. Test Equipment

The following test equipments are used during the radiated emission test:


Test Site	Equipment		Manufacturer	Model No./Serial No.	Last Cal.
☒Site # 3	X	Magnetic Loop Antenna	Teseq	HLA6121/ 37133	Sep., 2015
	X	Bilog Antenna	Schaffner Chase	CBL6112B/ 2707	Jun., 2015
	X	EMI Test Receiver	R&S	ESCS 30/838251/ 001	Jun., 2015
	X	Coaxial Cable	QTK(Arnist)	RG 214/ LC003-RG	Jun., 2015
	X	Coaxial signal switch	Arnist	MP59B/ 6200798682	Jun., 2015

Test Site	Equipment		Manufacturer	Model No./Serial No.	Last Cal.
☒CB # 8	X	Spectrum Analyzer	R&S	FSP40/ 100339	Oct., 2015
	X	Horn Antenna	ETS-Lindgren	3117/ 35205	Mar., 2016
	X	Horn Antenna	Schwarzbeck	BBHA9170/209	Jan., 2016
	X	Horn Antenna	TRC	AH-0801/95051	Aug., 2015
	X	Pre-Amplifier	EMCI	EMC012630SE/980210	Jan., 2016
	X	Pre-Amplifier	MITEQ	JS41-001040000-58-5P/153945	Jul., 2015
	X	Pre-Amplifier	NARDA	DBL-1840N506/013	Jul., 2015


Note: 1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with "X" are used to measure the final test results.

3.2. Test Setup

Radiated Emission Below 1GHz

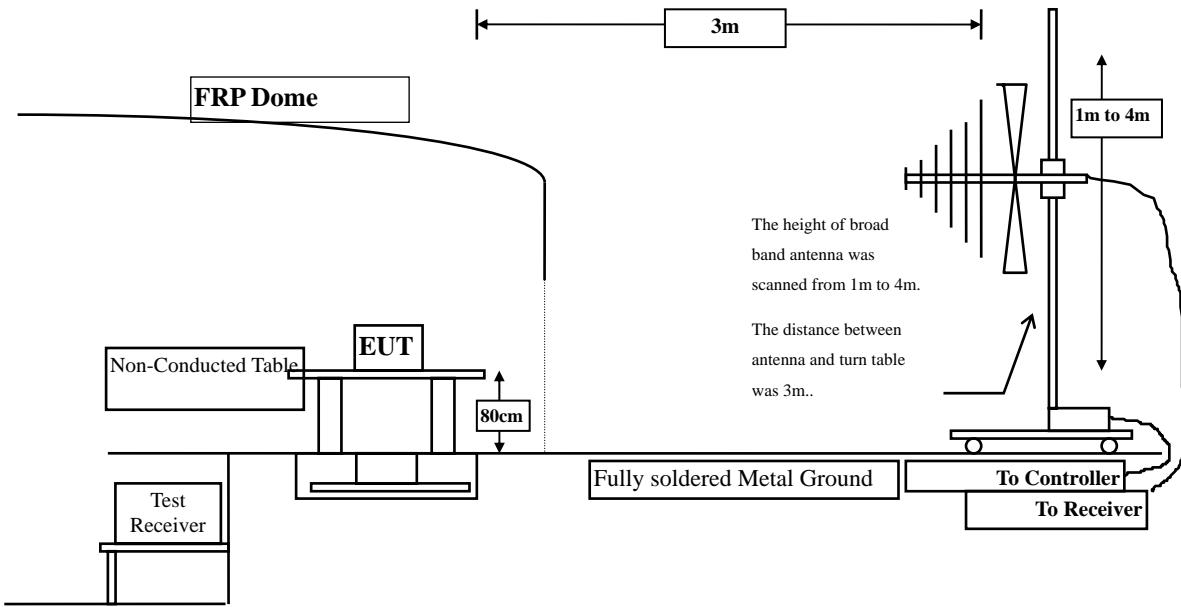

Radiated Emission Above 1GHz

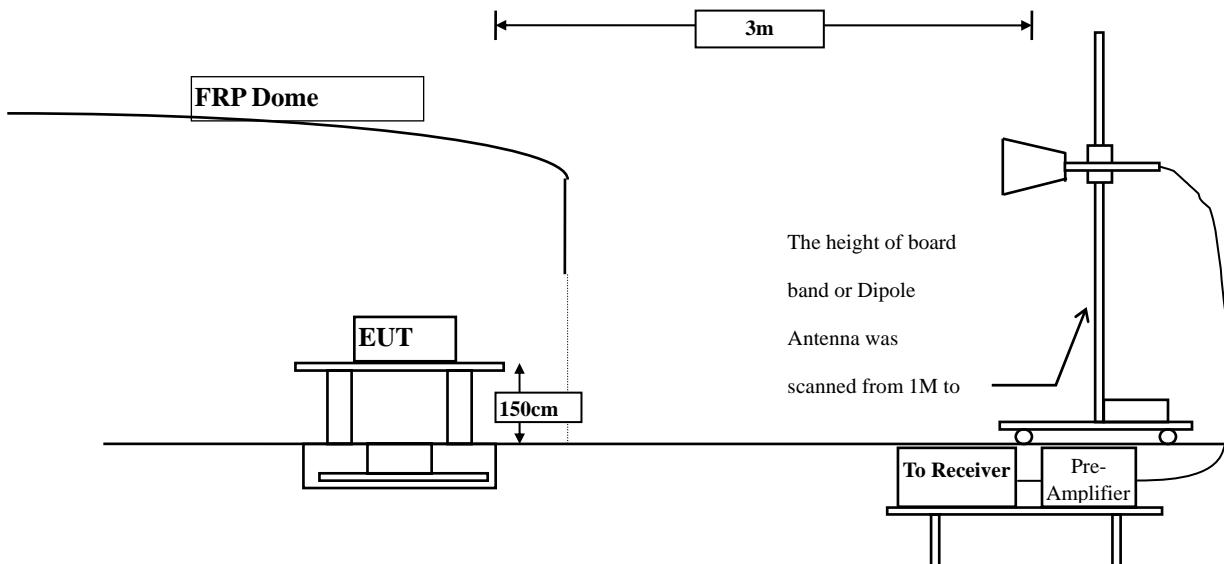

3.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 30dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dBuV/m) = 20 log E field strength (uV/m)

3.4. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

3.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

3.6. Test Result of Radiated Emission

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4824.000	3.261	47.360	50.621	-23.379	74.000
7236.000	10.650	30.830	41.480	-32.520	74.000
9648.000	13.337	31.220	44.556	-29.444	74.000

Average

Detector:

--

Vertical

Peak Detector:

4824.000	6.421	40.790	47.211	-26.789	74.000
7236.000	11.495	30.570	42.065	-31.935	74.000
9648.000	13.807	31.740	45.546	-28.454	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4874.000	3.038	44.100	47.137	-26.863	74.000
7311.000	11.795	31.790	43.584	-30.416	74.000
9748.000	12.635	31.220	43.855	-30.145	74.000

Average

Detector:

--

Vertical

Peak Detector:

4874.000	5.812	37.350	43.161	-30.839	74.000
7311.000	12.630	31.790	44.419	-29.581	74.000
9748.000	13.126	31.570	44.696	-29.304	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4924.000	2.858	46.600	49.457	-24.543	74.000
7386.000	12.127	31.840	43.968	-30.032	74.000
9848.000	12.852	31.830	44.683	-29.317	74.000

Average

Detector:

--

Vertical

Peak Detector:

4924.000	5.521	38.090	43.610	-30.390	74.000
7386.000	13.254	31.770	45.024	-28.976	74.000
9848.000	13.367	32.290	45.657	-28.343	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4824.000	3.261	46.960	50.221	-23.779	74.000
7236.000	10.650	30.840	41.490	-32.510	74.000
9648.000	13.337	32.296	45.632	-28.368	74.000

Average

Detector:

--

Vertical

Peak Detector:

4824.000	6.421	42.278	48.699	-25.301	74.000
7236.000	11.495	31.530	43.025	-30.975	74.000
9648.000	13.807	32.740	46.546	-27.454	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4874.000	3.038	45.100	48.137	-25.863	74.000
7311.000	11.795	32.729	44.523	-29.477	74.000
9748.000	12.635	32.220	44.855	-29.145	74.000

Average

Detector:

--

Vertical

Peak Detector:

4874.000	5.812	38.350	44.161	-29.839	74.000
7311.000	12.630	32.486	45.115	-28.885	74.000
9748.000	13.126	32.570	45.696	-28.304	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4924.000	2.858	47.647	50.504	-23.496	74.000
7386.000	12.127	32.135	44.263	-29.737	74.000
9848.000	12.852	32.668	45.521	-28.479	74.000

Average

Detector:

--

Vertical

Peak Detector:

4924.000	5.521	38.732	44.252	-29.748	74.000
7386.000	13.254	31.961	45.215	-28.785	74.000
9848.000	13.367	33.265	46.632	-27.368	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2412MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4824.000	3.261	47.034	50.295	-23.705	74.000
7236.000	10.650	32.012	42.662	-31.338	74.000
9648.000	13.337	31.263	44.599	-29.401	74.000

Average

Detector:

--

Vertical

Peak Detector:

4824.000	6.421	42.104	48.525	-25.475	74.000
7236.000	11.495	32.141	43.636	-30.364	74.000
9648.000	13.807	32.719	46.525	-27.475	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2437MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4874.000	3.038	45.489	48.526	-25.474	74.000
7311.000	11.795	33.147	44.941	-29.059	74.000
9748.000	12.635	31.954	44.589	-29.411	74.000

Average

Detector:

--

Vertical

Peak Detector:

4874.000	5.812	38.343	44.154	-29.846	74.000
7311.000	12.630	31.959	44.588	-29.412	74.000
9748.000	13.126	33.399	46.525	-27.475	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2462MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4924.000	2.858	46.039	48.896	-25.104	74.000
7386.000	12.127	32.460	44.588	-29.412	74.000
9848.000	12.852	32.676	45.529	-28.471	74.000

Average

Detector:

--

Vertical

Peak Detector:

4924.000	5.521	39.032	44.552	-29.448	74.000
7386.000	13.254	33.268	46.522	-27.478	74.000
9848.000	13.367	33.332	46.699	-27.301	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2422MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4844.000	3.171	46.351	49.522	-24.478	74.000
7266.000	11.162	32.537	43.699	-30.301	74.000
9688.000	12.964	32.617	45.582	-28.418	74.000

Average

Detector:

--

Vertical

Peak Detector:

4844.000	6.178	42.121	48.299	-25.701	74.000
7266.000	11.982	31.714	43.696	-30.304	74.000
9688.000	13.507	31.377	44.885	-29.115	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2437MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4874.000	3.038	45.100	48.137	-25.863	74.000
7311.000	11.795	32.790	44.584	-29.416	74.000
9748.000	12.635	31.320	43.955	-30.045	74.000

Average

Detector:

--

Vertical

Peak Detector:

4874.000	5.812	38.444	44.255	-29.745	74.000
7311.000	12.630	33.012	45.641	-28.359	74.000
9748.000	13.126	33.513	46.639	-27.361	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2452MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal

Peak Detector:

4904.000	2.914	47.240	50.155	-23.845	74.000
7356.000	11.995	32.594	44.588	-29.412	74.000
9808.000	12.475	33.366	45.841	-28.159	74.000

Average

Detector:

--

Vertical

Peak Detector:

4904.000	5.530	39.079	44.610	-29.390	74.000
7356.000	13.005	33.020	46.024	-27.976	74.000
9808.000	12.901	32.620	45.521	-28.479	74.000

Average

Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437MHz)

Frequency MHz	Correct Factor	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
125.594	-21.503	48.226	26.722	-16.778	43.500
170.580	-24.381	52.829	28.448	-15.052	43.500
239.464	-22.708	51.082	28.374	-17.626	46.000
356.145	-17.718	40.203	22.485	-23.515	46.000
439.087	-15.385	39.357	23.972	-22.028	46.000
717.435	-11.470	34.971	23.500	-22.500	46.000
Vertical					
174.797	-21.925	47.287	25.362	-18.138	43.500
239.464	-21.577	51.261	29.684	-16.316	46.000
399.725	-16.535	33.809	17.274	-28.726	46.000
433.464	-15.165	48.492	33.327	-12.673	46.000
610.594	-12.530	43.408	30.878	-15.122	46.000
720.246	-11.611	40.416	28.805	-17.195	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
174.797	-24.389	52.148	27.759	-15.741	43.500
239.464	-22.708	51.249	28.541	-17.459	46.000
291.478	-16.994	42.649	25.656	-20.344	46.000
590.913	-13.102	37.227	24.125	-21.875	46.000
720.246	-11.419	35.783	24.364	-21.636	46.000
838.333	-10.875	32.679	21.803	-24.197	46.000
Vertical					
128.406	-19.253	44.729	25.475	-18.025	43.500
193.072	-20.760	45.451	24.691	-18.809	43.500
242.275	-21.716	49.732	28.016	-17.984	46.000
582.478	-13.205	54.517	41.311	-4.689	46.000
644.333	-12.444	51.163	38.718	-7.282	46.000
675.261	-12.600	47.711	35.111	-10.889	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band) (2437MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
131.1217	-22.150	49.752	27.602	-15.898	43.500
184.638	-24.067	52.908	28.841	-14.659	43.500
242.275	-22.403	52.335	29.932	-16.068	46.000
299.913	-17.055	42.144	25.089	-20.911	46.000
599.348	-13.114	37.514	24.400	-21.600	46.000
720.246	-11.419	36.749	25.330	-20.670	46.000
Vertical					
128.406	-19.253	42.001	22.747	-20.753	43.500
188.855	-20.950	48.281	27.331	-16.169	43.500
239.464	-21.577	49.793	28.216	-17.784	46.000
500.942	-14.157	40.948	26.791	-19.209	46.000
649.957	-12.509	38.897	26.389	-19.611	46.000
720.246	-11.611	38.768	27.157	-18.843	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band) (2437MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level	dB	dBuV/m
MHz	dB	dBuV	dBuV/m		
Horizontal					
121.377	-21.632	57.287	35.655	-7.845	43.500
181.826	-23.909	52.208	28.299	-15.201	43.500
239.464	-22.708	52.536	29.828	-16.172	46.000
482.667	-13.828	40.350	26.522	-19.478	46.000
599.348	-13.114	35.948	22.834	-23.166	46.000
720.246	-11.419	36.156	24.737	-21.263	46.000
Vertical					
132.623	-19.652	45.696	26.044	-17.456	43.500
187.449	-20.999	47.903	26.904	-16.596	43.500
239.464	-21.577	49.980	28.403	-17.597	46.000
297.101	-18.271	33.493	15.222	-30.778	46.000
595.130	-12.771	29.629	16.858	-29.142	46.000
720.246	-11.611	38.613	27.002	-18.998	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

4. Band Edge

4.1. Test Equipment

RF Conducted Measurement

The following test equipments are used during the band edge tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2015
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2015
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

RF Radiated Measurement:


The following test equipments are used during the band edge tests:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
XCB # 8	X Spectrum Analyzer	R&S	FSP40/ 100339	Oct, 2015
	X Horn Antenna	ETS-Lindgren	3117/ 35205	Mar, 2016
	X Horn Antenna	Schwarzbeck	BBHA9170/209	Jan, 2016
	X Horn Antenna	TRC	AH-0801/95051	Aug, 2015
	X Pre-Amplifier	EMCI	EMC012630SE/980210	Jan, 2016
	X Pre-Amplifier	MITEQ	JS41-001040000-58-5P/153945	Jul, 2015
	X Pre-Amplifier	NARDA	DBL-1840N506/013	Jul, 2015


Note: 1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with “X” are used to measure the final test results.

4.2. Test Setup

RF Conducted Measurement

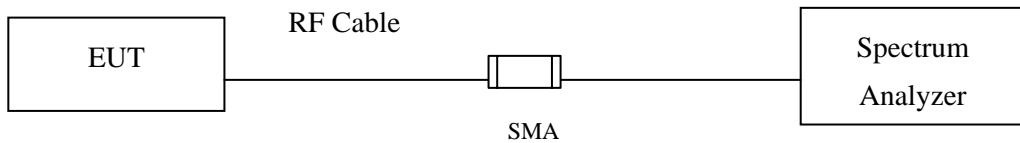

RF Radiated Measurement:

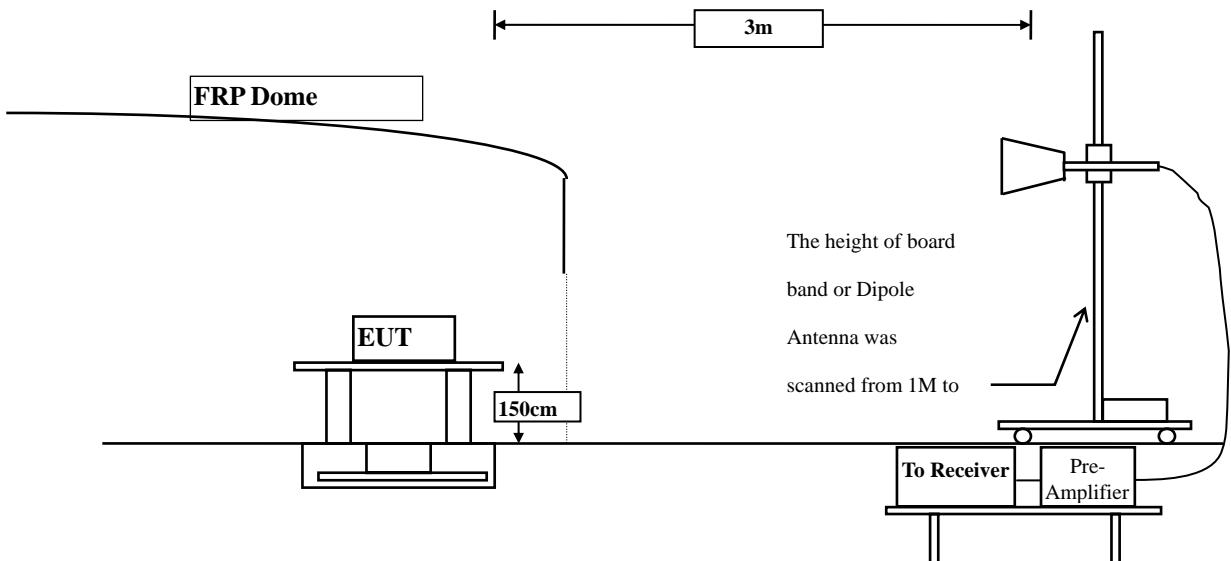

4.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 30dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

4.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

4.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

4.6. Test Result of Band Edge

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2387.681	31.500	28.882	60.382	74.00	54.00	Pass
01 (Peak)	2390.000	31.509	27.957	59.466	74.00	54.00	Pass
01 (Peak)	2397.246	31.545	29.136	60.681	--	--	--
01 (Peak)	2400.000	31.561	27.676	59.237	--	--	--
01 (Peak)	2413.043	31.646	66.727	98.373	--	--	--
01 (Average)	2390.000	31.509	14.173	45.682	74.00	54.00	Pass
01 (Average)	2398.696	31.554	14.726	46.279	--	--	--
01 (Average)	2400.000	31.561	14.472	46.033	--	--	--
01 (Average)	2412.754	31.644	63.641	95.285	--	--	--

Figure Channel 01:

Horizontal (Peak)


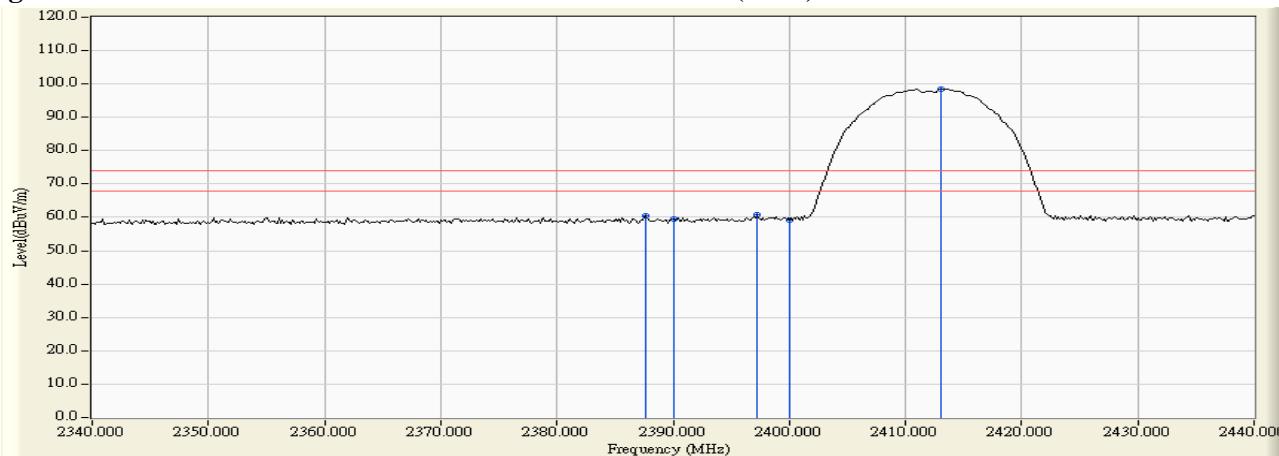


Figure Channel 01:

Horizontal (Average)

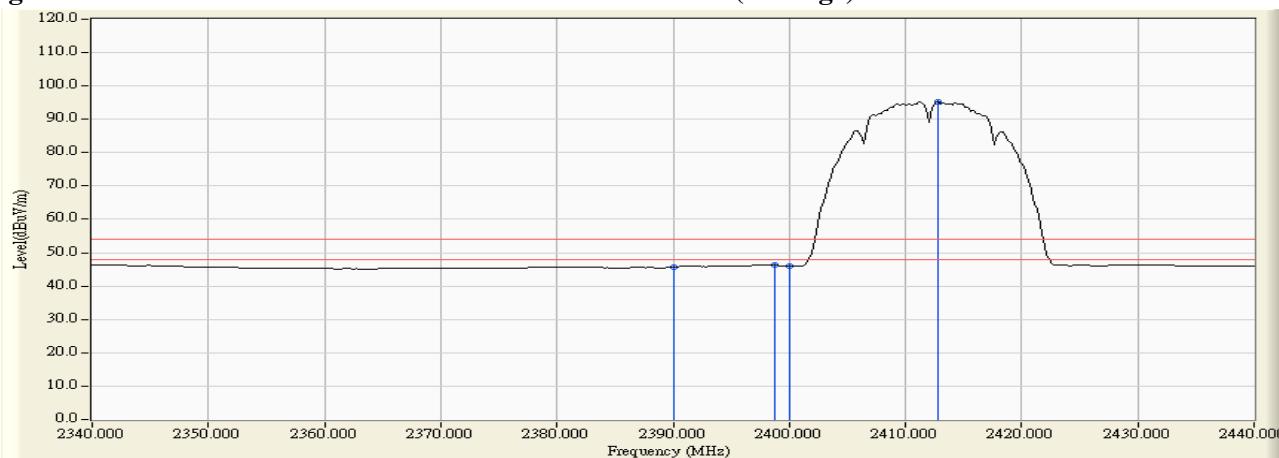

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2386.087	30.933	36.320	67.253	74.00	54.00	Pass
01 (Peak)	2390.000	30.915	35.997	66.912	74.00	54.00	Pass
01 (Peak)	2400.000	30.912	40.590	71.502	--	--	--
01 (Peak)	2413.043	30.957	84.754	115.710	--	--	--
01 (Average)	2390.000	30.915	22.461	53.376	74.00	54.00	Pass
01 (Average)	2400.000	30.912	25.620	56.532	--	--	--
01 (Average)	2412.754	30.955	81.720	112.674	--	--	--

Figure Channel 01:

Vertical (Peak)


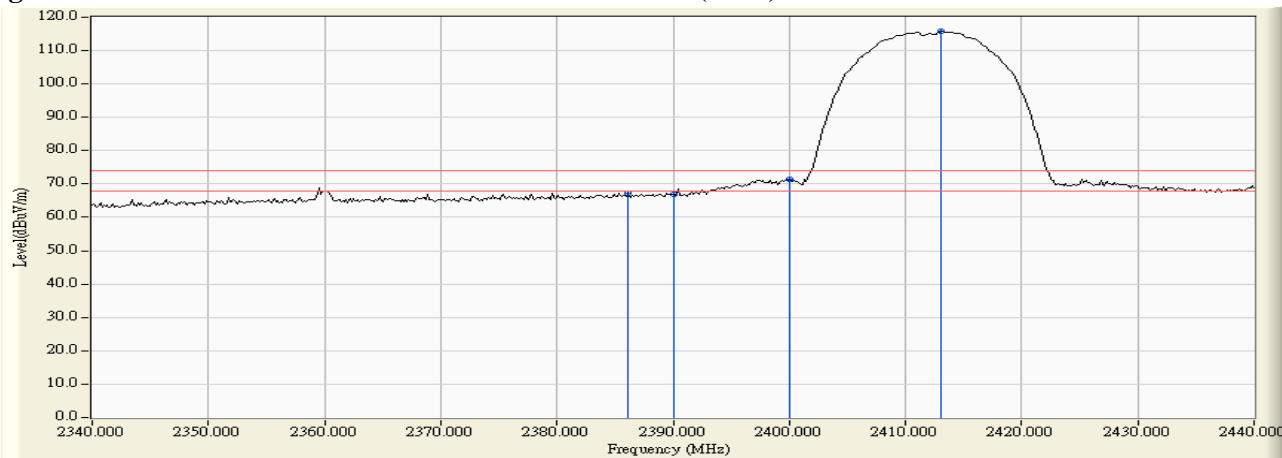


Figure Channel 01:

Vertical (Average)

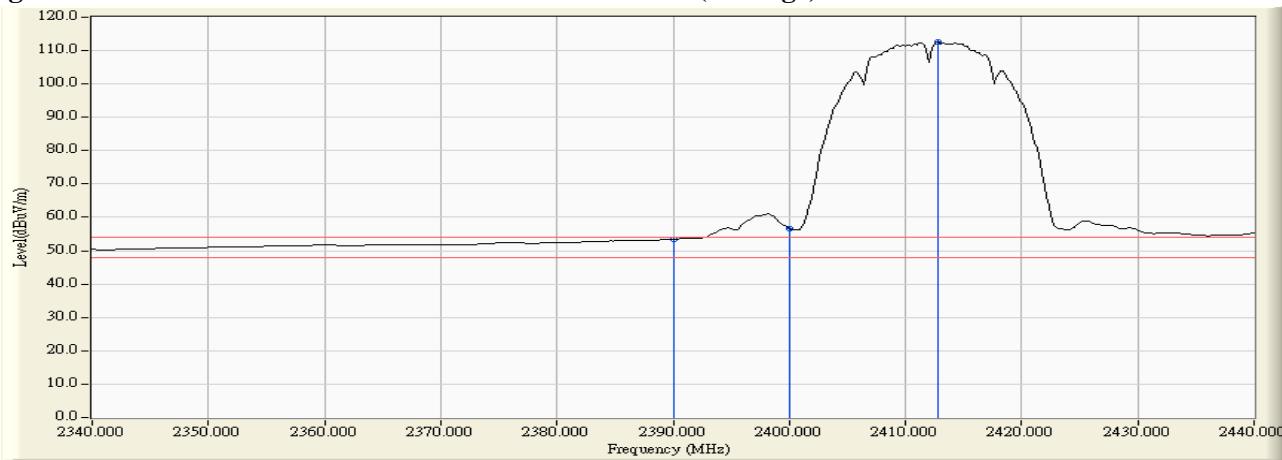

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2460.891	32.011	66.749	98.760	--	--	--
11 (Peak)	2483.500	32.182	28.077	60.259	74.00	54.00	Pass
11 (Peak)	2485.094	32.194	28.844	61.038	74.00	54.00	Pass
11 (Average)	2461.181	32.014	63.592	95.605	--	--	--
11 (Average)	2483.500	32.182	14.422	46.604	74.00	54.00	Pass
11 (Average)	2509.152	32.254	15.613	47.867	74.00	54.00	Pass

Figure Channel 11:

Horizontal (Peak)


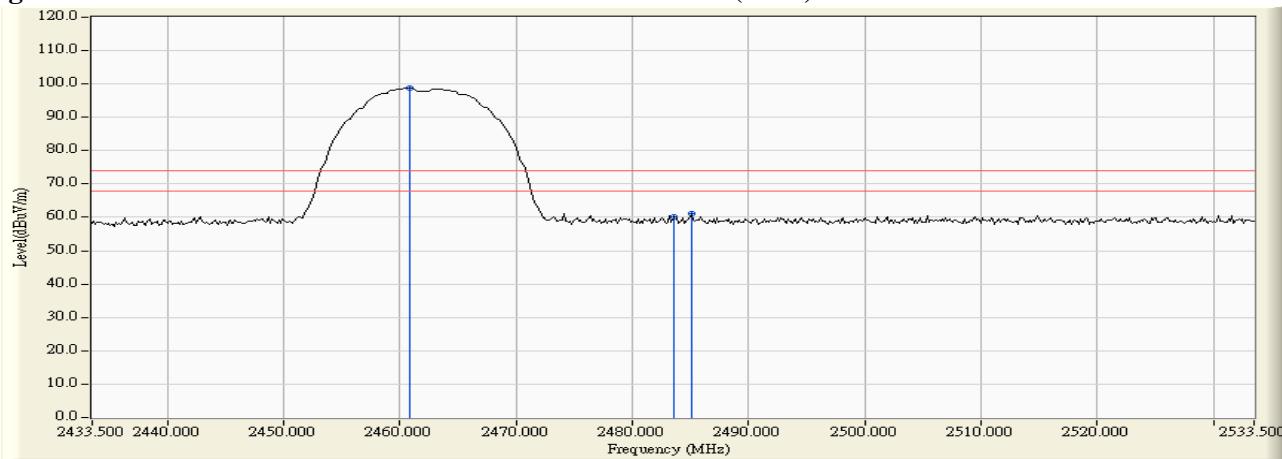


Figure Channel 11:

Horizontal (Average)

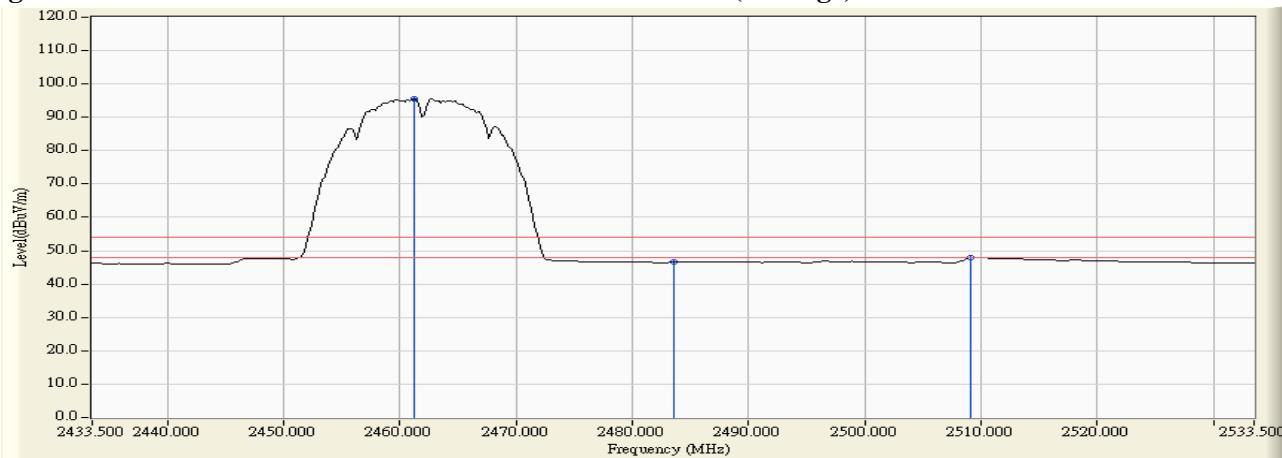

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2460.891	31.283	83.937	115.220	--	--	--
11 (Peak)	2483.500	31.435	34.573	66.008	74.00	54.00	Pass
11 (Peak)	2488.138	31.467	35.837	67.304	74.00	54.00	Pass
11 (Average)	2461.181	31.285	80.785	112.070	--	--	--
11 (Average)	2483.500	31.435	22.048	53.483	74.00	54.00	Pass

Figure Channel 11:

Vertical (Peak)


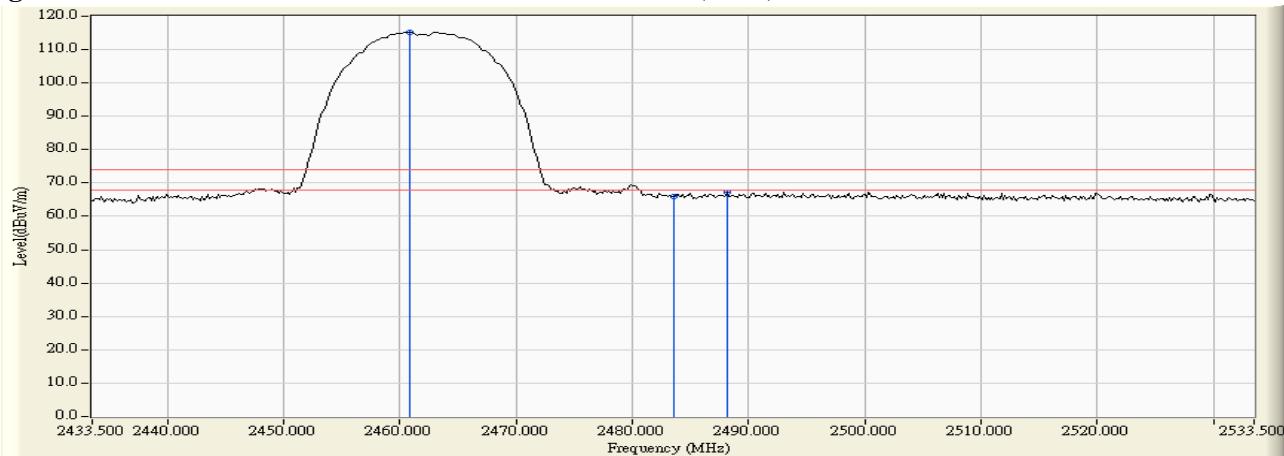


Figure Channel 11:

Vertical (Average)

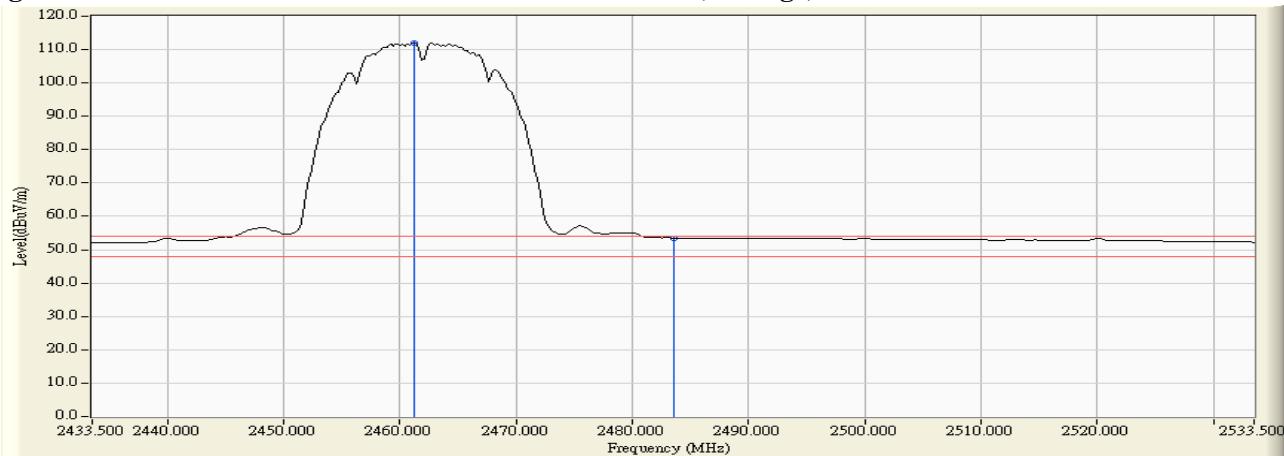

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2389.710	31.508	35.938	67.446	74.00	54.00	Pass
01 (Peak)	2390.000	31.509	34.338	65.847	74.00	54.00	Pass
01 (Peak)	2400.000	31.561	50.890	82.451	--	--	--
01 (Peak)	2407.536	31.608	74.041	105.650	--	--	--
01(Average)	2390.000	31.509	15.804	47.313	74.00	54.00	Pass
01(Average)	2400.000	31.561	24.010	55.571	--	--	--
01(Average)	2413.623	31.650	61.977	93.628	--	--	--

Figure Channel 01:

Horizontal (Peak)


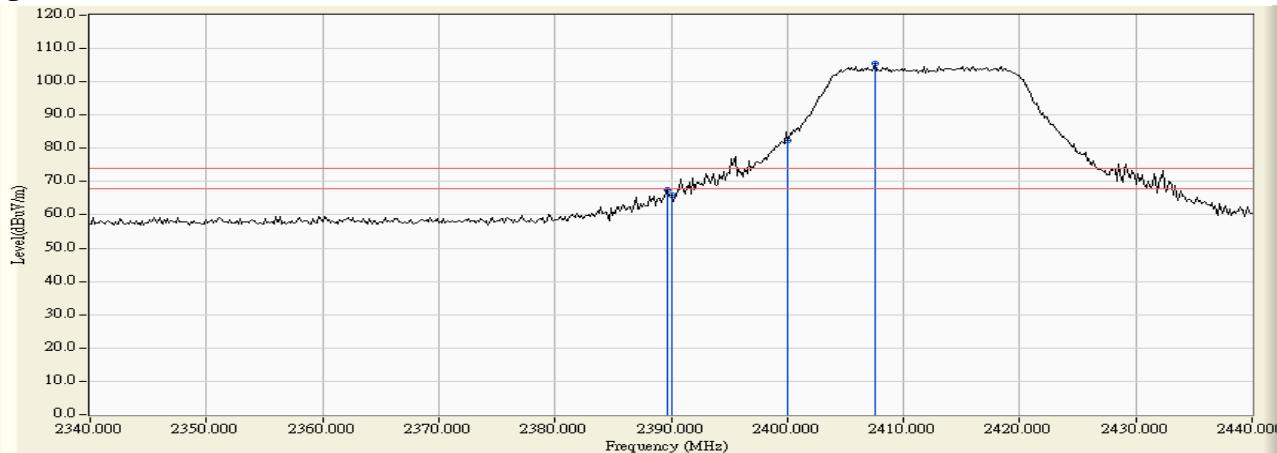


Figure Channel 01:

Horizontal (Average)

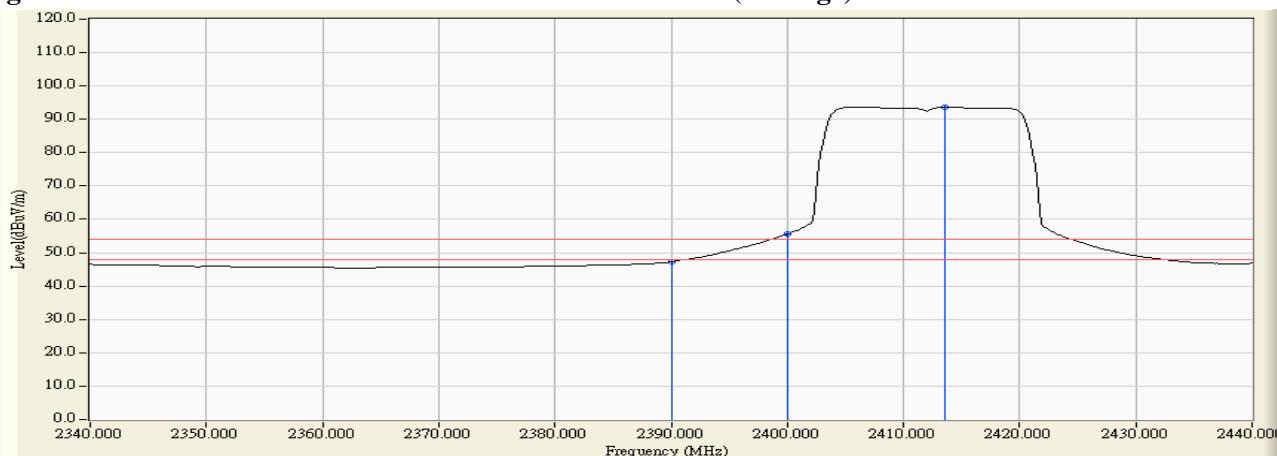

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2389.275	30.919	35.841	66.760	74.00	54.00	Pass
01 (Peak)	2390.000	30.915	34.761	65.676	74.00	54.00	Pass
01 (Peak)	2400.000	30.912	61.307	92.219	--	--	--
01 (Peak)	2414.928	30.969	83.563	114.532	--	--	--
01 (Average)	2390.000	30.915	20.881	51.796	74.00	54.00	Pass
01 (Average)	2400.000	30.912	31.076	61.988	--	--	--
01 (Average)	2414.493	30.967	72.461	103.427	--	--	--

Figure Channel 01:

Vertical (Peak)


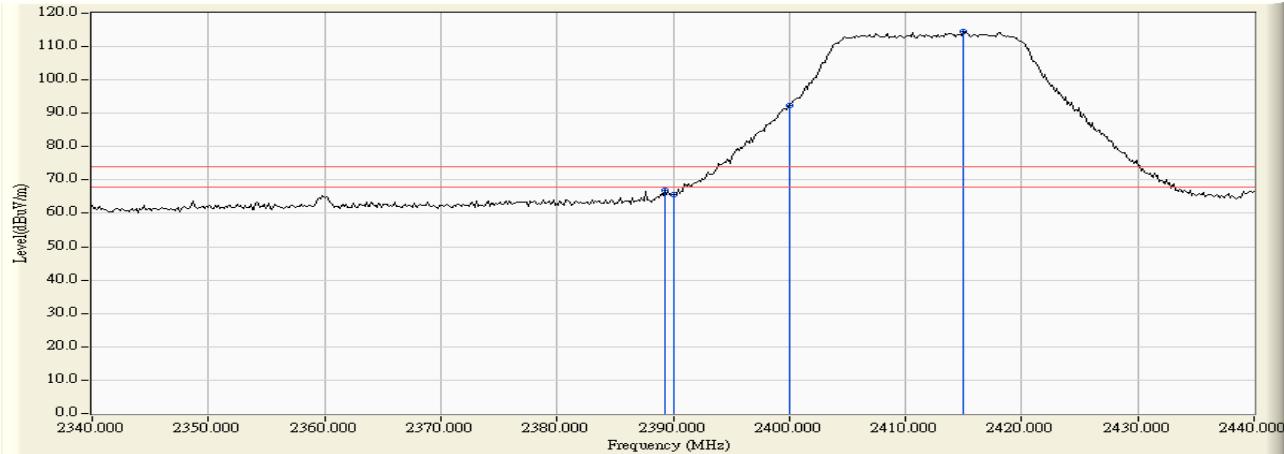


Figure Channel 01:

Vertical (Average)

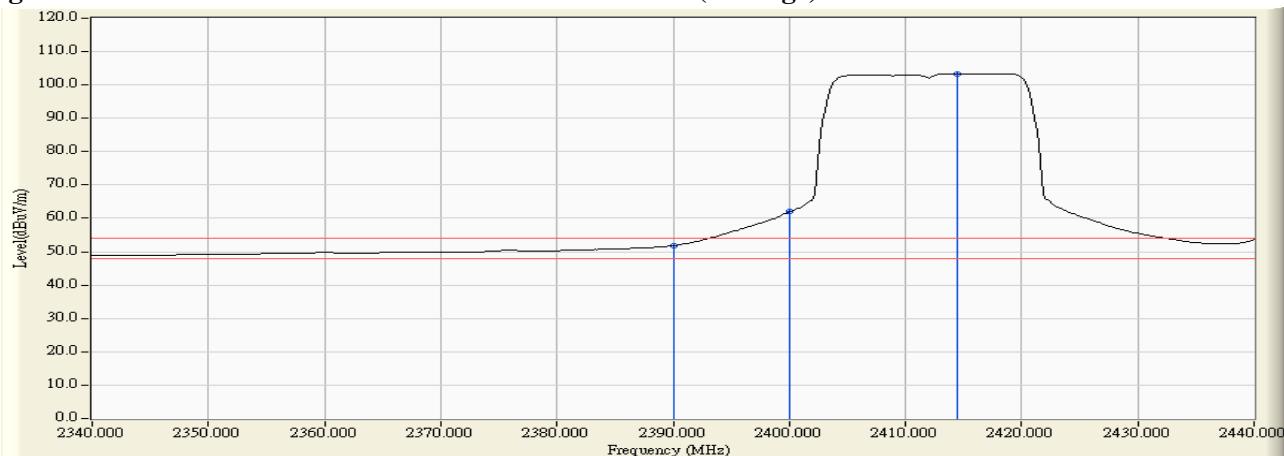

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2465.094	32.043	65.002	97.045	--	--	--
11 (Peak)	2483.500	32.182	27.907	60.089	74.00	54.00	Pass
11 (Peak)	2485.094	32.194	27.984	60.178	74.00	54.00	Pass
11 (Average)	2468.283	32.067	54.179	86.246	--	--	--
11 (Average)	2483.500	32.182	14.463	46.645	74.00	54.00	Pass
11 (Average)	2509.007	32.253	15.570	47.824	74.00	54.00	Pass

Figure Channel 11:

Horizontal (Peak)


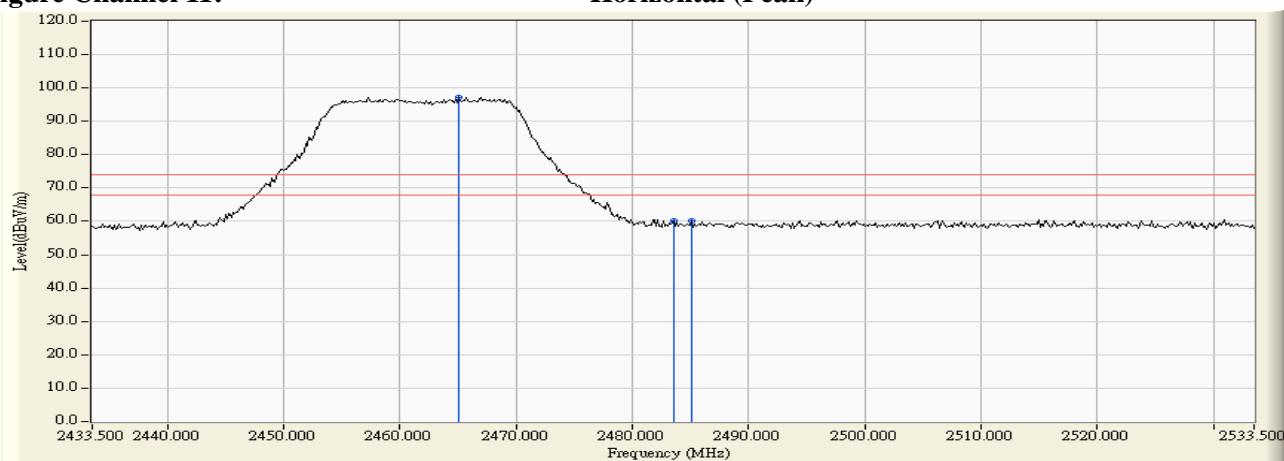


Figure Channel 11:

Horizontal (Average)

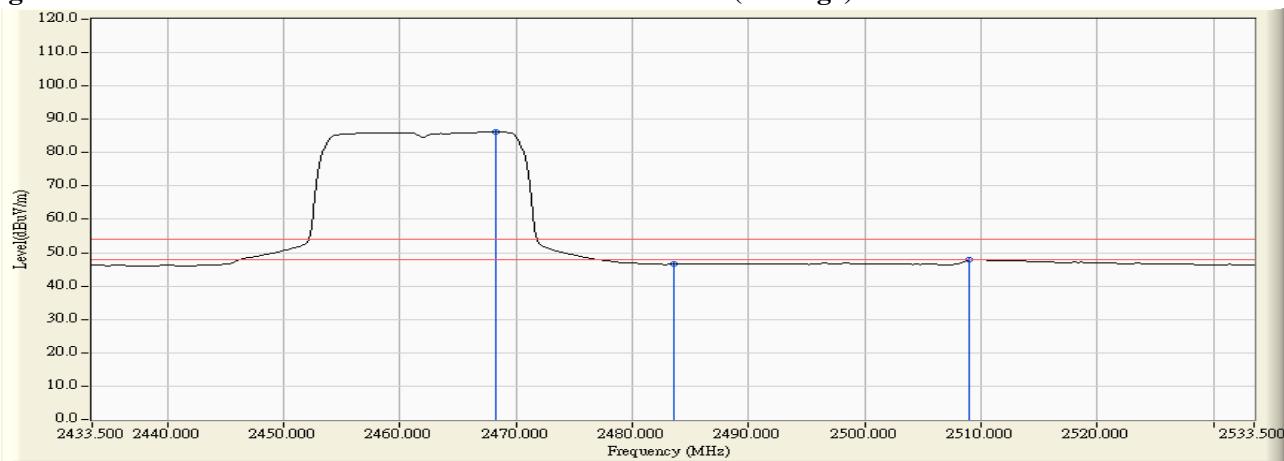

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2468.283	31.332	82.216	113.549	--	--	--
11 (Peak)	2483.500	31.435	35.251	66.686	74.00	54.00	Pass
11 (Peak)	2488.572	31.470	35.488	66.958	74.00	54.00	Pass
11 (Average)	2468.138	31.332	71.045	102.377	--	--	--
11 (Average)	2483.500	31.435	22.307	53.742	74.00	54.00	Pass

Figure Channel 11:

Vertical (Peak)


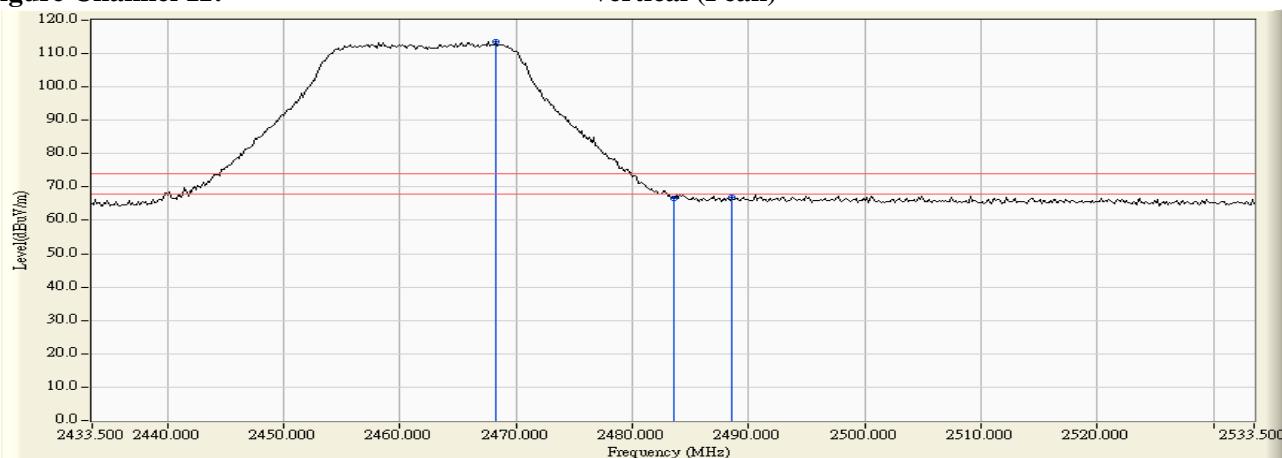


Figure Channel 11:

Vertical (Average)

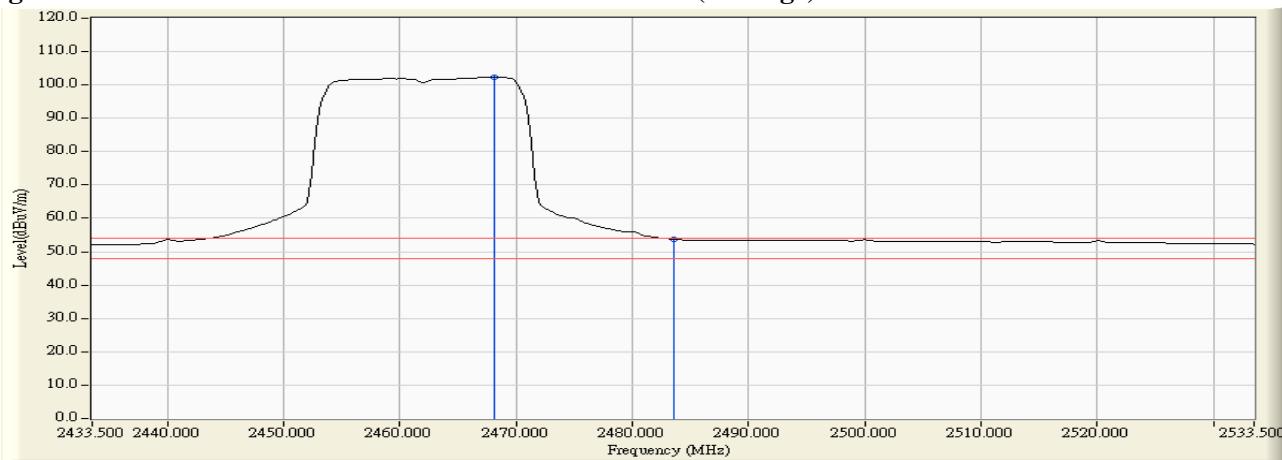

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2388.696	31.504	30.831	62.335	74.00	54.00	Pass
01 (Peak)	2390.000	31.509	30.129	61.638	74.00	54.00	Pass
01 (Peak)	2400.000	31.561	52.843	84.404	--	--	--
01 (Peak)	2415.217	31.663	75.063	106.726	--	--	--
01 (Average)	2359.855	31.390	18.496	49.886	74.00	54.00	Pass
01 (Average)	2390.000	31.509	15.729	47.238	74.00	54.00	Pass
01 (Average)	2400.000	31.561	25.272	56.833	--	--	--
01 (Average)	2414.348	31.657	61.531	93.187	--	--	--

Figure Channel 01:

Horizontal (Peak)


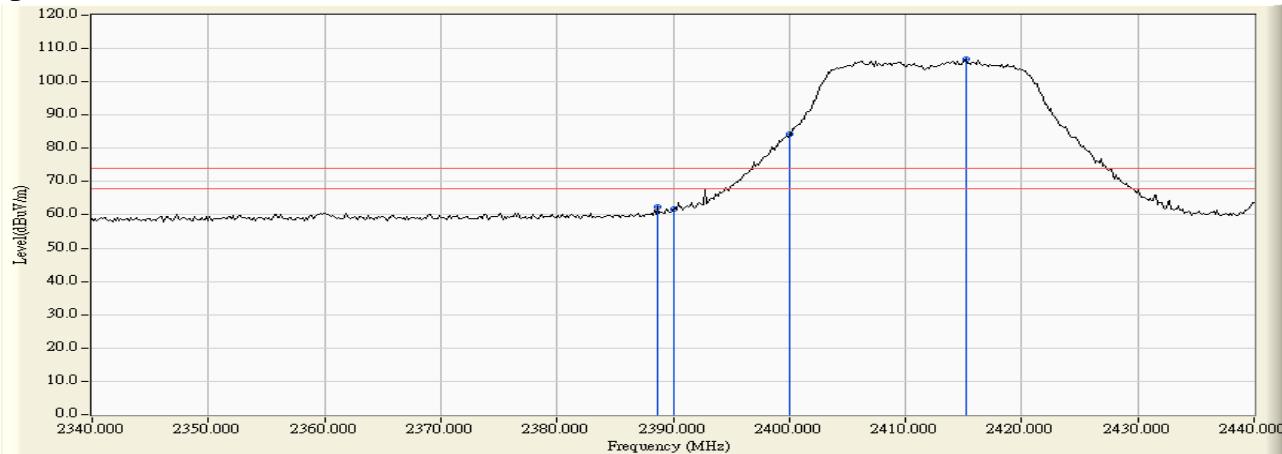


Figure Channel 01:

Horizontal (Average)

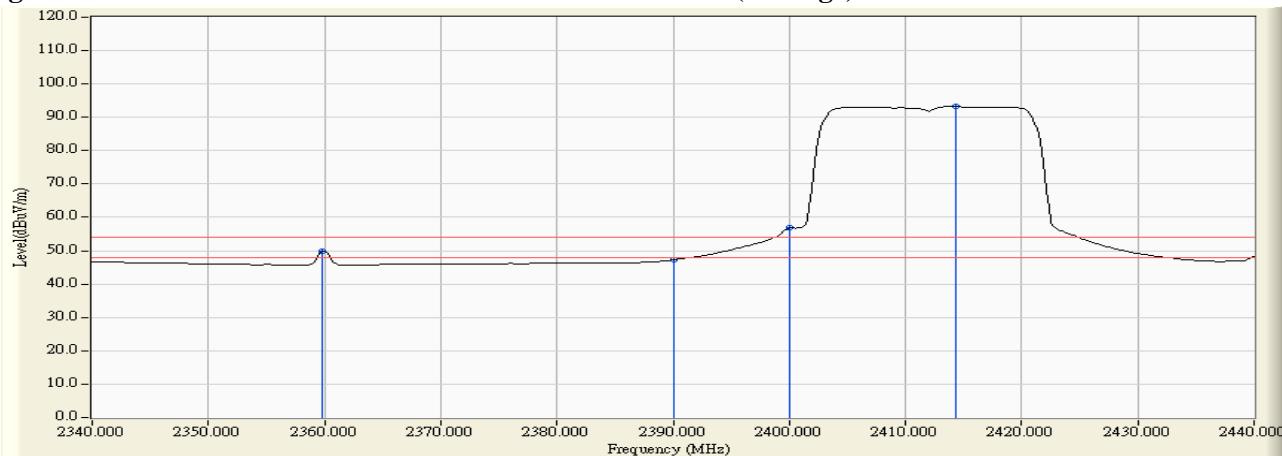

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2388.696	30.921	35.954	66.875	74.00	54.00	Pass
01 (Peak)	2390.000	30.915	35.869	66.784	74.00	54.00	Pass
01 (Peak)	2400.000	30.912	62.046	92.958	--	--	--
01 (Peak)	2418.986	30.996	84.518	115.515	--	--	--
01 (Average)	2360.145	31.053	21.988	53.041	74.00	54.00	Pass
01 (Average)	2390.000	30.915	22.543	53.458	74.00	54.00	Pass
01 (Average)	2400.000	30.912	35.620	66.532	--	--	--
01 (Average)	2418.406	30.993	72.943	103.936	--	--	--

Figure Channel 01:

Vertical (Peak)


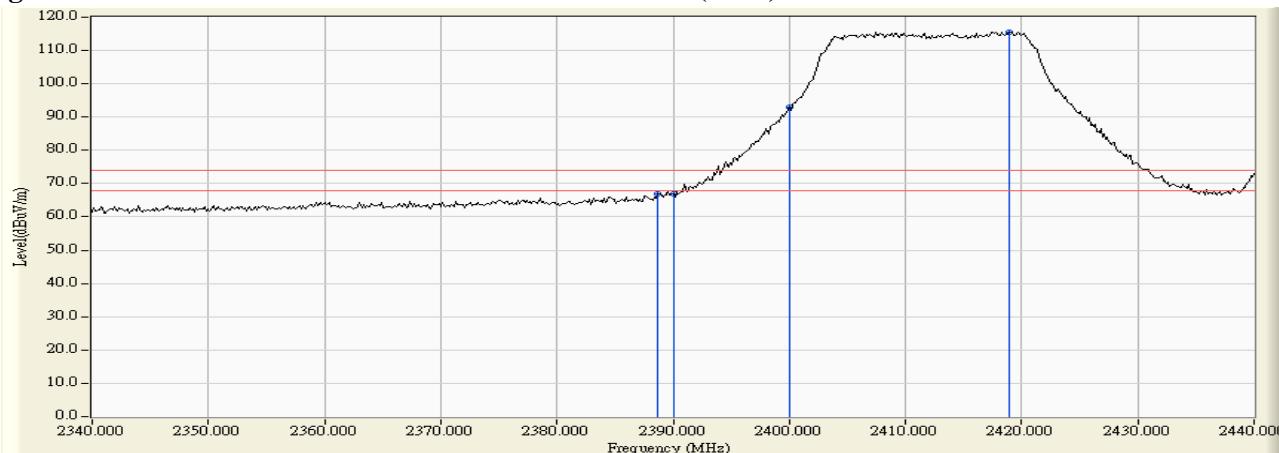


Figure Channel 01:

Vertical (Average)

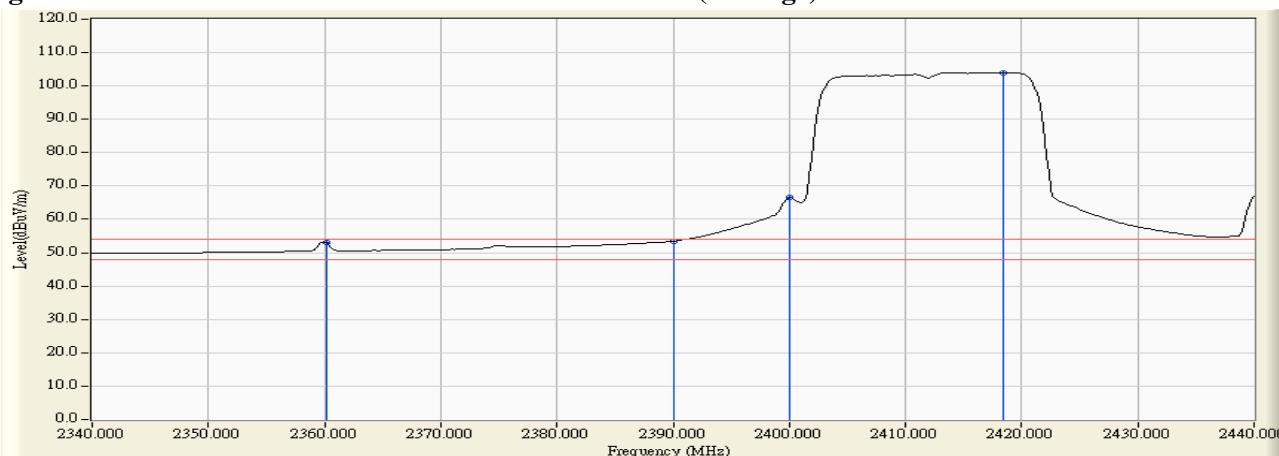

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2457.703	31.987	64.710	96.697	--	--	--
11 (Peak)	2483.500	32.182	26.531	58.713	74.00	54.00	Pass
11 (Peak)	2484.804	32.193	27.604	59.796	74.00	54.00	Pass
11 (Average)	2467.993	32.065	52.344	84.409	--	--	--
11 (Average)	2483.500	32.182	14.336	46.518	74.00	54.00	Pass
11 (Average)	2509.007	32.253	15.564	47.818	74.00	54.00	Pass

Figure Channel 11:

Horizontal (Peak)


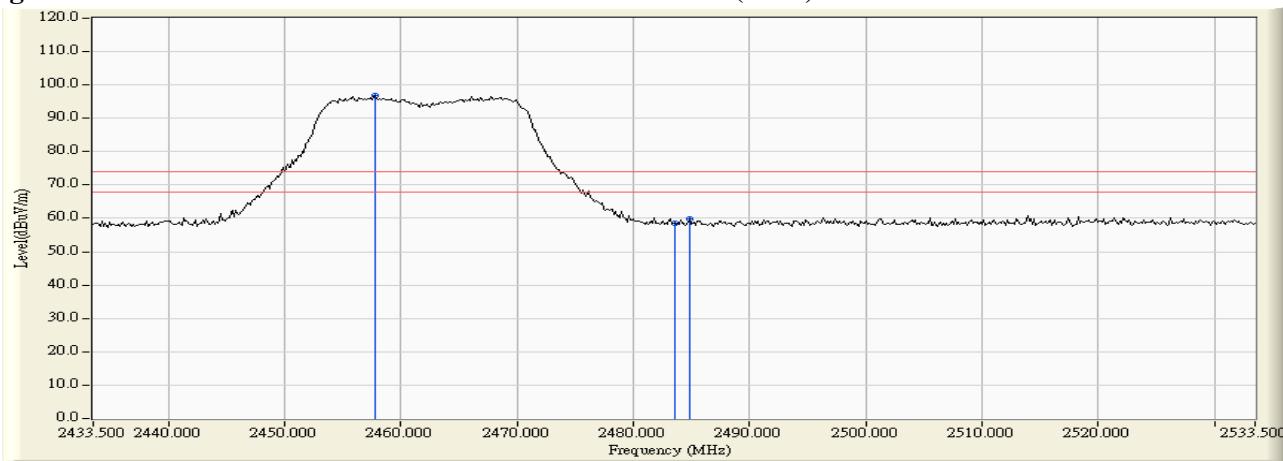


Figure Channel 11:

Horizontal (Average)

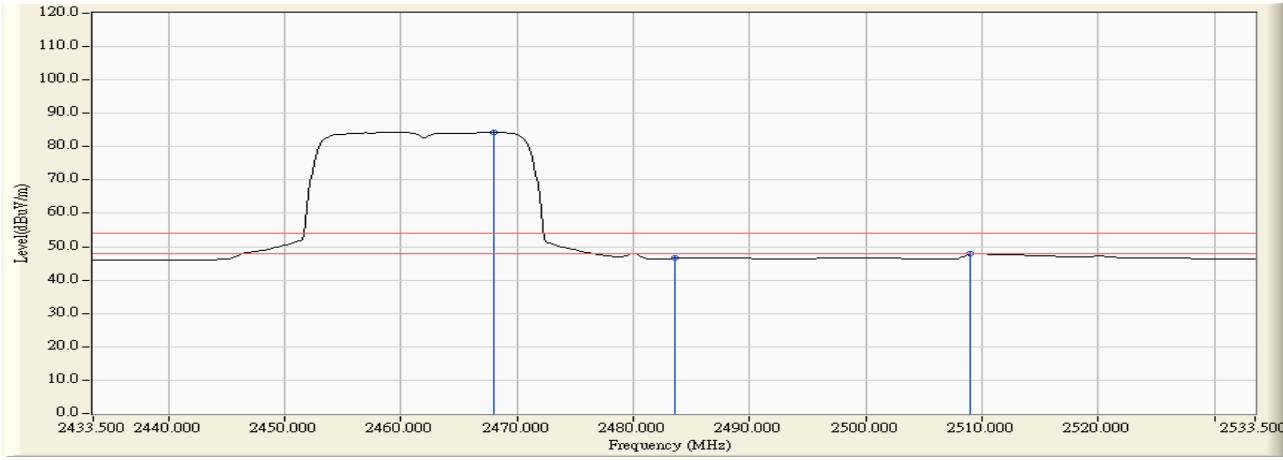

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2460.312	31.278	81.644	112.923	--	--	--
11 (Peak)	2483.500	31.435	33.857	65.292	74.00	54.00	Pass
11 (Peak)	2484.804	31.445	34.405	65.849	74.00	54.00	Pass
11 (Average)	2468.138	31.332	69.649	100.981	--	--	--
11 (Average)	2483.500	31.435	20.816	52.251	74.00	54.00	Pass

Figure Channel 11:

Vertical (Peak)


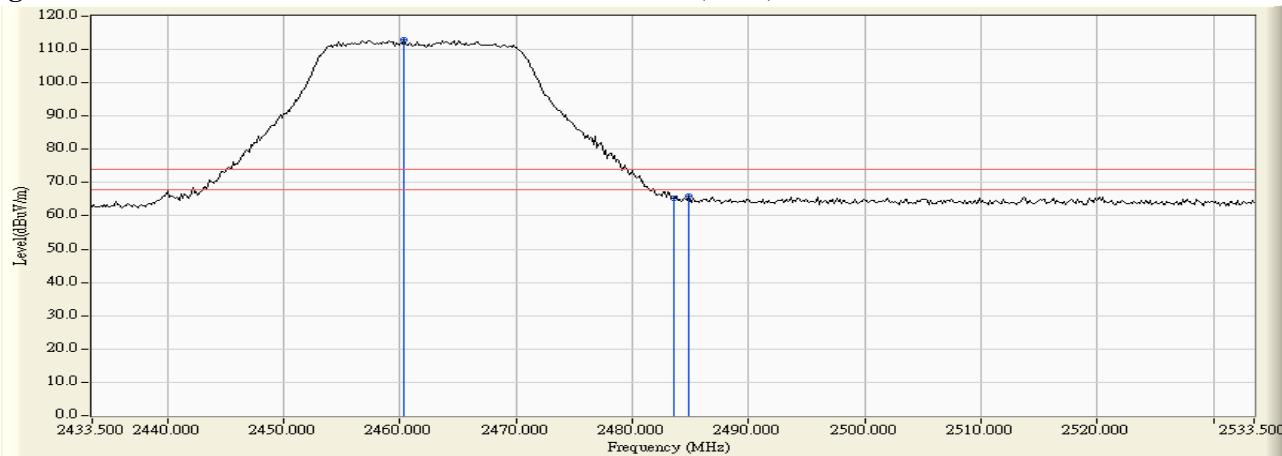


Figure Channel 11:

Vertical (Average)

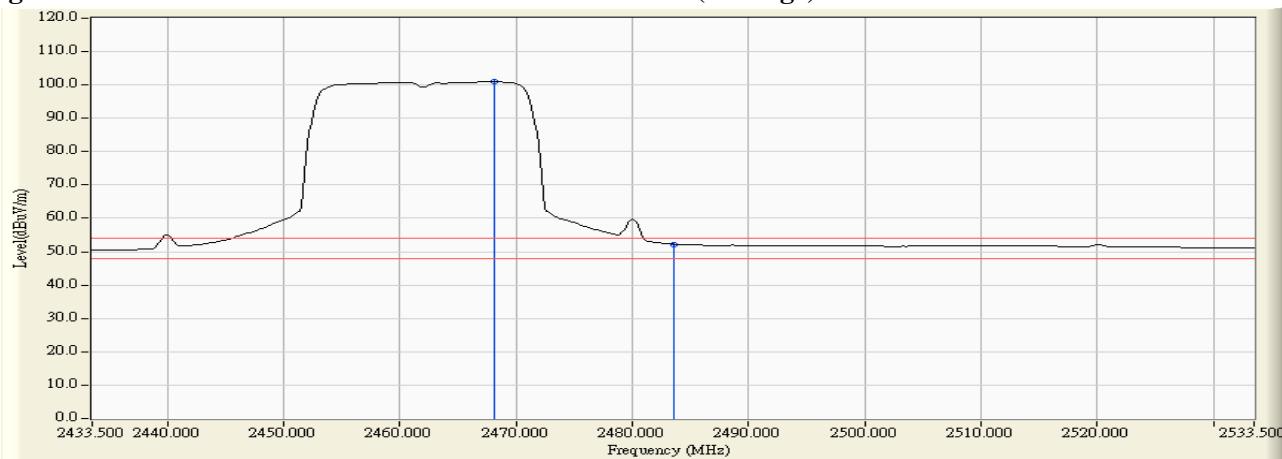

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
03 (Peak)	2390.000	31.509	34.740	66.249	74.00	54.00	Pass
03 (Peak)	2400.000	31.561	49.517	81.078	--	--	--
03 (Peak)	2426.087	31.747	69.417	101.163	--	--	--
03 (Average)	2390.000	31.509	17.700	49.209	74.00	54.00	Pass
03 (Average)	2400.000	31.561	23.663	55.224	--	--	--
03 (Average)	2413.043	31.646	57.526	89.172	--	--	--

Figure Channel 03:

Horizontal (Peak)


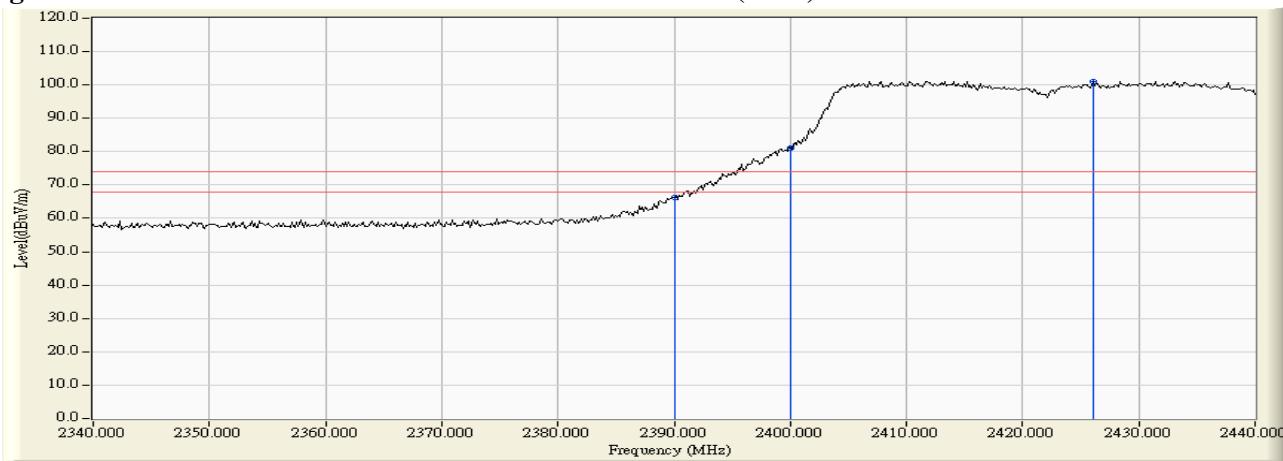


Figure Channel 03:

Horizontal (Average)

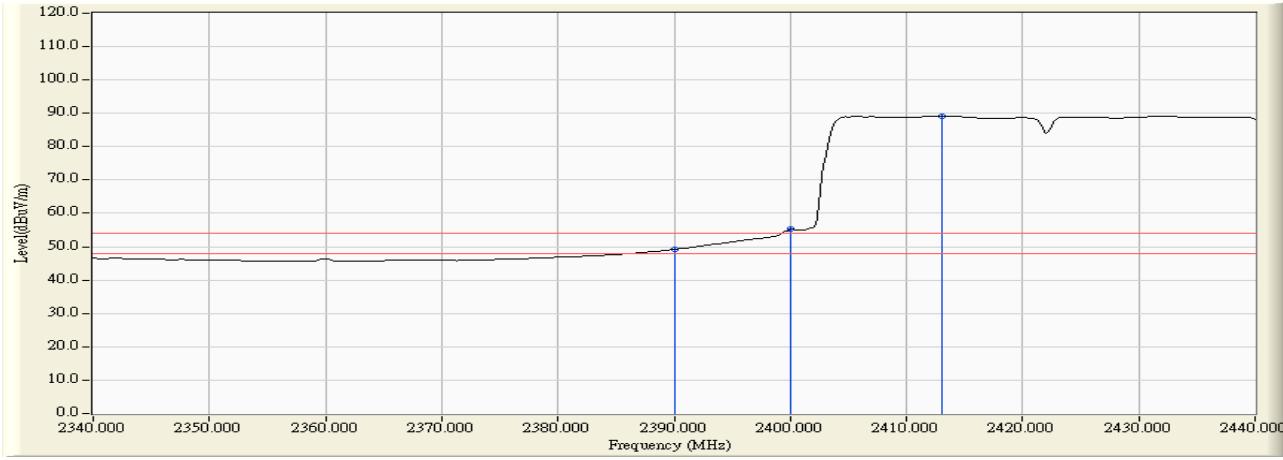

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
03 (Peak)	2390.000	30.915	42.513	73.428	74.00	54.00	Pass
03 (Peak)	2400.000	30.912	57.998	88.910	--	--	--
03 (Peak)	2438.841	31.132	78.976	110.107	--	--	--
03 (Average)	2390.000	30.915	23.071	53.986	74.00	54.00	Pass
03 (Average)	2400.000	30.912	35.112	66.024	--	--	--
03 (Average)	2431.594	31.082	67.094	98.176	--	--	--

Figure Channel 03:

Vertical (Peak)


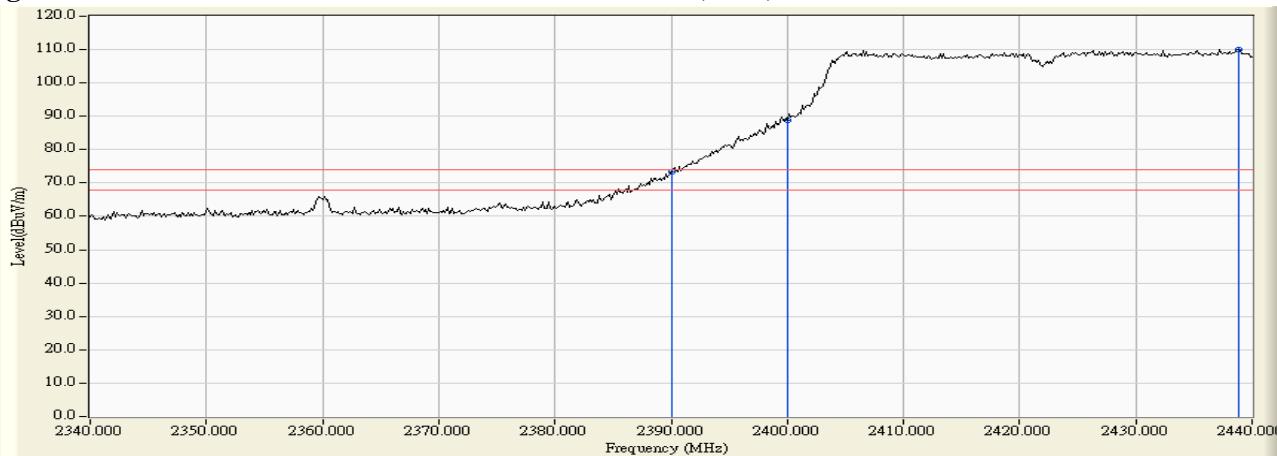


Figure Channel 03:

Vertical (Average)

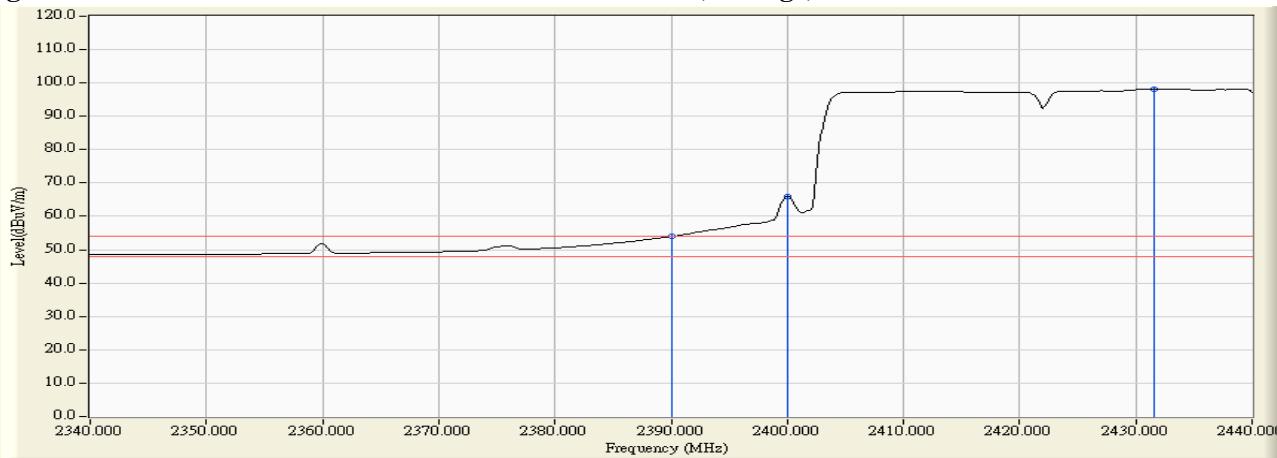

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band)

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
09 (Peak)	2466.543	32.053	57.600	89.654	--	--	--
09 (Peak)	2483.500	32.182	28.188	60.370	74.00	54.00	Pass
09 (Peak)	2484.804	32.193	28.757	60.949	74.00	54.00	Pass
09 (Average)	2468.283	32.067	44.788	76.855	--	--	--
09 (Average)	2483.500	32.182	14.460	46.642	74.00	54.00	Pass
09 (Average)	2509.442	32.253	15.640	47.893	74.00	54.00	Pass

Figure Channel 09:

Horizontal (Peak)


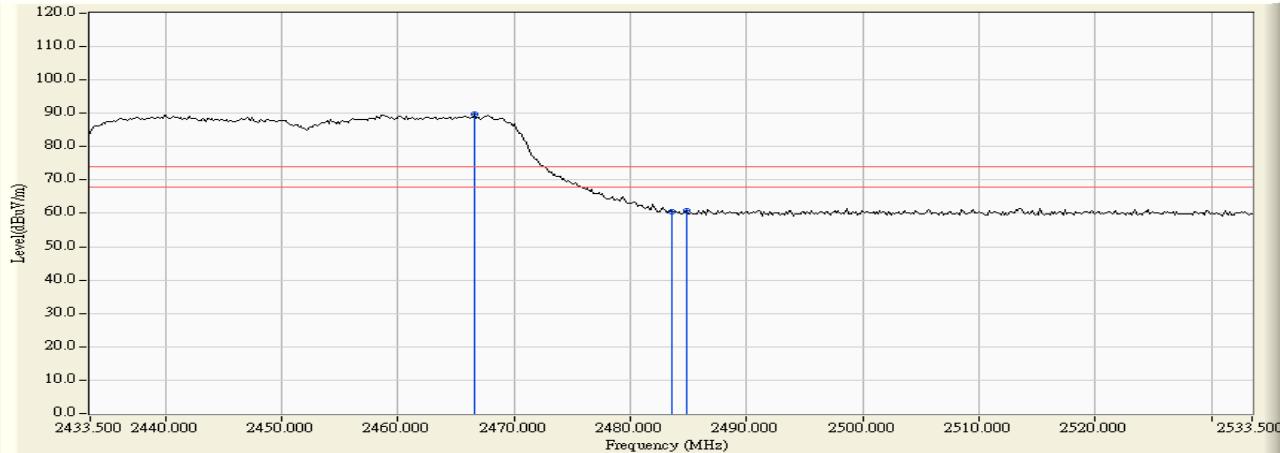


Figure Channel 09:

Horizontal (Average)

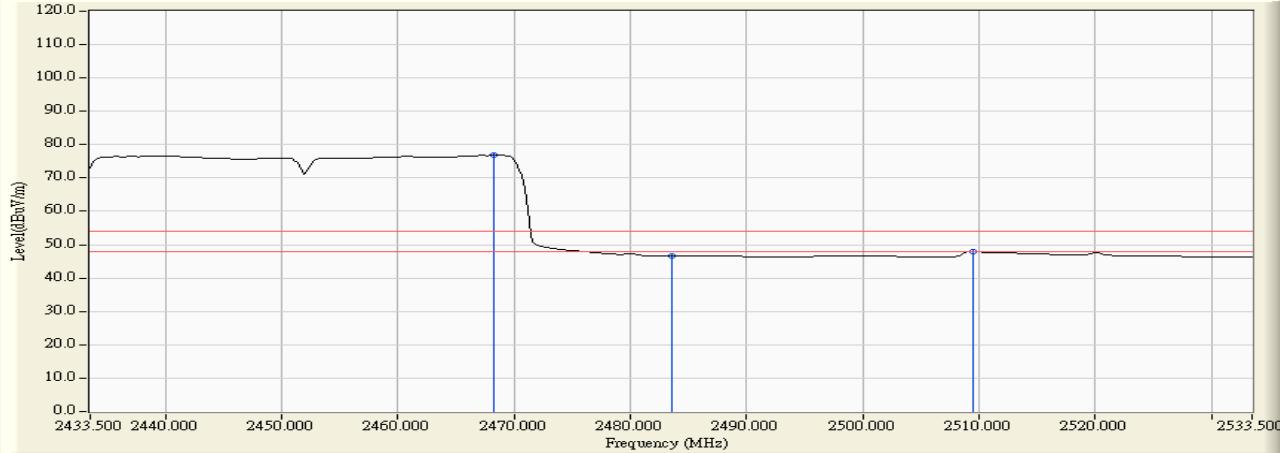

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : MOXA IEEE 802.11 a/b/g/n
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band)

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
09 (Peak)	2469.007	31.338	75.427	106.765	--	--	--
09 (Peak)	2483.500	31.435	40.328	71.763	74.00	54.00	Pass
09 (Average)	2468.572	31.334	63.323	94.658	--	--	--
09 (Average)	2483.500	31.435	22.437	53.872	74.00	54.00	Pass
09 (Average)	2520.022	31.555	22.324	53.879	74.00	54.00	Pass

Figure Channel 09:

Vertical (Peak)


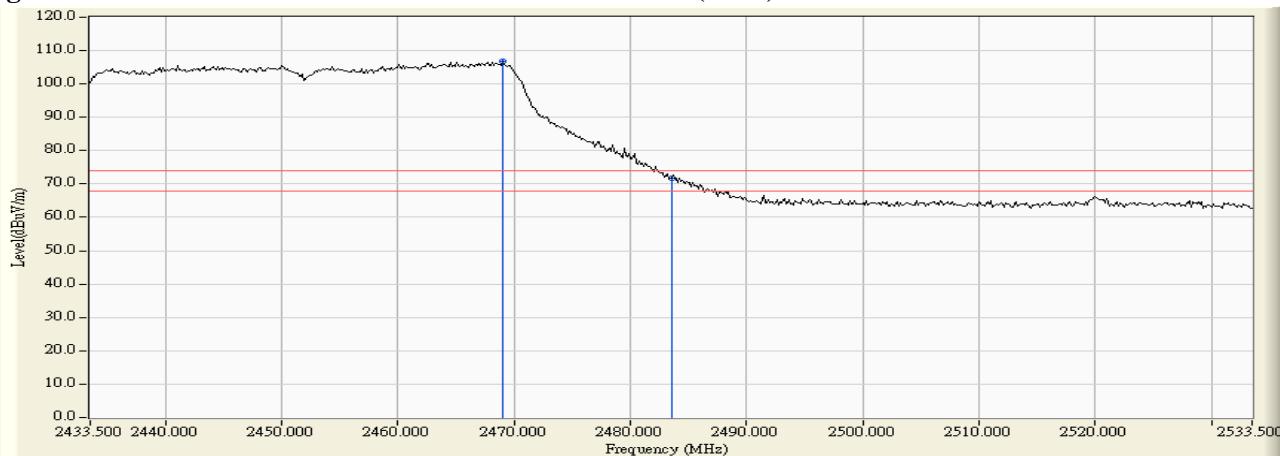


Figure Channel 09:

Vertical (Average)

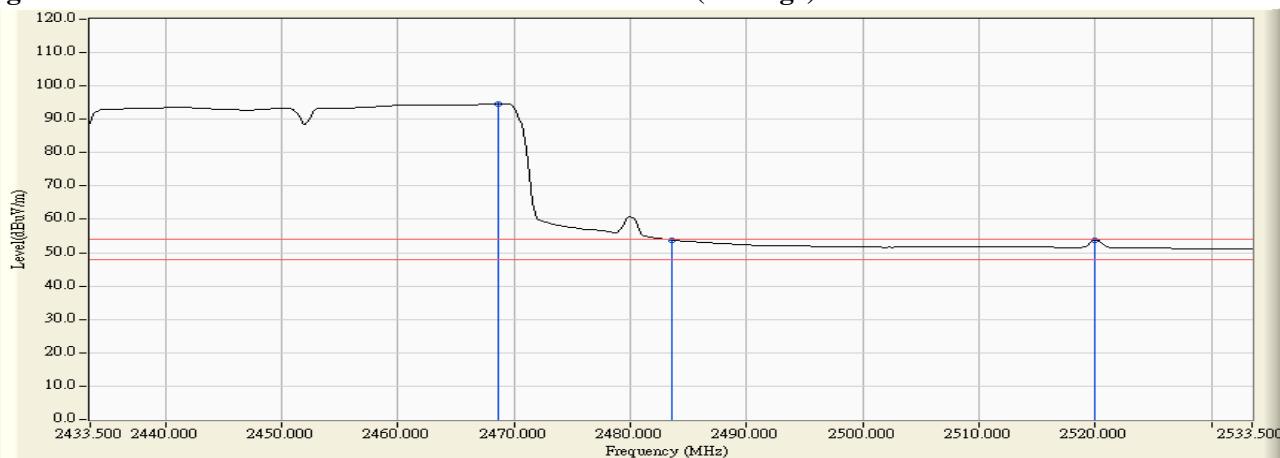

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

5. EMI Reduction Method During Compliance Testing

No modification was made during testing.

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs