



FCC REPORT (WIFI)

Applicant: Shenzhen Womate Technology Co., Ltd.

Address of Applicant: Room 304, 3F, Tower B, Huayuan Digital Building, No.1079
Nanhai Road, Nanshan District, Shenzhen, China

Equipment Under Test (EUT)

Product Name: WOMATE

Model No.: WM100

FCC ID: SLL-WM100

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247:2011

Date of sample receipt: 24 Apr., 2013

Date of Test: 25 Apr., to 16 May 2013

Date of report issued: 17 May 2013

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager


This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
<i>00</i>	<i>17 May 2013</i>	<i>Original</i>

Prepared By:**Report Clerk****Date:***17 May 2013***Check By:****Project Engineer****Date:***17 May 2013*

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF E.U.T.	5
5.3 TEST ENVIRONMENT AND MODE.....	7
5.4 DESCRIPTION OF SUPPORT UNITS	8
5.5 LABORATORY FACILITY	8
5.6 LABORATORY LOCATION	8
5.7 TEST INSTRUMENTS LIST	9
6 TEST RESULTS AND MEASUREMENT DATA	10
6.1 ANTENNA REQUIREMENT:	10
6.2 CONDUCTED EMISSIONS.....	11
6.3 CONDUCTED OUTPUT POWER.....	14
6.4 OCCUPY BANDWIDTH.....	18
6.5 POWER SPECTRAL DENSITY.....	25
6.6 BAND EDGE.....	29
6.6.1 Conducted Emission Method.....	29
6.6.2 Radiated Emission Method	32
6.7 SPURIOUS EMISSION	57
6.7.1 Conducted Emission Method.....	57
6.7.2 Radiated Emission Method	63
7 TEST SETUP PHOTO	85
8 EUT CONSTRUCTIONAL DETAILS	86

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
26/6dB Emission Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.

5 General Information

5.1 Client Information

Applicant:	Shenzhen Womate Technology Co., Ltd.
Address of Applicant:	Room 304, 3F, Tower B, Huayuan Digital Building, No.1079 Nanhai Road, Nanshan District, Shenzhen, China
Manufacturer:	Shenzhen Womate Technology Co., Ltd.
Address of Manufacturer:	Room 304, 3F, Tower B, Huayuan Digital Building, No.1079 Nanhai Road, Nanshan District, Shenzhen, China
Factory:	Shenzhen Womate Technology Co., Ltd.
Address of Factory:	Room 304, 3F, Tower B, Huayuan Digital Building, No.1079 Nanhai Road, Nanshan District, Shenzhen, China

5.2 General Description of E.U.T.

Product Name:	WOMATE
Model No.:	WM100
Operation Frequency:	2412MHz~2462MHz (802.11b/802.11g/802.11n(H20))
Channel numbers:	11 for 802.11b/802.11g/802.11n(H20)
Channel separation:	5MHz
Modulation technology: (IEEE 802.11b)	Direct Sequence Spread Spectrum (DSSS)
Modulation technology: (IEEE 802.11g/802.11n)	Orthogonal Frequency Division Multiplexing(OFDM)
Data speed (IEEE 802.11b):	1Mbps, 2Mbps, 5.5Mbps, 11Mbps
Data speed (IEEE 802.11g):	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps,54Mbps
Data speed (IEEE 802.11n):	Up to 150Mbps
Antenna Type:	Integral Antenna
Antenna gain:	-1 dBi
Power supply:	Rechargeable Li-ion Battery DC3.7V/ 2200 mAh

Operation Frequency each of channel For 802.11b/g/n(H20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

802.11b/802.11g/802.11n (H20)

Channel	Frequency
The lowest channel	2412MHz
The middle channel	2437MHz
The Highest channel	2462MHz

5.3 Test environment and mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Operation mode	Keep the EUT in continuous transmitting with modulation
The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(H20)	6.5Mbps

Final Test Mode:

According to ANSI C63.4 standards, the test results are both the “worst case” and “worst setup” 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n(H20). Duty cycle setting during the transmission is 100% with maximum power setting for all modulations.

5.4 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID
Apple Inc.	iPad mini	A1432	DLXK186LF197	BCGA1432
Dell Inc.	Laptop PC	INSPIRON M4010	B1LMVP1	N/A

5.5 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Registration No.: 817957**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 817957, February 27, 2012.

● **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

5.6 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
Address: No.B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Tel: 0755-23118282
Fax: 0755-23116366


5.7 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (dd-mm-yy)	Cal. Due date (dd-mm-yy)
1	3m Semi- Anechoic Chamber	SAEMC	9(L)*6(W)* 6(H)	CCIS0001	June 09 2012	June 08 2013
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	CCIS0002	N/A	N/A
3	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	CCIS0005	June 04 2012	June 03 2013
4	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	CCIS0006	May 30 2012	May 29 2013
5	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
6	Coaxial Cable	CCIS	N/A	CCIS0016	Apr. 01 2013	Mar. 31 2014
7	Coaxial Cable	CCIS	N/A	CCIS0017	Apr. 01 2013	Mar. 31 2014
8	Coaxial cable	CCIS	N/A	CCIS0018	Apr. 01 2013	Mar. 31 2014
9	Coaxial Cable	CCIS	N/A	CCIS0019	Apr. 01 2013	Mar. 31 2014
10	Coaxial Cable	CCIS	N/A	CCIS0087	Apr. 01 2013	Mar. 31 2014
11	Amplifier(10kHz-1.3GHz)	HP	8447D	CCIS0003	Apr. 01 2013	Mar. 31 2014
12	Amplifier(1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	June 09 2012	June 08 2013
13	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	Apr. 01 2013	Mar. 31 2014
14	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 30 2013	Mar. 29 2014
15	Printer	HP	HP LaserJet P1007	N/A	N/A	N/A
16	Positioning Controller	UC	UC3000	CCIS0015	N/A	N/A
17	Spectrum analyzer 9k-30GHz	Rohde & Schwarz	FSP	CCIS0023	May. 29 2012	May. 28 2013
18	Loop antenna	Laplace instrument	RF300	EMC0701	Aug. 12 2012	Aug. 11 2013
19	EMI Test Receiver	Rohde & Schwarz	ESCI	CCIS0002	May 25 2012	May 24 2013
20	Signal Analyzer	Rohde & Schwarz	FSIQ3	CCIS0088	May 29 2012	May 28 2013

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (dd-mm-yy)	Cal. Due date (dd-mm-yy)
1	Shielding Room	ZhongShuo Electron	11.0(L)x4.0(W)x3.0(H)	CCIS0061	June 09 2012	June 08 2013
2	EMI Test Receiver	Rohde & Schwarz	ESCI	CCIS0002	May 25 2012	May. 24 2013
3	LISN	CHASE	MN2050D	CCIS0074	Apr. 01 2013	Mar. 31 2014
4	Coaxial Cable	CCIS	N/A	CCIS0086	Apr. 01 2013	Mar. 31 2014

6 Test results and Measurement Data

6.1 Antenna requirement:

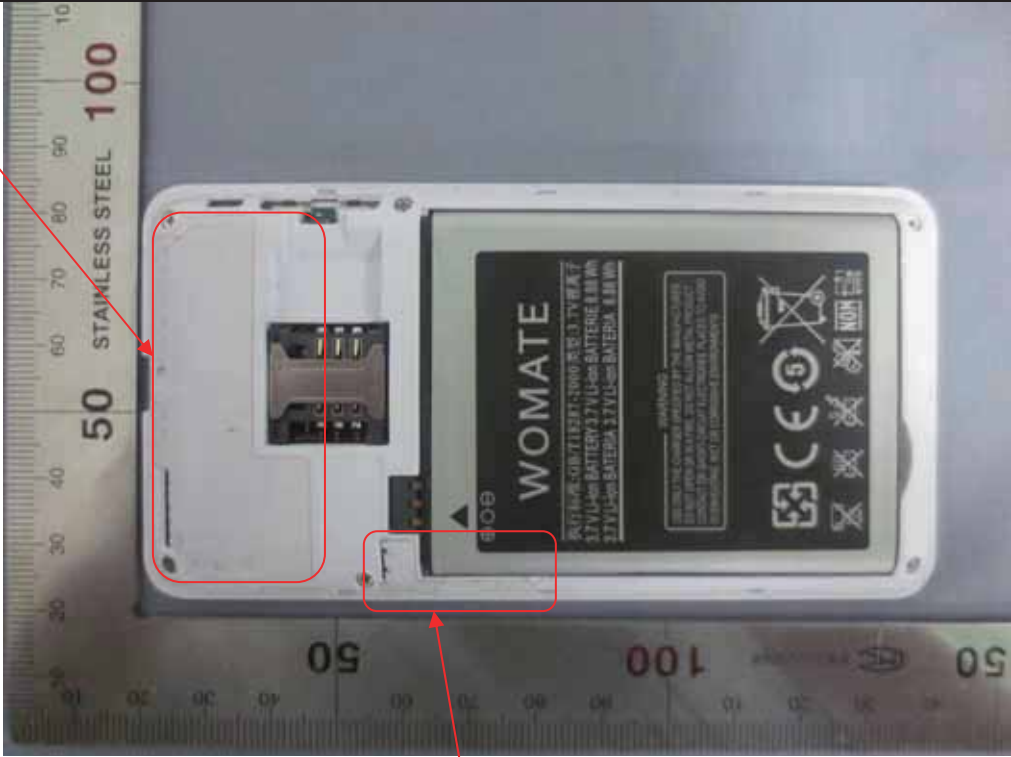
Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i> 15.247(c) (1)(i) requirement: <i>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</i>	
E.U.T Antenna:	
The antenna is an internal antenna which cannot replace by end-user, the best case gain of the WiFi antenna is -1 dBi.	
	

6.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207			
Test Method:	ANSI C63.4: 2003			
Test Frequency Range:	150kHz to 30MHz			
Class / Severity:	Class B			
Receiver setup:	RBW=9kHz, VBW=30kHz			
Limit:	Frequency range (MHz)	Limit (dBuV)		
		Quasi-peak	Average	
		0.15-0.5	66 to 56*	56 to 46*
		0.5-5	56	46
		5-30	60	50
* Decreases with the logarithm of the frequency.				
Test procedure	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.			
Test setup:	Reference Plane LISN AUX Equipment E.U.T 40cm 80cm EMI Receiver Filter AC power Test table/Insulation plane Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m			
Test Instruments:	Refer to section 5.7 for details			
Test mode:	Refer to section 5.3 for details			
Test results:	Passed			

Measurement Data


Neutral:

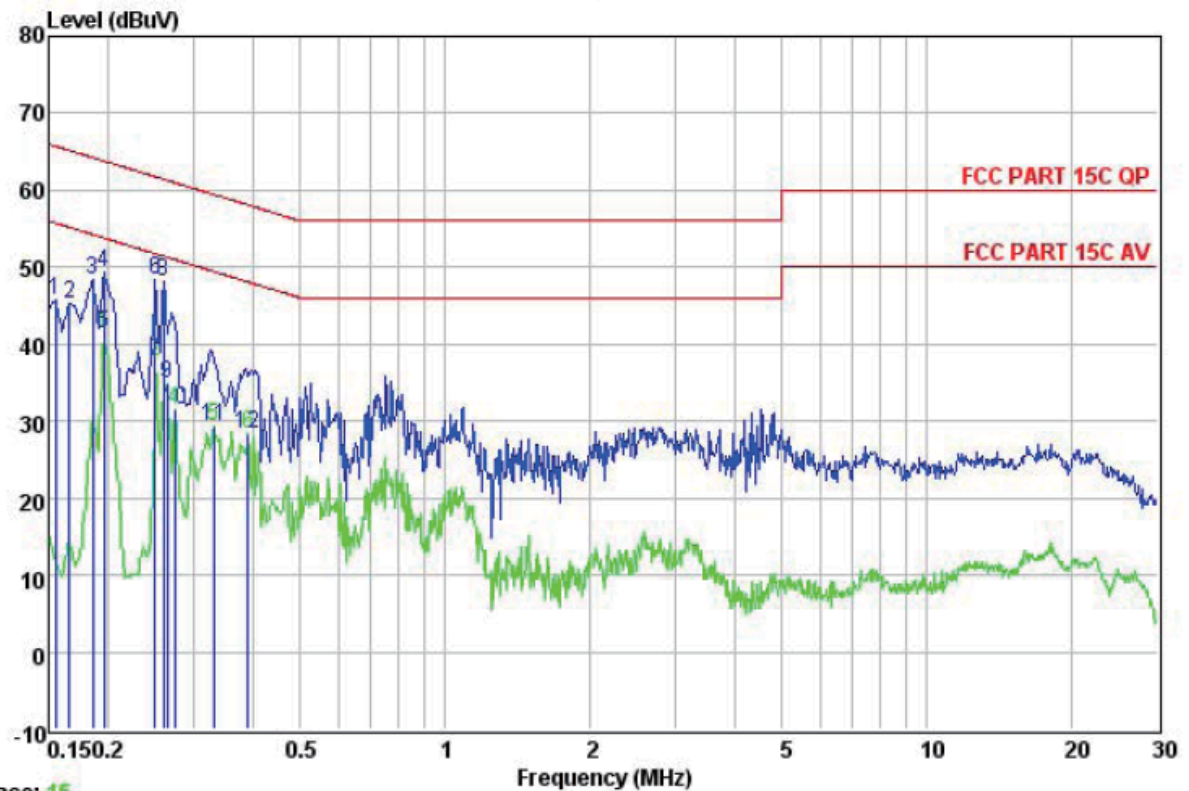

Site : CCIS Conducted Test Site
 Condition : FCC PART 15C QP LISN NEUTRAL
 Job NO. : 113RF
 Model : VM100
 Test Mode : WIFI mode
 Power Rating : AC 120V/60Hz
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa
 Test Engineer: Joe

	Read	LISN	Cable		Limit	Over	
Freq	Level	Factor	Loss	Level	Line	Limit	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.155	34.73	10.27	0.79	45.79	65.74	-19.95 QP
2	0.166	34.10	10.26	0.78	45.14	65.16	-20.02 QP
3	0.185	37.46	10.24	0.77	48.47	64.24	-15.77 QP
4	0.195	38.42	10.23	0.76	49.41	63.80	-14.39 QP
5	0.195	30.52	10.23	0.76	41.51	53.80	-12.29 Average
6	0.249	37.36	10.24	0.75	48.35	61.78	-13.43 QP
7	0.249	26.71	10.24	0.75	37.70	51.78	-14.08 Average
8	0.260	37.13	10.24	0.75	48.12	61.42	-13.30 QP
9	0.264	23.83	10.24	0.74	34.81	51.29	-16.48 Average
10	0.274	20.43	10.24	0.74	31.41	50.98	-19.57 Average
11	0.330	18.34	10.25	0.73	29.32	49.44	-20.12 Average
12	0.389	17.48	10.26	0.72	28.46	48.08	-19.62 Average

Line:

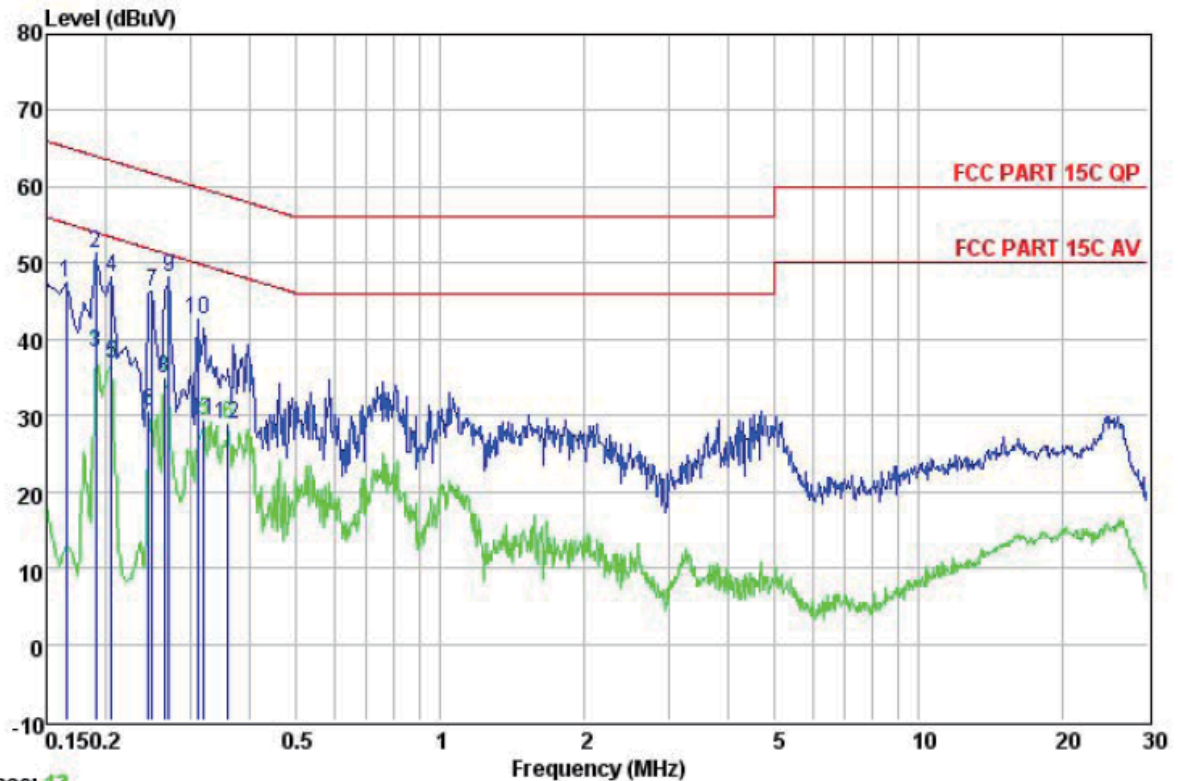


Site : CCIS Conducted Test Site
 Condition : FCC PART 15C QP LISN LINE
 Job NO. : 113RF
 Model : WM100
 Test Mode : WIFI mode
 Power Rating : AC 120V/60Hz
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa
 Test Engineer: Joe

	Read	LISN	Cable	Limit	Over	
Freq	Level	Factor	Loss	Level	Line	Limit Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB
1	0.165	36.48	10.24	0.78	47.50	65.21 -17.71 QP
2	0.190	40.24	10.22	0.76	51.22	64.02 -12.80 QP
3	0.190	27.38	10.22	0.76	38.36	54.02 -15.66 Average
4	0.205	37.26	10.21	0.76	48.23	63.40 -15.17 QP
5	0.205	25.87	10.21	0.76	36.84	53.40 -16.56 Average
6	0.246	19.66	10.24	0.75	30.65	51.91 -21.26 Average
7	0.249	35.23	10.24	0.75	46.22	61.78 -15.56 QP
8	0.264	23.98	10.24	0.74	34.96	51.29 -16.33 Average
9	0.270	37.19	10.25	0.74	48.18	61.12 -12.94 QP
10	0.310	31.69	10.26	0.74	42.69	59.97 -17.28 QP
11	0.320	18.34	10.26	0.74	29.34	49.71 -20.37 Average
12	0.360	17.95	10.27	0.73	28.95	48.74 -19.79 Average

Notes:

1. An initial pre-scan was performed on the live and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss

6.3 Conducted Output Power

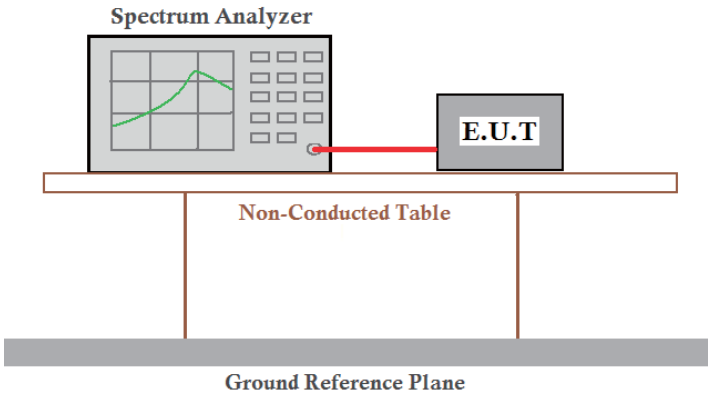Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	30dBm
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	Test method refers to KDB558074 (DTS Measure Guidance). AVGSA-1 method was used.

Measurement Data

Test CH	Maximum Conducted Output Power (dBm)			Limit(dBm)	Result
	802.11b	802.11g	802.11n(H20)		
Lowest	18.87	15.07	13.63	30.00	Pass
Middle	18.80	15.04	13.41		
Highest	18.65	14.94	13.23		


Test plot as follows:

Test mode:

802.11b




Ref 27 dBm *Att 30 dB RBW 1 MHz Marker 1 [T1] 10.55 dBm
 VBW 3 MHz 2.413760000 GHz
 SWT 2.5 ms

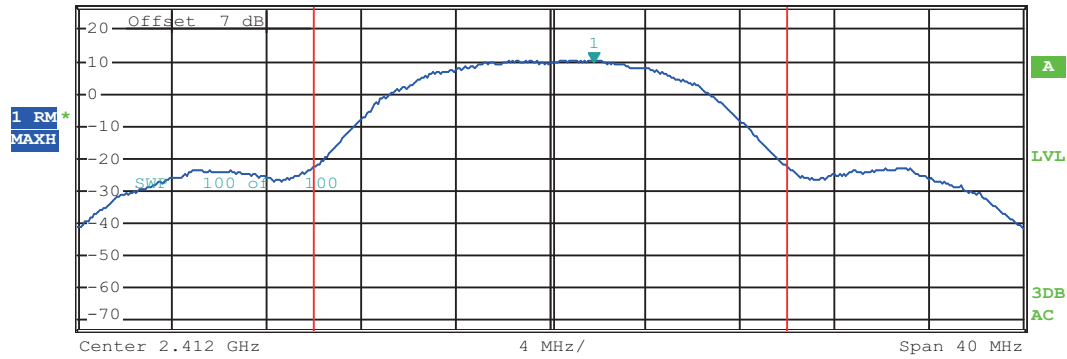

Lowest channel




Ref 27 dBm *Att 30 dB RBW 1 MHz Marker 1 [T1] 10.63 dBm
 VBW 3 MHz 2.438360000 GHz
 SWT 2.5 ms

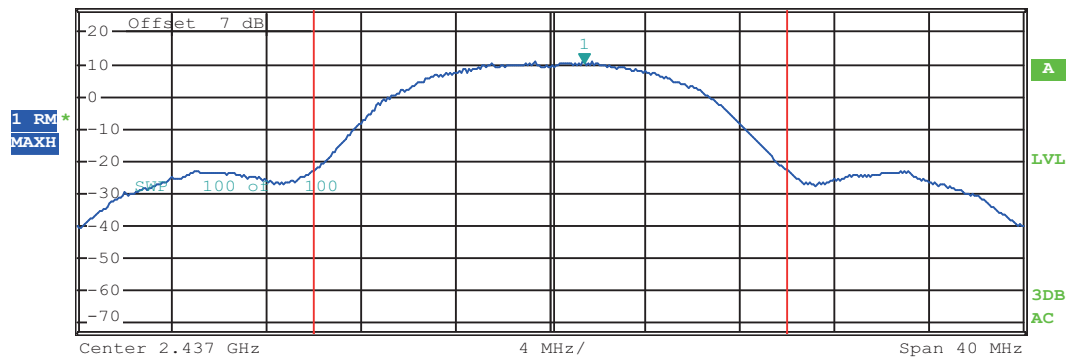

Middle channel



Ref 27 dBm *Att 30 dB RBW 1 MHz Marker 1 [T1] 10.57 dBm
 VBW 3 MHz 2.463840000 GHz
 SWT 2.5 ms

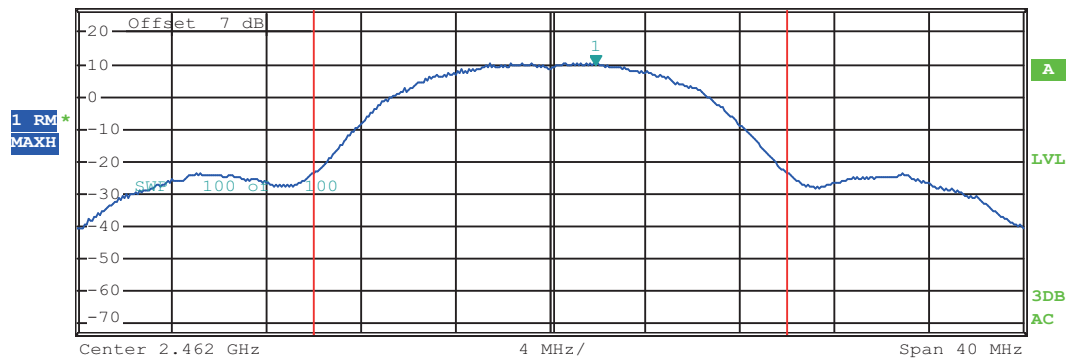


Highest channel

Test mode:	802.11g
------------	---------



Ref 27 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] 4.62 dBm
*VBW 3 MHz 2.410080000 GHz
SWT 2.5 ms

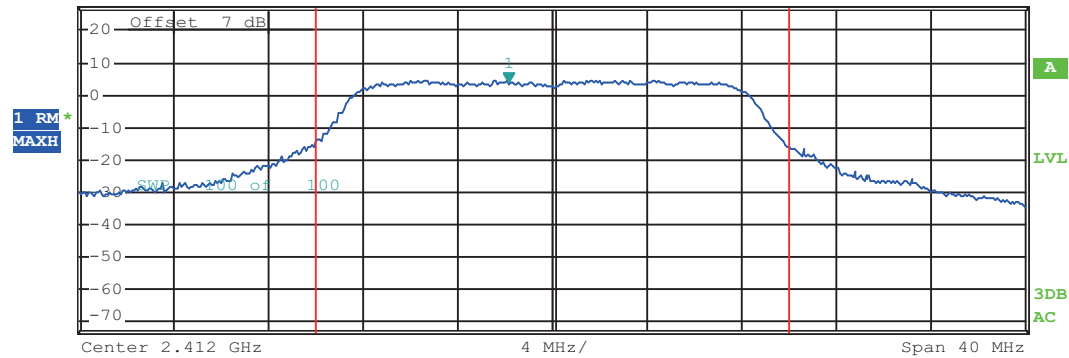


Tx Channel

Bandwidth 20 MHz Power 15.07 dBm

Lowest channel



Ref 27 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] 4.97 dBm
*VBW 3 MHz 2.438920000 GHz
SWT 2.5 ms

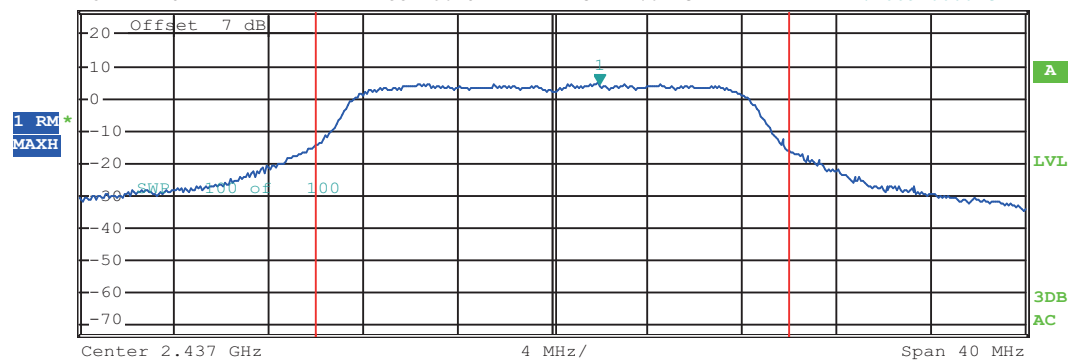


Tx Channel

Bandwidth 20 MHz Power 15.04 dBm

Middle channel



Ref 27 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] 4.50 dBm
*VBW 3 MHz 2.459920000 GHz
SWT 2.5 ms

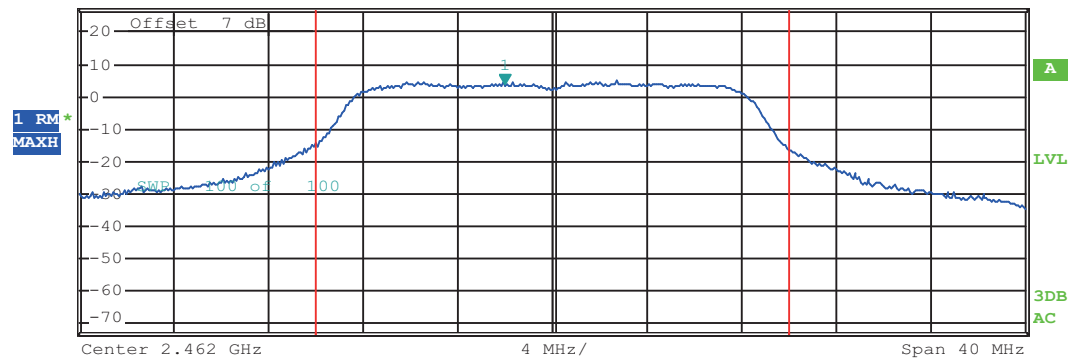

Tx Channel


Bandwidth 20 MHz Power 14.94 dBm

Highest channel

Test mode:	802.11n(H20)
------------	--------------



Ref 27 dBm *Att 30 dB RBW 1 MHz Marker 1 [T1] 3.27 dBm
 VBW 3 MHz 2.416320000 GHz
 SWT 2.5 ms

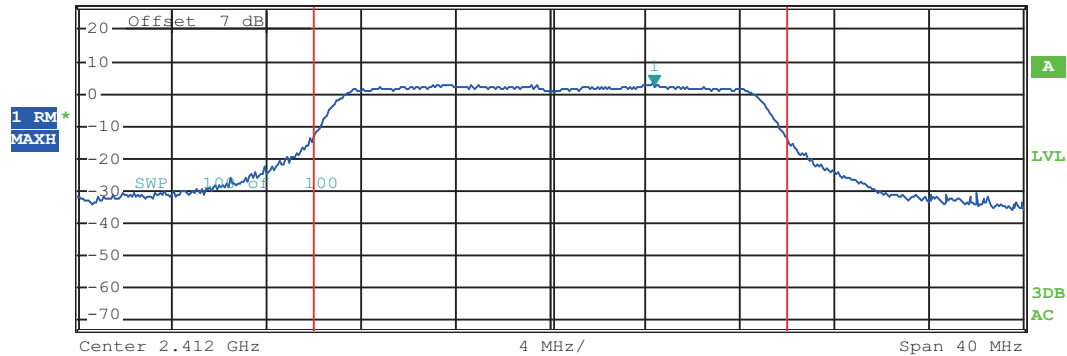

Tx Channel

Bandwidth

20 MHz


Power

13.63 dBm

Lowest channel



Ref 27 dBm *Att 30 dB RBW 1 MHz Marker 1 [T1] 2.92 dBm
 VBW 3 MHz 2.441160000 GHz
 SWT 2.5 ms

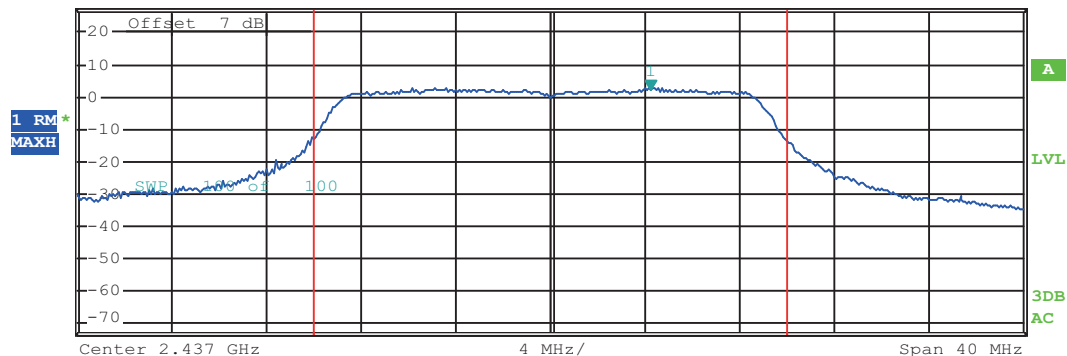

Tx Channel

Bandwidth

20 MHz


Power

13.41 dBm

Middle channel



Ref 27 dBm *Att 30 dB RBW 1 MHz Marker 1 [T1] 2.55 dBm
 VBW 3 MHz 2.466400000 GHz
 SWT 2.5 ms

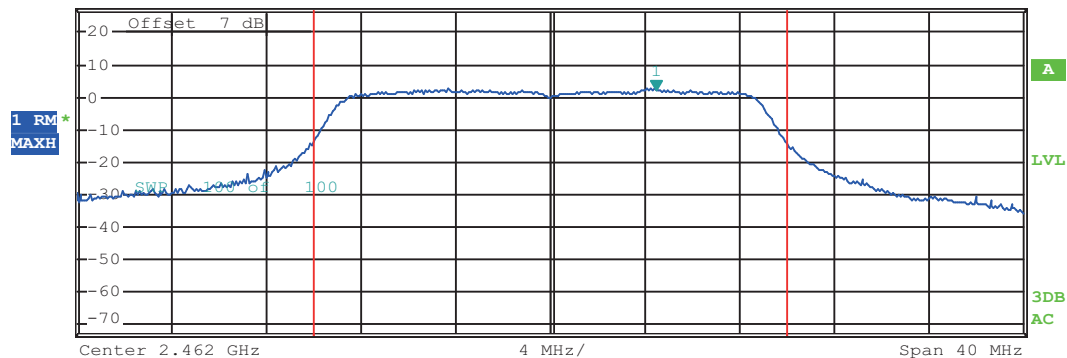

Tx Channel

Bandwidth


20 MHz

Power

13.23 dBm

Highest channel

6.4 Occupy Bandwidth

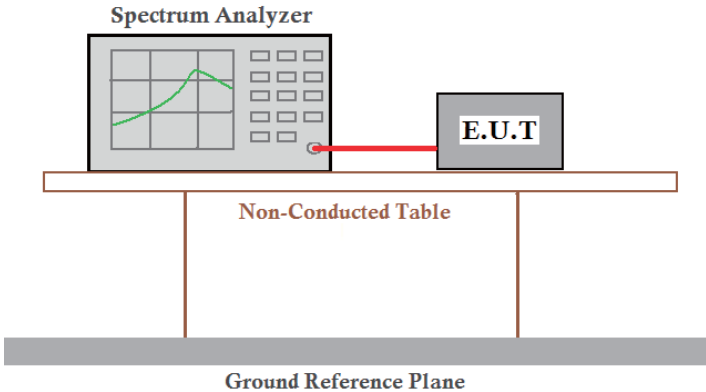Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	>500kHz
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data


Test CH	6dB Occupy Bandwidth (MHz)			Limit(kHz)	Result
	802.11b	802.11g	802.11n(H20)		
Lowest	10.48	16.64	17.84	>500	Pass
Middle	10.64	16.64	17.84		
Highest	10.56	16.64	17.84		

Test CH	99%dB Occupy Bandwidth (MHz)			Limit(kHz)	Result
	802.11b	802.11g	802.11n(H20)		
Lowest	14.00	16.56	17.68	N/A	N/A
Middle	14.00	16.56	17.68		
Highest	14.00	16.56	17.76		

Test plot as follows:


Test mode:6dB BW

802.11b

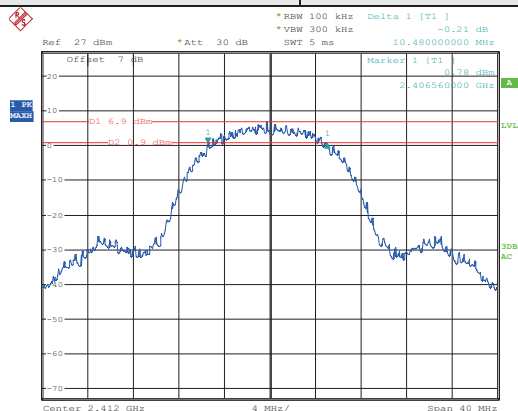


Date: 3.MAY.2013 13:23:57

Lowest channel

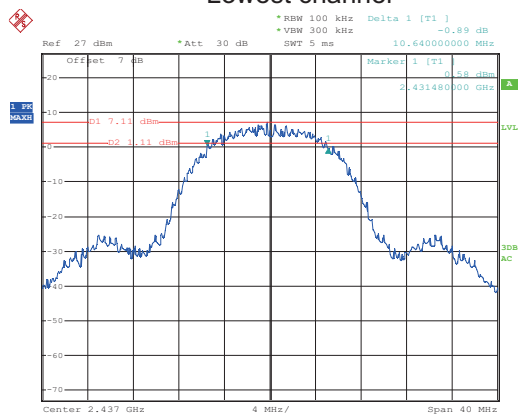

Date: 3.MAY.2013 13:25:29

Middle channel

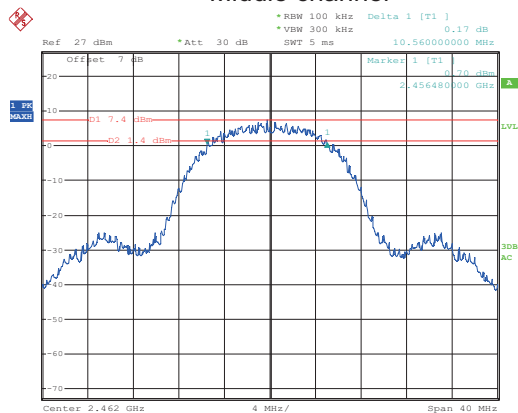


Date: 3.MAY.2013 13:26:40

Highest channel


Test mode:6dB BW

802.11g

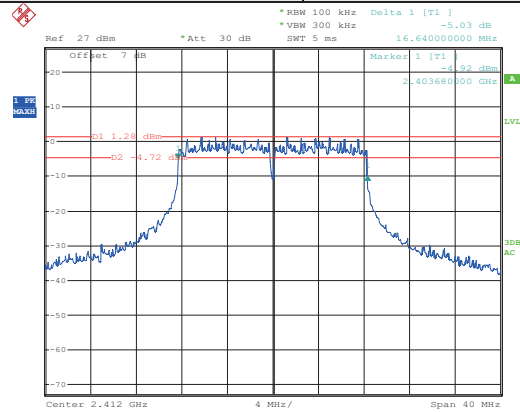


Date: 3.MAY.2013 13:29:03

Lowest channel

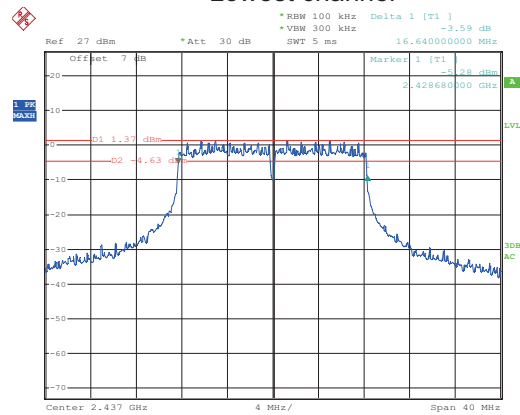

Date: 3.MAY.2013 13:30:48

Middle channel

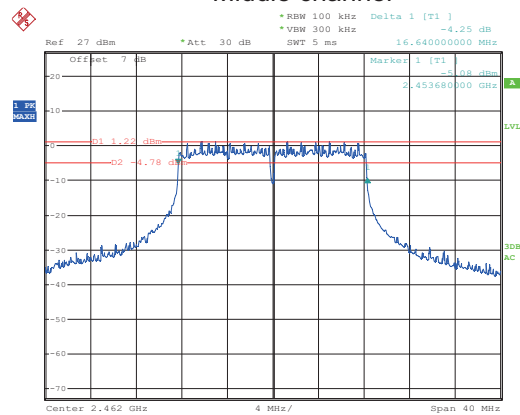


Date: 3.MAY.2013 13:32:33

Highest channel


Test mode:6dB BW

802.11n(H20)

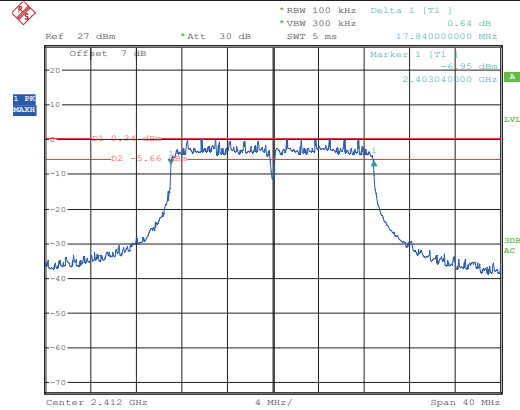


Date: 3.MAY.2013 13:43:40

Lowest channel

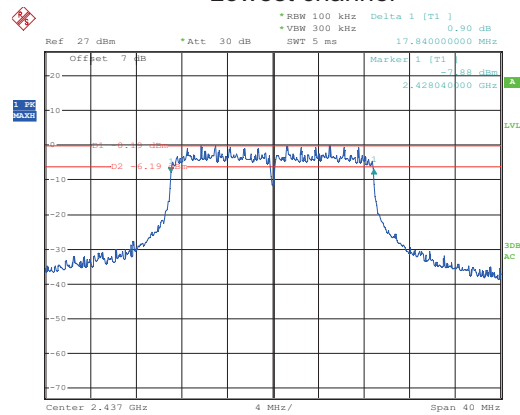

Date: 3.MAY.2013 13:45:43

Middle channel

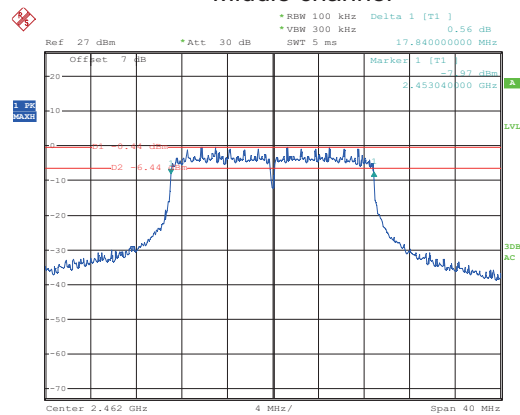


Date: 3.MAY.2013 13:47:13

Highest channel


Test mode: 99%dB Occupy Bandwidth

802.11b

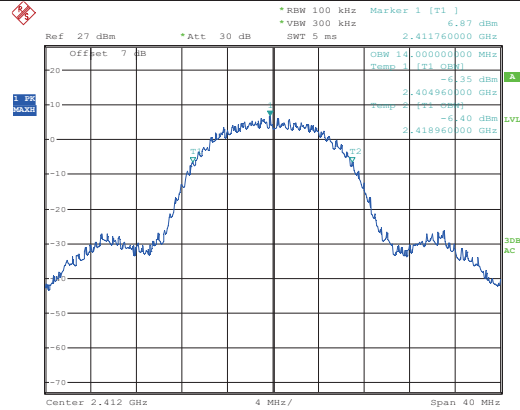


Date: 3.MAY.2013 13:54:24

Lowest channel

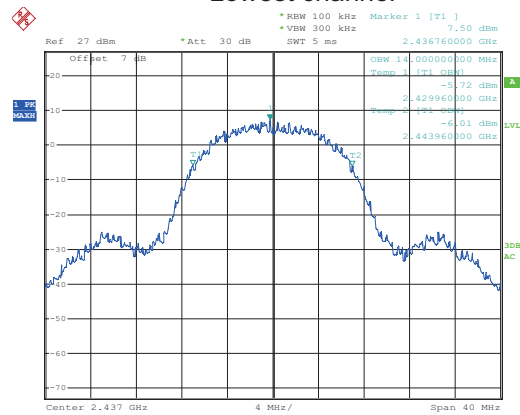

Date: 3.MAY.2013 13:55:22

Middle channel

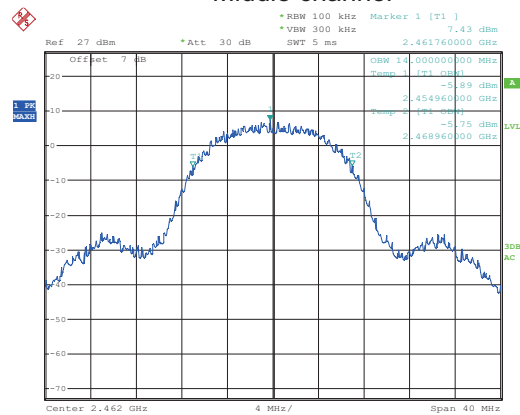


Date: 3.MAY.2013 13:55:59

Highest channel


Test mode: 99%dB Occupy Bandwidth

802.11g

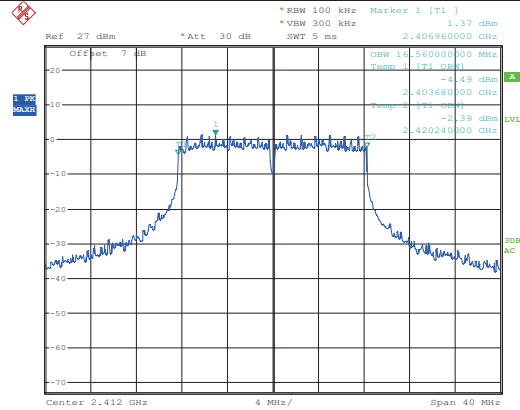


Date: 3.MAY.2013 13:51:50

Lowest channel

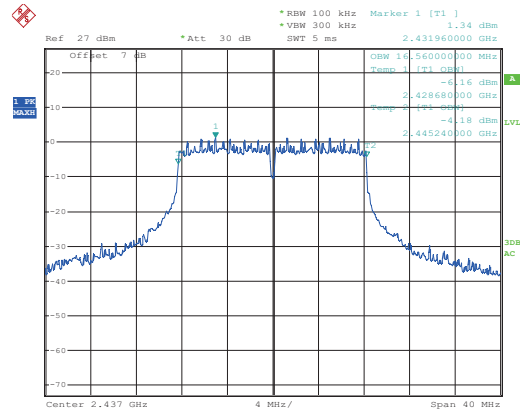

Date: 3.MAY.2013 13:52:30

Middle channel

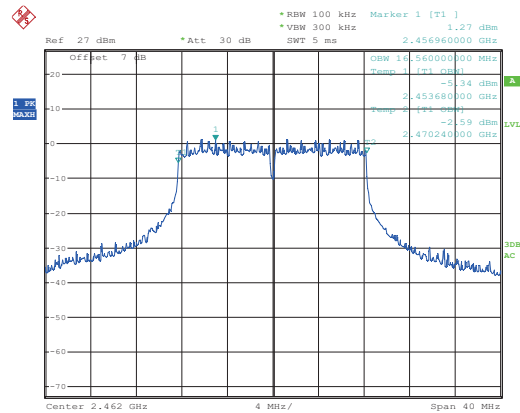


Date: 3.MAY.2013 13:53:15

Highest channel


Test mode: 99%dB Occupy Bandwidth

802.11n(H20)

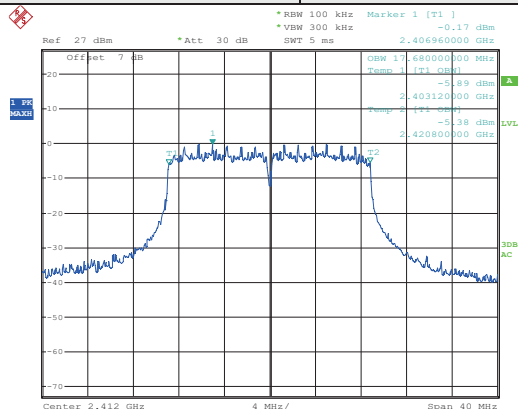


Date: 3.MAY.2013 13:50:46

Lowest channel

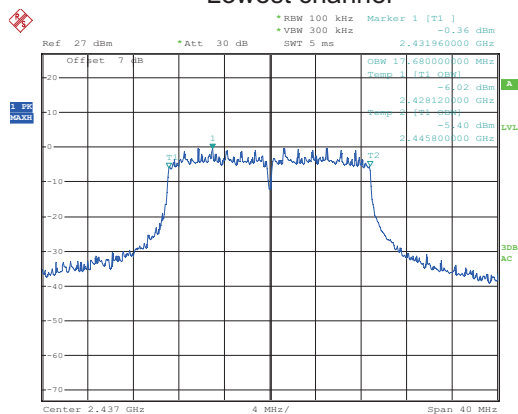

Date: 3.MAY.2013 13:49:59


Middle channel

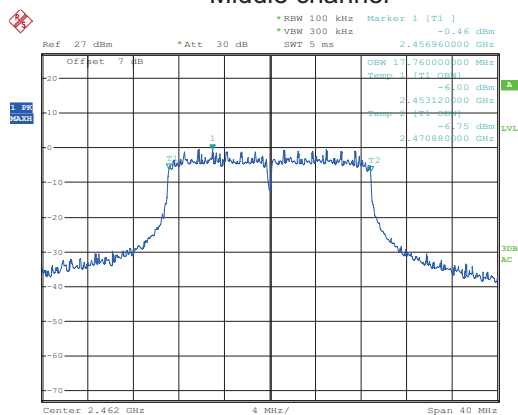

Date: 3.MAY.2013 13:48:57

Highest channel

6.5 Power Spectral Density

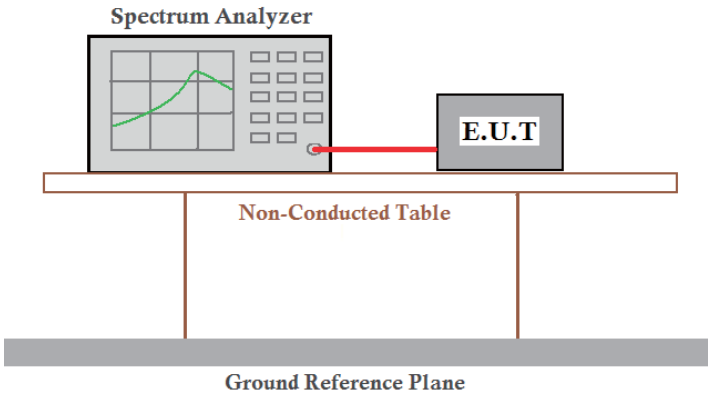Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	8dBm
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data

Test CH	Power Spectral Density (dBm)			Limit(dBm)	Result
	802.11b	802.11g	802.11n(H20)		
Lowest	6.60	1.48	-0.22	8.00	Pass
Middle	6.46	1.82	-0.25		
Highest	6.16	1.63	-0.48		

Test plot as follows:


Test mode:

802.11b

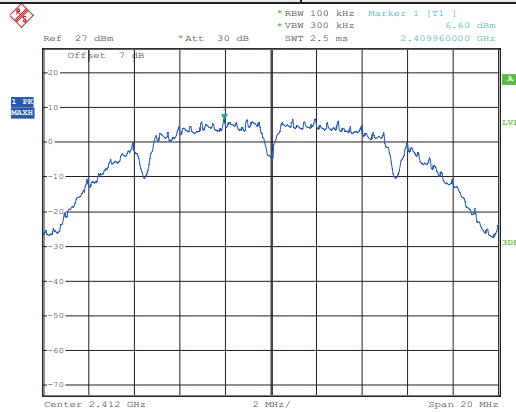


Date: 10.MAY.2013 15:49:35

Lowest channel

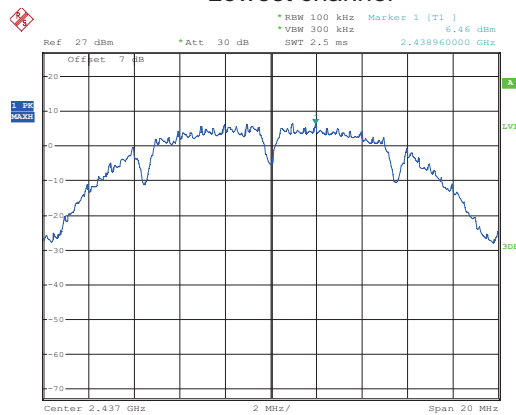

Date: 10.MAY.2013 15:52:09

Middle channel

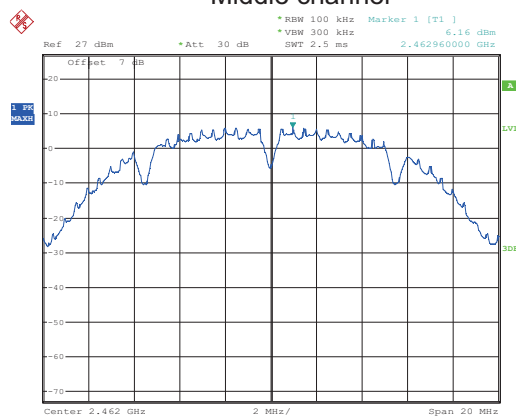


Date: 10.MAY.2013 15:54:10

Highest channel


Test mode:

802.11g

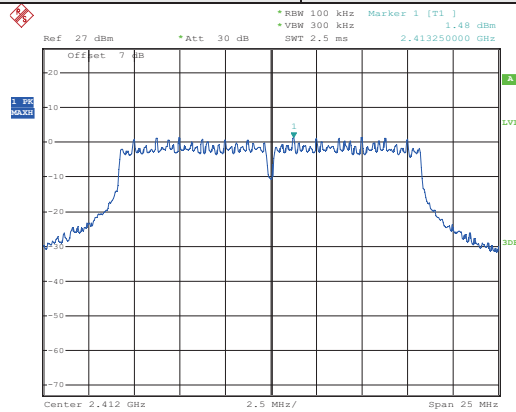


Date: 10.MAY.2013 15:58:06

Lowest channel

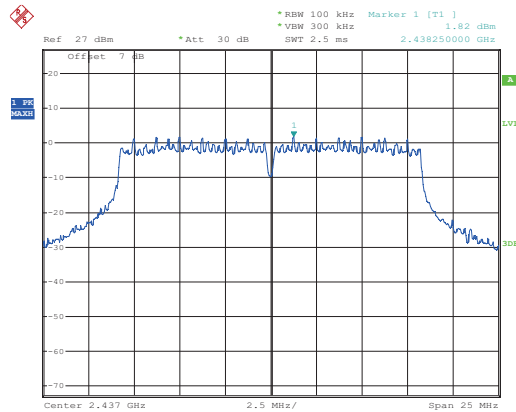

Date: 10.MAY.2013 16:00:51

Middle channel

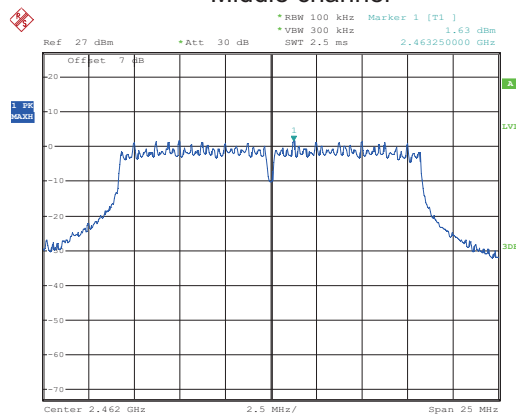


Date: 10.MAY.2013 16:03:49

Highest channel


Test mode:

802.11n(H20)

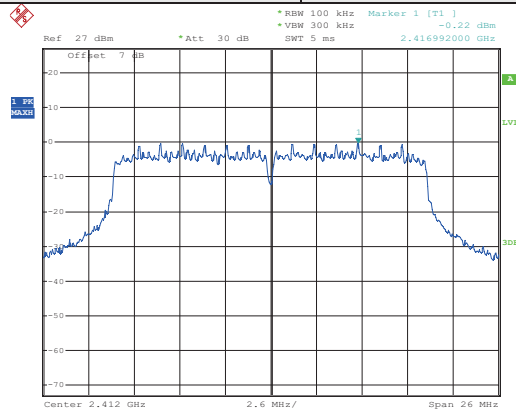


Date: 10.MAY.2013 16:06:33

Lowest channel

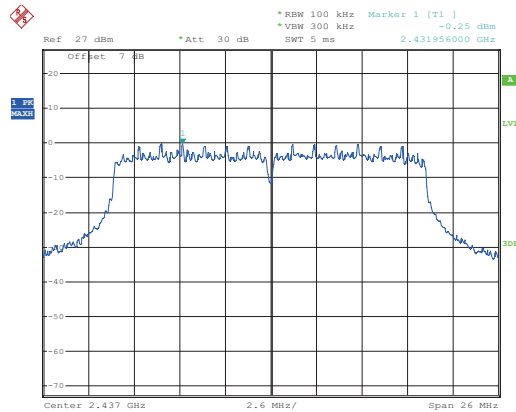

Date: 10.MAY.2013 16:08:42

Middle channel

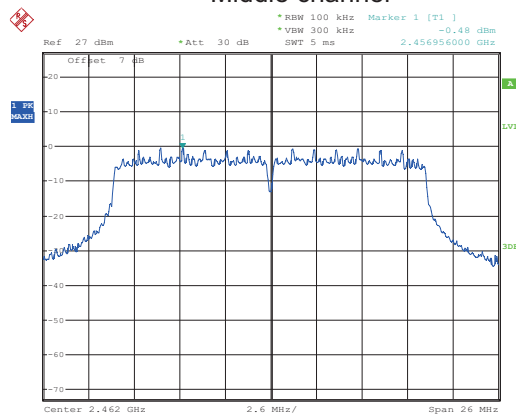


Date: 10.MAY.2013 16:10:30

Highest channel


6.6 Band Edge

6.6.1 Conducted Emission Method

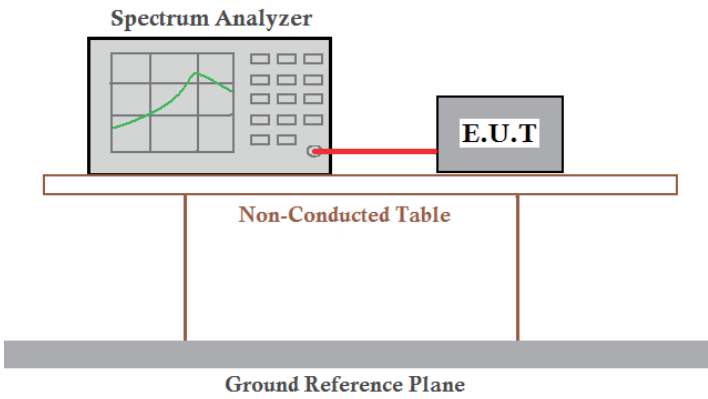
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane, represented by a thick grey bar.
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plot as follows:

Test mode:	802.11b
------------	---------

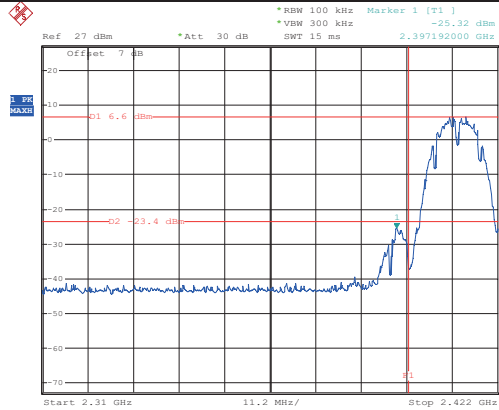


Lowest channel

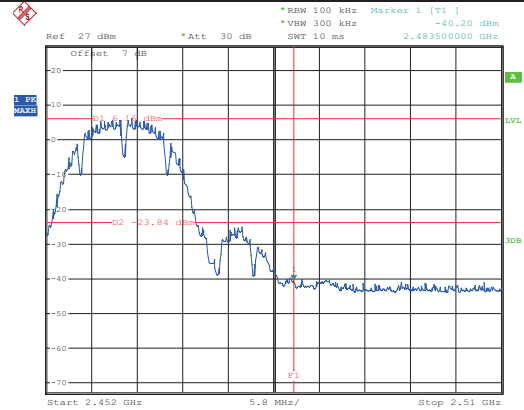


Highest channel

Test mode:	802.11g
------------	---------

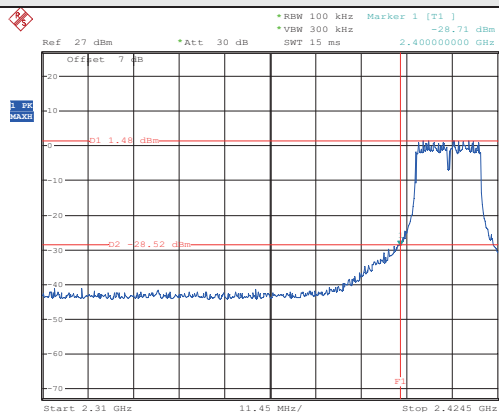


Lowest channel

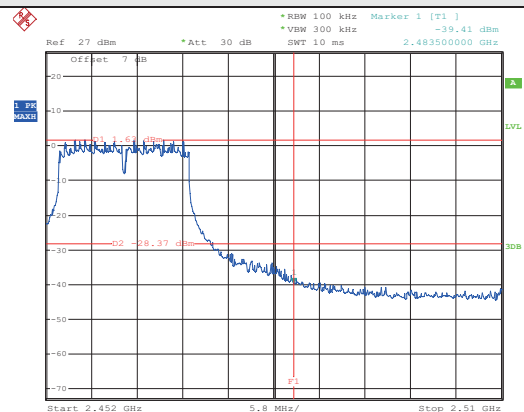

Highest channel


Test mode:

802.11n(H20)

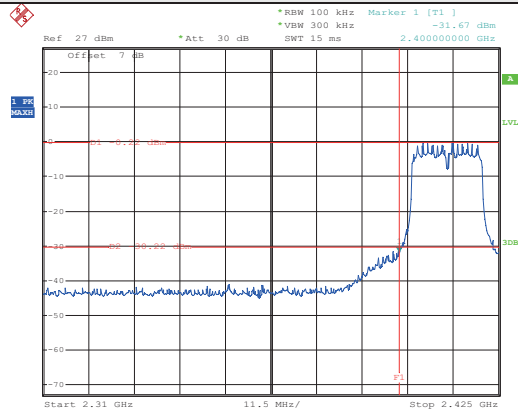

Date: 10.MAY.2013 16:06:58


Lowest channel

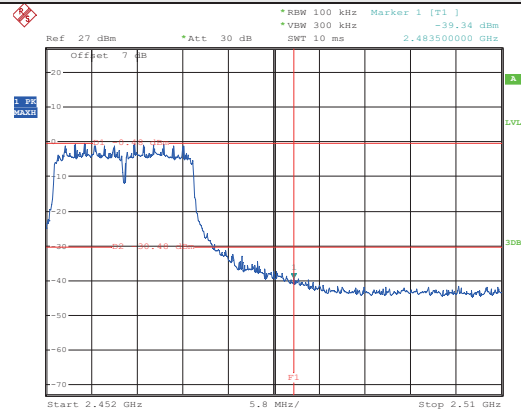

Date: 10.MAY.2013 16:11:02

Highest channel


6.6.2 Radiated Emission Method

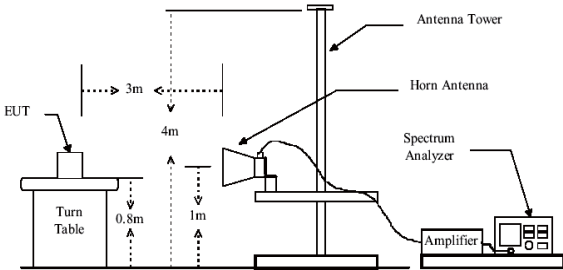Test Requirement:	FCC Part15 C Section 15.209 and 15.205																		
Test Method:	ANSI C63.4: 2003																		
Test Frequency Range:	2.3GHz to 2.5GHz																		
Test site:	Measurement Distance: 3m																		
Receiver setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr><tr><td>Peak</td><td>1MHz</td><td>10Hz</td><td>Average Value</td></tr></table>					Frequency	Detector	RBW	VBW	Remark	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value
Frequency	Detector	RBW	VBW	Remark															
Above 1GHz	Peak	1MHz	3MHz	Peak Value															
	Peak	1MHz	10Hz	Average Value															
Limit:	<table><tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td rowspan="2">Above 1GHz</td><td>54.00</td><td>Average Value</td></tr><tr><td>74.00</td><td>Peak Value</td></tr></table>					Frequency	Limit (dBuV/m @3m)	Remark	Above 1GHz	54.00	Average Value	74.00	Peak Value						
Frequency	Limit (dBuV/m @3m)	Remark																	
Above 1GHz	54.00	Average Value																	
	74.00	Peak Value																	
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.																		
Test setup:																			
Test Instruments:	Refer to section 5.7 for details																		
Test mode:	Refer to section 5.3 for details																		
Test results:	Passed																		

802.11b


Test channel: Lowest

Horizontal:

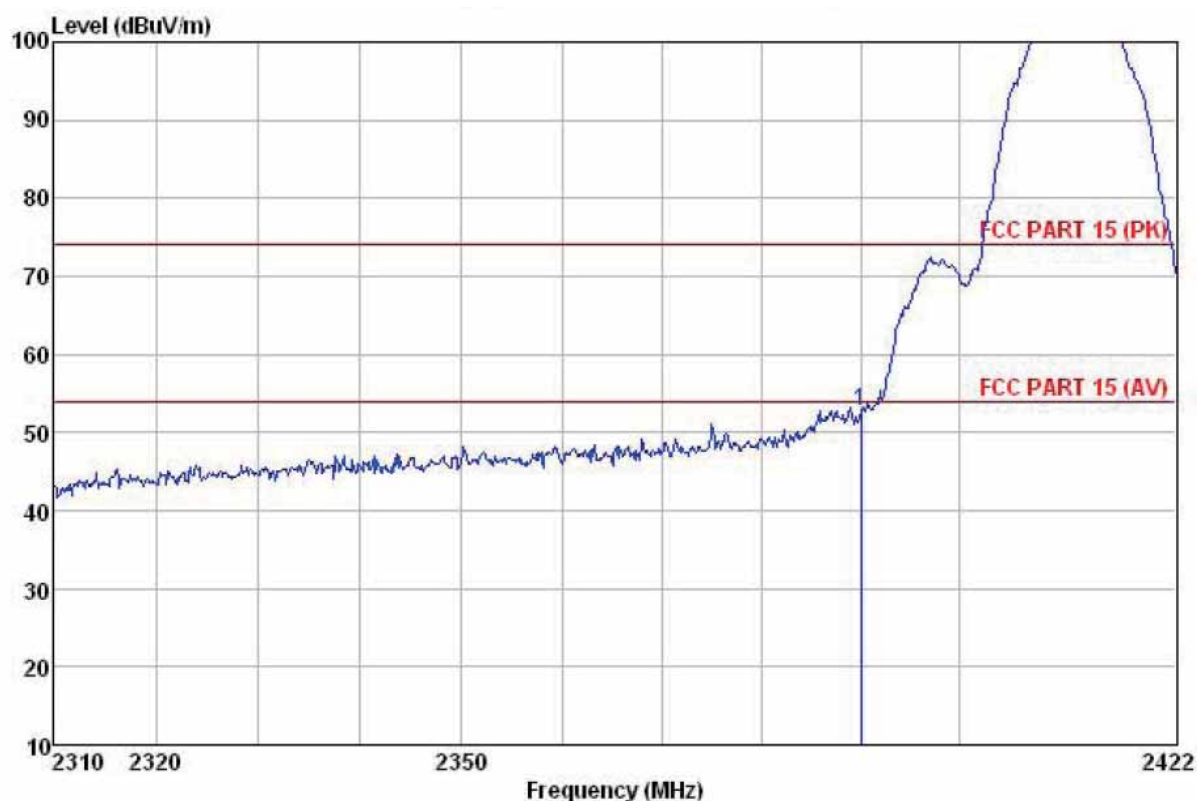

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11B L CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe


	Read	Antenna	Cable	Preamp		Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 2390.000	50.90	27.58	5.67	31.35	52.80	74.00	-21.20	Peak

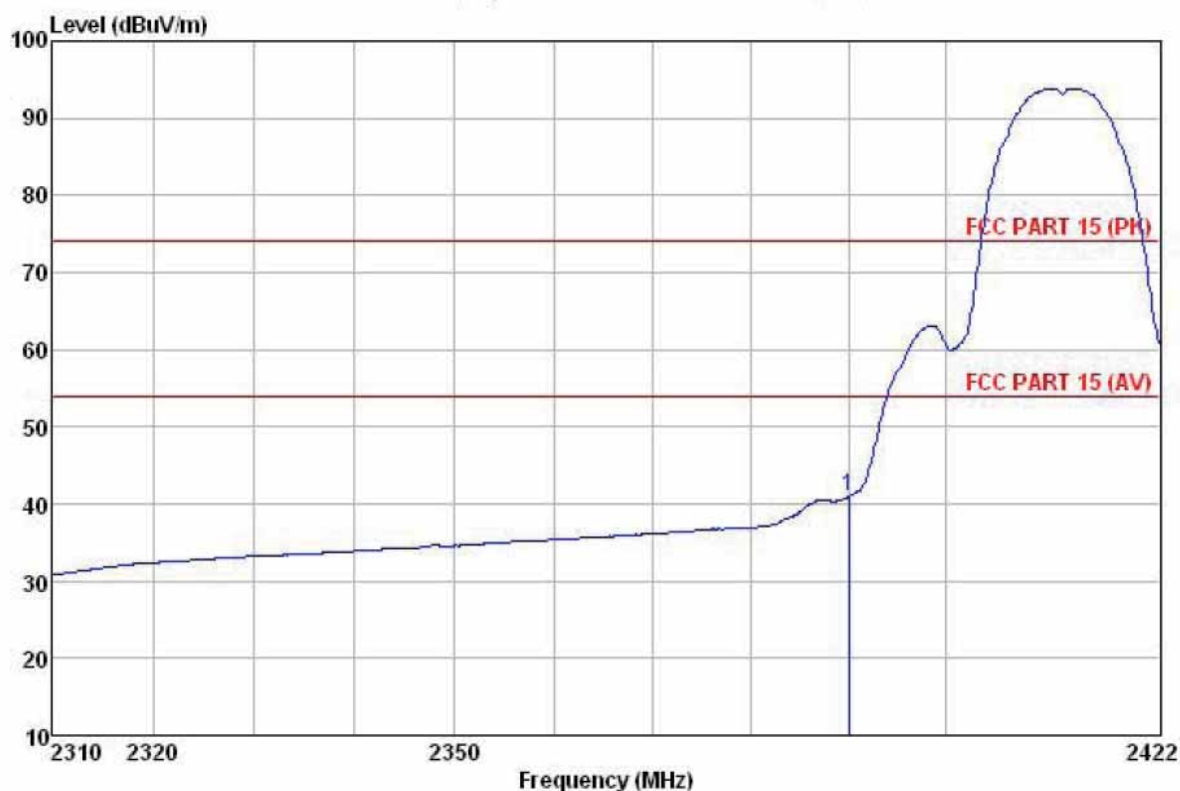

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11B L CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe


	Freq	ReadAntenna Level	Cable Factor	Preamp Loss Factor	Limit Level	Over Line	Remark
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB
1	2390.000	39.07	27.58	5.67	31.35	40.97	54.00 -13.03 Average

Vertical:

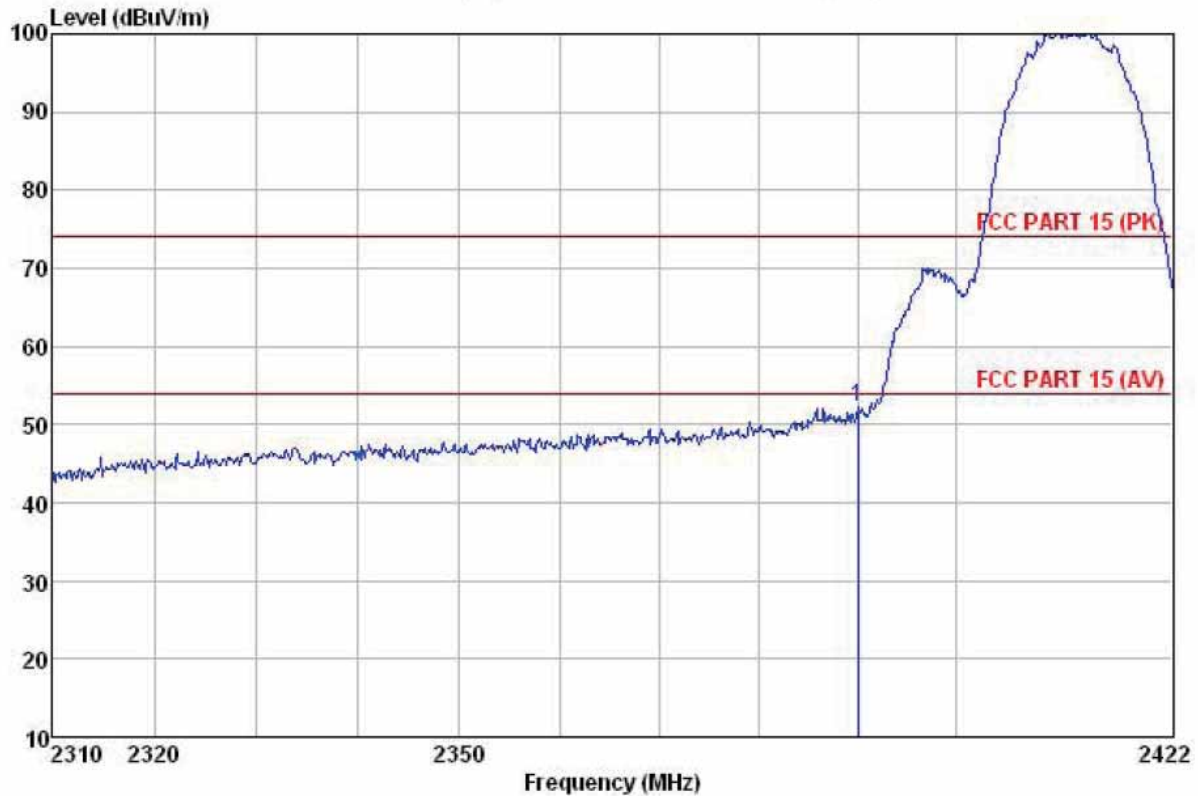

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11B L CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe

	Freq	ReadAntenna Level	Cable Factor	Preamp Loss	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB	
1	2390.000	50.30	27.58	5.67	31.35	52.20	74.00	-21.80 Peak

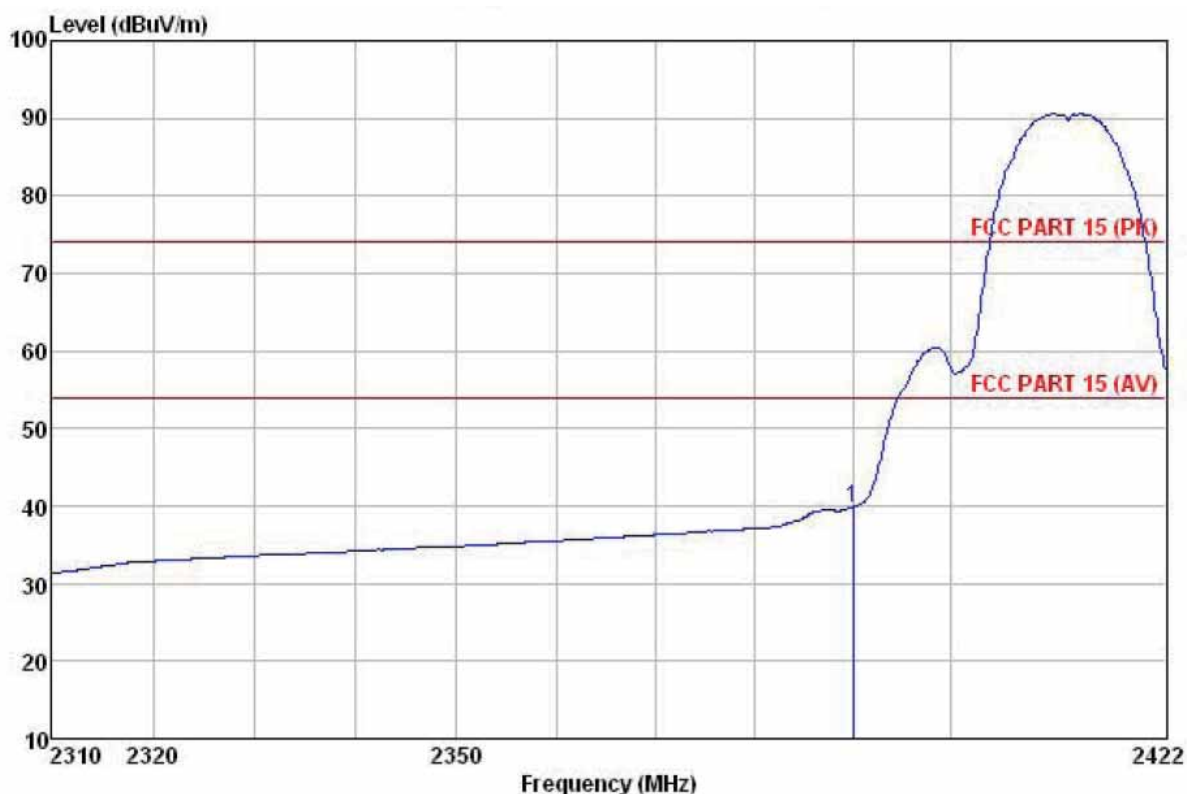


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11B L CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe

		ReadAntenna	Cable	Preamp		Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 2390.000	37.94	27.58	5.67	31.35	39.84	54.00	-14.16	Average


Test channel: Highest

Horizontal:

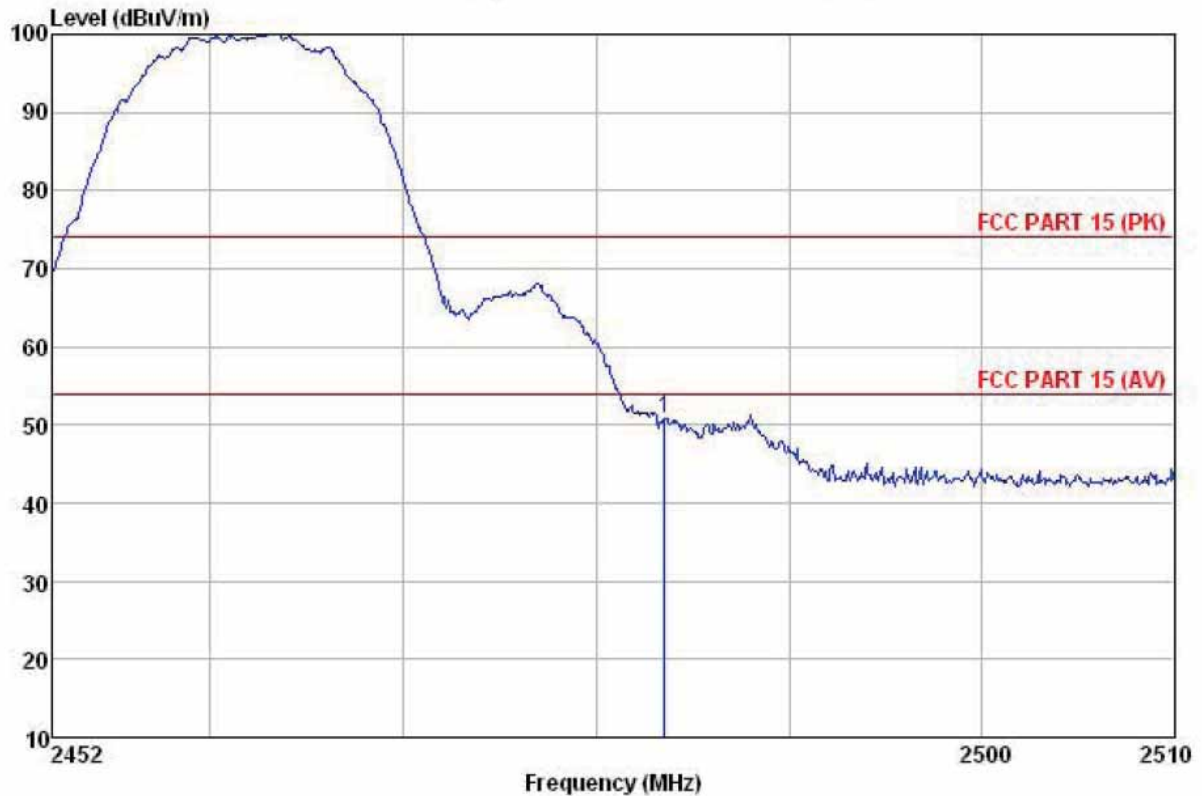

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11B H CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe


	Freq	ReadAntenna	Cable	Preamp	Limit	Over	
	Level	Factor	Loss	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m dB
1	2483.500	54.85	27.52	5.70	37.26	50.81	74.00 -23.19 Peak

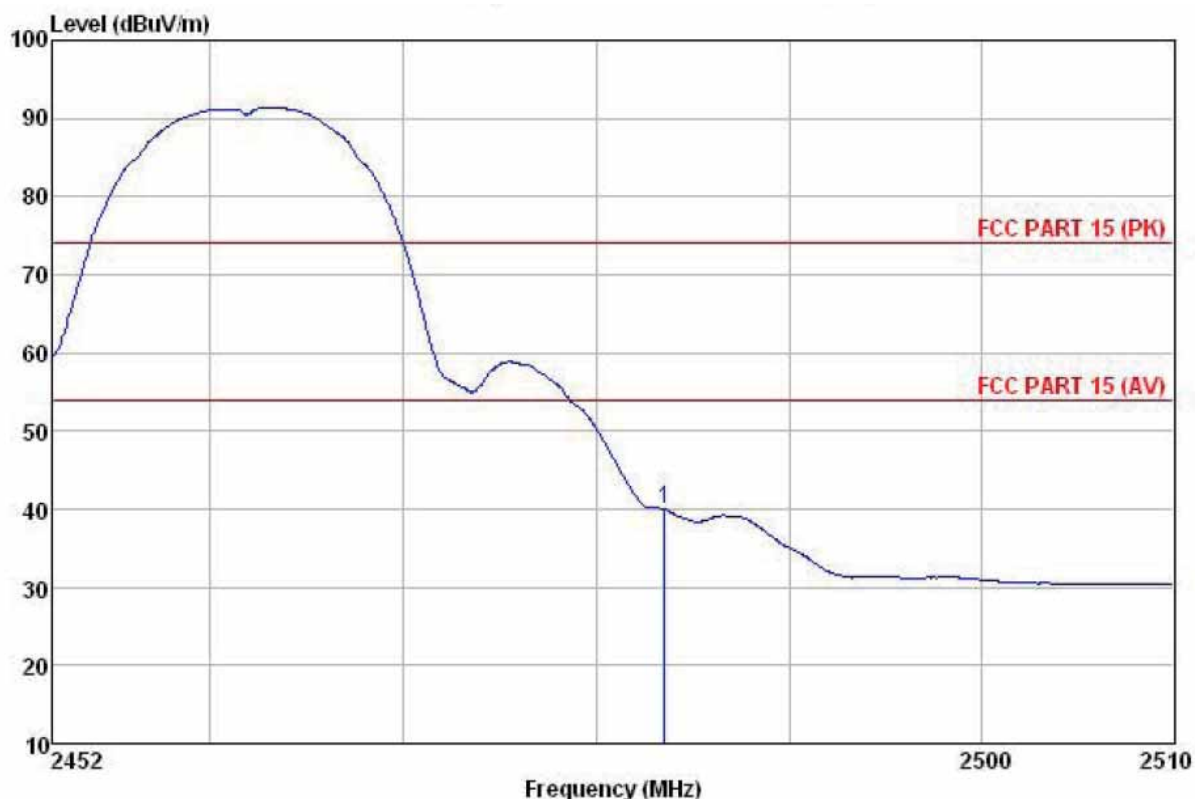

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11B H CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe


	Freq	ReadAntenna	Cable	Preamp	Limit	Over	
	Level	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m
1	2483.500	43.98	27.52	5.70	37.26	39.94	54.00 -14.06 Average

Vertical:

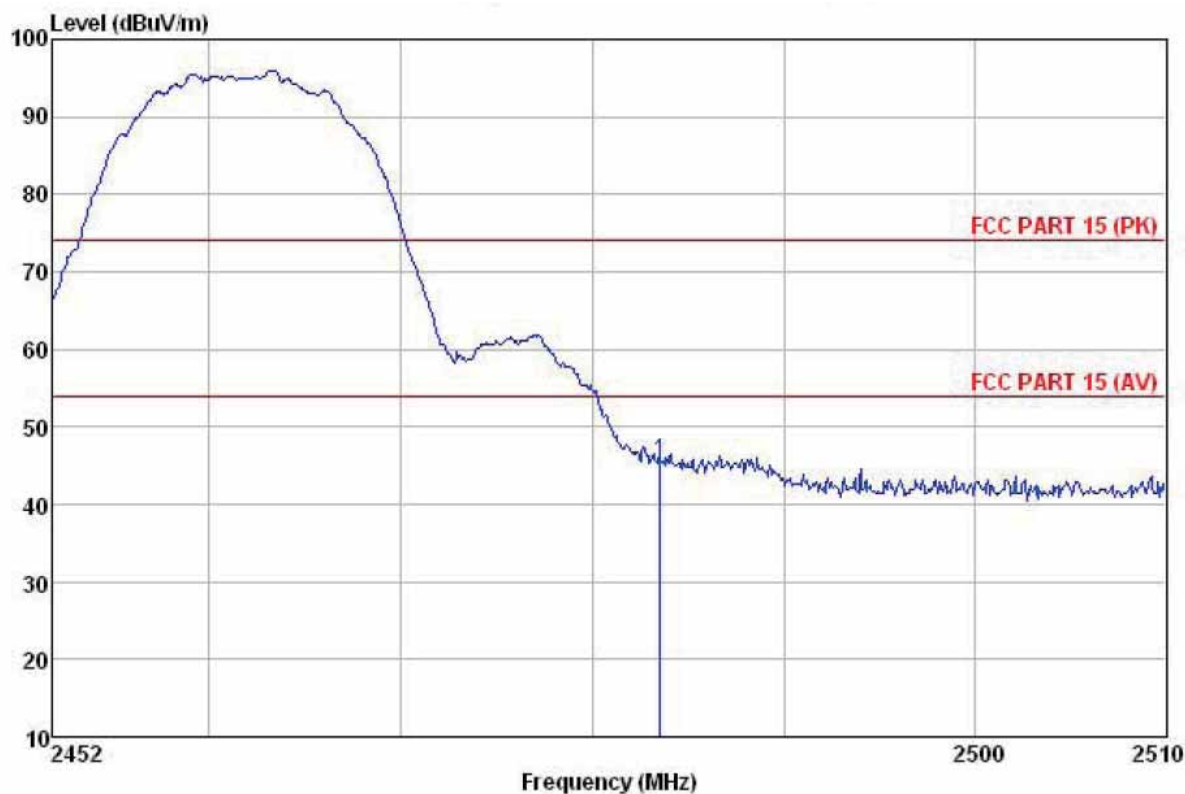

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11B H CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe

	Freq	ReadAntenna	Cable	Preamp	Limit	Over	
	Level	Factor	Loss	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m dB
1	2483.500	49.59	27.52	5.70	37.26	45.55	74.00 -28.45 Peak

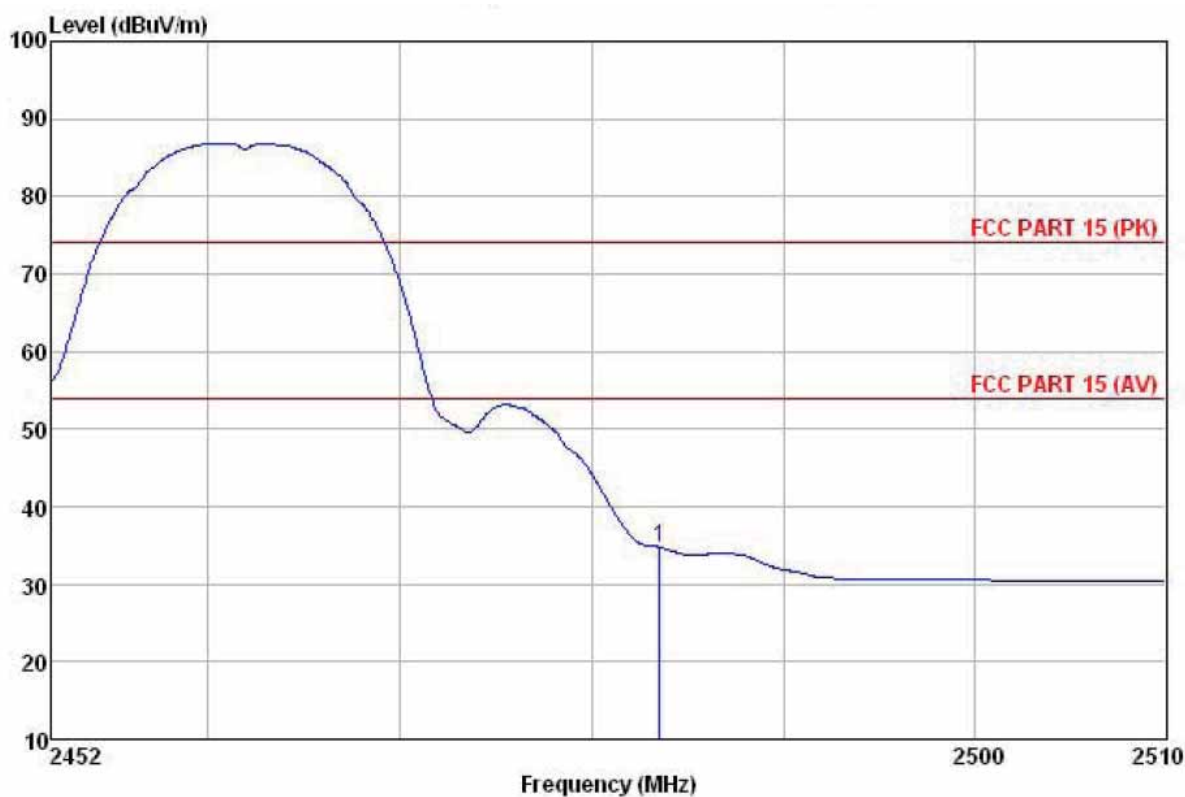


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11B H CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe

	ReadAntenna	Cable	Preamp		Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit Remark
-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1 2483.500	38.81	27.52	5.70	37.26	34.77	54.00	-19.23 Average

802.11g


Test channel: Lowest

Horizontal:

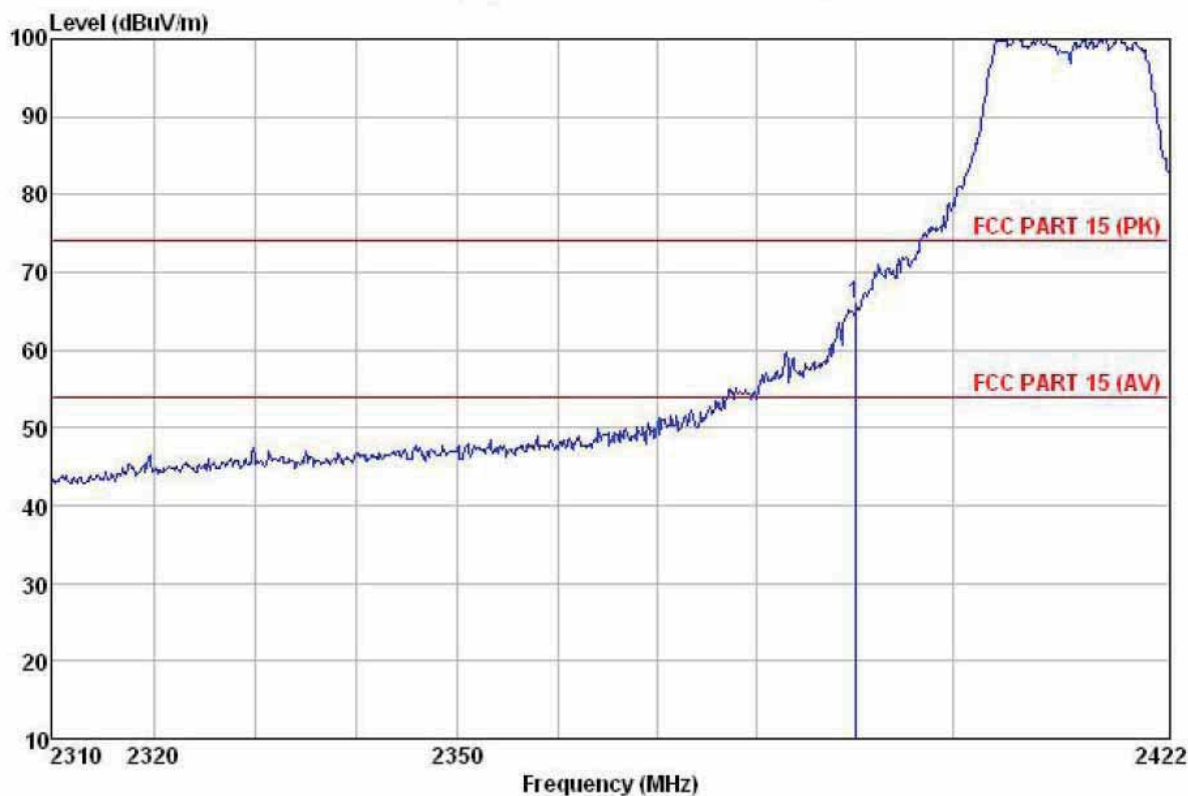

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11G L CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24'C Humi:65% Atmos:101Kpa
 Test Engineer: Joe


	Freq	ReadAntenna	Cable	Preamp	Limit	Over	
	Level Factor	Loss Factor	Level	Line	Limit	Remark	
-----	-----	-----	-----	-----	-----	-----	-----
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m
1	2390.000	64.06	27.58	5.67	31.35	65.96	74.00
							-8.04
							Peak

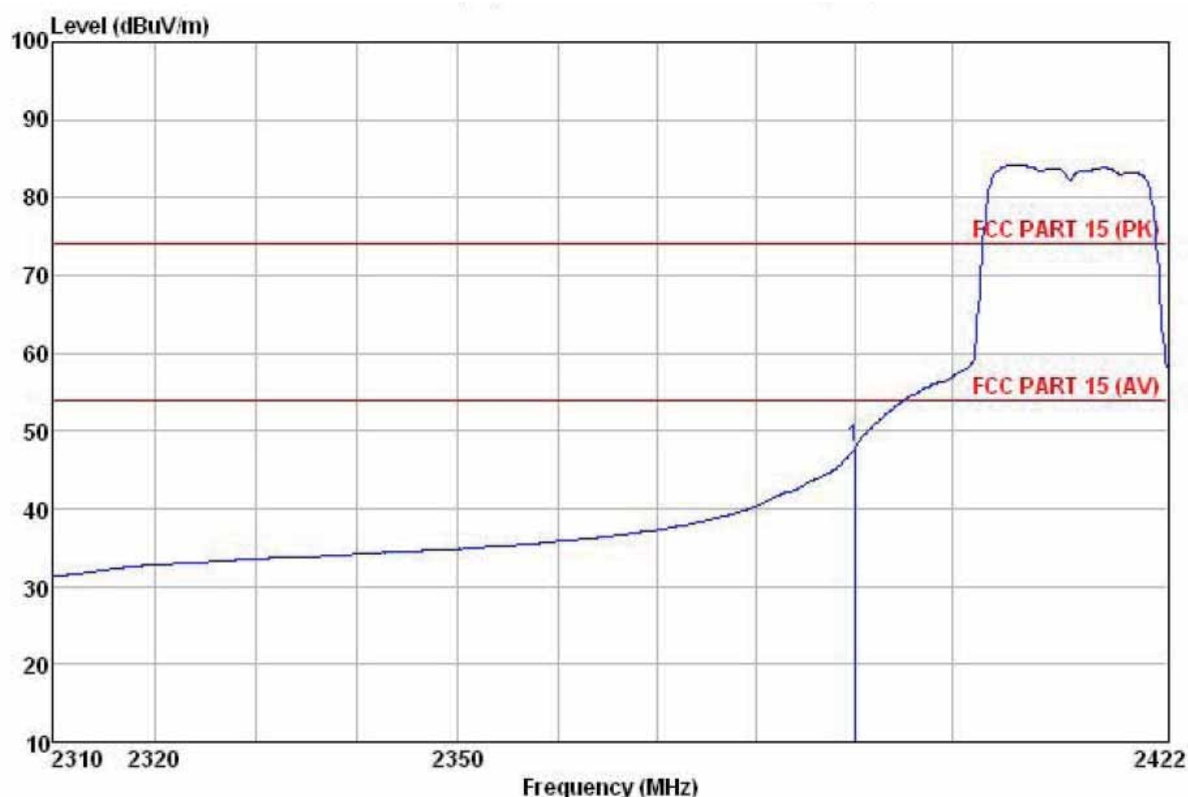

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11G L CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe


Freq	ReadAntenna		Cable Preamp		Limit		Over	Remark
	Level	Factor	Loss	Factor	Level	Line	Limit	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 2390.000	45.94	27.58	5.67	31.35	47.84	54.00	-6.16	Average

Vertical:

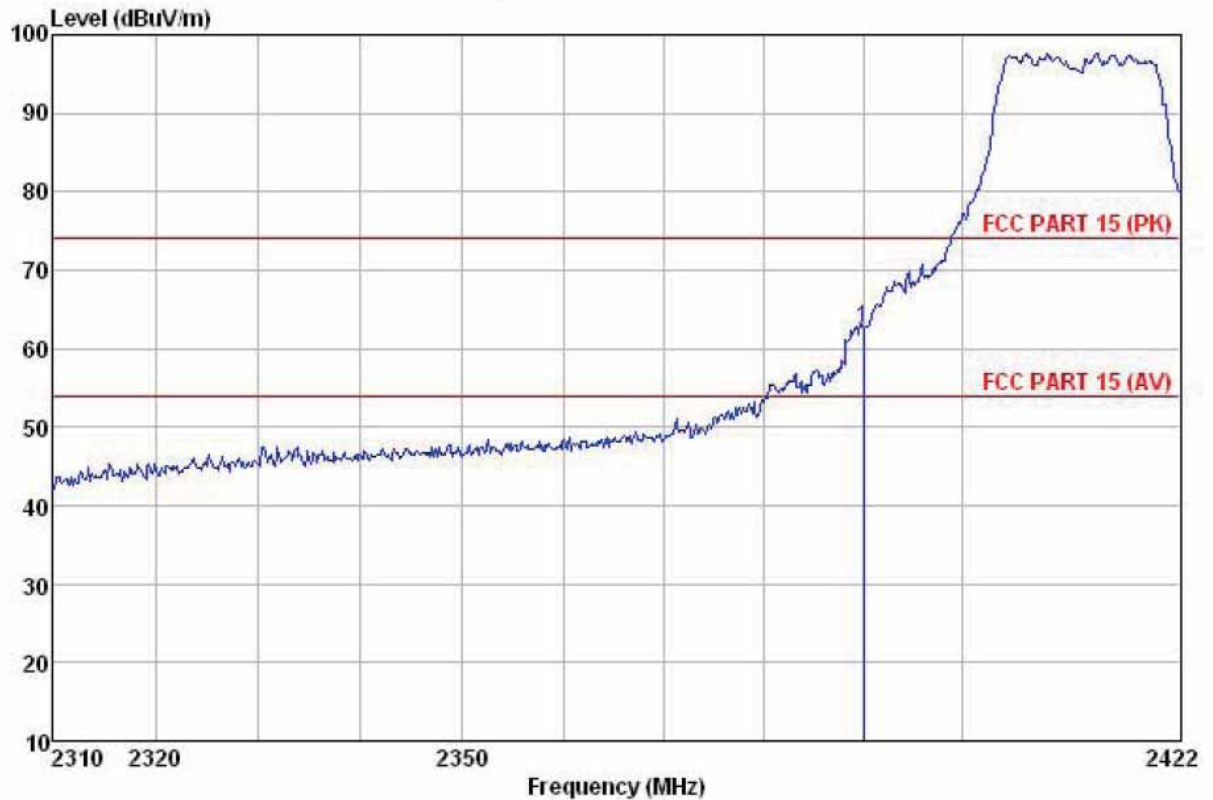

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11G L CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe

	Freq	ReadAntenna	Cable	Preamp		Limit	Over	
	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	60.68	27.58	5.67	31.35	62.58	74.00	-11.42 Peak

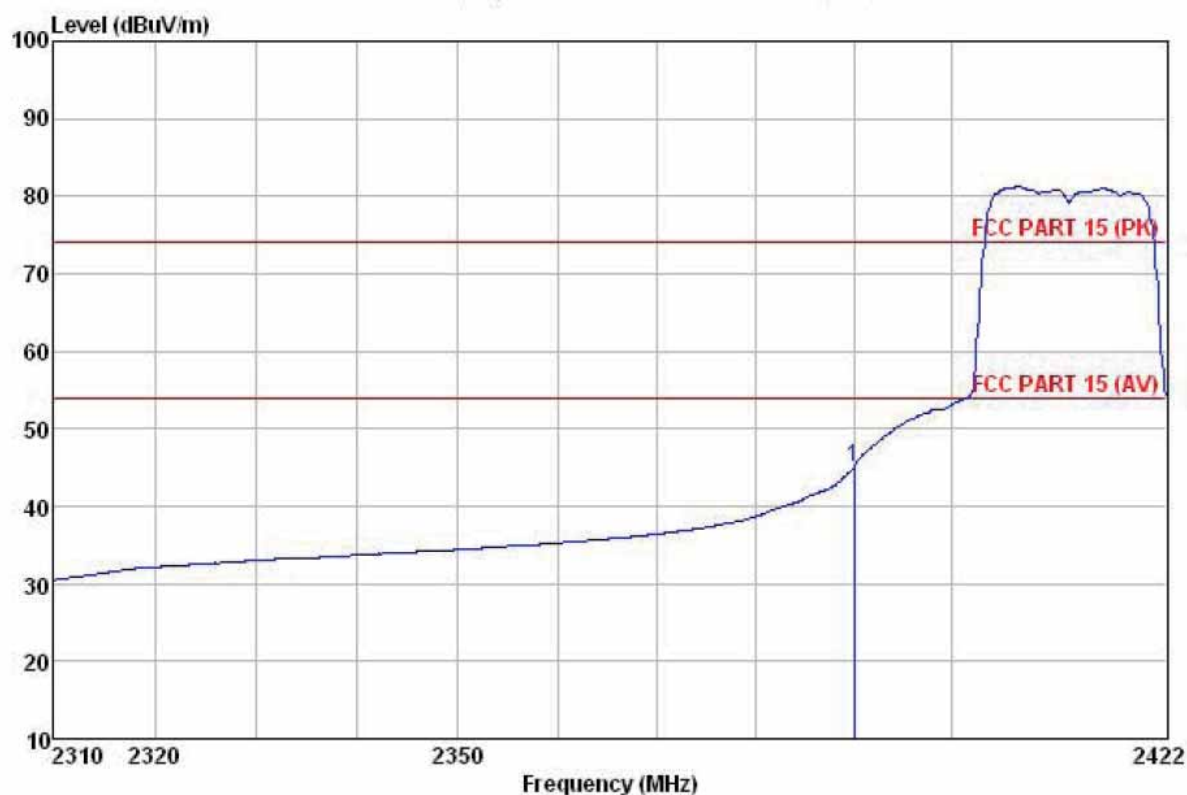


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11G L CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe

Test Engineer: JSE		ReadAntenna	Cable	Preamp		Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	43.16	27.58	5.67	31.35	45.06	54.00	-8.94 Average


Test channel: Highest

Horizontal:

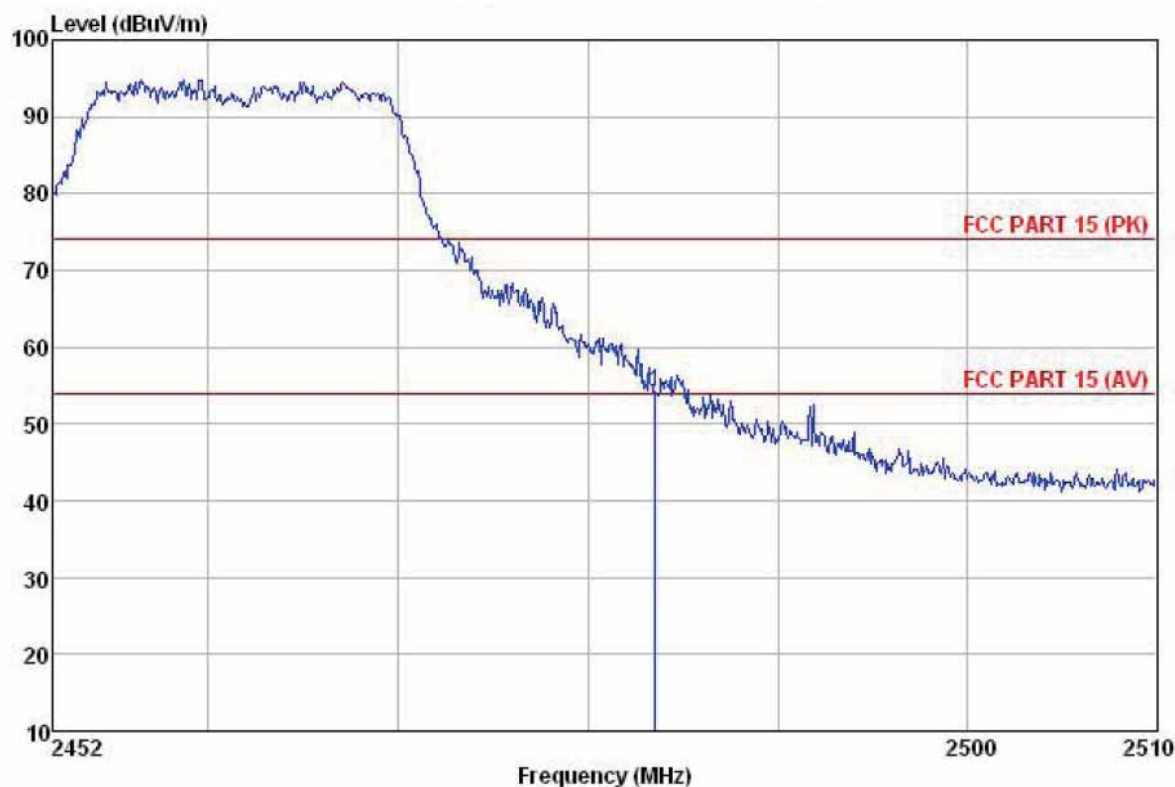

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11g H CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	Remark
1	2483.500	58.28	27.52	5.70	37.26	54.24	74.00	-19.76	Peak

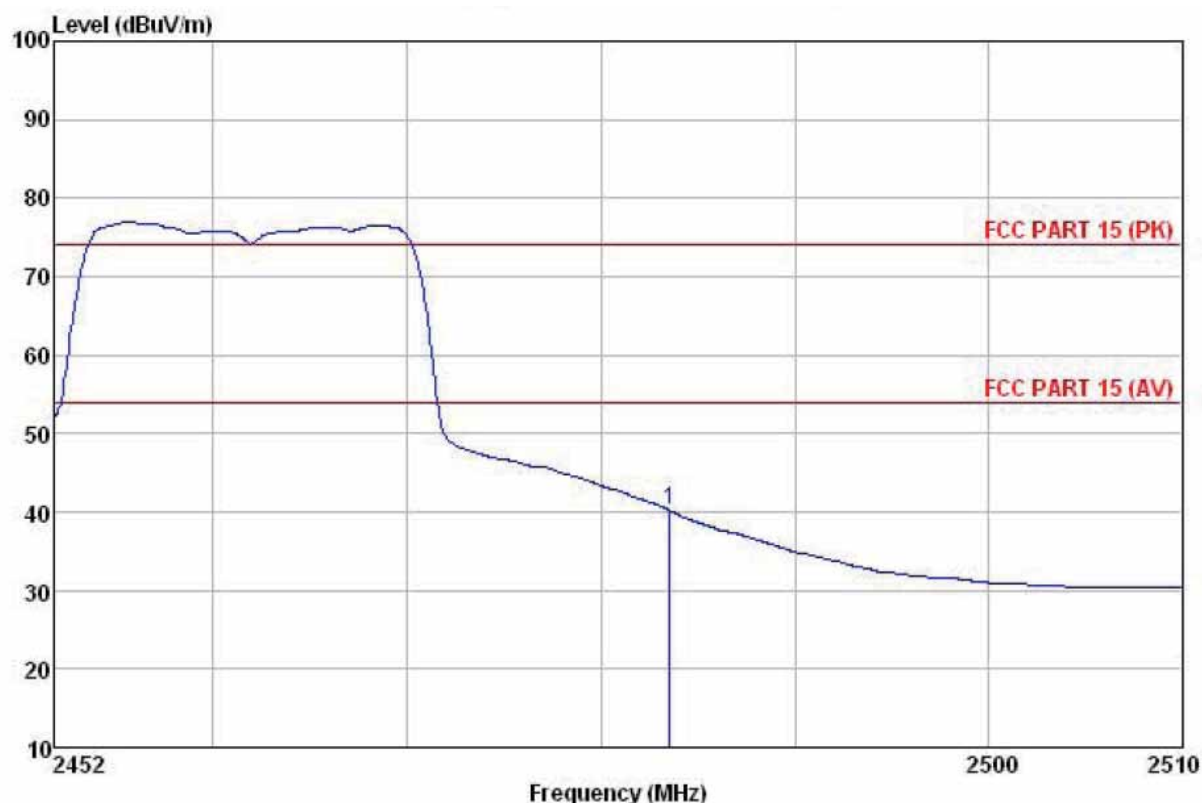

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11g H CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe


	Freq	ReadAntenna Level	Cable Factor	Preamp Loss	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB	
1	2483.500	44.18	27.52	5.70	37.26	40.14	54.00 -13.86	Average

Vertical;

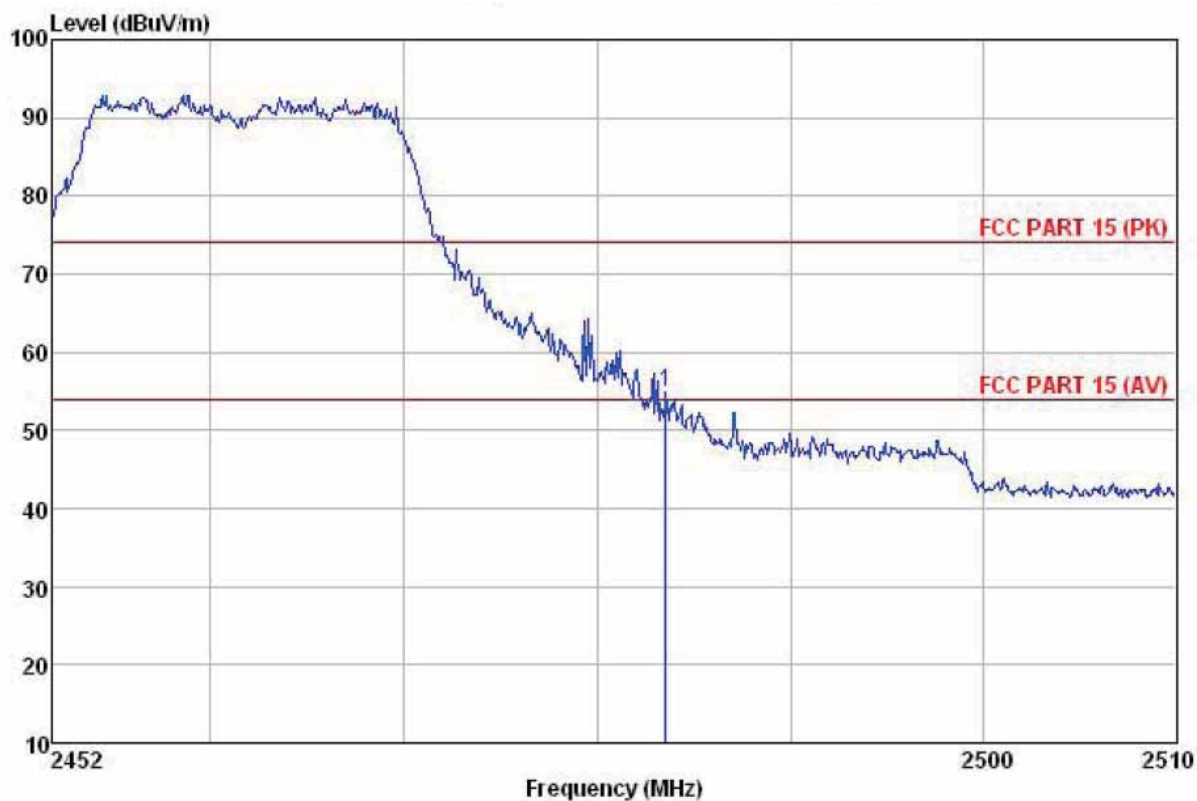

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11g H CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe

	Freq	ReadAntenna	Cable	Preamp	Limit	Over	
	Level	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m
							dB
1	2483.500	58.83	27.52	5.70	37.26	54.79	74.00 -19.21 Peak

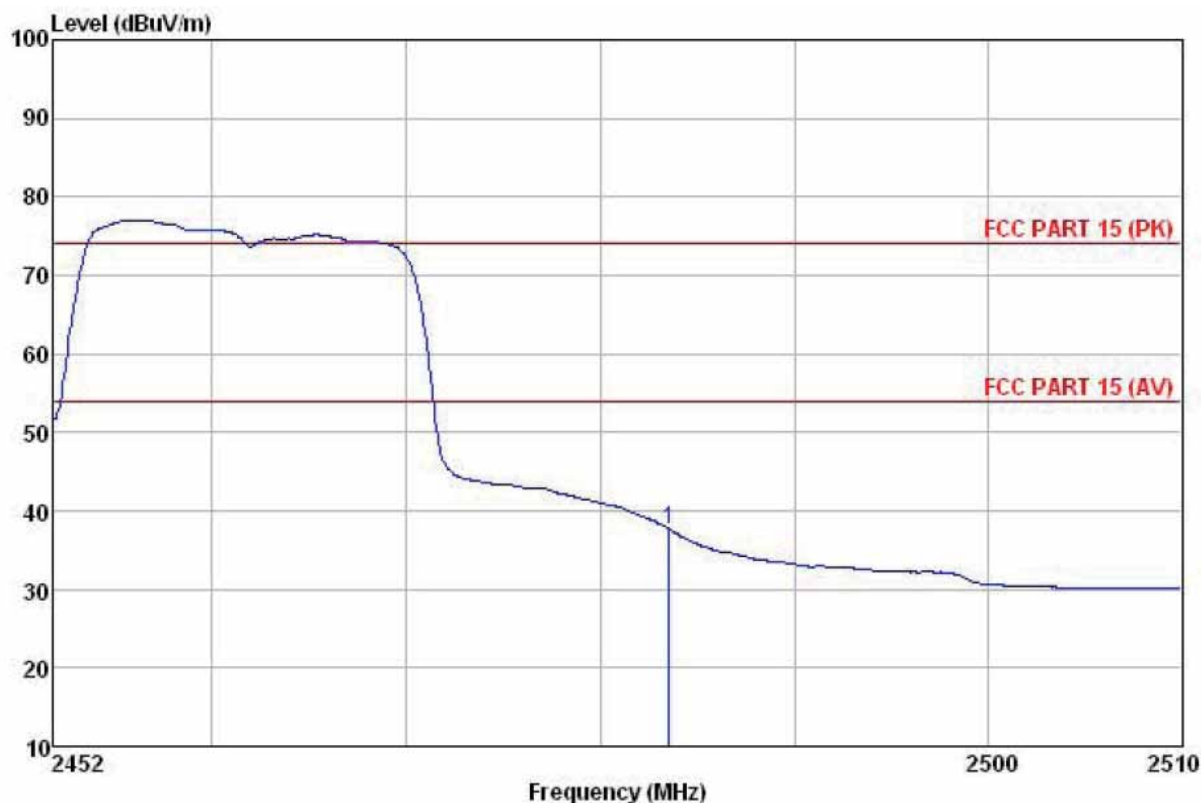


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11g H CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe

	Freq	ReadAntenna Level	Cable Factor	Preamp Loss	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB	
1	2483.500	41.63	27.52	5.70	37.26	37.59	54.00	-16.41 Average

802.11n (H20)


Test channel: Lowest

Horizontal:

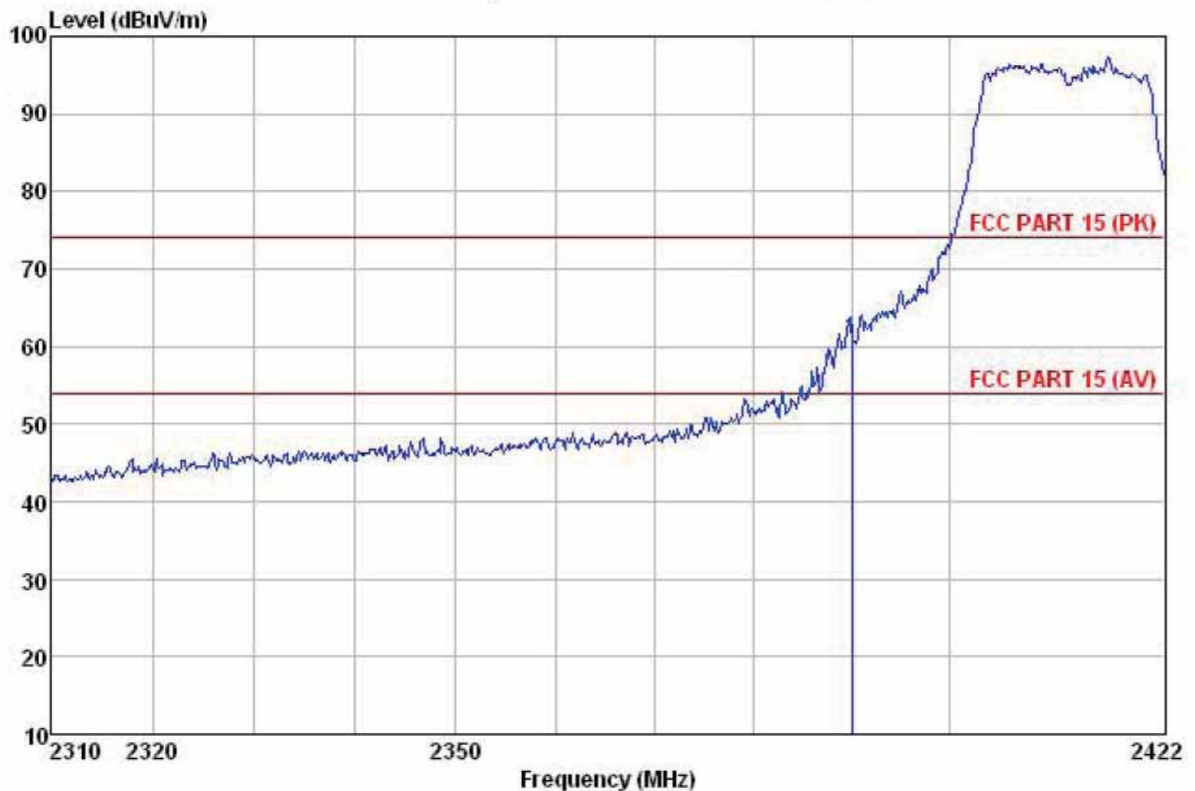

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11n20 L CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24'C Humi:65% Atmos:101Kpa
 Test Engineer: Joe


Freq	ReadAntenna		Cable Preamp		Level	Limit	Over	Remark
	Level	Factor	Loss	Factor				
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 2390.000	59.10	27.58	5.67	31.35	61.00	74.00	-13.00	Peak

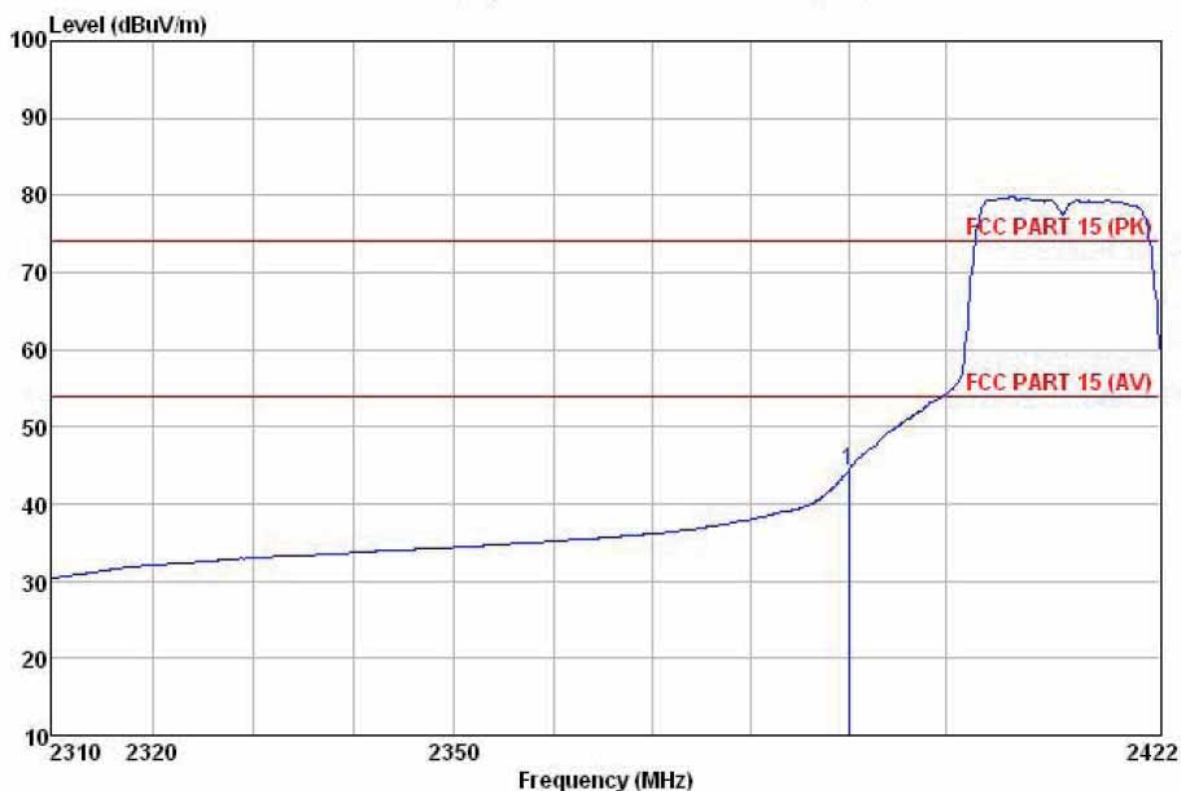

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11n20 L CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe


	Read	Antenna	Cable	Preamp		Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1 2390.000	42.53	27.58	5.67	31.35	44.43	54.00	-9.57	Average

Vertical:

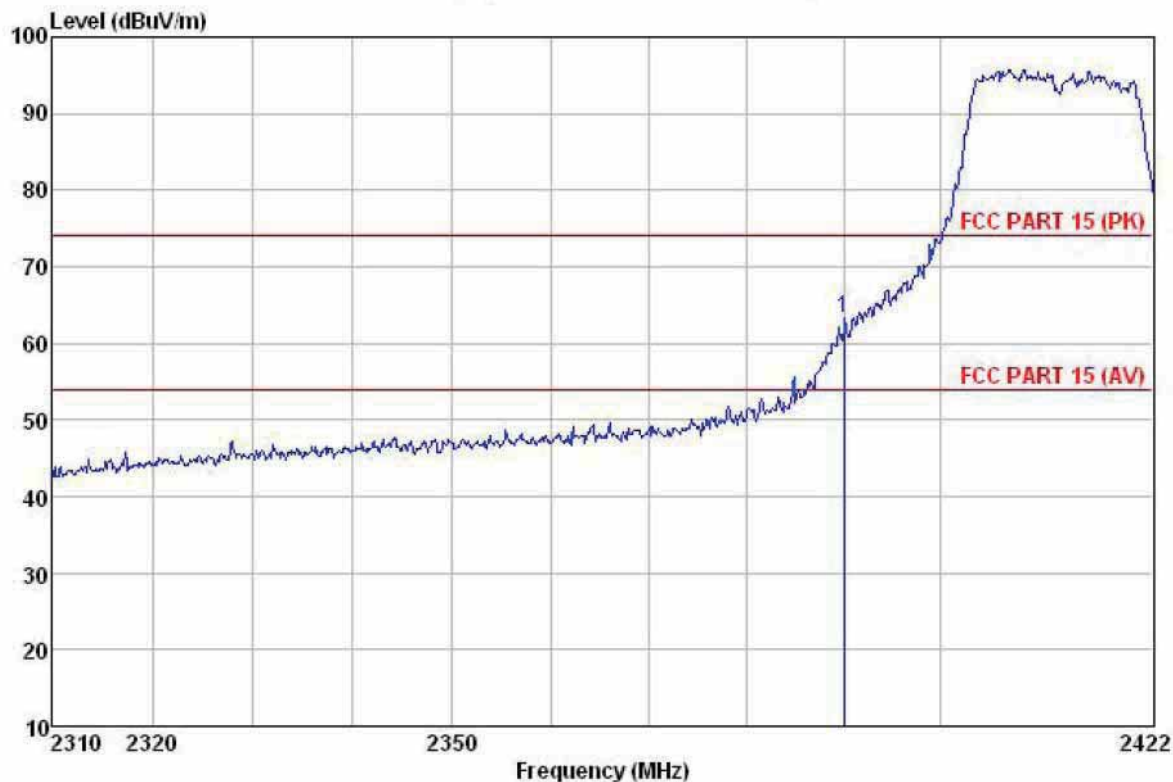

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11n20 L CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe

	ReadAntenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m
1 2390.000	61.33	27.58	5.67	31.35	63.23	74.00
						-10.77
						Peak

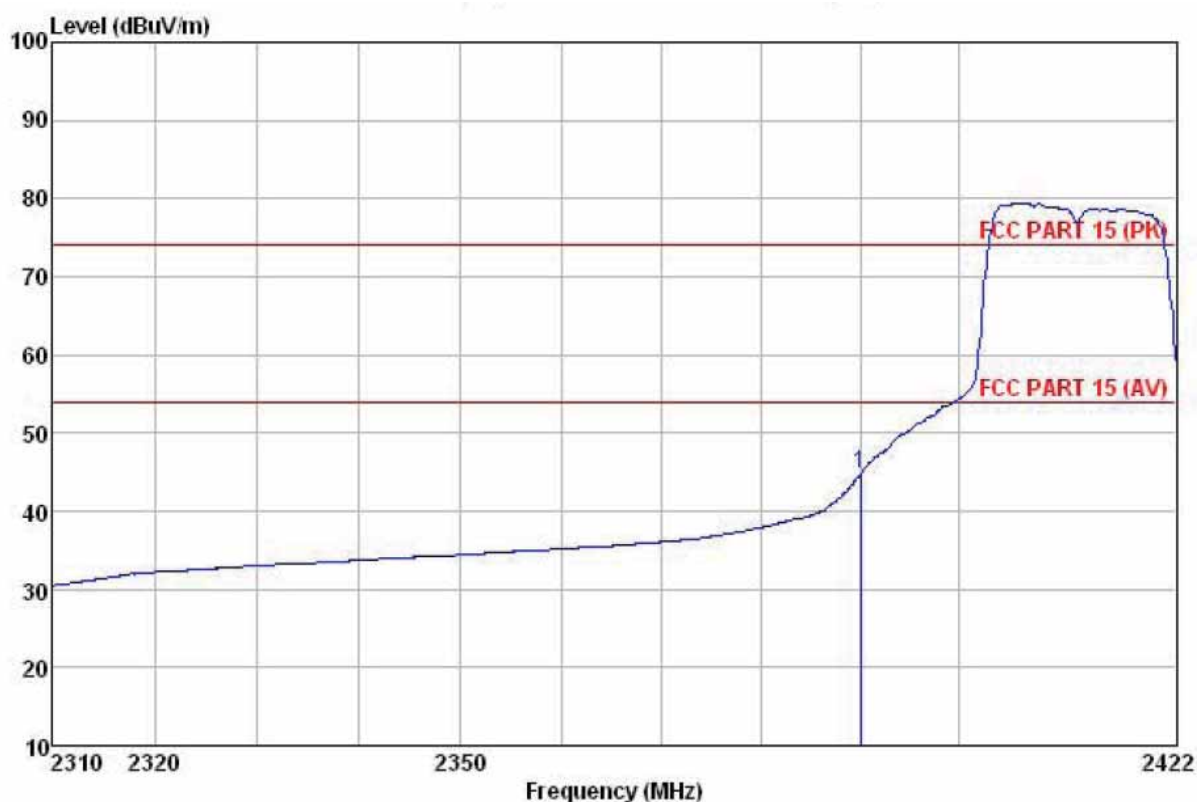


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11n20 L CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe

	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	42.87	27.58	5.67	31.35	44.77	54.00	-9.23	Average


Test channel: Highest

Horizontal:

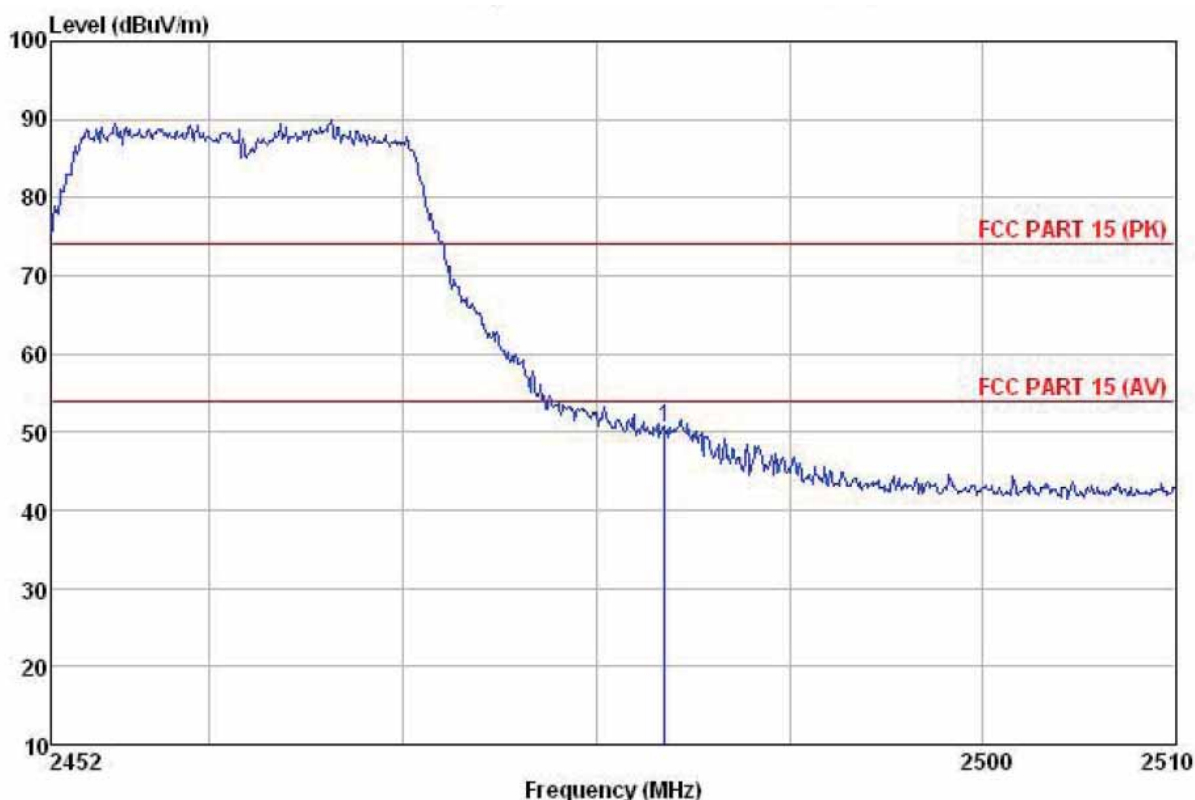

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11n20 H CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe


	Freq	ReadAntenna	Cable	Preamp	Limit	Over	
		Level	Factor	Loss	Factor	Level	Line
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m
							dB
1	2483.500	54.64	27.52	5.70	37.26	50.60	74.00
							-23.40
							Peak

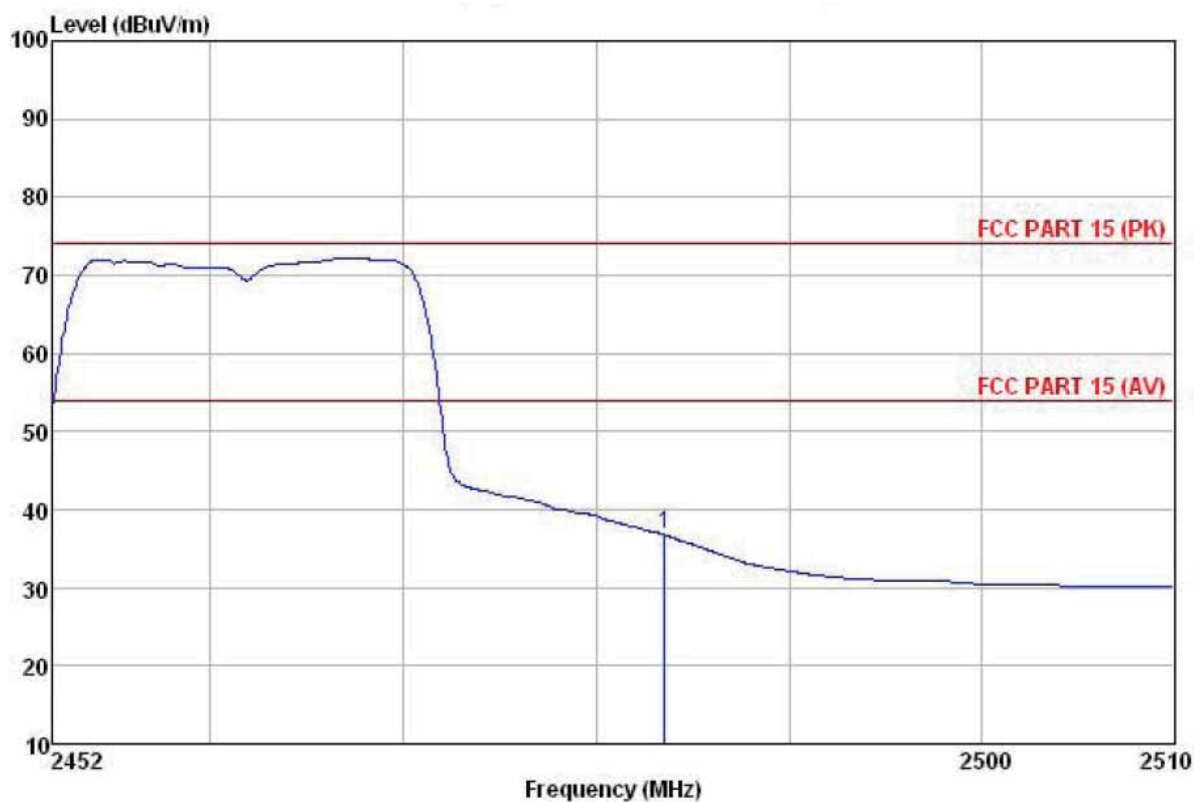

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11n20 H CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe


	Freq	ReadAntenna	Cable	Preamp	Limit	Over	
	Level	Factor	Loss	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m dB
1	2483.500	40.83	27.52	5.70	37.26	36.79	54.00 -17.21 Average

Vertical:

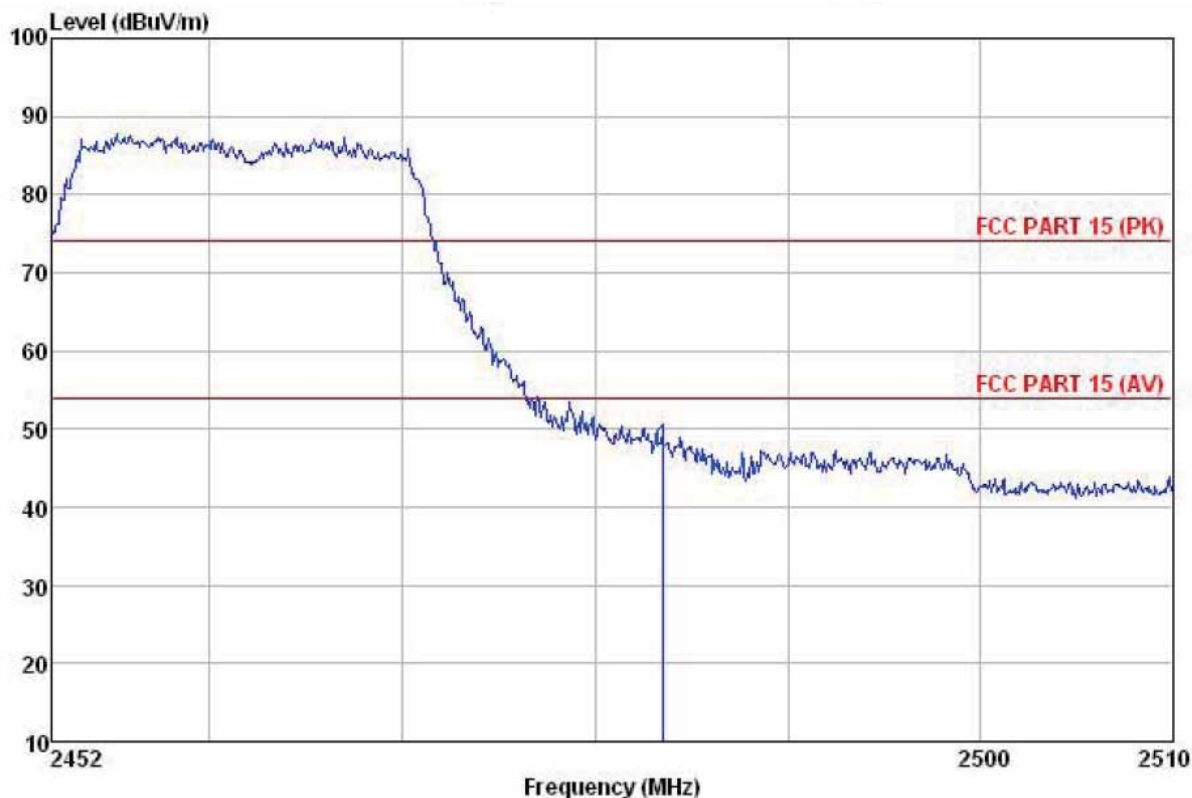

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11n20 H CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe

	Freq	ReadAntenna Level	Cable Factor	Preamp Loss	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB	
1	2483.500	51.62	27.52	5.70	37.26	47.58	74.00	-26.42 Peak

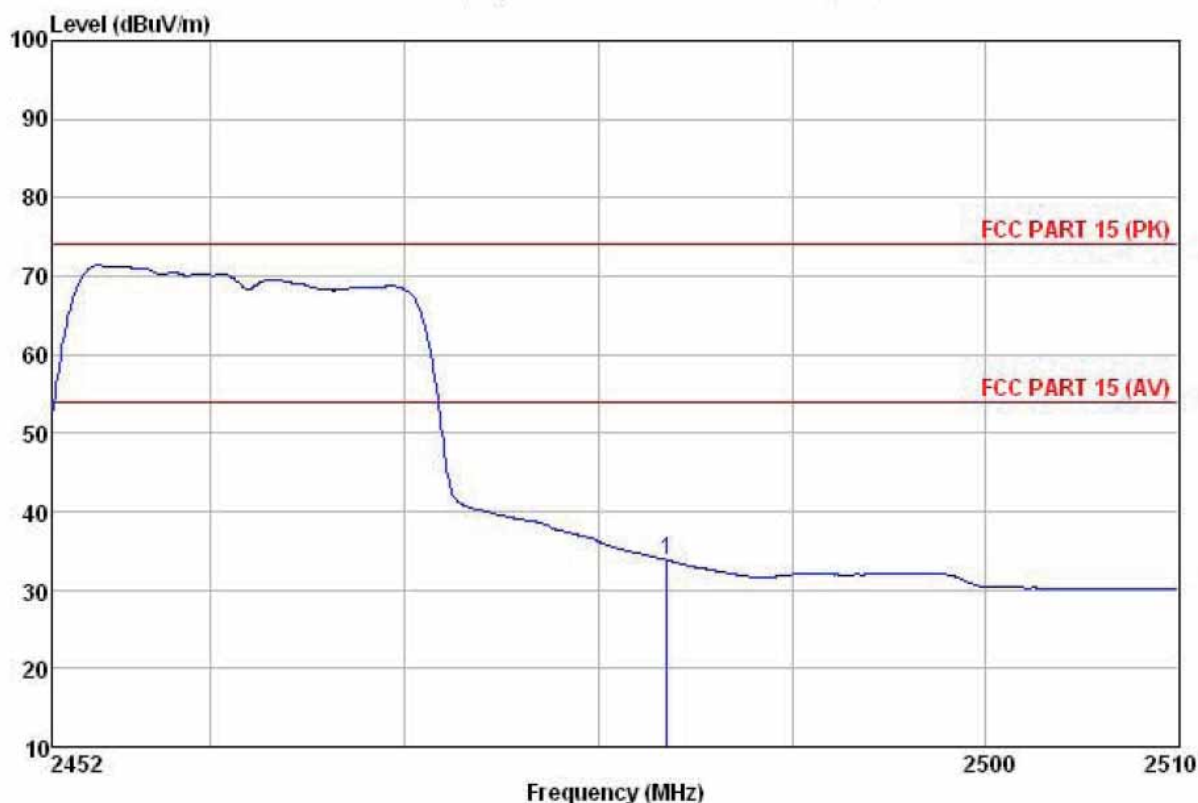


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11n20 H CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	37.83	27.52	5.70	37.26	33.79	54.00	-20.21	Average

6.7 Spurious Emission

6.7.1 Conducted Emission Method

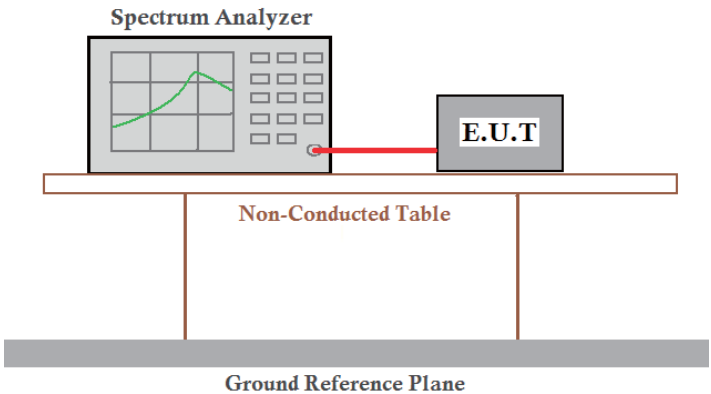
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and KDB558074
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plot as follows:

Test mode:

802.11b


Lowest channel

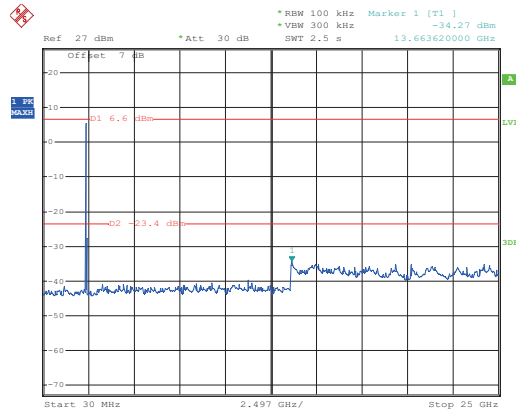

Date: 10.MAY.2013 15:50:48

30MHz~25GHz


Middle channel

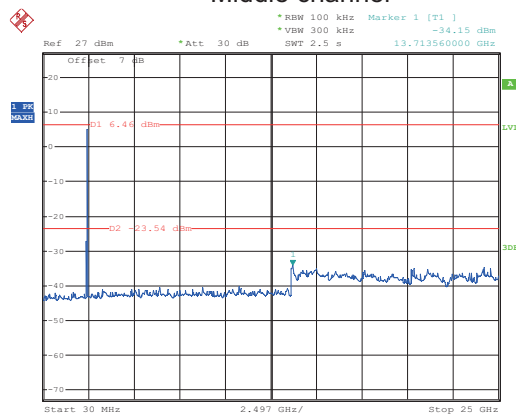

Date: 10.MAY.2013 15:52:51

30MHz~25GHz

Highest channel

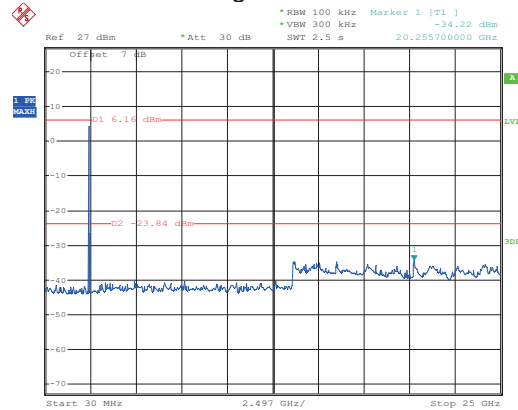


Date: 10.MAY.2013 15:55:47

30MHz~25GHz

Test mode:

802.11g


Lowest channel

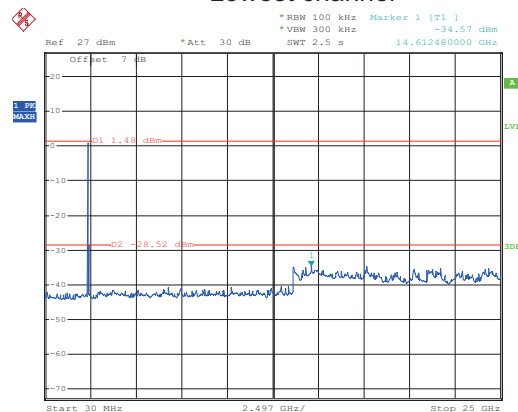

Date: 10.MAY.2013 15:59:23

30MHz~25GHz


Middle channel

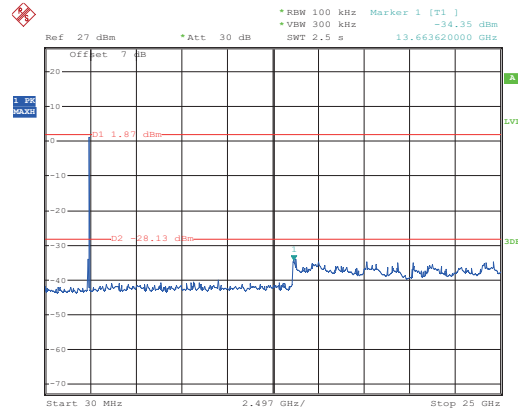

Date: 10.MAY.2013 16:01:36

30MHz~25GHz

Highest channel

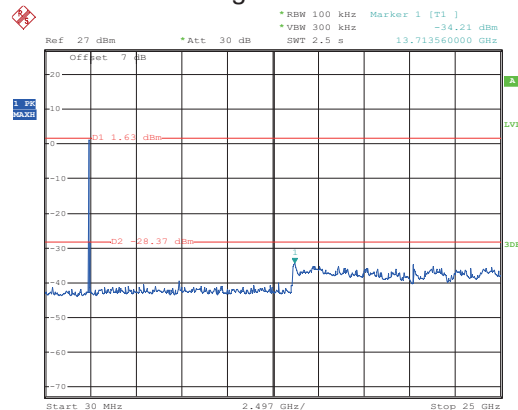


Date: 10.MAY.2013 16:05:01

30MHz~25GHz

Test mode:

802.11n(H20)


Lowest channel

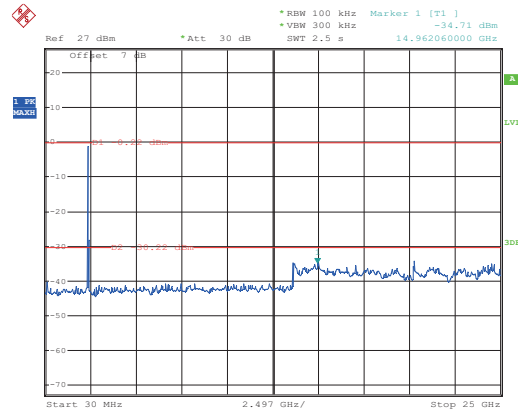

Date: 10.MAY.2013 16:07:27


30MHz~25GHz

Middle channel

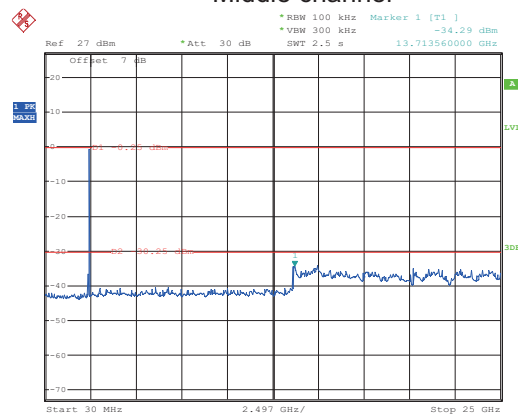

Date: 10.MAY.2013 16:09:36

30MHz~25GHz


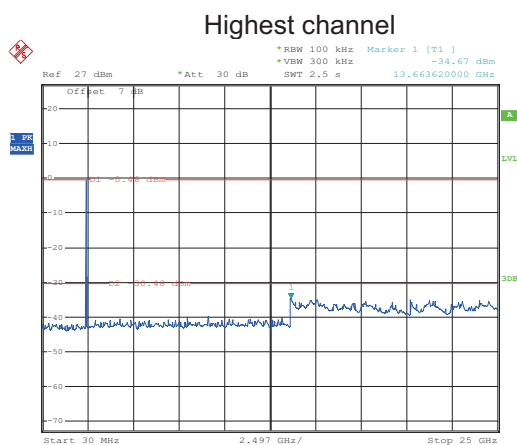


Date: 10.MAY.2013 16:11:42

30MHz~25GHz

6.7.2 Radiated Emission Method


Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.4:2003				
Test Frequency Range:	9KHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:					
	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
Peak		1MHz	10Hz	Average Value	
Limit:					
	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz	54.0		Average Value	
74.0		Peak Value			
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				

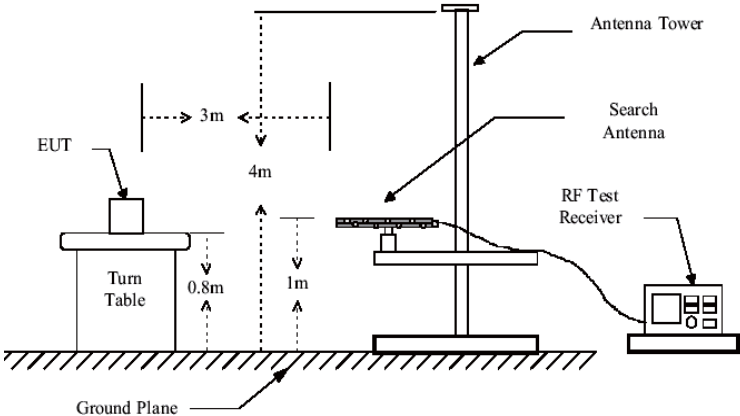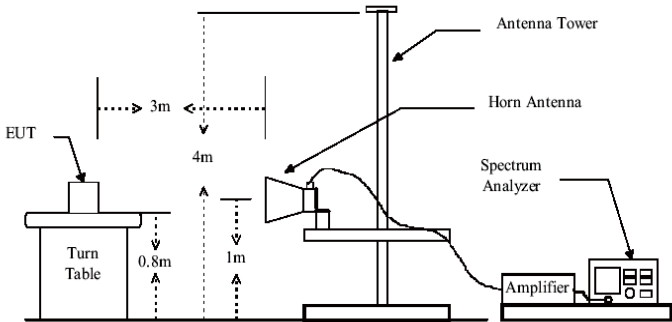Test setup:	Below 1GHz  Above 1GHz 
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case. 2. 9 kHz to 30MHz is too low, so only shows the data of above 30MHz in this report.

Below 1GHz

Measurement Data


Horizontal:

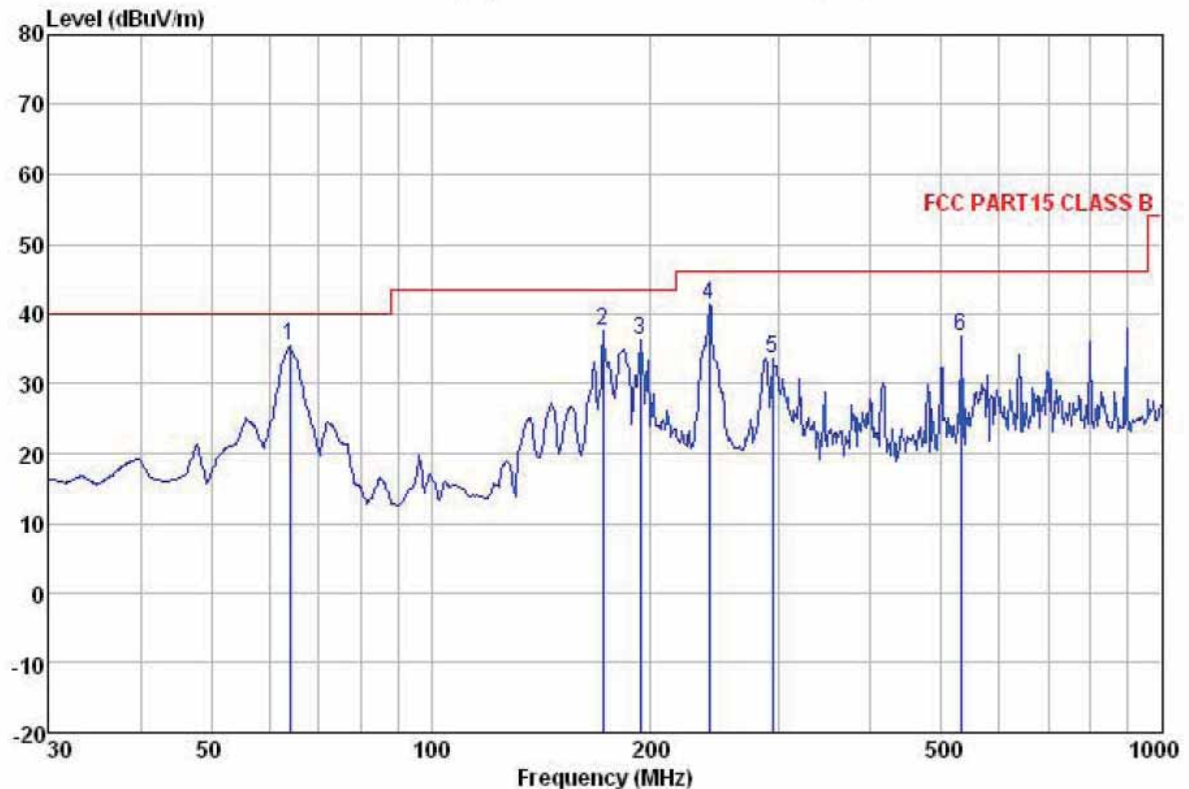

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : wifi mode
 Power Rating : AC 120V /60Hz
 Environment : Temp:24'C Humi:65% Atmos:101Kpa
 Test Engineer: Joe

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	dBuV/m	Line	Limit	Remark
		dBuV	dB/m	dB	dB		dBuV/m	dB	
1	63.983	52.48	11.11	1.38	29.59	35.38	40.00	-4.62	QP
2	171.995	54.11	9.10	2.67	28.33	37.55	43.50	-5.95	QP
3	193.095	52.66	10.56	2.82	29.82	36.22	43.50	-7.28	QP
4	239.987	56.19	12.09	2.82	29.64	41.46	46.00	-4.54	QP
5	293.084	47.27	12.92	2.92	29.45	33.66	46.00	-12.34	QP
6	531.964	46.35	17.20	3.79	30.53	36.81	46.00	-9.19	QP

Vertical:

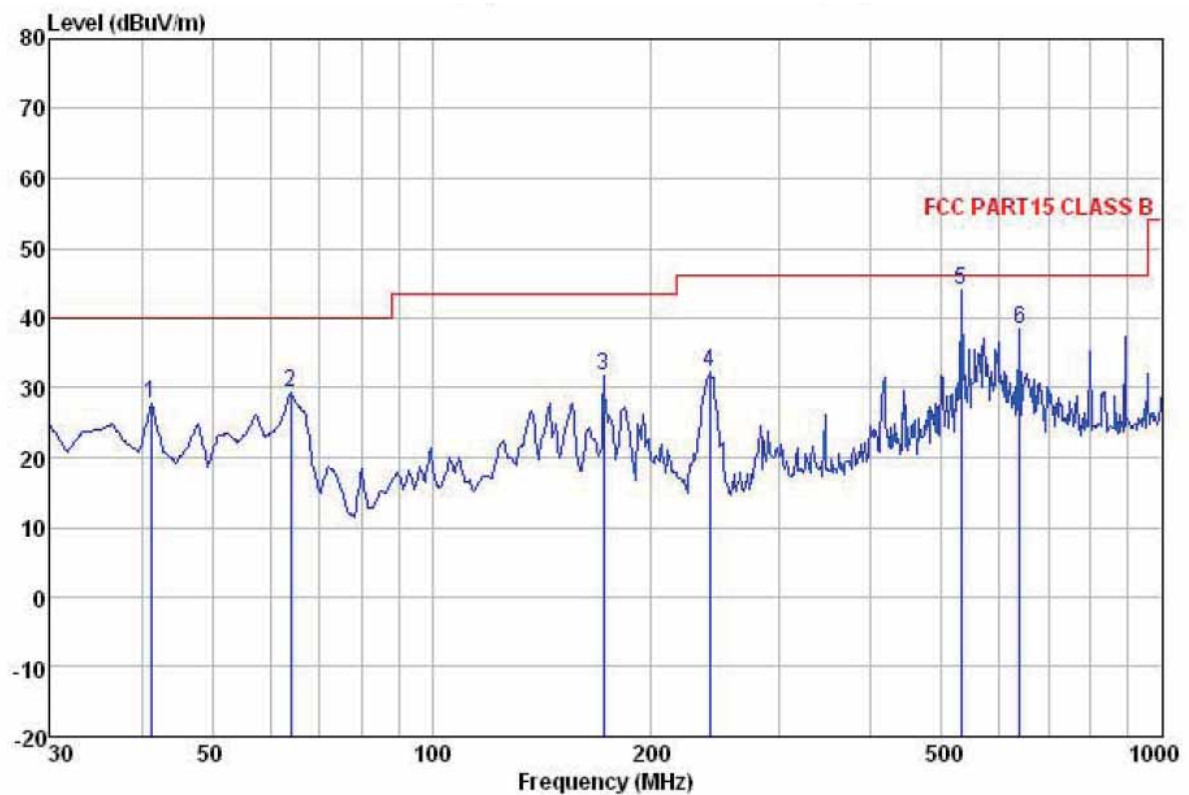

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : wifi mode
 Power Rating : AC 120V /60Hz
 Environment : Temp:24'C Humi:65% Atmos:101Kpa
 Test Engineer: Joe


	Freq	ReadAntenna	Cable	Preamp		Limit	Over	
		Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	41.277	40.22	13.57	1.24	27.39	27.64	40.00	-12.36 QP
2	63.983	46.41	11.11	1.38	29.59	29.31	40.00	-10.69 QP
3	171.995	48.39	9.10	2.67	28.33	31.83	43.50	-11.67 QP
4	239.987	46.89	12.09	2.82	29.64	32.16	46.00	-13.84 QP
5	531.964	53.44	17.20	3.79	30.53	43.90	46.00	-2.10 QP
6	638.369	46.51	18.59	3.88	30.57	38.41	46.00	-7.59 QP

Above 1GHz

802.11b

Test channel: Lowest

Horizontal

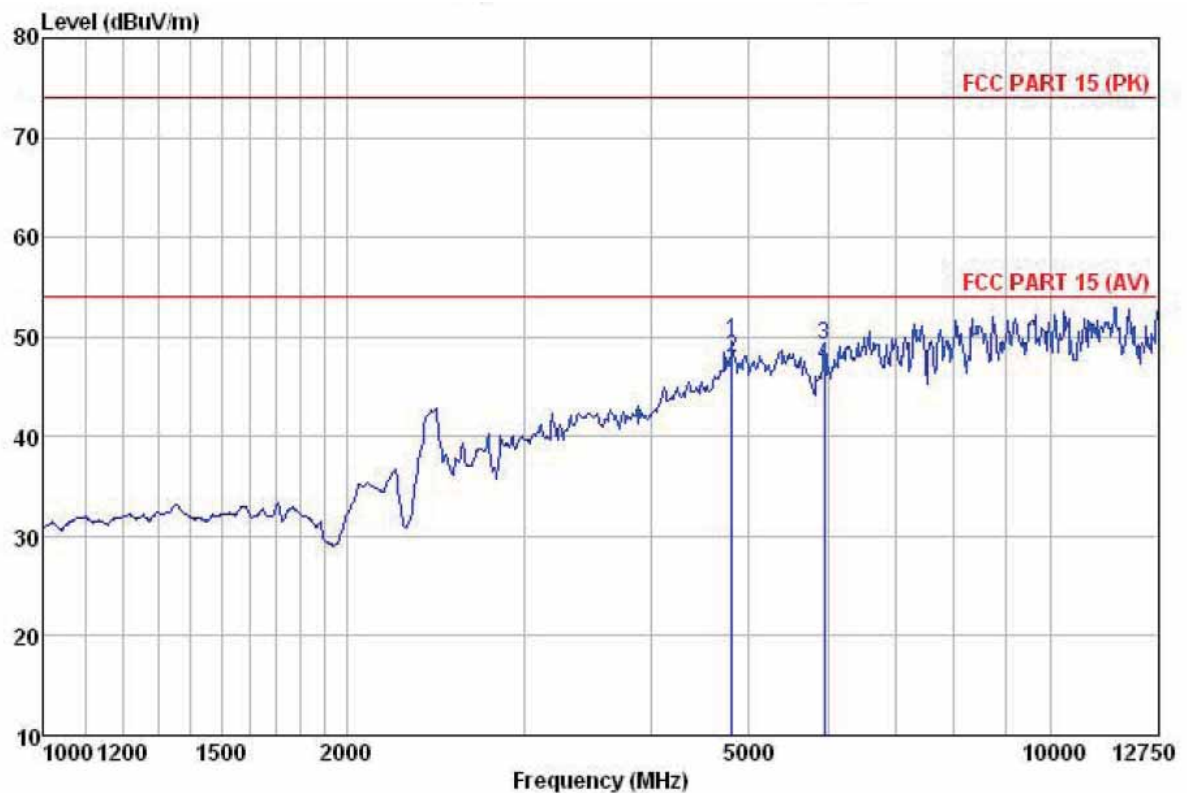


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11b L CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBm	dB/m	dB	dB	dBm/m	dBm/m	dB	
1	4821.757	49.39	31.54	8.92	40.22	49.63	74.00	-24.37	Peak
2	4821.757	47.63	31.54	8.92	40.22	47.87	54.00	-6.13	Average
3	5956.109	47.88	32.77	9.45	40.84	49.26	74.00	-24.74	Peak
4	5956.109	45.68	32.77	9.45	40.84	47.06	54.00	-6.94	Average

Remark: The emissions above 12.75GHz were noise floor, so not recorded in report.

Vertical

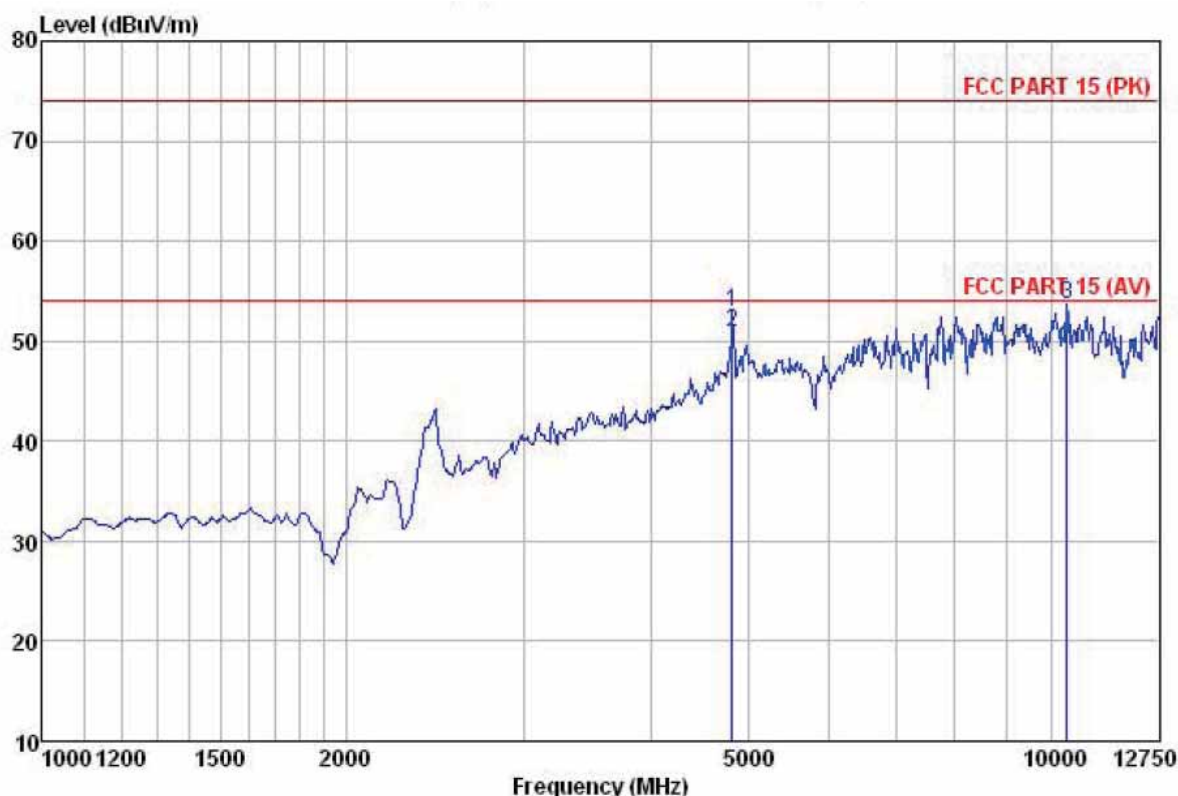

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11b L CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe


	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	
		Level	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBm	dB/m	dB	dB	dBm/m	dBm/m	dB
1	4821.757	52.75	31.54	8.92	40.22	52.99	74.00	-21.01 Peak
2	4821.757	50.62	31.54	8.92	40.22	50.86	54.00	-3.14 Average
3	10348.050	42.12	39.19	13.83	41.38	53.76	74.00	-20.24 Peak
4	10348.050	38.51	39.19	13.83	41.38	50.15	54.00	-3.85 Average

Remark: The emissions above 12.75GHz were noise floor, so not recorded in report.

802.11b

Test channel: Middle

Horizontal

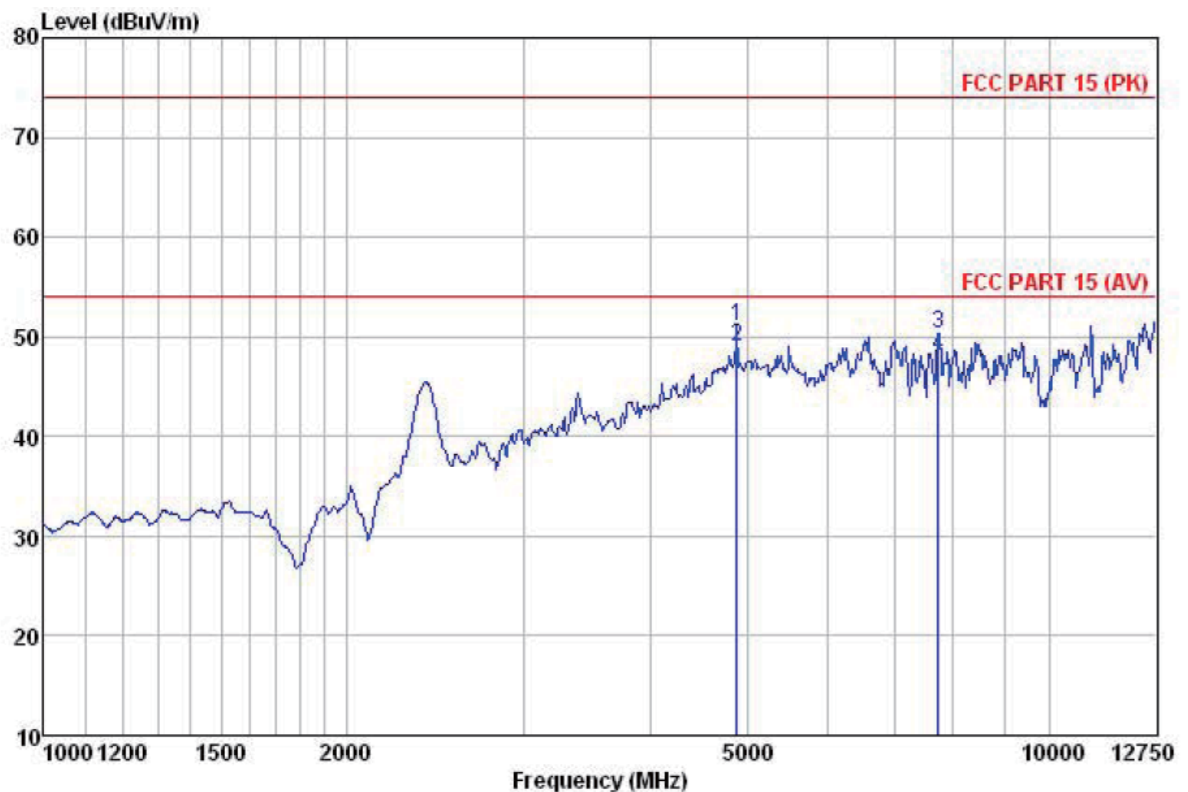


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11b M CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
		Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBm	dB/m	dB	dB	dBm/m	dBm/m	dB	
1	4883.519	50.65	31.58	8.98	40.15	51.06	74.00	-22.94	Peak
2	4883.519	48.65	31.58	8.98	40.15	49.06	54.00	-4.94	Average
3	7741.590	43.73	36.57	10.93	41.00	50.23	74.00	-23.77	Peak
4	7741.590	41.62	36.57	10.93	41.00	48.12	54.00	-5.88	Average

Remark: The emissions above 12.75GHz were noise floor, so not recorded in report.

Vertical

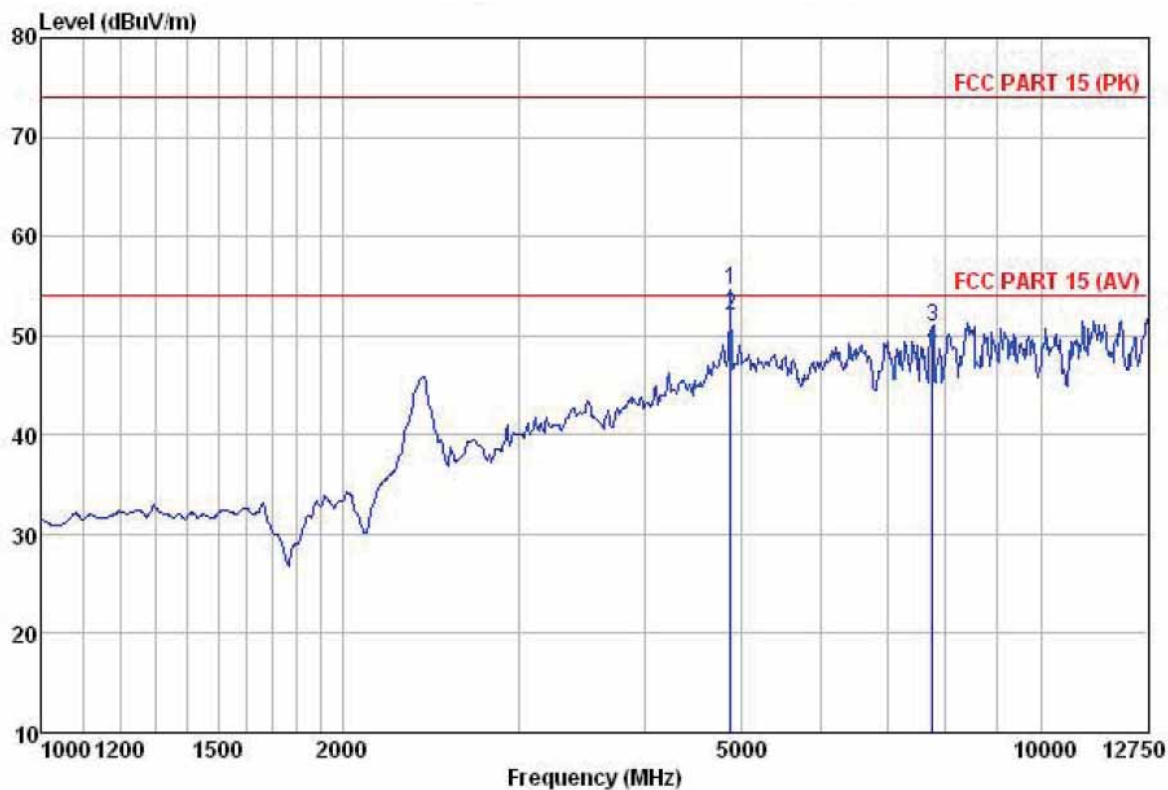

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11b M CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe


	ReadAntenna	Cable	Preamp		Limit	Over	
Freq	Level	Factor	Loss	Factor	Level	Line	Limit
MHz	dBm	dB/m	dB	dB	dBm/m	dBm/m	dB
1	4883.519	54.27	31.58	8.98	40.15	54.68	74.00
2	4883.519	51.62	31.58	8.98	40.15	52.03	54.00
3	7761.322	44.38	36.60	10.94	41.00	50.92	74.00
4	7761.322	42.25	36.60	10.94	41.00	48.79	54.00

Remark: The emissions above 12.75GHz were noise floor, so not recorded in report.

802.11b

Test channel: Highest

Horizontal

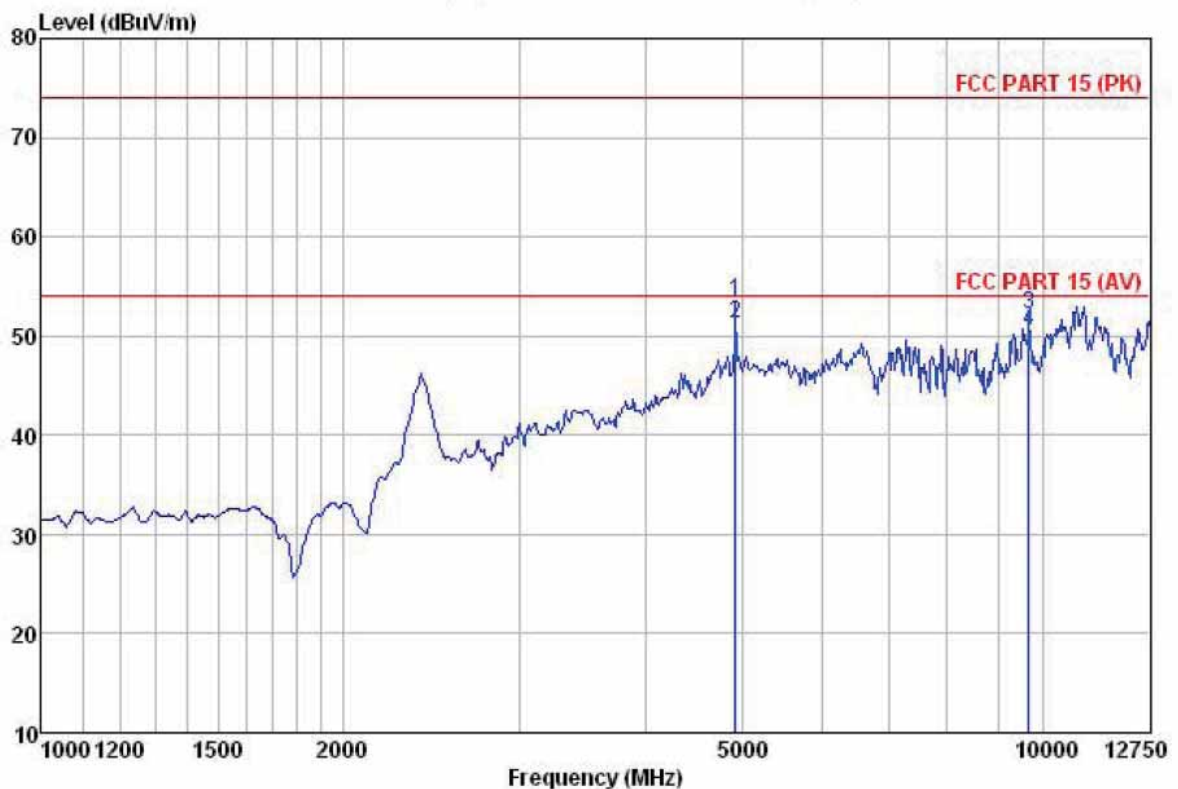


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11b H CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	4920.955	52.98	31.61	9.04	40.08	53.55	74.00	-20.45 Peak
2	4920.955	50.66	31.61	9.04	40.08	51.23	54.00	-2.77 Average
3	9660.722	42.27	38.19	13.22	41.50	52.18	74.00	-21.82 Peak
4	9660.722	40.55	38.19	13.22	41.50	50.46	54.00	-3.54 Average

Remark: The emissions above 12.75GHz were noise floor, so not recorded in report.

Vertical

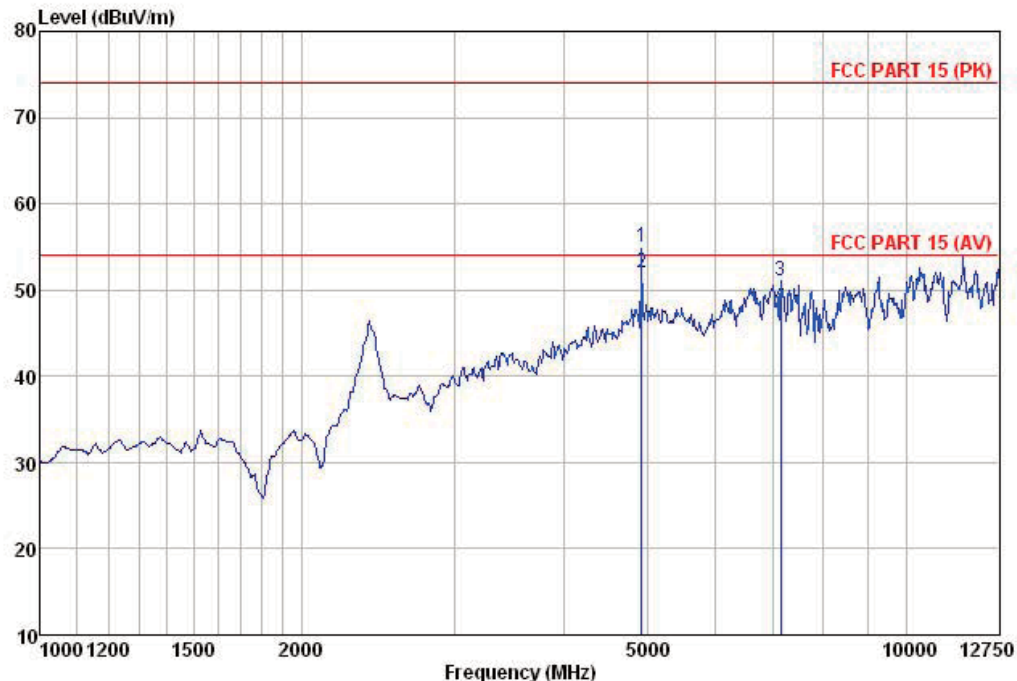

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11b H CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe


	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	
		Level Factor	Loss Factor	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	4920.955	54.37	31.61	9.04	40.08	54.94	74.00	-19.06 Peak
2	4920.955	51.49	31.61	9.04	40.08	52.06	54.00	-1.94 Average
3	7154.172	45.49	36.32	10.54	41.29	51.06	74.00	-22.94 Peak
4	7154.172	42.49	36.32	10.54	41.29	48.06	54.00	-5.94 Average

Remark: The emissions above 12.75GHz were noise floor, so not recorded in report.

802.11 g

Test channel: Lowest

Horizontal

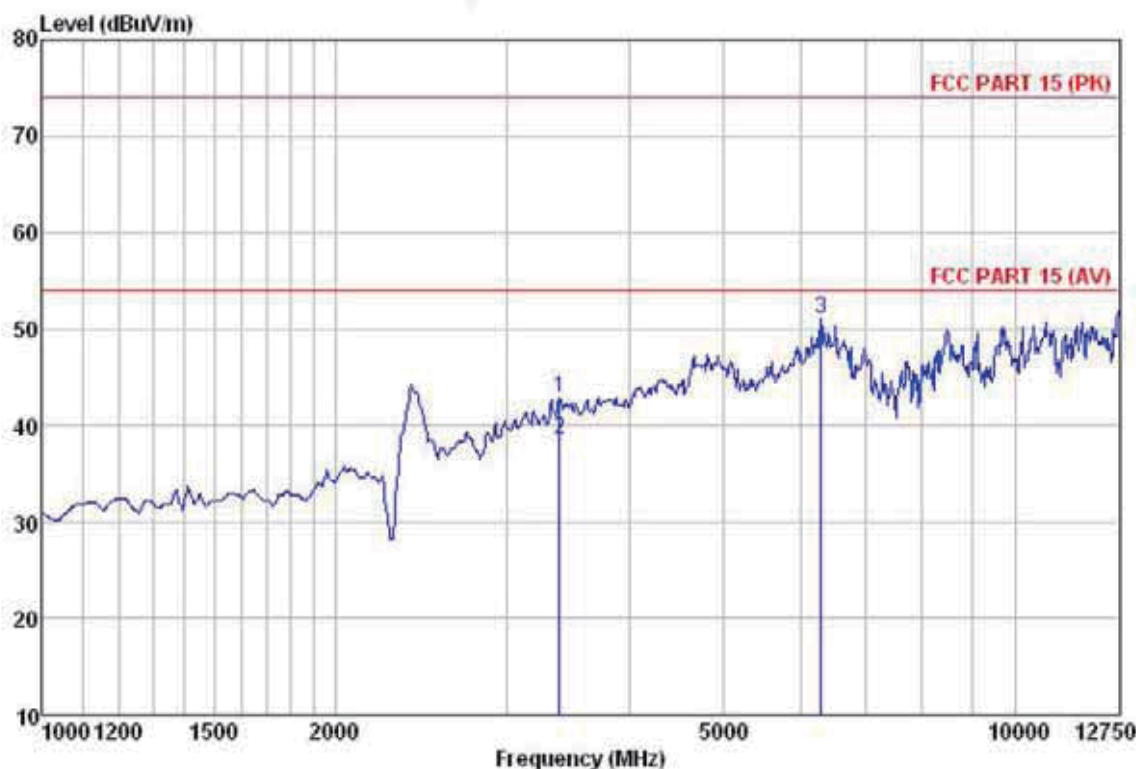


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11g L CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Line	Limit	Remark
		dBm	dB/m	dB	dB	dBm/m	dB	
1	3393.477	46.72	28.46	6.44	38.84	42.78	74.00	-31.22 Peak
2	3393.477	42.53	28.46	6.44	38.84	38.59	54.00	-15.41 Average
3	6299.178	48.66	33.49	10.01	41.06	51.10	74.00	-22.90 Peak
4	6299.178	45.21	33.49	10.01	41.06	47.65	54.00	-6.35 Average

Remark: The emissions above 12.75GHz were noise floor, so not recorded in report.

Vertical

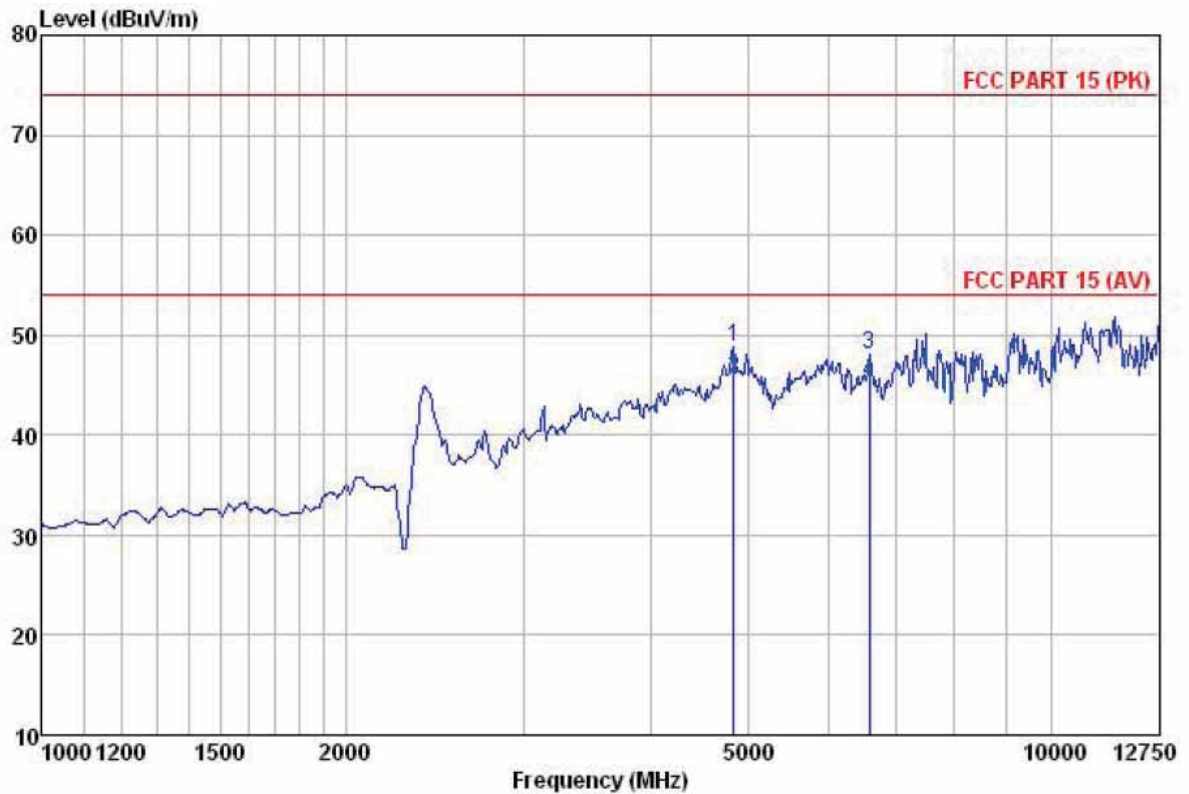

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11g L CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBm	dB/m	dB	dB	dBm/m	dBm/m	dB	
1	4834.046	48.43	31.55	8.94	40.19	48.73	74.00	-25.27	Peak
2	4834.046	45.35	31.55	8.94	40.19	45.65	54.00	-8.35	Average
3	6594.518	44.35	34.58	10.38	41.22	48.09	74.00	-25.91	Peak
4	6594.518	41.52	34.58	10.38	41.22	45.26	54.00	-8.74	Average

Remark: The emissions above 12.75GHz were noise floor, so not recorded in report.

802.11 g

Test channel: Middle

Horizontal

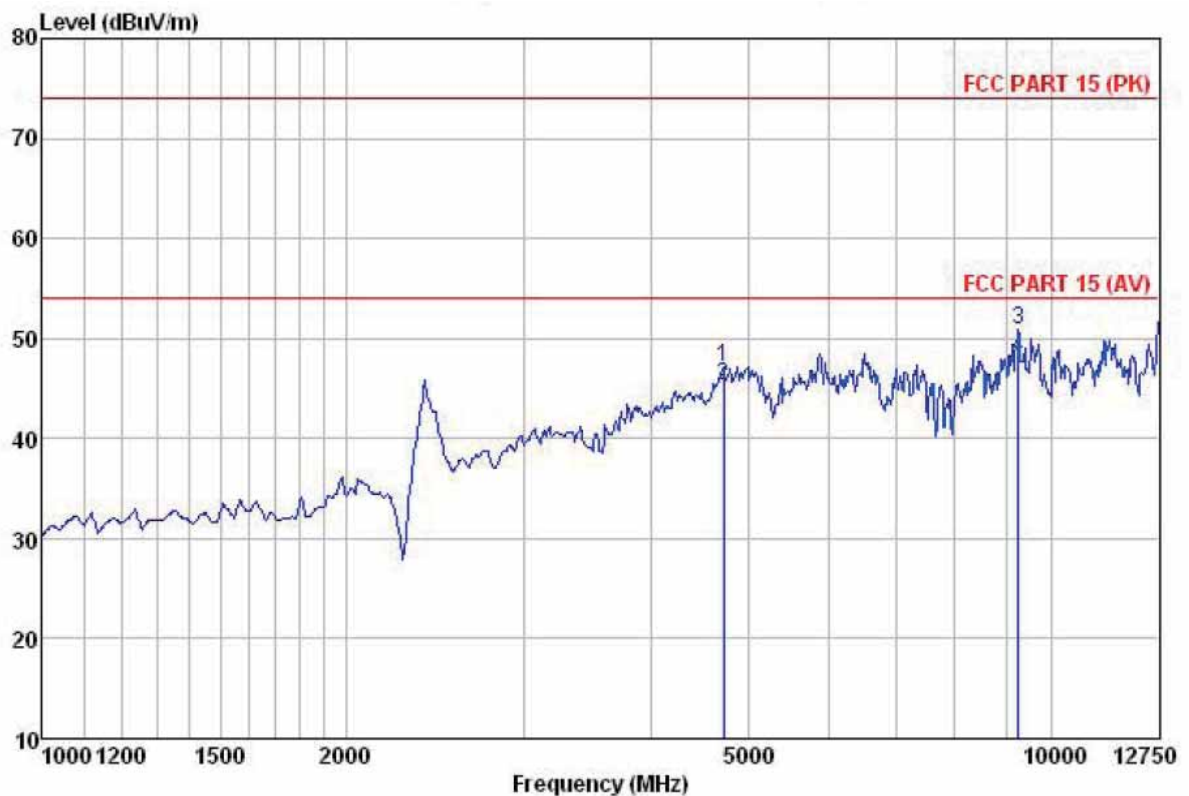


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11g M CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	
		Level	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBm	dB/m	dB	dB	dBm/m	dB	
1	4724.558	47.40	31.40	8.80	40.36	47.24	74.00	-26.76 Peak
2	4724.558	45.35	31.40	8.80	40.36	45.19	54.00	-8.81 Average
3	9251.580	40.87	37.79	13.42	41.22	50.86	74.00	-23.14 Peak
4	9251.580	38.15	37.79	13.42	41.22	48.14	54.00	-5.86 Average

Remark: The emissions above 12.75GHz were noise floor, so not recorded in report.

Vertical

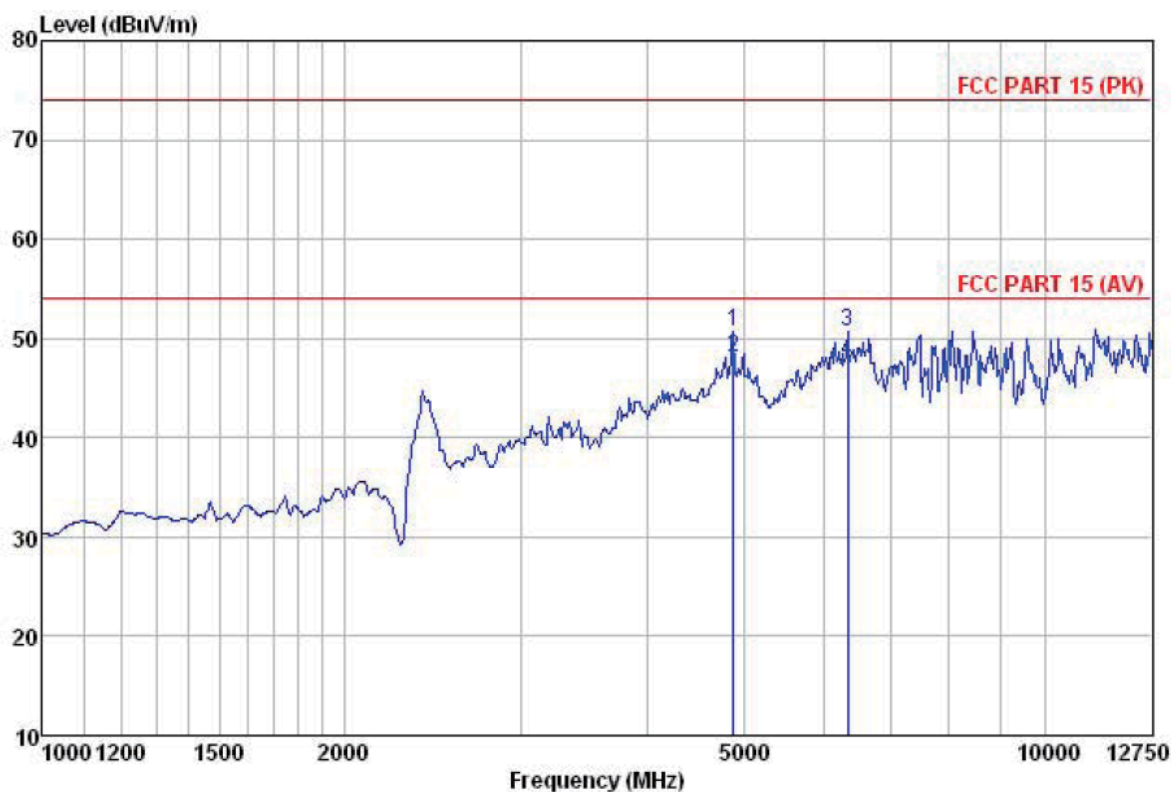

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11g M CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe


	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBm	dB/m	dB	dB	dBm/m	dBm/m	dB
1	4883.519	50.23	31.58	8.98	40.15	50.64	74.00 -23.36 Peak
2	4883.519	47.65	31.58	8.98	40.15	48.06	54.00 -5.94 Average
3	6347.466	48.06	33.62	10.10	41.09	50.69	74.00 -23.31 Peak
4	6347.466	45.12	33.62	10.10	41.09	47.75	54.00 -6.25 Average

Remark: The emissions above 12.75GHz were noise floor, so not recorded in report.

802.11 g

Test channel: Highest

Horizontal

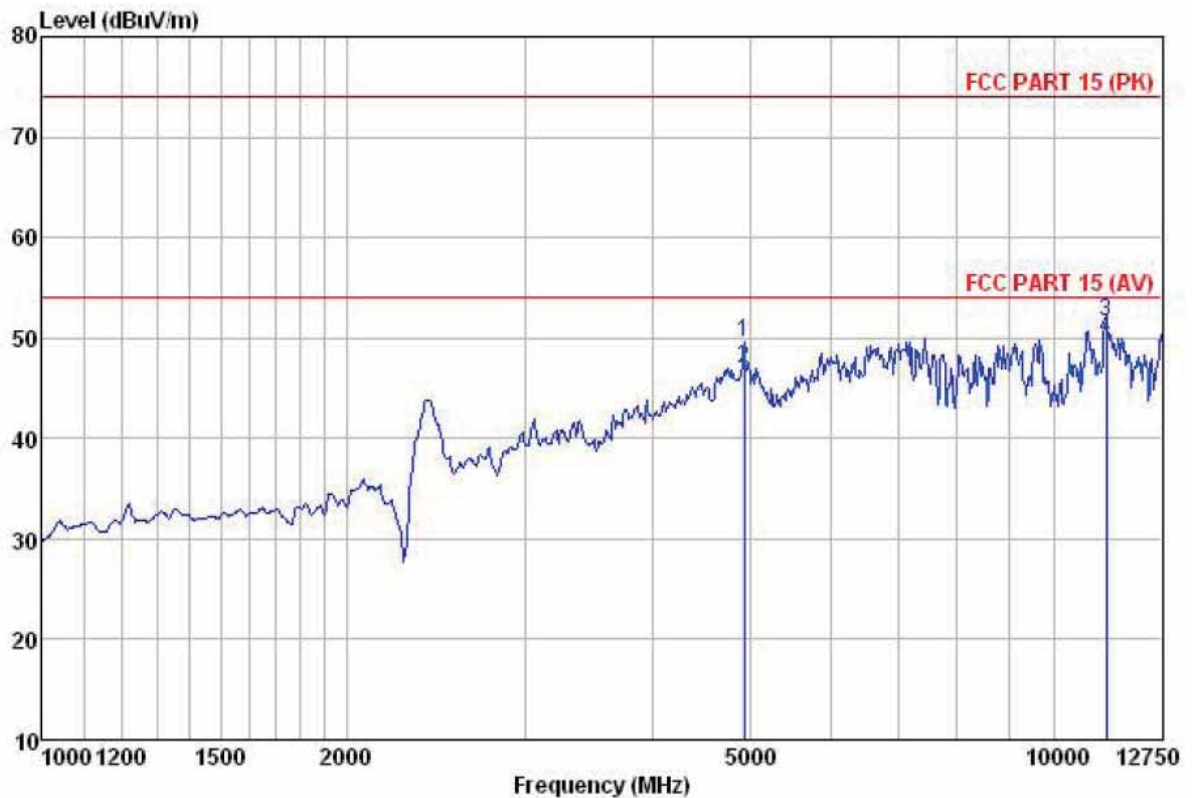


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11g H CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	dBm/m	Line	Limit	Remark
		dBm	dB/m	dB	dB		dBm/m	dB	
1	4933.497	48.92	31.64	9.04	40.08	49.52	74.00	-24.48	Peak
2	4933.497	46.35	31.64	9.04	40.08	46.95	54.00	-7.05	Average
3	11226.250	38.40	39.96	13.70	40.42	51.64	74.00	-22.36	Peak
4	11226.250	36.64	39.96	13.70	40.42	49.88	54.00	-4.12	Average

Remark: The emissions above 12.75GHz were noise floor, so not recorded in report.

Vertical

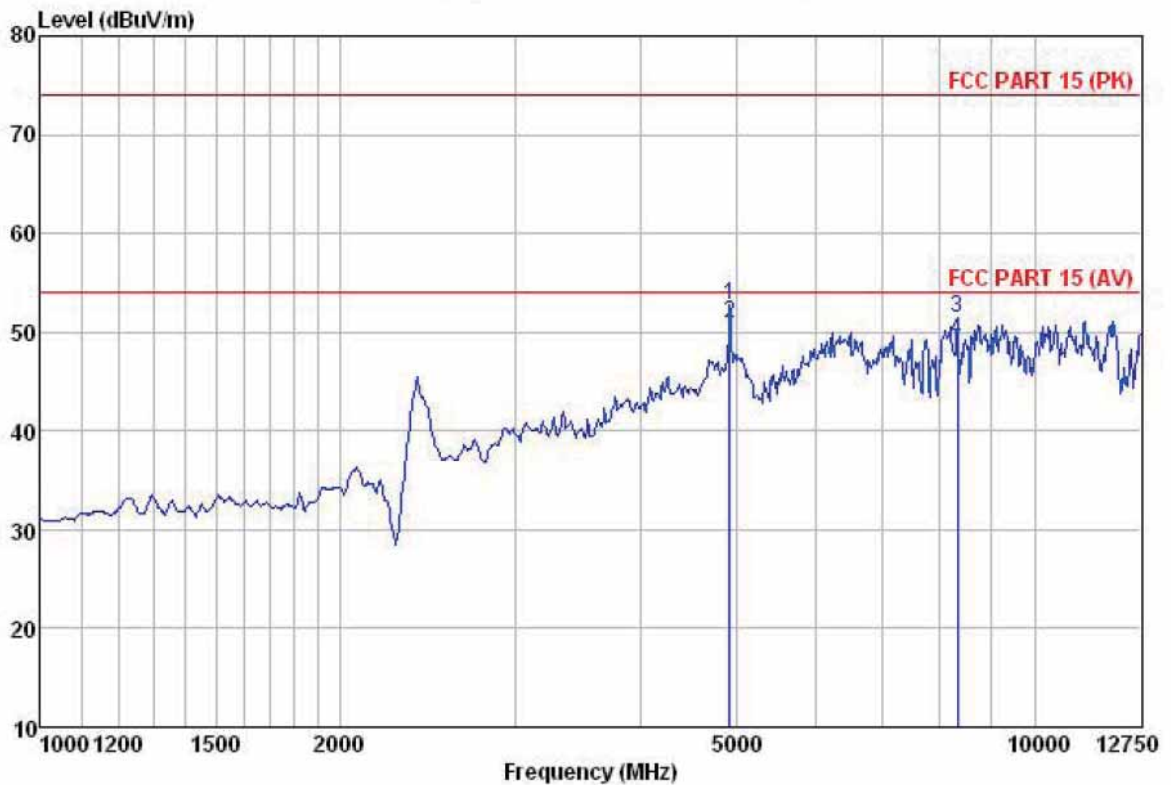

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11g H CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe


	Freq	ReadAntenna	Cable	Preamp	Limit	Over	
	Level	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBm	dB/m	dB	dB	dBm/m	dBm/m
1	4920.955	52.21	31.61	9.04	40.08	52.78	74.00 -21.22 Peak
2	4920.955	50.36	31.61	9.04	40.08	50.93	54.00 -3.07 Average
3	8334.700	43.74	36.41	12.58	41.30	51.43	74.00 -22.57 Peak
4	8334.700	41.56	36.41	12.58	41.30	49.25	54.00 -4.75 Average

Remark: The emissions above 12.75GHz were noise floor, so not recorded in report.

802.11 n (H20)

Test channel: Lowest

Horizontal

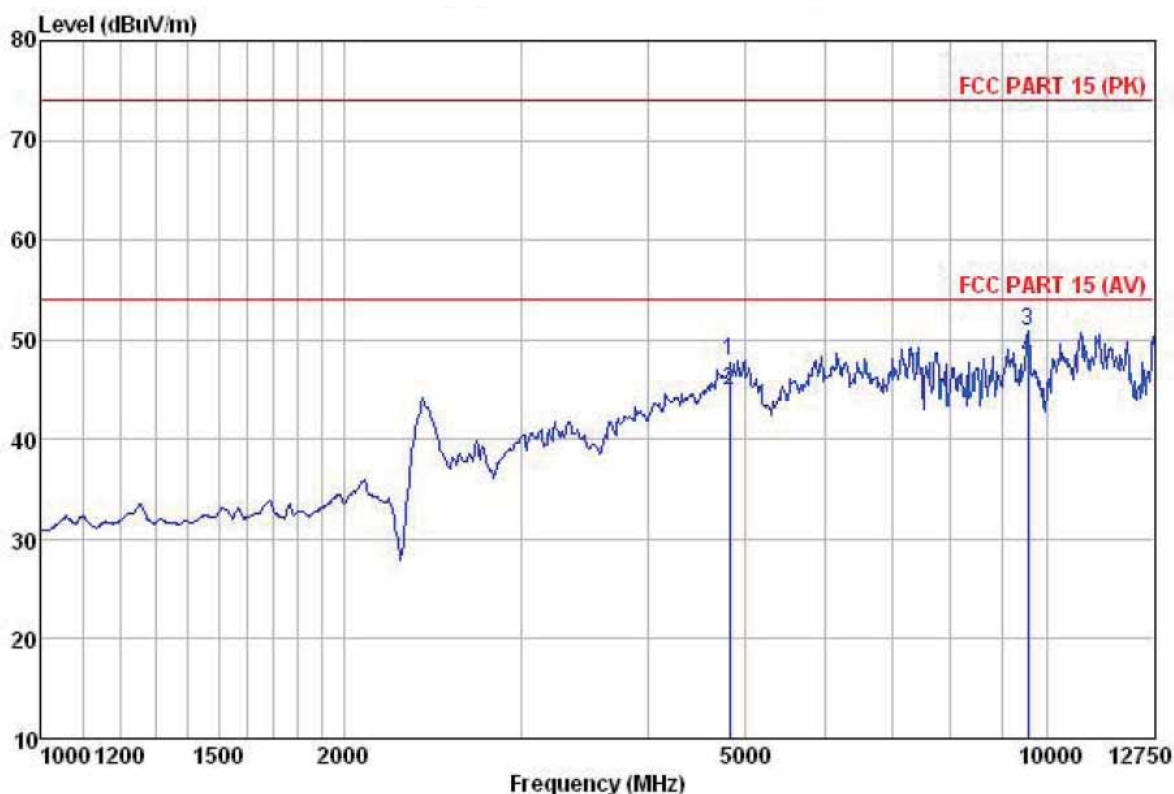


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11n20 L CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	dBm/m	Limit	Remark
		dBm	dB/m	dB	dB	dBm/m	dB	
1	4824.000	47.57	31.54	8.92	40.22	47.81	74.00	-26.19 Peak
2	4824.000	44.69	31.54	8.92	40.22	44.93	54.00	-9.07 Average
3	9562.854	40.97	38.05	13.12	41.34	50.80	74.00	-23.20 Peak
4	9562.854	38.18	38.05	13.12	41.34	48.01	54.00	-5.99 Average

Remark: The emissions above 12.75GHz were noise floor, so not recorded in report.

Vertical

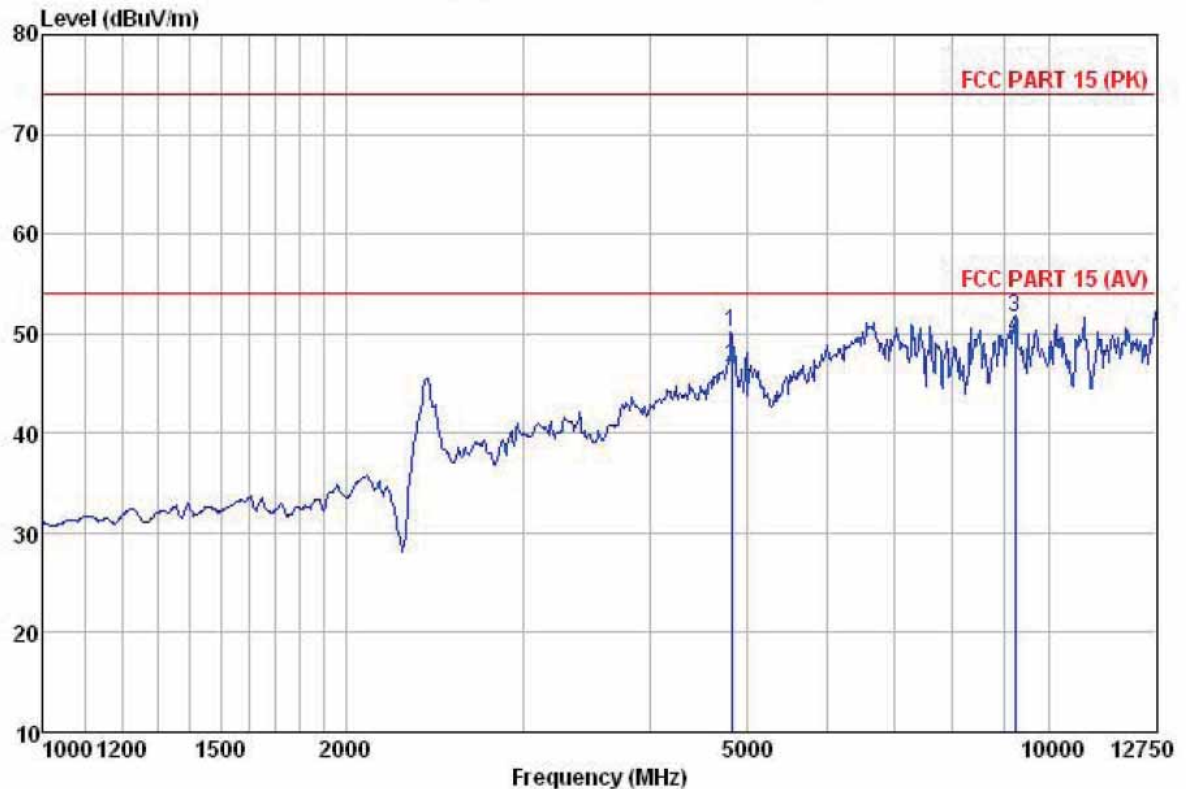

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11n20 L CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBm	dB/m	dB	dB	dBm/m	dBm/m	dB	
1	4824.000	49.86	31.54	8.92	40.22	50.10	74.00	-23.90	Peak
2	4824.000	46.35	31.54	8.92	40.22	46.59	54.00	-7.41	Average
3	9228.060	41.71	37.73	13.45	41.22	51.67	74.00	-22.33	Peak
4	9228.060	39.63	37.73	13.45	41.22	49.59	54.00	-4.41	Average

Remark: The emissions above 12.75GHz were noise floor, so not recorded in report.

802.11 n (H20)

Test channel: Middle

Horizontal

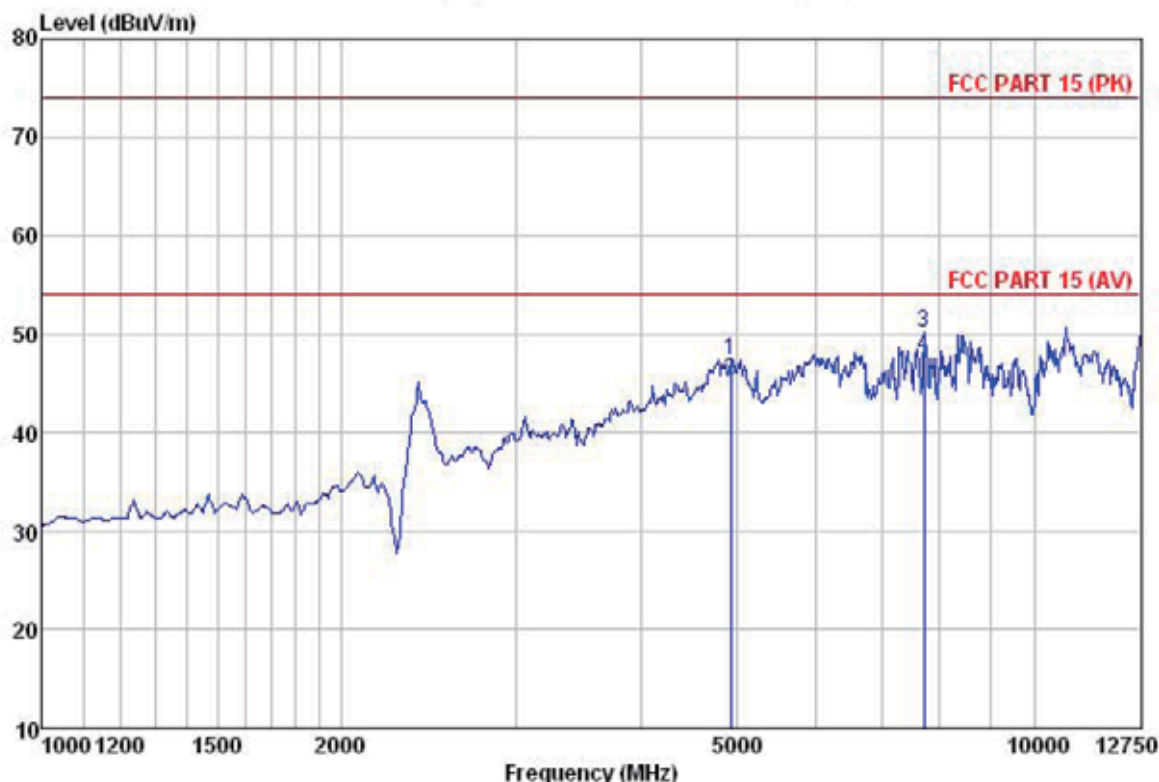


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11n20 M CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBm	dB/m	dB	dB	dBm/m	dBm/m	dB
1	4933.497	46.70	31.64	9.04	40.08	47.30	74.00	-26.70 Peak
2	4933.497	44.68	31.64	9.04	40.08	45.28	54.00	-8.72 Average
3	7721.909	43.73	36.53	10.92	41.00	50.18	74.00	-23.82 Peak
4	7721.909	41.25	36.53	10.92	41.00	47.70	54.00	-6.30 Average

Remark: The emissions above 12.75GHz were noise floor, so not recorded in report.

Vertical

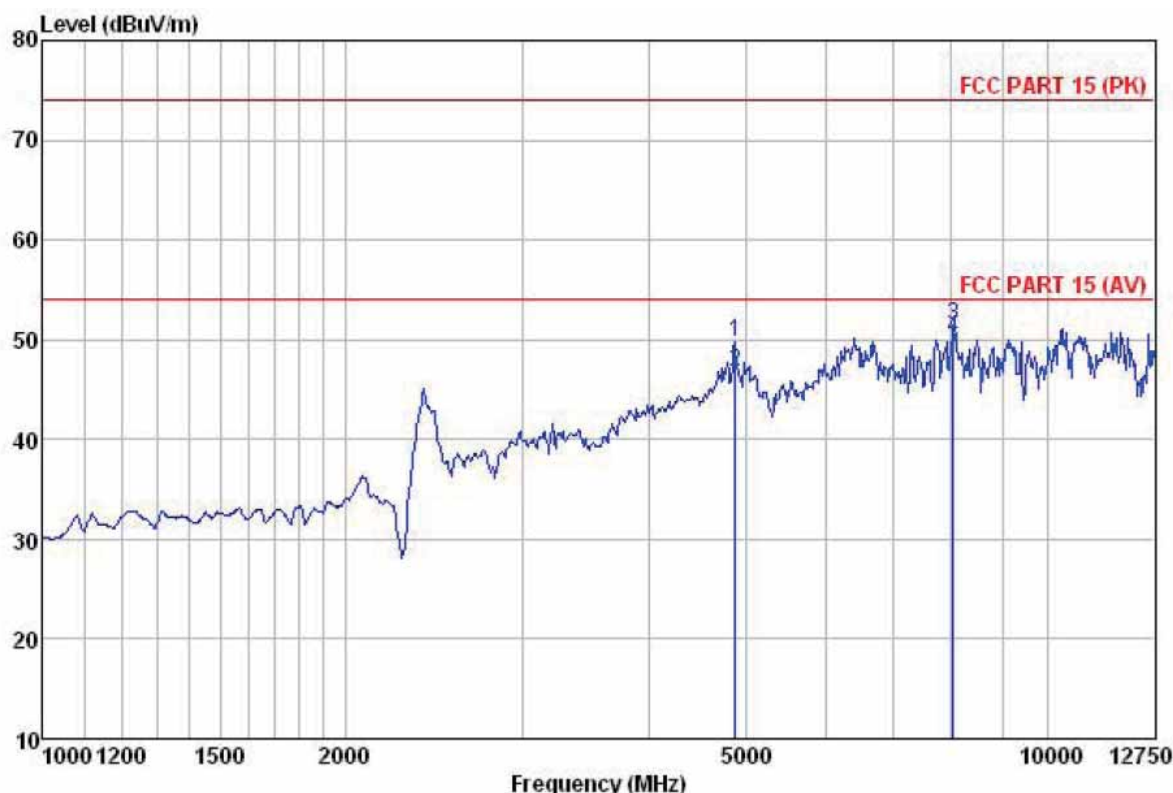

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11n20 M CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBm	dB/m	dB	dB	dBm/m	dBm/m	dB	
1	4883.519	49.36	31.58	8.98	40.15	49.77	74.00	-24.23	Peak
2	4883.519	46.29	31.58	8.98	40.15	46.70	54.00	-7.30	Average
3	8042.903	44.10	37.27	11.18	41.02	51.53	74.00	-22.47	Peak
4	8042.903	42.65	37.27	11.18	41.02	50.08	54.00	-3.92	Average

Remark: The emissions above 12.75GHz were noise floor, so not recorded in report.

802.11 n (H20)

Test channel: Highest

Horizontal

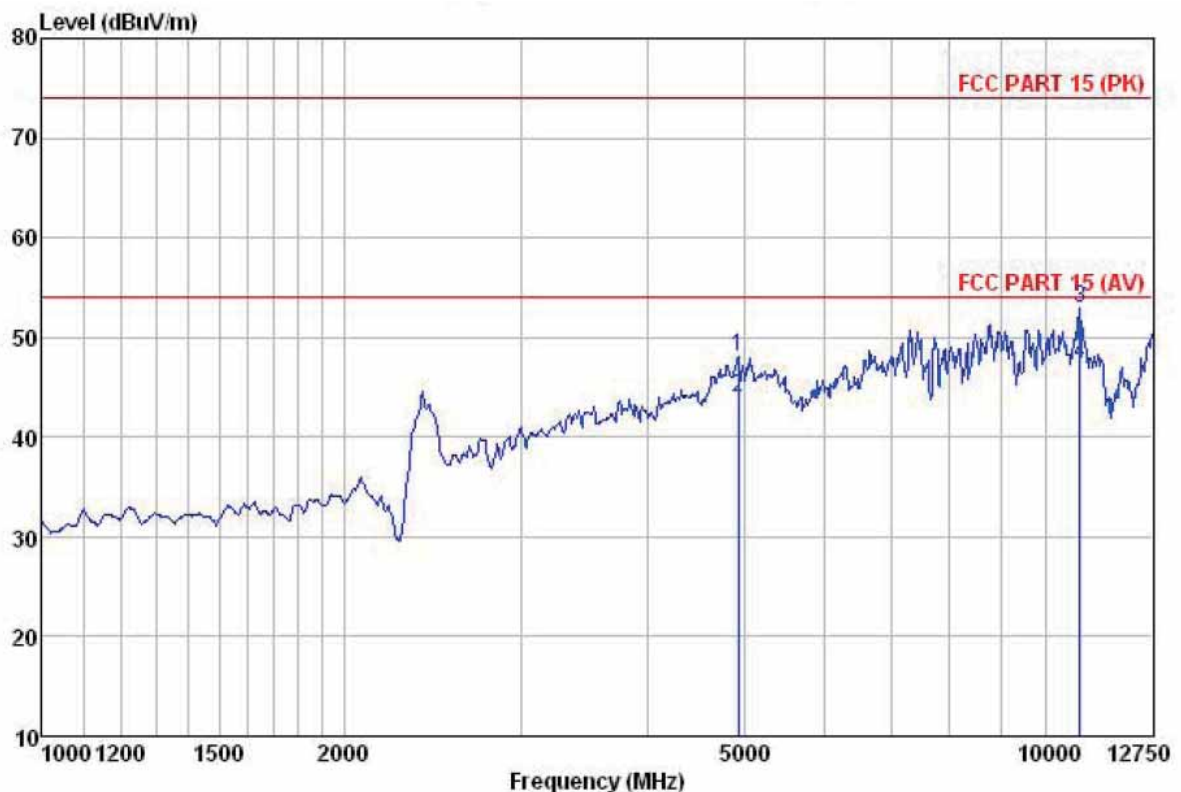


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11n20 H CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24'C Humi:65% Atmos:101Kpa
 Test Engineer: Joe

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	dBm/m	Line	Limit	Remark
		dBm	dB/m	dB	dB		dBm/m	dB	
1	4933.497	47.46	31.64	9.04	40.08	48.06	74.00	-25.94	Peak
2	4933.497	43.28	31.64	9.04	40.08	43.88	54.00	-10.12	Average
3	10778.210	39.75	39.93	13.73	40.54	52.87	74.00	-21.13	Peak
4	10778.210	34.14	39.93	13.73	40.54	47.26	54.00	-6.74	Average

Remark: The emissions above 12.75GHz were noise floor, so not recorded in report.

Vertical

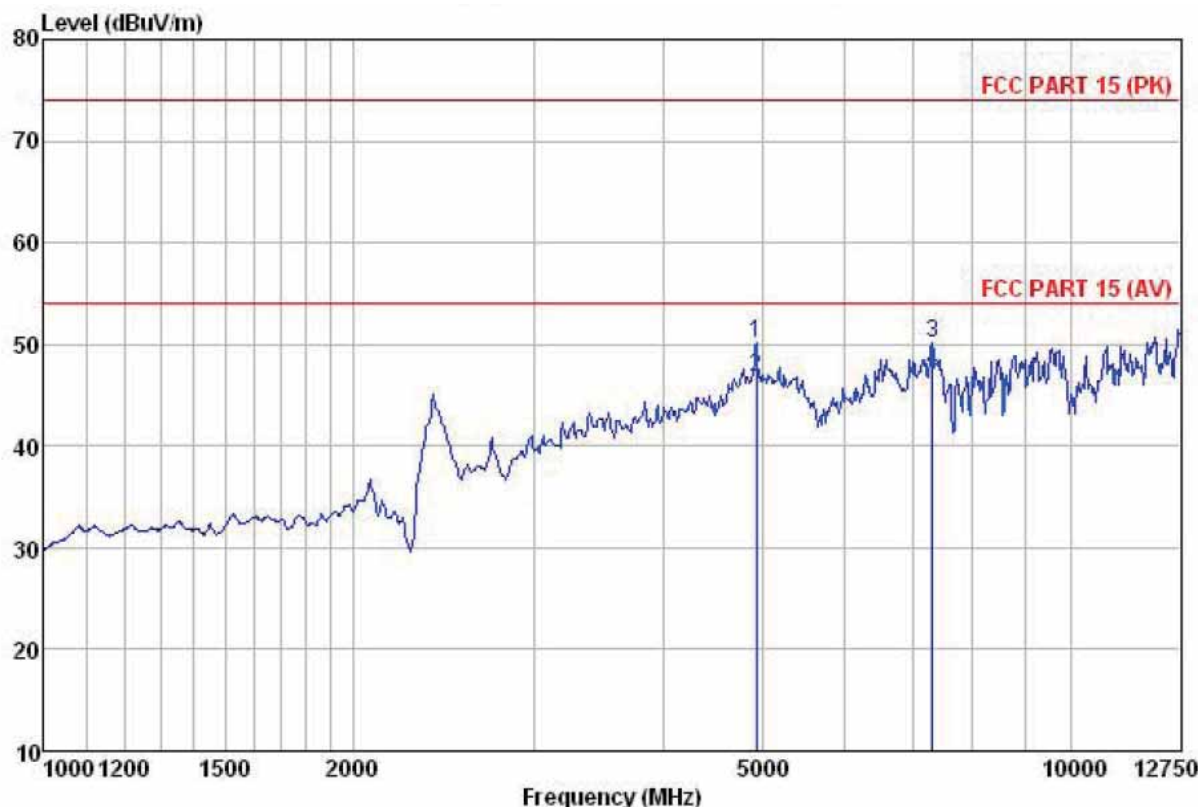

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Job NO. : 113RF
 EUT : WOMATE
 Test mode : 802.11n20 H CH TX
 Power Rating : AC 120V /60Hz
 Environment : Temp:24°C Humi:65% Atmos:101Kpa
 Test Engineer: Joe

	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark
MHz	dBm	dB/m	dB	dB	dBm/m	dBm/m	dB
1	4933.497	49.58	31.64	9.04	40.08	50.18	74.00 -23.82 Peak
2	4933.497	46.25	31.64	9.04	40.08	46.85	54.00 -7.15 Average
3	7319.964	44.08	36.48	10.69	41.15	50.10	74.00 -23.90 Peak
4	7319.964	41.25	36.48	10.69	41.15	47.27	54.00 -6.73 Average

Remark: The emissions above 12.75GHz were noise floor, so not recorded in report.