



**Spectrum Research  
& Testing Lab., Inc.**  
No. 101-10, Ling 8,  
Shan-Tong Li, Chung-Li  
City, Taoyuan, Taiwan,  
R.O.C.

## TEST REPORT

Reference No.:A06071802  
Report No.:FCCA06071802  
Page:1 of 20  
Date: Aug. 08, 2006

Product Name: RocketFish Wireless NB Keypad  
Model No.: RF-NBKPD  
Applicant: Sonnenschein Ind. Co., Ltd.  
14F-3, No. 137, Section 1, Fushing S. Rd.,  
Taipei, Taiwan, R.O.C.  
Date of Receipt: Jul. 18, 2006  
Finished date of Test: Aug. 08, 2006  
Applicable Standards: 47 CFR Part 15, Subpart C  
ANSI C63.4:2003  
RSS-310 ISSUE 1:2005

We, **Spectrum Research & Testing Laboratory Inc.**, hereby certify that one sample of the above was tested in our laboratory with positive results according to the above-mentioned standards. The records in the report are an accurate account of the results. Details of the results are given in the subsequent pages of this report.

Tested By : Roger Horng, Date: Aug. 08. 2006  
( Roger Horng )

Approved By : J H, Date: Aug. 08. 2006  
( Johnson Ho, Director )

**NVLAP**<sup>®</sup>

FCC ID: SLQ-RFNBKPD

Lab Code: 200099-0



**Spectrum Research  
& Testing Lab., Inc.**  
No. 101-10, Ling 8,  
Shan-Tong Li, Chung-Li  
City, Taoyuan, Taiwan,  
R.O.C.

## TEST REPORT

Reference No.:A06071802  
Report No.:FCCA06071802  
Page:2 of 21  
Date: Aug. 08, 2006

## Table of Contents

1. DOCUMENT POLICY AND TEST STATEMENT .....	3
1.1 DOCUMENT POLICY .....	3
1.2 TEST STATEMENT .....	3
1.3 EUT MODIFICATION .....	3
2. DESCRIPTION OF EUT AND TEST MODE .....	4
2.1 GENERAL DESCRIPTION OF EUT.....	4
2.2 DESCRIPTION OF EUT INTERNAL DEVICE.....	4
2.3 DESCRIPTION OF TEST MODE .....	4
2.4 DESCRIPTION OF SUPPORT UNIT .....	5
3. DESCRIPTION OF APPLIED STANDARDS .....	5
4. CONDUCTED EMISSION TEST .....	6
4.1 CONDUCTED EMISSION LIMIT.....	6
4.2 TEST EQUIPMENT.....	6
4.3 TEST SETUP .....	7
4.4 TEST PROCEDURE .....	7
4.5 EUT OPERATING CONDITION .....	7
4.6 TEST RESULT .....	8
5. RADIATED EMISSION TEST .....	9
5.1 RADIATED EMISSION LIMIT.....	9
5.2 TEST EQUIPMENT.....	10
5.3 TEST SET-UP .....	11
5.4 TEST PROCEDURE .....	13
5.5 EUT OPERATING CONDITION .....	13
5.6 RADIATED EMISSION TEST RESULT .....	14
6. PHOTOS OF TESTING .....	17
7. TERMS OF ABBREVIATION .....	21

 <p><b>Spectrum Research &amp; Testing Lab., Inc.</b> No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<b>TEST REPORT</b>	Reference No.:A06071802 Report No.:FCCA06071802 Page:3 of 21 Date: Aug. 08, 2006
---	--------------------	---

## 1. DOCUMENT POLICY AND TEST STATEMENT

### 1.1 DOCUMENT POLICY

- The report shall not be reproduced except in full, without the written approval of SRT Lab, Inc.
- The report must not be used by the applicant to claim that the product is endorsed by NVLAP, TÜV, NEMKO and SRT.
- The NVLAP logo applies only to the applicable standards specified in this report.

### 1.2 TEST STATEMENT

- The test results in the report apply only to the unit tested by SRT Lab.
- There was no deviation from the requirements of test standards during the test.
- AC power source, 120 Vac/60 Hz, was used during the test.

### 1.3 EUT MODIFICATION

- No modification in SRT Lab.

 <p><b>Spectrum Research &amp; Testing Lab., Inc.</b> No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A06071802 Report No.:FCCA06071802 Page:4 of 21 Date: Aug. 08, 2006
---	----------------------	---

## 2. DESCRIPTION OF EUT AND TEST MODE

### 2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	RocketFish Wireless NB Keypad
MODEL NO.	RF-NBKPD
POWER REQUIREMENTS	+1.5V DC
FREQUENCY BAND	26.995~27.195MHz
CARRIER FREQUENCY	27.045 MHz
NUMBER OF CHANNEL	1
RATED RF OUTPUT POWER	0.02mW
MODULATION TYPE	FSK
MODE OF OPERATION	Simplex
ANTENNA TYPE	Integral antenna
ANTENNA GAIN	<0.025
CHANNEL BANDWIDTH	25KHz

#### NOTE :

The EUT contains transmitter and receiver parts.

For more detailed features, please refer to the manufacturer's specification or User's Manual.

### 2.2 DESCRIPTION OF EUT INTERNAL DEVICE

DEVICE	BRAND / MAKER	MODEL #	FCC ID/DOC	REMARK

### 2.3 DESCRIPTION OF TEST MODE

N/A (It is only applicable to more than one test mode.)

 <p><b>Spectrum Research &amp; Testing Lab., Inc.</b> No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A06071802 Report No.:FCCA06071802 Page:5 of 21 Date: Aug. 08, 2006
---	----------------------	---

## 2.4 DESCRIPTION OF SUPPORT UNIT

The EUT was configured by the requirement of ANSI C63.4:2003 and CISRP22:2003. All interface ports were connected to the appropriate support units via specific cables. The support units and cables are listed below.

NO	DEVICE	BRAND	MODEL #	FCC ID/DOC	CABLE
1	PRINTER	EPSON	STYLUS C20SX	N/A	1.5m unshielded power cord 1.5m shielded data cable
2	USB HD	TeraSys	F12-UF	N/A	1.2m unshielded power cord
3	NOTEBOOK	Compaq	Presario B2000	N/A	1.8m unshielded power cord
4	MONITOR	SANGSUNG	700IFT	N/A	1.8m unshielded power cord 1.5m shielded data cable
5	MOUSE	COMPAQ	M-S34	DZL211029	1.5m unshielded data cord

**NOTE :** For the actual test configuration, please refer to the photos of testing.

## 3. DESCRIPTION OF APPLIED STANDARDS

The EUT is a kind of wireless product and to be connected with a PC system for normal use. According to the specifications provided by the applicant, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C  
ANSI C63.4:2003  
RSS-310 ISSUE 1:2005

All tests have been performed and recorded as per the above standards.

 <p><b>Spectrum Research &amp; Testing Lab., Inc.</b> No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A06071802 Report No.:FCCA06071802 Page:6 of 21 Date: Aug. 08, 2006
---	----------------------	---

## 4. CONDUCTED EMISSION TEST

### 4.1 CONDUCTED EMISSION LIMIT

FREQUENCY (MHz)	Class A (dB $\mu$ V)		Class B (dB $\mu$ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.5 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

#### NOTE:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 4.2 TEST EQUIPMENT


The following test equipment was used for the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9 kHz TO 2.75 GHz	ROHDE & SCHWARZ	ESHS30/ 826003/008	AUG. 2006 ETC
LISN (for EUT)	50 $\mu$ H, 50 ohm	FCC	FCC-LISN-50-25-2 / 01017	NOV. 2006 ETC
LISN (for Peripheral)	50 $\mu$ H, 50 ohm	FCC	FCC-LISN-50-25-2 / 01018	NOV. 2006 ETC
50 ohm TERMINATOR	50 ohm	HP	11593A/ 2	MAR. 2007 ETC
COAXIAL CABLE	3m	SUNCITY	J400/ 3M	JUL. 2007 SRT
ISOLATION TRANSFORMER	N/A	APC	AFC-11015/ F102040016	N/A
FILTER	2 LINE, 30A	FIL.COIL	FC-943/ 771	N/A
GROUND PLANE	2.3M (H) x 2.4M (W)	SRT	N/A	N/A
GROUND PLANE	2.4M (H) x 2.4M (W)	SRT	N/A	N/A

**NOTE:** The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.



## 4.3 TEST SETUP

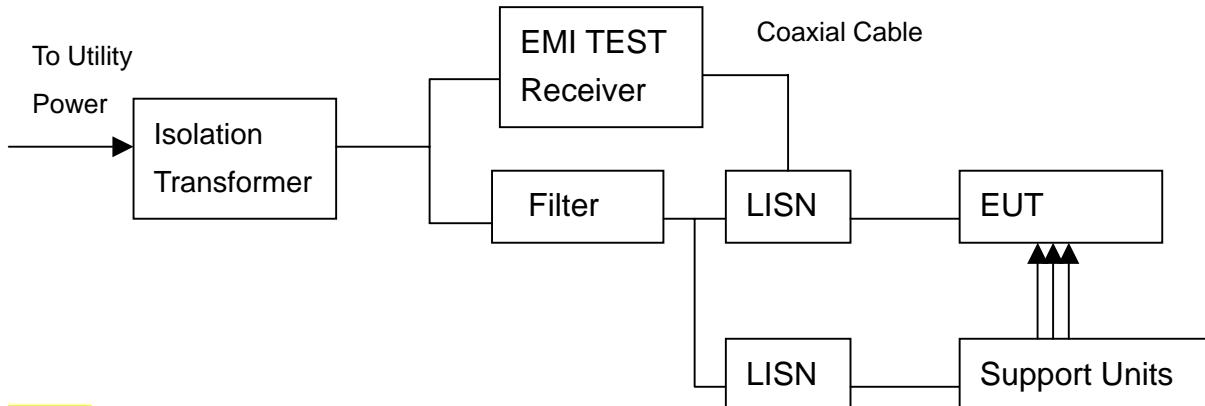

### NOTE:

1. The EUT was put on a wooden table with 0.8m heights above ground plane, and 0.4m away from reference ground plane (> 2mx2m).
2. For the actual test configuration, please refer to the photos of testing.
3. The serial no. of the LISN connected to EUT is 01017.
4. The serial no. of the LISN connected to support units is 01018.

## 4.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4:2003 and CISRP22:2003. The frequency spectrum from 0.15 MHz to 30 MHz was investigated. The LISN used was 50 ohm/50μH as specified. All readings were quasi-peak and average values with 10 kHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. Both lines of the power mains of EUT were measured and the cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

First, find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.

## 4.5 EUT OPERATING CONDITION

1. Set the EUT under transmission condition continuously at specific channel frequency.
2. Under Windows XP run “EMI TEST”, “XCOPY”, “WINFCC” program and PC sent “H” pattern or accessed the following peripherals directly or via EUT:
  - Color Monitor
  - Printer
  - Mouse
  - USB HD

 <p><b>Spectrum Research &amp; Testing Lab., Inc.</b> No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A06071802 Report No.:FCCA06071802 Page:8 of 21 Date: Aug. 08, 2006
---	----------------------	---

## 4.6 TEST RESULT

Temperature:	24°C	Humidity:	70 %RH
Ferquency Range:	0.15 – 30 MHz	Tested Mode:	N/A
Receiver Detector:	Q.P. and AV.	Tested By:	Roger Horng
		Tested Date:	Aug. 05, 2006

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB $\mu$ V)		Emission Level (dB $\mu$ V)		Limit (dB $\mu$ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.177	0.30	55.12	27.67	55.42	27.97	65.23	55.23	-9.81	-27.26
0.195	0.30	57.92	42.19	58.22	42.49	64.71	54.71	-6.49	-12.22
1.398	0.15	37.90	24.16	38.05	24.31	56.00	46.00	-17.95	-21.69
13.841	0.25	29.74	23.73	29.99	23.98	60.00	50.00	-30.01	-26.02
14.896	0.25	29.78	23.95	30.03	24.20	60.00	50.00	-29.97	-25.80
16.701	0.30	29.86	23.72	30.16	24.02	60.00	50.00	-29.84	-25.98

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB $\mu$ V)		Emission Level (dB $\mu$ V)		Limit (dB $\mu$ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.198	0.30	56.56	39.00	56.86	39.30	64.63	54.63	-7.77	-15.33
0.201	0.28	56.34	40.97	56.62	41.25	64.54	54.54	-7.92	-13.29
3.101	0.18	30.52	19.99	30.70	20.17	56.00	46.00	-25.30	-25.83
11.729	0.24	29.94	23.81	30.18	24.05	60.00	50.00	-29.82	-25.95
13.150	0.24	29.62	23.66	29.86	23.90	60.00	50.00	-30.14	-26.10
19.059	0.28	30.86	24.32	31.14	24.60	60.00	50.00	-28.86	-25.40

### NOTE :

1. Measurement uncertainty is +/-1.32dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

 <p><b>Spectrum Research &amp; Testing Lab., Inc.</b> No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<h1>TEST REPORT</h1>	Reference No.:A06071802 Report No.:FCCA06071802 Page:9 of 21 Date: Aug. 08, 2006
---	----------------------	---

## 5. RADIATED EMISSION TEST

### 5.1 RADIATED EMISSION LIMIT

FCC Part 15, Subpart C Section 15.227.

FREQUENCY (MHz)	DISTANCE (m)	FIELD STRENGTH (dB $\mu$ V/m)	
		PEAK	AVERAGE
26.96 - 27.28	3	100.0	80.0

FCC Part 15, Subpart B Section 15.209.

FREQUENCY (MHz)	DISTANCE (m)	FIELD STRENGTH (dB $\mu$ V/m)
30 - 88	3	40.0
88 - 216	3	43.5
216 - 960	3	46.0
Above 960	3	54.0

#### NOTE :

1. In the emission tables above , the tighter limit applies at the band edges.
2. Distance refers to the distance between measuring instrument, antemma, and the closest point of any part of the device or system.

CISPR 22:2003 limits of radiated emission measurement for frequency below 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 10m)
	dB $\mu$ V/m	dB $\mu$ V/m
30 – 230	40	30
230 - 1000	47	37

#### NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).

 <p><b>Spectrum Research &amp; Testing Lab., Inc.</b> No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<p><b>TEST REPORT</b></p>	<p>Reference No.:A06071802 Report No.:FCCA06071802 Page:10 of 21 Date: Aug. 08, 2006</p>
---	---------------------------	--

## 5.2 TEST EQUIPMENT

The following test equipment was used during the radiated emission test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9 kHz TO 1 GHz	ROHDE & SCHWARZ	ESCS30/ 830245/012	OCT. 2006 ETC
BI-LOG ANTENNA	25 MHz TO 2 GHz	EMCO	3143/ 9509-1141	SEP. 2006 SRT
SPECTRUM ANALYZER	9 KHz TO 26.5 GHz	HP	8593E/ 3710A03220	MAY 2007 ETC
PRE-AMPLIFIER	1 GHz TO 26.5 GHz	HP	8449B/ 3008A01019	NOV. 2006 ETC
HORN ANTENNA	1 GHz TO 18 GHz	EMCO	3115/ 9602-4681	DEC. 2006 ETC
OATS	3 – 10 M MEASUREMENT	SRT	SRT-1	DEC. 2006 SRT
COAXIAL CABLE	25M	SUNCITY	J400/ 25M	AUG. 2006 SRT
FILTER	2 LINE, 30A	FIL.COIL	FC-943/ 869	N/A
FREQUENCY CONVERTER	N/A	APC	AFC-2KBB/ F100030031	AUG. 2006 SRT


**NOTE:**

1. The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.
2. The Open Area Test Site (SRT-1) is registered by FCC with No. 90957 and VCCI with No. R-1081.
3. The Open Area Test Site (SRT-2) is registered by FCC with No. 98458 and VCCI with No. R-1168.



## 5.3 TEST SET-UP

(Below 30MHz)

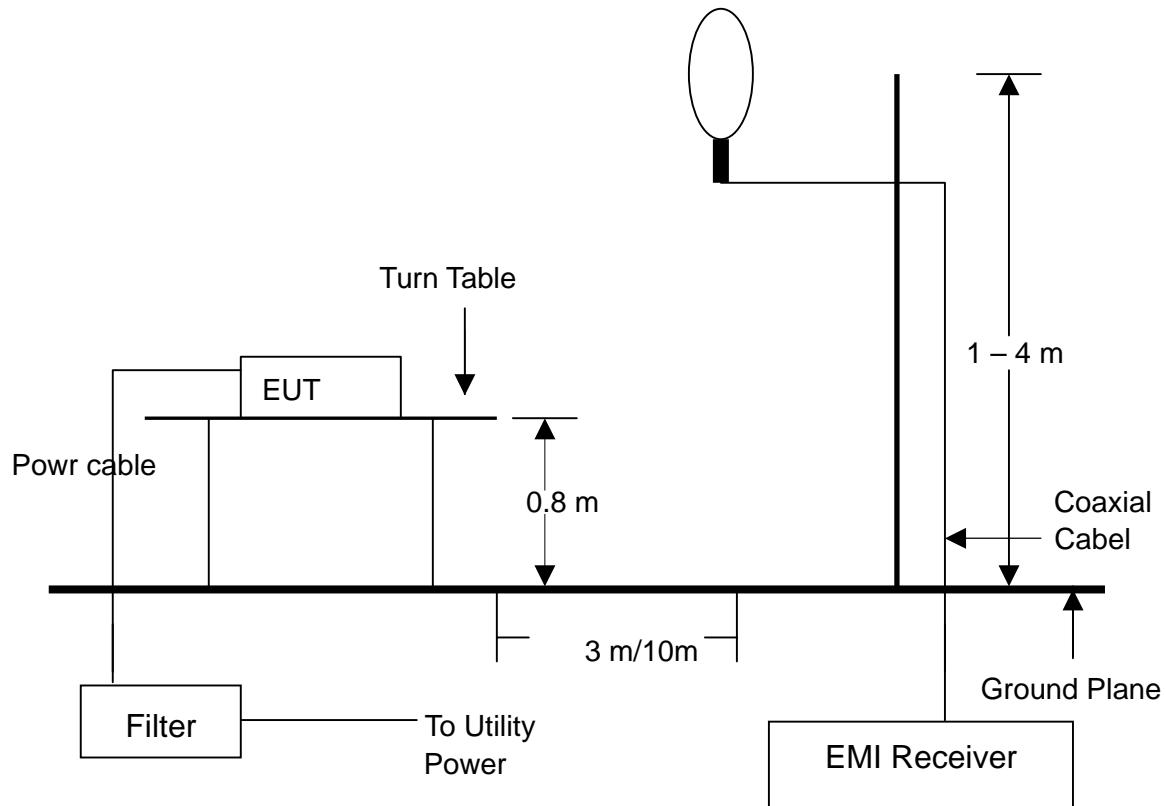


### NOTE :

1. The EUT system was put on a wooden table with 0.8m heights above a ground plane.
2. For the actual test configuration, please refer to the photos of testing.



(30-1000MHz)

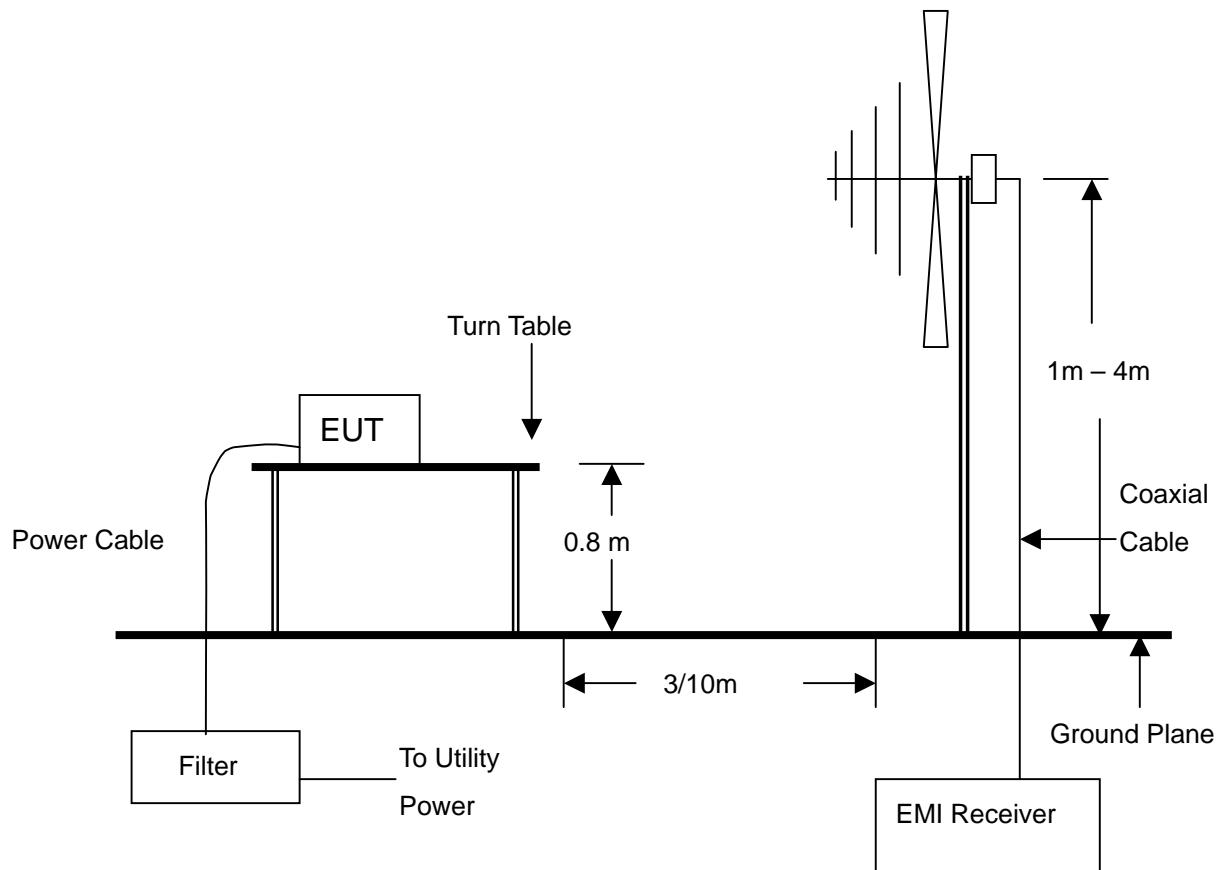

**NOTE :**

1. The EUT system was put on a wooden table with 0.8m heights above a ground plane.
2. For the actual test configuration, please refer to the photos of testing.

 <p><b>Spectrum Research &amp; Testing Lab., Inc.</b> No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan, R.O.C.</p>	<b>TEST REPORT</b>	Reference No.:A06071802 Report No.:FCCA06071802 Page:13 of 21 Date: Aug. 08, 2006
---	--------------------	--

#### 5.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4:2003 and CISPR 22:2003. The measurements were made at an open area test site with 10 meter measurement distance under 1 GHz and with 3m distance above 1GHz. The frequency spectrum measured started from 30 MHz. Under 1 GHz, all readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. Above 1 GHz, the measurements were made at an open area test site with 3 meter measurement distance and all readings were peak or average values with 1 MHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. The cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

First, find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.

#### 5.5 EUT OPERATING CONDITION

Same as section 4.5 of this report.



**Spectrum Research  
& Testing Lab., Inc.**  
No. 101-10, Ling 8,  
Shan-Tong Li, Chung-Li  
City, Taoyuan, Taiwan,  
R.O.C.

## TEST REPORT

Reference No.:A06071802  
Report No.:FCCA06071802  
Page:14 of 21  
Date: Aug. 08, 2006

### 5.6 RADIATED EMISSION TEST RESULT

Temperature:	29°C	Humidity:	75 %RH
Ferquency Range:	9KHz-30 MHz	Measured Distance:	3m
Receiver Detector:	PK & AV.	Tested Mode:	Fundamental
Tested Date:	Jul. 27, 2006		
Tested By:	Roger Horng		

Frequency (MHz)	Antenna Polarization	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
27.045(F)		0.03	20.2	40.2(PK)	60.4	100.0	-39.6
27.045(F)		0.03	20.2	34.8(AV)	55.0	80.0	-25.0



**Spectrum Research  
& Testing Lab., Inc.**  
No. 101-10, Ling 8,  
Shan-Tong Li, Chung-Li  
City, Taoyuan, Taiwan,  
R.O.C.

## TEST REPORT

Reference No.:A06071802  
Report No.:FCCA06071802  
Page:15 of 21  
Date: Aug. 08, 2006

Temperature: 29°C Humidity: 75 %RH  
Frequency Range: 30-1000 MHz Measured Distance: 3m  
Receiver Detector: PK & AV. Tested Mode: TX  
Tested Date: Jul. 27, 2006  
Tested By: Roger Horng

Frequency (MHz)	Antenna Polarization	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
54.0750	H	0.79	7.80	7.4	16.0	40.0	-24.0
81.1400	H	1.05	6.24	6.1	13.4	40.0	-26.6
135.1950	H	1.22	7.35	4.4	13.0	43.5	-30.5
162.2300	H	1.38	9.00	5.2	15.6	43.5	-27.9
189.3000	H	1.49	10.38	4.1	16.0	43.5	-27.5
216.3100	H	1.60	10.26	5.5	17.4	46.0	-28.6
54.1380	V	0.79	7.80	8.1	16.7	40.0	-23.3
81.1400	V	1.05	6.24	6.4	13.7	40.0	-26.3
134.9000	V	1.21	7.36	3.4	12.0	43.5	-31.5
162.1050	V	1.38	9.00	3.7	14.1	43.5	-29.4
189.3400	V	1.49	10.38	5.2	17.1	43.5	-26.4
216.0550	V	1.60	10.26	2.9	14.8	46.0	-31.2

**NOTE :**

1. Measurement uncertainty is less than +/- 2dB
2. \*\*: Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss
4. The field strength of other emission frequencies were very low against the limit.
5. (F) : Fundamental frequency of transmitter.



**Spectrum Research  
& Testing Lab., Inc.**  
No. 101-10, Ling 8,  
Shan-Tong Li, Chung-Li  
City, Taoyuan, Taiwan,  
R.O.C.

# TEST REPORT

Reference No.:A06071802  
Report No.:FCCA06071802  
Page:16 of 21  
Date: Aug. 08, 2006

Temperature:	31°C	Humidity:	70 %RH
Ferquency Range:	30 – 1000 MHz	Measured Distance:	3m
Receiver Detector:	Q.P.	Tested Mode:	RX
Tested Date:	Aug. 08, 2006	Tested By:	Roger Horng

Antenna Polarization:Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	AZ(°)	EL(m)
196.7400	2.47	8.32	14.2	25.0	43.5	-18.5	9.1	1.4
499.3800	4.12	19.38	8.9	32.4	46.0	-13.6	348.0	1.3
600.2600	4.60	21.00	8.9	34.5	46.0	-11.5	261.7	1.5
667.1900	4.85	22.14	8.6	35.6	46.0	-10.4	88.4	2.1
733.1500	5.14	22.67	8.0	35.8	46.0	-10.2	41.7	3.1
800.8000	5.33	22.60	7.5	35.4	46.0	-10.6	13.2	2.8

Antenna Polarization:Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	AZ(°)	EL(m)
165.7000	2.27	7.60	18.7	28.6	43.5	-14.9	89.6	2.5
331.5700	3.18	15.68	9.5	28.4	46.0	-17.7	69.2	2.8
353.9000	3.29	16.23	9.5	29.0	46.0	-17.0	92.7	1.7
599.2900	4.60	20.98	8.9	34.5	46.0	-11.5	101.4	1.3
666.2200	4.85	22.12	8.8	35.8	46.0	-10.2	90.1	1.8
733.1500	5.14	22.67	7.9	35.7	46.0	-10.3	72.9	2.7

**NOTE :**

1. Measurement uncertainty is +/-2dB.
2. \*\*: Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.




**Spectrum Research  
& Testing Lab., Inc.**  
No. 101-10, Ling 8,  
Shan-Tong Li, Chung-Li  
City, Taoyuan, Taiwan,  
R.O.C.

## TEST REPORT

Reference No.:A06071802  
Report No.:FCCA06071802  
Page:17 of 21  
Date: Aug. 08, 2006

### 6. PHOTOS OF TESTING

- Conducted test

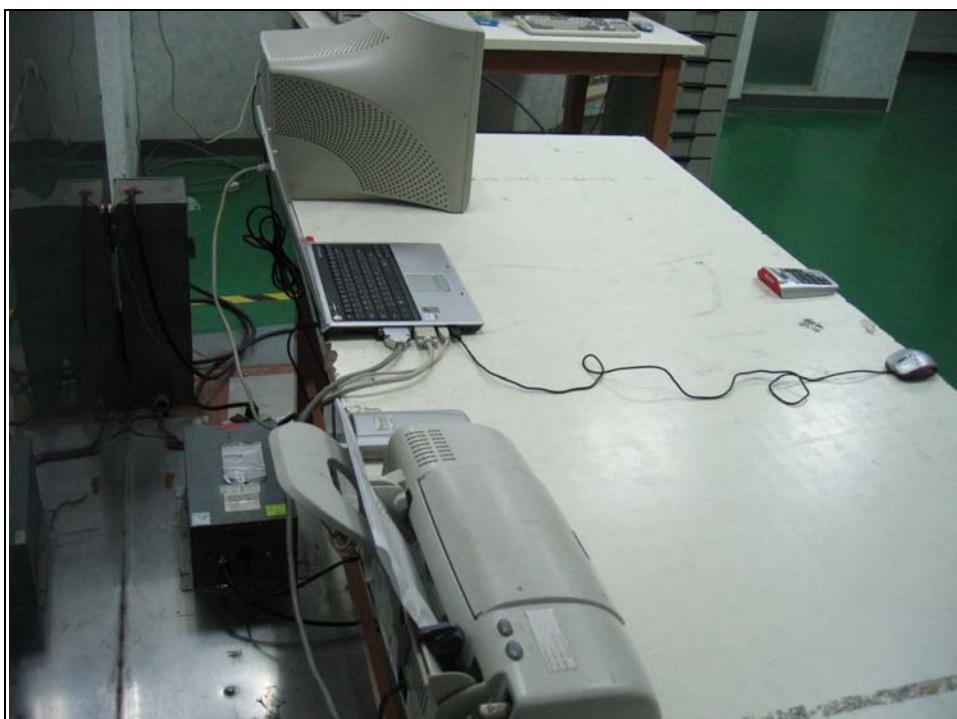



**Spectrum Research  
& Testing Lab., Inc.**  
No. 101-10, Ling 8,  
Shan-Tong Li, Chung-Li  
City, Taoyuan, Taiwan,  
R.O.C.

## TEST REPORT

Reference No.:A06071802  
Report No.:FCCA06071802  
Page:18 of 21  
Date: Aug. 08, 2006

- Radiated test (TX)9KHz-30MHz





**Spectrum Research  
& Testing Lab., Inc.**  
No. 101-10, Ling 8,  
Shan-Tong Li, Chung-Li  
City, Taoyuan, Taiwan,  
R.O.C.

## TEST REPORT

Reference No.:A06071802  
Report No.:FCCA06071802  
Page:19 of 21  
Date: Aug. 08, 2006

- Radiated test (TX) 30MHz-1GHz






**Spectrum Research  
& Testing Lab., Inc.**  
No. 101-10, Ling 8,  
Shan-Tong Li, Chung-Li  
City, Taoyuan, Taiwan,  
R.O.C.

## TEST REPORT

Reference No.:A06071802  
Report No.:FCCA06071802  
Page:20 of 21  
Date: Aug. 08, 2006

- Radiated test (RX)30M-1G

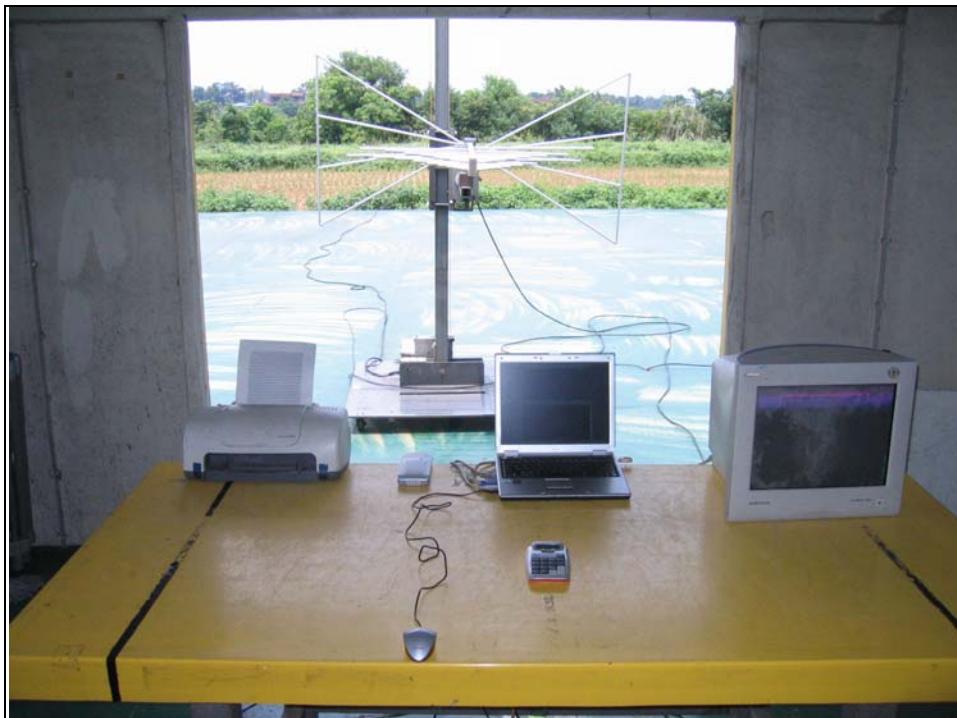



**Spectrum Research  
& Testing Lab., Inc.**  
No. 101-10, Ling 8,  
Shan-Tong Li, Chung-Li  
City, Taoyuan, Taiwan,  
R.O.C.

## TEST REPORT

Reference No.:A06071802  
Report No.:FCCA06071802  
Page:21 of 21  
Date: Aug. 08, 2006

### 7. TERMS OF ABBREVIATION

AV.	Average detection
AZ(°)	Turn table azimuth
Correct.	Correction
EL(m)	Antenna height (meter)
EUT	Equipment Under Test
Horiz.	Horizontal direction
LISN	Line Impedance Stabilization Network
NSA	Normalized Site Attenuation
Q.P.	Quasi-peak detection
SRT Lab	Spectrum Research & Testing Laboratory, Inc.
Vert.	Vertical direction