

8 7 6 5 4 3 2 1

▼


2

1

| REV | DESCRIPTION | DATE | APPROVED |
|-----|----------------------|----------|----------|
| A00 | ORIGINATED | 01/12/10 | |
| A01 | REVISED SIZE | 02/22/10 | |
| B00 | REVISED PER EGN11013 | 06/01/11 | |

C

D

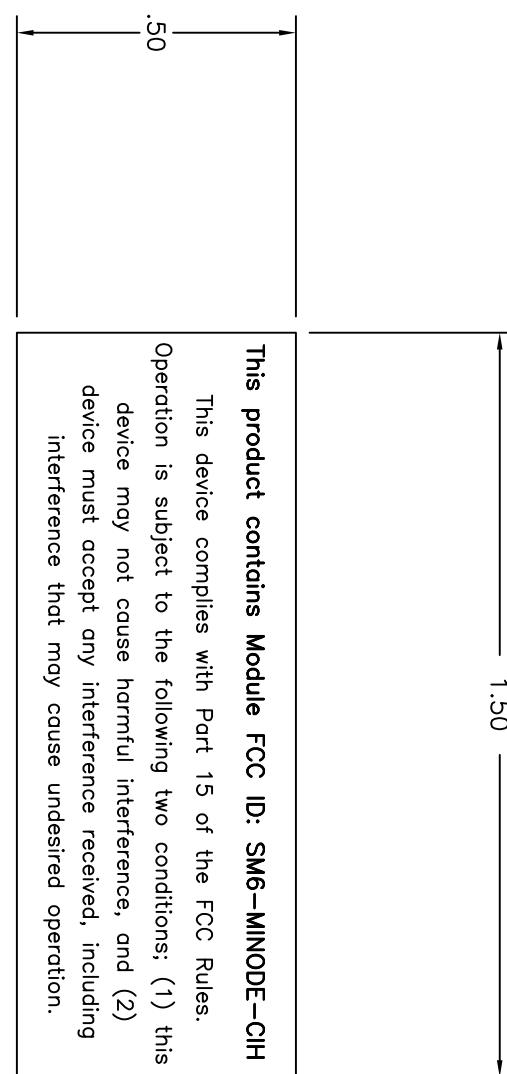

This product contains Module FCC ID: SM6-MINODE-CH

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions; (1) this device may not cause harmful interference, and (2) device must accept any interference received, including interference that may cause undesired operation.

NOTES: UNLESS OTHERWISE SPECIFIED

1) MATERIAL: 2 mil Gloss White Polyester (Thermal Transfer) base w/ 2 mil Acrylic Adhesive UL recognized and CA certified for outdoor use that will not rub off under a 50% alcohol/water solution or equivalent process. Able to withstand outside exposure to -40C, rain and direct sunlight

- 2) Thermal Transfer printing: Resin ribbon or equivalent, Black
- 3) Font: Arial / Size: 4pt
- 4) Dimensions: 1.50 wide by .50 high

DWG file: 130-0020-001_B00
UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES OR IN [MILLIMETERS]

APPROVALS DATE

APPROVED BY:

DATE</p