

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

588 West Jindu Road, Songjiang District, Shanghai, China

Telephone: +86 (0) 21 6191 5666
Fax: +86 (0) 21 6191 5678
ee.shanghai@sgs.com

Report No.: SHEM130300038201
Page 1 of 22

TEST REPORT

Application No.:	SHEM1303000382PF
Applicant:	Wintop International industrial Co.Ltd
FCC ID:	SM8RA13
Equipment Under Test (EUT):	
NOTE: The following sample(s) submitted was/were identified on behalf of the client as	
Product Name:	iModule
Brand Name:	Wintop
Model:	RA13
Added Model:	N/A
Standards:	FCC PART 15 Subpart C Section 15.249: 2011
Date of Receipt:	Mar.18, 2013
Date of Test:	Mar.19, 2013 to Apr.01, 2013
Date of Issue:	Apr.07, 2013
Test Result :	PASS *

* In the configuration tested, the EUT complied with the standards specified above.



Tony Wu
E&E Section Manager

SGS-CSTC (Shanghai) Co., Ltd.

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00	/	Apr.07, 2013	/	Original

Authorized for issue by:			
Engineer		Zenger Zhang	<i>Zenger Zhang</i>
Clerk		Amy Wang	<i>Amy Wang</i>
Reviewer		Keny Xu	<i>Keny Xu</i>

3 Test Summary

Test Item	FCC Requirement	Test method	Result
Antenna Requirement	Section 15.203	ANSI C63.10 (2009)	PASS
AC Power Line Conducted Emission	Section 15.207	ANSI C63.10 (2009)	N/A
Field Strength of the Fundamental Signal	Section 15.249 (a)	ANSI C63.10 (2009)	PASS
Spurious Emissions	Section 15.249 (a)/15.209	ANSI C63.10 (2009)	PASS
20dB Occupied Bandwidth	Section 15.215 (c)	ANSI C63.10 (2009)	PASS

N/A: Not applicable

4 Contents

	Page
1 COVER LETTER	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENTS	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TECHNICAL SPECIFICATIONS:.....	5
5.4 SUPPORT EQUIPMENTS FOR TESTING.....	5
5.5 DETAILS OF TEST MODE	6
5.6 TEST LOCATION.....	6
5.7 TEST FACILITY.....	7
5.8 DEVIATION FROM STANDARDS	7
5.9 ABNORMALITIES FROM STANDARD CONDITIONS	7
5.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
5.11 TEST INSTRUMENTS LIST	8
6 TEST RESULTS AND MEASUREMENT DATA	9
6.1 ANTENNA REQUIREMENT	9
6.2 CONDUCTED EMISSIONS	10
6.3 FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL.....	12
6.4 SPURIOUS EMISSIONS.....	14
6.4.1 <i>Measurement Data</i>	17
6.5 20dB BANDWIDTH	20
2 TEST SETUP PHOTOGRAPHS	22
3 EUT CONSTRUCTIONAL DETAILS	22
4 TEST SETUP PHOTOGRAPHS	22
5 EUT CONSTRUCTIONAL DETAILS	22

5 General Information

5.1 Client Information

Applicant:	Wintop International industrial Co.Ltd
Address of Applicant:	No.1301, Xinfei Road, Songjiang District Shanghai, China
Manufacturer:	Wintop International industrial Co.Ltd
Address of Manufacturer:	No.1301, Xinfei Road, Songjiang District Shanghai, China
Factory:	Wintop International industrial Co.Ltd

5.2 General Description of EUT

Product Name:	iModule
Model No.(EUT):	RA13
Trade Mark:	Wintop
Add Model No.:	N/A
Product Description:	Wireless sensor

5.3 Technical Specifications:

Operation Frequency:	908.42MHz/1Channel
Modulation Technique:	GFSK
Power Supply:	3V DC (the New Alkaline Battery(AA*2) is used during the test)
Antenna Type	Integral
Antenna Gain	2.01dBi

5.4 Support equipments for Testing

The EUT has been tested independently.

5.5 Details of Test Mode

Test Mode	Description of Test Mode
Transmitting mode:	Keep the EUT on continuous transmitting mode

5.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.
No.588 West Jindu Road, Songjiang District, Shanghai, China.201612.

Tel: +86 21 6191 5666 Fax: +86 21 6191 5678

5.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L0599)**

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. Date of expiry: 2014-07-26.

- **FCC – Registration No.: 402683**

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 402683, Expiry Date: 2015-02-22.

- **Industry Canada (IC) – IC Assigned Code: 8617A**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A. Expiry Date: 2014-09-20.

- **VCCI (Member No.: 3061)**

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3868 and C-4336 respectively. Date of Registration: 2012-05-29. Date of Expiry: 2015-05-28.

5.8 Deviation from Standards

None.

5.9 Abnormalities from Standard Conditions

None.

5.10 Other Information Requested by the Customer

None.

5.11 Test Instruments List

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due date
1	EMI test receiver	Rohde & Schwarz	ESU40	100109	2012-6-3	2013-6-2
2	Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-679	2012-6-3	2013-6-2
3	Horn Antenna	Rohde & Schwarz	HF906	100284	2013-3-12	2014-3-11
4	ANTENNA	SCHWARZBECK	VULB9168	9168-313	2012-6-3	2013-6-2
5	Ultra broadband antenna	Rohde & Schwarz	HL562	100227	2012-10-7	2013-10-6
6	Atmosphere pressure meter	Shanghai ZhongXuan Electronic Co;Ltd	BY-2009P	--	2012-10-13	2013-10-12
7	CLAMP METER	FLUKE	316	86080010	2012-4-22	2013-4-21
8	Thermo-Hygrometer	ZHICHEN	ZC1-2	01050033	2012-10-13	2013-10-12
9	High-low temperature cabinet	Shanghai YuanZhen	GW2050	--	2012-6-17	2013-6-16
11	Tunable Notch Filter	Wainwright instruments GmbH	WRCT1800.0/2000.0-0.2/40-5SSK	11	2013-1-24	2014-1-23
12	Tunable Notch Filter	Wainwright instruments GmbH	WRCT800.0/88 0.0-0.2/40-5SSK	9	2013-1-24	2014-1-23
13	High pass Filter	FSCW	HP 12/2800-5AA2	19A45-02	2012-4-8	2013-4-7
14	Low nosie amplifier	TESEQ	LNA6900	70133	2012-7-5	2013-7-4
15	EMI test receiver	Rohde & Schwarz	ESCS30	100086	2012-6-4	2013-6-3
16	Line impedance stabilization network	SCHWARZBECK	NSLK8127	8127-490	2012-5-7	2013-5-6
18	AVG Power Sensor	Rohde & Schwarz	NRP-Z22	1137	2012-5-7	2013-5-6
20	Power meter	Rohde & Schwarz	NRP	101641	2012-5-5	2013-5-4
21	Active Loop Antenna	Beijing Daze	ZN30900A	0097	2012-10-28	2013-10-27

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

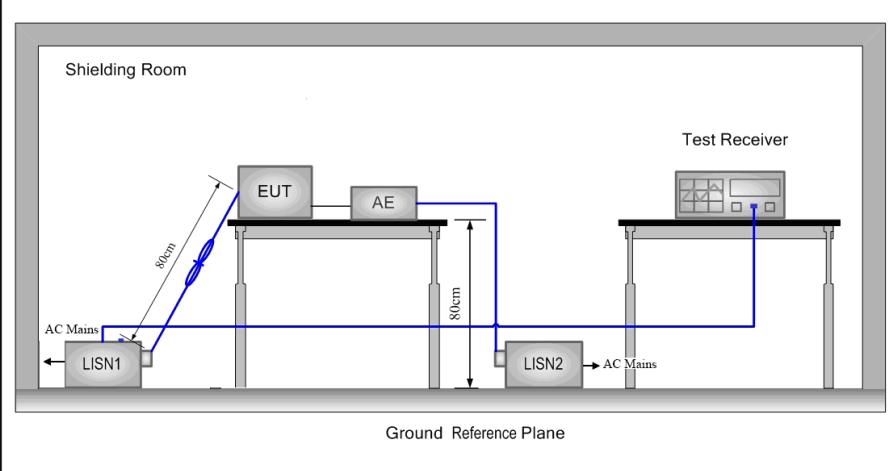
6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203
15.203 requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
EUT Antenna:	Integral antenna
The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.01dBi	

6.2 Conducted Emissions

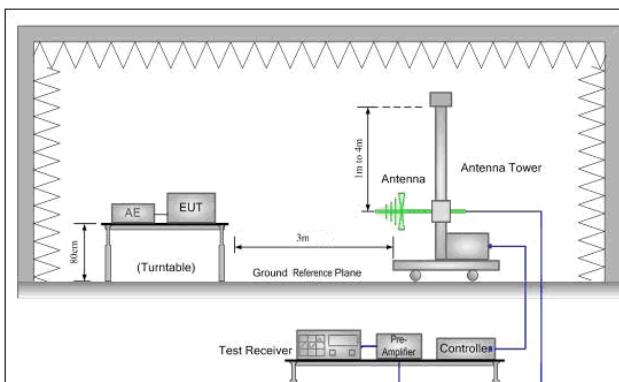
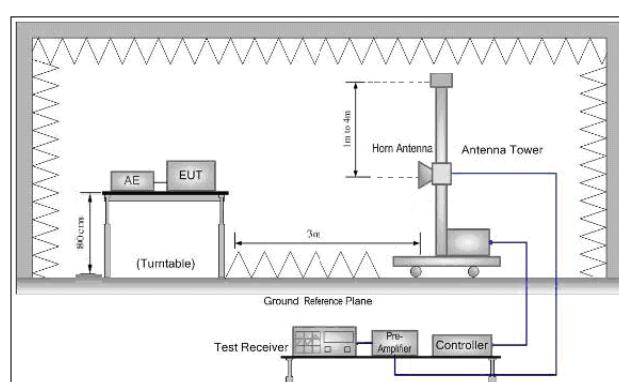
Test Requirement:	47 CFR Part 15C Section 15.207																
Test Method:	ANSI C63.10: 2009																
Test Frequency Range:	150KHz to 30MHz																
Limit:	<table border="1"><thead><tr><th>Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th></th><th>Quasi-peak</th><th>Average</th></tr></thead><tbody><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></tbody></table>		Frequency range (MHz)	Limit (dBuV)			Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
	* Decreases with the logarithm of the frequency.																
Test Procedure:	<ol style="list-style-type: none">1) The mains terminal disturbance voltage test was conducted in a shielded room.2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.																

Test Setup:	
Instruments Used:	Refer to section 5.12 for details
Test Mode:	N/A
Test Results:	N/A

Measurement Data

Note: Due to this EUT is powered by the battery only, this test item is not applicable.

6.3 Field Strength of the Fundamental Signal

Test Requirement:	47 CFR Part 15C Section 15.249 and 15.209													
Test Method:	ANSI C63.10: 2009													
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)													
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark									
	30MHz-1GHz	Quasi-peak	100 kHz	300KHz	Quasi-peak									
	Above 1GHz	Peak	1MHz	3MHz	Peak									
Limit:	Frequency	Limit (dBuV/m @3m)		Remark										
	902MHz~928MHz	94.0		Average Value										
		114.0		Peak Value										
Test Setup:														
														
														
Figure 1. 30MHz to 1GHz			Figure 2. Above 1 GHz											

Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
-----------------	---

	g. Test the EUT in the lowest channel, the middle channel, the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report. i. Repeat above procedures until all frequencies measured was complete.
Instruments Used:	Refer to section 5.12 for details
Test Mode:	Sensor mode
Test Results:	Pass

6.3.1.1 Field Strength Of The Fundamental Signal

Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Preamp Factor (dB)	Cable Loss (dB)	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
908.42	75.74	23.06	23.80	3.67	78.67	94.00	-15.33	QP	Horizontal
908.42	88.72	23.06	23.80	3.67	91.65	94.00	-2.35	QP	Vertical

6.4 Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.249 and 15.209				
Test Method:	ANSI C63.10: 2009				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Test frequency range	9KHz-10GHz				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.015MHz	Quasi-peak	200Hz	1KHz	Quasi-peak
	0.015MHz-30MHz	Quasi-peak	9kHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit: (Spurious Emissions)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	Quasi-peak	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	Quasi-peak	30
	1.705MHz-30MHz	30	-	Quasi-peak	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
			74.0	Peak	3



SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Report No.: SHEM130300038201
Page: 15 of 22

Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)	Remark
	902MHz~928MHz	94.0	Average Value
		114.0	Peak Value

Test Setup:

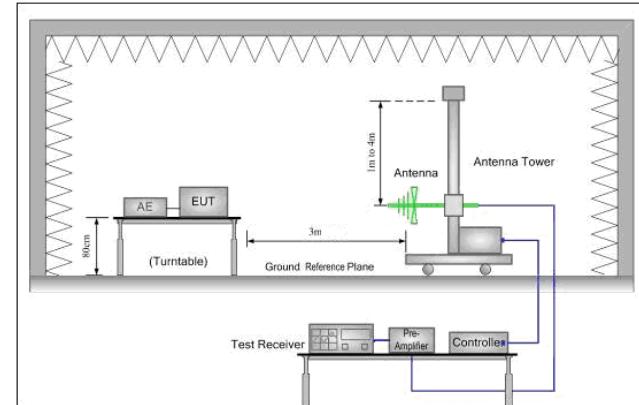


Figure 1. 30MHz to 1GHz

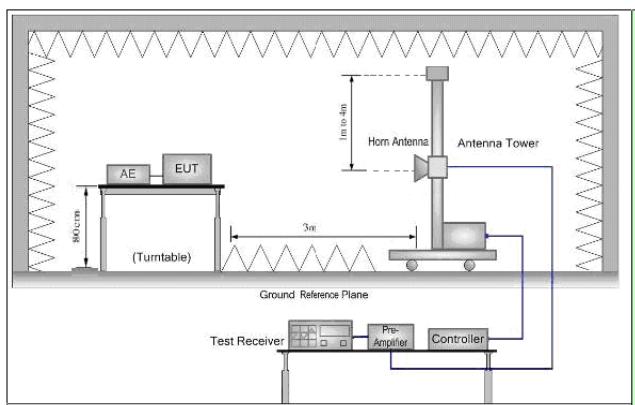


Figure 2. Above 1 GHz

Test Procedure:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel
- The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- Repeat above procedures until all frequencies measured was complete.

Instruments Used: Refer to section 5.12 for details

Test Mode: Sensor mode

Test Results: Pass

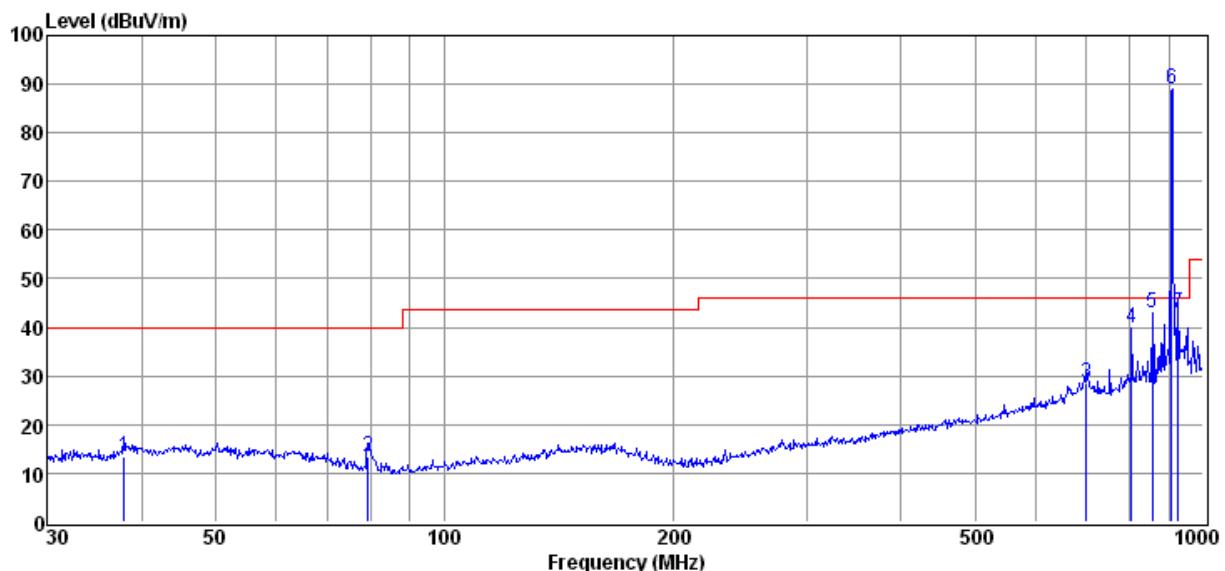
6.4.1 Measurement Data

6.4.1.1 Spurious Emissions

30MHz~1GHz

Test mode: Transmitting mode

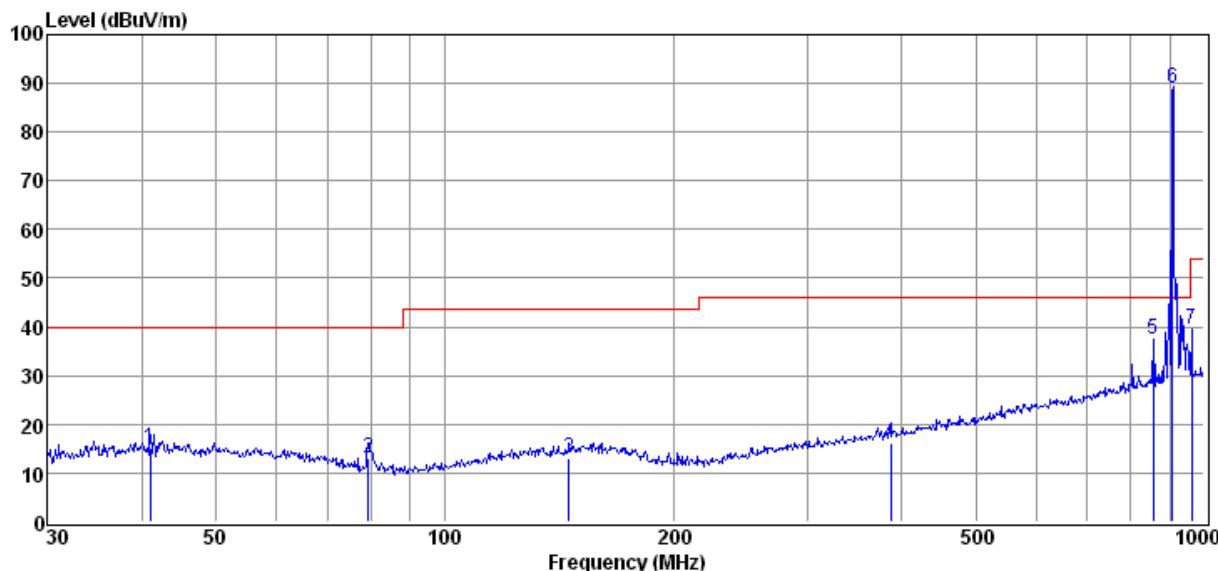
Vertical:



Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Preamp Factor (dB)	Cable Loss (dB)	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	37.81	24.73	12.91	24.70	0.53	13.47	40.00	-26.53	QP	VERTICAL
2	79.24	28.21	8.95	24.70	0.86	13.32	40.00	-26.68	QP	VERTICAL
3	701.76	28.89	20.45	24.10	3.15	28.39	46.00	-17.61	QP	VERTICAL
4	804.60	37.89	22.48	23.98	3.46	39.85	46.00	-6.15	QP	VERTICAL
5	857.03	40.62	22.63	23.90	3.57	42.92	46.00	-3.08	QP	VERTICAL
6	908.42	N/A	N/A	N/A	N/A	N/A	N/A	N/A	fundamental signal	
7	925.76	39.57	23.42	23.80	3.72	42.91	46.00	-3.09	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

2. If Peak Result comply with QP limit, QP Result is deemed to comply with QP limit.

30MHz~1GHz
Test mode: Transmitting mode
Horizontal:


Item (Mark)	Freq. (MHz)	Read Level (dB μ V)	Antenna Factor (dB/m)	Preamp Factor (dB)	Cable Loss (dB)	Result Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Detector	Polarization
1	40.99	25.84	13.26	24.70	0.57	14.97	40.00	-25.03	QP	HORIZONTAL
2	79.24	28.08	8.95	24.70	0.86	13.19	40.00	-26.81	QP	HORIZONTAL
3	145.86	24.13	12.45	24.70	1.25	13.13	43.50	-30.37	QP	HORIZONTAL
4	386.63	24.25	14.21	24.40	2.25	16.31	46.00	-29.69	QP	HORIZONTAL
5	857.03	35.18	22.63	23.90	3.57	37.48	46.00	-8.52	QP	HORIZONTAL
6	908.42	N/A	N/A	N/A	N/A	N/A	N/A	N/A	fundamental signal	
7	962.16	35.49	24.00	23.75	3.82	39.56	54.00	-14.44	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

2. If Peak Result comply with QP limit, QP Result is deemed to comply with QP limit.

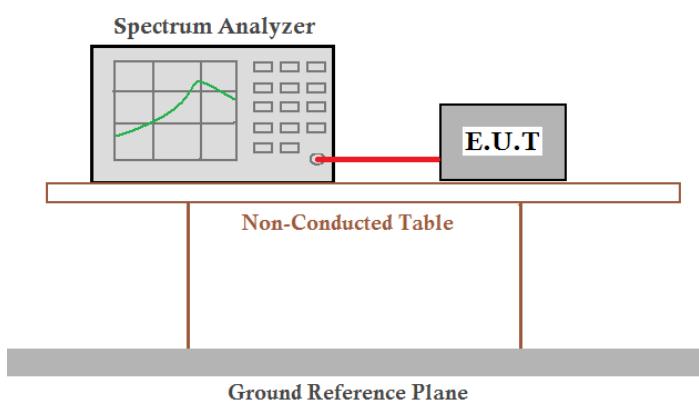
1GHz - 10GHz

Test mode:	Transmitting mode	Test channel:	908MHz				
Frequency (MHz)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Remark:	Polarization
1810.75	-8.63	69.68	61.05	74	-12.95	Peak	Vertical
1815.49	-8.59	51.47	42.88	54	-11.12	AVG	Vertical
2727.25	-5.84	53.84	48.00	54	-6.00	AVG	Vertical
4536.75	-1.24	51.93	50.69	54	-3.31	AVG	Vertical
5441.5	1.00	62.00	63.00	74	-11.00	Peak	Vertical
5446.56	1.00	45.13	46.13	54	-7.87	AVG	Vertical
6354.50	3.09	40.88	43.97	54	-10.03	AVG	Vertical
6358.00	3.10	54.14	57.24	74	-16.76	Peak	Vertical
7262.75	6.53	44.62	51.15	54	-2.85	AVG	Vertical
1810.75	-8.63	75.51	66.88	74	-7.12	Peak	Horizontal
1815.49	-8.59	55.88	47.29	54	-6.71	AVG	Horizontal
2723.39	-5.86	46.68	40.82	54	-13.18	AVG	Horizontal
2727.25	-5.84	63.33	57.49	74	-16.51	Peak	Horizontal
4536.75	-1.24	54.94	53.70	54	-0.30	AVG	Horizontal
4538.25	-1.24	41.12	39.88	54	-14.12	AVG	Horizontal
5441.50	1.00	65.13	66.13	74	-7.87	Peak	Horizontal
5446.38	1.00	49.62	50.62	54	-3.38	AVG	Horizontal
6355.46	3.09	46.27	49.36	54	-4.64	AVG	Horizontal
6358.00	3.10	62.17	65.27	74	-8.73	Peak	Horizontal
8167.50	7.99	50.22	58.21	74	-15.79	Peak	Horizontal
8170.30	7.99	35.89	43.88	54	-10.12	AVG	Horizontal
9987.35	11.19	39.08	50.27	54	-3.73	AVG	Horizontal
9988.75	11.19	52.73	63.92	74	-10.08	Peak	Horizontal

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 2) The disturbance below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

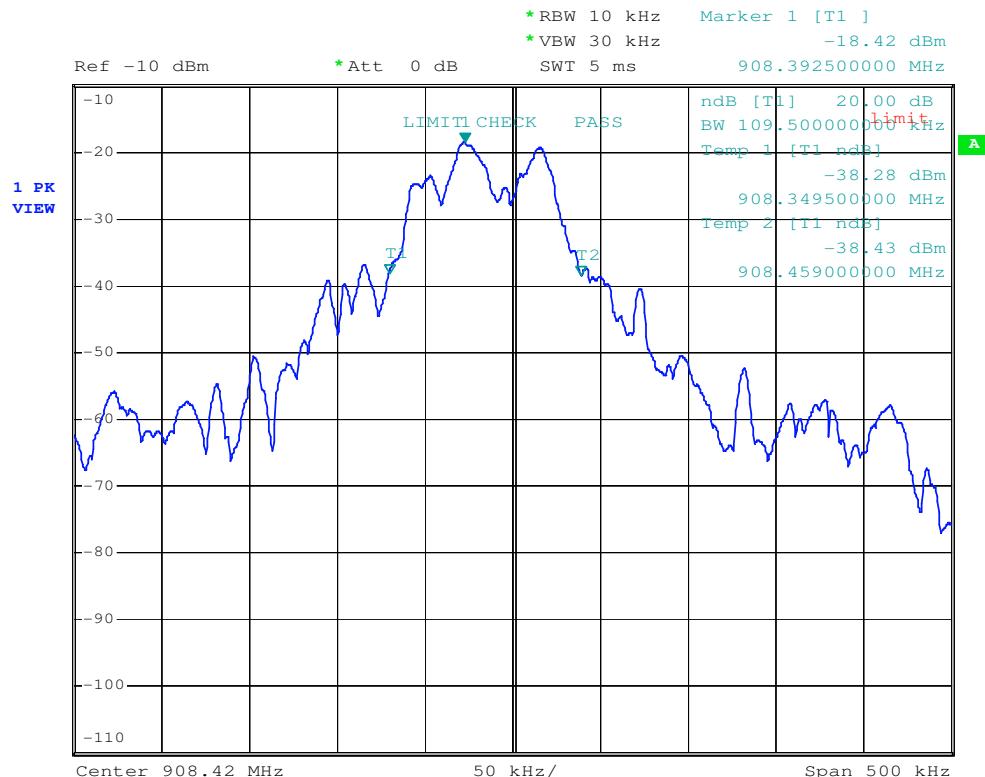
6.5 20dB Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.215
Test Method:	ANSI C63.10:2009
Test Setup:	
Instruments Used:	Refer to section 5.12 for details
Test mode:	Sensor
Limit:	N/A
Test Results:	Pass

Measurement Data

Test channel	20dB bandwidth	Results
908.42MHz	109.50KHz	Pass

Test plot as follows:



4 Test Setup Photographs

Refer to the < Door Sensor Test Setup photos>.

5 EUT Constructional Details

Refer to the < Door Sensor External Photos > & < Door Sensor Internal Photos >.