



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

TEST REPORT

FCC PART 15 SUBPART C 15.247 & RSS-247

Report Reference No. : CTL2104135021-WF02

Compiled by:
(position+printed name+signature)

Happy Guo
(File administrators)

Happy Guo

Tested by:
(position+printed name+signature)

Gary Gao
(Test Engineer)

Gary Gao

Approved by:
(position+printed name+signature)

Ivan Xie
(Manager)

Ivan Xie

Product Name : Smart Projector

Model/Type reference : J78-4D0

List Model(s) : J78-4D1, J78-4D2, J78-4D3, J78-4D4, J78-4D5, J78-4D6,
J78-4D7, J78-4D8, J78-4D9, J78-4DA, J78-4DB, J78-4DC,
J78-4DD, J78-4DE, J78-4DF, J78-4DG, J78-4DH, J78-4DI,
J78-4DJ

Trade Mark : JMGO

FCC ID : SMC-H79P

Applicant's name : SHENZHEN HOLATEK CO., LTD.

Address of applicant : Rm.1001, Unit 4, Bld.B, Kexing Science Park, Keyuan Road,
Nanshan District, Shenzhen, China

Test Firm : Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm : Floor 1-A, Baisha Technology Park, No.3011, Shaheji Road,
Nanshan District, Shenzhen, China 518055

Test specification :

Standard : 47 CFR FCC Part 15 Subpart C 15.247
RSS-247 Issue 2, February 2017

TRF Originator : Shenzhen CTL Testing Technology Co., Ltd.

Master TRF : Dated 2011-01

Date of receipt of test item : Apr. 19, 2021

Date of sampling : Apr. 19, 2021

Date of Test Date : Apr. 19, 2021-May 18, 2021

Date of Issue : May 18, 2021

Result : Pass

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL2104135021-WF02	May 18, 2021
		Date of issue

Equipment under Test : Smart Projector

Sample No. CTL210413502-S001

Model /Type : J78-4D0

Listed Models : J78-4D1, J78-4D2, J78-4D3, J78-4D4, J78-4D5,
J78-4D6, J78-4D7, J78-4D8, J78-4D9, J78-4DA,
J78-4DB, J78-4DC, J78-4DD, J78-4DE, J78-4DF,
J78-4DG, J78-4DH, J78-4DI, J78-4DJ

Applicant : **SHENZHEN HOLATEK CO., LTD.**

Address : Rm.1001, Unit 4, Bld.B, Kexing Science Park,
Keyuan Road, Nanshan District, Shenzhen, China

Manufacturer : **SHENZHEN HOLATEK CO., LTD.**

Address : Rm.1001, Unit 4, Bld.B, Kexing Science Park,
Keyuan Road, Nanshan District, Shenzhen, China

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

**** Modified History ****

[illegible]

Table of Contents

Page

1. SUMMARY	5
1.1. TEST STANDARDS	5
1.2. TEST DESCRIPTION	5
1.3. TEST FACILITY	6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	8
2.1. ENVIRONMENTAL CONDITIONS	8
2.2. GENERAL DESCRIPTION OF EUT	8
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY	8
2.4. EQUIPMENTS USED DURING THE TEST	9
2.5. RELATED SUBMITTAL(S) / GRANT (S)	9
2.6. MODIFICATIONS	9
3. TEST CONDITIONS AND RESULTS	10
3.1. CONDUCTED EMISSIONS TEST	10
3.2. RADIATED EMISSIONS AND BAND EDGE	15
3.3. MAXIMUM CONDUCTED OUTPUT POWER	28
3.4. POWER SPECTRAL DENSITY	29
3.5. 6dB BANDWIDTH	30
3.6. OUT-OF-BAND EMISSIONS	31
3.7. ANTENNA REQUIREMENT	32
4. TEST SETUP PHOTOS OF THE EUT	33
5. PHOTOS OF THE EUT	34

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 15.247 Meas Guidance v05r02](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

[RSS-247-Issue 2](#): Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.

[RSS-Gen Issue 5](#): General Requirements for Compliance of Radio Apparatus

1.2. Test Description

FCC PART 15.247		
FCC Part 15.207 RSS-Gen 8.8	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2) RSS-247 5.2 (1) RSS GEN 6.7	6dB Bandwidth	PASS
FCC Part 15.247(d) RSS-247 5.5	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b) RSS-Gen 6.8 RSS-247 5.4 (4)	Maximum Conducted Output Power	PASS
FCC Part 15.247(e) RSS-247 5.2 (2)	Power Spectral Density	PASS
FCC Part 15.205/ 15.209 RSS-Gen 8.9	Radiated Emissions	PASS
FCC Part 15.247(d) RSS-Gen 8.10	Band Edge	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.10 and CISPR 32/EN 55032 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L7497

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: 9618B

CAB identifier: CN0041

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9618B on Jan. 22, 2019.

FCC-Registration No.: 399832

Designation No.: CN1216

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	±0.57 dB	(1)
Transmitter power Radiated	±2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	±2.20 dB	(1)
Occupied Bandwidth	±0.01ppm	(1)
Radiated Emission 30~1000MHz	±4.10dB	(1)
Radiated Emission Above 1GHz	±4.32dB	(1)

Conducted Disturbance 0.15~30MHz	$\pm 3.20\text{dB}$	(1)
----------------------------------	---------------------	-----

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	Smart Projector
Model/Type reference:	J78-4D0
Power supply:	DC19V from adapter
Adapter information:	Input: AC 100-240V 50/60Hz 1.5A Output: 19V---4.74A
Bluetooth LE	
Supported type:	Bluetooth low Energy
Modulation:	GFSK
Operation frequency:	2402MHz to 2480MHz
Channel number:	40
Channel separation:	2 MHz
Antenna type:	FPC Antenna
Antenna gain:	0.8 dBi

Note: For more details, please refer to the user's manual of the EUT.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.

There are 40 channels provided to the EUT and Channel 00/19/39 were selected for BLE test.

Operation Frequency List :

Channel	Frequency (MHz)
00	2402
01	2404
02	2406
:	:
19	2440
:	:
37	2476
38	2478
39	2480

Note: The line display in grey were the channel selected for testing

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ESH2-Z5	860014/010	2021/05/15	2022/05/14
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2021/04/08	2022/04/07
EMI Test Receiver	R&S	ESCI	1166.5950.03	2021/05/18	2022/05/17
Spectrum Analyzer	Agilent	E4407B	MY41440676	2021/05/14	2022/05/13
Spectrum Analyzer	Agilent	N9020A	US46220290	2021/05/14	2022/05/13
Spectrum Analyzer	Keysight	N9020A	MY53420874	2021/05/14	2022/05/13
Controller	EM Electronics	EM 1000	060859	2020/05/20	2021/05/19
Horn Antenna	Ocean Microwave	OBH100400	26999002	2020/11/28	2021/11/27
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2020/05/20	2021/05/19
Active Loop Antenna	Da Ze	ZN30900A	/	2020/05/20	2021/05/19
Amplifier	Agilent	8449B	3008A02306	2021/05/15	2022/05/14
Amplifier	Agilent	8447D	2944A10176	2021/05/15	2022/05/14
Temperature/Humidity Meter	Gangxing	CTH-608	02	2021/05/16	2022/05/15
Power Sensor	Agilent	U2021XA	MY55130004	2021/05/14	2022/05/13
Power Sensor	Agilent	U2021XA	MY55130006	2021/05/14	2022/05/13
Spectrum Analyzer	RS	FSP	1164.4391.38	2021/05/15	2022/05/14

The calibration interval was one year

2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

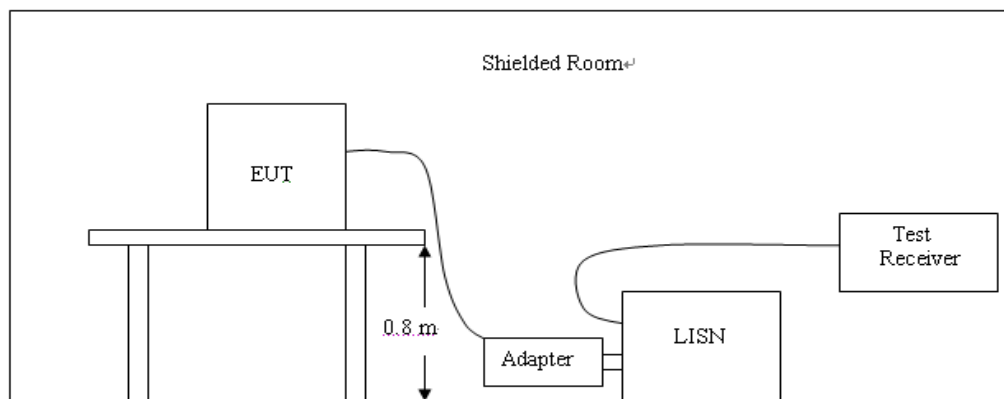

TEST PROCEDURE


1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

BT4.0

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

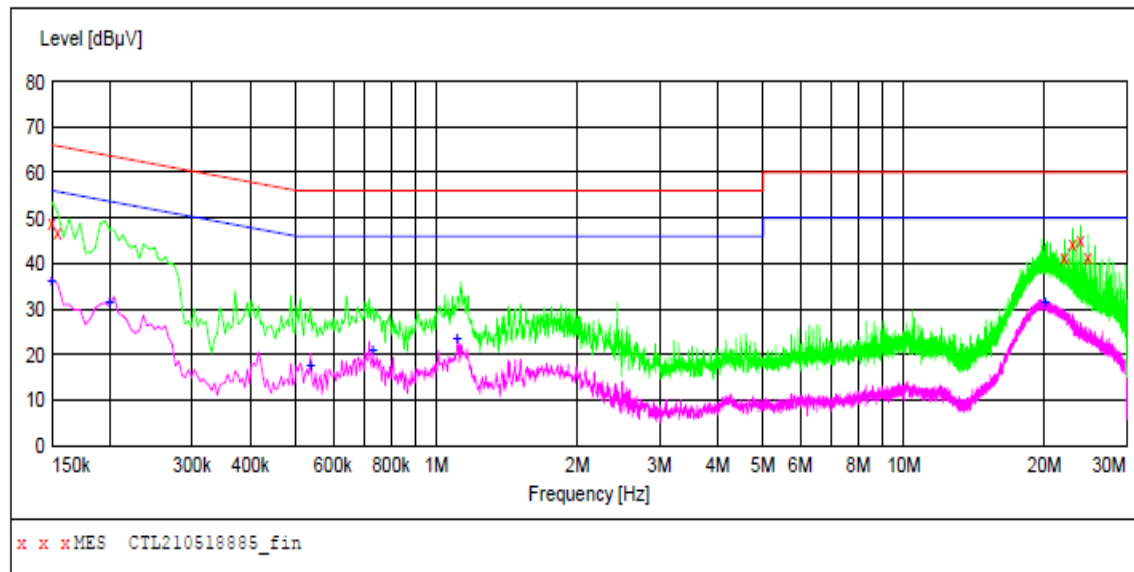**MEASUREMENT RESULT: "CTL210518885_fin"**

5/18/2021 12:50PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.150000	49.00	10.0	66	17.0	QP	L1	GND
0.154500	46.90	10.0	66	18.9	QP	L1	GND
22.087500	41.50	11.3	60	18.5	QP	L1	GND
22.983000	44.20	11.4	60	15.8	QP	L1	GND
23.878500	45.20	11.4	60	14.8	QP	L1	GND
24.774000	41.30	11.5	60	18.7	QP	L1	GND


MEASUREMENT RESULT: "CTL210518885_fin2"

5/18/2021 12:50PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.150000	36.20	10.0	56	19.8	AV	L1	GND
0.199500	31.80	10.0	54	21.8	AV	L1	GND
0.537000	17.90	10.1	46	28.1	AV	L1	GND
0.730500	21.20	10.1	46	24.8	AV	L1	GND
1.108500	23.60	10.2	46	22.4	AV	L1	GND
20.058000	31.80	11.2	50	18.2	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

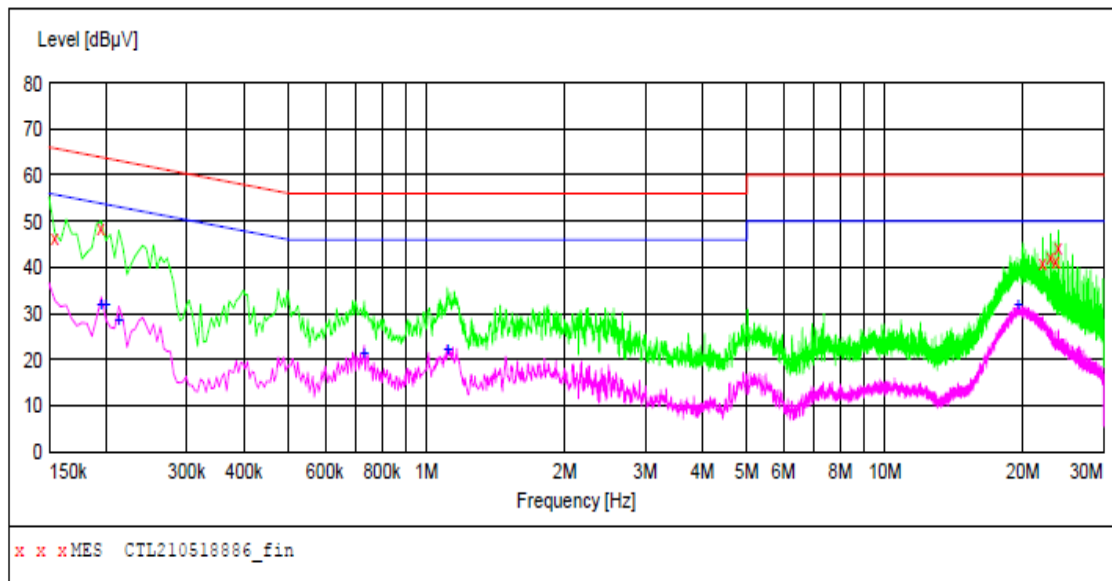**MEASUREMENT RESULT: "CTL210518886_fin"**

5/18/2021 12:53PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154500	46.60	10.0	66	19.2	QP	N	GND
0.195000	48.50	10.0	64	15.3	QP	N	GND
22.087500	40.80	11.3	60	19.2	QP	N	GND
22.978500	42.20	11.4	60	17.8	QP	N	GND
23.586000	41.20	11.4	60	18.8	QP	N	GND
23.883000	44.20	11.4	60	15.8	QP	N	GND

MEASUREMENT RESULT: "CTL210518886_fin2"


5/18/2021 12:53PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.195000	31.90	10.0	54	21.9	AV	N	GND
0.199500	31.90	10.0	54	21.7	AV	N	GND
0.213000	28.70	10.0	53	24.4	AV	N	GND
0.730500	21.60	10.1	46	24.4	AV	N	GND
1.113000	22.30	10.2	46	23.7	AV	N	GND
19.527000	32.00	11.2	50	18.0	AV	N	GND

BT5.0

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

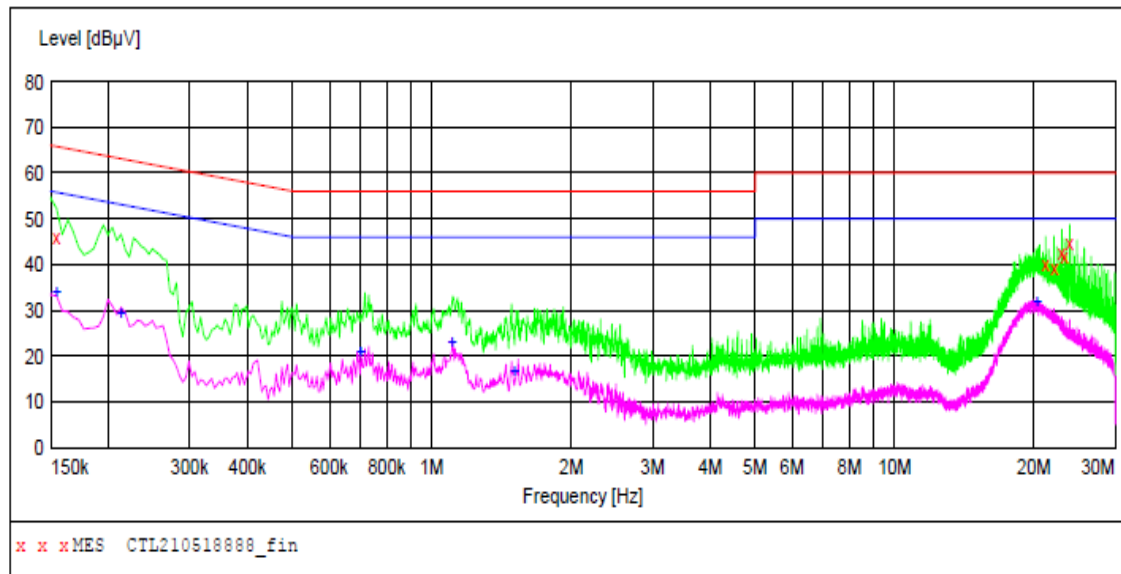**MEASUREMENT RESULT: "CTL210518888_fin"**

5/18/2021 12:58PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.154500	46.20	10.0	66	19.6	QP	L1	GND
21.192000	40.10	11.3	60	19.9	QP	L1	GND
22.096500	39.30	11.3	60	20.7	QP	L1	GND
22.992000	42.80	11.4	60	17.2	QP	L1	GND
23.271000	41.90	11.4	60	18.1	QP	L1	GND
23.883000	44.70	11.4	60	15.3	QP	L1	GND


MEASUREMENT RESULT: "CTL210518888_fin2"

5/18/2021 12:58PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.154500	34.10	10.0	56	21.7	AV	L1	GND
0.213000	29.70	10.0	53	23.4	AV	L1	GND
0.703500	21.00	10.1	46	25.0	AV	L1	GND
1.108500	23.30	10.2	46	22.7	AV	L1	GND
1.509000	17.00	10.2	46	29.0	AV	L1	GND
20.305500	32.20	11.2	50	17.8	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

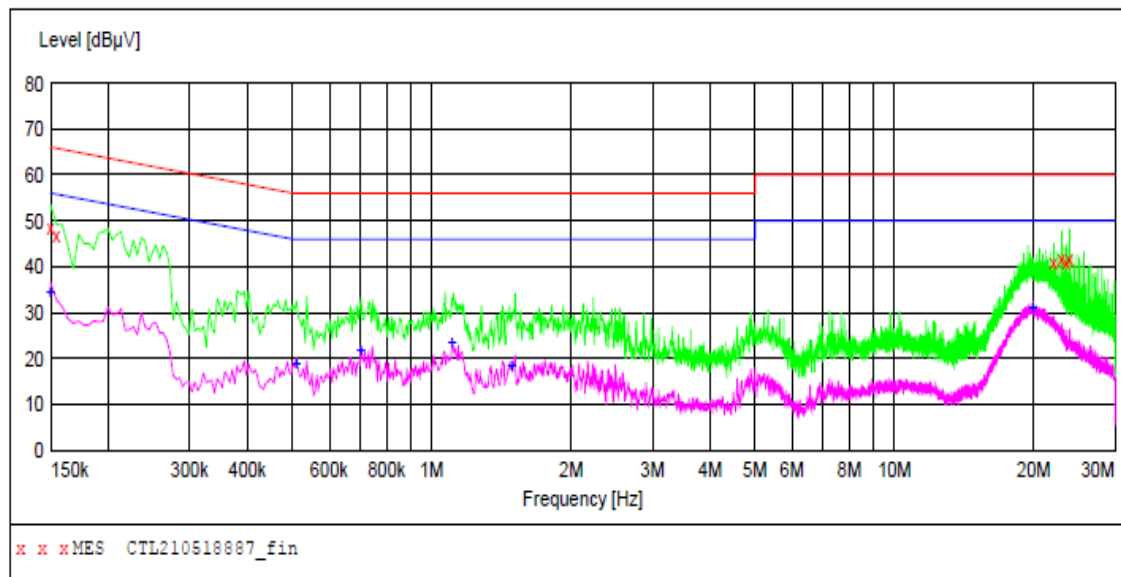**MEASUREMENT RESULT: "CTL210518887_fin"**

5/18/2021 12:56PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.150000	48.60	10.0	66	17.4	QP	N	GND
0.154500	46.70	10.0	66	19.1	QP	N	GND
22.087500	41.00	11.3	60	19.0	QP	N	GND
22.978500	41.90	11.4	60	18.1	QP	N	GND
23.568000	40.90	11.4	60	19.1	QP	N	GND
23.887500	41.80	11.4	60	18.2	QP	N	GND

MEASUREMENT RESULT: "CTL210518887_fin2"

5/18/2021 12:56PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.150000	34.80	10.0	56	21.2	AV	N	GND
0.510000	19.20	10.1	46	26.8	AV	N	GND
0.703500	21.80	10.1	46	24.2	AV	N	GND
1.108500	23.50	10.2	46	22.5	AV	N	GND
1.491000	18.80	10.2	46	27.2	AV	N	GND
19.909500	31.40	11.2	50	18.6	AV	N	GND

3.2. Radiated Emissions and Band Edge

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz})) + 40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz})) + 40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30) + 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

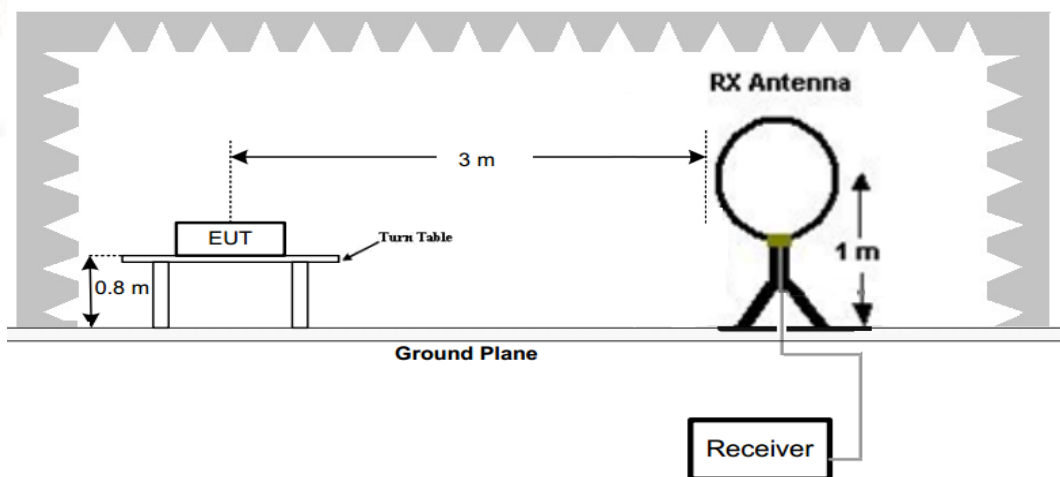

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

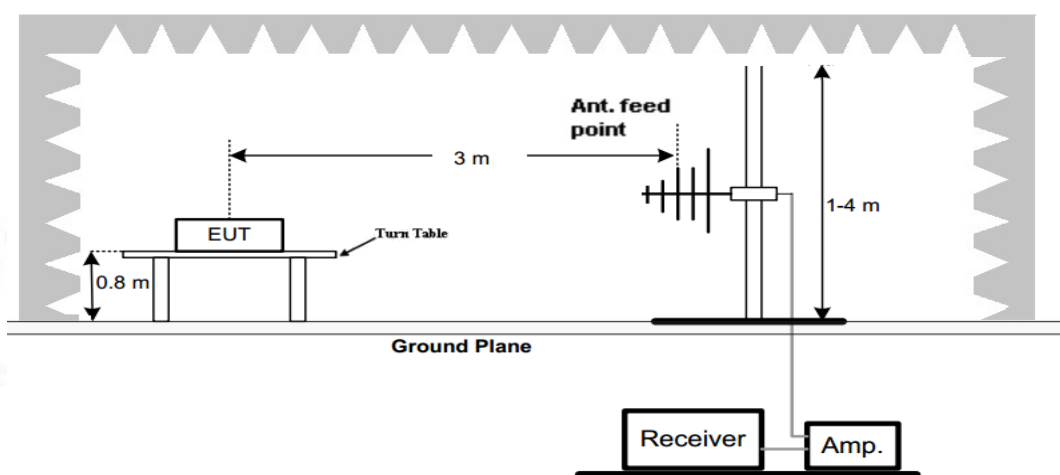

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

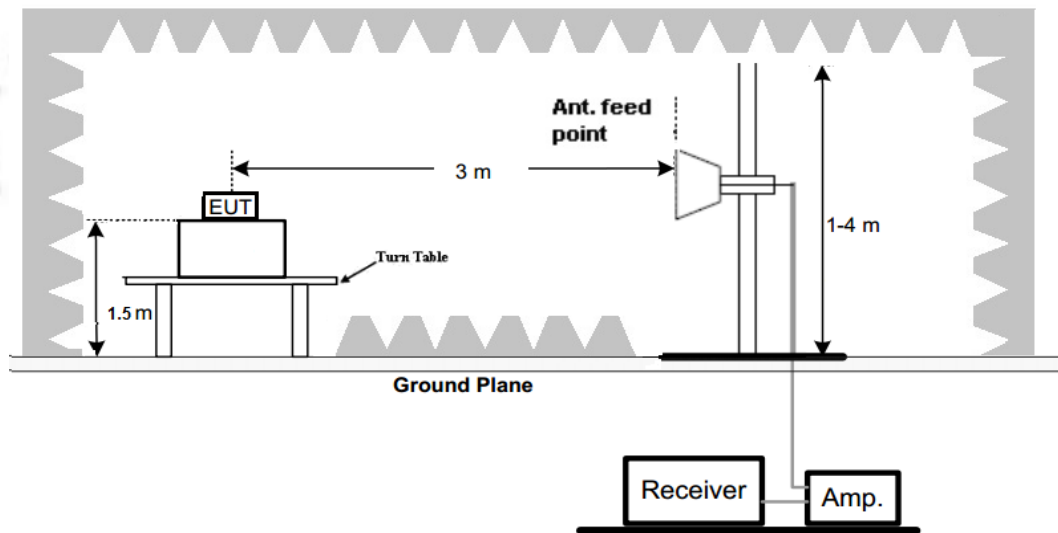

Test Procedure

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

TEST RESULTS

Remark:

1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis. The worst-case was found at X axis. For below 1GHz testing recorded worst at low channel.
2. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and The emission levels from 9kHz to 30MHz are attenuated 20dB below the limit and not recorded in report.

For 30MHz-1GHz

BT4.0

Horizontal

Radiated Emission Measurement


File :HUO LE

Data :#7

Date: 2021/05/18

Time: 13:44:40

72.0 dBuV/m

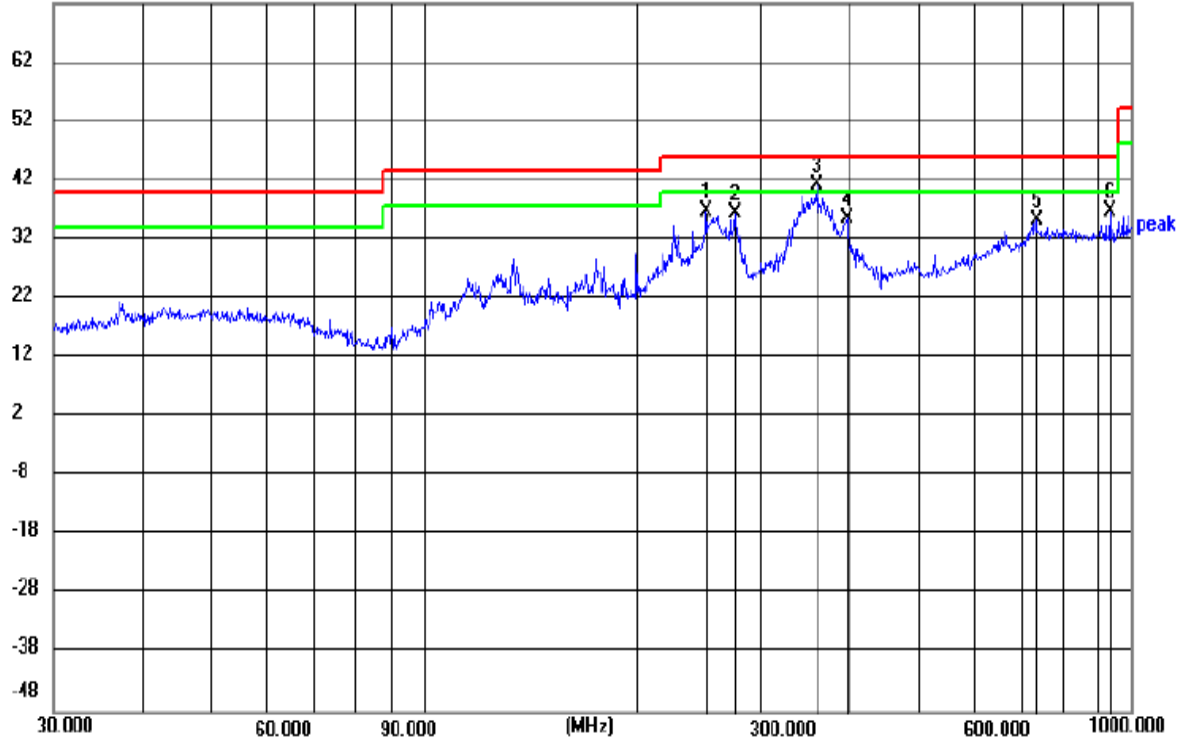

Site LAB

Polarization: **Horizontal**

Temperature: 25(C)

Limit: FCC Part15 Class B_30-1000MHz

Power: AC120/60Hz

Humidity: 50 %

EUT: /

Distance: 3m

M/N: Smart Projector

Mode: WORKING

Note: SHENZHEN HOLATEK CO.,LTD.

BT4.0

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	250.3011	23.17	13.62	36.79	46.00	9.21	peak	100	226	P	
2	275.1570	22.21	14.10	36.31	46.00	9.69	peak	100	360	P	
3	360.4476	24.92	16.44	41.36	46.00	4.64	peak	100	341	P	
4	396.2415	17.56	17.92	35.48	46.00	10.52	peak	100	359	P	
5	734.4913	11.16	24.12	35.28	46.00	10.72	peak	100	319	P	
6	932.2715	9.82	26.82	36.64	46.00	9.36	peak	100	322	P	

Vertical

Radiated Emission Measurement


File :HUO LE

Data :#8

Date: 2021/05/18

Time: 13:45:50

72.0 dBuV/m

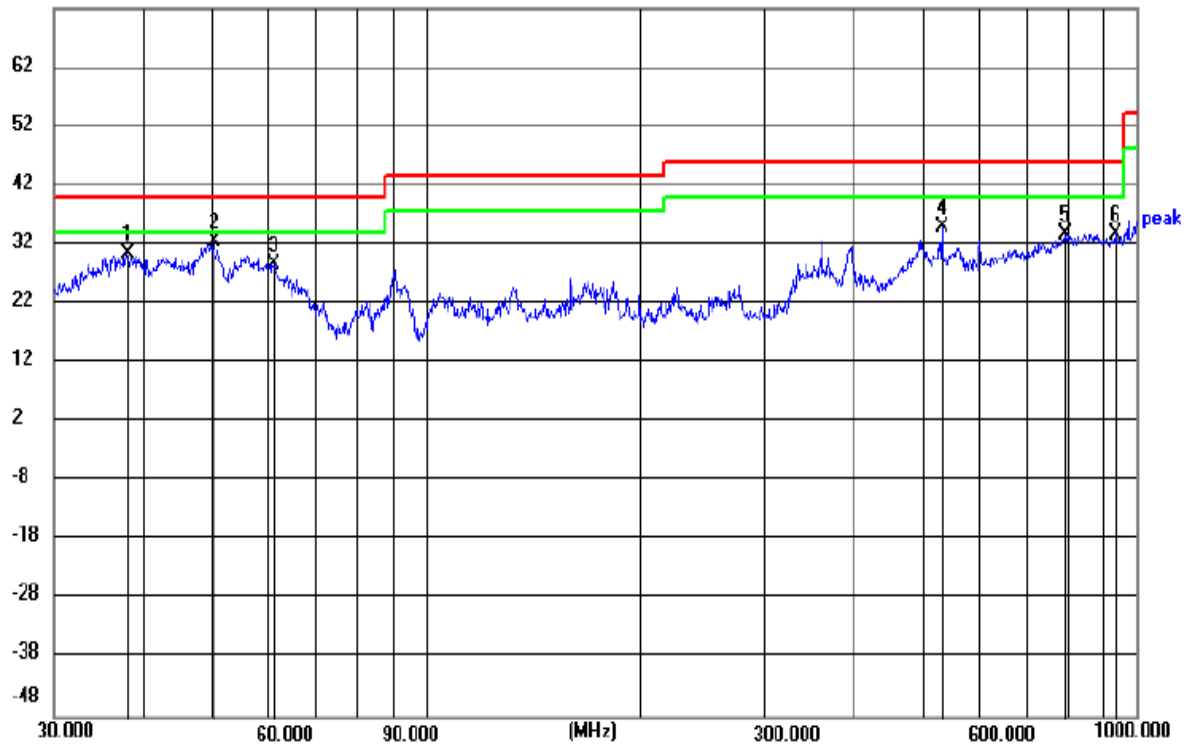

Site LAB

Polarization: **Vertical**

Temperature: 25(C)

Limit: FCC Part15 Class B_30-1000MHz

Power: AC120/60Hz

Humidity: 50 %

EUT: /

Distance: 3m

M/N: Smart Projector

Mode: WORKING

Note: SHENZHEN HOLATEK CO.,LTD.

BT4.0

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	37.9449	15.97	14.37	30.34	40.00	9.66	peak	100	81	P	
2	50.2324	17.62	14.81	32.43	40.00	7.57	peak	100	356	P	
3	61.1315	14.14	14.49	28.63	40.00	11.37	peak	100	305	P	
4	531.9634	15.05	20.00	35.05	46.00	10.95	peak	100	257	P	
5	793.3958	8.03	25.74	33.77	46.00	12.23	peak	100	312	P	
6	932.2715	7.08	26.82	33.90	46.00	12.10	peak	100	138	P	

BT5.0

Horizontal

Radiated Emission Measurement


File :HUO LE

Data :#9

Date: 2021/05/18

Time: 13:47:44

72.0 dBuV/m

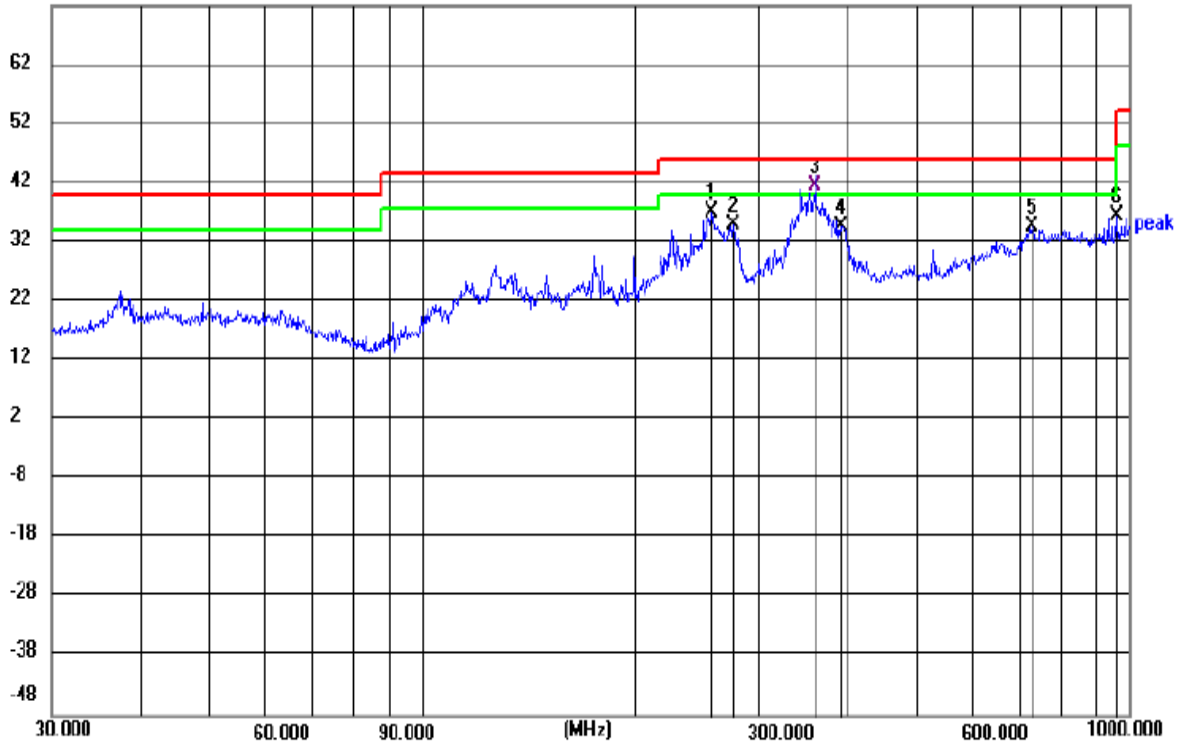

Site LAB

Polarization: **Horizontal**

Temperature: 25(C)

Limit: FCC Part15 Class B_30-1000MHz

Power: AC120/60Hz

Humidity: 50 %

EUT: /

Distance: 3m

M/N: Smart Projector

Mode: WORKING

Note: SHENZHEN HOLATEK CO.,LTD.

BT5.0

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	257.4221	23.57	13.49	37.06	46.00	8.94	peak	100	221	P	
2	275.1570	20.93	14.10	35.03	46.00	10.97	peak	100	195	P	
3	360.0126	25.15	16.42	41.57	46.00	4.43	QP	100	338	P	
4	390.7225	17.19	17.52	34.71	46.00	11.29	peak	100	338	P	
5	729.3582	10.79	23.89	34.68	46.00	11.32	peak	100	251	P	
6	958.7943	9.27	27.07	36.34	46.00	9.66	peak	100	330	P	

Vertical

Radiated Emission Measurement


File :HUO LE

Data :#10

Date: 2021/05/18

Time: 13:48:54

72.0 dBuV/m

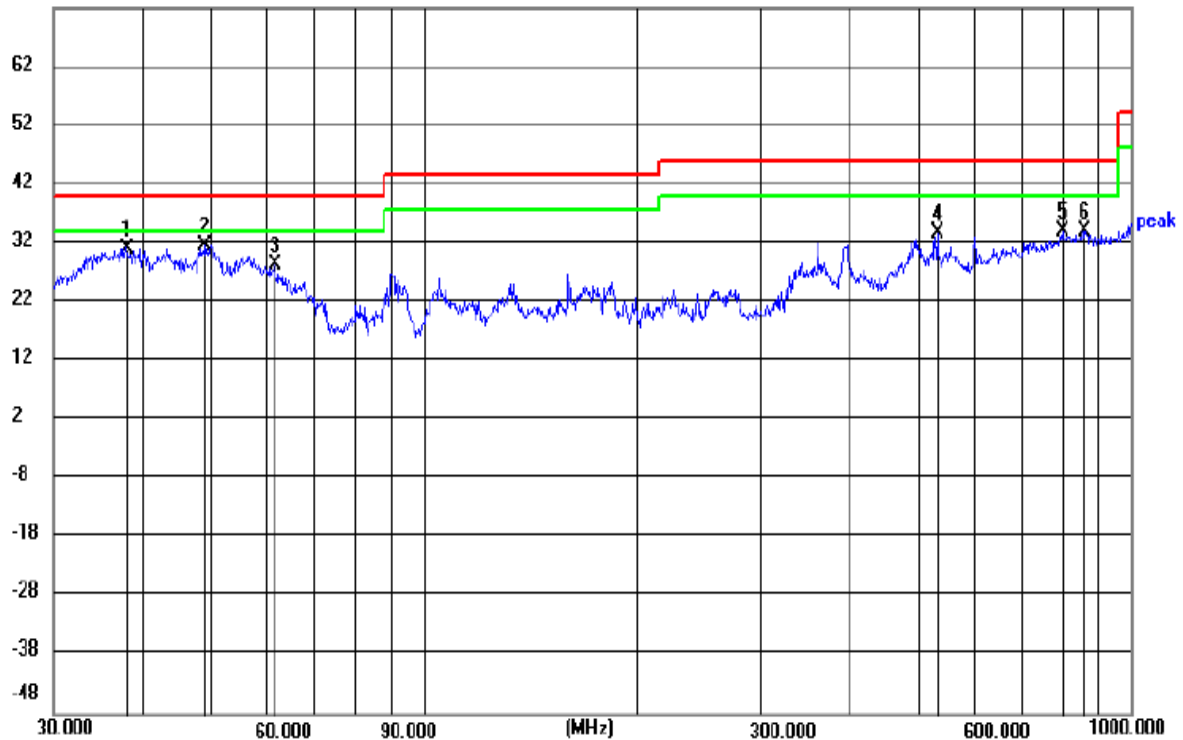

Site LAB

Polarization: **Vertical**

Temperature: 25(C)

Limit: FCC Part15 Class B_30-1000MHz

Power: AC120/60Hz

Humidity: 50 %

EUT: /

Distance: 3m

M/N: Smart Projector

Mode: WORKING

Note: SHENZHEN HOLATEK CO.,LTD.

BT5.0

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	37.9449	16.83	14.37	31.20	40.00	8.80	peak	100	174	P	
2	49.1865	16.99	14.74	31.73	40.00	8.27	peak	100	171	P	
3	61.5618	14.05	14.36	28.41	40.00	11.59	peak	100	328	P	
4	531.9634	13.89	20.00	33.89	46.00	12.11	peak	100	231	P	
5	798.9797	8.05	25.86	33.91	46.00	12.09	peak	100	328	P	
6	857.0246	7.76	26.34	34.10	46.00	11.90	peak	100	355	P	

For 1GHz to 25GHz**BT4.0(above 1GHz)**

Frequency(MHz):			2402		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4804.00	51.54	PK	74.00	22.46	47.03	33.49	6.91	35.89	4.51
4804.00	--	AV	54.00	--	--	--	--	--	--
6428.00	46.48	PK	74.00	27.52	39.27	34.38	7.10	34.27	7.21
6428.00	--	AV	54.00	--	--	--	--	--	--
7206.00	45.60	PK	74.00	28.40	34.50	36.95	9.18	35.03	11.10
7206.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2402		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4804.00	54.83	PK	74.00	19.17	50.32	33.49	6.91	35.89	4.51
4804.00	44.34	AV	54.00	9.66	39.83	33.49	6.91	35.89	4.51
5271.00	52.27	PK	74.00	21.73	44.71	34.69	7.23	34.36	7.56
5271.00	--	AV	54.00	--	--	--	--	--	--
7206.00	45.25	PK	74.00	28.75	34.15	36.95	9.18	35.03	11.10
7206.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2440		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4880.00	51.58	PK	74.00	22.42	45.33	33.60	6.95	34.30	6.25
4880.00	--	AV	54.00	--	--	--	--	--	--
6002.00	47.02	PK	74.00	26.98	39.39	34.57	7.16	34.10	7.63
6002.00	--	AV	54.00	--	--	--	--	--	--
7320.00	45.39	PK	74.00	28.61	33.70	37.46	9.23	35.00	11.69
7320.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2440		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4880.00	55.64	PK	74.00	18.36	49.39	33.60	6.95	34.30	6.25
4880.00	45.12	AV	54.00	8.88	38.87	33.60	6.95	34.30	6.25
5291.00	46.47	PK	74.00	27.53	38.84	34.57	7.16	34.10	7.63
5291.00	--	AV	54.00	--	--	--	--	--	--
7320.00	44.68	PK	74.00	29.32	32.99	37.46	9.23	35.00	11.69
7320.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4960.00	52.26	PK	74.00	21.74	47.34	33.84	7.00	35.92	4.92
4960.00	--	AV	54.00	--	--	--	--	--	--
5230.00	46.30	PK	74.00	27.70	38.76	34.67	7.22	34.35	7.54
5230.00	--	AV	54.00	--	--	--	--	--	--
7440.00	43.45	PK	74.00	30.55	31.50	37.64	9.28	34.97	11.95
7440.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4960.00	52.90	PK	74.00	21.10	47.98	33.84	7.00	35.92	4.92
4960.00	--	AV	54.00	--	--	--	--	--	--
5230.00	51.83	PK	74.00	22.17	44.29	34.67	7.22	34.35	7.54
5230.00	--	AV	54.00	--	--	--	--	--	--
7440.00	44.41	PK	74.00	29.59	32.46	37.64	9.28	34.97	11.95
7440.00	--	AV	54.00	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

BT5.0(above 1GHz)

Frequency(MHz):			2402		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4804.00	52.82	PK	74.00	21.18	48.31	33.49	6.91	35.89	4.51
4804.00	--	AV	54.00	--	--	--	--	--	--
6258.00	43.60	PK	74.00	30.40	36.39	34.38	7.10	34.27	7.21
6258.00	--	AV	54.00	--	--	--	--	--	--
7206.00	44.42	PK	74.00	29.58	33.32	36.95	9.18	35.03	11.10
7206.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2402		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4804.00	53.85	PK	74.00	20.15	49.34	33.49	6.91	35.89	4.51
4804.00	--	AV	54.00	--	--	--	--	--	--
5271.00	51.02	PK	74.00	22.98	43.46	34.69	7.23	34.36	7.56
5271.00	--	AV	54.00	--	--	--	--	--	--
7206.00	44.03	PK	74.00	29.97	32.93	36.95	9.18	35.03	11.10
7206.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2440		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4880.00	52.11	PK	74.00	21.89	45.86	33.60	6.95	34.30	6.25
4880.00	--	AV	54.00	--	--	--	--	--	--
5289.00	44.93	PK	74.00	29.07	37.30	34.57	7.16	34.10	7.63
5289.00	--	AV	54.00	--	--	--	--	--	--
7320.00	44.25	PK	74.00	29.75	32.56	37.46	9.23	35.00	11.69
7320.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2440		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4880.00	53.65	PK	74.00	20.35	47.40	33.60	6.95	34.30	6.25
4880.00	--	AV	54.00	--	--	--	--	--	--
5289.00	50.94	PK	74.00	23.06	43.30	34.58	7.16	34.10	7.64
5289.00	--	AV	54.00	--	--	--	--	--	--
7320.00	45.29	PK	74.00	28.71	33.60	37.46	9.23	35.00	11.69
7320.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4960.00	51.15	PK	74.00	22.85	46.23	33.84	7.00	35.92	4.92
4960.00	--	AV	54.00	--	--	--	--	--	--
6428.00	46.29	PK	74.00	27.71	38.75	34.67	7.22	34.35	7.54
6428.00	--	AV	54.00	--	--	--	--	--	--
7440.00	44.20	PK	74.00	29.80	32.25	37.64	9.28	34.97	11.95
7440.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
4960.00	52.39	PK	74.00	21.61	47.47	33.84	7.00	35.92	4.92
4960.00	--	AV	54.00	--	--	--	--	--	--
5284.00	50.13	PK	74.00	23.87	42.94	34.36	7.10	34.27	7.19
5284.00	--	AV	54.00	--	--	--	--	--	--
7440.00	45.88	PK	74.00	28.12	33.93	37.64	9.28	34.97	11.95
7440.00	--	AV	54.00	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. Other emission levels are attenuated 20dB below the limit and not recorded in report.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Results of Band Edges Test (Radiated)**BT4.0**

Frequency(MHz):			2402		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2402.00	97.19	PK	--	--	63.80	28.78	4.61	0.00	33.39
2402.00	87.00	AV	--	--	53.61	28.78	4.61	0.00	33.39
2310.00	45.12	PK	74.00	28.88	12.04	28.52	4.56	0.00	33.08
2310.00	--	AV	54.00	--	--	--	--	--	--
2390.00	45.53	PK	74.00	28.47	12.21	28.72	4.60	0.00	33.32
2390.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2402		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2402.00	100.78	PK	--	--	67.39	28.78	4.61	0.00	33.39
2402.00	91.24	AV	--	--	57.85	28.78	4.61	0.00	33.39
2310.00	45.71	PK	74.00	28.29	12.63	28.52	4.56	0.00	33.08
2310.00	--	AV	54.00	--	--	--	--	--	--
2390.00	46.45	PK	74.00	27.55	13.13	28.72	4.60	0.00	33.32
2390.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2480.00	98.03	PK	--	--	64.41	28.92	4.70	0.00	33.62
2480.00	88.57	AV	--	--	54.95	28.92	4.70	0.00	33.62
2483.50	49.50	PK	74.00	24.50	15.87	28.93	4.70	0.00	33.63
2483.50	--	AV	54.00	--	--	--	--	--	--
2496.00	45.45	PK	74.00	28.55	11.79	28.95	4.71	0.00	33.66
2496.00	--	AV	54.00	--	--	--	--	--	--
2500.00	43.13	PK	74.00	30.87	9.45	28.96	4.72	0.00	33.68
2500.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2480.00	101.16	PK	--	--	67.54	28.92	4.70	0.00	33.62
2480.00	92.58	AV	--	--	58.96	28.92	4.70	0.00	33.62
2483.50	52.59	PK	74.00	21.41	18.96	28.93	4.70	0.00	33.63
2483.50	--	AV	54.00	--	--	--	--	--	--
2488.00	46.04	PK	74.00	27.96	12.38	28.95	4.71	0.00	33.66
2488.00	--	AV	54.00	--	--	--	--	--	--
2500.00	44.75	PK	74.00	29.25	11.07	28.96	4.72	0.00	33.68
2500.00	--	AV	54.00	--	--	--	--	--	--

BT5.0

Frequency(MHz):			2402		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
2402.00	97.10	PK	--	--	63.71	28.78	4.61	0.00	33.39
2402.00	88.67	AV	--	--	55.28	28.78	4.61	0.00	33.39
2310.00	44.35	PK	74.00	29.65	11.27	28.52	4.56	0.00	33.08
2310.00	--	AV	54.00	--	--	--	--	--	--
2390.00	45.62	PK	74.00	28.38	12.30	28.72	4.60	0.00	33.32
2390.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2402		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
2402.00	100.62	PK	--	--	67.23	28.78	4.61	0.00	33.39
2402.00	90.29	AV	--	--	56.90	28.78	4.61	0.00	33.39
2310.00	45.37	PK	74.00	28.63	12.29	28.52	4.56	0.00	33.08
2310.00	--	AV	54.00	--	--	--	--	--	--
2390.00	46.21	PK	74.00	27.79	12.89	28.72	4.60	0.00	33.32
2390.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
2480.00	98.07	PK	--	--	64.45	28.92	4.70	0.00	33.62
2480.00	88.28	AV	--	--	54.66	28.92	4.70	0.00	33.62
2483.50	47.09	PK	74.00	26.91	13.46	28.93	4.70	0.00	33.63
2483.50	--	AV	54.00	--	--	--	--	--	--
2493.00	45.15	PK	74.00	28.85	11.49	28.95	4.71	0.00	33.66
2493.00	--	AV	54.00	--	--	--	--	--	--
2500.00	42.80	PK	74.00	31.20	9.12	28.96	4.72	0.00	33.68
2500.00	--	AV	54.00	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
2480.00	99.96	PK	--	--	66.34	28.92	4.70	0.00	33.62
2480.00	89.45	AV	--	--	55.83	28.92	4.70	0.00	33.62
2483.50	50.13	PK	74.00	23.87	16.50	28.93	4.70	0.00	33.63
2483.50	--	AV	54.00	--	--	--	--	--	--
2492.00	44.21	PK	74.00	29.79	10.55	28.95	4.71	0.00	33.66
2492.00	--	AV	54.00	--	--	--	--	--	--
2500.00	42.38	PK	74.00	31.62	8.70	28.96	4.72	0.00	33.68
2500.00	--	AV	54.00	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. Other emission levels are attenuated 20dB below the limit and not recorded in report.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value; RMS detector is for AV value.

3.3. Maximum Conducted Output Power

Limit

The Maximum Peak Output Power Measurement is 30dBm.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.

Test Configuration



Test Results

Raw data reference to Annex for FCC BLE Appendix C.

3.4. Power Spectral Density


Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW ≥ 3 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.

Test Configuration



Test Results

Raw data reference to Annex for FCC BLE Appendix D.

3.5. 6dB Bandwidth

Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

Test Configuration



Test Results

Raw data reference to Annex for FCC BLE Appendix A and Appendix B.

3.6. Out-of-band Emissions


Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

Test Configuration



Test Results

Raw data reference to Annex for FCC BLE Appendix E and Appendix F.

3.7. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited


FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result:

The maximum gain of antenna was 0.8 dBi.

4. Test Setup Photos of the EUT

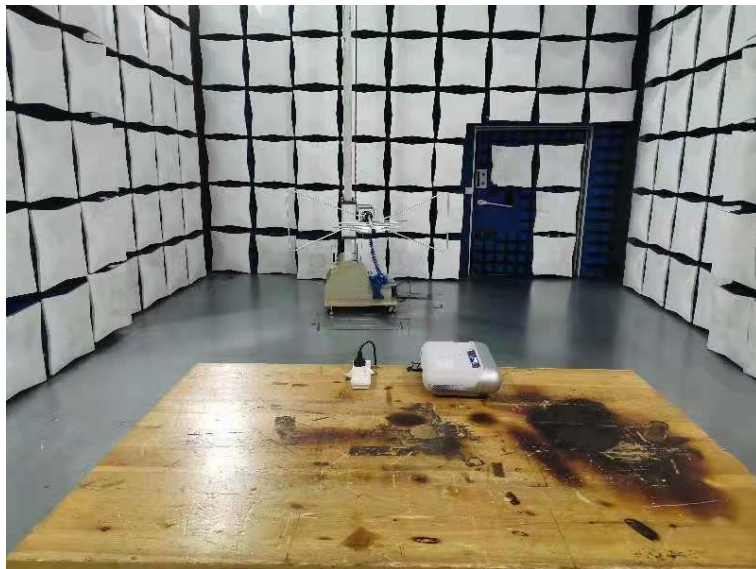

5. Photos of the EUT

Reference to the test report No. CTL2104135021-WF01

***** End of Report *****