



Shenzhen GUOREN Certification Technology Service Co., Ltd.

101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community,
Fenghuang Street, Guangming District, Shenzhen, China

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No.....: GRCTR241102053-03

FCC ID.....: SMC-K62A

Compiled by

(position+printed name+signature)..: Testing Engineer Jimmy Wang

Supervised by

(position+printed name+signature)..: Project Engineer Kelley Zhang

Approved by

(position+printed name+signature)..: Manager Sam Wang

Date of issue.....: Dec. 19, 2024

Testing Laboratory Name.....: Shenzhen GUOREN Certification Technology Service Co., Ltd.

Address.....: 101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community, Fenghuang Street, Guangming District, Shenzhen, China

Applicant's name.....: SHENZHEN HOLATEK CO., LTD.

Address.....: #12,Building 1,Chongwen Park, Nanshan Zhiyuan,3370 Liuxian Ave, Nanshan District, Shenzhen, China.

Test specification.....:

Standard.....: FCC Part 15.247

Shenzhen GUOREN Certification Technology Service Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen GUOREN Certification Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen GUOREN Certification Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: Smart Projector

Trade Mark.....: JMGO

Manufacturer.....: SHENZHEN HOLATEK CO., LTD.

Model/Type reference.....: J61-7K1

Listed Models: J61-7KR,J61-7KS,J61-7KT,J61-7KX,J61-7KY,J61-7KZ

Firmware Version.....: 1.1.21.1

Hardware Version.....: Ver B

Modulation Type.....: DSSS/ OFDM

Operation Frequency.....: From 2412 - 2462MHz

Rating.....: DC 20V from external circuit

Result.....: PASS

TEST REPORT

Equipment under Test : Smart Projector

Model /Type : J61-7K1

Listed Models : J61-7KR,J61-7KS,J61-7KT,J61-7KX,J61-7KY,J61-7KZ

Applicant : SHENZHEN HOLATEK CO., LTD.

Address : #12,Building 1,Chongwen Park, Nanshan Zhiyuan,3370 Liuxian Ave, Nanshan District, Shenzhen, China.

Manufacturer : SHENZHEN HOLATEK CO., LTD.

Address : #12,Building 1,Chongwen Park, Nanshan Zhiyuan,3370 Liuxian Ave, Nanshan District, Shenzhen, China.

Test Result:	PASS
--------------	------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1 TEST STANDARDS	4
2 SUMMARY	5
2.1 General Remarks	5
2.2 Product Description	5
2.3 Short description of the Equipment under Test (EUT)	5
2.4 EUT configuration	5
2.5 EUT operation mode	6
2.6 Block Diagram of Test Setup	6
2.7 Related Submittal(s) / Grant (s)	6
2.8 Modifications	6
3 TEST ENVIRONMENT	7
3.1 Address of the test laboratory	7
3.2 Test Facility	7
3.3 Environmental conditions	7
3.4 Test Description	7
3.5 Statement of the measurement uncertainty	8
3.6 Equipments Used during the Test	8
4 TEST CONDITIONS AND RESULTS	10
4.1 AC Power Conducted Emission	10
4.2 Radiated Emission	15
4.3 Maximum Conducted Output Power	24
4.4 Power Spectral Density	26
4.5 6dB Bandwidth	32
4.6 Out-of-band Emissions	38
4.7 Antenna Requirement	55
5 TEST SETUP PHOTOS OF THE EUT	56
6 PHOTOS OF THE EUT	57

1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2020](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 v05r02](#): Guidance for Compliance Measurements on Digital Transmission Systems (DTS) ,Frequency Hopping Spread Spectrum System(HFSS), and Hybrid System Devices Operating Under §15.247 of The FCC rules.

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	Nov. 18, 2024
Testing commenced on	:	Nov. 18, 2024
Testing concluded on	:	Dec. 19, 2024

2.2 Product Description

Product Name:	Smart Projector
Model/Type reference:	J61-7K1
Listed Models:	J61-7KR,J61-7KS,J61-7KT,J61-7KX,J61-7KY,J61-7KZ(The electrical circuit design, layout, components used and internal wiring are identical. Only the body color, pattern, sales customers, and sales regions are different)
Power supply:	DC 20V from external circuit
Adapter 1 information:	M/N:XY-PD065U75 Input:AC 100-240V 50/60Hz 1.5A MAX Output:5.0V $\overline{\text{---}}$ 3.0A,9.0V $\overline{\text{---}}$ 3.0A,12.0V $\overline{\text{---}}$ 3.0A,15.0V $\overline{\text{---}}$ 3.0A, 20.0V $\overline{\text{---}}$ 3.25A 65W
Adapter 2 information:	M/N:PD065E-D1C0AVU Input:AC 100-240V 50/60Hz 1.5A Output:5.0V $\overline{\text{---}}$ 3.0A,9.0V $\overline{\text{---}}$ 3.0A,12.0V $\overline{\text{---}}$ 3.0A,15.0V $\overline{\text{---}}$ 3.0A, 20.0V $\overline{\text{---}}$ 3.25A
testing sample ID:	GRCTR241102053-1# (Engineer sample), GRCTR241102053-2# (Normal sample)
WIFI:	
Supported type:	802.11b/802.11g/802.11n HT20/802.11n HT40
Modulation:	802.11b: DSSS 802.11g/802.11n HT20/802.11n HT40: OFDM
Operation frequency:	802.11b/802.11g/802.11n HT20: 2412MHz~2462MHz 802.11n HT40: 2422MHz~2452MHz
Channel number:	802.11b/802.11g/802.11n HT20: 11 802.11n HT40: 7
Channel separation:	5MHz
Antenna type:	FPC antenna
Antenna gain* (Supplied by the customer) :	Ant 1: 1.90 dBi Ant 2: 1.89 dBi
Remark:*When the information provided by the customer was used to calculate test results, if the information provided by the customer is not accurate, shenzhen GUOREN Certification Technology Service Co., Ltd. does not assume any responsibility.	

2.3 Short description of the Equipment under Test (EUT)

This is a Smart Projector.
For more details, refer to the user's manual of the EUT.

2.4 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

○ - supplied by the manufacturer

● - supplied by the lab

○ /	M/N: /
	Manufacturer: /


2.5 EUT operation mode

The Applicant provides communication tools software(SecureCRT) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) for testing meet KDB558074 test requirement.

IEEE 802.11b/g/n HT20/n HT40: Thirteen channels are provided to the EUT.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

2.6 Block Diagram of Test Setup

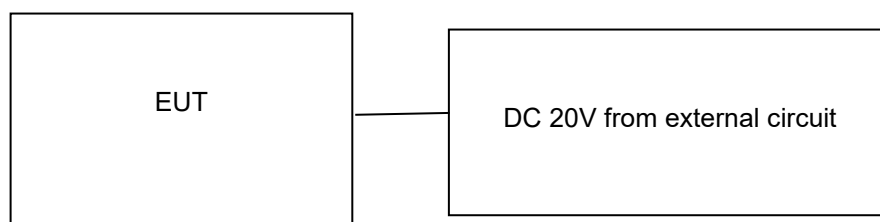

2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.8 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen GUOREN Certification Technology Service Co., Ltd.

101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community, Fenghuang Street, Guangming District, Shenzhen, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 920798 Designation Number: CN1304

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6202.01

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

ISED#: 27264 CAB identifier: CN0115

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

CNAS-Lab Code: L15631

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories for the Competence of Testing and Calibration Laboratories.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	15-35 °C
Relative Humidity	30-60 %
Air Pressure	950-1050mbar

3.4 Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Conducted Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS

FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS
----------------------------	---------------------	------

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Maximum Peak Conducted Output Power Power Spectral Density 6dB Bandwidth Spurious RF conducted emission Radiated Emission 9KHz~1GHz& Radiated Emission 1GHz~10th Harmonic	11b/DSSS	1 Mbps	1/6/11
	11g/OFDM	6 Mbps	1/6/11
	11n HT20/OFDM	6.5Mbps	1/6/11
	11n HT40/OFDM	13.5Mbps	3/6/9
Band Edge	11b/DSSS	1 Mbps	1/11
	11g/OFDM	6 Mbps	1/11
	11n HT20/OFDM	6.5Mbps	1/11
	11n HT40/OFDM	13.5Mbps	3/6/9

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the Shenzhen GUOREN Certification Technology Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GUOREN Certification Technology Service Co., Ltd.:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.06 dB	(1)
Radiated Emission	1~18GHz	5.14 dB	(1)
Radiated Emission	18-40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.14 dB	(1)
Max output power	30MHz~18GHz	0.54 dB	(1)
Power spectral density	/	0.56 dB	(1)
Spectrum bandwidth	/	1.2%	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6 Equipments Used during the Test


Test Equipment	Manufacturer	Model No.	Equipment No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	GRCTEE009	2024/09/19	2025/09/18
LISN	R&S	ENV216	GRCTEE010	2024/09/19	2025/09/18
EMI Test Receiver	R&S	ESPI	GRCTEE017	2024/09/19	2025/09/18
EMI Test Receiver	R&S	ESCI	GRCTEE008	2024/09/19	2025/09/18

Spectrum Analyzer	Agilent	N9020A	GRCTEE002	2024/09/19	2025/09/18
Spectrum Analyzer	R&S	FSP	GRCTEE003	2024/09/20	2025/09/19
Vector Signal generator	Agilent	N5181A	GRCTEE007	2024/09/19	2025/09/18
Analog Signal Generator	R&S	SML03	GRCTEE006	2024/09/19	2025/09/18
Climate Chamber	QIYA	LCD-9530	GRCTES016	2024/09/19	2025/09/18
Ultra-Broadband Antenna	Schwarzbeck	VULB9163	GRCTEE018	2023/09/28	2026/09/27
Horn Antenna	Schwarzbeck	BBHA 9120D	GRCTEE019	2023/09/28	2026/09/27
Loop Antenna	Zhinan	ZN30900C	GRCTEE020	2023/10/15	2026/10/14
Horn Antenna	Beijing Hangwei Dayang	OBH100400	GRCTEE049	2023/09/28	2026/09/27
Amplifier	Schwarzbeck	BBV 9745	GRCTEE021	2024/09/19	2025/09/18
Amplifier	Taiwan chengyi	EMC051845B	GRCTEE022	2024/09/19	2025/09/18
Temperature/Humidity Meter	Huaguan	HG-308	GRCTES037	2024/09/19	2025/09/18
Directional coupler	NARDA	4226-10	GRCTEE004	2024/09/19	2025/09/18
High-Pass Filter	XingBo	XBLBQ-GTA18	GRCTEE053	2024/09/19	2025/09/18
High-Pass Filter	XingBo	XBLBQ-GTA27	GRCTEE054	2024/09/19	2025/09/18
Automated filter bank	Tonscend	JS0806-F	GRCTEE055	2024/09/19	2025/09/18
Power Sensor	Agilent	U2021XA	GRCTEE070	2024/09/19	2025/09/18
EMI Test Software	ROHDE & SCHWARZ	ESK1-V1.71	GRCTEE060	N/A	N/A
EMI Test Software	Fera	EZ-EMC	GRCTEE061	N/A	N/A

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Conducted Emission

TEST CONFIGURATION

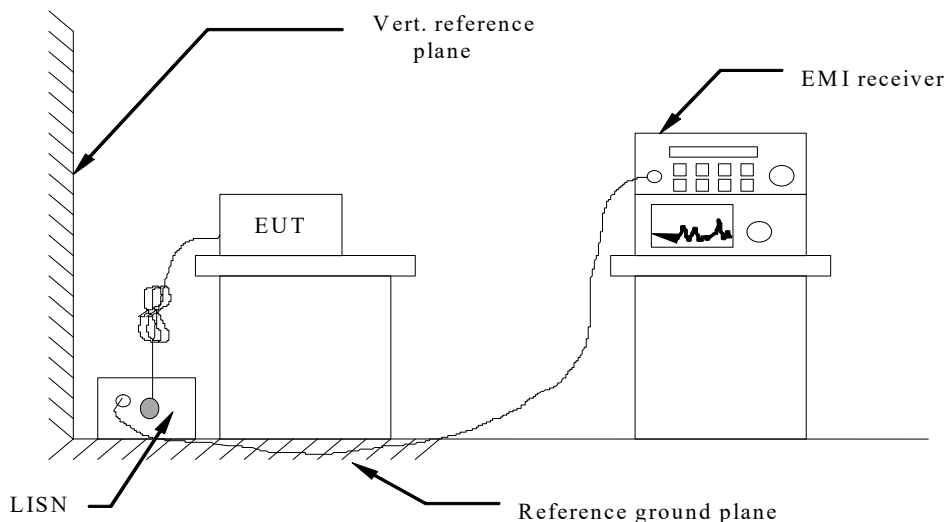

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2020.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2020
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2020
- 4 The EUT received power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.


TEST RESULTS

Remark:

1. All modes of 802.11b/g/n were tested at Low, Middle, and High channel; only the worst result of 802.11b CH11 was reported as below:

2. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:

Adapter:XY-PD065U75

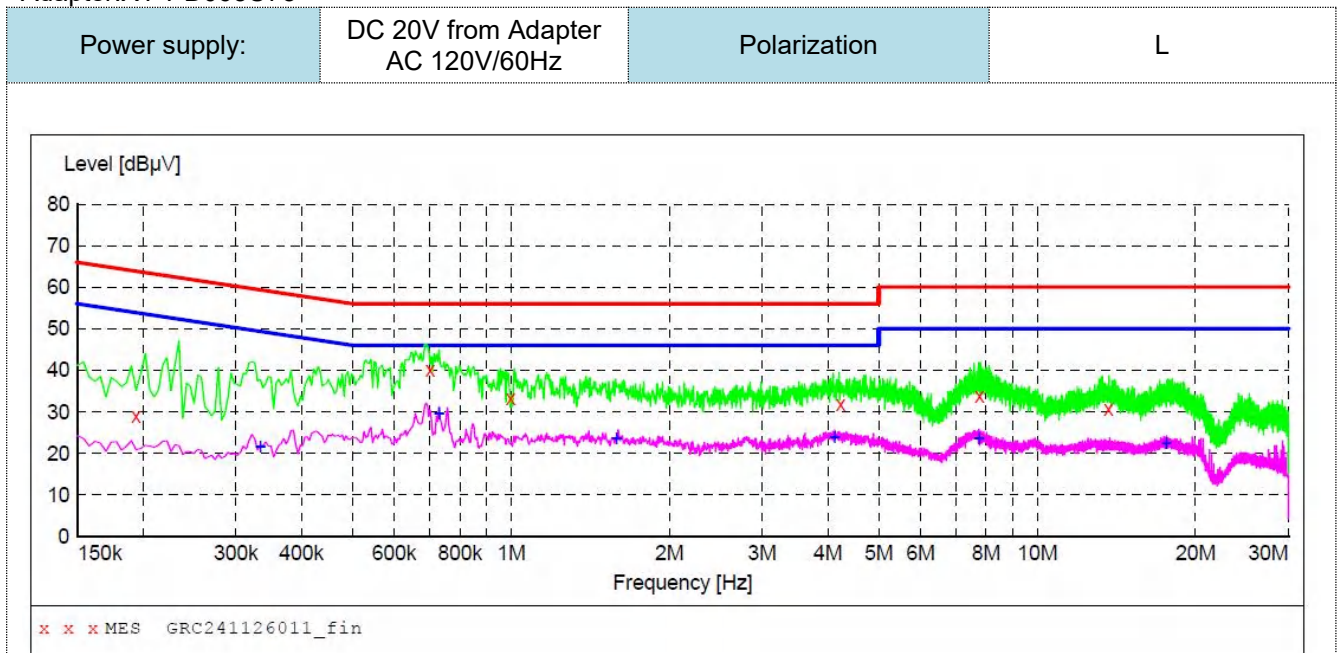

MEASUREMENT RESULT: "GRC241126011_fin"

11/27/2024 8:43AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.194000	29.10	9.5	64	34.8	QP	L1	GND
0.702000	40.20	9.6	56	15.8	QP	L1	GND
0.998000	33.20	10.0	56	22.8	QP	L1	GND
4.230000	31.90	9.9	56	24.1	QP	L1	GND
7.766000	33.80	10.0	60	26.2	QP	L1	GND
13.662000	30.70	10.0	60	29.3	QP	L1	GND

MEASUREMENT RESULT: "GRC241126011_fin2"

11/27/2024 8:43AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.334000	21.60	9.5	49	27.8	AV	L1	GND
0.730000	29.60	9.6	46	16.4	AV	L1	GND
1.586000	23.60	10.0	46	22.4	AV	L1	GND
4.118000	24.00	9.9	46	22.0	AV	L1	GND
7.750000	23.70	10.0	50	26.3	AV	L1	GND
17.586000	22.50	10.1	50	27.5	AV	L1	GND

Note:1).Level (dBμV)= Reading (dBμV)+ Transducer (dB)

2). Transducer (dB)=insertion loss of LISN (dB) + Cable loss (dB)


3). Margin(dB) = Limit (dBμV) - Level (dBμV)

Power supply:

DC 20V from Adapter
AC 120V/60Hz

Polarization

N

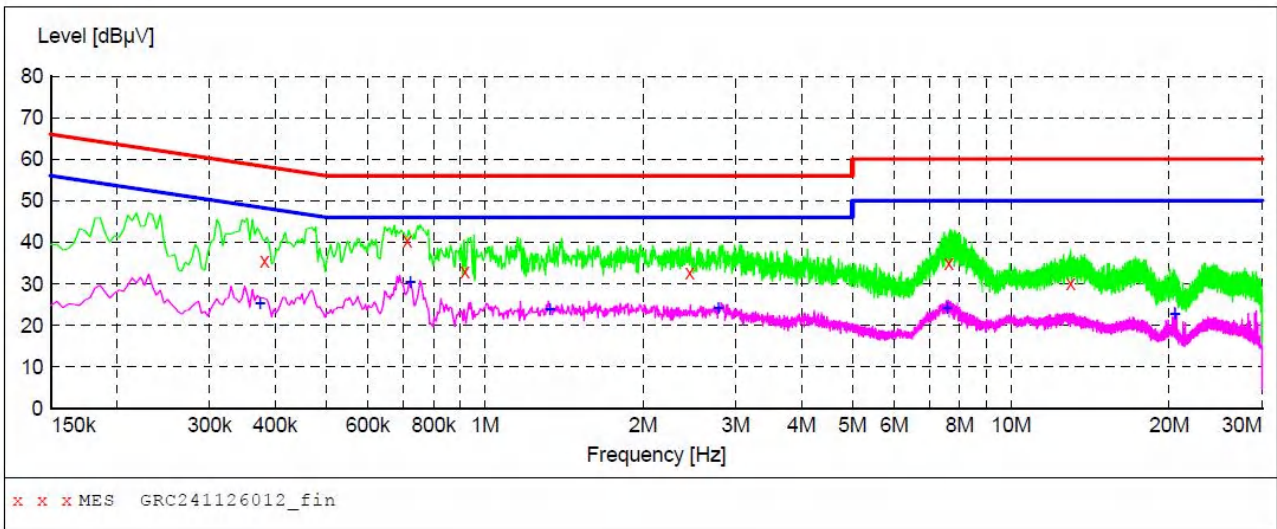

MEASUREMENT RESULT: "GRC241126012_fin"

11/27/2024 8:46AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.382000	35.60	9.7	58	22.6	QP	N	GND
0.714000	40.50	9.6	56	15.5	QP	N	GND
0.918000	33.10	9.7	56	22.9	QP	N	GND
2.454000	32.80	10.0	56	23.2	QP	N	GND
7.622000	35.00	10.0	60	25.0	QP	N	GND
12.994000	30.20	10.0	60	29.8	QP	N	GND

MEASUREMENT RESULT: "GRC241126012_fin2"


11/27/2024 8:46AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.374000	25.40	9.6	48	23.0	AV	N	GND
0.722000	30.40	9.6	46	15.6	AV	N	GND
1.330000	23.80	10.0	46	22.2	AV	N	GND
2.778000	24.30	10.0	46	21.7	AV	N	GND
7.562000	24.10	10.0	50	25.9	AV	N	GND
20.478000	22.70	10.2	50	27.3	AV	N	GND

- Note:1).Level (dBμV)= Reading (dBμV)+ Transducer (dB)
2). Transducer (dB)=insertion loss of LISN (dB) + Cable loss (dB)
3). Margin(dB) = Limit (dBμV) - Level (dBμV)

Adapter:PD065E-D1C0AVU

Power supply:	DC 20V from Adapter AC 120V/60Hz	Polarization	L
---------------	-------------------------------------	--------------	---

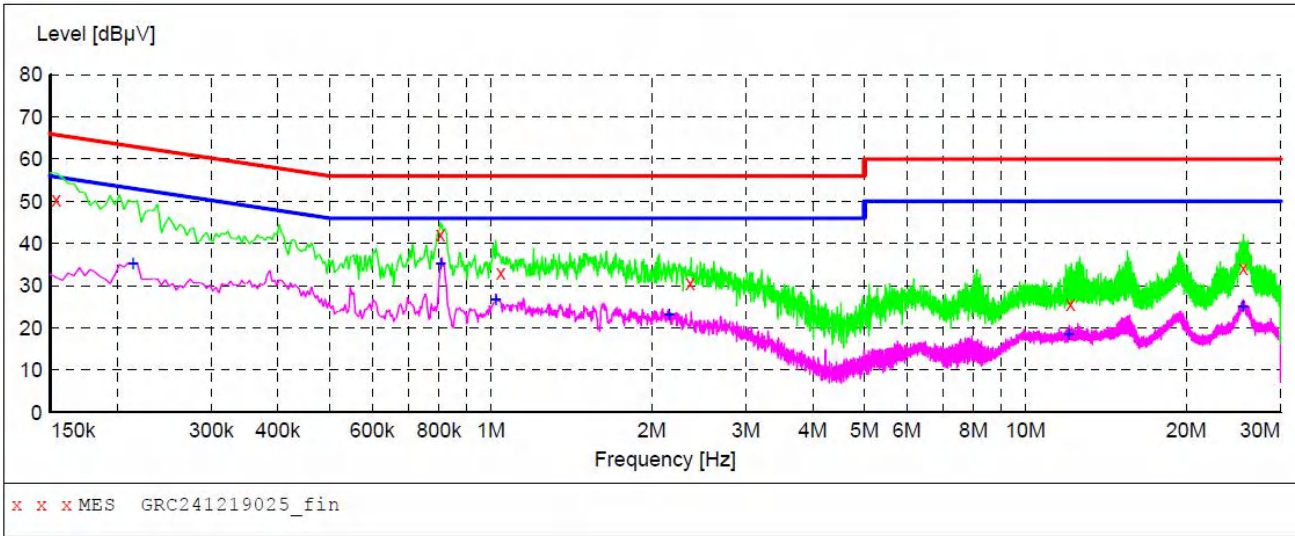

MEASUREMENT RESULT: "GRC241219025_fin"

12/19/2024 5:41PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154000	50.40	9.6	66	15.4	QP	L1	GND
0.806000	42.30	9.8	56	13.7	QP	L1	GND
1.046000	33.00	10.0	56	23.0	QP	L1	GND
2.362000	30.50	10.0	56	25.5	QP	L1	GND
12.158000	25.70	10.0	60	34.3	QP	L1	GND
25.598000	34.10	10.2	60	25.9	QP	L1	GND

MEASUREMENT RESULT: "GRC241219025_fin2"

12/19/2024 5:41PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.214000	35.40	9.6	53	17.6	AV	L1	GND
0.806000	35.40	9.8	46	10.6	AV	L1	GND
1.022000	26.90	10.0	46	19.1	AV	L1	GND
2.154000	23.30	10.0	46	22.7	AV	L1	GND
12.050000	18.60	10.0	50	31.4	AV	L1	GND
25.502000	25.20	10.2	50	24.8	AV	L1	GND


- Note:1).Level (dBμV)= Reading (dBμV)+ Transducer (dB)
2). Transducer (dB)=insertion loss of LISN (dB) + Cable loss (dB)
3). Margin(dB) = Limit (dBμV) - Level (dBμV)

Power supply:

DC 20V from Adapter
AC 120V/60Hz

Polarization

N

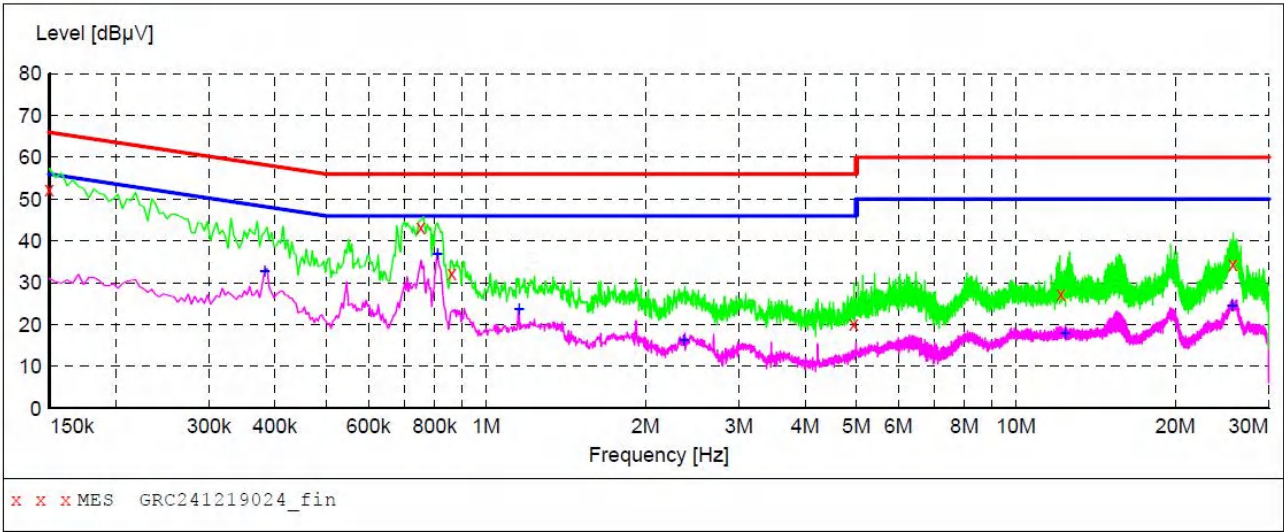

MEASUREMENT RESULT: "GRC241219024_fin"

12/19/2024 5:31PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	52.40	9.6	66	13.6	QP	N	GND
0.754000	43.30	9.7	56	12.7	QP	N	GND
0.862000	32.20	9.7	56	23.8	QP	N	GND
4.946000	20.30	10.0	56	35.7	QP	N	GND
12.158000	27.30	10.0	60	32.7	QP	N	GND
25.682000	34.50	10.2	60	25.5	QP	N	GND

MEASUREMENT RESULT: "GRC241219024_fin2"

12/19/2024 5:31PM


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.382000	32.90	9.7	48	15.3	AV	N	GND
0.810000	36.90	9.8	46	9.1	AV	N	GND
1.154000	23.70	10.0	46	22.3	AV	N	GND
2.362000	16.40	10.0	46	29.6	AV	N	GND
12.370000	17.90	10.0	50	32.1	AV	N	GND
25.570000	24.70	10.2	50	25.3	AV	N	GND

- Note:1).Level (dBµV)= Reading (dBµV)+ Transducer (dB)
2). Transducer (dB)=insertion loss of LISN (dB) + Cable loss (dB)
3). Margin(dB) = Limit (dBµV) - Level (dBµV)


4.2 Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

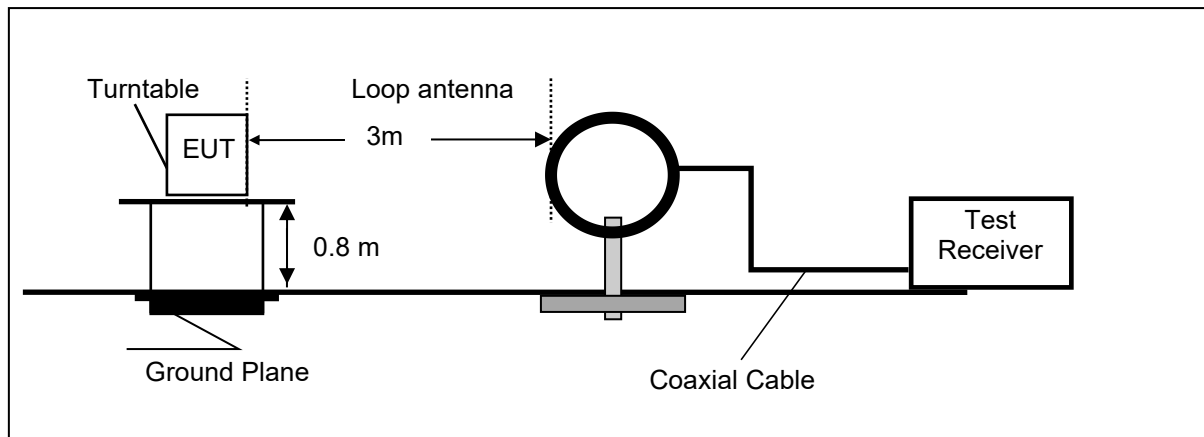

Frequency range 30MHz – 1000MHz

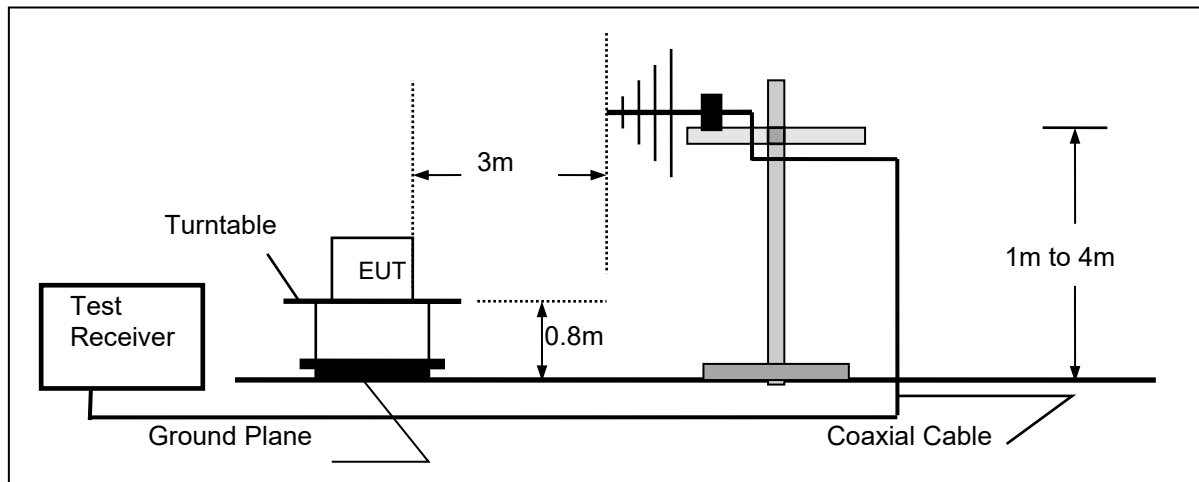

Frequency range above 1GHz-25GHz

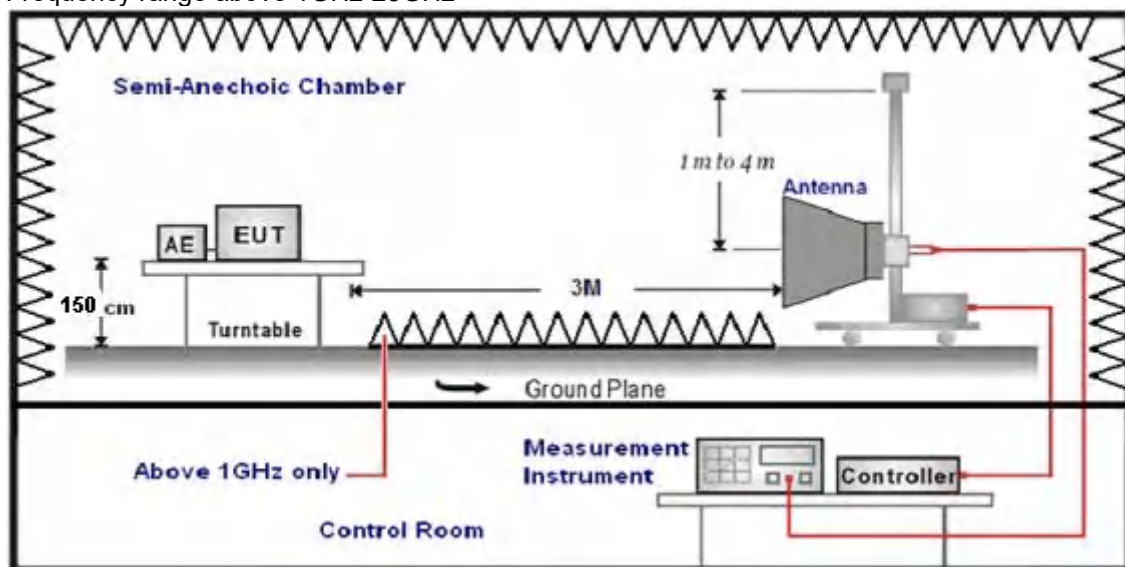

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz, the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz})) + 40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz})) + 40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30) + 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS


Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. All three channels (lowest/middle/highest) of each mode were measured below 1GHz and recorded worst case at 802.11b low channel.
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

Adapter:XY-PD065U75

Horizontal

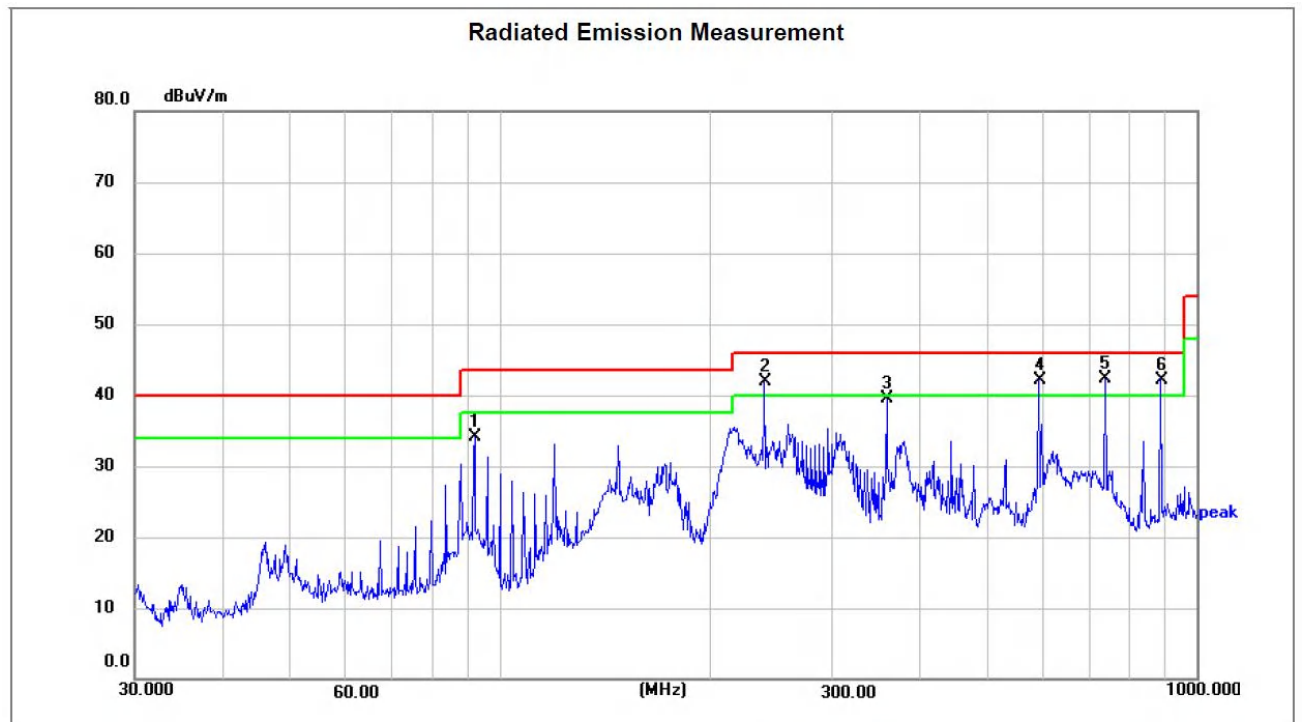

Site LAB

Polarization: **Horizontal**

Temperature: 24.4(C)

Limit: FCC Part15 RE-Class B_30-1000MHz

Power: AC120V/60Hz

Humidity: 51 %

EUT:

Distance: 3m

M/N:

Mode:

Note:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	92.1388	54.38	-20.36	34.02	43.50	-9.48	peak	200	318	P	
2 !	239.9874	60.44	-18.44	42.00	46.00	-4.00	peak	100	167	P	
3	359.1860	55.90	-16.39	39.51	46.00	-6.49	peak	100	144	P	
4 !	593.0497	53.63	-11.51	42.12	46.00	-3.88	peak	100	282	P	
5 *	739.6604	52.57	-10.17	42.40	46.00	-3.60	peak	100	185	P	
6 !	887.6099	49.97	-7.77	42.20	46.00	-3.80	peak	100	259	P	

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Level (dBuV/m) - Limit (dBuV/m)

Vertical

Radiated Emission Measurement



Site LAB

Polarization: **Vertical**

Temperature: 24.4(C)

Limit: FCC Part15 RE-Class B_30-1000MHz

Power: AC120V/60Hz

Humidity: 51 %

EUT:

Distance: 3m

M/N:

Mode:

Note:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	67.4382	52.97	-20.20	32.77	40.00	-7.23	peak	100	117	P	
2 *	119.9975	57.25	-19.94	37.31	43.50	-6.19	QP	100	344	P	
3	147.9214	58.59	-21.69	36.90	43.50	-6.60	peak	100	110	P	
4	239.9873	57.97	-18.44	39.53	46.00	-6.47	peak	100	141	P	
5	455.9058	51.56	-15.07	36.49	46.00	-9.51	peak	100	164	P	
6	593.0496	48.54	-11.51	37.03	46.00	-8.97	peak	100	39	P	

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Level (dBuV/m) - Limit (dBuV/m)

Adapter:PD065E-D1C0AVU

Horizontal

Radiated Emission Measurement



Site LAB

Polarization: **Horizontal**

Temperature: 24.1(C)

Limit: FCC Part15 RE-Class B_30-1000MHz

Power: AC120V/60Hz

Humidity: 52 %

EUT:

Distance: 3m

M/N:

Mode:

Note:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	88.0329	53.77	-21.11	32.66	43.50	-10.84	peak	199	333	P	
2	239.9874	54.69	-18.44	36.25	46.00	-9.75	peak	100	308	P	
3	283.9791	53.00	-17.41	35.59	46.00	-10.41	peak	100	61	P	
4	530.1014	53.41	-14.20	39.21	46.00	-6.79	peak	199	351	P	
5 !	739.6604	50.65	-10.17	40.48	46.00	-5.52	peak	100	9	P	
6 *	887.6099	48.31	-7.77	40.54	46.00	-5.46	peak	199	290	P	


Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Level (dBuV/m) - Limit (dBuV/m)

Vertical

Radiated Emission Measurement

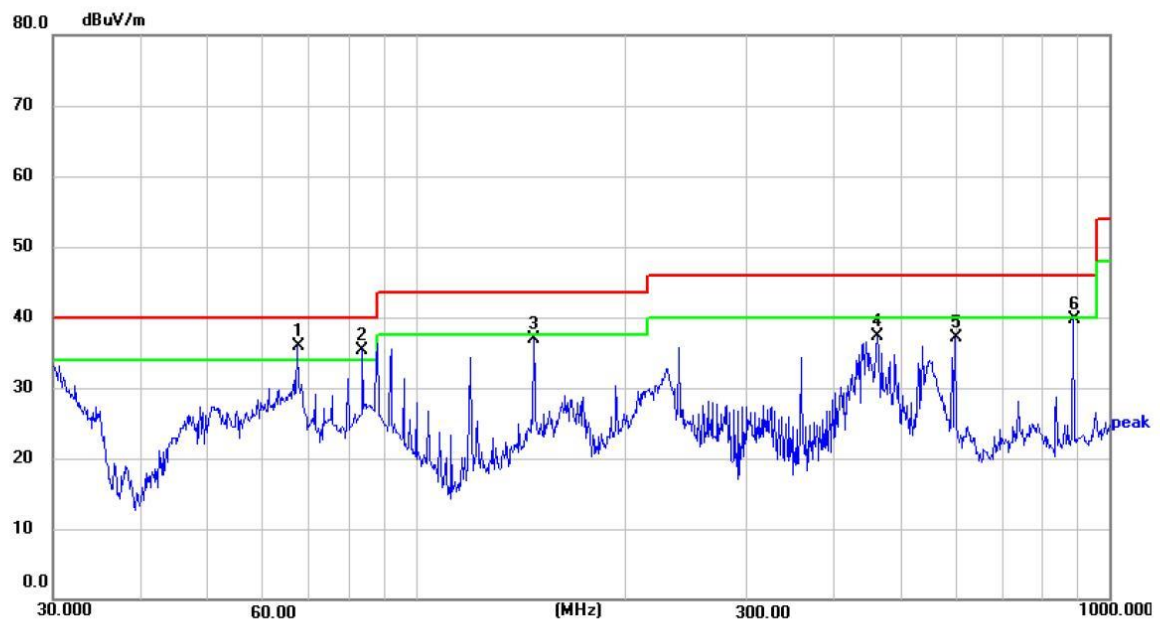

Site LAB

Limit: FCC Part15 RE-Class B_30-1000MHz

EUT:

M/N:

Mode:

Note:

Polarization: **Vertical**

Power: AC120V/60Hz

Distance: 3m

Temperature: 24.1(C)

Humidity: 52 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	67.4382	56.19	-20.20	35.99	40.00	-4.01	peak	100	62	P	
2 !	83.8155	57.28	-21.97	35.31	40.00	-4.69	peak	100	150	P	
3	147.9214	58.59	-21.69	36.90	43.50	-6.60	peak	100	115	P	
4	462.3455	52.19	-14.96	37.23	46.00	-8.77	peak	100	177	P	
5	599.3212	48.24	-11.14	37.10	46.00	-8.90	peak	100	97	P	
6	887.6099	47.46	-7.77	39.69	46.00	-6.31	peak	100	185	P	

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Level (dBuV/m) - Limit (dBuV/m)

For 1GHz to 25GHz

Note: 802.11b/802.11g/802.11n HT20/802.11n HT40 Mode all have been tested, only worse case 802.11b mode is reported.

(above 1GHz)

Frequency(MHz):			2412		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4824.00	54.10	PK	74	19.90	75.33	28.37	5.10	54.70	-21.23
4824.00	42.74	AV	54	11.26	63.97	28.37	5.10	54.70	-21.23
7236.00	52.21	PK	74	21.79	66.70	34.10	6.42	55.01	-14.49
7236.00	39.25	AV	54	14.75	53.74	34.10	6.42	55.01	-14.49

Frequency(MHz):			2412		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4824.00	54.01	PK	74	19.99	75.24	28.37	5.10	54.70	-21.23
4824.00	41.93	AV	54	12.07	63.16	28.37	5.10	54.70	-21.23
7236.00	52.49	PK	74	21.51	66.98	34.10	6.42	55.01	-14.49
7236.00	39.39	AV	54	14.61	53.88	34.10	6.42	55.01	-14.49

Frequency(MHz):			2437		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4874.00	55.79	PK	74	18.21	76.06	28.76	5.35	54.38	-20.27
4874.00	42.16	AV	54	11.84	62.43	28.76	5.35	54.38	-20.27
7311.00	52.64	PK	74	21.36	66.27	34.40	6.83	54.86	-13.63
7311.00	39.79	AV	54	14.21	53.42	34.40	6.83	54.86	-13.63

Frequency(MHz):			2437		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4874.00	54.36	PK	74	19.64	74.63	28.76	5.35	54.38	-20.27
4874.00	41.55	AV	54	12.45	61.82	28.76	5.35	54.38	-20.27
7311.00	52.40	PK	74	21.60	66.03	34.40	6.83	54.86	-13.63
7311.00	42.45	AV	54	11.55	56.08	34.40	6.83	54.86	-13.63

Frequency(MHz):			2462		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4924.00	55.88	PK	74	18.12	75.33	29.54	5.66	54.65	-19.45
4924.00	42.27	AV	54	11.73	61.72	29.54	5.66	54.65	-19.45
7386.00	54.28	PK	74	19.72	67.42	34.51	7.25	54.9	-13.14
7386.00	40.24	AV	54	13.76	53.38	34.51	7.25	54.9	-13.14

Frequency(MHz):			2462		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4924.00	55.88	PK	74	18.12	75.33	29.54	5.66	54.65	-19.45
4924.00	42.82	AV	54	11.18	62.27	29.54	5.66	54.65	-19.45
7386.00	53.44	PK	74	20.56	66.58	34.51	7.25	54.9	-13.14
7386.00	43.01	AV	54	10.99	56.15	34.51	7.25	54.9	-13.14

- 1) Emission level (dBuV/m) = Meter Reading+ antenna Factor+ cable loss- preamp factor.
- 2) Margin value = Limits-Emission level.
- 3) -- Mean the PK detector measured value is below average limit.
- 4) The other emission levels were very low against the limit.
- 5) RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Results of Band Edges Test (Radiated)

Note: 802.11b/802.11g/802.11n HT20/802.11n HT40 Mode all have been tested, only worse case 802.11b mode is reported.

Frequency(MHz):			2412		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	53.73	PK	74	20.27	78.45	25.72	4.32	54.76	-24.72
2390.00	38.32	AV	54	15.68	63.04	25.72	4.32	54.76	-24.72
Frequency(MHz):			2412		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390.00	54.32	PK	74	19.68	79.04	25.72	4.32	54.76	-24.72
2390.00	38.79	AV	54	15.21	63.51	25.72	4.32	54.76	-24.72
Frequency(MHz):			2462		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	55.62	PK	74	18.38	80.19	25.78	4.48	54.83	-24.57
2483.50	38.28	AV	54	15.72	62.85	25.78	4.48	54.83	-24.57
Frequency(MHz):			2462		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.50	55.71	PK	74	18.29	80.28	25.78	4.48	54.83	-24.57
2483.50	38.63	AV	54	15.37	63.20	25.78	4.48	54.83	-24.57

Note:

- 1) Emission level (dBuV/m) = Meter Reading+ antenna Factor+ cable loss- preamp factor.
- 2) Margin value = Limits-Emission level.
- 3) -- Mean the PK detector measured value is below average limit.
- 4) The other emission levels were very low against the limit.
- 5) RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

4.3 Maximum Conducted Output Power


Limit

The Maximum Peak Output Power Measurement is 30dBm.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration



Test Results

Ant 1

Type	Channel	Output power PK (dBm)	Limit (dBm)	Result
802.11b	01	14.04	30	Pass
	06	15.05		
	11	15.20		
802.11g	01	14.31	30	Pass
	06	15.34		
	11	15.61		
802.11n HT20	01	13.53	30	Pass
	06	14.31		
	11	14.58		
802.11n HT40	03	14.08	30	Pass
	06	14.22		
	09	14.54		

Ant 2

Type	Channel	Output power PK (dBm)	Limit (dBm)	Result
802.11b	01	13.78	30	Pass
	06	14.02		
	11	13.65		
802.11g	01	14.49	30	Pass
	06	15.23		
	11	14.96		
802.11n HT20	01	13.26	30	Pass
	06	14.13		
	11	14.46		
802.11n HT40	03	13.88	30	Pass
	06	14.05		
	09	14.52		

MIMO

Type	Channel	Output power PK(dBm) ANT1	Output power PK(dBm) ANT2	Output power PK(dBm) MIMO	Limit (dBm)	Result
802.11n HT20	01	13.53	13.26	16.41	30	Pass
	06	14.31	14.13	17.23		
	11	14.58	14.46	17.53		
802.11n HT40	03	14.08	13.88	16.99	30	Pass
	06	14.22	14.05	17.15		
	09	14.54	14.52	17.54		

Note:

- 1) Measured output power at difference data rate for each mode and recorded worst case for each mode.
- 2) Test results including cable loss.
- 3) Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40.

4.4 Power Spectral Density

Limit

The resulting peak PSD level shall not be greater than 8 dBm/3KHz.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW ≥ 3 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level shall not be greater than 8 dBm/3KHz.

Test Configuration



Test Results

Ant 1

Type	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	01	0.82	8	Pass
	06	1.58		
	11	2.29		
802.11g	01	-17.72	8	Pass
	06	-17.36		
	11	-16.40		
802.11n HT20	01	-17.38	8	Pass
	06	-16.40		
	11	-17.62		
802.11n HT40	03	-20.07	8	Pass
	06	-19.96		
	09	-20.71		

Ant 2

Type	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	01	1.01	8	Pass
	06	1.47		
	11	1.10		
802.11g	01	-16.27	8	Pass
	06	-16.86		
	11	-16.44		
802.11n HT20	01	-17.76	8	Pass
	06	-17.88		
	11	-16.66		
802.11n HT40	03	-21.09	8	Pass
	06	-20.18		
	09	-20.12		

MIMO

Type	Channel	Power Spectral Density (dBm/3KHz) ANT1	Power Spectral Density (dBm/3KHz) ANT2	Power Spectral Density (dBm/3KHz) MIMO	Limit(dBm/3KHz)	Result
802.11n HT20	01	-17.38	-17.76	-14.56	8	Pass
	06	-16.40	-17.88	-14.07		
	11	-17.62	-16.66	-14.10		
802.11n HT40	03	-20.07	-21.09	-17.54	8	Pass
	06	-19.96	-20.18	-17.06		
	09	-20.71	-20.12	-17.39		

Note:

- 1) Measured peak power spectrum density at difference data rate for each mode and recorded worst case for each mode.
- 2) Test results including cable loss;
- 3) Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40.


Please refer to following plots;

Ant 1

802.11b




802.11g

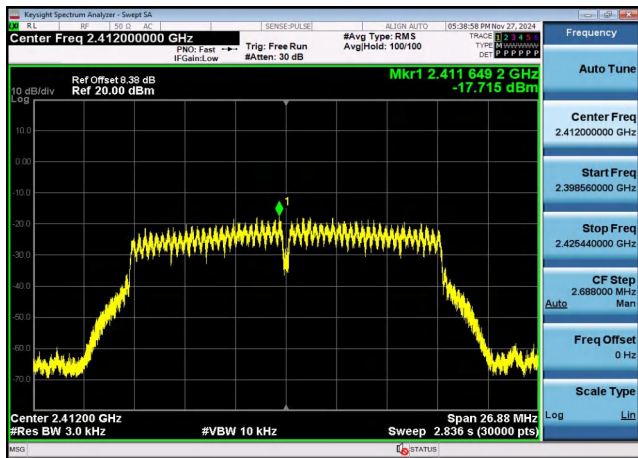

CH01




CH01

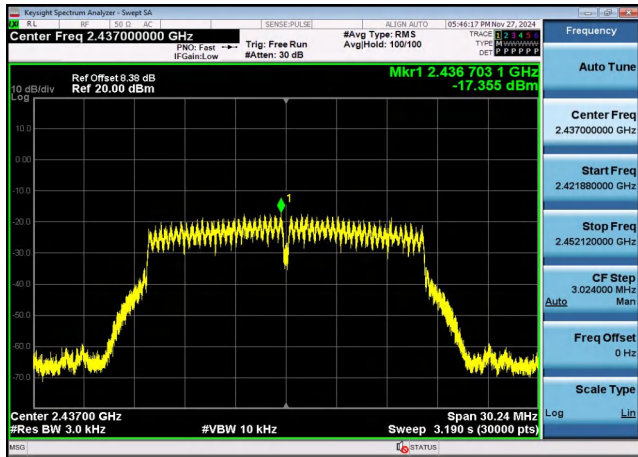

CH06




CH06

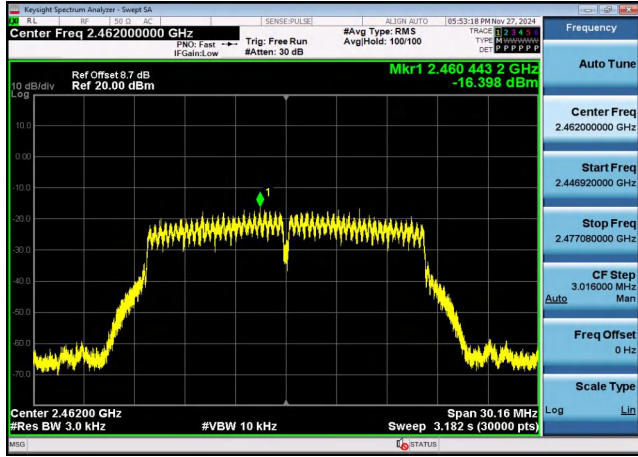


CH11

CH11


802.11n HT20

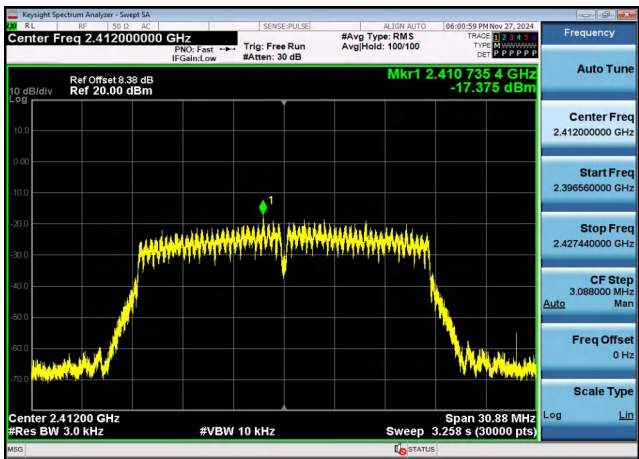


802.11n HT40

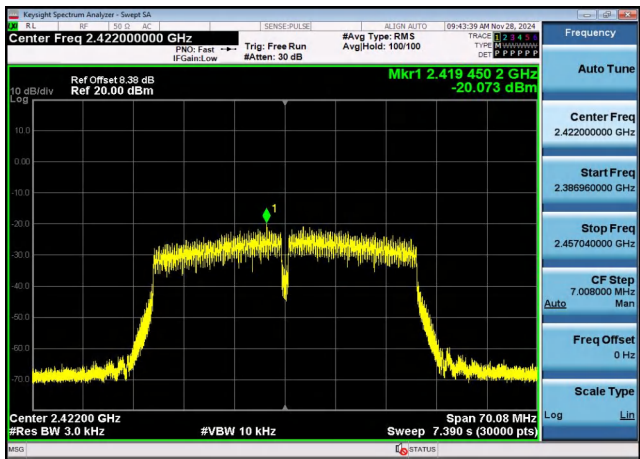


CH01

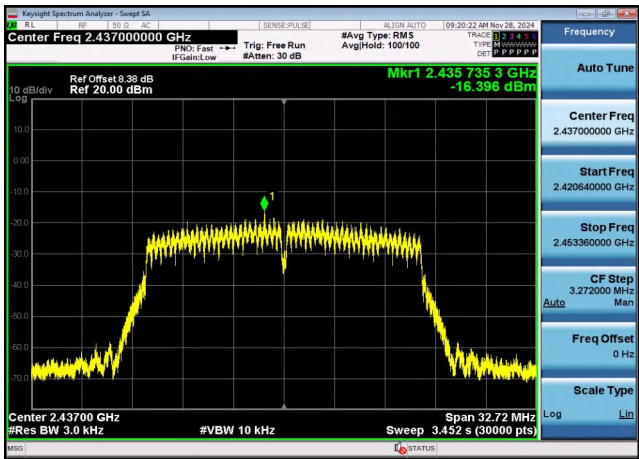


CH03

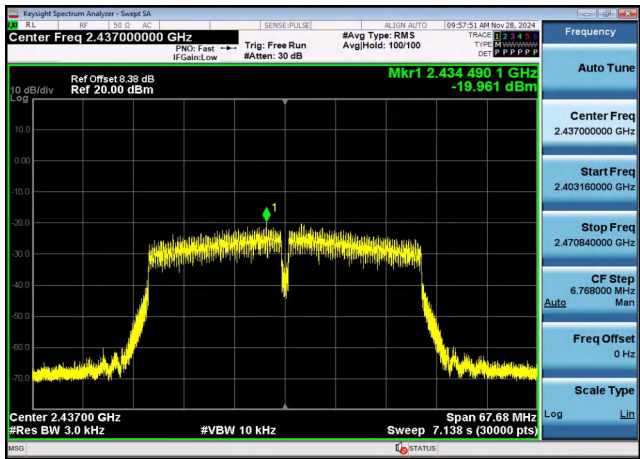

CH06

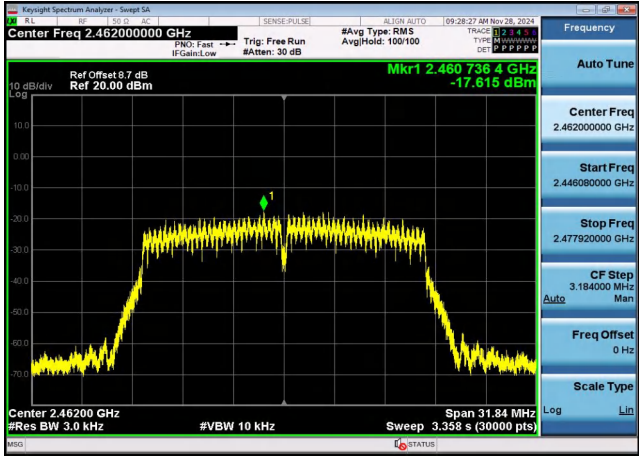

CH06

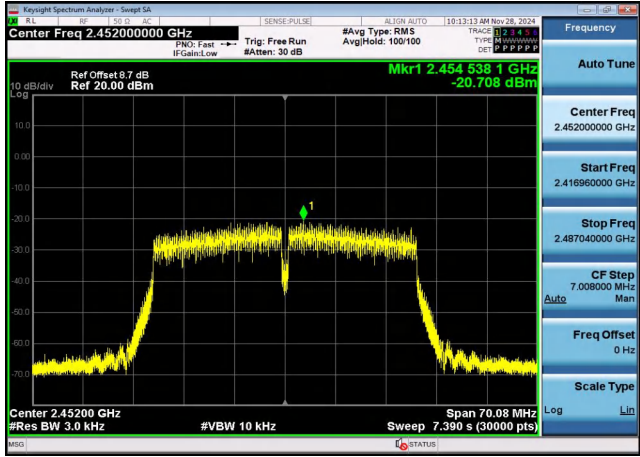

CH11


CH09

Ant 2


802.11b




802.11g

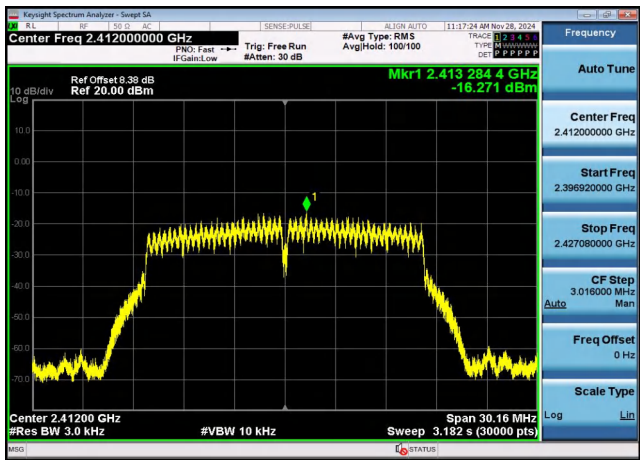

CH01

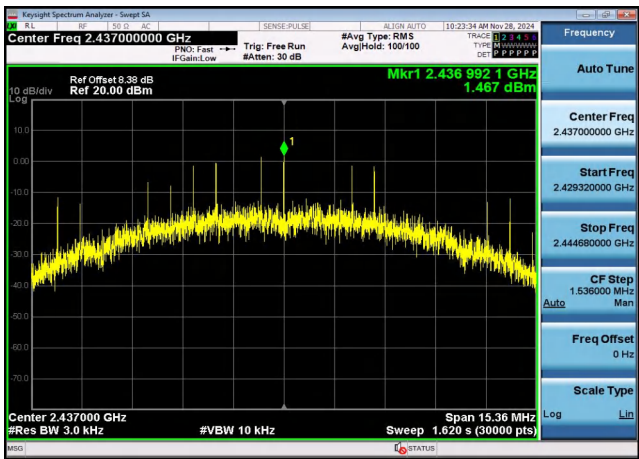


CH01

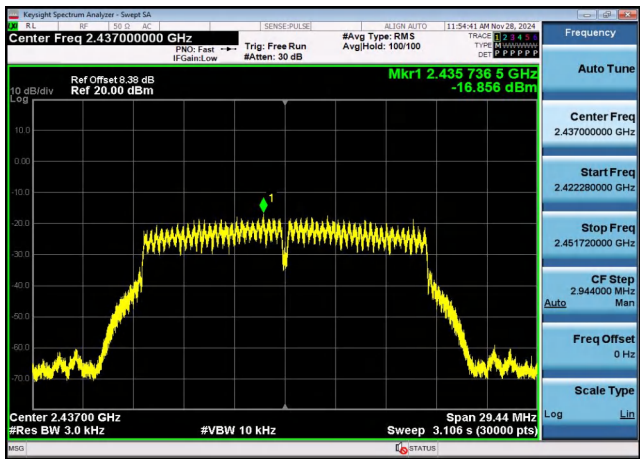

CH06




CH06

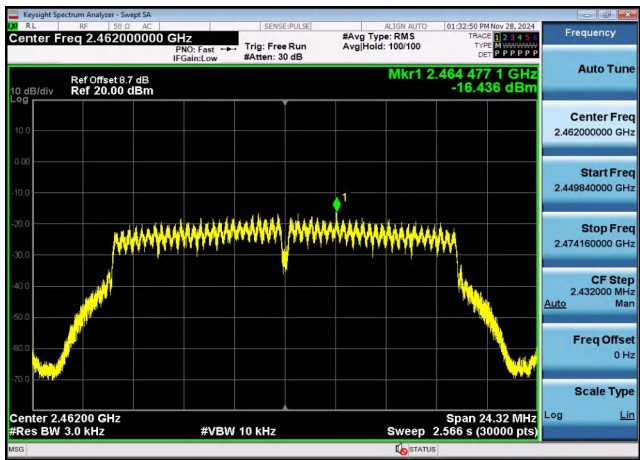


CH11

CH11


802.11n HT20

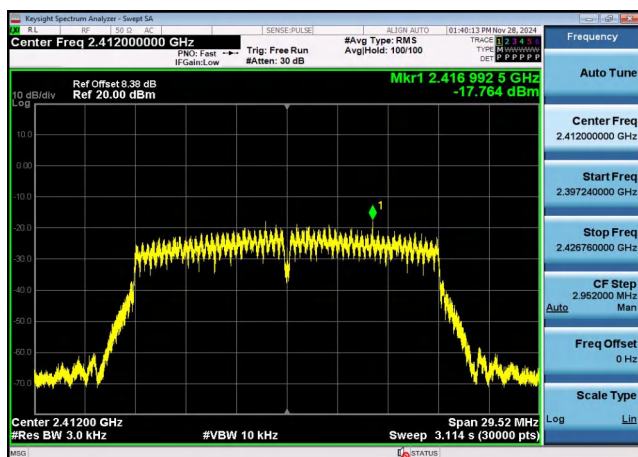


802.11n HT40

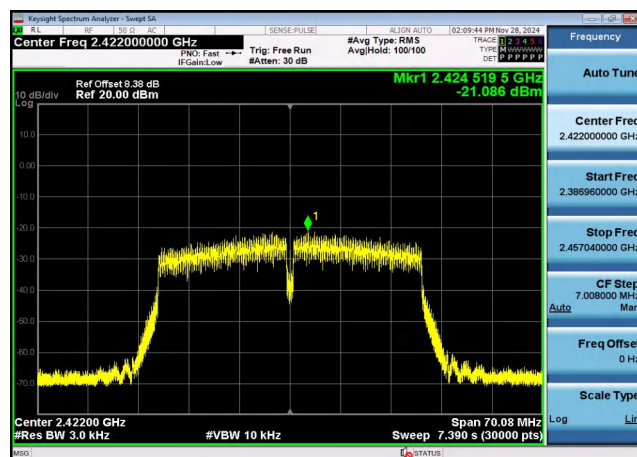


CH01

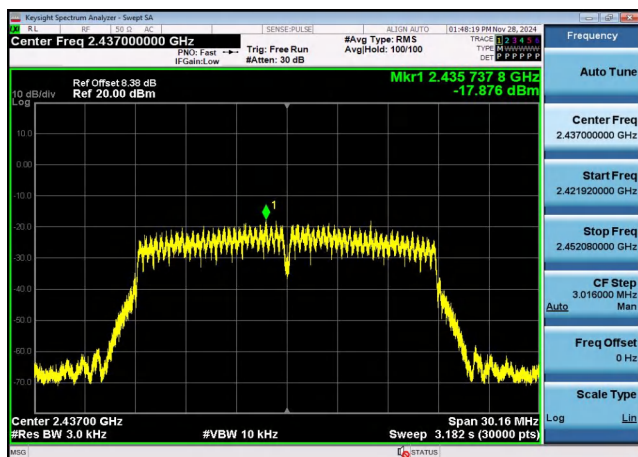


CH03

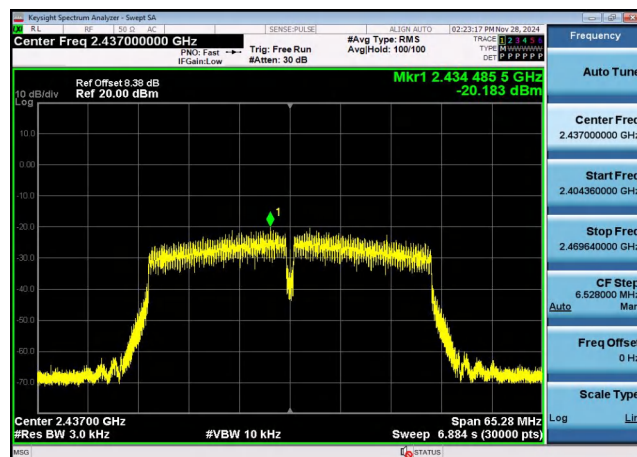

CH06

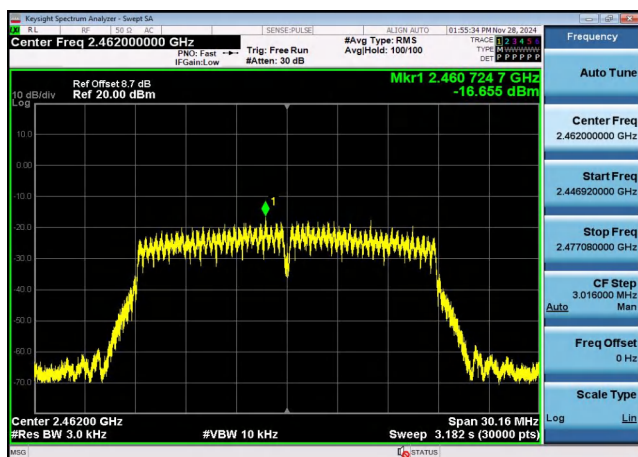

CH06

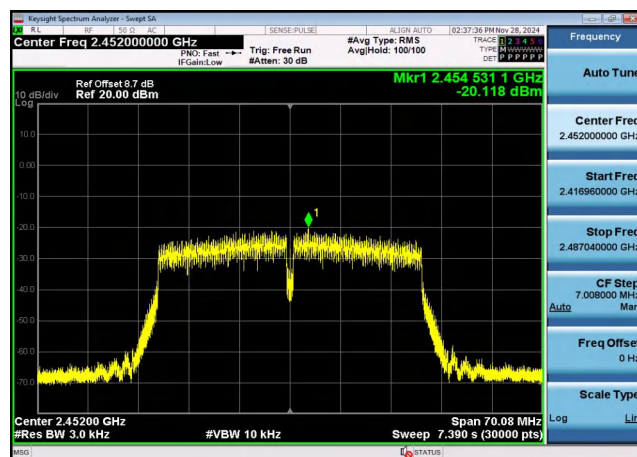

CH11

CH09

4.5 6dB Bandwidth


Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

Test Configuration



Test Results

Ant 1

Type	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11b	01	8.560	≥500	Pass
	06	9.000		
	11	9.040		
802.11g	01	13.440	≥500	Pass
	06	15.120		
	11	15.080		
802.11n HT20	01	15.440	≥500	Pass
	06	16.360		
	11	15.920		
802.11n HT40	03	35.040	≥500	Pass
	06	33.840		
	09	35.040		

Ant 2

Type	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11b	01	8.600	≥500	Pass
	06	9.040		
	11	7.880		
802.11g	01	15.080	≥500	Pass
	06	14.720		
	11	12.160		
802.11n HT20	01	14.760	≥500	Pass
	06	15.080		
	11	15.080		
802.11n HT40	03	35.040	≥500	Pass
	06	32.640		
	09	35.040		

Note:

- 1) Measured peak power spectrum density at difference data rate for each mode and recorded worst case for each mode.
- 2) Test results including cable loss;
- 3) Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40.


Please refer to following plots;

Ant 1

802.11b





802.11g

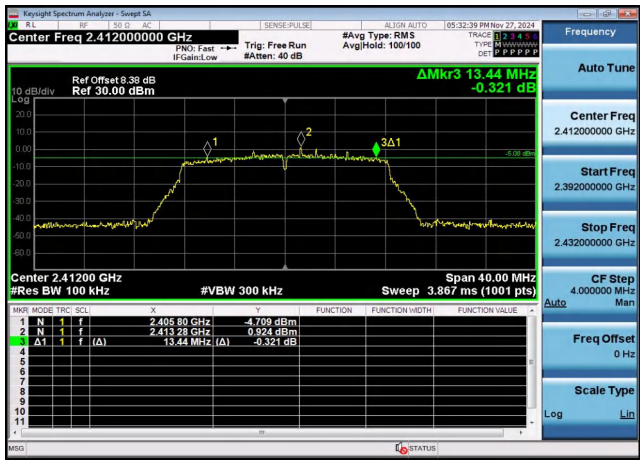



CH01

CH01

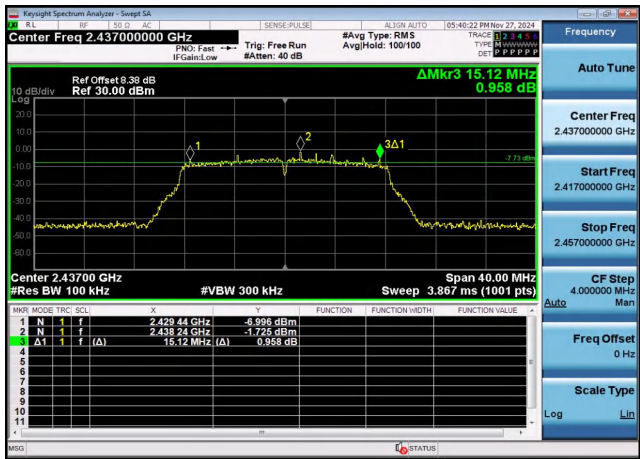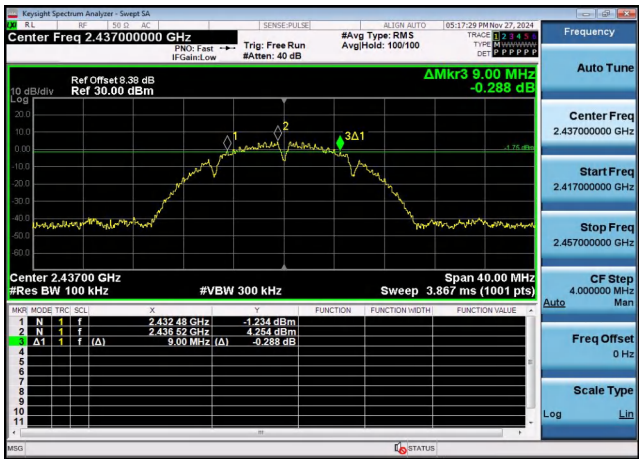

CH06

CH06

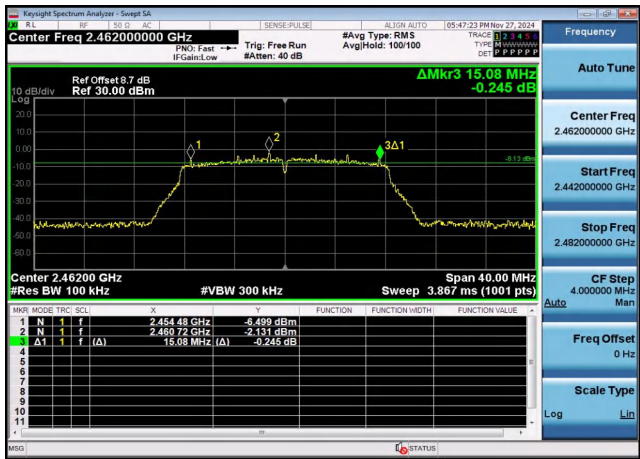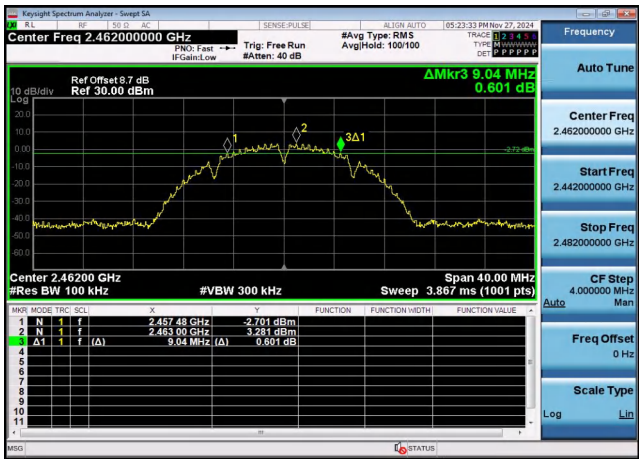


CH11

CH11

802.11n HT20




802.11n HT40

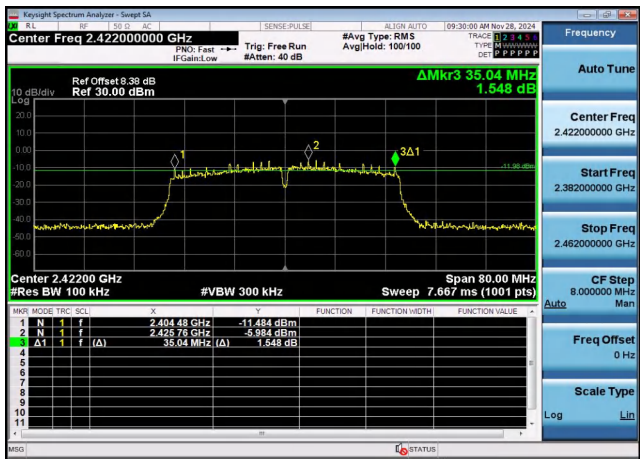


CH01




CH03

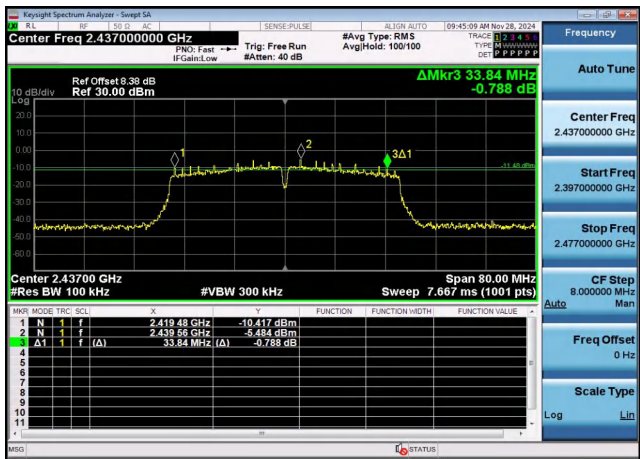

CH06

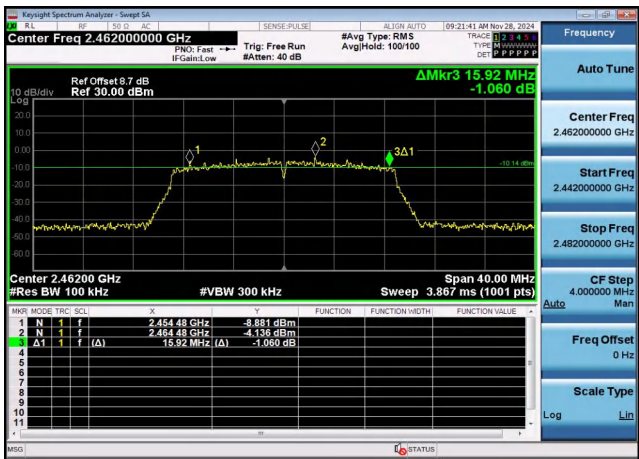

CH06

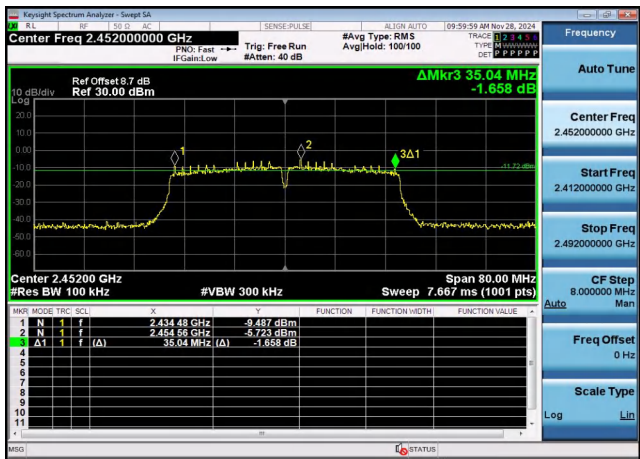

CH11

CH09

