

4.5 6dB Bandwidth


Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

Test Configuration



Test Results

Ant 1

Type	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11b	01	8.080	≥500	Pass
	06	8.080		
	11	8.000		
802.11g	01	14.960	≥500	Pass
	06	15.080		
	11	13.880		
802.11n HT20	01	13.840	≥500	Pass
	06	15.080		
	11	13.880		
802.11n HT40	03	34.000	≥500	Pass
	06	35.040		
	09	35.040		
802.11ax HE20	01	16.240	≥500	Pass
	06	18.480		
	11	18.320		
802.11ax HE40	03	35.840	≥500	Pass
	06	36.320		
	09	36.960		

Ant 2

Type	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11b	01	8.040	≥500	Pass
	06	8.040		
	11	8.080		
802.11g	01	14.480	≥500	Pass
	06	15.800		
	11	16.040		
802.11n HT20	01	14.200	≥500	Pass
	06	17.240		
	11	16.600		
802.11n HT40	03	35.040	≥500	Pass
	06	33.840		
	09	35.040		
802.11ax HE20	01	17.160	≥500	Pass
	06	17.480		
	11	18.560		
802.11ax HE40	03	36.640	≥500	Pass
	06	36.080		
	09	36.480		


Note:

- 1) Measured peak power spectrum density at difference data rate for each mode and recorded worst case for each mode.
- 2) Test results including cable loss;
- 3) Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40; 8.6Mbps at IEEE 802.11ax HE20; 17.2Mbps at IEEE 802.11ax HE40.


Please refer to following plots;

Ant 1

802.11b

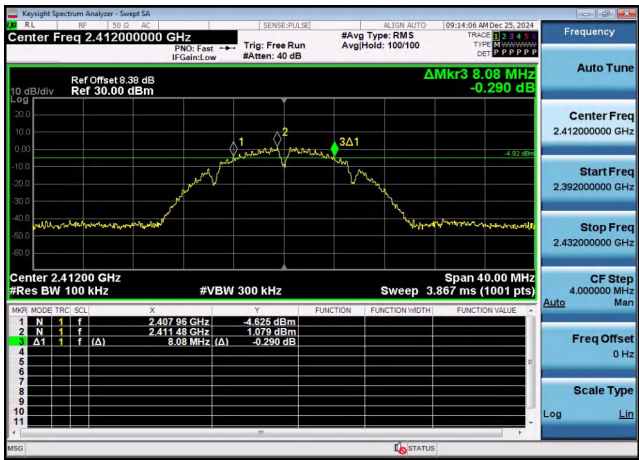

802.11g

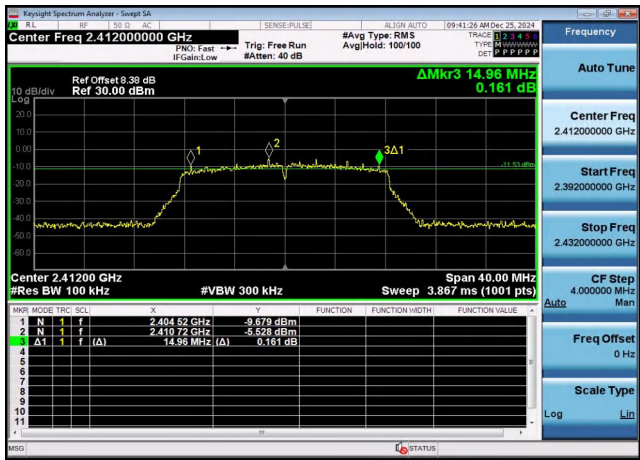


CH01




CH01



CH06

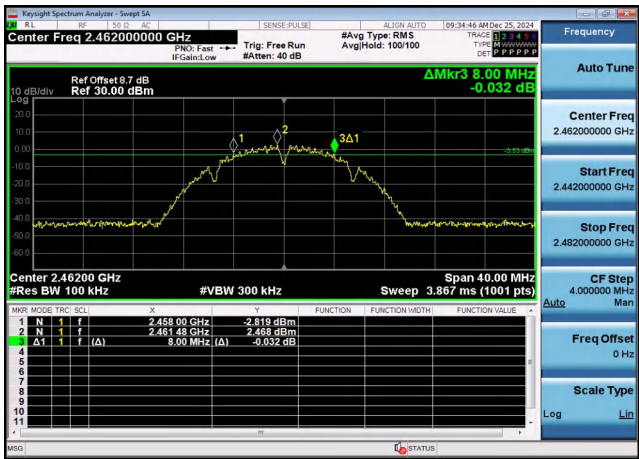


CH06

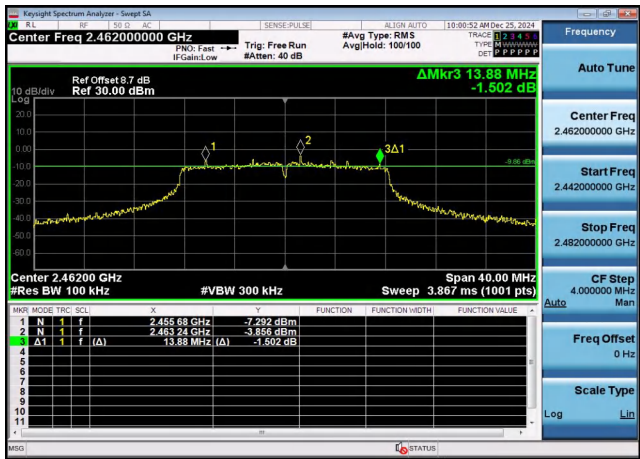


CH11

CH11

802.11n HT20

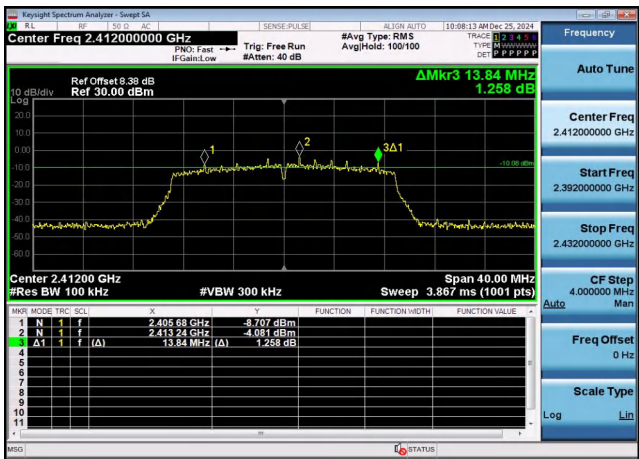


802.11n HT40

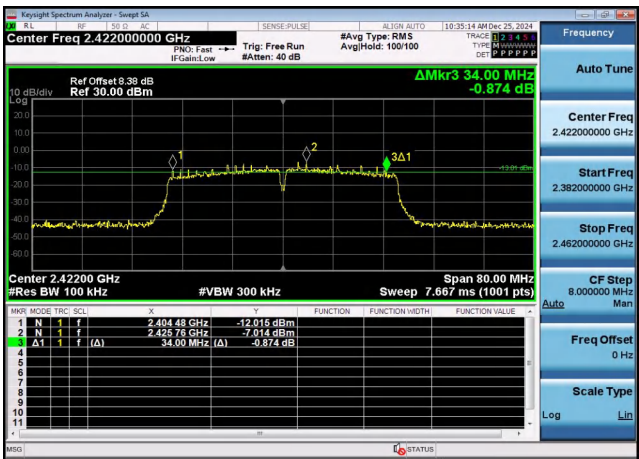

CH01




CH03

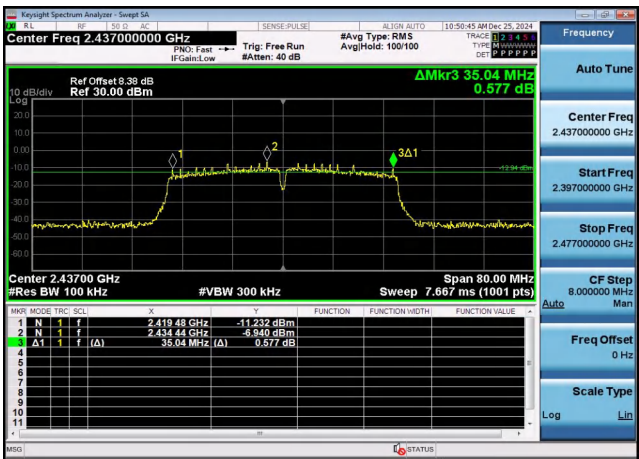

CH06




CH06

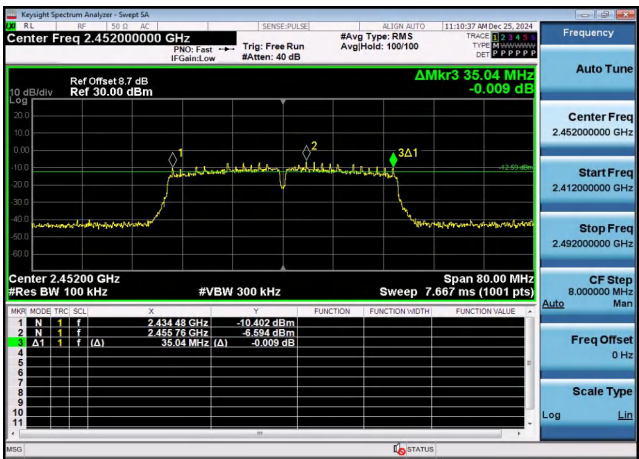


CH11

CH09


802.11ax HE20

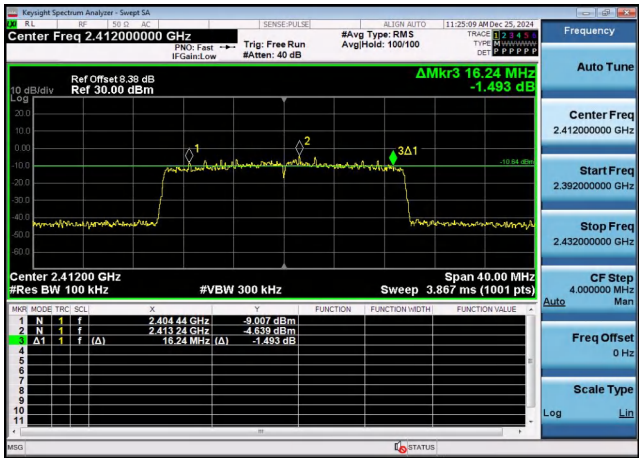


802.11ax HE40

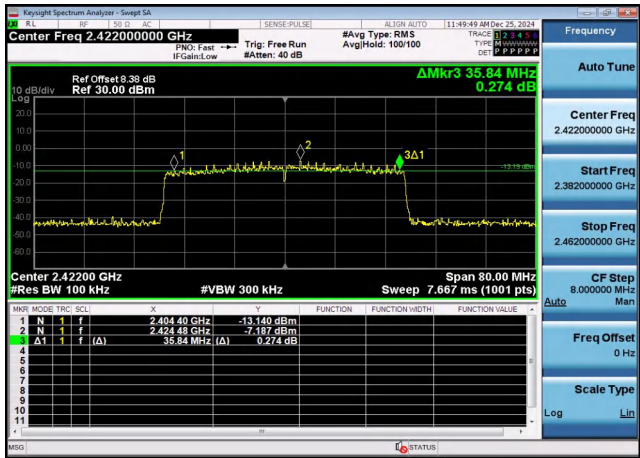


CH01

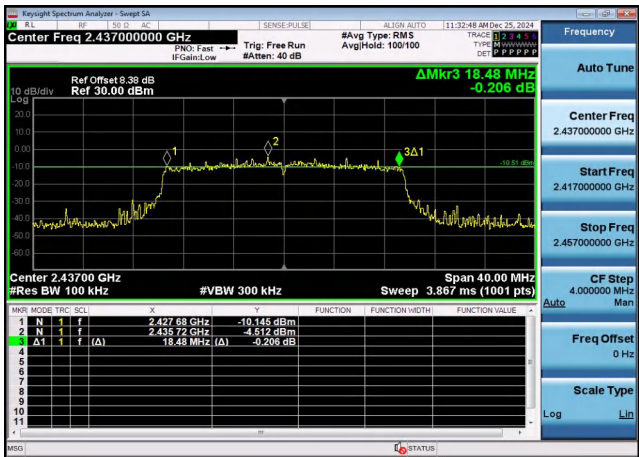


CH03

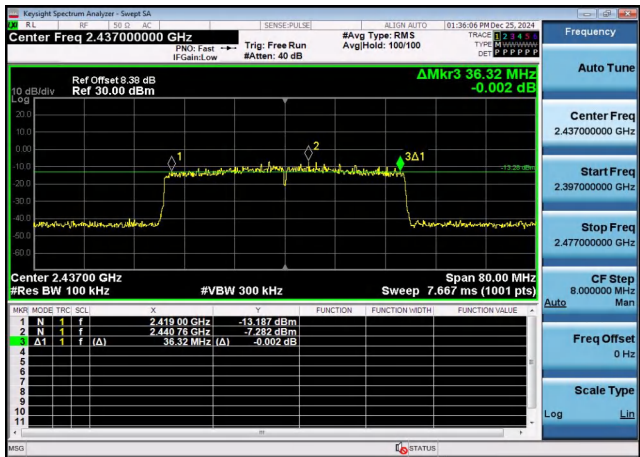

CH06

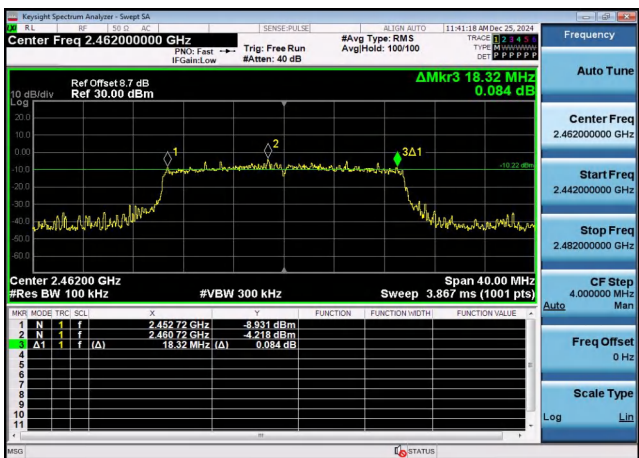

CH06

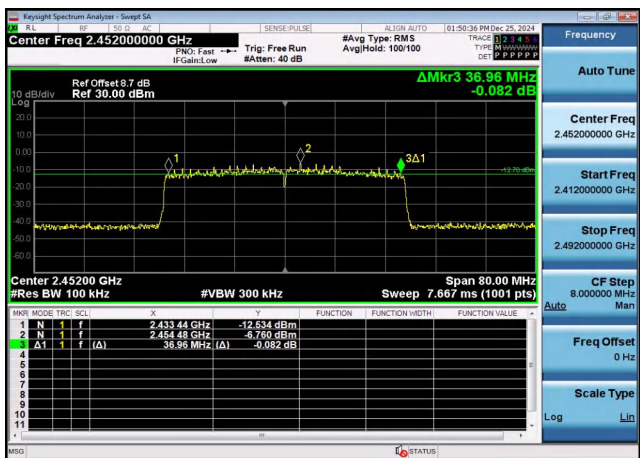


CH11


CH09

Ant 2

802.11b


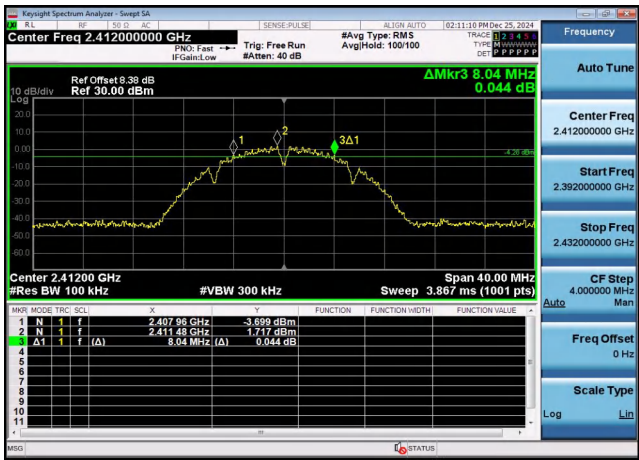


802.11g

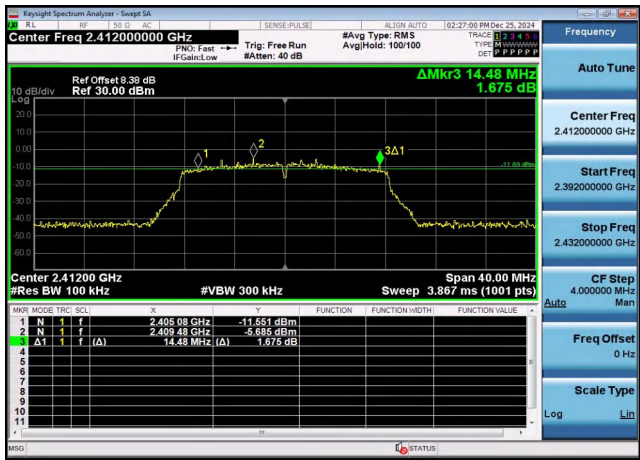



CH01

CH01

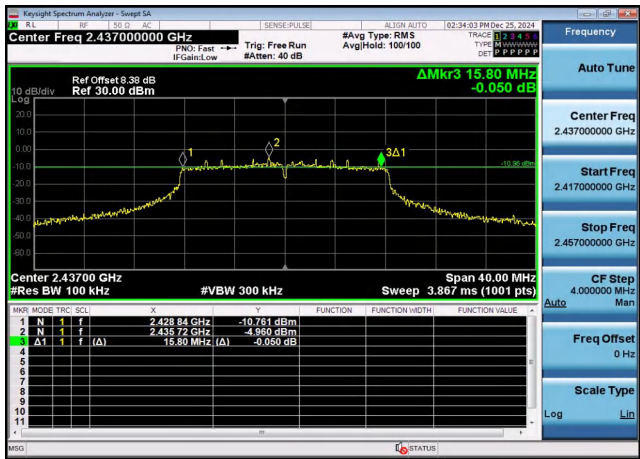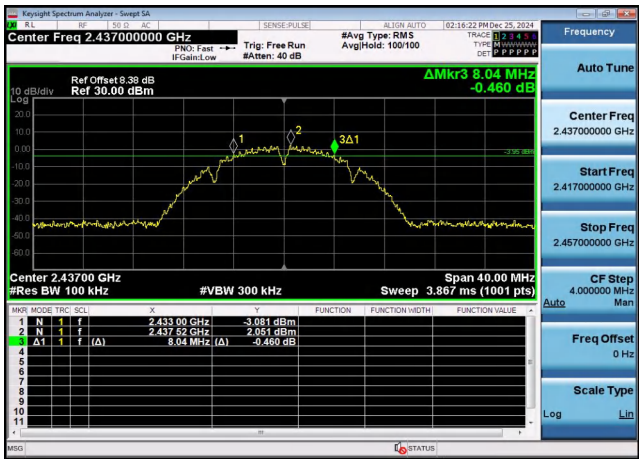

CH06


CH06

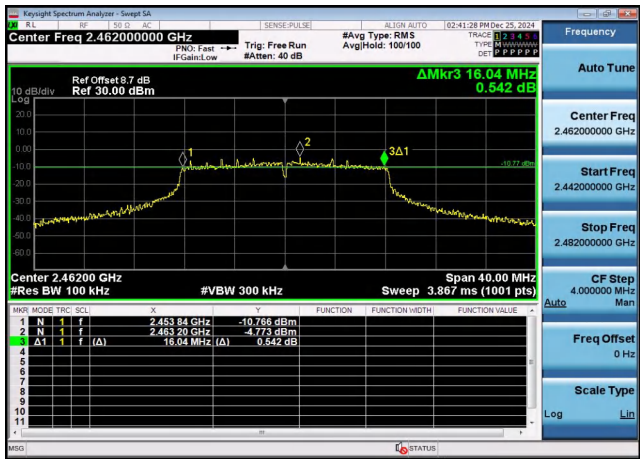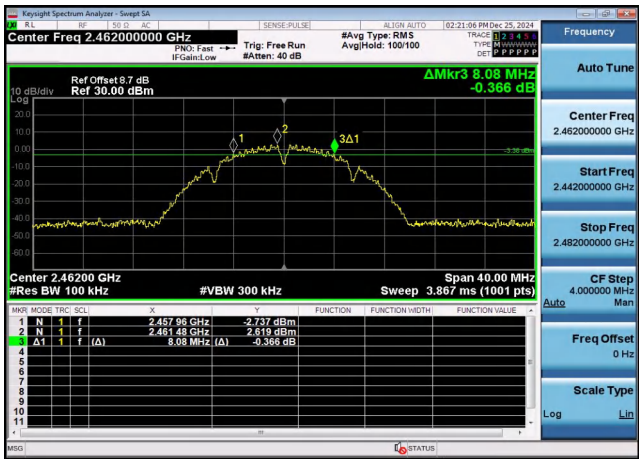


CH11

CH11


802.11n HT20

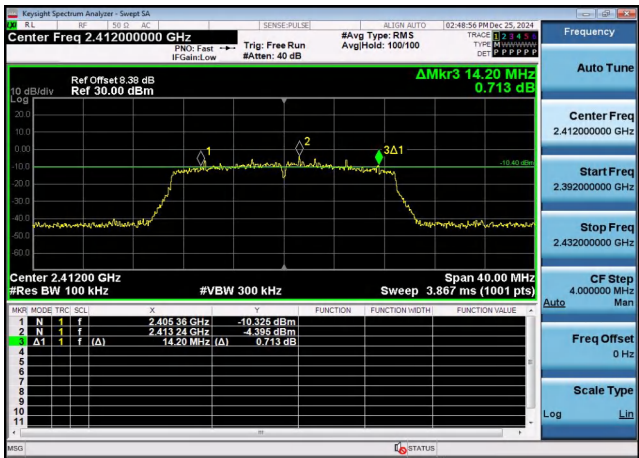


802.11n HT40

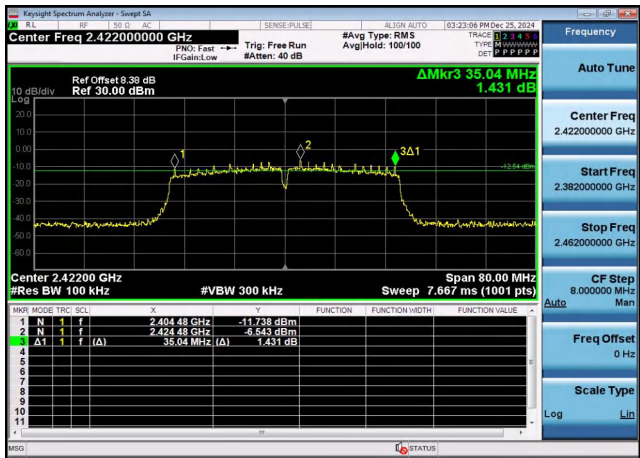

CH01

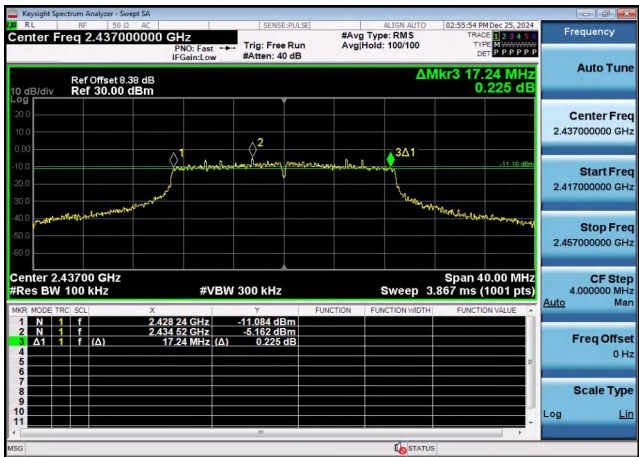


CH03

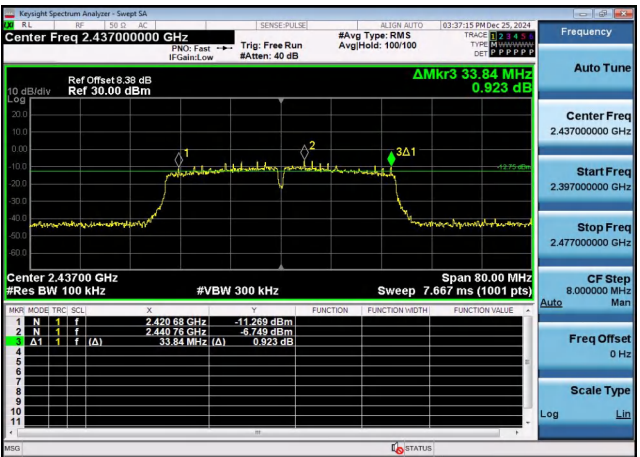

CH06




CH06

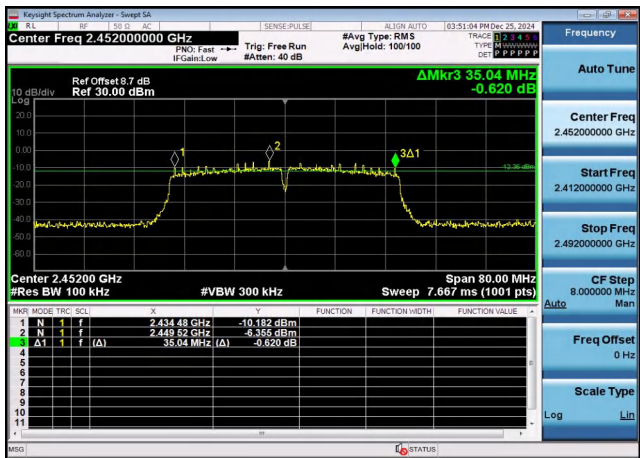


CH11

CH09


802.11ax HE20

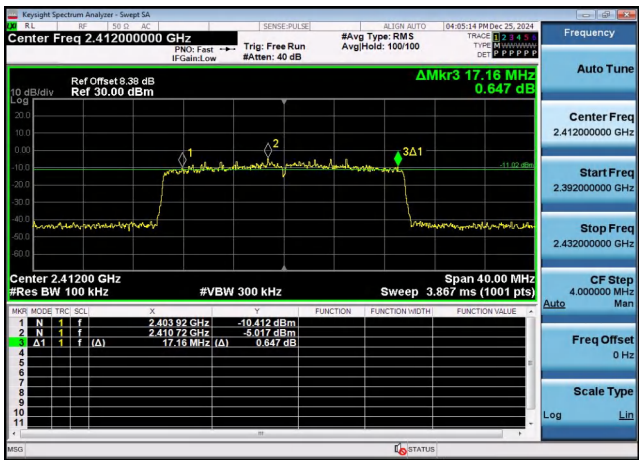


802.11ax HE40

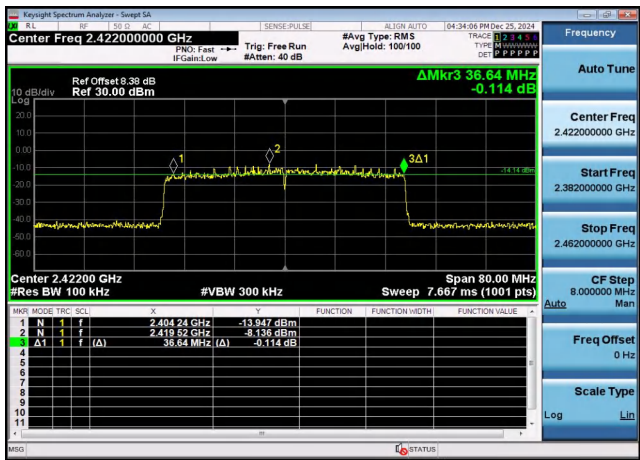


CH01

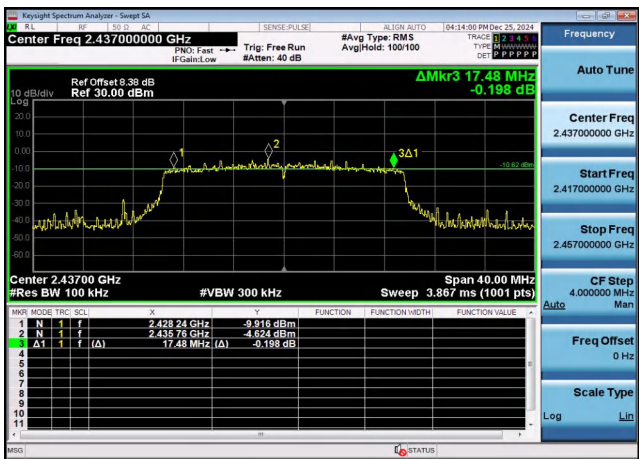


CH03

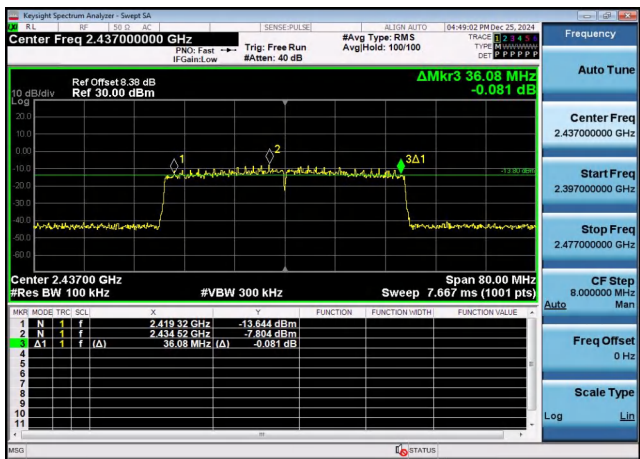

CH06

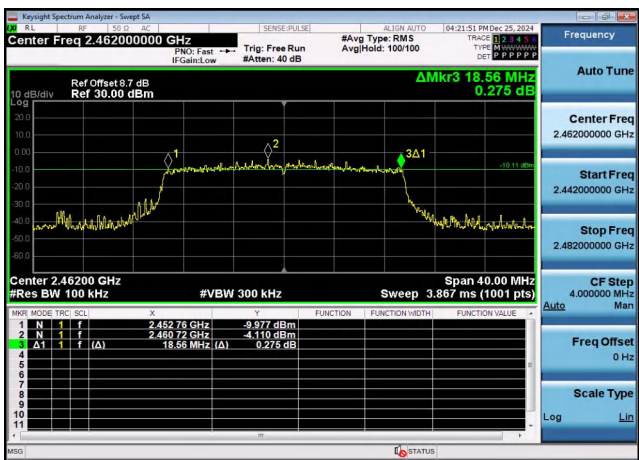

CH06

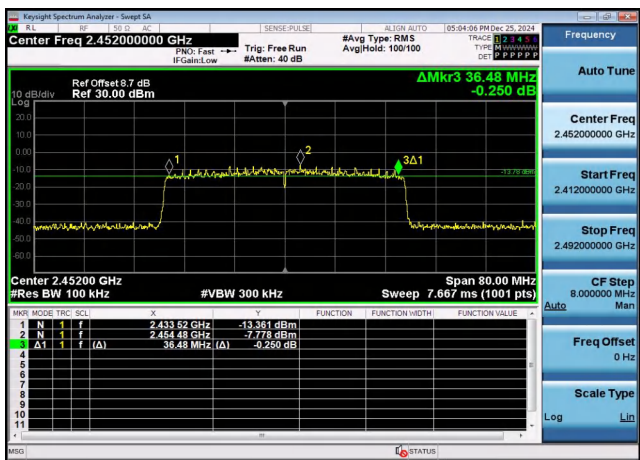

CH11



CH09



4.6 Out-of-band Emissions

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

Test Configuration




Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data. And record the worst data in the report.

Test plot as follows:

Ant 1

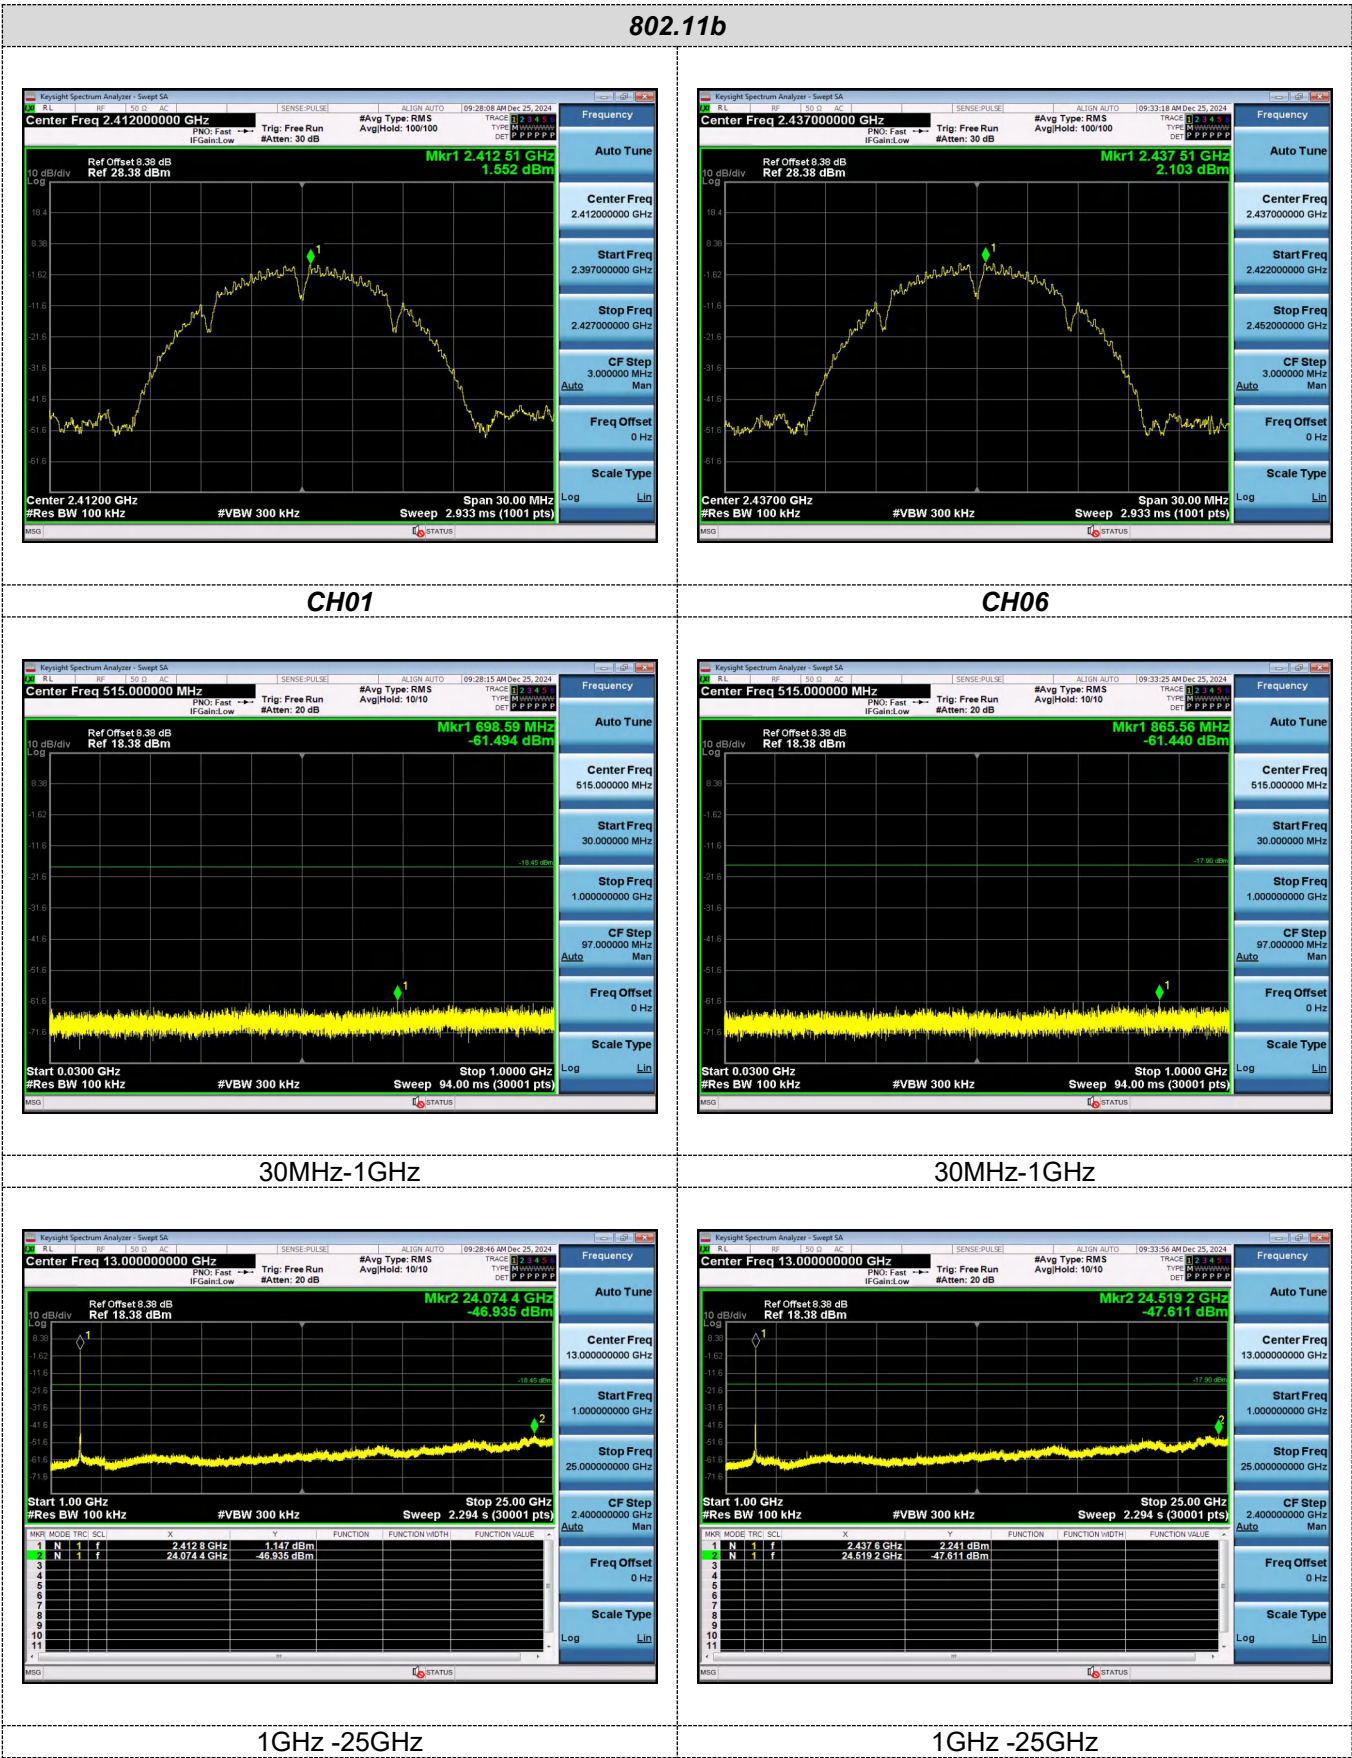


802.11b




802.11g




CH11

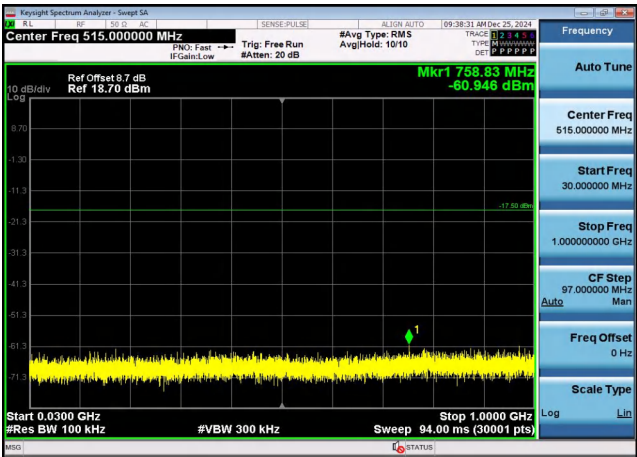


CH01

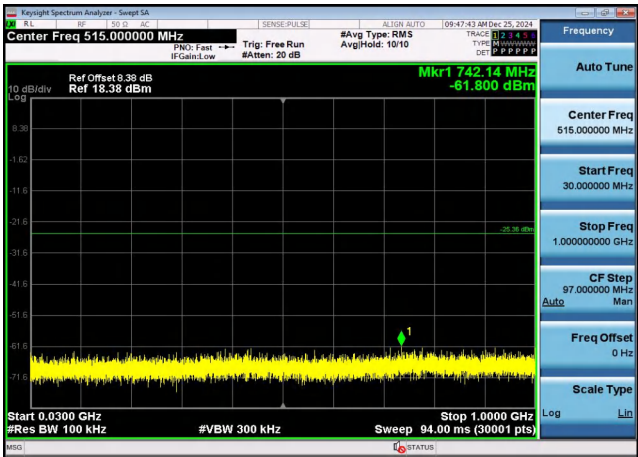

30MHz-1GHz

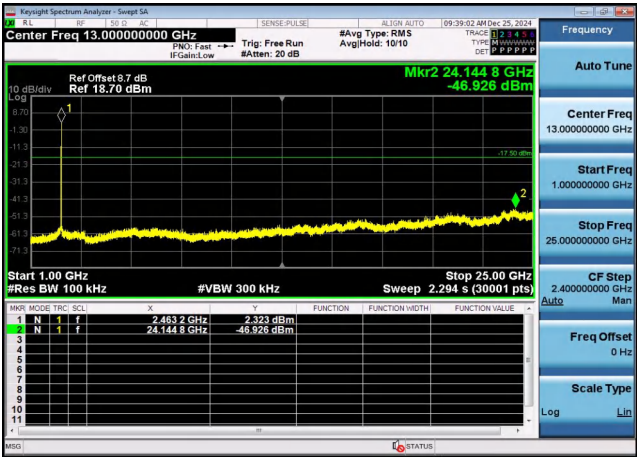

30MHz-1GHz

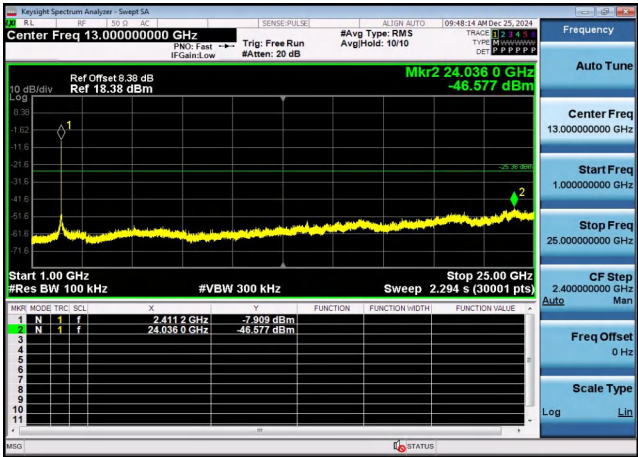

1GHz -25GHz

1GHz -25GHz