



Shenzhen GUOREN Certification Technology Service Co., Ltd.

101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community,
Fenghuang Street, Guangming District, Shenzhen, China

FCC PART 15 SUBPART E TEST REPORT

FCC PART 15 SUBPART E 15.407

Report Reference No......: **GRCTR240702037-04**

FCC ID.....: **SMC-V93**

Compiled by

(position+printed name+signature)..: Testing Engineer Jimmy Wang

Supervised by

(position+printed name+signature)..: Project Engineer Kelley Zhang

Approved by

(position+printed name+signature)..: Manager Sam Wang

Date of issue.....: **Aug. 07, 2024**

Testing Laboratory Name.....: **Shenzhen GUOREN Certification Technology Service Co., Ltd.**

Address.....: 101#, Building K & Building T, The Second Industrial Zone,
Jiazitang Community, Fenghuang Street, Guangming District,
Shenzhen, China

Applicant's name.....: **SHENZHEN HOLATEK CO., LTD.**

Address.....: #12,Building 1,Chongwen Park, Nanshan Zhiyuan,3370 Liuxian
Ave, Nanshan District, Shenzhen, China.

Test specification.....:

Standard.....: **FCC Part 15 Subpart E 15.407**

Shenzhen GUOREN Certification Technology Service Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen GUOREN Certification Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen GUOREN Certification Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: **Smart Projector**

Trade Mark.....: **JMGO**

Manufacturer.....: **SHENZHEN HOLATEK CO., LTD.**

Model/Type reference.....: **J92-5D5**

Listed Models: J92-5D2,J92-5D3,J92-5D4,J92-5D6,J92-5D7,J92-5D8,J92-5D9,J92-5DA,J92-5DB,J92-5DC,J92-5DD,J92-5DE,J92-5DF,J92-5DG,J92-5DH,J92-5DI,J92-5DJ,J92-5DK,J92-5DM,J92-5DN,J92-5DL,J92-5DO,J92-5DP,J92-5DQ,J92-5DR,J92-5DS,J92-5DT,J92-5DU,J92-5DV,J92-5DW,J92-5DX,J92-5DY,J92-5DZ

Firmware Version.....: **1.1.31.8**

Hardware Version.....: **Ver A**

Modulation: **OFDM**

Frequency.....: **From 5180MHz-5240MHz, 5745MHz-5825MHz**

Ratings.....: **DC 24V from external circuit**

Result.....: **PASS**

TEST REPORT

Equipment under Test : Smart Projector

Model /Type : J92-5D5

Listed Models : J92-5D2,J92-5D3,J92-5D4,J92-5D6,J92-5D7,J92-5D8,J92-5D9,J92-5DA,J92-5DB,J92-5DC,J92-5DD,J92-5DE,J92-5DF,J92-5DG,J92-5DH,J92-5DI,J92-5DJ,J92-5DK,J92-5DM,J92-5DN,J92-5DL,J92-5DO,J92-5DP,J92-5DQ,J92-5DR,J92-5DS,J92-5DT,J92-5DU,J92-5DV,J92-5DW,J92-5DX,J92-5DY,J92-5DZ

Applicant : SHENZHEN HOLATEK CO., LTD.

Address : #12,Building 1,Chongwen Park, Nanshan Zhiyuan,3370 Liuxian Ave, Nanshan District, Shenzhen, China.

Manufacturer : SHENZHEN HOLATEK CO., LTD.

Address : #12,Building 1,Chongwen Park, Nanshan Zhiyuan,3370 Liuxian Ave, Nanshan District, Shenzhen, China.

Test Result:	PASS
--------------	------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1 TEST STANDARDS	4
2 SUMMARY	5
2.1 General Remarks	5
2.2 Product Description	5
2.3 Equipment Under Test	6
2.4 Short description of the Equipment under Test (EUT)	6
2.5 EUT configuration	6
2.6 EUT operation mode	6
2.7 Block Diagram of Test Setup	6
2.8 Related Submittal(s) / Grant (s)	7
2.9 Modifications	7
3 TEST ENVIRONMENT	8
3.1 Address of the test laboratory	8
3.2 Test Facility	8
3.3 Environmental conditions	8
3.4 Test Description	8
3.5 Statement of the measurement uncertainty	9
3.6 Equipments Used during the Test	10
4 TEST CONDITIONS AND RESULTS	11
4.1 AC Power Conducted Emission	11
4.2 Radiated Emissions	14
4.3 Maximum Conducted Average Output Power	21
4.4 Power Spectral Density	28
4.5 Emission Bandwidth (26dB Bandwidth)	63
4.6 Minimum Emission Bandwidth (6dB Bandwidth)	79
4.7 Frequency Stability	95
4.8 Automatically Discontinue Transmission	98
4.9 Band edge for RF Conducted Emissions	99
5 TEST SETUP PHOTOS OF THE EUT	127
6 PHOTOS OF THE EUT	128

1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.407](#): UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE DEVICES.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 789033 D02](#): GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPART E

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	Jul. 28, 2024
Testing commenced on	:	Jul. 28, 2024
Testing concluded on	:	Aug. 07, 2024

2.2 Product Description

Product Name:	Smart Projector			
Model/Type reference:	J92-5D5			
Listed Models:	J92-5D2,J92-5D3,J92-5D4,J92-5D6,J92-5D7,J92-5D8,J92-5D9,J92-5DA,J92-5DB,J92-5DC,J92-5DD,J92-5DE,J92-5DF,J92-5DG,J92-5DH,J92-5DI,J92-5DJ,J92-5DK,J92-5DM,J92-5DN,J92-5DL,J92-5DO,J92-5DP,J92-5DQ,J92-5DR,J92-5DS,J92-5DT,J92-5DU,J92-5DV,J92-5DW,J92-5DX ,J92-5DY,J92-5DZ(The electrical circuit design, layout, components used and internal wiring are identical. Only the body color, pattern, sales customers, and sales regions are different)			
Power supply:	DC 24V from external circuit			
Adapter information:	M/N:NSA240EC-2401001 Input:AC 100-240V 50/60Hz 2.5A Output:DC 24V/10.0A			
Sample ID:	GRCTR240702037-1# (Engineer sample), GRCTR240702037-2# (Normal sample)			
WIFI				
Supported type:	20MHz system	40MHz system	80MHz system	160MHz system
	802.11a 802.11n 802.11ac 802.11ax	802.11n 802.11ac 802.11ax	N/A	N/A
Operation frequency:	5180MHz-5240MHz 5745MHz-5825MHz	5190MHz-5230MHz 5755MHz-5795MHz	N/A	N/A
Modulation:	OFDM	OFDM	N/A	N/A
Channel number:	9	4	N/A	N/A
Channel separation:	20MHz	40MHz	N/A	N/A
Antenna type:	FPC antenna			
Antenna gain*(Supplied by the customer):	Ant 1: 3.3 dBi for 5180MHz-5240MHz 3.3 dBi for 5745MHz-5825MHz Ant 2: 3.3 dBi for 5180MHz-5240MHz 3.2 dBi for 5745MHz-5825MHz			
Remark:*When the information provided by the customer was used to calculate test results, if the information provided by the customer is not accurate, shenzhen GUOREN Certification Technology Service Co., Ltd. does not assume any responsibility.				

2.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC 24V from external circuit

2.4 Short description of the Equipment under Test (EUT)

This is a Smart Projector.

For more details, refer to the user's manual of the EUT.

2.5 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

☐ - supplied by the manufacturer

☒ - supplied by the lab

☐ /	M/N: /
	Manufacturer: /

2.6 EUT operation mode


The Applicant provides communication tools software(SecureCRT) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) for testing meet KDB558074 test requirement.

Operation Frequency List WIFI on 5G Band:

Operating band	20MHz		40MHz		80MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII 1 (5150MHz-5250MHz)	36	5180	38	5190	42	5210
	40	5200				
	44	5220	46	5230		
	48	5240				
U-NII 3 (5725MHz-5850MHz)	149	5745	151	5755	155	5775
	153	5765				
	157	5785	159	5795		
	161	5805				
	165	5825	--	--	--	--

Note: The line display in gray is those Channels/Frequencies select to test in this report for each operation mode.

2.7 Block Diagram of Test Setup

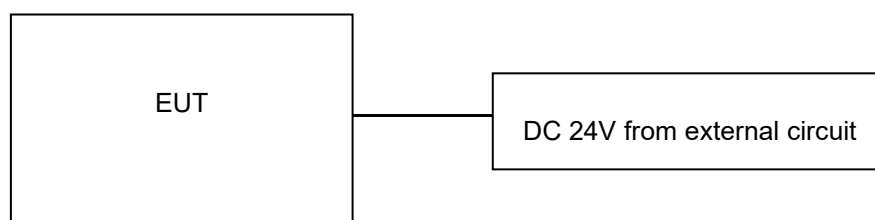

2.8 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.

2.9 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen GUOREN Certification Technology Service Co., Ltd.

101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community, Fenghuang Street, Guangming District, Shenzhen, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 920798 Designation Number: CN1304

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6202.01

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

ISED#: 27264 CAB identifier: CN0115

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

CNAS-Lab Code: L15631

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories for the Competence of Testing and Calibration Laboratories.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature	15-35 °C
Relative Humidity	30-60 %
Air Pressure	950-1050mbar

3.4 Test Description

FCC Requirement		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.407(a)	Emission Bandwidth(26dBm Bandwidth)	PASS ^{Note1}
FCC Part 15.407(e)	Minimum Emission Bandwidth(6dBm Bandwidth)	PASS ^{Note2}
FCC Part 15.407(a)	Maximum Conducted Output Power	PASS
FCC Part 15.407(a)	Peak Power Spectral Density	PASS
FCC Part 15.407(g)	Frequency Stability	PASS

FCC Part 15.407(b)	Undesirable emission	PASS
FCC Part 15.407(b)/15.205/15.209	Radiated Emissions	PASS
FCC Part 15.407(h)	Dynamic Frequency Selection	N/A Note 3
FCC Part 15.203/15.247(b)	Antenna Requirement	PASS
FCC Part 15.407(c)	Automatically Discontinue Transmission	PASS

Note 1: Apply to U-NII 1, U-NII 2A, and U-NII 2C band.

Note 2: Apply to U-NII 3 band only.

Note 3: This device not work in DFS band.

Note 4: N/A means “not applicable”.

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Conducted Output Power Power Spectral Density Emission Bandwidth(26dBm Bandwidth) Minimum Emission Bandwidth(6dBm Bandwidth) Undesirable emission Frequency Stability	11a/OFDM	6 Mbps
	11n HT20,11ac VHT20,ax HE20/OFDM	7.2 Mbps
	11n HT40,11ac VHT40,ax HE40/OFDM	15.0Mbps
	11ac VHT80,ax HE80/OFDM	65.0Mbps

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 “Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1” and TR-100028-02 “Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 “ and is documented in the Shenzhen GUOREN Certification Technology Service Co., Ltd.quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GUOREN Certification Technology Service Co., Ltd.:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.06 dB	(1)
Radiated Emission	1~18GHz	5.14 dB	(1)
Radiated Emission	18-40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.14 dB	(1)
Max output power	30MHz~18GHz	0.54 dB	(1)
Power spectral density	/	0.56 dB	(1)
Spectrum bandwidth	/	1.2%	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


3.6 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Equipment No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	GRCTEE009	2023/09/27	2024/09/26
LISN	R&S	ENV216	GRCTEE010	2023/09/27	2024/09/26
EMI Test Receiver	R&S	ESPI	GRCTEE017	2023/09/28	2024/09/27
EMI Test Receiver	R&S	ESCI	GRCTEE008	2023/09/27	2024/09/26
Spectrum Analyzer	Agilent	N9020A	GRCTEE002	2023/09/27	2024/09/26
Spectrum Analyzer	R&S	FSP	GRCTEE003	2023/09/28	2024/09/27
Vector Signal generator	Agilent	N5181A	GRCTEE007	2023/09/27	2024/09/26
Analog Signal Generator	R&S	SML03	GRCTEE006	2023/09/27	2024/09/26
Climate Chamber	QIYA	LCD-9530	GRCTES016	2023/09/27	2024/09/26
Ultra-Broadband Antenna	Schwarzbeck	VULB9163	GRCTEE018	2023/09/28	2026/09/27
Horn Antenna	Schwarzbeck	BBHA 9120D	GRCTEE019	2023/09/28	2026/09/27
Loop Antenna	Zhinan	ZN30900C	GRCTEE020	2023/10/15	2026/10/14
Horn Antenna	Beijing Hangwei Dayang	OBH100400	GRCTEE049	2023/09/28	2026/09/27
Amplifier	Schwarzbeck	BBV 9745	GRCTEE021	2023/09/27	2024/09/26
Amplifier	Taiwan chengyi	EMC051845B	GRCTEE022	2023/09/28	2024/09/27
Temperature/Humidity Meter	Huaguan	HG-308	GRCTES037	2023/09/27	2024/09/26
Directional coupler	NARDA	4226-10	GRCTEE004	2023/09/27	2024/09/26
High-Pass Filter	XingBo	XBLBQ-GTA18	GRCTEE053	2023/09/27	2024/09/26
High-Pass Filter	XingBo	XBLBQ-GTA27	GRCTEE054	2023/09/27	2024/09/26
Automated filter bank	Tonscend	JS0806-F	GRCTEE055	2023/09/27	2024/09/26
Power Sensor	Agilent	U2021XA	GRCTEE070	2023/09/27	2024/09/26
EMI Test Software	ROHDE & SCHWARZ	ESK1-V1.71	GRCTEE060	N/A	N/A
EMI Test Software	Fera	EZ-EMC	GRCTEE061	N/A	N/A

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Conducted Emission

TEST CONFIGURATION

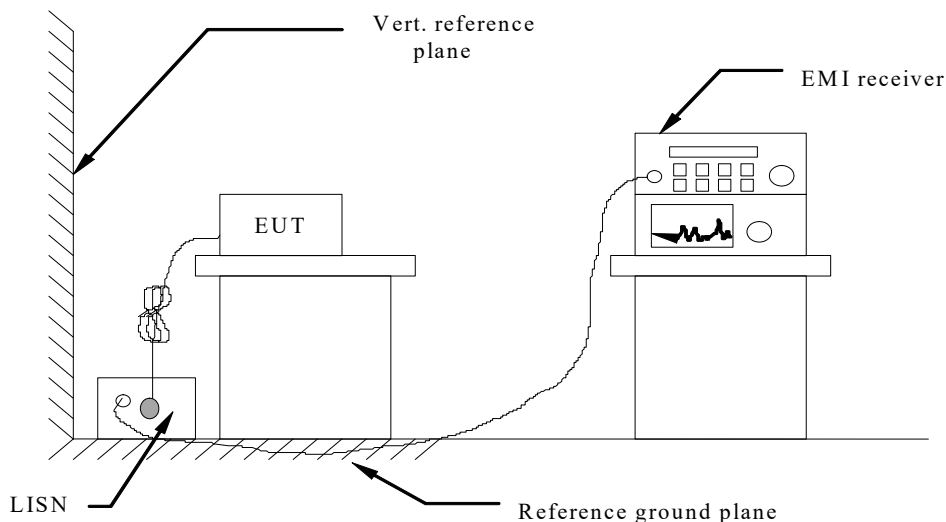

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

Remark:


1. All modes of 802.11a/ 802.11ac VHT20/802.11ac VHT40/802.11ac VHT80/ 802.11ax HE20/ 802.11ax HE40/802.11ax HE80/ 802.11n HT20/ 802.11n HT40 were tested at Low, Middle, and High channel; only the worst result of 802.11n HT20 CH36 was reported as below:
2. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:

Power supply:

DC 24V from Adapter AC
120V/60Hz

Polarization

L

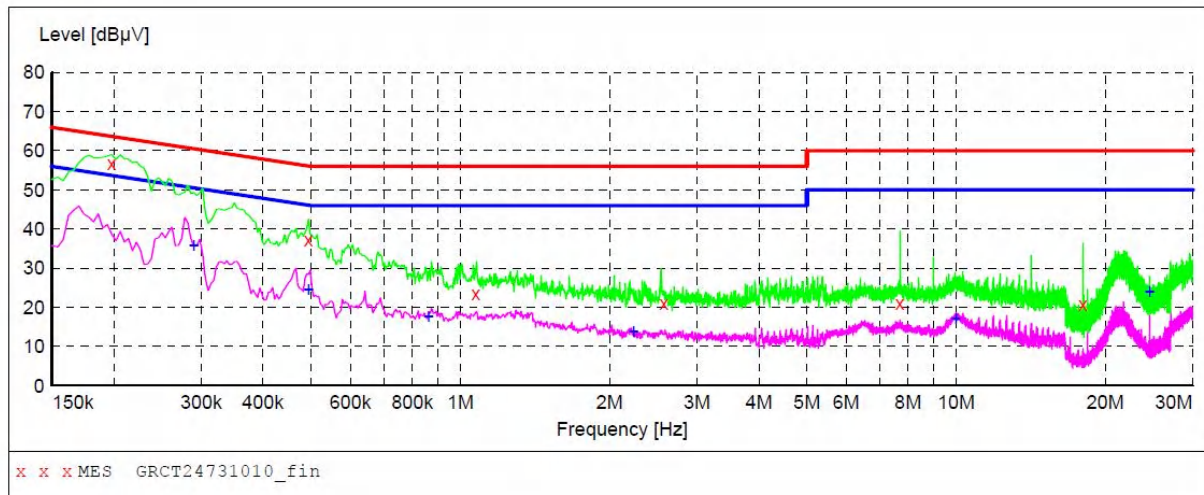**MEASUREMENT RESULT: "GRCT24731010_fin"**

7/31/2024 11:06AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.198000	56.70	9.5	64	7.0	QP	L1	GND
0.494000	37.20	9.7	56	18.9	QP	L1	GND
1.074000	23.60	10.0	56	32.4	QP	L1	GND
2.574000	21.00	10.0	56	35.0	QP	L1	GND
7.706000	21.10	10.0	60	38.9	QP	L1	GND
18.014000	20.60	10.1	60	39.4	QP	L1	GND

MEASUREMENT RESULT: "GRCT24731010_fin2"

7/31/2024 11:06AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.290000	35.90	9.6	51	14.6	AV	L1	GND
0.494000	24.70	9.7	46	21.4	AV	L1	GND
0.862000	17.80	9.7	46	28.2	AV	L1	GND
2.234000	14.00	10.0	46	32.0	AV	L1	GND
9.978000	17.20	10.0	50	32.8	AV	L1	GND
24.578000	24.10	10.2	50	25.9	AV	L1	GND

Note:1).Level (dBμV)= Reading (dBμV)+ Transducer (dB)

2). Transducer (dB)=insertion loss of LISN (dB) + Cable loss (dB)


3). Margin(dB) = Limit (dBμV) - Level (dBμV)

Power supply:

DC 24V from Adapter AC
120V/60Hz

Polarization

N

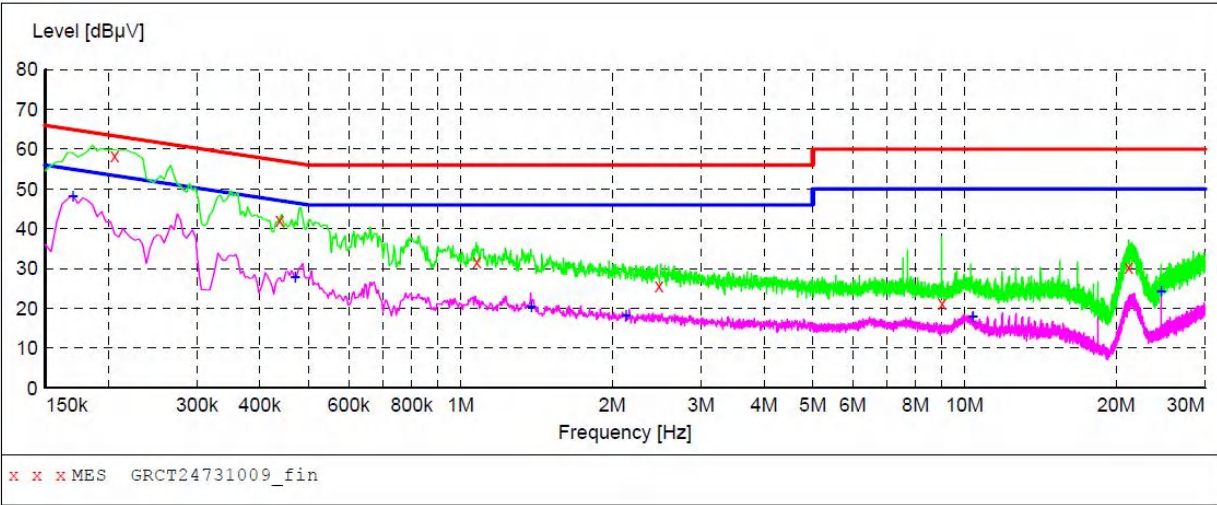

MEASUREMENT RESULT: "GRCT24731009_fin"

7/31/2024 11:01AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.206000	58.30	9.6	63	5.1	QP	N	GND
0.438000	42.10	9.8	57	15.0	QP	N	GND
1.078000	31.70	10.0	56	24.3	QP	N	GND
2.478000	25.60	10.0	56	30.4	QP	N	GND
9.030000	21.30	10.0	60	38.7	QP	N	GND
21.214000	30.50	10.2	60	29.5	QP	N	GND

MEASUREMENT RESULT: "GRCT24731009_fin2"

7/31/2024 11:01AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.170000	48.20	9.5	55	6.8	AV	N	GND
0.470000	28.00	9.7	47	18.5	AV	N	GND
1.382000	20.50	10.0	46	25.5	AV	N	GND
2.130000	18.40	10.0	46	27.6	AV	N	GND
10.390000	18.10	10.0	50	31.9	AV	N	GND
24.578000	24.30	10.2	50	25.7	AV	N	GND

- Note:1).Level (dBμV)= Reading (dBμV)+ Transducer (dB)
2). Transducer (dB)=insertion loss of LISN (dB) + Cable loss (dB)
3). Margin(dB) = Limit (dBμV) - Level (dBμV)

4.2 Radiated Emissions

Limit

The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Undesirable emission limits

Requirement	Limit(EIRP)	Limit (Field strength at 3m) ^{Note1}
15.407(b)(1)	PK:-27(dBm/MHz)	PK:68.2(dBμV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)		

Note1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$


- (5) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209
- (6) In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

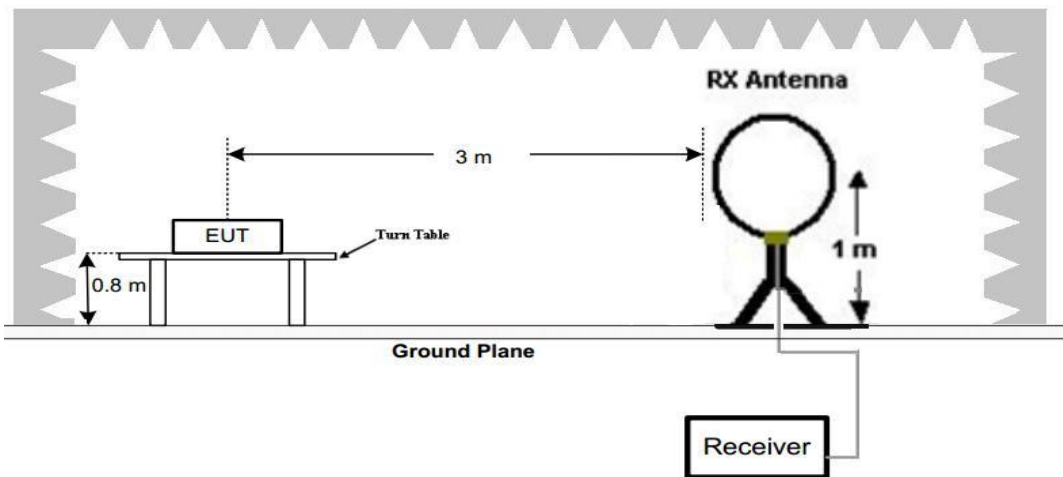

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

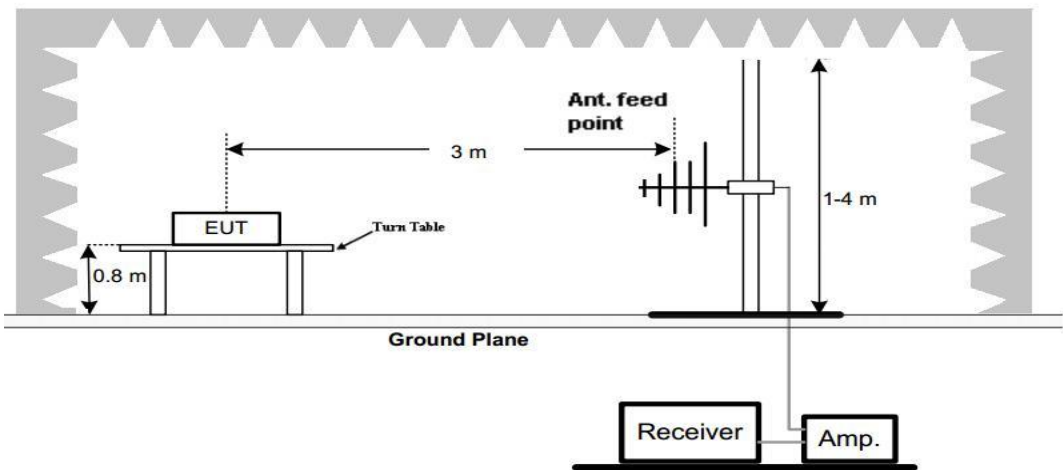

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

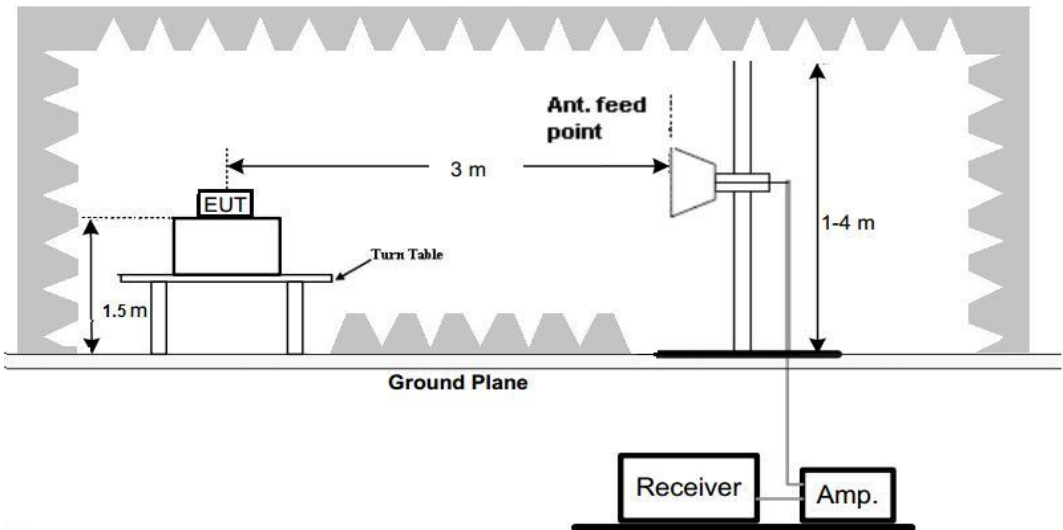

Test Procedure

- Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed.
- Radiated emission test frequency band from 9KHz to 40GHz.
- The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

- Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak


TEST RESULTS

Remark:

- This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
- All 802.11a/ 802.11ac VHT20/802.11ac VHT40/802.11ac VHT80/ 802.11ax HE20/ 802.11ax HE40/ 802.11ax HE80/ 802.11n HT20/ 802.11n HT40 modes have been tested for below 1GHz test, only the worst case 802.11n HT20 low channel of U-NII 1 band was recorded.
- All 802.11a/ 802.11ac VHT20/802.11ac VHT40/802.11ac VHT80/ 802.11ax HE20/ 802.11ax HE40/ 802.11ax HE80/ 802.11n HT20/ 802.11n HT40 modes have been tested for above 1GHz test, only the worst case 802.11n HT20 was recorded.
- Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

Horizontal

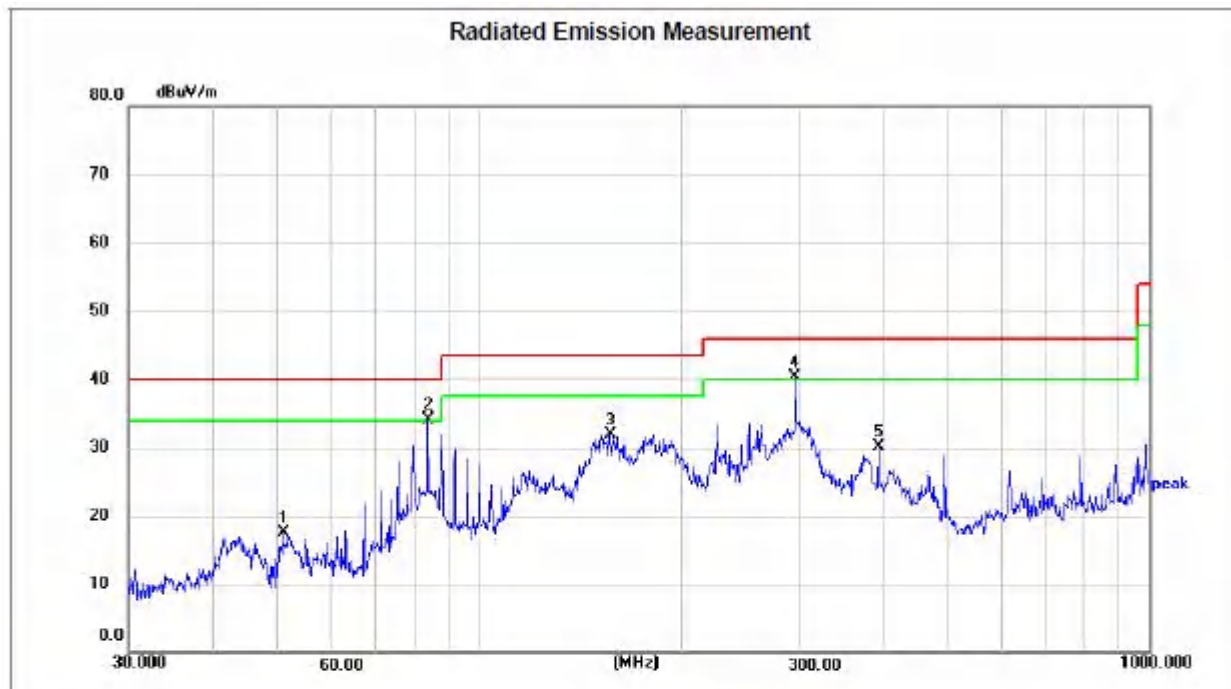

Site LAB

Limit: FCC Part15 RE-Class B_30-1000MHz

EUT: Smart Projector

M/N: J92-5D5

Mode: 802.11n (HT20) CH 36

Note: N/A

Polarization: *Horizontal*

Power: AC120V/60Hz

Distance: 3m

Temperature: 23(C)

Humidity: 51 %


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	51.1209	34.98	-17.53	17.45	40.00	-22.55	peak	200	7	P	
2 !	83.8156	56.09	-21.97	34.12	40.00	-5.88	peak	200	357	P	
3	156.4578	53.74	-21.90	31.84	43.50	-11.66	peak	200	61	P	
4 *	296.1836	57.39	-17.08	40.31	46.00	-5.69	peak	100	66	P	
5	394.8545	45.91	-15.79	30.12	46.00	-15.88	peak	100	316	P	

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Level (dBuV/m) - Limit (dBuV/m)

Vertical

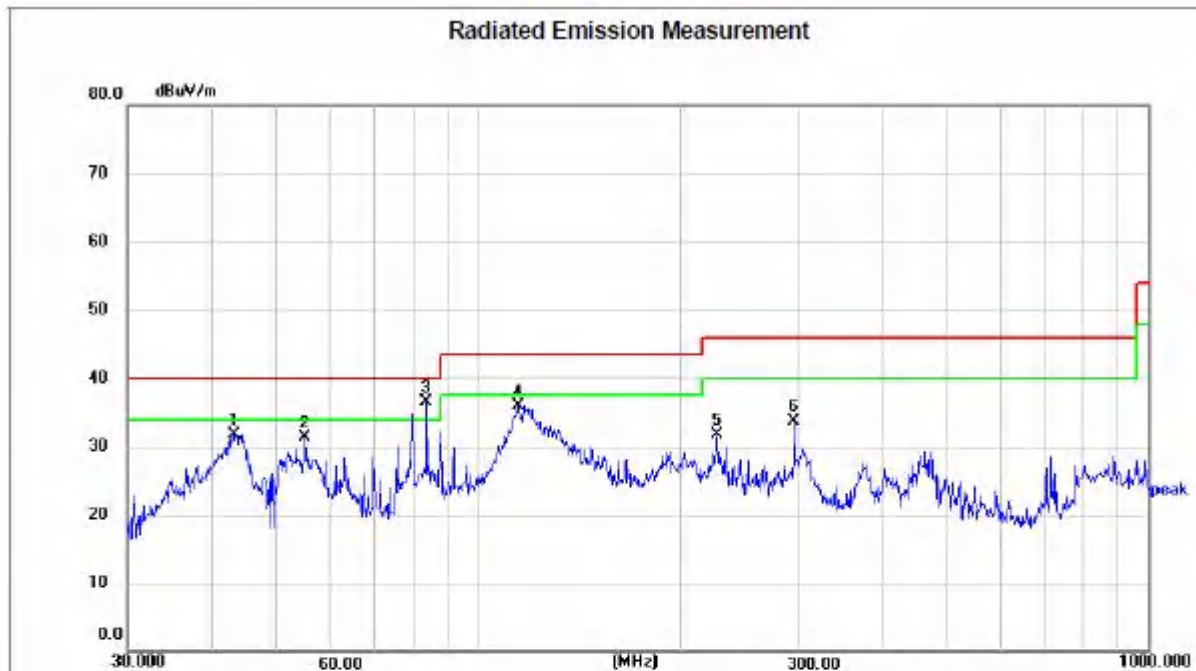

Site LAB

Polarization: *Vertical*

Temperature: 23(C)

Limit: FCC Part15 RE-Class B_30-1000MHz

Power: AC120V/60Hz

Humidity: 51 %

EUT: Smart Projector

Distance: 3m

M/N: J92-5D5

Mode: 802.11n (HT20) CH 36

Note: N/A

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	43.2014	49.39	-17.67	31.72	40.00	-8.28	peak	100	48	P	
2	55.2207	49.10	-17.83	31.27	40.00	-8.73	peak	100	123	P	
3 *	83.8155	58.44	-21.97	36.47	40.00	-3.53	peak	100	96	P	
4	114.9167	55.73	-19.75	35.98	43.50	-7.52	peak	100	325	P	
5	226.8935	50.30	-18.62	31.68	46.00	-14.32	peak	100	78	P	
6	296.1836	50.75	-17.08	33.67	46.00	-12.33	peak	100	111	P	

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Level (dBuV/m) - Limit (dBuV/m)

For 1GHz to 40GHz

U-NII 1 & 802.11n HT20 Mode (above 1GHz)

[illegible][illegible]

U-NII 3 & 802.11n HT20 Mode (above 1GHz)

Tested	Frequency	Emission	Detector	ANT	Limit	Margin	Raw	Antenna	Cable	Pre	Correction
Channel	(MHz)	Level	Mode	Pol	(dBuV/m)	(dB)	Value	Factor	Factor	amplifier	Factor
		(dBuV/m)					(dBuV)	(dB/m)	(dB)	(dB)	(dB/m)
	5650.00	51.54	PK	H	68.30	16.76	69.9	30.54	5.74	54.64	-18.36
	5700.00	51.78	PK	H	105.30	53.52	70	30.61	5.83	54.66	-18.22
149.00	5720.00	52.24	PK	H	110.90	58.66	70.11	30.82	6.02	54.71	-17.87
	5725.00	51.54	PK	H	122.30	70.76	69.39	30.83	6.05	54.73	-17.85
(5745MHz)	11490.00	50.12	PK	H	68.20	18.08	54.87	39.23	10.83	54.81	-4.75
	--	--	--	--	--	--	--	--	--	--	--
157.00	11570.00	51.09	PK	H	68.20	17.11	55.54	39.34	10.96	54.75	-4.45
(5785MHz)	--	--	--	--	--	--	--	--	--	--	--
	5850.00	51.54	PK	H	122.30	70.76	69.26	30.85	6.08	54.65	-17.72
165.00	5855.00	51.45	PK	H	110.90	59.45	69.16	30.87	6.10	54.68	-17.71
	5875.00	52.57	PK	H	105.30	52.73	70.26	30.90	6.13	54.72	-17.69
	5925.00	50.78	PK	H	68.30	17.52	68.32	30.94	6.15	54.63	-17.54
(5825MHz)	11650.00	51.41	PK	H	68.20	16.79	55.12	39.42	11.15	54.28	-3.71
	--	--	--	--	--	--	--	--	--	--	--

Tested	Frequency	Emission	Detector	ANT	Limit	Margin	Raw	Antenna	Cable	Pre	Correction
Channel	(MHz)	Level	Mode	Pol	(dBuV/m)	(dB)	Value	Factor	Factor	amplifier	Factor
		(dBuV/m)					(dBuV)	(dB/m)	(dB)	(dB)	(dB/m)
	5650.00	51.45	PK	V	68.30	16.85	69.81	30.54	5.74	54.64	-18.36
	5700.00	52.08	PK	V	105.30	53.22	70.30	30.61	5.83	54.66	-18.22
149.00	5720.00	51.37	PK	V	110.90	59.53	69.24	30.82	6.02	54.71	-17.87
	5725.00	51.81	PK	V	122.30	70.49	69.66	30.83	6.05	54.73	-17.85
(5745MHz)	11490.00	51.71	PK	V	68.20	16.49	56.46	39.23	10.83	54.81	-4.75
	--	--	--	--	--	--	--	--	--	--	--
157.00	11570.00	51.25	PK	V	68.20	16.95	55.70	39.34	10.96	54.75	-4.45
(5785MHz)	--	--	--	--	--	--	--	--	--	--	--
	5850.00	52.68	PK	V	122.30	69.62	70.40	30.85	6.08	54.65	-17.72
165.00	5855.00	51.46	PK	V	110.90	59.44	69.17	30.87	6.10	54.68	-17.71
	5875.00	51.57	PK	V	105.30	53.73	69.26	30.90	6.13	54.72	-17.69
	5925.00	50.36	PK	V	68.20	17.84	67.90	30.94	6.15	54.63	-17.54
(5825MHz)	11650.00	51.22	PK	V	68.20	16.98	54.93	39.42	11.15	54.28	-3.71
	--	--	--	--	--	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the other emission levels were very low against the limit.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
6. Worst case data at 6Mbps at IEEE 802.11a, MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40, IEEE 802.11ac VHT20 ,IEEE 802.11ac VHT40,IEEE 802.11ac VHT80, IEEE 802.11ax HE20 ,IEEE 802.11ax HE40 and IEEE 802.11ax HE80.

4.3 Maximum Conducted Average Output Power

Limit

For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.


For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration



Test Results**Ant 1****U-NII 1**

Type	Channel	Output power (dBm)	Limit (dBm)	Result
802.11a	36	11.18	23.98	Pass
	40	10.83		
	48	11.80		
802.11n HT20	36	10.75	23.98	Pass
	40	10.24		
	48	11.20		
802.11n HT40	38	10.65	23.98	Pass
	46	11.23		
802.11ac VHT20	36	10.79	23.98	Pass
	40	10.26		
	48	11.15		
802.11ac VHT40	38	10.65	23.98	Pass
	46	11.19		
802.11ac VHT80	42	9.48	23.98	Pass
802.11ax HE20	36	11.42	23.98	Pass
	40	10.97		
	48	11.87		
802.11ax HE40	38	10.82	23.98	Pass
	46	10.35		
802.11ax HE80	42	8.77	23.98	Pass

U-NII 3

Type	Channel	Output power (dBm)	Limit (dBm)	Result
802.11a	149	11.21	30.00	Pass
	157	10.75		
	165	11.57		
802.11n HT20	149	10.60	30.00	Pass
	157	10.13		
	165	10.95		
802.11n HT40	151	10.36	30.00	Pass
	159	10.43		
802.11ac VHT20	149	10.57	30.00	Pass
	157	10.04		
	165	10.93		
802.11ac VHT40	151	10.35	30.00	Pass
	159	10.40		
802.11ac VHT80	155	9.76	30.00	Pass
802.11ax HE20	149	11.37	30.00	Pass
	157	10.86		
	165	11.71		
802.11ax HE40	151	9.54	30.00	Pass
	159	9.65		
802.11ax HE80	155	8.15	30.00	Pass

Ant 2**U-NII 1**

Type	Channel	Output power (dBm)	Limit (dBm)	Result
802.11a	36	11.67	23.98	Pass
	40	11.78		
	48	10.00		
802.11n HT20	36	11.13	23.98	Pass
	40	11.20		
	48	10.34		
802.11n HT40	38	11.02	23.98	Pass
	46	10.58		
802.11ac VHT20	36	11.09	23.98	Pass
	40	11.22		
	48	10.34		
802.11ac VHT40	38	11.95	23.98	Pass
	46	10.44		
802.11ac VHT80	42	8.71	23.98	Pass
802.11ax HE20	36	11.79	23.98	Pass
	40	12.07		
	48	11.15		
802.11ax HE40	38	10.18	23.98	Pass
	46	10.69		
802.11ax HE80	42	7.75	23.98	Pass

U-NII 3

Type	Channel	Output power (dBm)	Limit (dBm)	Result
802.11a	149	12.85	30.00	Pass
	157	12.31		
	165	12.25		
802.11n HT20	149	11.18	30.00	Pass
	157	10.69		
	165	10.60		
802.11n HT40	151	11.56	30.00	Pass
	159	11.22		
802.11ac VHT20	149	11.17	30.00	Pass
	157	10.63		
	165	10.54		
802.11ac VHT40	151	11.53	30.00	Pass
	159	11.10		
802.11ac VHT80	155	9.31	30.00	Pass
802.11ax HE20	149	12.87	30.00	Pass
	157	12.28		
	165	11.76		
802.11ax HE40	151	10.59	30.00	Pass
	159	10.14		
802.11ax HE80	155	8.37	30.00	Pass

MIMO**U-NII 1**

Type	Channel	Output power Ant 1(dBm)	Output power Ant 2(dBm)	Output power MIMO(dBm)	Limit (dBm)	Result
802.11n HT20	36	10.75	11.13	13.95	23.98	Pass
	40	10.24	11.20	13.76		
	48	11.20	10.34	13.80		
802.11n HT40	38	10.65	11.02	13.85	23.98	Pass
	46	11.23	10.58	13.93		
802.11ac VHT20	36	10.79	11.09	13.95	23.98	Pass
	40	10.26	11.22	13.78		
	48	11.15	10.34	13.77		
802.11ac VHT40	38	10.65	11.95	14.36	23.98	Pass
	46	11.19	10.44	13.84		
802.11ac VHT80	42	9.48	8.71	12.12	23.98	Pass
802.11ax HE20	36	11.42	11.79	14.62	23.98	Pass
	40	10.97	12.07	14.57		
	48	11.87	11.15	14.54		
802.11ax HE40	38	10.82	10.18	13.52	23.98	Pass
	46	10.35	10.69	13.53		
802.11ax HE80	42	8.77	7.75	11.30	23.98	Pass

U-NII 3

Type	Channel	Output power Ant 1(dBm)	Output power Ant 2(dBm)	Output power MIMO(dBm)	Limit (dBm)	Result
802.11n HT20	149	10.60	11.18	13.91	30	Pass
	157	10.13	10.69	13.43		
	165	10.95	10.60	13.79		
802.11n HT40	151	10.36	11.56	14.01	30	Pass
	159	10.43	11.22	13.85		
802.11ac VHT20	149	10.57	11.17	13.89	30	Pass
	157	10.04	10.63	13.36		
	165	10.93	10.54	13.75		
802.11ac VHT40	151	10.35	11.53	13.99	30	Pass
	159	10.40	11.10	13.77		
802.11ac VHT80	155	9.76	9.31	12.55	30	Pass
802.11ax HE20	149	11.37	12.87	15.19	30	Pass
	157	10.86	12.28	14.64		
	165	11.71	11.76	14.75		
802.11ax HE40	151	9.54	10.59	13.11	30	Pass
	159	9.65	10.14	12.91		
802.11ax HE80	155	8.15	8.37	11.27	30	Pass

4.4 Power Spectral Density

Limit

(1) For the band 5.15 - 5.25 GHz.

(i) For an outdoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.^{note1}

(ii) For an indoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band.^{note1}

(iii) For fixed point-to-point access points operating in the band 5.15 - 5.25 GHz, transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.

(iv) For mobile and portable client devices in the 5.15 - 5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 MHz band.^{note1}

(2) For the 5.25 - 5.35 GHz and 5.47 - 5.725 GHz bands, the peak power spectral density shall not exceed 11 dBm in any 1 MHz band.^{note1}

(3) For the band 5.725 - 5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band.^{note1, note2}

Note1: If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note2: Fixed point - to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW = 1MHz for U-NII 1, U-NII 2A, U-NII C band and 300KHz for U-NII 3 band.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to encompass the entire EBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.

Test Configuration



Test Results**Ant 1**

Type	Bands	Channel	Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)	Result
802.11a	U-NII 1	36	0.80	11	Pass
		40	0.38		
		48	1.84		
802.11n HT20	U-NII 1	36	0.25		
		40	-0.38		
		48	0.74		
802.11n HT40	U-NII 1	38	-1.97		
		46	-1.24		
802.11ac VHT20	U-NII 1	36	0.31		
		40	-0.43		
		48	0.88		
802.11ac VHT40	U-NII 1	38	-1.93		
		46	-1.30		
802.11ac VHT80	U-NII 1	42	-5.47		
802.11ax HE20	U-NII 1	36	1.06		
		40	-0.08		
		48	1.28		
802.11ax HE40	U-NII 1	38	-1.27		
		46	-1.23		
802.11ax HE80	U-NII 1	42	-5.05		

Type	Bands	Channel	Power Spectral Density (dBm/300KHz)	Power Spectral Density (dBm/500KHz)	Limit (dBm/500KHz)	Result
802.11a	U-NII 3	149	-1.98	0.238	30	Pass
		157	-2.44	-0.222		
		165	-1.61	0.608		
802.11n HT20	U-NII 3	149	-2.85	-0.632		
		157	-2.91	-0.692		
		165	-2.49	-0.272		
802.11n HT40	U-NII 3	151	-5.57	-3.352		
		159	-5.36	-3.142		
802.11ac VHT20	U-NII 3	149	-2.69	-0.472		
		157	-3.29	-1.072		
		165	-2.40	-0.182		
802.11ac VHT40	U-NII 3	151	-5.16	-2.942		
		159	-4.92	-2.702		
802.11ac VHT80	U-NII 3	155	-9.12	-6.902		
802.11ax HE20	U-NII 3	149	-1.76	0.458		
		157	-2.96	-0.742		
		165	-1.95	0.268		
802.11ax HE40	U-NII 3	151	-4.04	-1.822		
		159	-3.73	-1.512		
802.11ax HE80	U-NII 3	155	-7.19	-4.972		

Remark: $P.S.D(dBm/500KHz) = P.S.D(dBm/300KHz) + 10 \log(500 \text{ kHz}/300KHz)$.

Ant 2

Type	Bands	Channel	Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)	Result
802.11a	U-NII 1	36	1.40	11	Pass
		40	1.42		
		48	-0.27		
802.11n HT20	U-NII 1	36	0.54		
		40	0.64		
		48	-1.12		
802.11n HT40	U-NII 1	38	-0.61		
		46	-2.12		
802.11ac VHT20	U-NII 1	36	0.47		
		40	0.62		
		48	-1.17		
802.11ac VHT40	U-NII 1	38	-0.57		
		46	-2.27		
802.11ac VHT80	U-NII 1	42	-4.88		
802.11ax HE20	U-NII 1	36	0.78		
		40	1.38		
		48	-0.65		
802.11ax HE40	U-NII 1	38	-1.31		
		46	-3.30		
802.11ax HE80	U-NII 1	42	-5.97		

Type	Bands	Channel	Power Spectral Density (dBm/300KHz)	Power Spectral Density (dBm/500KHz)	Limit (dBm/500KHz)	Result
802.11a	U-NII 3	149	-0.38	1.838	30	Pass
		157	-0.89	1.328		
		165	-1.20	1.018		
802.11n HT20	U-NII 3	149	-2.12	0.098		
		157	-2.65	-0.432		
		165	-2.84	-0.622		
802.11n HT40	U-NII 3	151	-3.79	-1.572		
		159	-4.40	-2.182		
802.11ac VHT20	U-NII 3	149	-2.34	-0.122		
		157	-2.71	-0.492		
		165	-3.12	-0.902		
802.11ac VHT40	U-NII 3	151	-4.08	-1.862		
		159	-4.59	-2.372		
802.11ac VHT80	U-NII 3	155	-8.27	-6.052		
802.11ax HE20	U-NII 3	149	-0.77	1.448		
		157	-1.48	0.738		
		165	-1.65	0.568		
802.11ax HE40	U-NII 3	151	-2.95	-0.732		
		159	-3.41	-1.192		
802.11ax HE80	U-NII 3	155	-6.28	-4.062		

Remark: $P.S.D(dBm/500KHz) = P.S.D(dBm/300KHz) + 10 \log(500 \text{ kHz}/300KHz)$.

MIMO**U-NII 1**


Type	Channel	Power Spectral Density Ant 1 (dBm/MHz)	Power Spectral Density Ant 2 (dBm/MHz)	Power Spectral Density MIMO (dBm/MHz)	Limit (dBm/MHz)	Result
802.11n HT20	36	0.25	0.54	3.41	11	Pass
	40	-0.38	0.64	3.17		
	48	0.74	-1.12	2.92		
802.11n HT40	38	-1.97	-0.61	1.77		
	46	-1.24	-2.12	1.35		
802.11ac VHT20	36	0.31	0.47	3.40		
	40	-0.43	0.62	3.14		
	48	0.88	-1.17	2.99		
802.11ac VHT40	38	-1.93	-0.57	1.81		
	46	-1.30	-2.27	1.25		
802.11ac VHT80	42	-5.47	-4.88	-2.15		
802.11ax HE20	36	1.06	0.78	3.93		
	40	-0.08	1.38	3.72		
	48	1.28	-0.65	3.43		
802.11ax HE40	38	-1.27	-1.31	1.72		
	46	-1.23	-3.30	0.87		
802.11ax HE80	42	-5.05	-5.97	-2.48		


U-NII 3

Type	Channel	Power Spectral Density Ant 1 (dBm/500KHz)	Power Spectral Density Ant 2 (dBm/500KHz)	Power Spectral Density MIMO (dBm/500KHz)	Limit (dBm/500KHz)	Result
802.11n HT20	149	-0.632	0.098	2.76	30	Pass
	157	-0.692	-0.432	2.45		
	165	-0.272	-0.622	2.57		
802.11n HT40	151	-3.352	-1.572	0.64		
	159	-3.142	-2.182	0.37		
802.11ac VHT20	149	-0.472	-0.122	2.72		
	157	-1.072	-0.492	2.24		
	165	-0.182	-0.902	2.48		
802.11ac VHT40	151	-2.942	-1.862	0.64		
	159	-2.702	-2.372	0.48		
802.11ac VHT80	155	-6.902	-6.052	-3.45		
802.11ax HE20	149	0.458	1.448	3.99		
	157	-0.742	0.738	3.07		
	165	0.268	0.568	3.43		
802.11ax HE40	151	-1.822	-0.732	1.77		
	159	-1.512	-1.192	1.66		
802.11ax HE80	155	-4.972	-4.062	-1.48		


Test plot as follows

Ant 1

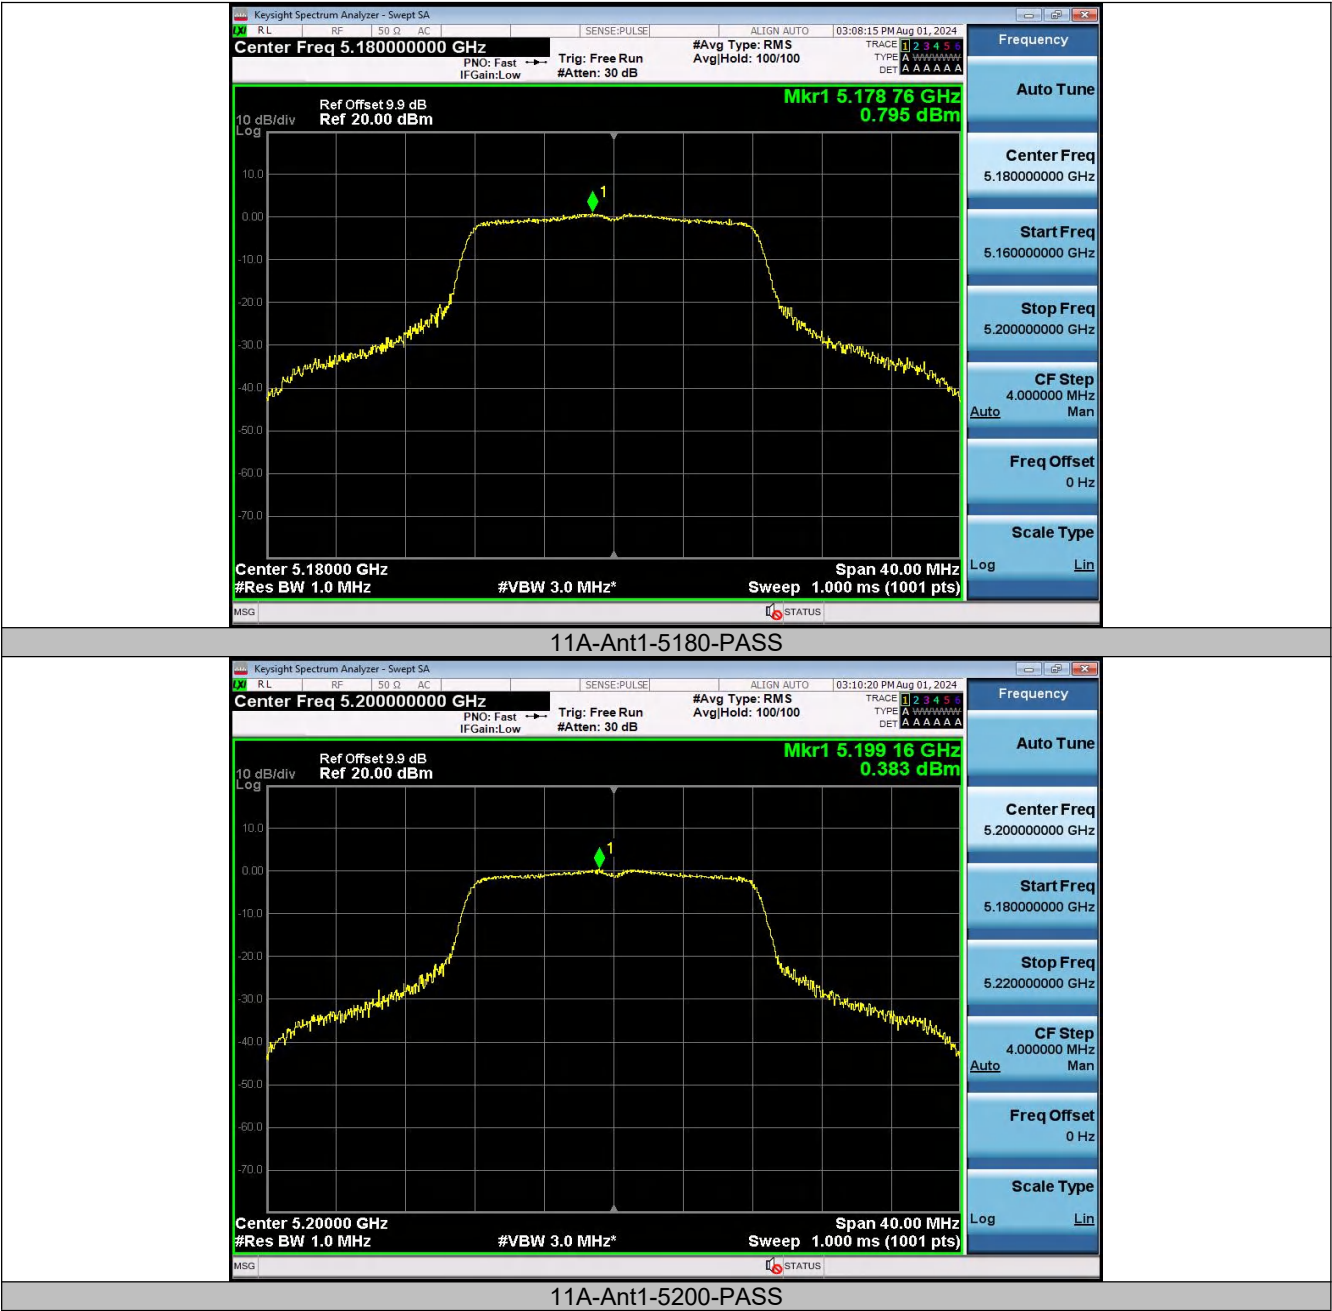


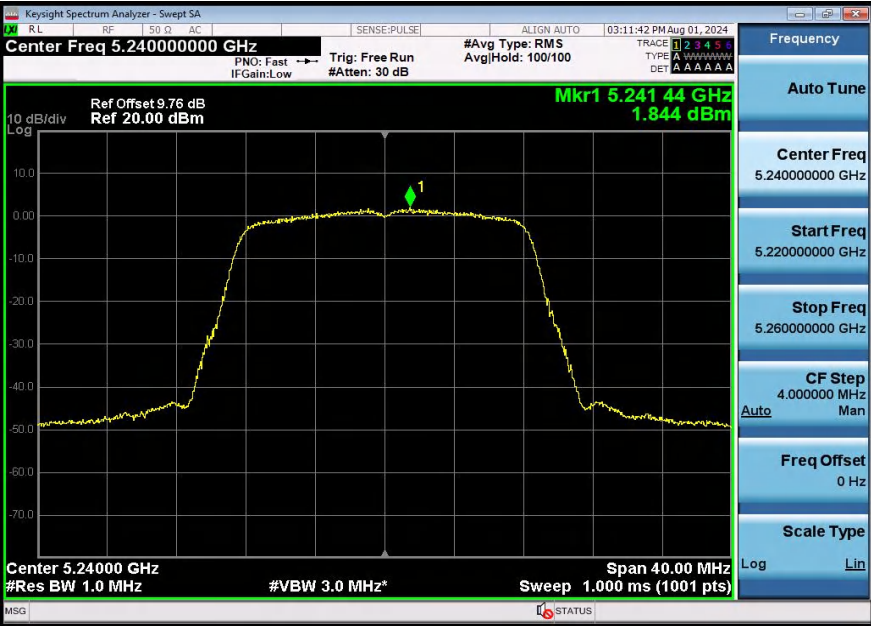


11A-Ant1-5240-PASS

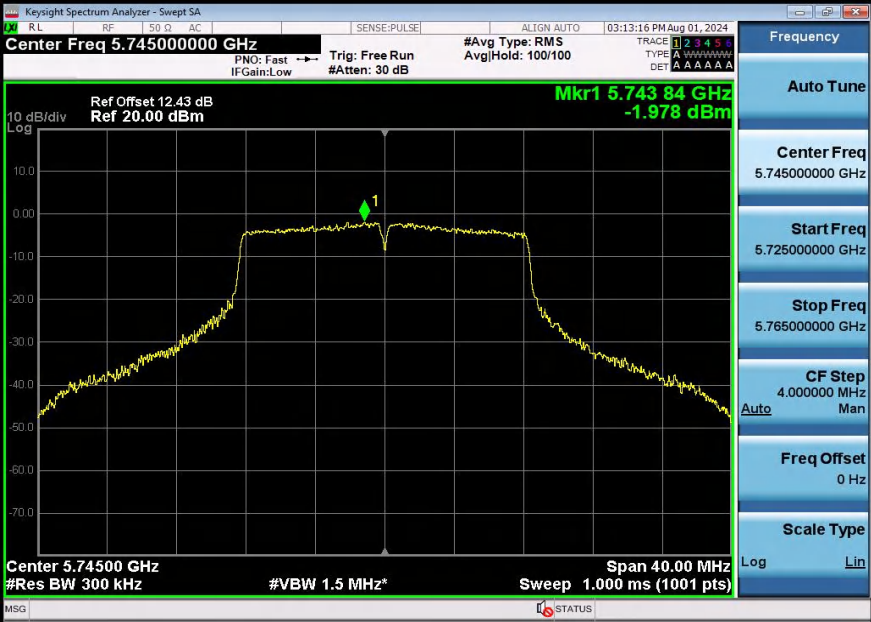


11A-Ant1-5745-PASS

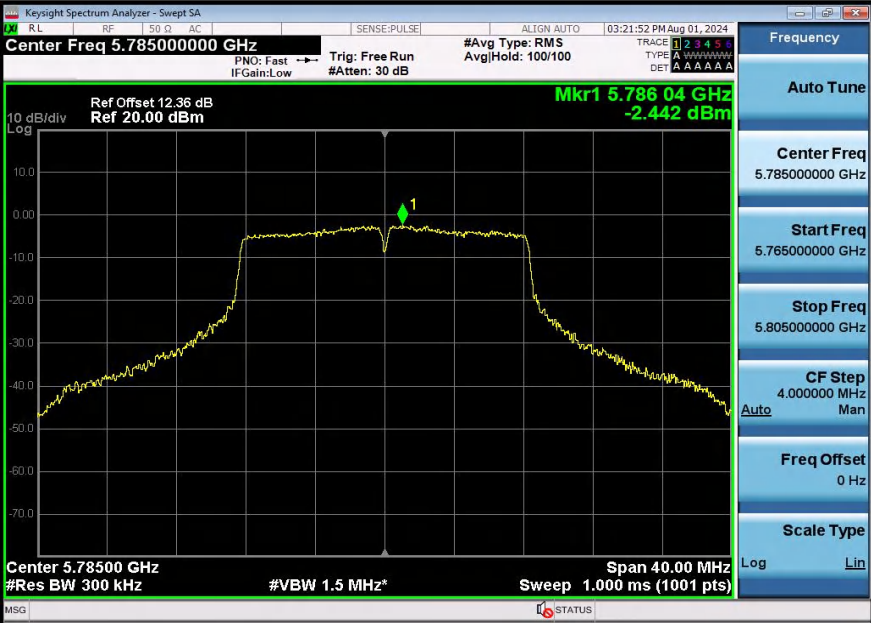

11A-Ant1-5785-PASS

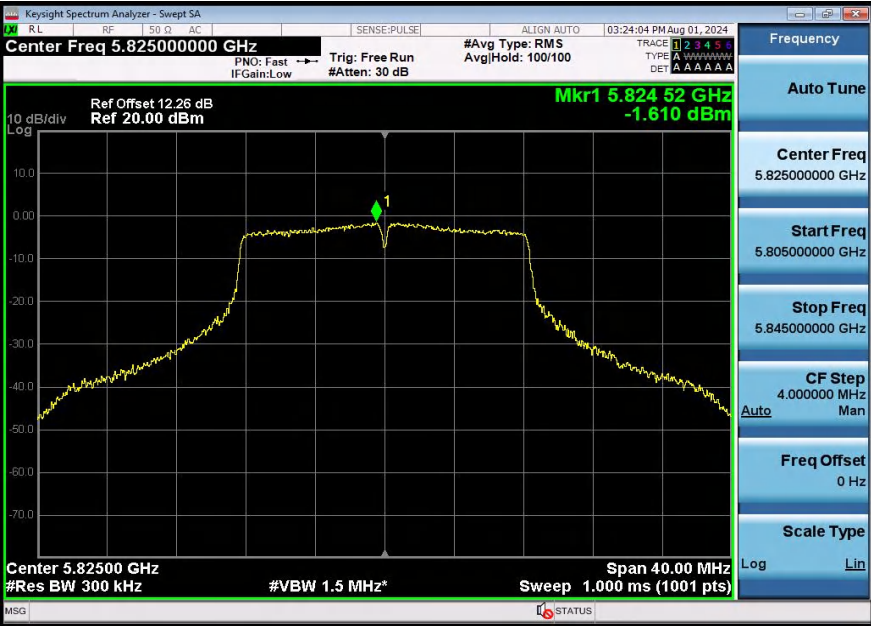


11A-Ant1-5825-PASS

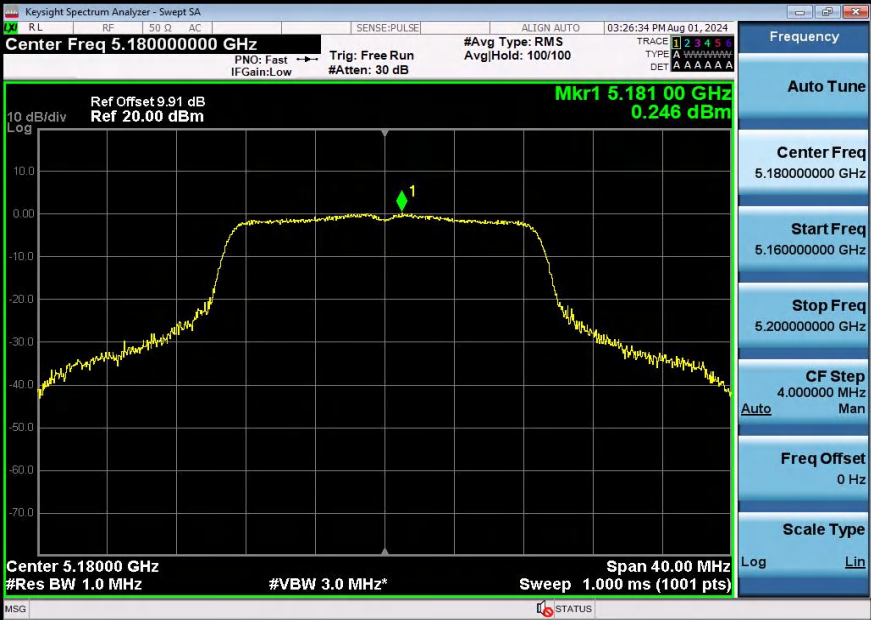

11N20SISO-Ant1-5180-PASS




11N20SISO-Ant1-5200-PASS

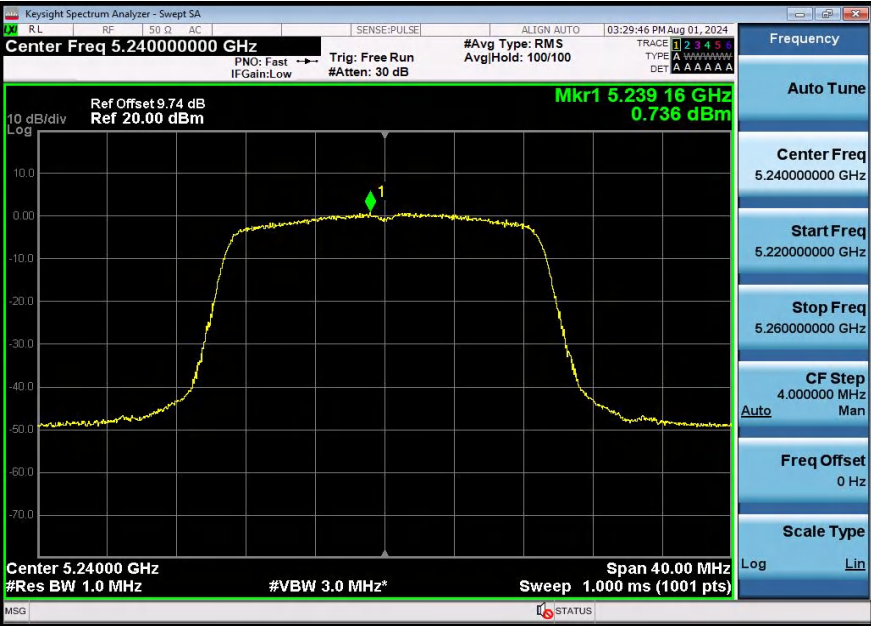



11N20SISO-Ant1-5240-PASS




11N20SISO-Ant1-5745-PASS

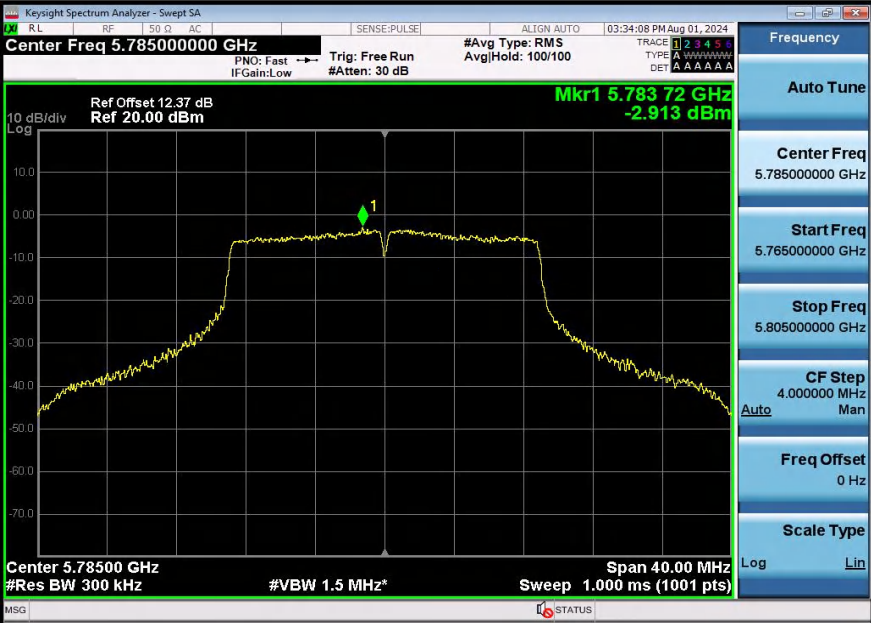


11N20SISO-Ant1-5785-PASS

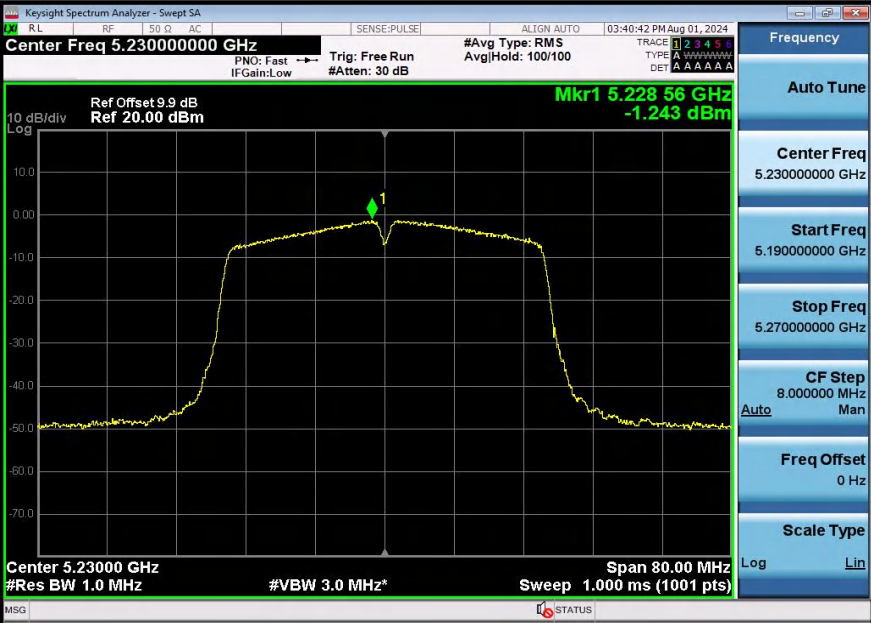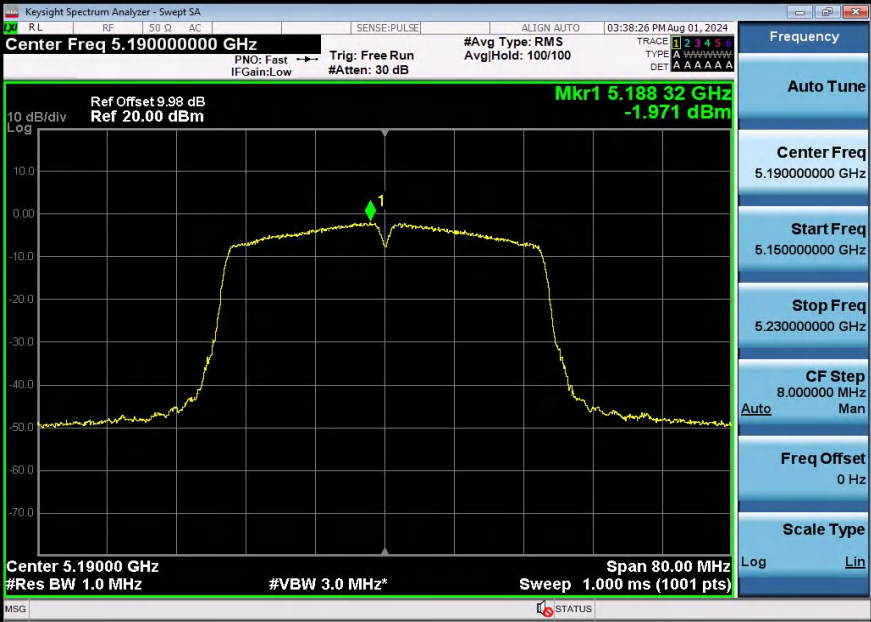


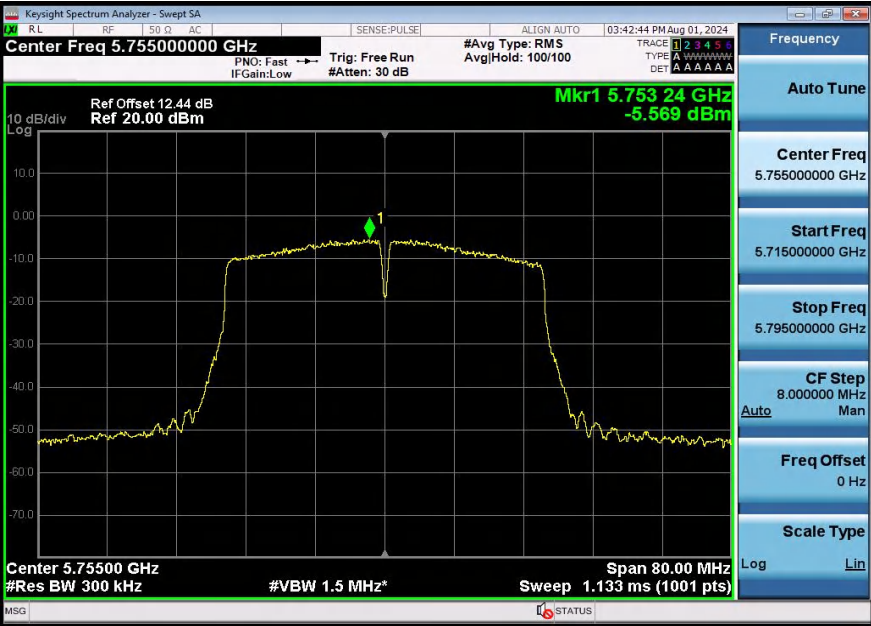


11N40SISO-Ant1-5755-PASS

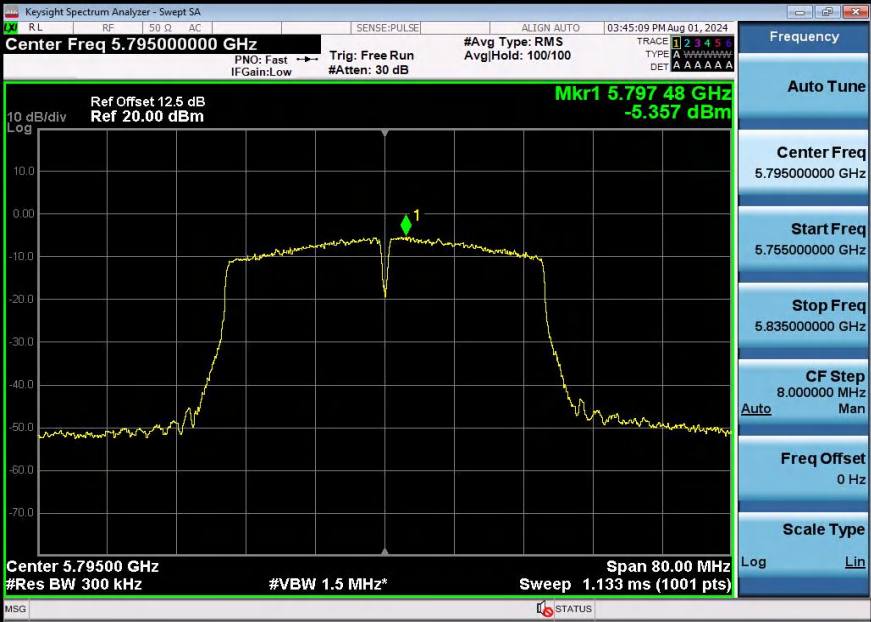


11N40SISO-Ant1-5795-PASS

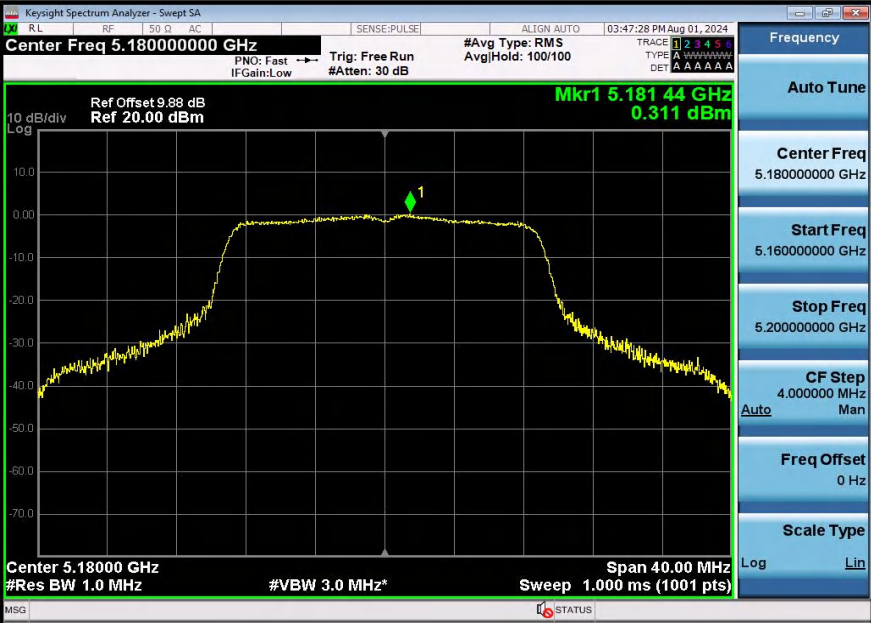

11AC20SISO-Ant1-5180-PASS

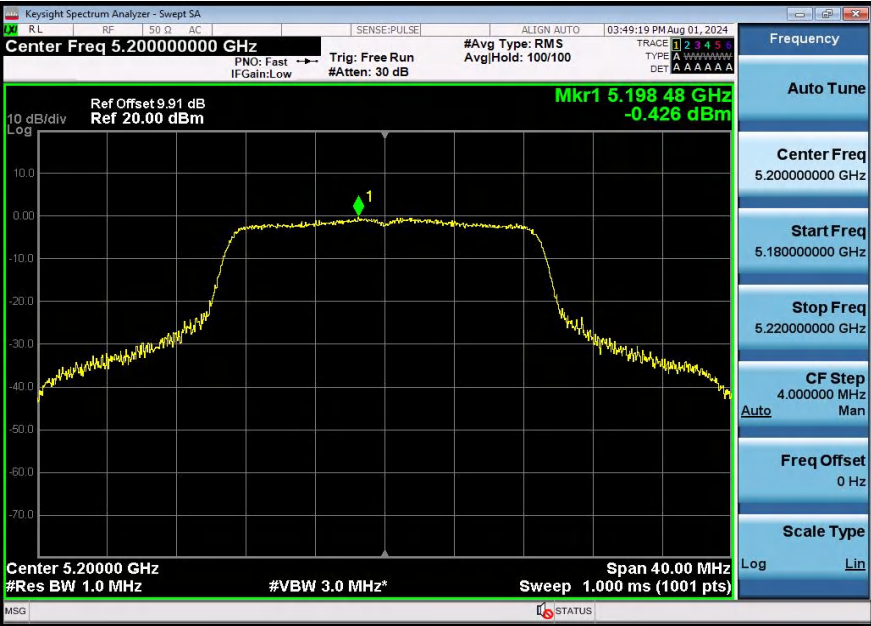


11AC20SISO-Ant1-5200-PASS

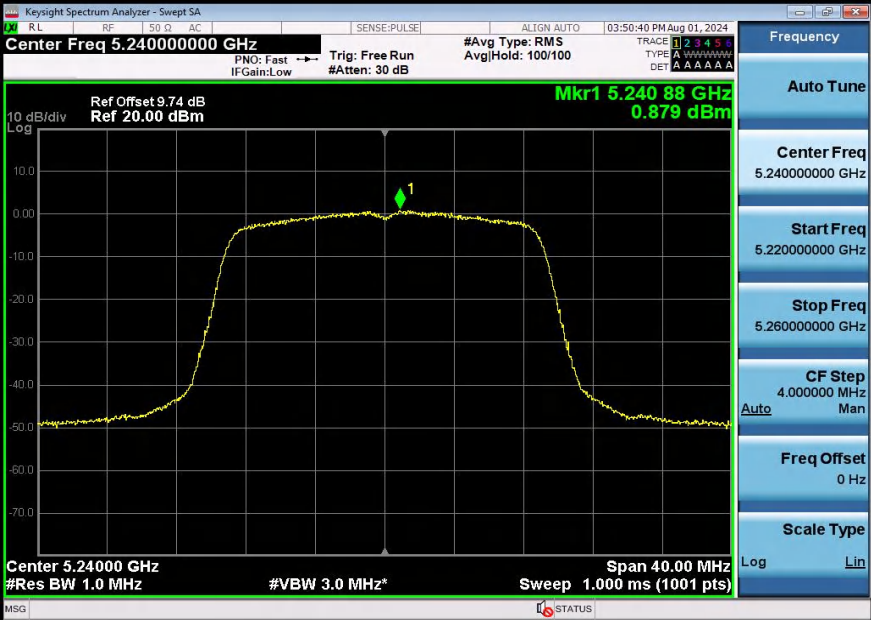

11AC20SISO-Ant1-5240-PASS




11AC20SISO-Ant1-5745-PASS

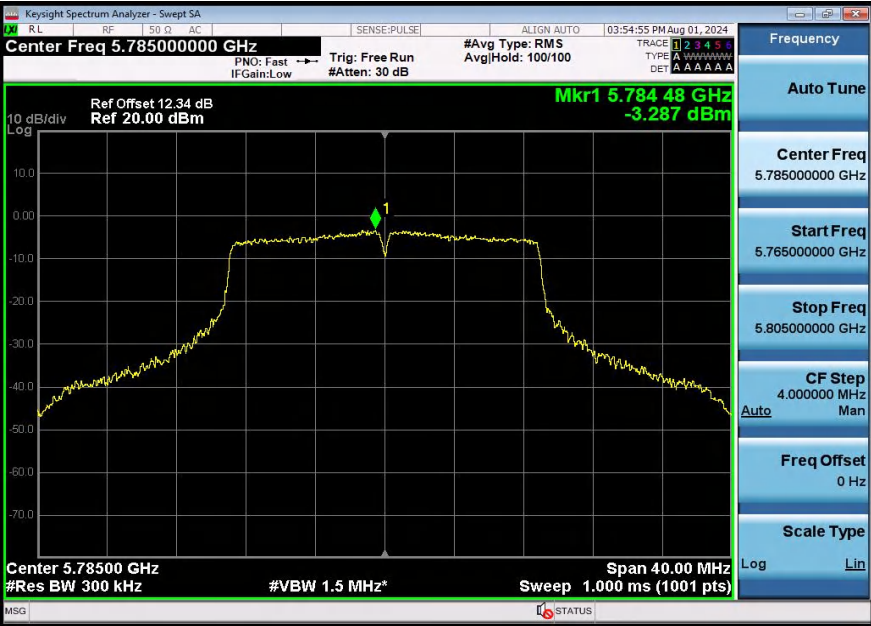


11AC20SISO-Ant1-5785-PASS




11AC20SISO-Ant1-5825-PASS

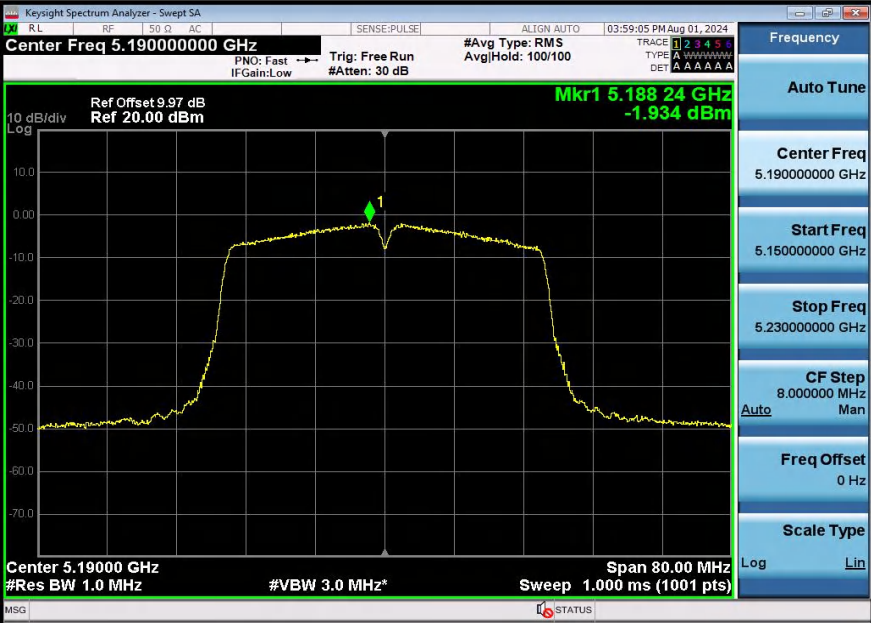


11AC40SISO-Ant1-5190-PASS

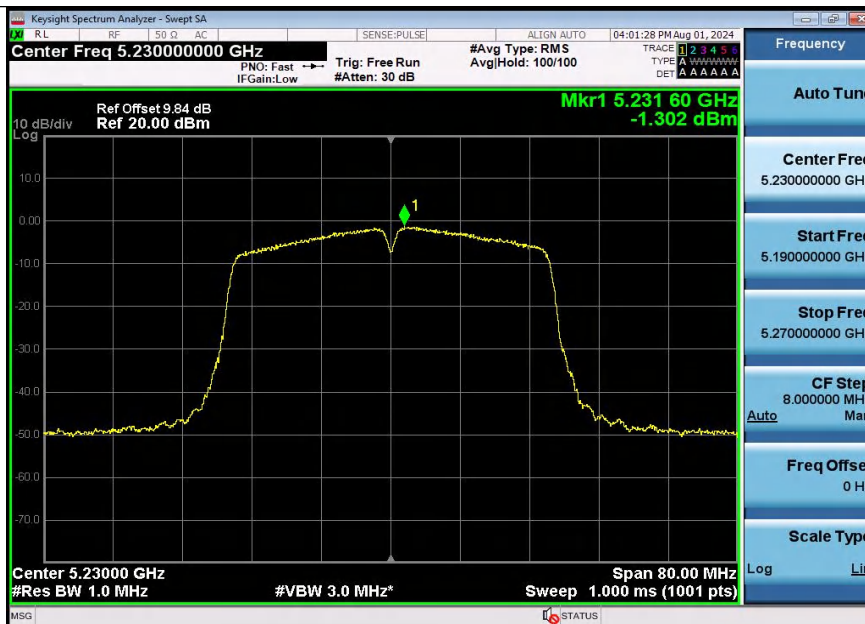


11AC40SISO-Ant1-5230-PASS

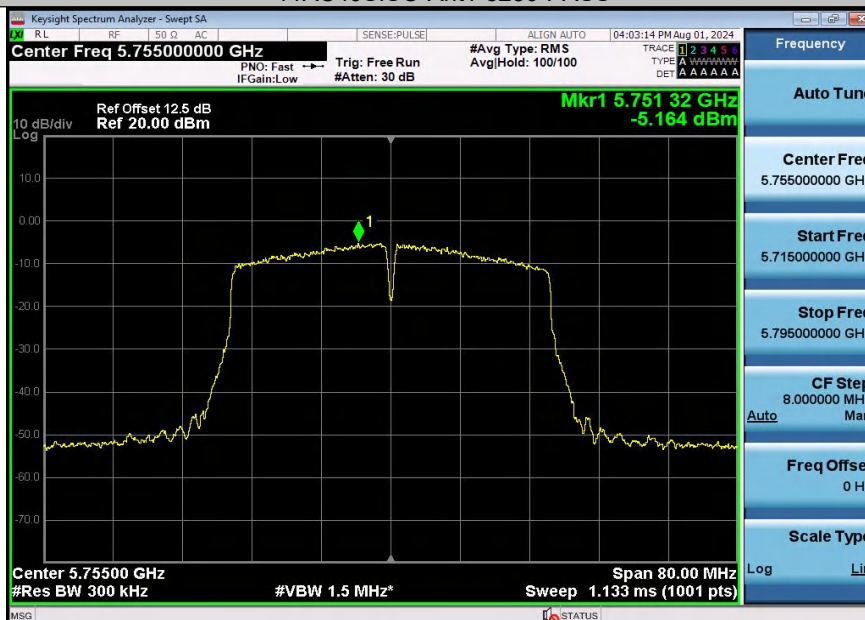


11AC40SISO-Ant1-5755-PASS

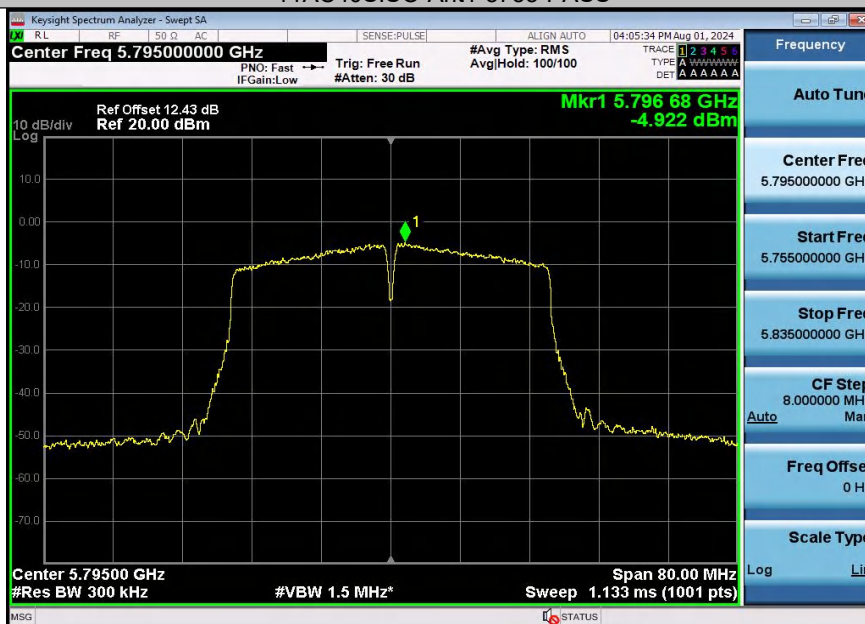


11AC40SISO-Ant1-5795-PASS

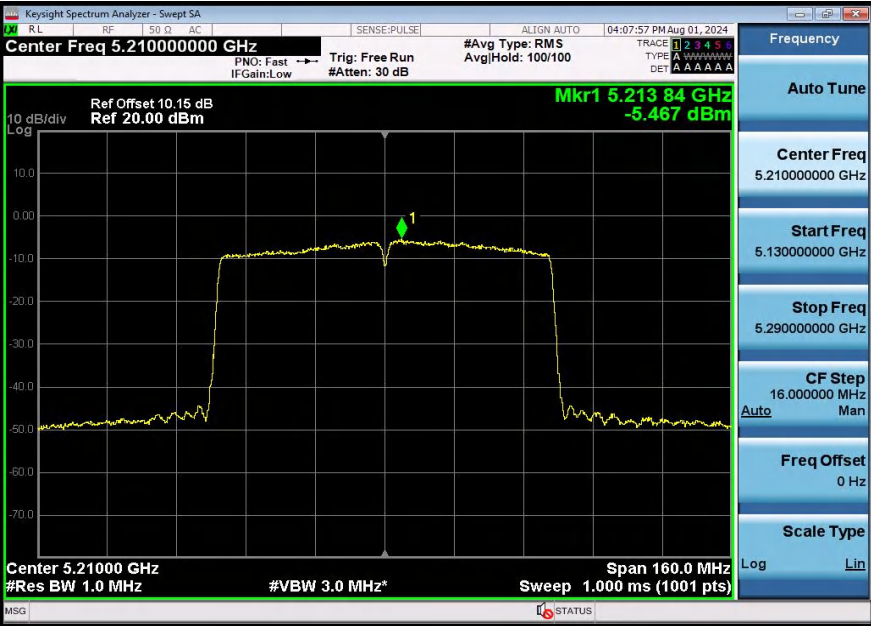


11AC80SISO-Ant1-5210-PASS

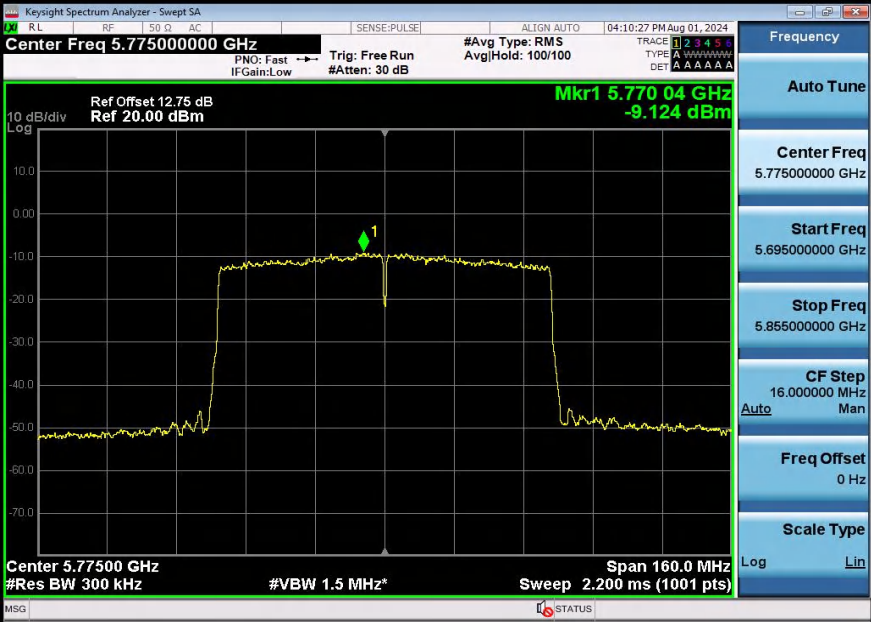


11AC80SISO-Ant1-5775-PASS

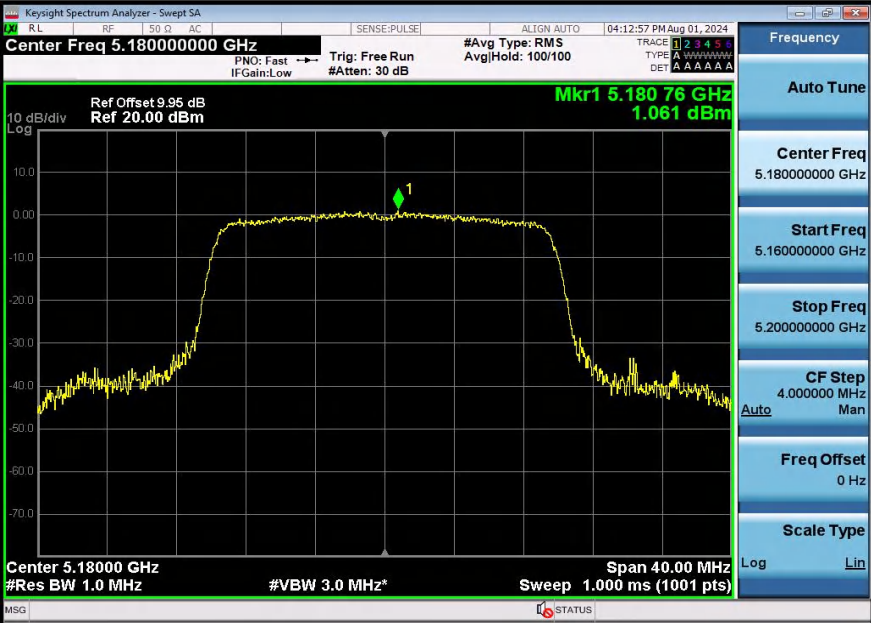


11AX20SISO-Ant1-5180-PASS

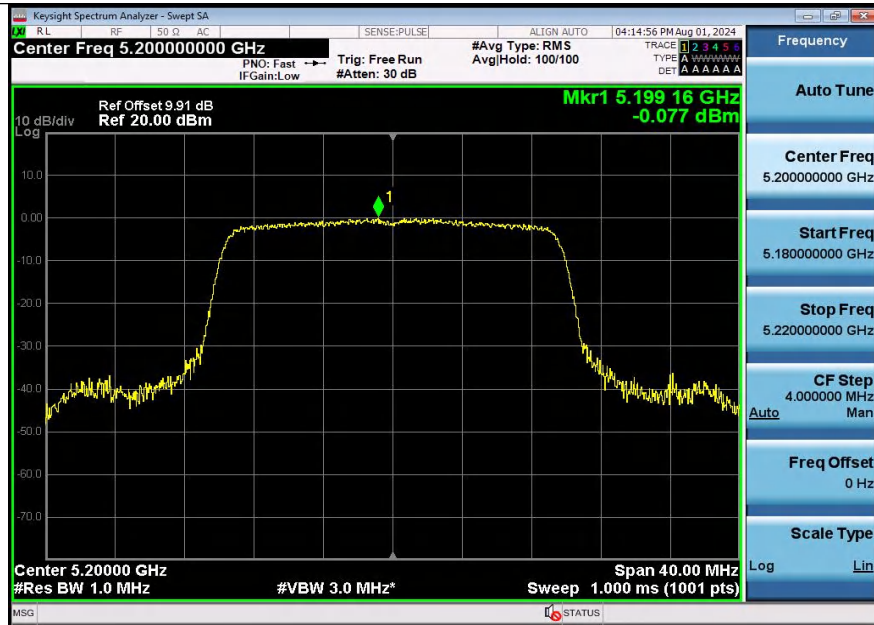


11AX20SISO-Ant1-5200-PASS

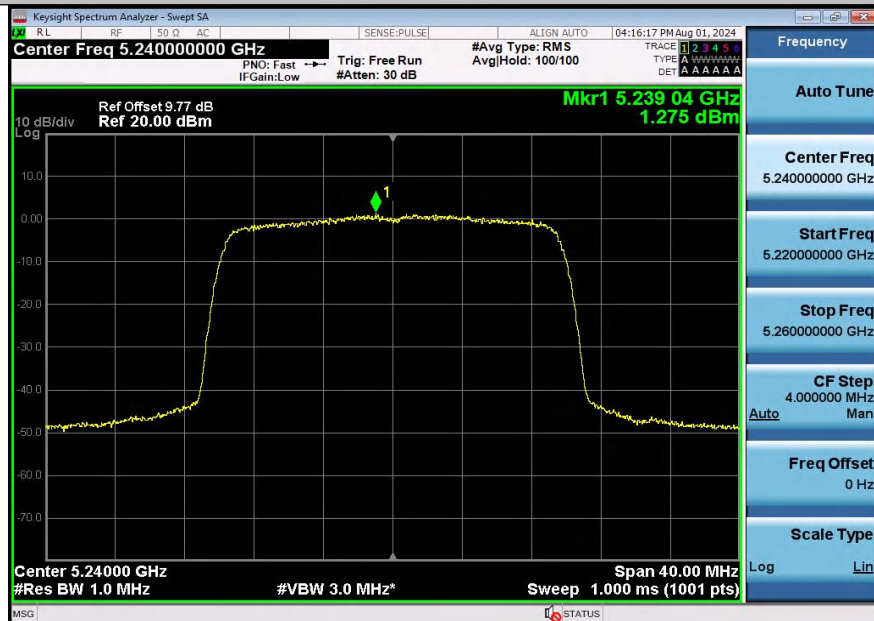


11AX20SISO-Ant1-5240-PASS

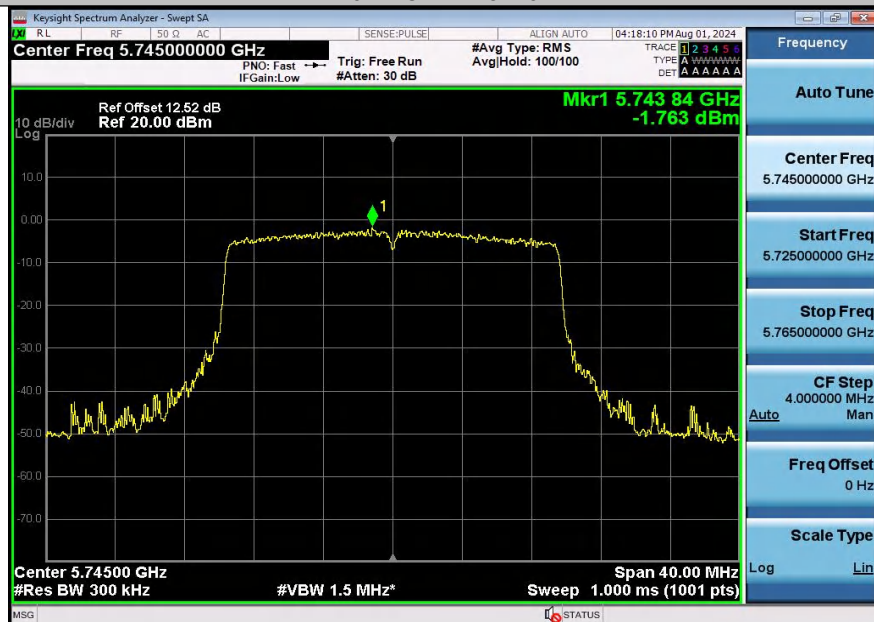


11AX20SISO-Ant1-5745-PASS

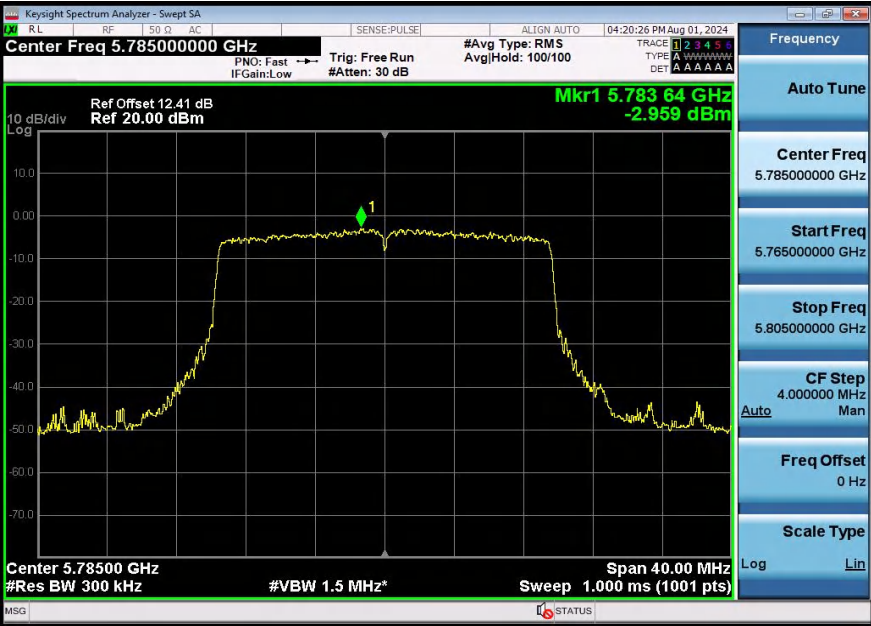


11AX20SISO-Ant1-5785-PASS

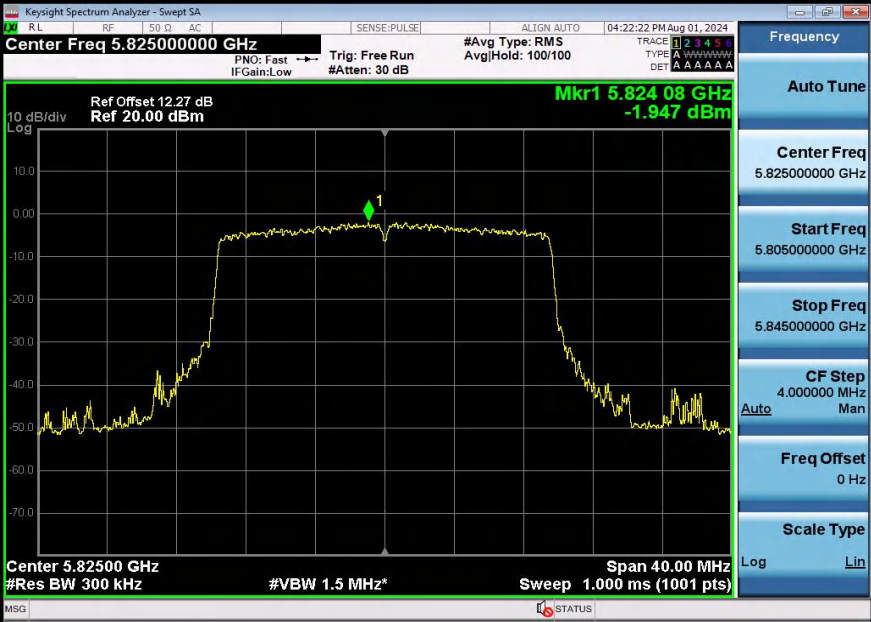


11AX20SISO-Ant1-5825-PASS

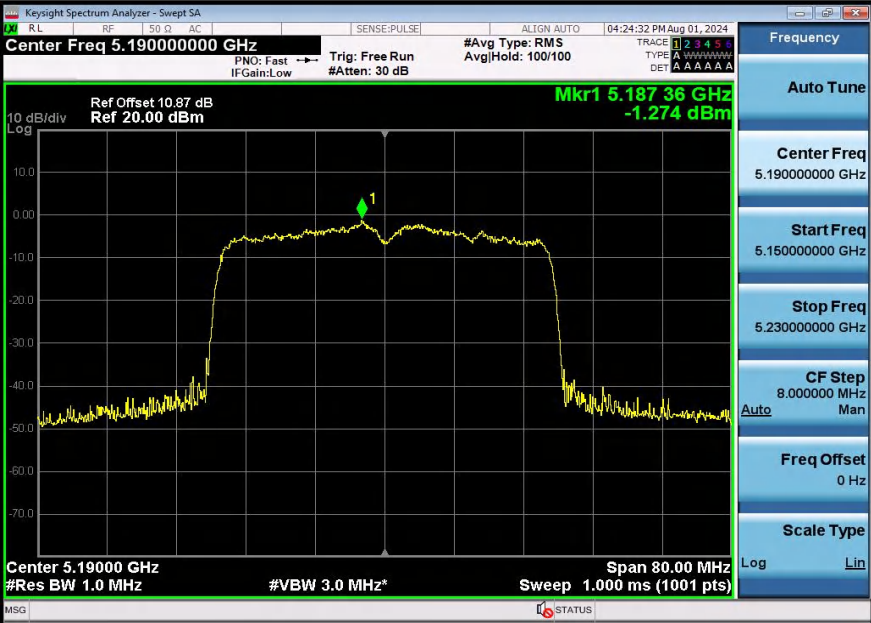


11AX40SISO-Ant1-5190-PASS

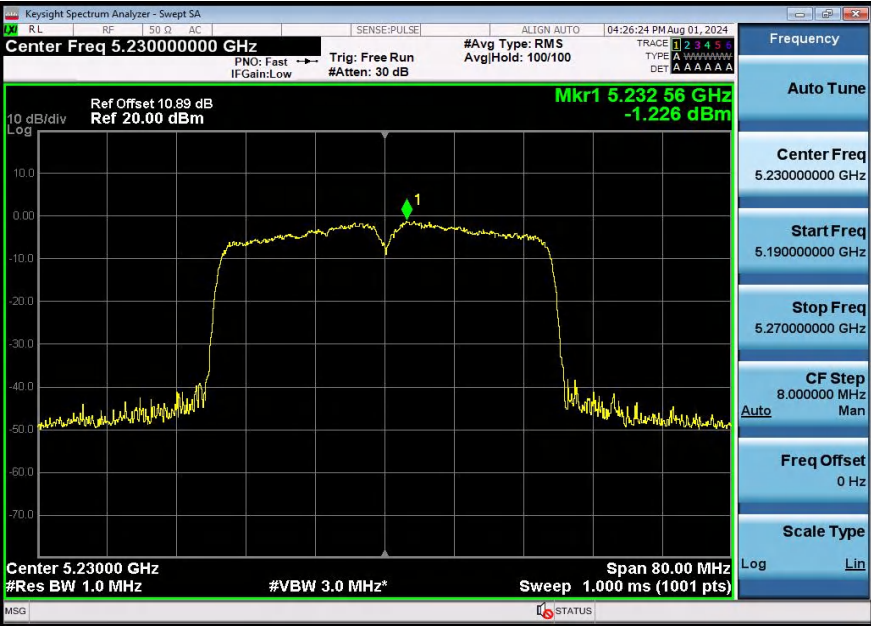


11AX40SISO-Ant1-5230-PASS

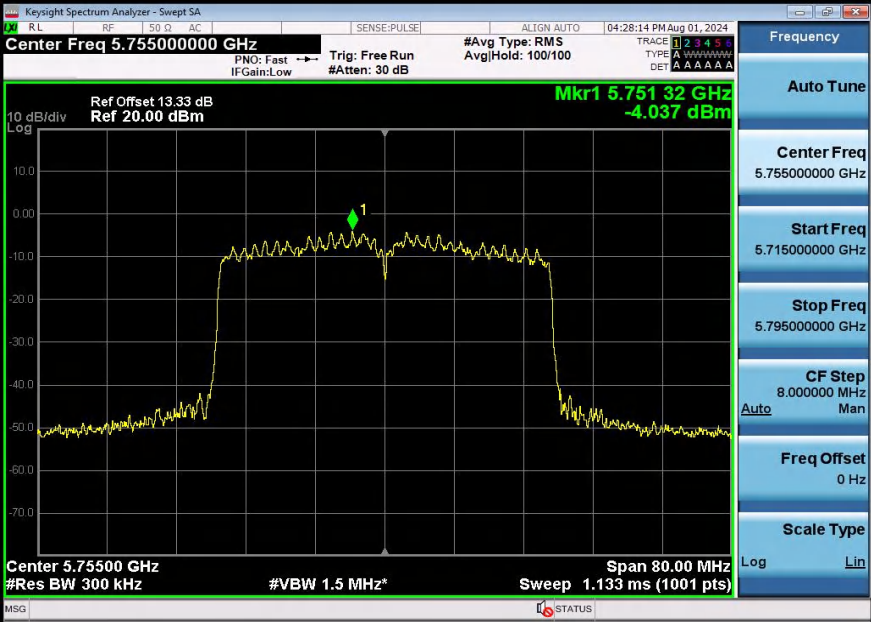

11AX40SISO-Ant1-5755-PASS

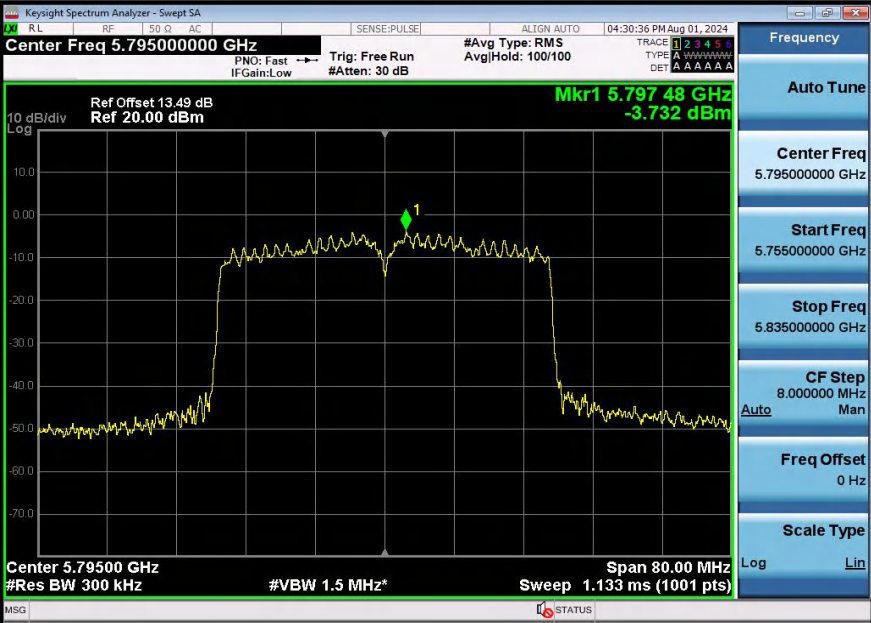

11AX40SISO-Ant1-5795-PASS

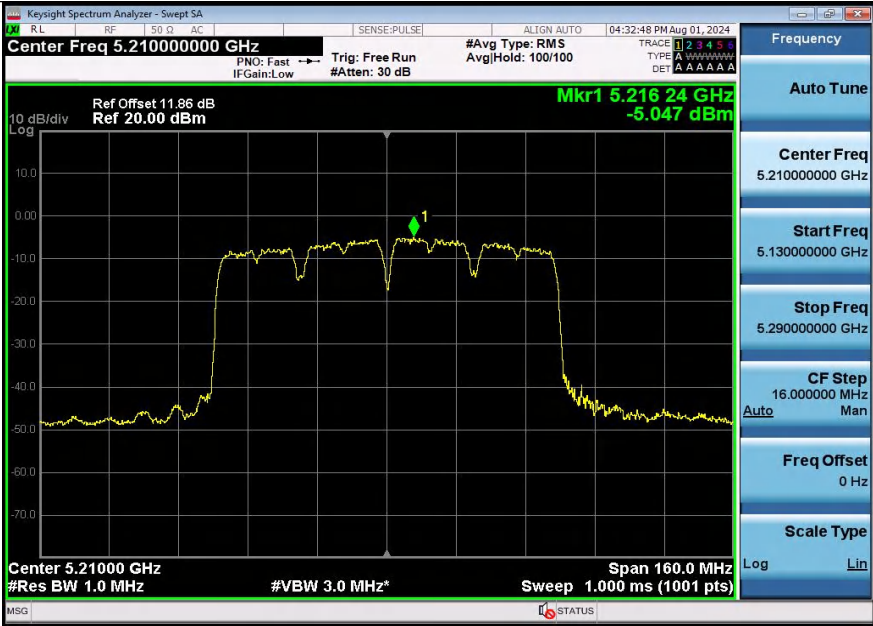

11AX80SISO-Ant1-5210-PASS



11AX80SISO-Ant1-5775-PASS