



## **FCC 47 CFR PART 15 SUBPART C**

### **TEST REPORT**

**For**

**382213 Module**

**Model: MP21QCFS**

**Brand: N/A**

**Test Report Number:**

**C180619Z01-RP1-1**

Issued for

**WANLIDA GROUP CO., LTD**

**No.618 JIAHE ROAD XIAMEN FUJIAN China**

Issued by:

**COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.**

**No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,  
Guan Lan Town, Baoan District, Shenzhen China**

**TEL: 86-755-28055000**

**FAX: 86-755-28055221**

**E-Mail: [service@ccssz.com](mailto:service@ccssz.com)**

**Issued Date: July 23, 2018**



Certificate Number: 2861.01

**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc. This document may be altered or revised by Compliance Certification Services (Shenzhen) Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST, CNAS or any government agencies. The test result of this report relate only to the tested sample identified in this report.



## Revision History

| Rev. | Issue Date       | Revisions     | Effect Page | Revised By |
|------|------------------|---------------|-------------|------------|
| 00   | October 25, 2016 | Initial Issue | ALL         | Nancy Fu   |
| 01   | July 23, 2018    | Update Report | ALL         | Anna Liu   |
|      |                  |               |             |            |
|      |                  |               |             |            |

**Rev.01:** C180619Z01-RP1-1

- Note:** 1. Update the EUT's screen and the location of the antenna. The material of the antenna is updated from iron sheet to FPC. After reassessment, Peak Power Measurement, band edges Measurement, radiated emissions items and Antenna Conducted Spurious Emission were re-tested.
2. The other information, please refer to report: C160929Z01-RP1-1 and this report.



## TABLE OF CONTENTS

|                                               |           |
|-----------------------------------------------|-----------|
| <b>1. TEST RESULT CERTIFICATION .....</b>     | <b>4</b>  |
| <b>2. TEST RESULT SUMMARY .....</b>           | <b>5</b>  |
| <b>3. EUT DESCRIPTION .....</b>               | <b>6</b>  |
| <b>4. TEST METHODOLOGY.....</b>               | <b>7</b>  |
| 4.1 DESCRIPTION OF TEST MODES.....            | 7         |
| <b>5. FACILITIES AND ACCREDITATIONS .....</b> | <b>8</b>  |
| 5.1 FACILITIES .....                          | 8         |
| 5.2 ACCREDITATIONS .....                      | 8         |
| 5.3 MEASUREMENT UNCERTAINTY .....             | 8         |
| <b>6. SETUP OF EQUIPMENT UNDER TEST.....</b>  | <b>9</b>  |
| 6.1 SETUP CONFIGURATION OF EUT .....          | 9         |
| 6.2 SUPPORT EQUIPMENT .....                   | 9         |
| <b>7. FCC PART 15.247 REQUIREMENTS.....</b>   | <b>12</b> |
| 7.1 20DB BANDWIDTH .....                      | 12        |
| 7.2 ANTENNA GAIN .....                        | 16        |
| 7.3 PEAK POWER.....                           | 17        |
| 7.4 PEAK POWER SPECTRAL DENSITY .....         | 20        |
| 7.5 BAND EDGES MEASUREMENT .....              | 21        |
| 7.6 FREQUENCY SEPARATION .....                | 30        |
| 7.7 NUMBER OF HOPPING FREQUENCY .....         | 33        |
| 7.8 TIME OF OCCUPANCY (DWEIL TIME) .....      | 35        |
| 7.9 SPURIOUS EMISSIONS .....                  | 42        |
| 7.10 POWERLINE CONDUCTED EMISSIONS .....      | 65        |



## 1. TEST RESULT CERTIFICATION

|              |                                                                 |
|--------------|-----------------------------------------------------------------|
| Product      | 382213 Module                                                   |
| Model        | MP21QCFS                                                        |
| Brand        | N/A                                                             |
| Tested       | September 29~ October 25, 2016 & June 19~July 23, 2018          |
| Applicant    | WANLIDA GROUP CO., LTD<br>No.618 JIAHE ROAD XIAMEN FUJIAN China |
| Manufacturer | WANLIDA GROUP CO., LTD<br>No.618 JIAHE ROAD XIAMEN FUJIAN China |

| APPLICABLE STANDARDS         |                         |
|------------------------------|-------------------------|
| STANDARD                     | TEST RESULT             |
| FCC 47 CFR Part 15 Subpart C | No non-compliance noted |

### We hereby certify that:

The above equipment was tested by Compliance Certification Services (Shenzhen) Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.10: 2013** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Eve Wang  
Supervisor of EMC Dept.  
Compliance Certification Services (Shenzhen)  
Inc.

Nancy Fu  
Supervisor of Report Dept.  
Compliance Certification Services (Shenzhen)  
Inc.



## 2. TEST RESULT SUMMARY

| APPLICABLE STANDARDS         |                                |        |                                |        |
|------------------------------|--------------------------------|--------|--------------------------------|--------|
| Standard                     | Test Type                      | Result | Remark                         | Retest |
| 15.247(a)(1)                 | 20dB Bandwidth Measurement     | Pass   | Meet the requirement of limit. | No     |
| 15.247(b)(3)<br>15.247(b)(4) | Peak Power Measurement         | Pass   | Meet the requirement of limit. | Yes    |
| 15.247(a)(1)                 | Frequency Separation           | Pass   | Meet the requirement of limit. | No     |
| 15.247(a)(1)(ii)             | Number Of Hopping Frequency    | Pass   | Meet the requirement of limit. | No     |
| 15.247(a)(1)(iii)            | Time Of Occupancy (Dwell Time) | Pass   | Meet the requirement of limit. | No     |
| 15.247(d)                    | Band Edges Measurement         | Pass   | Meet the requirement of limit. | Yes    |
| 15.247(d)                    | ● Spurious Emissions           | Pass   | Meet the requirement of limit. | Yes    |
|                              | ● Conducted Measurement        | Pass   | Meet the requirement of limit. | Yes    |
|                              | ● Radiated Emissions           | Pass   | Meet the requirement of limit. | Yes    |
| 15.207(a)                    | Power line Conducted Emissions | Pass   | Meet the requirement of limit. | No     |

Note:

1. The statements of test result on the above are decided by the request of test standard only; the measurement uncertainties are not factored into this compliance determination.
2. The information of measurement uncertainty is available upon the customer's request.



### 3. EUT DESCRIPTION

|                       |                                                                     |
|-----------------------|---------------------------------------------------------------------|
| Product               | 382213 Module                                                       |
| Model Number          | MP21QCFS                                                            |
| Brand                 | N/A                                                                 |
| Model Discrepancy     | N/A                                                                 |
| Identify Number       | C180619Z01-RP1-1                                                    |
| Received Date         | September 29, 2016 & June 19, 2018                                  |
| Power Supply          | DC 12V supplied by adapter                                          |
| Frequency Range       | 2402 ~ 2480 MHz                                                     |
| Transmit Power        | GFSK: 3.59dBm<br>$\pi/4$ -DQPSK: 2.88dBm<br>8DPSK: 3.03dBm          |
| Modulation Technique  | FHSS<br>(GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8DPSK for 3Mbps) |
| Number of Channels    | 79 Channels                                                         |
| Antenna Specification | Internal Antenna with 3.31dBi gain (Max)                            |
| Temperature Range     | 0°C ~ +35°C                                                         |
| Hardware Version      | 9521C                                                               |
| Software Version      | Model number AOSP on Drone                                          |

**Note:** This submittal(s) (test report) is intended for FCC ID: SMFOMC382213 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



## 4. TEST METHODOLOGY

### 4.1 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Used the “SME2.4G S16B-FCC” software to control the EUT for staying in continuous transmitting and receiving mode is programmed.

| Test Item          | Test mode             | Worse mode                          |
|--------------------|-----------------------|-------------------------------------|
| Conducted Emission | <b>Mode 1:</b> Normal | <input checked="" type="checkbox"/> |
| Radiated Emission  | <b>Mode 1:</b> TX     | <input checked="" type="checkbox"/> |

**Note:**

1. Channel Low (2402MHz), Mid (2441MHz) and High (2480MHz) were chosen for pre-testing for GFSK,  $\pi/4$ -DQPSK were the worse case and print in the report.
2. Radiated band edges were tested with both fixed and hopping mode; the fixed mode was the worse case and recorded in the report.
3. For  $\pi/4$  QPSK its same modulation type with 8-DPSK, and based exploratory test, there is no significant difference of that two types test result, so except output power, all other items final test were only performed with the worst case For  $\pi/4$  QPSK and GFSK.



## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☒ **No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,  
Guan Lan Town, Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.10:2013, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 5.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

|              |      |
|--------------|------|
| <b>USA</b>   | A2LA |
| <b>China</b> | CNAS |

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

|               |                                       |
|---------------|---------------------------------------|
| <b>USA</b>    | FCC                                   |
| <b>Japan</b>  | VCCI(C-4815, R-4320, T-2317, G-10624) |
| <b>Canada</b> | INDUSTRY CANADA                       |

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccscsz.com>

### 5.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Parameter                                                | Uncertainty |
|----------------------------------------------------------|-------------|
| Radiated Emission, 30 to 200 MHz<br>Test Site : 966(2)   | +/-3.6880dB |
| Radiated Emission, 200 to 1000 MHz<br>Test Site : 966(2) | +/-3.6695dB |
| Radiated Emission, 1 to 8 GHz                            | +/-5.1782dB |
| Radiated Emission, 8 to 18 GHz                           | +/-5.2173dB |
| Conducted Emissions                                      | +/-3.6836dB |
| Band Width                                               | 178kHz      |
| Peak Output Power MU                                     | +/-1.906dB  |
| Band Edge MU                                             | +/-0.182dB  |
| Channel Separation MU                                    | 416.178Hz   |
| Duty Cycle MU                                            | 0.054ms     |
| Frequency Stability MU                                   | 226Hz       |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

| No. | Equipment | Model No. | Serial No. | FCC ID | Brand  | Data Cable | Power Cord          |
|-----|-----------|-----------|------------|--------|--------|------------|---------------------|
| 1   | Adapter   | MPA-630   | N/A        | N/A    | Malata | N/A        | Unshielded<br>1.50m |

**Notes:**

*Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*



## 6.3 TEST INSTRUMENTS

| Conducted Emission Test Site |               |                    |               |                  |                 |
|------------------------------|---------------|--------------------|---------------|------------------|-----------------|
| Name of Equipment            | Manufacturer  | Model Number       | Serial Number | Last Calibration | Due Calibration |
| EMI TEST RECEIVER            | ROHDE&SCHWARZ | ESCI               | 100783        | 02/21/2016       | 02/20/2017      |
| LISN(EUT)                    | ROHDE&SCHWARZ | ENV216             | 101543-WX     | 02/21/2016       | 02/20/2017      |
| LISN                         | EMCO          | 3825/2             | 8901-1459     | 02/21/2016       | 02/20/2017      |
| Temp. / Humidity Meter       | VICTOR        | HTC-1              | N/A           | 02/21/2016       | 02/20/2017      |
| Test S/W                     | FARAD         | EZ-EMC/ CCS-3A1-CE |               |                  |                 |

| Radiated Emission Test Site 966 (2) |                |                    |               |                  |                 |
|-------------------------------------|----------------|--------------------|---------------|------------------|-----------------|
| Name of Equipment                   | Manufacturer   | Model Number       | Serial Number | Last Calibration | Due Calibration |
| Spectrum Analyzer                   | Agilent        | N9010A             | MY52221469    | 01/27/2018       | 01/26/2019      |
| EMI TEST RECEIVER                   | ROHDE&SCHWARZ  | ESCI               | 100783        | 01/27/2018       | 01/26/2019      |
| Amplifier                           | EMEC           | EM330              | 060661        | 01/27/2018       | 01/26/2019      |
| High Noise Amplifier                | Agilent        | 8449B              | 3008A01838    | 01/27/2018       | 01/26/2019      |
| Loop Antenna                        | COM-POWER      | AL-130             | 121044        | 01/30/2018       | 01/29/2019      |
| Bilog Antenna                       | SCHAFFNER      | CBL6143            | 5082          | 02/21/2018       | 02/20/2019      |
| Horn Antenna                        | SCHWARZBECK    | BBHA9120           | D286          | 01/27/2018       | 01/26/2019      |
| Board-Band Horn Antenna             | Schwarzbeck    | BBHA 9170          | 9170-497      | 01/24/2018       | 01/23/2019      |
| Turn Table                          | N/A            | N/A                | N/A           | N.C.R            | N.C.R           |
| Antenna Tower                       | SUNOL          | TLT2               | N/A           | N.C.R            | N.C.R           |
| Controller                          | Sunol Sciences | SC104V             | 022310-1      | N.C.R            | N.C.R           |
| Controller                          | CT             | N/A                | N/A           | N.C.R            | N.C.R           |
| Temp. / Humidity Meter              | Anymetre       | JR913              | N/A           | 01/29/2018       | 01/28/2019      |
| Test S/W                            | FARAD          | LZ-RF / CCS-SZ-3A2 |               |                  |                 |

| 20dB Bandwidth    |              |              |               |                  |                 |
|-------------------|--------------|--------------|---------------|------------------|-----------------|
| Name of Equipment | Manufacturer | Model Number | Serial Number | Last Calibration | Due Calibration |
| Spectrum Analyzer | Agilent      | N9010A       | MY55370330    | 02/21/2016       | 02/20/2017      |

| Peak Output Power |              |              |               |                  |                 |
|-------------------|--------------|--------------|---------------|------------------|-----------------|
| Name of Equipment | Manufacturer | Model Number | Serial Number | Last Calibration | Due Calibration |
| Power Meter       | Anritsu      | ML2495A      | 1204003       | 01/27/2018       | 01/26/2019      |
| Power Sensor      | Anritsu      | MA2411B      | 1126150       | 01/27/2018       | 01/26/2019      |



| Frequency Separation |              |              |               |                  |                 |
|----------------------|--------------|--------------|---------------|------------------|-----------------|
| Name of Equipment    | Manufacturer | Model Number | Serial Number | Last Calibration | Due Calibration |
| Spectrum Analyzer    | Agilent      | N9010A       | MY52221469    | 02/21/2016       | 02/20/2017      |

| Number Of Hopping Frequency |              |              |               |                  |                 |
|-----------------------------|--------------|--------------|---------------|------------------|-----------------|
| Name of Equipment           | Manufacturer | Model Number | Serial Number | Last Calibration | Due Calibration |
| Spectrum Analyzer           | Agilent      | N9010A       | MY52221469    | 02/21/2016       | 02/20/2017      |

| Time Of Occupancy (Dwell Time) |              |              |               |                  |                 |
|--------------------------------|--------------|--------------|---------------|------------------|-----------------|
| Name of Equipment              | Manufacturer | Model Number | Serial Number | Last Calibration | Due Calibration |
| Spectrum Analyzer              | Agilent      | N9010A       | MY52221469    | 02/21/2016       | 02/20/2017      |

| Band edges        |              |              |               |                  |                 |
|-------------------|--------------|--------------|---------------|------------------|-----------------|
| Name of Equipment | Manufacturer | Model Number | Serial Number | Last Calibration | Due Calibration |
| Spectrum Analyzer | Agilent      | N9010A       | MY52221469    | 01/27/2018       | 01/26/2019      |

| Antenna Conducted Spurious Emission |              |              |               |                  |                 |
|-------------------------------------|--------------|--------------|---------------|------------------|-----------------|
| Name of Equipment                   | Manufacturer | Model Number | Serial Number | Last Calibration | Due Calibration |
| Spectrum Analyzer                   | Agilent      | N9010A       | MY52221469    | 01/27/2018       | 01/26/2019      |

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. N.C.R = No Calibration Request.




## 7. FCC PART 15.247 REQUIREMENTS

### 7.1 20DB BANDWIDTH

No limits.

### TEST CONFIGURATION

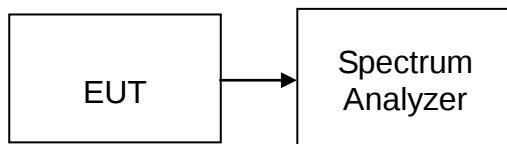

### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT, and then connect a low loss RF cable from antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=30 kHz, VBW=100 kHz, Span=3MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the test channels are investigated.

### TEST RESULTS


No non-compliance noted




## Test plot

### GFSK

#### 20dB Bandwidth(CH Low)

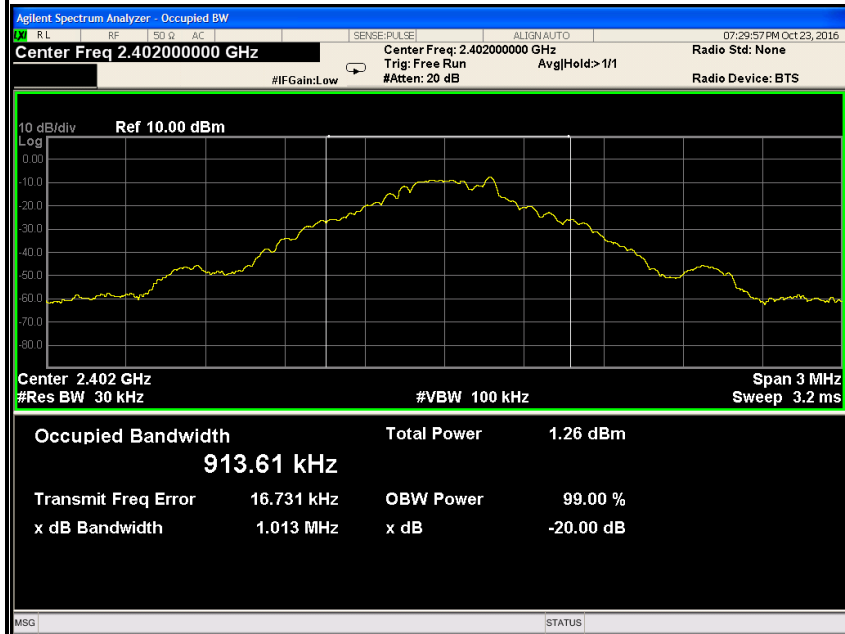


#### 20dB Bandwidth (CH Mid)

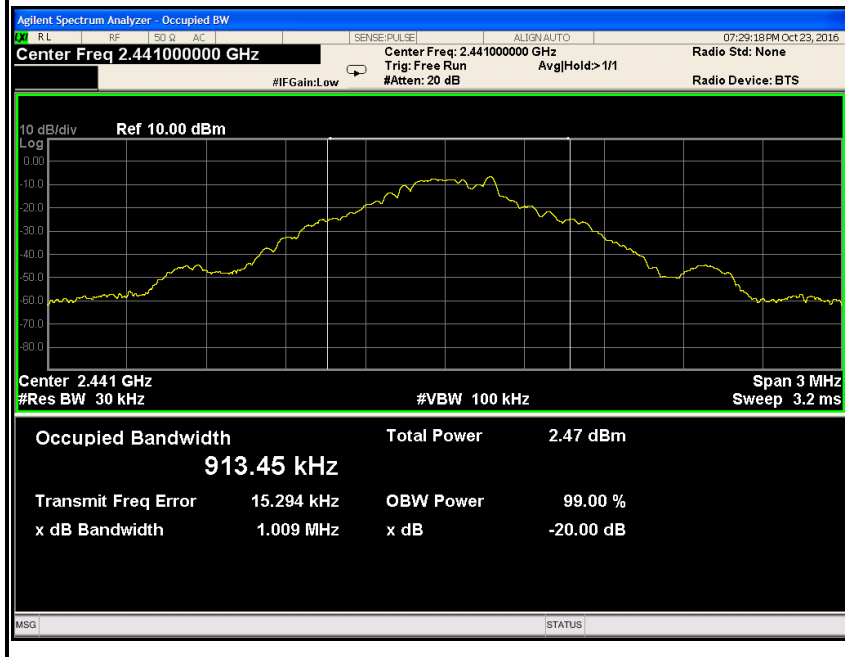




## 20dB Bandwidth (CH High)

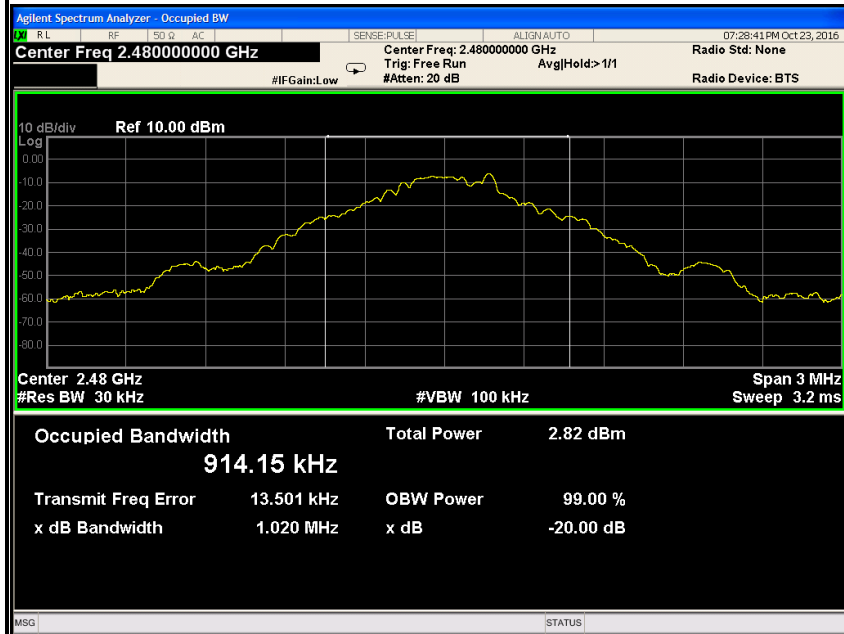


## 8DPSK

## 20dB Bandwidth (CH Low)

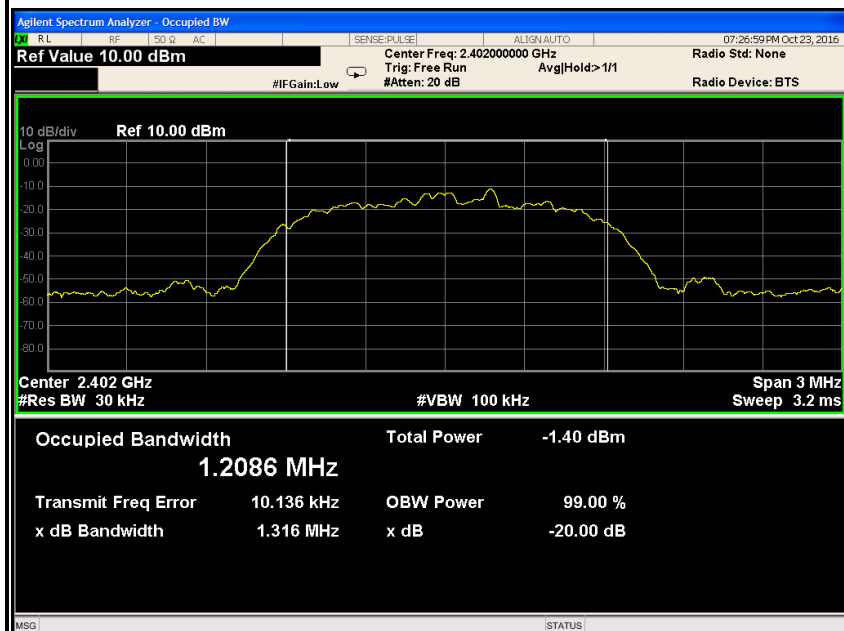




### 20dB Bandwidth (CH Mid)

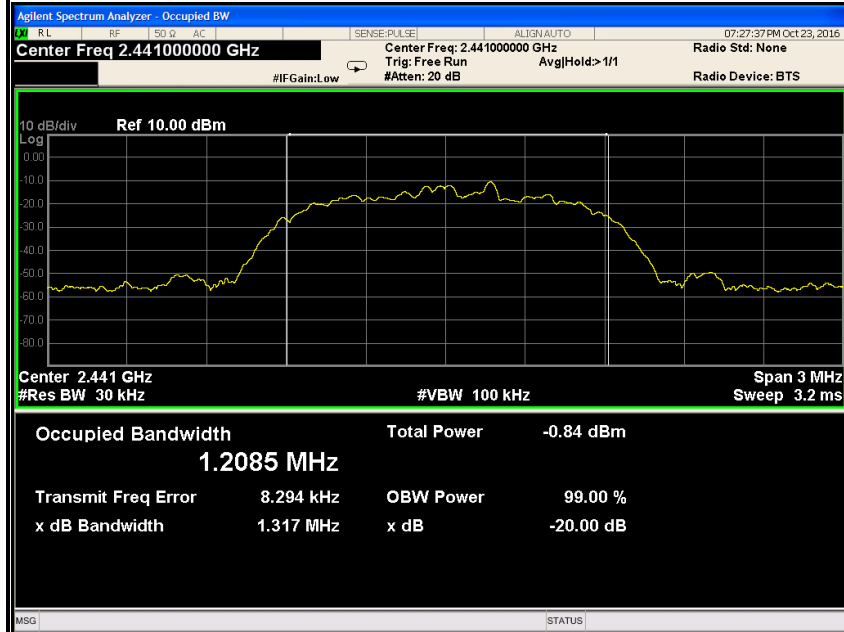

### 20dB Bandwidth (CH High)

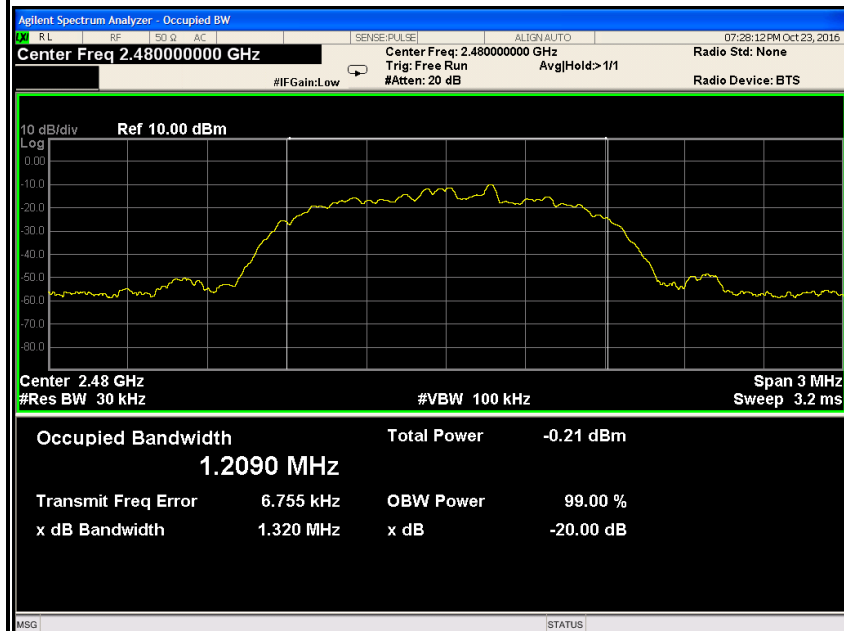



## 7.2 ANTENNA GAIN

### MEASUREMENT

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal BT devices, the GFSK mode is used.

### MEASUREMENT PARAMETERS

| Measurement parameter |          |
|-----------------------|----------|
| Detector              | Peak     |
| Sweep time            | Auto     |
| Resolution bandwidth  | 3 MHz    |
| Video bandwidth       | 3 MHz    |
| Trace-Mode            | Max hold |

### LIMITS

| FCC          | IC |
|--------------|----|
| Antenna Gain |    |
| 6 dBi        |    |

## TEST RESULTS

### GFSK

| T <sub>nom</sub>                                    | V <sub>nom</sub> | Lowest channel<br>2402MHz        | Middle channel<br>2441MHz | Highest channel<br>2480MHz |
|-----------------------------------------------------|------------------|----------------------------------|---------------------------|----------------------------|
| Conducted power [dBm] Measured with GFSK modulation |                  | 3.59                             | 2.95                      | 1.96                       |
| Radiated power [dBm] Measured with GFSK modulation  |                  | 6.57                             | 6.16                      | 5.07                       |
| Gain [dBi] Calculated                               |                  | 2.98                             | 3.21                      | 3.11                       |
| Measurement uncertainty                             |                  | ± 1.5 dB (cond.) / ± 3 dB (rad.) |                           |                            |

### 8DPSK

| T <sub>nom</sub>                                    | V <sub>nom</sub> | Lowest channel<br>2402MHz        | Middle channel<br>2441MHz | Highest channel<br>2480MHz |
|-----------------------------------------------------|------------------|----------------------------------|---------------------------|----------------------------|
| Conducted power [dBm] Measured with GFSK modulation |                  | 3.03                             | 1.96                      | 0.77                       |
| Radiated power [dBm] Measured with GFSK modulation  |                  | 6.02                             | 5.22                      | 3.93                       |
| Gain [dBi] Calculated                               |                  | 2.99                             | 3.26                      | 3.16                       |
| Measurement uncertainty                             |                  | ± 1.5 dB (cond.) / ± 3 dB (rad.) |                           |                            |




## 7.3 PEAK POWER

### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.
3. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### TEST CONFIGURATION

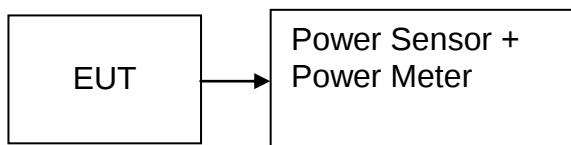

### TEST PROCEDURE

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.



## TEST RESULTS

No non-compliance noted

### Test Dat

#### GFSK

| Channel | Frequency (MHz) | Reading Power | Cable loss | Output Power (dBm) | Output Power (W) | Limit (W) | Peak /AVG | Result |
|---------|-----------------|---------------|------------|--------------------|------------------|-----------|-----------|--------|
| Low     | 2402            | 0.09          | 3.50       | 3.59               | 0.00229          | 0.125     | peak      | PASS   |
| Mid     | 2441            | -0.55         | 3.50       | 2.95               | 0.00197          |           |           | PASS   |
| High    | 2480            | -1.54         | 3.50       | 1.96               | 0.00157          |           |           | PASS   |
| Low     | 2402            | -0.06         | 3.50       | 3.44               | 0.00221          | 0.125     | AVG       | PASS   |
| Mid     | 2441            | -0.74         | 3.50       | 2.76               | 0.00189          |           |           | PASS   |
| High    | 2480            | -1.75         | 3.50       | 1.75               | 0.00150          |           |           | PASS   |

#### $\pi/4$ -DQPSK

| Channel | Frequency (MHz) | Reading Power | Cable loss | Output Power (dBm) | Output Power (W) | Limit (W) | Peak /AVG | Result |
|---------|-----------------|---------------|------------|--------------------|------------------|-----------|-----------|--------|
| Low     | 2402            | -0.62         | 3.50       | 2.88               | 0.00194          | 0.125     | peak      | PASS   |
| Mid     | 2441            | -1.78         | 3.50       | 1.72               | 0.00149          |           |           | PASS   |
| High    | 2480            | -3.01         | 3.50       | 0.49               | 0.00112          |           |           | PASS   |
| Low     | 2402            | -3.18         | 3.50       | 0.32               | 0.00108          | 0.125     | AVG       | PASS   |
| Mid     | 2441            | -4.31         | 3.50       | -0.81              | 0.00083          |           |           | PASS   |
| High    | 2480            | -5.47         | 3.50       | -1.97              | 0.00064          |           |           | PASS   |

#### 8DPSK

| Channel | Frequency (MHz) | Reading Power | Cable loss | Output Power (dBm) | Output Power (W) | Limit (W) | Peak /AVG | Result |
|---------|-----------------|---------------|------------|--------------------|------------------|-----------|-----------|--------|
| Low     | 2402            | -0.47         | 3.50       | 3.03               | 0.00201          | 0.125     | peak      | PASS   |
| Mid     | 2441            | -1.54         | 3.50       | 1.96               | 0.00157          |           |           | PASS   |
| High    | 2480            | -2.73         | 3.50       | 0.77               | 0.00119          |           |           | PASS   |
| Low     | 2402            | -3.09         | 3.50       | 0.41               | 0.00110          | 0.125     | AVG       | PASS   |
| Mid     | 2441            | -4.19         | 3.50       | -0.69              | 0.00085          |           |           | PASS   |
| High    | 2480            | -5.34         | 3.50       | -1.84              | 0.00065          |           |           | PASS   |

**Latest assessment:****Test Dat****GFSK**

| Channel | Frequency (MHz) | Reading Power (dBm) | Cable loss (dB) | Output Power (dBm) | Output Power (W) | Limit (W) | Peak /AVG | Result |
|---------|-----------------|---------------------|-----------------|--------------------|------------------|-----------|-----------|--------|
| Low     | 2402            | -0.25               | 3.50            | 3.25               | 0.00211          | 0.125     | peak      | PASS   |
| Mid     | 2441            | -0.84               | 3.50            | 2.66               | 0.00185          |           |           | PASS   |
| High    | 2480            | -1.77               | 3.50            | 1.73               | 0.00149          |           |           | PASS   |
| Low     | 2402            | -0.35               | 3.50            | 3.15               | 0.00207          | 0.125     | AVG       | PASS   |
| Mid     | 2441            | -1.08               | 3.50            | 2.42               | 0.00175          |           |           | PASS   |
| High    | 2480            | -2.07               | 3.50            | 1.43               | 0.00139          |           |           | PASS   |

 **$\pi/4$ -DQPSK**

| Channel | Frequency (MHz) | Reading Power (dBm) | Cable loss (dB) | Output Power (dBm) | Output Power (W) | Limit (W) | Peak / AVG | Result |
|---------|-----------------|---------------------|-----------------|--------------------|------------------|-----------|------------|--------|
| Low     | 2402            | -0.96               | 3.50            | 2.54               | 0.00179          | 0.125     | peak       | PASS   |
| Mid     | 2441            | -1.92               | 3.50            | 1.58               | 0.00144          |           |            | PASS   |
| High    | 2480            | -3.38               | 3.50            | 0.12               | 0.00103          |           |            | PASS   |
| Low     | 2402            | -3.38               | 3.50            | 0.12               | 0.00103          | 0.125     | AVG        | PASS   |
| Mid     | 2441            | -4.53               | 3.50            | -1.03              | 0.00079          |           |            | PASS   |
| High    | 2480            | -5.69               | 3.50            | -2.19              | 0.00060          |           |            | PASS   |

**8DPSK**

| Channel | Frequency (MHz) | Reading Power (dBm) | Cable loss (dB) | Output Power (dBm) | Output Power (W) | Limit (W) | Peak / AVG | Result |
|---------|-----------------|---------------------|-----------------|--------------------|------------------|-----------|------------|--------|
| Low     | 2402            | -0.63               | 3.50            | 2.87               | 0.00194          | 0.125     | peak       | PASS   |
| Mid     | 2441            | -1.74               | 3.50            | 1.76               | 0.00150          |           |            | PASS   |
| High    | 2480            | -3.05               | 3.50            | 0.45               | 0.00111          |           |            | PASS   |
| Low     | 2402            | -3.38               | 3.50            | 0.12               | 0.00103          | 0.125     | AVG        | PASS   |
| Mid     | 2441            | -4.38               | 3.50            | -0.88              | 0.00082          |           |            | PASS   |
| High    | 2480            | -5.57               | 3.50            | -2.07              | 0.00062          |           |            | PASS   |

Note: The power value of the latest test is lower than the original power value.




## 7.4 PEAK POWER SPECTRAL DENSITY

### LIMIT

1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

### TEST CONFIGURATION

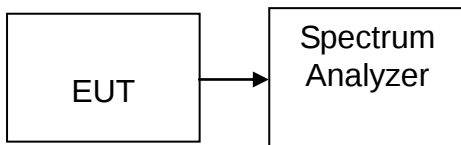

### TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### TEST RESULTS

*Not applicable. Since EUT is the Bluetooth device.*




## 7.5 BAND EDGES MEASUREMENT

### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### TEST CONFIGURATION

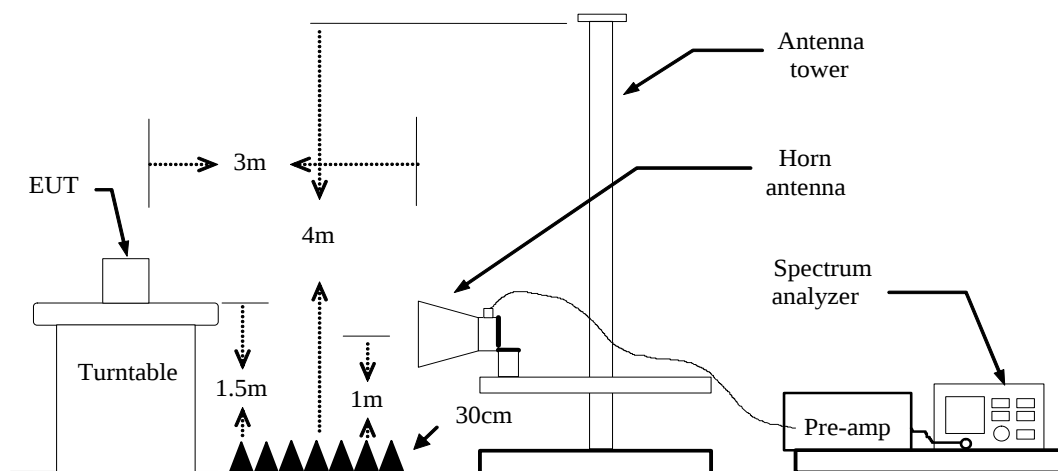

### TEST PROCEDURE


1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=1MHz / VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=1/T / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

### TEST RESULTS

Refer to attach spectrum analyzer data chart.



**Test Data (GFSK )**  
**Band Edges (CH Low)**

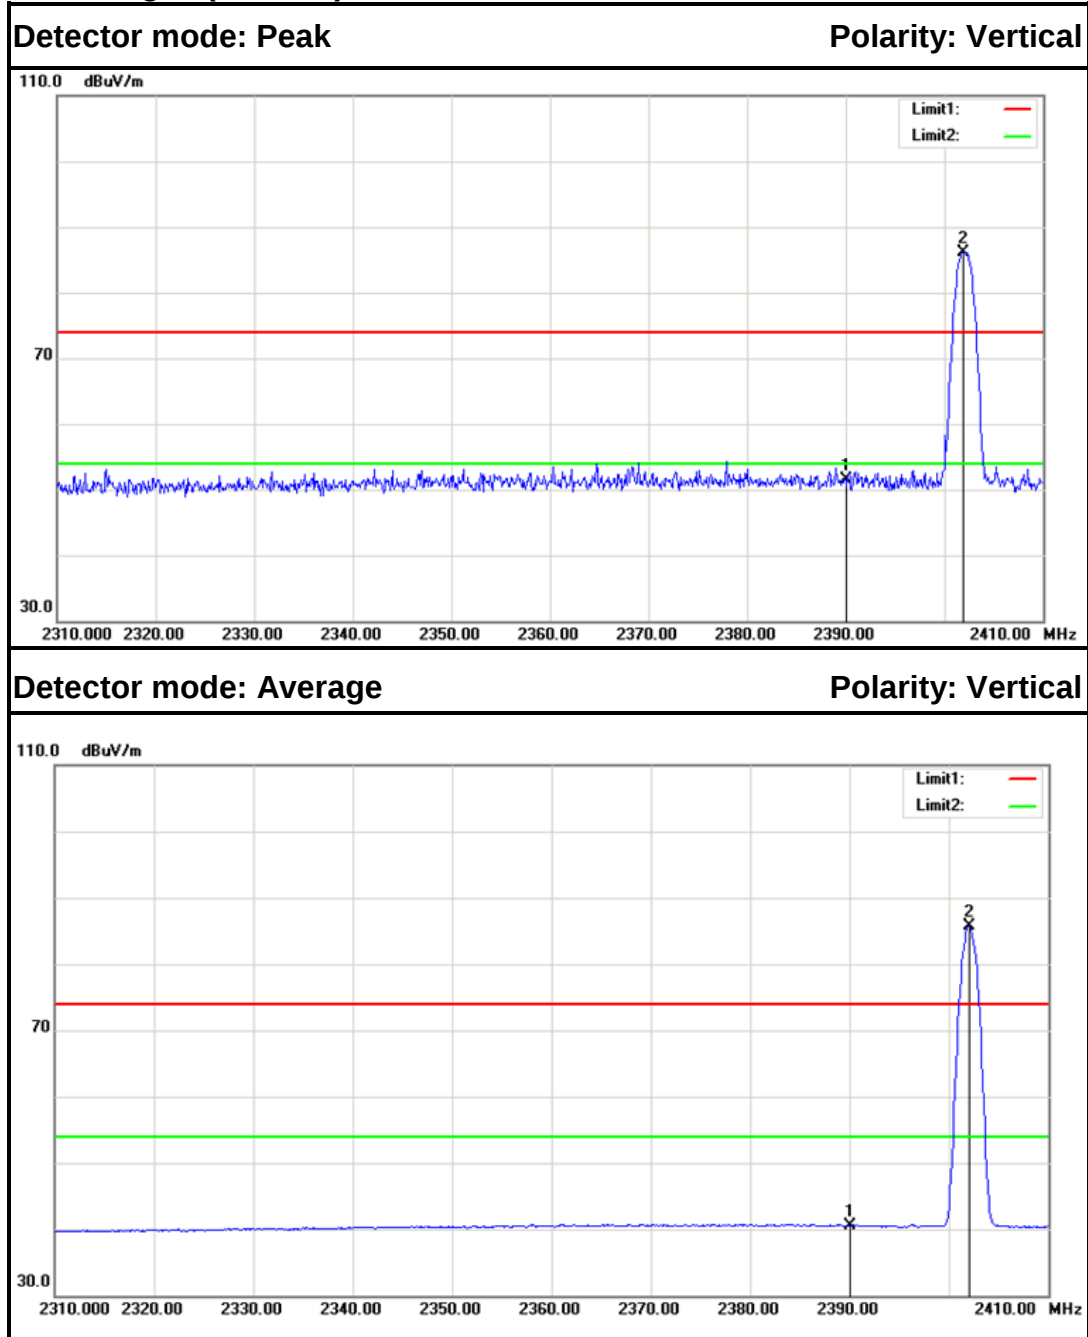


| No. | Frequency (MHz) | Reading (dB) | Factor (dB/m) | Result (dB/m) | Limit (dB/m) | Margin (dB) | Remark  | Antenna Polar |
|-----|-----------------|--------------|---------------|---------------|--------------|-------------|---------|---------------|
| 1   | 2390.000        | 54.32        | -2.86         | 51.46         | 74.00        | -22.54      | Peak    | Vertical      |
| 2   | 2401.900        | 88.96        | -2.80         | 86.16         | ---          | ---         | Peak    | Vertical      |
| 1   | 2390.000        | 43.39        | -2.86         | 40.53         | 54.00        | -13.47      | Average | Vertical      |
| 2   | 2402.000        | 88.52        | -2.80         | 85.72         | ---          | ---         | Average | Vertical      |




Detector mode: Peak

Polarity: Horizontal

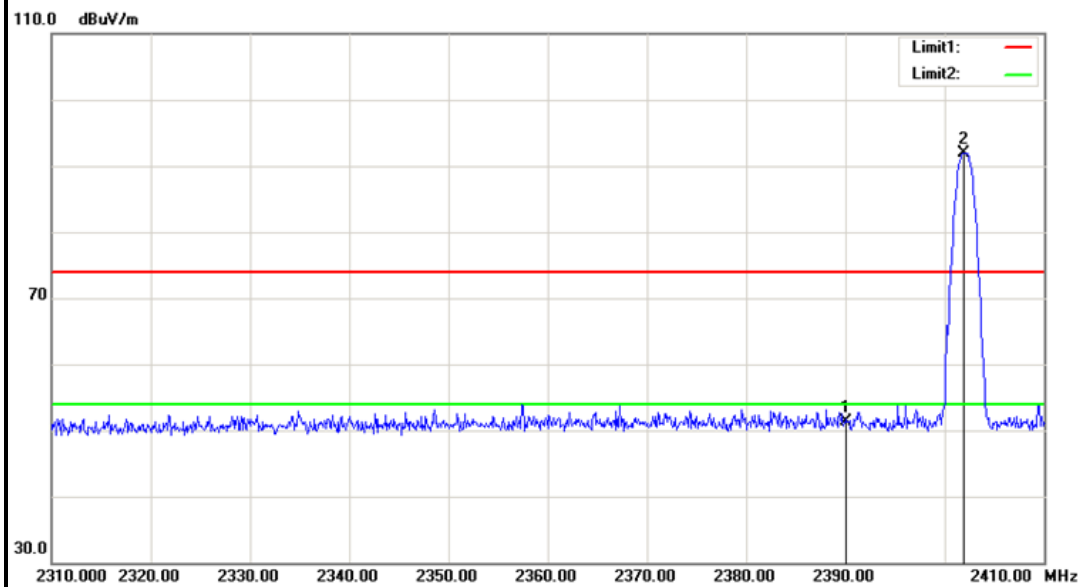

Detector mode: Average



Polarity: Horizontal

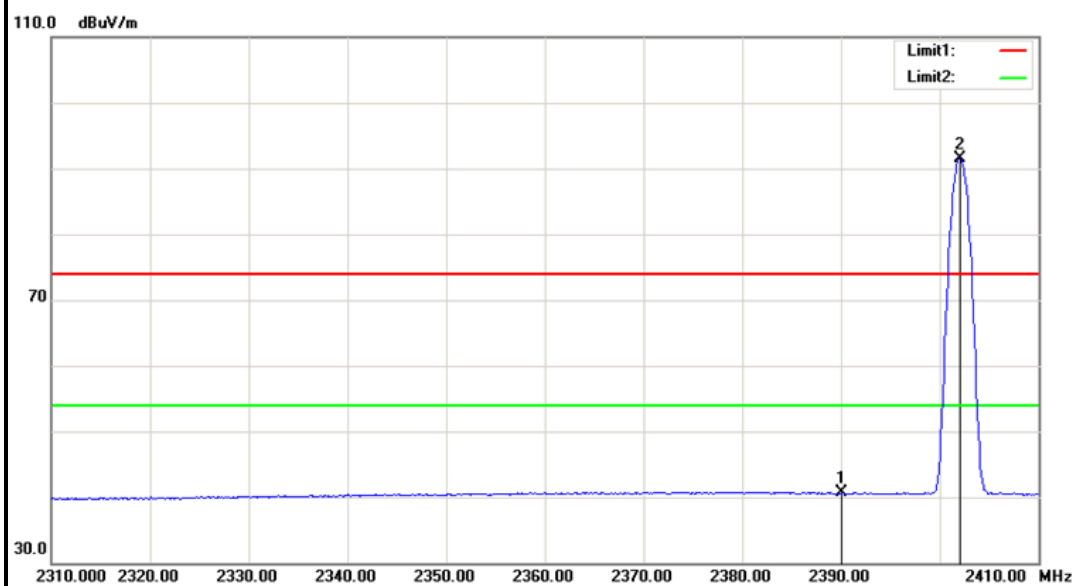

| No. | Frequency (MHz) | Reading (dB) | Factor (dB/m) | Result (dB/m) | Limit (dB/m) | Margin (dB) | Remark  | Antenna Polar |
|-----|-----------------|--------------|---------------|---------------|--------------|-------------|---------|---------------|
| 1   | 2390.000        | 54.07        | -2.86         | 51.21         | 74.00        | -22.79      | Peak    | Horizontal    |
| 2   | 2401.900        | 94.71        | -2.80         | 91.91         | ---          | ---         | Peak    | Horizontal    |
| 1   | 2390.000        | 43.55        | -2.86         | 40.69         | 54.00        | -13.31      | Average | Horizontal    |
| 2   | 2402.000        | 94.30        | -2.80         | 91.50         | ---          | ---         | Average | Horizontal    |



### Band Edges (CH-High)

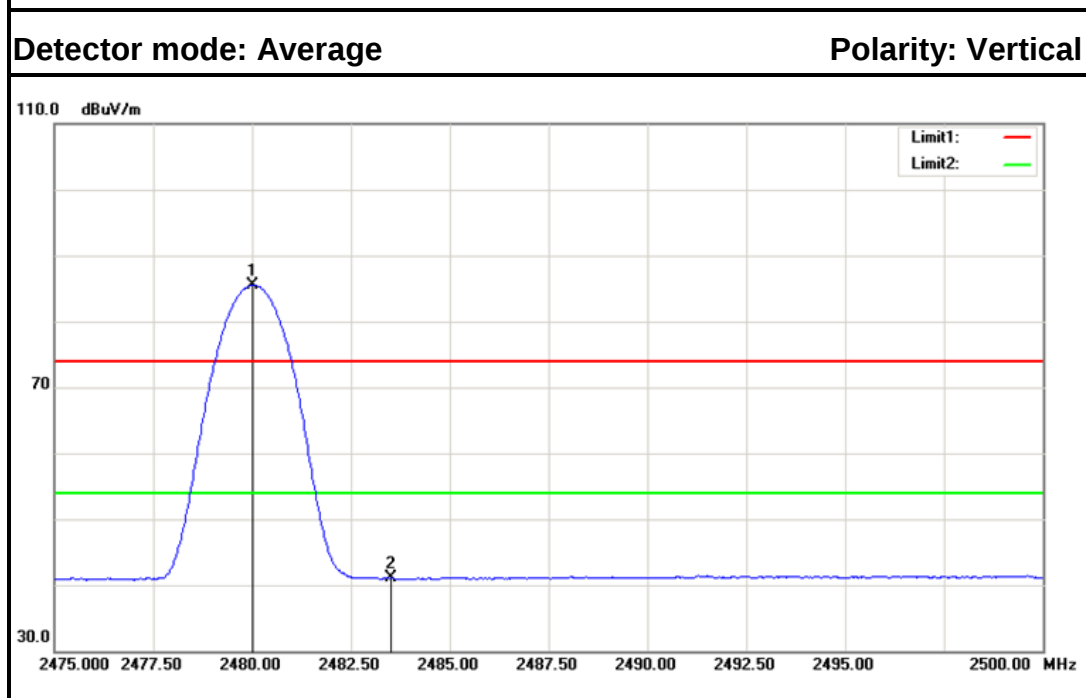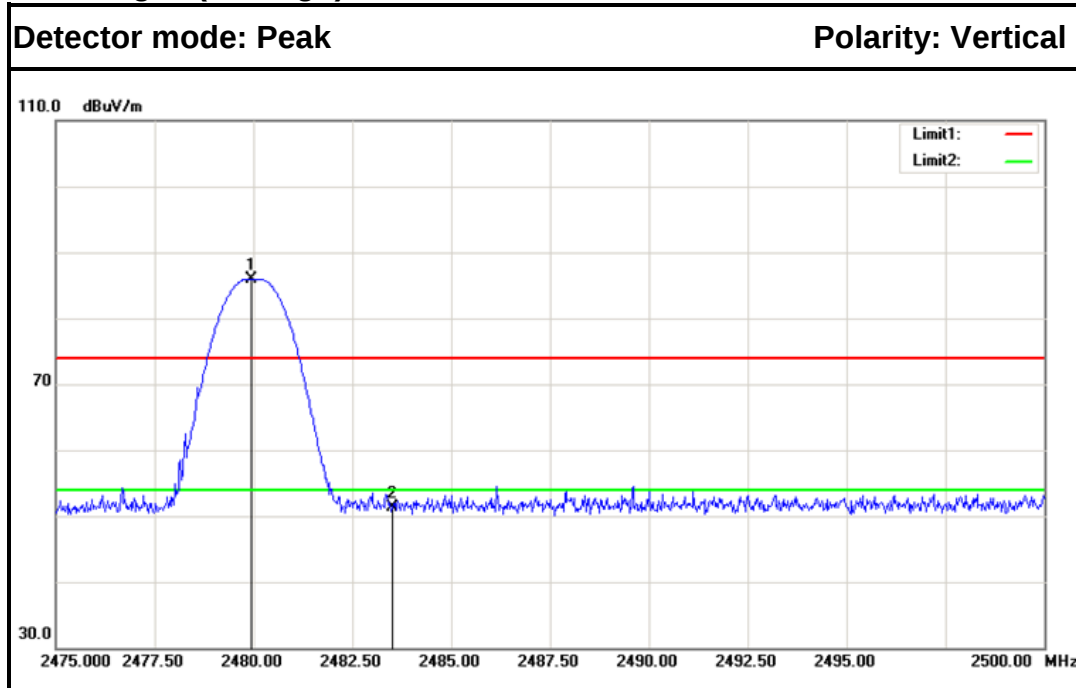


| No. | Frequency (MHz) | Reading (dB) | Factor (dB/m) | Result (dB/m) | Limit (dB/m) | Margin (dB) | Remark  | Antenna Polar |
|-----|-----------------|--------------|---------------|---------------|--------------|-------------|---------|---------------|
| 1   | 2479.950        | 88.36        | -2.37         | 85.99         | ---          | ---         | Peak    | Vertical      |
| 2   | 2483.500        | 53.69        | -2.35         | 51.34         | 74.00        | -22.66      | Peak    | Vertical      |
| 1   | 2480.025        | 87.89        | -2.37         | 85.52         | ---          | ---         | Average | Vertical      |
| 2   | 2483.500        | 43.36        | -2.35         | 41.01         | 54.00        | -12.99      | Average | Vertical      |




Detector mode: Peak

Polarity: Horizontal

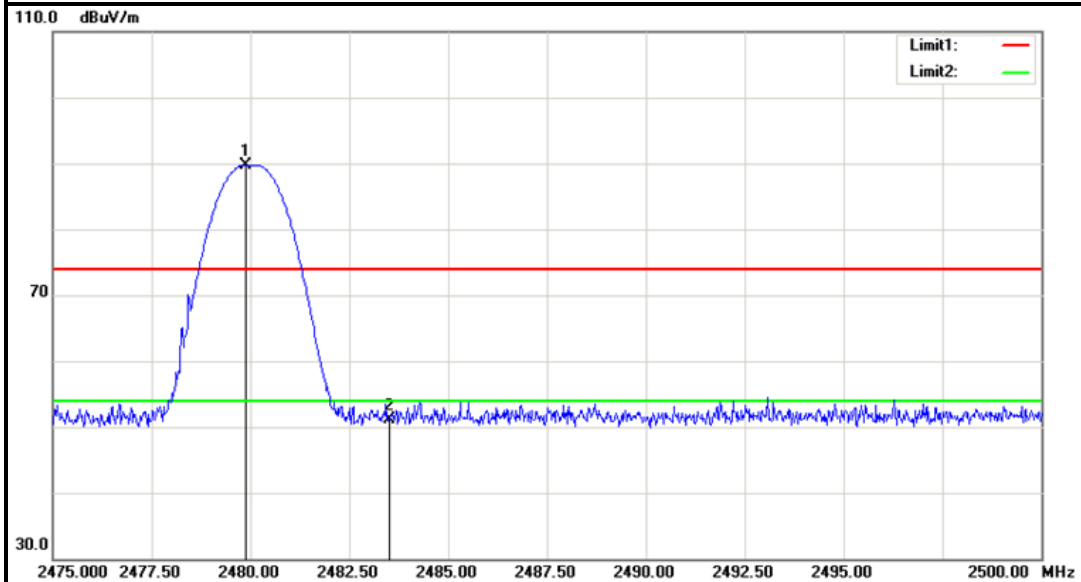

Detector mode: Average

Polarity: Horizontal

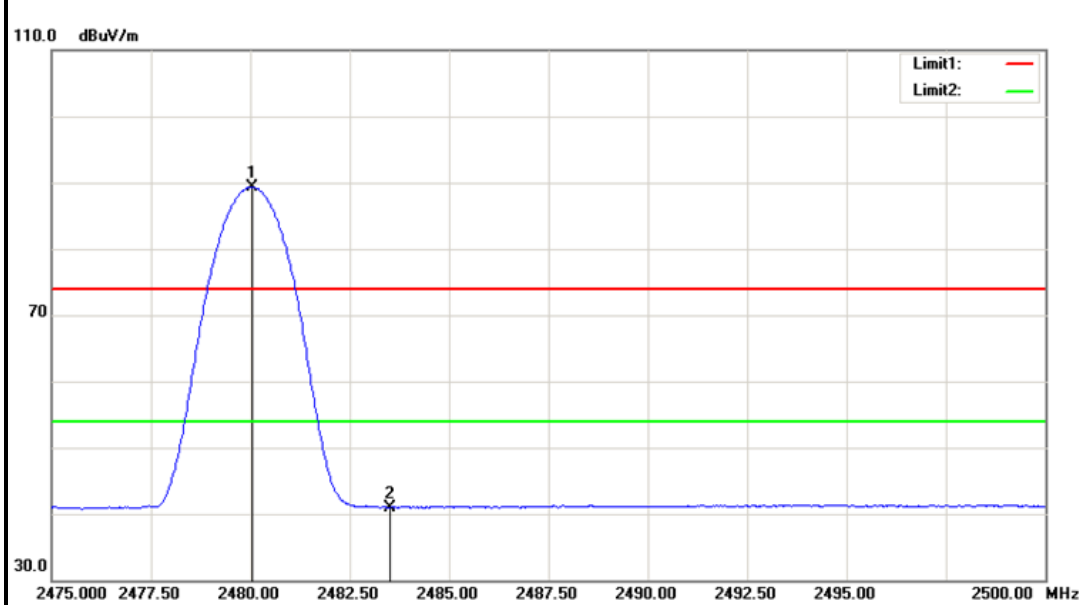


| No. | Frequency (MHz) | Reading (dB) | Factor (dB/m) | Result (dB/m) | Limit (dB/m) | Margin (dB) | Remark  | Antenna Polar |
|-----|-----------------|--------------|---------------|---------------|--------------|-------------|---------|---------------|
| 1   | 2479.875        | 92.12        | -2.37         | 89.75         | ---          | ---         | Peak    | Horizontal    |
| 2   | 2483.500        | 53.36        | -2.35         | 51.01         | 74.00        | -22.99      | Peak    | Horizontal    |
| 1   | 2480.050        | 91.70        | -2.37         | 89.33         | ---          | ---         | Average | Horizontal    |
| 2   | 2483.500        | 43.29        | -2.35         | 40.94         | 54.00        | -13.06      | Average | Horizontal    |




## 8DPSK

### Band Edges (CH Low)

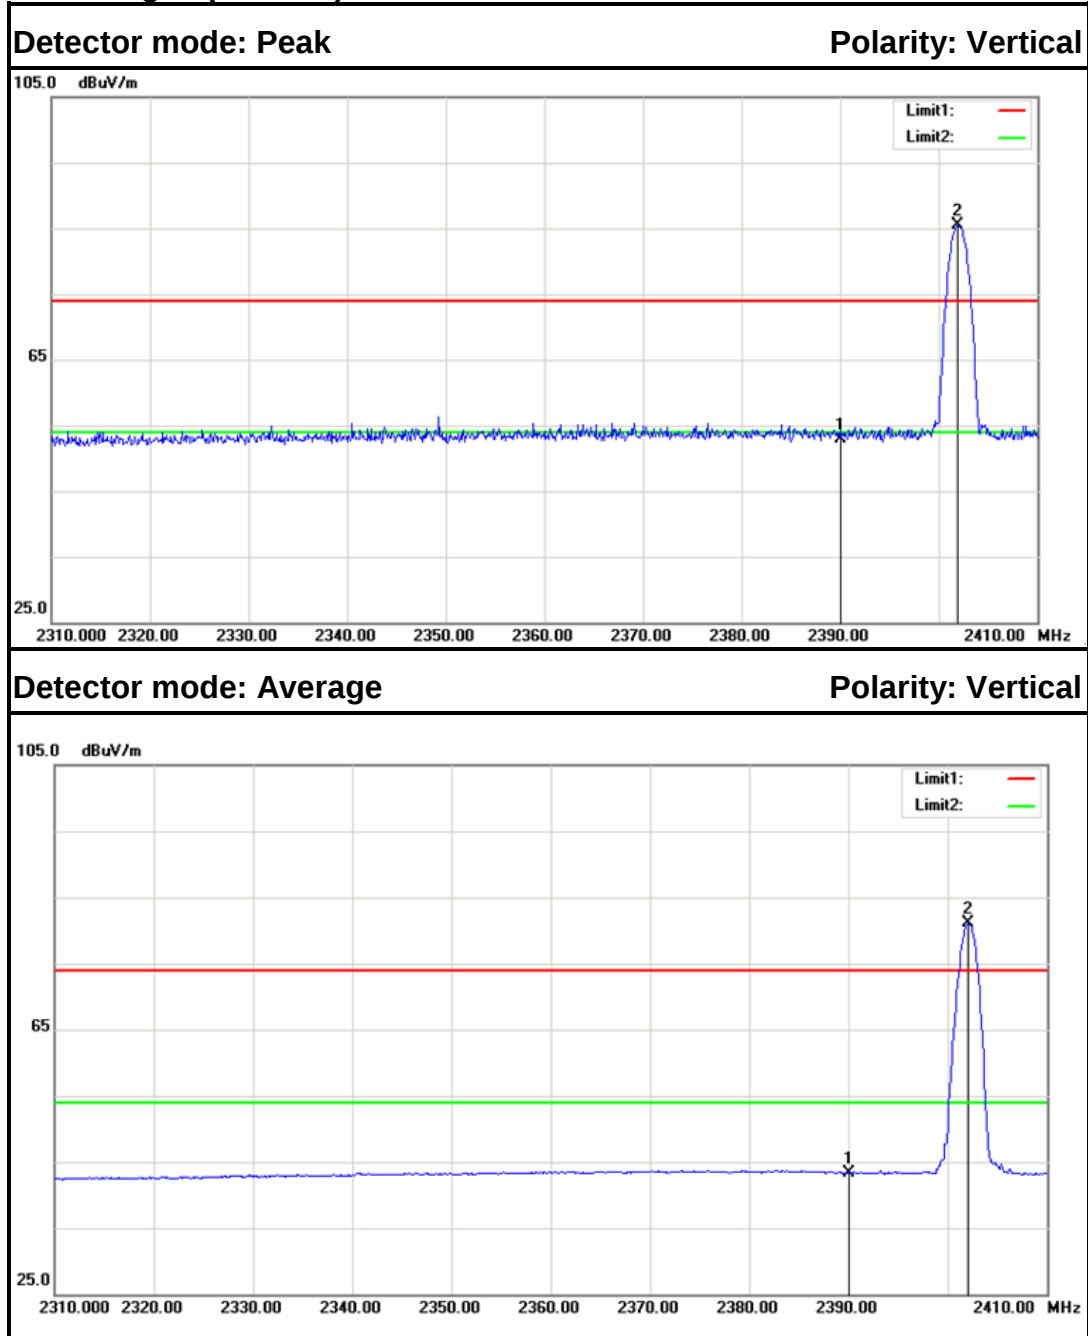


| No. | Frequency (MHz) | Reading (dB) | Factor (dB/m) | Result (dB/m) | Limit (dB/m) | Margin (dB) | Remark  | Antenna Polar |
|-----|-----------------|--------------|---------------|---------------|--------------|-------------|---------|---------------|
| 1   | 2390.000        | 55.82        | -2.86         | 52.96         | 74.00        | -21.04      | Peak    | Vertical      |
| 2   | 2401.900        | 88.27        | -2.80         | 85.47         | ---          | ---         | Peak    | Vertical      |
| 1   | 2390.000        | 46.20        | -2.86         | 43.34         | 54.00        | -10.66      | Average | Vertical      |
| 2   | 2402.100        | 83.83        | -2.80         | 81.03         | ---          | ---         | Average | Vertical      |

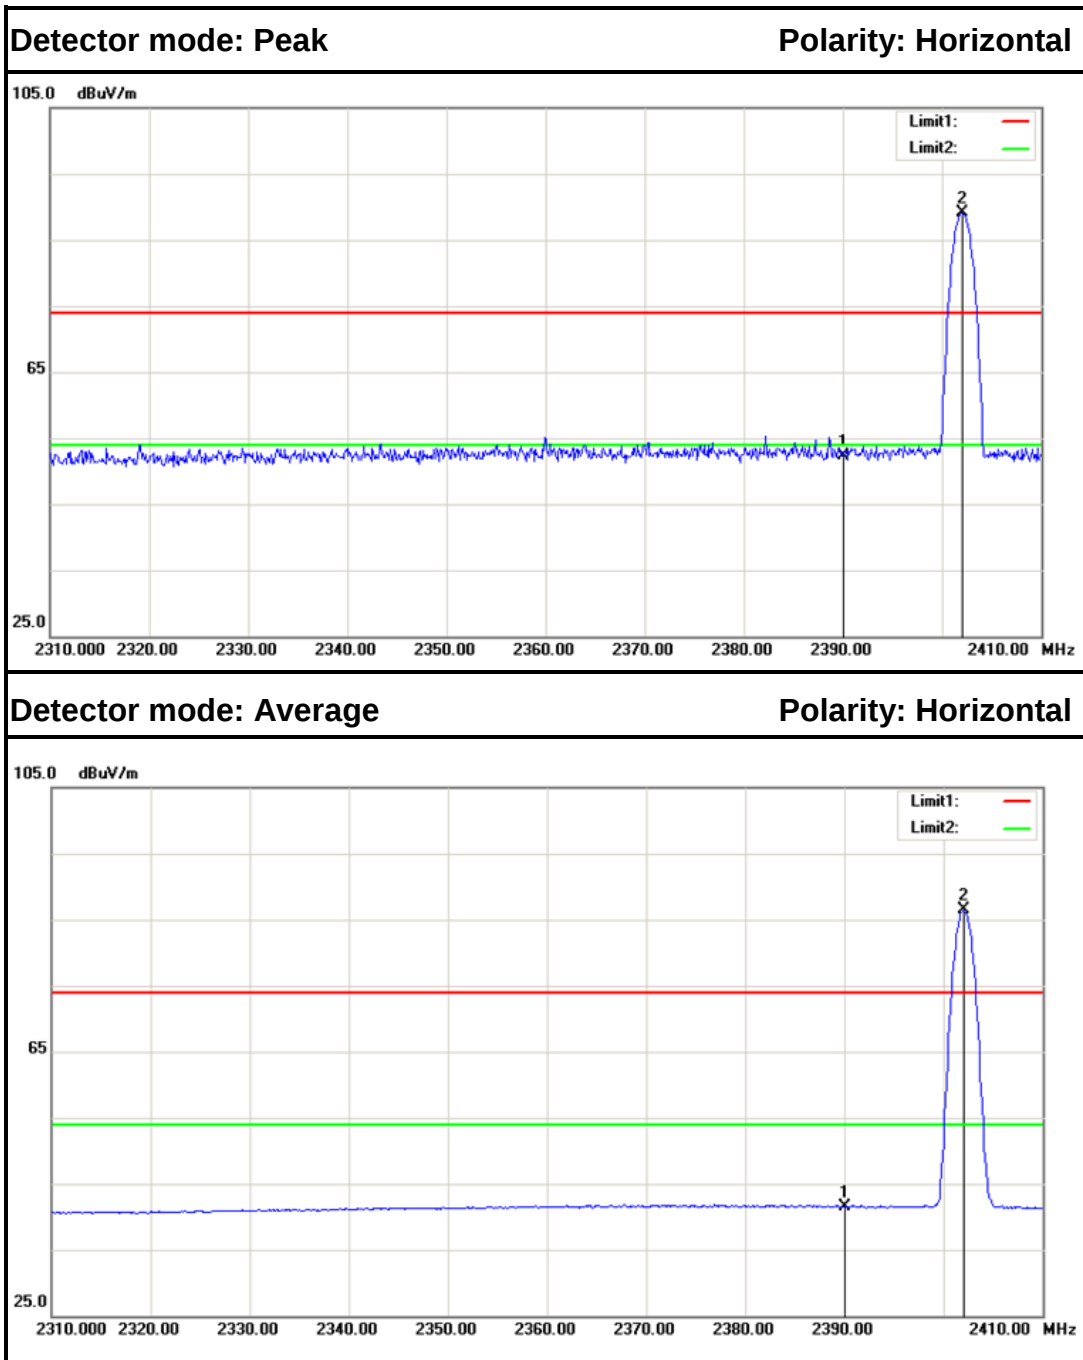


| No. | Frequency (MHz) | Reading (dB) | Factor (dB/m) | Result (dB/m) | Limit (dB/m) | Margin (dB) | Remark  | Antenna Polar |
|-----|-----------------|--------------|---------------|---------------|--------------|-------------|---------|---------------|
| 1   | 2390.000        | 55.09        | -2.86         | 52.23         | 74.00        | -21.77      | Peak    | Horizontal    |
| 2   | 2402.000        | 91.87        | -2.80         | 89.07         | ---          | ---         | Peak    | Horizontal    |
| 1   | 2390.000        | 44.41        | -2.86         | 41.55         | 54.00        | -12.45      | Average | Horizontal    |
| 2   | 2402.100        | 89.25        | -2.80         | 86.45         | ---          | ---         | Average | Horizontal    |



### Band Edges (CH-High)

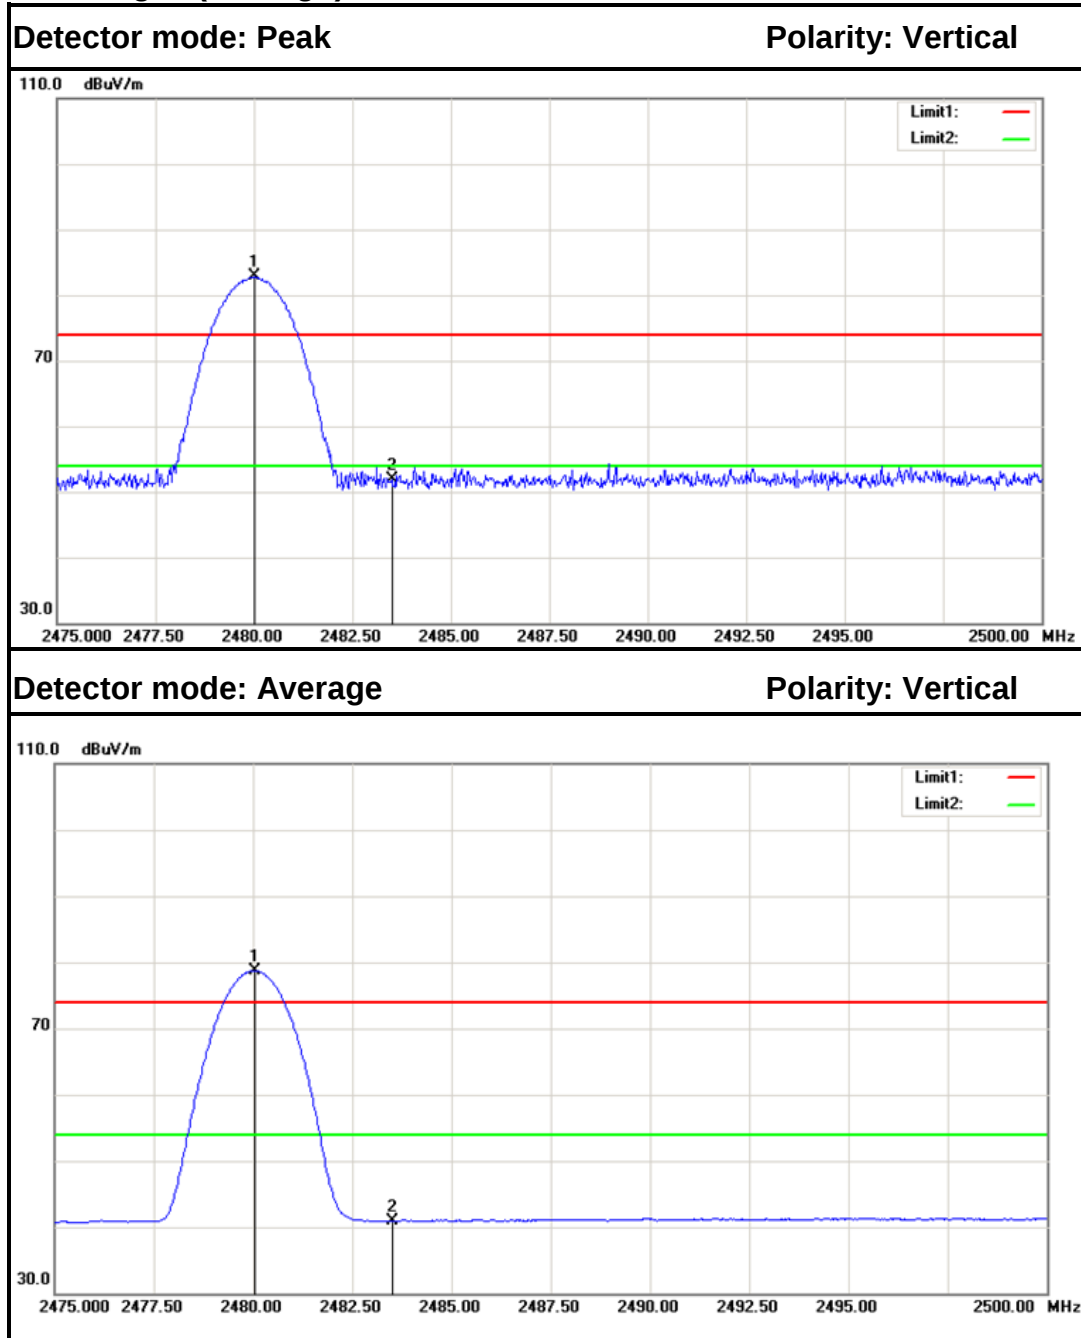

| No. | Frequency (MHz) | Reading (dB) | Factor (dB/m) | Result (dB/m) | Limit (dB/m) | Margin (dB) | Remark  | Antenna Polar |
|-----|-----------------|--------------|---------------|---------------|--------------|-------------|---------|---------------|
| 1   | 2480.025        | 85.20        | -2.37         | 82.83         | ---          | ---         | Peak    | Vertical      |
| 2   | 2483.500        | 54.30        | -2.35         | 51.95         | 74.00        | -22.05      | Peak    | Vertical      |
| 1   | 2480.050        | 81.11        | -2.37         | 78.74         | ---          | ---         | Average | Vertical      |
| 2   | 2483.500        | 43.30        | -2.35         | 40.95         | 54.00        | -13.05      | Average | Vertical      |

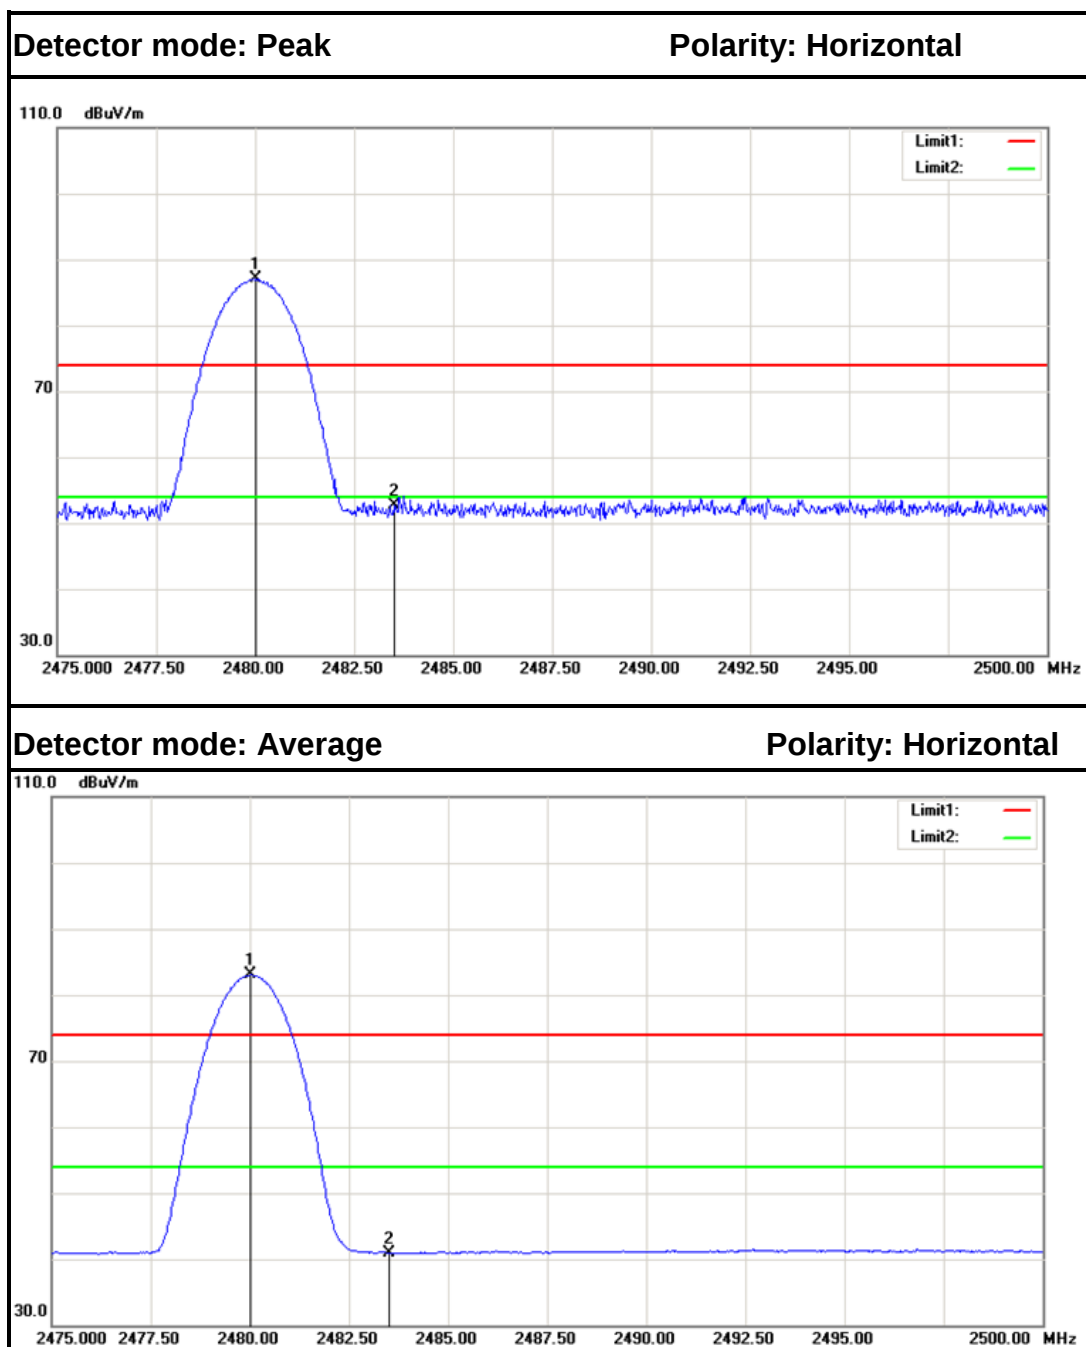

| No. | Frequency (MHz) | Reading (dB) | Factor (dB/m) | Result (dB/m) | Limit (dB/m) | Margin (dB) | Remark  | Antenna Polar |
|-----|-----------------|--------------|---------------|---------------|--------------|-------------|---------|---------------|
| 1   | 2480.000        | 89.45        | -2.37         | 87.08         | ---          | ---         | Peak    | Horizontal    |
| 2   | 2483.500        | 54.98        | -2.35         | 52.63         | 74.00        | -21.37      | Peak    | Horizontal    |
| 1   | 2480.025        | 85.38        | -2.37         | 83.01         | ---          | ---         | Average | Horizontal    |
| 2   | 2483.500        | 43.32        | -2.35         | 40.97         | 54.00        | -13.03      | Average | Horizontal    |




## 7.6 FREQUENCY SEPARATION

### LIMIT

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### TEST CONFIGURATION

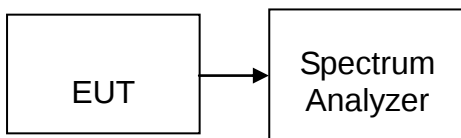

### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW=30kHz, VBW=30kHz, Adjust Span to 4 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

### TEST RESULTS

*No non-compliance noted*

#### Test Data

##### GFSK

| Channel Separation (MHz) | Two-thirds of the 20 dB Bandwidth (kHz) | Channel Separation Limit            | Result |
|--------------------------|-----------------------------------------|-------------------------------------|--------|
| 1.000                    | 680.000                                 | > Two-thirds of the 20 dB Bandwidth | Pass   |

##### 8DPSK


| Channel Separation (MHz) | Two-thirds of the 20 dB Bandwidth (kHz) | Channel Separation Limit            | Result |
|--------------------------|-----------------------------------------|-------------------------------------|--------|
| 1.000                    | 880.000                                 | > Two-thirds of the 20 dB Bandwidth | Pass   |




## GFSK

### Test Plot

### Measurement of Channel Separation

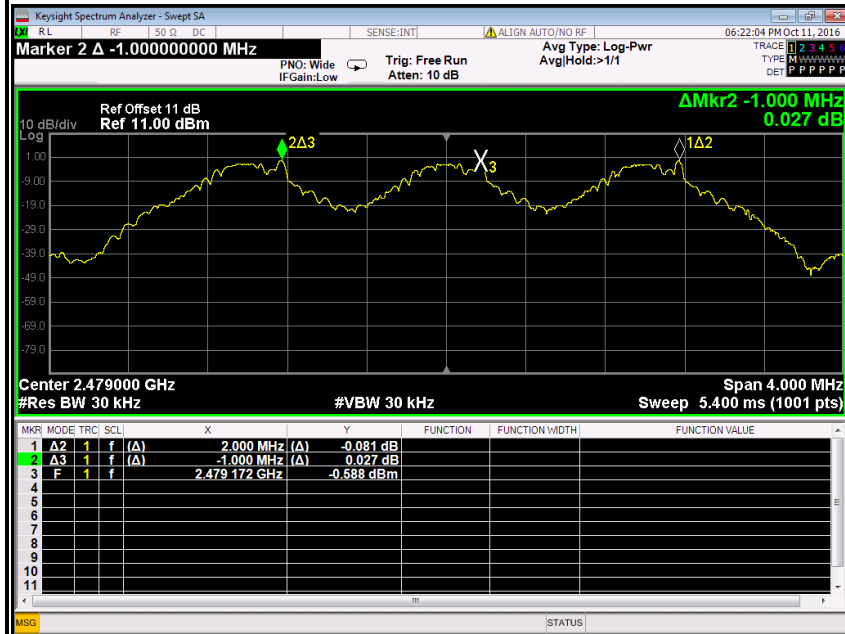

### 20 dB bandwidth(CH High)

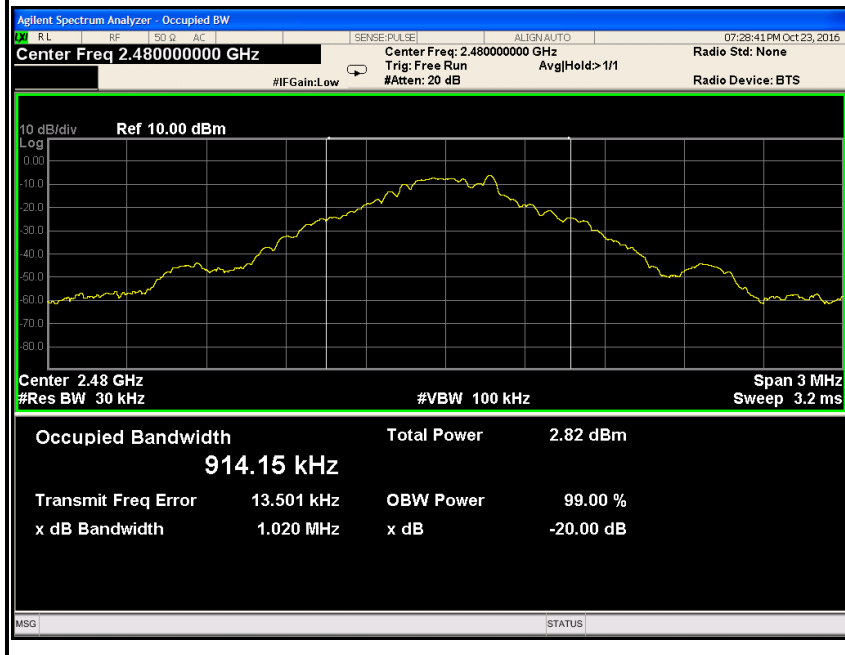





## 8DPSK

### Test Plot

### Measurement of Channel Separation

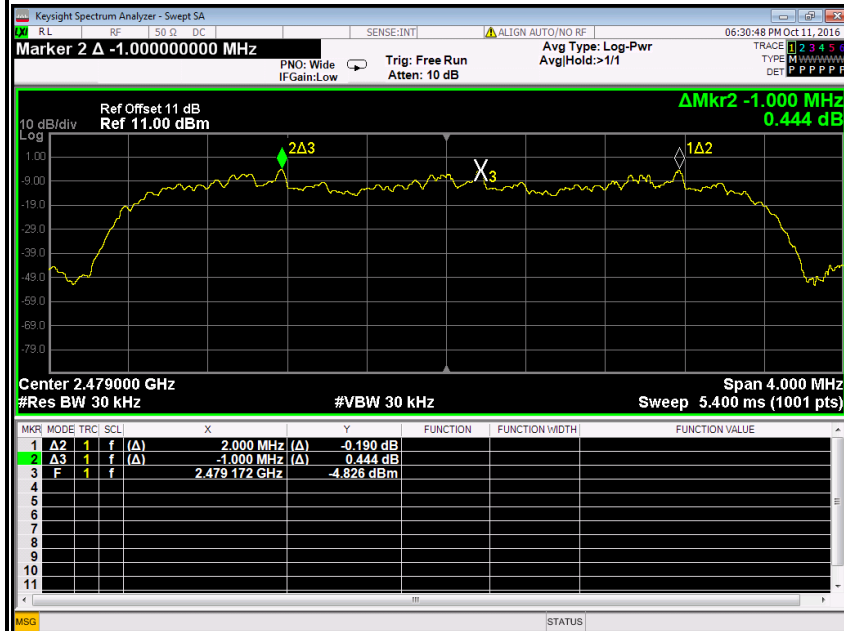

### 20 dB bandwidth(CH High)

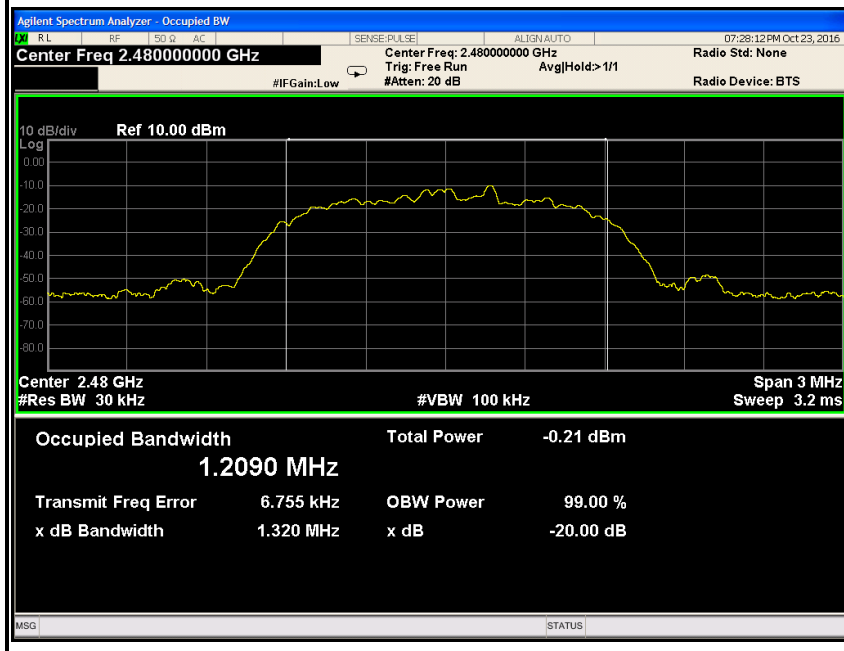




## 7.7 NUMBER OF HOPPING FREQUENCY

### LIMIT

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

### TEST CONFIGURATION



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = 1ms.
4. Set the spectrum analyzer as RBW, VBW=300kHz,
5. Max hold, view and count how many channel in the band.

### TEST RESULTS

*No non-compliance noted*

#### Test Data

| Result (No. of CH) | Limit (No. of CH) | Result |
|--------------------|-------------------|--------|
| 79                 | >15               | PASS   |




## Test Plot

### Channel Number


#### GFSK

#### 2.400 GHz – 2.4835 GHz

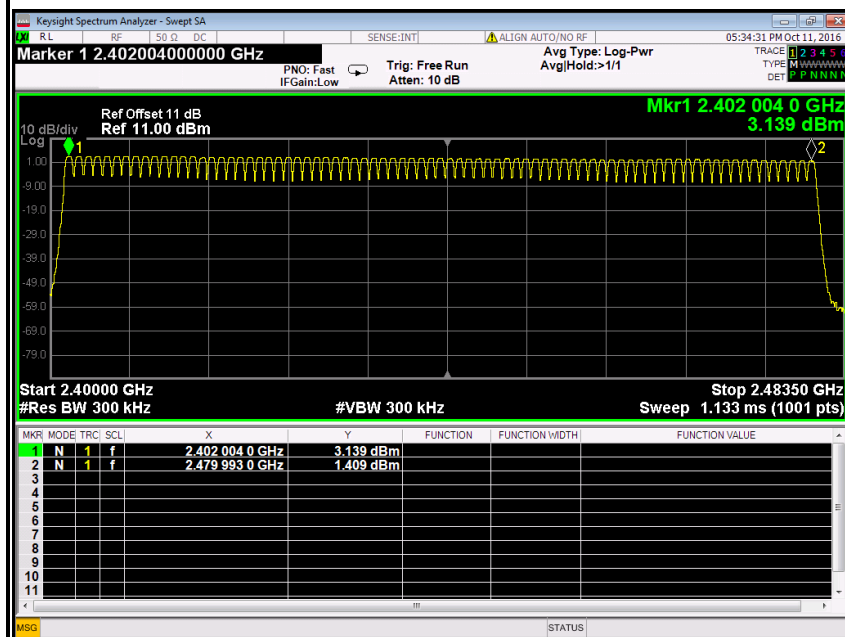

#### 8DPSK

#### 2.400 GHz – 2.4835 GHz

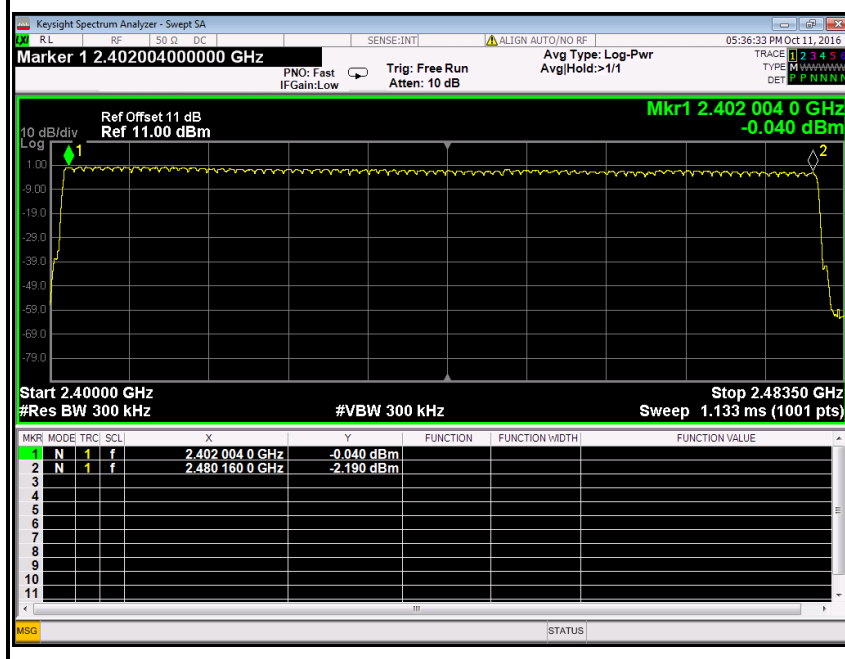




## 7.8 TIME OF OCCUPANCY (DWELL TIME)

### LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4s multiplied by the number of hopping channels employed.

### TEST CONFIGURATION



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.



## **TEST RESULTS**

*No non-compliance noted*

### **Test Data**

#### **GFSK**

##### **DH 1**

CH Mid:  $0.409 * (1600/2)/79 * 31.6 = 130.880(\text{ms})$

| CH  | Pulse Time (ms) | Total of Dwell (ms) | Period Time (s) | Limit (ms) | Result |
|-----|-----------------|---------------------|-----------------|------------|--------|
| Mid | 0.409           | 130.880             | 31.60           | 400.00     | PASS   |

##### **DH 3**

CH Mid:  $1.677 * (1600/4)/79 * 31.6 = 268.320 (\text{ms})$

| CH  | Pulse Time (ms) | Total of Dwell (ms) | Period Time (s) | Limit (ms) | Result |
|-----|-----------------|---------------------|-----------------|------------|--------|
| Mid | 1.677           | 268.320             | 31.60           | 400.00     | PASS   |

##### **DH 5**

CH Mid:  $2.916 * (1600/6)/79 * 31.6 = 311.040(\text{ms})$

| CH  | Pulse Time (ms) | Total of Dwell (ms) | Period Time (s) | Limit (ms) | Result |
|-----|-----------------|---------------------|-----------------|------------|--------|
| Mid | 2.916           | 311.040             | 31.60           | 400.00     | PASS   |



**8DPSK**

**DH 1**

CH Mid:  $0.418 * (1600/2)/79 * 31.6 = 133.760$  (ms)

| CH  | Pulse Time<br>(ms) | Total of Dwell<br>(ms) | Period Time<br>(s) | Limit<br>(ms) | Result |
|-----|--------------------|------------------------|--------------------|---------------|--------|
| Mid | 0.418              | 133.760                | 31.60              | 400.00        | PASS   |

**DH 3**

CH Mid:  $1.677 * (1600/4)/79 * 31.6 = 268.320$  (ms)

| CH  | Pulse Time<br>(ms) | Total of Dwell<br>(ms) | Period Time<br>(s) | Limit<br>(ms) | Result |
|-----|--------------------|------------------------|--------------------|---------------|--------|
| Mid | 1.677              | 268.320                | 31.60              | 400.00        | PASS   |

**DH 5**

CH Mid:  $2.928 * (1600/6)/79 * 31.6 = 312.320$ (ms)

| CH  | Pulse Time<br>(ms) | Total of Dwell<br>(ms) | Period Time<br>(s) | Limit<br>(ms) | Result |
|-----|--------------------|------------------------|--------------------|---------------|--------|
| Mid | 2.928              | 312.320                | 31.60              | 400.00        | PASS   |




## Test Plot

### GFSK


#### DH 1


#### CH Mid

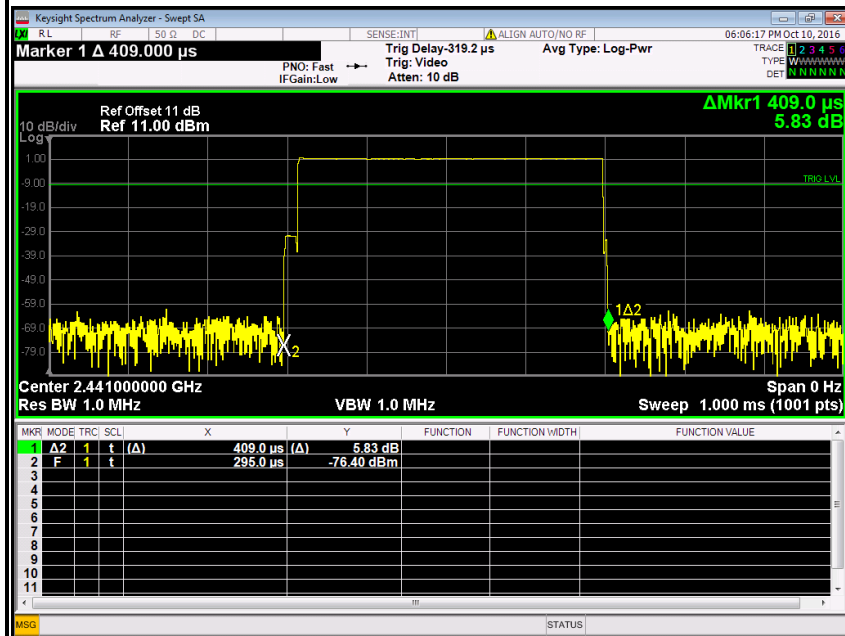

#### DH 3

#### CH Mid

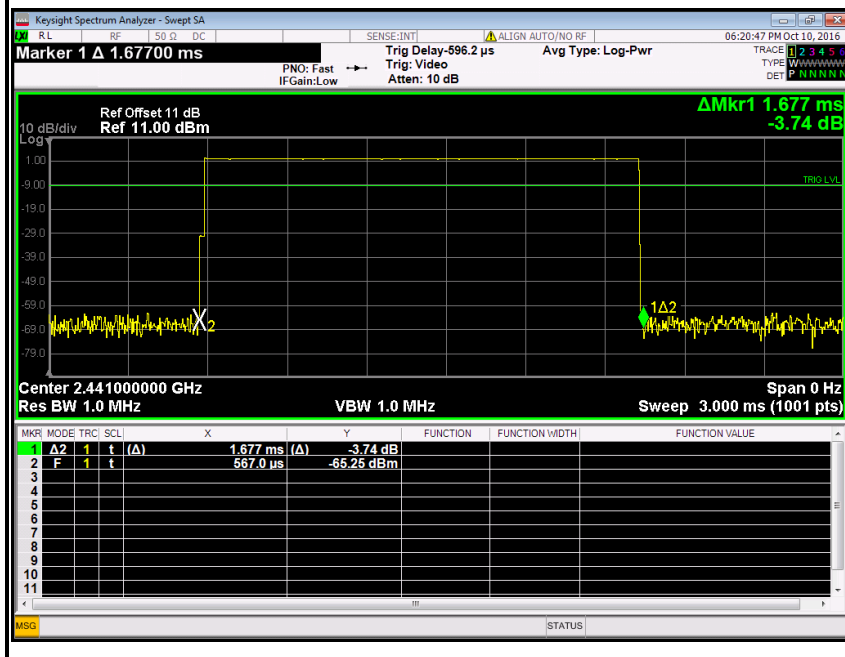

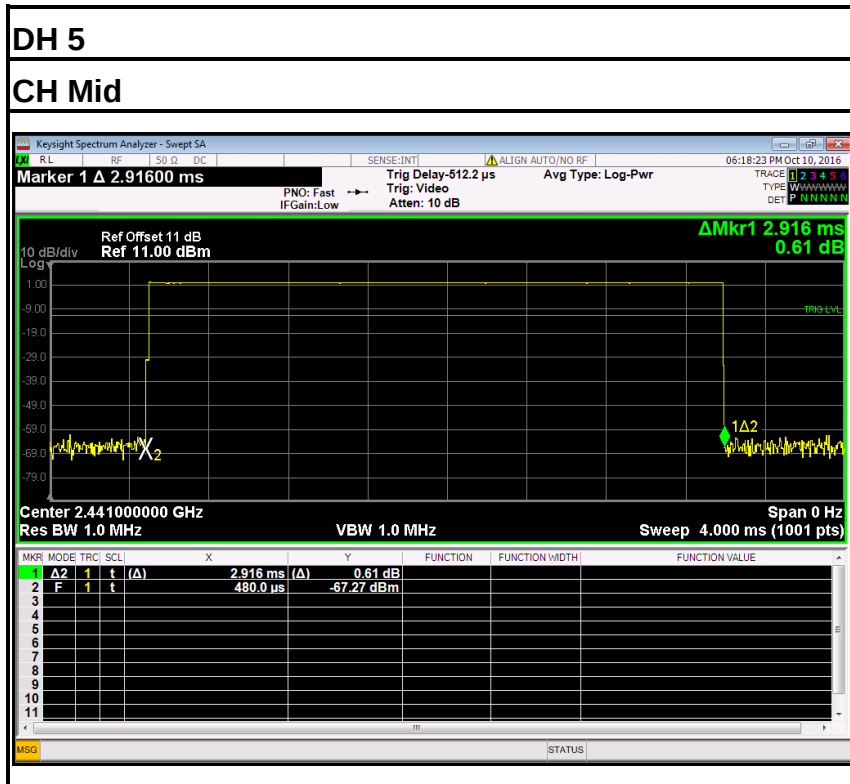




## Test Plot

### 8DPSK


#### DH 1

#### CH Mid

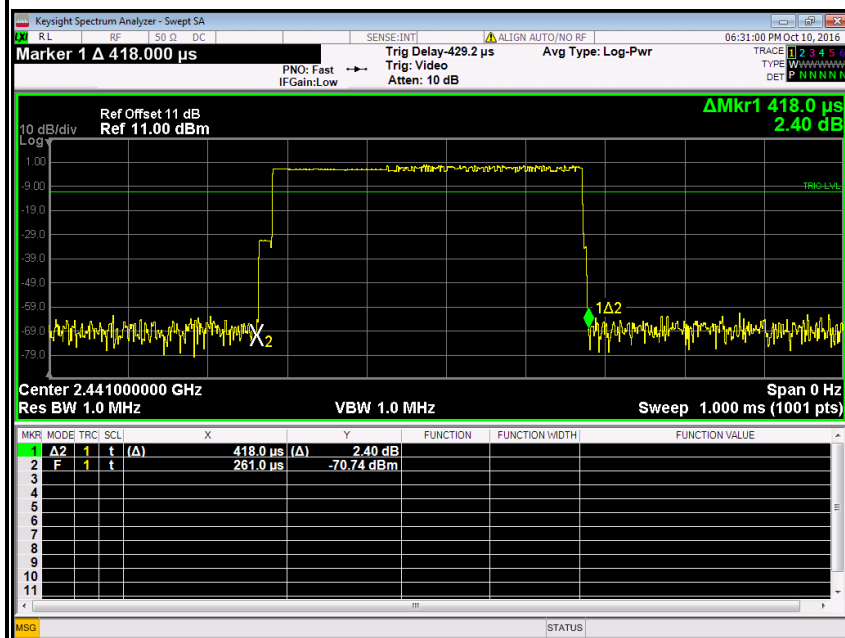

#### DH 3


#### CH Mid

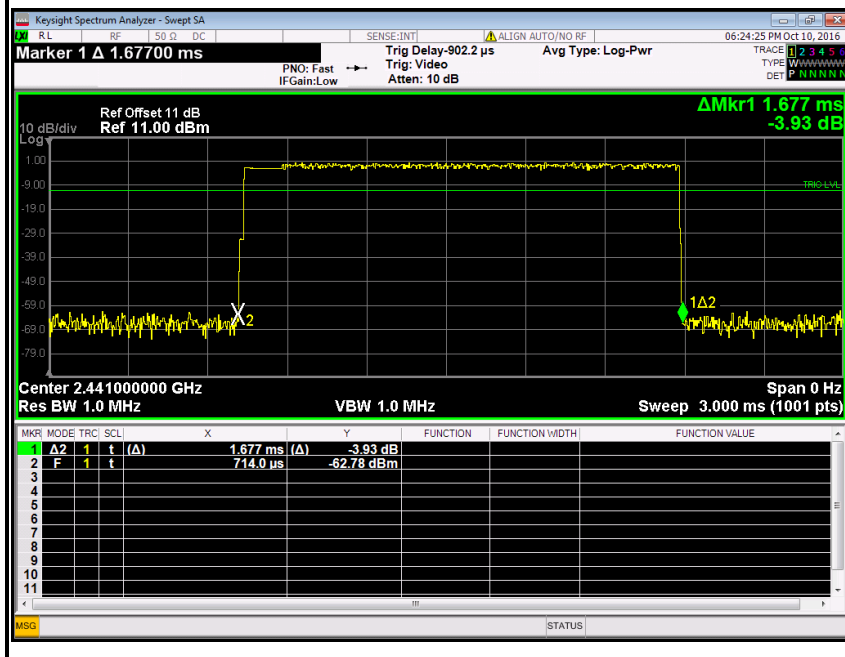



DH 5

CH Mid

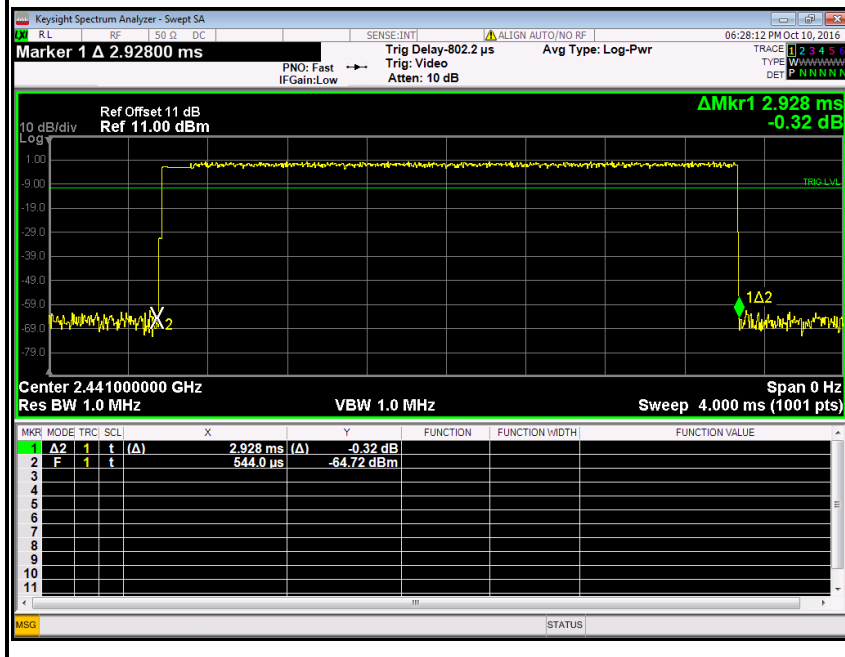




## 7.9 SPURIOUS EMISSIONS

### 7.9.1. CONDUCTED MEASUREMENT

#### LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

#### TEST CONFIGURATION

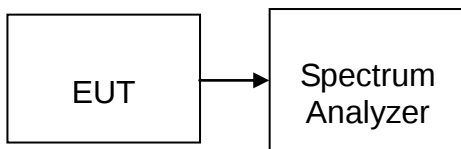

#### TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 9 kHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels, and highest channels. No emission found between lowest internal used/generated frequency to 10MHz, it is only recorded 10MHz to 26GHz.


#### TEST RESULTS

*No non-compliance noted*

**Remark:** The hopping on mode and hopping off mode were chosen for pre-test and the hopping off mode was the worse case and print in the report.




Hopping Off  
Test Plot (GFSK )

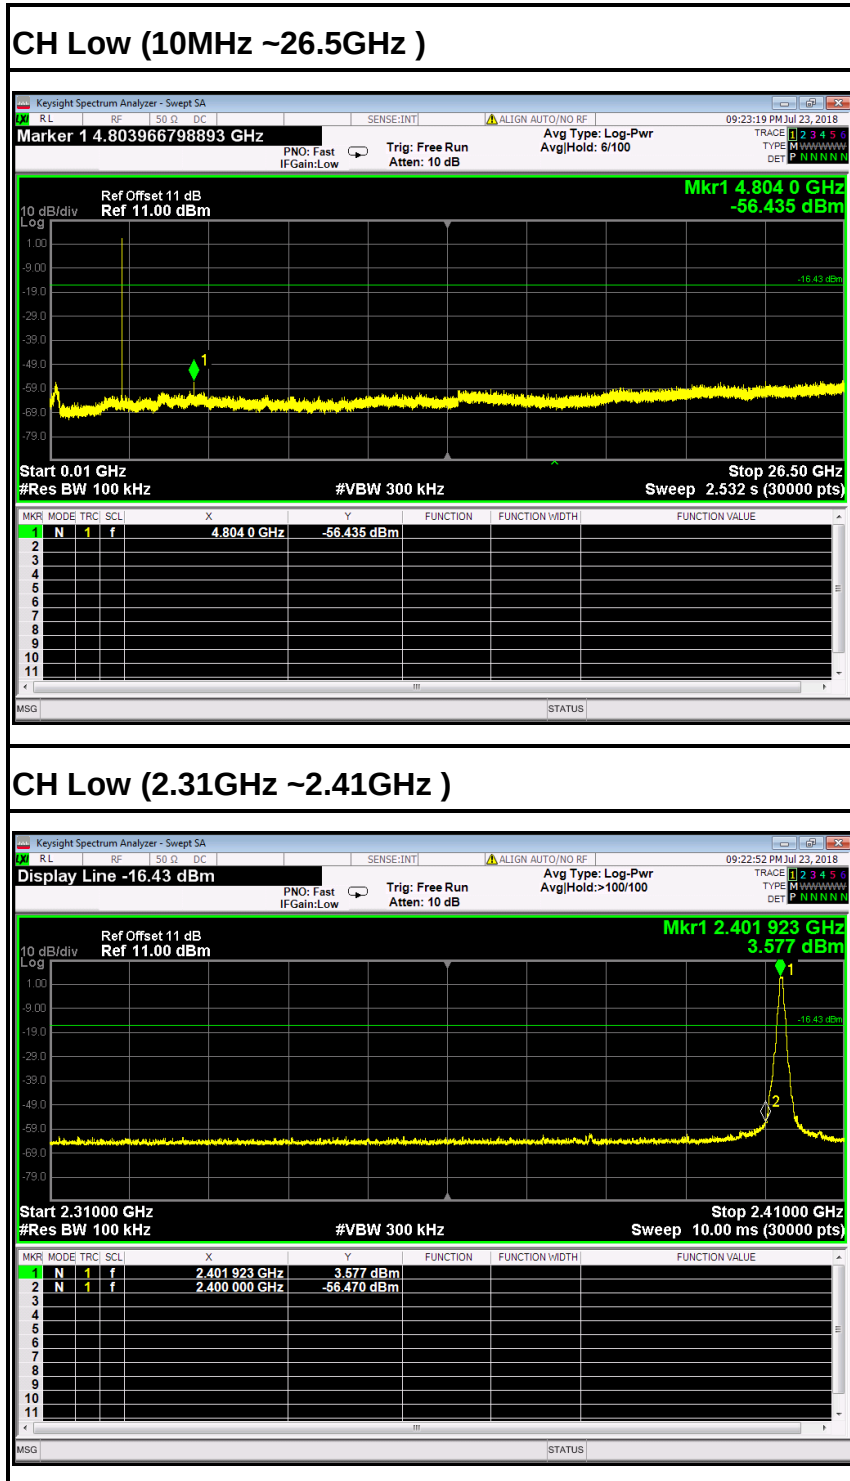




### CH Mid (10MHz ~26.5GHz)

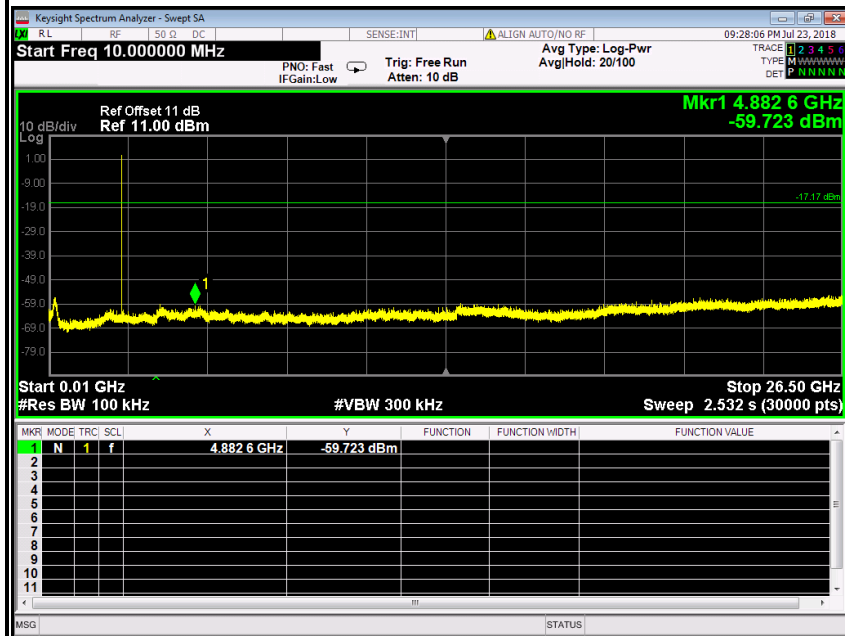


### CH Mid (2.441GHz)

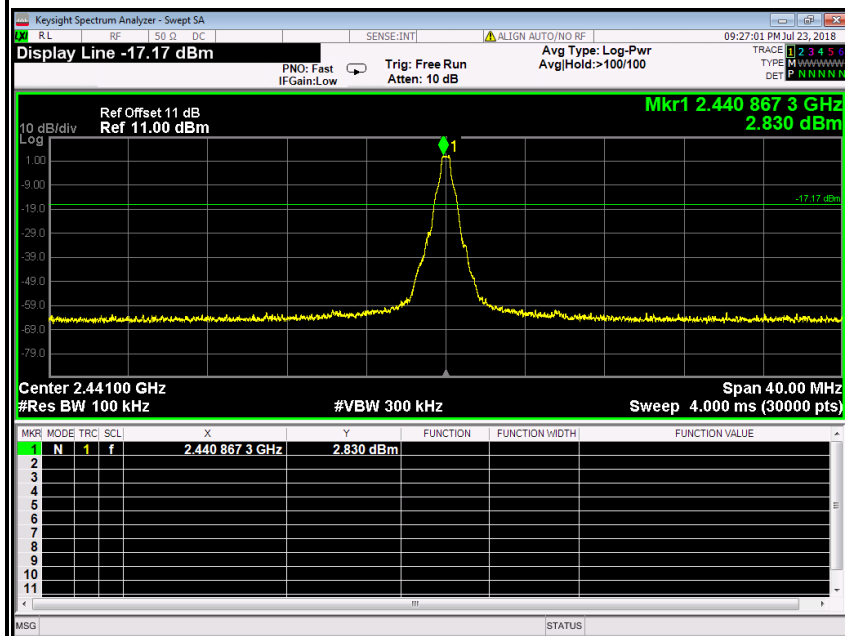




### CH High (10MHz ~26.5GHz)

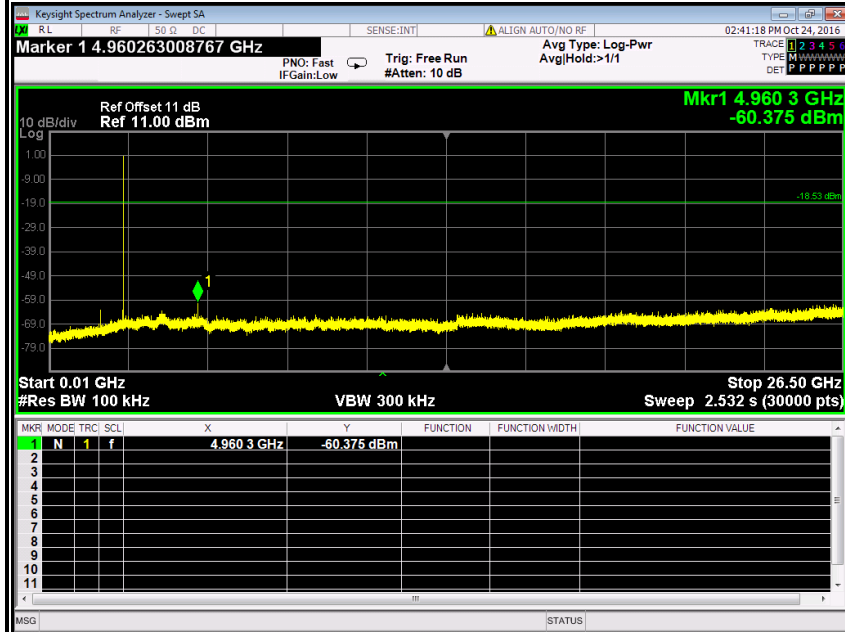


### CH High (2.475GHz ~ 2.5GHz)

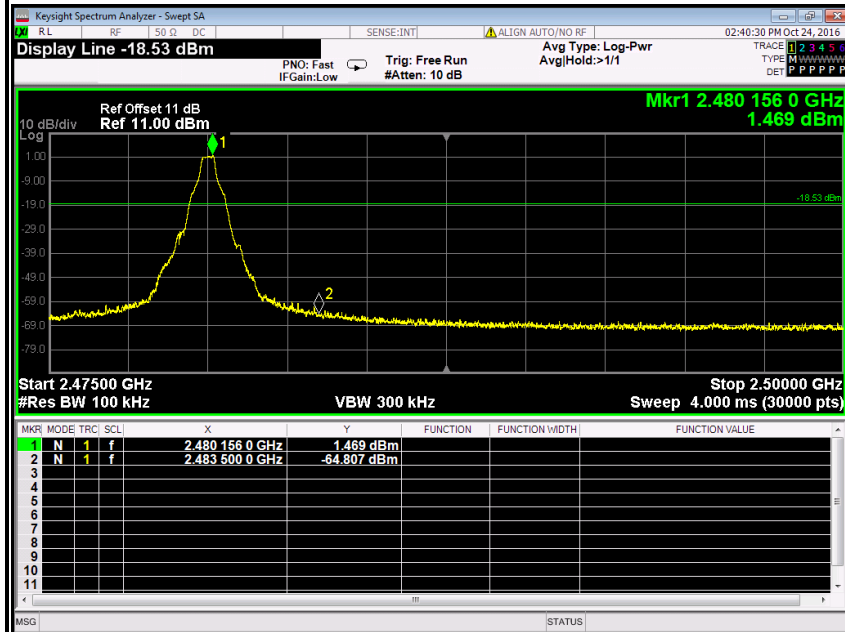




Test Plot(8DPSK )

**CH Low (10MHz ~26.5GHz )**

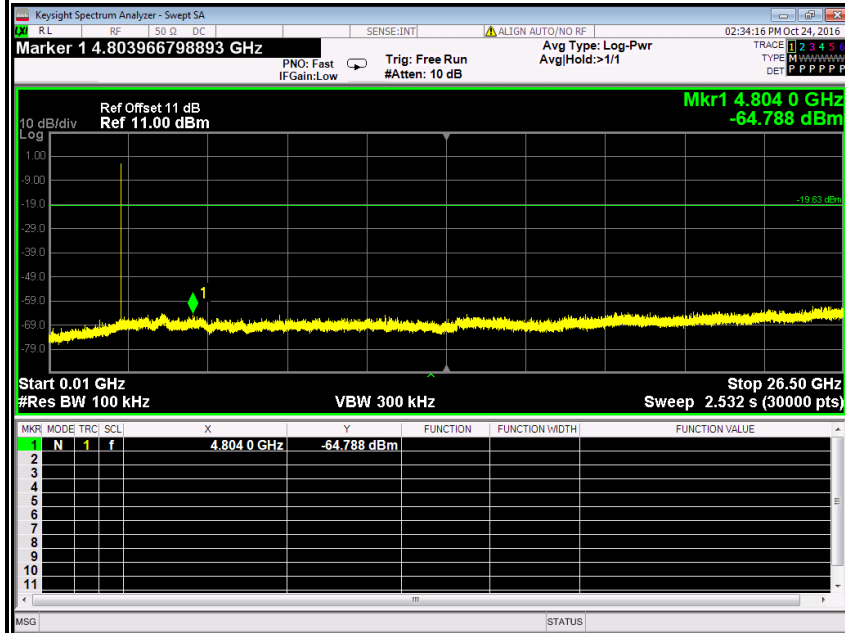


**CH Low (2.31GHz ~2.41GHz )**

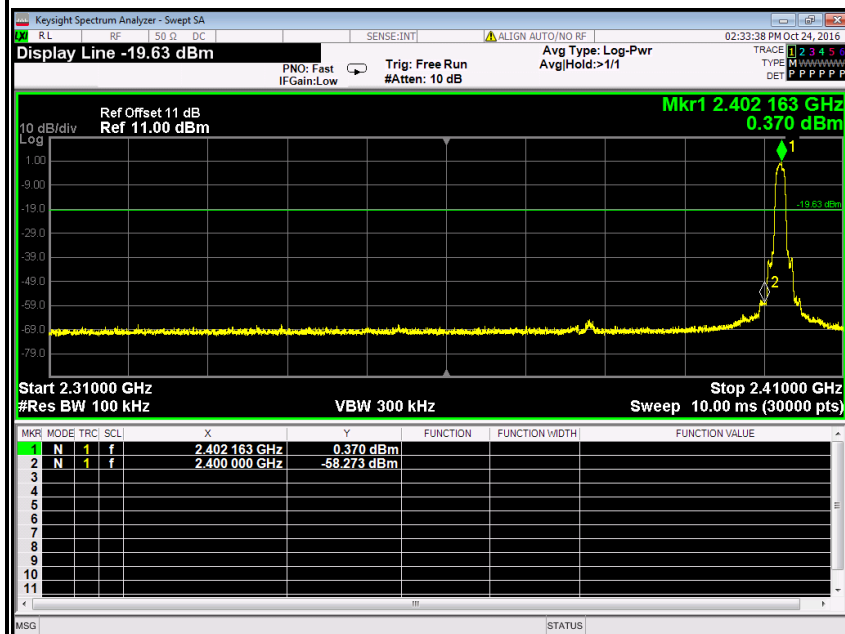




### CH Mid (10MHz ~26.5GHz )

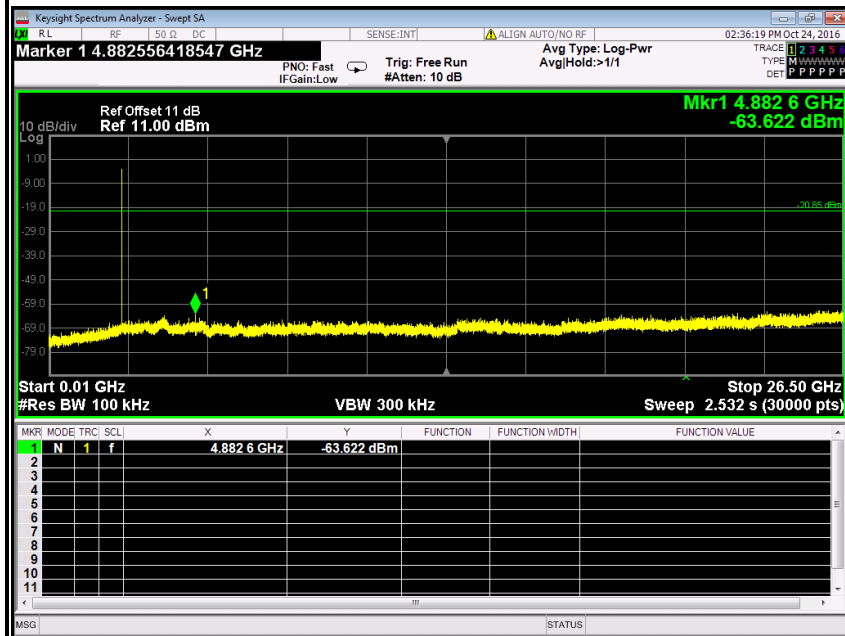


### CH Mid (2.441GHz)

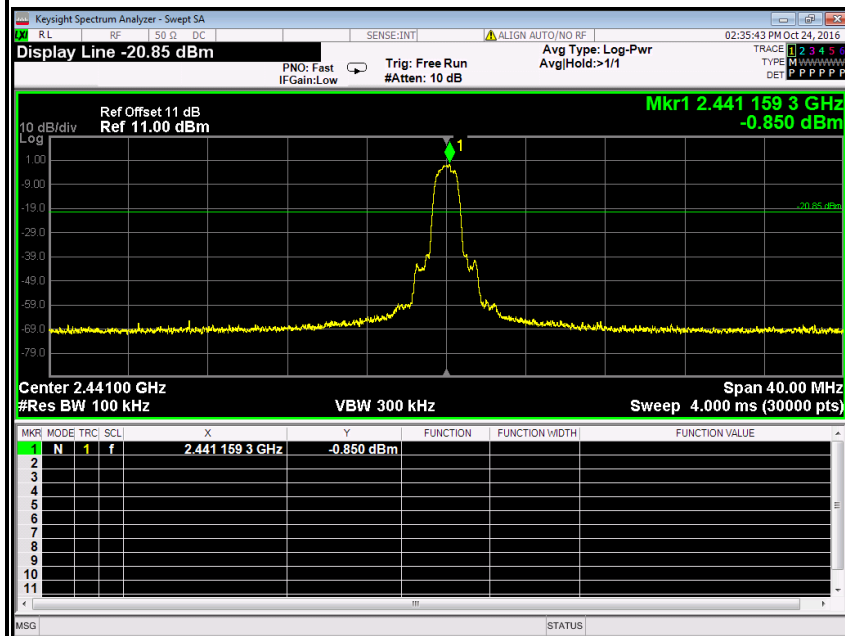




### CH High (10MHz ~26.5GHz)

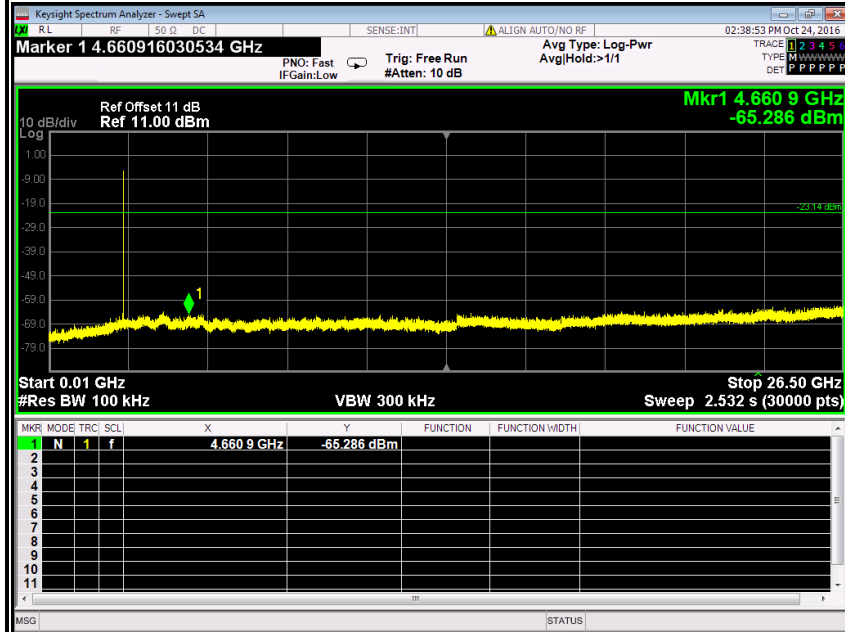

### CH High (2.475GHz ~ 2.5GHz)

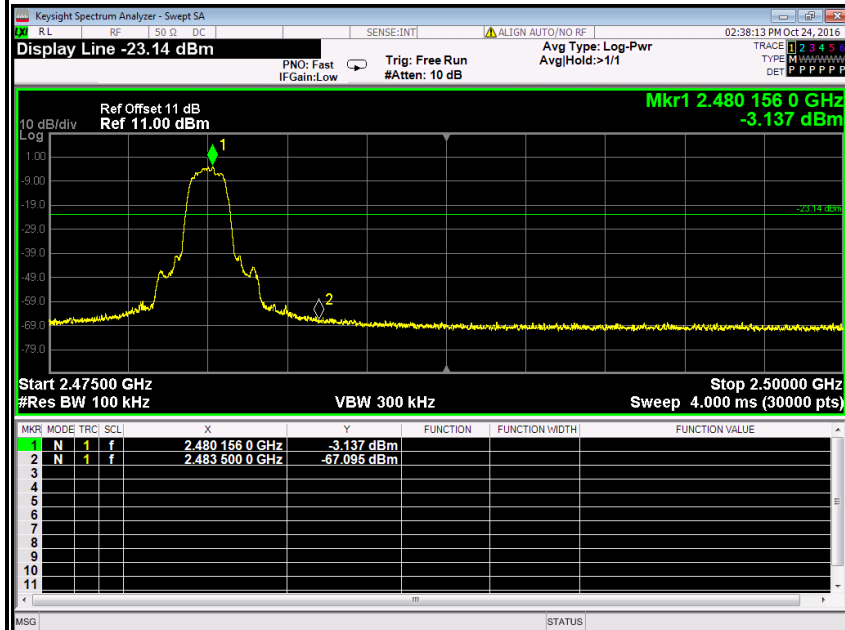




## Hopping On


### Test Data (GFSK)

#### CH Low (2.31GHz ~2.5GHz)

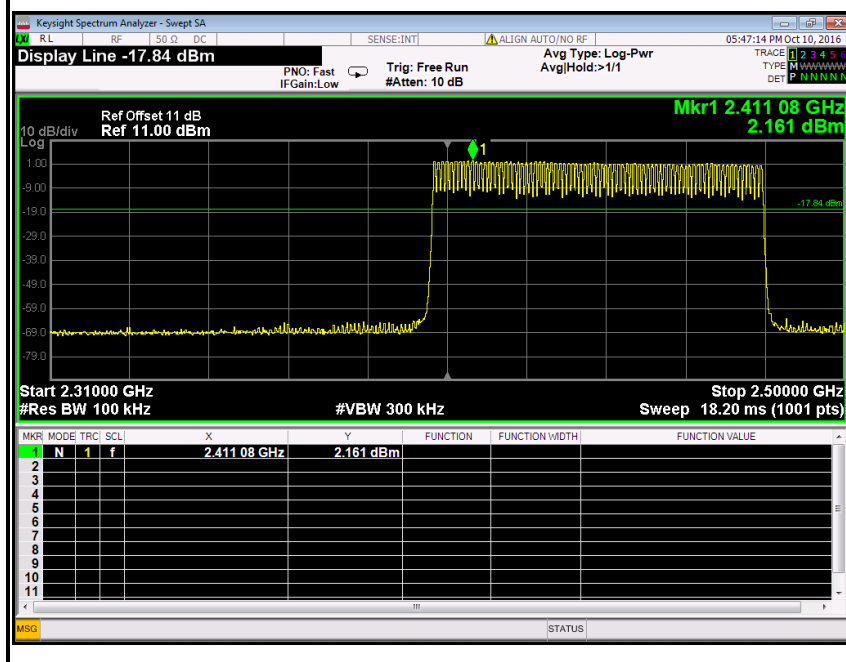

### Test Data(8DPSK)

#### CH Low (2.31GHz ~2.5GHz )

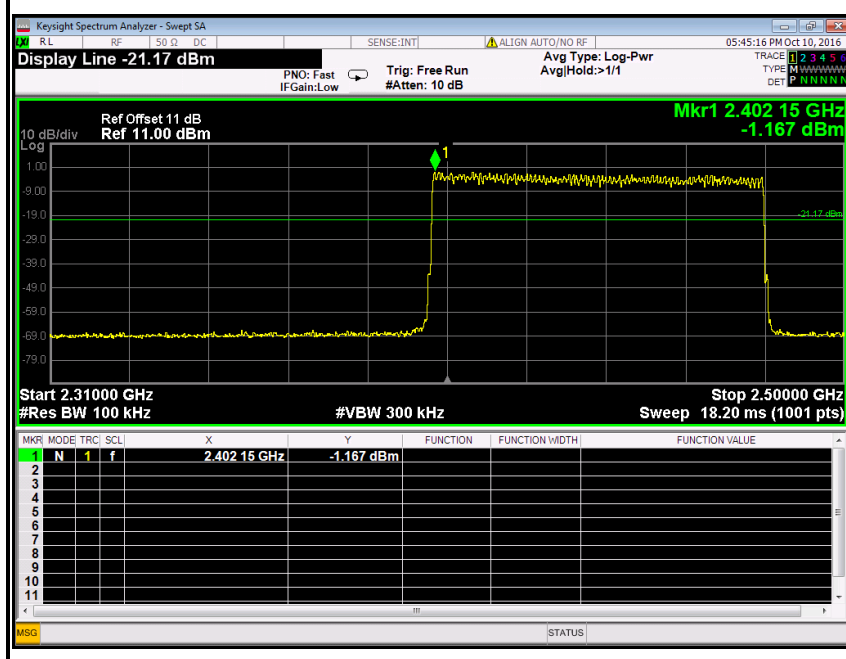



## 7.9.2. Radiated Emissions

### LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (mV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 0.009-0.490     | 2400/F(kHz)           | 300                      |
| 0.490-1.705     | 24000/F(kHz)          | 30                       |
| 1.705-30.0      | 30                    | 30                       |
| 30-88           | 100*                  | 3                        |
| 88-216          | 150*                  | 3                        |
| 216-960         | 200*                  | 3                        |
| Above 960       | 500                   | 3                        |

**Note:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the above emission table, the tighter limit applies at the band edges.

| Frequency (Hz) | Field Strength ( $\mu\text{V/m}$ at 3-meter) | Field Strength ( $\text{dB}\mu\text{V/m}$ at 3-meter) |
|----------------|----------------------------------------------|-------------------------------------------------------|
| 30-88          | 100                                          | 40                                                    |
| 88-216         | 150                                          | 43.5                                                  |
| 216-960        | 200                                          | 46                                                    |
| Above 960      | 500                                          | 54                                                    |




## Test Configuration

### Below 30MHz

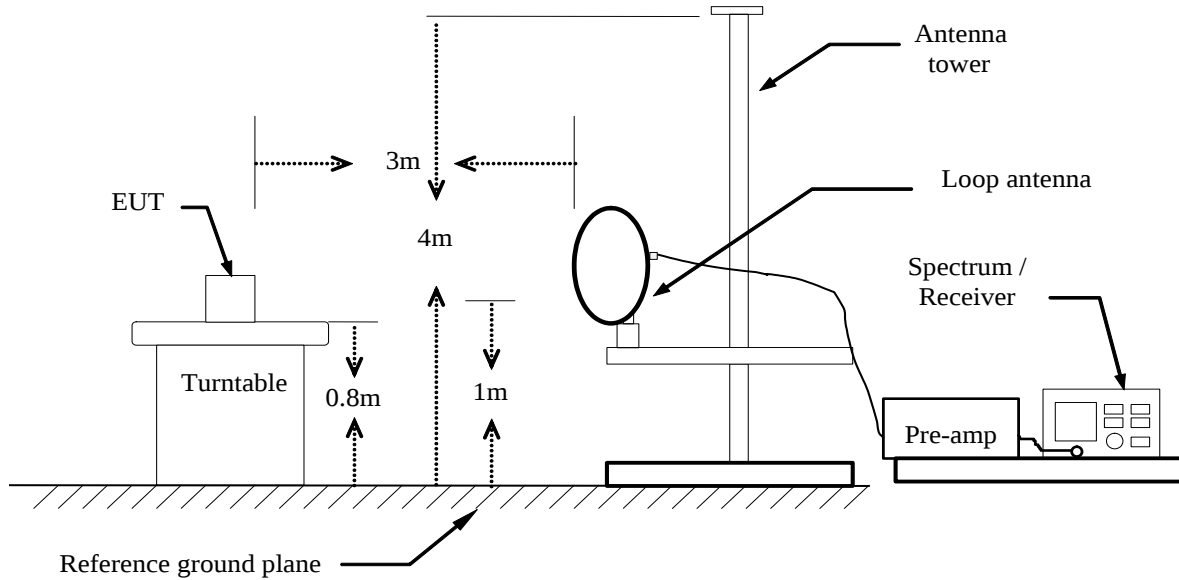


### Below 1 GHz

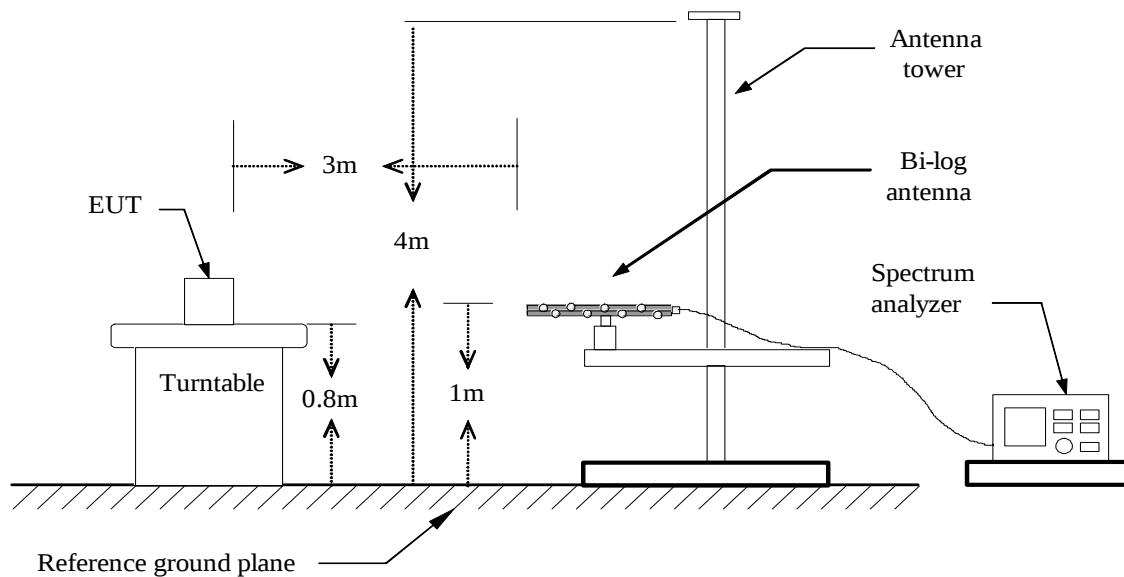



**Above 1 GHz**

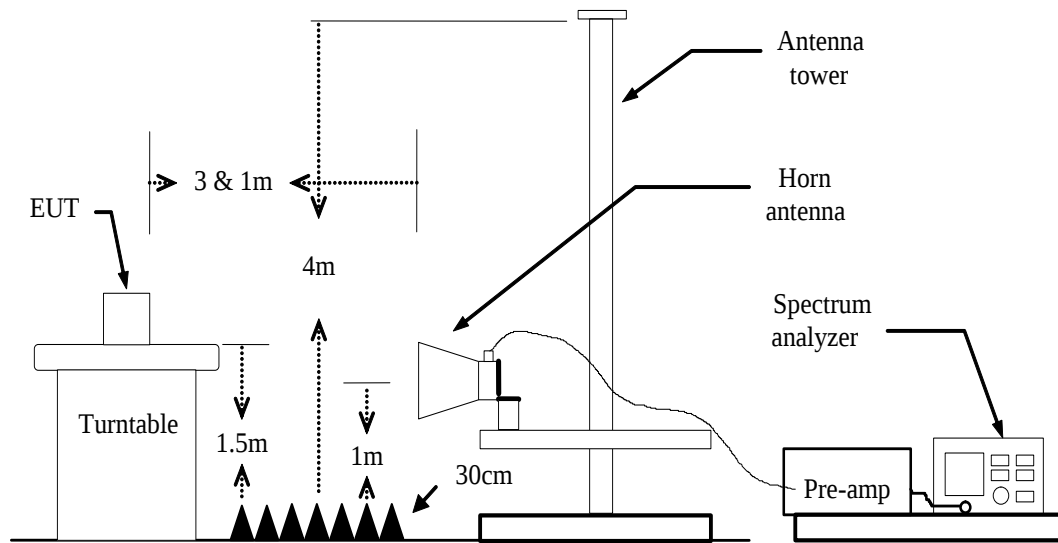



## **MEASURING SETTING**

The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter                        | Setting                                       |
|-------------------------------------------|-----------------------------------------------|
| Attenuation                               | Auto                                          |
| Start Frequency                           | 1000 MHz                                      |
| Stop Frequency                            | 10th carrier harmonic                         |
| RB / VB (Emission in restricted band)     | 1MHz / 1MHz for Peak, 1 MHz / 1/T for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 1/T for Average |

| Receiver Parameter     | Setting                           |
|------------------------|-----------------------------------|
| Attenuation            | Auto                              |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP/AVG |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP/AVG |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 100kHz for QP  |

## **TEST PROCEDURE**

### **1) Sequence of testing 9 kHz to 30 MHz**

#### **Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### **Pre measurement:**

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions



#### **Final measurement:**

--- Identified emissions during the pre measurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).

--- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement and the limit will be stored.

## **2) Sequence of testing 30 MHz to 1 GHz**

#### **Setup:**

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

#### **Pre measurement:**

--- The turntable rotates from 0° to 315° using 45° steps.

--- The antenna is polarized vertical and horizontal.

--- The antenna height changes from 1 to 3 meter.

--- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.



**Final measurement:**

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

**3) Sequence of testing 1 GHz to 18 GHz**

**Setup:**

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

**Pre measurement:**

- The turntable rotates from  $0^\circ$  to  $315^\circ$  using  $45^\circ$  steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.



**Final measurement:**

--- The final measurement will be performed with minimum the six highest peaks.

--- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.

--- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the pre measurement with marked maximum final measurements and the limit will be stored.

**4) Sequence of testing above 18 GHz**

**Setup:**

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 1 meter.

--- The EUT was set into operation.

**Pre measurement:**

--- The antenna is moved spherical over the EUT in different polarisations of the antenna.

**Final measurement:**

--- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.

--- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

**TEST RESULTS****Below 1 GHz****Test Mode:** TX / GFSK(CH Low)**Tested by:** Sam Zeng**Ambient temperature:** 24°C **Relative humidity:** 52% RH**Date:** June 23, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 34.8500         | 47.84          | -14.50                   | 33.34           | 40.00          | -6.66       | V                  | QP     |
| 93.0500         | 56.70          | -24.42                   | 32.28           | 43.50          | -11.22      | V                  | QP     |
| 230.7900        | 49.67          | -21.82                   | 27.85           | 46.00          | -18.15      | V                  | QP     |
| 307.4200        | 46.53          | -19.28                   | 27.25           | 46.00          | -18.75      | V                  | QP     |
| 364.6500        | 43.42          | -17.32                   | 26.10           | 46.00          | -19.90      | V                  | QP     |
| 384.0500        | 48.24          | -16.45                   | 31.79           | 46.00          | -14.21      | V                  | QP     |
| 34.8500         | 46.51          | -14.50                   | 32.01           | 40.00          | -7.99       | H                  | QP     |
| 94.9900         | 51.69          | -24.21                   | 27.48           | 43.50          | -16.02      | H                  | QP     |
| 153.1900        | 50.39          | -22.01                   | 28.38           | 43.50          | -15.12      | H                  | QP     |
| 208.4800        | 57.17          | -21.70                   | 35.47           | 43.50          | -8.03       | H                  | QP     |
| 234.6700        | 55.48          | -21.69                   | 33.79           | 46.00          | -12.21      | H                  | QP     |
| 384.0500        | 41.32          | -16.45                   | 24.87           | 46.00          | -21.13      | H                  | QP     |

**\*\*Remark:** 1. No emission found between lowest internal used/generated frequency to 30MHz.

2. Pre-scan all mode and recorded the worst case results in this report (TX-Low Channel(1Mbps)).


**Notes:**

1. Measuring frequencies from 9kHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Peak/Quasi-peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 120kHz.
5.
 


|                         |                                                |
|-------------------------|------------------------------------------------|
| Frequency (MHz).        | = Emission frequency in MHz                    |
| Reading (dBuV)          | = Receiver reading                             |
| Correction Factor(dB/m) | = Antenna factor + Cable loss – Amplifier gain |
| Actual FS (dBuV/m)      | = Reading (dBuV) + Corr. Factor (dB/m)         |
| Limit (dBuV/m)          | = Limit stated in standard                     |
| Margin(dB)              | = Measured (dBuV/m) – Limits (dBuV/m)          |
| Antenna Pole(V/H)       | = Current carrying line of reading             |



## Vertical

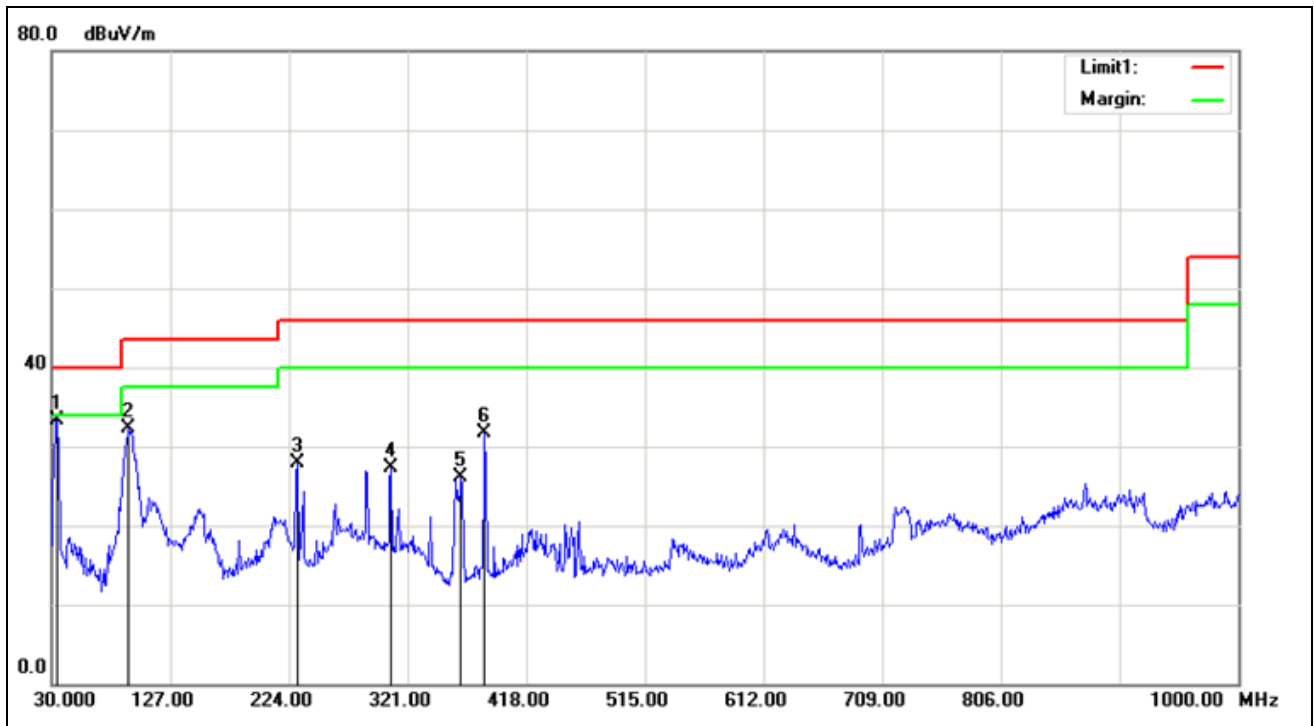

## Horizontal

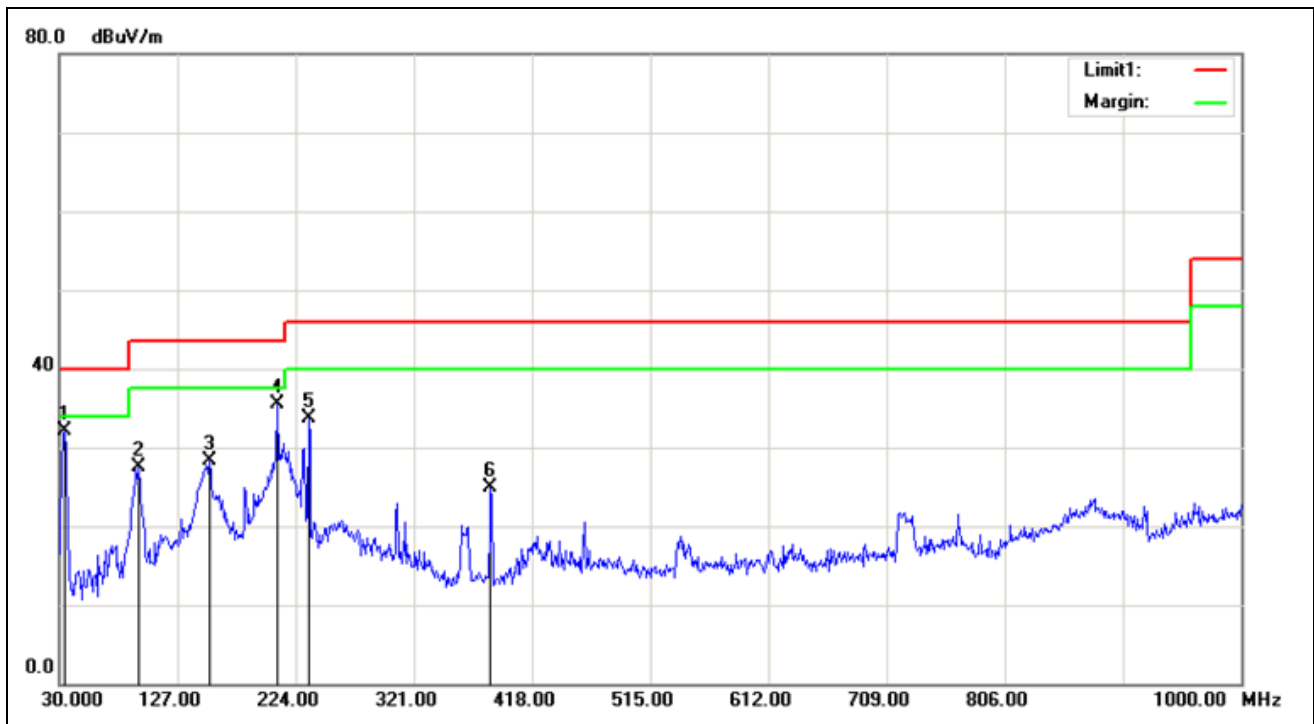

**Above 1 GHz****GFSK****Test Mode:** TX(CH Low)**Tested by:** Sam Zeng**Ambient temperature:** 24°C**Relative humidity:** 52% RH**Date:** June 23, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 2251.000        | 46.41          | -3.62                    | 42.79           | 74.00          | -31.21      | V                  | peak   |
| 2836.000        | 46.33          | -1.66                    | 44.67           | 74.00          | -29.33      | V                  | peak   |
| 3331.000        | 47.74          | -0.80                    | 46.94           | 74.00          | -27.06      | V                  | peak   |
| 3997.000        | 47.14          | 1.58                     | 48.72           | 74.00          | -25.28      | V                  | peak   |
| 4573.000        | 43.80          | 3.59                     | 47.39           | 74.00          | -26.61      | V                  | peak   |
| 5482.000        | 42.21          | 5.84                     | 48.05           | 74.00          | -25.95      | V                  | peak   |
| 1999.000        | 47.53          | -5.01                    | 42.52           | 74.00          | -31.48      | H                  | Peak   |
| 2836.000        | 45.63          | -1.66                    | 43.97           | 74.00          | -30.03      | H                  | Peak   |
| 3997.000        | 43.42          | 1.58                     | 45.00           | 74.00          | -29.00      | H                  | Peak   |
| 4258.000        | 42.95          | 2.50                     | 45.45           | 74.00          | -28.55      | H                  | Peak   |
| 5014.000        | 43.82          | 5.00                     | 48.82           | 74.00          | -25.18      | H                  | peak   |
| 5338.000        | 42.10          | 5.58                     | 47.68           | 74.00          | -26.32      | H                  | peak   |

**Notes:**

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- Spectrum setting:
  - Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
  - AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
- Frequency (MHz) = Emission frequency in MHz  
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading  
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain  
 Limit (dBuV/m) = Limit stated in standard  
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)  
 Pk = Peak Reading  
 AV = Average Reading  
 Remark = Mark Peak Reading or Average Reading



Test Mode: TX(CH Mid)

Tested by: Sam Zeng

Ambient temperature: 24°C

Relative humidity: 52% RH

Date: June 23, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 1036.000        | 54.05          | -8.42                    | 45.63           | 74.00          | -28.37      | V                  | peak   |
| 1297.000        | 49.10          | -7.44                    | 41.66           | 74.00          | -32.34      | V                  | peak   |
| 2638.000        | 46.14          | -2.01                    | 44.13           | 74.00          | -29.87      | V                  | peak   |
| 3223.000        | 45.72          | -0.99                    | 44.73           | 74.00          | -29.27      | V                  | peak   |
| 3997.000        | 45.75          | 1.58                     | 47.33           | 74.00          | -26.67      | V                  | peak   |
| 4987.000        | 43.07          | 4.94                     | 48.01           | 74.00          | -25.99      | V                  | peak   |
| 1315.000        | 48.44          | -7.37                    | 41.07           | 74.00          | -32.93      | H                  | Peak   |
| 2656.000        | 45.17          | -1.98                    | 43.19           | 74.00          | -30.81      | H                  | Peak   |
| 3070.000        | 44.98          | -1.24                    | 43.74           | 74.00          | -30.26      | H                  | Peak   |
| 3997.000        | 45.53          | 1.58                     | 47.11           | 74.00          | -26.89      | H                  | Peak   |
| 4564.000        | 42.45          | 3.56                     | 46.01           | 74.00          | -27.99      | H                  | peak   |
| 4915.000        | 41.68          | 4.70                     | 46.38           | 74.00          | -27.62      | H                  | peak   |

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz  
 Reading (dBμV/m) = Uncorrected Analyzer / Receiver Reading  
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain  
 Limit (dBμV/m) = Limit stated in standard  
 Margin (dB) = Result (dBμV/m) - Limit (dBμV/m)  
 Pk = Peak Reading  
 AV = Average Reading  
 Remark = Mark Peak Reading or Average Reading



Test Mode: TX(CH High)

Tested by: Sam Zeng

Ambient temperature: 24°C

Relative humidity: 52% RH

Date: June 23, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 2638.000        | 45.21          | -2.01                    | 43.20           | 74.00          | -30.80      | V                  | peak   |
| 3331.000        | 47.44          | -0.80                    | 46.64           | 74.00          | -27.36      | V                  | peak   |
| 3997.000        | 46.97          | 1.58                     | 48.55           | 74.00          | -25.45      | V                  | peak   |
| 4915.000        | 42.01          | 4.70                     | 46.71           | 74.00          | -27.29      | V                  | peak   |
| 5437.000        | 43.03          | 5.76                     | 48.79           | 74.00          | -25.21      | V                  | peak   |
| 6787.000        | 41.59          | 7.35                     | 48.94           | 74.00          | -25.06      | V                  | peak   |
| 1225.000        | 50.73          | -7.70                    | 43.03           | 74.00          | -30.97      | H                  | Peak   |
| 2656.000        | 45.07          | -1.98                    | 43.09           | 74.00          | -30.91      | H                  | Peak   |
| 3331.000        | 47.41          | -0.80                    | 46.61           | 74.00          | -27.39      | H                  | Peak   |
| 3997.000        | 47.20          | 1.58                     | 48.78           | 74.00          | -25.22      | H                  | Peak   |
| 5203.000        | 42.48          | 5.34                     | 47.82           | 74.00          | -26.18      | H                  | Peak   |
| 5788.000        | 41.87          | 5.99                     | 47.86           | 74.00          | -26.14      | H                  | peak   |

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz  
Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading  
Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain  
Limit (dBuV/m) = Limit stated in standard  
Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)  
Pk = Peak Reading  
AV = Average Reading  
Remark = Mark Peak Reading or Average Reading

**8DPSK**Test Mode: TX(CH Low)Tested by: Sam ZengAmbient temperature: 24°C Relative humidity: 52% RHDate: June 23, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 1306.000        | 48.31          | -7.40                    | 40.91           | 74.00          | -33.09      | V                  | peak   |
| 2152.000        | 46.08          | -4.17                    | 41.91           | 74.00          | -32.09      | V                  | peak   |
| 2566.000        | 45.83          | -2.14                    | 43.69           | 74.00          | -30.31      | V                  | peak   |
| 3331.000        | 45.47          | -0.80                    | 44.67           | 74.00          | -29.33      | V                  | peak   |
| 3997.000        | 47.09          | 1.58                     | 48.67           | 74.00          | -25.33      | V                  | peak   |
| 4717.000        | 42.93          | 4.06                     | 46.99           | 74.00          | -27.01      | V                  | peak   |
| 2260.000        | 45.04          | -3.58                    | 41.46           | 74.00          | -32.54      | H                  | Peak   |
| 2638.000        | 44.98          | -2.01                    | 42.97           | 74.00          | -31.03      | H                  | Peak   |
| 3331.000        | 44.45          | -0.80                    | 43.65           | 74.00          | -30.35      | H                  | Peak   |
| 4141.000        | 44.31          | 2.09                     | 46.40           | 74.00          | -27.60      | H                  | peak   |
| 5374.000        | 42.45          | 5.65                     | 48.10           | 74.00          | -25.90      | H                  | peak   |
| 5941.000        | 41.36          | 6.06                     | 47.42           | 74.00          | -26.58      | H                  | peak   |

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz  
 Reading (dBuV/m) = Uncorrected Analyzer / Receiver Reading  
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain  
 Limit (dBuV/m) = Limit stated in standard  
 Margin (dB) = Result (dBuV/m) - Limit (dBuV/m)  
 Pk = Peak Reading  
 AV = Average Reading  
 Remark = Mark Peak Reading or Average Reading



Test Mode: TX(CH Mid)

Tested by: Darry Wu

Ambient temperature: 24°C

Relative humidity: 52% RH

Date: June 23, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 1297.000        | 48.27          | -7.44                    | 40.83           | 74.00          | -33.17      | V                  | peak   |
| 2224.000        | 46.09          | -3.77                    | 42.32           | 74.00          | -31.68      | V                  | peak   |
| 2665.000        | 45.99          | -1.96                    | 44.03           | 74.00          | -29.97      | V                  | peak   |
| 3664.000        | 45.91          | 0.17                     | 46.08           | 74.00          | -27.92      | V                  | peak   |
| 3997.000        | 46.13          | 1.58                     | 47.71           | 74.00          | -26.29      | V                  | peak   |
| 5212.000        | 42.61          | 5.36                     | 47.97           | 74.00          | -26.03      | V                  | peak   |
| 2242.000        | 46.39          | -3.67                    | 42.72           | 74.00          | -31.28      | H                  | Peak   |
| 2539.000        | 45.65          | -2.19                    | 43.46           | 74.00          | -30.54      | H                  | Peak   |
| 3070.000        | 45.52          | -1.24                    | 44.28           | 74.00          | -29.72      | H                  | Peak   |
| 3997.000        | 46.26          | 1.58                     | 47.84           | 74.00          | -26.16      | H                  | peak   |
| 5059.000        | 42.66          | 5.09                     | 47.75           | 74.00          | -26.25      | H                  | peak   |
| 5662.000        | 42.21          | 5.94                     | 48.15           | 74.00          | -25.85      | H                  | peak   |

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz  
 Reading (dBμV/m) = Uncorrected Analyzer / Receiver Reading  
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain  
 Limit (dBμV/m) = Limit stated in standard  
 Margin (dB) = Result (dBμV/m) - Limit (dBμV/m)  
 Pk = Peak Reading  
 AV = Average Reading  
 Remark = Mark Peak Reading or Average Reading

Test Mode: TX(CH High)Tested by: Sam ZengAmbient temperature: 24°CRelative humidity: 52% RHDate: June 23, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 2143.000        | 45.28          | -4.22                    | 41.06           | 74.00          | -32.94      | V                  | peak   |
| 2575.000        | 46.01          | -2.12                    | 43.89           | 74.00          | -30.11      | V                  | peak   |
| 3331.000        | 44.55          | -0.80                    | 43.75           | 74.00          | -30.25      | V                  | peak   |
| 3997.000        | 47.35          | 1.58                     | 48.93           | 74.00          | -25.07      | V                  | peak   |
| 5005.000        | 42.52          | 4.99                     | 47.51           | 74.00          | -26.49      | V                  | peak   |
| 5230.000        | 42.17          | 5.39                     | 47.56           | 74.00          | -26.44      | V                  | peak   |
| 1648.000        | 52.33          | -6.60                    | 45.73           | 74.00          | -28.27      | H                  | Peak   |
| 3331.000        | 46.92          | -0.80                    | 46.12           | 74.00          | -27.88      | H                  | Peak   |
| 3997.000        | 48.44          | 1.58                     | 50.02           | 74.00          | -23.98      | H                  | Peak   |
| 5023.000        | 41.73          | 5.02                     | 46.75           | 74.00          | -27.25      | H                  | Peak   |
| 5635.000        | 41.77          | 5.93                     | 47.70           | 74.00          | -26.30      | H                  | peak   |
| 6661.000        | 41.99          | 7.15                     | 49.14           | 74.00          | -24.86      | H                  | peak   |

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 3MHz, Sweep time = auto.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.
5. Frequency (MHz) = Emission frequency in MHz  
 Reading (dBμV/m) = Uncorrected Analyzer / Receiver Reading  
 Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain  
 Limit (dBμV/m) = Limit stated in standard  
 Margin (dB) = Result (dBμV/m) - Limit (dBμV/m)  
 Pk = Peak Reading  
 AV = Average Reading  
 Remark = Mark Peak Reading or Average Reading



## 7.10 POWERLINE CONDUCTED EMISSIONS


### LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

| Frequency Range (MHz) | Limits (dB $\mu$ V) |          |
|-----------------------|---------------------|----------|
|                       | Quasi-peak          | Average  |
| 0.15 to 0.50          | 66 to 56            | 56 to 46 |
| 0.50 to 5             | 56                  | 46       |
| 5 to 30               | 60                  | 50       |

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### TEST CONFIGURATION

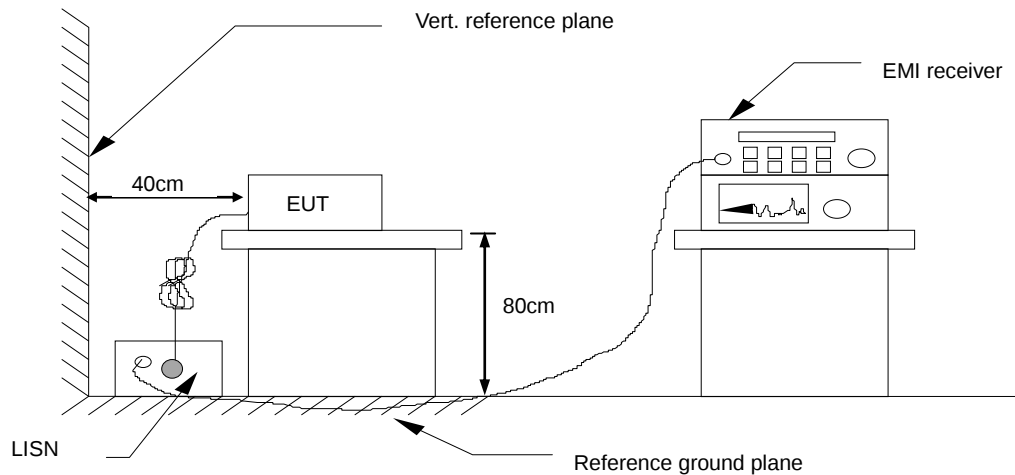

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.



## **TEST PROCEDURE**

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.


## **TEST RESULTS**

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.



### Test Data

|                          |                  |           |        |
|--------------------------|------------------|-----------|--------|
| Model No.                | MP21QCFS         | RBW,VBW   | 9 kHz  |
| Environmental Conditions | 22°C, 45% RH     | Test Mode | Mode 1 |
| Tested by                | Jackson Luo      | Line      | L      |
| Test Date                | October 13, 2016 |           |        |

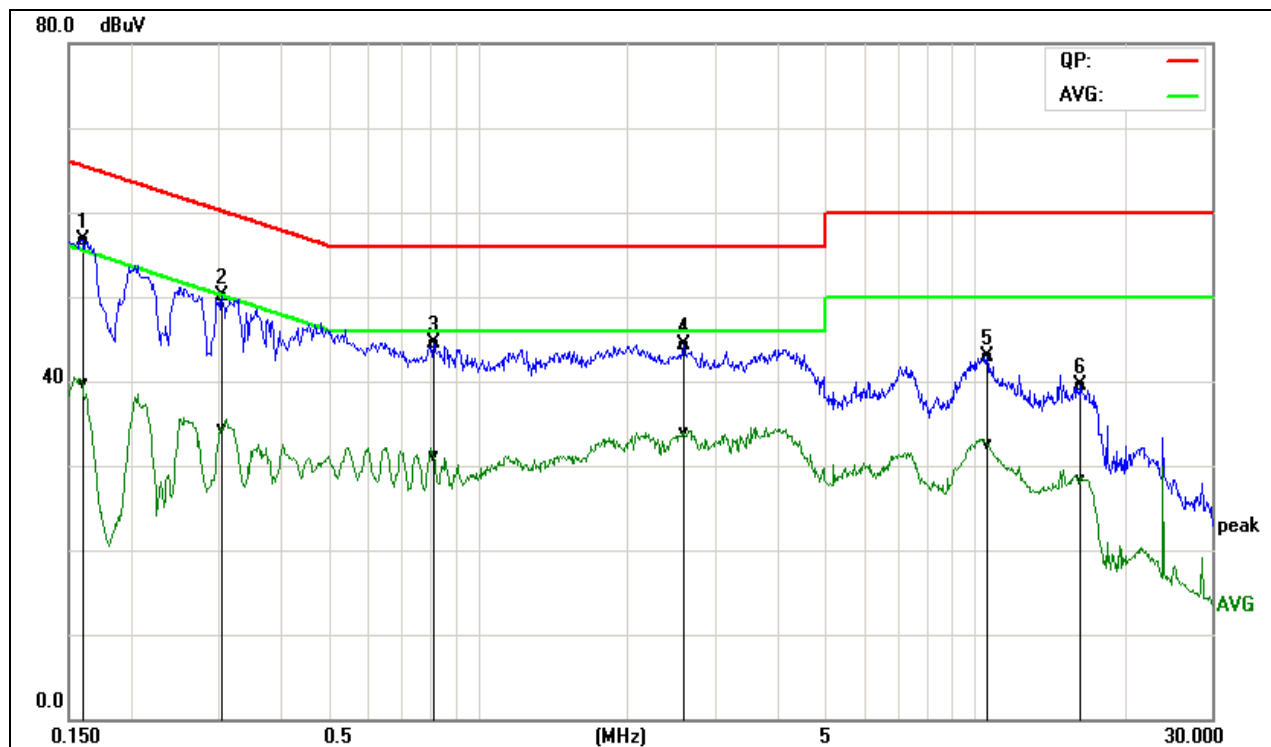


| Frequency (MHz) | QuasiPeak Reading (dBuV) | Average Reading (dBuV) | Correction Factor (dB) | QuasiPeak Result (dBuV) | Average Result (dBuV) | QuasiPeak Limit (dBuV) | Average Limit (dBuV) | QuasiPeak Margin (dB) | Average Margin (dB) | Remark (Pass/Fail) |
|-----------------|--------------------------|------------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|-----------------------|---------------------|--------------------|
| 0.1597          | 47.08                    | 30.14                  | 9.60                   | 56.68                   | 39.74                 | 65.47                  | 55.48                | -8.79                 | -15.74              | Pass               |
| 0.3050          | 40.50                    | 24.67                  | 9.69                   | 50.19                   | 34.36                 | 60.10                  | 50.11                | -9.91                 | -15.75              | Pass               |
| 0.8131          | 34.66                    | 21.31                  | 9.76                   | 44.42                   | 31.07                 | 56.00                  | 46.00                | -11.58                | -14.93              | Pass               |
| 2.5945          | 34.49                    | 24.11                  | 9.72                   | 44.21                   | 33.83                 | 56.00                  | 46.00                | -11.79                | -12.17              | Pass               |
| 10.5638         | 33.04                    | 22.73                  | 9.87                   | 42.91                   | 32.60                 | 60.00                  | 50.00                | -17.09                | -17.40              | Pass               |
| 16.3118         | 29.53                    | 18.32                  | 9.89                   | 39.42                   | 28.21                 | 60.00                  | 50.00                | -20.58                | -21.79              | Pass               |

REMARKS: L = Line One (Live Line)



|                          |                  |           |        |
|--------------------------|------------------|-----------|--------|
| Model No.                | MP21QCFS         | RBW,VBW   | 9 kHz  |
| Environmental Conditions | 22°C, 45% RH     | Test Mode | Mode 1 |
| Tested by                | Jacksan Luo      | Line      | N      |
| Test Date                | October 13, 2016 |           |        |

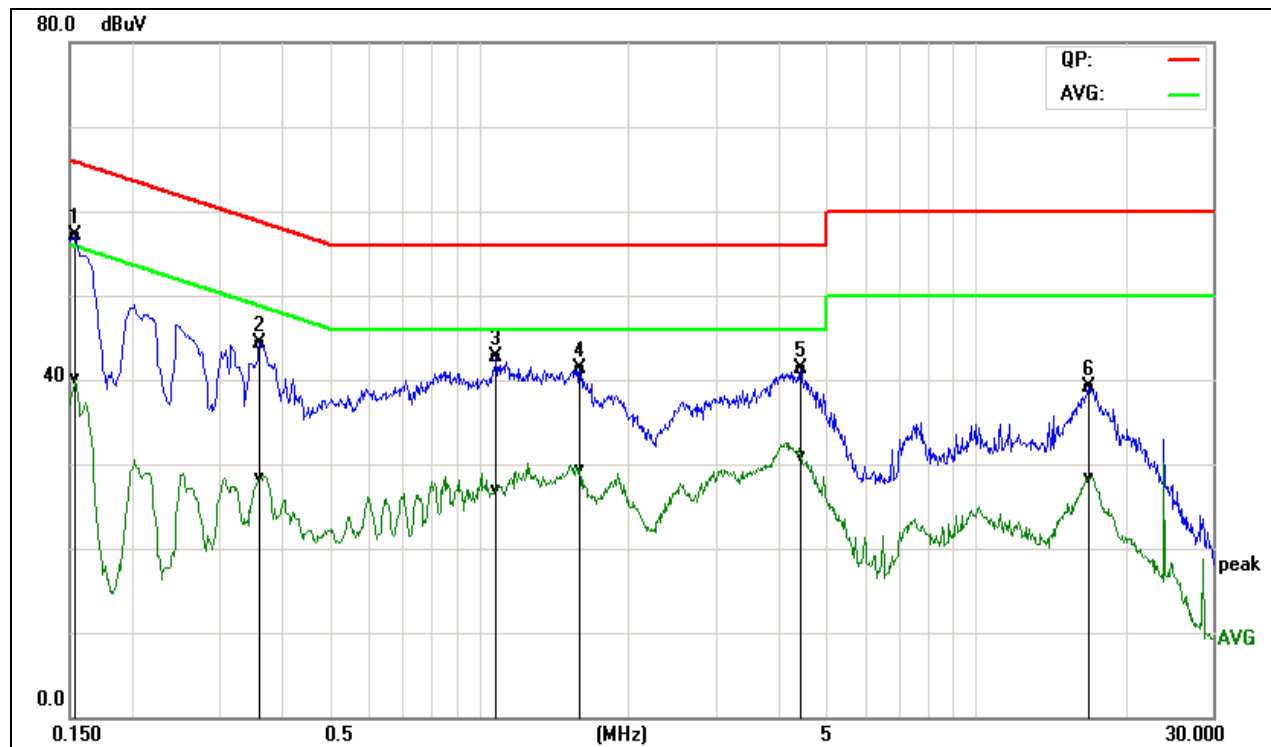

| Frequency (MHz) | QuasiPeak Reading (dBuV) | Average Reading (dBuV) | Correction Factor (dB) | QuasiPeak Result (dBuV) | Average Result (dBuV) | QuasiPeak Limit (dBuV) | Average Limit (dBuV) | QuasiPeak Margin (dB) | Average Margin (dB) | Remark (Pass/Fail) |
|-----------------|--------------------------|------------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|-----------------------|---------------------|--------------------|
| 0.1539          | 47.25                    | 30.23                  | 9.78                   | 57.03                   | 40.01                 | 65.78                  | 55.79                | -8.75                 | -15.78              | Pass               |
| 0.3614          | 34.51                    | 18.64                  | 9.73                   | 44.24                   | 28.37                 | 58.69                  | 48.70                | -14.45                | -20.33              | Pass               |
| 1.0824          | 32.86                    | 17.20                  | 9.80                   | 42.66                   | 27.00                 | 56.00                  | 46.00                | -13.34                | -19.00              | Pass               |
| 1.5933          | 31.46                    | 19.64                  | 9.76                   | 41.22                   | 29.40                 | 56.00                  | 46.00                | -14.78                | -16.60              | Pass               |
| 4.4305          | 31.63                    | 21.17                  | 9.77                   | 41.40                   | 30.94                 | 56.00                  | 46.00                | -14.60                | -15.06              | Pass               |
| 16.8386         | 29.29                    | 18.66                  | 9.72                   | 39.01                   | 28.38                 | 60.00                  | 50.00                | -20.99                | -21.62              | Pass               |

REMARKS: N = Line Two (Neutral Line)