

---

## REPORT ON

Limited FCC CFR 47: Parts 15 B and C Testing in support of an  
Application for Grant of Equipment Authorisation  
of a Albert Hall Meetings Limited Clikapad Base Station

FCC ID: SMP CLIKAPAD – BASE

Report No OR613808/01 Issue 2

March 2005

---

**REPORT ON**

Limited FCC CFR 47: Parts 15 B and C Testing in  
support of an Application for Grant of Equipment Authorisation  
of a Albert Hall Meetings Limited Clikapad Base Station

FCC ID: SMP CLIKAPAD - BASE

Report No OR613808/01 Issue 2

March 2005

**PREPARED FOR**

Albert Hall Meetings Limited  
Albert Hall  
161 Albert Street  
Fleet  
GU51 3RP  
United Kingdom

**PREPARED BY**

*J Plummer*  
J Plummer  
Technical Author

**APPROVED BY**

*K Adsetts*  
K Adsetts  
UKAS Signatory

**DATED**

1<sup>st</sup> March 2005

**DISTRIBUTION**

Albert Hall Meetings Limited

Copy 1

BABT

Copy 2

Copy No

---

**ENGINEERING STATEMENT**

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47: Parts 15 B & C. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineers;

*T Guy*

T Guy





## CONTENTS

<b>Section</b>		<b>Page No</b>
<b>1</b>	<b>REPORT SUMMARY</b>	
1.1	Status.....	4
1.2	Introduction and Declaration of Build Status .....	5
1.3	Brief Summary of Results.....	7
1.4	Product information .....	8
1.5	Test Conditions.....	9
1.6	Deviations from the Standard .....	9
1.7	Modification Record.....	9
<b>2</b>	<b>TEST DETAILS Part 15 B</b>	
2.1	Spurious Radiated Emissions, Idle.....	11
<b>2</b>	<b>TEST DETAILS Part 15 C</b>	
2.2	Measurement At The Band Edge .....	13
2.3	Maximum Carrier and Harmonics, Field Strength .....	18
2.4	Spurious Radiated Emissions 30MHz to 1GHz .....	21
2.5	Spurious Radiated Emissions 1GHz to 25GHz.....	24
<b>3</b>	<b>TEST EQUIPMENT USED</b>	
3.1	Table of Test Equipment Used.....	27
3.2	Measurement Uncertainty .....	28
<b>4</b>	<b>ACCREDITATION, DISCLAIMERS AND COPYRIGHT</b>	
4.1	Accreditation, Disclaimers And Copyright .....	30
<b>APPENDICES</b>		
A	Titchfield FCC Site Compliance Letter .....	32



## **SECTION 1**

### **REPORT SUMMARY**

Limited FCC CFR 47: Parts 15 B and C Testing in support of an  
Application for Grant of Equipment Authorisation  
of a Albert Hall Meetings Limited Clikapad Base Station



### 1.1 STATUS

EQUIPMENT UNDER TEST	Albert Hall Meetings Limited Clikapad Base Station
OBJECTIVE	To undertake measurements to determine the Equipment Under Test's (EUT's) compliance with the specification.
NAME AND ADDRESS OF CLIENT	Albert Hall Meetings Limited Albert Hall 161 Albert Street Fleet GU51 3RP United Kingdom
TYPE NUMBER	CLIKAPAD - BASE
SERIAL NUMBER	000000034, 000000132, 000000181, 000000171
HARDWARE VERSION	0205-1
DECLARED VARIANTS	None
TEST SPECIFICATION / ISSUE / DATE	FCC CFR 47: Part 15 B and C August 2002
NUMBER OF ITEMS TESTED	Four
SECURITY CLASSIFICATION OF EUT	Commercial in Confidence
INCOMING RELEASE DATE	Declaration of Build Status 16 February 2005
DISPOSAL	Held pending disposal
REFERENCE NUMBER	Not Applicable
DATE	Not Applicable
ORDER NUMBER	PO20050062
DATE	31 January 2005
START OF TEST	2 February 2005
FINISH OF TEST	6 February 2005
RELATED DOCUMENTS	ANSI C63.4 2001. Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz. FCC Public Notice document (DA 00-705 released 30 March 2000)



## 1.2 INTRODUCTION

The information contained within this report is intended to show limited verification of compliance of the Albert Hall Meetings Limited Clikapad Base Station to the requirements of FCC Specification Parts 15.109, 15.205, 15.209 and 15.249.

Testing was carried out in support of an application for Grant of Equipment Authorisation in the name of Albert Hall Meetings Limited.

This Test Report No OR613808/01 Issue 2 replaces Test Report No OR613808/01 Issue 1, which is issued to correct the omission of the limits for Part 15.109.



## 1.2.1 DECLARATION OF BUILD STATUS

MAIN EUT	
<b>MANUFACTURING DESCRIPTION</b>	Voting System Base Station
<b>MANUFACTURER</b>	AHM Ltd (Albert Hall Meetings Limited)
<b>TYPE</b>	CLIKAPAD - BASE
<b>PART NUMBER</b>	CLIKAPAD - BASE
<b>SERIAL NUMBER</b>	000000034, 000000132, 000000181, 000000171
<b>HARDWARE VERSION</b>	0205-1
<b>TRANSMITTER OPERATING RANGE</b>	2400-2524MHz (Restricted to 2406-2477MHz)
<b>COUNTRY OF ORIGIN</b>	UK
<b>RECEIVER OPERATING RANGE</b>	2400-2524MHz (Restricted to 2406-2477MHz)
<b>ITU DESIGNATION OF EMISSION</b>	1M00F1D
<b>HIGHEST INTERNALLY GENERATED FREQUENCY</b>	48MHz
<b>POWER</b>	1mW
<b>FCC ID</b>	SMP CLIKAPAD-BASE
<b>INDUSTRY CANADA ID</b>	5716A CLIKAPAD BASE
<b>TECHNICAL DESCRIPTION</b>	A Base Station transceiver for operation in the 2.4-2.5GHz ISM Band. This unit is for use in a Voting System

Signature

A handwritten signature in black ink, appearing to read 'John' or a similar name, is placed here.

Date  
D of B S Serial No

16 February 2005  
OR613808-01

BABT formally certifies that the manufacturer's declaration as reproduced in this report is a true and accurate record of the original received from the applicant.



### 1.3 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out is shown below.

Test	Spec Clause	Test Description	Result	Levels/Comments
2.1	15.109	Spurious Radiated Emissions Idle	Pass	Class A and Class B
2.2	15.205	Measurement at Band Edge	Pass	
2.3	15.249(a)	Maximum Field Strength, Carrier & Harmonics	Pass	
2.4	15.209, 15.249 (d)	Spurious Radiated Emissions, Transmit, 30MHz to 1GHz	Pass	
2.5	15.209, 15.249(d) & 15.249 (e)	Spurious Radiated Emissions, Transmit, 1 to 25GHz	Pass	



## 1.4 PRODUCT INFORMATION

### 1.4.1 Technical Description

The Equipment Under Test (EUT) was an Albert Hall Meetings Limited Clikapad Voting System Base Station, which offers 2.4GHz Short Range Device Functionality connectivity.

### 1.4.2 Modes of Operation

Modes of operation of the EUT during testing were as follows:

Applicable testing was carried out with the EUT transmitting at maximum power or receiving as detailed in Section 1.4.3 "Test Configuration".

### 1.4.3 Test Configuration

#### 1.4.3.1 Test Configuration – Transmit.

Clikapad Base Station Transmitting on the following channels and frequencies;

Bottom Channel: 2.406GHz

Middle Channel: 2.442GHz

Top Channel: 2.478GHz

The Output Power level was set to Maximum.

#### 1.4.3.2 Test Configuration – Idle

Clikapad Base Station Idle on the following channels and frequencies;

Bottom Channel: 2.406GHz



## 1.5 TEST CONDITIONS

The EUT was set-up simulating a typical user installation on the Alternative Open Area Test Site identified in Appendices A and tested in accordance with the applicable specification.

For all tests, the Albert Hall Meetings Limited Clikapad Base Station was powered via a USB connection. Since the USB connection uses DC no Conducted Emissions testing was required on this system.

The EUT is capable of transmitting using either 256kbps or 1Mbps data rates. For the purpose of this testing a comparison was made between the Maximum Peak Carrier Field Strengths of EUT's operating at 256kbps or 1Mbps data rates, the results are given below:

Carrier Frequency (GHz)	Serial No	Data Rate Kbps	Measured (dB $\mu$ V/m)
2.406	000000034	1000	95.1
2.406	000000058	256	94.0
2.442	000000132	1000	91.8
2.442	000000120	256	91.8
2.478	000000181	1000	89.6
2.478	000000158	256	89.4

As the measured Maximum Peak Carrier Field Strengths of EUT's operating at 1Mbps data rates were slightly higher or at least the same, then for the purposes of the testing carried out in this test report 1Mbps data rate was considered the "worst-case" and hence this was the data rate used for testing.

## 1.6 DEVIATIONS FROM THE STANDARD

Not Applicable

## 1.7 MODIFICATION RECORD

Not Applicable



## **SECTION 2**

### **TEST DETAILS**

Limited FCC CFR 47: Parts 15 B and C Testing in support of an  
Application for Grant of Equipment Authorisation  
Of a Albert Hall Meetings Limited Clikapad Base Station

**2.1 SPURIOUS RADIATED EMISSIONS IDLE****2.1.1 Specification Reference**

FCC CFR 47: Part 15 Subpart B, Section 15.109

**2.1.2 Equipment Under Test**

Albert Hall Meetings Limited Clikapad Base Station

**2.1.3 Date of Test**

6 February 2005

**2.1.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified as "Section 2.1" within the Test Equipment Used table shown in Section 3.1.

**2.1.5 Test Procedure**

Test Performed in accordance with ANSI C63.4.

A preliminary profile of the Spurious Radiated Emissions was obtained by operating the EUT on a remotely controlled turntable within a semi-anechoic chamber. Measurements of emissions from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations. The profiling produced a list of the worst-case emissions together with the EUT azimuth and antenna polarisation.

Using the information from the preliminary profiling of the EUT. The list of emissions was then confirmed or updated under Alternative Open Site conditions. Emission levels were maximised by adjusting the antenna height, antenna polarisation and turntable azimuth.

Emissions identified within the range 30MHz – 1GHz were then formally measured using a CISPR Quasi-Peak detector.

The measurements were performed at a 3m distance unless otherwise stated.



## 2.1 SPURIOUS RADIATED EMISSIONS IDLE - Continued

### 2.1.6 Test Results

Equipment Designation: Unintentional Radiator.

The EUT met the requirements of FCC CFR 47: Part 15 Subpart B, Section 15.109 for Spurious Radiated Emissions (30MHz – 1GHz) for both Class A and Class B limits.

#### EUT Idle Bottom Channel (2.406GHz) (Serial No 0171)

No emissions were detected in Idle mode within 10dB of the limit.

Class A Limits (Measurement Distance 10m)

Frequency Range MHz	Field Strength µV/m	Quasi Peak Field Strength dBµV/m
30-88	90	39.0
88-216	150	43.5
216-960	210	46.4
960-1000	300	49.5

Class B Limits (Measurement Distance 3m)

Frequency Range MHz	Field Strength µV/m	Quasi Peak Field Strength dBµV/m
30-88	100	40.0
88-216	150	43.5
216-960	200	40.0
960-1000	500	54.0

**2.2 MEASUREMENT AT THE BAND EDGE (MARKER DELTA METHOD)****2.2.1 Specification Reference**

FCC CFR 47: Part 15 Subpart C, Section 15.205

**2.2.2 Equipment Under Test**

Albert Hall Meetings Limited Clikapad Base Station

**2.2.3 Date of Test**

3 February 2005

**2.2.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified as "Section 2.2" within the Test Equipment Used table shown in Section 3.1.

**2.2.5 Test Procedure**

Test Performed in accordance with FCC Public Notice document (DA 00-705 released 30 March 2000).

Test Performed in accordance with ANSI C63.4.

Measurements were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations together with the EUT azimuth and antenna polarisation.

Using the information from the preliminary profiling of the EUT. The emission was then confirmed or updated under Anechoic Chamber (3 metres) conditions. Emission levels were maximised by adjusting the antenna height, antenna polarisation and turntable azimuth.

The measurements were performed at a 3m distance unless otherwise stated.



## 2.2 MEASUREMENT AT THE BAND EDGE (MARKER DELTA METHOD) - continued

### 2.2.6 Test Results

The EUT met the requirements of FCC CFR 47: Part 15 Subpart C, Section 15.205 for Band Edge Measurements.

Measurements were made with the EUT transmitting on the Bottom Channel 2.406GHz.

#### Step 1

Bottom Channel Fundamental Field Strength Measurement.

Peak measurements performed utilising a Resolution Bandwidth and Video Bandwidth of 1MHz. Average measurements performed utilising a Resolution Bandwidth of 1MHz and Video Bandwidth of 10Hz.

Frequency	Antenna Polarisation	Height	Azimuth	Peak Field Strength	Average Field Strength
MHz	H/V	Cm	deg	dB $\mu$ V/m	dB $\mu$ V/m
2406	H	100	349	95.1	37.7

#### Step 2

Determine Marker delta amplitude between 2406MHz (the fundamental) and 2390MHz (the Band Edge under investigation).

Using a span of 30MHz with Resolution Bandwidth and Video Bandwidth of 300kHz.

Marker Delta Amplitude = 46.1dB

#### Step 3

Subtracting the Marker Delta obtained from Step 2 from the 2406MHz Field Strength measurement from Step 1, gives following Result:

Peak of 49.0dB $\mu$ V/m (Limit is 74.0dB $\mu$ V/m)


Average of -8.4dB $\mu$ V/m (Limit is 54.0dB $\mu$ V/m)



## 2.2 MEASUREMENT AT THE BAND EDGE (MARKER DELTA METHOD) - continued

### 2.2.6 Test Results - continued

Plot for Bottom Channel 2406MHz

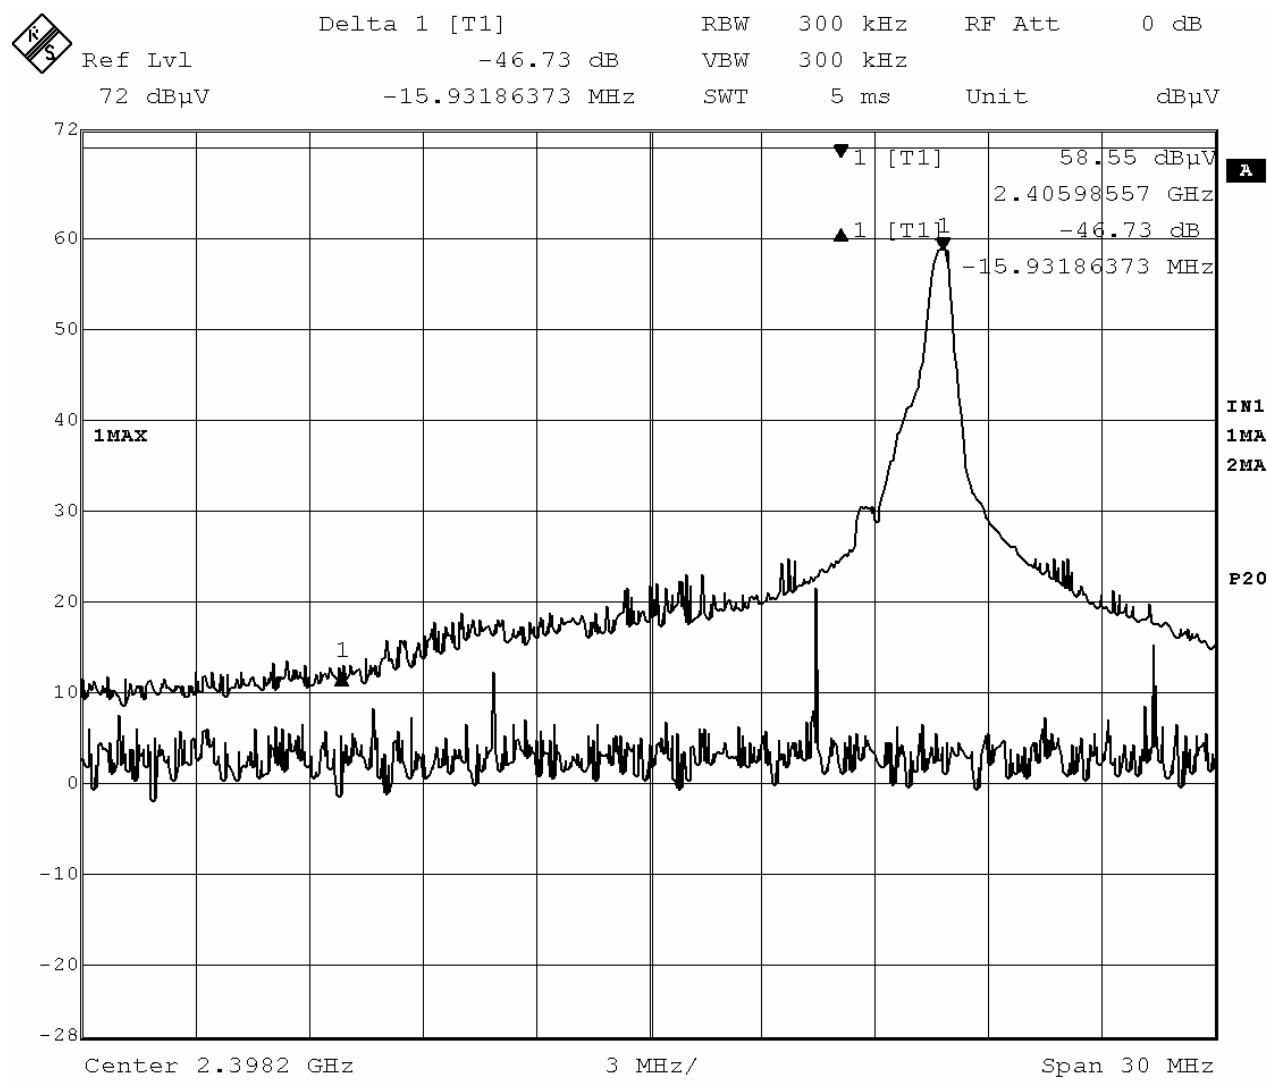

Date: 4.FEB.2005 03:37:50



## 2.2 MEASUREMENT AT THE BAND EDGE (MARKER DELTA METHOD) - continued

### 2.2.6 Test Results - continued

The EUT met the requirements of FCC CFR 47: Part 15 Subpart C, Section 15.205 for Band Edge Measurements.

Measurements were made with the EUT transmitting on the Top Channel 2.478GHz.

Peak measurements performed utilising a Resolution Bandwidth and Video Bandwidth of 1MHz. Average measurements performed utilising a Resolution Bandwidth of 1MHz and Video Bandwidth of 10Hz.

Frequency	Antenna Polarisation	Height	Azimuth	Peak Field Strength	Average Field Strength
MHz	H/V	Cm	deg	dB $\mu$ V/m	dB $\mu$ V/m
2478	H	100	322	89.6	38.4

### Step 2

Determine Marker delta amplitude between 2478MHz (the fundamental) and 2483.5MHz (the Band Edge under investigation).

Using a span of 30MHz with Resolution Bandwidth and Video Bandwidth of 300kHz.

Marker Delta Amplitude = 36.2dB

### Step 3

Subtracting the Marker Delta obtained from Step 2 from the 2478MHz Field Strength measurement from Step 1, gives following Result

Peak of 53.4dB $\mu$ V/m (Limit is 74.0dB $\mu$ V/m)


Average of 2.2dB $\mu$ V/m (Limit is 54.0dB $\mu$ V/m)



## 2.2 MEASUREMENT AT THE BAND EDGE (MARKER DELTA METHOD) - continued

### 2.2.6 Test Results - continued

Plot for Top Channel 2478MHz

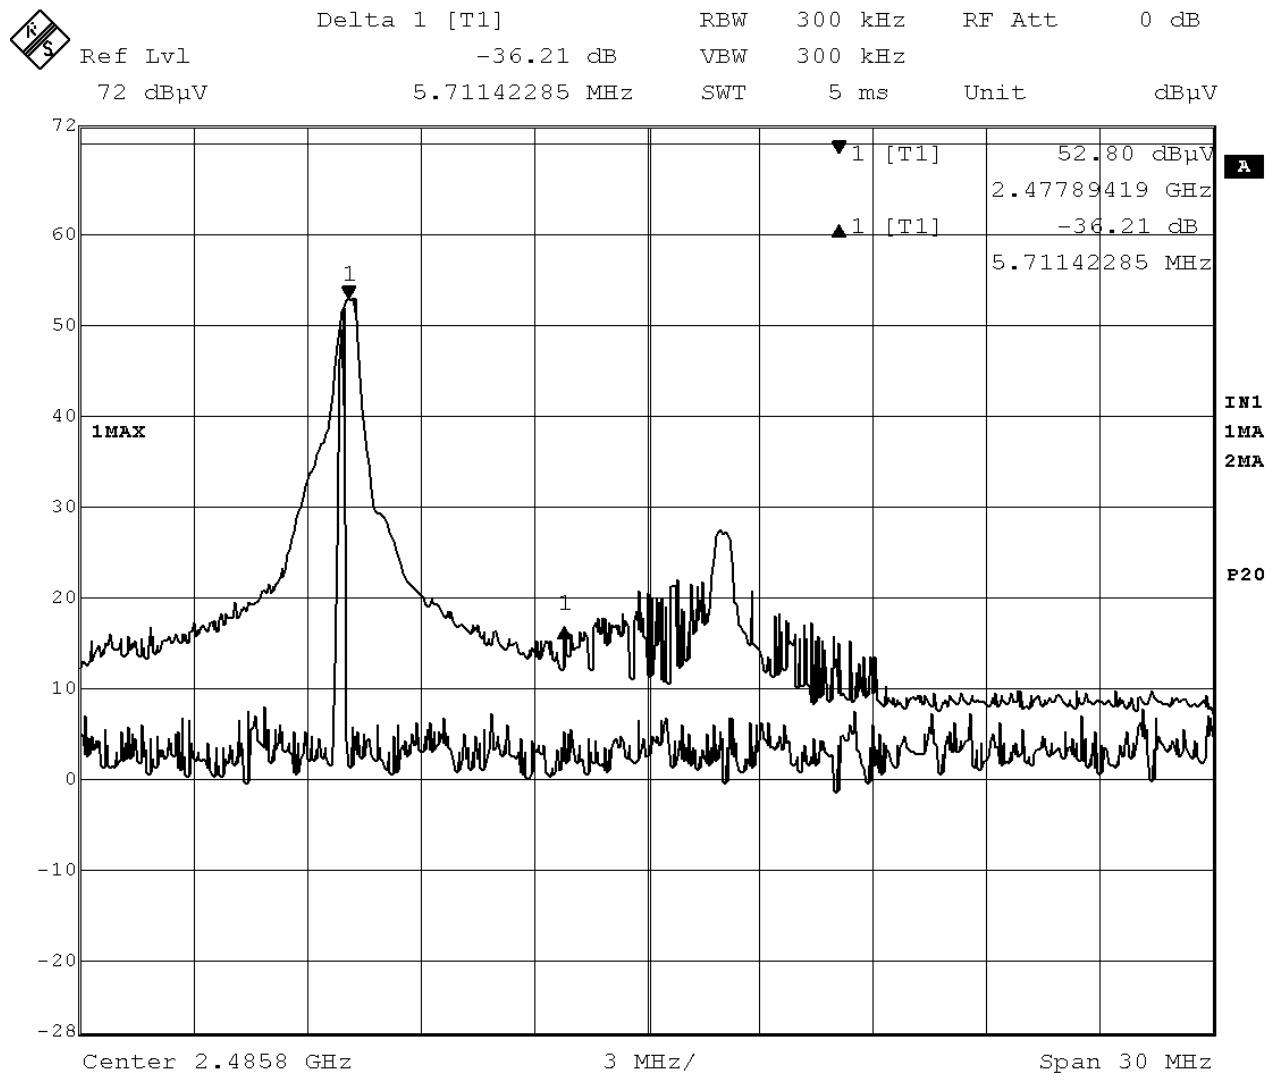



### 2.3 MAXIMUM FIELD STRENGTH OF CARRIER AND HARMONICS

#### 2.3.1 Specification Reference

FCC CFR 47: Part 15 Subpart C, Section 15.249(a)

#### 2.3.2 Equipment Under Test

Albert Hall Meetings Limited Clikapad Base Station

#### 2.3.3 Date of Test

3 February 2005

#### 2.3.4 Test Equipment Used

The major items of test equipment used for the above tests are identified as "Section 2.3" within the Test Equipment Used table shown in Section 3.1.

#### 2.3.5 Test Procedure

Test Performed in accordance with ANSI C63.4.

The EUT contains an integral antenna and therefore the Maximum Peak Power of the Carrier and Harmonics were measured using the field strength method.

The Spectrum Analyser was tuned to the test frequency. The device Output Power setting was controlled as specified in the Product Information, Section 1.5 of this document. The device was then rotated through 360 degrees until the highest power level was observed in both horizontal and vertical polarisation. The device was then measured using a Average Detector and Peak Detector.

#### 2.3.6 Test Results

The EUT met the requirements of FCC CFR 47: Part 15 Section 249(a) for Maximum Carrier Field Strength.

Measurements were made with the EUT Transmitting.

##### EUT Tx on Bottom Channel (2.406GHz) (Serial No 0034)

Carrier Frequency (GHz)	Average Measured (mV/m)	Average Margin (mV/m)	Average Limit (mV/m)	Average Measured (dB $\mu$ V/m)	Average Margin (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)
2.406	0.077	49.923	50.0	37.7	56.3	94.0



### 2.3 MAXIMUM FIELD STRENGTH OF CARRIER AND HARMONICS - Continued

#### 2.3.6 Test Results – Continued

##### EUT Tx on Middle Channel (2.442GHz) (Serial No 0132)

Carrier Frequency (GHz)	Average Measured (mV/m)	Average Margin (mV/m)	Average Limit (mV/m)	Average Measured (dB $\mu$ V/m)	Average Margin (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)
2.442	0.079	49.921	50.0	38.0	56.0	94.0

##### EUT Tx on Top Channel (2.478GHz) (Serial No 0181)

Carrier Frequency (GHz)	Average Measured (mV/m)	Average Margin (mV/m)	Average Limit (mV/m)	Average Measured (dB $\mu$ V/m)	Average Margin (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)
2.478	0.089	49.911	50.0	38.0	55.0	94.0



### 2.3 MAXIMUM FIELD STRENGTH OF CARRIER AND HARMONICS - Continued

The EUT met the requirements of FCC CFR 47: Part 15 Section 249(a) for Maximum Field Strength, Harmonics.

Measurements were made with the EUT Transmitting.

#### EUT Tx on Bottom Channel (2.406GHz) (Serial No 0034)

Frequency	Antenna		Turntable	Peak Field Strength	Peak Limit	Average Field Strength	Average Limit
	Pol	Height					
GHz	H/V	Cm	Deg	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m
4.812	V	100	315	67.9	74.0	28.7	54.0
7.218	H	174	067	55.7	74.0	32.6	54.0

#### EUT Tx on Middle Channel (2.442GHz) (Serial No 0132)

Frequency	Antenna		Turntable	Peak Field Strength	Peak Limit	Average Field Strength	Average Limit
	Pol	Height					
GHz	H/V	cm	Deg	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m
4.884	H	121	318	67.4	74.0	28.7	54.0
7.326	H	173	069	55.6	74.0	32.7	54.0

#### EUT Tx on Top Channel (2.478GHz) (Serial No 0181)

Frequency	Antenna		Turntable	Peak Field Strength	Peak Limit	Average Field Strength	Average Limit
	Pol	Height					
GHz	H/V	cm	Deg	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m
4.956	V	109	011	67.6	74.0	29.0	54.0
7.434	H	184	063	53.6	74.0	32.5	54.0



## 2.4 SPURIOUS RADIATED EMISSIONS 30MHz - 1GHz

### 2.4.1 Specification Reference

FCC CFR 47: Part 15 Subpart C, Section 15.209 and 15.249(d)

### 2.4.2 Equipment Under Test

Albert Hall Meetings Limited Clikapad System

### 2.4.3 Date of Test

6 February 2005

### 2.4.4 Test Equipment Used

The major items of test equipment used for the above tests are identified as "Section 2.4" within the Test Equipment Used table shown in Section 3.1.

### 2.4.5 Test Procedure

Test Performed in accordance with ANSI C63.4.

A preliminary profile of the Spurious Radiated Emissions was obtained by operating the EUT on a remotely controlled turntable within a semi-anechoic chamber. Measurements of emissions from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations. The profiling produced a list of the worst-case emissions together with the EUT azimuth and antenna polarisation.

Using the information from the preliminary profiling of the EUT. The list of emissions was then confirmed or updated under Alternative Open Site conditions. Emission levels were maximised by adjusting the antenna height, antenna polarisation and turntable azimuth.

Emissions identified within the range 30MHz – 1GHz were then formally measured using Peak and Average Detectors, as appropriate.

The measurements were performed at a 3m distance unless otherwise stated.



## 2.4 SPURIOUS RADIATED EMISSIONS 30MHz – 1GHz - continued

### 2.4.6 Test Results

#### 30MHz - 1GHz Frequency Range

The EUT met the requirements of FCC CFR 47: Part 15 Subpart C, Sections 15.209 & 15.249(d) for Spurious Radiated Emissions (30MHz – 1GHz).

#### **EUT Tx on Bottom Channel (2.406GHz) (Serial No 0034)**

The levels of the six highest emissions measured in accordance with the specification are presented below: -

Emission Frequency	Polarisation	Height	Azimuth	Field Strength		Limit	
MHz	Horizontal/ Vertical	cm	Degree	dB $\mu$ V/m	$\mu$ V/m	dB $\mu$ V/m	$\mu$ V/m
48.0	V	116	015	26.0	20.0	40.0	100.0
72.0	V	100	154	25.4	18.6	40.0	100.0
120.0	V	100	111	29.5	29.8	43.5	150.0
168.1	V	110	130	30.5	33.5	43.5	150.0
216.0	V	100	121	30.0	31.6	43.5	150.0
240.0	V	100	093	29.6	30.2	46.0	200.0

#### **EUT Tx on Middle Channel (2.446GHz) (Serial No 0132)**

The levels of the six highest emissions measured in accordance with the specification are presented below: -

Emission Frequency	Polarisation	Height	Azimuth	Field Strength		Limit	
MHz	Horizontal/ Vertical	Cm	degree	dB $\mu$ V/m	$\mu$ V/m	dB $\mu$ V/m	$\mu$ V/m
48.0	V	109	011	29.1	28.5	40.0	100.0
72.1	V	100	160	26.5	21.1	40.0	100.0
120.0	V	100	105	29.9	31.3	43.5	150.0
168.0	V	105	130	30.2	32.4	43.5	150.0
215.8	V	126	120	30.0	31.6	43.5	150.0
240.0	V	111	100	28.4	26.3	46.0	200.0



## 2.4 SPURIOUS RADIATED EMISSIONS 30MHz – 1GHz - continued

### 2.4.6 Test Results

#### 30MHz - 1GHz Frequency Range

The EUT met the requirements of FCC CFR 47: Part 15 Subpart C, Section 15.209 and 15.249(d) for Spurious Radiated Emissions (30MHz – 1GHz).

#### **EUT Tx on Top Channel (2.478GHz) (Serial No 0181)**

The levels of the six highest emissions measured in accordance with the specification are presented below: -

Emission Frequency	Polarisation	Height	Azimuth	Field Strength		Limit					
				MHz	Horizontal/ Vertical	Cm	degree	dB $\mu$ V/m	$\mu$ V/m	dB $\mu$ V/m	$\mu$ V/m
48.2	V	110	000	27.6		24.0		40.0		100.0	
72.1	V	100	149	26.1		20.2		40.0		100.0	
120.0	V	100	100	29.4		29.5		43.5		150.0	
167.9	V	100	125	29.8		30.9		43.5		150.0	
215.9	V	119	105	29.6		30.2		43.5		150.0	
239.9	V	112	097	28.0		25.1		46.0		200.0	

**2.5 SPURIOUS RADIATED EMISSIONS 1GHz – 25GHz****2.5.1 Specification Reference**

FCC CFR 47: Part 15 Subpart C, Section 15.209, 15.249(d) and 15.249 (e)

**2.5.2 Equipment Under Test**

Albert Hall Meetings Limited Clikapad System

**2.5.3 Date of Test**

4 February 2005

**2.5.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified as "Section 2.5" within the Test Equipment Used table shown in Section 3.1.

**2.5.5 Test Procedure**

Test Performed in accordance with ANSI C63.4.

A preliminary profile of the Spurious Radiated Emissions was obtained by operating the EUT on a remotely controlled turntable within a semi-anechoic chamber. Measurements of emissions from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations. The profiling produced a list of the worst-case emissions together with the EUT azimuth and antenna polarisation.

Using the information from the preliminary profiling of the EUT. The list of emissions was then confirmed or updated under Alternative Open Site conditions. Emission levels were maximised by adjusting the antenna height, antenna polarisation and turntable azimuth.

Emissions identified within the range 1GHz – 25GHz were then formally measured using Peak and Average Detectors, as appropriate.

The measurements were performed at a 3m distance unless otherwise stated.



## 2.5 SPURIOUS RADIATED EMISSIONS 1GHz – 25GHz- Continued

### 2.5.6 Test Results - Continued

#### 1GHz - 25GHz Frequency Range

Equipment Designation: Intentional Radiator.

The EUT met the requirements of FCC CFR 47: Part 15 Subpart C, Section 15.209, 15.249(d) and 125.249 (e) for Spurious Radiated Emissions (1GHz –25GHz).

#### **EUT Tx on Bottom Channel (2.406GHz) (Serial No 0034)**

Frequency	Antenna		Turntable	Peak Field Strength	Peak Limit	Average Field Strength	Average Limit
	Pol	Height					
GHz	H/V	Cm	Deg	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m
2.351	H	100	009	69.3	74.0	36.4	54.0
2.376	H	100	360	67.4	74.0	36.3	54.0

#### **EUT Tx on Middle Channel (2.442GHz) (Serial No 0132)**

Frequency	Antenna		Turntable	Peak Field Strength	Peak Limit	Average Field Strength	Average Limit
	Pol	Height					
GHz	H/V	cm	Deg	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m
2.354	H	100	000	68.0	74.0	36.0	54.0

#### **EUT Tx on Top Channel (2.478GHz) (Serial No 0181)**

Frequency	Antenna		Turntable	Peak Field Strength	Peak Limit	Average Field Strength	Average Limit
	Pol	Height					
GHz	H/V	cm	Deg	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m	dB $\mu$ V/m
2.487	H	100	034	64.4	74.0	35.6	54.0



## **SECTION 3**

### **TEST EQUIPMENT USED AND MEASUREMENT UNCERTAINTY**



### 3.1 TEST EQUIPMENT USED

Item	Instrument	Manufacturer	Type No	Serial No	EMC No	Cal. Due
<b>Sections 2.1</b>						
1	Spectrum Analyser	Hewlett Packard	8542E	3617A00165_00154	2286	08/01/2006
2	Bilog Antenna	Schaffner	CBL6143	-	2965	12/09/2005
3	Turntable Controller	No Data	HD 050	050/396	2528	-
4	Antenna Mast	EMCO	1051	-	2182	-
5	Screened Room 5	Siemens	EAC54300	NA	2533	-
<b>Section 2.2 &amp; 2.3</b>						
6	Turntable Controller	No Data	HD 050	050/396	2528	-
7	EMI Test Receiver	Rohde & Schwarz	ESIB40	100142/040	2917	11/02/2005
8	Emco 3115 Drg Ant	Emco	3115	97015079	2397	07/07/2005
9	Antenna Mast	Emco	1051	-	2182	-
10	Screened Room 5	Siemens	EAC54300	NA	2533	-
<b>Sections 2.4 &amp; 2.5</b>						
11	Turntable Controller	No Data	HD 050	050/396	2528	-
12	Screened Room 5	Siemens	EAC54300	NA	2533	-
13	Antenna Mast	EMCO	1051	-	2182	-
14	Low Noise Amplifier	Miteq Corp	AMF-3d-001080-18-13P	UNK	2457	-
15	Solid State Amplifier	Avanteck	AWT-18036	F13365 8452	1081	26/06/2005
16	Signal Amplifier	Avanteck	AMT-26177-33	6669	2072	25/06/2005
17	Drg Horn Antenna	Link Microtek Ltd	AM180HA-K-TU2	2007	2945	24/06/2005
18	10dB Attenuator	Marconi	6534/3	2954	1494	-
19	EMI Test Receiver	Rohde & Schwarz	ESIB40	100142/040	2917	11/02/2005
20	Drg Horn Antenna	Emco	3115	97015079	2397	07/07/2005
21	Signal Generator	Hewlett Packard	8673B	2147A00423	411	02/03/2005



### 3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

IN THE FREQUENCY RANGE 30MHz TO 1000MHz		
TEST	FREQUENCY	AMPLITUDE
For Radiated Emissions, Quasi-Peak Measurements taken in Zero Span using the Hewlett Packard EMI Receiver and Bilog Antenna	$\pm 2 \times 10^{-7} \times$ Centre Frequency	5.15dB calculated in accordance with CISPR 16-4
IN THE FREQUENCY RANGE 1GHz TO 10GHz		
TEST	FREQUENCY	AMPLITUDE
For Spurious Radiated Emissions measurements	$\pm 2 \times 10^{-7} \times$ Centre Frequency	$\pm 6.3$ dB



## **SECTION 4**

### **ACCREDITATION, DISCLAIMERS AND COPYRIGHT**



#### 4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA  
(Not UKAS Accredited).

This report must not be reproduced without the written permission of TÜV Product Service Limited

© 2005 TÜV Product Service Limited



## APPENDIX A

### TITCHFIELD FCC SITE COMPLIANCE LETTER



**FEDERAL COMMUNICATIONS COMMISSION**

Laboratory Division  
7435 Oakland Mills Road  
Columbia, MD 21046

October 18, 2002

Registration Number: 90987

TUV Product Service Ltd  
Segensworth Road  
Titchfield  
Fareham, Hampshire, PO15 5RH  
United Kingdom  
Attention: Kevan Adsetts

Re: Measurement facility located at Titchfield  
Anechoic chamber (3 meters) and 3 & 10 meter OATS  
Date of Listing: October 18, 2002

Gentlemen:

Your request for registration of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC rules. The information has, therefore, been placed on file and the name of your organization added to the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website [www.fcc.gov](http://www.fcc.gov) under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

A handwritten signature in black ink that reads "Thomas W. Phillips".

Thomas W Phillips  
Electronics Engineer