

RF TEST REPORT



Report No.: 15050005-FCC-R3

Supersede Report No.: N/A

Applicant	NINGBO BIRD CO., LTD	
Product Name	Mobile phone	
Model No.	A5005	
Serial No.	N/A	
Test Standard	FCC Part 15.247: 2014, ANSI C63.10: 2013	
Test Date	Apr. 02 to Apr. 10, 2015	
Issue Date	Apr. 14, 2015	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification		<input checked="" type="checkbox"/>
Equipment did not comply with the specification		<input type="checkbox"/>
Winnie Zhang	Chris You	
Winnie Zhang Test Engineer	Chris You Checked By	
This test report may be reproduced in full only		
Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	15050005-FCC-R3
Page	3 of 50

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1 ANTENNA REQUIREMENT.....	9
6.2 DTS (6 DB&20 DB) CHANNEL BANDWIDTH.....	10
6.3 MAXIMUM OUTPUT POWER	16
6.4 POWER SPECTRAL DENSITY.....	20
6.5 BAND-EDGE & UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS.....	24
6.6 AC POWER LINE CONDUCTED EMISSIONS.....	30
6.7 RADIATED SPURIOUS EMISSIONS	34
ANNEX A. TEST INSTRUMENT.....	39
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	40
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	46
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	49
ANNEX E. DECLARATION OF SIMILARITY	50

1. Report Revision History

Report No.	Report Version	Description	Issue Date
15050005-FCC-R3	NONE	Original	Apr. 14, 2015

2. Customer information

Applicant Name	NINGBO BIRD CO., LTD
Applicant Add	No.999, Dacheng East Road, Fenghua City, Zhejiang Province
Manufacturer	NINGBO BIRD CO., LTD
Manufacturer Add	No.999, Dacheng East Road, Fenghua City, Zhejiang Province

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission program to Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT: Mobile phone

Main Model: A5005

Serial Model: N/A

Date EUT received: Apr. 01, 2015

Test Date(s): Apr. 02 to Apr. 10, 2015

Equipment Category : DTS

GSM850: -2.2 dBi

PCS1900: -1.8 dBi

Antenna Gain: UMTS-FDD Band 5/ Band 2/ Band 4: -2 dBi

Bluetooth: -1 dBi

WIFI: -3 dBi

GSM / GPRS: GMSK

EGPRS: GMSK, 8PSK

Type of Modulation: UMTS-FDD: QPSK, 16QAM

802.11b/g/n: DSSS, OFDM

Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK

GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz

PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz

UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz

UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz;

RX: 1932.4 ~ 1987.6 MHz

RF Operating Frequency (ies): **1932.4 ~ 1987.0 MHz**

UMTS-FDD Band IV 1X .1712.4 ~ 1752.6 MHz,

RA. 2112.4 ~ 2152.0 MHz

WIFI:802.11b/g/n(20M): 2412-2462 MHz

WIFI:802.11n(40M): 2422-2452 MHz

Bluetooth: 2402-2480 MHz

Test Report	15050005-FCC-R3
Page	7 of 50

Max. Output Power:
 802.11b: 9.43 dBm
 802.11g: 9.30 dBm
 802.11n(20M): 9.35 dBm
 802.11n(40M): 9.41 dBm

Number of Channels:
 GSM 850: 124CH
 PCS1900: 299CH
 UMTS-FDD Band V : 102CH
 UMTS-FDD Band II : 277CH
 UMTS-FDD Band IV: 202CH
 WIFI :802.11b/g/n(20M): 11CH
 WIFI :802.11n(40M): 7CH
 Bluetooth: 79CH

Port: Power Port, Earphone Port, USB Port

Battery:
 Model: A5005
 Spec: 3.7V 1900mAh
 Input Power:
 Limited charger voltage: 4.2V
 Adapter:
 Model: BIRD
 Input: AC 100-240V; 50/60Hz 0.15A
 Output: DC 5.0V; 500mA

Trade Name : BIRD

GPRS/EGPRS Multi-slot class 8/10/12

FCC ID: SNM-5005

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247 (a)(2)	DTS (6 dB&20 dB) CHANNEL BANDWIDTH	Compliance
§15.247(b)(3)	Conducted Maximum Output Power	Compliance
§15.247(e)	Power Spectral Density	Compliance
§15.247(d)	Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands	Compliance
§15.207 (a),	AC Power Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Spurious Emissions & Unwanted Emissions into Restricted Frequency Bands	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 2 antennas:

A permanently attached PIFA antenna for Bluetooth/WIFI, the gain is -1 dBi for Bluetooth, -3 dBi for WIFI.

A permanently attached PIFA antenna for GSM and UMTS, the gain is -2.2 dBi for GSM850, -1.8 dBi for PCS1900, -2 dBi for UMTS-FDD Band II / Band V / Band IV.

The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.

6.2 DTS (6 dB&20 dB) Channel Bandwidth

Temperature	22°C
Relative Humidity	63%
Atmospheric Pressure	1009mbar
Test date :	Apr. 10, 2015
Tested By :	Winnie Zhang

	case (i.e., the widest) bandwidth. Unless otherwise specified for an unlicensed wireless device, measure the bandwidth at the 20 dB levels with respect to the reference level.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A


Measurement result

Test mode	CH	Freq (MHz)	6dB Bandwidth (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	10.117	16.402	≥ 0.5
	Mid	2437	10.107	16.417	≥ 0.5
	High	2462	10.083	16.404	≥ 0.5
802.11g	Low	2412	16.480	19.113	≥ 0.5
	Mid	2437	16.470	19.122	≥ 0.5
	High	2462	16.478	19.141	≥ 0.5
802.11n (20M)	Low	2412	17.694	19.702	≥ 0.5
	Mid	2437	17.690	19.699	≥ 0.5
	High	2462	17.684	19.514	≥ 0.5
802.11n (40M)	Low	2422	35.445	38.660	≥ 0.5
	Mid	2437	35.559	38.419	≥ 0.5
	High	2452	35.514	38.732	≥ 0.5


Test Plots


6dB Bandwidth measurement result

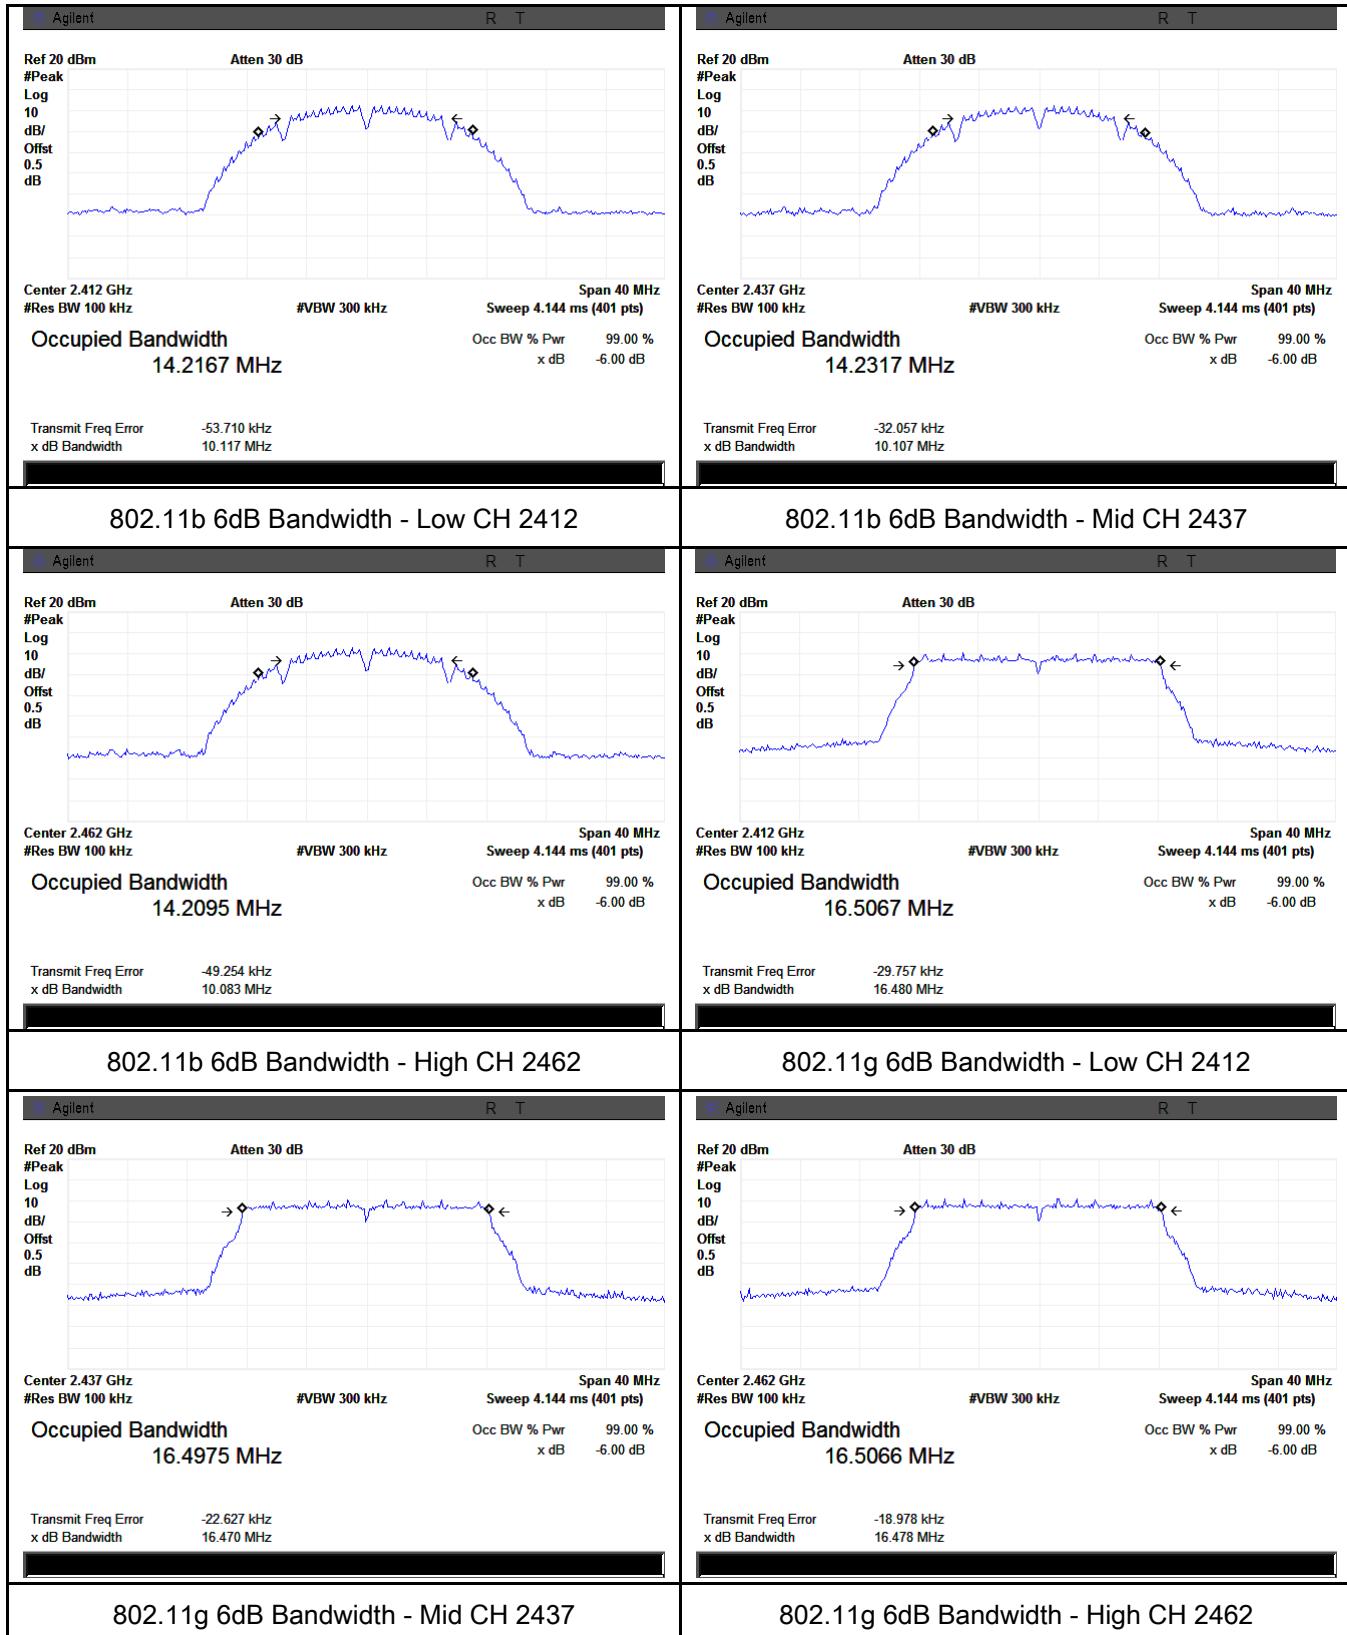

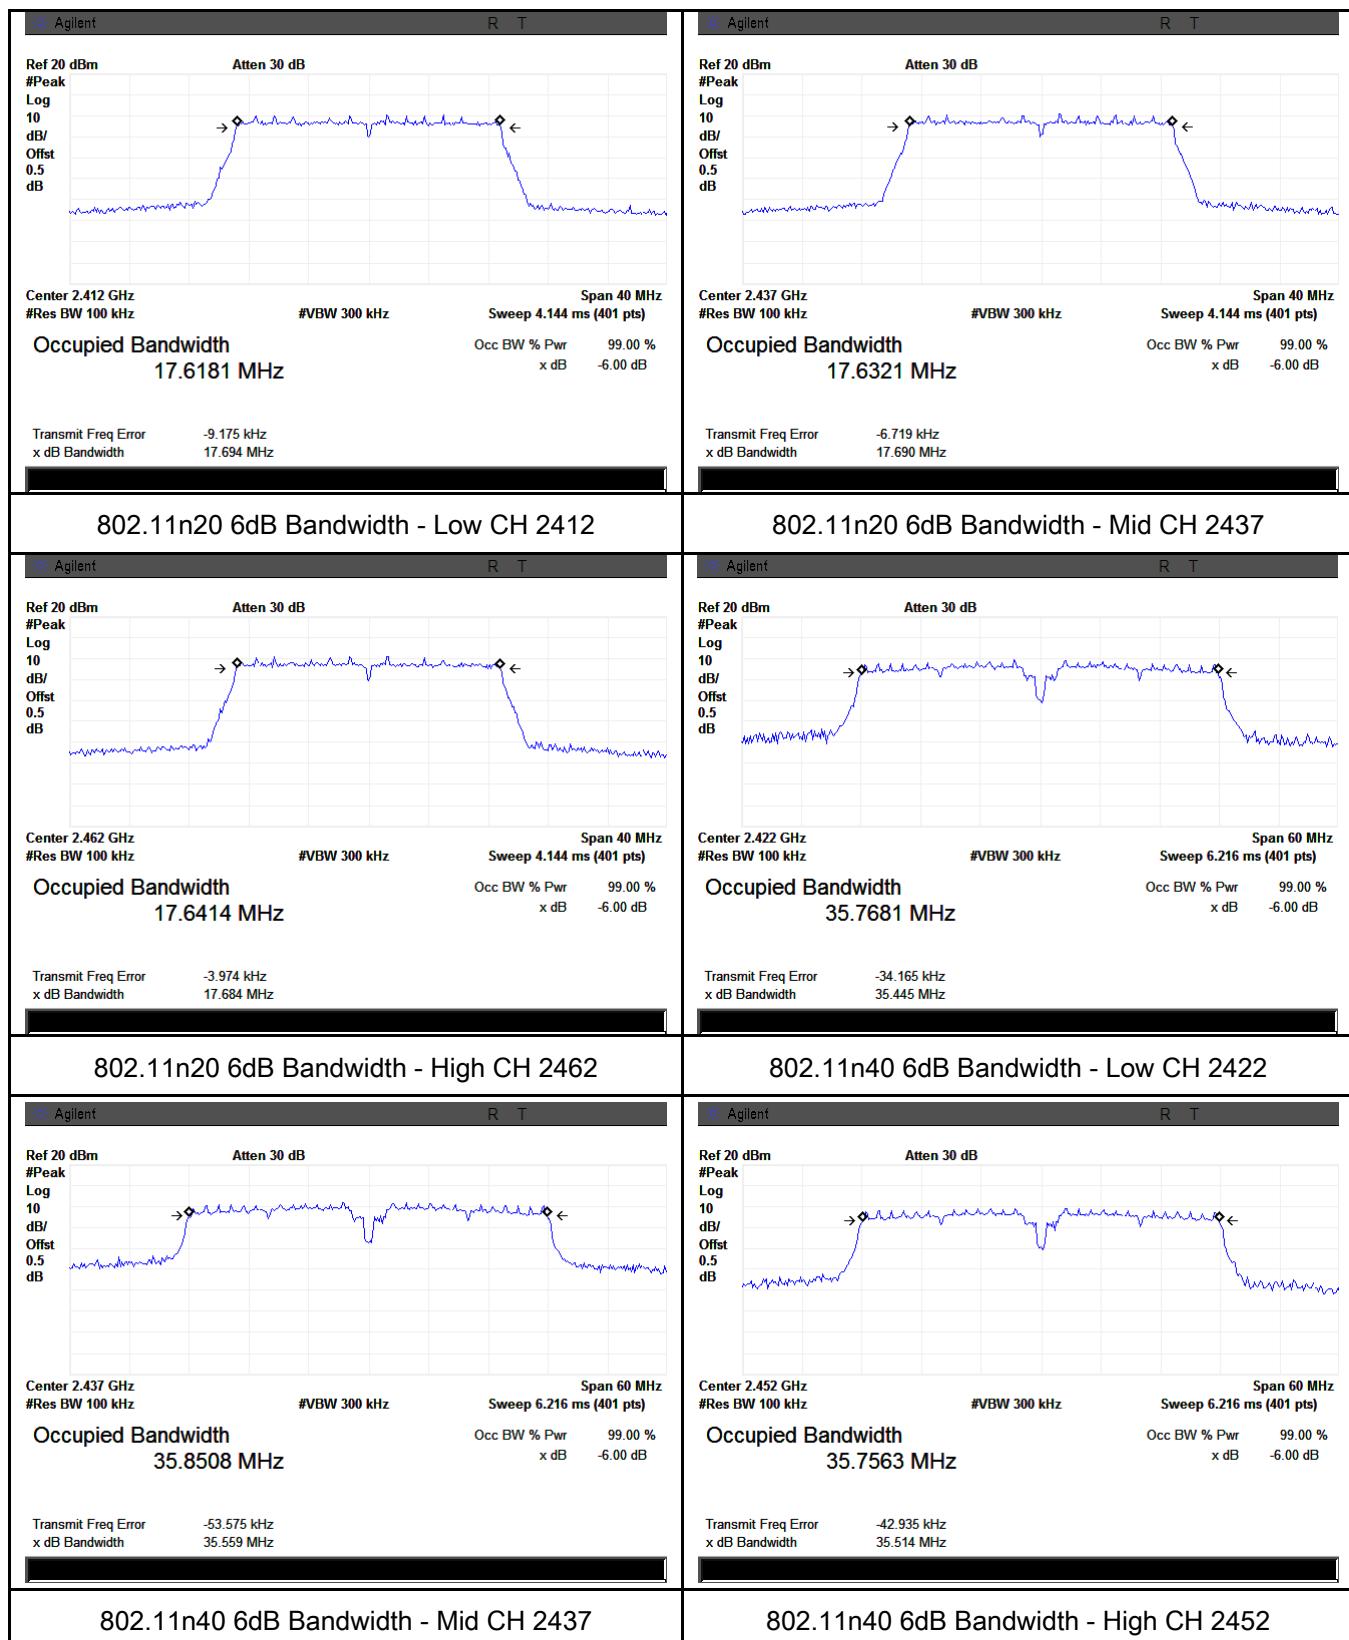

20 dB Bandwidth measurement result

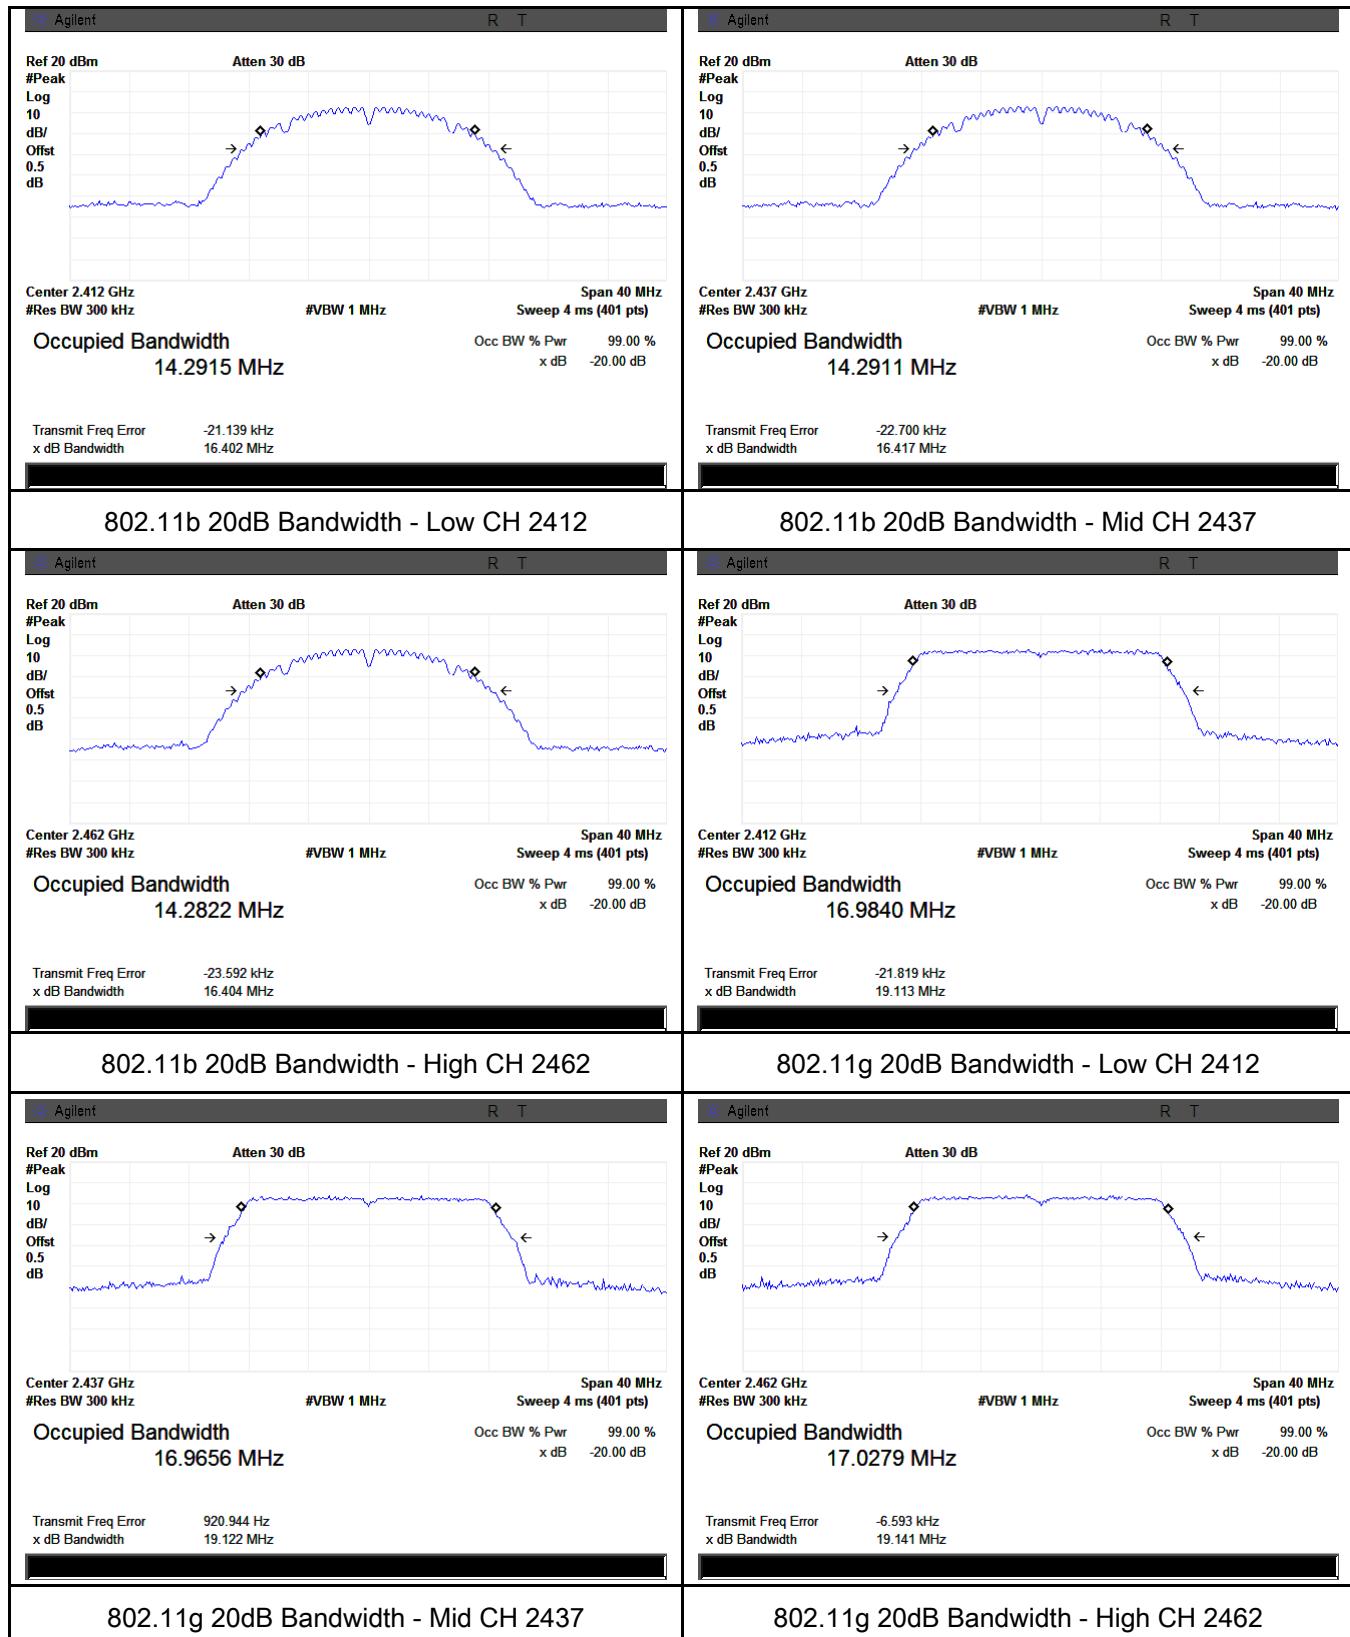


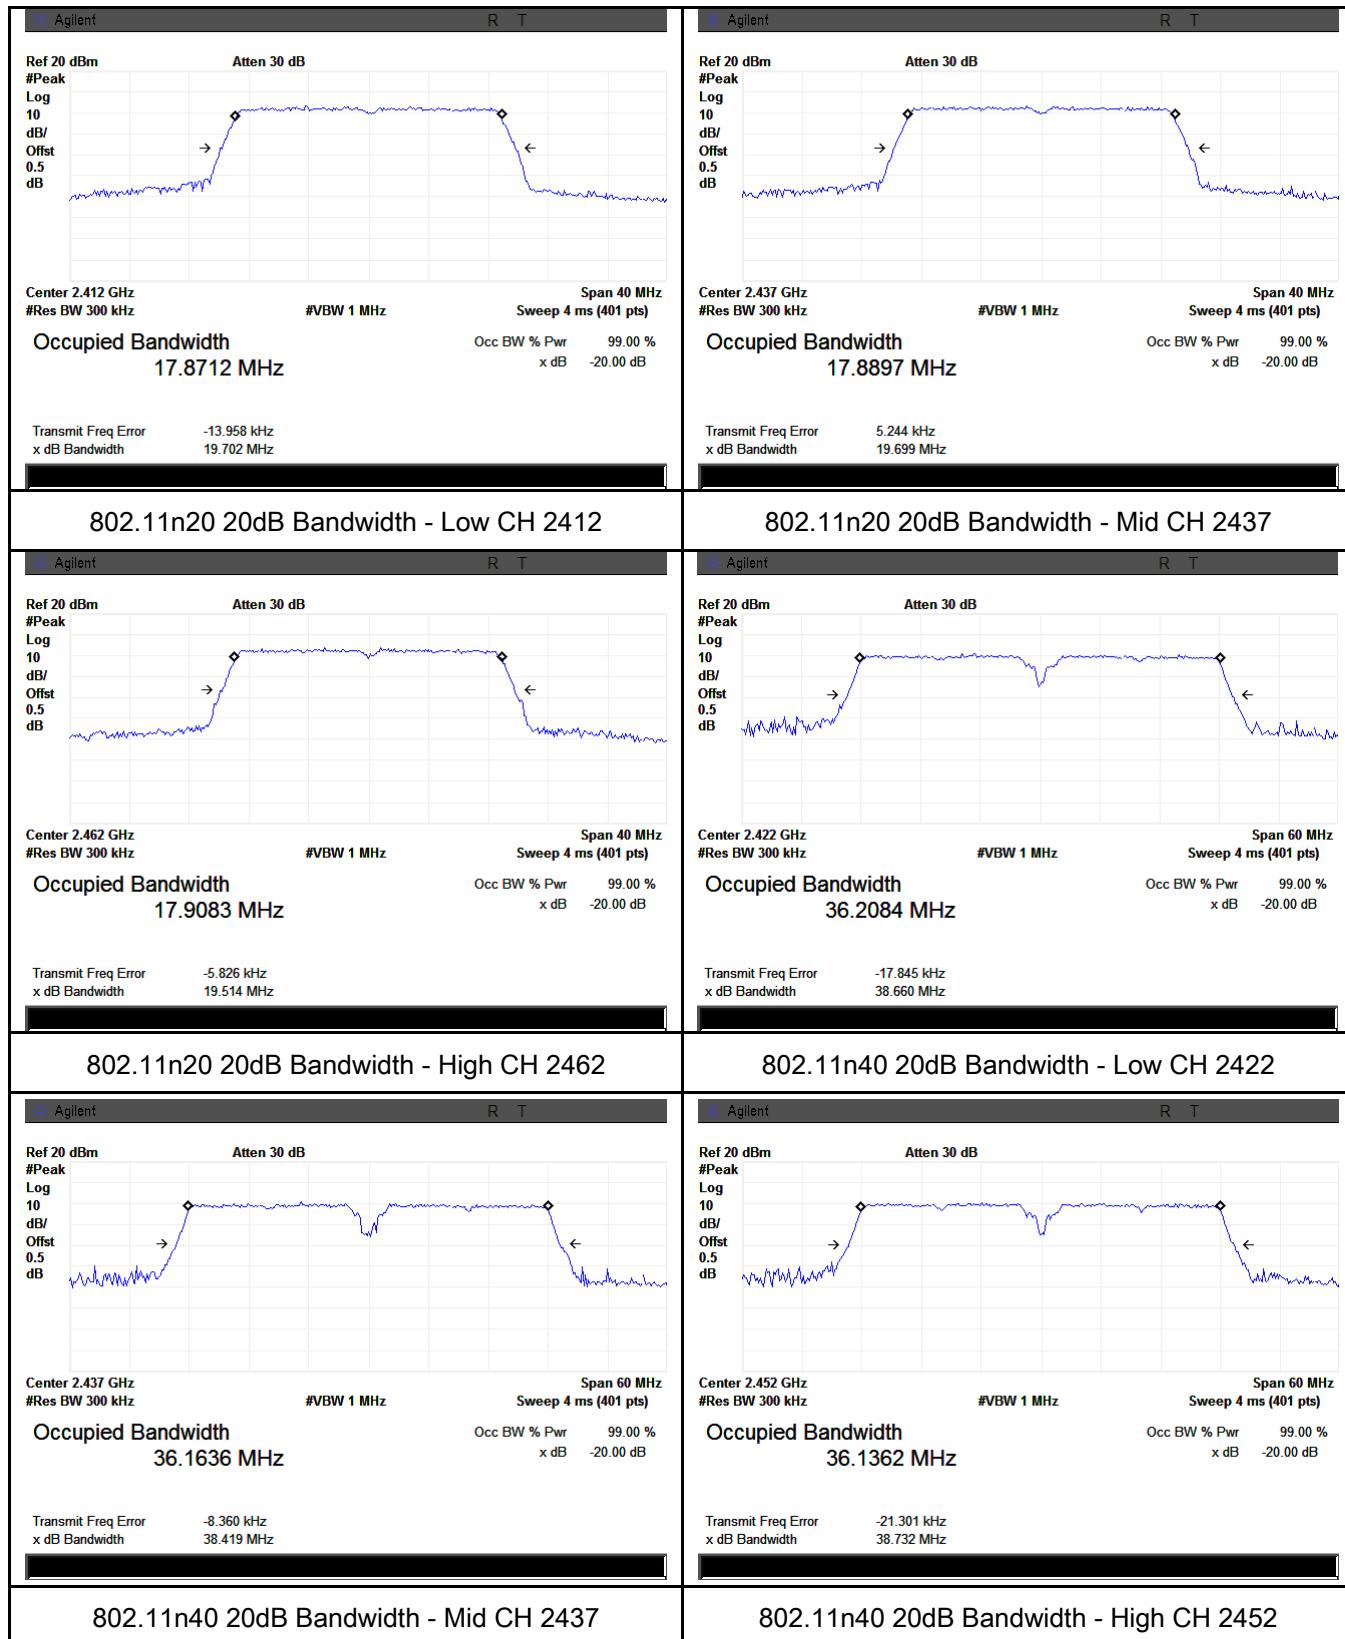

6.3 Maximum Output Power

Temperature	22°C
Relative Humidity	63%
Atmospheric Pressure	1009mbar
Test date :	Apr. 10, 2015
Tested By :	Winnie Zhang

Requirement(s):

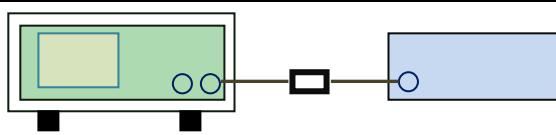Spec	Item	Requirement	Applicable
§15.247(b) (2), RSS210 (A8.4)	a)	FHSS in 2400-2483.5MHz with \geq 75 channels: \leq 1 Watt	<input type="checkbox"/>
	b)	FHSS in 5725-5850MHz: \leq 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: \leq 0.125 Watt.	<input type="checkbox"/>
	d)	FHSS in 902-928MHz with \geq 50 channels: \leq 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with \geq 25 & < 50 channels: \leq 0.25 Watt	<input type="checkbox"/>
	f)	DSSS in 902-928MHz, 2400-2483.5MHz, 5725-5850MHz: \leq 1 Watt	<input checked="" type="checkbox"/>
Test Setup		 Spectrum Analyzer EUT	
Test Procedure		<p>558074 D01 DTS MEAS Guidance v03r02, 9.1.2 Integrated band power method</p> <p>Maximum output power measurement procedure</p> <ul style="list-style-type: none"> - a) Set span to at least 1.5 times the OBW. - b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz. - c) Set VBW \geq 3 x RBW. - d) Number of points in sweep \geq 2 \times span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.) - e) Sweep time = auto. - f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode. - g) If transmit duty cycle $<$ 98 %, use a sweep trigger with the level set to enable 	

	<p>triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “ free run” .</p> <ul style="list-style-type: none"> - h) Trace average at least 100 traces in power averaging (i.e., RMS) mode. - i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A


Output Power measurement result

Type	Test mode	CH	Freq (MHz)	Conducted Power (dBm)	Limit (dBm)	Result
Output power	802.11b	Low	2412	9.0	30	Pass
		Mid	2437	9.43	30	Pass
		High	2462	9.07	30	Pass
	802.11g	Low	2412	8.62	30	Pass
		Mid	2437	8.72	30	Pass
		High	2462	9.30	30	Pass
	802.11n (20M)	Low	2412	8.81	30	Pass
		Mid	2437	9.13	30	Pass
		High	2462	9.35	30	Pass
	802.11n (40M)	Low	2422	9.21	30	Pass
		Mid	2437	9.0	30	Pass
		High	2452	9.41	30	Pass

Test Plots


The Average Power

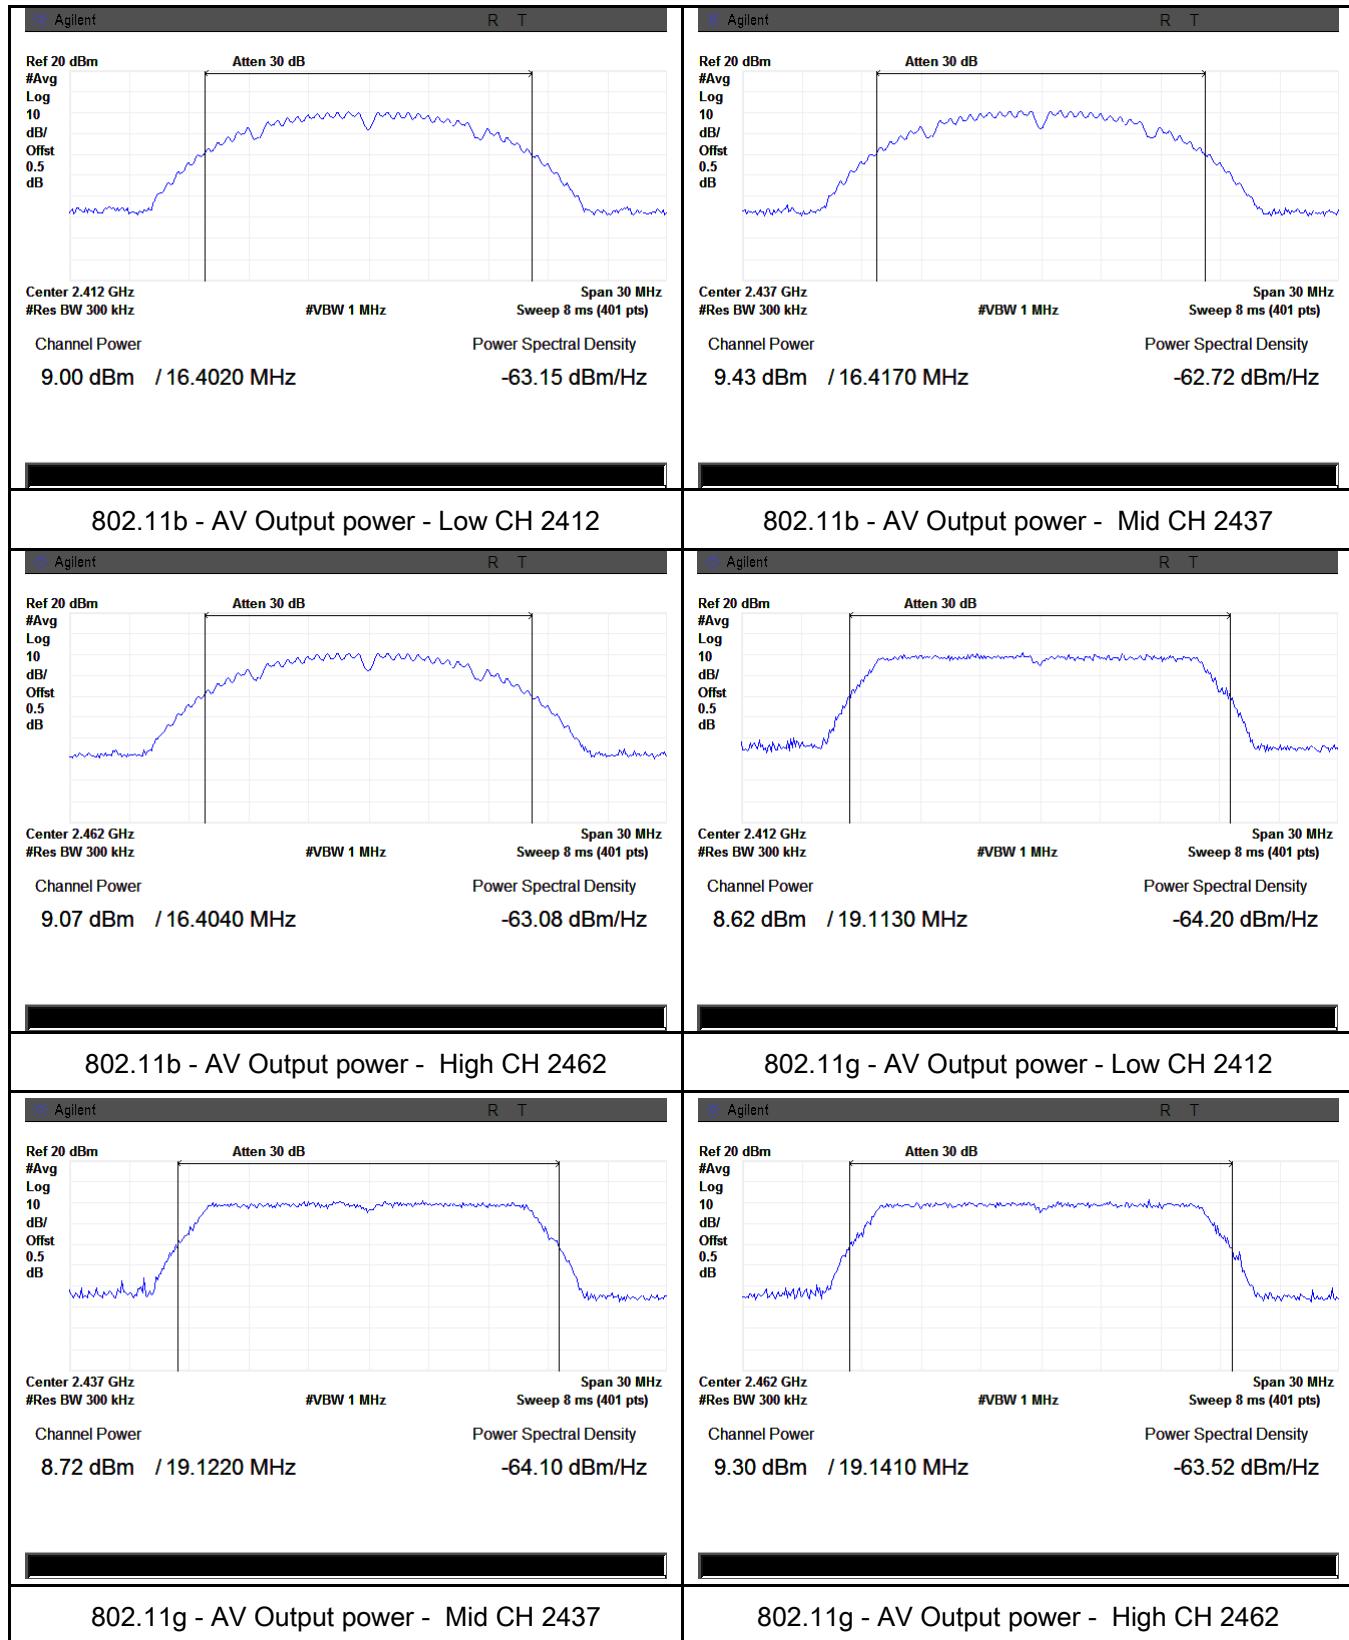

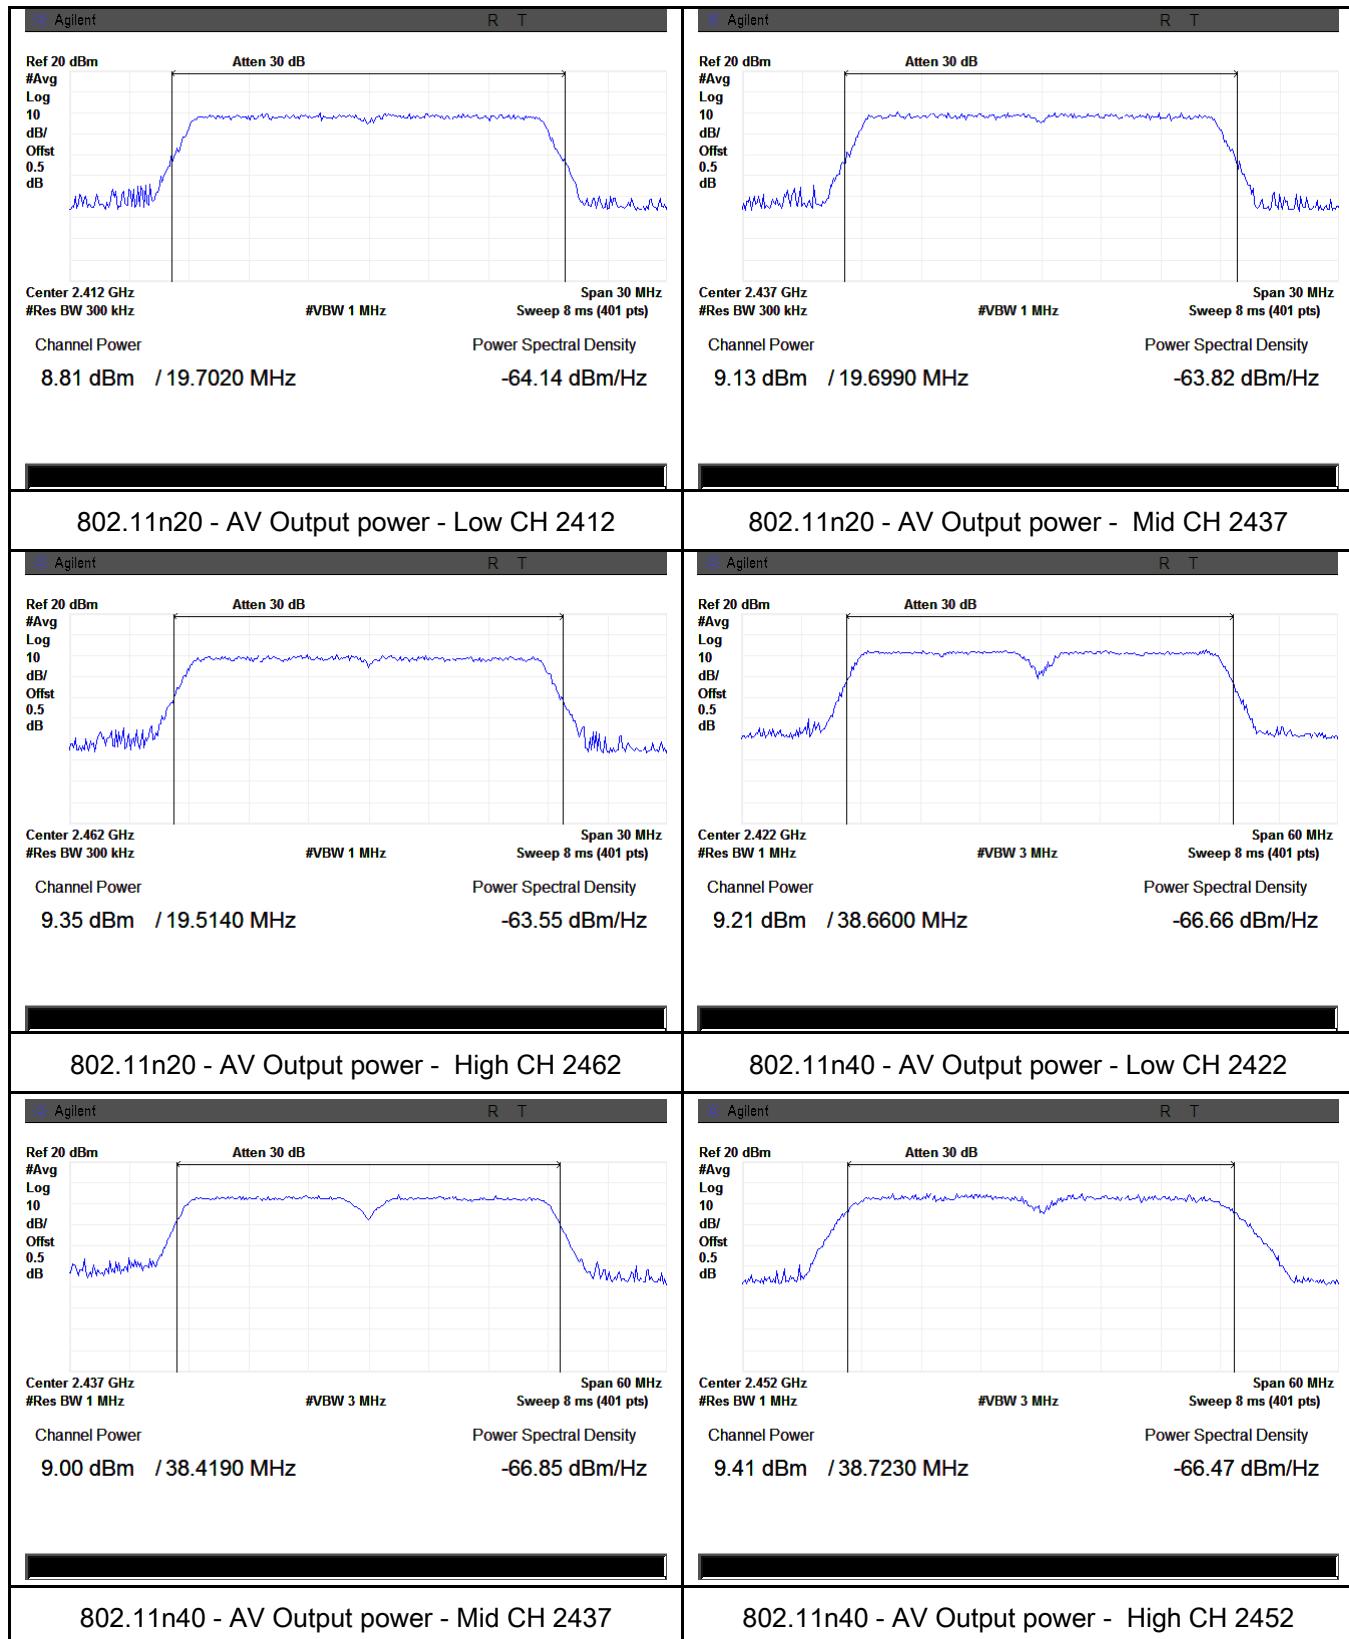

6.4 Power Spectral Density

Temperature	22°C
Relative Humidity	63%
Atmospheric Pressure	1009mbar
Test date :	Apr. 10, 2015
Tested By :	Winnie Zhang

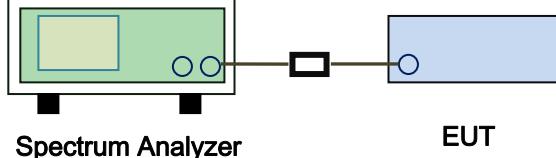Spec	Item	Requirement	Applicable
§15.247(e)	a)	The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>558074 D01 DTS MEAS Guidance v03r02, 10.2 power spectral density method power spectral density measurement procedure</p> <ul style="list-style-type: none"> - a) Set analyzer center frequency to DTS channel center frequency. - b) Set the span to 1.5 times the DTS bandwidth. - c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$. - d) Set the VBW $\geq 3 \times \text{RBW}$. - e) Detector = peak. - f) Sweep time = auto couple. - g) Trace mode = max hold. - h) Allow trace to fully stabilize. - i) Use the peak marker function to determine the maximum amplitude level within the RBW. - j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat. 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


Test Data Yes N/A
 Test Plot Yes (See below) N/A


Power Spectral Density measurement result

Type	Test mode	CH	Freq (MHz)	PSD (dBm)	Limit (dBm)	Result
PSD	802.11b	Low	2412	0.079	8	Pass
		Mid	2437	2.052	8	Pass
		High	2462	2.505	8	Pass
	802.11g	Low	2412	-4.171	8	Pass
		Mid	2437	-4.838	8	Pass
		High	2462	-3.906	8	Pass
	802.11n (20M)	Low	2412	-4.329	8	Pass
		Mid	2437	-3.696	8	Pass
		High	2462	-3.832	8	Pass
	802.11n (40M)	Low	2422	-1.47	8	Pass
		Mid	2437	1.853	8	Pass
		High	2452	-1.003	8	Pass

Test Plots

Power Spectral Density measurement result

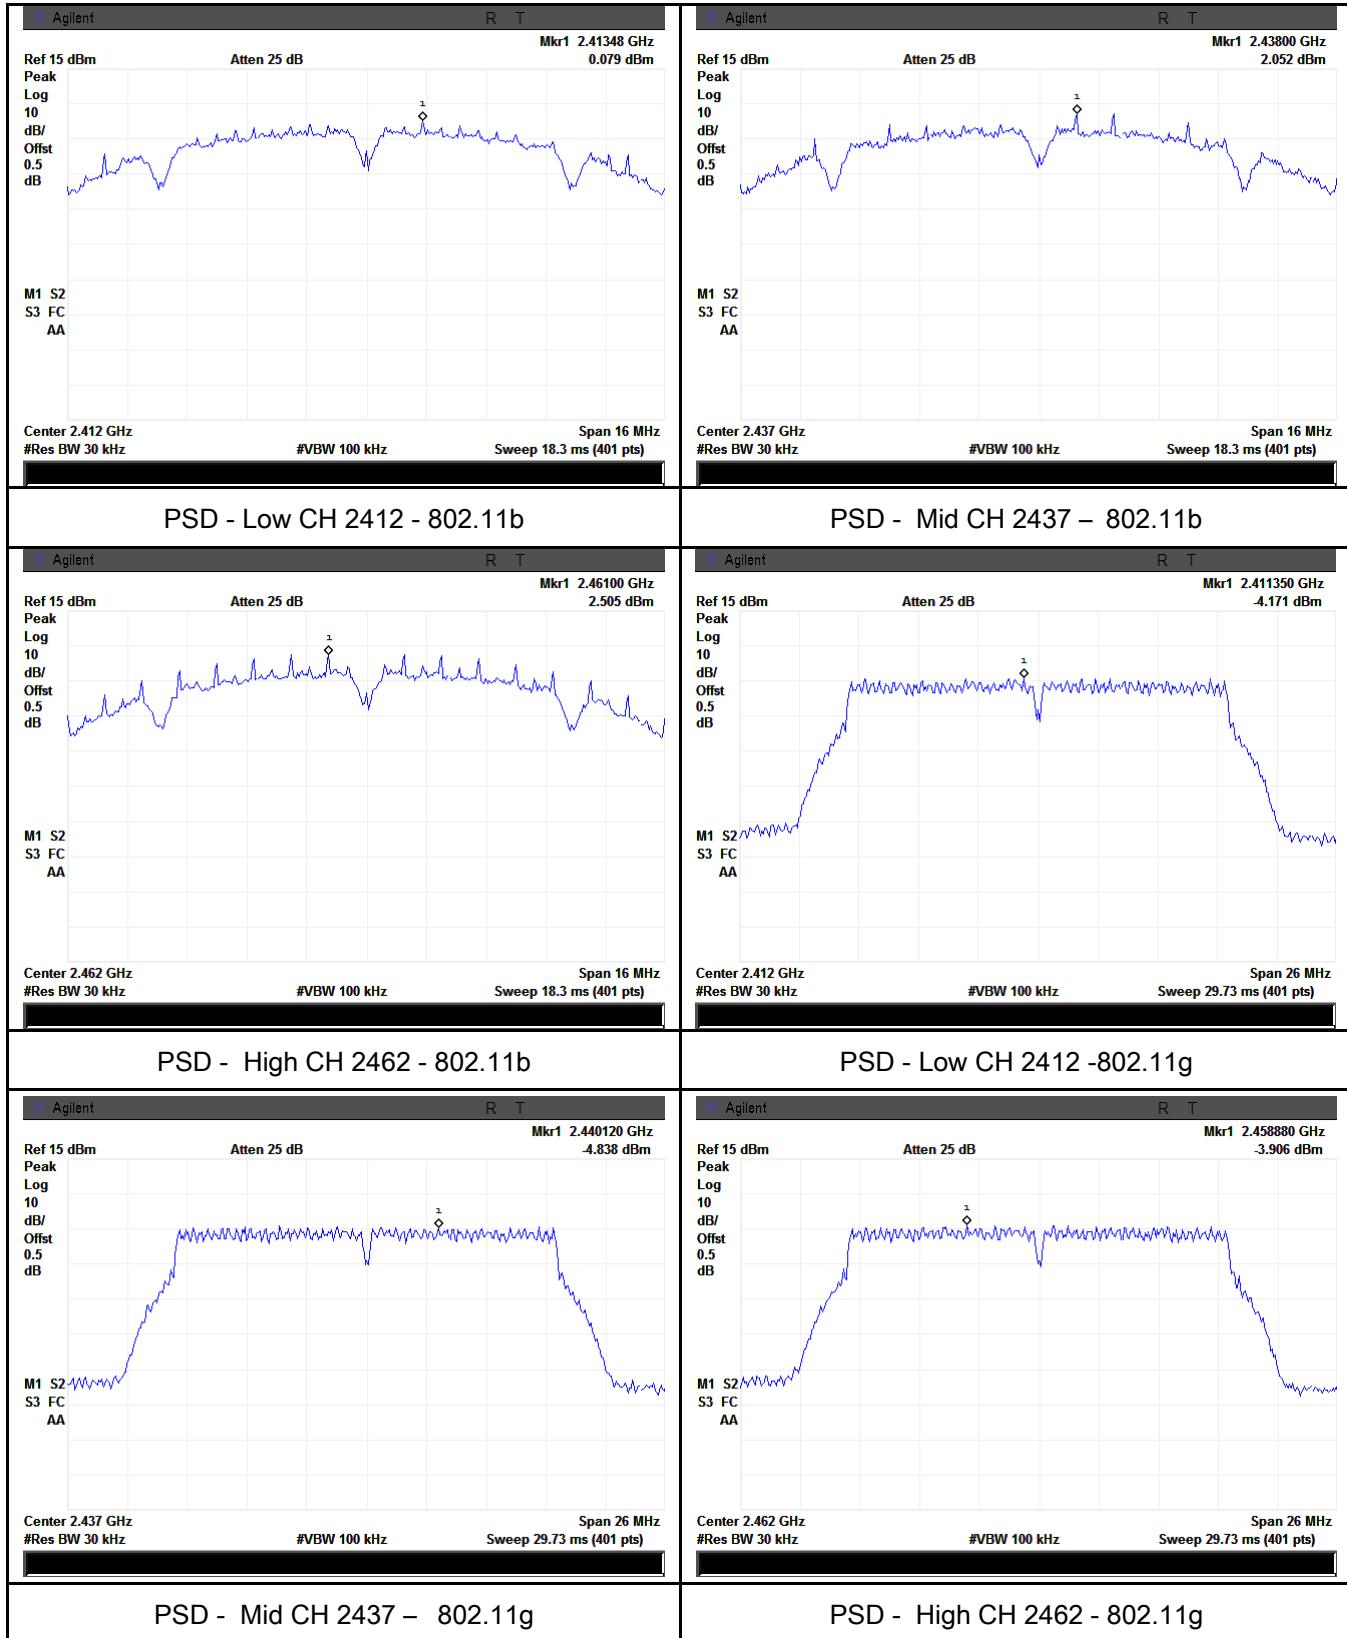


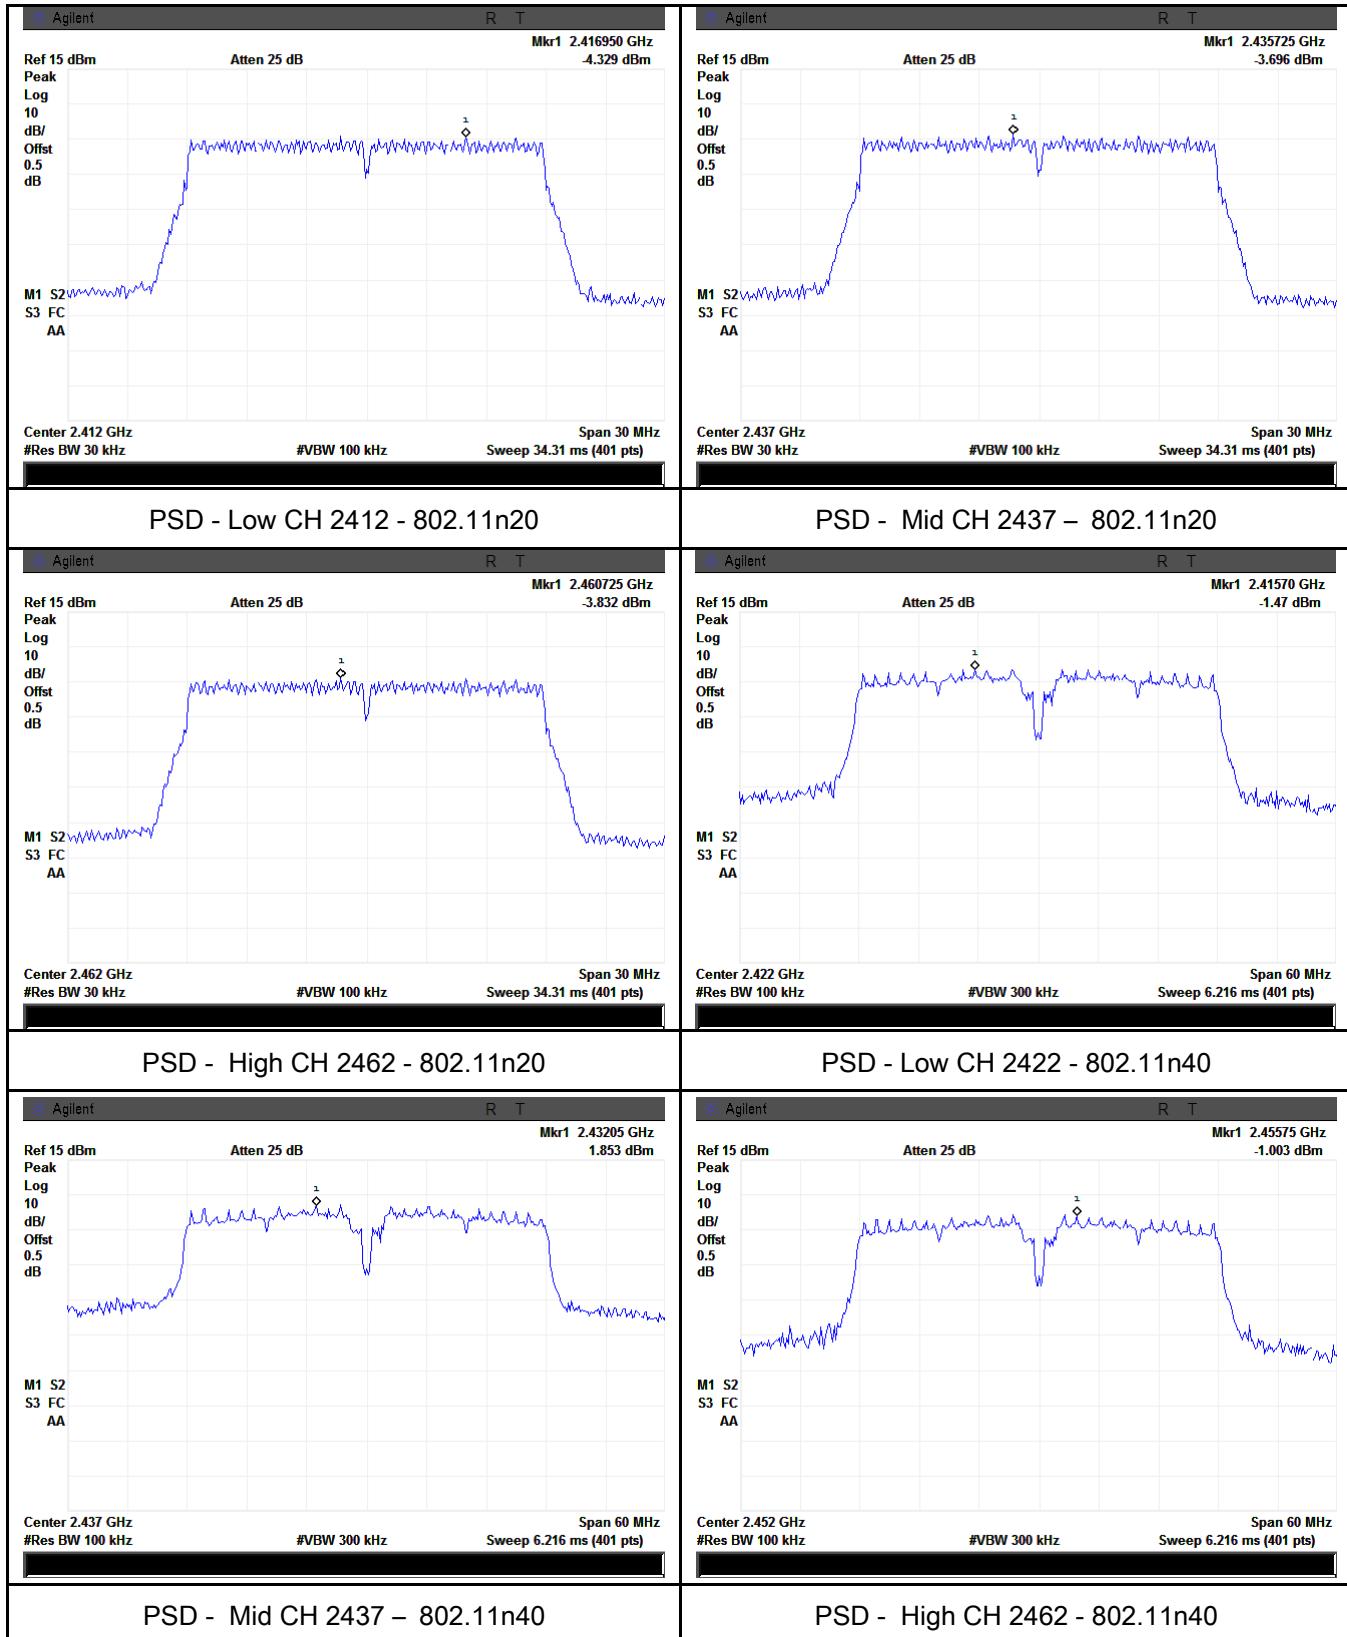

6.5 Band-Edge & Unwanted Emissions into Non-Restricted Frequency Bands

Temperature	23°C
Relative Humidity	62%
Atmospheric Pressure	1011mbar
Test date :	Apr. 07, 2015
Tested By :	Winnie Zhang

Requirement(s):

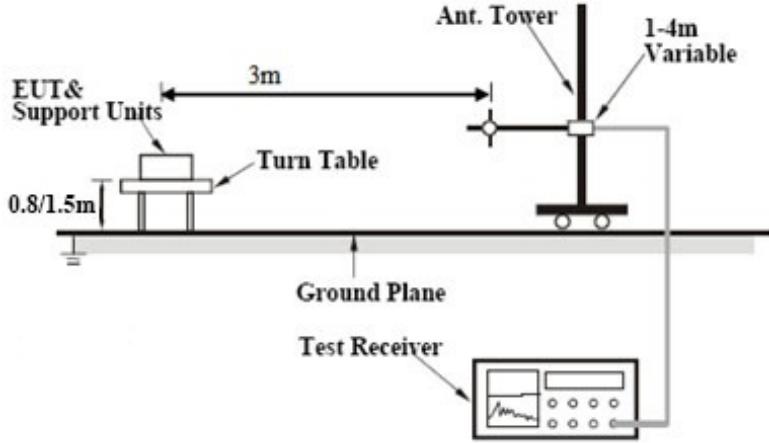Spec	Item	Requirement	Applicable
§15.247(d)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>
Test Setup		 <p>The diagram illustrates the test setup. An Ant. Tower is positioned 3m away from the EUT & Support Units, which are placed on a Turn Table. The Turn Table is mounted on a Ground Plane. A Test Receiver is connected to the system, with a 1-4m Variable cable connecting the Test Receiver to the Ant. Tower. The height of the EUT & Support Units is specified as 0.8/1.5m.</p>	
Test Procedure		<p>Radiated Method Only</p> <ul style="list-style-type: none"> - 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. - 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range. 	



	<ul style="list-style-type: none"> - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: <ul style="list-style-type: none"> a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data Yes N/A





Test Plot Yes (See below) N/A





Test Plots

Band Edge measurement result

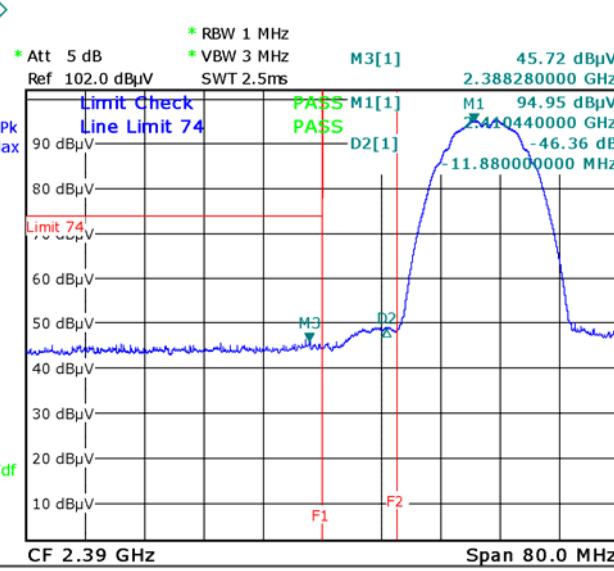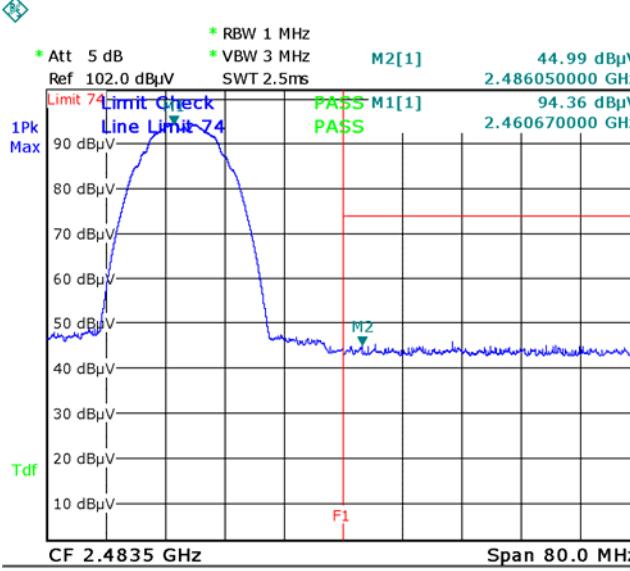	
Date: 7.APR.2015 15:21:11	Date: 7.APR.2015 17:42:47
Band Edge, Left Side (Peak) - 802.11b	Band Edge, Right Side (Peak) - 802.11b
Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz	Note: F1 is frequency 2483.5MHz
Note: (no need if PK value less than the AV limit)	Note: (no need if PK value less than the AV limit)
Band Edge, Left Side (Average) - 802.11b	Band Edge, Right Side (Average) - 802.11b
Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz	Note: F1 is frequency 2483.5MHz

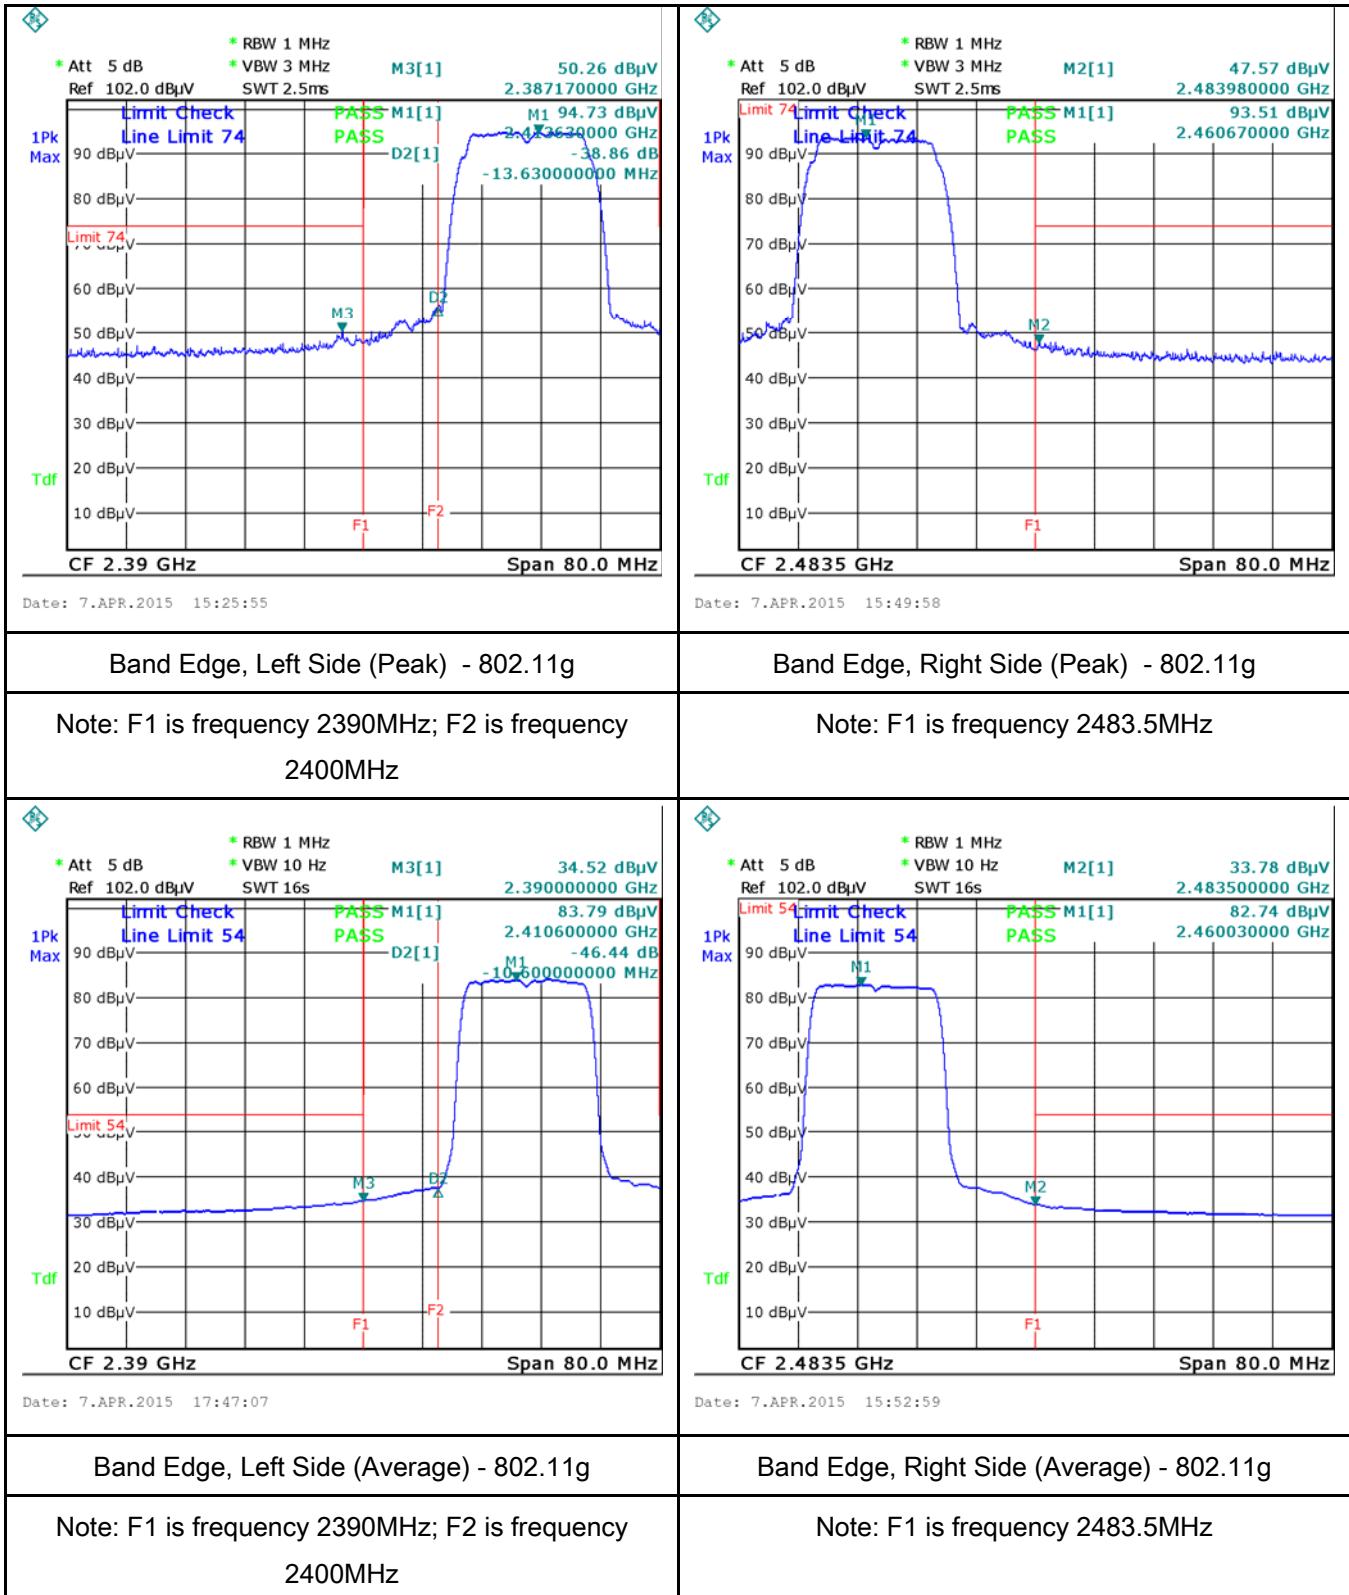

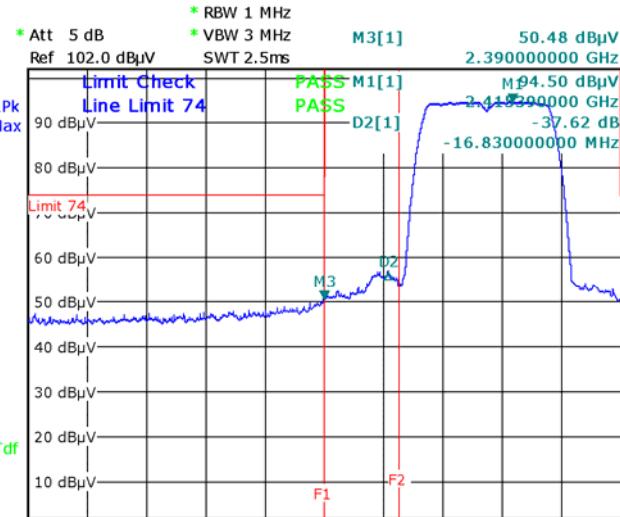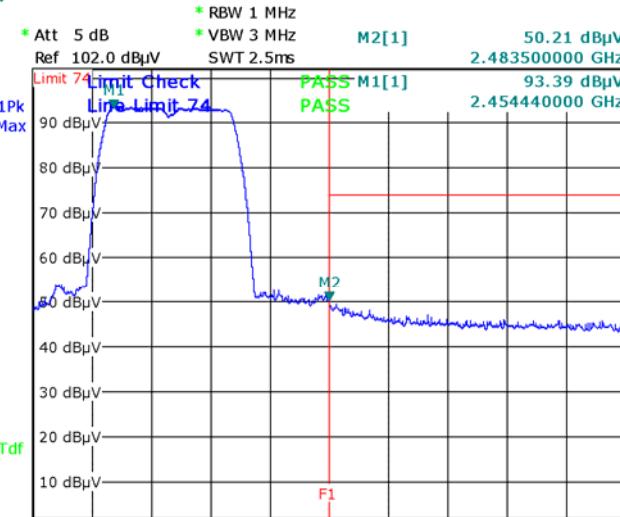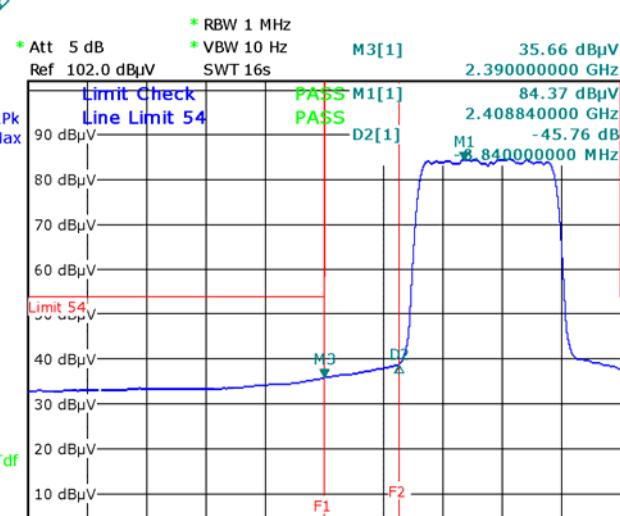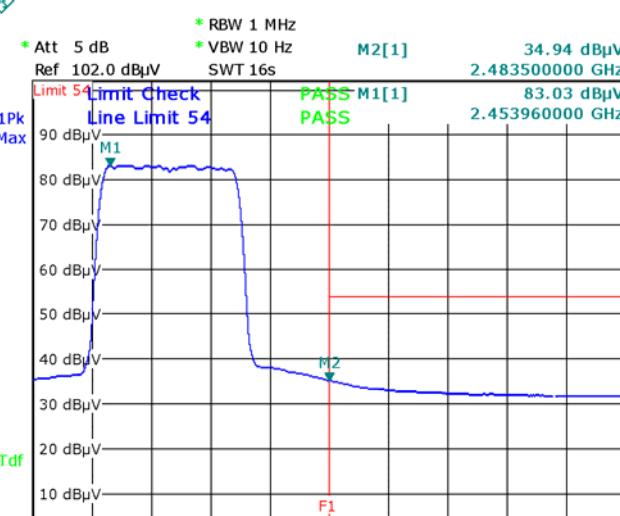
 <p>* RBW 1 MHz * Att 5 dB * VBW 3 MHz Ref 102.0 dBµV SWT 2.5ms</p> <p>1Pk Max Tdf</p> <p>Limit Check Line Limit 74 90 dBµV 80 dBµV 70 dBµV 60 dBµV 50 dBµV 40 dBµV 30 dBµV 20 dBµV 10 dBµV</p> <p>M3[1] 50.48 dBµV 2.39000000 GHz</p> <p>M1 94.50 dBµV 2.41330000 GHz -37.62 dB -16.83000000 MHz</p> <p>D2[1]</p> <p>F1 F2</p> <p>CF 2.39 GHz Span 80.0 MHz</p>	 <p>* RBW 1 MHz * Att 5 dB * VBW 3 MHz Ref 102.0 dBµV SWT 2.5ms</p> <p>1Pk Max Tdf</p> <p>Limit 74 Limit Check Line Limit 74 90 dBµV 80 dBµV 70 dBµV 60 dBµV 50 dBµV 40 dBµV 30 dBµV 20 dBµV 10 dBµV</p> <p>M2[1] 50.21 dBµV 2.48350000 GHz</p> <p>M1 93.39 dBµV 2.45444000 GHz</p> <p>D2</p> <p>F1</p> <p>CF 2.4835 GHz Span 80.0 MHz</p>
<p>Date: 7.APR.2015 15:36:49</p> <p>Band Edge, Left Side (Peak) - 802.11n20</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Date: 7.APR.2015 15:42:28</p> <p>Band Edge, Right Side (Peak) - 802.11n20</p> <p>Note: F1 is frequency 2483.5MHz</p>
 <p>* RBW 1 MHz * Att 5 dB * VBW 10 Hz Ref 102.0 dBµV SWT 16s</p> <p>1Pk Max Tdf</p> <p>Limit Check Line Limit 54 90 dBµV 80 dBµV 70 dBµV 60 dBµV 50 dBµV 40 dBµV 30 dBµV 20 dBµV 10 dBµV</p> <p>M3[1] 35.66 dBµV 2.39000000 GHz</p> <p>M1 84.37 dBµV 2.40884000 GHz -45.76 dB</p> <p>D2[1]</p> <p>F1 F2</p> <p>CF 2.39 GHz Span 80.0 MHz</p> <p>Date: 7.APR.2015 15:39:24</p> <p>Band Edge, Left Side (Average) - 802.11n20</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	 <p>* RBW 1 MHz * Att 5 dB * VBW 10 Hz Ref 102.0 dBµV SWT 16s</p> <p>1Pk Max Tdf</p> <p>Limit 54 Limit Check Line Limit 54 90 dBµV 80 dBµV 70 dBµV 60 dBµV 50 dBµV 40 dBµV 30 dBµV 20 dBµV 10 dBµV</p> <p>M2[1] 34.94 dBµV 2.48350000 GHz</p> <p>M1 83.03 dBµV 2.45396000 GHz</p> <p>D2</p> <p>F1</p> <p>CF 2.4835 GHz Span 80.0 MHz</p> <p>Date: 7.APR.2015 15:45:02</p> <p>Band Edge, Right Side (Average) - 802.11n20</p> <p>Note: F1 is frequency 2483.5MHz</p>

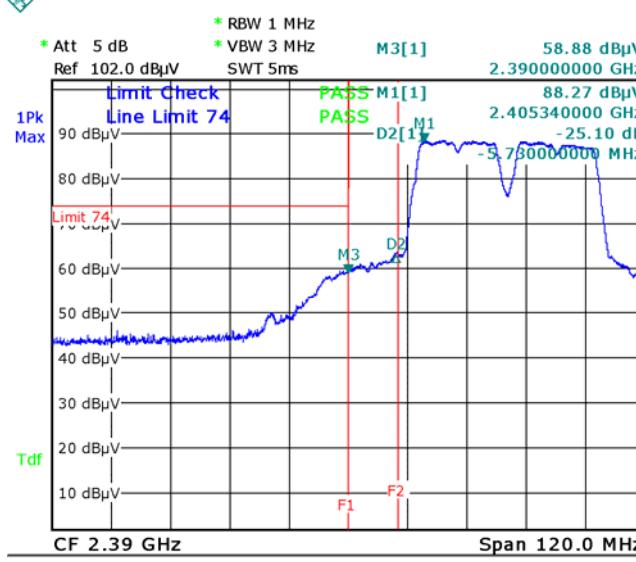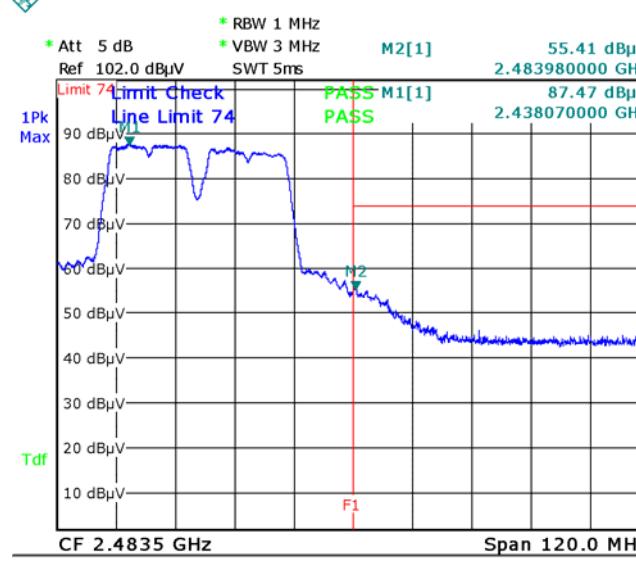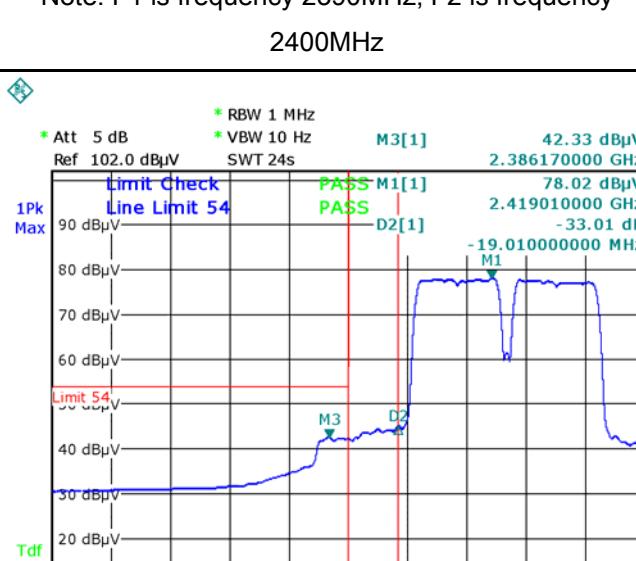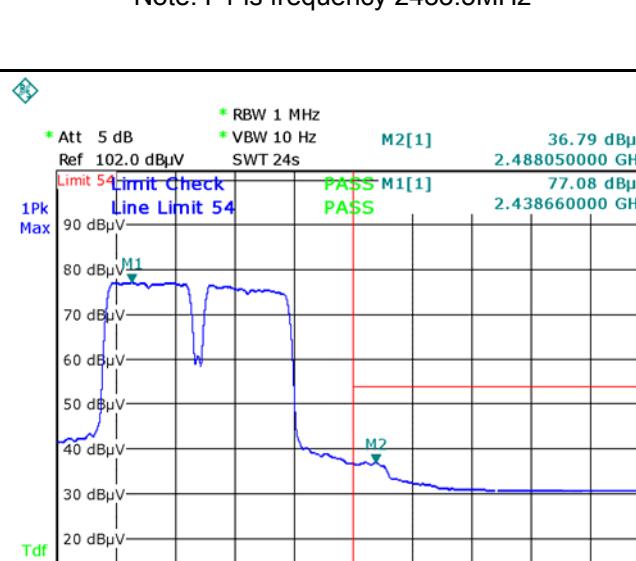 <p>* RBW 1 MHz * Att 5 dB * VBW 3 MHz Ref 102.0 dBμV SWT 5ms</p> <p>1Pk Max Tdf</p> <p>Limit Check Line Limit 74 90 dBμV 80 dBμV 70 dBμV 60 dBμV 50 dBμV 40 dBμV 30 dBμV 20 dBμV 10 dBμV</p> <p>M3[1] 58.88 dBμV 2.390000000 GHz</p> <p>PASS M1[1] PASS M1 D2[1] M1 -25.10 dB -5.780000000 MHz</p> <p>CF 2.39 GHz Span 120.0 MHz</p>	 <p>* RBW 1 MHz * Att 5 dB * VBW 3 MHz Ref 102.0 dBμV SWT 5ms</p> <p>1Pk Max Tdf</p> <p>Limit 74 Limit Check Line Limit 74 90 dBμV 80 dBμV 70 dBμV 60 dBμV 50 dBμV 40 dBμV 30 dBμV 20 dBμV 10 dBμV</p> <p>M2[1] 55.41 dBμV 2.483500000 GHz</p> <p>PASS M1[1] PASS M2</p> <p>CF 2.4835 GHz Span 120.0 MHz</p>
<p>Band Edge, Left Side (Peak) - 802.11n40</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Band Edge, Right Side (Peak) - 802.11n40</p> <p>Note: F1 is frequency 2483.5MHz</p>
 <p>* RBW 1 MHz * Att 5 dB * VBW 10 Hz Ref 102.0 dBμV SWT 24s</p> <p>1Pk Max Tdf</p> <p>Limit Check Line Limit 54 90 dBμV 80 dBμV 70 dBμV 60 dBμV 50 dBμV 40 dBμV 30 dBμV 20 dBμV 10 dBμV</p> <p>M3[1] 42.33 dBμV 2.386170000 GHz</p> <p>PASS M1[1] PASS D2[1] M1 -33.01 dB -19.010000000 MHz</p> <p>CF 2.39 GHz Span 120.0 MHz</p>	 <p>* RBW 1 MHz * Att 5 dB * VBW 10 Hz Ref 102.0 dBμV SWT 24s</p> <p>1Pk Max Tdf</p> <p>Limit 54 Limit Check Line Limit 54 90 dBμV 80 dBμV 70 dBμV 60 dBμV 50 dBμV 40 dBμV 30 dBμV 20 dBμV 10 dBμV</p> <p>M2[1] 36.79 dBμV 2.488050000 GHz</p> <p>PASS M1[1] PASS M2</p> <p>CF 2.4835 GHz Span 120.0 MHz</p>
<p>Band Edge, Left Side (Average) - 802.11n40</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Band Edge, Right Side (Average) - 802.11n40</p> <p>Note: F1 is frequency 2483.5MHz</p>

6.6 AC Power Line Conducted Emissions

Temperature	24°C
Relative Humidity	58%
Atmospheric Pressure	1009mbar
Test date :	Apr. 02, 2015
Tested By :	Winnie Zhang

Requirement(s):

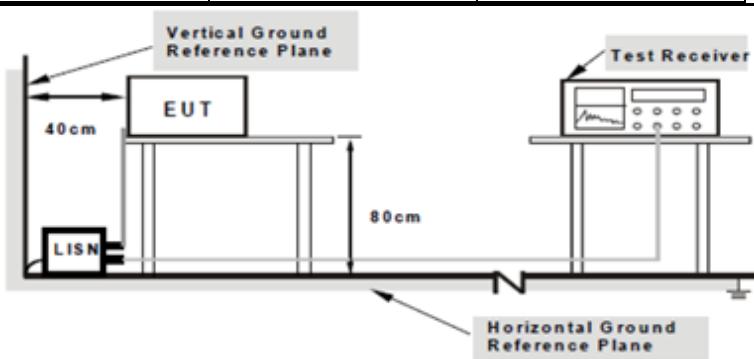
Spec	Item	Requirement	Applicable															
47CFR§15.207, RSS210 (A8.1)	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th>Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th></th> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dB μ V)			QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dB μ V)																	
	QP	Average																
0.15 ~ 0.5	66 – 56	56 – 46																
0.5 ~ 5	56	46																
5 ~ 30	60	50																
Test Setup	 <p>Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>																	
Procedure	<ol style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss 																	

	coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A


Test Mode:	Transmitting Mode
------------	-------------------

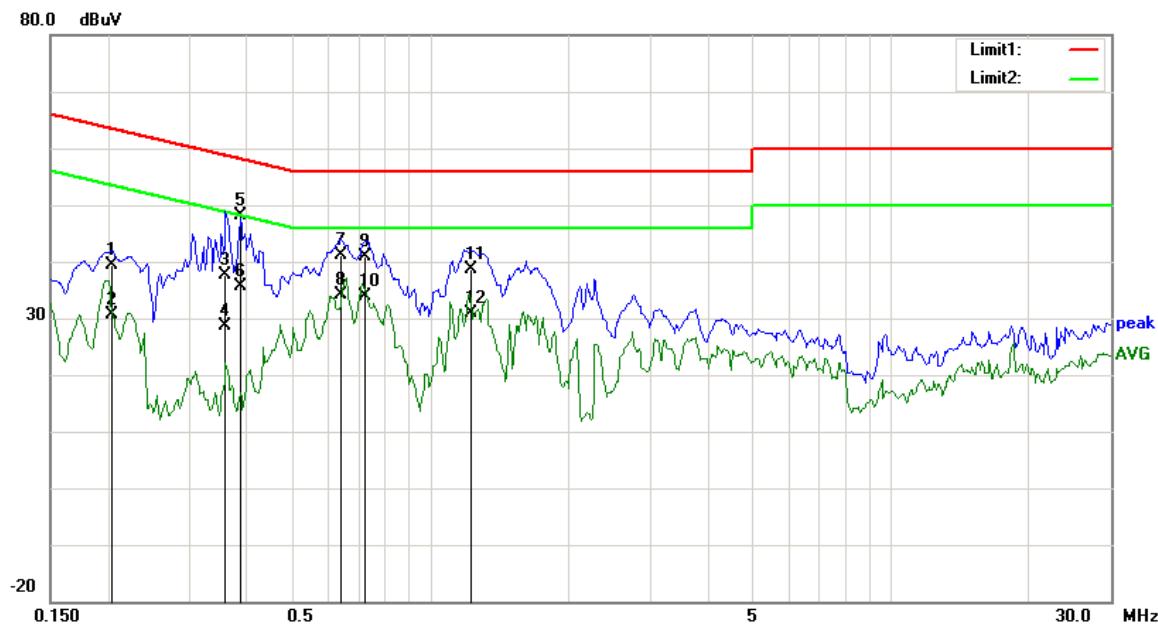

Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dB μ V/m)	Detector	Corrected (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1	L1	0.2047	28.07	QP	11.27	39.34	63.42	-24.08
2	L1	0.2047	19.31	AVG	11.27	30.58	53.42	-22.84
3	L1	0.3609	26.51	QP	11.20	37.71	58.71	-21.00
4	L1	0.3609	17.50	AVG	11.20	28.70	48.71	-20.01
5	L1	0.3883	36.93	QP	11.19	48.12	58.10	-9.98
6	L1	0.3883	24.36	AVG	11.19	35.55	48.10	-12.55
7	L1	0.6422	30.13	QP	11.07	41.20	56.00	-14.80
8	L1	0.6422	22.96	AVG	11.07	34.03	46.00	-11.97
9	L1	0.7203	29.89	QP	11.03	40.92	56.00	-15.08
10	L1	0.7203	22.92	AVG	11.03	33.95	46.00	-12.05
11	L1	1.2281	27.64	QP	10.90	38.54	56.00	-17.46
12	L1	1.2281	20.10	AVG	10.90	31.00	46.00	-15.00

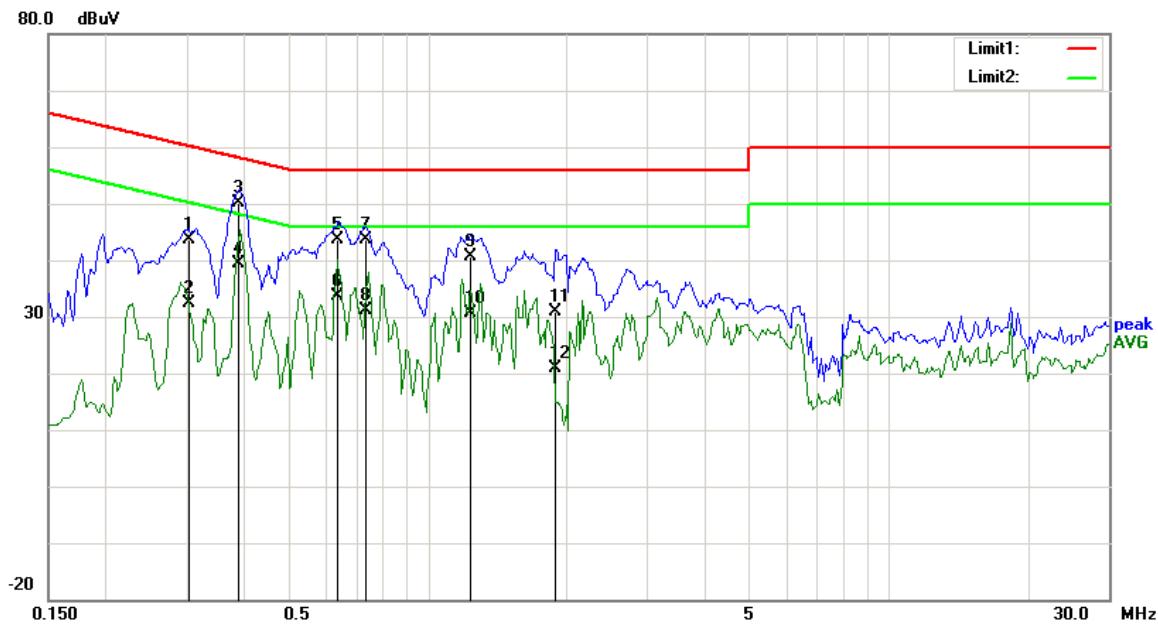

Test Data

Phase Neutral Plot at 120Vac, 60Hz


No.	P/L	Frequency (MHz)	Reading (dB μ V/m)	Detector	Corrected (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1	N	0.3023	43.75	QP	0.00	43.75	60.18	-16.43
2	N	0.3023	32.28	AVG	0.00	32.28	50.18	-17.90
3	N	0.3883	50.24	QP	0.00	50.24	58.10	-7.86
4	N	0.3883	39.44	AVG	0.00	39.44	48.10	-8.66
5	N	0.6383	43.58	QP	0.00	43.58	56.00	-12.42
6	N	0.6383	33.67	AVG	0.00	33.67	46.00	-12.33
7	N	0.7320	43.51	QP	0.00	43.51	56.00	-12.49
8	N	0.7320	31.03	AVG	0.00	31.03	46.00	-14.97
9	N	1.2398	40.64	QP	0.00	40.64	56.00	-15.36
10	N	1.2398	30.60	AVG	0.00	30.60	46.00	-15.40
11	N	1.8961	30.78	QP	0.00	30.78	56.00	-25.22
12	N	1.8961	20.81	AVG	0.00	20.81	46.00	-25.19

6.7 Radiated Spurious Emissions

Temperature	23°C
Relative Humidity	58%
Atmospheric Pressure	1009mbar
Test date :	Apr. 03, 2015
Tested By :	Winnie Zhang

Requirement(s):

Spec	Item	Requirement	Applicable							
47CFR§15. 247(d), RSS210 (A8.5)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges	<input checked="" type="checkbox"/>							
		<table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (µV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 – 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>		Frequency range (MHz)	Field Strength (µV/m)	30 – 88	100	88 – 216	150	216 – 960
Frequency range (MHz)	Field Strength (µV/m)									
30 – 88	100									
88 – 216	150									
216 – 960	200									
Above 960	500									
b)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required <input checked="" type="checkbox"/> 20 dB down <input type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>								
c)	or restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input checked="" type="checkbox"/>								

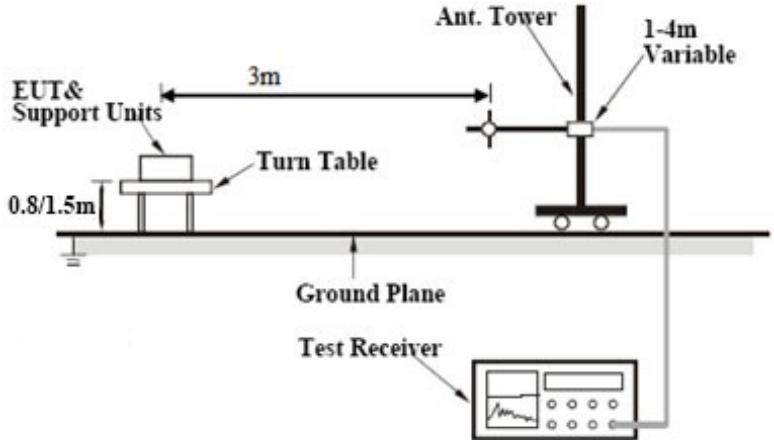
Test Setup	 <p>The diagram illustrates the test setup. An EUT & Support Units assembly is mounted on a Turn Table, which is positioned on a Ground Plane. The Turn Table is 0.8/1.5m high. A vertical Ant. Tower is connected to the Turn Table via a horizontal crossbar, with a height of 3m. The Ant. Tower is connected to a 1-4m Variable antenna. A Test Receiver is connected to the 1-4m Variable antenna. The entire setup is shown in perspective, with the Turn Table and EUT assembly on the left and the Test Receiver and antenna on the right.</p>
Procedure	<ol style="list-style-type: none"> 1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. 4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. 5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
Remark	<p>Different RF configuration has been evaluated but not much difference was found. The data presented here is the worst case data with EUT under 802.11n – HT20-2437MHz mode.</p>
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode:	Transmitting Mode
------------	-------------------


Below 1GHz

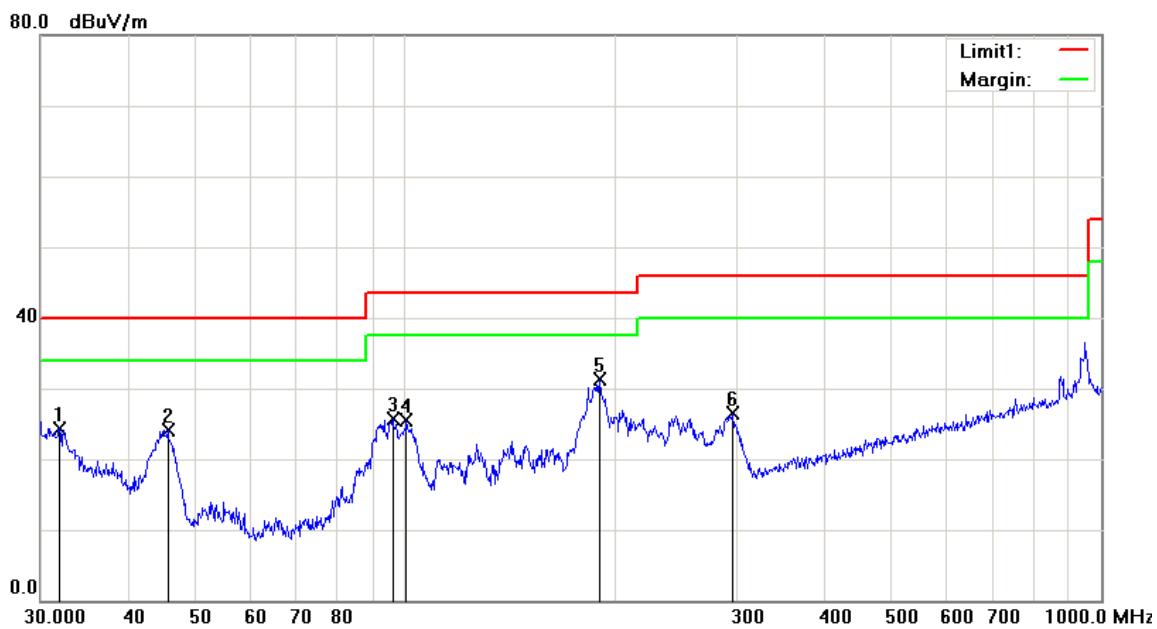

Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dB μ V/m)	Detector	Corrected (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Degree (°)
1	H	31.9546	26.11	peak	-1.71	24.40	40.00	-15.60	200	225
2	H	45.6948	26.18	peak	-2.12	24.06	40.00	-15.94	199	360
3	H	96.0986	37.48	peak	-11.84	25.64	43.50	-17.86	200	180
4	H	100.5806	36.26	peak	-10.70	25.56	43.50	-17.94	200	180
5	H	190.4050	40.57	peak	-9.21	31.36	43.50	-12.14	100	220
6	H	296.1836	33.61	peak	-7.08	26.53	46.00	-19.47	100	0

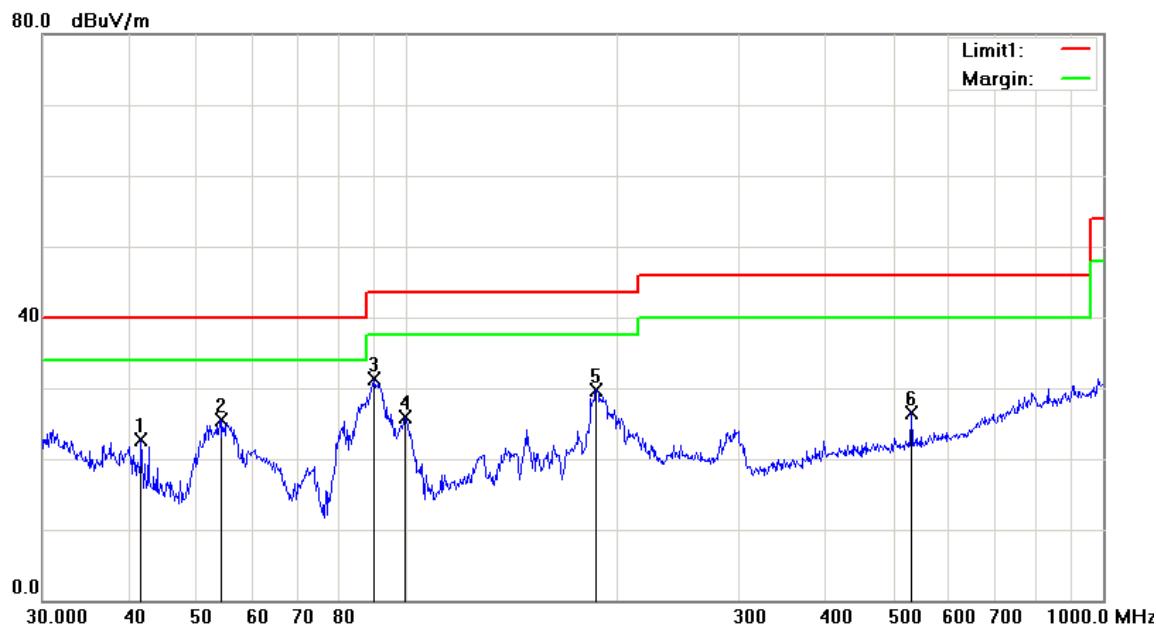

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dB μ V/m)	Detector	Corrected (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Degree (°)
1	V	41.5670	31.48	peak	-8.75	22.73	40.00	-17.27	100	338
2	V	54.0711	39.70	peak	-14.11	25.59	40.00	-14.41	100	240
3	V	89.9047	45.11	peak	-13.87	31.24	43.50	-12.26	100	195
4	V	99.5281	37.78	peak	-11.80	25.98	43.50	-17.52	100	251
5	V	187.0958	38.29	peak	-8.56	29.73	43.50	-13.77	200	194
6	V	530.1014	28.68	peak	-2.13	26.55	46.00	-19.45	100	218

Test Mode:	Transmitting Mode
------------	-------------------

(Above 1GHz)

Note: Other modes were verified, only the result of worst case basic rate mode was presented.

Mode: 802.11b

Low Channel (2412 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4824	37.59	AV	V	34	6.86	31.72	46.73	54	-7.27
4824	36.82	AV	H	33.8	6.86	31.72	45.76	54	-8.24
4824	47.16	PK	V	34	6.86	31.72	56.3	74	-17.7
4824	48.33	PK	H	33.8	6.86	31.72	57.27	74	-16.73

Middle Channel (2437 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4874	38.06	AV	V	33.6	6.82	31.82	46.66	54	-7.34
4874	37.44	AV	H	33.8	6.82	31.82	46.24	54	-7.76
4874	48.24	PK	V	33.6	6.82	31.82	56.84	74	-17.16
4874	49.11	PK	H	33.8	6.82	31.82	57.91	74	-16.09

High Channel (2462 MHz)


Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4924	38.93	AV	V	34.6	6.76	31.92	48.37	54	-5.63
4924	37.39	AV	H	34.7	6.76	31.92	46.93	54	-7.07
4924	48.13	PK	V	34.6	6.76	31.92	57.57	74	-16.43
4924	46.82	PK	H	34.7	6.76	31.92	56.36	74	-17.64


Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/25/2014	09/24/2015	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	09/02/2014	09/01/2015	<input checked="" type="checkbox"/>
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	09/02/2014	09/01/2015	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/20/2014	11/19/2015	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/02/2014	09/01/2015	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	10/04/2015	10/04/2016	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/22/2014	09/21/2015	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/25/2014	09/24/2015	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>


Annex B. EUT and Test Setup Photographs


Annex B.i. Photograph: EUT External Photo

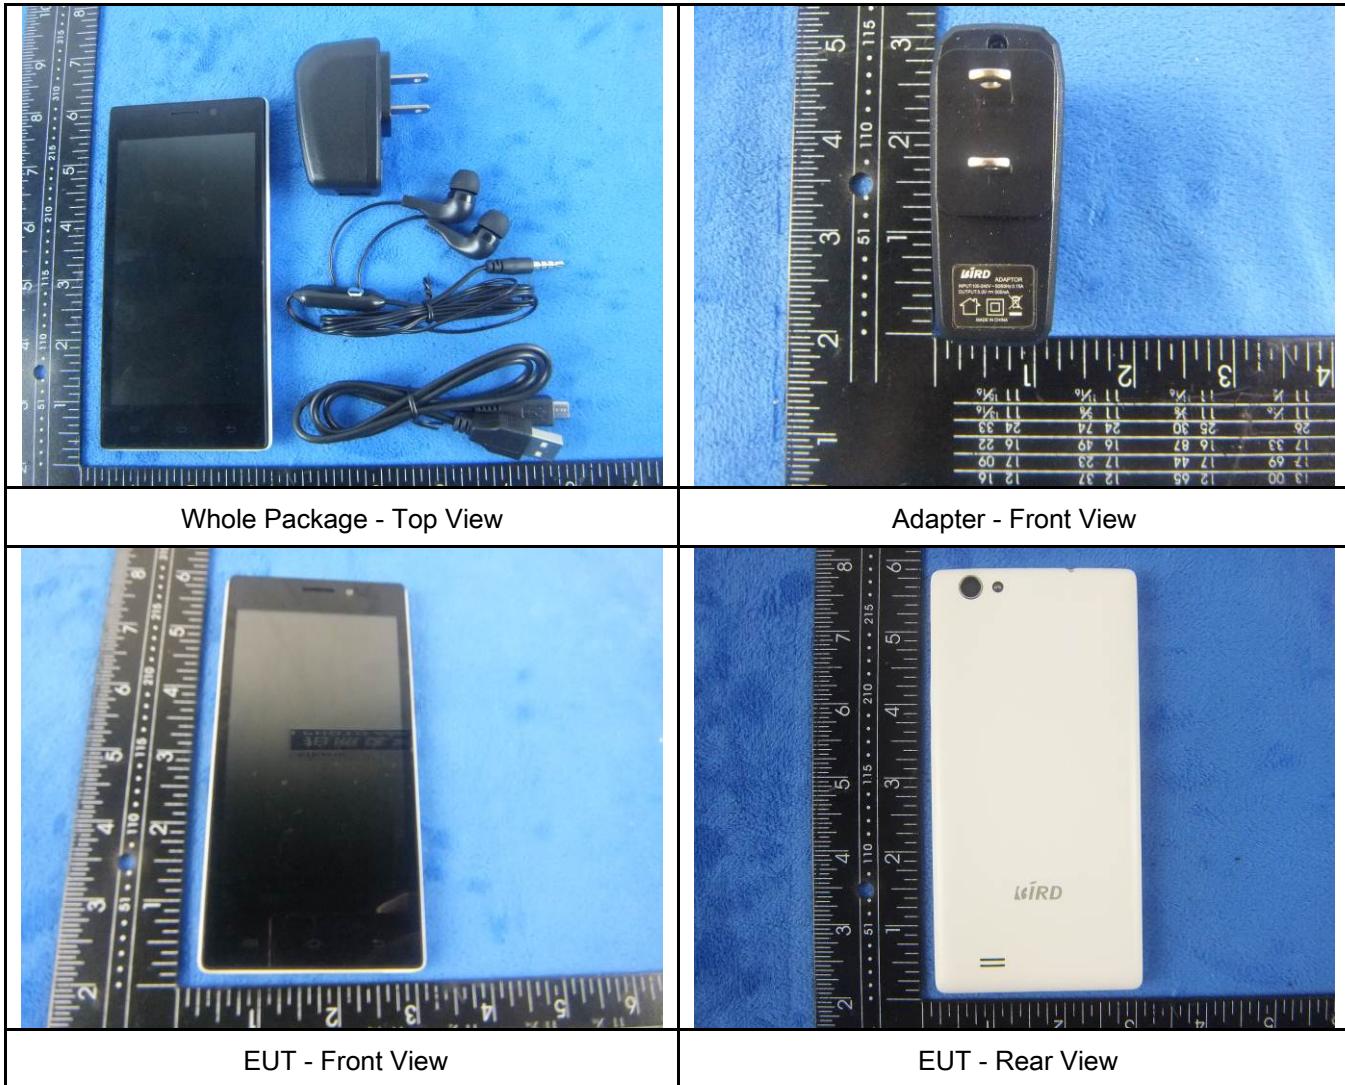

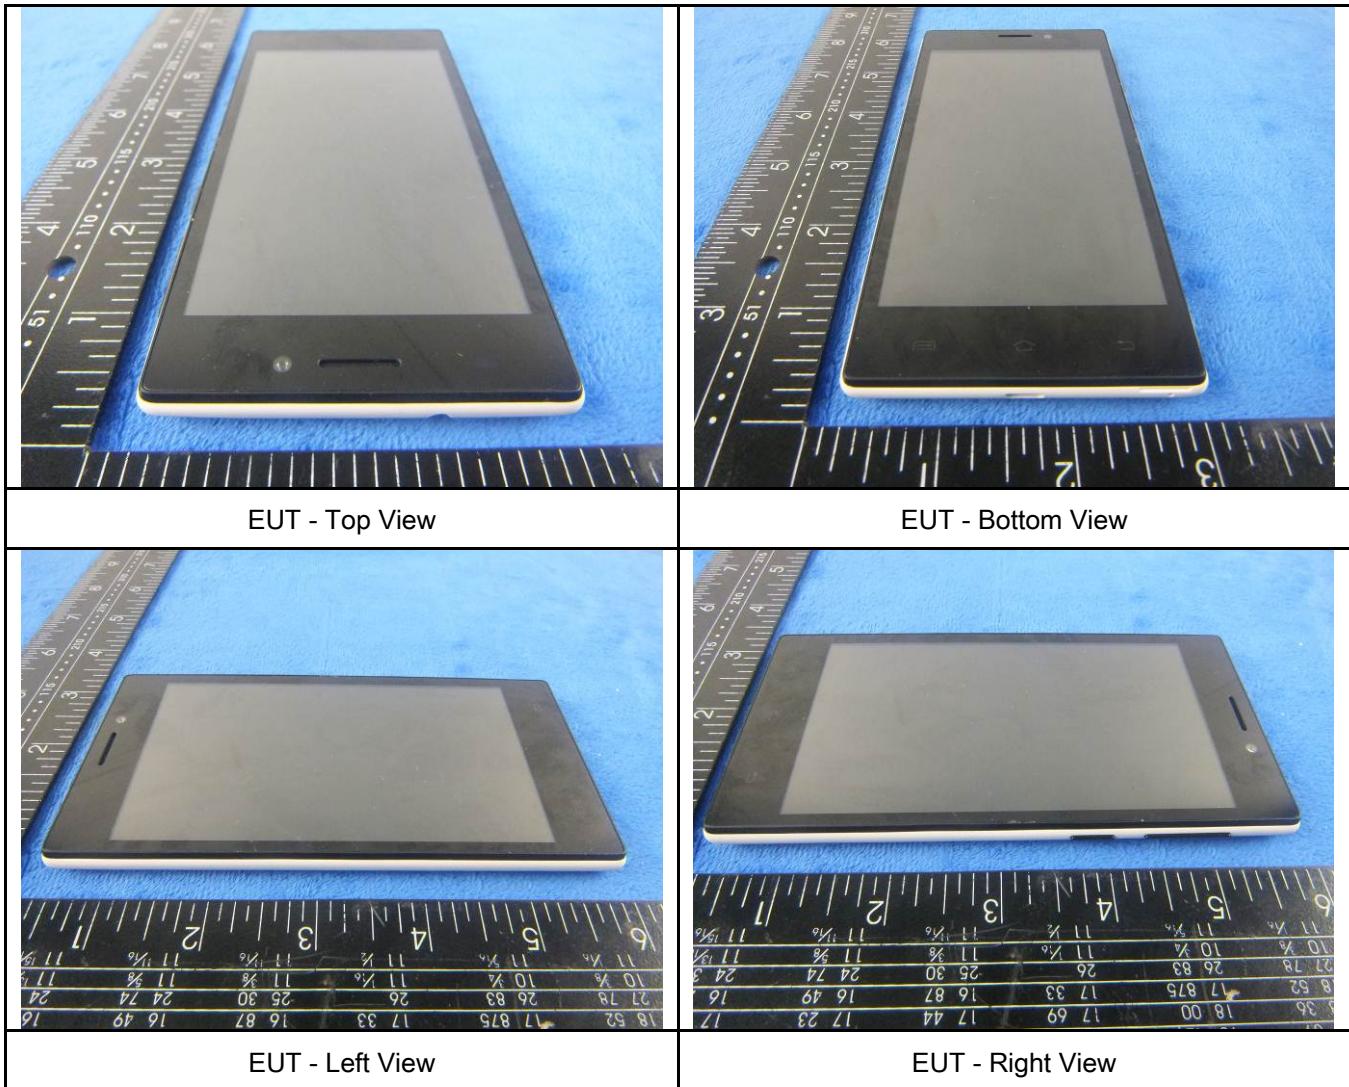

Annex B.ii. Photograph: EUT Internal Photo

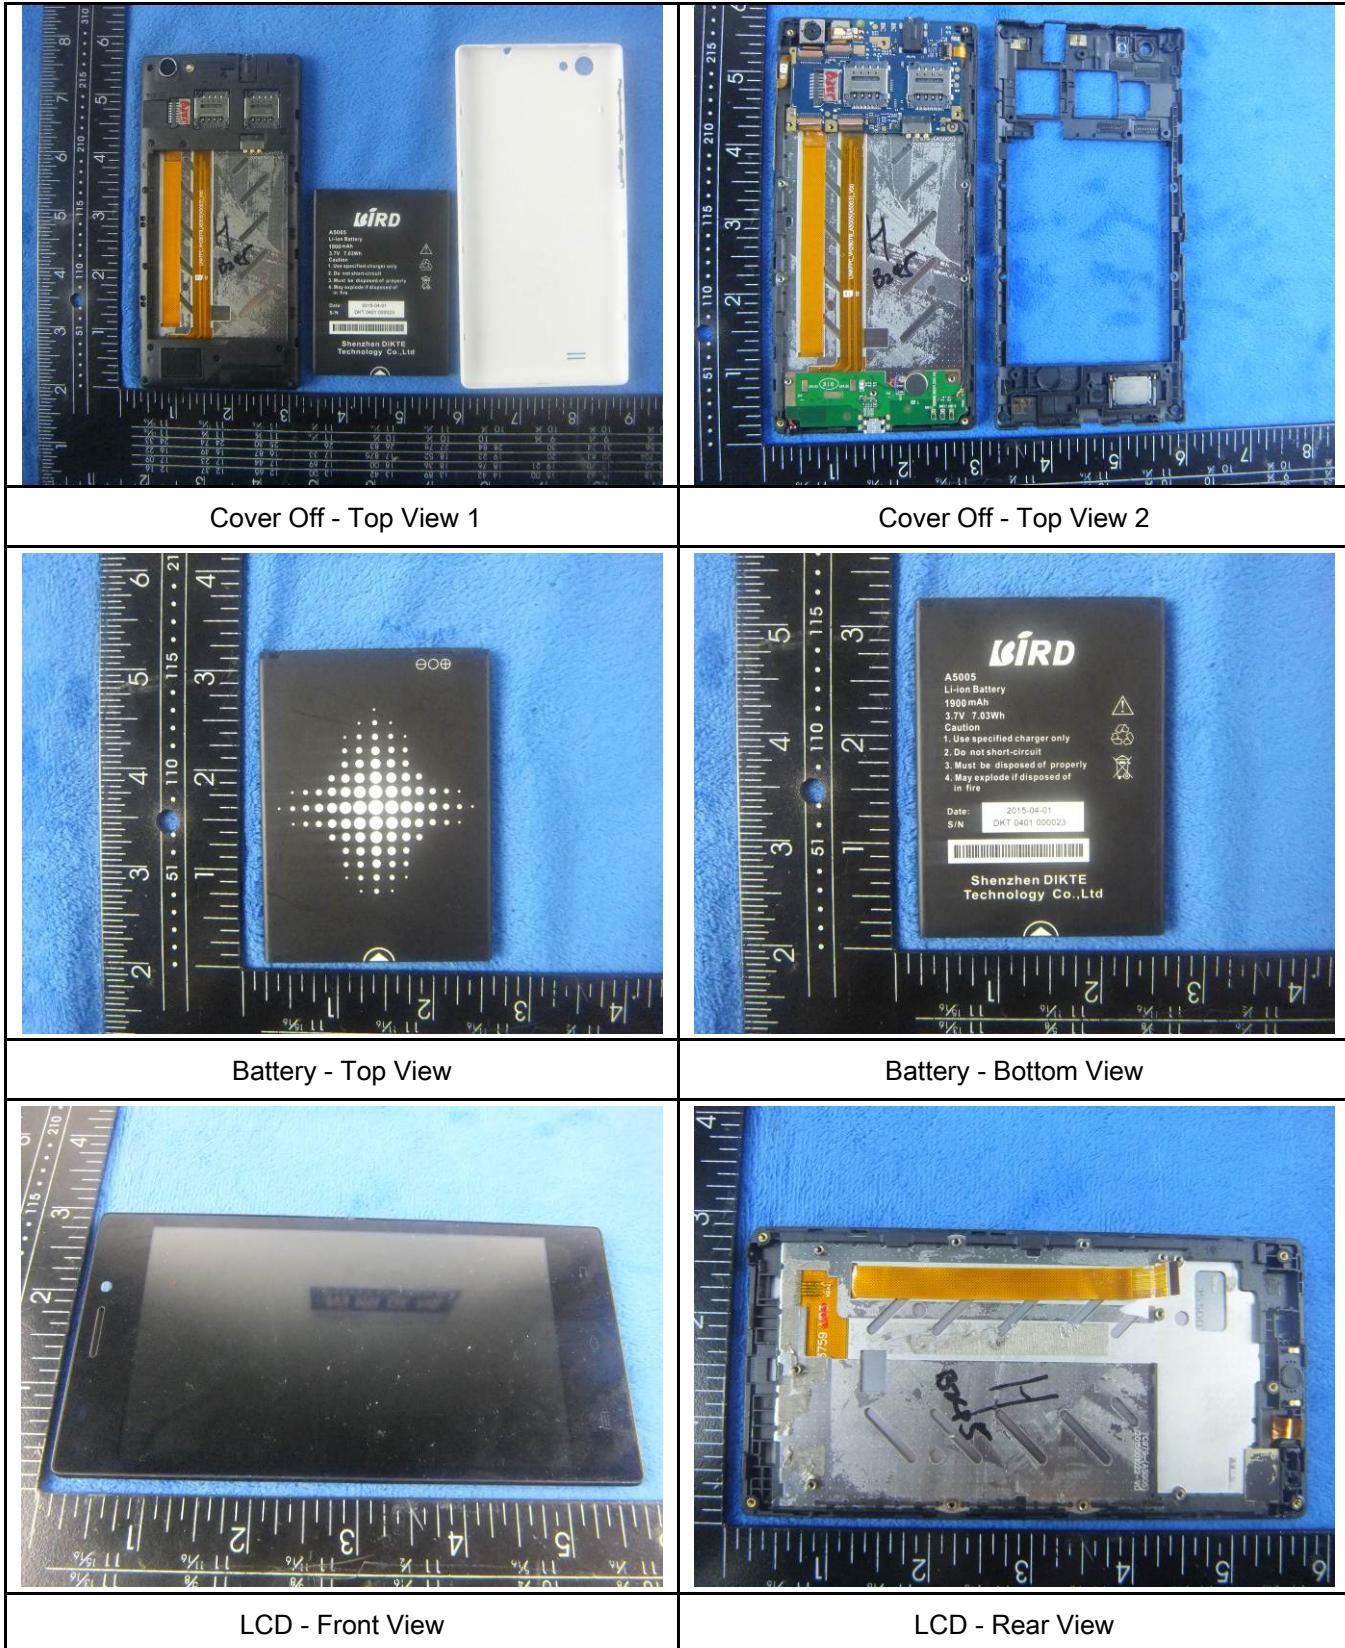


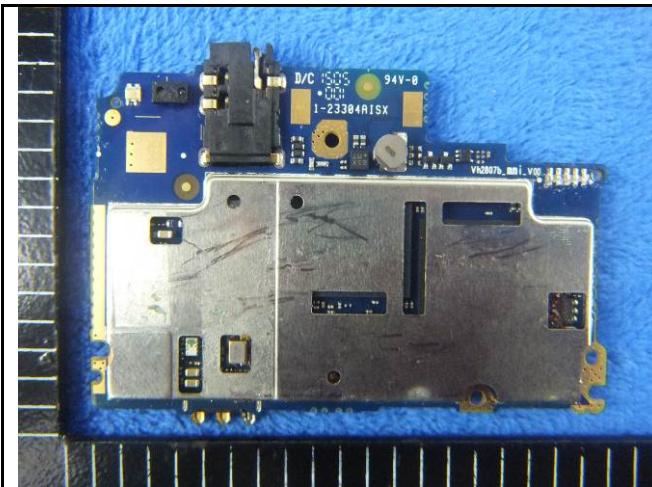


Mainborad With Shielding - Front View




Mainborad Without Shielding - Front View

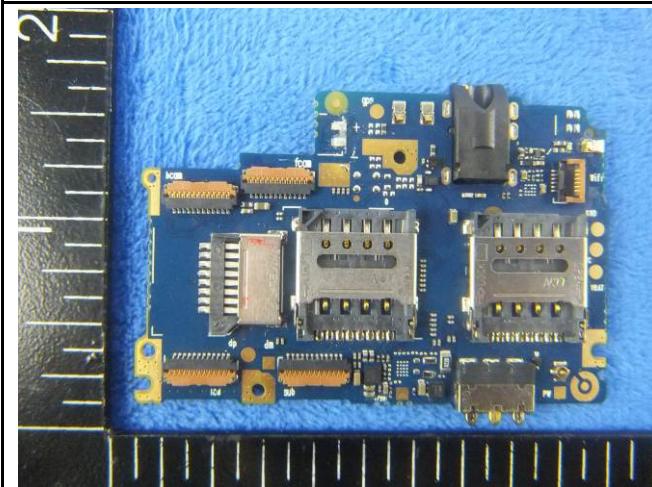

Mainborad - Rear View

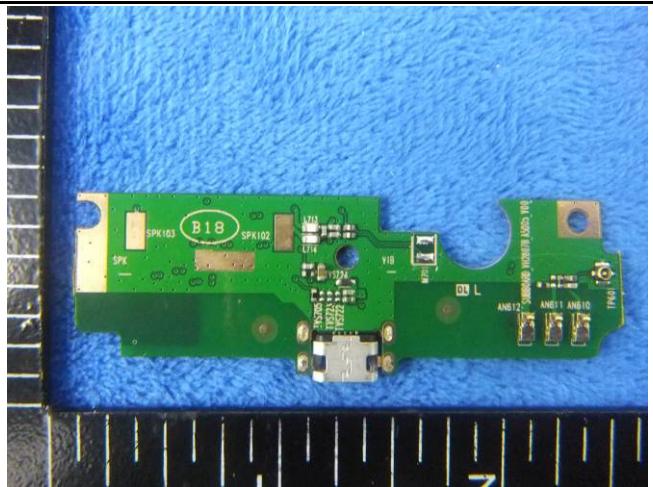

Connect borad - Front View

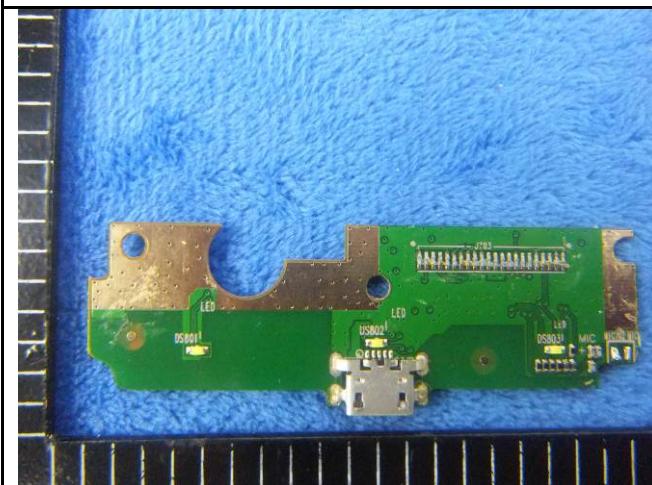

Connect borad - Rear View




GSM/PCS/UMTS-FDD Antenna View



BT/ WIFI Antenna View


Annex B.iii. Photograph: Test Setup Photo

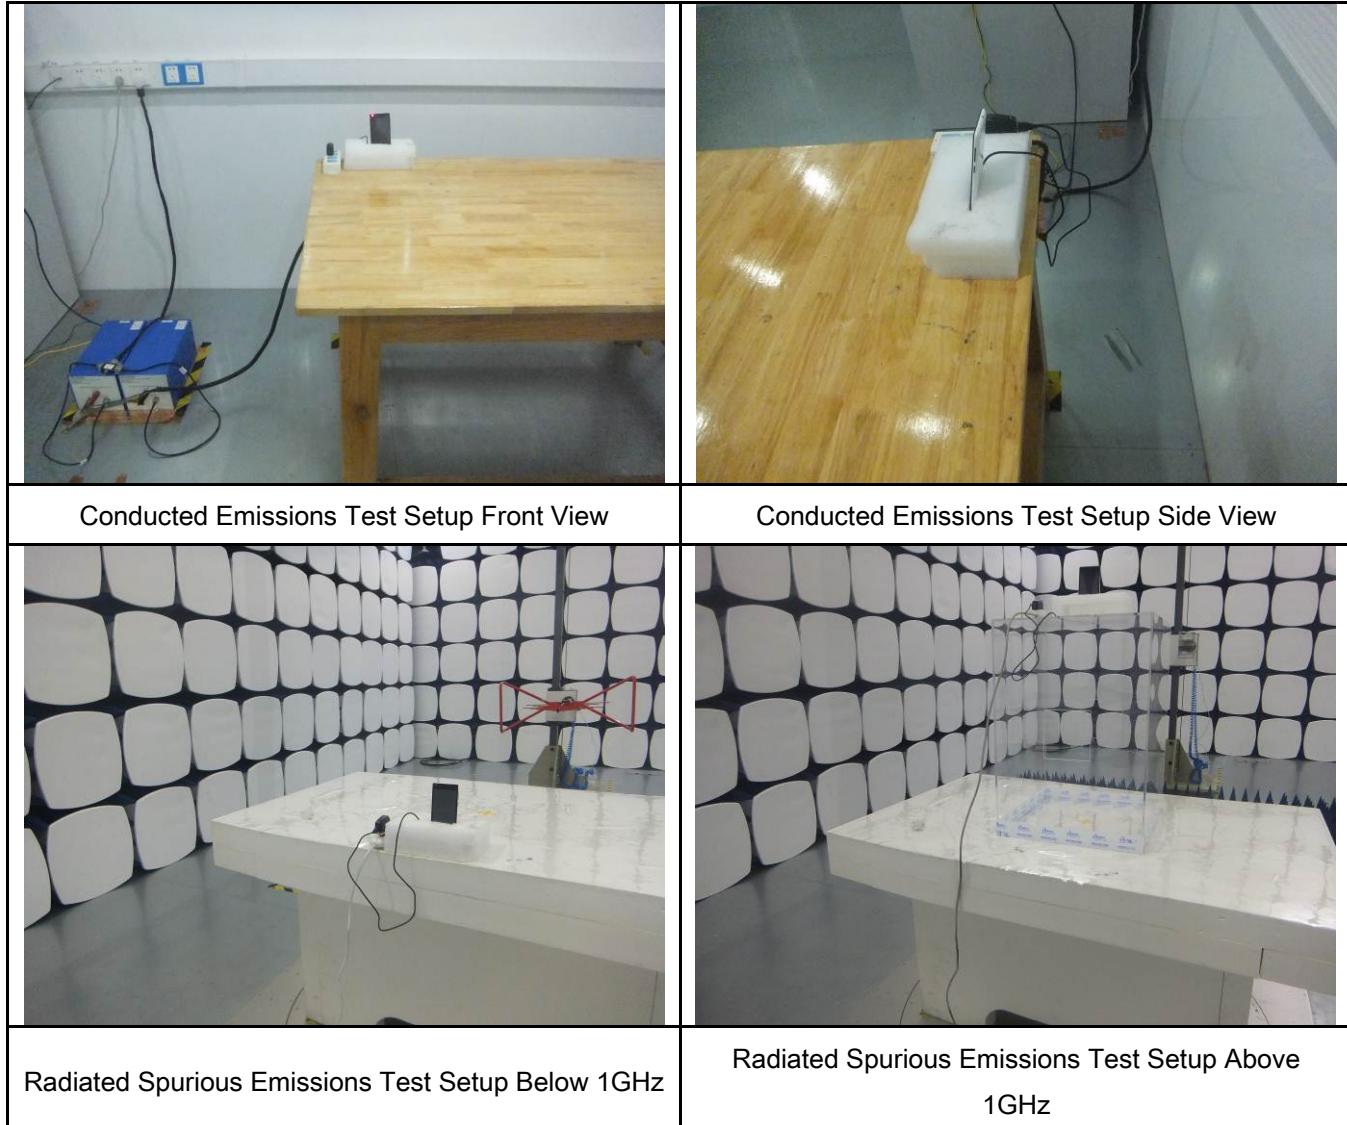


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for AC Line Conducted Emissions

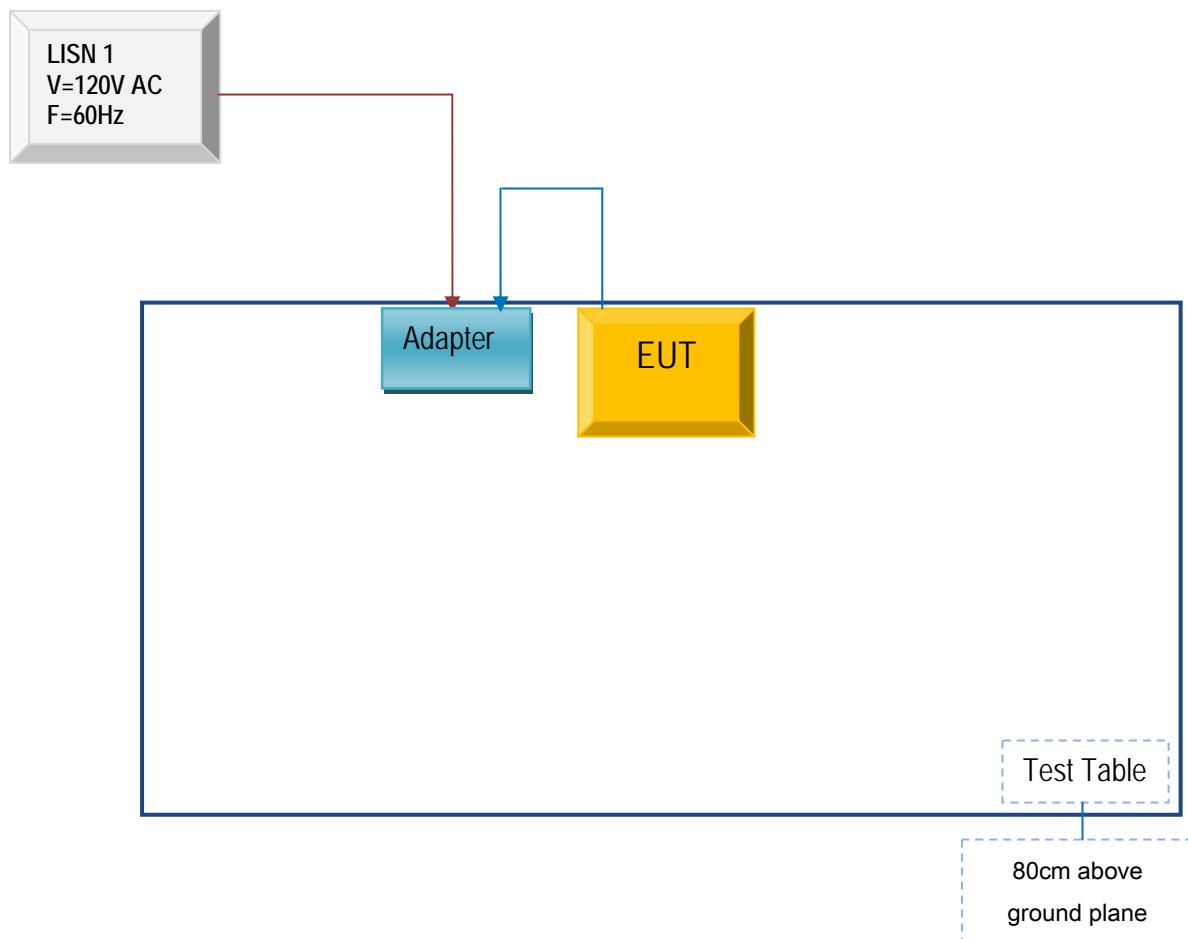

Block Configuration Diagram for Radiated Emissions

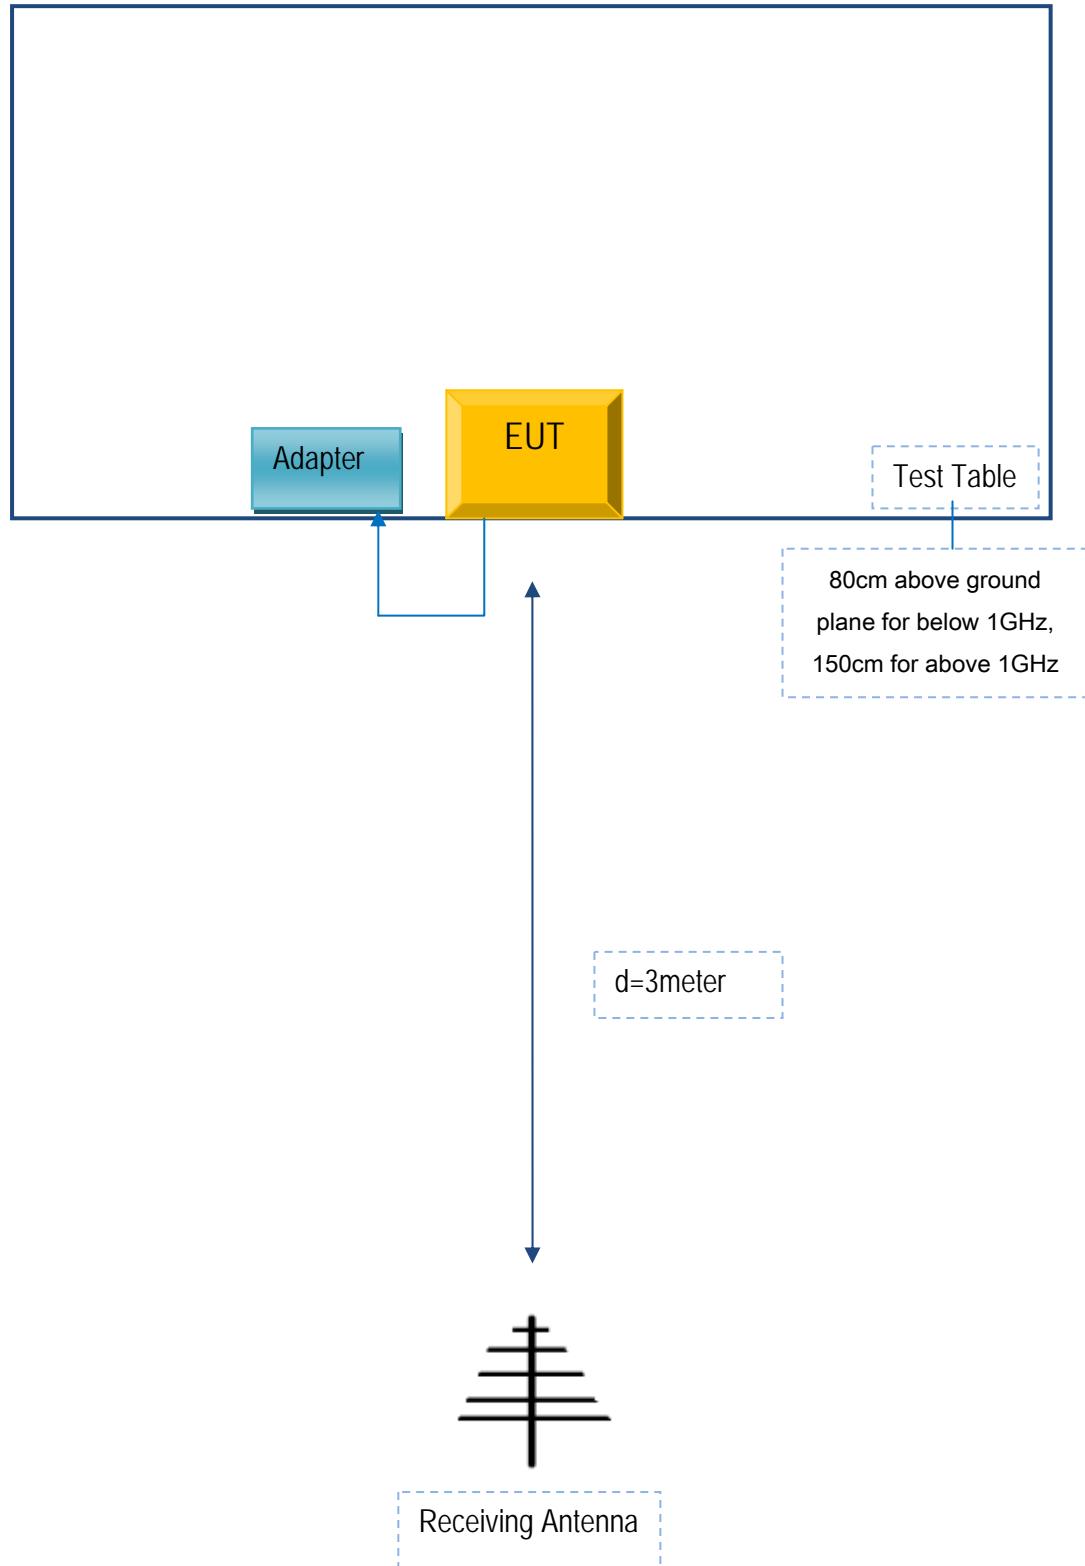

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date	Calibration Due Date
N/A	N/A	N/A	N/A	N/A

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Test Report	15050005-FCC-R3
Page	50 of 50

Annex E. DECLARATION OF SIMILARITY

N/A