

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : OT-218-RWD-078

Reception No. : 2108003530

Applicant : ROBOTIS

Address : 37, Magokjungang 5-ro 1-gil, Gangseo-gu, Seoul, South Korea

Manufacturer : ROBOTIS

Address : 37, Magokjungang 5-ro 1-gil, Gangseo-gu, Seoul, South Korea

Type of Equipment : Controller

FCC ID. : SOD-CM-151

Model Name : CM-151

Multiple Model Name : N/A

Serial number : N/A

Total page of Report : 33 pages (including this page)

Date of Incoming : August 04, 2021

Date of issue : August 20, 2021

SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART C Section 15.247**

This test report only contains the result of a single test of the sample supplied for the examination.


It is not a generally valid assessment of the features of the respective products of the mass-production.



Tested by
Joon-Woo, Kim / Assistant Manager
ONETECH Corp.



Reviewed by
Tae-Ho, Kim / Senior Manager
ONETECH Corp.



Approved by
Ki-Hong, Nam / General Manager
ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY	6
2.6 TEST FACILITY	6
3. GENERAL INFORMATION	7
3.1 PRODUCT DESCRIPTION	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT	7
4. EUT MODIFICATIONS	7
5. SYSTEM TEST CONFIGURATION	8
5.1 JUSTIFICATION	8
5.2 PERIPHERAL EQUIPMENT	8
5.3 MODE OF OPERATION DURING THE TEST	9
5.4 CONFIGURATION OF TEST SYSTEM	11
5.5 ANTENNA REQUIREMENT	11
6. PRELIMINARY TEST	11
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS	11
6.2 GENERAL RADIATED EMISSIONS TESTS	11
7. MINIMUM 6 DB BANDWIDTH	12
7.1 OPERATING ENVIRONMENT	12
7.2 TEST SET-UP	12
7.3 TEST DATE	12
7.4 TEST DATA	13
8. MAXIMUM PEAK OUTPUT POWER	15
8.1 OPERATING ENVIRONMENT	15
8.2 TEST SET-UP	15
8.3 TEST DATE	15
8.4 TEST DATA	16
9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND	18

9.1 OPERATING ENVIRONMENT	18
9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	18
9.3 TEST SET-UP FOR RADIATED MEASUREMENT.....	18
9.4 TEST DATE	18
9.5 TEST DATA FOR CONDUCTED EMISSION	19
9.6 TEST DATA FOR RADIATED EMISSION.....	24
9.6.1 Radiated Emission which fall in the Restricted Band.....	24
9.6.2 Spurious & Harmonic Radiated Emission.....	25
10. PEAK POWER SPECTRAL DENSITY	26
10.1 OPERATING ENVIRONMENT	26
10.2 TEST SET-UP	26
10.3 TEST DATE	26
10.4 TEST DATA.....	27
11. RADIATED EMISSION TEST	29
11.1 OPERATING ENVIRONMENT	29
11.2 TEST SET-UP	29
11.3 TEST DATE	30
11.4 TEST DATA FOR 30 MHz ~ 1 000 MHz	31
11.5 TEST DATA FOR BELOW 30 MHz	32
11.6 TEST DATA FOR ABOVE 1 GHz	32
13. LIST OF TEST EQUIPMENT	33

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-218-RWD-078	August 20, 2021	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : ROBOTIS
Address : 37, Magokjungang 5-ro 1-gil, Gangseo-gu, Seoul, South Korea
Contact Person : Eunsung Lee / Research Engineer
Telephone No. : +82-70-8671-2600
FCC ID : SOD-CM-151
Model Name : CM-151
Brand Name : -
Serial Number : N/A
Date : August 20, 2021

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
E.U.T. DESCRIPTION	Controller
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2020
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	N/A (See Note)
15.203	Antenna Requirement	Met requirement / PASS

Note: This test is not performed because the EUT is operated by DC Power.

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2020. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The ROBOTIS, Model CM-151 (referred to as the EUT in this report) is a Controller. The product specification described herein was obtained from product data sheet or user's manual.

Device Type	Controller
Temperature Range	-5 °C ~ 70 °C
Operating Frequency	2 402 MHz ~ 2 480 MHz
RF Output Power	-7.78 dBm
Number of Channel	40 Channel
Modulation Type	DSSS Modulation(GFSK)
Antenna Type	Chip Antenna
Antenna Gain	2.80 dBi
Electrical Rating	DC 3.7 V
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	32 MHz

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	ROBOTIS	CM-151 BCM12-A02-E001	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
CM-151	ROBOTIS	Controller (EUT)	-
ProBook 4540s	HP	Notebook	
GP-4303D	LG Precision Co.,Ltd	DC Power Supply	
HP Adapter	HP	AC-DC Adapter	
LN-101	N/A	Jig Board	EUT

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 402 MHz, 2 440 MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis, but the worst data was recorded in this report.

-. Channel List (Bluetooth LE)

Channel	Frequency[MHz]	Channel	Frequency[MHz]	Channel	Frequency[MHz]
0	2 402.00	14	2 430.00	28	2 458.00
1	2 404.00	15	2 432.00	29	2 460.00
2	2 406.00	16	2 434.00	30	2 462.00
3	2 408.00	17	2 436.00	31	2 464.00
4	2 410.00	18	2 438.00	32	2 466.00
5	2 412.00	19	2 440.00	33	2 468.00
6	2 414.00	20	2 442.00	34	2 470.00
7	2 416.00	21	2 444.00	35	2 472.00
8	2 418.00	22	2 446.00	36	2 474.00
9	2 420.00	23	2 448.00	37	2 476.00
10	2 422.00	24	2 450.00	38	2 478.00
11	2 424.00	25	2 452.00	39	2 480.00
12	2 426.00	26	2 454.00		
13	2 428.00	27	2 456.00		


-. Duty Cycle

Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Bluetooth LE	0.386	0.235	62.16	2.07

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Correction Factor : 10 * Log(1 / (Duty Cycle / 100))

-. Test Plot

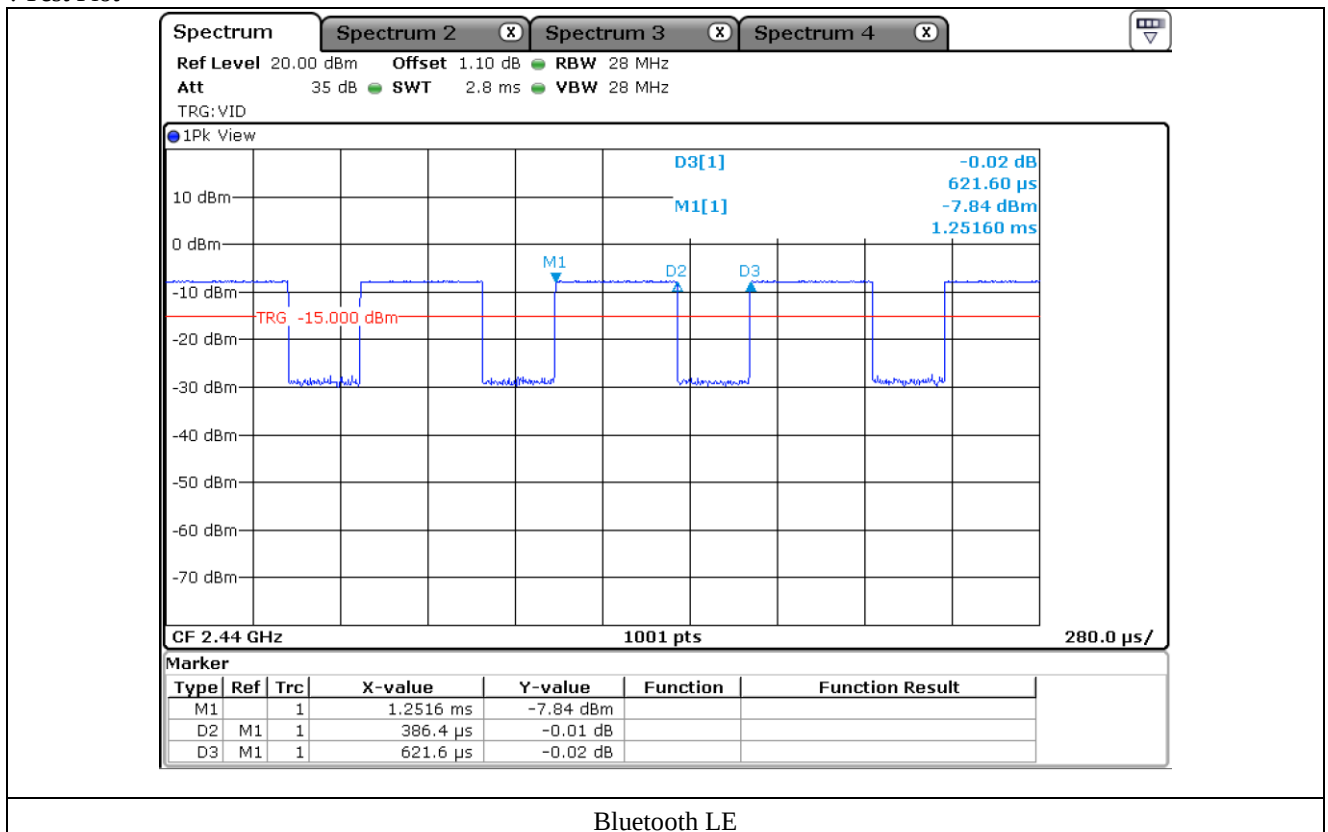

5.4 Configuration of Test System

Line Conducted Test: It is not need to test this requirement, because the EUT shall be operated by DC Power.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a Chip Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
It is not need to test this requirement, because the power of the EUT is supplied by DC Power.	

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

7. MINIMUM 6 dB BANDWIDTH


7.1 Operating environment

Temperature : 24.3 °C

Relative humidity : 43.9 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

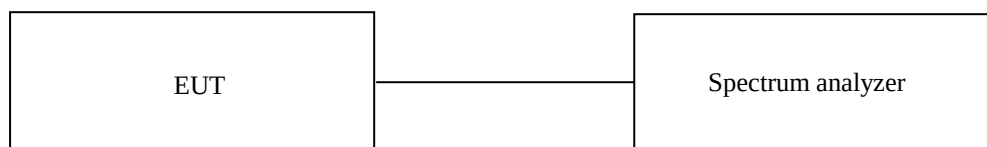


7.3 Test Date


August 04, 2021 ~ August 13, 2021

7.4 Test data


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (kHz)	LIMIT (kHz)	MARGIN (kHz)
Low	2 402.00	709.30	500.00	209.30
Middle	2 440.00	689.30	500.00	189.30
High	2 480.00	704.30	500.00	204.30

Remark. Margin = Measured Value - Limit

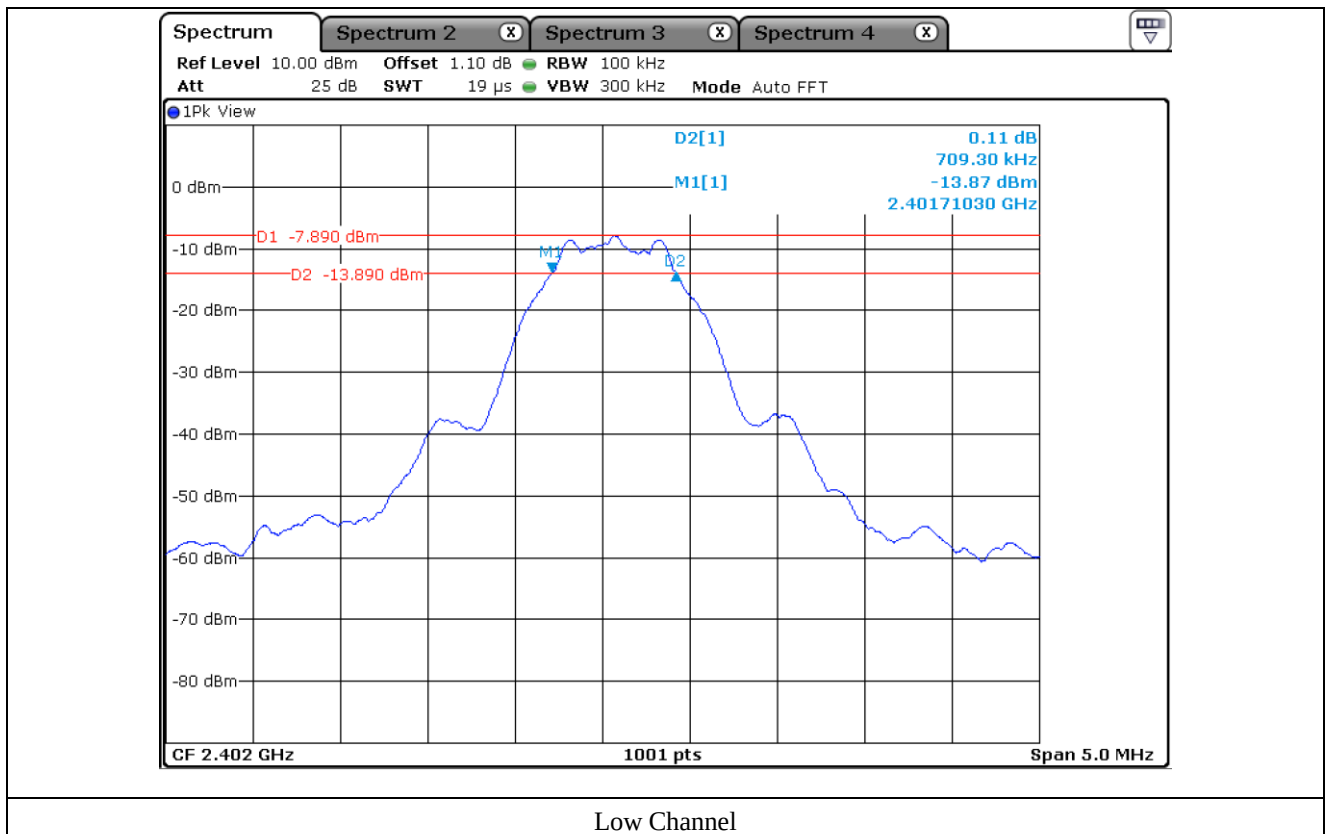

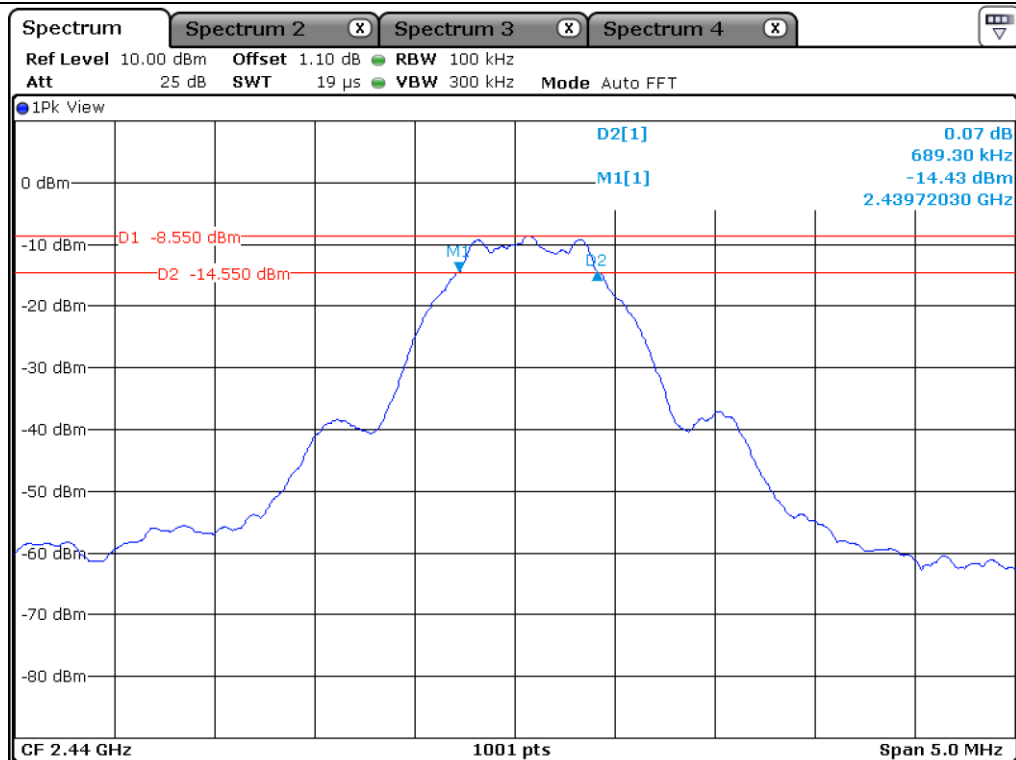

Middle Channel

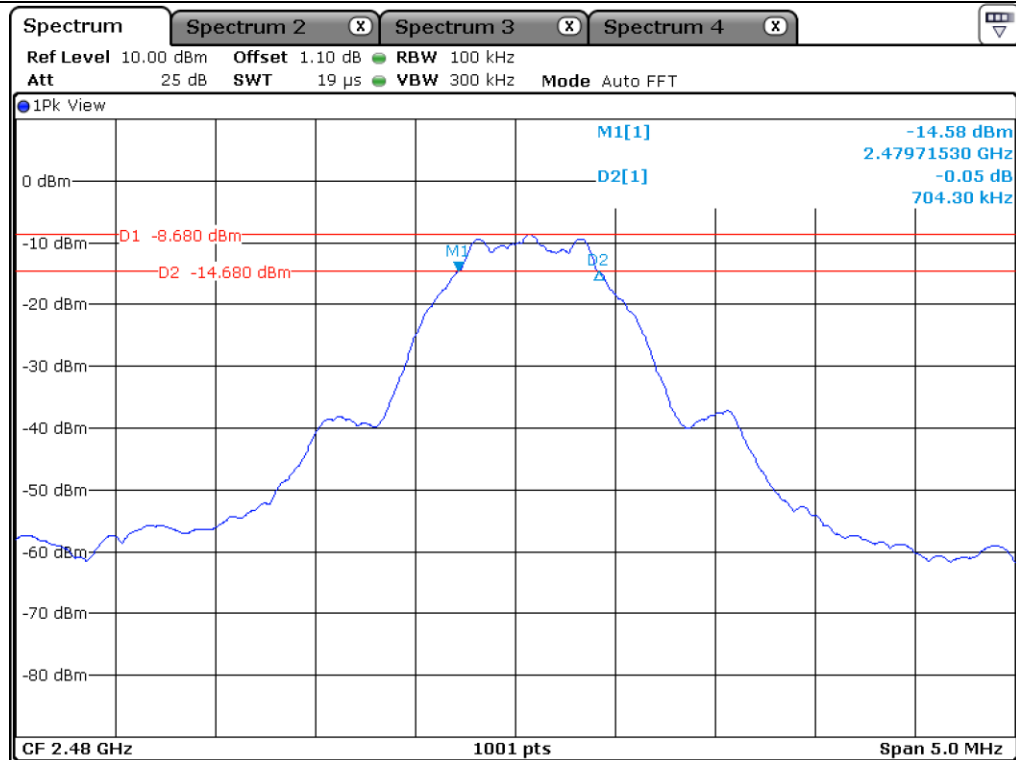

High Channel

8. MAXIMUM PEAK OUTPUT POWER

8.1 Operating environment


Temperature : 24.3 °C

Relative humidity : 43.9 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $\geq$ DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.

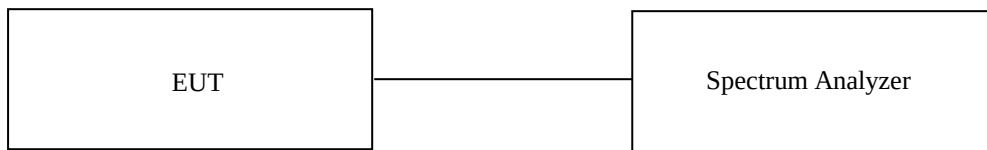

8.3 Test Date


August 04, 2021 ~ August 13, 2021


8.4 Test data

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	-7.78	30.00	37.78
MIDDLE	2 440.00	-8.49	30.00	38.49
HIGH	2 480.00	-8.58	30.00	38.58

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

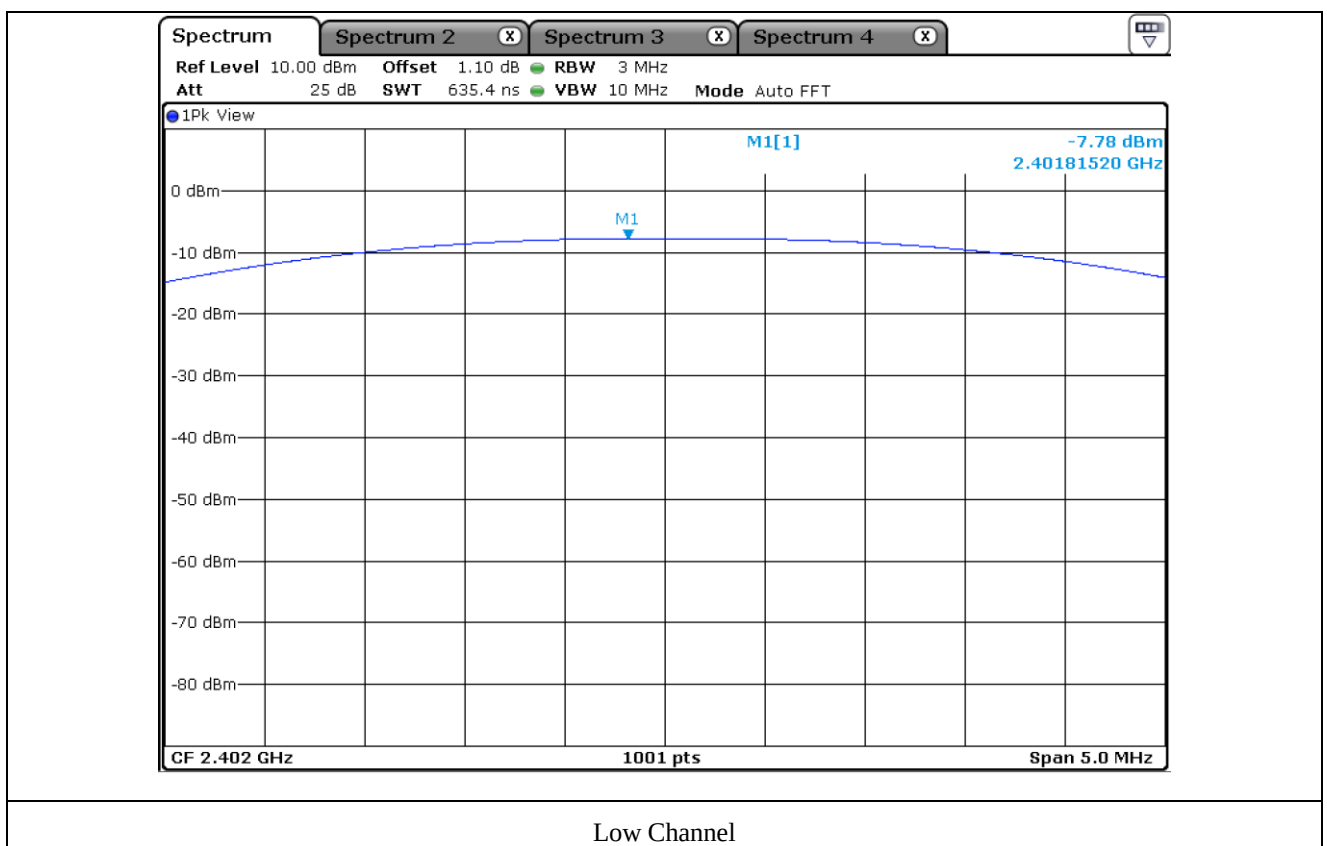

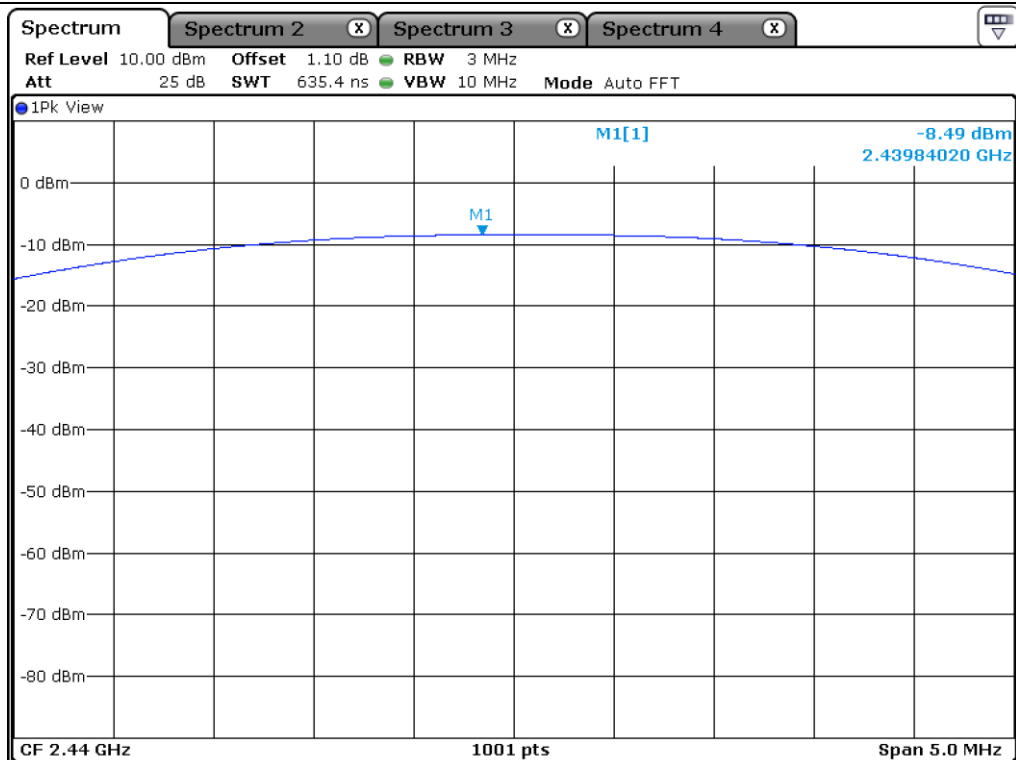

Middle Channel

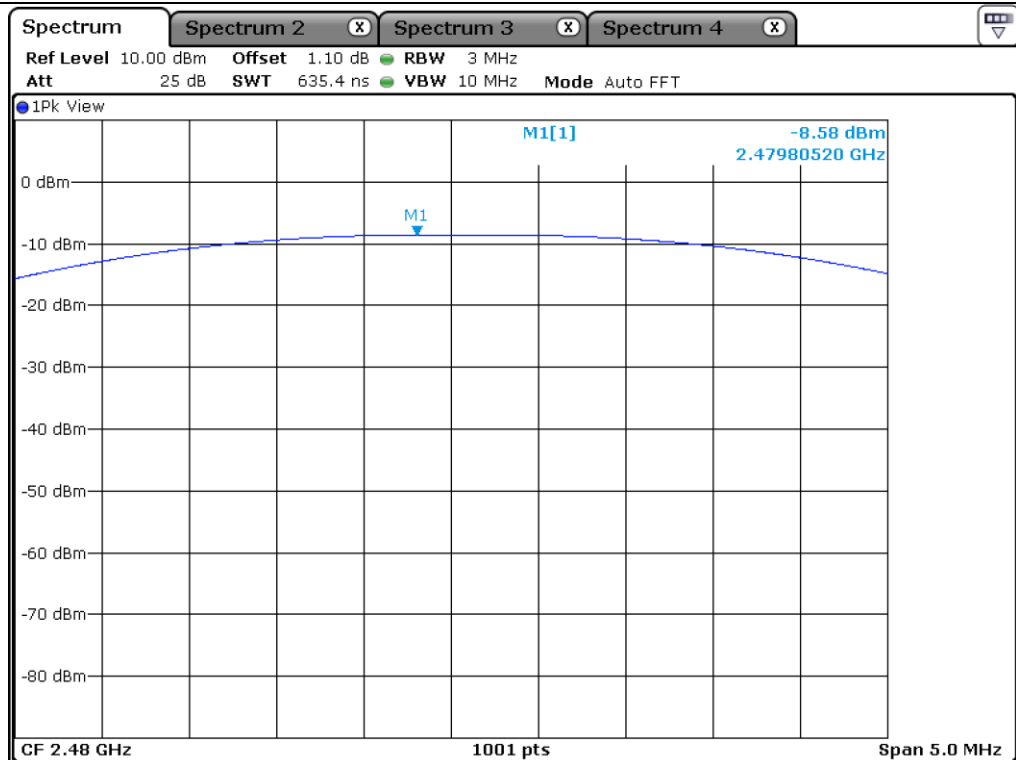

High Channel

9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND


9.1 Operating environment

Temperature : 24.3 °C

Relative humidity : 43.9 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, the video bandwidth is set to 3 times the resolution bandwidth and peak detection was used.

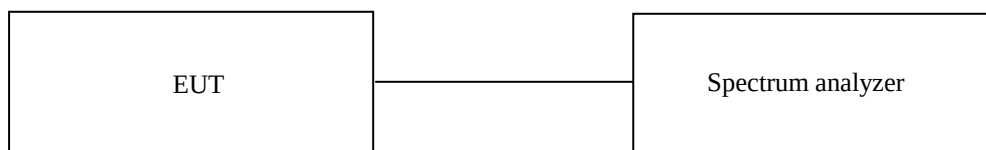

9.3 Test set-up for radiated measurement


The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


9.4 Test Date

August 04, 2021 ~ August 13, 2021


9.5 Test data for conducted emission

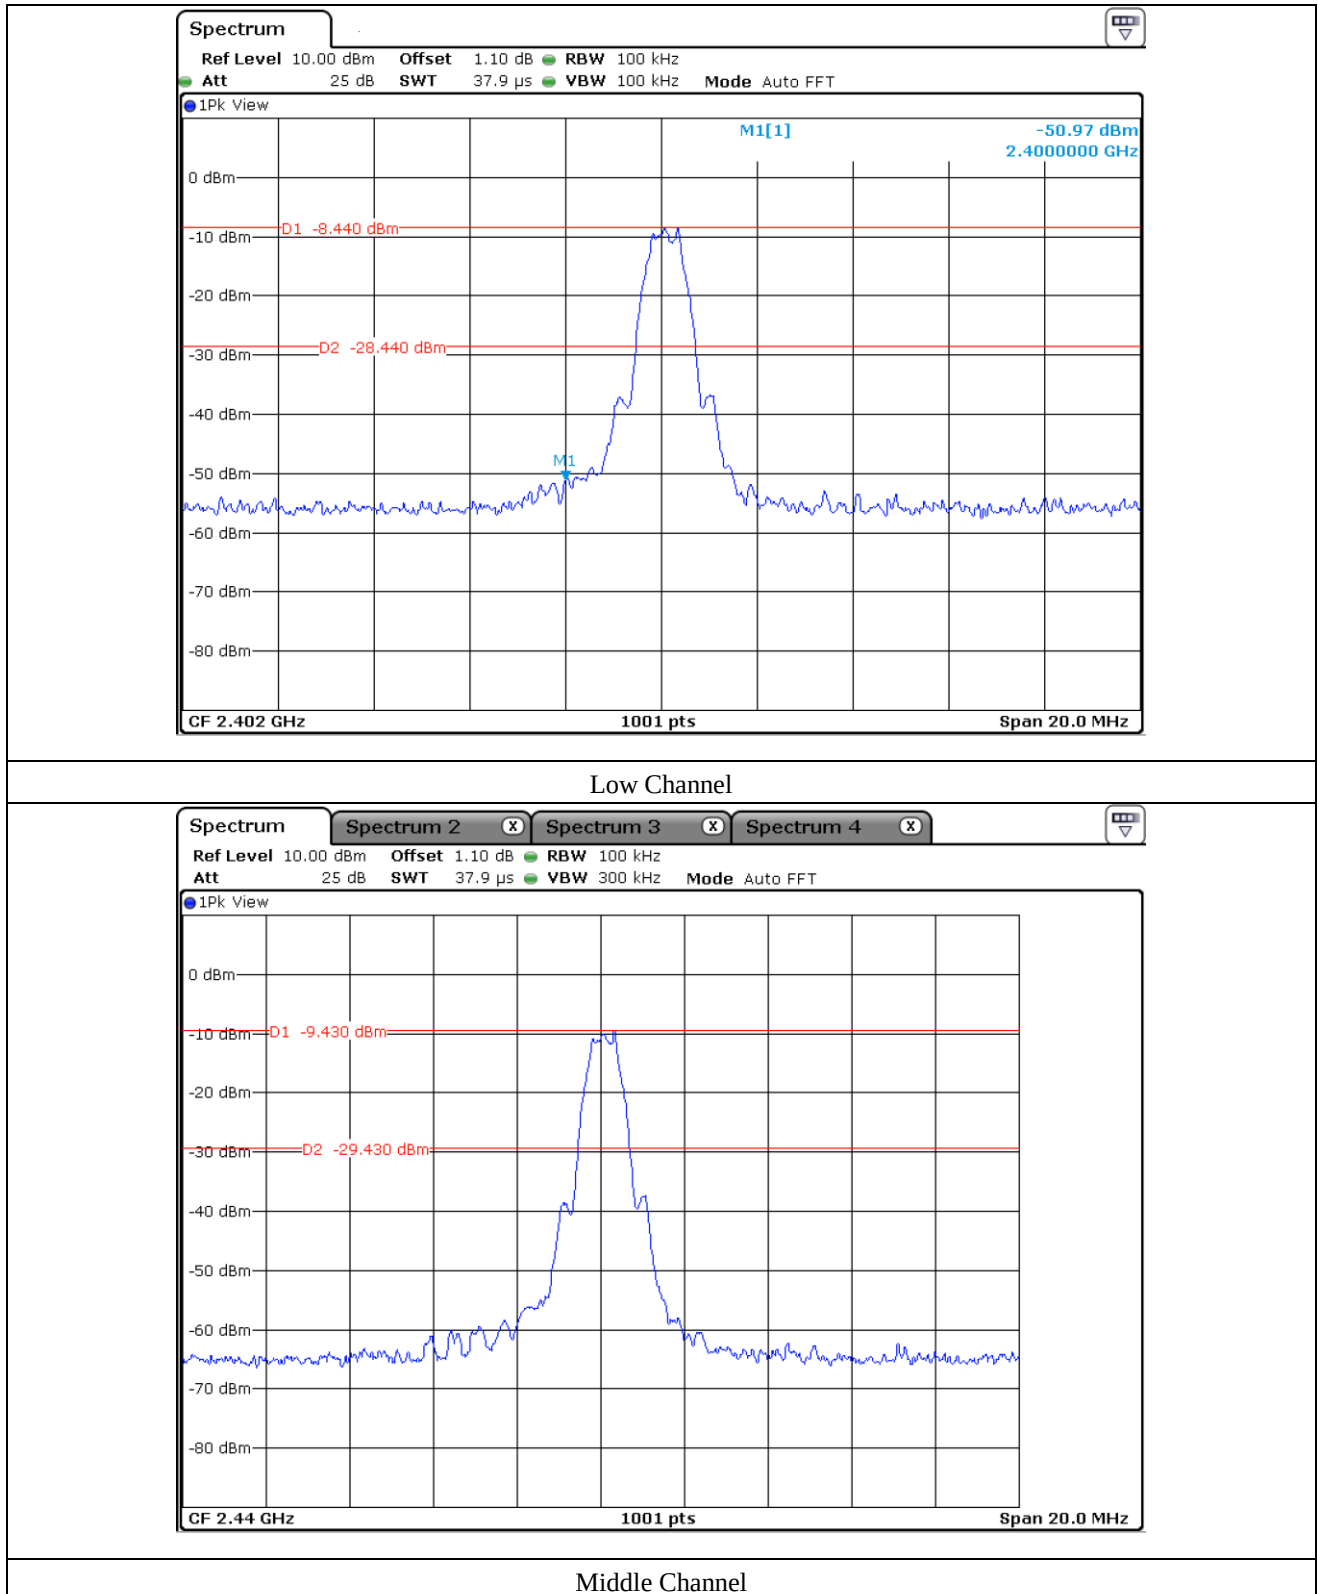

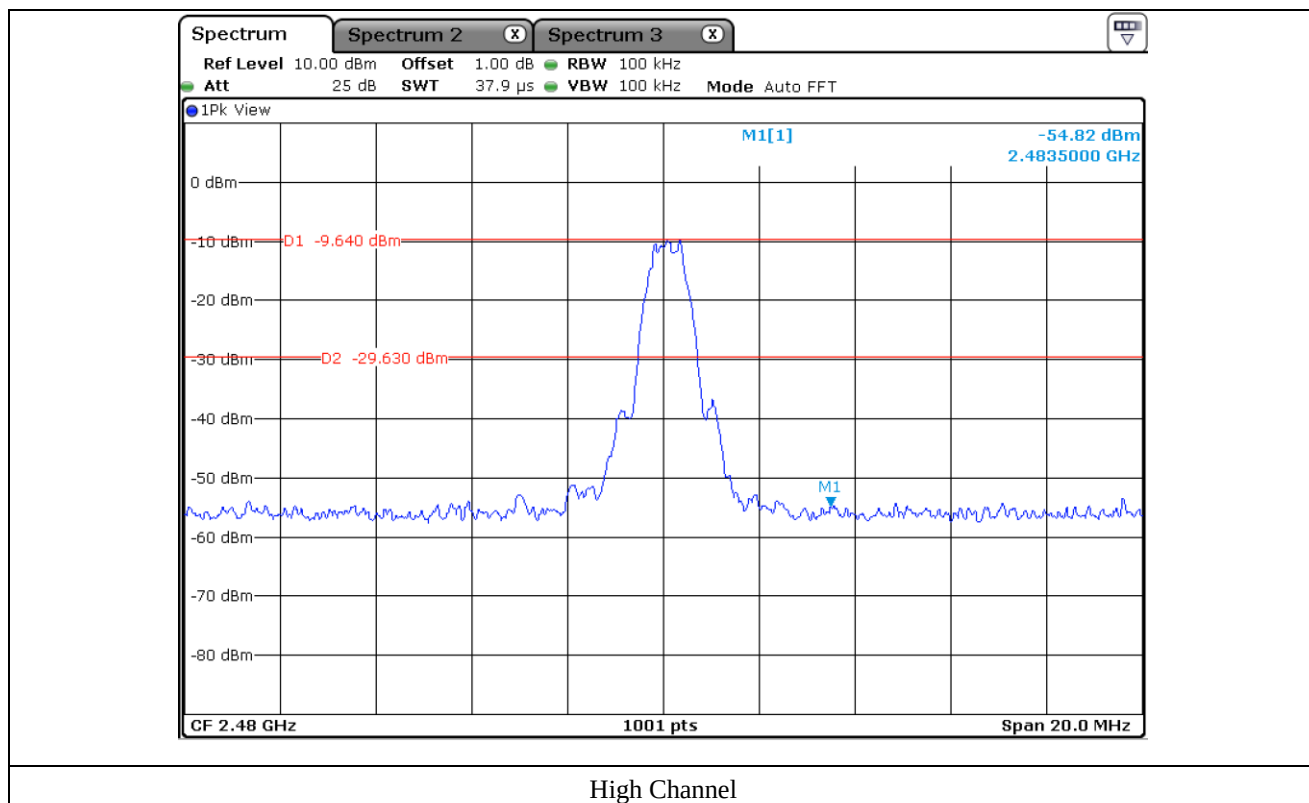


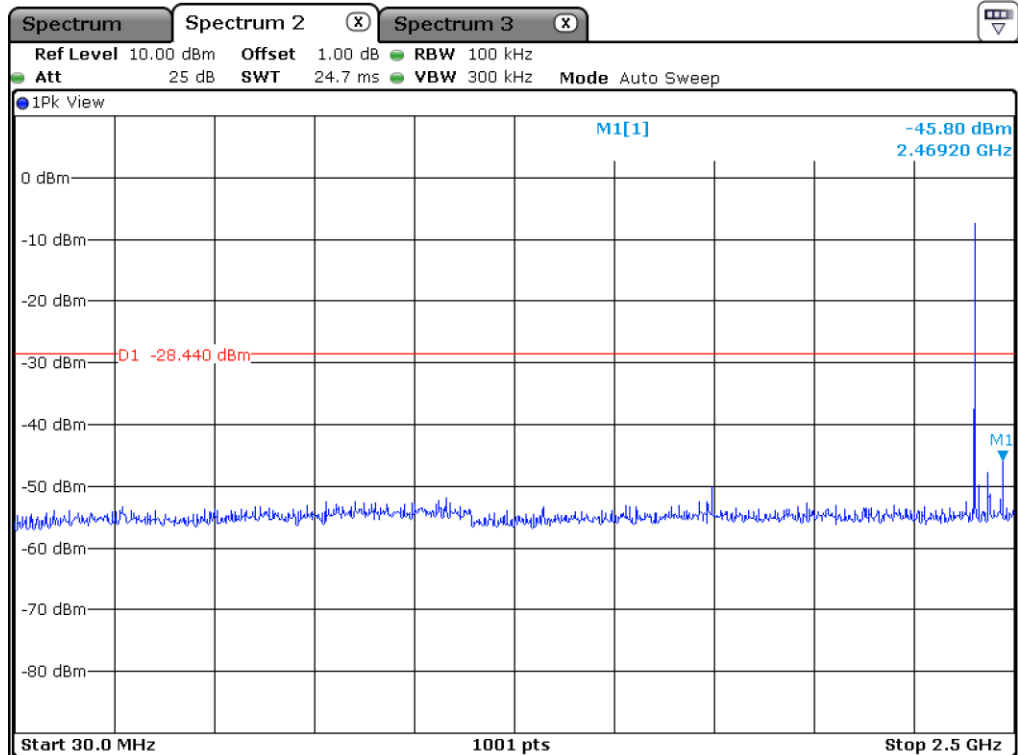


Low Channel

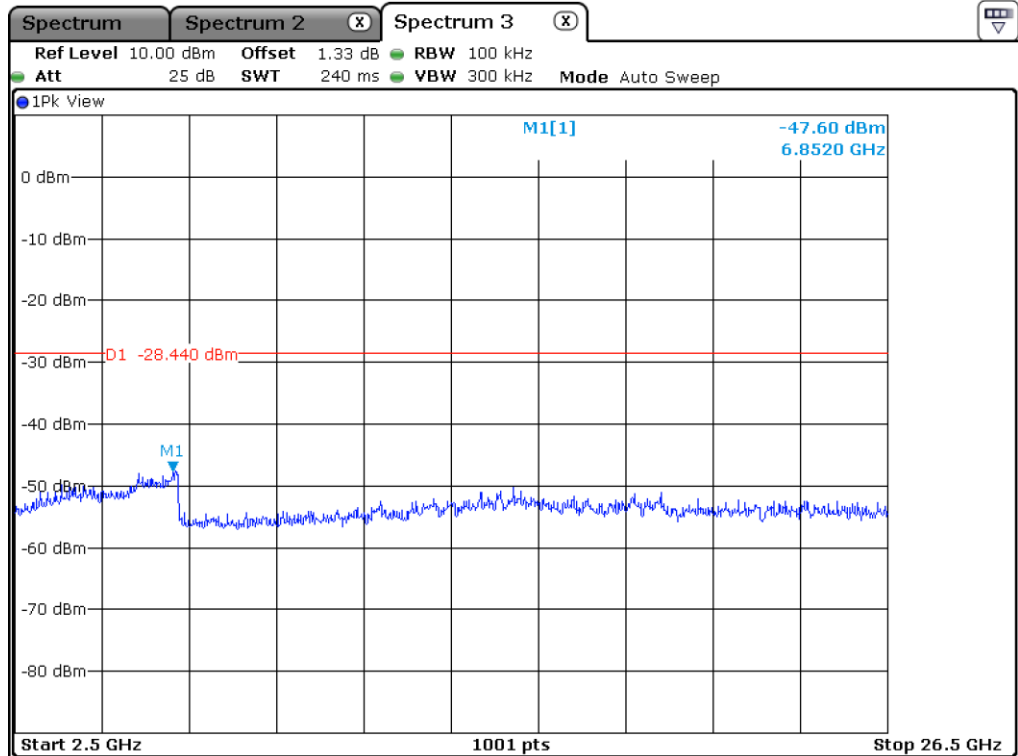


Low Channel

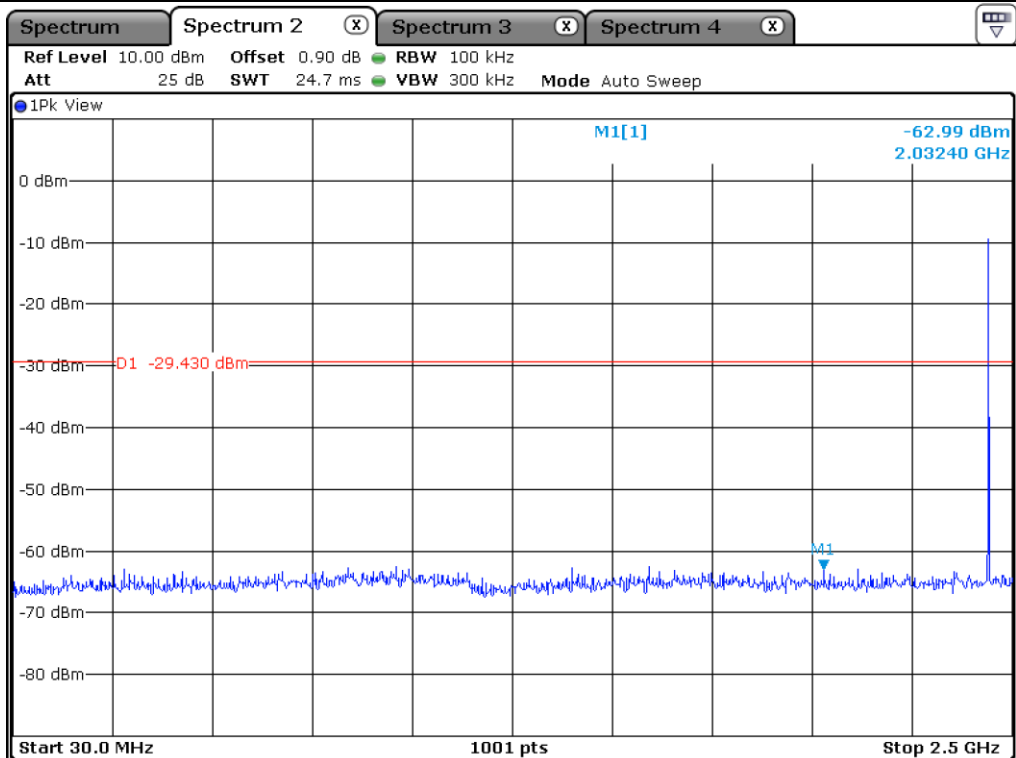


Middle Channel

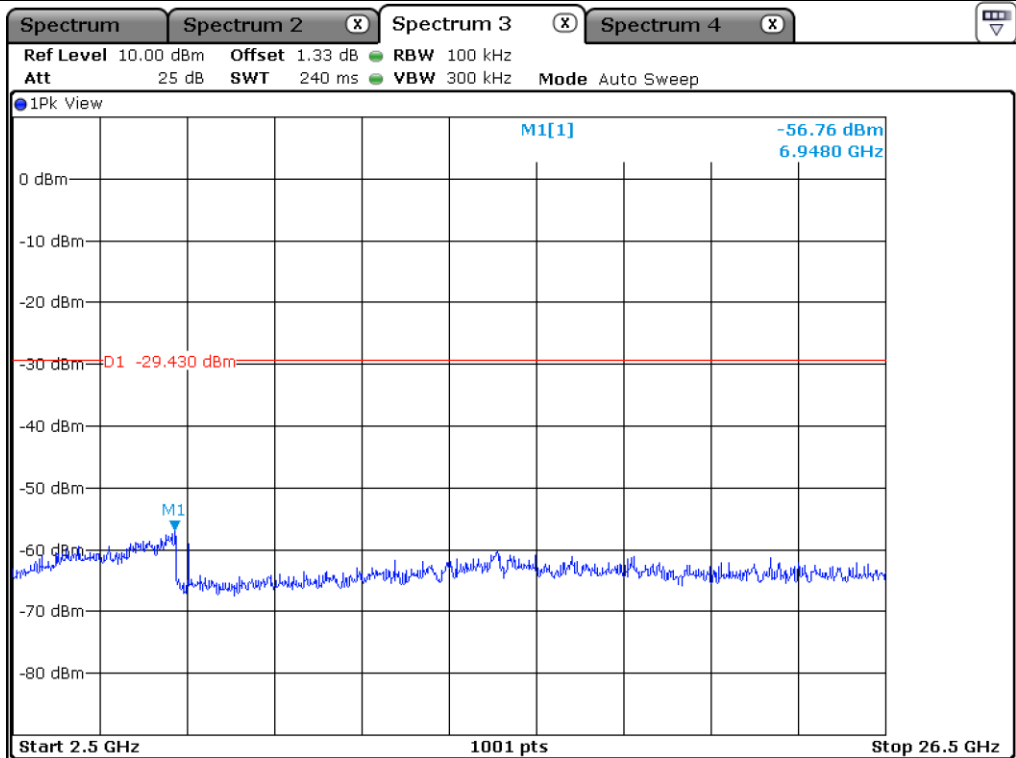

Middle Channel

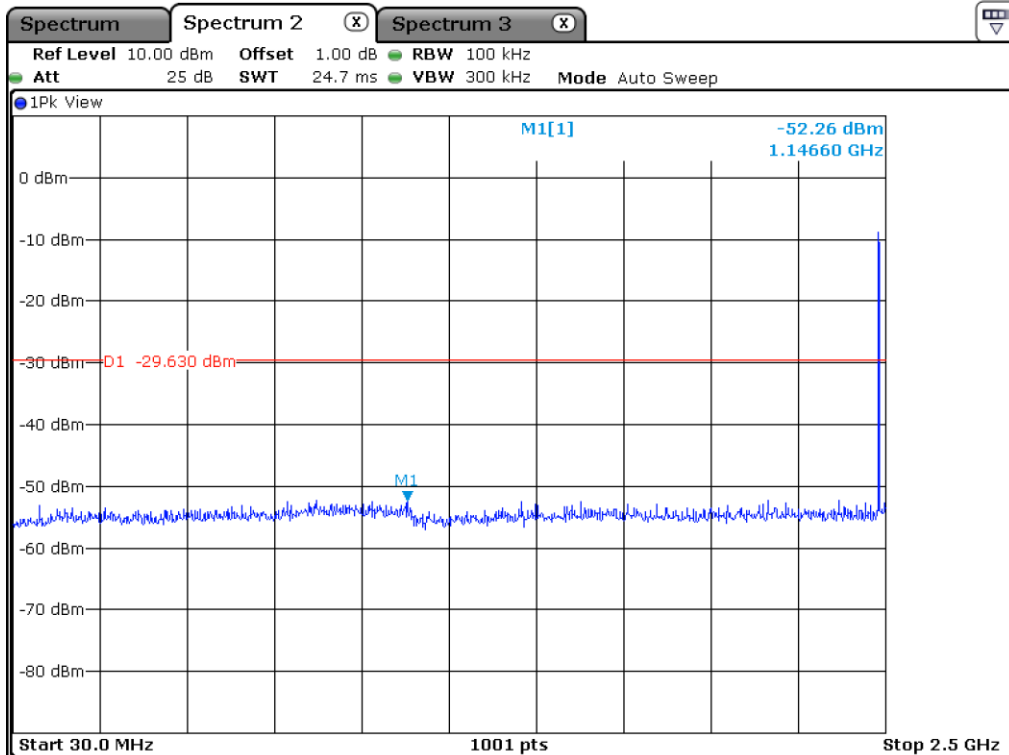

High Channel

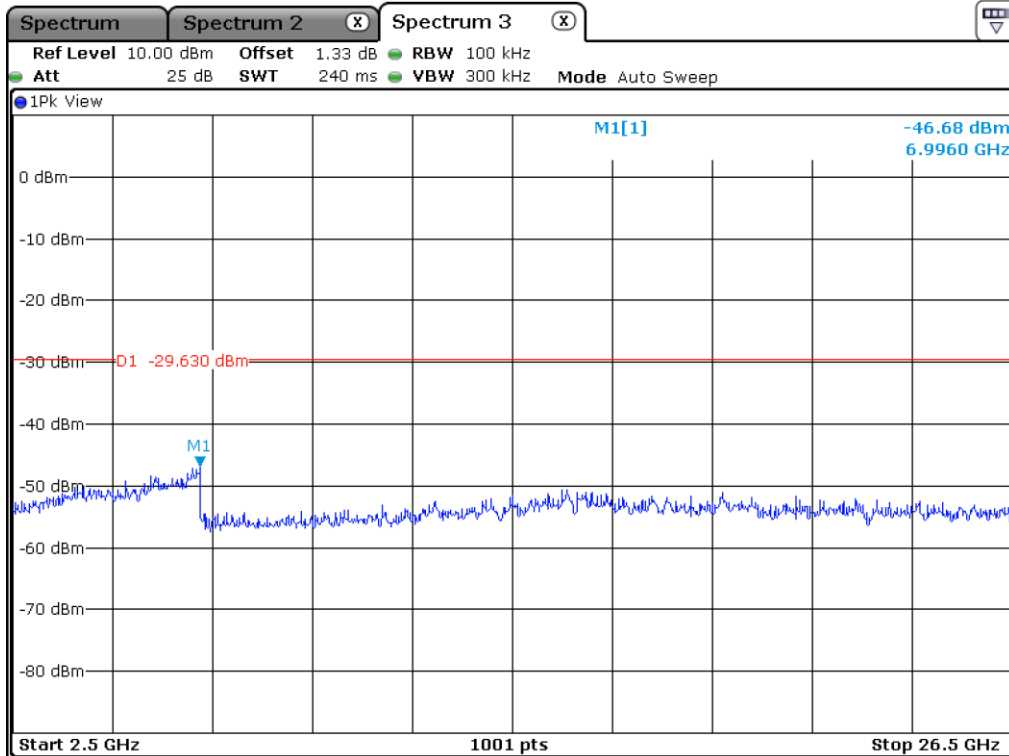

High Channel

9.6 Test data for radiated emission

9.6.1 Radiated Emission which fall in the Restricted Band

- . Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Measurement distance : 3 m
- . Duty Cycle : 62.16 %
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
2 368.302	52.20	Peak	H	27.80	7.81	45.14	-	42.67	74.00	31.33
2 311.638	40.15	Average	H	27.90	7.81	45.14	2.07	32.79	54.00	21.21
2 314.036	52.43	Peak	V	27.90	7.81	45.14	-	43.00	74.00	31.00
2 338.012	40.35	Average	V	27.90	7.81	45.14	2.07	32.99	54.00	21.01
Test Data for High Channel										
2 485.750	51.84	Peak	H	28.70	8.09	45.14	-	43.49	74.00	30.51
2 493.909	40.13	Average	H	28.70	8.09	45.14	2.07	33.85	54.00	20.15
2 483.508	53.55	Peak	V	28.70	8.09	45.14	-	45.20	74.00	28.80
2 494.880	40.14	Average	V	28.70	8.09	45.14	2.07	33.86	54.00	20.14

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss - Amp Gain + Correction Factor

9.6.2 Spurious & Harmonic Radiated Emission

- . Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
1 MHz for Peak Mode for the emissions outside restricted band
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Duty Cycle : 62.16 %
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Am Gainp	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4 804.00	50.83	Peak	H	33.40	11.56	45.10	-	50.69	74.00	23.31
4 804.00	39.14	Average	H	33.40	11.56	45.10	2.05	41.07	54.00	12.93
4 804.00	50.43	Peak	V	33.40	11.56	45.10	-	50.29	74.00	23.71
4 804.00	39.01	Average	V	33.40	11.56	45.10	2.05	40.94	54.00	13.06
Test Data for Middle Channel										
4 880.00	51.31	Peak	H	33.30	11.56	45.10	-	51.07	74.00	22.93
4 880.00	39.89	Average	H	33.30	11.56	45.10	2.05	41.72	54.00	12.28
4 880.00	51.10	Peak	V	33.30	11.56	45.10	-	50.86	74.00	23.14
4 880.00	39.75	Average	V	33.30	11.56	45.10	2.05	41.58	54.00	12.42
Test Data for High Channel										
4 960.00	51.60	Peak	H	33.40	11.56	45.10	-	51.46	74.00	22.54
4 960.00	40.21	Average	H	33.40	11.56	45.10	2.05	42.14	54.00	11.86
4 960.00	51.01	Peak	V	33.40	11.56	45.10	-	50.87	74.00	23.13
4 960.00	39.70	Average	V	33.40	11.56	45.10	2.05	41.63	54.00	12.37

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dBμV/m)} - \text{Total Level (dBμV/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amp Gain} + \text{Correction Factor}$$

10. PEAK POWER SPECTRAL DENSITY

10.1 Operating environment


Temperature : 24.3 °C

Relative humidity : 43.9 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$, the video bandwidth is set to 3 times the resolution bandwidth.

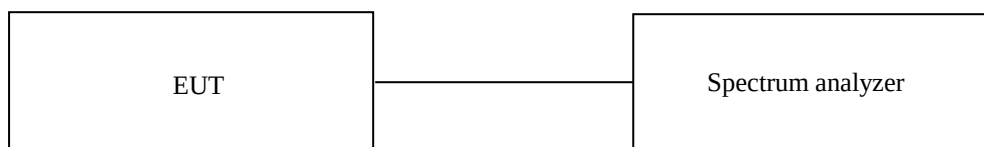

10.3 Test Date

August 04, 2021 ~ August 13, 2021


10.4 Test data


-. Test Result : Pass

-. Operating Condition : Continuous transmitting mode


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 402.00	-22.95	8.00	30.95
Middle	2 440.00	-23.46	8.00	31.46
High	2 480.00	-24.07	8.00	32.07

Remark. Margin = Limit – Measured value

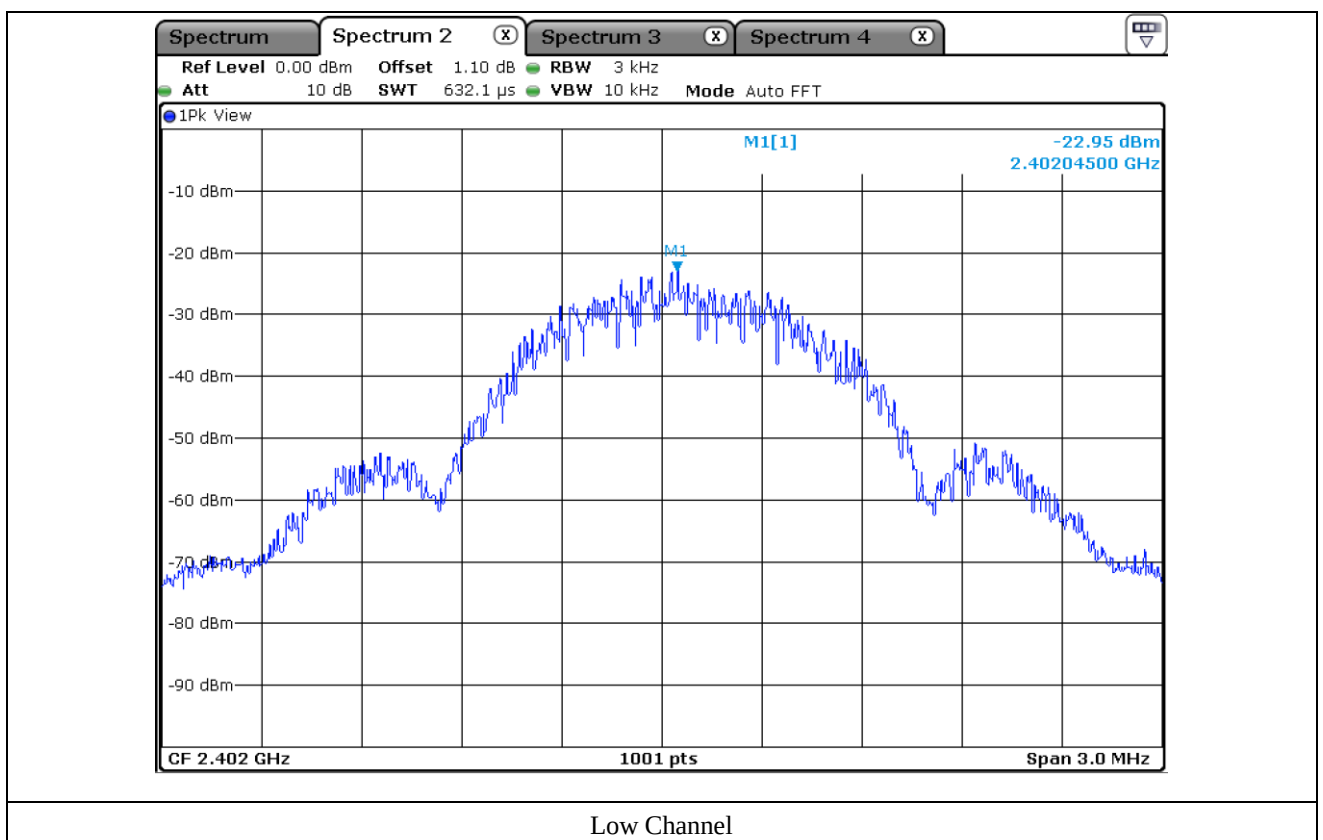

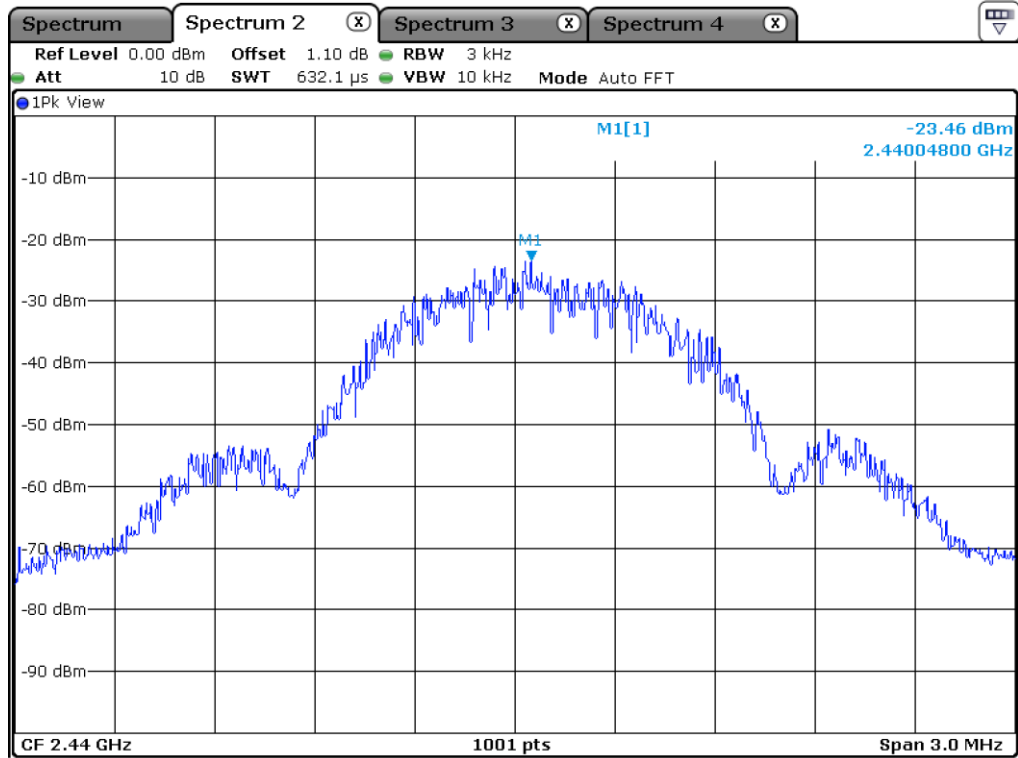

Middle Channel

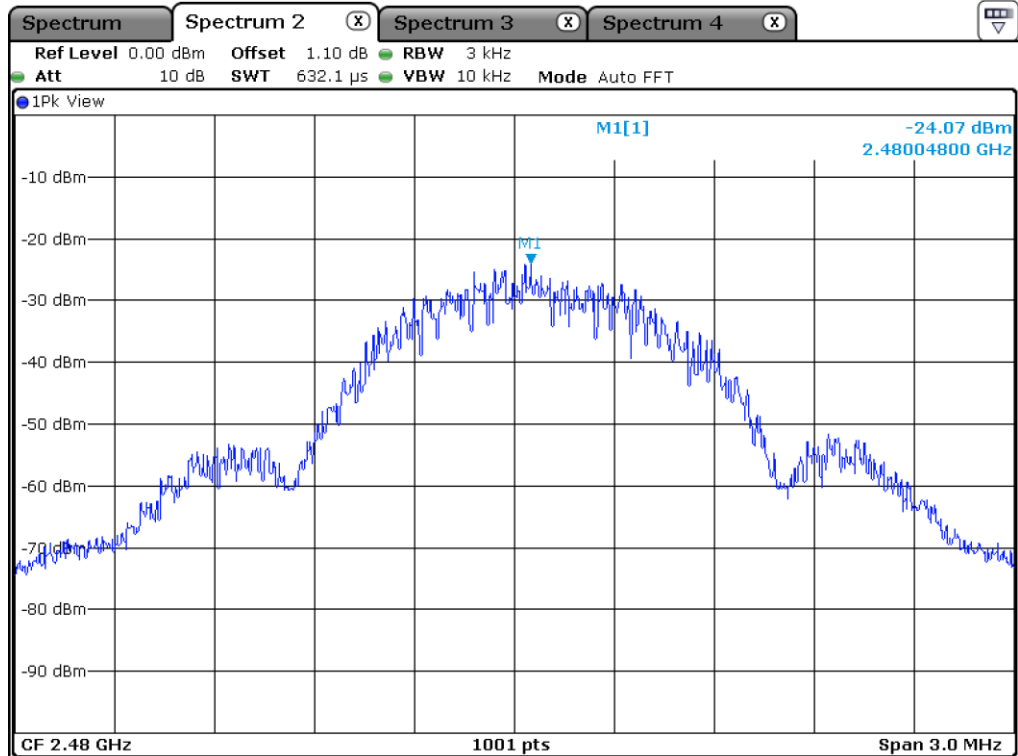

High Channel

11. RADIATED EMISSION TEST

11.1 Operating environment

Temperature : 24.3 °C

Relative humidity : 43.9 % R.H.


11.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

- Test Configuration


1. Below 30 MHz

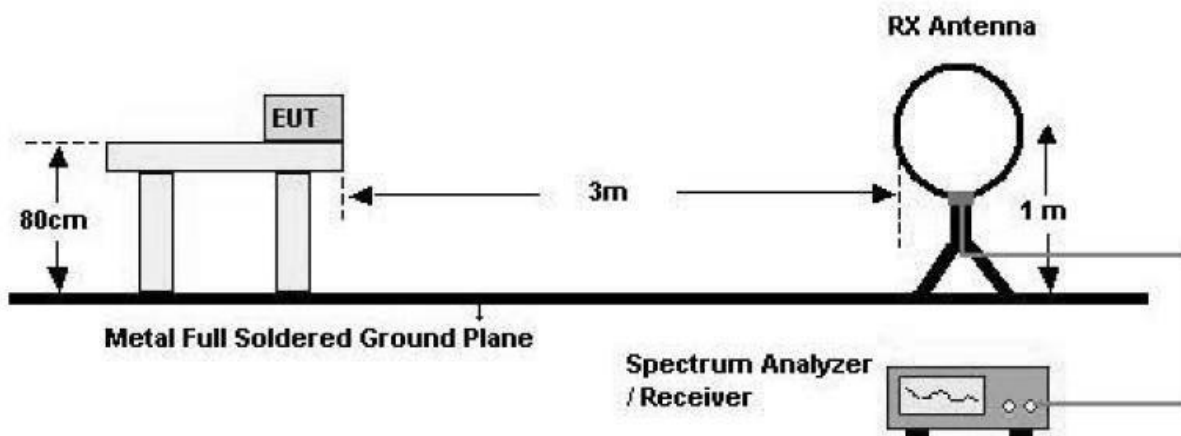

2. 30 MHz - 1 GHz

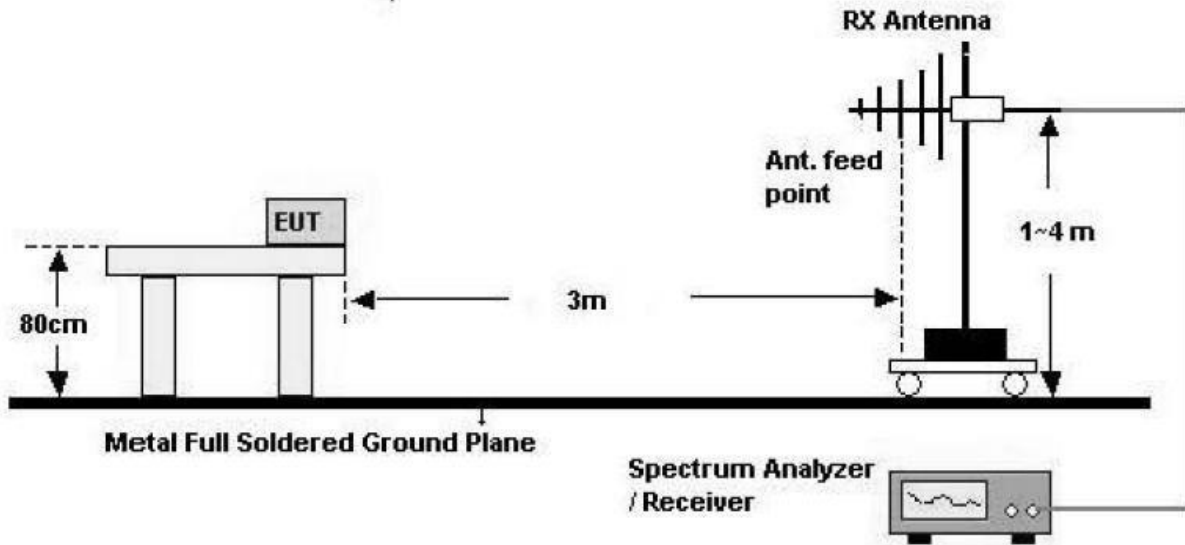

3. Above 1 GHz

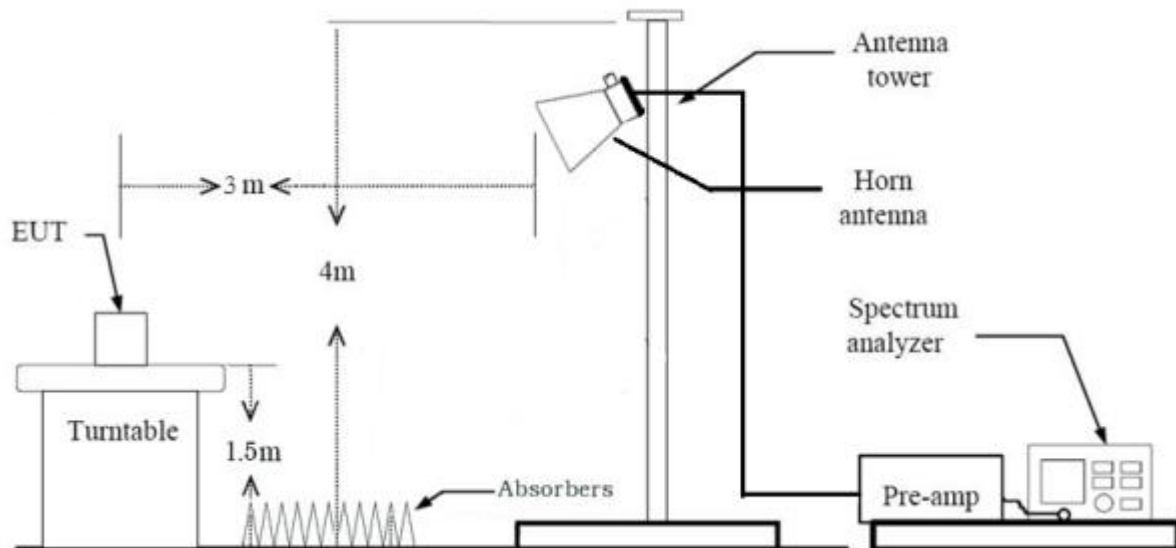

11.3 Test Date

August 04, 2021 ~ August 13, 2021


11.4 Test data for 30 MHz ~ 1 000 MHz

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : Controller

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

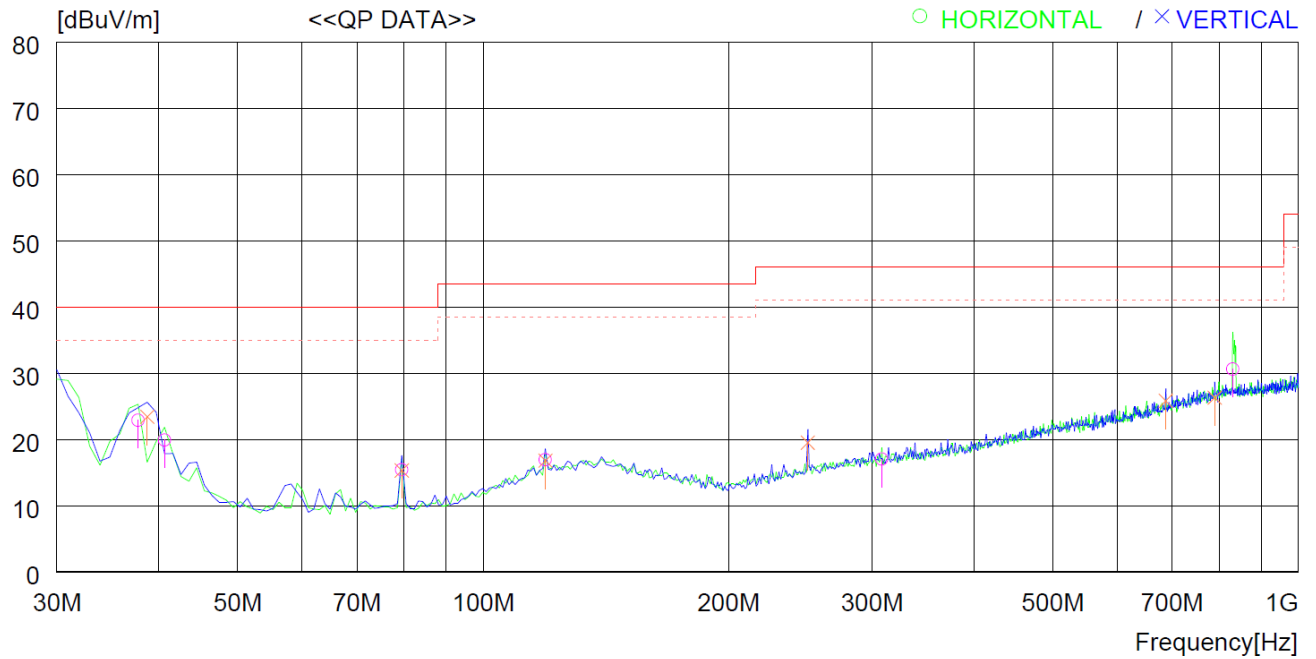

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	QP	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	37.760	35.5	18.1	1.3	32.0	22.9	40.0	17.1	200	0
2	40.670	33.6	17.0	1.3	32.0	19.9	40.0	20.1	200	104
3	79.470	32.8	12.9	1.7	32.0	15.4	40.0	24.6	200	0
4	119.240	28.4	18.5	2.0	32.0	16.9	43.5	26.6	300	359
5	308.390	26.6	19.3	3.1	32.0	17.0	46.0	29.0	300	359
6	831.211	30.2	27.2	5.1	31.9	30.6	46.0	15.4	300	51
----- Vertical -----										
7	38.730	36.3	17.8	1.3	32.0	23.4	40.0	16.6	400	359
8	79.470	32.7	12.9	1.7	32.0	15.3	40.0	24.7	300	305
9	119.240	28.3	18.5	2.0	32.0	16.8	43.5	26.7	400	115
10	250.190	30.9	17.8	2.8	32.0	19.5	46.0	26.5	100	0
11	687.655	28.1	25.4	4.6	32.3	25.8	46.0	20.2	200	317
12	789.502	26.5	26.9	4.9	32.0	26.3	46.0	19.7	300	90

11.5 Test data for Below 30 MHz

- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

11.6 Test data for above 1 GHz

- . Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
1 MHz for Peak Mode for the emissions outside restricted band
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

13. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
FSV40-N	Rohde & Schwarz	Signal Analyzer	102177	Apr. 16, 2021 (1Y)
ESW 44	Rohde & Schwarz	EMI Test Receiver	101851	Mar. 23, 2021 (1Y)
310N	Sonoma Instrument	Pre-Amplifier	392756	Oct. 16, 2020 (1Y)
SCU18	Rohde & Schwarz	Signal Conditioning unit	102266	Jul. 14, 2021 (1Y)
PAM-840A	Com-Power	Pre-Amplifier	461339	Oct. 16, 2020 (1Y)
DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
FMZB 1513	Schwarzbeck	Loop Antenna	1513-235	Mar. 24, 2020 (2Y)
HLP-2008	TDK	Hybrid Antenna	131316	Feb. 27, 2020 (2Y)
AH-118	Com-Power	Horn Antenna	10050061	Oct. 15, 2020 (1Y)
BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 07, 2021 (1Y)
BBHA9120D	Schwarzbeck	Horn Antenna	9120D-1366	Jul. 20, 2021 (1Y)
BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 07, 2021 (1Y)
FMZB 1513	Schwarzbeck	Loop Antenna	1513-235	Mar. 24, 2020 (2Y)