



FCC Test Report

**FCC Part 15.247 for FHSS systems/
Canada RSS-210**

FOR:
VXI Corporation Inc.
One Front Street, Rollinsford
NH, 03869 USA

Bluetooth Wireless Headset

Marketing Name: Xpressway
Model No.: XpressWay

FCC ID: SOM-202555
IC ID: 4293A-202555

TEST REPORT #: EMC_VXICO_003_09001_15.247_Rev2
DATE: 2009-10-21



FCC listed
A2LA Accredited

IC recognized #
3462B

CETECOM Inc.

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: +1 (408) 586 6200 ♦ Fax: +1 (408) 586 6299 ♦ E-mail: info@cetecomusa.com ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

TABLE OF CONTENTS

1	Assessment	4
2	Administrative Data	5
2.1	Identification of the Testing Laboratory Issuing the EMC Test Report	5
2.2	Identification of the Client	5
2.3	Identification of the Manufacturer	6
3	Equipment under Test (EUT)	7
3.1	Specification of the Equipment under Test	7
3.2	Identification of the Equipment Under Test (EUT)	7
3.3	Identification of Accessory equipment	7
4	Subject Of Investigation	8
5	Measurements (Radiated)	9
5.1	MAXIMUM PEAK OUTPUT POWER	9
5.1.1	Test Result:	9
5.2	RESTRICTED BAND EDGE COMPLIANCE RADIATED §15.247/15.205	15
5.2.1	LIMITS	15
5.2.2	RESULTS: GFSK	16
5.2.3	RESULTS: $\pi/4$ DQPSK	20
5.2.4	RESULTS: 8DPSK	24
5.3	TRANSMITTER SPURIOUS EMISSIONS RADIATED § 15.247/15.205/15.209	28
5.3.1	LIMITS	28
5.3.2	RESULTS	29
5.4	Receiver Spurious Emission § 2.1053 / RSS-132 & 133	38
6	Measurements (Conducted)	42
6.1	MAXIMUM PEAK OUTPUT POWER § 15.247 (CONDUCTED)	42
6.1.1	LIMIT SUB CLAUSE § 15.247 (b) (1)	42
6.1.2	RESULTS:	42
6.2	20dB BANDWIDTH	52
6.2.1	LIMIT SUB CLAUSE § 15.247 (a) (1) (i) (ii) (iii)	52
6.2.2	RESULTS:	52
6.3	CARRIER FREQUENCY SEPARATION	62
6.3.1	LIMIT SUB CLAUSE § 15.247 (a) (1) (i) (ii) (iii)	62
6.3.2	RESULTS: 1.003 MHz	62
6.4	NUMBER OF HOPPING CHANNELS	63
6.4.1	LIMIT SUB CLAUSE § 15.247 (a) (1) (iii)	63
6.4.2	RESULTS: 79	63
6.5	TIME OF OCCUPANCY (DWELL TIME)	64
6.5.1	LIMIT SUB CLAUSE § 15.247 (a) (1) (i) (ii) (iii)	64
6.5.2	RESULTS:	64



6.6	CONDUCTED SPURIOUS EMISSION	65
6.6.1	LIMIT SUB CLAUSE § 15.247 (d)	65
6.6.2	RESULTS: Tnom(23)°C VnomVDC	65
6.7	AC POWER LINE CONDUCTED EMISSIONS § 15.107/207	69
6.7.1	LIMITS	69
6.7.2	Test Results:	69
7	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	72
8	BLOCK DIAGRAMS	73
9	Revision History	75

1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Part 15.247 of the Code of Federal Regulations and in compliance with the applicable criteria specified in Industry Canada Rules RSS-210 Issue 7.

Company	Description	Model #
VXI Corporation	Bluetooth wireless headset	Xpressway

This report is reviewed by:

Marc Douat

2009-10-21 Compliance (Test Lab Manager)

Date	Section	Name	Signature
------	---------	------	-----------

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

This report is prepared by:

Sajay Jose

2009-10-21 Compliance (EMC Test Engineer)

Date	Section	Name	Signature
------	---------	------	-----------

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	Compliance
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Responsible Test Lab Manager:	Heiko Strehlow
Responsible Project Leader:	Peter Mu
Date of test:	2009-06-06 to 2009-10-19

2.2 Identification of the Client

APPLICANT	
Applicant (Company Name)	VXI Corporation Inc.
Street Address	One Front Street
City/Zip Code	Rollinsford NH, 03869
Country	USA
Contact Person	David Geno
Telephone	(603) 609-1039
Fax	(603) 742-5065
e-mail	geno@vxicorp.com



2.3 Identification of the Manufacturer

APPLICANT	
Applicant (Company Name)	Sevco International Limited
Street Address	1301-3, Kwong Kin Trade Centre, 5 Kin Fat Street
City/Zip Code	Tuen Mun, N.T. Hong Kong
Country	China
Contact Person	Bob Mitchell
Company	Feature Products
Telephone	603-772-1116
e-mail	rbmit-mm@comcast.net

3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

Marketing Name:	Xpressway
Description:	Bluetooth wireless headset
Model No:	Xpressway
Antenna Type:	Integral Quarter-wavelength vertically polarized Calculated gain of 3.03dBi
Type(s) of Modulation:	GFSK, DQPSK, 8DPSK
Frequency Band(s) of Operation:	2400~2483.5MHz
Numbers of Channels:	79
Equipment Classification: (CLASS)	☐ FIXED ☐ VEHICULAR ☒ PORTABLE ☐ MODULE
Equipment Classification: (POWER(AC MAINS))	☐ 110VAC (<i>GROUND</i>) ☒ 230VAC (<i>NO GROUND</i>) ☐ 12VDC ☒ 3.0(Min)/3.8(Nom)/4.2(Max)VDC Li Battery

3.2 Identification of the Equipment Under Test (EUT)

EUT #	TYPE	MANF.	MODEL	SERIAL #
1	EUT	VXI Corporation	B350-XT Headset	S090900063
2	EUT	VXI Corporation	B350-XT Headset	S090900072
3	EUT	VXI Corporation	B350-XT Headset	S090900002
4	EUT	VXI Corporation	B350-XT Headset	S090900065

HW Version: 202733 rev. A

SW version: Sys 202815 rev. A / HMI 202816 rev. A

3.3 Identification of Accessory equipment

AE #	TYPE	MANF.	MODEL	SERIAL #
1	Car Charger	BI	BI-050070-C	N/A
2	AC Power Adaptor	BI	BI07-050070-ADJ	N/A

4 Subject Of Investigation

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations and Industry Canada rules RSS-210 Issue 7.

The maximization of portable equipment is conducted in accordance with ANSI C63.4.

This test report is to support a request for new equipment authorization under the FCC ID **SOM-202555** and IC ID **4293A-202555**.

All testing was performed on the product referred to in Section 3 as EUT. This test report contains full radiated and conducted testing results as per FCC15.247.

During the testing process the EUT was tested on a single channel using PRBS payload using DH5, 2DH5 or 3DH5 packets, all data in this report shows the worst case between horizontal and vertical polarization for above 1GHz.

5 Measurements (Radiated)

5.1 MAXIMUM PEAK OUTPUT POWER

5.1.1 Test Result:

EIRP: GFSK

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom} VDC	0.60	1.71	2.13
Measurement uncertainty		±0.5dBm		

EIRP: $\pi / 4$ DQPSK

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom} VDC	0.15	1.10	1.74
Measurement uncertainty		±0.5dBm		


EIRP: 8DPSK

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom} VDC	0.51	1.22	1.74
Measurement uncertainty		±0.5dBm		

Antenna Gain= Radiated Power- Conducted Power
 Maximum Gain calculated to be 3.03 dBi for GFSK 2480 MHz.

Radiated Peak Power GFSK 2402 MHz


EIRP BT L

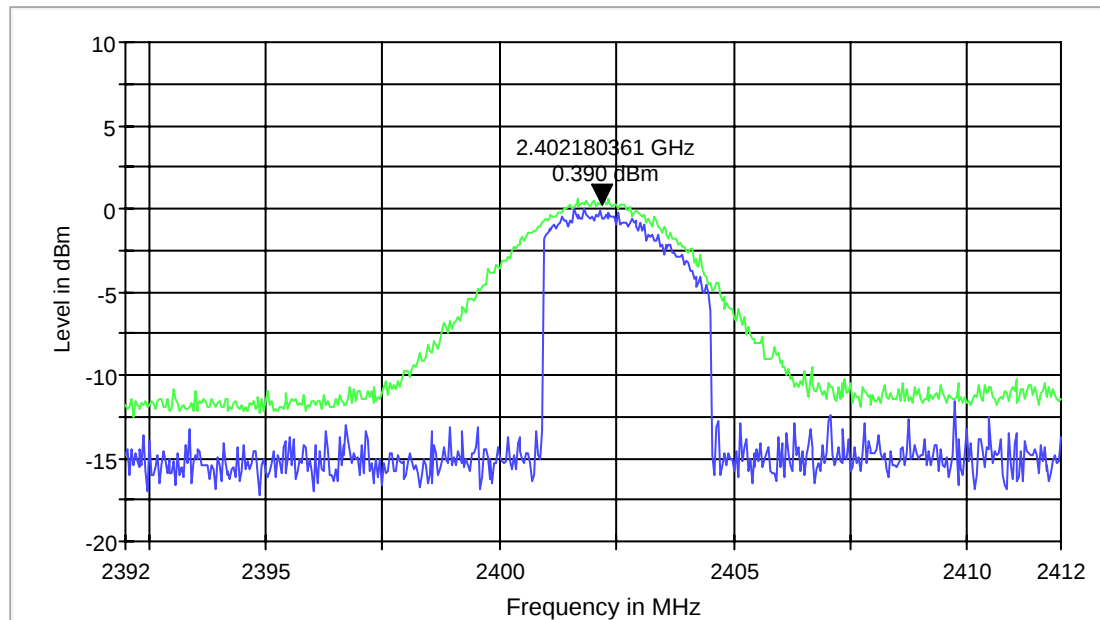

MaxPeak-ClearWrite MaxPeak-MaxHold

Radiated Peak Power GFSK 2441 MHz


EIRP BT M

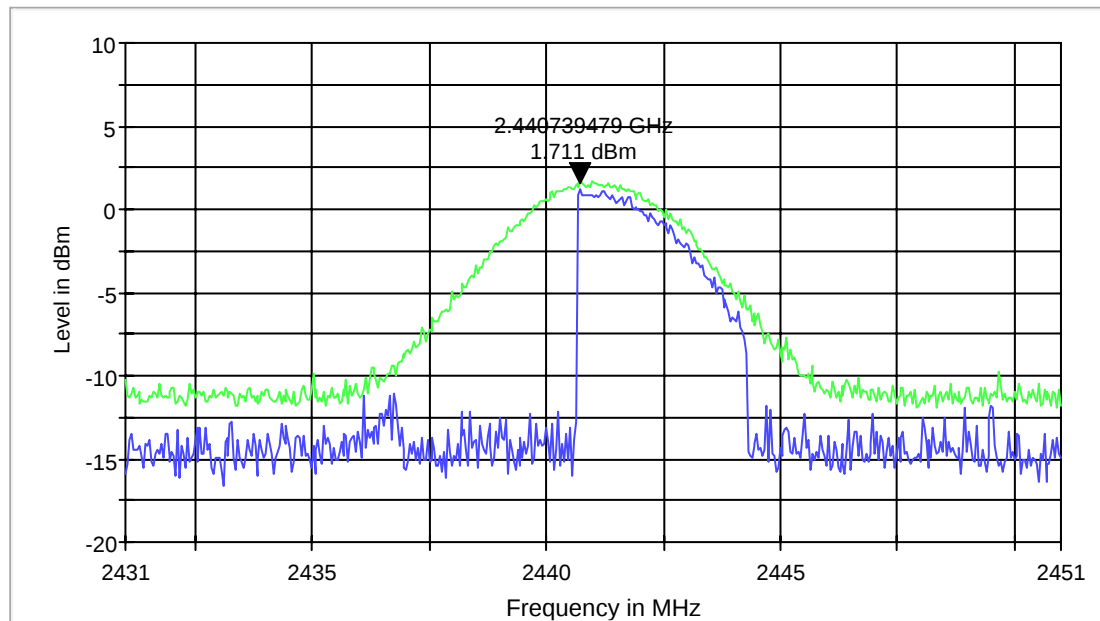

MaxPeak-ClearWrite MaxPeak-MaxHold

Radiated Peak Power GFSK 2480 MHz


EIRP BT H

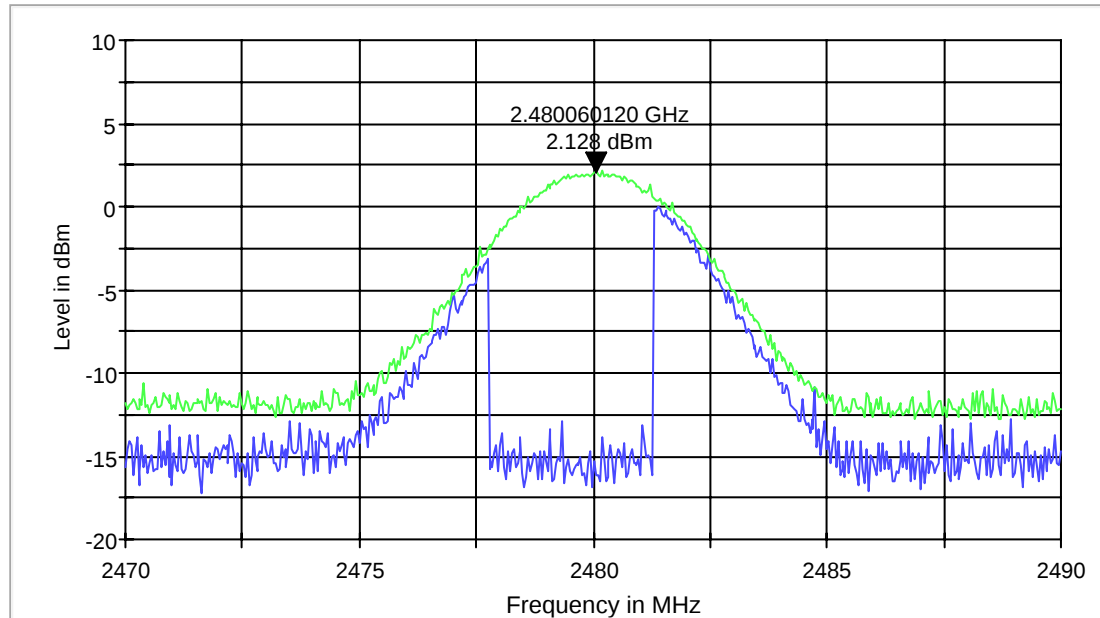

MaxPeak-ClearWrite MaxPeak-MaxHold

Radiated Peak Power $\pi / 4$ DQPSK 2402 MHz


EIRP BT L

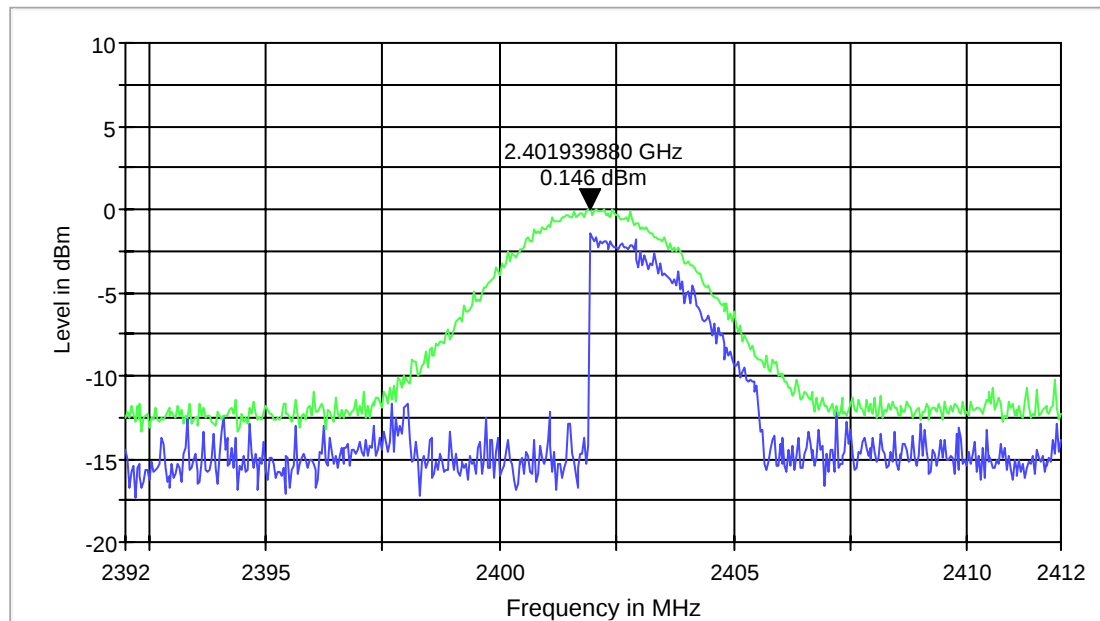

MaxPeak-ClearWrite MaxPeak-MaxHold

Radiated Peak Power π / 4 DQPSK 2441 MHz


EIRP BT M

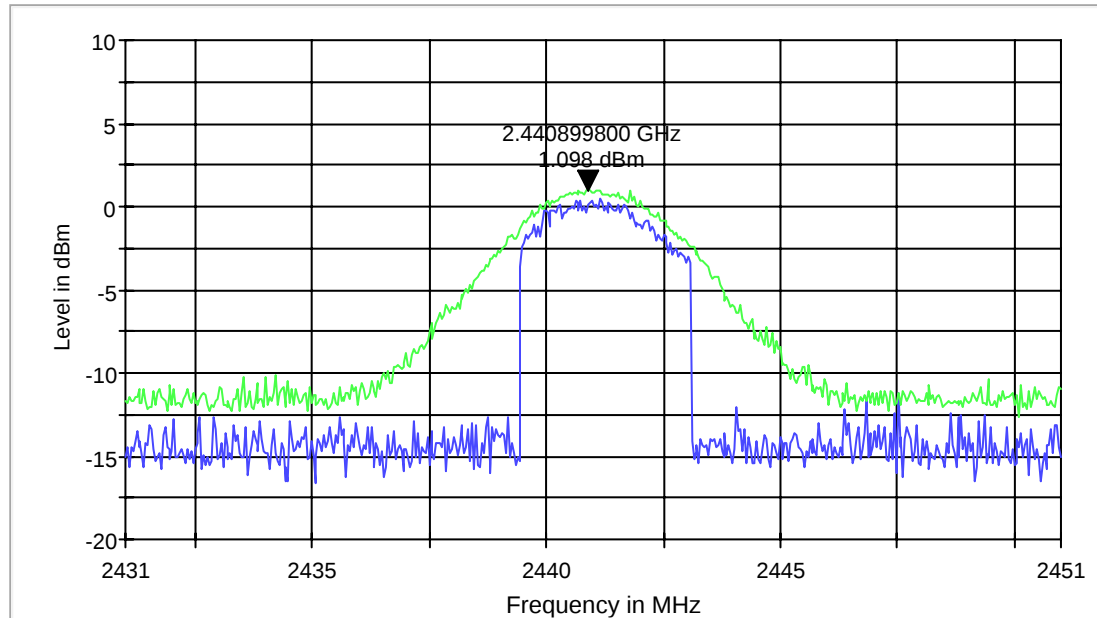

MaxPeak-ClearWrite MaxPeak-MaxHold

Radiated Peak Power π / 4 DQPSK 2480 MHz


EIRP BT H

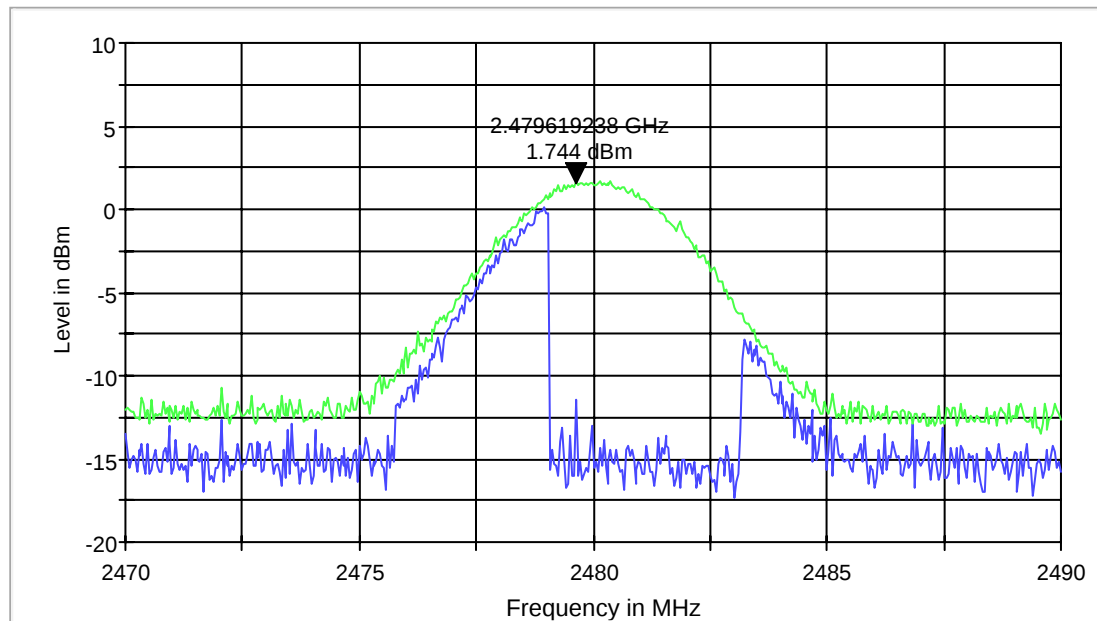

MaxPeak-ClearWrite MaxPeak-MaxHold

Radiated Peak Power 8DPSK 2402 MHz


EIRP BT L

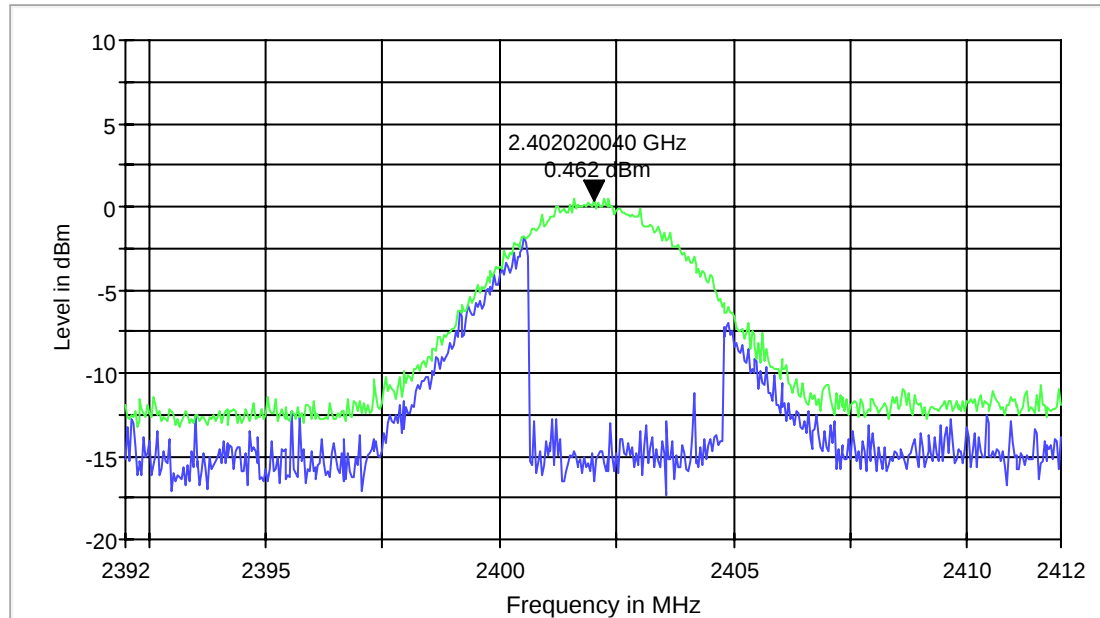

MaxPeak-ClearWrite MaxPeak-MaxHold

Radiated Peak Power 8DPSK 2441 MHz


EIRP BT M

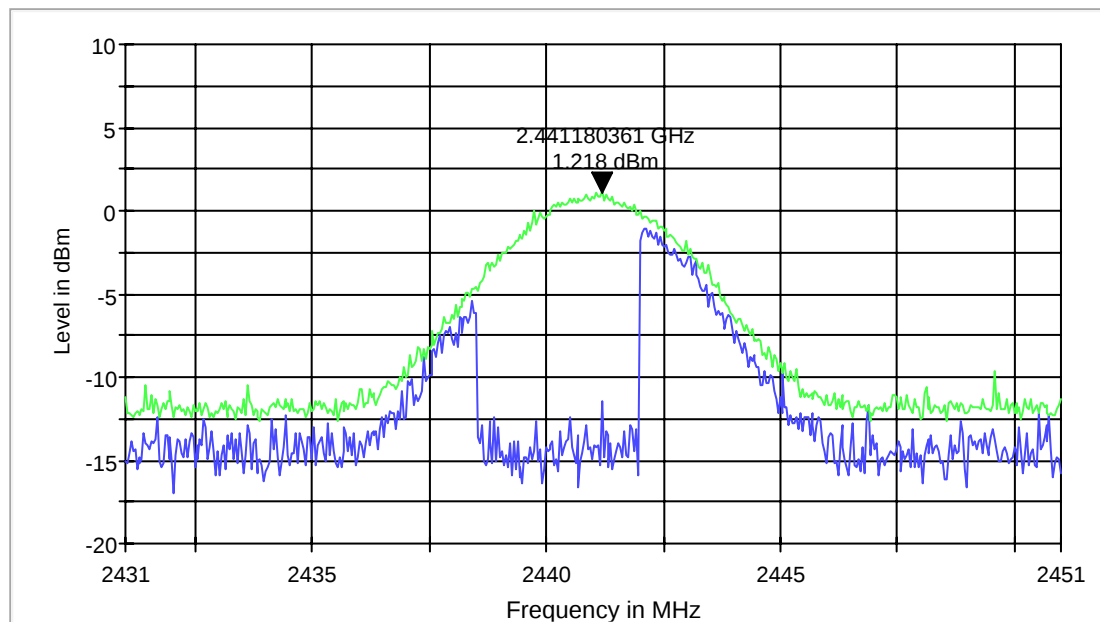

MaxPeak-ClearWrite MaxPeak-MaxHold

Radiated Peak Power 8DPSK 2480 MHz

EIRP BT H

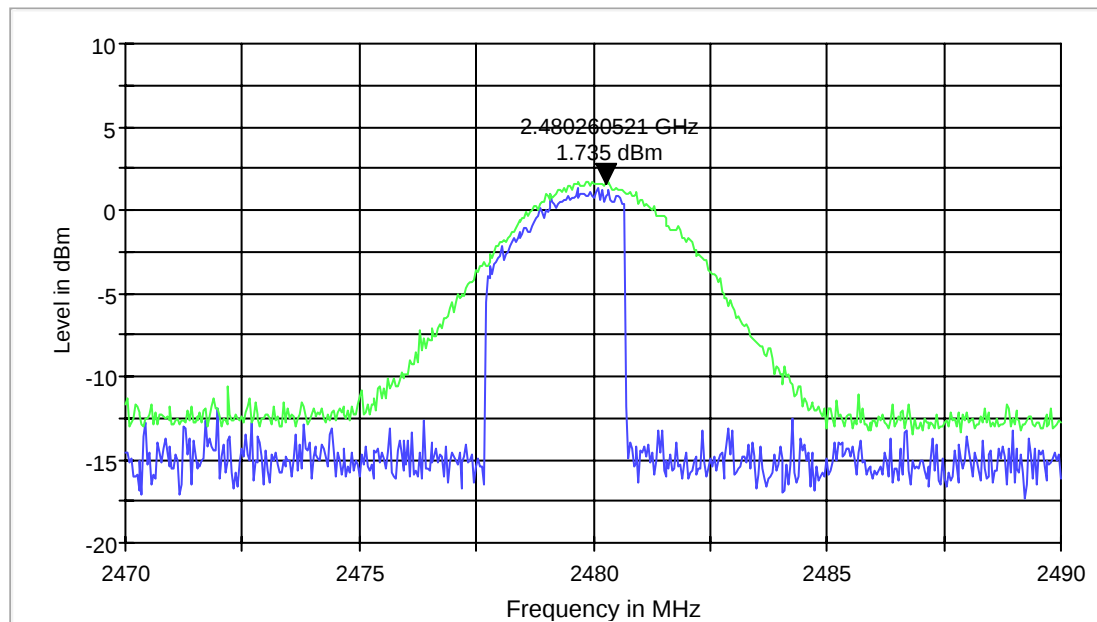

MaxPeak-ClearWrite

MaxPeak-MaxHold

5.2 RESTRICTED BAND EDGE COMPLIANCE RADIATED §15.247/15.205

5.2.1 LIMITS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

*PEAK LIMIT= 74dBuV/m


*AVG. LIMIT= 54dBuV/m

5.2.2 RESULTS: GFSK (2402MHz) LOWER BAND EDGE PEAK -GFSK MODULATION

EUT: Xpressway Bluetooth Headset
Customer:: VXI Corp.
Test Mode: BT GFSK Ch. 0
ANT Orientation: V
EUT Orientation: V
Test Engineer: Ahmad
Voltage: AC Adapter & Battery
Comments:

SWEEP TABLE: "FCC15.247 LBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.3 GHz	2.4 GHz	MaxPeak MaxPeak	Coupled	1 MHz	#326horn_AF_vert

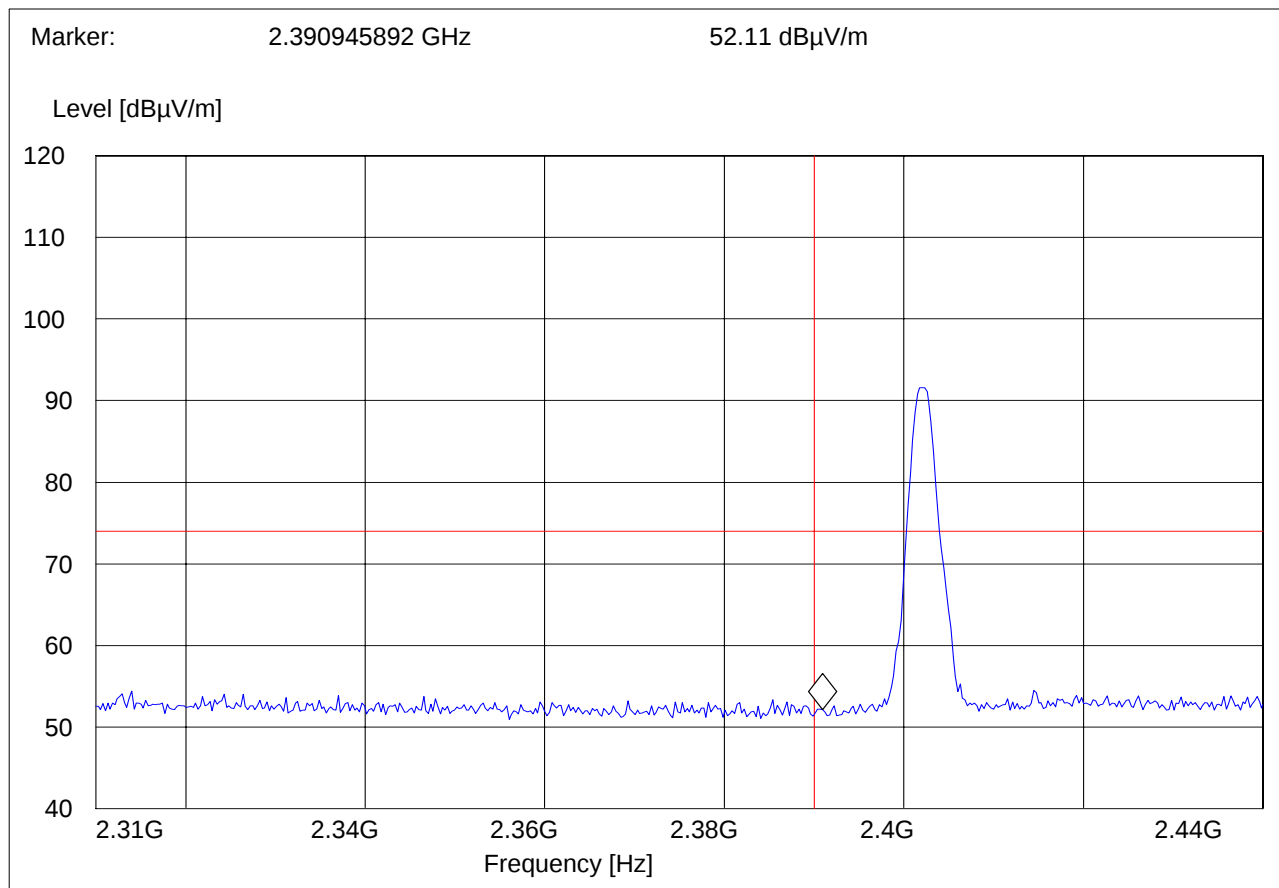


(2402MHz) LOWER BAND EDGE AVERAGE -GFSK MODULATION

EUT: Xpressway Bluetooth Headset
Customer:: VXI Corp.
Test Mode: BT GFSK Ch. 0
ANT Orientation: V
EUT Orientation: V
Test Engineer: Ahmad
Voltage: AC Adapter & Battery
Comments:

SWEEP TABLE: "FCC15.247 LBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

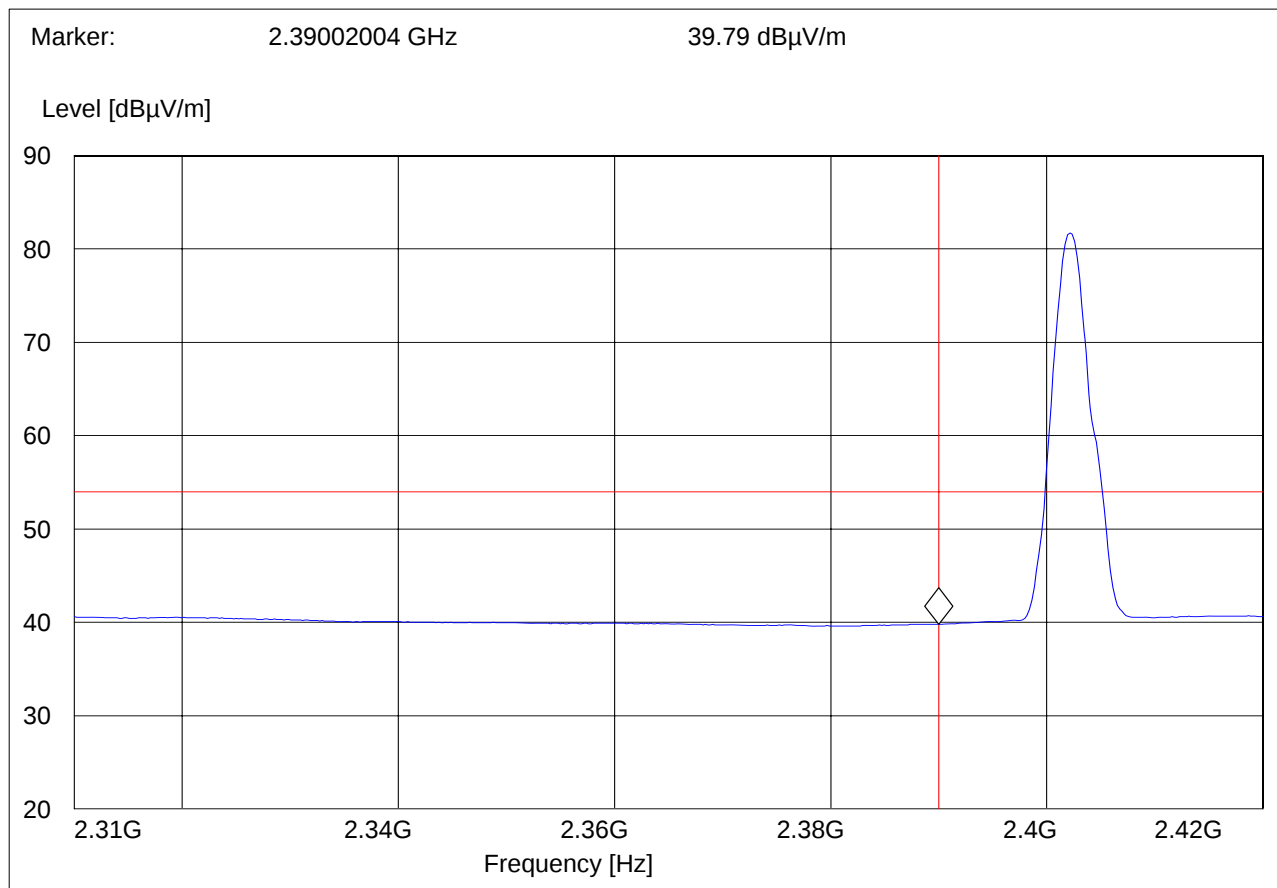


(2480MHz) HIGHER BAND EDGE PEAK -GFSK MODULATION

EUT: Xpressway Bluetooth Headset
Customer:: VXI Corp.
Test Mode: BT DQPSK Ch. 78
ANT Orientation: V
EUT Orientation: V
Test Engineer: Ahmad
Voltage: AC Adapter & Battery
Comments:

SWEEP TABLE: "FCC15.247 HBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.45 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert
		MaxPeak			

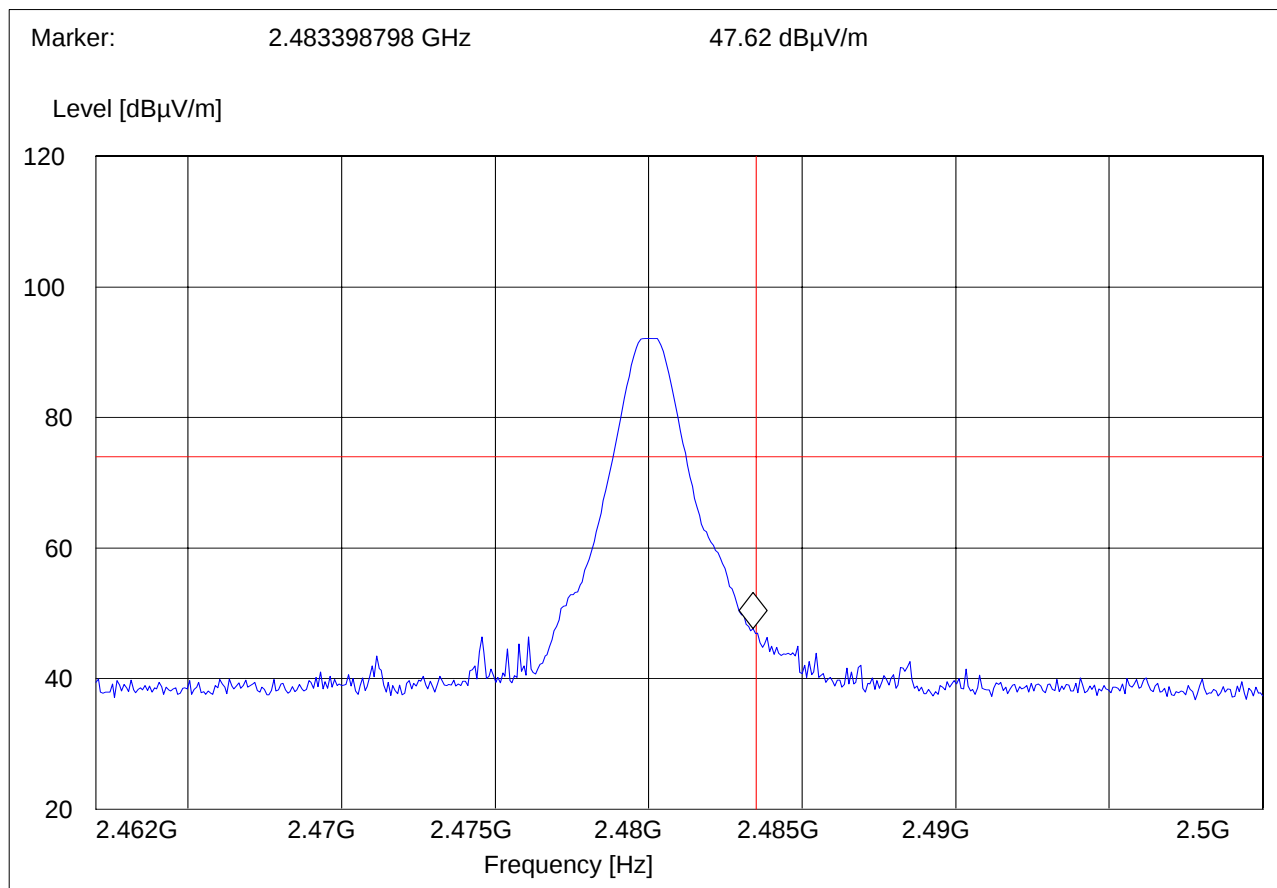


(2480MHz) HIGHER BAND EDGE AVERAGE-GFSK MODULATION

EUT: Xpressway Bluetooth Headset
Customer:: VXI Corp.
Test Mode: BT DQPSK Ch. 78
ANT Orientation: V
EUT Orientation: V
Test Engineer: Ahmad
Voltage: AC Adapter & Battery
Comments:

SWEEP TABLE: "FCC15.247 HBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.45 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

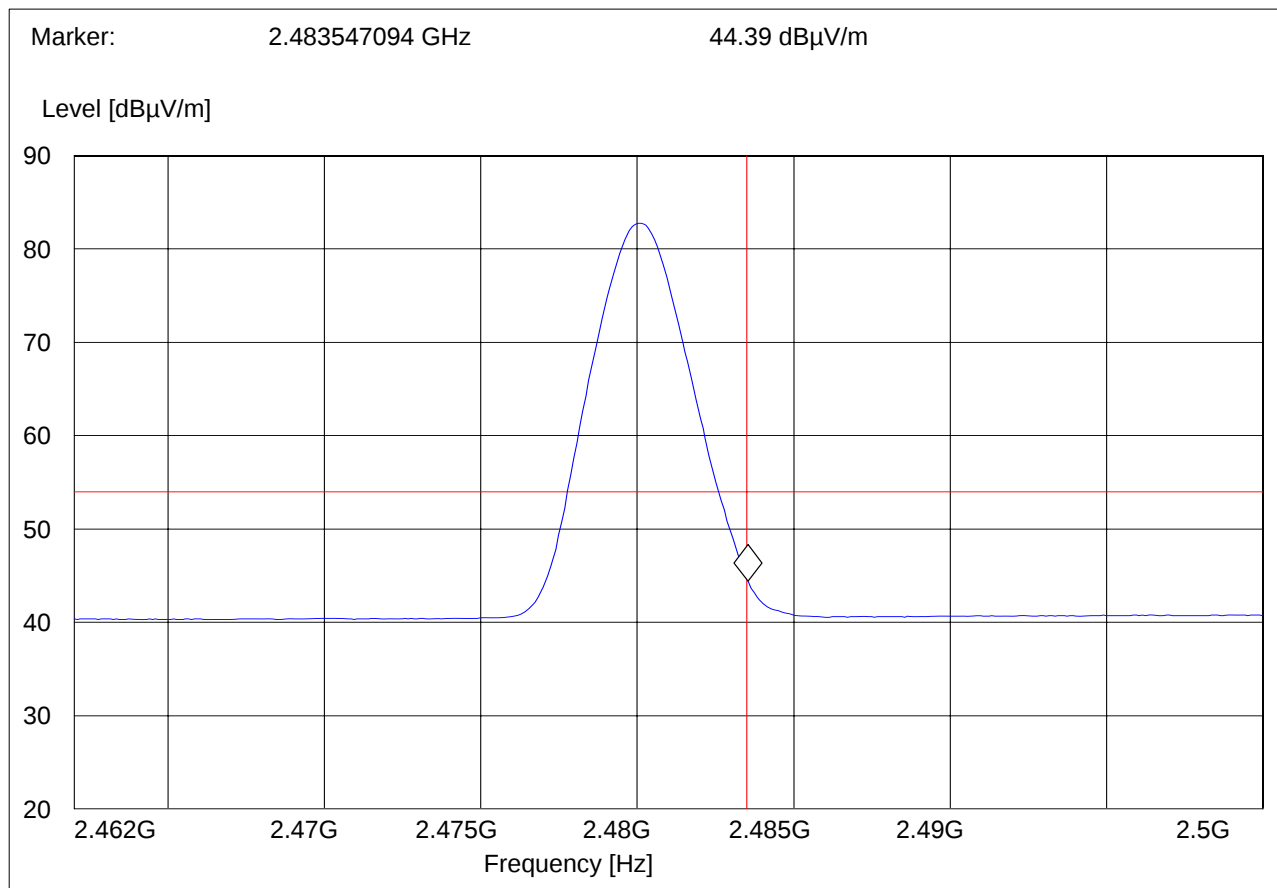


5.2.3 RESULTS: $\pi/4$ DQPSK (2402MHz) LOWER BAND EDGE PEAK - $\pi/4$ DQPSK MODULATION

EUT: Xpressway Bluetooth Headset
Customer:: VXI Corp.
Test Mode: BT GFSK Ch. 0
ANT Orientation: V
EUT Orientation: V
Test Engineer: Ahmad
Voltage: AC Adapter & Battery
Comments:

SWEEP TABLE: "FCC15.247 LBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.3 GHz	2.4 GHz	MaxPeak MaxPeak	Coupled	1 MHz	#326horn_AF_vert

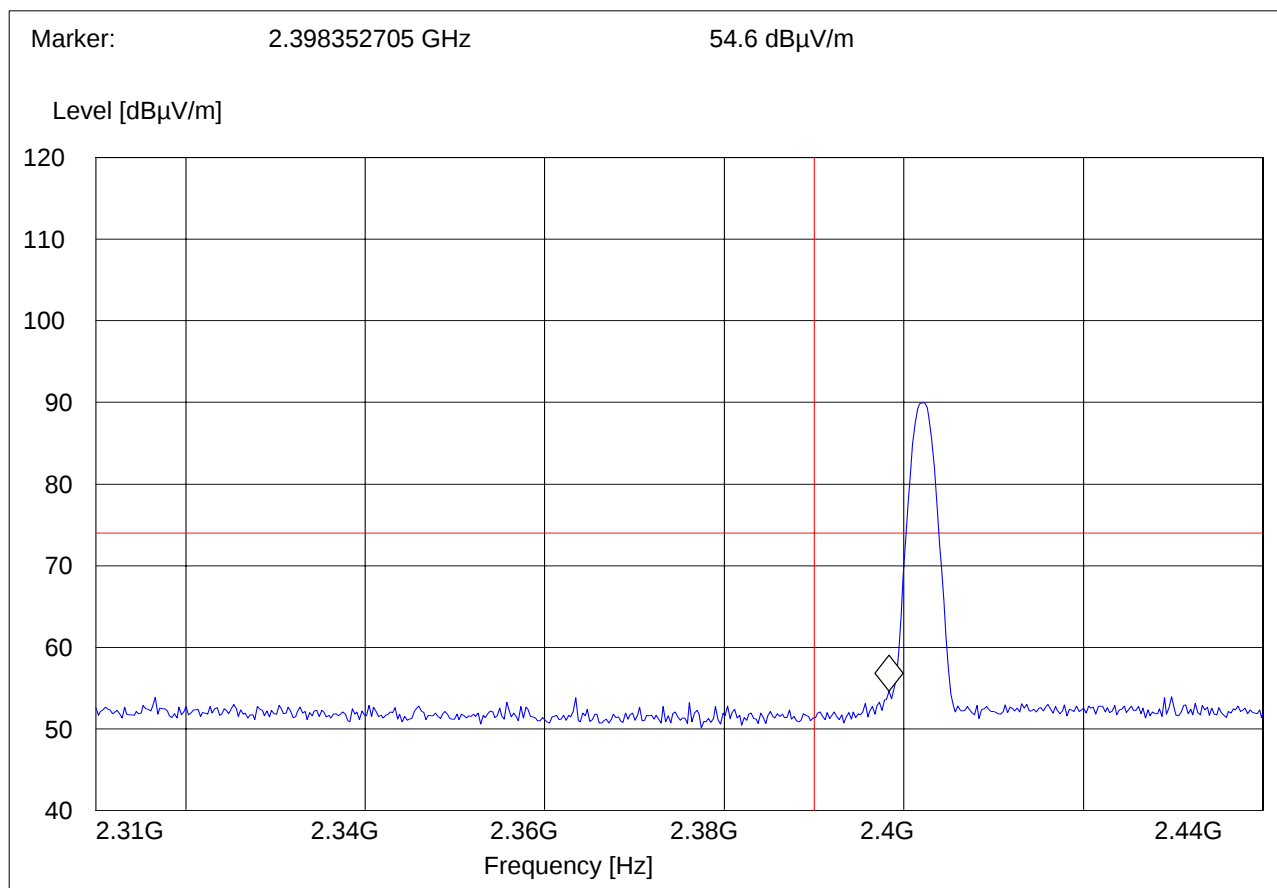


(2402MHz) LOWER BAND EDGE AVERAGE - $\pi/4$ DQPSK MODULATION

EUT: Xpressway Bluetooth Headset
Customer:: VXI Corp.
Test Mode: BT GFSK Ch. 0
ANT Orientation: V
EUT Orientation: V
Test Engineer: Ahmad
Voltage: AC Adapter & Battery
Comments:

SWEEP TABLE: "FCC15.247 LBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

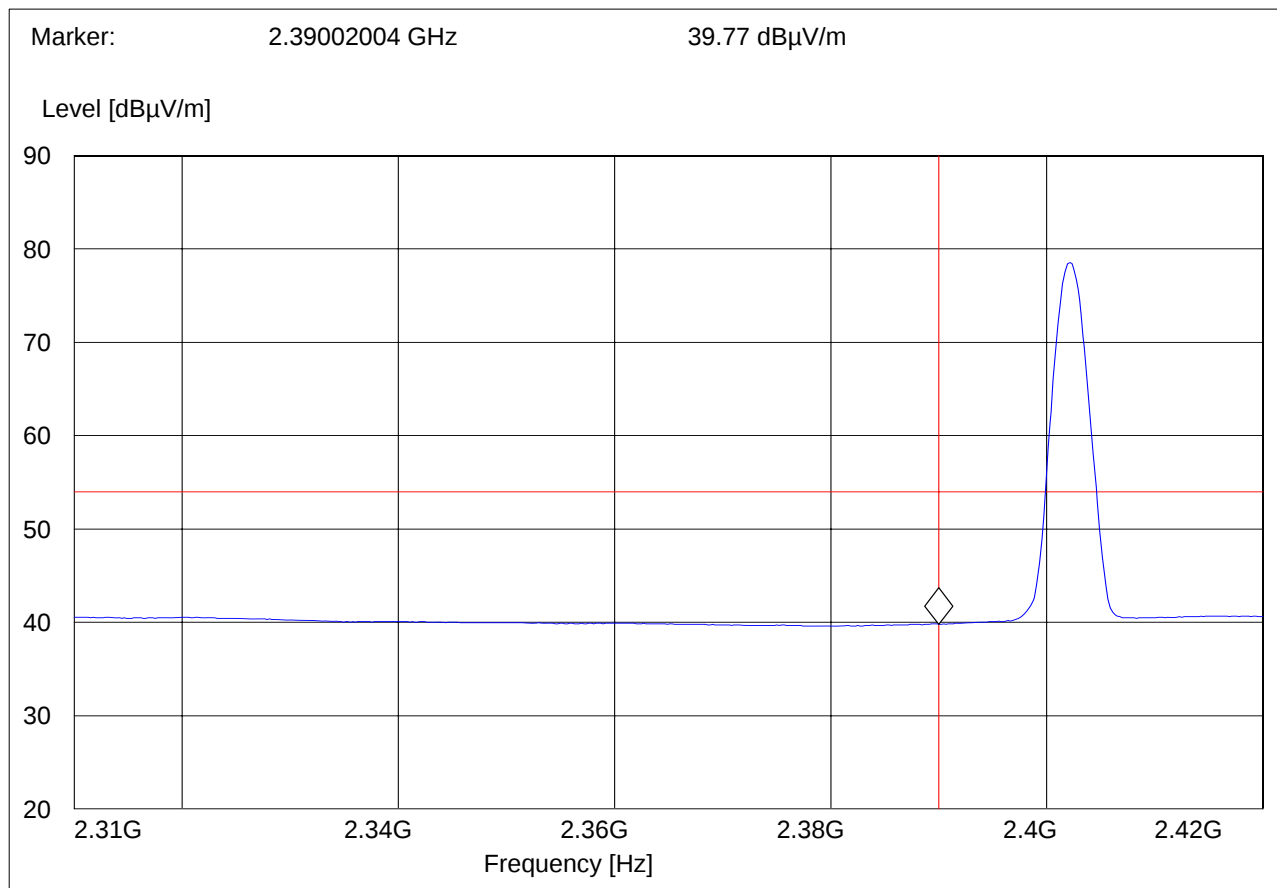


(2480MHz) HIGHER BAND EDGE PEAK - $\pi/4$ DQPSK MODULATION

EUT: Xpressway Bluetooth Headset
Customer:: VXI Corp.
Test Mode: BT DQPSK Ch. 78
ANT Orientation: V
EUT Orientation: V
Test Engineer: Ahmad
Voltage: AC Adapter & Battery
Comments:

SWEEP TABLE: "FCC15.247 HBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.45 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert
		MaxPeak			

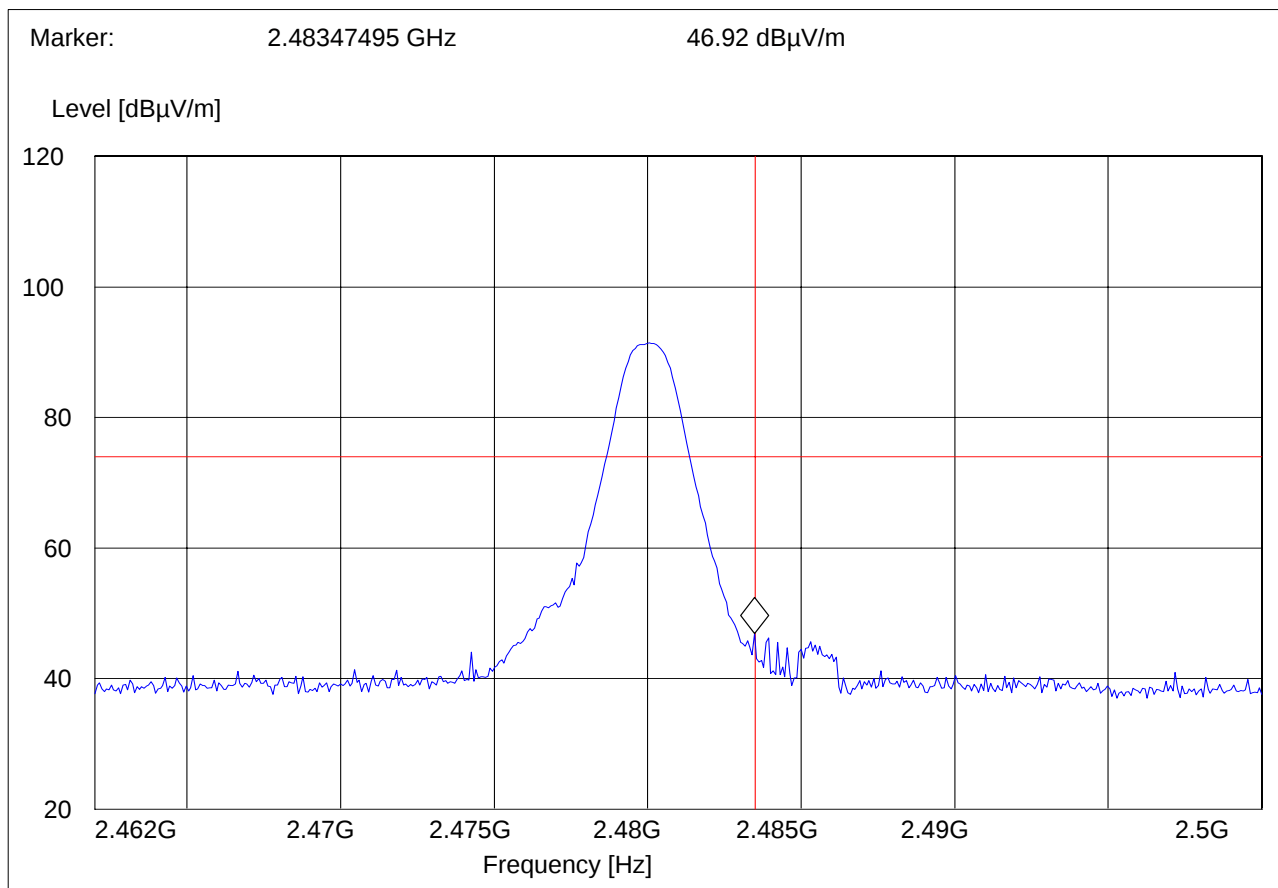


(2480MHz) HIGHER BAND EDGE AVERAGE- $\pi/4$ DQPSK MODULATION

EUT: Xpressway Bluetooth Headset
Customer:: VXI Corp.
Test Mode: BT DQPSK Ch. 78
ANT Orientation: V
EUT Orientation: V
Test Engineer: Ahmad
Voltage: AC Adapter & Battery
Comments:

SWEEP TABLE: "FCC15.247 HBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.45 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

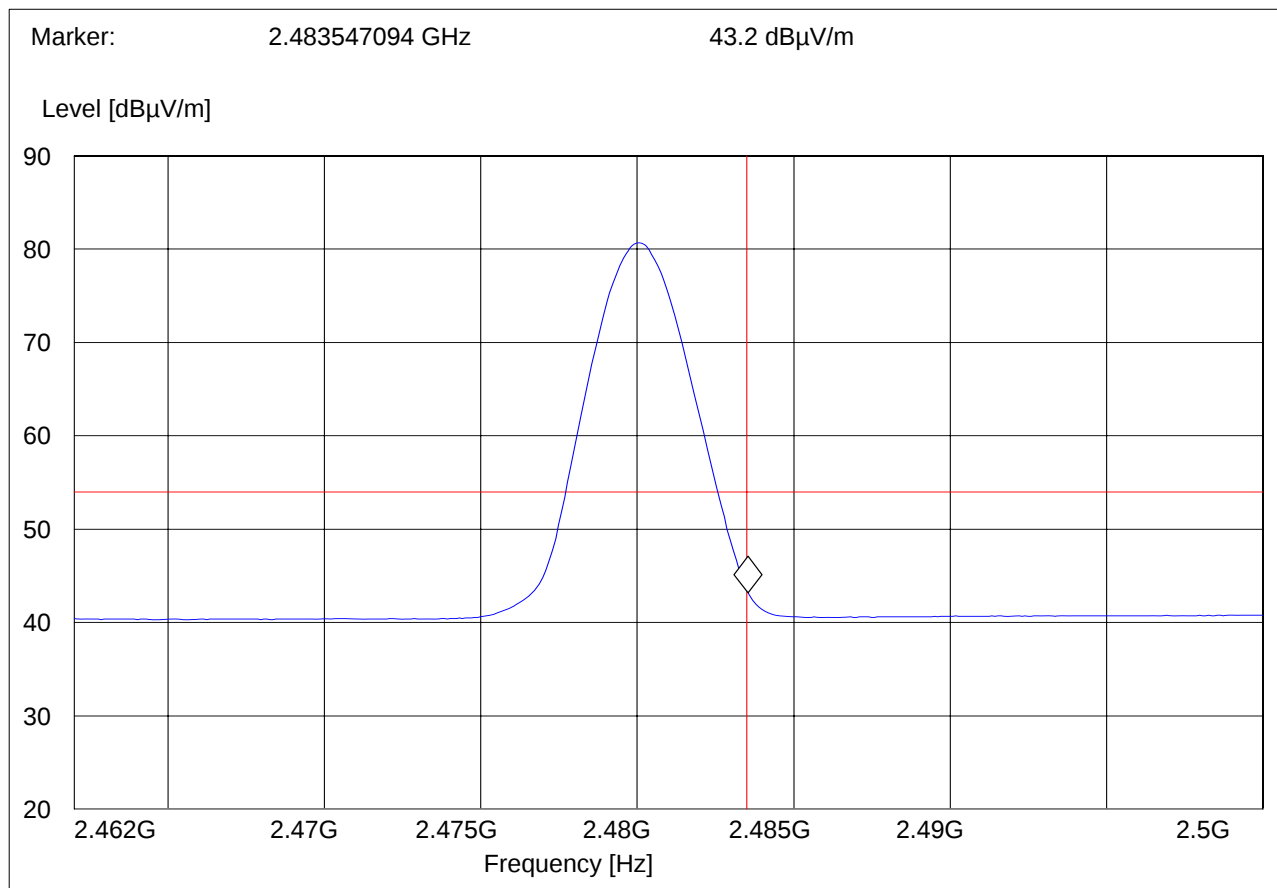


5.2.4 RESULTS: 8DPSK (2402MHz) LOWER BAND EDGE PEAK - 8DPSK MODULATION

EUT: Xpressway Bluetooth Headset
Customer:: VXI Corp.
Test Mode: BT 8DPSK Ch. 0
ANT Orientation: V
EUT Orientation: V
Test Engineer: Ahmad
Voltage: AC Adapter & Battery
Comments:

SWEEP TABLE: "FCC15.247 LBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.3 GHz	2.4 GHz	MaxPeak MaxPeak	Coupled	1 MHz	#326horn_AF_vert

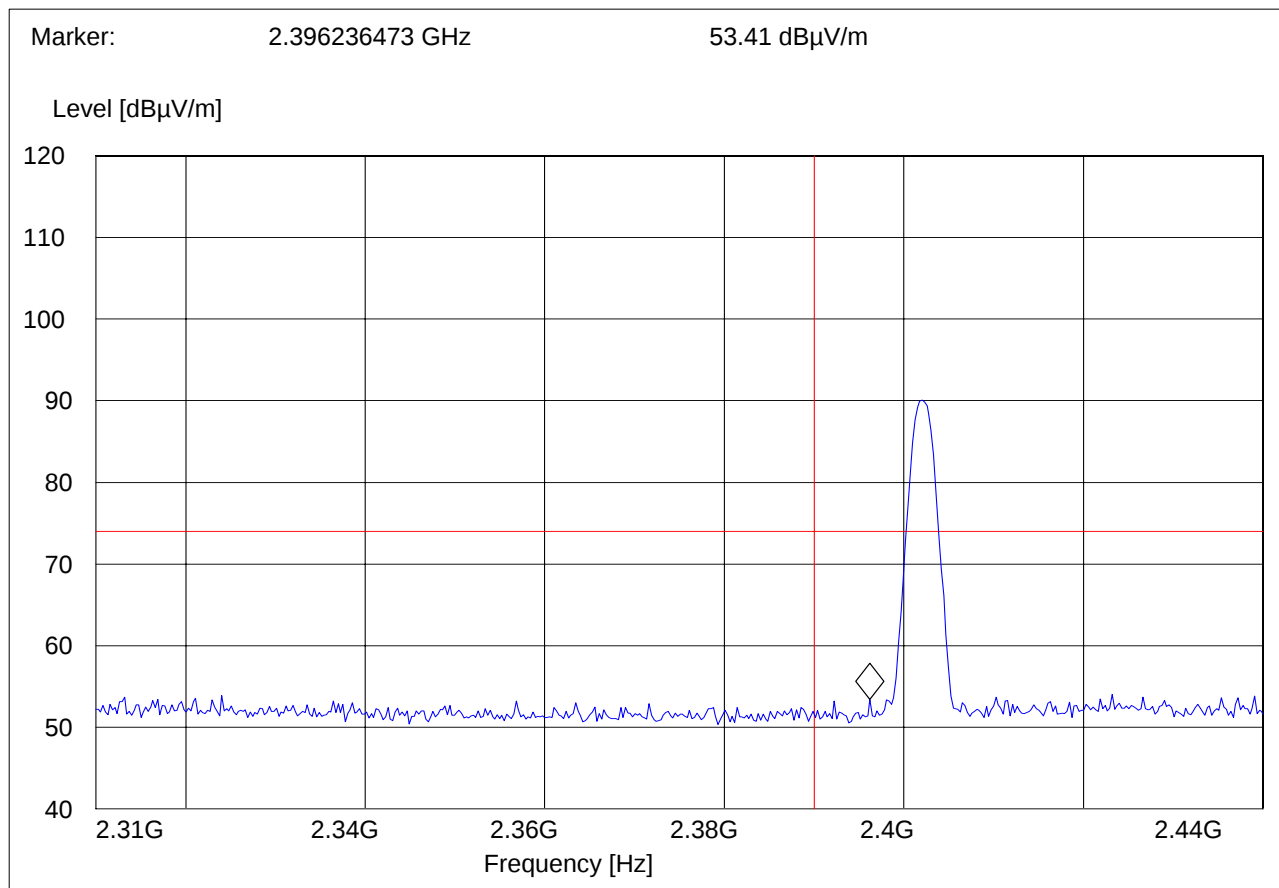


(2402MHz) LOWER BAND EDGE AVERAGE -8DPSK MODULATION

EUT: Xpressway Bluetooth Headset
Customer:: VXI Corp.
Test Mode: BT 8DPSK Ch. 0
ANT Orientation: V
EUT Orientation: V
Test Engineer: Ahmad
Voltage: AC Adapter & Battery
Comments:

SWEEP TABLE: "FCC15.247 LBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

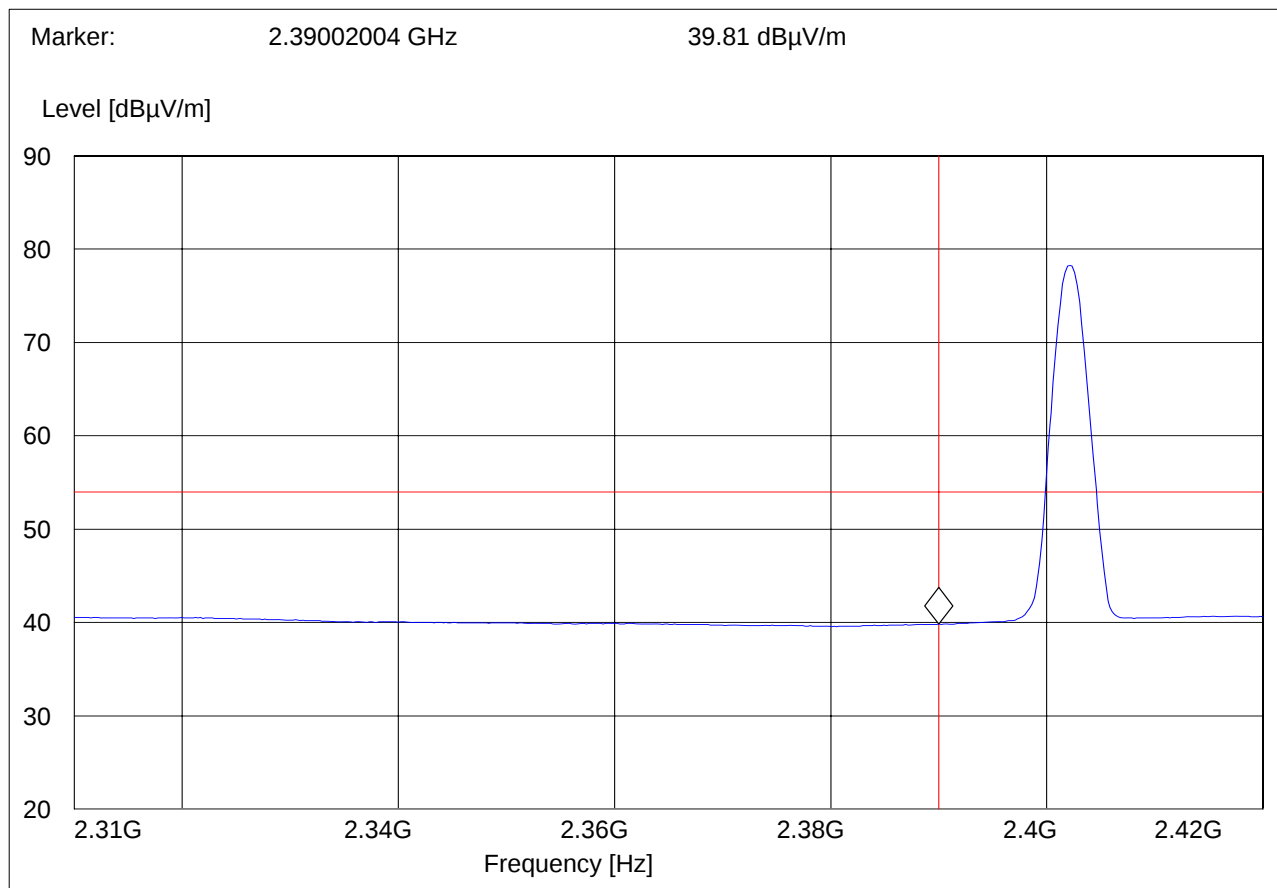


(2480MHz) HIGHER BAND EDGE PEAK - 8DPSK MODULATION

EUT: Xpressway Bluetooth Headset
Customer:: VXI Corp.
Test Mode: BT 8DPSK Ch. 78
ANT Orientation: V
EUT Orientation: V
Test Engineer: Ahmad
Voltage: AC Adapter & Battery
Comments:

SWEEP TABLE: "FCC15.247 HBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.45 GHz	2.5 GHz	MaxPeak MaxPeak	Coupled	1 MHz	#326horn_AF_vert

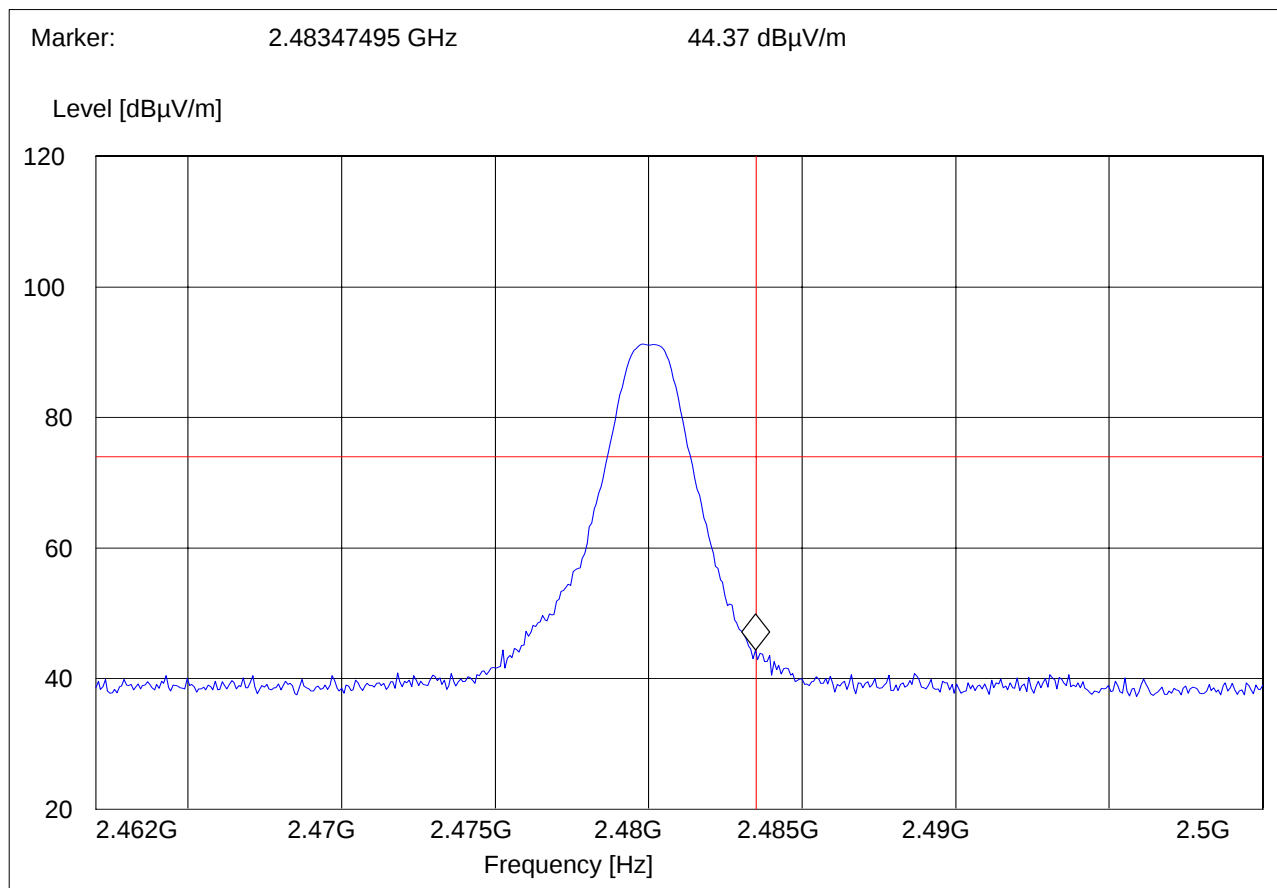


(2480MHz) HIGHER BAND EDGE AVERAGE-8DPSK MODULATION

EUT: Xpressway Bluetooth Headset
Customer:: VXI Corp.
Test Mode: BT 8DPSK Ch. 78
ANT Orientation: V
EUT Orientation: V
Test Engineer: Ahmad
Voltage: AC Adapter & Battery
Comments:

SWEEP TABLE: "FCC15.247 HBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.45 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

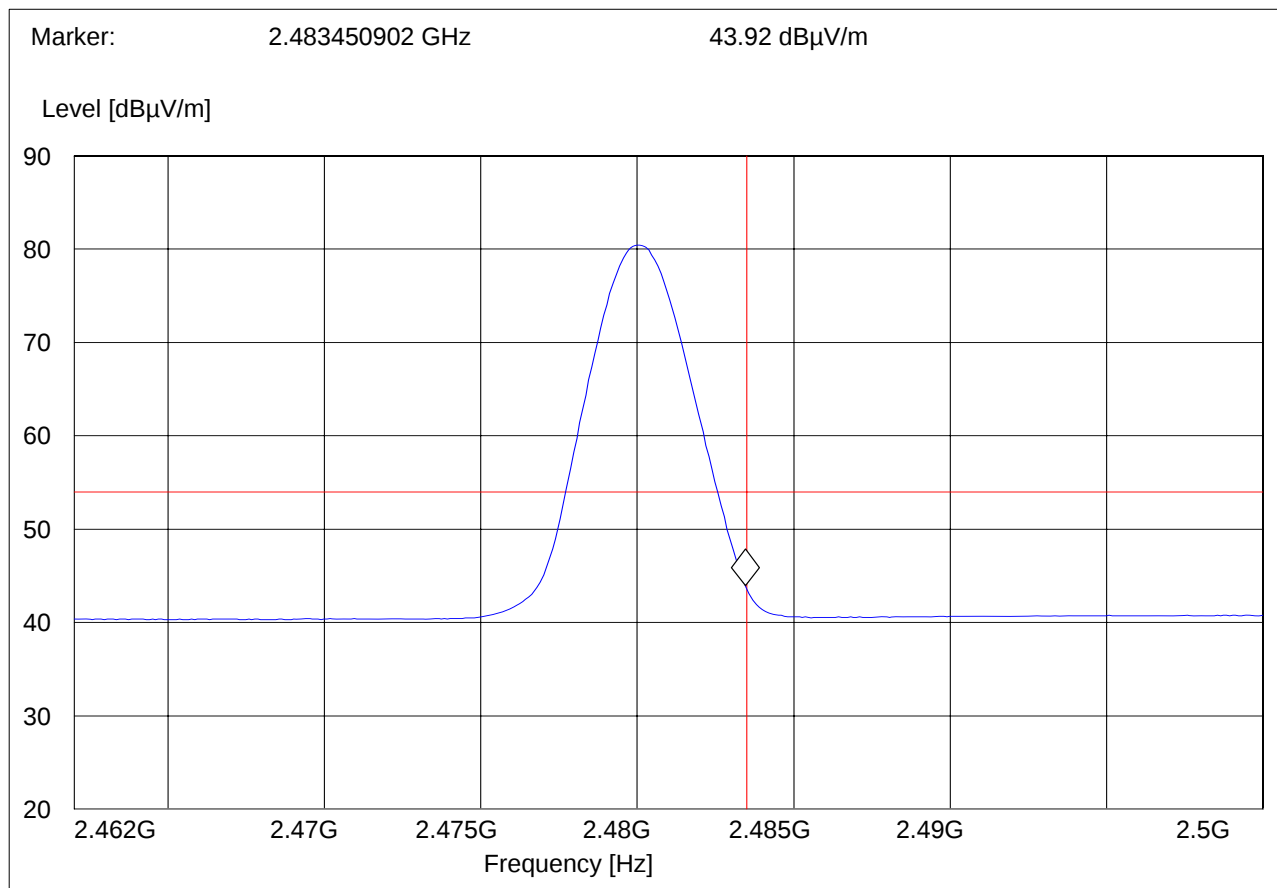

5.3 TRANSMITTER SPURIOUS EMISSIONS RADIATED § 15.247/15.205/15.209

5.3.1 LIMITS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

*PEAK LIMIT= 74dBuV/m

*AVG. LIMIT= 54dBuV/m

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.

2. All measurements are done in peak mode using an average limit , unless specified with the plots.

Results for the radiated measurements below 30MHz according § 15.33

Frequency	Measured values	Remarks
9KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested channels

5.3.2 RESULTS

30MHz – 1GHz


Antenna: Vertical

Note: Worse case representation for all channels.

EUT: Xpressway Bluetooth Headset
Customer:: VXI CORPORATION
Test Mode: BT GFSK CH.0
ANT Orientation: V
EUT Orientation: V
Test Engineer: SAM
Voltage: AC Adapter + BATTERY
Comments:

SWEEP TABLE: "FCC15.247_30M-1G_Ver"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

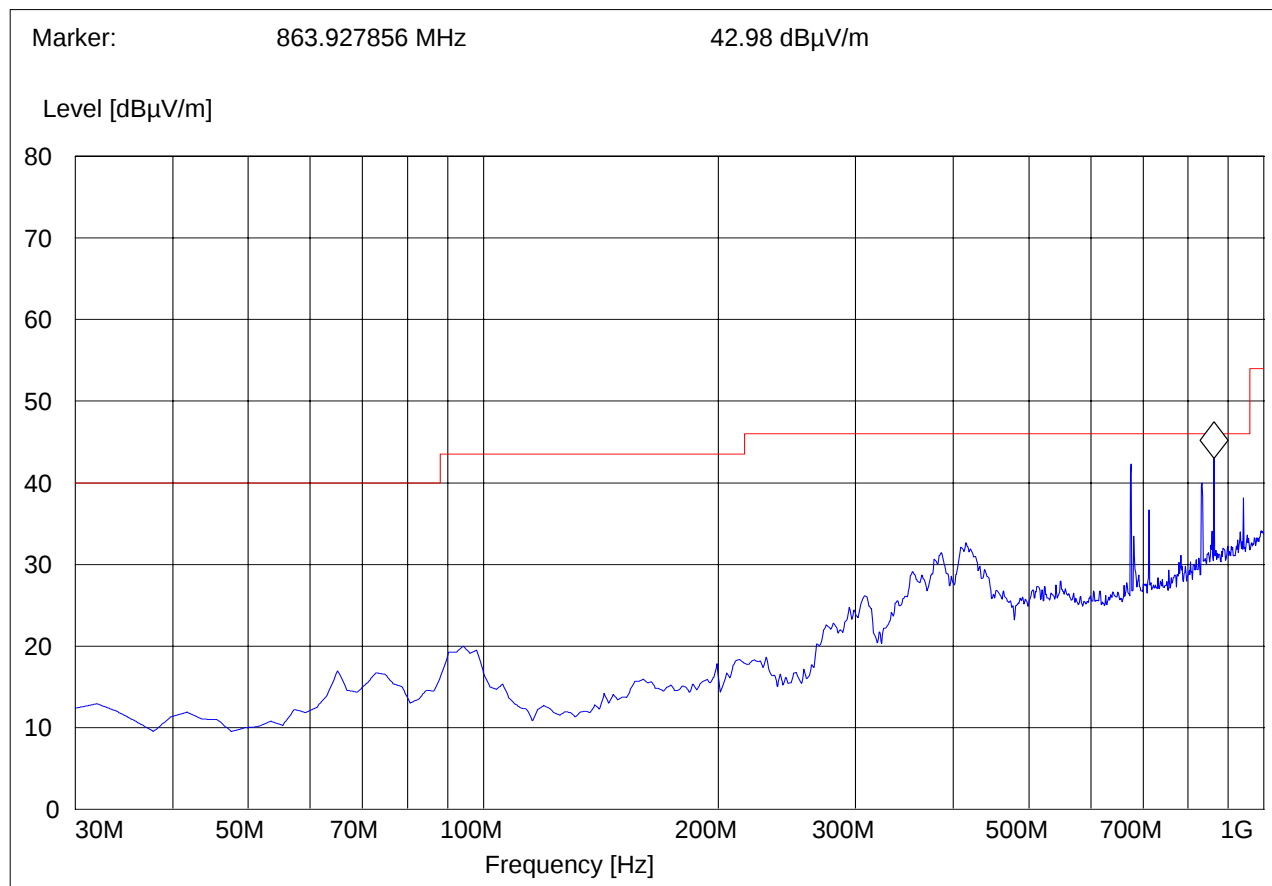

30MHz – 1GHz


Antenna: Horizontal

Note: Worse case representation for all channels.

EUT: Xpressway Bluetooth Headset
Customer:: VXI CORPORATION
Test Mode: BT 8DPSK CH.78
ANT Orientation: H
EUT Orientation: V
Test Engineer: SAM
Voltage: AC Adapter + BATTERY
Comments:

SWEEP TABLE: "FCC15.247_30M-1G_Hor"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horz

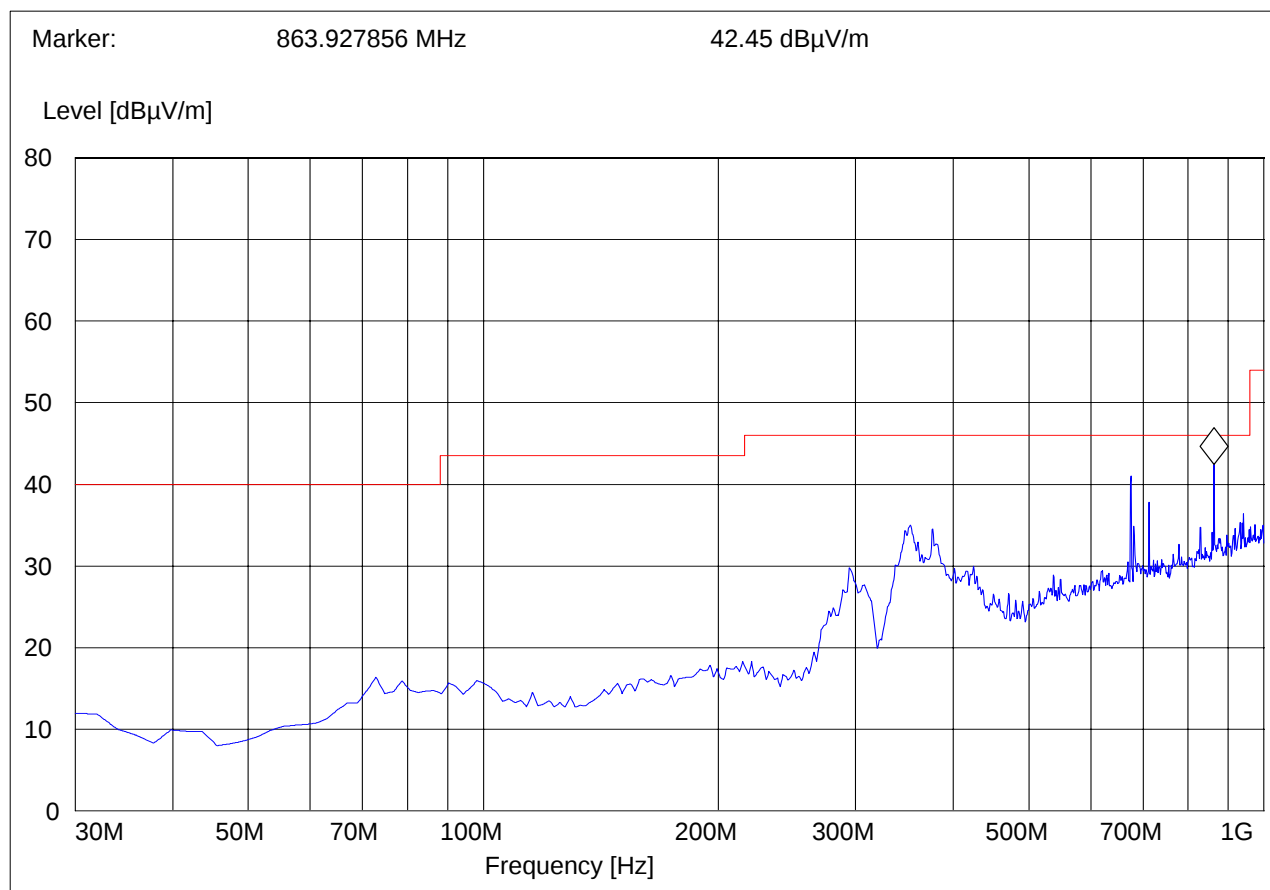

1-3GHz (2402MHz)


Note: The peak above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

EUT: Xpressway Bluetooth Headset
Customer:: VXI CORPORATION
Test Mode: BT ch 0
ANT Orientation: V
EUT Orientation: V
Test Engineer: Ahmad
Voltage: AC Adapter & Battery
Comments:

SWEEP TABLE: "FCC15.247_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

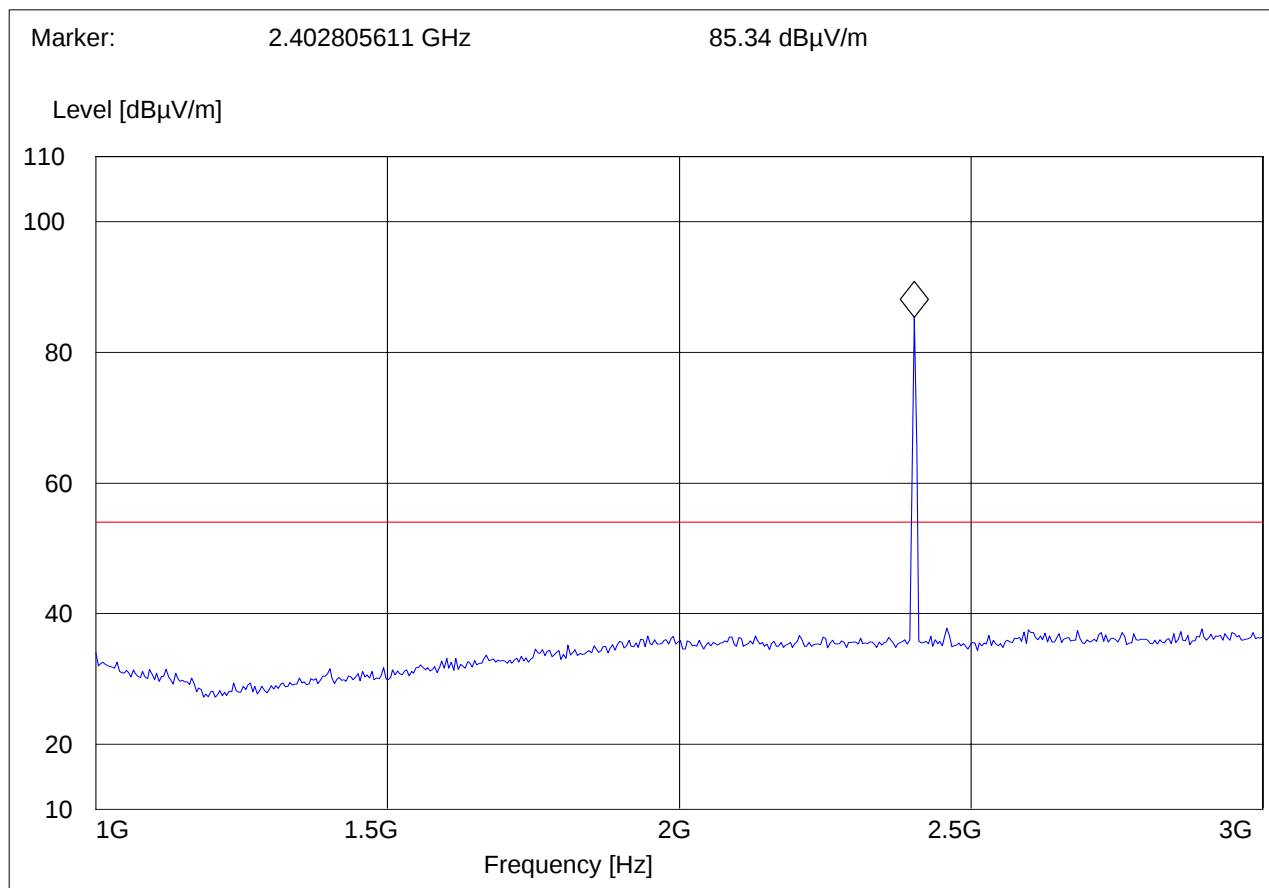

1-3GHz (2441MHz)


Note: The peaks above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

EUT: Xpressway Bluetooth Headset
Customer:: VXI CORPORATION
Test Mode: BT DQPSK CH.39
ANT Orientation: V
EUT Orientation: V
Test Engineer: SAM
Voltage: AC Adapter + BATTERY
Comments:

SWEEP TABLE: "FCC15.247_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

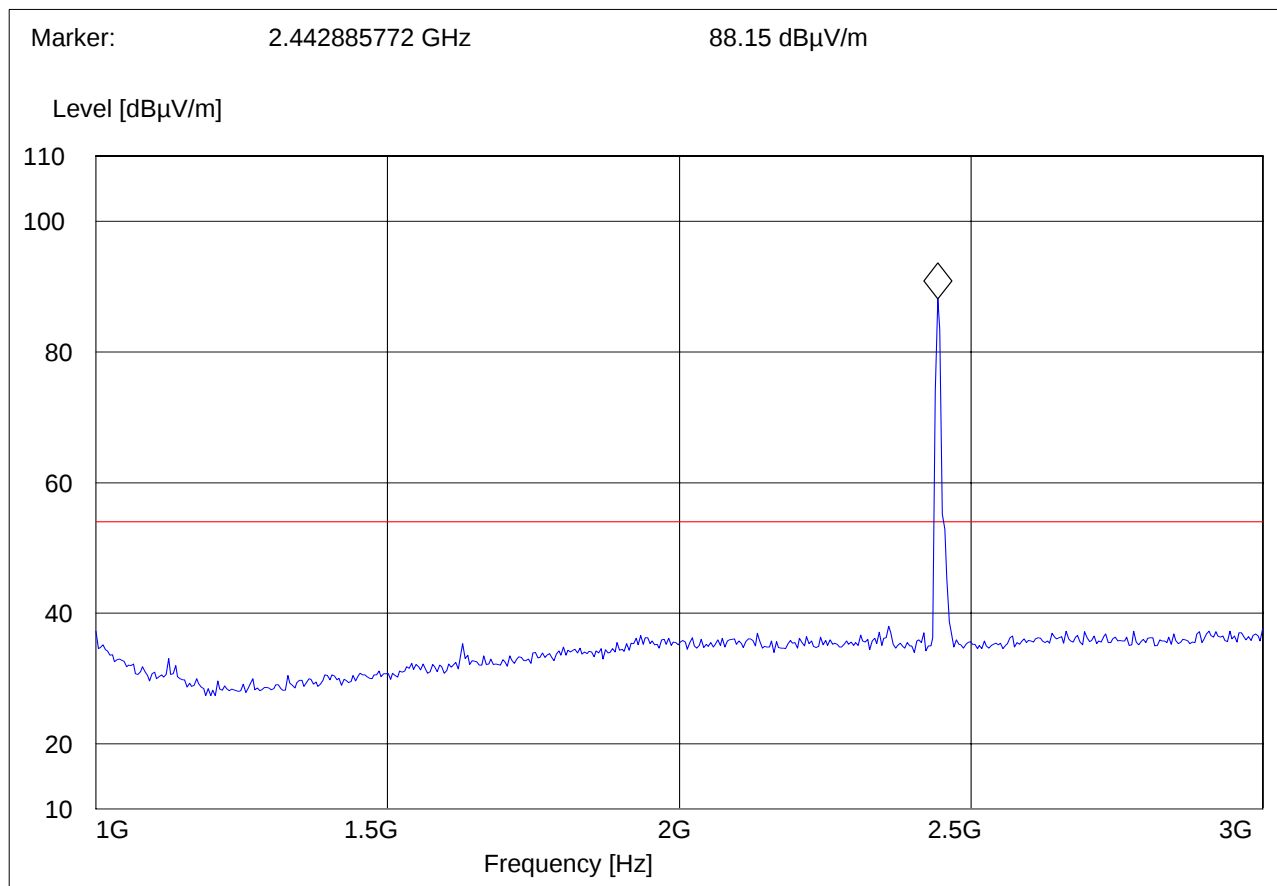

1-3GHz (2480MHz)


Note: The peaks above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

EUT: Xpressway Bluetooth Headset
Customer:: VXI CORPORATION
Test Mode: BT DQPSK CH.78
ANT Orientation: V
EUT Orientation: V
Test Engineer: SAM
Voltage: AC Adapter + BATTERY
Comments:

SWEEP TABLE: "FCC15.247_1-3G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

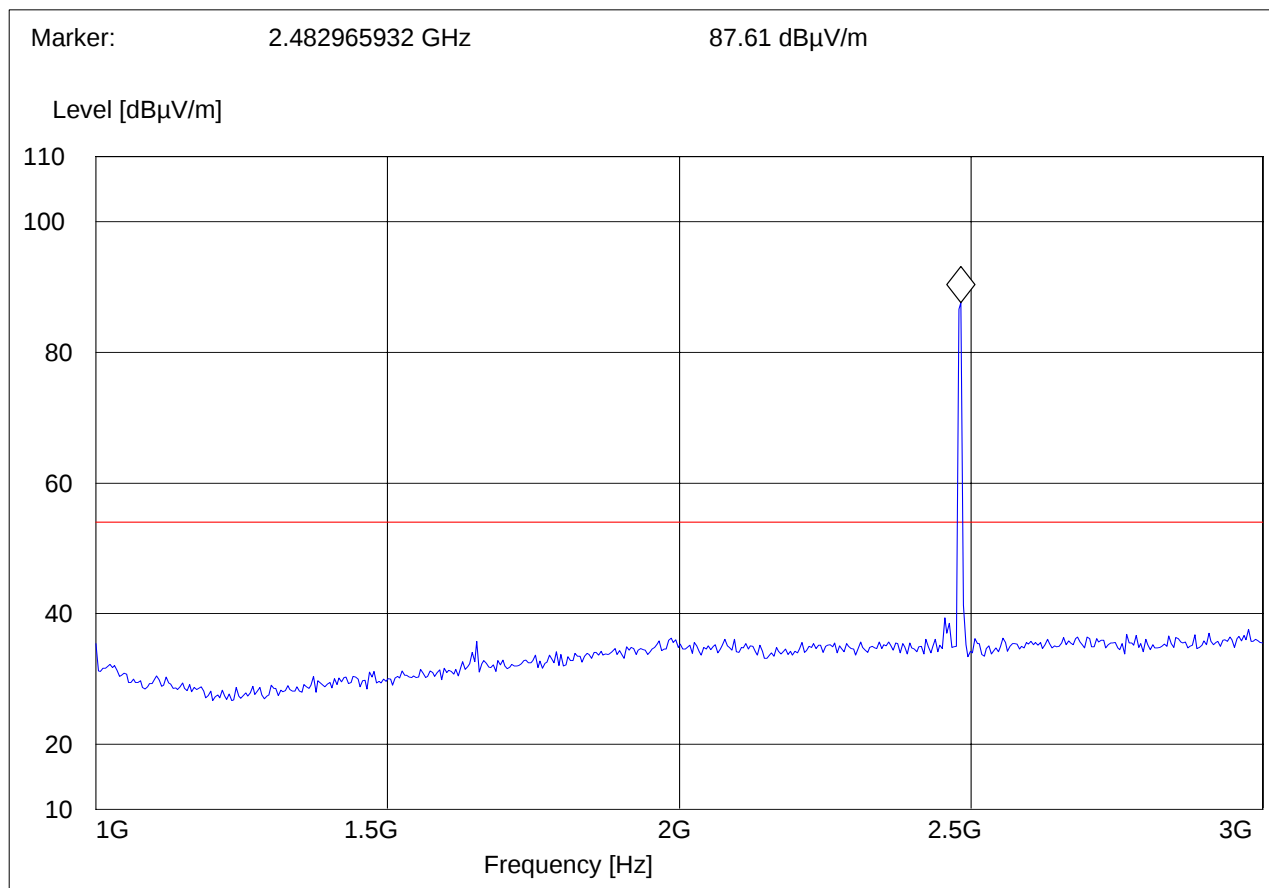


3-18GHz (2402MHz)

Note: Peak Reading vs. Average limit

EUT: Xpressway Bluetooth Headset
Customer:: VXI CORPORATION
Test Mode: BT GFSK ch 0
ANT Orientation: V
EUT Orientation: V
Test Engineer: Ahmad
Voltage: AC Adapter & battery
Comments: Average Peak @ 4.803607214 GHZ is 52.13 dBuV/m

SWEEP TABLE: "FCC15.247_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

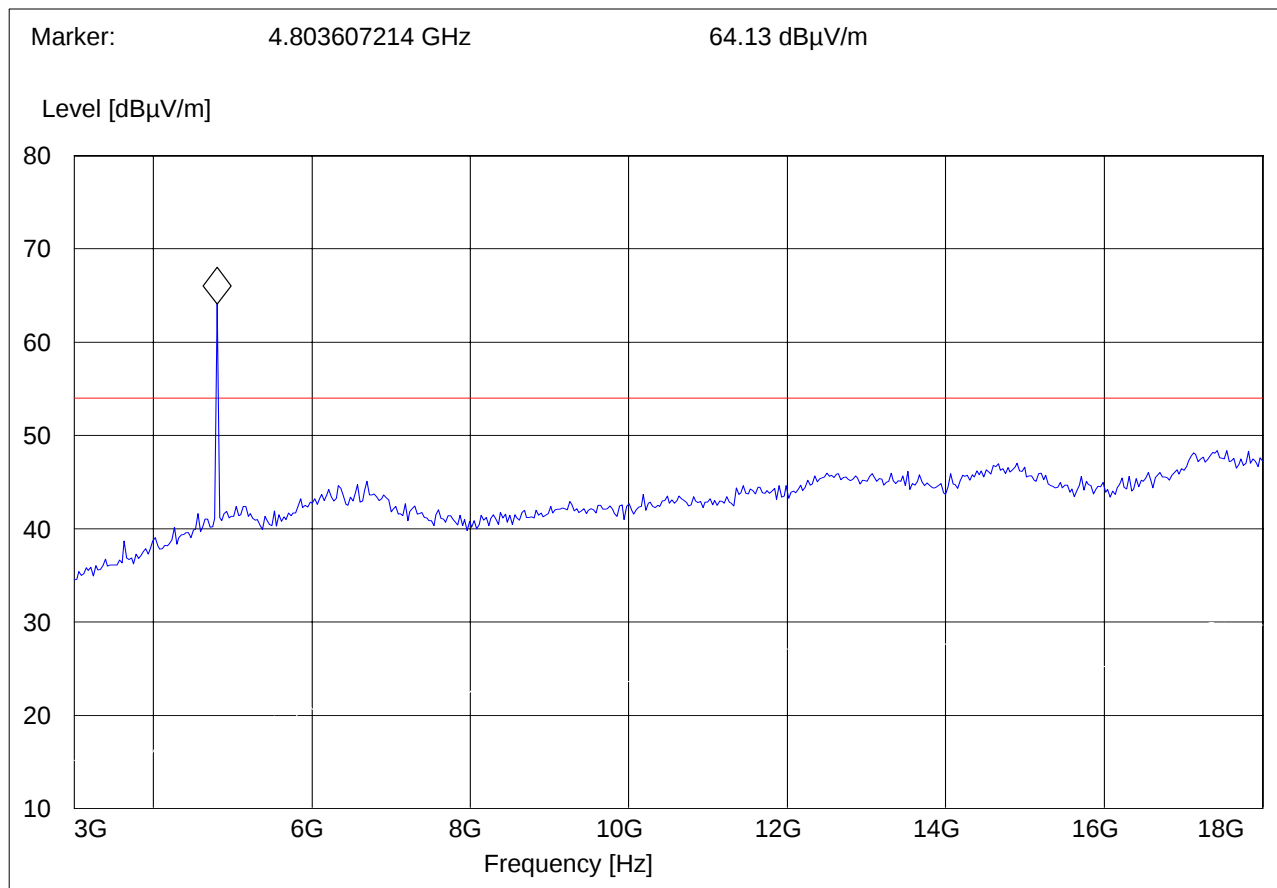


3-18GHz (2441MHz)

Note: Peak Reading vs. Average limit

EUT: Xpressway Bluetooth Headset
Customer:: VXI CORPORATION
Test Mode: BT DQPSK CH 39
ANT Orientation: V
EUT Orientation: V
Test Engineer: Ahmad
Voltage: AC Adapter & Battery
Comments: Average Peak @ 4.863727 GHz is 51.12 dBuV/m

SWEEP TABLE: "FCC15.247_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

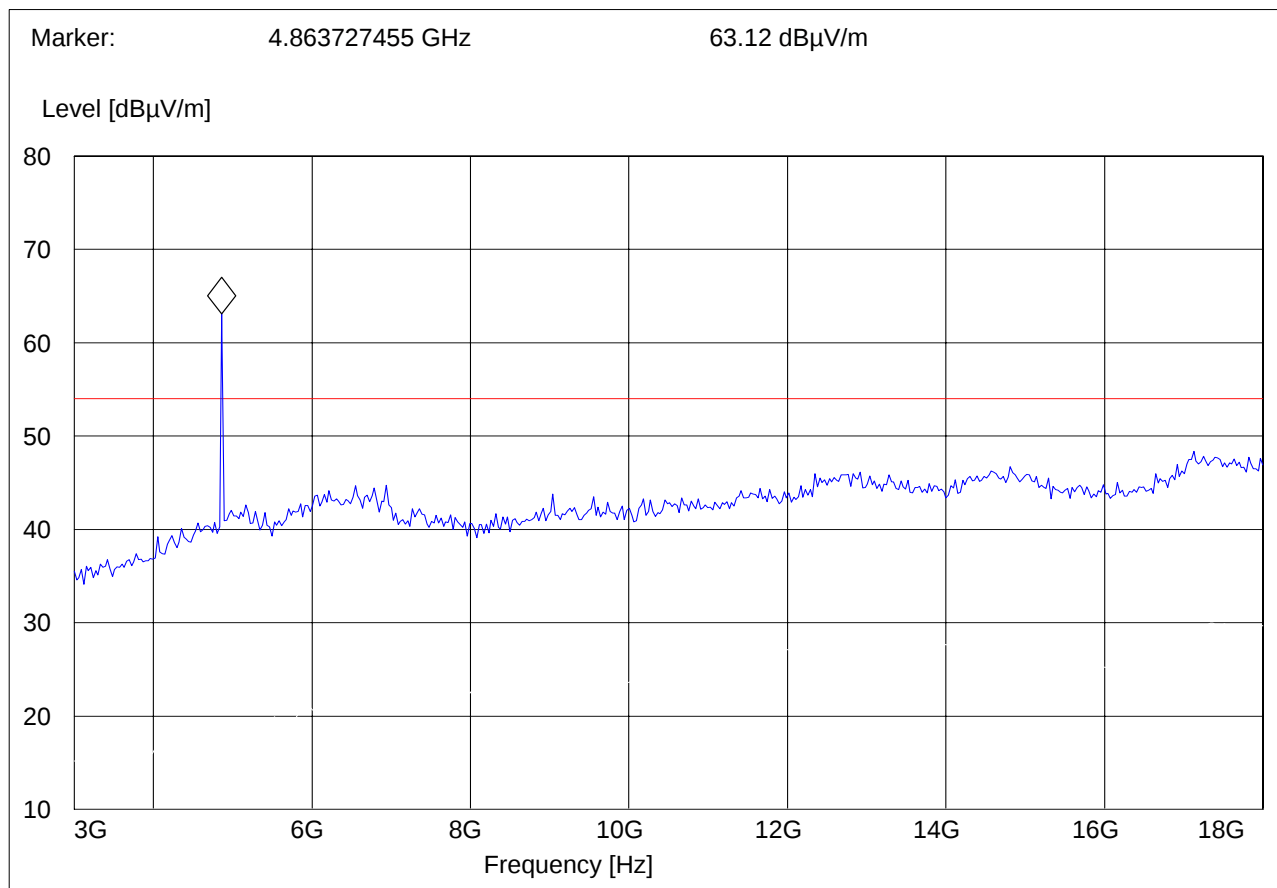


3-18GHz (2480MHz)

Note: Peak Reading vs. Average limit

EUT: Xpressway Bluetooth Headset
Customer:: VXI CORPORATION
Test Mode: BT DQPSK CH78
ANT Orientation: V
EUT Orientation: V
Test Engineer: SAM
Voltage: AC Adapter + BATTERY
Comments: Average Peak @ 4.953907 GHz is 50.27 dBuV/m

SWEEP TABLE: "FCC15.247_3-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

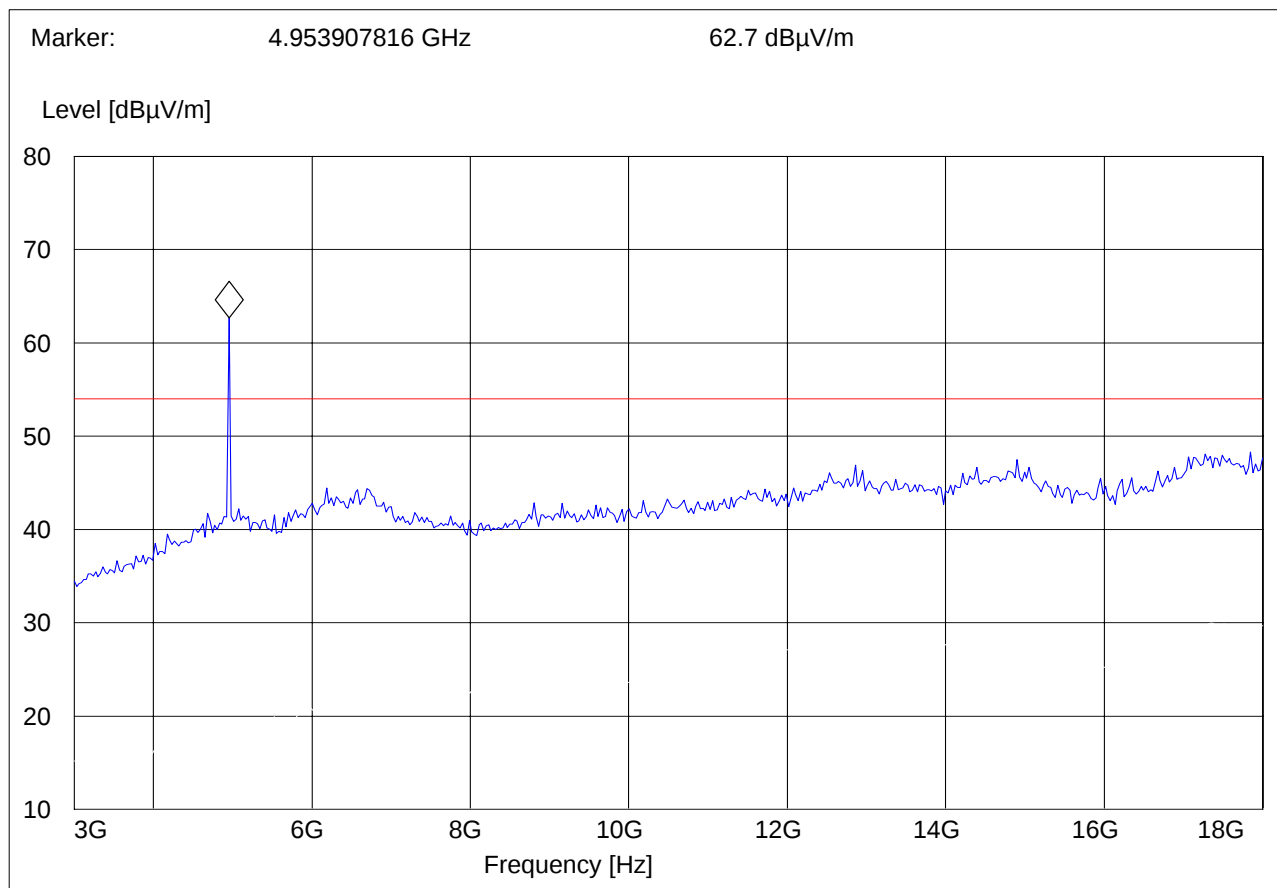

18-25GHz


Note: This plot is valid for low, mid, high channels (worst-case plot)

Note: Peak Reading vs. Average limit

EUT: Xpressway Bluetooth Headset
Customer:: VXI CORPORATION
Test Mode: BT CH39
ANT Orientation: H
EUT Orientation: V
Test Engineer: SAM
Voltage: AC Adapter + BATTERY
Comments:

SWEEP TABLE: "FCC15.247_18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
18.0 GHz	26.5 GHz	MaxPeak MaxPeak	Coupled	100 kHz	Horn # 3116_18-40G

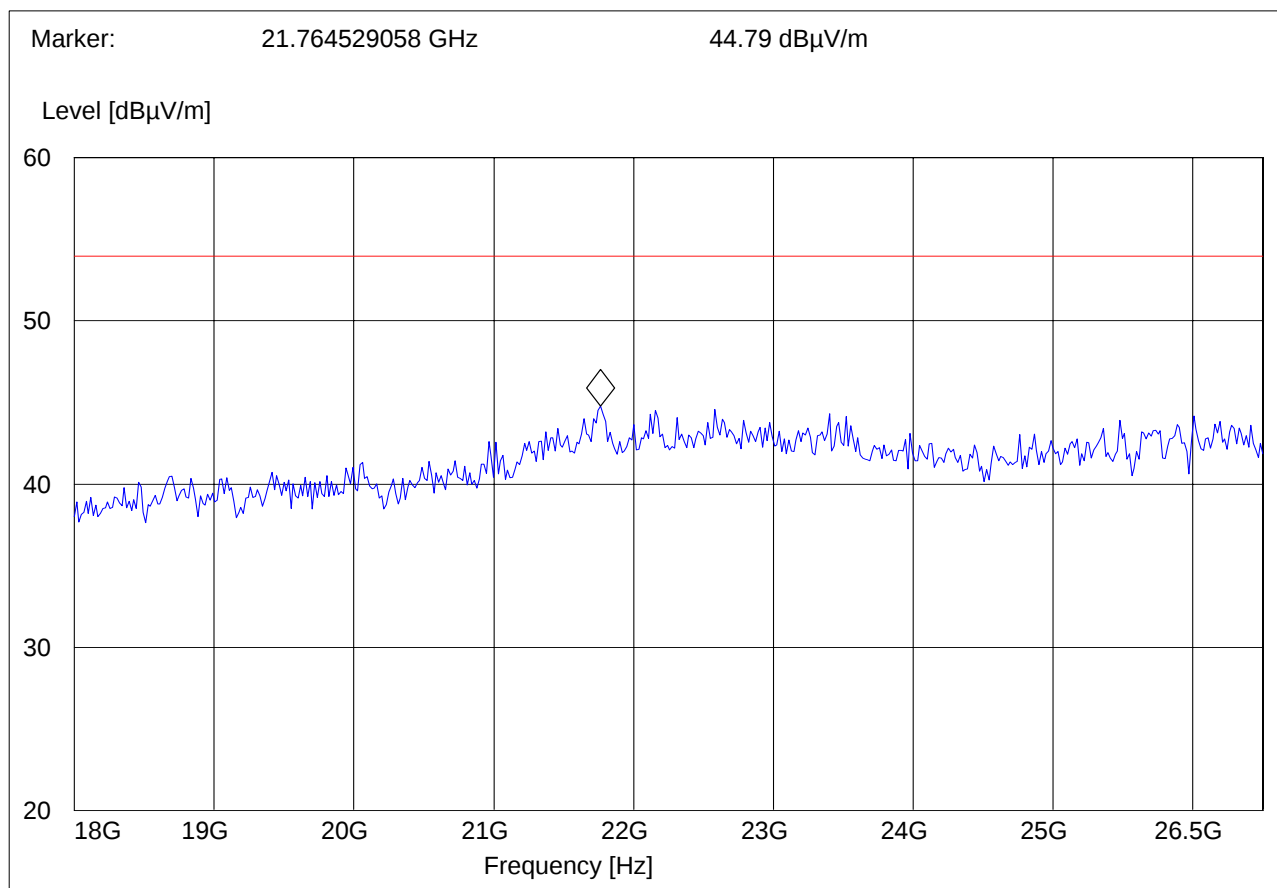

5.4 Receiver Spurious Emission § 2.1053 / RSS-132 & 133

Limits

SUBCLAUSE § RSS-133

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

30-1GHz

Antenna Horizontal


Note: This plot is valid for low, mid, high channels (worst-case plot)

Note: Peak Reading vs. Average limit

EUT: Xpressway Bluetooth Headset
Customer:: VXI CORP
Test Mode: BT RX
ANT Orientation: H
EUT Orientation: V
Test Engineer: SAM
Voltage: AC Adapter + BATTERY
Comments:

SWEEP TABLE: "FCC15.247_30M-1G_Hor"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horz

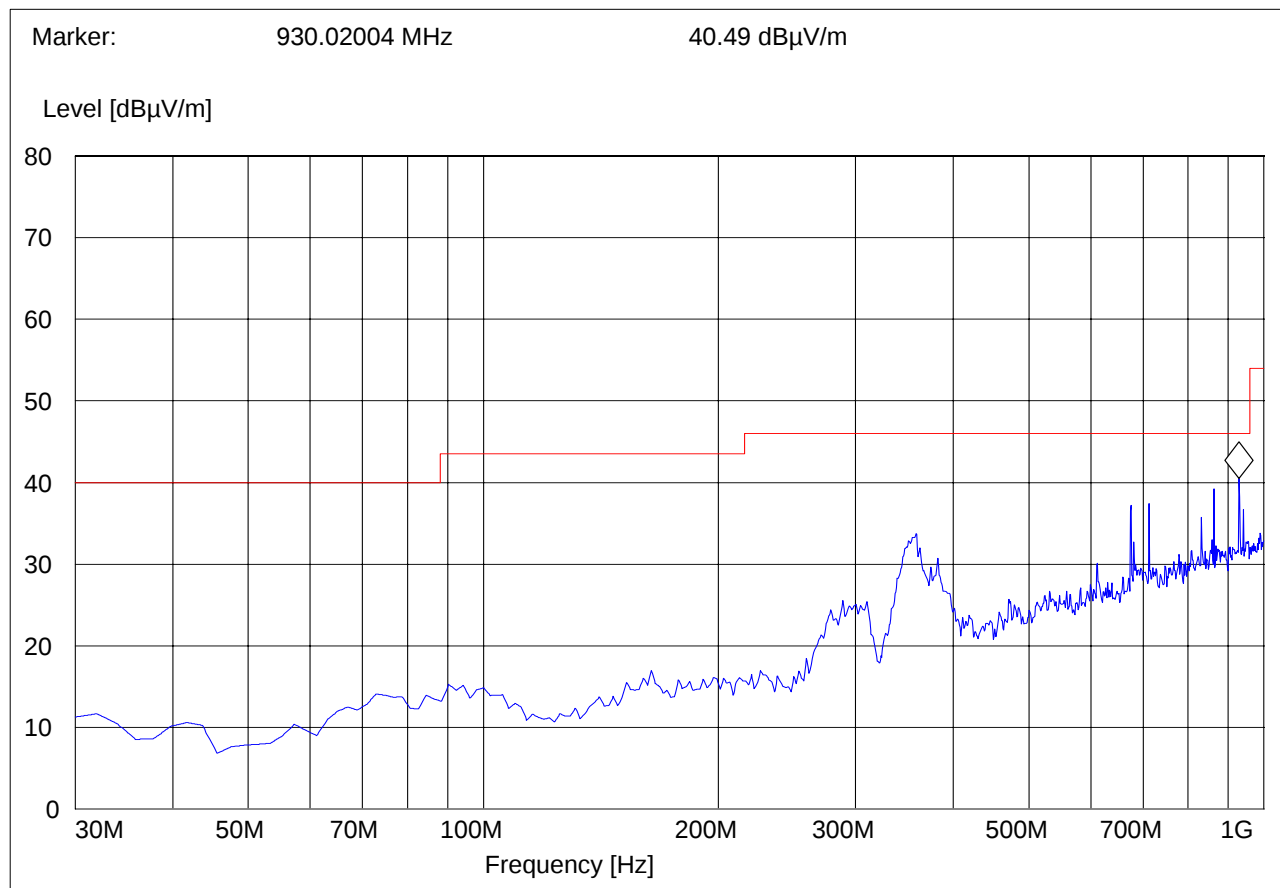

30-1GHz

Antenna: Vertical


Note: This plot is valid for low, mid, high channels (worst-case plot)

Note: Peak Reading vs. Average limit

EUT: Xpressway Bluetooth Headset
Customer:: VXI CORP
Test Mode: BT RX
ANT Orientation: V
EUT Orientation: V
Test Engineer: SAM
Voltage: AC Adapter + BATTERY
Comments:

SWEEP TABLE: "FCC15.247_30M-1G_Ver"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

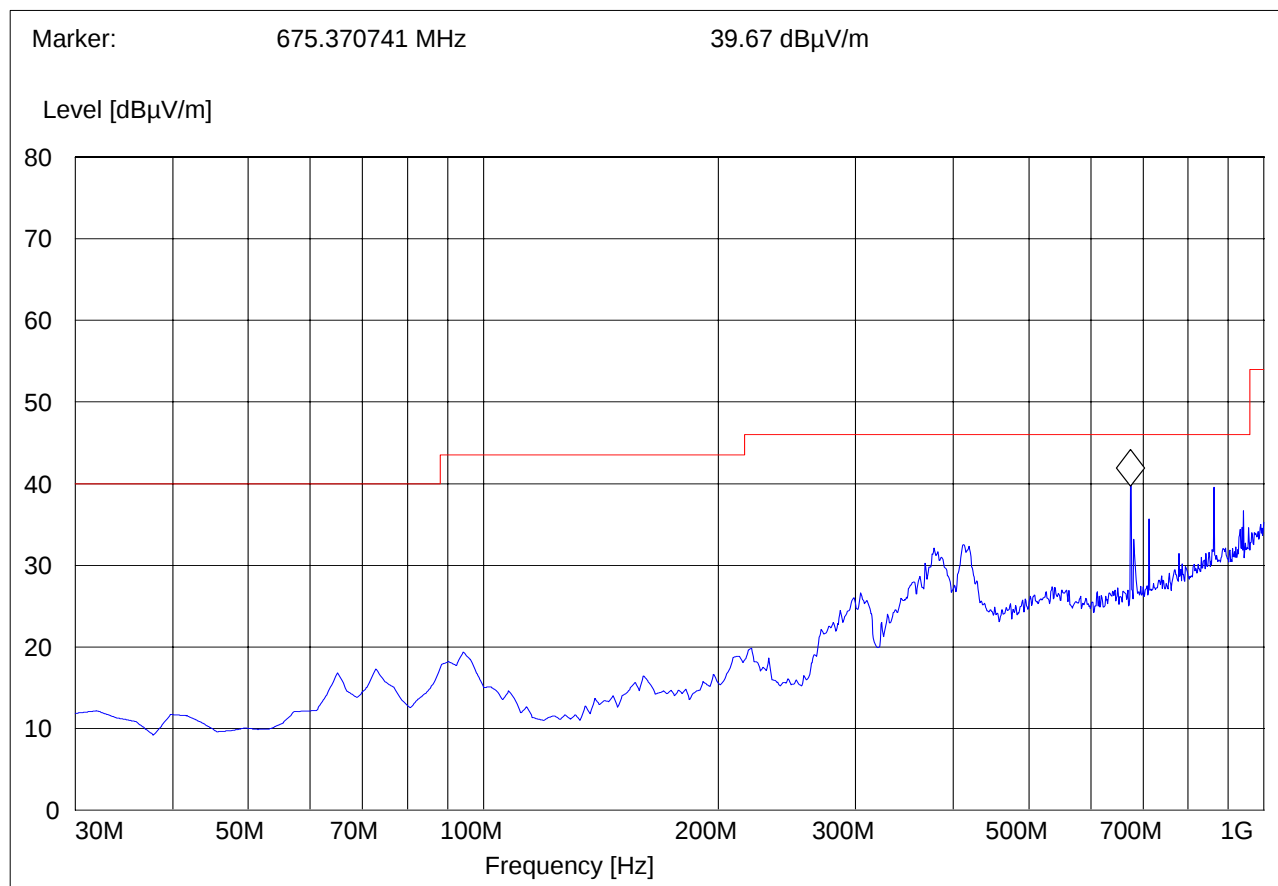

1-18GHz

Antenna: Vertical

Note: This plot is valid for low, mid, high channels (worst-case plot)

Note: Peak Reading vs. Average limit


EUT: Xpressway Bluetooth Headset
Customer: VXI CORP
Operation Mode: BT RX
ANT Orientation: : V
EUT Orientation:: V
Test Engineer: SAM
Voltage: AC Adapter
Comments::

SWEEP TABLE: "FCC15.247_1-18G"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

Marker: 17.114228457 GHz 47.27 dBμV/m

Level [dBμV/m]

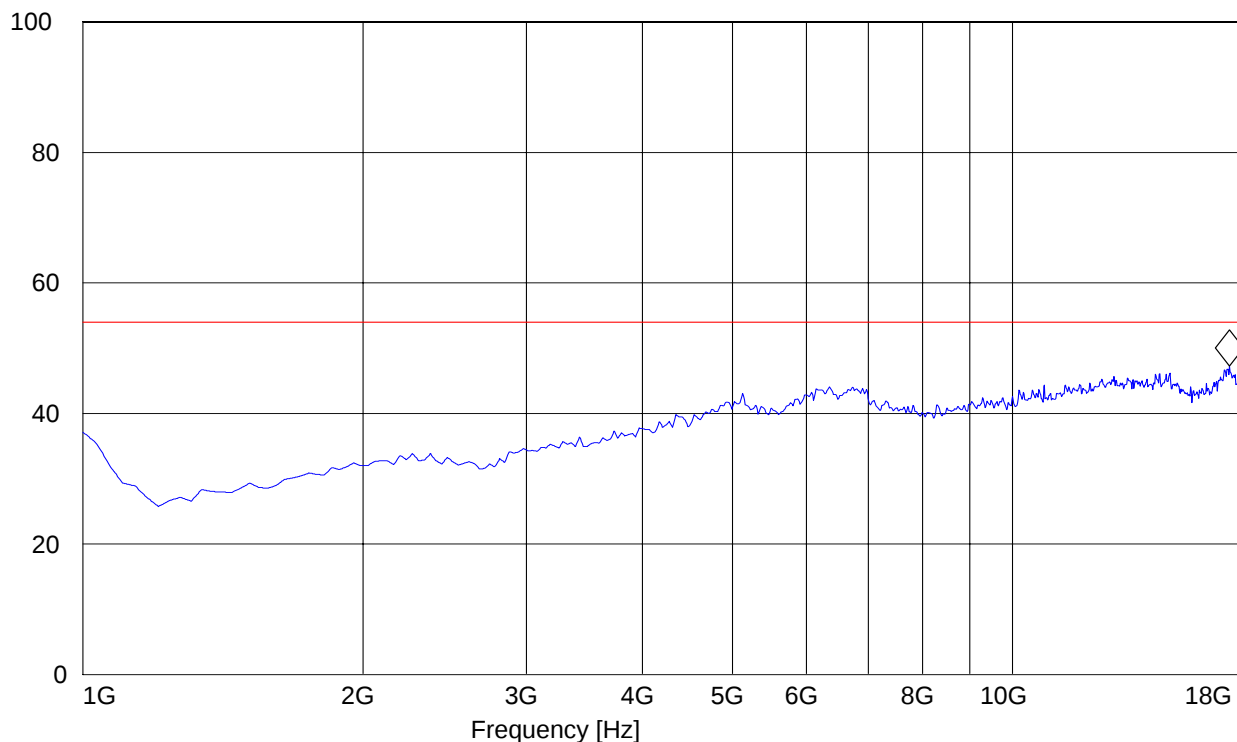

6 Measurements (Conducted)

6.1 MAXIMUM PEAK OUTPUT POWER § 15.247 (CONDUCTED)

6.1.1 LIMIT SUB CLAUSE § 15.247 (b) (1)

Frequency range	RF power output
2400-2483.5 MHz	30dBm

*limit is based upon antenna gain of less than or equal to 6dBi.

6.1.2 RESULTS:

Conducted Peak Power: GFSK

TEST CONDITIONS		Conducted Peak Power (dBm)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom} VDC	1.8	0.6	-0.9
Measurement uncertainty		±0.5dBm		

Conducted Peak Power: $\pi / 4$ DQPSK


TEST CONDITIONS		Conducted Peak Power (dBm)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom} VDC	1.8	0.4	-0.7
Measurement uncertainty		±0.5dBm		

Conducted Peak Power: 8DPSK


TEST CONDITIONS		Conducted Peak Power (dBm)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom} VDC	2.0	0.6	-0.5
Measurement uncertainty		±0.5dBm		

Antenna Gain= Radiated Power- Conducted Power
 Maximum Gain calculated to be 3.03 dBi for GFSK 2480 MHz.


Conducted Peak Power GFSK 2402 MHz

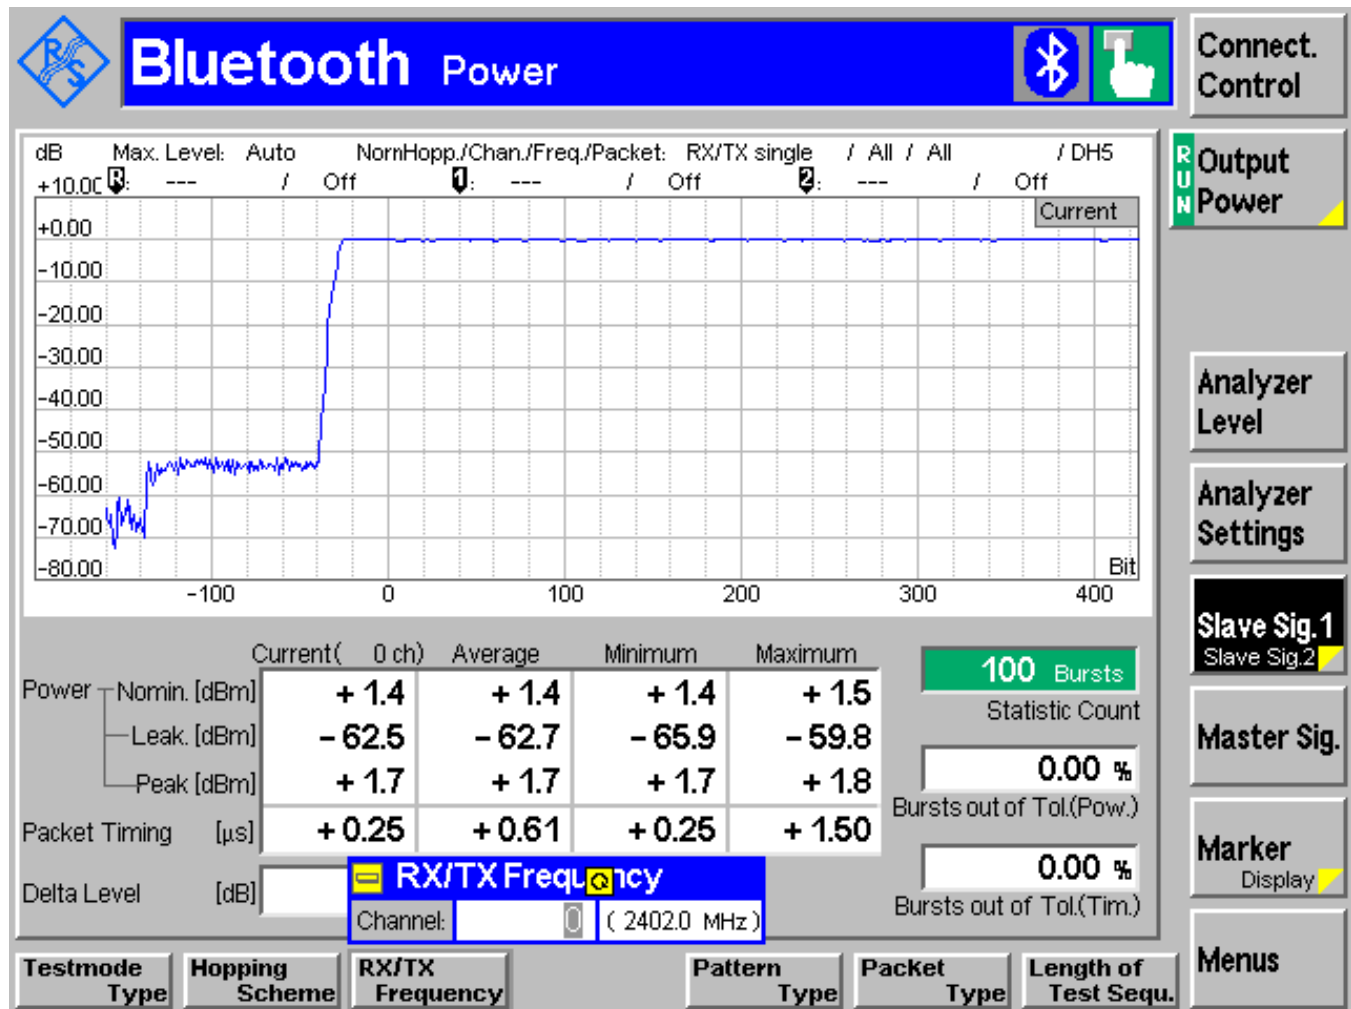


Conducted Peak Power GFSK 2441 MHz

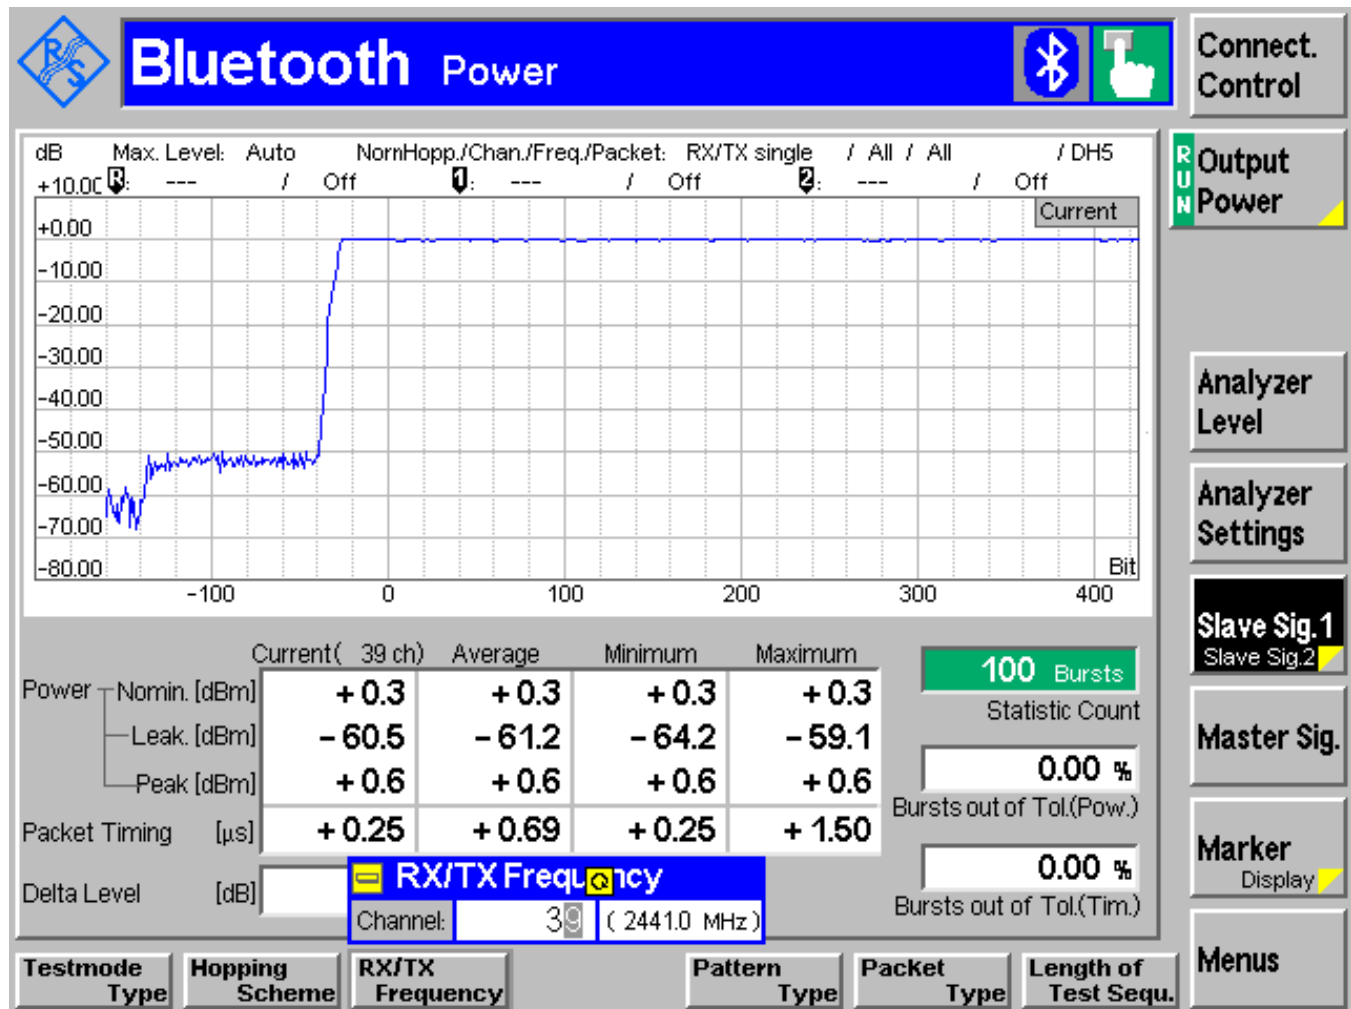


Conducted Peak Power GFSK 2480 MHz

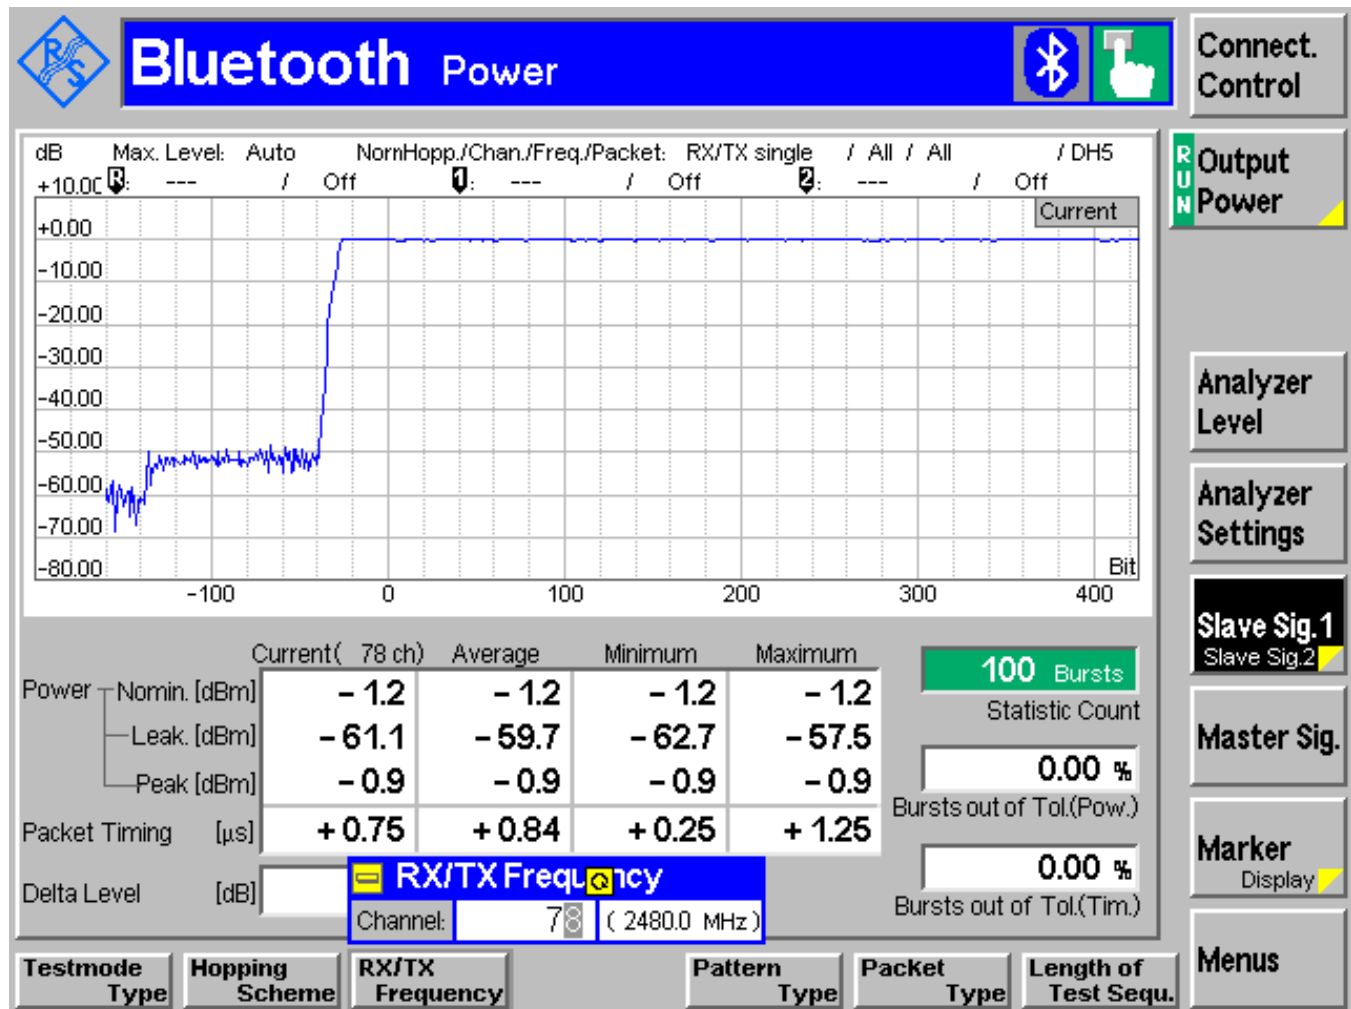


Conducted Peak Power π / 4 DQPSK 2402 MHz

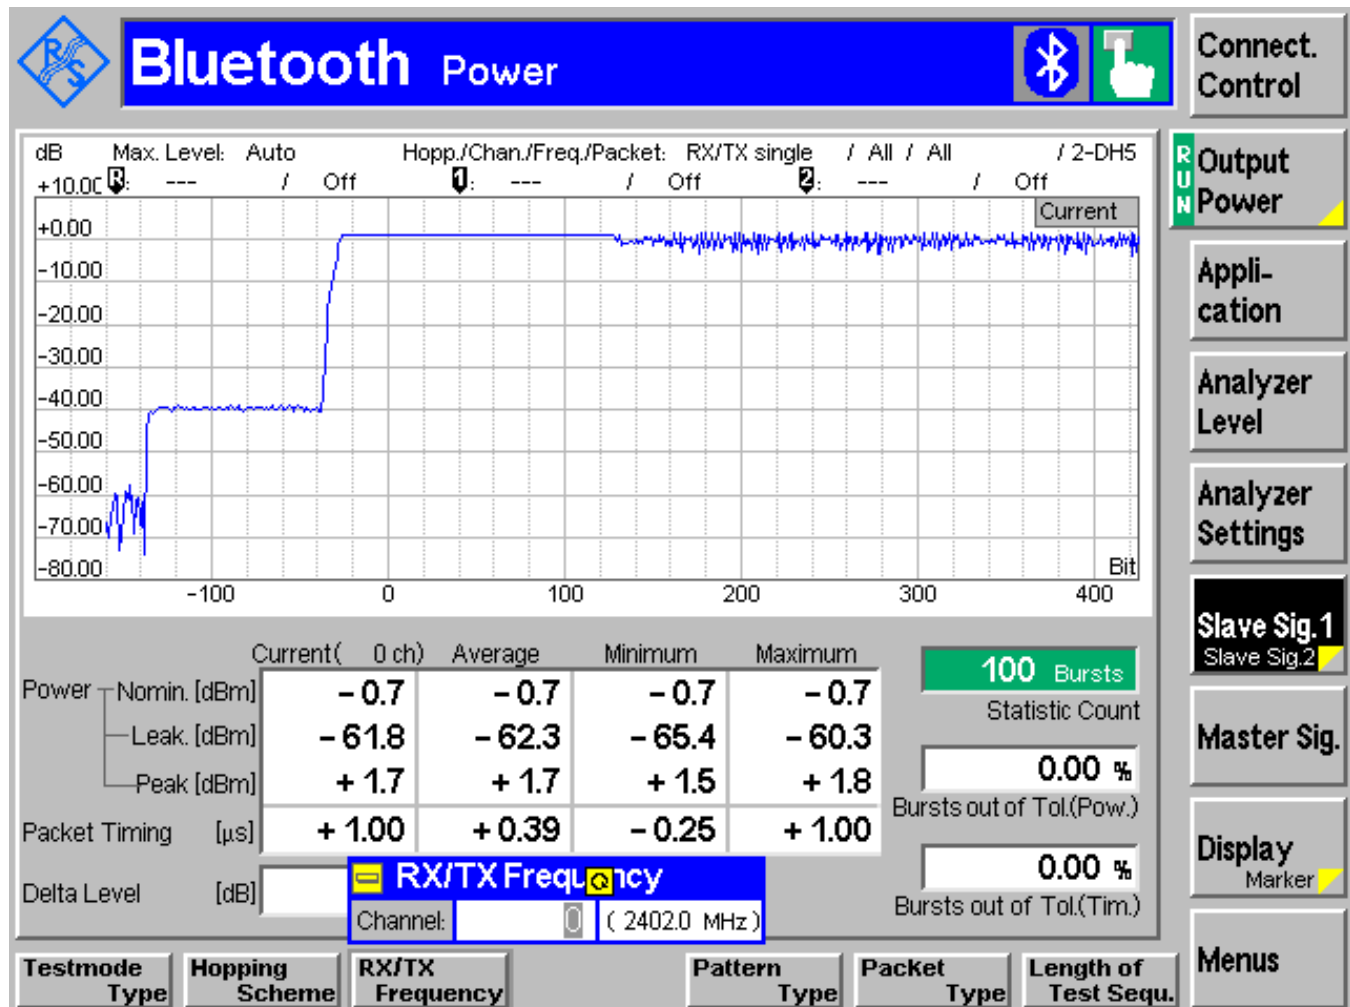


Conducted Peak Power π / 4 DQPSK 2441 MHz

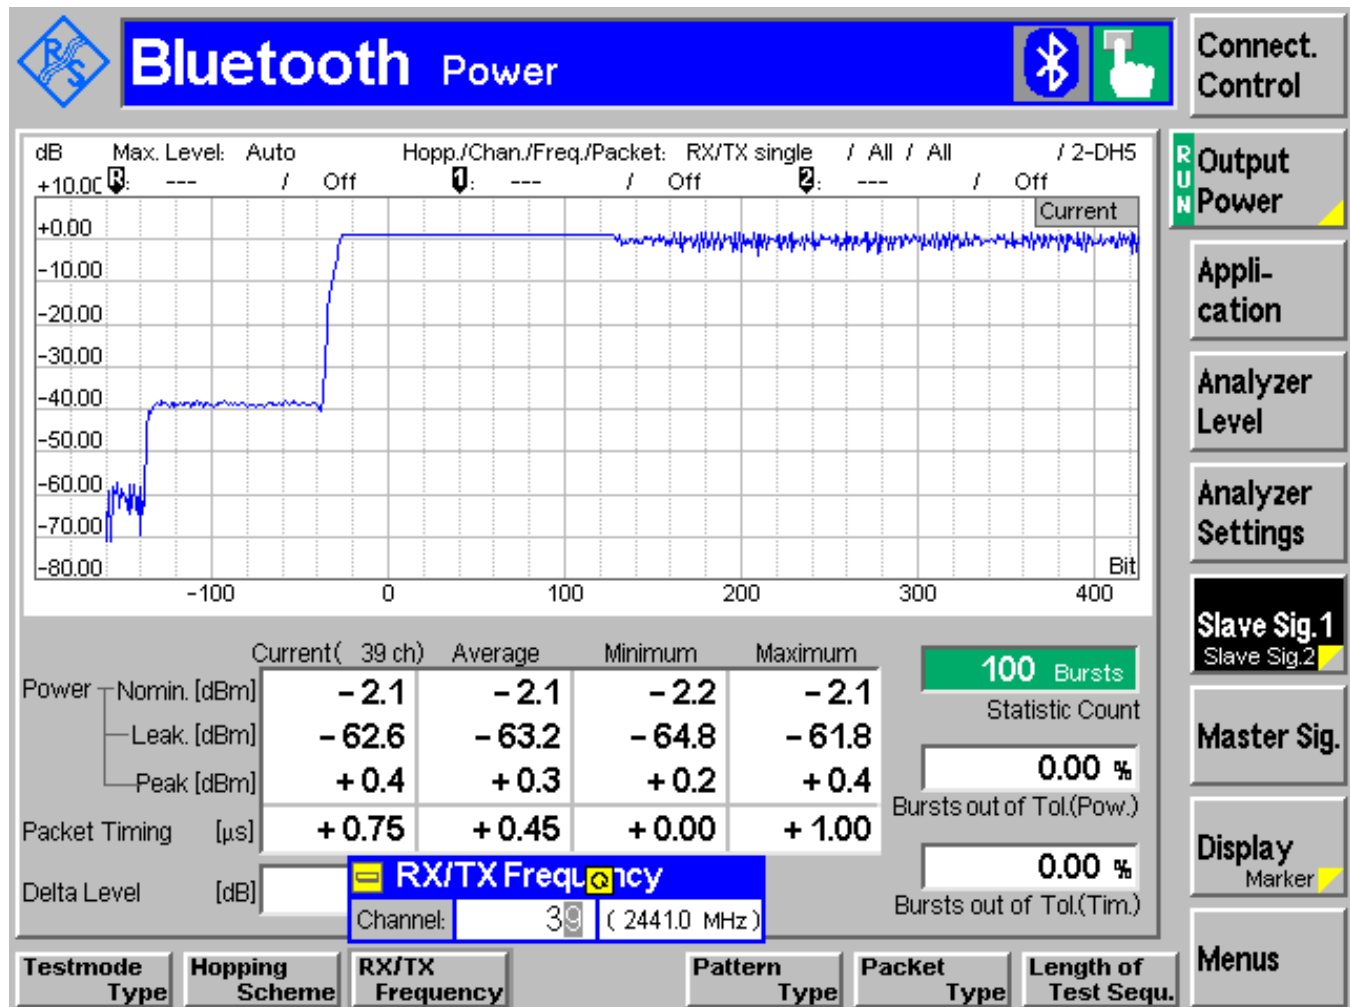


Conducted Peak Power π / 4 DQPSK 2480 MHz

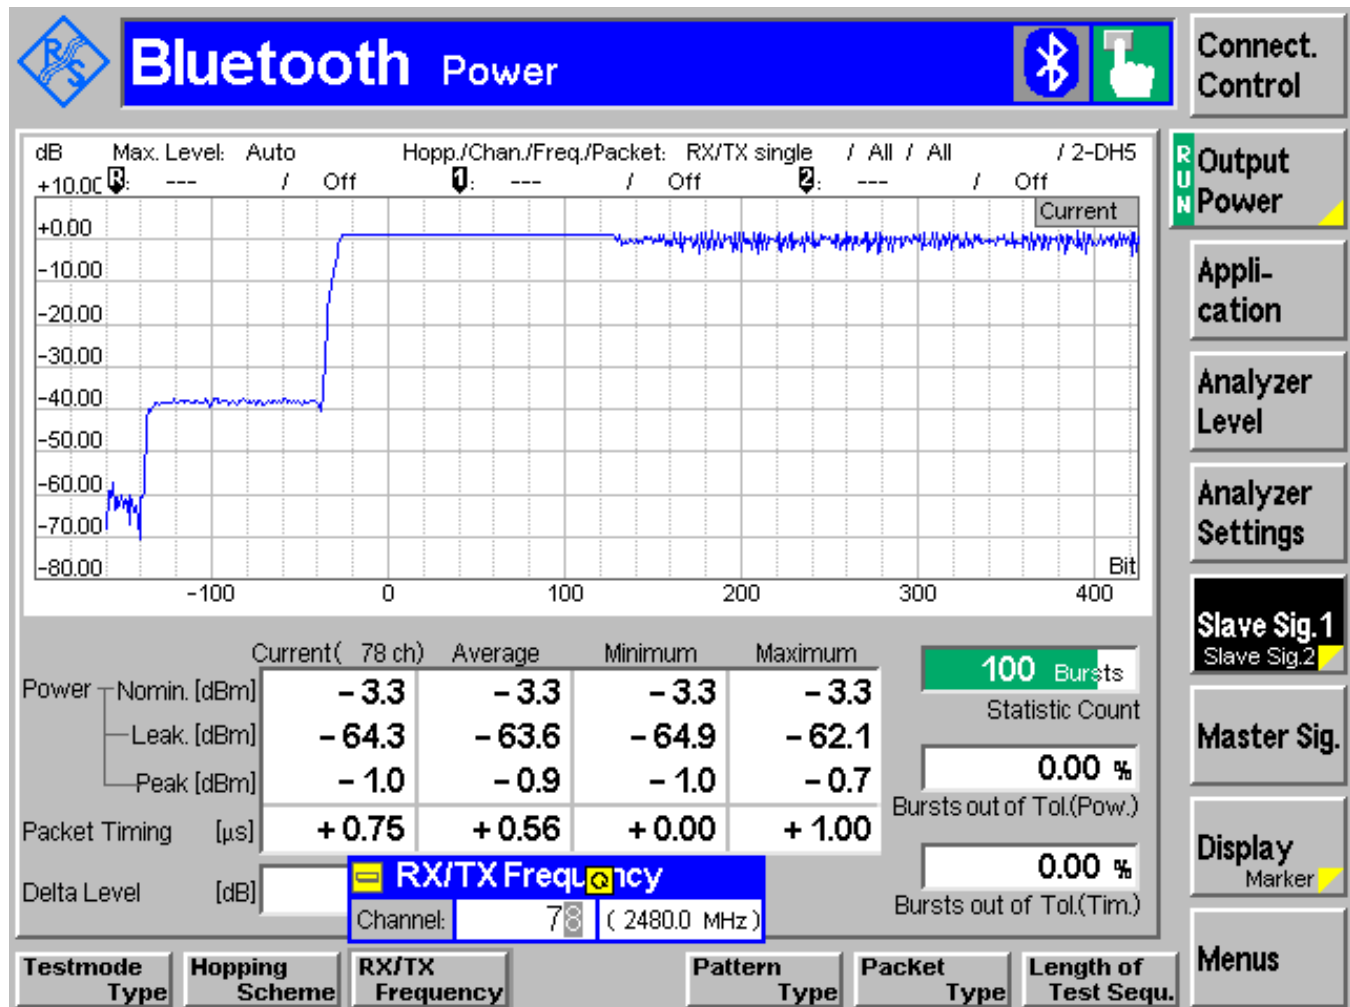


Conducted Peak Power 8DPSK 2402 MHz

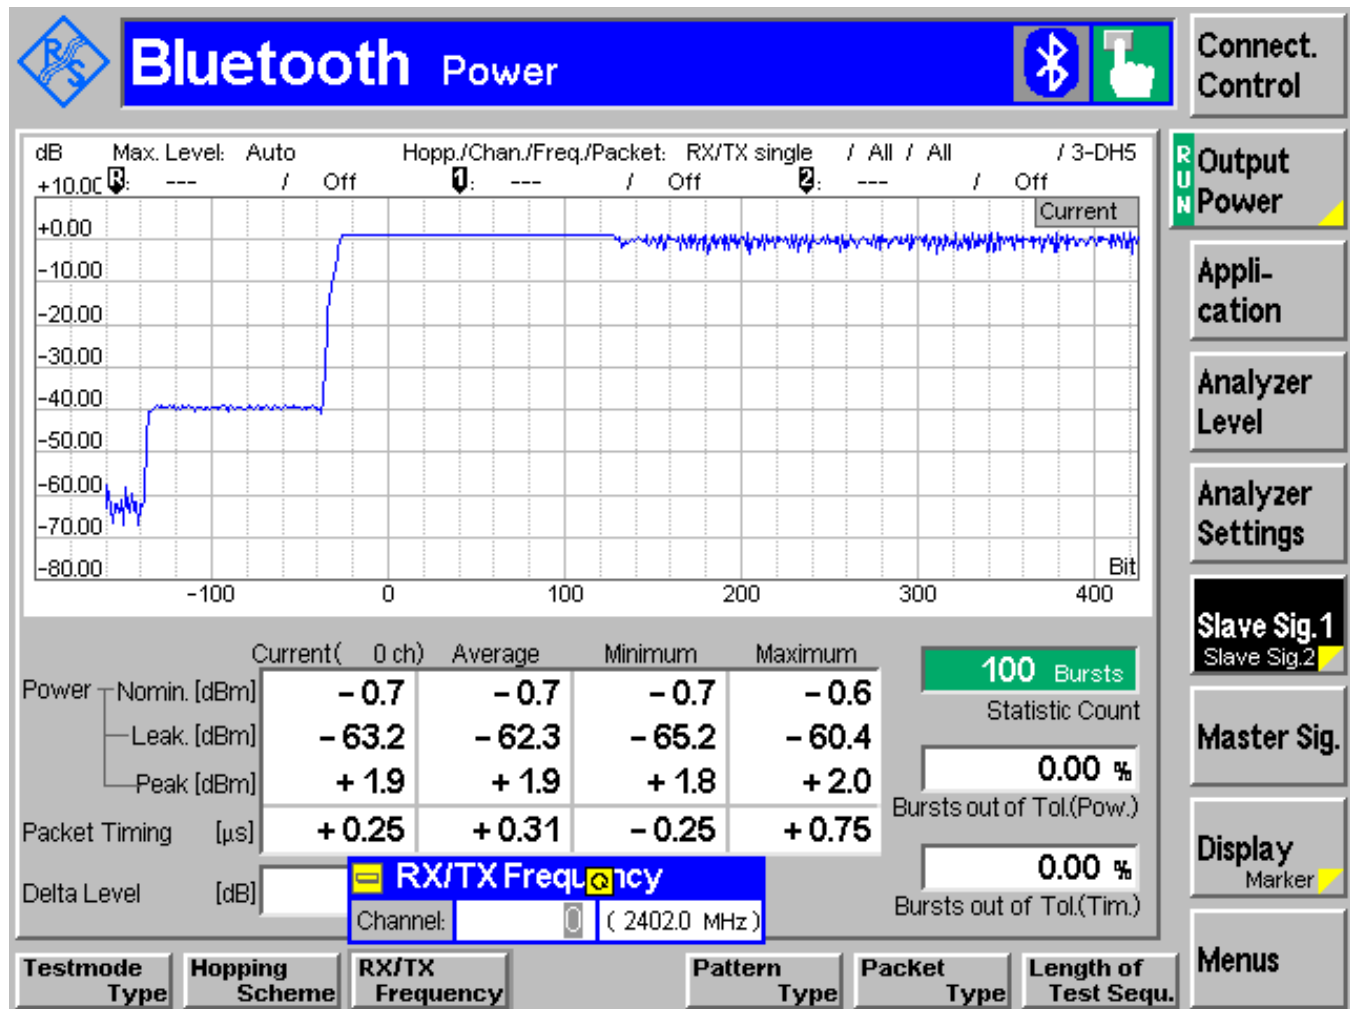

Conducted Peak Power 8DPSK 2441 MHz

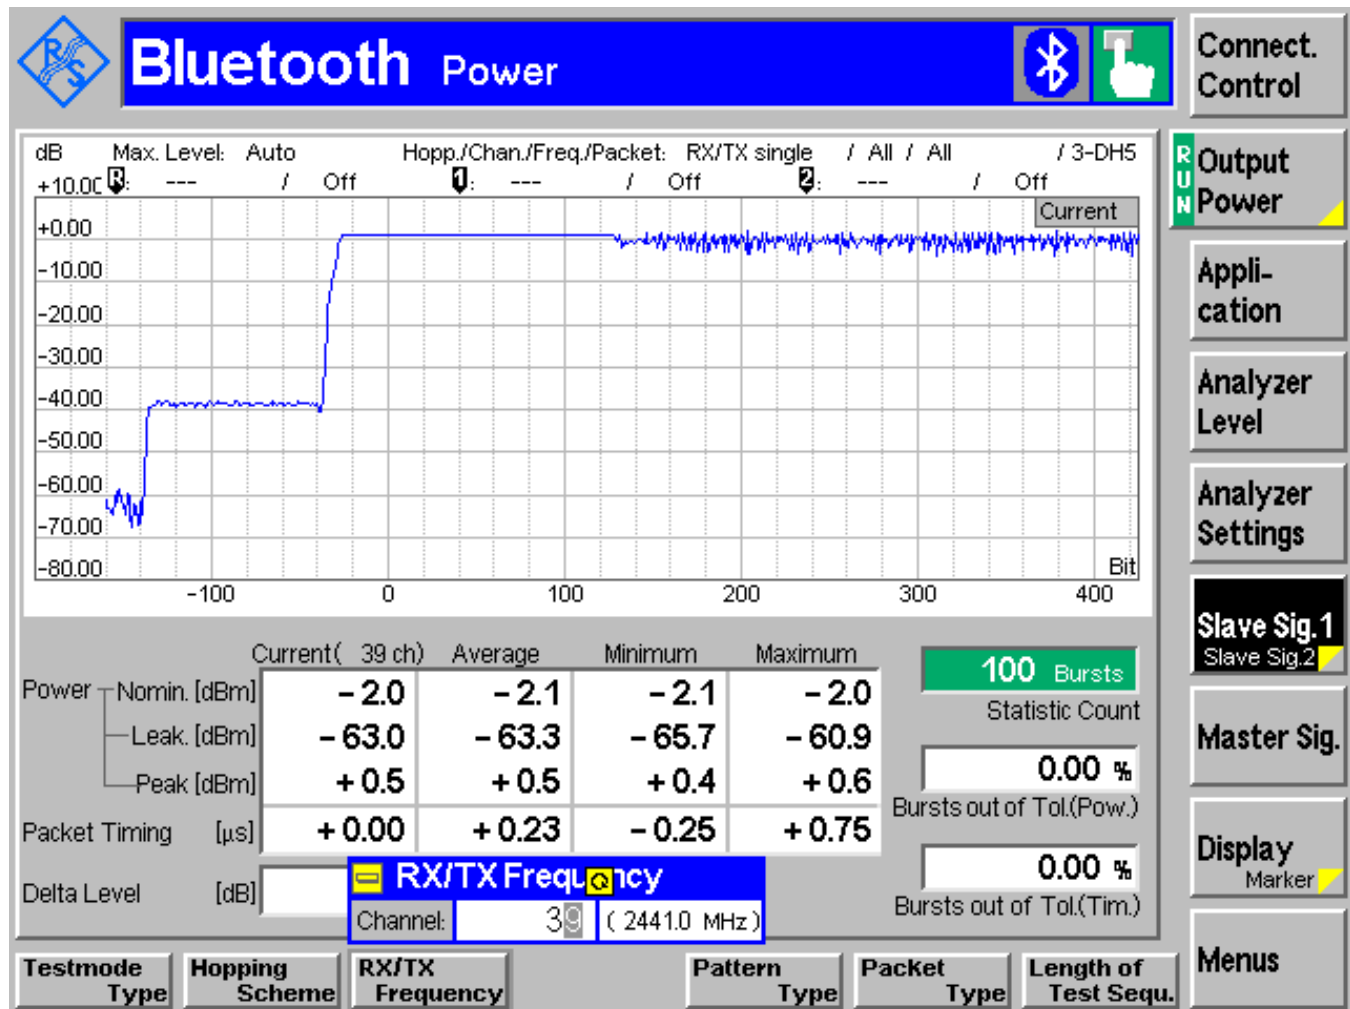

Conducted Peak Power 8DPSK 2480 MHz

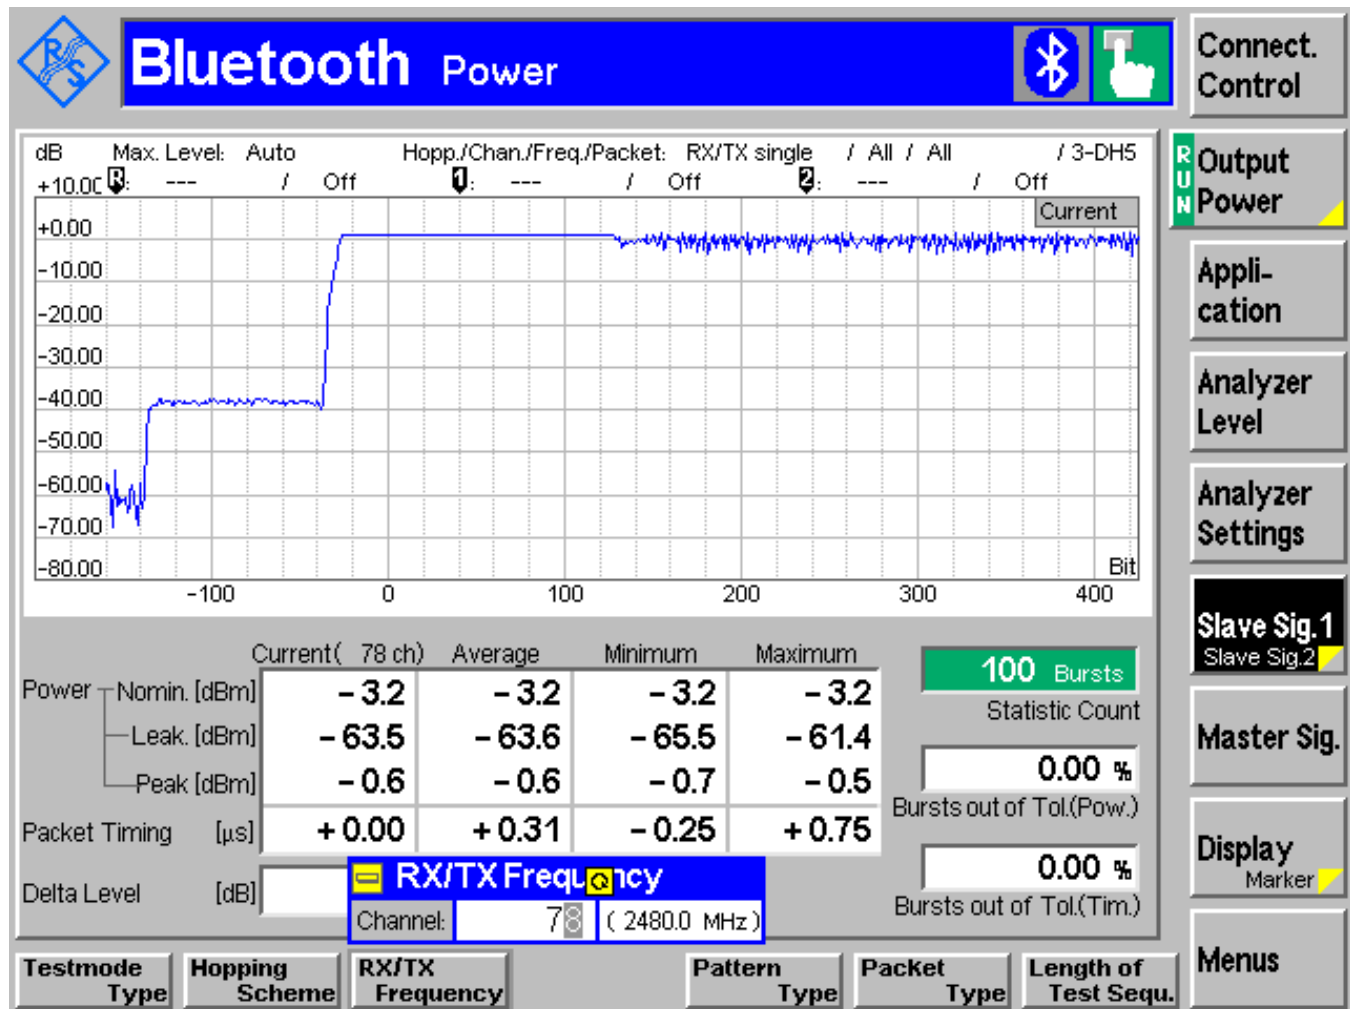

6.2 20dB BANDWIDTH

6.2.1 LIMIT SUB CLAUSE § 15.247 (a) (1) (i) (ii) (iii)

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

6.2.2 RESULTS:

20dB Bandwidth: GFSK

TEST CONDITIONS		20dB Bandwidth (kHz)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom} VDC	921	920	920


20dB Bandwidth: $\pi / 4$ DQPSK

TEST CONDITIONS		20dB Bandwidth (MHz)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom} VDC	1.307	1.307	1.308


20dB Bandwidth: 8DPSK

TEST CONDITIONS		20dB Bandwidth (MHz)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23)°C	V _{nom} VDC	1.261	1.259	1.260


20dB Bandwidth GFSK 2402MHz

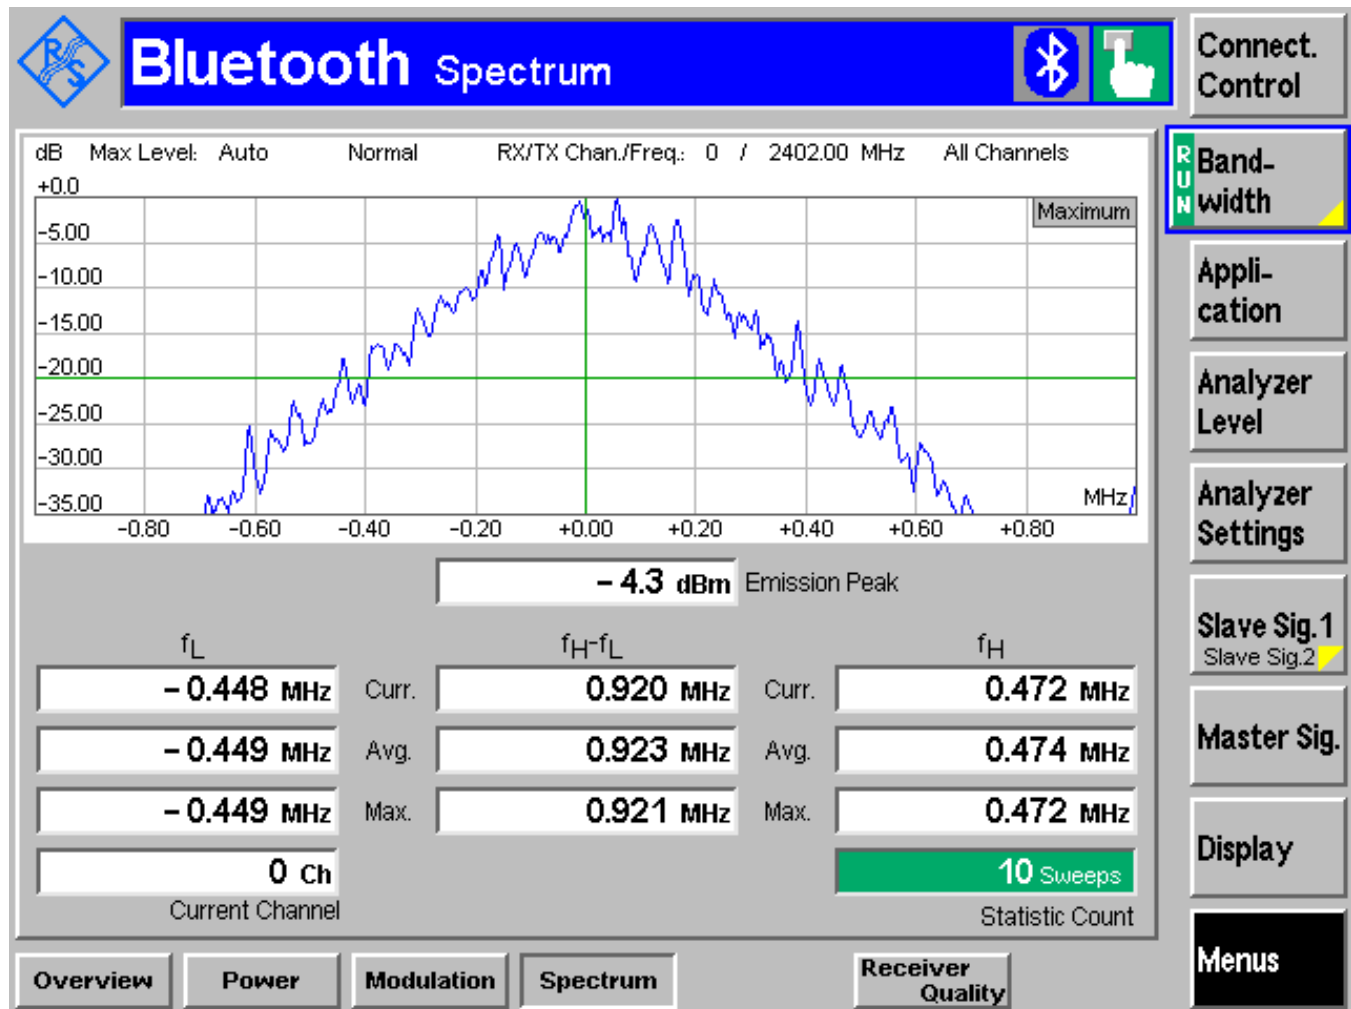


20dB Bandwidth GFSK 2441MHz

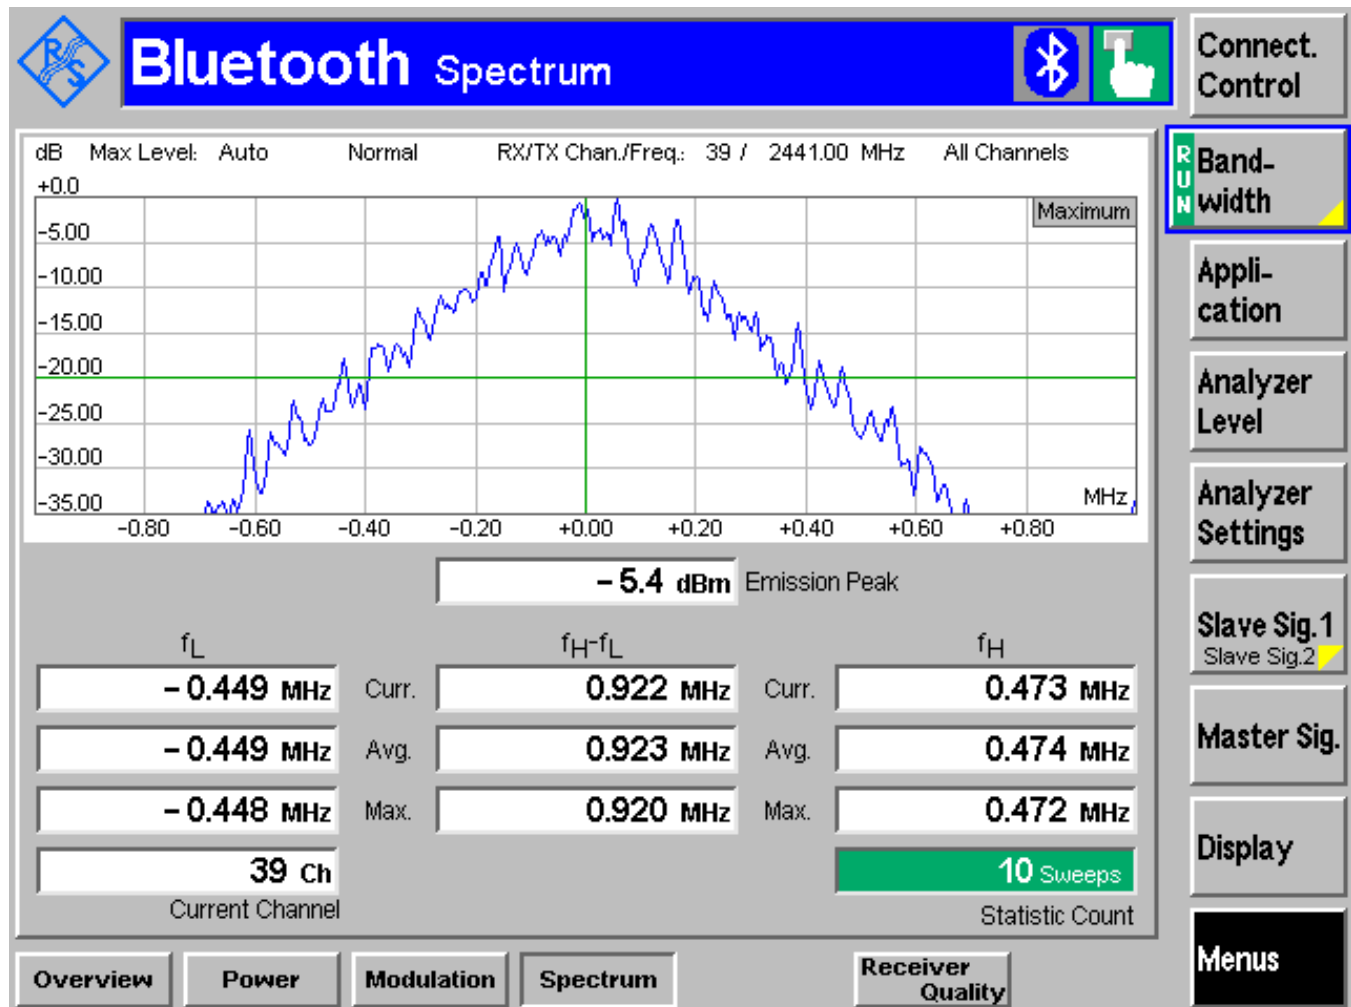


20dB Bandwidth GFSK 2480MHz

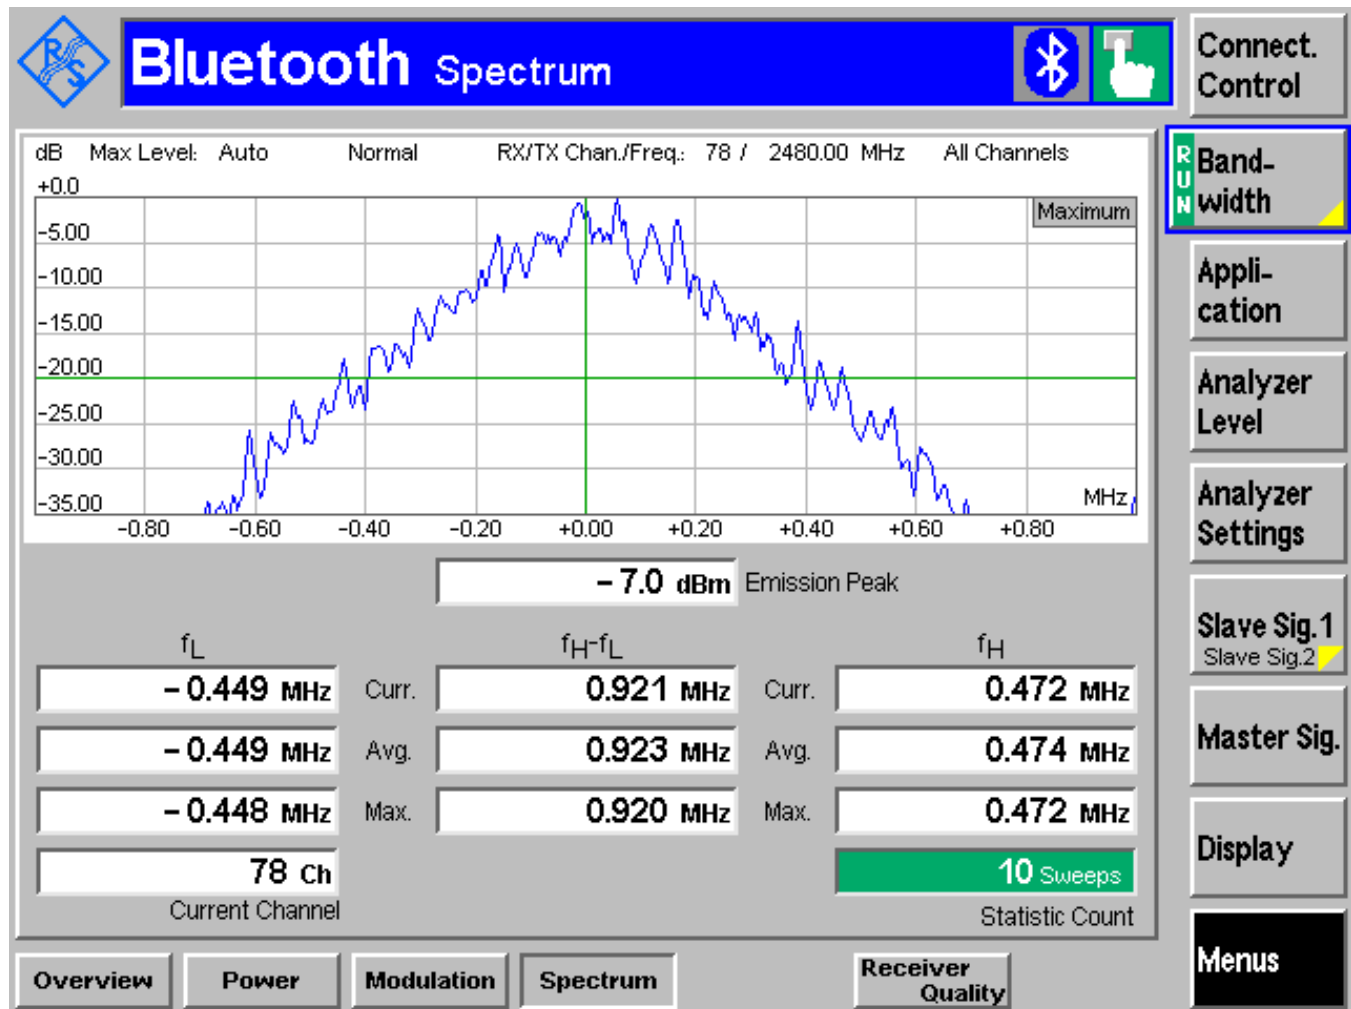


20dB Bandwidth $\pi / 4$ DQPSK 2402MHz

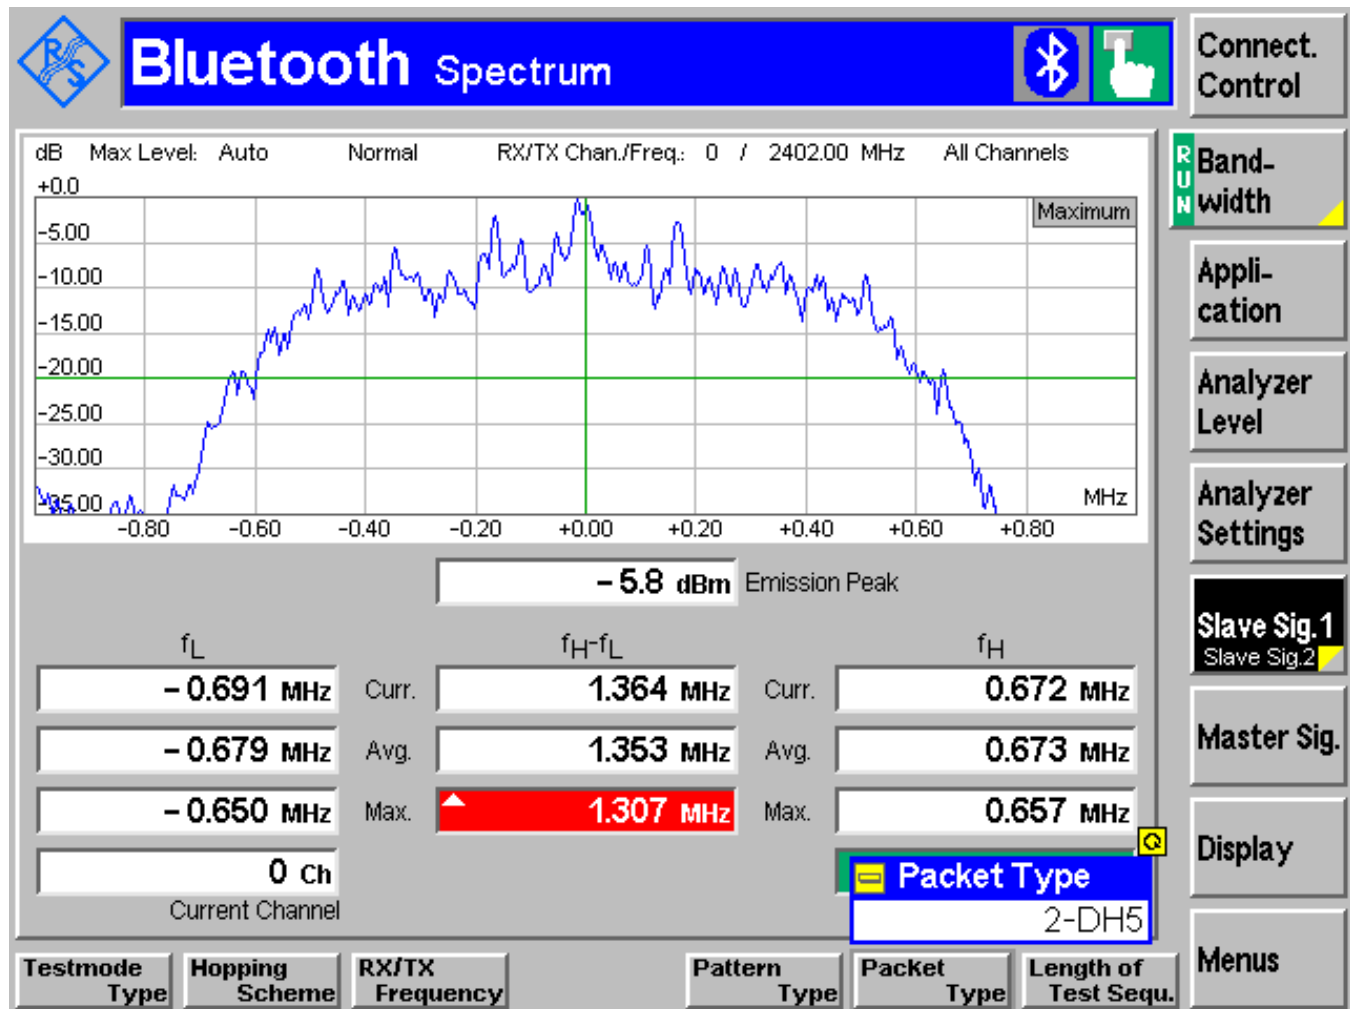


20dB Bandwidth $\pi / 4$ DQPSK 2441MHz

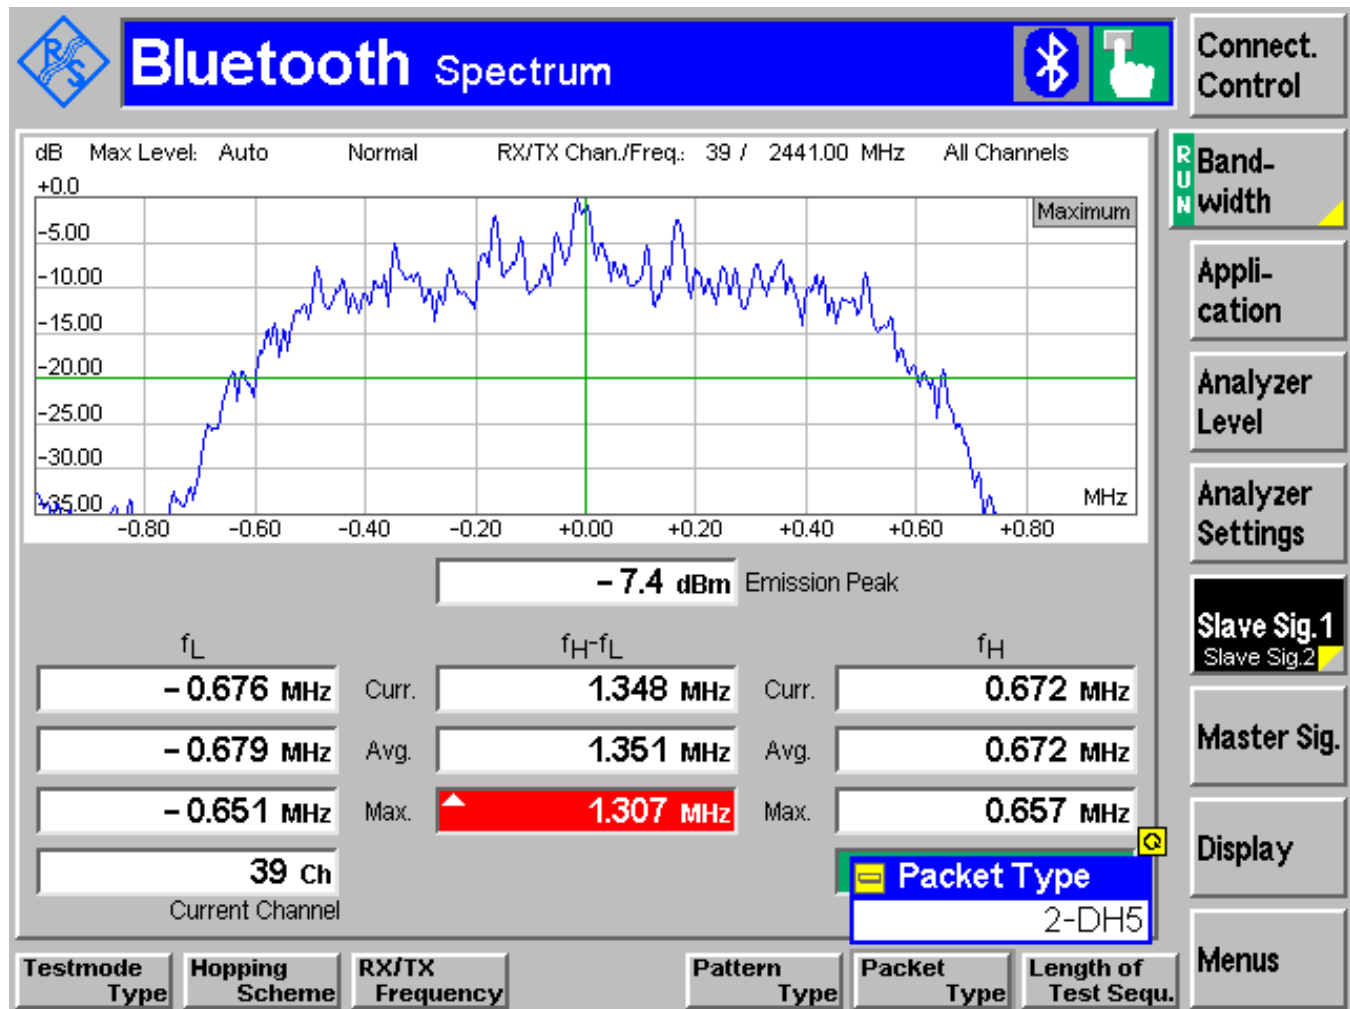


20dB Bandwidth $\pi / 4$ DQPSK 2480MHz

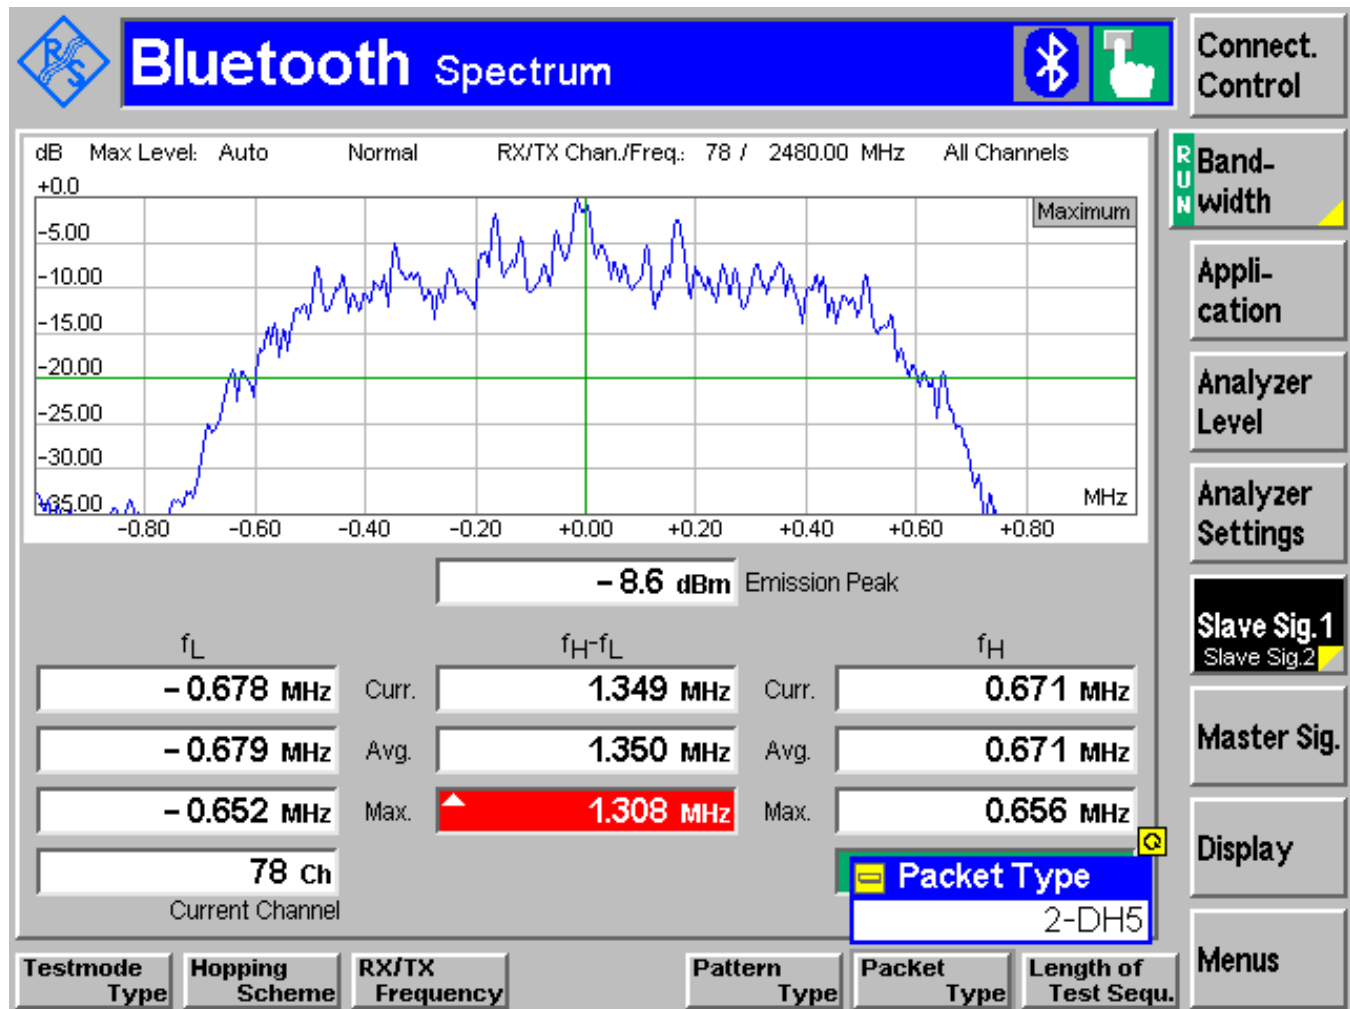


20dB Bandwidth 8PSK 2402MHz

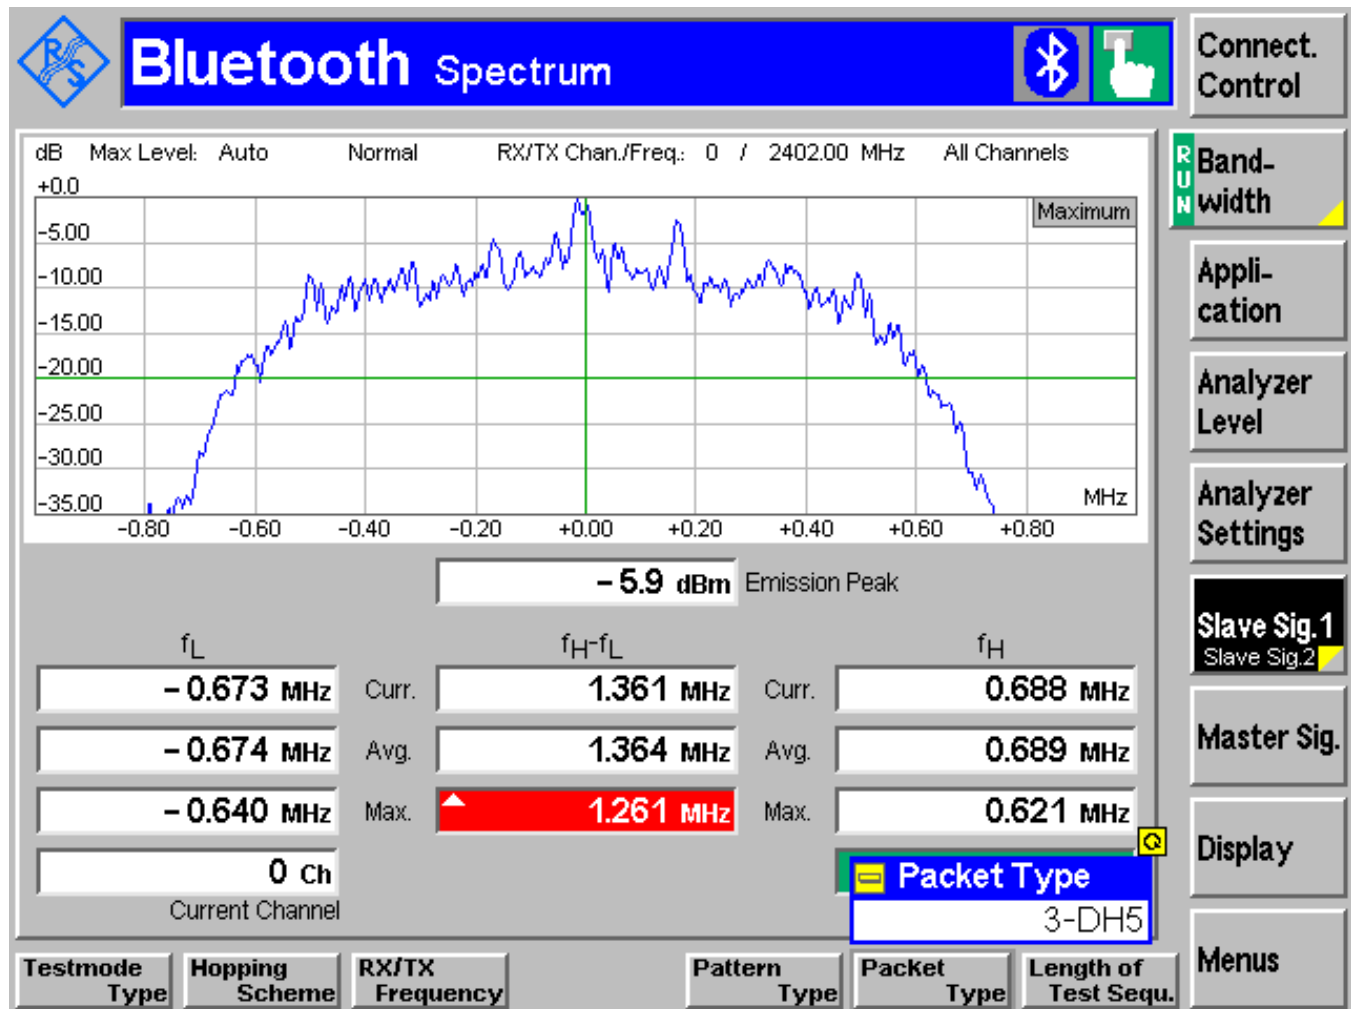

20dB Bandwidth 8PSK 2441MHz

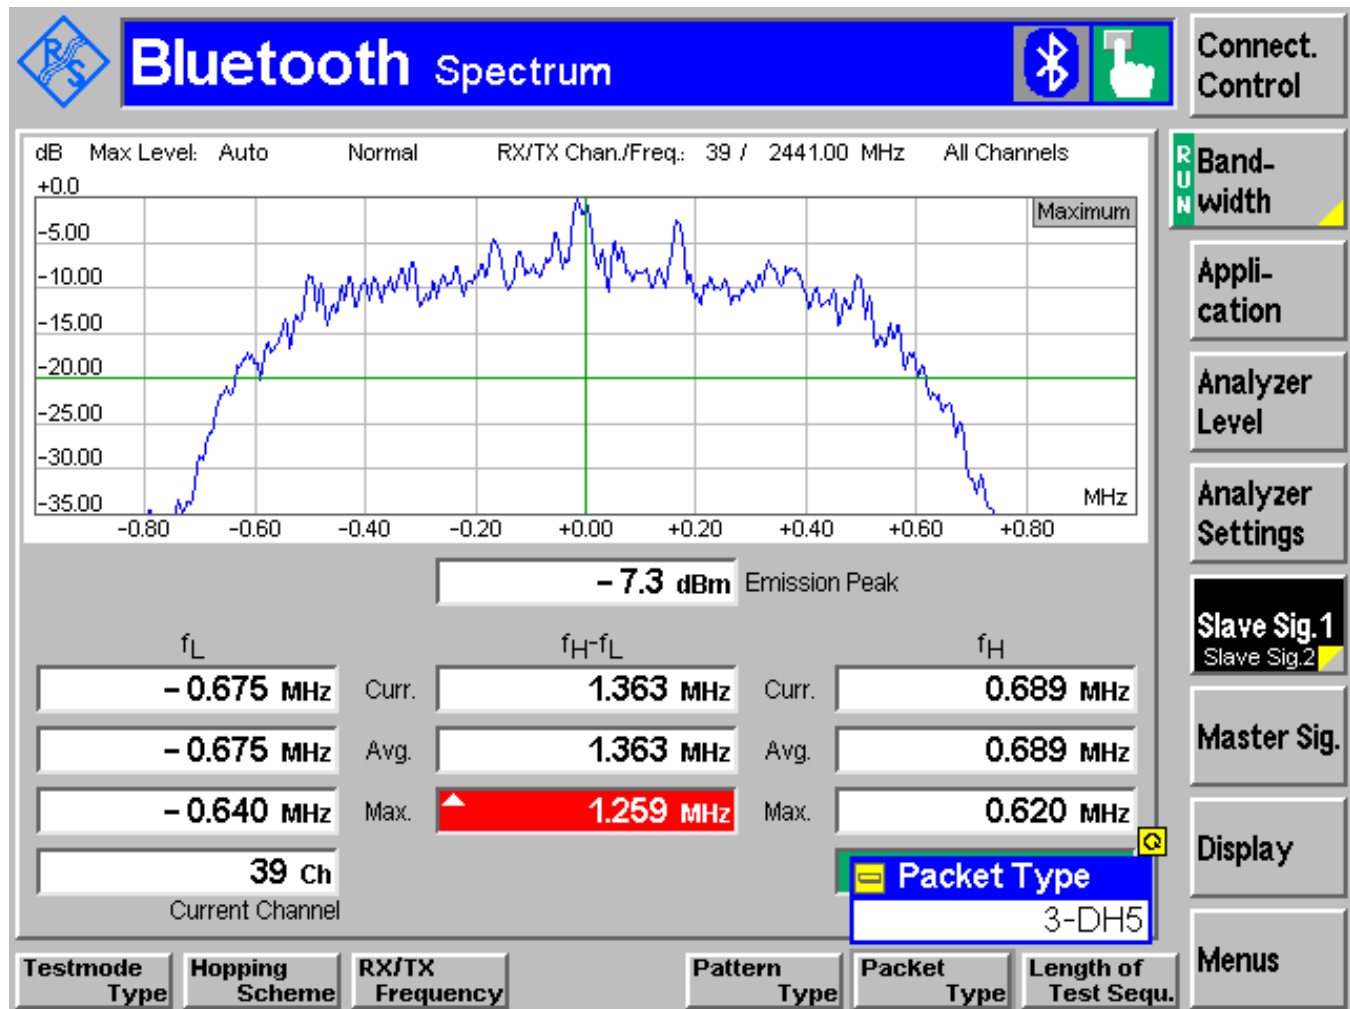

20dB Bandwidth 8PSK 2480MHz

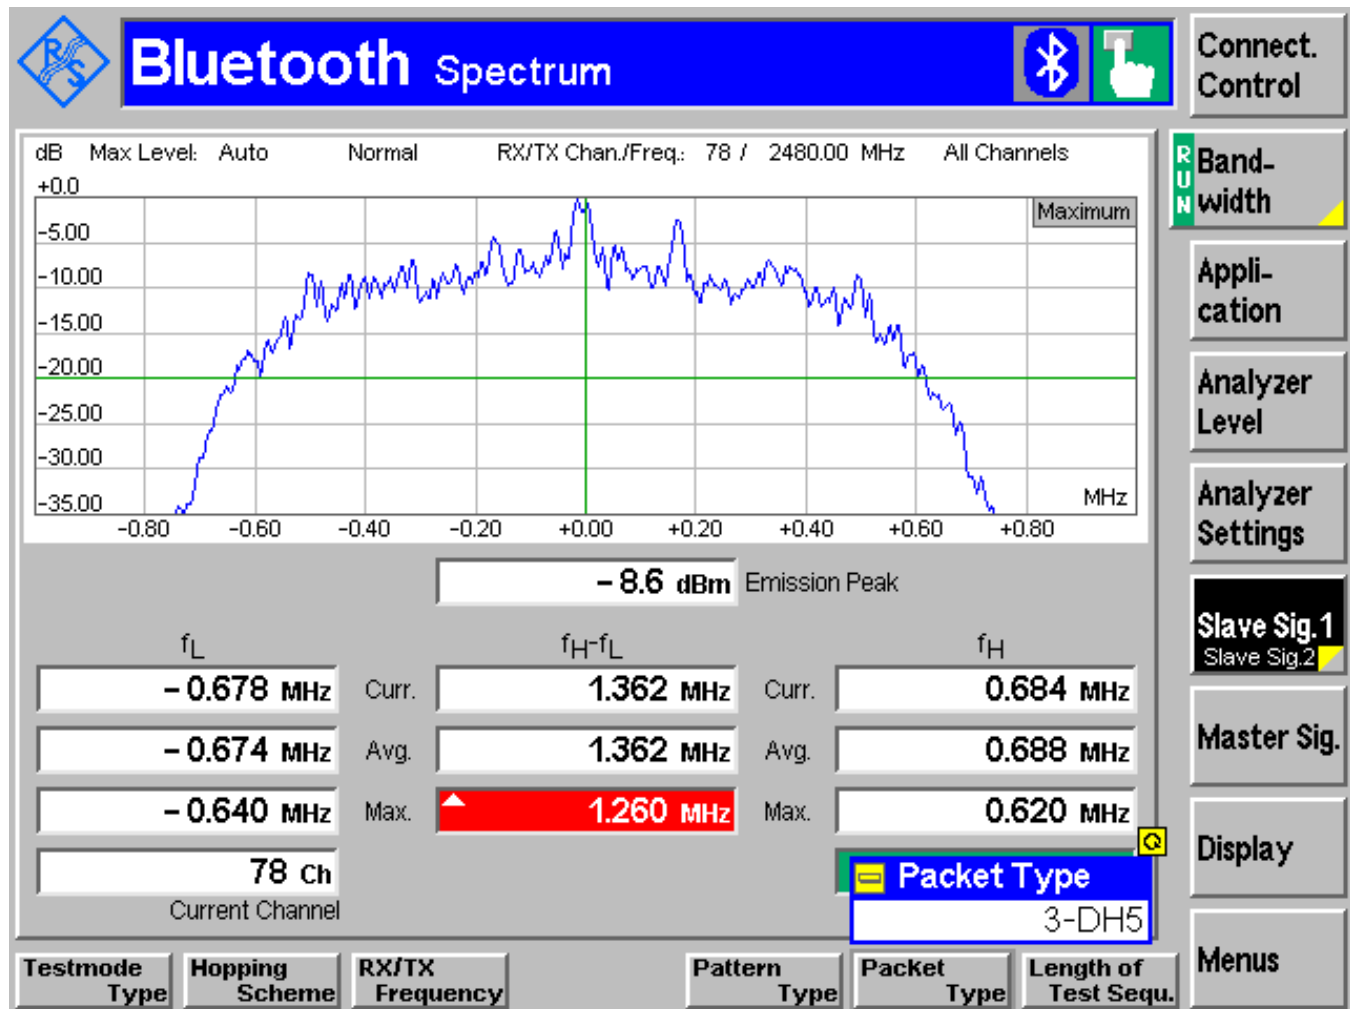


6.3 CARRIER FREQUENCY SEPARATION

6.3.1 LIMIT SUB CLAUSE § 15.247 (a) (1) (i) (ii) (iii)

SEPARATION
> 25 KHz or > 2/3 * 20 dB BANDWIDTH = 839kHz

6.3.2 RESULTS: 1.003 MHz

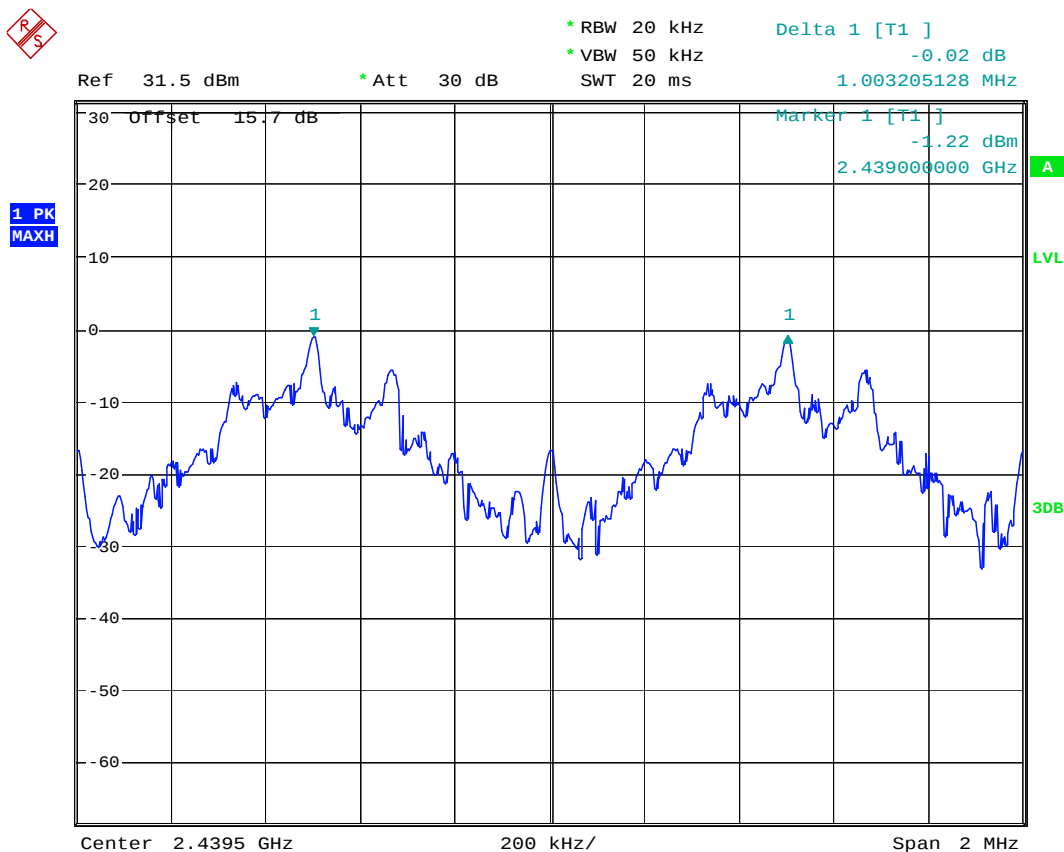


Date: 29.APR.2009 12:07:40

6.4 NUMBER OF HOPPING CHANNELS

6.4.1 LIMIT SUB CLAUSE § 15.247 (a) (1) (iii)

NUMBER OF CHANNELS
> 15

6.4.2 RESULTS: 79

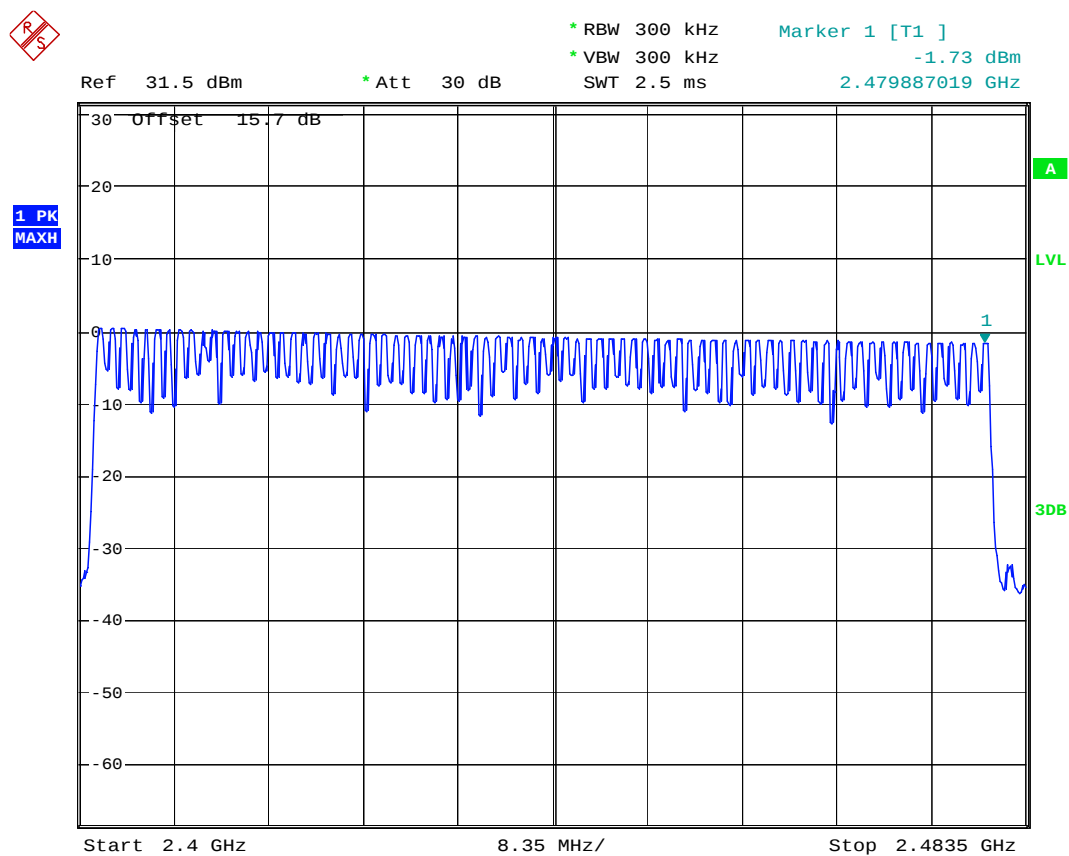

Date: 29.APR.2009 12:15:44

6.5 TIME OF OCCUPANCY (DWELL TIME)

6.5.1 LIMIT SUB CLAUSE § 15.247 (a) (1) (i) (ii) (iii)

FREQUENCY RANGE	AVERAGE TIME OF OCCUPANCY PER 31.6 SECONDS (LIMIT)
2400-2483.5	0.4 SECONDS

6.5.2 RESULTS:

T _{nom} (23)°C	V _{nom} VDC
-------------------------	----------------------

For Bluetooth devices:

The dwell time of 0.4 s within a 31.6 second period in data mode is independent from the packet type (packet length). The calculation for a 31.6 second period is as follows:

Dwell time = time slot length * hop rate / number of hopping channels * 31.6 s

Example for a DH1 packet (with a maximum length of one time slot)

Dwell time = $625 \mu\text{s} * 1600 \text{ 1/s} / 79 * 31.6 \text{ s} = 0.4 \text{ s}$ (in a 31.6 s period)

For multi-slot packet the hopping is reduced according to the length of the packet.

Example for a DH5 packet (with a maximum length of five time slots)

Dwell time = $5 * 625 \mu\text{s} * 1600 * 1/5 * 1/s / 79 * 31.6 \text{ s} = 0.4 \text{ s}$ (in a 31.6 s period)

This is the same for all BT devices and therefore all BT devices satisfy FCC requirement on time of occupancy (dwell time).

6.6 CONDUCTED SPURIOUS EMISSION

6.6.1 LIMIT SUB CLAUSE § 15.247 (d)


FREQUENCY RANGE	limit
30M-25GHz	-20dBc

6.6.2 RESULTS: Tnom(23)°C VnomVDC

All tests conducted in GFSK mode.

Verdict: PASS


Conducted Spurious Emission 2402MHz

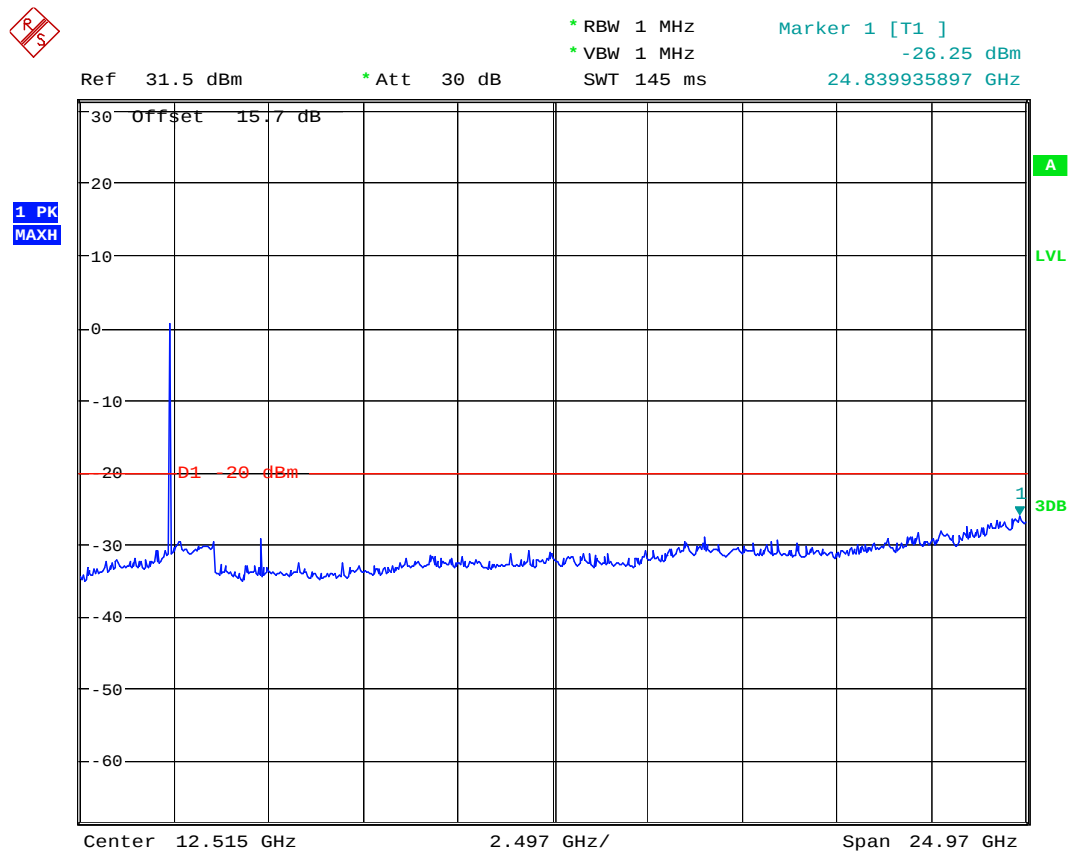

Date: 29.APR.2009 11:55:32

Date: 29.APR.2009 11:50:32

Conducted Spurious Emission 2480MHz

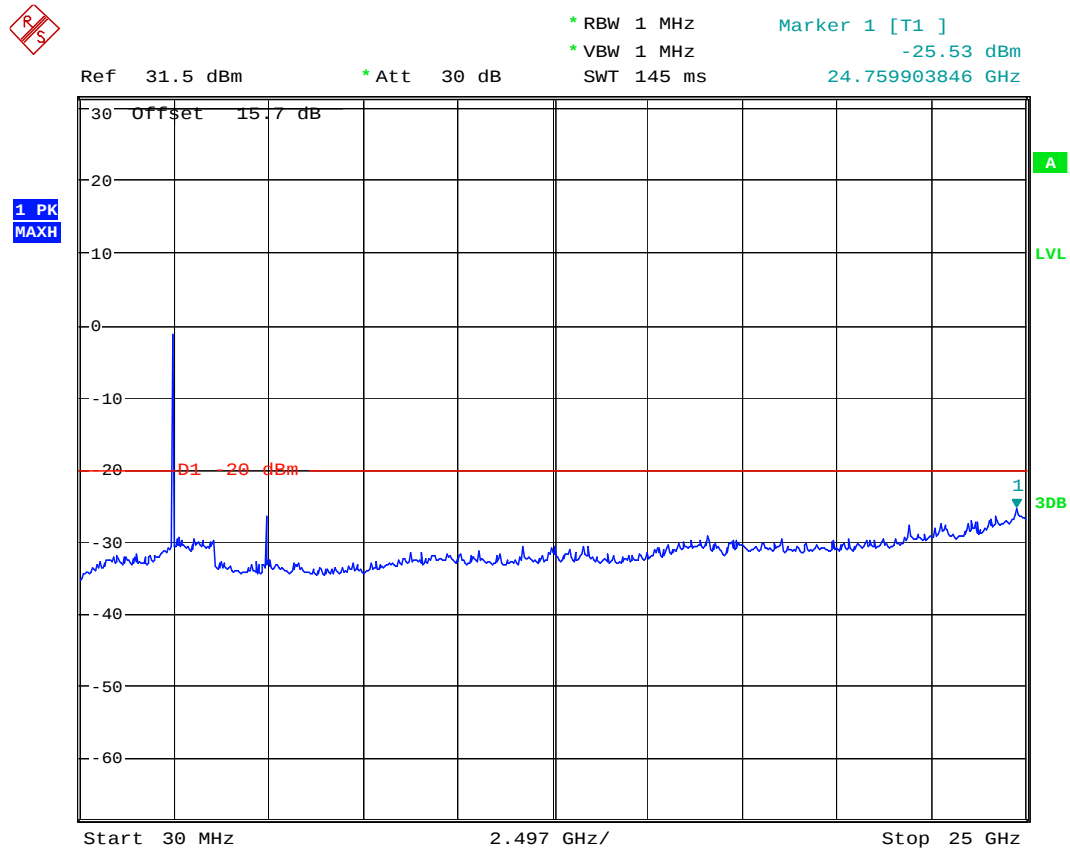

Date: 29.APR.2009 11:58:47

6.7 AC POWER LINE CONDUCTED EMISSIONS § 15.107/207

6.7.1 LIMITS

Technical specification: 15.107 / 15.207

Limit

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50
* Decreases with logarithm of the frequency		

ANALYZER SETTINGS: RBW = 10KHz


VBW = 10KHz

6.7.2 Test Results:


Pass, see plots.




Results:
TX Mode- Line

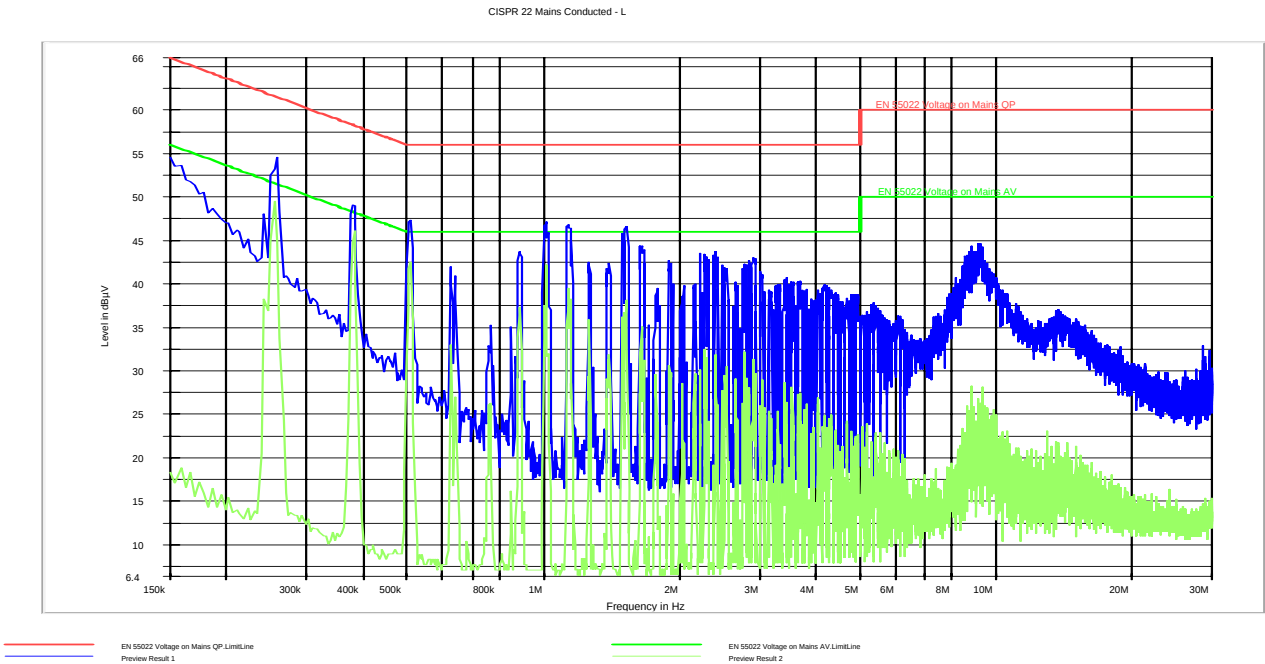


Results:
TX Mode- Neutral

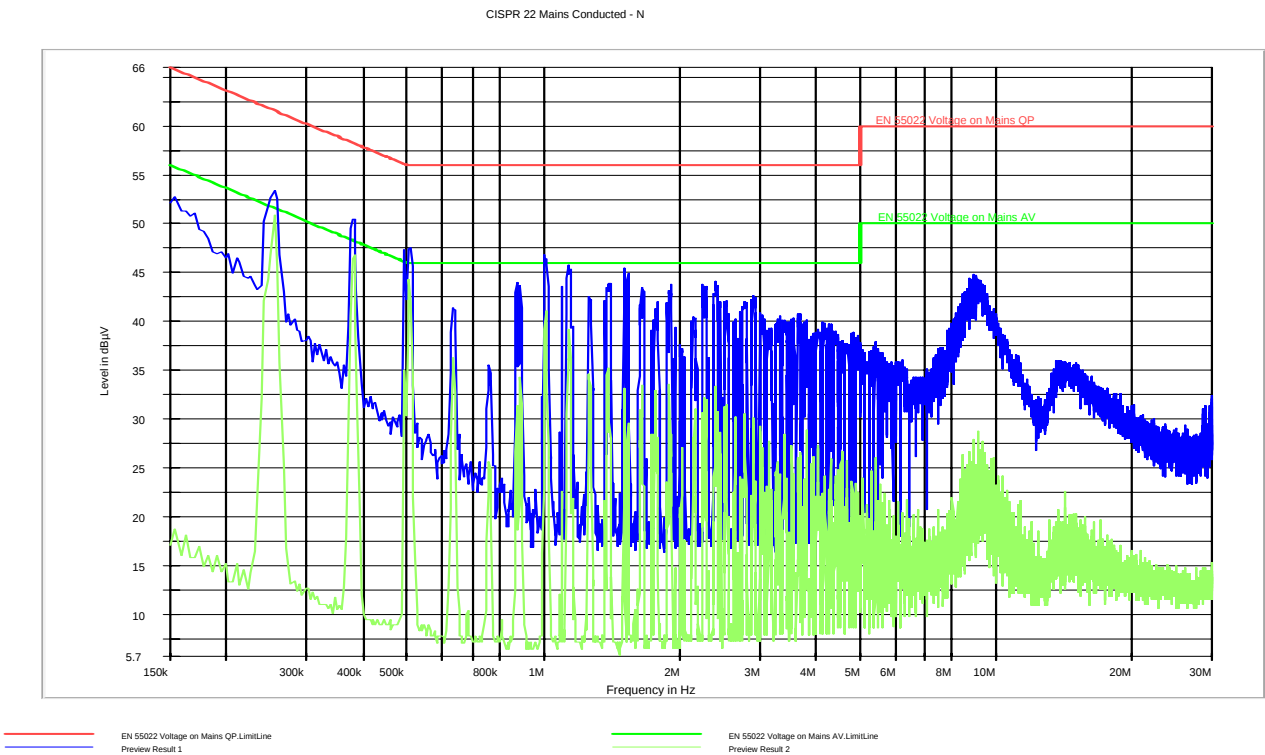

Results:
RX Mode- Line

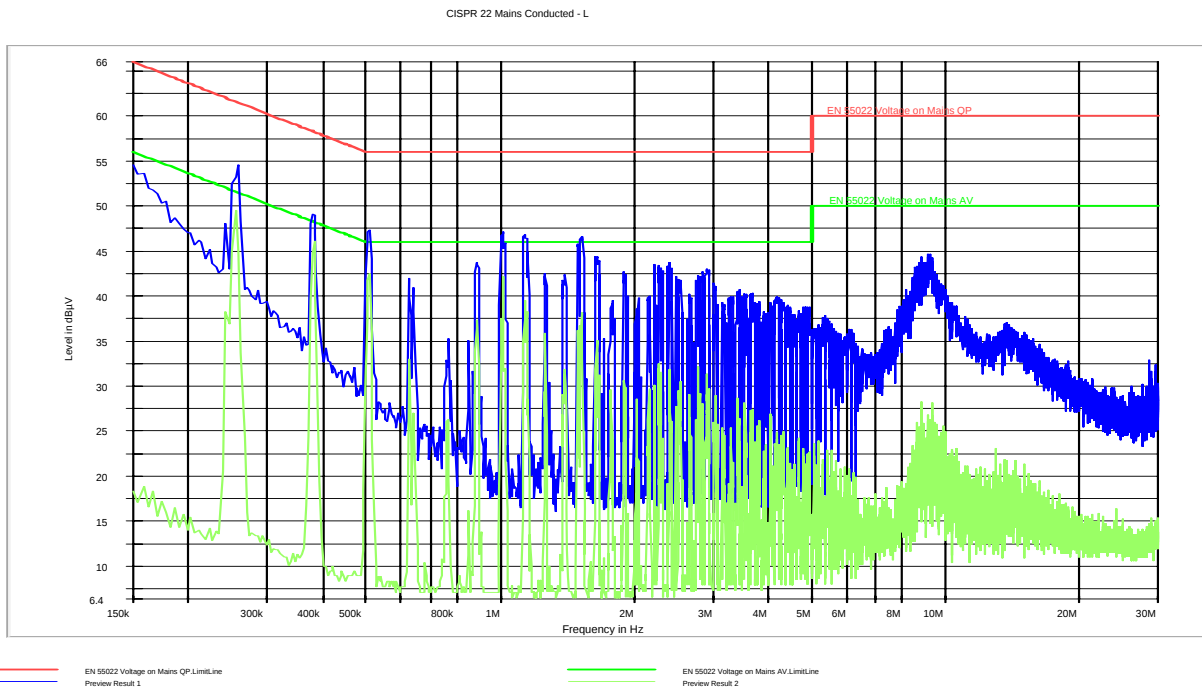



Results:
RX Mode- Neutral

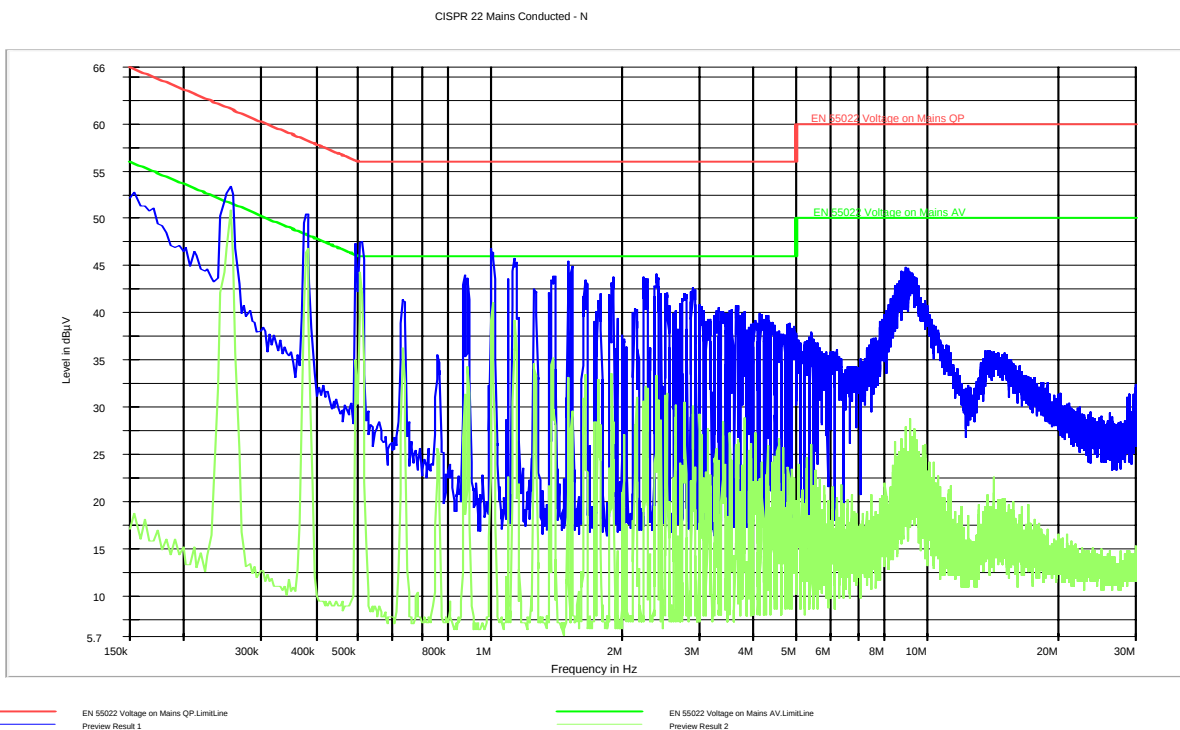


7 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due	Interval
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2010	1 year
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	100017	May 2010	1 year
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011	May 2010	1 year
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02	May 2010	1 year
05	Biconilog Antenna	3141	EMCO	0005-1186	June 2010	1 year
06	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325	June 2010	1 year
07	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240	June 2010	1 year
08	Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
09	Climatic Chamber	VT4004	Voltsch	G1115	May 2010	1 year
10	High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
11	High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
12	Pre-Amplifier	JS4-00102600	Miteq	00616	May 2010	1 year
13	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807	May 2010	1 year
14	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008	May 2010	1 year
15	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06	May 2010	1 year
16	LISN	ESH3-Z5	Rohde & Schwarz	836679/003	May 2010	1 year
17	Loop Antenna	6512	EMCO	00049838	July 2010	2 years

8 BLOCK DIAGRAMS

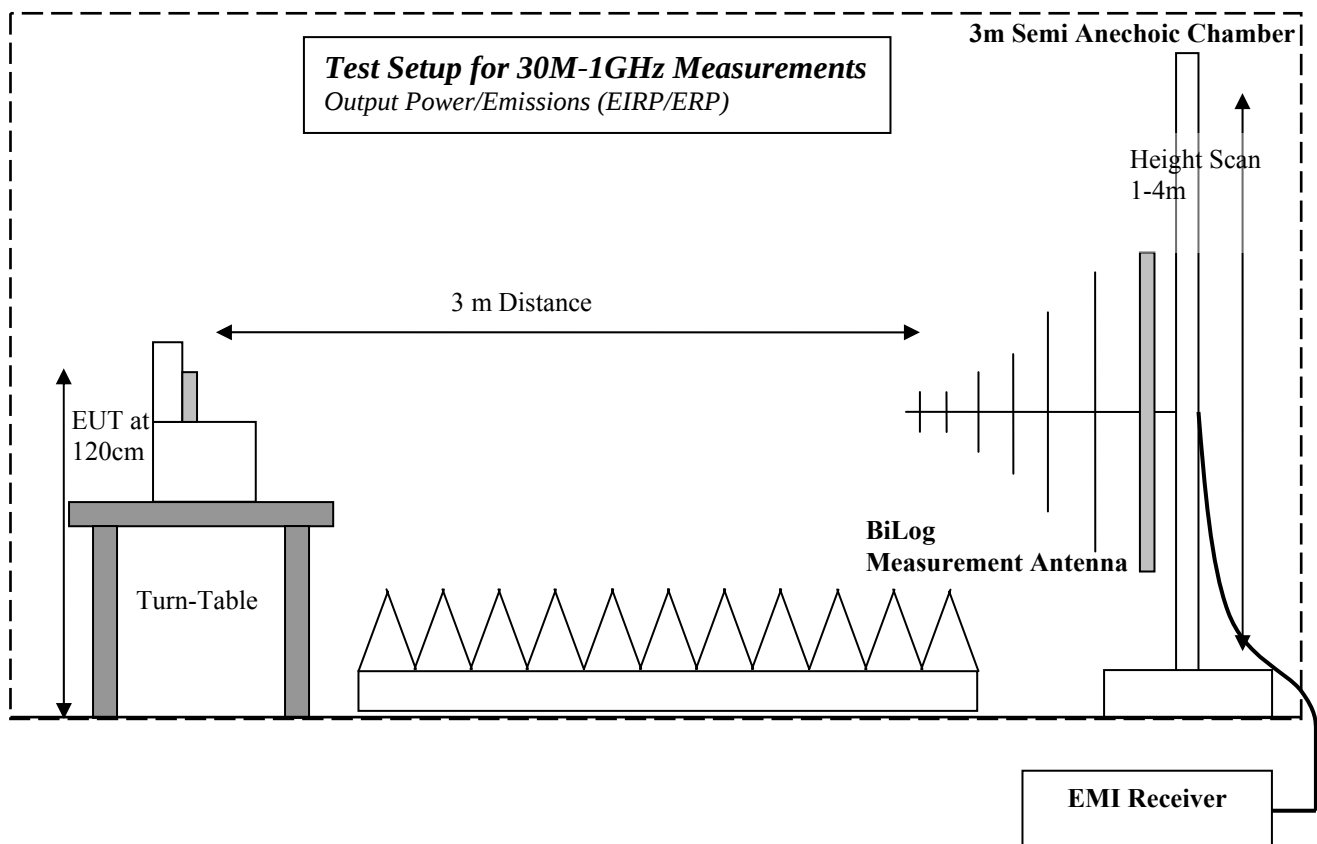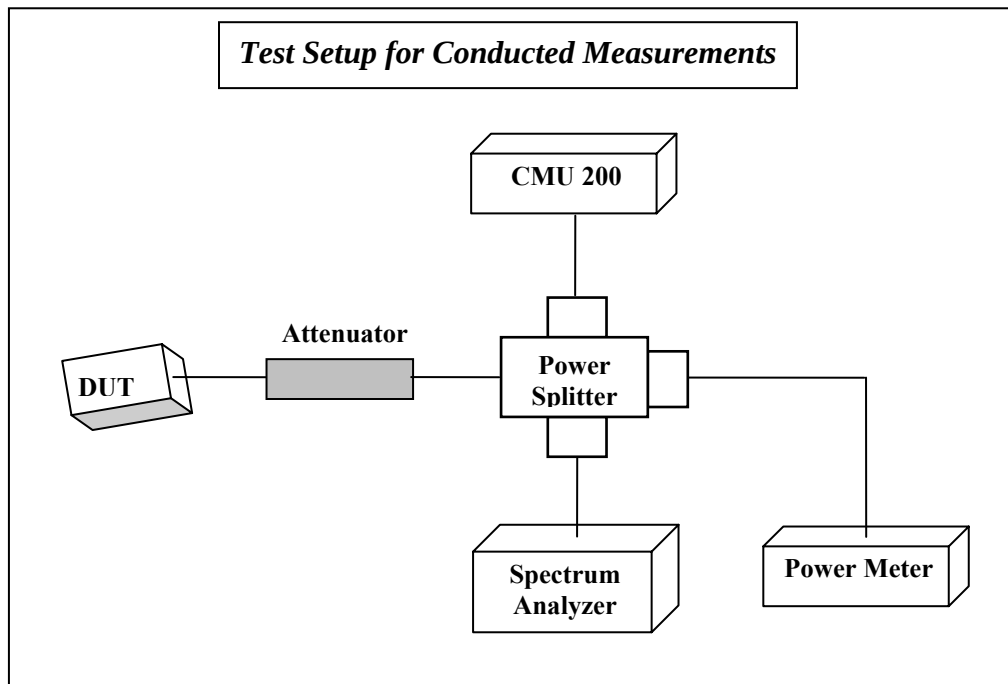

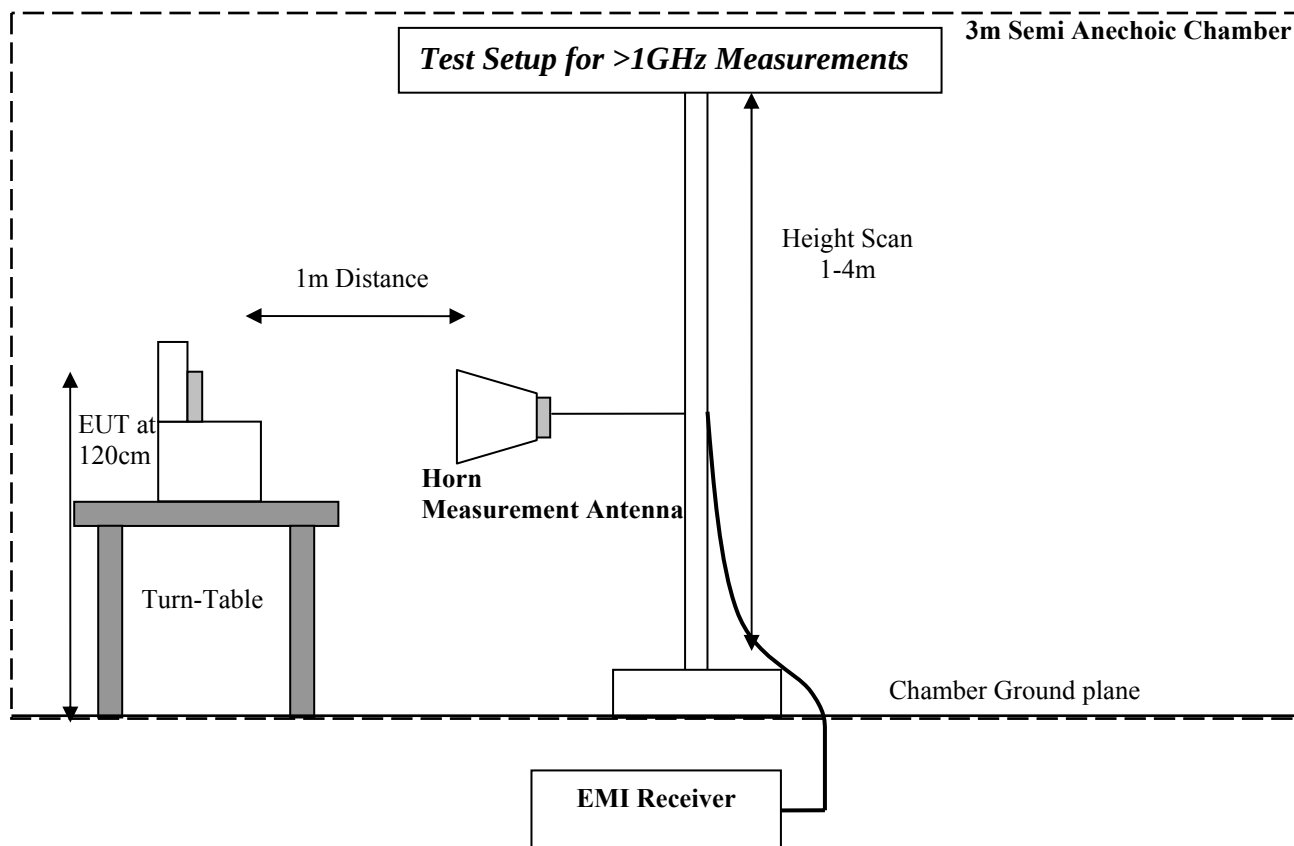

9 Revision History

2009-08-28: Original Document.

2009-10-19: Rev1- Added EIRP Measurement results.

2009-10-21: Rev2- Included calculated antenna gain.