

FCC REPORT

Applicant: Archos SA

Address of Applicant: 12 Rue Ampere Igny France 91430

Equipment Under Test (EUT)

Product Name: A80S Internet Tablet

Model No.: 9080

Trade mark: Archos

FCC ID: SOV9080

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247:2010

Date of sample receipt: 02 Aug., 2011

Date of Test: 02-05 Aug., 2011

Date of report issued: 08 Aug., 2011

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Kevin Yu

Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the EBO product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of EBO International Electrical Approvals or testing done by EBO International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by EBO International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

2 Version

Version No.	Date	Description
00	2011-08-08	Original

Prepared By:

Collin. He

Date:

2011-08-08

Project Engineer

Check By:

Hans. Hu

Date:

2011-08-08

Reviewer

3 Contents

	Page
.....	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST ENVIRONMENT AND MODE	7
5.4 TEST FACILITY.....	7
5.5 TEST LOCATION.....	7
5.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
5.7 TEST INSTRUMENTS LIST.....	8
6 TEST RESULTS AND MEASUREMENT DATA	9
6.1 ANTENNA REQUIREMENT:.....	9
6.2 CONDUCTED EMISSIONS	10
6.3 CONDUCTED PEAK OUTPUT POWER.....	13
6.4 20dB OCCUPY BANDWIDTH	20
6.5 CARRIER FREQUENCIES SEPARATION	26
6.6 HOPPING CHANNEL NUMBER.....	33
6.7 DWELL TIME.....	36
6.8 BAND EDGE	39
6.9 RF ANTENNA CONDUCTED SPURIOUS EMISSIONS	42
6.10 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	46
6.11 RADIATED EMISSION	47
6.11.1 <i>Below 1GHz</i>	49
6.11.2 <i>Above 1GHz</i>	50
6.11.3 <i>Band edge (Radiated Emission)</i>	53

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	PASS
AC Power Line Conducted Emission	15.207	PASS
Conducted Peak Output Power	15.247 (b)(1)	PASS
20dB Occupied Bandwidth	15.247 (a)(1)	PASS
Carrier Frequencies Separation	15.247 (a)(1)	PASS
Hopping Channel Number	15.247 (a)(1)	PASS
Dwell Time	15.247 (a)(1)	PASS
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List (7 July 2002)	PASS
Radiated Emission	15.205/15.209	PASS
Band Edge	15.247(d)	PASS

Remark:

Pass: The EUT complies with the essential requirements in the standard.

5 General Information

5.1 Client Information

Applicant:	Archos SA
Address of Applicant:	12 Rue Ampere 91430 Igny France
Manufacturer:	Archos SA
Address of Manufacturer:	12 Rue Ampere 91430 Igny France
Factory:	Excelsior Electronics
Address of Factory:	Sam Tuen Management Zone, Houjie, Dongguan Guangdong PRC

5.2 General Description of E.U.T.

Product Name:	A80S Internet Tablet
Model No.:	9080
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	Frequency Hopping Spread Spectrum (FHSS)
Modulation Technology:	GFSK, Pi/4QPSK, 8DPSK
Antenna Type:	Integral
Antenna gain:	2dBi (declare by manufacturer)
Power supply:	Model:MD-ADP-0516UN001 Input: AC 100-240V 0.3A 50/60Hz Output: DC 5.0V 1.5A

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

5.3 Test environment and mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1008 mbar
Test mode:	
Transmitting mode	Keep the EUT in transmitting continuously mode.

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, July 20, 2010.

● **Industry Canada (IC)**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1.

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China

Tel: 0755-27798480

Fax: 0755-27798960

5.6 Other Information Requested by the Customer

None.


5.7 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 30 2011	Mar. 29 2012
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Sept. 10 2010	Sept. 09 2011
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Feb. 26 2011	Feb. 25 2012
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	Aug. 03 2011	Aug. 02 2012
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	Aug. 03 2011	Aug. 02 2012
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	Apr. 01 2011	Mar. 31 2012
9	Coaxial Cable	GTS	N/A	GTS211	Apr. 01 2011	Mar. 31 2012
9	Coaxial cable	GTS	N/A	GTS210	Apr. 01 2011	Mar. 31 2012
11	Coaxial Cable	GTS	N/A	GTS212	Apr. 01 2011	Mar. 31 2012
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Aug. 03 2011	Aug. 02 2012
13	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Aug. 03 2011	Aug. 02 2012
14	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	Aug. 03 2011	Aug. 02 2012
15	Band filter	Amindeon	82346	GTS219	Aug. 03 2011	Aug. 02 2012

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS252	Apr. 10 2011	Apr. 09 2012
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	Sept. 14 2010	Sept. 13 2011
3	10dB Pulse Limit	Rohde & Schwarz	N/A	GTS224	Sept. 14 2010	Sept. 13 2011
4	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	Apr. 14 2011	Apr. 13 2012
5	Coaxial Cable	GTS	N/A	GTS227	Apr. 01 2011	Mar. 31 2012
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

6 Test results and Measurement Data

6.1 Antenna requirement:

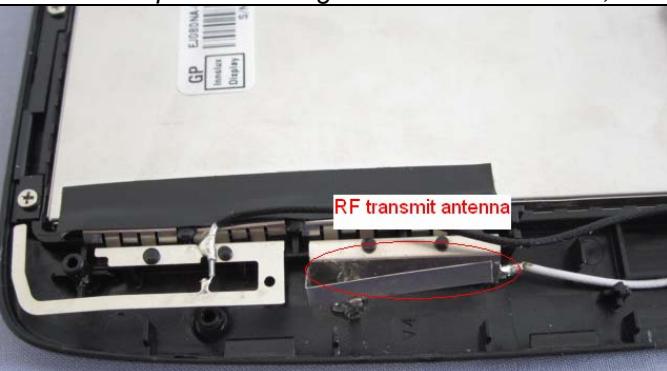Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement:	<p><i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i></p>
15.247(c) (1)(i) requirement:	<p><i>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</i></p>
E.U.T Antenna:	<p><i>The antenna port is an integral antenna inside EUT, the best case gain of the antenna is 2.0dBi.</i></p> 

6.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.4:2003		
Test Frequency Range:	150KHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9KHz, VBW=30KHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50

* Decreases with the logarithm of the frequency.


Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.		
Test setup:	Reference Plane LISN 40cm 80cm AUX Equipment E.U.T Test table/Insulation plane EMI Receiver Filter AC power Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Instruments:	Refer to section 5.7 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Line:

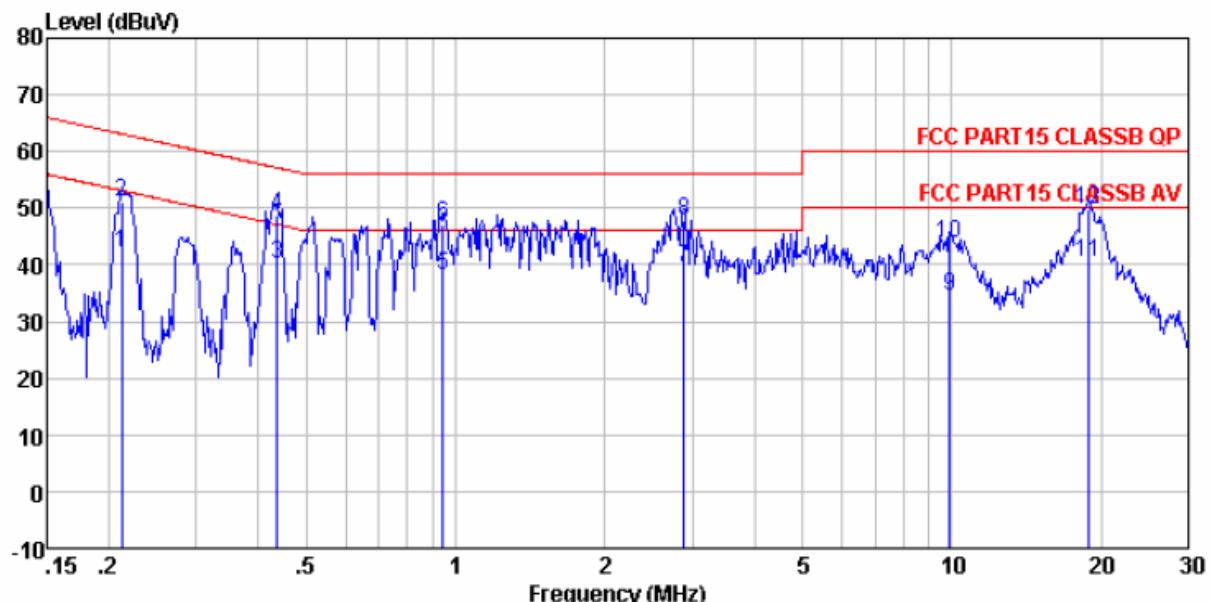


Condition : FCC PART15 CLASSB QP LISN(2011) LINE

Job No. : 507IT

Test Engineer: Collin

Freq	Read	LISN	Cable	Limit Line	Over Line	Remark
	Level	Factor	Loss			
MHz	dBuV	dB	dB	dBuV	dBuV	dB
1	0.213	41.28	0.65	0.10	42.03	53.10 -11.07 Average
2	0.213	50.24	0.65	0.10	50.99	63.10 -12.11 QP
3	0.437	39.61	0.57	0.10	40.28	47.11 -6.83 Average
4	0.437	48.19	0.57	0.10	48.86	57.11 -8.25 QP
5	0.943	37.66	0.48	0.10	38.24	46.00 -7.76 Average
6	0.943	46.53	0.48	0.10	47.11	56.00 -8.89 QP
7	2.884	38.91	0.36	0.10	39.37	46.00 -6.63 Average
8	2.884	47.43	0.36	0.10	47.89	56.00 -8.11 QP
9	9.913	34.19	0.22	0.20	34.61	50.00 -15.39 Average
10	9.913	43.45	0.22	0.20	43.87	60.00 -16.13 QP
11	18.920	40.18	0.15	0.21	40.54	50.00 -9.46 Average
12	18.920	49.36	0.15	0.21	49.72	60.00 -10.28 QP

Neutral:

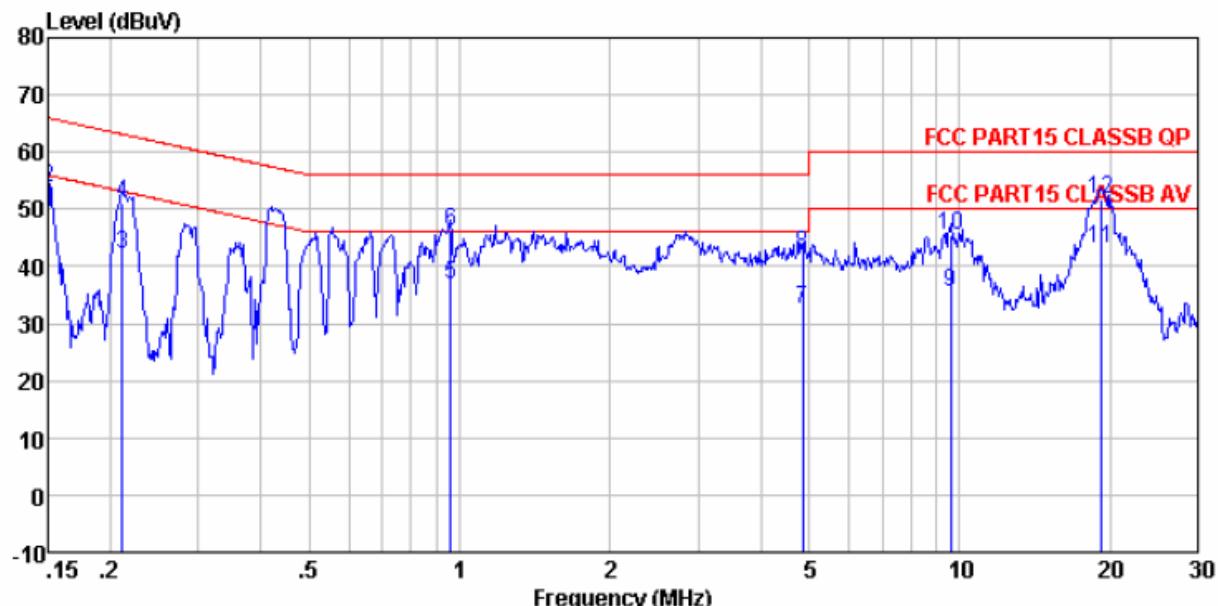

Condition : FCC PART15 CLASSB QP LISN(2011) NEUTRAL

Job No. : 507IT


Test Engineer: Collin

Freq	Read	LISN	Cable	Limit	Over	Remark	
	Level	Factor	Loss				
	MHz	dBuV	dB	dB	dBuV	dB	
1	0.150	43.18	0.69	0.10	43.97	56.00	-12.03 Average
2	0.150	52.93	0.69	0.10	53.72	66.00	-12.28 QP
3	0.212	41.55	0.65	0.10	42.30	53.14	-10.84 Average
4	0.212	50.40	0.65	0.10	51.15	63.14	-11.99 QP
5	0.958	36.27	0.48	0.10	36.85	46.00	-9.15 Average
6	0.958	45.62	0.48	0.10	46.20	56.00	-9.80 QP
7	4.848	32.19	0.30	0.10	32.59	46.00	-13.41 Average
8	4.848	41.77	0.30	0.10	42.17	56.00	-13.83 QP
9	9.603	35.18	0.23	0.20	35.61	50.00	-14.39 Average
10	9.603	44.97	0.23	0.20	45.40	60.00	-14.60 QP
11	19.224	42.89	0.15	0.21	43.25	50.00	-6.75 Average
12	19.224	51.25	0.15	0.21	51.61	60.00	-8.39 QP

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

6.3 Conducted Peak Output Power

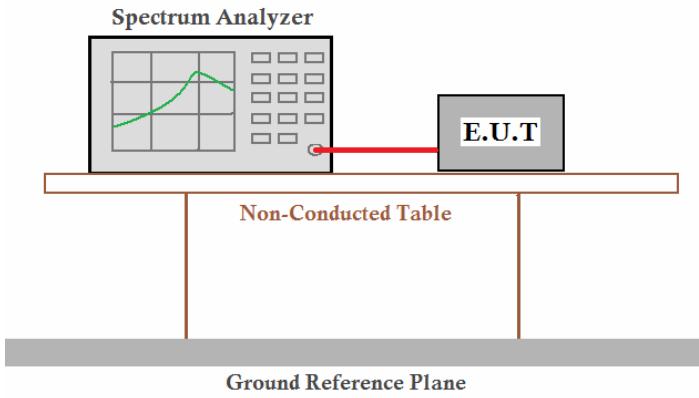Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.4:2003 and KDB DA00-705
Receiver setup:	RBW=3MHz, VBW=3MHz, Detector=Peak
Limit:	30dBm
Test setup:	 <p>Remark: Offset the High-Frequency cable loss 2.0dB in the spectrum analyzer.</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data


GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	1.21	30.00	Pass
Middle	1.30	30.00	Pass
Highest	0.60	30.00	Pass

Pi/4QPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	0.58	30.00	Pass
Middle	0.85	30.00	Pass
Highest	0.06	30.00	Pass


8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	0.89	30.00	Pass
Middle	1.20	30.00	Pass
Highest	0.62	30.00	Pass

Test plot as follows:


Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

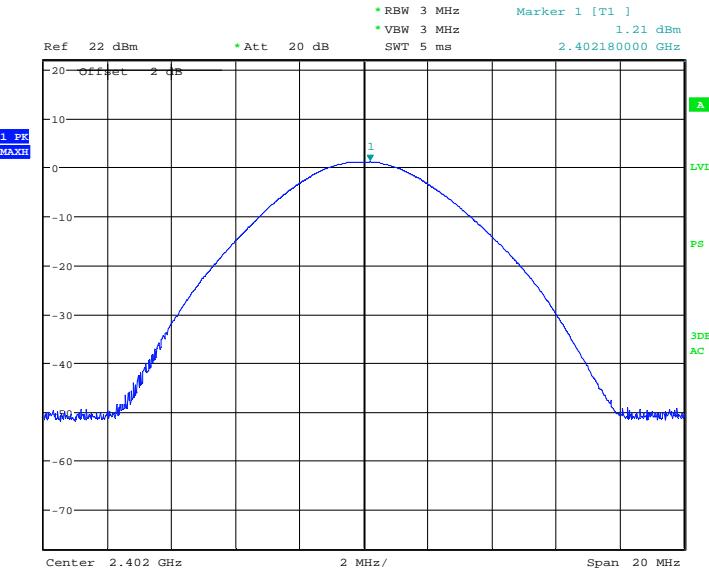


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

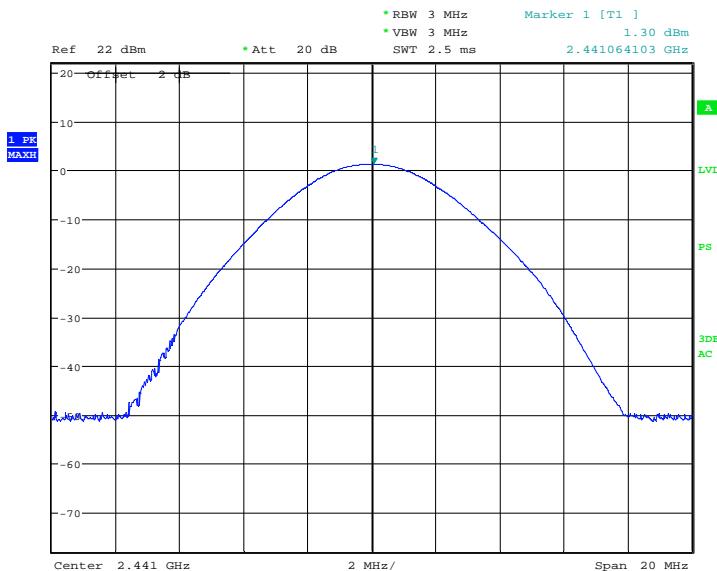


Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

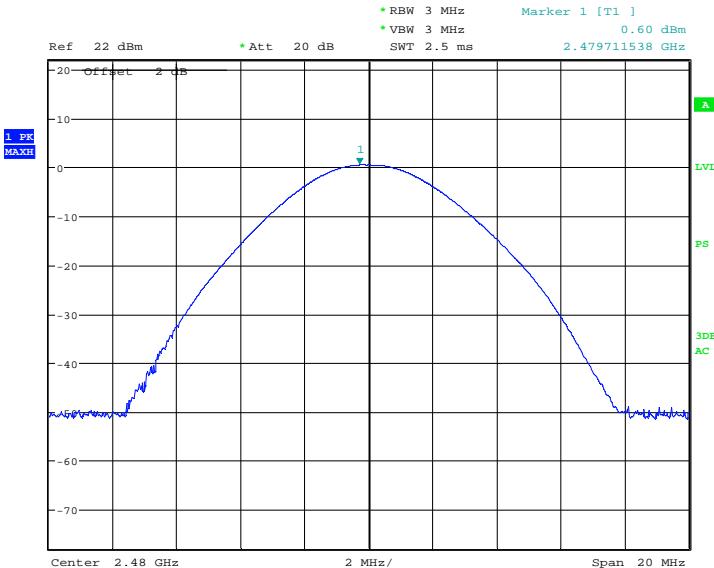


Test mode:	Pi/4QPSK	Test channel:	Lowest
------------	----------	---------------	--------

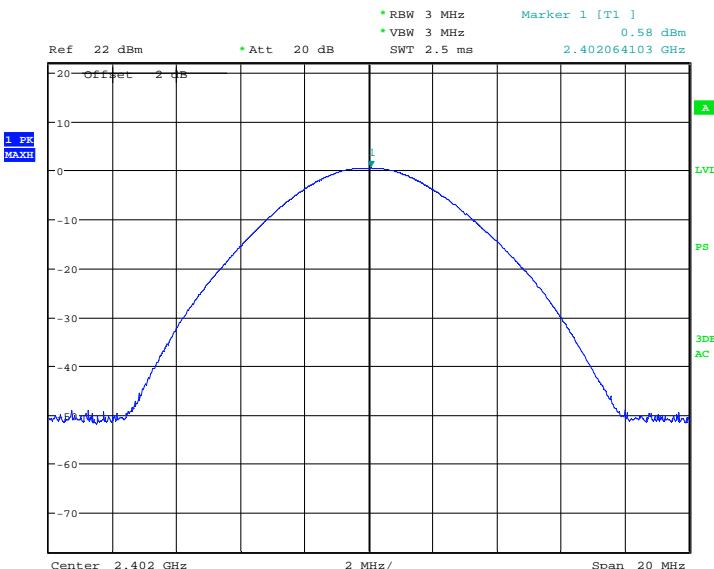


Test mode:	Pi/4QPSK	Test channel:	Middle
------------	----------	---------------	--------

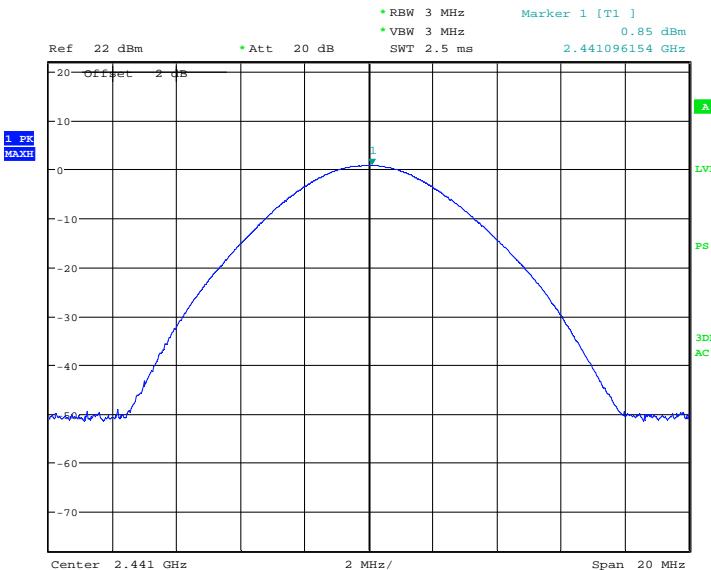


Test mode:	Pi/4QPSK	Test channel:	Highest
------------	----------	---------------	---------

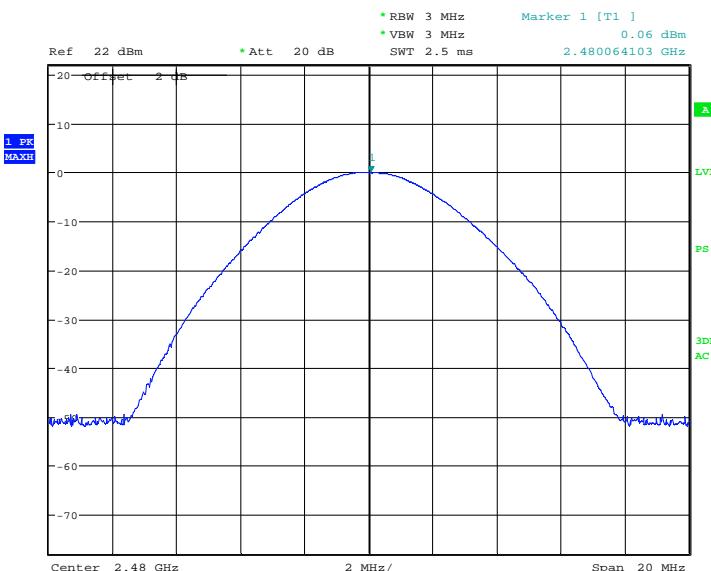


Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

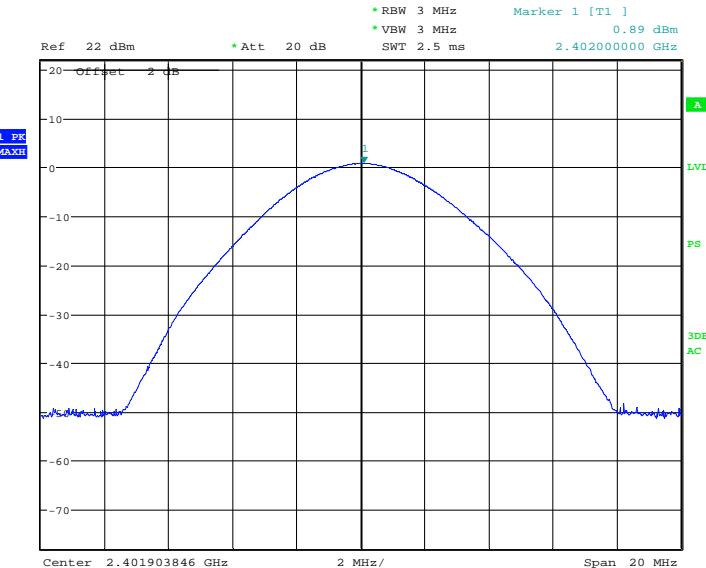

Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

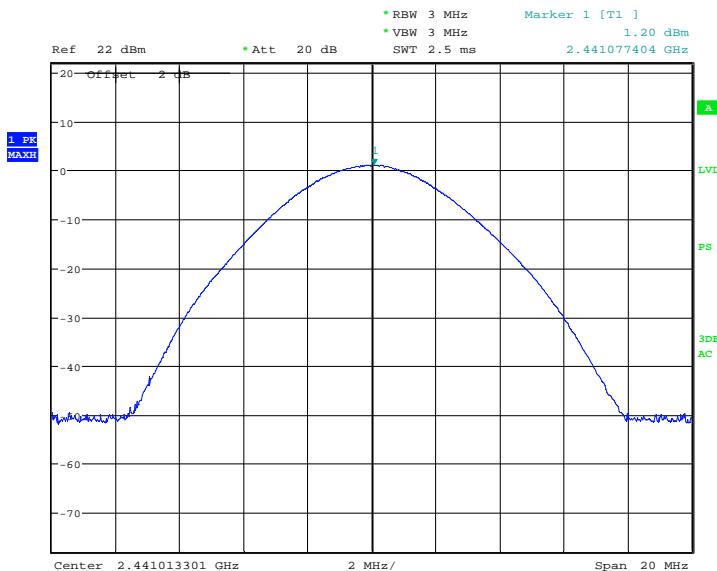


Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

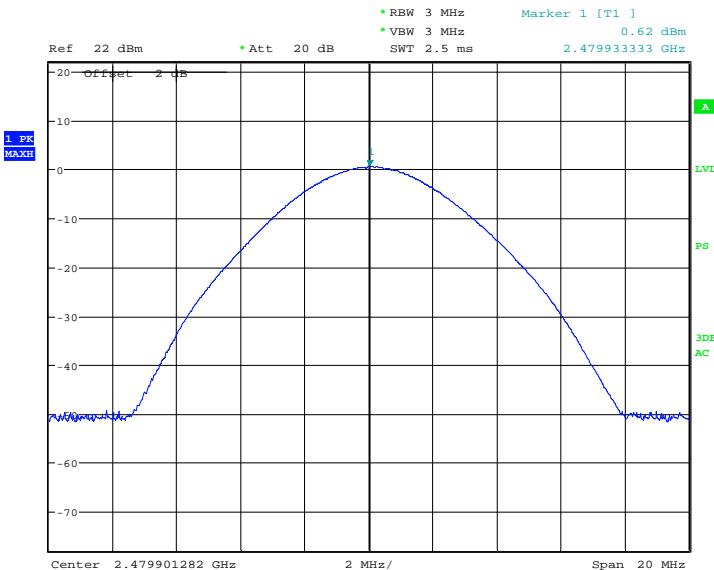

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotech.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotech.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."


6.4 20dB Occupy Bandwidth

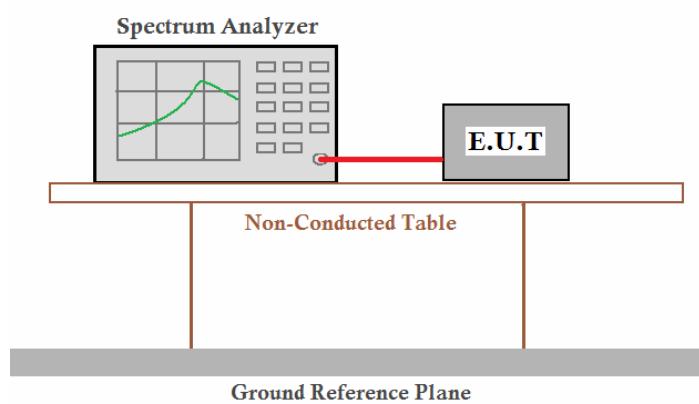Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and KDB DA00-705
Receiver setup:	RBW=30KHz, VBW=100KHz,detector=Peak
Limit:	NA
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Measurement Data			
Test channel	20dB Occupy Bandwidth (KHz)		
	GFSK	Pi/4QPSK	8DPSK
Lowest	844.00	1128.28	1214.75
Middle	846.15	1352.56	1214.74
Highest	871.79	1217.94	1211.53

Test plot as follows:


Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

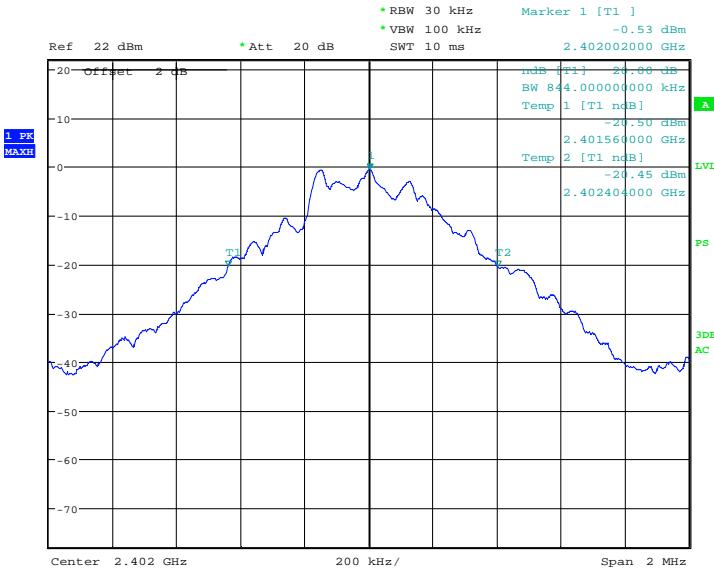


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

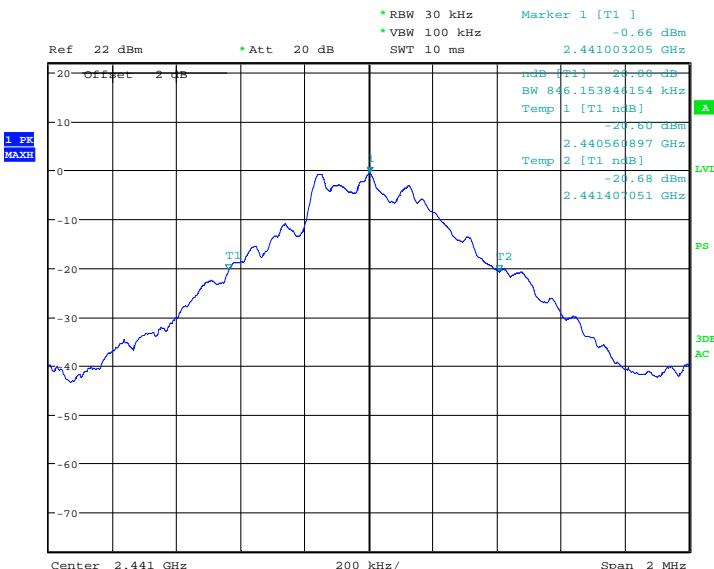

Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

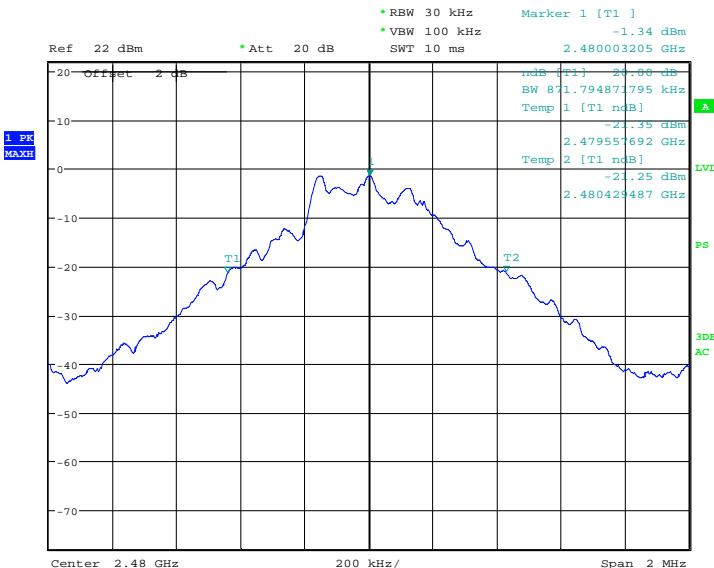

Test mode:	Pi/4QPSK	Test channel:	Lowest
------------	----------	---------------	--------

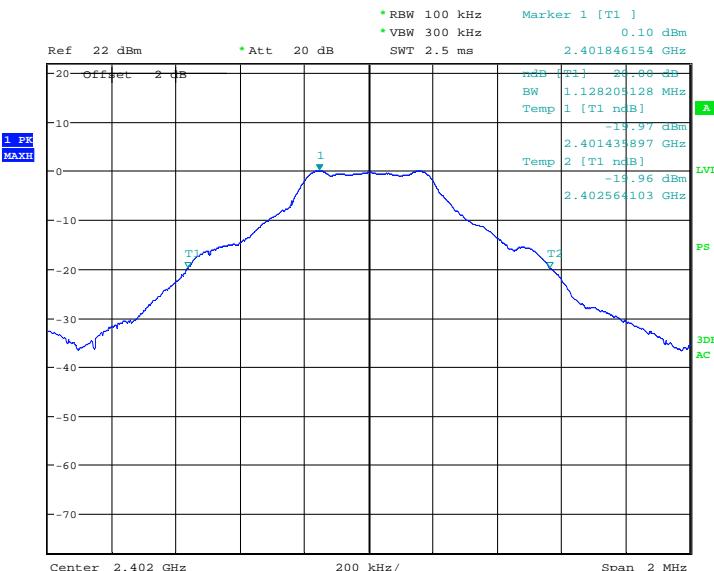


Date: 14.JUL.2011 20:48:46


Test mode:	Pi/4QPSK	Test channel:	Middle
------------	----------	---------------	--------




Test mode:	Pi/4QPSK	Test channel:	Highest
------------	----------	---------------	---------

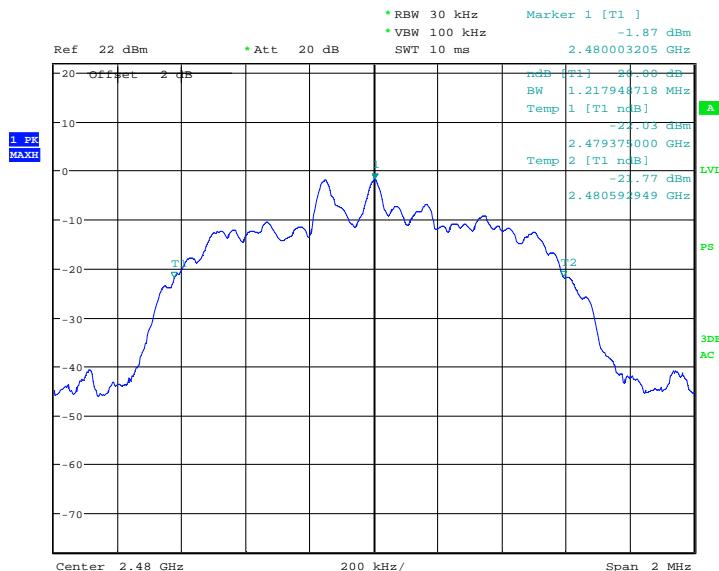


Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

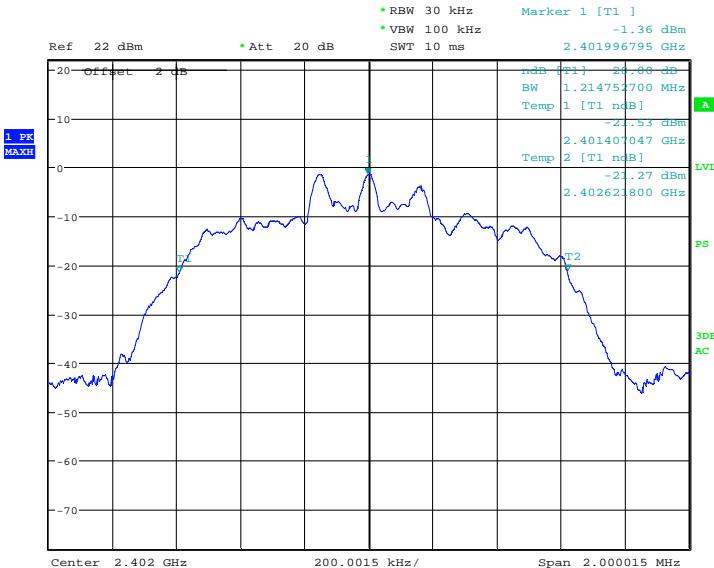

Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

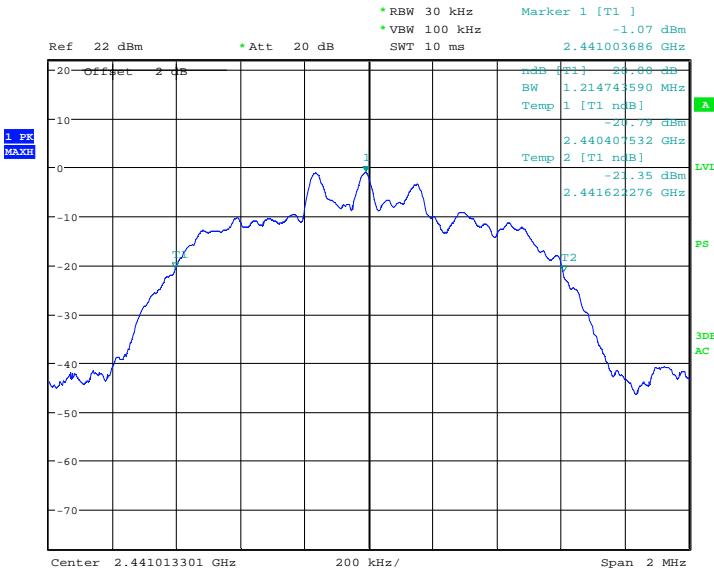


Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

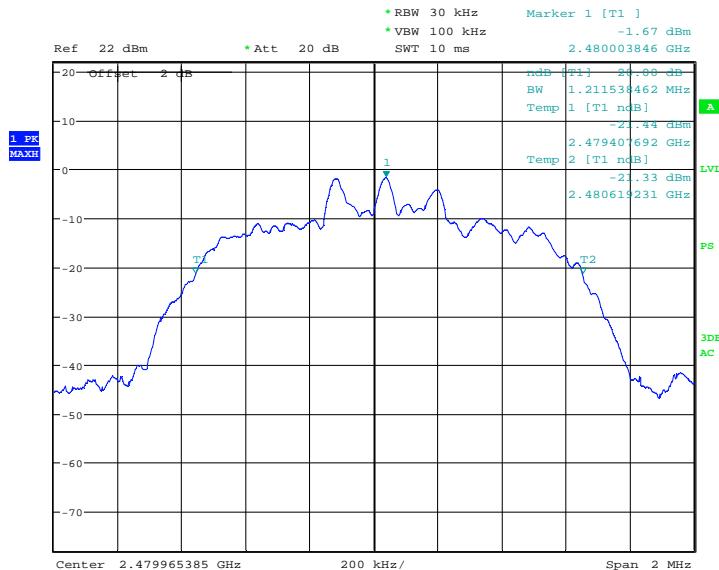

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotech.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotech.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

6.5 Carrier Frequencies Separation

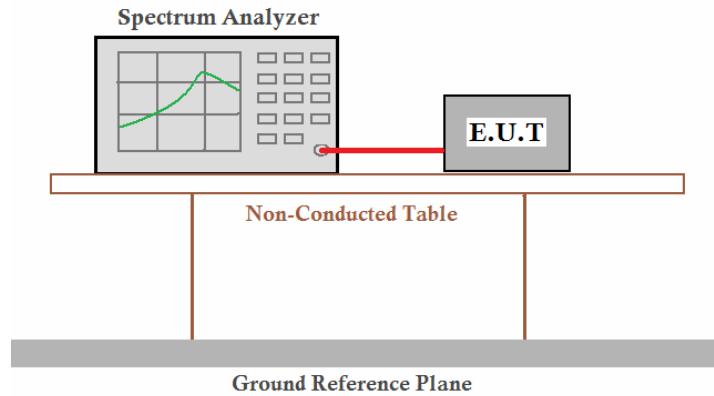Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and KDB DA00-705
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Measurement Data			
GFSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1019	531	Pass
Middle	996	531	Pass
Highest	967	531	Pass
Pi/4QPSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1006	920	Pass
Middle	1000	920	Pass
Highest	1006	920	Pass
8DPSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1006	805	Pass
Middle	1003	805	Pass
Highest	1009	805	Pass

Note: According to section 6.4,


Mode	20dB bandwidth (KHz) (worse case)	Limit (KHz) (Carrier Frequencies Separation)
GFSK	796	531
Pi/4QPSK	1380	920
8DPSK	1208	805

Test plot as follows:


Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

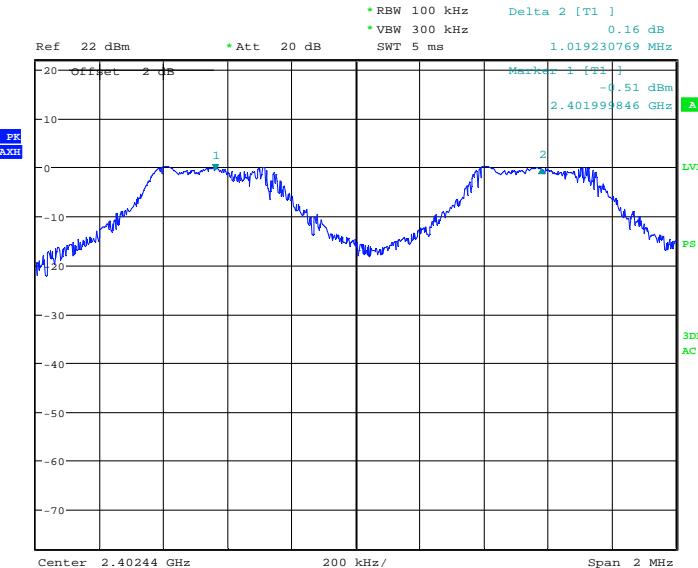


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

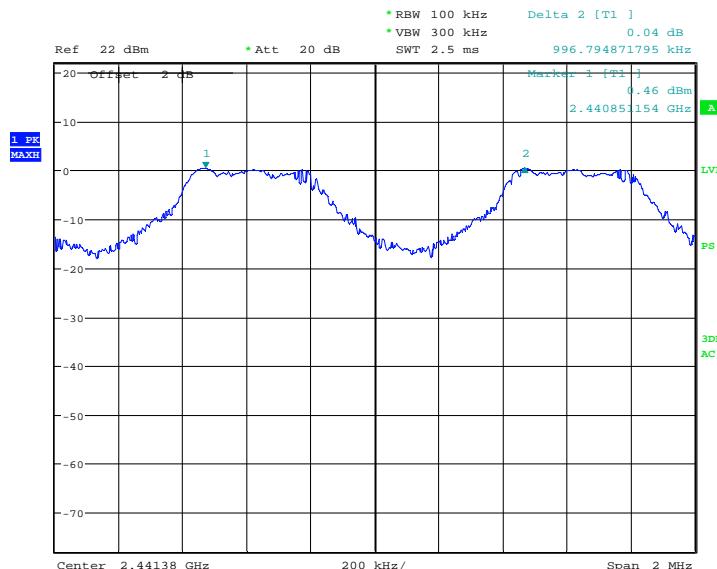


Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

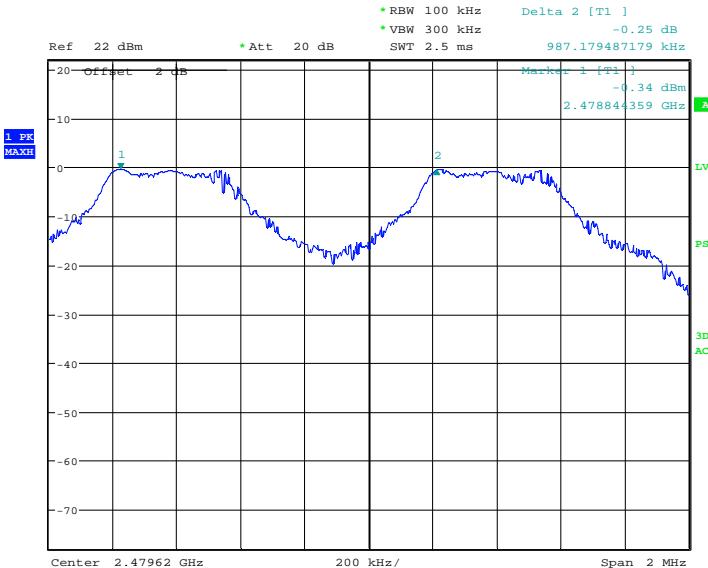


Test mode:	Pi/4QPSK	Test channel:	Lowest
------------	----------	---------------	--------

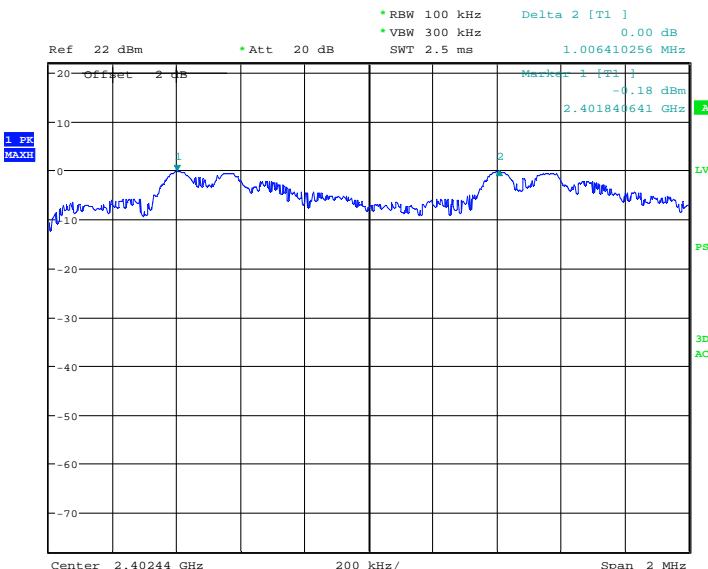


Test mode:	Pi/4QPSK	Test channel:	Middle
------------	----------	---------------	--------

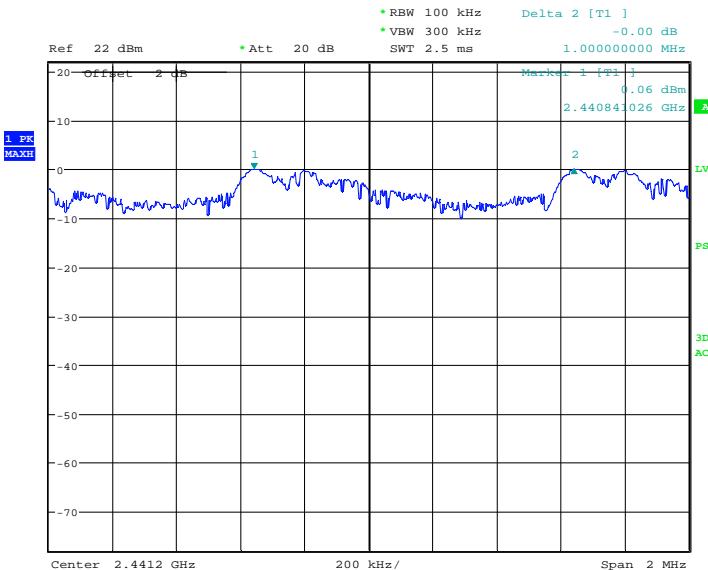


Test mode:	Pi/4QPSK	Test channel:	Highest
------------	----------	---------------	---------

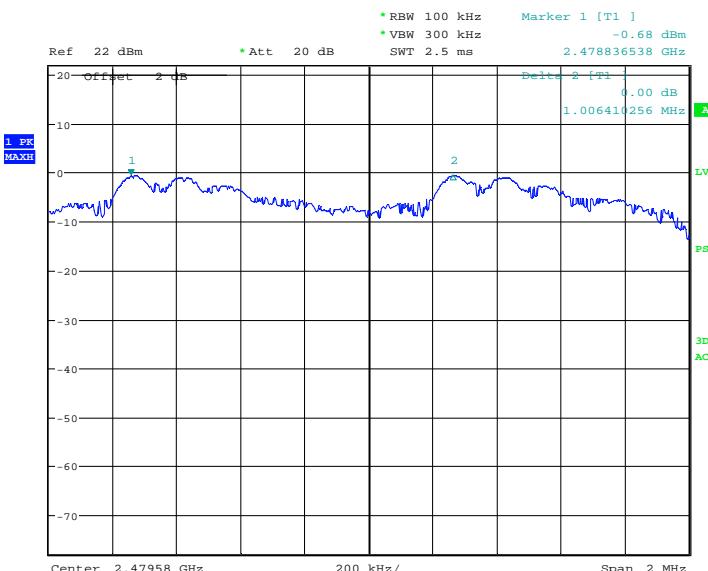


Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

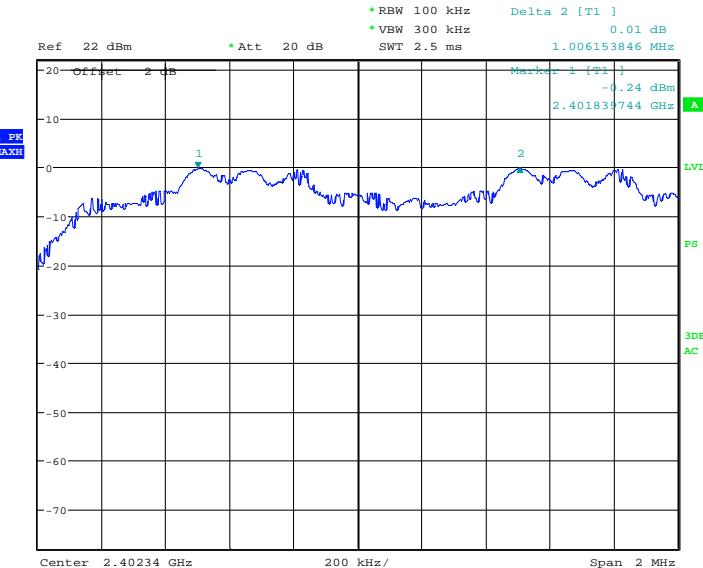

Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

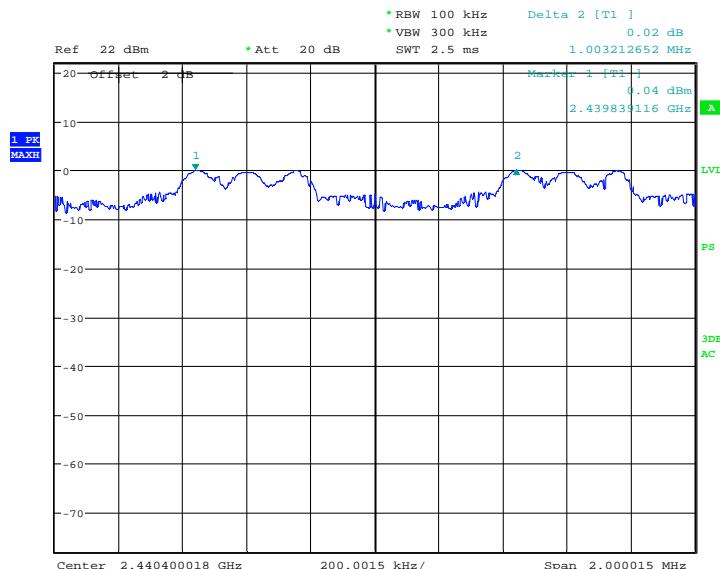


Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

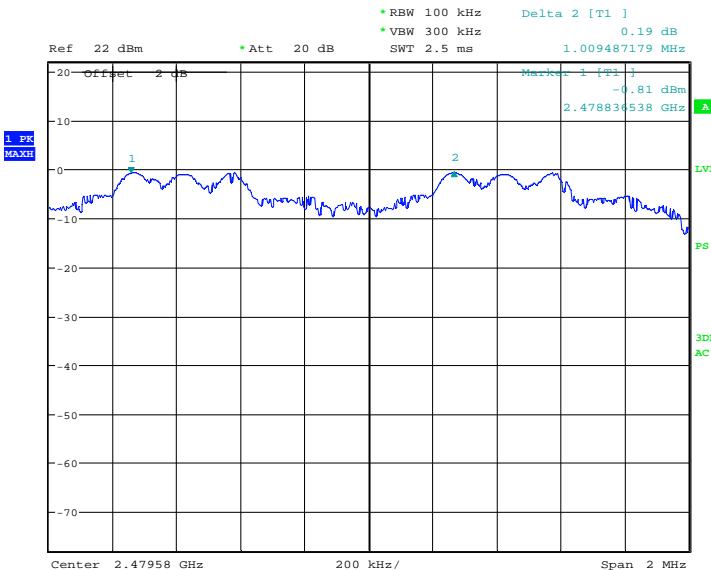

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotech.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotech.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."


6.6 Hopping Channel Number

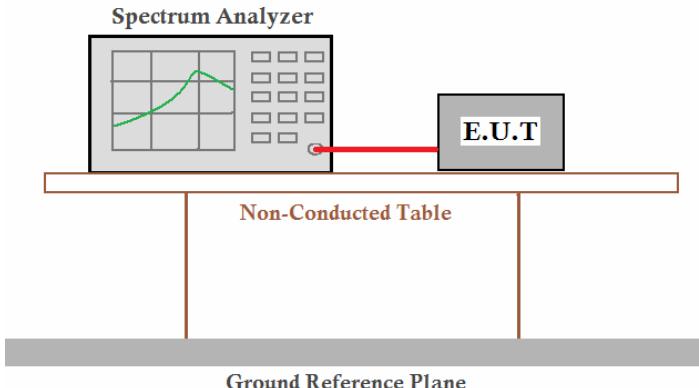Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and KDB DA00-705
Receiver setup:	RBW=100KHz, VBW=300KHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15channels
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Measurement Data		
Mode	Hopping channel numbers	Limit
GFSK	79	75
Pi/4QPSK	79	75
8DPSK	79	75

Test plot as follows


Test mode:	GFSK
------------	------

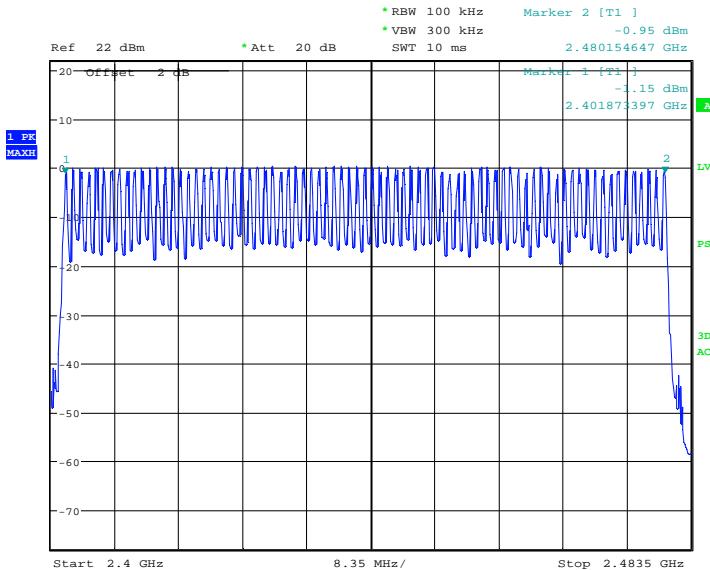

Test mode:	Pi/4QPSK
------------	----------

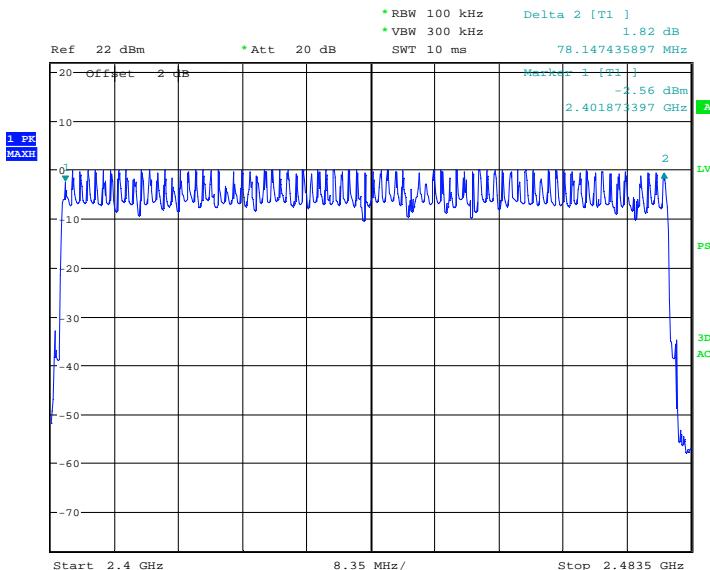


Test mode:	8DPSK
------------	-------

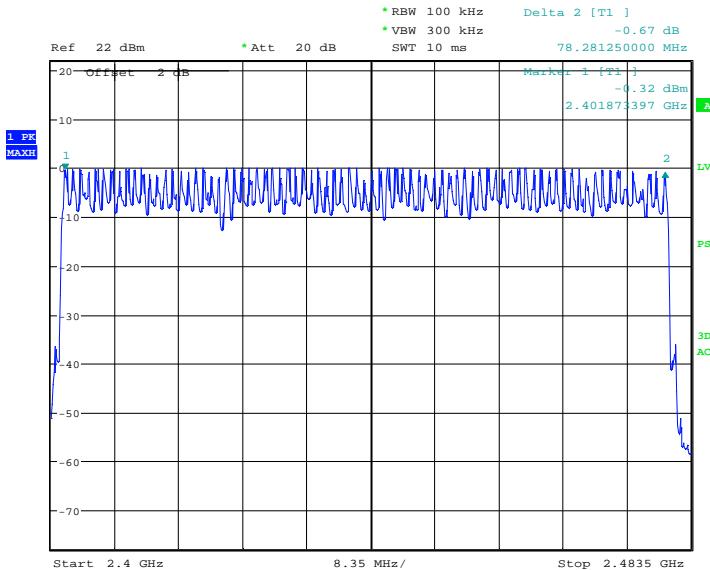

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebotech.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebotech.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

6.7 Dwell Time

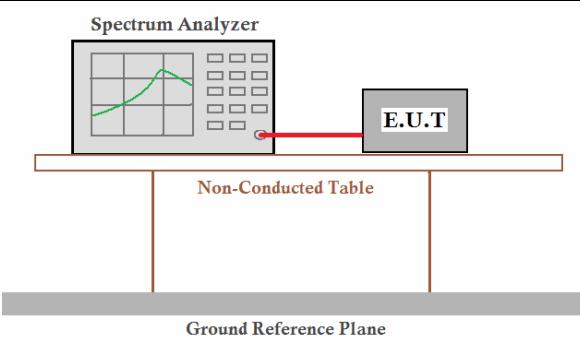Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and KDB DA00-705
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test mode:	Hopping transmitting with all kind of modulation.
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data			
Mode	Packet	Dwell time (second)	Limit (second)
GFSK	DH1	0.134	0.4
	DH3	0.269	0.4
	DH5	0.314	0.4
Pi/4QPSK	2-DH1	0.134	0.4
	2-DH3	0.269	0.4
	2-DH5	0.314	0.4
8DPSK	3-DH1	0.134	0.4
	3-DH3	0.269	0.4
	3-DH5	0.314	0.4

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as blow


DH1 time slot=0.418 (ms)*(1600/ (2*79))*31.6=133.76ms

DH3 time slot=1.679(ms)*(1600/ (4*79))*31.6=268.64ms


DH5 time slot=2.947 (ms)*(1600/ (6*79))*31.6=314.34ms

Test plot as follows


Test mode:	GFSK, Pi/4QPSK, 8DPSK	Test Packet:	DH1, 2-DH1, 3-DH1
------------	-----------------------	--------------	-------------------

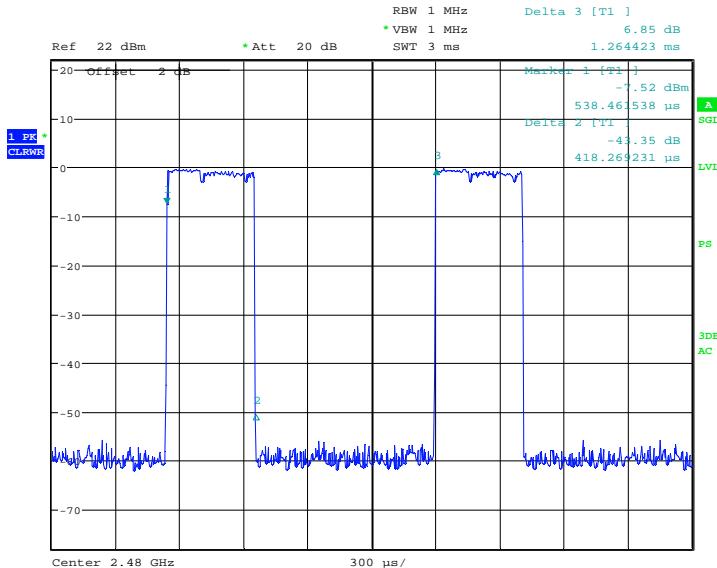


Test mode: GFSK, Pi/4QPSK, 8DPSK Test Packet: DH3, 2-DH3, 3-DH3

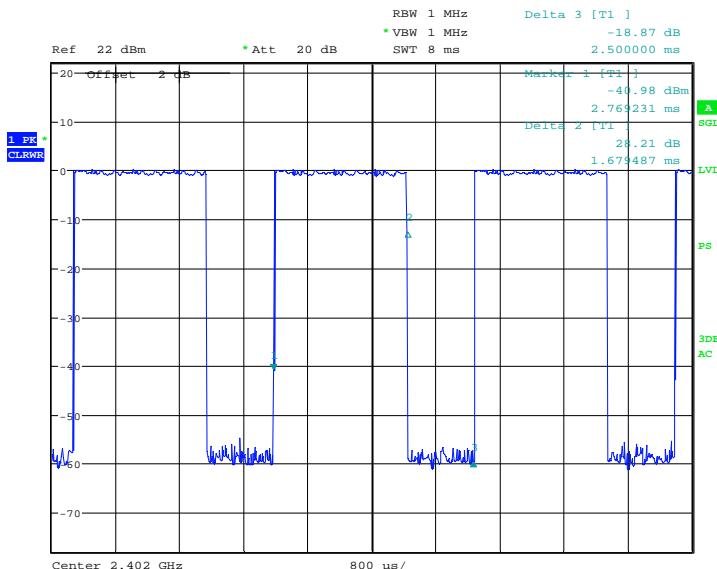

Test mode:	GFSK, Pi/4QPSK, 8DPSK	Test Packet:	DH5, 2-DH5, 3-DH5
------------	-----------------------	--------------	-------------------

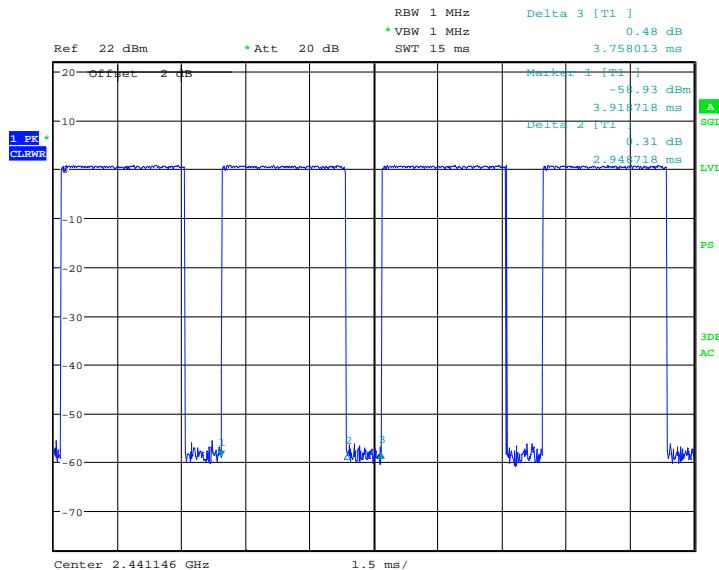

6.8 Band Edge

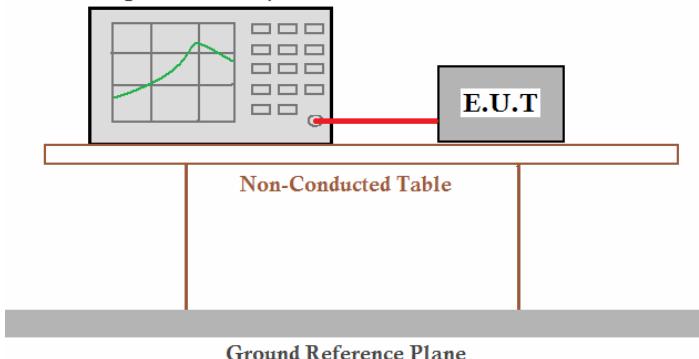
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and KDB DA00-705
Receiver setup:	RBW=100KHz, VBW=300KHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	<p style="text-align: center;">Spectrum Analyzer</p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Remark:


During test the item, Pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case.

Test plot as follows:

Worse case mode:	GFSK	Test channel:	Lowest
Hopping off mode:			

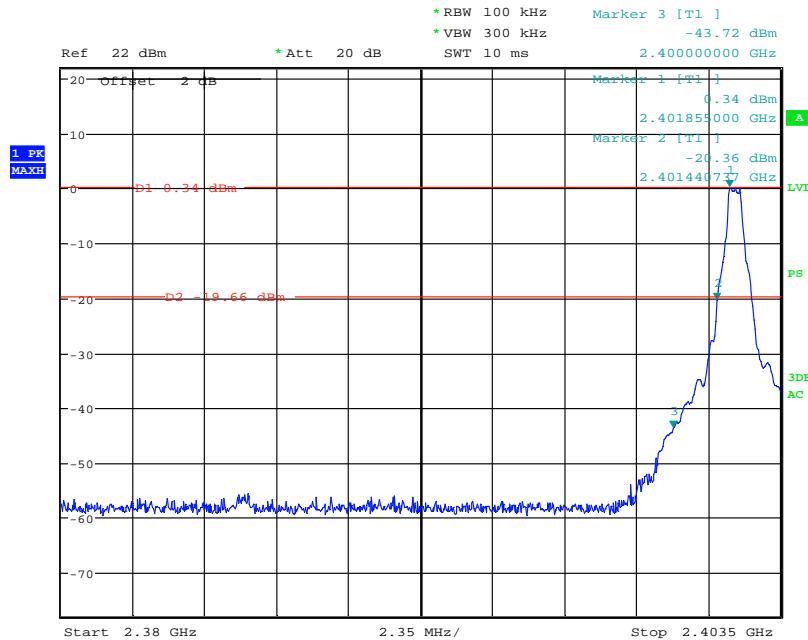


Hopping mode:

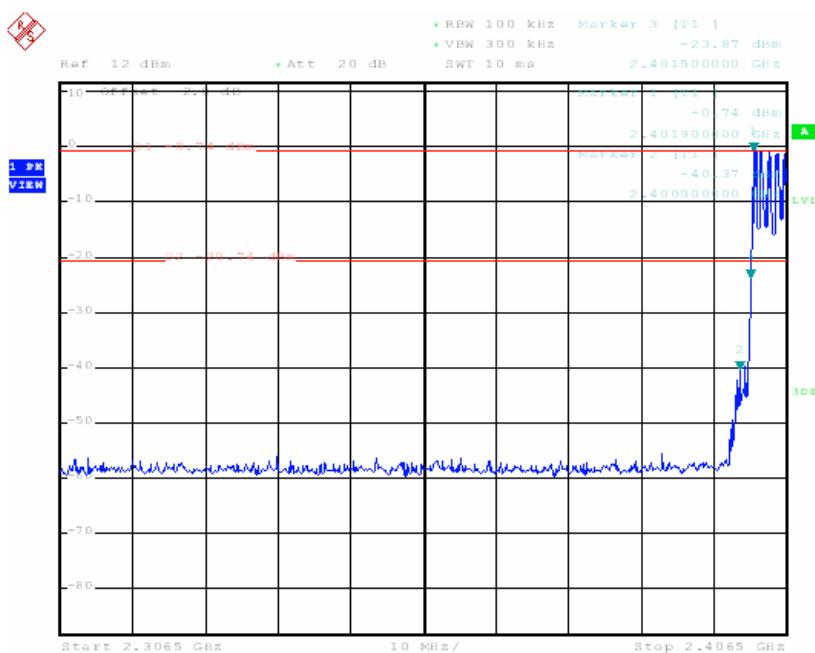


Worse case mode:	GFSK	Test channel:	Highest
------------------	------	---------------	---------


Hopping off mode:

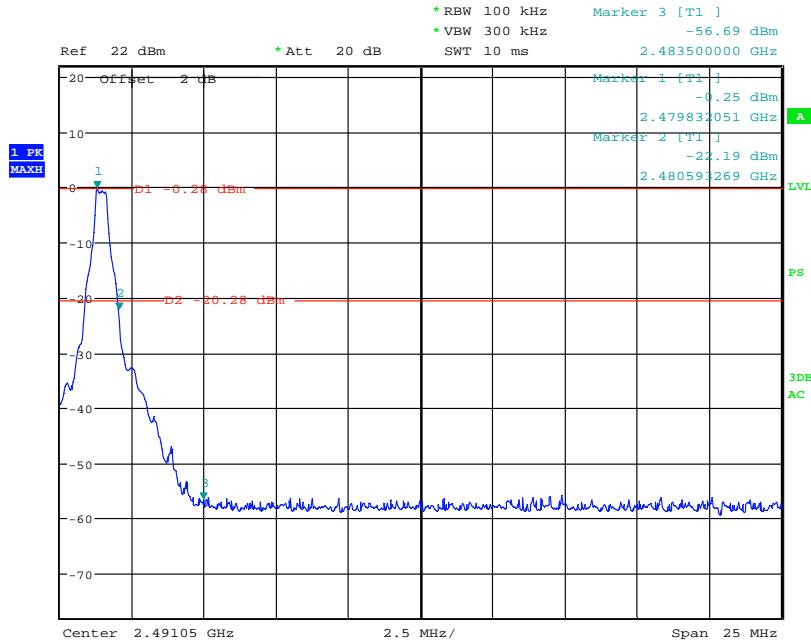

Hopping mode:

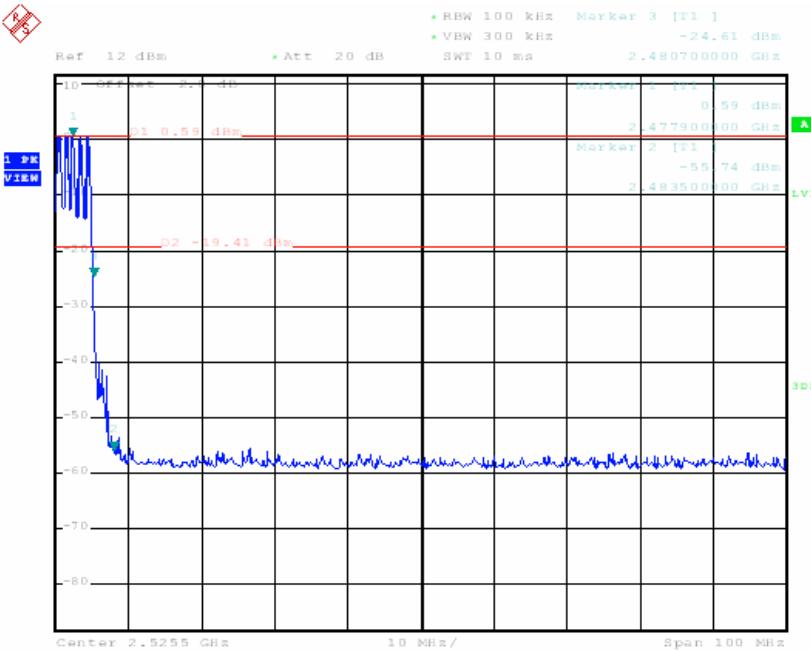



6.9 RF Antenna Conducted spurious emissions

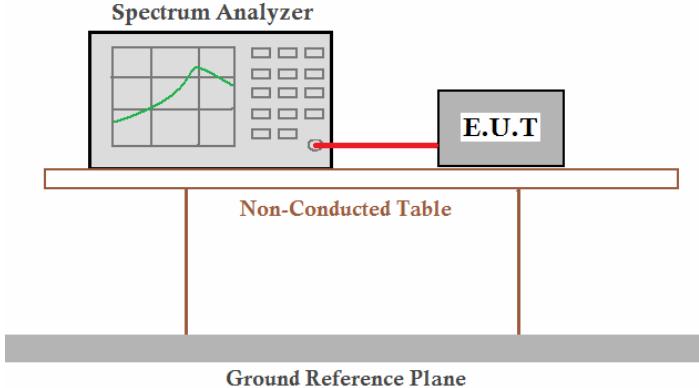Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and KDB DA00-705
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>Remark: <i>Offset the High-Frequency cable loss 2.0dB in the spectrum analyzer.</i></p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass



Remark:

During test the item, Pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case.



Worse case mode:	GFSK	Test channel:	Lowest
------------------	------	---------------	--------

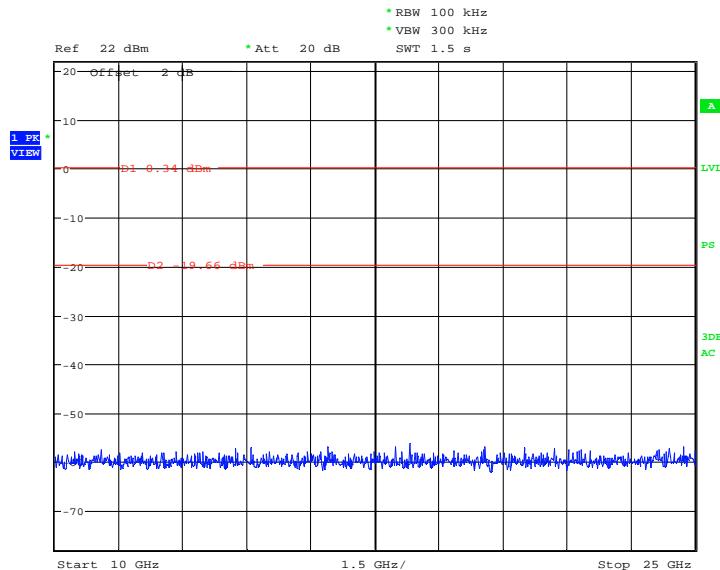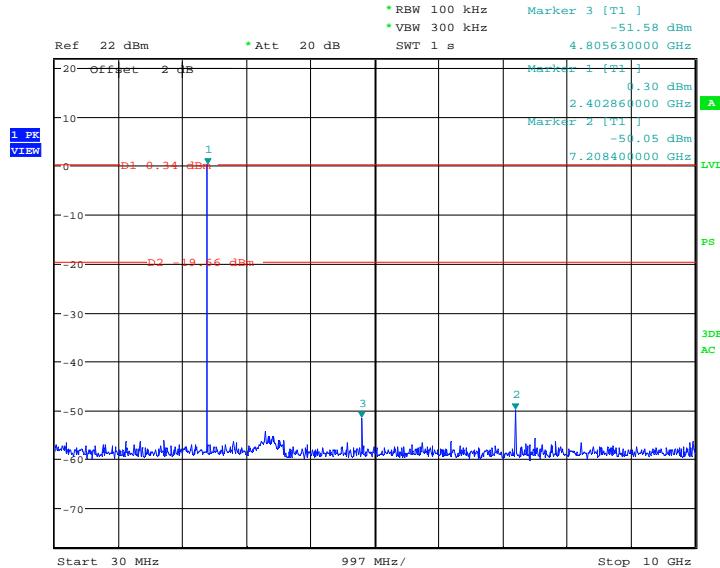


Worse case mode: GFSK Test channel: Middle

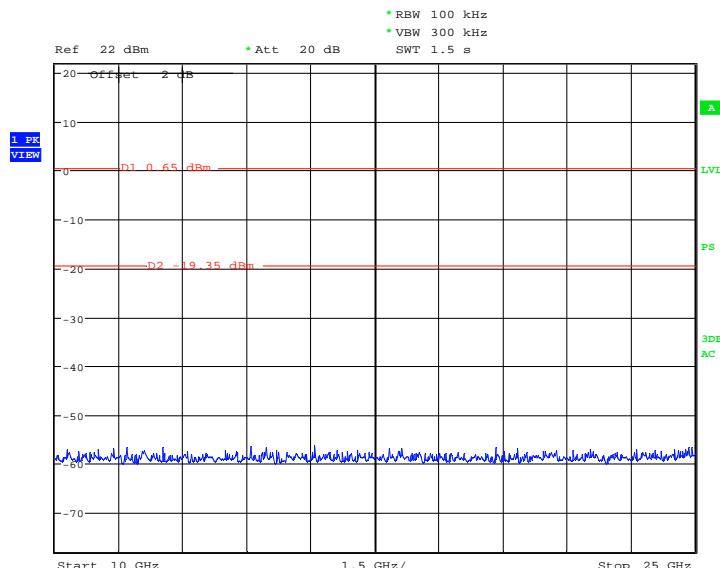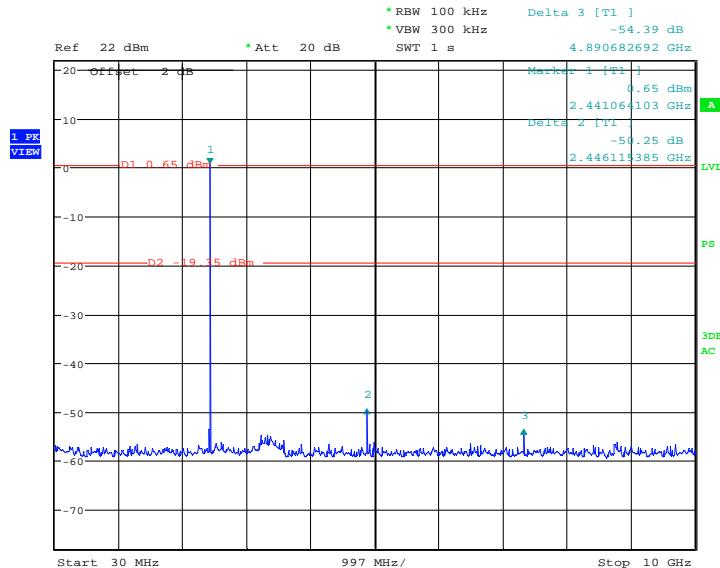

Worse case mode:	GFSK	Test channel:	Highest
------------------	------	---------------	---------

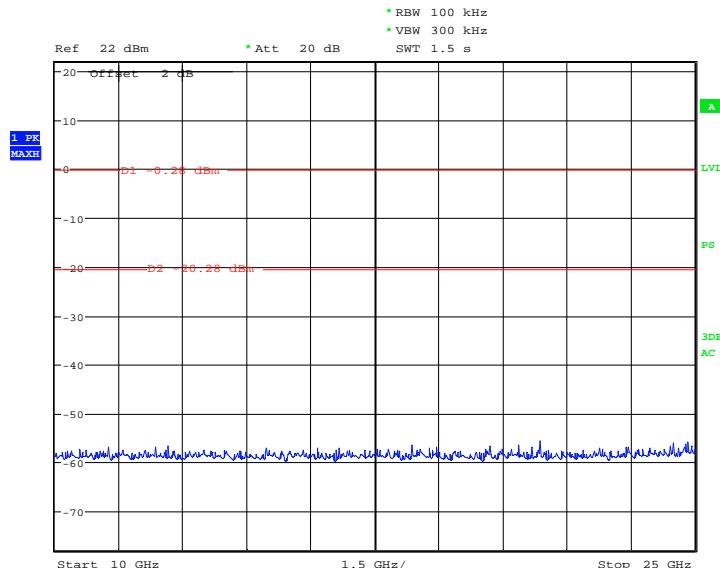
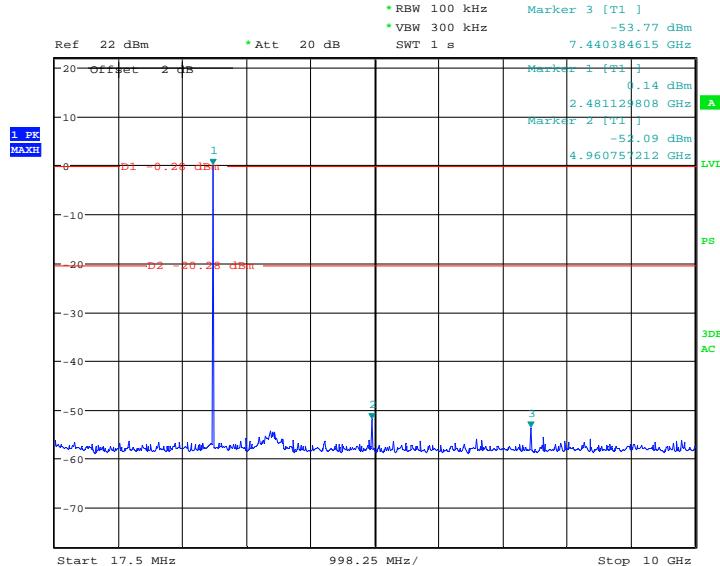


6.10 Pseudorandom Frequency Hopping Sequence

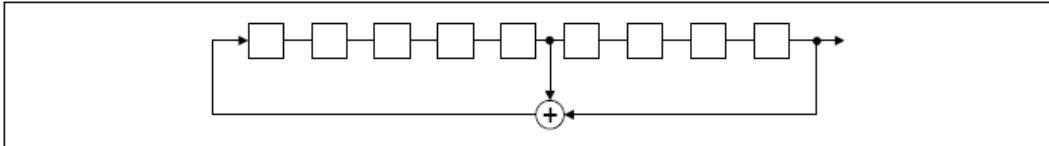Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement: <i>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</i> <i>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</i>																						
EUT Pseudorandom Frequency Hopping Sequence																							
<p><i>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.</i></p> <ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) 																							
<p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p><i>An example of Pseudorandom Frequency Hopping Sequence as follow:</i></p> <table border="1"> <tr> <td>0</td><td>2</td><td>4</td><td>6</td><td>62</td><td>64</td><td>78</td><td>1</td><td>73</td><td>75</td><td>77</td> </tr> <tr> <td> </td><td> </td> </tr> </table> <p><i>Each frequency used equally on the average by each transmitter.</i> <i>The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</i></p>		0	2	4	6	62	64	78	1	73	75	77											
0	2	4	6	62	64	78	1	73	75	77													

6.11 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205																									
Test Method:	ANSI C63.4: 2003																									
Test Frequency Range:	30MHz to 25GHz																									
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																									
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>100KHz</td> <td>300KHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td></td> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average Value</td> </tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value		Peak	1MHz	10Hz	Average Value	
Frequency	Detector	RBW	VBW	Remark																						
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																						
Above 1GHz	Peak	1MHz	3MHz	Peak Value																						
	Peak	1MHz	10Hz	Average Value																						
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.5</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>Above 1GHz</td> <td>54.0</td> <td>Average Value</td> </tr> <tr> <td></td> <td>74.0</td> <td>Peak Value</td> </tr> </tbody> </table>					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value		74.0	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																								
30MHz-88MHz	40.0	Quasi-peak Value																								
88MHz-216MHz	43.5	Quasi-peak Value																								
216MHz-960MHz	46.0	Quasi-peak Value																								
960MHz-1GHz	54.0	Quasi-peak Value																								
Above 1GHz	54.0	Average Value																								
	74.0	Peak Value																								
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report. 																									

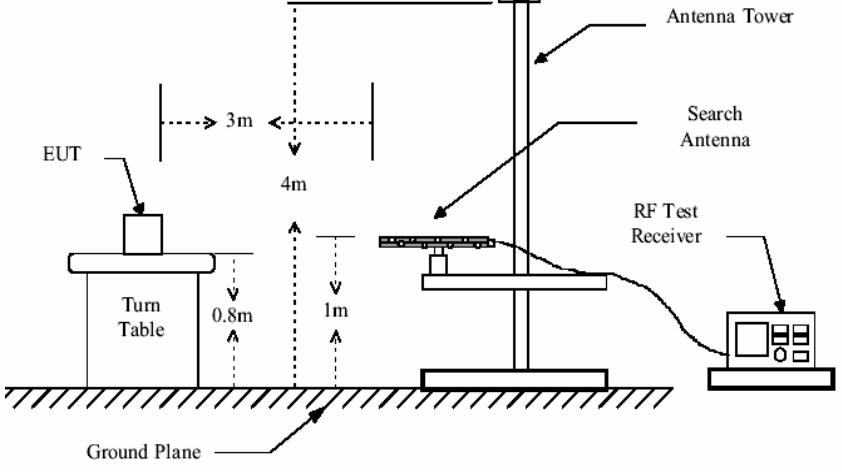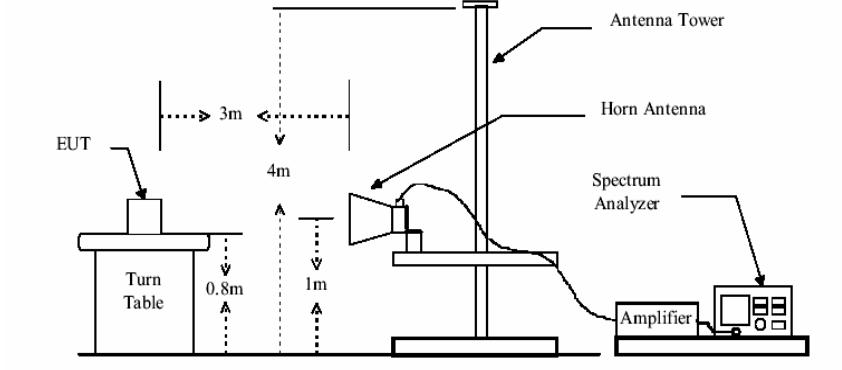Test setup:	<p>Below 1GHz</p>  <p>Above 1GHz</p> 
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

6.11.1 Below 1GHz

Test in Bluetooth mode.

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Frequency (MHz)
32.07	0.61	14.60	32.23	47.51	30.49	40.00	-9.51	Vertical
71.33	0.86	13.23	31.87	45.25	27.47	40.00	-12.53	Vertical
156.46	1.56	10.02	32.01	50.20	29.77	43.50	-13.73	Vertical
230.91	1.90	10.86	32.28	48.15	28.63	46.00	-17.37	Vertical
400.43	2.26	14.22	32.32	51.68	35.84	46.00	-10.16	Vertical
699.31	2.94	20.27	31.70	48.24	39.75	46.00	-6.25	Vertical
49.71	0.67	14.80	32.01	39.47	22.93	40.00	-17.07	Horizontal
166.65	1.61	11.53	32.08	52.42	33.48	43.50	-10.02	Horizontal
232.53	1.91	11.98	32.28	53.77	35.38	46.00	-10.62	Horizontal
349.25	2.17	13.84	32.31	55.08	38.78	46.00	-7.22	Horizontal
400.43	2.26	15.64	32.32	54.74	40.32	46.00	-5.68	Horizontal
701.76	2.94	23.19	31.69	47.34	41.78	46.00	-4.22	Horizontal

6.11.2 Above 1GHz

Worse case mode:	GFSK	Test channel:	Lowest	Remark:	Peak
------------------	------	---------------	--------	---------	------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804	9.36	34.25	41.53	50.17	52.25	74.00	-21.75	Vertical
7206	11.42	35.84	39.48	45.29	53.07	74.00	-20.93	Vertical
9608	13.39	37.99	37.56	41.92	55.74	74.00	-18.26	Vertical
12010	16.45	39.10	39.09	40.09	56.55	74.00	-17.45	Vertical
14412				---		74.00		Vertical
16814				---		74.00		Vertical
4804	9.36	34.25	41.53	48.78	50.86	74.00	-23.14	Horizontal
7206	11.42	35.84	39.48	43.83	51.61	74.00	-22.39	Horizontal
9608	13.39	37.99	37.56	40.39	54.21	74.00	-19.79	Horizontal
12010	16.45	39.10	39.09	38.49	54.95	74.00	-19.05	Horizontal
14412				---		74.00		Horizontal
16814				---		74.00		Horizontal

Worse case mode:	GFSK	Test channel:	Lowest	Remark:	Average
------------------	------	---------------	--------	---------	---------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804	9.36	34.25	41.53	29.64	31.72	54.00	-22.28	Vertical
7206	11.42	35.84	39.48	26.41	34.19	54.00	-19.81	Vertical
9608	13.39	37.99	37.56	24.57	38.39	54.00	-15.61	Vertical
12010	16.45	39.10	39.09	24.21	40.67	54.00	-13.33	Vertical
14412				---		54.00		Vertical
16814				---		54.00		Vertical
4804	9.36	34.25	41.53	28.35	30.43	54.00	-23.57	Horizontal
7206	11.42	35.84	39.48	25.05	32.83	54.00	-21.17	Horizontal
9608	13.39	37.99	37.56	23.14	36.96	54.00	-17.04	Horizontal
12010	16.45	39.10	39.09	22.71	39.17	54.00	-14.83	Horizontal
14412				---		54.00		Horizontal
16814				---		54.00		Horizontal

Remark

--- means that the emission level is too low to be measured

Worse case mode:	GFSK	Test channel:	Middle	Remark:	Peak
------------------	------	---------------	--------	---------	------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882	10.57	34.35	40.33	47.04	51.63	74.00	-22.37	Vertical
7323	11.85	36.12	39.18	44.35	53.14	74.00	-20.86	Vertical
9764	13.89	38.03	37.94	40.47	54.45	74.00	-19.55	Vertical
12205	17.95	39.23	39.30	37.86	55.74	74.00	-18.26	Vertical
14646				---		74.00		Vertical
17087				---		74.00		Vertical
4882	10.57	34.35	40.33	45.99	50.58	74.00	-23.42	Horizontal
7323	11.85	36.12	39.18	43.37	52.16	74.00	-21.84	Horizontal
9764	13.89	38.03	37.94	39.56	53.54	74.00	-20.46	Horizontal
12205	17.95	39.23	39.30	38.02	55.90	74.00	-18.10	Horizontal
14646				---		74.00		Horizontal
17087				---		74.00		Horizontal

Worse case mode:	GFSK	Test channel:	Middle	Remark:	Average
------------------	------	---------------	--------	---------	---------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882	10.57	34.35	40.33	28.95	33.54	54.00	-20.46	Vertical
7323	11.85	36.12	39.18	26.47	35.26	54.00	-18.74	Vertical
9764	13.89	38.03	37.94	24.75	38.73	54.00	-15.27	Vertical
12205	17.95	39.23	39.30	22.62	40.50	54.00	-13.50	Vertical
14646				---		54.00		Vertical
17087				---		54.00		Vertical
4882	10.57	34.35	40.33	28.04	32.63	54.00	-21.37	Horizontal
7323	11.85	36.12	39.18	25.60	34.39	54.00	-19.61	Horizontal
9764	13.89	38.03	37.94	23.92	37.90	54.00	-16.10	Horizontal
12205	17.95	39.23	39.30	21.83	39.71	54.00	-14.29	Horizontal
14646				---		54.00		Horizontal
17087				---		54.00		Horizontal

Remark

”---“ means that the emission level is too low to be measured

Worse case mode:	GFSK	Test channel:	Highest	Remark:	Peak
------------------	------	---------------	---------	---------	------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960	10.73	34.45	40.18	44.73	49.73	74.00	-24.27	Vertical
7440	12.35	36.68	38.85	43.57	53.75	74.00	-20.25	Vertical
9920	14.24	38.08	37.78	40.44	54.98	74.00	-19.02	Vertical
12400	17.55	39.34	37.48	37.18	56.59	74.00	-17.41	Vertical
14880				---		74.00		Vertical
17360				---		74.00		Vertical
4960	10.73	34.45	40.18	43.48	48.48	74.00	-25.52	Horizontal
7440	12.35	36.68	38.85	42.25	52.43	74.00	-21.57	Horizontal
9920	14.24	38.08	37.78	39.05	53.59	74.00	-20.41	Horizontal
12400	17.55	39.34	37.48	37.41	56.82	74.00	-17.18	Horizontal
14880				---		74.00		Horizontal
17360				---		74.00		Horizontal

Worse case mode:	GFSK	Test channel:	Highest	Remark:	Average
------------------	------	---------------	---------	---------	---------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960	10.43	34.45	41.03	31.07	34.92	54.00	-19.08	Vertical
7440	12.72	37.37	40.01	25.54	35.62	54.00	-18.38	Vertical
9920	14.24	38.08	37.78	24.08	38.62	54.00	-15.38	Vertical
12400	17.55	39.34	37.48	21.48	40.89	54.00	-13.11	Vertical
14880				---		54.00		Vertical
17360				---		54.00		Vertical
4960	10.43	34.45	41.03	29.88	33.73	54.00	-20.27	Horizontal
7440	12.72	37.37	40.01	24.23	34.31	54.00	-19.69	Horizontal
9920	14.24	38.08	37.78	22.65	37.19	54.00	-16.81	Horizontal
12400	17.55	39.34	37.48	19.93	39.34	54.00	-14.66	Horizontal
14880				---		54.00		Horizontal
17360				---		54.00		Horizontal

Remark

”---“ means that the emission level is too low to be measured

6.11.3 Band edge (Radiated Emission)

Test mode:		Transmitting	Test channel:		Lowest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
2390.00	6.02	29.76	39.75	50.39	46.42	74.00	-27.58	Horizontal	
2400.00	6.34	30.03	38.87	51.96	49.46	74.00	-24.54	Horizontal	
2390.00	6.02	29.76	39.75	51.64	47.67	74.00	-26.33	Vertical	
2400.00	6.34	30.03	38.87	53.28	50.78	74.00	-23.22	Vertical	

Test mode:		Transmitting	Test channel:		Lowest		Remark:		Average
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
2390.00	6.02	29.76	39.75	29.88	25.91	54.00	-28.09	Horizontal	
2400.00	6.34	30.03	38.87	33.30	30.80	54.00	-23.20	Horizontal	
2390.00	6.02	29.76	39.75	31.03	27.06	54.00	-26.94	Vertical	
2400.00	6.34	30.03	38.87	34.52	32.02	54.00	-21.98	Vertical	

Test mode:		Transmitting	Test channel:		Highest		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
2483.50	6.22	30.32	39.53	52.60	49.61	74.00	-24.39	Horizontal	
2500.00	6.36	30.37	39.65	49.29	46.37	74.00	-27.63	Horizontal	
2483.50	6.22	30.32	39.53	53.71	50.72	74.00	-23.28	Vertical	
2500.00	6.36	30.37	39.65	50.47	47.55	74.00	-26.45	Vertical	

Test mode:		Transmitting	Test channel:		Highest		Remark:		Average
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
2483.50	6.22	30.32	39.53	34.99	32.00	54.00	-22.00	Horizontal	
2500.00	6.36	30.37	39.65	31.41	28.49	54.00	-25.51	Horizontal	
2483.50	6.22	30.32	39.53	35.94	32.95	54.00	-21.05	Vertical	
2500.00	6.36	30.37	39.65	32.48	29.56	54.00	-24.44	Vertical	