

North 710, Yihua Building, Shennan Road, Futian District,
Shenzhen, P. R. China
Telephone: +86-755-29451282,
Fax: +86-755-22639141

Report No.: FCC11-RTE080901
Page 1 of 26

TEST REPORT

Applicant: Archos SA

Address of Applicant: 12 Rue Ampere Igny France 91430

Equipment Under Test (EUT)

Product Name: A80S Internet Tablet

Model No.: 9080

Trade mark: Archos

FCC ID: SOV9080

Applicable standards: FCC CFR Title 47 Part 15 Subpart B:2010

Date of sample receipt: 02 Aug., 2011

Date of Test: 02-05 Aug., 2011

Date of report issued: 09 Aug., 2011

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



KEVIN YU

Laboratory Manager


This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the EBO product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of EBO International Electrical Approvals or testing done by EBO International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by EBO International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

2 Version

Version No.	Date	Description
00	2011-08-09	<i>Original</i>

Prepared by:**Date:**

2011-08-09

Project Engineer**Reviewed by:****Date:**

2011-08-09

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF E.U.T.	5
5.3 TEST MODE AND VOLTAGE	5
5.4 TEST FACILITY.....	6
5.5 TEST LOCATION	6
5.6 DESCRIPTION OF SUPPORT UNITS	6
5.7 DEVIATION FROM STANDARDS.....	6
5.8 ABNORMALITIES FROM STANDARD CONDITIONS.....	6
5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
6 TEST INSTRUMENTS LIST	7
7 TEST RESULTS AND MEASUREMENT DATA	8
7.1 CONDUCTED EMISSIONS.....	8
7.2 RADIATED EMISSION.....	11
8 TEST SETUP PHOTO	17
9 EUT CONSTRUCTIONAL DETAILS	19

4 Test Summary

Test Item	Section in CFR 47	Result
Conducted Emission	Part15.107	PASS
Readiated Emissions	Part15.109	PASS

PASS: The EUT complies with the essential requirements in the standard.

5 General Information

5.1 Client Information

Applicant:	Archos SA
Address of Applicant:	12 Rue Ampere Igny France 91430
Manufacturer:	Archos SA
Address of Manufacturer:	12 Rue Ampere Igny France 91430
Factory:	Excelsior Electronics
Address of Factory:	Sam Tuen Management Zone, Houjie, Dongguan Guangdong PRC

5.2 General Description of E.U.T.

Product Name:	A80S Internet Tablet
Model No.:	9080
Power supply:	Model:MD-ADP-0516UN001 Input: AC 100-240V 0.3A 50/60Hz Output: DC 5.0V 1.5A

5.3 Test mode and voltage

Test mode:	
Normal operation mode	Keep the EUT exchange data with PC.
Test voltage:	AC 120V/60Hz

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, July 20, 2010.

● **Industry Canada (IC)**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1.

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China

Tel: 0755-27798480

Fax: 0755-27798960

5.6 Description of Support Units

Manufacturer	Description	Model	Serial Number
DELL	PC	OPTIPLEX745	GTS312
DELL	KEYBOARD	SK-8115	N/A
DELL	MOUSE	N/A	N/A
Cannon	Printer	IP1600	N/A
ELNEC	Encoder	Superpro/5000	N/A

5.7 Deviation from Standards

Biconical, log.per. antenna and horn antenna were used instead of dipole antenna.

Semi-anechoic Chamber was used as alternation of open air test sites, and all test suites were performed with radiated method in it.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.


6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 30 2011	Mar. 29 2012
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Sept. 10 2010	Sept. 09 2011
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Feb. 26 2011	Feb. 25 2012
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	Aug. 03 2011	Aug. 02 2012
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	Aug. 03 2011	Aug. 02 2012
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	Apr. 01 2011	Mar. 31 2012
9	Coaxial Cable	GTS	N/A	GTS211	Apr. 01 2011	Mar. 31 2012
9	Coaxial cable	GTS	N/A	GTS210	Apr. 01 2011	Mar. 31 2012
11	Coaxial Cable	GTS	N/A	GTS212	Apr. 01 2011	Mar. 31 2012
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Aug. 03 2011	Aug. 02 2012
13	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Aug. 03 2011	Aug. 02 2012
14	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	Aug. 03 2011	Aug. 02 2012
15	Band filter	Amindeon	82346	GTS219	Aug. 03 2011	Aug. 02 2012

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS252	Apr. 10 2011	Apr. 09 2012
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	Sept. 14 2010	Sept. 13 2011
3	10dB Pulse Limit	Rohde & Schwarz	N/A	GTS224	Sept. 14 2010	Sept. 13 2011
4	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	Apr. 14 2011	Apr. 13 2012
5	Coaxial Cable	GTS	N/A	GTS227	Apr. 01 2011	Mar. 31 2012
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

7 Test results and Measurement Data

7.1 Conducted Emissions

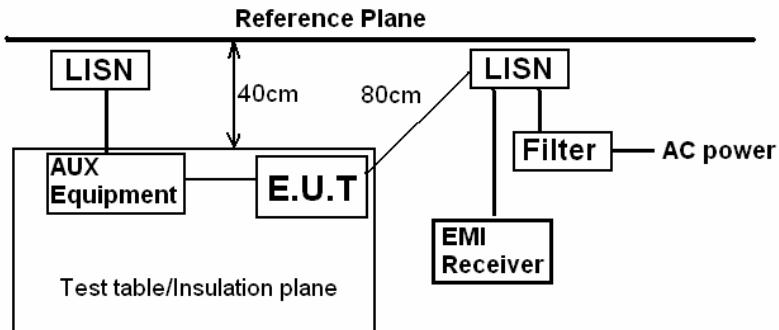
Test Requirement:	FCC Part15 B Section 15.107					
Test Method:	ANSI C63.4:2003					
Test Frequency Range:	150kHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9kHz, VBW=30kHz					
Limit:	Frequency range (MHz)	Limit (dB μ V)				
		Quasi-peak	Average			
	0.15-0.5	66 to 56*	56 to 46*			
	0.5-5	56	46			
	5-30	60	50			
* Decreases with the logarithm of the frequency.						
Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.					
Test setup:	 <p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>					
Test environment:	Temp.:	24 °C	Humid.:	51%	Press.:	1 012mbar
Measurement Record:	Uncertainty: ± 3.45 dB					
Test Instruments:	Refer to section 6 for details					
Test mode:	Refer to section 5.3 for details					
Test results:	Pass					

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Line:

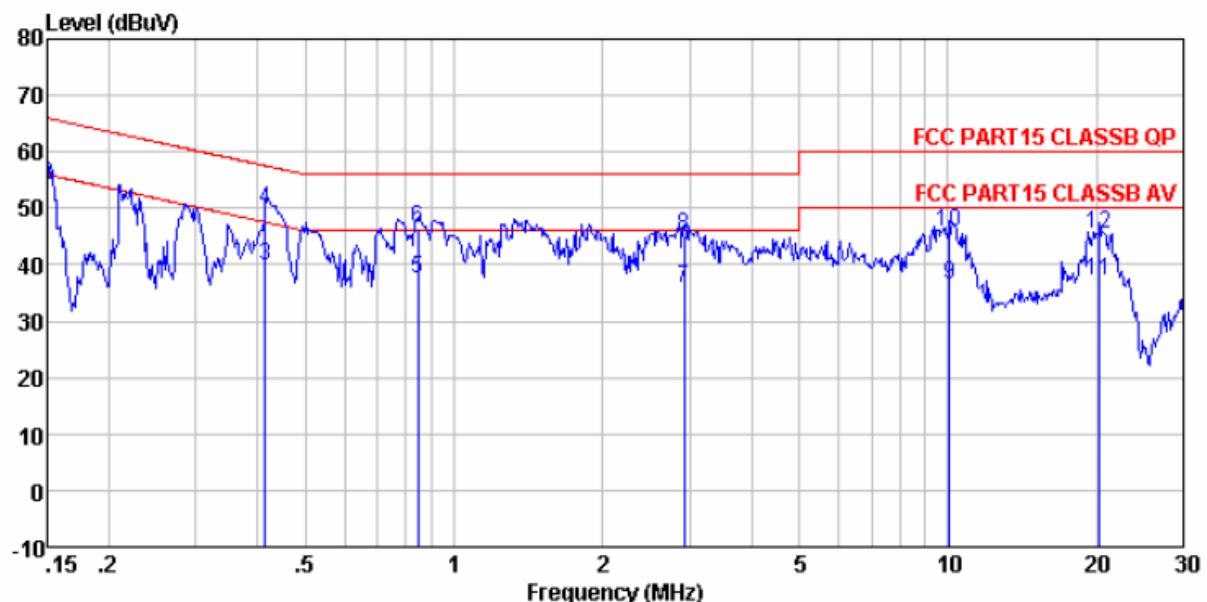


Condition : FCC PART15 CLASSB QP LISN(2011) LINE

Job No. : 508IT

Test Engineer: Collin

	Read Freq	LISN Level	Cable Factor	Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV		dB	dBuV	dBuV	dB	
1	0.150	44.17	0.69	0.10	44.96	56.00	-11.04	Average
2	0.150	53.25	0.69	0.10	54.04	66.00	-11.96	QP
3	0.415	39.11	0.58	0.10	39.79	47.55	-7.76	Average
4	0.415	48.98	0.58	0.10	49.66	57.55	-7.89	QP
5	0.844	36.89	0.50	0.10	37.49	46.00	-8.51	Average
6	0.844	45.94	0.50	0.10	46.54	56.00	-9.46	QP
7	2.931	35.51	0.36	0.10	35.97	46.00	-10.03	Average
8	2.931	44.76	0.36	0.10	45.22	56.00	-10.78	QP
9	10.072	36.17	0.22	0.20	36.59	50.00	-13.41	Average
10	10.072	45.37	0.22	0.20	45.79	60.00	-14.21	QP
11	20.270	36.68	0.14	0.21	37.03	50.00	-12.97	Average
12	20.270	45.04	0.14	0.21	45.39	60.00	-14.61	QP

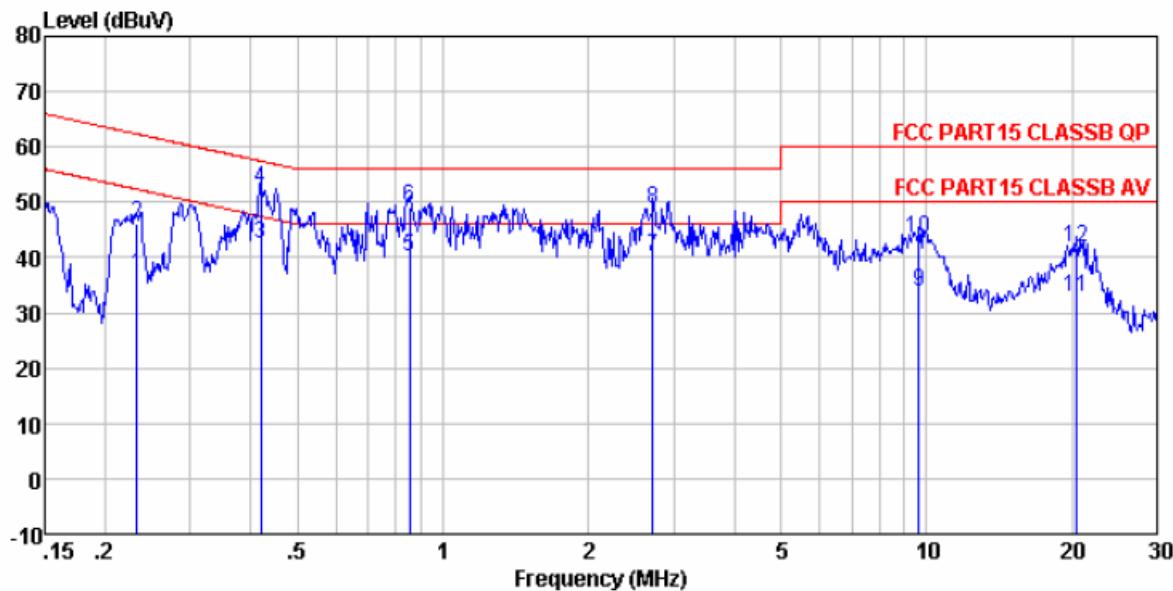Neutral:

Condition : FCC PART15 CLASSB QP LISN(2011) NEUTRAL

Job No. : 508IT

Test Engineer: Collin

Freq	Read	LISN	Cable	Limit	Over	Limit	Remark
	Level	Factor	Loss				
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.233	36.11	0.64	0.10	36.85	52.35	-15.50 Average
2	0.233	45.48	0.64	0.10	46.22	62.35	-16.13 QP
3	0.419	41.88	0.57	0.10	42.55	47.46	-4.91 Average
4	0.419	51.82	0.57	0.10	52.49	57.46	-4.97 QP
5	0.853	39.64	0.50	0.10	40.24	46.00	-5.76 Average
6	0.853	48.38	0.50	0.10	48.98	56.00	-7.02 QP
7	2.721	39.66	0.37	0.10	40.13	46.00	-5.87 Average
8	2.721	48.38	0.37	0.10	48.85	56.00	-7.15 QP
9	9.654	33.38	0.23	0.20	33.81	50.00	-16.19 Average
10	9.654	42.95	0.23	0.20	43.38	60.00	-16.62 QP
11	20.486	32.57	0.14	0.21	32.92	50.00	-17.08 Average
12	20.486	41.54	0.14	0.21	41.89	60.00	-18.11 QP



Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

7.2 Radiated Emission

Test Requirement:	FCC Part15 B Section 15.109																								
Test Method:	ANSI C63.4:2003																								
Test Frequency Range:	30MHz to 12000MHz																								
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																								
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>100KHz</td> <td>300KHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td><td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average Value</td> </tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value	
Frequency	Detector	RBW	VBW	Remark																					
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																					
Above 1GHz	Peak	1MHz	3MHz	Peak Value																					
	Peak	1MHz	10Hz	Average Value																					
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.5</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td><td>54.0</td> <td>Average Value</td> </tr> <tr> <td>74.0</td> <td>Peak Value</td> </tr> </tbody> </table>					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																							
30MHz-88MHz	40.0	Quasi-peak Value																							
88MHz-216MHz	43.5	Quasi-peak Value																							
216MHz-960MHz	46.0	Quasi-peak Value																							
960MHz-1GHz	54.0	Quasi-peak Value																							
Above 1GHz	54.0	Average Value																							
	74.0	Peak Value																							
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 																								
Test setup:	Below 1GHz																								

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.ebtek.cn> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.ebtek.cn>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

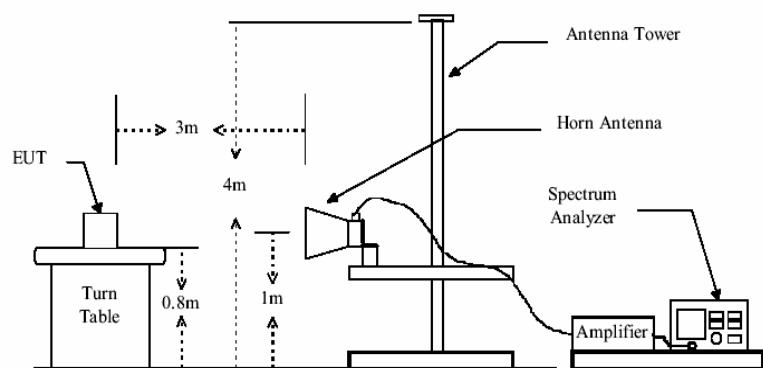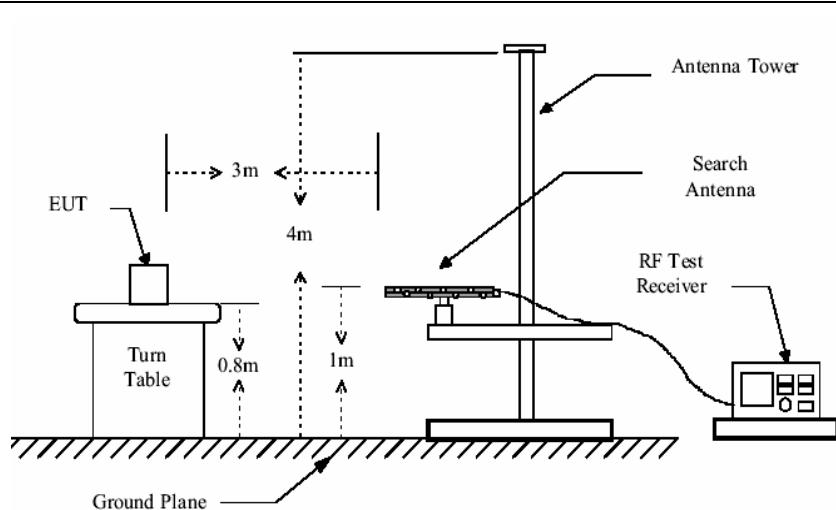

Test environment:	Temp.: 25 °C	Humid.: 52%	Press.: 1 012mbar
Measurement Record:	Uncertainty: $\pm 4.5\text{dB}$		
Test Instruments:	Refer to section 6 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Passed		

Note:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

Measurement Data

Below 1GHz:

Horizontal:

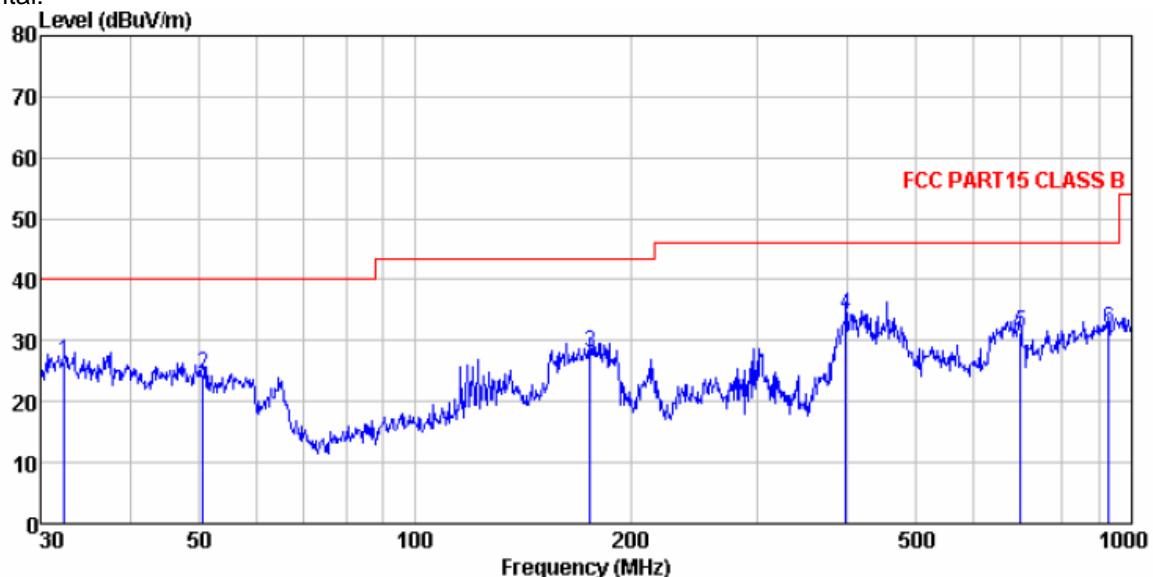


Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163 (NEW) HORIZONTAL
 Job No. : 508IT

Test Engineer: Collin

	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	32.41	42.55	15.65	0.61	32.23	26.58	40.00	-13.42 QP
2	50.59	40.89	14.80	0.68	32.01	24.36	40.00	-15.64 QP
3	175.65	47.43	11.22	1.66	32.13	28.18	43.50	-15.32 QP
4	399.03	48.71	15.64	2.26	32.32	34.29	46.00	-11.71 QP
5	699.30	36.96	23.19	2.94	31.70	31.39	46.00	-14.61 QP
6	929.01	35.42	24.64	3.38	31.48	31.96	46.00	-14.04 QP

Vertical:

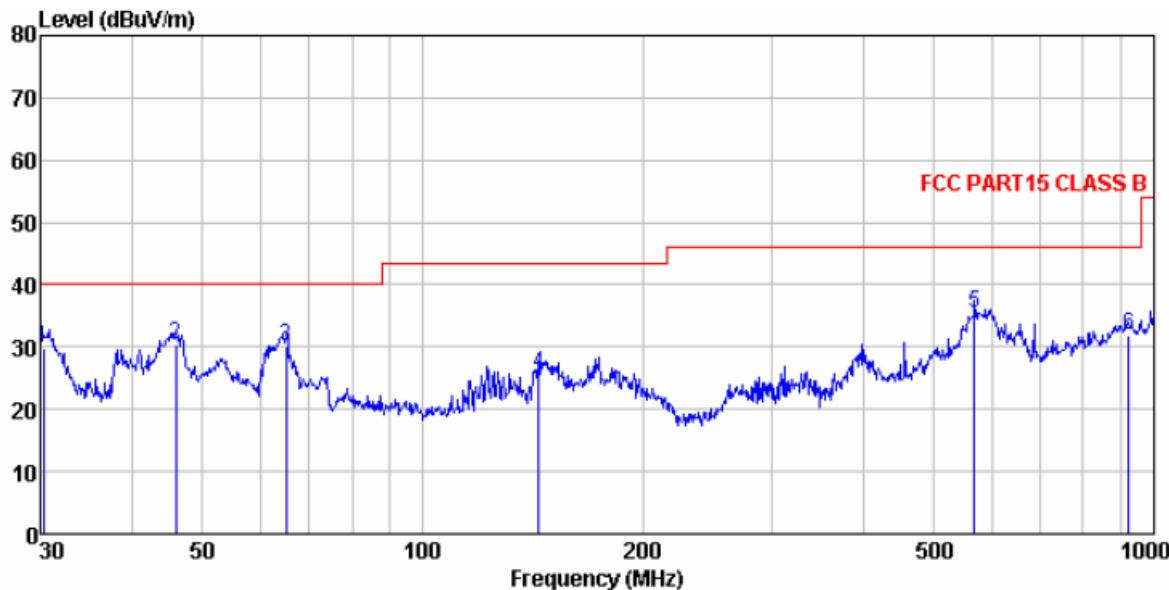


Site : 3m chamber
Condition : FCC PART15 CLASS B 3m VULB9163 (NEW) VERTICAL
Job No. : 508IT

Test Engineer: Collin

	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	30.32	47.18	14.45	0.60	32.27	29.96	40.00	-10.04 QP
2	46.02	45.63	16.29	0.66	32.08	30.50	40.00	-9.50 QP
3	65.11	47.65	13.65	0.77	31.91	30.16	40.00	-9.84 QP
4	144.33	45.80	10.36	1.48	31.95	25.69	43.50	-17.81 QP
5	568.61	45.45	18.77	2.61	31.38	35.45	46.00	-10.55 QP
6	922.52	35.38	24.56	3.36	31.47	31.83	46.00	-14.17 QP

Above 1GHz:

Horizontal:

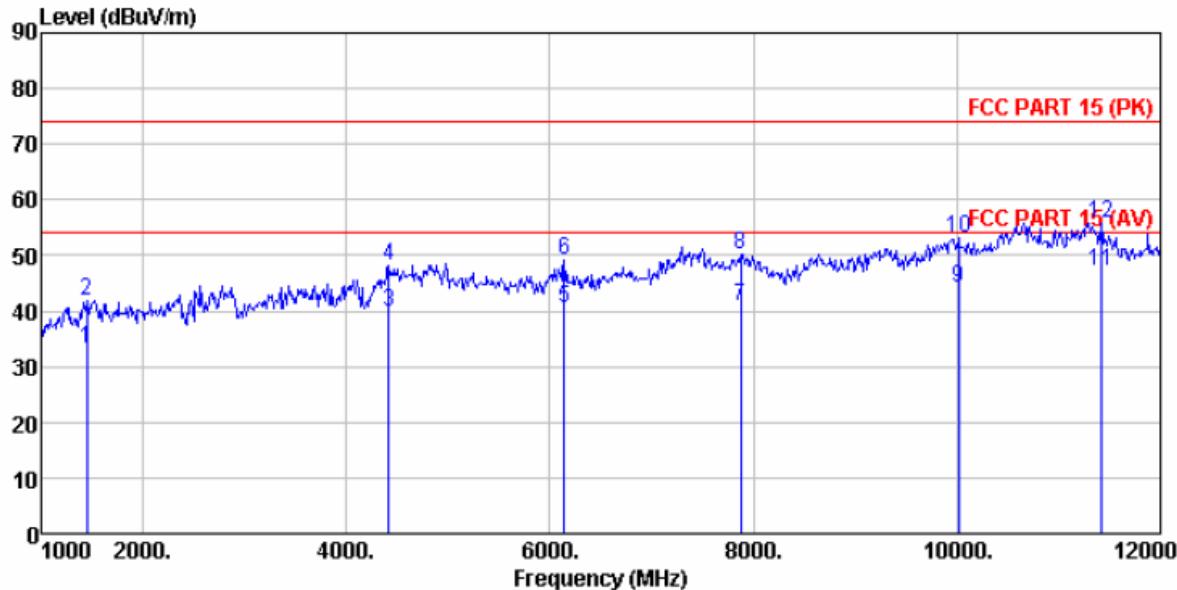


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) HORIZONTAL
 Job No. : 508IT

Test Engineer: Collin

	Read	Antenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1448.00	27.88	25.35	2.46	22.34	33.35	54.00	-20.65 Average
2	1448.00	36.43	25.35	2.46	22.34	41.90	74.00	-32.10 Peak
3	4416.00	28.89	31.13	4.68	24.77	39.93	54.00	-14.07 Average
4	4416.00	37.12	31.13	4.68	24.77	48.16	74.00	-25.84 Peak
5	6138.00	25.62	33.06	6.07	24.08	40.67	54.00	-13.33 Average
6	6138.00	34.07	33.06	6.07	24.08	49.12	74.00	-24.88 Peak
7	7874.00	24.56	37.11	7.14	28.03	40.78	54.00	-13.22 Average
8	7874.00	33.88	37.11	7.14	28.03	50.10	74.00	-23.90 Peak
9	10016.00	21.17	39.12	9.11	25.19	44.21	54.00	-9.79 Average
10	10016.00	30.17	39.12	9.11	25.19	53.21	74.00	-20.79 Peak
11	11416.00	21.79	39.92	10.11	24.81	47.01	54.00	-6.99 Average
12	11416.00	30.48	39.92	10.11	24.81	55.70	74.00	-18.30 Peak

Vertical:

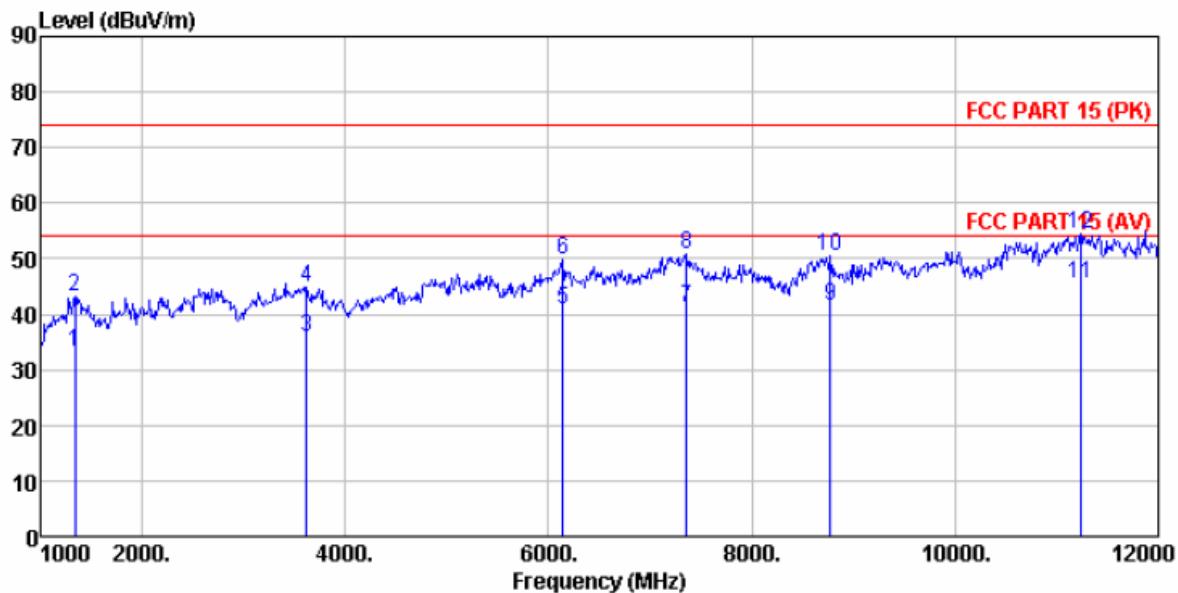

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) VERTICAL
 Job No. : 508IT
 Test Engineer: Collin

Freq	Read	Antenna	Cable	Preamp	Limit	Over	Limit	Remark
	MHz	dBuV	dB/m	dB				
1	1336.00	25.69	25.69	2.41	20.52	33.27	54.00	-20.73 Average
2	1336.00	35.70	25.69	2.41	20.52	43.28	74.00	-30.72 Peak
3	3618.00	30.27	29.15	4.18	27.68	35.92	54.00	-18.08 Average
4	3618.00	39.26	29.15	4.18	27.68	44.91	74.00	-29.09 Peak
5	6138.00	25.95	33.06	6.07	24.08	41.00	54.00	-13.00 Average
6	6138.00	34.71	33.06	6.07	24.08	49.76	74.00	-24.24 Peak
7	7356.00	24.55	36.45	6.92	26.70	41.22	54.00	-12.78 Average
8	7356.00	33.99	36.45	6.92	26.70	50.66	74.00	-23.34 Peak
9	8770.00	22.51	36.93	8.25	26.19	41.50	54.00	-12.50 Average
10	8770.00	31.49	36.93	8.25	26.19	50.48	74.00	-23.52 Peak
11	11234.00	20.18	40.11	10.00	24.69	45.60	54.00	-8.40 Average
12	11234.00	29.06	40.11	10.00	24.69	54.48	74.00	-19.52 Peak