

TEST REPORT

Applicant: Archos SA

Address of Applicant: 12 Rue Ampere, Igny 91430, France

Equipment Under Test (EUT)

Product Name: Tablet PC

Model No.: AC70BTI

Trade Mark: Archos

FCC ID: SOVAC70BTI

Applicable standards: FCC CFR Title 47 Part 15 Subpart B:2012

Date of sample receipt: April 08, 2013

Date of Test: April 08-17, 2013

Date of report issue: April 18, 2013

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo

Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.


This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS International Electrical Approvals or testing done by GTS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by GTS International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

2 Version

Version No.	Date	Description
00	April 18, 2013	Original

Prepared By:

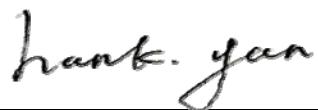

Date:

April 18, 2013

Project Engineer

Check By:



Date:

April 18, 2013

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST MODE	5
5.4 TEST FACILITY	6
5.5 TEST LOCATION	6
5.6 DESCRIPTION OF SUPPORT UNITS	6
5.7 DEVIATION FROM STANDARDS	6
5.8 ABNORMALITIES FROM STANDARD CONDITIONS	6
5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
6 TEST INSTRUMENTS LIST	7
7 TEST RESULTS AND MEASUREMENT DATA	8
7.1 CONDUCTED EMISSIONS	8
7.2 RADIATED EMISSION	11
8 TEST SETUP PHOTO	17
9 EUT CONSTRUCTIONAL DETAILS	18

4 Test Summary

Test Item	Section in CFR 47	Result
Conducted Emission	Part15.107	PASS
Radiated Emissions	Part15.109	PASS

PASS: The EUT complies with the essential requirements in the standard.

5 General Information

5.1 Client Information

Applicant:	Archos SA
Address of Applicant:	12 Rue Ampere, Igny 91430, France
Manufacturer :	Dongguan Yuanfeng Technology Co., Ltd.
Address of Manufacturer :	No.62, South Fumin Road, Fumin Industrial Park, Dalang Town, Dongguan City, Guangdong, P.R. China
Factory:	Dongguan Yuanfeng Technology Co., Ltd.
Address of Factory :	No.62, South Fumin Road, Fumin Industrial Park, Dalang Town, Dongguan City, Guangdong, P.R. China

5.2 General Description of EUT

Product Name:	Tablet PC
Model No.:	AC70BTI
Power supply:	Adapter 1: Model No. :ADS-10B-06 05010G Input: AC 100-240V 50/60Hz 0.3A MAX Output: DC 5.0V 2.0A Adapter 2: Model No. :HNC050200X Input: AC 100-240V 50/60Hz 0.35A MAX Output: DC 5.0V 2.0A Or DC 3.7V Li-ion Battery
Remark:	Two adapters were tested, and the Model No.:ADS-10B-06 05010G is worse. So the report exhibits that model's data only.

5.3 Test mode

Test mode:	
Playing mode	Keep the EUT in Playing mode
Video Record mode	Keep the EUT in Video Recording mode
HDMI mode	Keep the EUT in Playing mode with HDMI output
PC mode	Keep the EUT in exchanging data mode.

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **CNAS —Registration No.: CNAS L5775**

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, July 20, 2010.

• **Industry Canada (IC)**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1.

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China

Tel: 0755-27798480

Fax: 0755-27798960

5.6 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
HP	Printer	CB495A	05257893	DoC
DELL	PC	OPTIPLEX745	GTS312	DoC
DELL	MONITOR	E178FPC	N/A	DoC
DELL	KEYBOARD	SK-8115	N/A	DoC
DELL	MOUSE	MOC5UO	N/A	DoC

5.7 Deviation from Standards

Biconical, log.per. antenna and horn antenna were used instead of dipole antenna.
Semi-anechoic Chamber was used as alternation of open air test sites, and all test suites were performed with radiated method in it.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.

6 Test Instruments list


Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	Mar. 29 2013	Mar. 28 2015
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	ESU EMI Test Receiver	R&S	ESU26	GTS203	Jul. 07 2012	Jul. 06 2013
4	BiConiLog Antenna	SCHWARZBECK	VULB9163	GTS214	Mar. 09 2013	Mar. 08 2014
5	Double -ridged waveguide horn	SCHWARZBECK	9120D	GTS208	Mar. 09 2013	Mar. 08 2014
6	RF Amplifier	HP	8347A	GTS204	Jul. 07 2012	Jul. 06 2013
7	Preamplifier	HP	8349B	GTS206	Jul. 07 2012	Jul. 06 2013
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial cable	GTS	N/A	GTS210	Jul. 07 2012	Jul. 06 2013
10	Coaxial Cable	GTS	N/A	GTS211	Jul. 07 2012	Jul. 06 2013
11	Thermo meter	N/A	N/A	GTS256	Jul. 07 2012	Jul. 06 2013

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	Sep. 08 2011	Sep. 07 2013
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	Jul. 03 2012	Jul. 02 2013
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	Jul. 03 2012	Jul. 02 2013
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	Jul. 03 2012	Jul. 02 2013
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	Jul. 03 2012	Jul. 02 2013
6	Coaxial Cable	GTS	N/A	GTS227	Jul. 03 2012	Jul. 02 2013
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
1	Barometer	ChangChun	DYM3	GTS257	July 10 2012	July 09 2013


7 Test Results and Measurement Data

7.1 Conducted Emissions

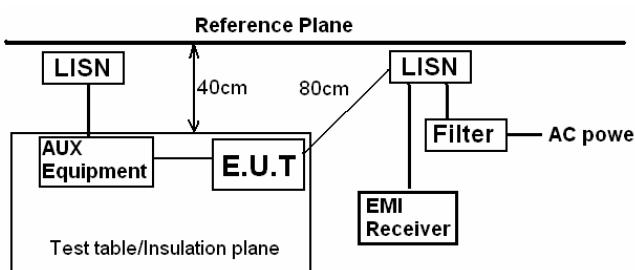Test Requirement:	FCC Part15 B Section 15.107																
Test Method:	ANSI C63.4:2003																
Test Frequency Range:	150KHz to 30MHz																
Class / Severity:	Class B																
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
	<p>* Decreases with the logarithm of the frequency.</p>																
Test setup:	 <p><i>Remark:</i> <i>E.U.T: Equipment Under Test</i> <i>LISN: Line Impedance Stabilization Network</i> <i>Test table height=0.8m</i></p>																
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement. 																
Test Instruments:	Refer to section 6 for details																
Test mode:	Pre-scan all modes in section 5.3, found the PC mode which it is worst case mode, so only show the test data of the worst case mode.																
Test results:	Pass																


Measurement Data

Line:

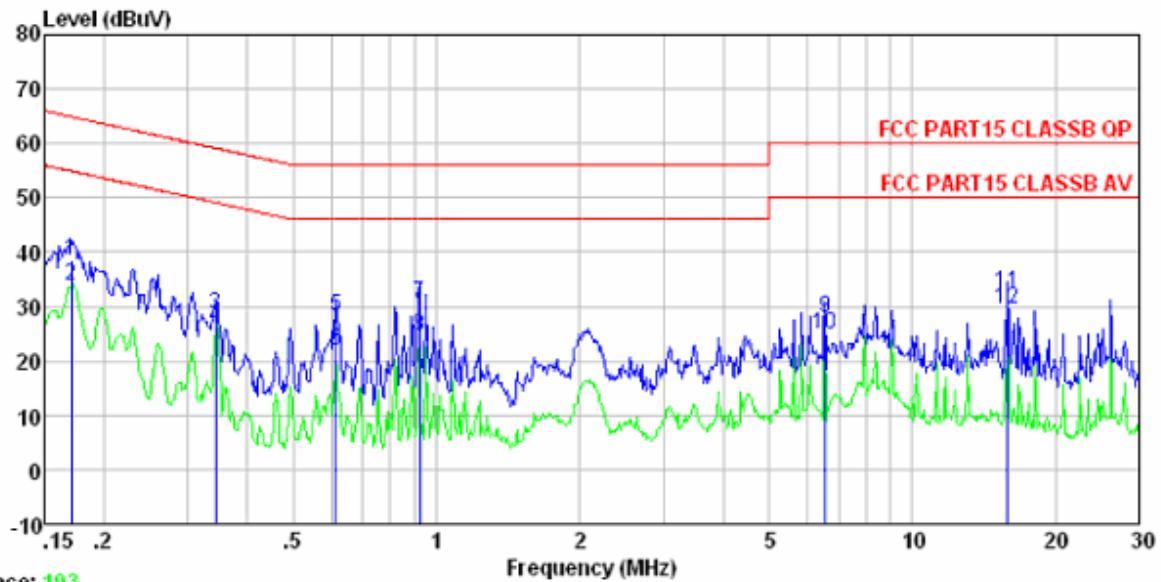

Condition : FCC PART15 CLASSB QP LISN-2012 LINE

	Freq	Read Level	LISN Factor	Cable Loss	Limit Level	Over Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.170	38.75	-0.26	0.10	38.59	64.94	-26.35	QP
2	0.170	34.14	-0.26	0.10	33.98	54.94	-20.96	Average
3	0.343	28.80	-0.22	0.10	28.68	59.13	-30.45	QP
4	0.343	26.37	-0.22	0.10	26.25	49.13	-22.88	Average
5	0.614	28.39	-0.20	0.10	28.29	56.00	-27.71	QP
6	0.614	22.04	-0.20	0.10	21.94	46.00	-24.06	Average
7	0.923	30.47	-0.21	0.10	30.36	56.00	-25.64	QP
8	0.923	24.52	-0.21	0.10	24.41	46.00	-21.59	Average
9	6.557	28.14	-0.33	0.13	27.94	60.00	-32.06	QP
10	6.557	24.98	-0.33	0.13	24.78	50.00	-25.22	Average
11	15.885	32.68	-0.53	0.20	32.35	60.00	-27.65	QP
12	15.885	29.90	-0.53	0.20	29.57	50.00	-20.43	Average

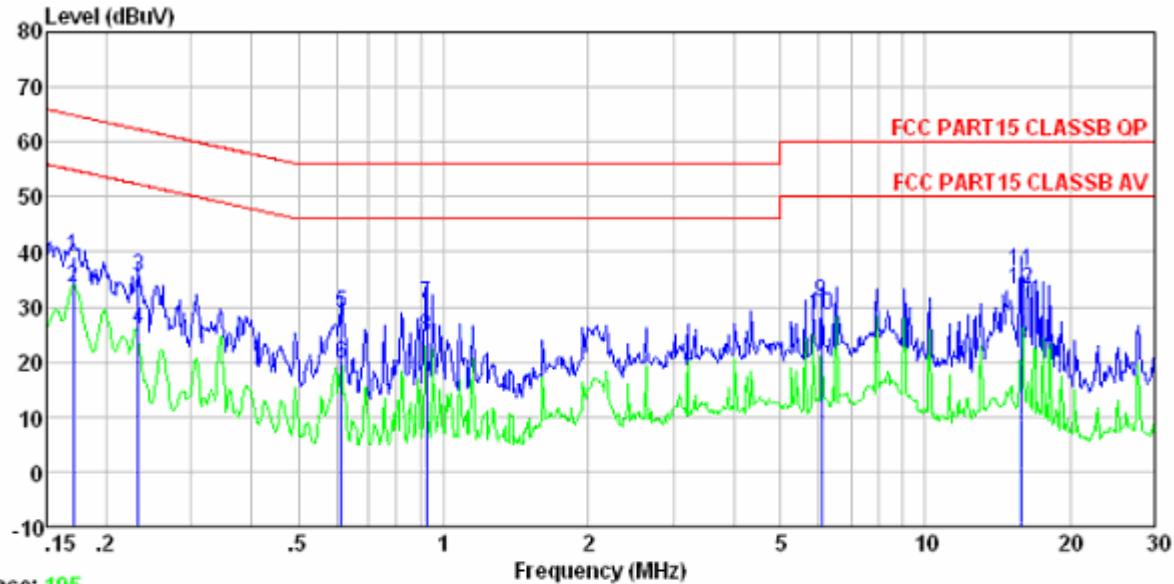Neutral:


Condition	FCC PART15 CLASSB QP LISN-2012 NEUTRAL						
	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit
	MHz	dBuV	dB	dB	dBuV	dBuV	dB
1	0.170	39.08	-0.13	0.10	39.05	64.94	-25.89 QP
2	0.170	33.47	-0.13	0.10	33.44	54.94	-21.50 Average
3	0.233	35.35	-0.09	0.10	35.36	62.35	-26.99 QP
4	0.233	25.94	-0.09	0.10	25.95	52.35	-26.40 Average
5	0.614	29.00	-0.08	0.10	29.02	56.00	-26.98 QP
6	0.614	19.64	-0.08	0.10	19.66	46.00	-26.34 Average
7	0.923	30.38	-0.09	0.10	30.39	56.00	-25.61 QP
8	0.923	24.62	-0.09	0.10	24.63	46.00	-21.37 Average
9	6.089	30.99	-0.18	0.12	30.93	60.00	-29.07 QP
10	6.089	28.44	-0.18	0.12	28.38	50.00	-21.62 Average
11	15.885	36.68	-0.42	0.20	36.46	60.00	-23.54 QP
12	15.885	33.35	-0.42	0.20	33.13	50.00	-16.87 Average


Remark: If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

Notes:


1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss

7.2 Radiated Emission

Test Requirement:	FCC Part15 B Section 15.109																								
Test Method:	ANSI C63.4:2003																								
Test Frequency Range:	30MHz to 7.5GHz																								
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																								
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th><th>Detector</th><th>RBW</th><th>VBW</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td><td>Quasi-peak</td><td>120kHz</td><td>300kHz</td><td>Quasi-peak Value</td></tr> <tr> <td>Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr> <tr> <td></td><td>Peak</td><td>1MHz</td><td>10Hz</td><td>Average Value</td></tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value		Peak	1MHz	10Hz	Average Value
Frequency	Detector	RBW	VBW	Remark																					
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value																					
Above 1GHz	Peak	1MHz	3MHz	Peak Value																					
	Peak	1MHz	10Hz	Average Value																					
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th><th>Limit (dBuV/m @3m)</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td><td>40.00</td><td>Quasi-peak Value</td></tr> <tr> <td>88MHz-216MHz</td><td>43.50</td><td>Quasi-peak Value</td></tr> <tr> <td>216MHz-960MHz</td><td>46.00</td><td>Quasi-peak Value</td></tr> <tr> <td>960MHz-1GHz</td><td>54.00</td><td>Quasi-peak Value</td></tr> <tr> <td rowspan="2">Above 1GHz</td><td>54.00</td><td>Average Value</td></tr> <tr> <td>74.00</td><td>Peak Value</td></tr> </tbody> </table>					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.00	Quasi-peak Value	88MHz-216MHz	43.50	Quasi-peak Value	216MHz-960MHz	46.00	Quasi-peak Value	960MHz-1GHz	54.00	Quasi-peak Value	Above 1GHz	54.00	Average Value	74.00	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																							
30MHz-88MHz	40.00	Quasi-peak Value																							
88MHz-216MHz	43.50	Quasi-peak Value																							
216MHz-960MHz	46.00	Quasi-peak Value																							
960MHz-1GHz	54.00	Quasi-peak Value																							
Above 1GHz	54.00	Average Value																							
	74.00	Peak Value																							
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 																								
Test setup:	Below 1GHz																								

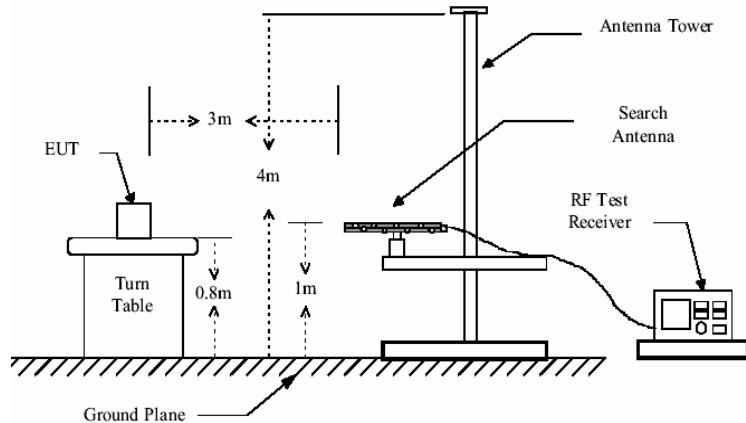

Above 1GHz

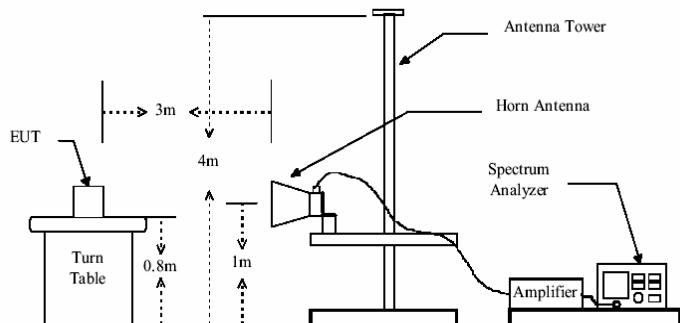

Test environment:	Temp.: 25 °C	Humid.: 52%	Press.: 1 012mbar
Measurement Record:	Uncertainty: $\pm 4.5\text{dB}$		
Test Instruments:	Refer to section 6 for details		
Test mode:	Pre-scan all modes in section 5.3, found the PC mode which it is worst case mode, so only show the test data of the worst case mode.		
Test results:	Pass		

Note:


The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

Measurement Data


Below 1GHz

Horizontal:

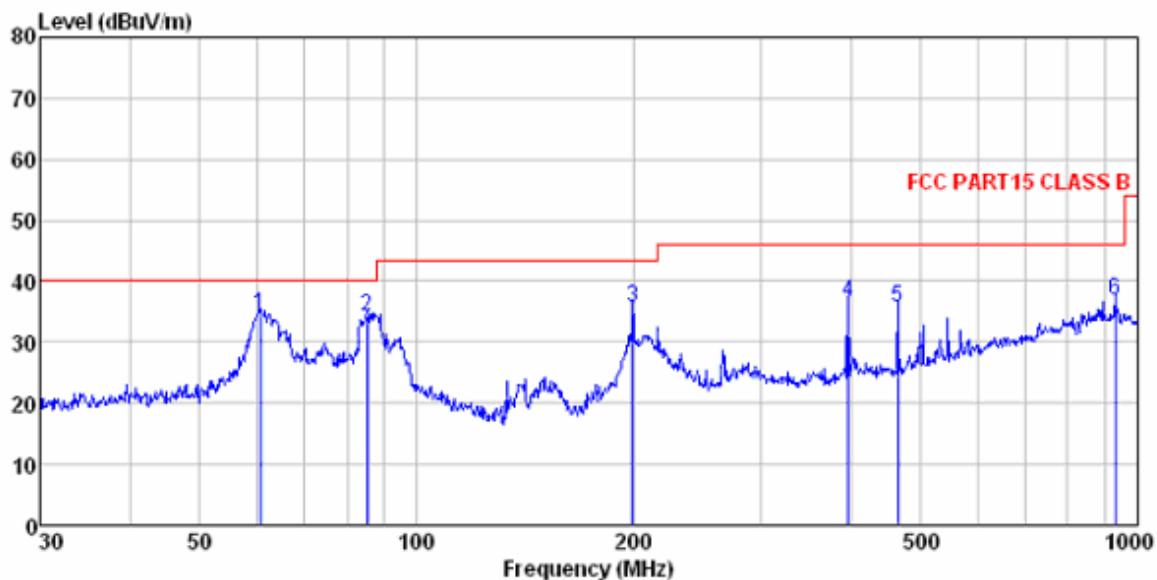

FCC PART15 CLASS B 3m VULB9163 -2012-05 HORIZONTAL									
Site	3m chamber								
Condition	ReadAntenna	Cable	Preamp	Limit	Over				
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	60.704	50.01	15.61	0.87	31.94	34.55	40.00	-5.45	QP
2	85.298	51.42	13.54	1.07	31.74	34.29	40.00	-5.71	QP
3	199.286	52.33	13.60	1.84	32.14	35.63	43.50	-7.87	QP
4	396.242	48.58	17.01	2.83	31.90	36.52	46.00	-9.48	QP
5	465.599	46.65	17.71	3.16	31.67	35.85	46.00	-10.15	QP
6	932.272	39.05	23.97	4.98	31.20	36.80	46.00	-9.20	QP


Vertical:

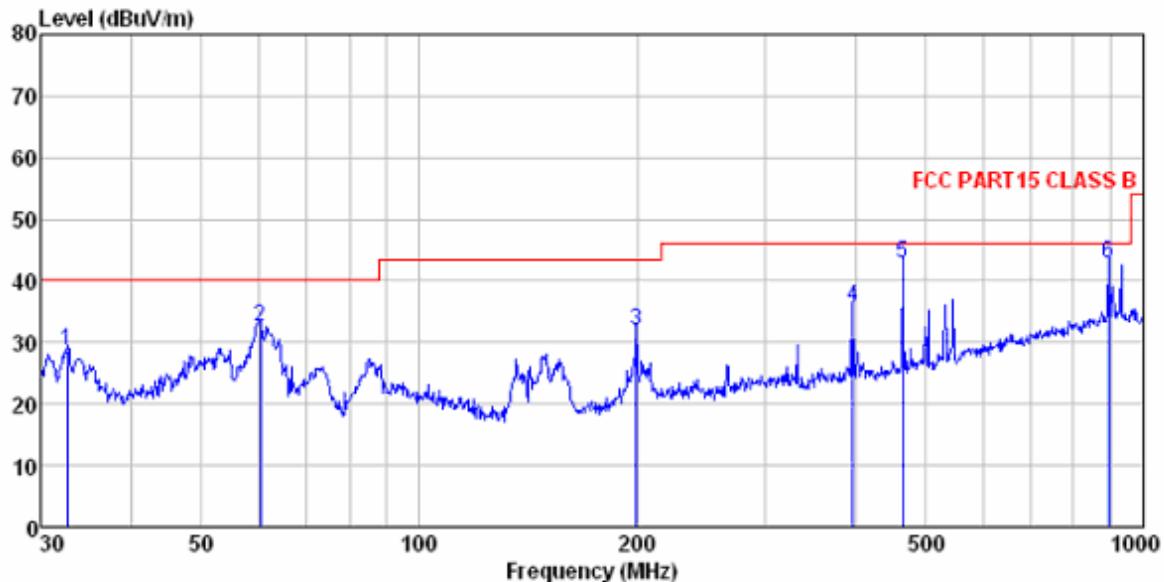

Site	3m chamber													
	FCC PART15 CLASS B 3m VULB9163 -2012-05 VERTICAL													
Condition	ReadAntenna	Cable	Preamp	Limit	Over	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB		dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB
1	32.634	44.32	15.75	0.58	32.06	28.59	40.00	-11.41	QP					
2	60.280	47.79	15.70	0.86	31.94	32.41	40.00	-7.59	QP					
3	199.286	48.52	13.60	1.84	32.14	31.82	43.50	-11.68	QP					
4	396.242	47.77	17.01	2.83	31.90	35.71	46.00	-10.29	QP					
5	465.599	53.54	17.71	3.16	31.67	42.74	46.00	-3.26	QP					
6	893.857	45.11	24.05	4.83	31.19	42.80	46.00	-3.20	QP					


Above 1GHz

Horizontal:

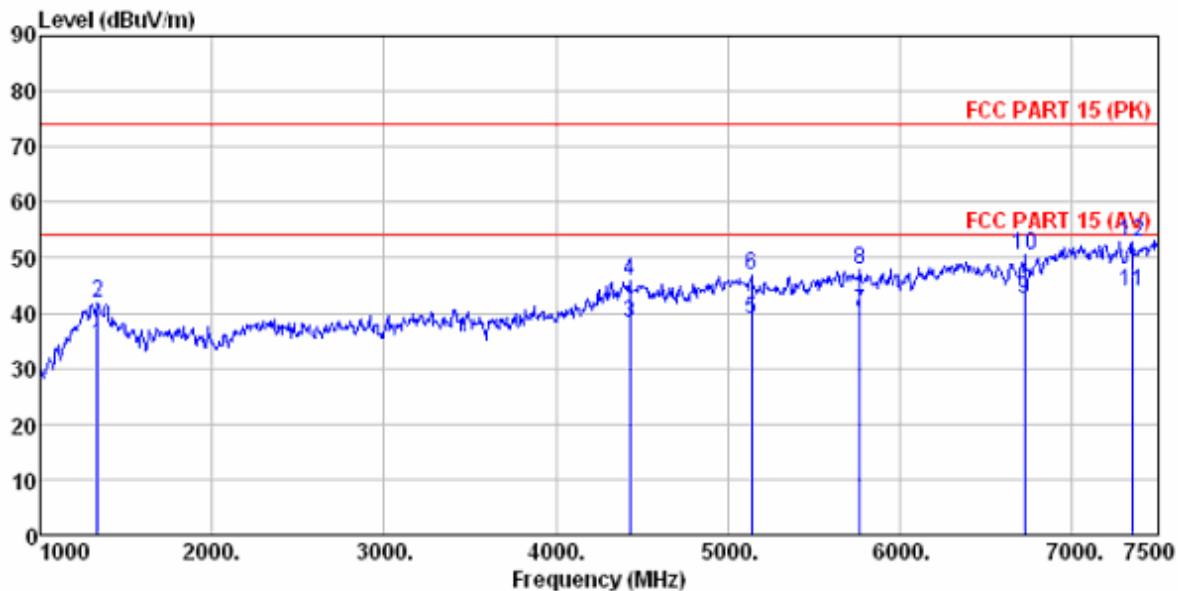

Site	3m chamber									
	FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) HORIZONTAL									
Condition	ReadAntenna	Cable	Preamp	Limit	Over					
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1336.000	24.65	25.69	4.57	20.79	34.12	54.00	-19.88	Average	
2	1336.000	32.53	25.69	4.57	20.79	42.00	74.00	-32.00	Peak	
3	4430.000	23.51	31.16	8.27	24.73	38.21	54.00	-15.79	Average	
4	4430.000	31.05	31.16	8.27	24.73	45.75	74.00	-28.25	Peak	
5	5137.000	21.83	32.06	8.97	23.88	38.98	54.00	-15.02	Average	
6	5137.000	29.76	32.06	8.97	23.88	46.91	74.00	-27.09	Peak	
7	5767.000	21.53	32.61	9.88	23.85	40.17	54.00	-13.83	Average	
8	5767.000	29.32	32.61	9.88	23.85	47.96	74.00	-26.04	Peak	
9	6726.000	22.82	34.24	11.18	25.65	42.59	54.00	-11.41	Average	
10	6726.000	30.67	34.24	11.18	25.65	50.44	74.00	-23.56	Peak	
11	7349.000	22.33	36.45	11.74	26.84	43.68	54.00	-10.32	Average	
12	7349.000	31.61	36.45	11.74	26.84	52.96	74.00	-21.04	Peak	

Vertical:

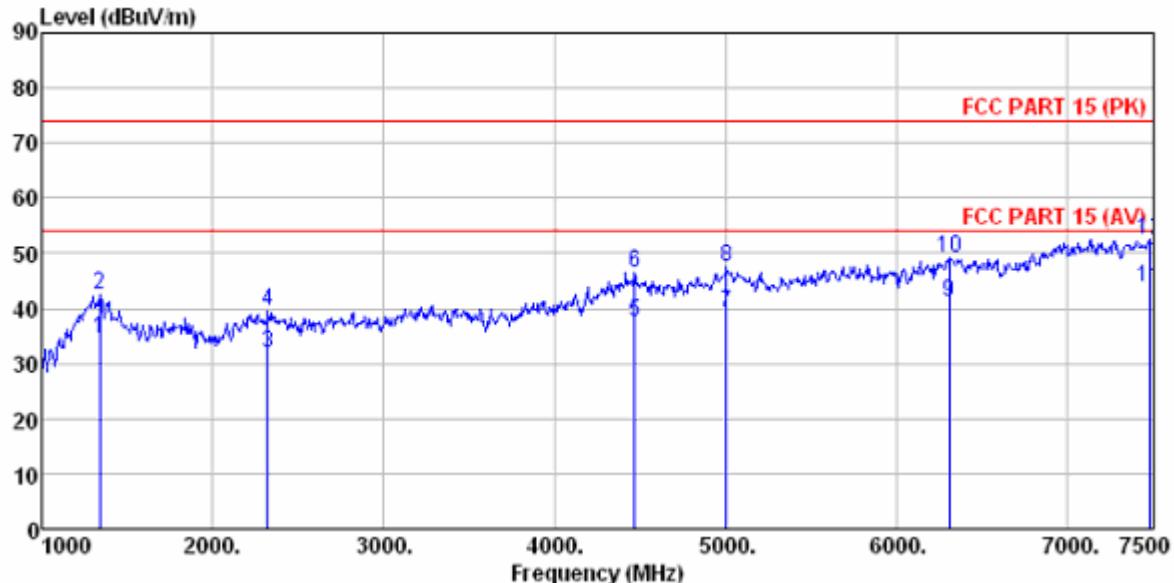

Site	3m chamber						
	FCC PART 15 (PK) 3m BBHA9120D ANT(>1GHZ) VERTICAL						
Condition	ReadAntenna	Cable	Preamp	Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	1343.000	25.21	25.70	4.57	20.79	34.69	54.00 -19.31 Average
2	1343.000	33.09	25.70	4.57	20.79	42.57	74.00 -31.43 Peak
3	2323.000	29.09	27.84	5.32	30.37	31.88	54.00 -22.12 Average
4	2323.000	36.72	27.84	5.32	30.37	39.51	74.00 -34.49 Peak
5	4465.000	22.64	31.26	8.31	24.69	37.52	54.00 -16.48 Average
6	4465.000	31.70	31.26	8.31	24.69	46.58	74.00 -27.42 Peak
7	5004.000	22.55	31.96	8.76	23.98	39.29	54.00 -14.71 Average
8	5004.000	30.88	31.96	8.76	23.98	47.62	74.00 -26.38 Peak
9	6306.000	21.78	33.30	10.63	24.49	41.22	54.00 -12.78 Average
10	6306.000	29.64	33.30	10.63	24.49	49.08	74.00 -24.92 Peak
11	7475.000	22.42	36.63	11.81	27.16	43.70	54.00 -10.30 Average
12	7475.000	31.31	36.63	11.81	27.16	52.59	74.00 -21.41 Peak