

# FCC PART 15.247 TEST REPORT

For

**Archos S.A**

12, Rue Ampere 91430 Igny, France

**FCC ID: SOVAK04**

|                                        |                                                                                                                                                                                                                                                                                             |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Report Type:</b><br>Original Report | <b>Product Type:</b><br>9.7inch Tablet PC                                                                                                                                                                                                                                                   |
| <b>Test Engineer:</b> Charlie Chen     | <i>charlie.chen</i>                                                                                                                                                                                                                                                                         |
| <b>Report Number:</b> RSZ130530005-00C |                                                                                                                                                                                                                                                                                             |
| <b>Report Date:</b> 2013-06-19         |                                                                                                                                                                                                                                                                                             |
| <b>Reviewed By:</b> RF Engineer        | <i>Sula Huang</i>                                                                                                                                                                                                                                                                           |
| <b>Prepared By:</b>                    | Bay Area Compliance Laboratories Corp. (Shenzhen)<br>6/F, the 3rd Phase of WanLi Industrial Building<br>ShiHua Road, FuTian Free Trade Zone<br>Shenzhen, Guangdong, China<br>Tel: +86-755-33320018<br>Fax: +86-755-33320008<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

## **TABLE OF CONTENTS**

|                                                                        |           |
|------------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                                        | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....               | 4         |
| OBJECTIVE .....                                                        | 4         |
| RELATED SUBMITTAL(S)/GRANT(S).....                                     | 4         |
| TEST METHODOLOGY .....                                                 | 4         |
| TEST FACILITY .....                                                    | 4         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                                  | <b>5</b>  |
| DESCRIPTION OF TEST CONFIGURATION .....                                | 5         |
| EQUIPMENT MODIFICATIONS .....                                          | 5         |
| EUT EXERCISE SOFTWARE .....                                            | 5         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                               | 5         |
| EXTERNAL I/O CABLE.....                                                | 5         |
| BLOCK DIAGRAM OF TEST SETUP .....                                      | 5         |
| <b>SUMMARY OF TEST RESULTS .....</b>                                   | <b>6</b>  |
| <b>FCC §15.247 (i) &amp; §2.1093 – RF EXPOSURE .....</b>               | <b>7</b>  |
| APPLICABLE STANDARD .....                                              | 7         |
| RESULT .....                                                           | 7         |
| <b>FCC §15.203 – ANTENNA REQUIREMENT .....</b>                         | <b>8</b>  |
| APPLICABLE STANDARD .....                                              | 8         |
| ANTENNA CONNECTOR CONSTRUCTION .....                                   | 8         |
| <b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>             | <b>9</b>  |
| APPLICABLE STANDARD .....                                              | 9         |
| MEASUREMENT UNCERTAINTY.....                                           | 9         |
| EUT SETUP.....                                                         | 9         |
| EMI TEST RECEIVER SETUP.....                                           | 10        |
| TEST PROCEDURE .....                                                   | 10        |
| TEST EQUIPMENT LIST AND DETAILS.....                                   | 10        |
| CORRECTED FACTOR & MARGIN CALCULATION .....                            | 10        |
| TEST RESULTS SUMMARY .....                                             | 11        |
| TEST DATA .....                                                        | 11        |
| <b>FCC §15.205, §15.209 &amp; §15.247(d) – RADIATED EMISSIONS.....</b> | <b>14</b> |
| APPLICABLE STANDARD .....                                              | 14        |
| MEASUREMENT UNCERTAINTY.....                                           | 14        |
| EUT SETUP.....                                                         | 14        |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....                      | 15        |
| TEST PROCEDURE .....                                                   | 15        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....                         | 15        |
| TEST EQUIPMENT LIST AND DETAILS.....                                   | 16        |
| TEST RESULTS SUMMARY .....                                             | 16        |
| TEST DATA .....                                                        | 16        |
| <b>FCC §15.247(a) (1)-CHANNEL SEPARATION .....</b>                     | <b>19</b> |
| APPLICABLE STANDARD .....                                              | 19        |
| TEST PROCEDURE .....                                                   | 19        |
| TEST EQUIPMENT LIST AND DETAILS.....                                   | 19        |
| TEST DATA .....                                                        | 19        |

|                                                                      |           |
|----------------------------------------------------------------------|-----------|
| <b>FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....</b>            | <b>26</b> |
| APPLICABLE STANDARD .....                                            | 26        |
| TEST PROCEDURE .....                                                 | 26        |
| TEST EQUIPMENT LIST AND DETAILS.....                                 | 26        |
| TEST DATA .....                                                      | 26        |
| <b>FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL .....</b>    | <b>32</b> |
| APPLICABLE STANDARD .....                                            | 32        |
| TEST PROCEDURE .....                                                 | 32        |
| TEST EQUIPMENT LIST AND DETAILS.....                                 | 32        |
| TEST DATA .....                                                      | 32        |
| <b>FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME).....</b> | <b>35</b> |
| APPLICABLE STANDARD .....                                            | 35        |
| TEST PROCEDURE .....                                                 | 35        |
| TEST EQUIPMENT LIST AND DETAILS.....                                 | 35        |
| TEST DATA .....                                                      | 35        |
| <b>FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT .....</b>      | <b>51</b> |
| APPLICABLE STANDARD .....                                            | 51        |
| TEST PROCEDURE .....                                                 | 51        |
| TEST EQUIPMENT LIST AND DETAILS.....                                 | 51        |
| TEST DATA .....                                                      | 51        |
| <b>FCC §15.247(d) - BAND EDGES .....</b>                             | <b>57</b> |
| APPLICABLE STANDARD .....                                            | 57        |
| TEST PROCEDURE .....                                                 | 57        |
| TEST EQUIPMENT LIST AND DETAILS.....                                 | 57        |
| TEST DATA .....                                                      | 58        |

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The Archos S.A's product, model number: AK04 (FCC ID: SOVAK04) or the "EUT" as referred to in this report was a 9.7inch Tablet PC, which was measured approximately: 24.5 cm (L) x 19.0 cm (W) x 0.8 cm (H), rated input voltage: DC 3.7V rechargeable Li-ion battery and DC 5.0V charging from adapter.

Adapter information: AC ADAPTER

Model: HNC050250U

Input: AC100-240V, 50/60Hz, 0.45A max

Output: DC 5.0V, 2.5A

*\* All measurement and test data in this report was gathered from production sample serial number: 1305167 (Assigned by the BACL, Shenzhen). The EUT supplied by the applicant was received on 2013-05-30.*

### Objective

This test report is prepared on behalf of Archos S.A in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

FCC Part 15B JBP and 15.247 DTS (Wi-Fi) submissions with FCC ID: SOVAK04.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3<sup>rd</sup> Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode.

### Equipment Modifications

No modification was made to the EUT.

### EUT Exercise Software

RF test tool built-in the EUT.


### Support Equipment List and Details

| Manufacturer | Description | Model | Serial Number |
|--------------|-------------|-------|---------------|
| /            | /           | /     | /             |

### External I/O Cable

| Cable Description                   | Length (m) | From Port | To  |
|-------------------------------------|------------|-----------|-----|
| Unshielded Detachable Adapter Cable | 1.2        | Adapter   | EUT |

### Block Diagram of Test Setup

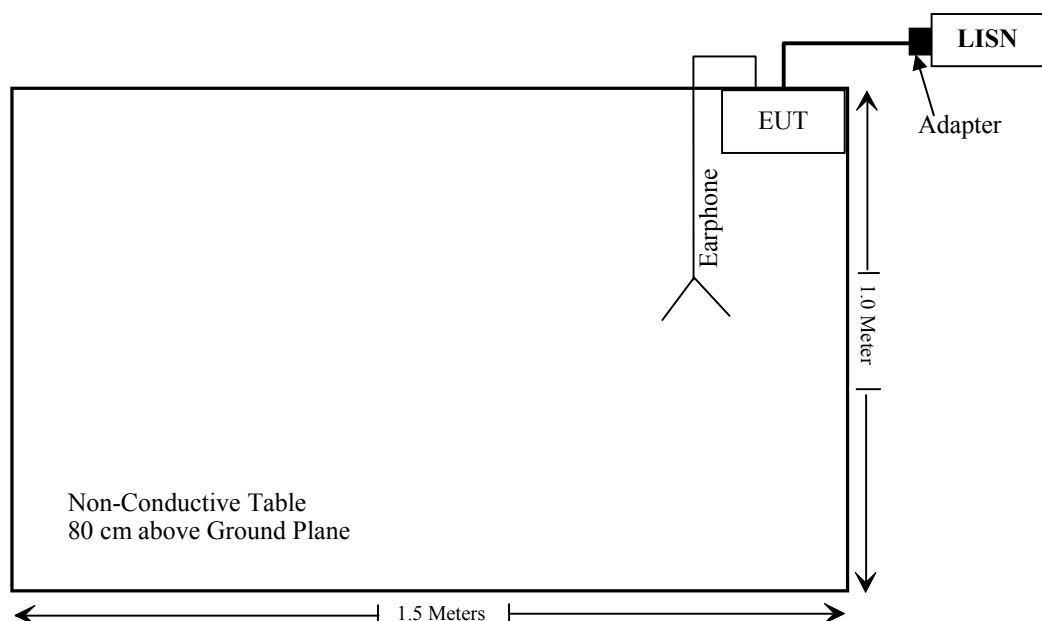

**SUMMARY OF TEST RESULTS**

| FCC Rules                     | Description of Test            | Result     |
|-------------------------------|--------------------------------|------------|
| §15.247 (i), §2.1093          | RF Exposure                    | Compliance |
| §15.203                       | Antenna Requirement            | Compliance |
| §15.207(a)                    | AC Line Conducted Emissions    | Compliance |
| §15.205, §15.209 & §15.247(d) | Radiated Emissions             | Compliance |
| §15.247(a)(1)                 | 20 dB Emission Bandwidth       | Compliance |
| §15.247(a)(1)                 | Channel Separation             | Compliance |
| §15.247(a)(1)(iii)            | Time of Occupancy (Dwell Time) | Compliance |
| §15.247(a)(1)(iii)            | Quantity of hopping channel    | Compliance |
| §15.247(b)(1)                 | Peak Output Power Measurement  | Compliance |
| §15.247(d)                    | Band edges                     | Compliance |

---

## **FCC §15.247 (i) & §2.1093 – RF EXPOSURE**

---

### **Applicable Standard**

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance v05

### **Result**

According to FCC KDB 447498 D01 General RF Exposure Guidance v05 generic portable criteria

The Max output power: -1.68 dBm (0.679 mW)

According to the Appendix A of KDB 447498, the exclusion thresholds for 2450 MHz is 10 mW

### **Conclusion:**

The time-averaged output power is 0.679 mW < the exclusion thresholds 10 mW, so stand-alone SAR evaluation is not required.

### **Result: Compliance**

**FCC §15.203 – ANTENNA REQUIREMENT**

---

**Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

**Antenna Connector Construction**

The EUT has one integrated antenna arrangement for bluetooth, which was permanently attached and the gain was 2.0 dBi, fulfill the requirement of this section. Please refer to the internal photos.

**Result:** Compliance.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a)


### Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements may be receiver reading, attenuation of the connection between AMN/ISN and receiver, AMN/ISN voltage division factor, AMN/ISN VDF frequency interpolation and receiver related input quantities, etc.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of conducted disturbance test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will not be taken into consideration for the test data recorded in the report

| Port     | Measurement uncertainty                |
|----------|----------------------------------------|
| AC Mains | 3.26 dB (k=2, 95% level of confidence) |
| CAT 3    | 3.70 dB (k=2, 95% level of confidence) |
| CAT 5    | 3.86 dB (k=2, 95% level of confidence) |
| CAT 6    | 4.64 dB (k=2, 95% level of confidence) |

### EUT Setup

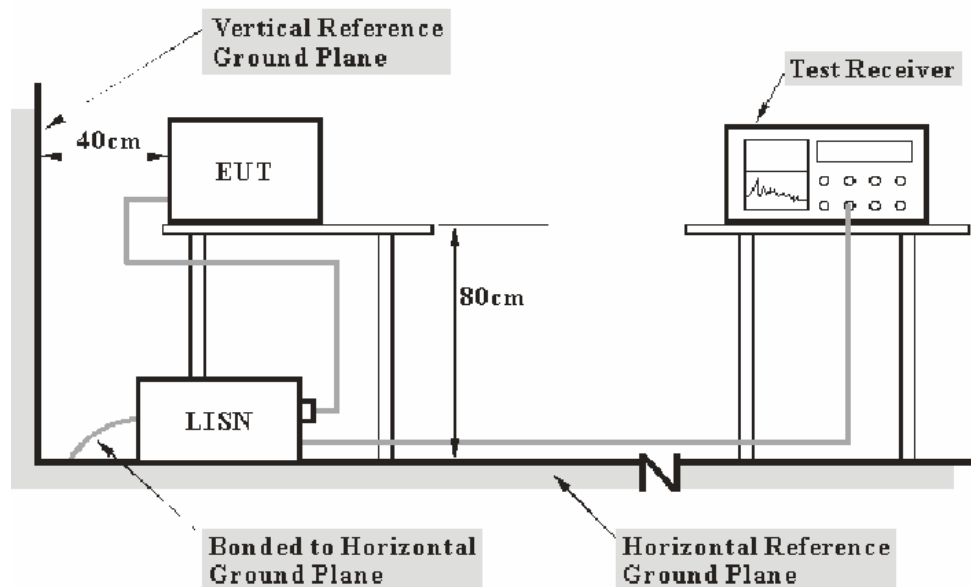

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2009. The related limit was specified in FCC Part 15.207.

The adapter was connected to a 120 VAC/60 Hz power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

### Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### Test Equipment List and Details

| Manufacturer    | Description       | Model   | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-------------------|---------|---------------|------------------|----------------------|
| Rohde & Schwarz | EMI Test Receiver | ESCI    | 101122        | 2013-05-09       | 2014-05-09           |
| Rohde & Schwarz | L.I.S.N.          | ESH2-Z5 | 892107/021    | 2012-08-22       | 2013-08-21           |
| BACL            | CE Test software  | BACL-CE | V1.0          | -                | -                    |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, with the worst margin reading of:

**10.6 dB at 0.180480 MHz** in the **Line** conducted mode

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cisprr}$$

in our lab.,  $U_{(Lm)}$  is less than  $U_{cisprr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

## Test Data

### Environmental Conditions


|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 55 %      |
| ATM Pressure:      | 100.1 kPa |

*The testing was performed by Charlie Chen on 2013-06-07.*

EUT operation mode: Charging&Transmitting

AC 120 V, 60 Hz, Line:


EMI Auto Test L

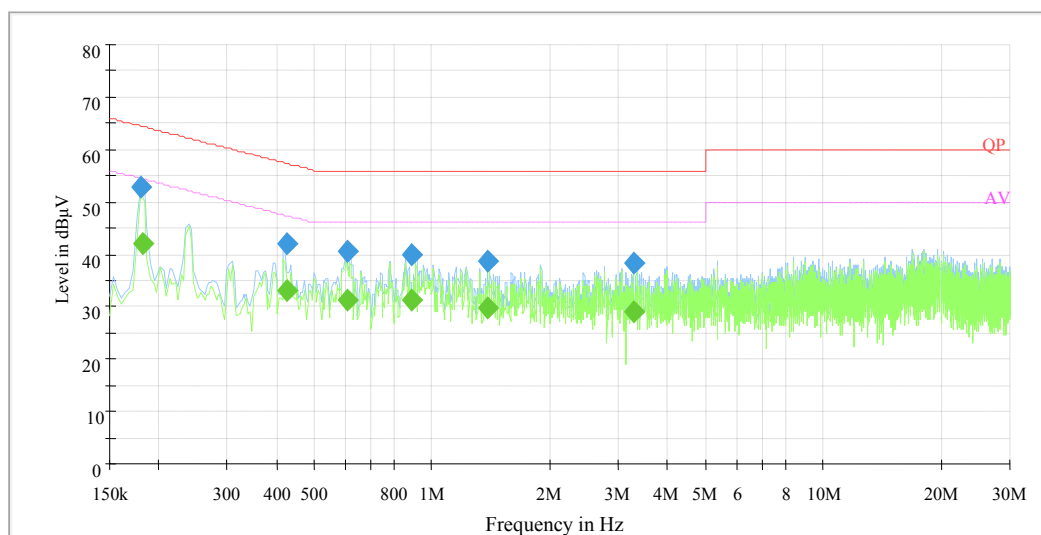

| Frequency (MHz) | Corrected Amplitude (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/Ave./QP) |
|-----------------|----------------------------|------------------------|--------------|-------------|-----------------------|
| 0.180480        | 43.9                       | 19.4                   | 54.5         | 10.6        | Ave.                  |
| 0.180480        | 53.3                       | 19.4                   | 64.5         | 11.2        | QP                    |
| 0.419511        | 42.8                       | 19.3                   | 57.5         | 14.7        | QP                    |
| 0.607978        | 31.2                       | 19.3                   | 46.0         | 14.8        | Ave.                  |
| 0.419511        | 32.5                       | 19.3                   | 47.5         | 15.0        | Ave.                  |
| 0.889024        | 30.9                       | 19.3                   | 46.0         | 15.1        | Ave.                  |
| 0.607978        | 40.6                       | 19.3                   | 56.0         | 15.4        | QP                    |
| 0.889024        | 39.7                       | 19.3                   | 56.0         | 16.3        | QP                    |
| 1.395105        | 29.5                       | 19.3                   | 46.0         | 16.5        | Ave.                  |
| 3.286590        | 28.7                       | 19.4                   | 46.0         | 17.3        | Ave.                  |
| 1.395105        | 38.5                       | 19.3                   | 56.0         | 17.5        | QP                    |
| 3.286590        | 38.1                       | 19.4                   | 56.0         | 17.9        | QP                    |

**AC 120V, 60 Hz, Neutral:**

EMI Auto Test N

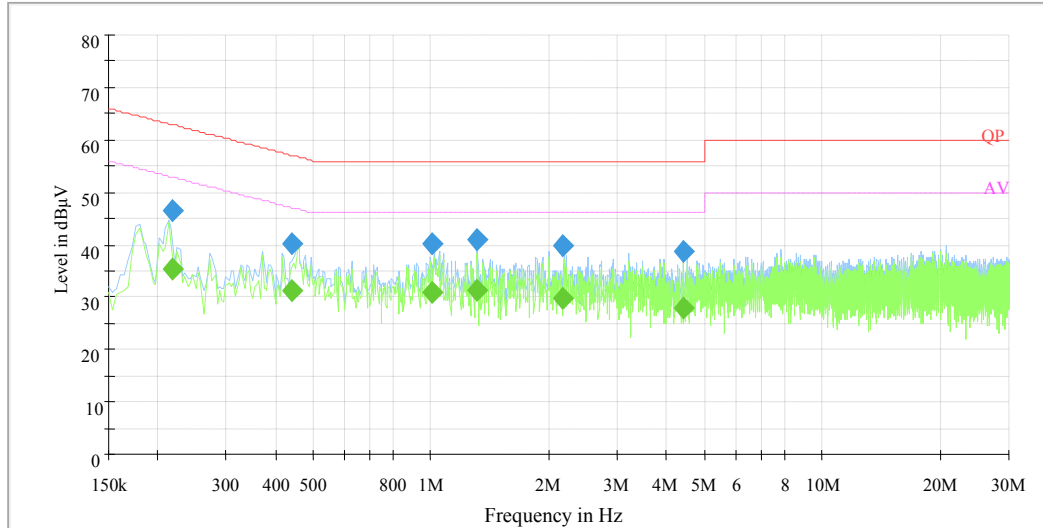

| Frequency (MHz) | Corrected Amplitude (dBμV) | Correction Factor (dB) | Limit (dBμV) | Margin (dB) | Detector (PK/Ave./QP) |
|-----------------|----------------------------|------------------------|--------------|-------------|-----------------------|
| 1.313735        | 32.2                       | 19.4                   | 46.0         | 13.8        | Ave.                  |
| 1.313735        | 41.9                       | 19.4                   | 56.0         | 14.1        | QP                    |
| 1.010055        | 41.6                       | 19.4                   | 56.0         | 14.4        | QP                    |
| 1.010055        | 31.5                       | 19.4                   | 46.0         | 14.5        | Ave.                  |
| 2.177777        | 41.0                       | 19.4                   | 56.0         | 15.0        | QP                    |
| 0.438555        | 32.0                       | 19.4                   | 47.1         | 15.1        | Ave.                  |
| 0.222920        | 46.8                       | 19.4                   | 62.7         | 15.9        | QP                    |
| 0.438555        | 41.2                       | 19.4                   | 57.1         | 15.9        | QP                    |
| 0.222920        | 36.7                       | 19.4                   | 52.7         | 16.0        | Ave.                  |
| 2.177777        | 29.9                       | 19.4                   | 46.0         | 16.1        | Ave.                  |
| 4.414775        | 39.2                       | 19.4                   | 56.0         | 16.8        | QP                    |
| 4.414775        | 27.6                       | 19.4                   | 46.0         | 18.4        | Ave.                  |

**Note:**

- 1) Correction Factor = LISN/ISN VDF (Voltage Division Factor) + Cable Loss  
The corrected factor has been input into the transducer of the test software.
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

## FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

### Applicable Standard

FCC §15.205; §15.209; §15.247(d)


### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown in below table. And the uncertainty will not be taken into consideration for the test data recorded in the report.

| Frequency    | Polarity   | Measurement uncertainty                |
|--------------|------------|----------------------------------------|
| 30MHz~200MHz | Horizontal | 4.62 dB (k=2, 95% level of confidence) |
|              | Vertical   | 4.54 dB (k=2, 95% level of confidence) |
| 200MHz~1GHz  | Horizontal | 4.84 dB (k=2, 95% level of confidence) |
|              | Vertical   | 5.91 dB (k=2, 95% level of confidence) |
| 1 GHz~6 GHz  | /          | 4.68 dB (k=2, 95% level of confidence) |
| Above 6 GHz  | /          | 4.92 dB (k=2, 95% level of confidence) |

### EUT Setup

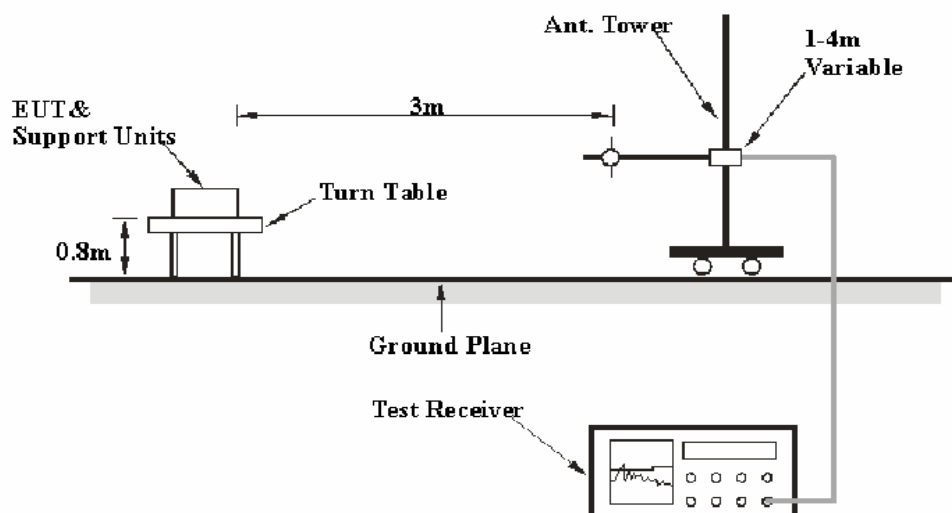

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to an AC 120V/60 Hz power source.

### EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range   | RBW     | Video B/W | IF B/W  | Detector |
|-------------------|---------|-----------|---------|----------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz   | 120 kHz | QP       |
| Above 1 GHz       | 1MHz    | 3 MHz     | /       | PK       |
|                   | 1MHz    | 10 Hz     | /       | Ave.     |

### Test Procedure

For the radiated emissions test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

### Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Corrected Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

**Test Equipment List and Details**

| Manufacturer              | Description       | Model    | Serial Number | Calibration Date | Calibration Due Date |
|---------------------------|-------------------|----------|---------------|------------------|----------------------|
| HP                        | Amplifier         | 8447E    | 1937A01046    | 2012-08-09       | 2013-08-09           |
| Rohde & Schwarz           | EMI Test Receiver | ESCI     | 101122        | 2013-05-09       | 2014-05-09           |
| Sunol Sciences            | Broadband Antenna | JB1      | A040904-2     | 2011-11-28       | 2014-11-27           |
| SUPER ULTRA               | Amplifier         | ZVA-213+ | N/A           | 2012-11-24       | 2013-11-23           |
| Sunol Sciences            | Horn Antenna      | DRH-118  | A052304       | 2011-12-01       | 2014-11-30           |
| Rohde & Schwarz           | Signal Analyzer   | FSIQ26   | 8386001028    | 2012-11-24       | 2013-11-23           |
| the electro-Mechanics Co. | Horn Antenna      | 3116     | 9510-2270     | 2010-10-14       | 2013-10-13           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**Test Results Summary**

According to the data in the following table, with the worst margin reading of:

**4.15 dB at 306.9 MHz in the Horizontal polarization**

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(L_m)} \leq L_{lim} + U_{cispr}$$

in our lab.,  $U_{(L_m)}$  is less than  $U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25 °C     |
| <b>Relative Humidity:</b> | 55 %      |
| <b>ATM Pressure:</b>      | 100.1 kPa |

*The testing was performed by Charlie Chen on 2013-06-07.*

*EUT operation mode: Transmitting*

**30 MHz ~25 GHz:** (Scan with GFSK,  $\pi/4$ -DQPSK, 8DPSK, the worst case is BDR Mode (GFSK))

| Frequency<br>(MHz)        | Receiver          |                          | Turntable<br>Degree | Rx Antenna    |                | Corrected<br>Factor<br>(dB) | Corrected<br>Amplitude<br>(dBμV/m) | FCC Part<br>15.247/205/209 |                |
|---------------------------|-------------------|--------------------------|---------------------|---------------|----------------|-----------------------------|------------------------------------|----------------------------|----------------|
|                           | Reading<br>(dBμV) | Detector<br>(PK/QP/Ave.) |                     | Height<br>(m) | Polar<br>(H/V) |                             |                                    | Limit<br>(dBμV/m)          | Margin<br>(dB) |
| Low Channel (2402 MHz)    |                   |                          |                     |               |                |                             |                                    |                            |                |
| 2402.0                    | 87.72             | PK                       | 215                 | 1.5           | H              | 6.13                        | 93.85                              | /                          | /              |
| 2402.0                    | 77.12             | Ave.                     | 215                 | 1.5           | H              | 6.13                        | 83.25                              | /                          | /              |
| 2402.0                    | 83.73             | PK                       | 322                 | 1.3           | V              | 6.13                        | 89.86                              | /                          | /              |
| 2402.0                    | 72.95             | Ave.                     | 322                 | 1.3           | V              | 6.13                        | 79.08                              | /                          | /              |
| 306.9                     | 55.64             | QP                       | 69                  | 1.5           | H              | -13.9                       | 41.74                              | 46                         | 4.26           |
| 3563.8                    | 29.33             | Ave.                     | 144                 | 1.6           | V              | 9.00                        | 38.33                              | 54                         | 15.67          |
| 7206.0                    | 20.08             | Ave.                     | 204                 | 1.5           | V              | 17.06                       | 37.14                              | 54                         | 16.86          |
| 3563.8                    | 44.45             | PK                       | 144                 | 1.6           | V              | 9.00                        | 53.45                              | 74                         | 20.55          |
| 7206.0                    | 35.73             | PK                       | 204                 | 1.5           | V              | 17.06                       | 52.79                              | 74                         | 21.21          |
| 4804.0                    | 20.06             | Ave.                     | 23                  | 1.7           | V              | 12.40                       | 32.46                              | 54                         | 21.54          |
| 2492.5                    | 22.15             | Ave.                     | 210                 | 1.2           | H              | 7.21                        | 29.36                              | 54                         | 24.64          |
| 4804.0                    | 35.91             | PK                       | 23                  | 1.7           | V              | 12.40                       | 48.31                              | 74                         | 25.69          |
| 2312.5                    | 21.53             | Ave.                     | 236                 | 1.5           | V              | 5.48                        | 27.01                              | 54                         | 26.99          |
| 2319.6                    | 21.10             | Ave.                     | 260                 | 1.4           | V              | 5.48                        | 26.58                              | 54                         | 27.42          |
| 2492.5                    | 37.11             | PK                       | 210                 | 1.2           | H              | 7.21                        | 44.32                              | 74                         | 29.68          |
| 2312.5                    | 36.64             | PK                       | 236                 | 1.5           | V              | 5.48                        | 42.12                              | 74                         | 31.88          |
| 2319.6                    | 36.07             | PK                       | 260                 | 1.4           | V              | 5.48                        | 41.55                              | 74                         | 32.45          |
| Middle Channel (2441 MHz) |                   |                          |                     |               |                |                             |                                    |                            |                |
| 2441.0                    | 85.08             | PK                       | 16                  | 1.7           | H              | 7.21                        | 92.29                              | /                          | /              |
| 2441.0                    | 74.52             | Ave.                     | 16                  | 1.7           | H              | 7.21                        | 81.73                              | /                          | /              |
| 2441.0                    | 83.97             | PK                       | 213                 | 1.5           | V              | 7.21                        | 91.18                              | /                          | /              |
| 2441.0                    | 73.11             | Ave.                     | 213                 | 1.5           | V              | 7.21                        | 80.32                              | /                          | /              |
| 306.9                     | 55.21             | QP                       | 60                  | 1.4           | H              | -13.9                       | 41.31                              | 46                         | 4.69           |
| 3563.8                    | 29.37             | Ave.                     | 96                  | 1.4           | V              | 9.00                        | 38.37                              | 54                         | 15.63          |
| 7323.0                    | 20.32             | Ave.                     | 117                 | 1.3           | H              | 16.49                       | 36.81                              | 54                         | 17.19          |
| 3563.8                    | 44.75             | PK                       | 96                  | 1.4           | V              | 9.00                        | 53.75                              | 74                         | 20.25          |
| 4882.0                    | 21.16             | Ave.                     | 122                 | 1.2           | V              | 12.46                       | 33.62                              | 54                         | 20.38          |
| 7323.0                    | 35.54             | PK                       | 117                 | 1.3           | H              | 16.49                       | 52.03                              | 74                         | 21.97          |
| 2489.1                    | 21.73             | Ave.                     | 115                 | 1.6           | V              | 7.21                        | 28.94                              | 54                         | 25.06          |
| 4882.0                    | 35.96             | PK                       | 122                 | 1.2           | V              | 12.46                       | 48.42                              | 74                         | 25.58          |
| 2335.1                    | 21.83             | Ave.                     | 306                 | 1.2           | H              | 5.48                        | 27.31                              | 54                         | 26.69          |
| 2346.5                    | 21.76             | Ave.                     | 35                  | 1.5           | V              | 5.48                        | 27.24                              | 54                         | 26.76          |
| 2489.1                    | 36.11             | PK                       | 115                 | 1.6           | V              | 7.21                        | 43.32                              | 74                         | 30.68          |
| 2335.1                    | 36.86             | PK                       | 306                 | 1.2           | H              | 5.48                        | 42.34                              | 74                         | 31.66          |
| 2346.5                    | 36.57             | PK                       | 35                  | 1.5           | V              | 5.48                        | 42.05                              | 74                         | 31.95          |

| Frequency<br>(MHz)      | Receiver          |                          | Turntable<br>Degree | Rx Antenna    |                | Corrected<br>Factor<br>(dB) | Corrected<br>Amplitude<br>(dBμV/m) | FCC Part<br>15.247/205/209 |                |
|-------------------------|-------------------|--------------------------|---------------------|---------------|----------------|-----------------------------|------------------------------------|----------------------------|----------------|
|                         | Reading<br>(dBμV) | Detector<br>(PK/QP/Ave.) |                     | Height<br>(m) | Polar<br>(H/V) |                             |                                    | Limit<br>(dBμV/m)          | Margin<br>(dB) |
| High Channel (2480 MHz) |                   |                          |                     |               |                |                             |                                    |                            |                |
| 2480.0                  | 82.96             | PK                       | 331                 | 1.3           | H              | 7.21                        | 90.17                              | /                          | /              |
| 2480.0                  | 72.81             | Ave.                     | 331                 | 1.3           | H              | 7.21                        | 80.02                              | /                          | /              |
| 2480.0                  | 80.74             | PK                       | 138                 | 1.4           | V              | 7.21                        | 87.95                              | /                          | /              |
| 2480.0                  | 70.66             | Ave.                     | 138                 | 1.4           | V              | 7.21                        | 77.87                              | /                          | /              |
| 306.9                   | 55.75             | QP                       | 302                 | 1.4           | H              | -13.9                       | 41.85                              | 46                         | 4.15           |
| 3563.8                  | 29.23             | Ave.                     | 163                 | 1.5           | V              | 9.00                        | 38.23                              | 54                         | 15.77          |
| 7440.0                  | 21.07             | Ave.                     | 37                  | 1.7           | V              | 15.90                       | 36.97                              | 54                         | 17.03          |
| 4960.0                  | 21.26             | Ave.                     | 152                 | 1.6           | V              | 12.50                       | 33.76                              | 54                         | 20.24          |
| 3563.8                  | 44.56             | PK                       | 163                 | 1.5           | V              | 9.00                        | 53.56                              | 74                         | 20.44          |
| 7440.0                  | 36.05             | PK                       | 37                  | 1.7           | V              | 15.90                       | 51.95                              | 74                         | 22.05          |
| 2483.6                  | 21.83             | Ave.                     | 199                 | 1.3           | H              | 7.21                        | 29.04                              | 54                         | 24.96          |
| 4960.0                  | 36.44             | PK                       | 152                 | 1.6           | V              | 12.50                       | 48.94                              | 74                         | 25.06          |
| 2482.5                  | 21.71             | Ave.                     | 33                  | 1.7           | H              | 7.21                        | 28.92                              | 54                         | 25.08          |
| 2355.9                  | 21.65             | Ave.                     | 17                  | 1.6           | V              | 5.48                        | 27.13                              | 54                         | 26.87          |
| 2483.6                  | 36.35             | PK                       | 199                 | 1.3           | H              | 7.21                        | 43.56                              | 74                         | 30.44          |
| 2482.5                  | 36.12             | PK                       | 33                  | 1.7           | H              | 7.21                        | 43.33                              | 74                         | 30.67          |
| 2355.9                  | 36.77             | PK                       | 17                  | 1.6           | V              | 5.48                        | 42.25                              | 74                         | 31.75          |

**Note:**

1. Corrected Factor=Antenna factor (RX) +cable loss – amplifier factor
2. Corrected Amplitude = Corrected Factor + Receiver Reading
3. Margin = Limit- Corrected Amplitude

**FCC §15.247(a) (1)-CHANNEL SEPARATION****Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

**Test Procedure**

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace
3. Measure the channel separation.

**Test Equipment List and Details**

| Manufacturer    | Description     | Model  | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-----------------|--------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 8386001028    | 2012-11-24       | 2013-11-23           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 55 %      |
| ATM Pressure:      | 100.1 kPa |

*The testing was performed by Charlie Chen on 2013-06-07.*


*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following tables and plots*


| Mode                                  | Channel  | Frequency (MHz) | Channel Separation (MHz) | $\geq$ Limit (MHz) | Result |
|---------------------------------------|----------|-----------------|--------------------------|--------------------|--------|
| <b>BDR (GFSK)</b>                     | Low      | 2402            | 1.002                    | 0.695              | Pass   |
|                                       | Adjacent | 2403            |                          |                    |        |
|                                       | Middle   | 2441            | 1.002                    | 0.695              | Pass   |
|                                       | Adjacent | 2442            |                          |                    |        |
|                                       | High     | 2480            | 1.002                    | 0.695              | Pass   |
|                                       | Adjacent | 2479            |                          |                    |        |
| <b>EDR (<math>\pi/4</math>-DQPSK)</b> | Low      | 2402            | 1.002                    | 0.906              | Pass   |
|                                       | Adjacent | 2403            |                          |                    |        |
|                                       | Middle   | 2441            | 1.002                    | 0.906              | Pass   |
|                                       | Adjacent | 2442            |                          |                    |        |
|                                       | High     | 2480            | 1.002                    | 0.906              | Pass   |
|                                       | Adjacent | 2479            |                          |                    |        |
| <b>EDR (8DPSK)</b>                    | Low      | 2402            | 1.002                    | 0.882              | Pass   |
|                                       | Adjacent | 2403            |                          |                    |        |
|                                       | Middle   | 2441            | 1.002                    | 0.882              | Pass   |
|                                       | Adjacent | 2442            |                          |                    |        |
|                                       | High     | 2480            | 1.002                    | 0.882              | Pass   |
|                                       | Adjacent | 2479            |                          |                    |        |

Note: Limit = 20 dB bandwidth \*2/3

### BDR (GFSK): Low Channel

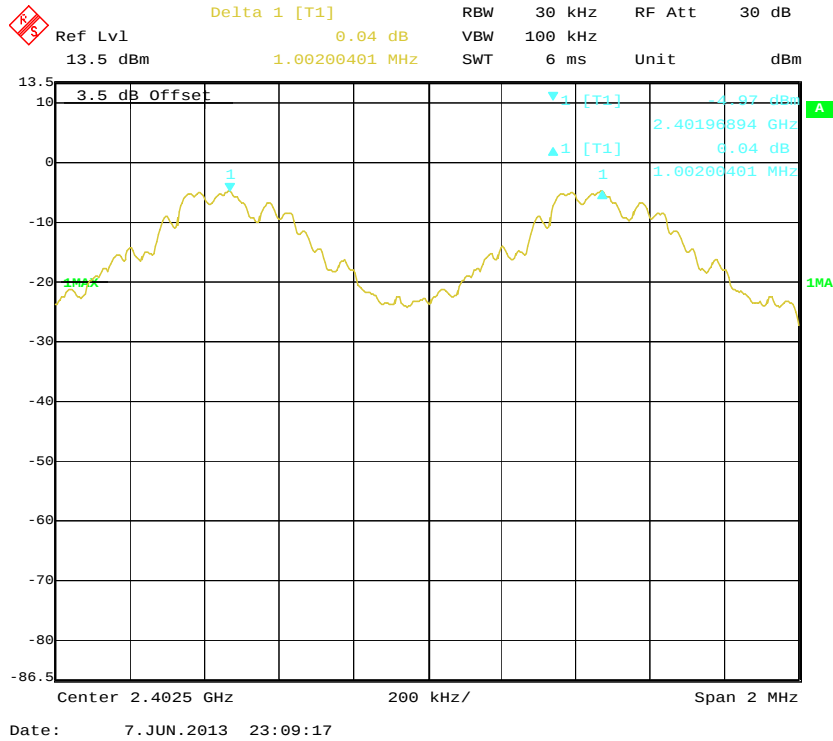

### BDR (GFSK): Middle Channel

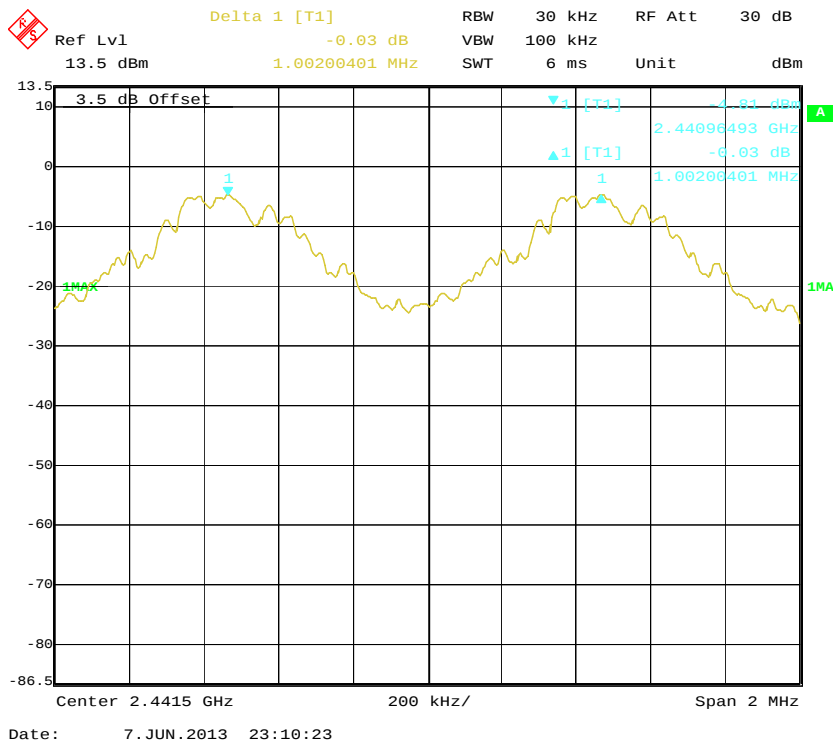

Ref Lvl 13.5 dBm Delta 1 [T1] 0.01 dB RBW 30 kHz RF Att 30 dB  
 1.00200401 MHz SWT 6 ms Unit dBm

3.5 dB Offset

1 [T1] 2.4796493 GHz 0.01 dB 1.00200401 MHz

Center 2.4796 GHz 200 kHz/ Span 2 MHz

Date: 7. JUN. 2013 23:11:28

Ref Lvl 13.5 dBm Delta 1 [T1] -0.05 dB 1.00200401 MHz RBW 30 kHz VBW 100 kHz SWT 6 ms RF Att 30 dB Unit dBm

3.5 dB Offset

1 [T1] -3.33 dBm 2.40196493 GHz -0.05 dB 1.00200401 MHz

1 [T1] -6.05 dB 1.00200401 MHz


1MAX

1MA


Center 2.4025 GHz 200 kHz/ Span 2 MHz

Date: 7. JUN. 2013 23:16:31


### EDR ( $\pi/4$ -DQPSK): Middle Channel

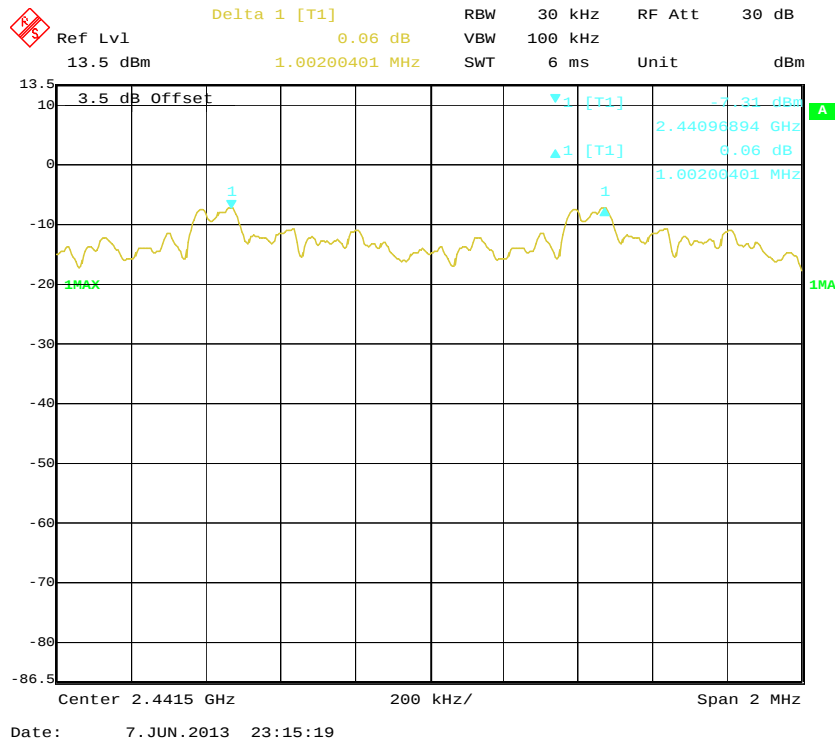


### EDR ( $\pi/4$ -DQPSK): High Channel

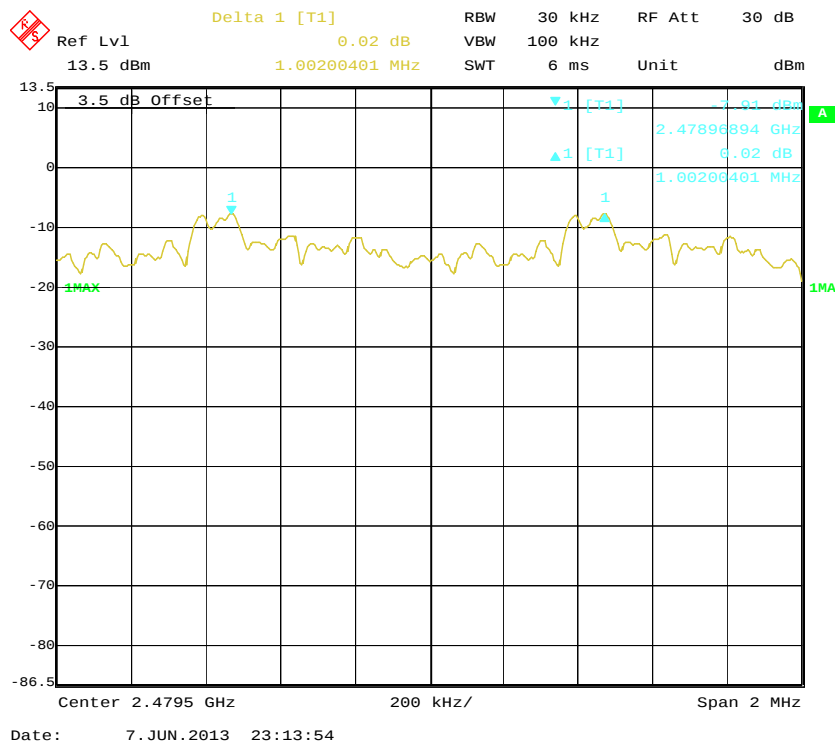


### EDR (8DPSK): Low Channel

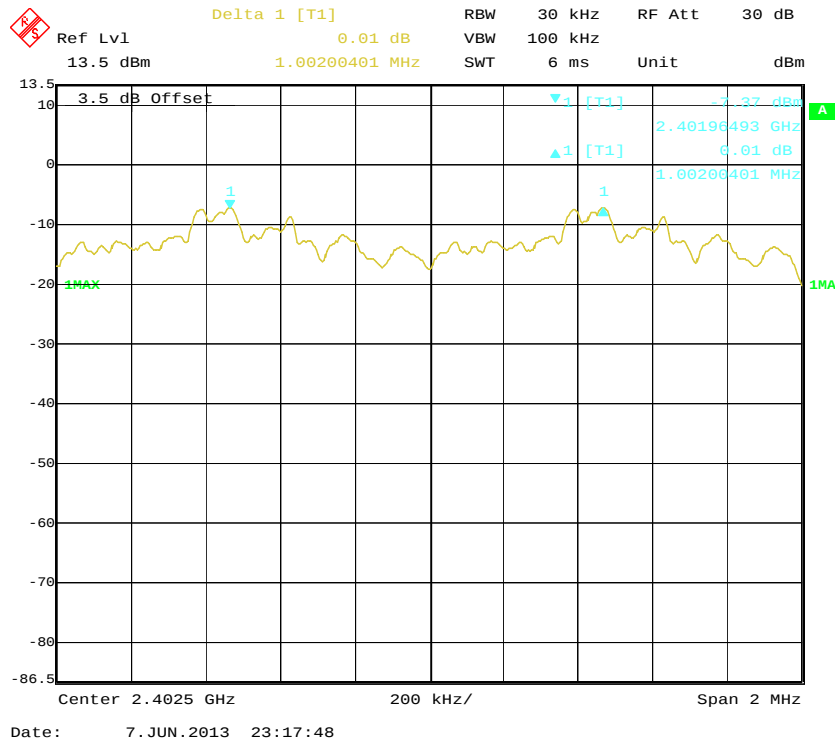

### EDR (8DPSK): Middle Channel

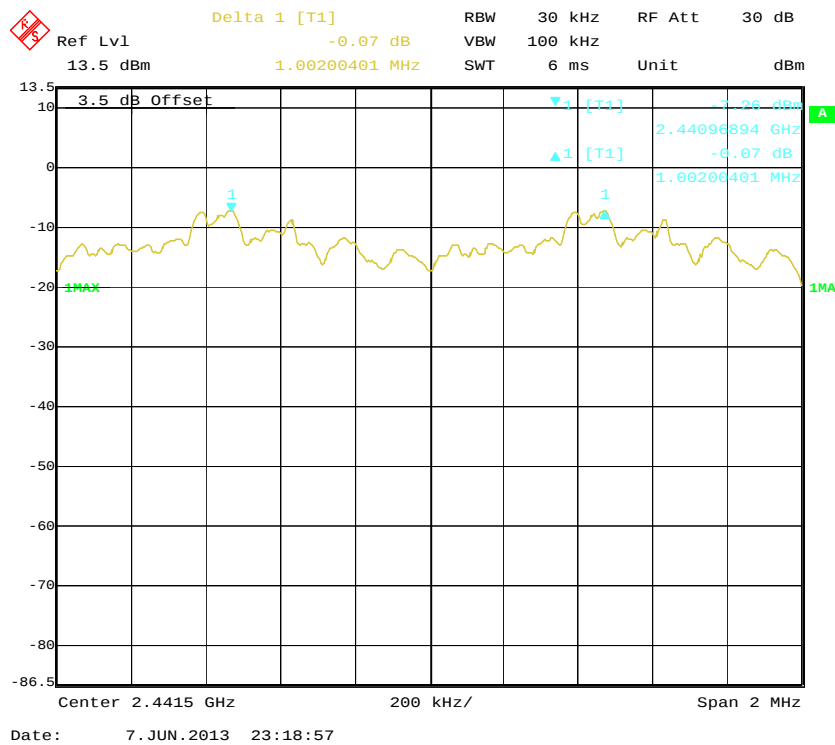

EDR (8DPSK): High Channel

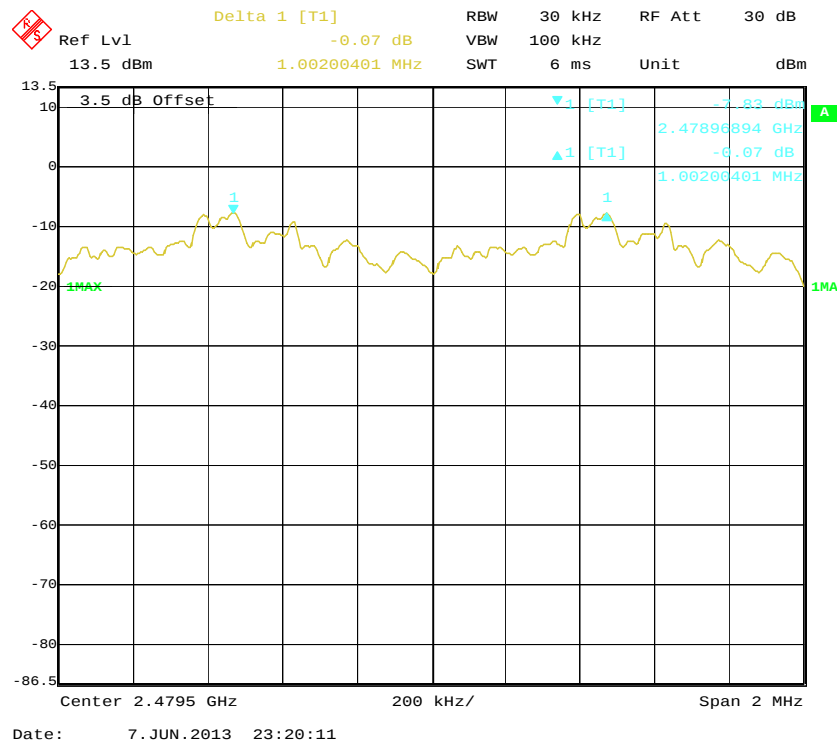

**FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH****Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

**Test Equipment List and Details**

| Manufacturer    | Description     | Model  | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-----------------|--------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 8386001028    | 2012-11-24       | 2013-11-23           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 55 %      |
| ATM Pressure:      | 100.1 kPa |


\* The testing was performed by Charlie Chen on 2013-06-07.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

| Mode                  | Channel | Frequency (MHz) | 20 dB Emission Bandwidth (MHz) |
|-----------------------|---------|-----------------|--------------------------------|
| BDR (GFSK)            | Low     | 2402            | 1.042                          |
|                       | Middle  | 2441            | 1.042                          |
|                       | High    | 2480            | 1.042                          |
| EDR ( $\pi/4$ -DQPSK) | Low     | 2402            | 1.359                          |
|                       | Middle  | 2441            | 1.359                          |
|                       | High    | 2480            | 1.359                          |
| EDR (8DPSK)           | Low     | 2402            | 1.323                          |
|                       | Middle  | 2441            | 1.323                          |
|                       | High    | 2480            | 1.323                          |


### BDR (GFSK): Low Channel

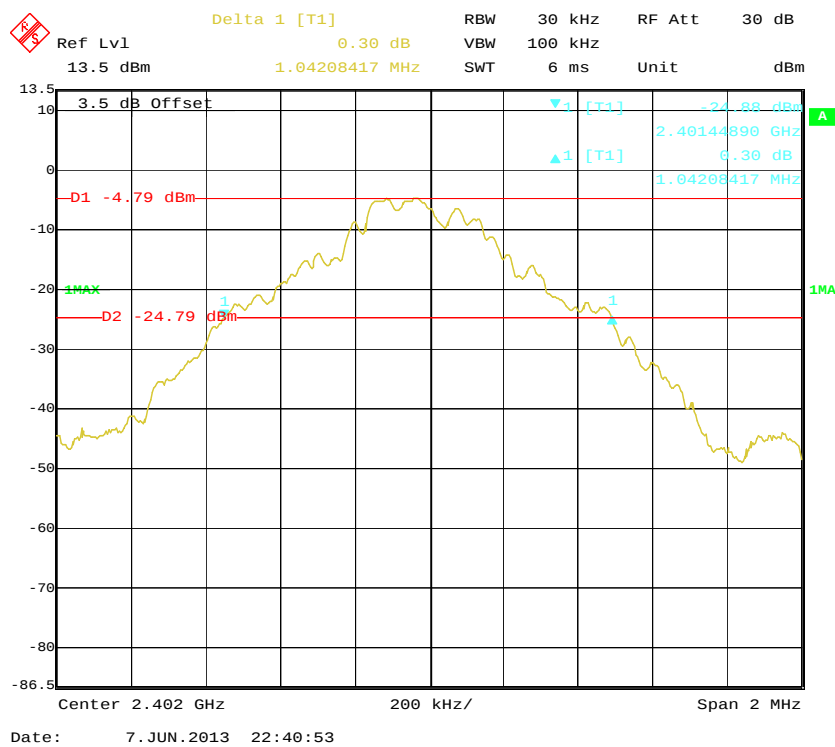

### BDR (GFSK): Middle Channel

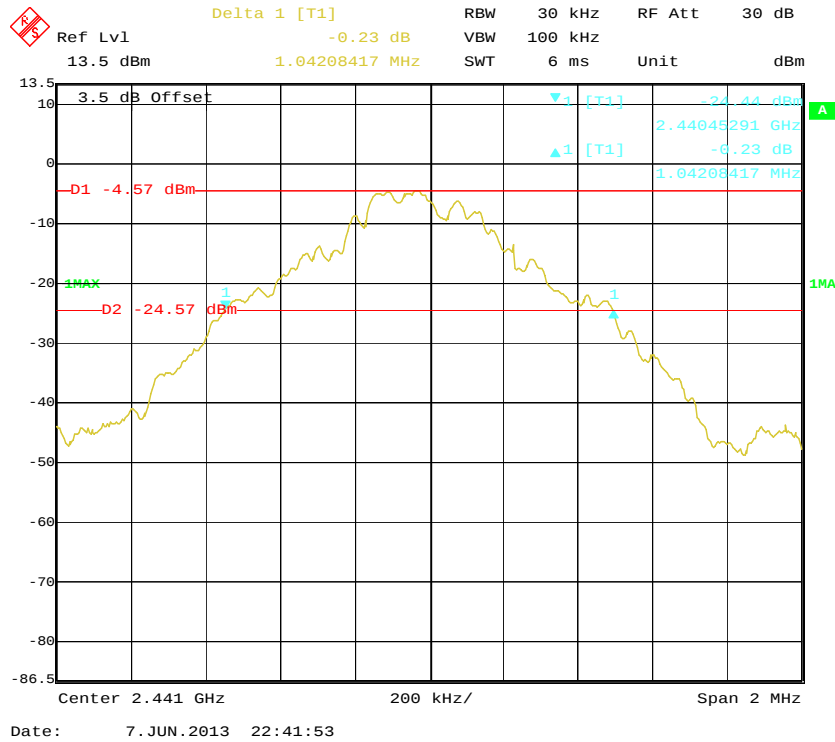

### BDR (GFSK): High Channel

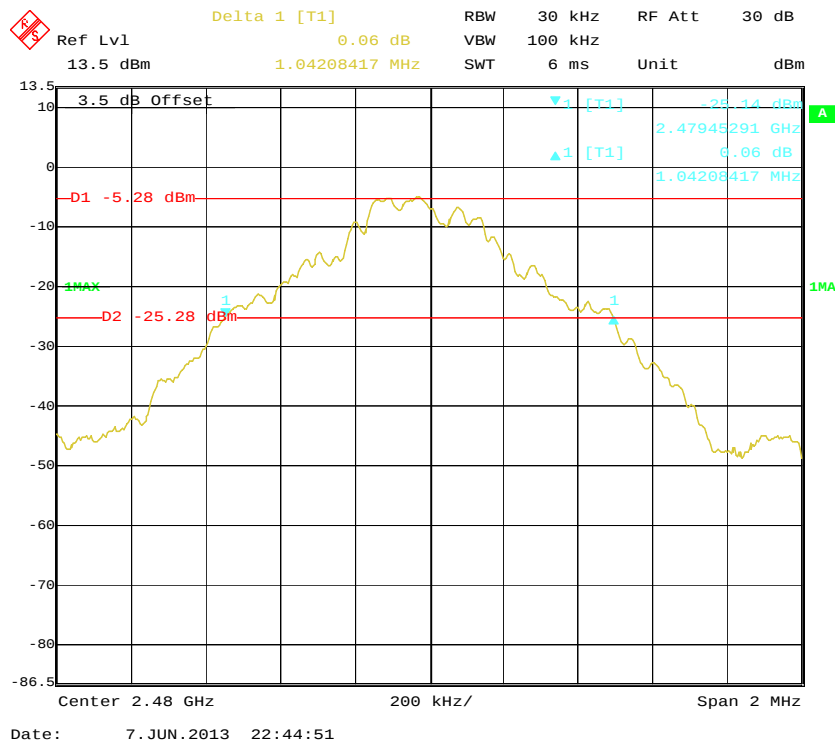

Ref Lvl 13.5 dBm Delta 1 [T1] 0.39 dB RBW 30 kHz RF Att 30 dB

13.5 dB Offset 3.5 dB Offset

D1 -7.12 dBm

D2 -27.12 dBm

1.35871743 MHz

2.40128156 GHz

300 kHz/

Span 3 MHz

Date: 7. JUN. 2013 22:30:42

Ref Lvl 0.68 dB RBW 30 kHz RF Att 30 dB  
 13.5 dBm 1.35871743 MHz SWT 8.5 ms Unit dBm

3.5 dB Offset

-D1 -7.24 dBm

-D2 -27.24 dBm

Delta 1 [T1]

1 [T1]

Center 2.441 GHz 300 kHz/ Span 3 MHz

Date: 7. JUN. 2013 22:29:18

Ref Lvl 13.5 dBm      Delta 1 [T1] 0.66 dB      RBW 30 kHz      VBW 100 kHz      RF Att 30 dB      Unit dBm      8.5 ms

3.5 dB Offset

D1 -7.82 dBm

D2 -27.82 dBm

Center 2.48 GHz      300 kHz/      Span 3 MHz

Date: 7. JUN. 2013 22:31:58

Ref Lvl 13.5 dBm      Delta 1 [T1] 0.34 dB      RBW 30 kHz      RF Att 30 dB  
 13.5 dBm      1.32264529 MHz      VBW 100 kHz      SWT 8.5 ms      Unit dBm

3.5 dB Offset

D1 -7.06 dBm

D2 -27.06 dBm

1MAX

1MA

1 [T1]

2.40130561 GHz


0.34 dB

1.32264529 MHz


Center 2.402 GHz      300 kHz/      Span 3 MHz

Date: 7. JUN. 2013 22:53:00

### EDR (8DPSK): Middle Channel

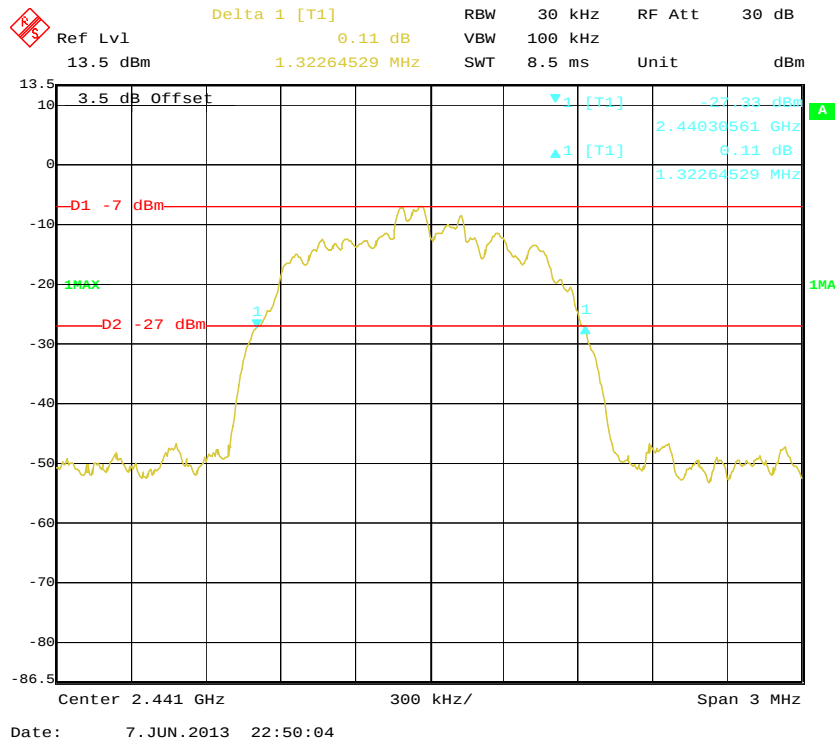

### EDR (8DPSK): High Channel

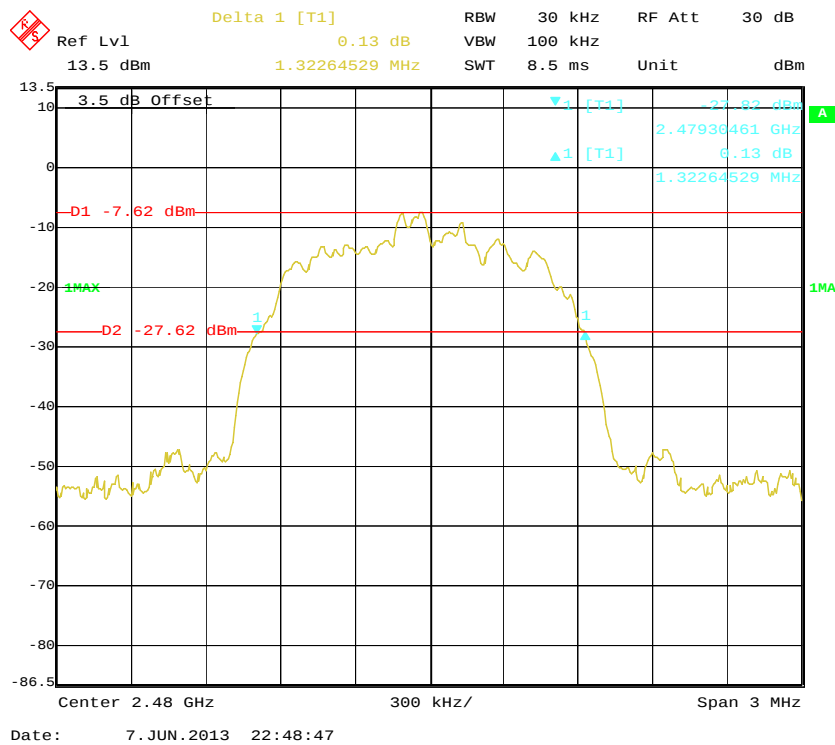

## FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL

### Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

### Test Equipment List and Details

| Manufacturer    | Description     | Model  | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-----------------|--------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 8386001028    | 2012-11-24       | 2013-11-23           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 55 %      |
| ATM Pressure:      | 100.1 kPa |


*The testing was performed by Charlie Chen on 2013-06-07.*

*EUT operation mode: Transmitting*


*Test Result: Compliance. Please refer to following tables and plots*

| Mode            | Frequency Range (MHz) | Number of Hopping Channel (CH) | Limit (CH) |
|-----------------|-----------------------|--------------------------------|------------|
| BDR (GFSK)      | 2400-2483.5           | 79                             | ≥15        |
| EDR (π/4-DQPSK) | 2400-2483.5           | 79                             | ≥15        |
| EDR (8DPSK)     | 2400-2483.5           | 79                             | ≥15        |


### BDR (GFSK): Number of Hopping Channels

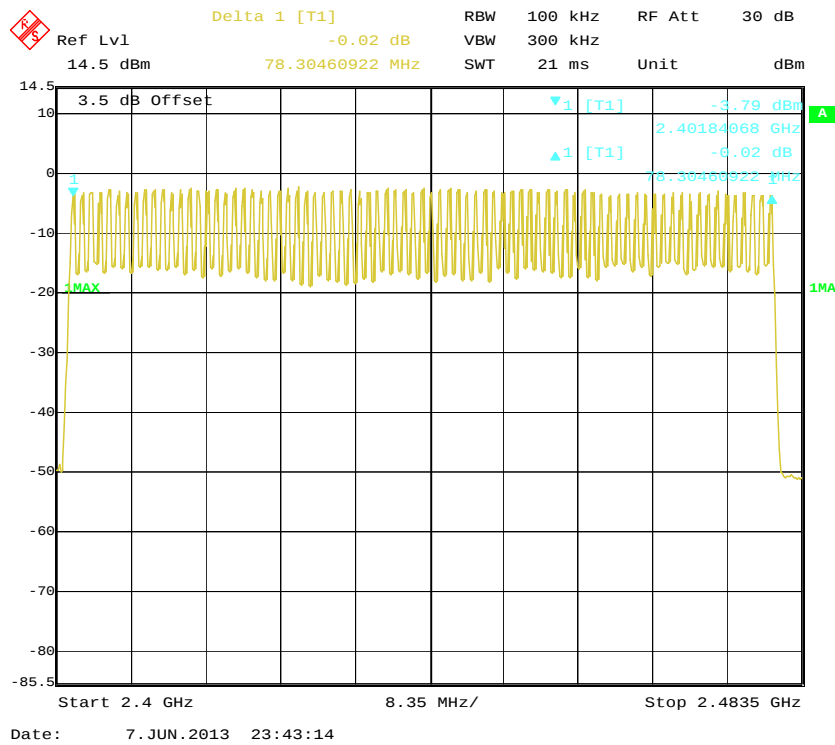

### EDR ( $\pi/4$ -DQPSK): Number of Hopping Channels

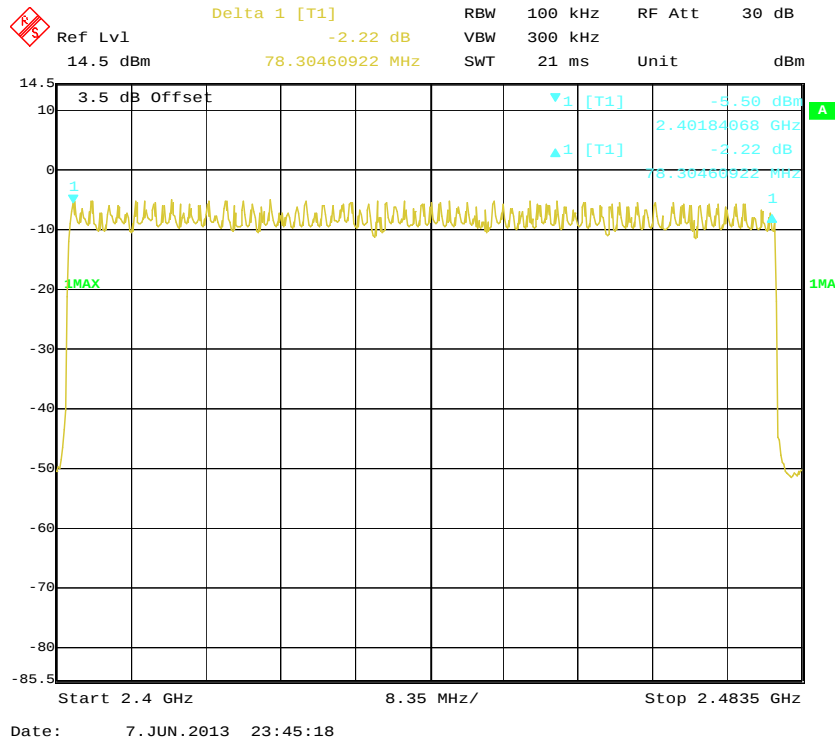

### (8DPSK): Number of Hopping Channels

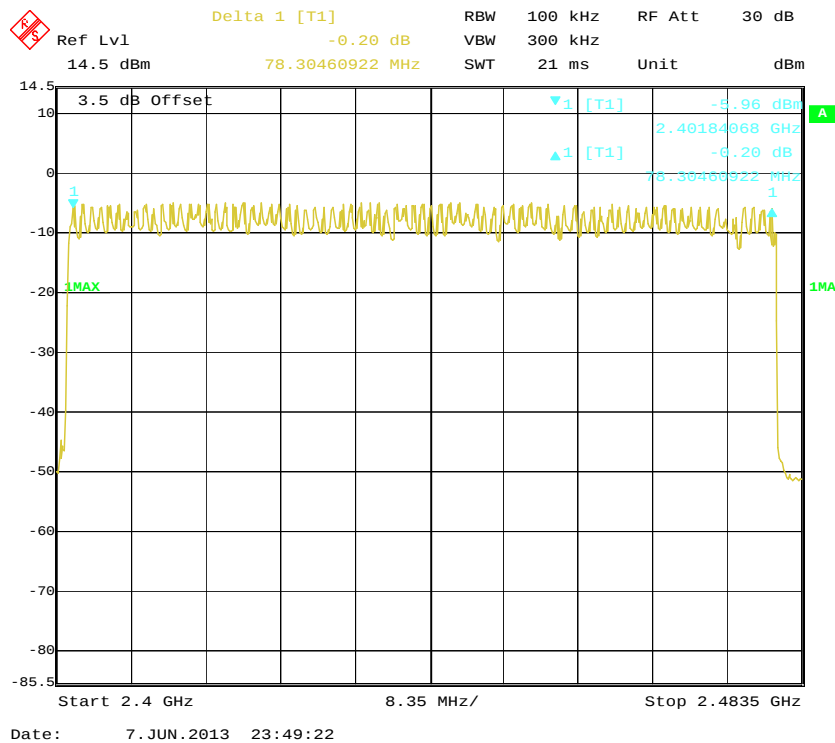

**FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell time = Pulse time\*hop rate/number of hopping channels\*31.6S

Hop rate=1600/S

**Test Equipment List and Details**

| Manufacturer    | Description     | Model  | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-----------------|--------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 8386001028    | 2012-11-24       | 2013-11-23           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 55 %      |
| ATM Pressure:      | 100.1 kPa |

*The testing was performed by Charlie Chen on 2013-06-07.*


*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following tables and plots*


| Mode                  |      | Channel                                             | Pulse Width (ms) | Dwell Time (S) | Limit (S) | Result |
|-----------------------|------|-----------------------------------------------------|------------------|----------------|-----------|--------|
| BDR (GFSK)            | DH 1 | Low                                                 | 0.397            | 0.127          | 0.4       | Pass   |
|                       |      | Middle                                              | 0.397            | 0.127          | 0.4       | Pass   |
|                       |      | High                                                | 0.397            | 0.127          | 0.4       | Pass   |
|                       |      | Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S |                  |                |           |        |
|                       | DH 3 | Low                                                 | 1.673            | 0.268          | 0.4       | Pass   |
|                       |      | Middle                                              | 1.673            | 0.268          | 0.4       | Pass   |
|                       |      | High                                                | 1.673            | 0.268          | 0.4       | Pass   |
|                       |      | Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S |                  |                |           |        |
|                       | DH 5 | Low                                                 | 2.926            | 0.312          | 0.4       | Pass   |
|                       |      | Middle                                              | 2.926            | 0.312          | 0.4       | Pass   |
|                       |      | High                                                | 2.926            | 0.312          | 0.4       | Pass   |
|                       |      | Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S |                  |                |           |        |
| EDR ( $\pi/4$ -DQPSK) | DH 1 | Low                                                 | 0.405            | 0.130          | 0.4       | Pass   |
|                       |      | Middle                                              | 0.405            | 0.130          | 0.4       | Pass   |
|                       |      | High                                                | 0.405            | 0.130          | 0.4       | Pass   |
|                       |      | Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S |                  |                |           |        |
|                       | DH 3 | Low                                                 | 1.673            | 0.268          | 0.4       | Pass   |
|                       |      | Middle                                              | 1.673            | 0.268          | 0.4       | Pass   |
|                       |      | High                                                | 1.673            | 0.268          | 0.4       | Pass   |
|                       |      | Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S |                  |                |           |        |
|                       | DH 5 | Low                                                 | 2.926            | 0.312          | 0.4       | Pass   |
|                       |      | Middle                                              | 2.926            | 0.312          | 0.4       | Pass   |
|                       |      | High                                                | 2.926            | 0.312          | 0.4       | Pass   |
|                       |      | Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S |                  |                |           |        |
| EDR (8DPSK)           | DH 1 | Low                                                 | 0.405            | 0.130          | 0.4       | Pass   |
|                       |      | Middle                                              | 0.405            | 0.130          | 0.4       | Pass   |
|                       |      | High                                                | 0.405            | 0.130          | 0.4       | Pass   |
|                       |      | Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S |                  |                |           |        |
|                       | DH 3 | Low                                                 | 1.673            | 0.268          | 0.4       | Pass   |
|                       |      | Middle                                              | 1.673            | 0.268          | 0.4       | Pass   |
|                       |      | High                                                | 1.673            | 0.268          | 0.4       | Pass   |
|                       |      | Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S |                  |                |           |        |
|                       | DH 5 | Low                                                 | 2.926            | 0.312          | 0.4       | Pass   |
|                       |      | Middle                                              | 2.926            | 0.312          | 0.4       | Pass   |
|                       |      | High                                                | 2.926            | 0.312          | 0.4       | Pass   |
|                       |      | Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S |                  |                |           |        |

**BDR (GFSK):**


**Pulse time, Low Channel, DH1**

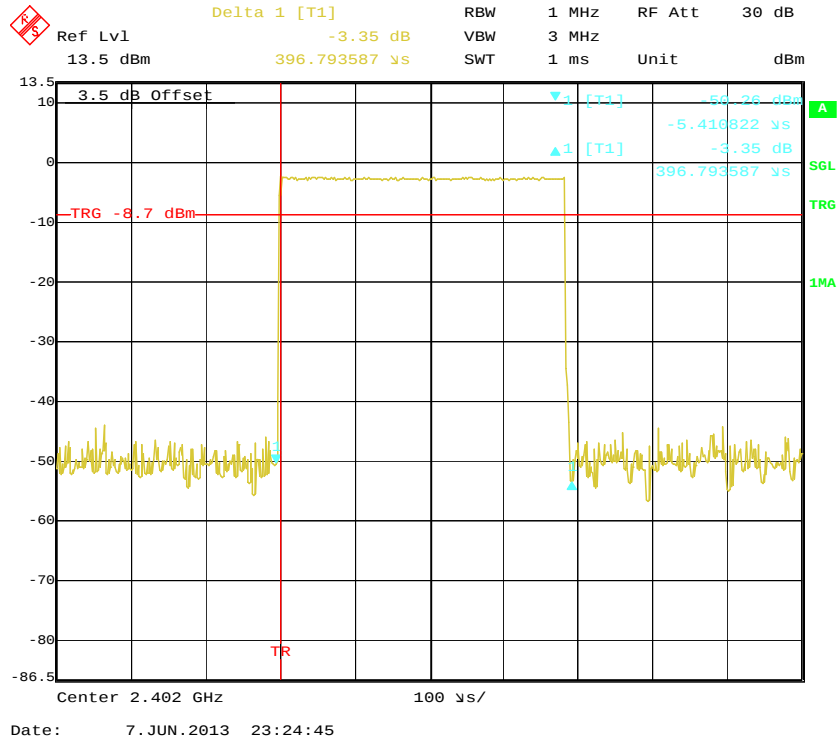


**Pulse time, Middle Channel, DH1**

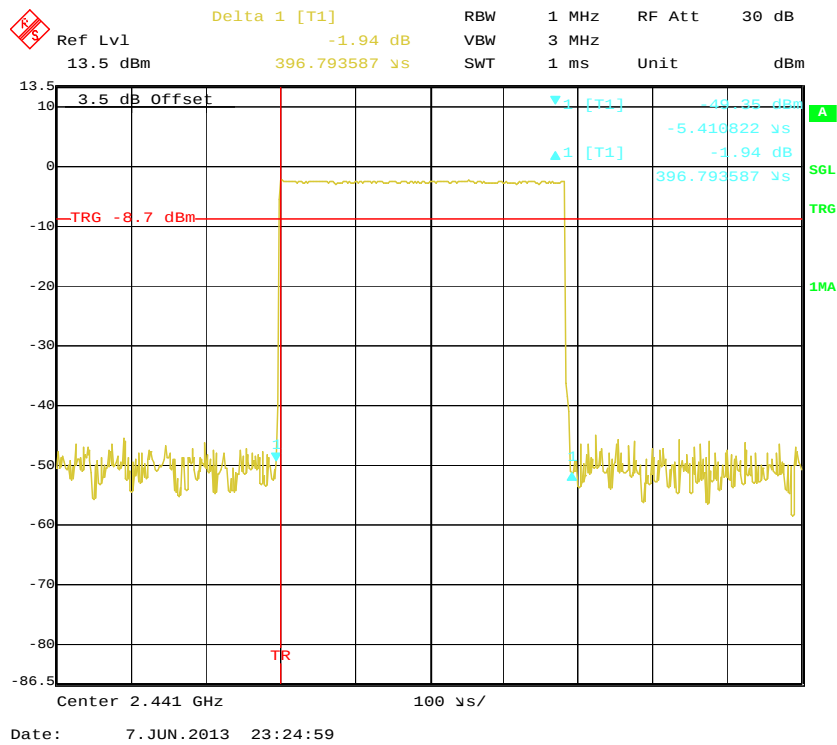


### Pulse time, High Channel, DH1

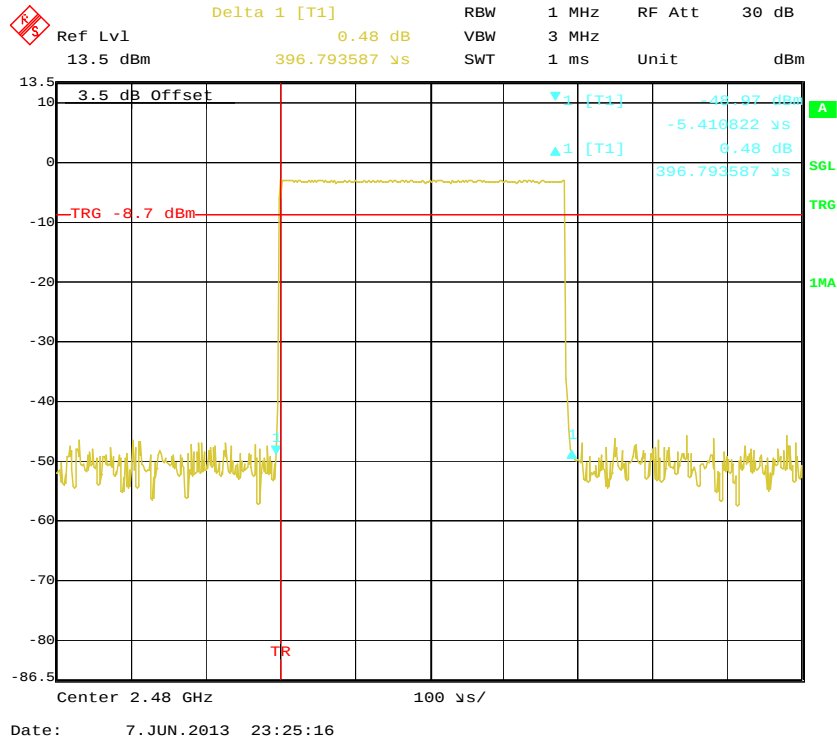


### Pulse time, Low Channel, DH3

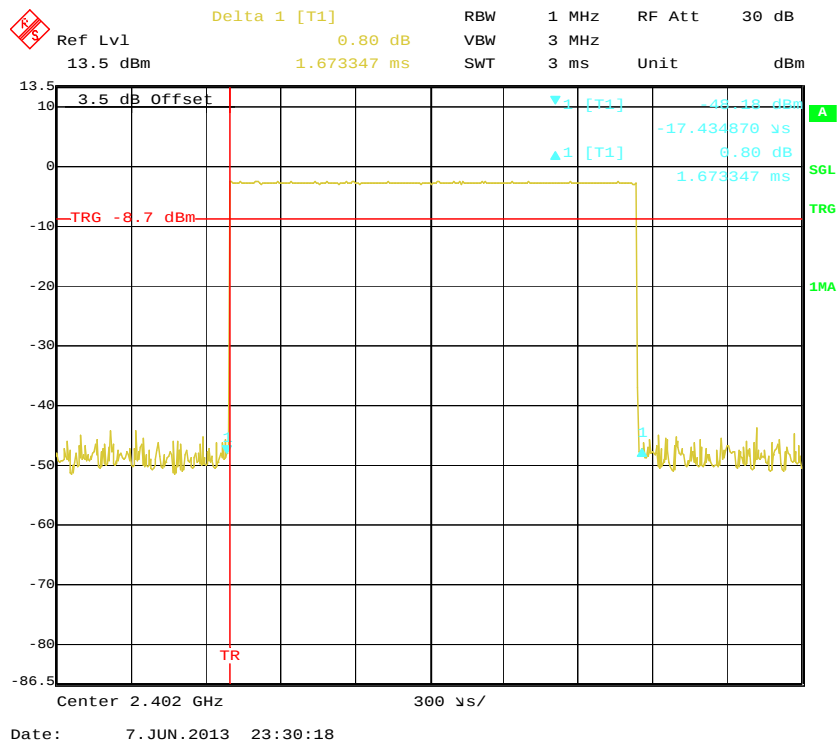


### Pulse time, Middle Channel, DH3

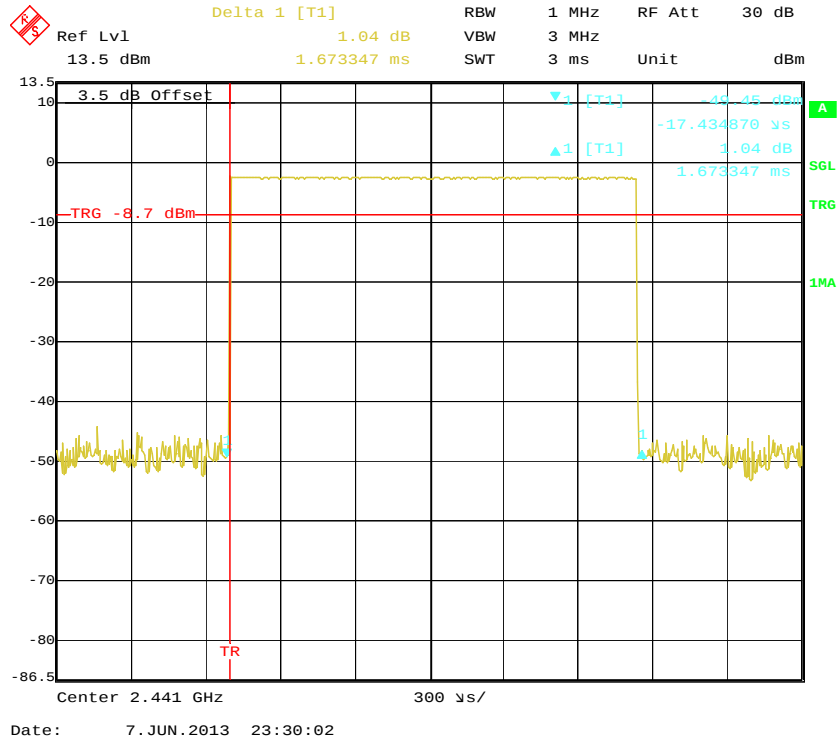


### Pulse time, High Channel, DH3

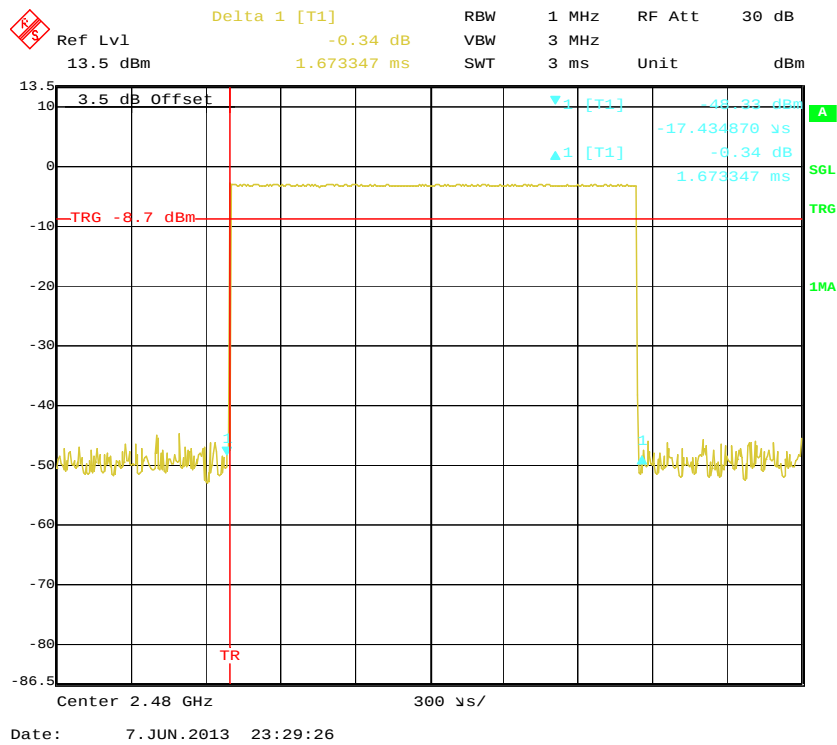

### Pulse time, Low Channel, DH5

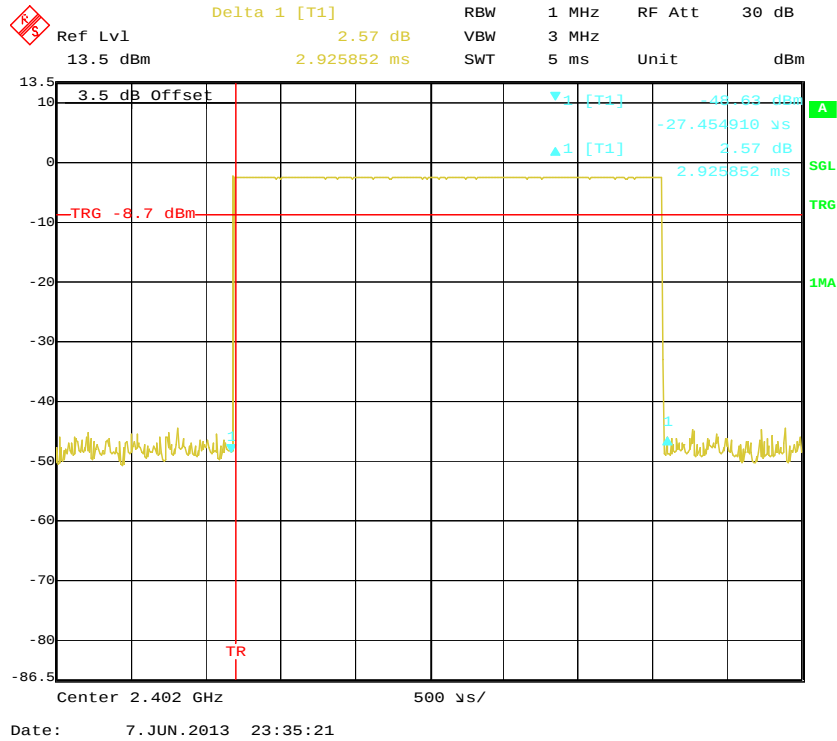

### Pulse time, Middle Channel, DH5

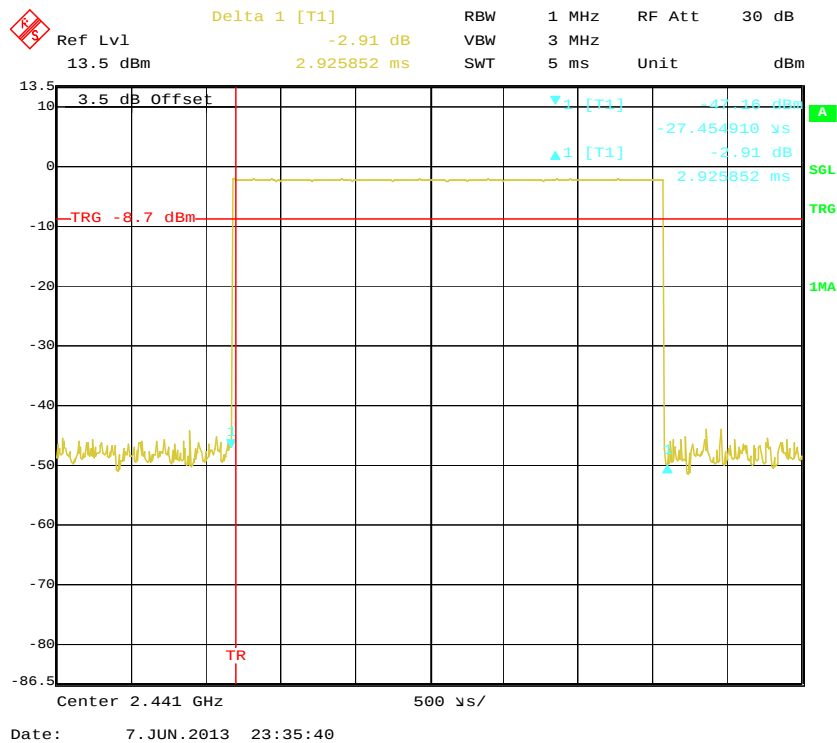


Ref Lvl 13.5 dBm Delta 1 [T1] 1.08 dB RBW 1 MHz RF Att 30 dB

3.5 dB Offset 2.925852 ms VBW 3 MHz Unit dBm


Center 2.48 GHz 500 μs/

Date: 7. JUN. 2013 23:36:07


### Pulse time, Low Channel, DH1

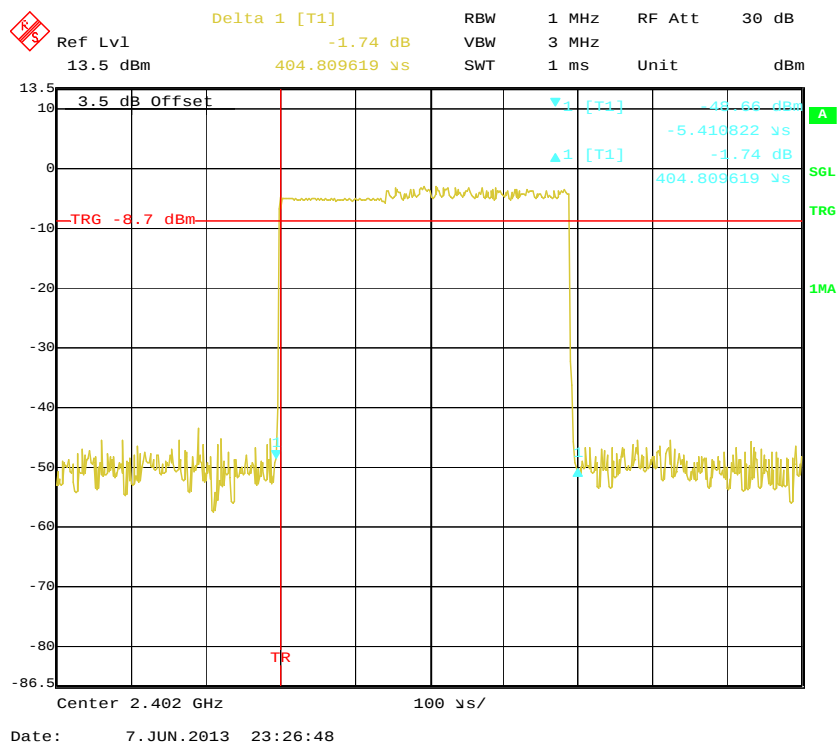


### Pulse time, Middle Channel, DH1

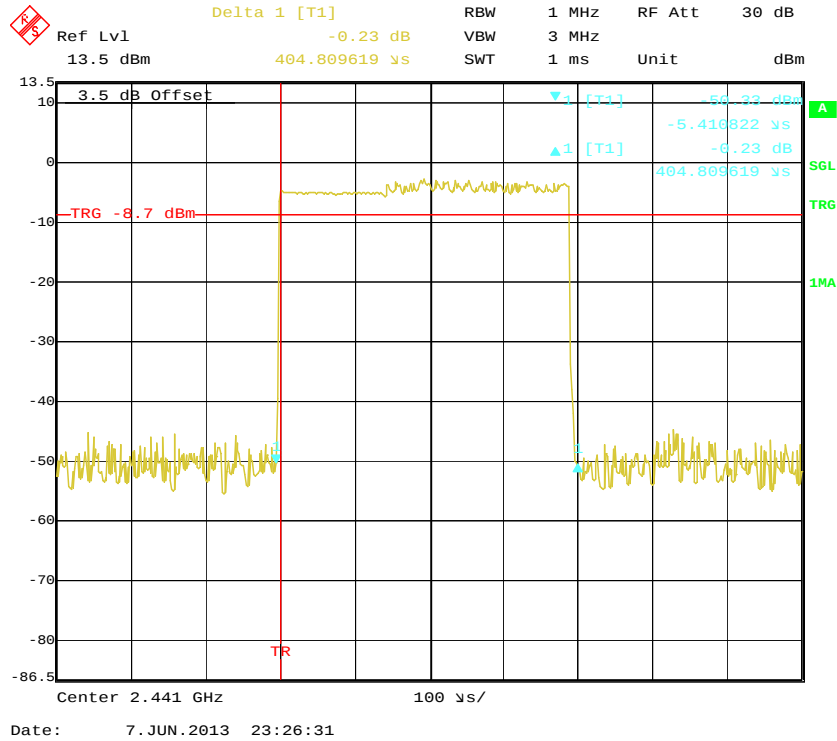


### Pulse time, High Channel, DH1

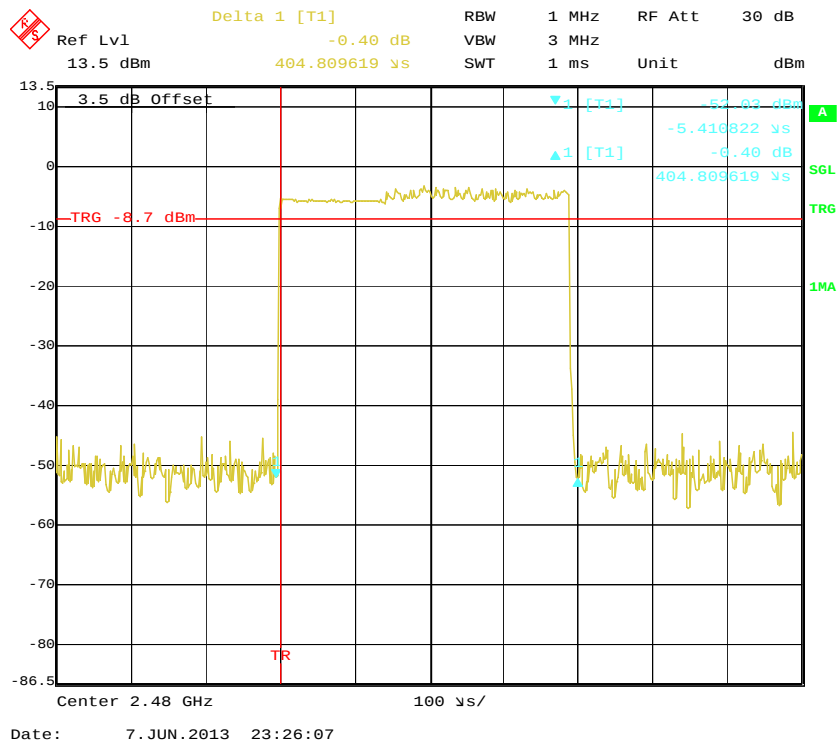


### Pulse time, Low Channel, DH3

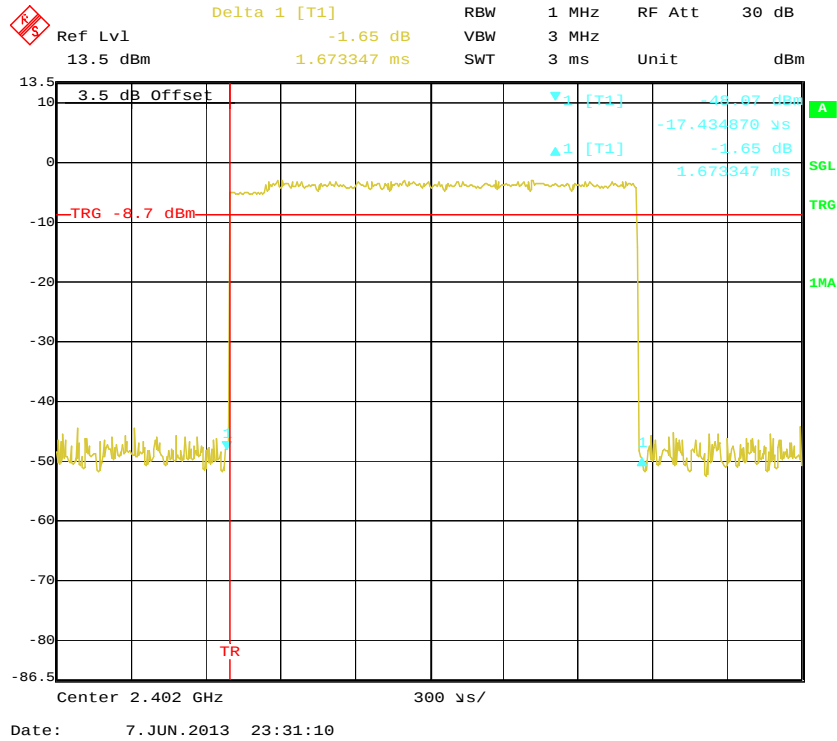


### Pulse time, Middle Channel, DH3

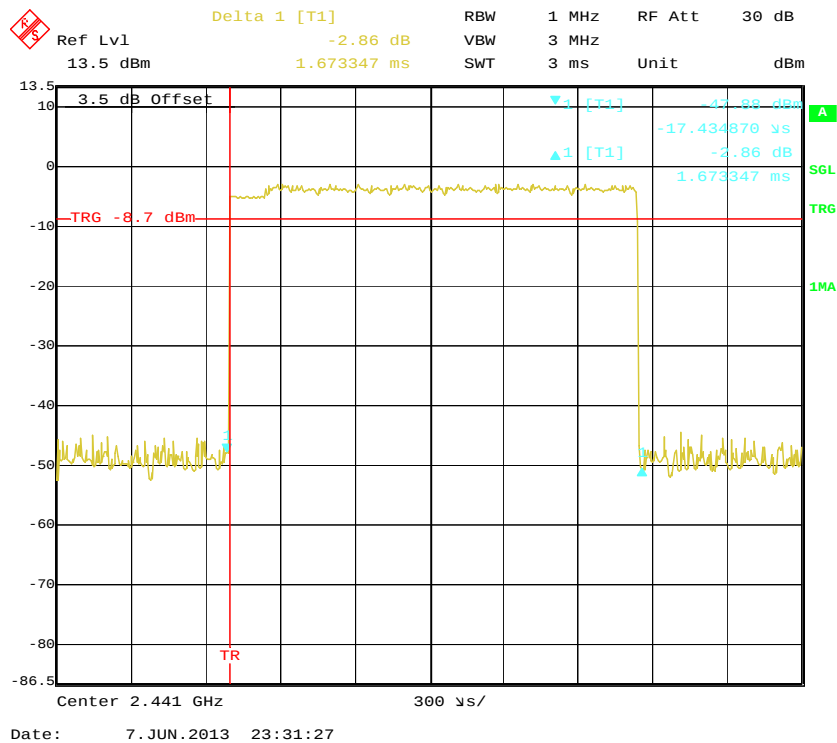


### Pulse time, High Channel, DH3

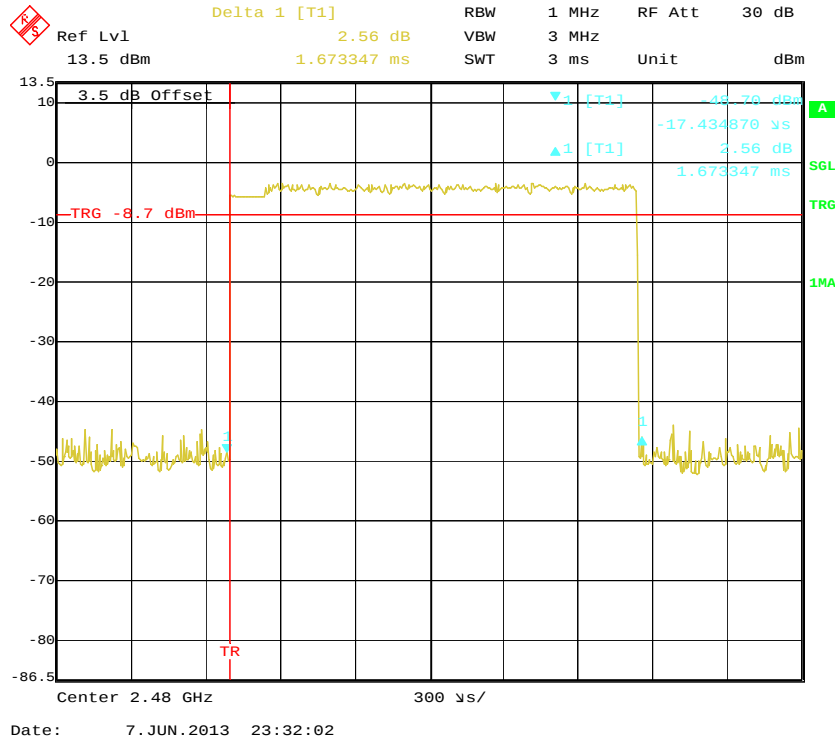


### Pulse time, Low Channel, DH5

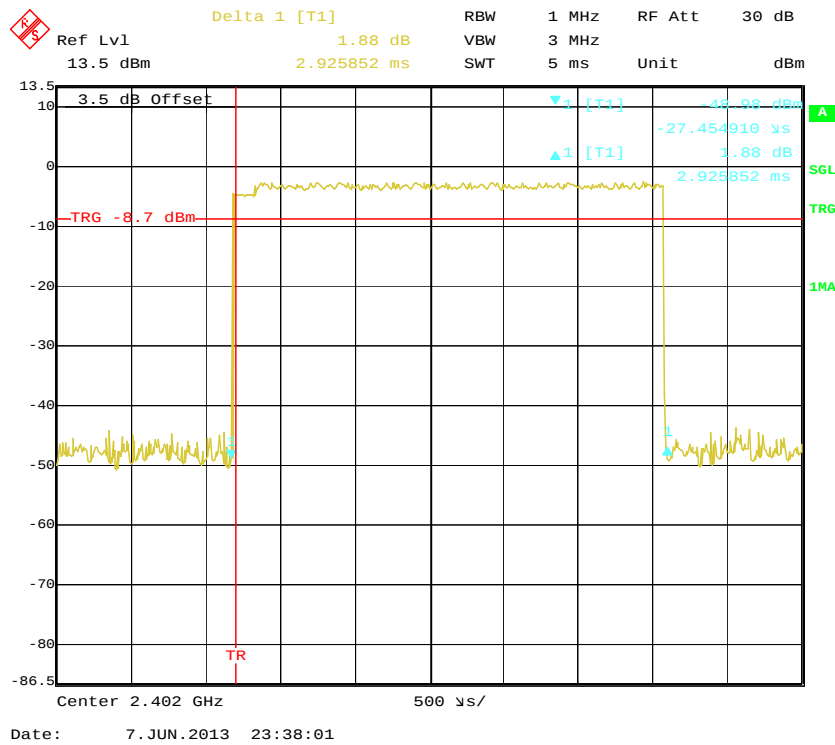

### Pulse time, Middle Channel, DH5

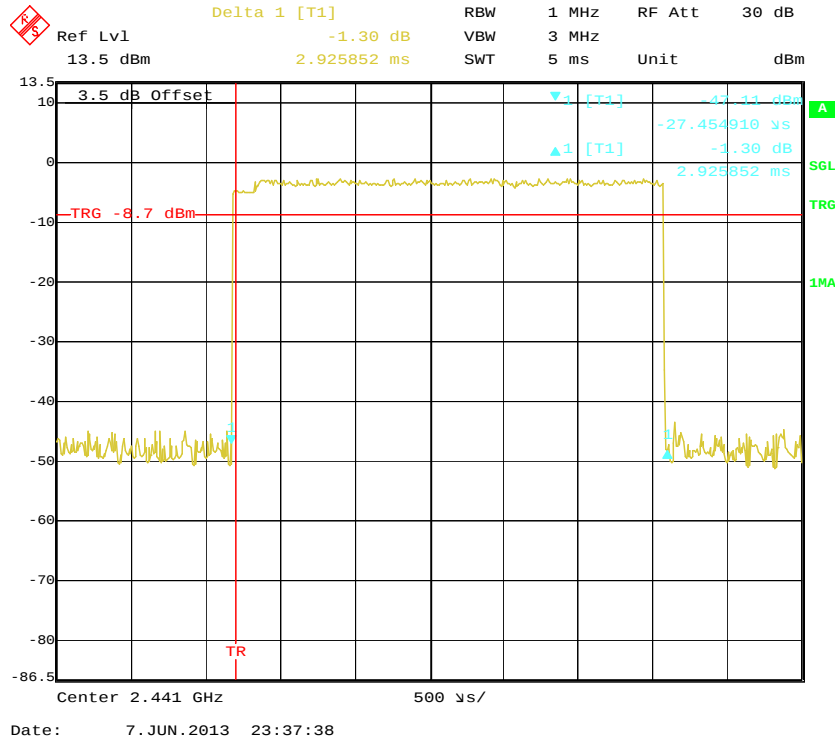


### Pulse time, High Channel, DH5

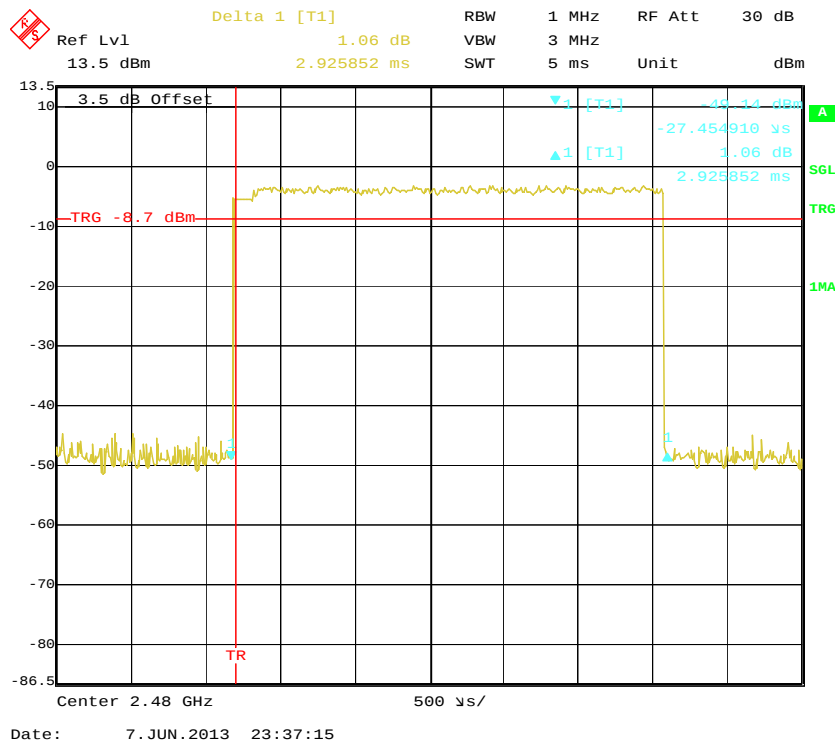


EDR (8DPSK):

Pulse time, Low Channel, DH1

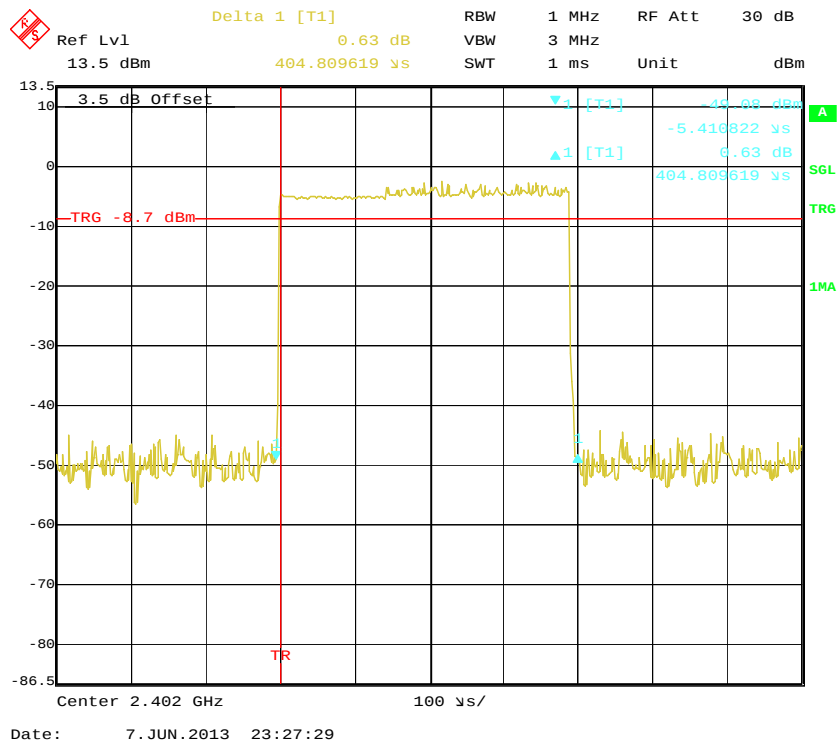

Pulse time, Middle Channel, DH1

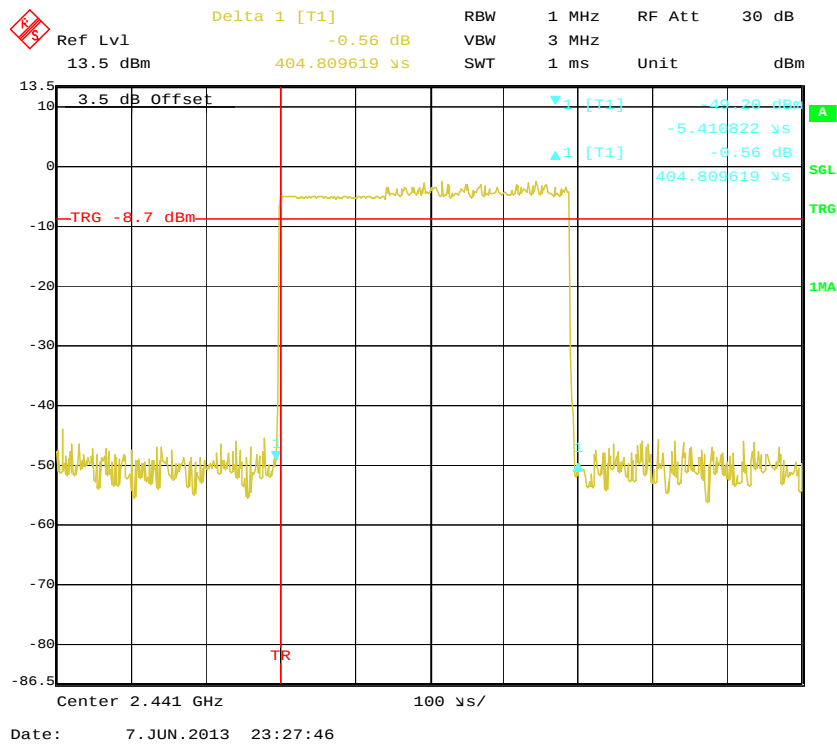

[illegible]

Ref Lvl 13.5 dBm Delta 1 [T1] 0.77 dB RBW 1 MHz RF Att 30 dB


3.5 dB Offset 1.673347 ms SWT 3 ms Unit dBm

TRG -8.7 dBm


Center 2.402 GHz 300  $\mu$ s/

Date: 7. JUN. 2013 23:32:57


### Pulse time, Middle Channel, DH3

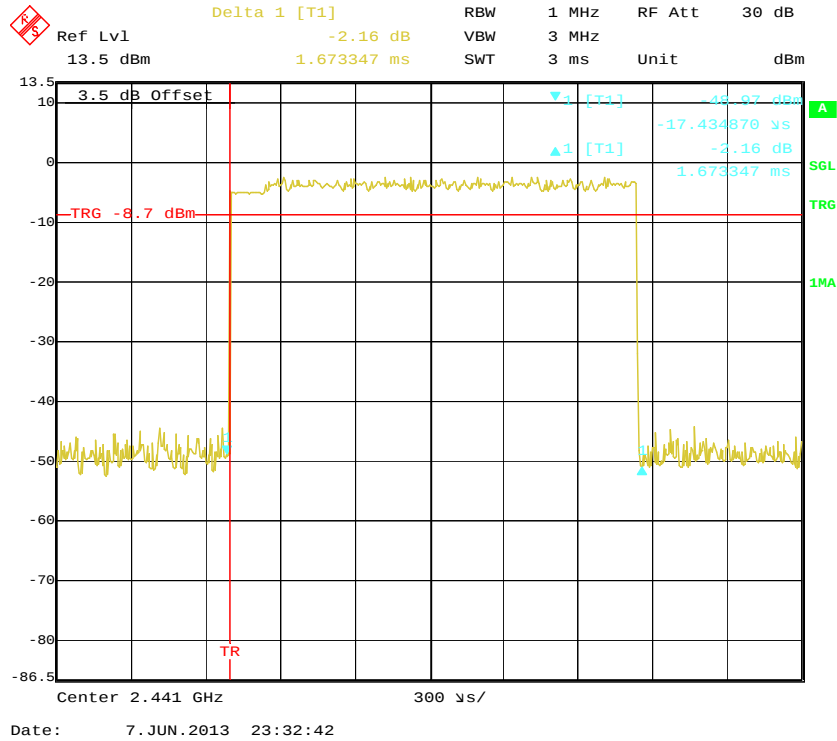


### Pulse time, High Channel, DH3

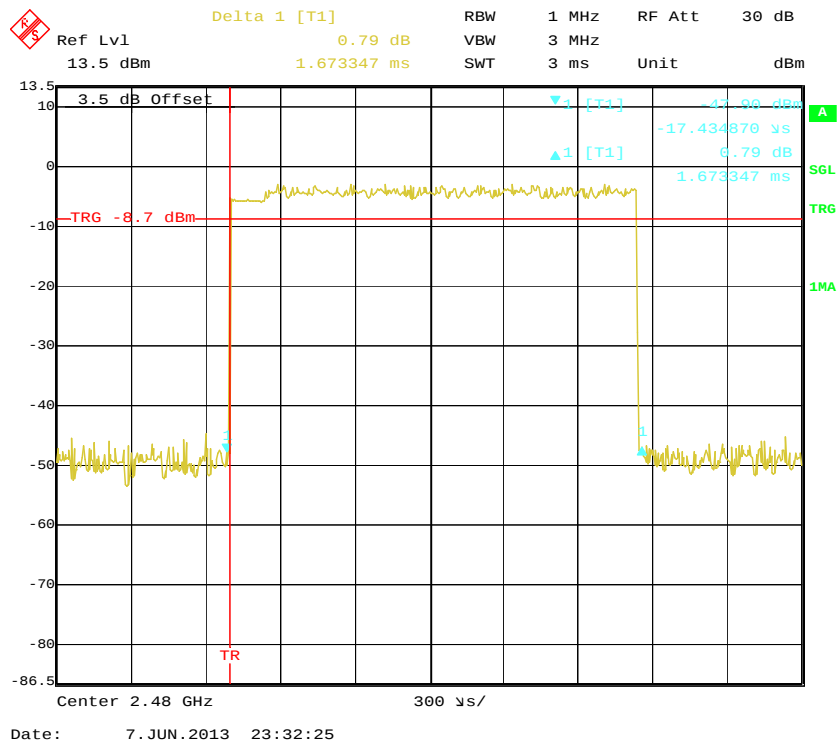

### Pulse time, Low Channel, DH5

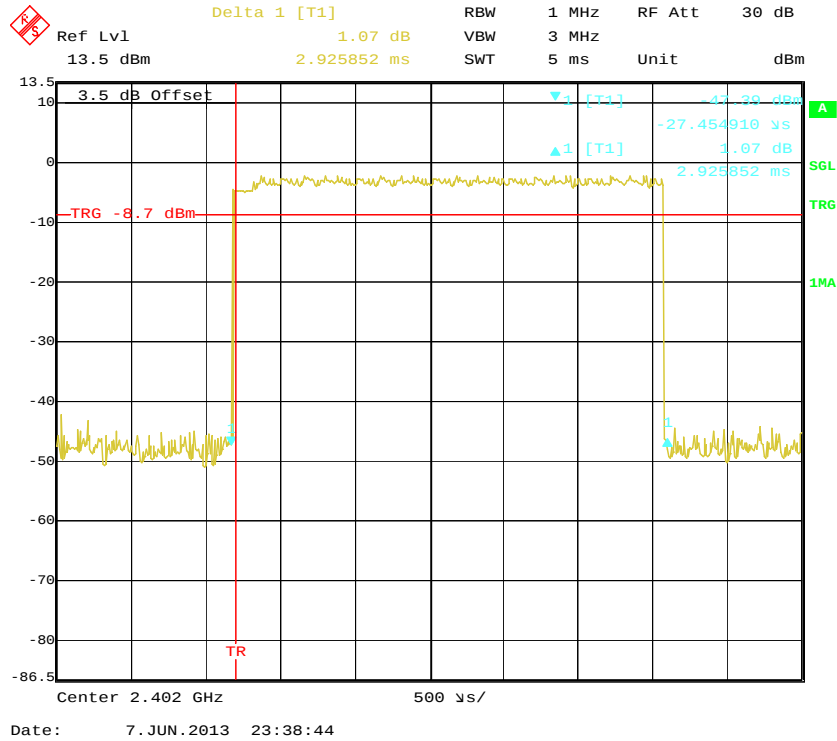

### Pulse time, Middle Channel, DH5

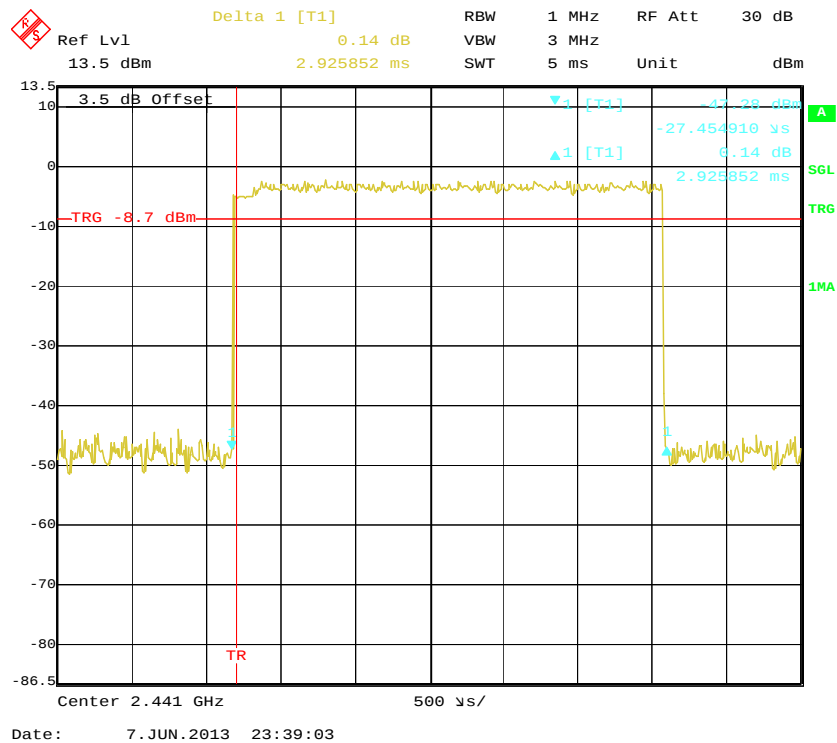


Ref Lvl 13.5 dBm Delta 1 [T1] 0.92 dB RBW 1 MHz RF Att 30 dB  
 3.5 dB Offset 2.925852 ms VBW 3 MHz Unit dBm  
 -TRG -8.7 dBm -42.10 dBm -27.454910  $\mu$ s 0.92 dB 2.925852 ms  
 Center 2.48 GHz 500  $\mu$ s/

**FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT****Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

**Test Procedure**

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.

**Test Equipment List and Details**

| Manufacturer    | Description     | Model  | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-----------------|--------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 8386001028    | 2012-11-24       | 2013-11-23           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**


|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 55 %      |
| ATM Pressure:      | 100.1 kPa |

*The testing was performed by Charlie Chen on 2013-06-07.*



*EUT operation mode: Transmitting*

*Test Result: Compliance. Please refer to following tables and plots*


| Mode                                  | Channel | Frequency (MHz) | Conducted Output Power |       | Limit (mW) |
|---------------------------------------|---------|-----------------|------------------------|-------|------------|
|                                       |         |                 | (dBm)                  | (mW)  |            |
| <b>BDR (GFSK)</b>                     | Low     | 2402            | -2.04                  | 0.625 | 1000       |
|                                       | Middle  | 2441            | -1.68                  | 0.679 | 1000       |
|                                       | High    | 2480            | -2.59                  | 0.551 | 1000       |
| <b>EDR (<math>\pi/4</math>-DQPSK)</b> | Low     | 2402            | -2.52                  | 0.560 | 1000       |
|                                       | Middle  | 2441            | -2.34                  | 0.583 | 1000       |
|                                       | High    | 2480            | -2.91                  | 0.512 | 1000       |
| <b>EDR (8DPSK)</b>                    | Low     | 2402            | -2.09                  | 0.618 | 1000       |
|                                       | Middle  | 2441            | -1.92                  | 0.643 | 1000       |
|                                       | High    | 2480            | -2.52                  | 0.560 | 1000       |

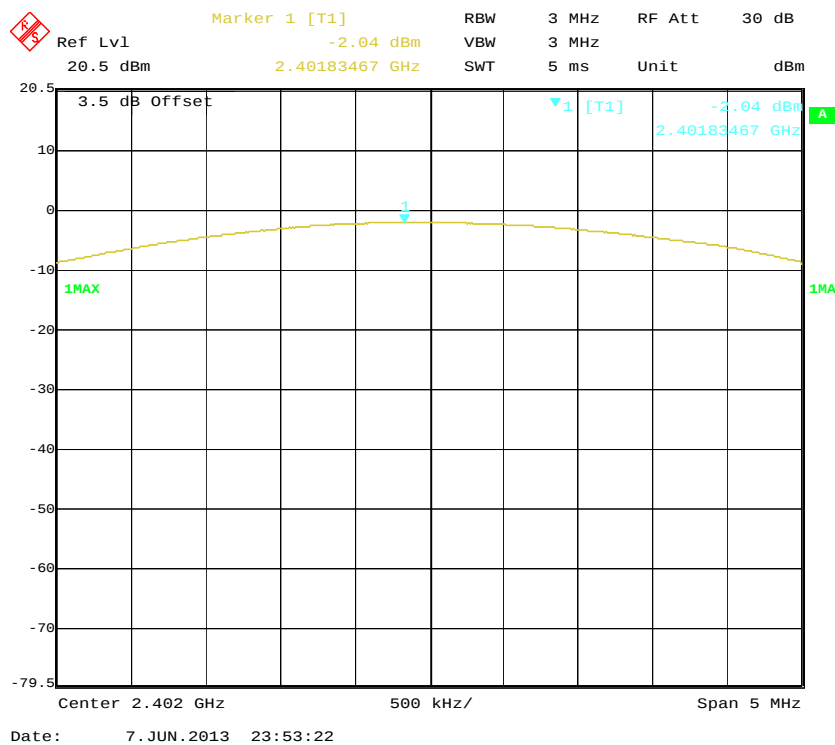**BDR (GFSK): Low Channel**


### BDR (GFSK): Middle Channel

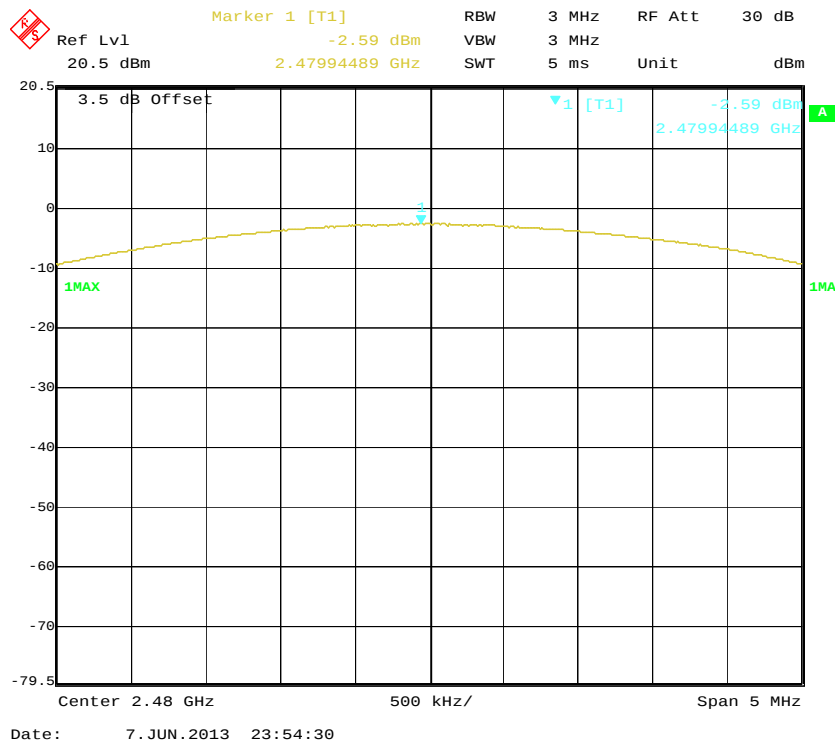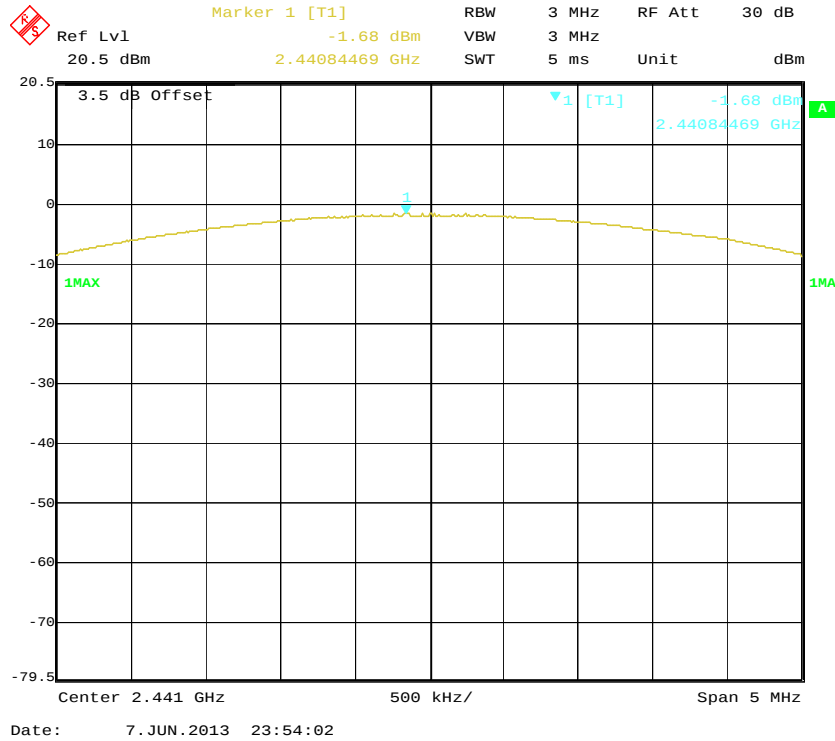


### EDR( $\pi/4$ -DQPSK): Low Channel

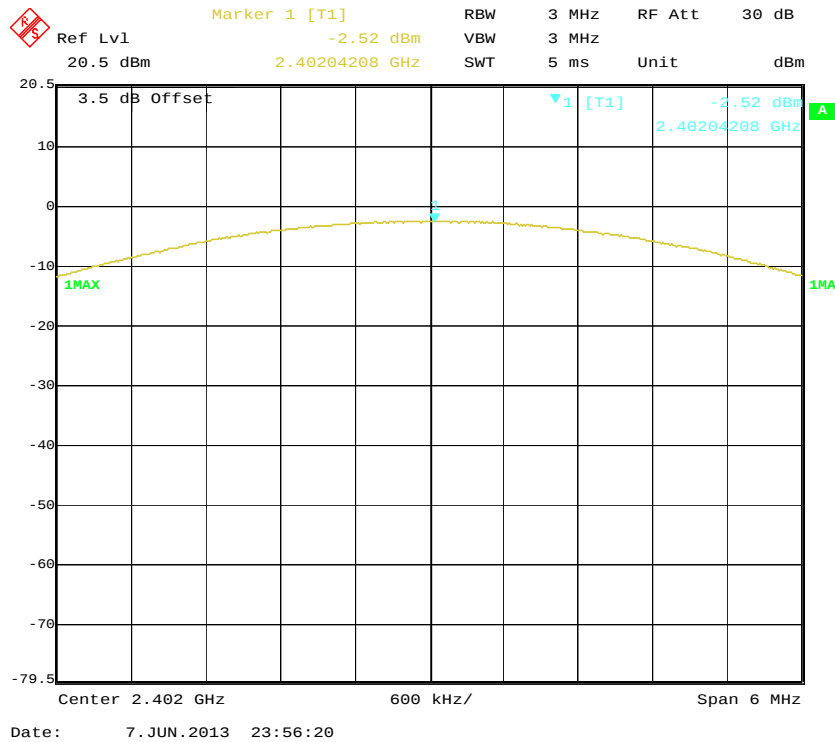


### EDR( $\pi/4$ -DQPSK): Middle Channel

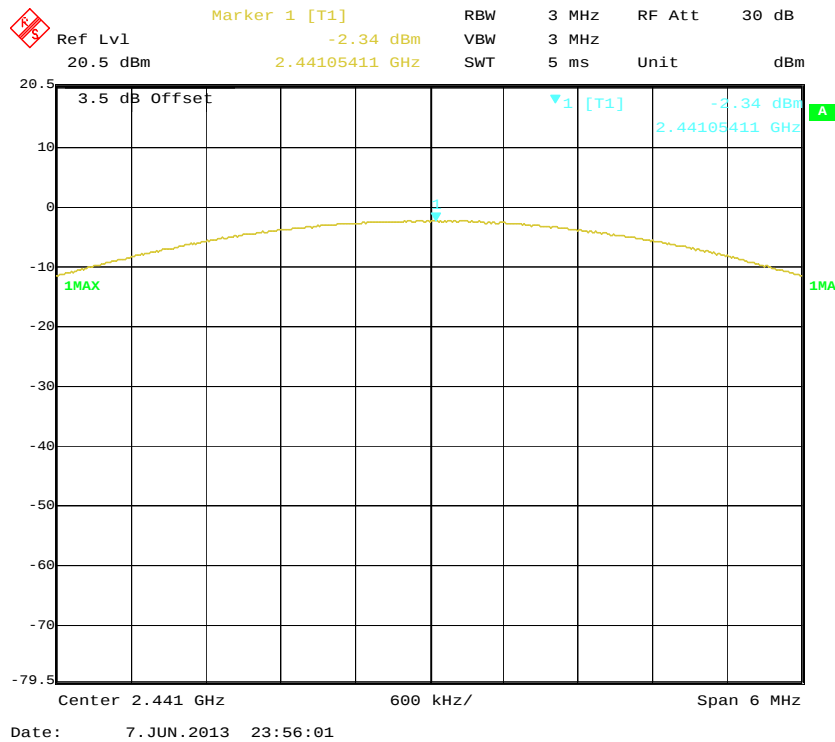


### EDR( $\pi/4$ -DQPSK): High Chanel

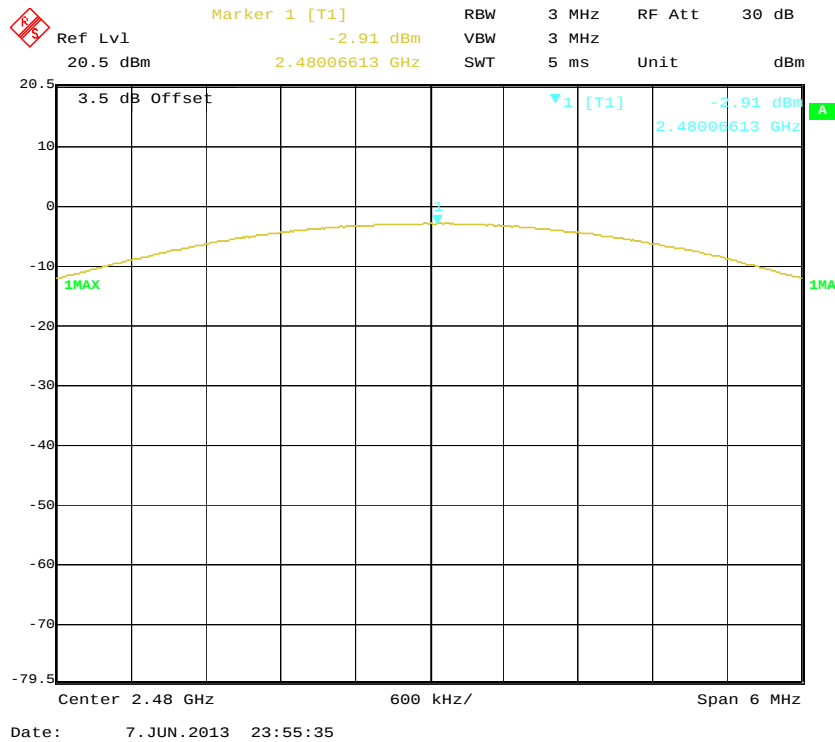


### EDR(8DPSK): Low Channel

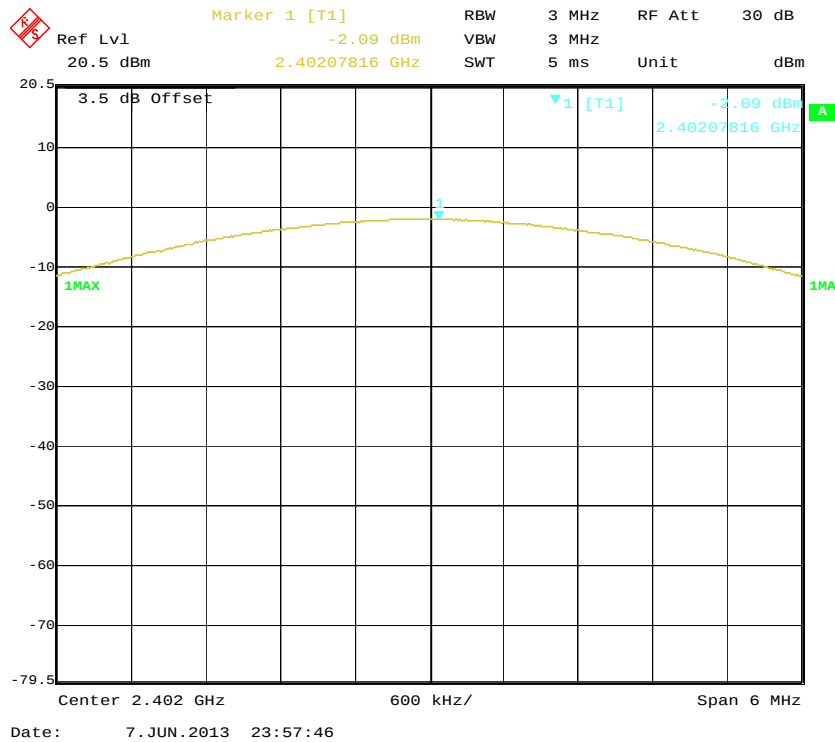

### EDR(8DPSK): Middle Channel

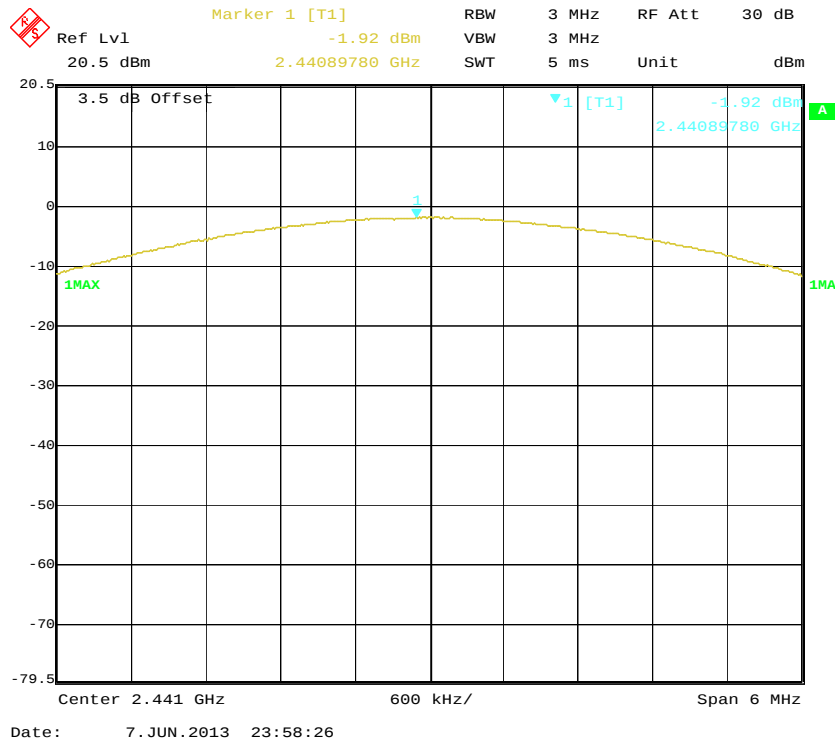

### EDR(8DPSK): High Channel

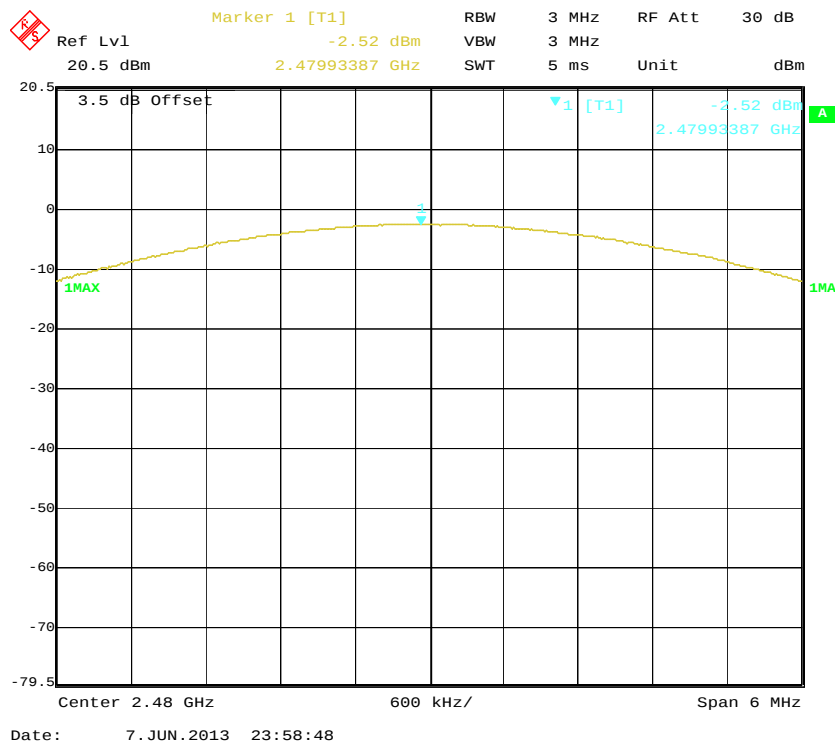

## **FCC §15.247(d) - BAND EDGES**

### **Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **Test Procedure**

According to FCC public notice DA 00-705 released on March 30, 2000.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 300 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### **Test Equipment List and Details**

| Manufacturer    | Description     | Model  | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-----------------|--------|---------------|------------------|----------------------|
| Rohde & Schwarz | Signal Analyzer | FSIQ26 | 8386001028    | 2012-11-24       | 2013-11-23           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).


**Test Data****Environmental Conditions**



|                    |           |
|--------------------|-----------|
| Temperature:       | 25 °C     |
| Relative Humidity: | 55 %      |
| ATM Pressure:      | 100.1 kPa |



The testing was performed by Charlie Chen on 2013-06-07.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following plots

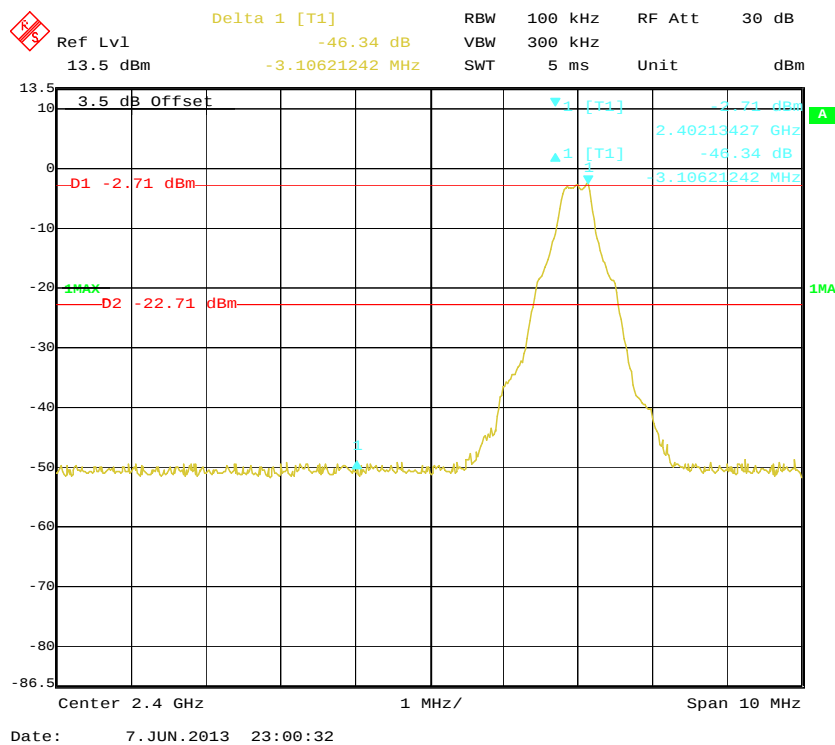**BDR (GFSK): Band Edge-Left Side**

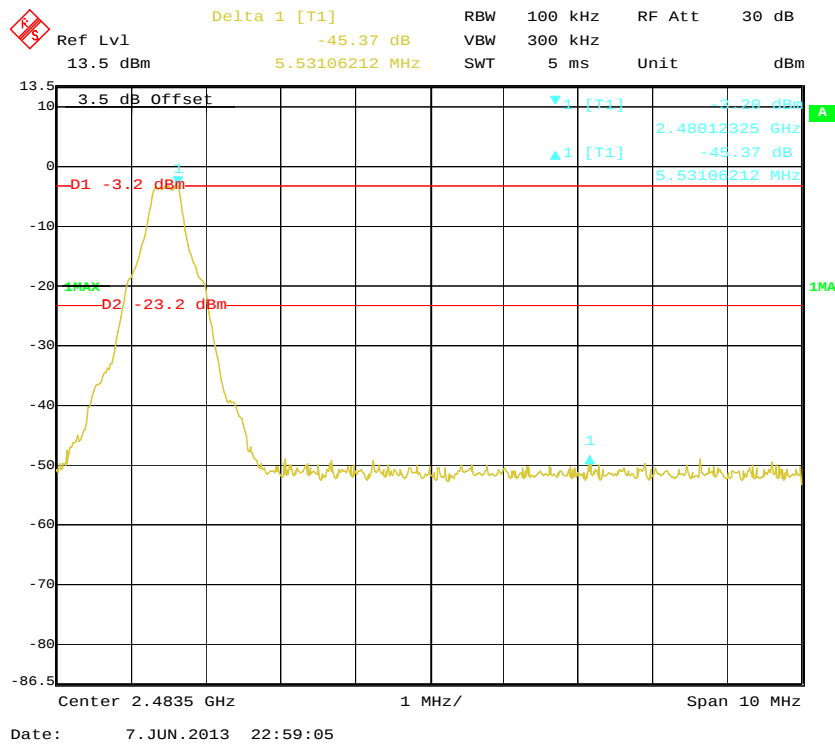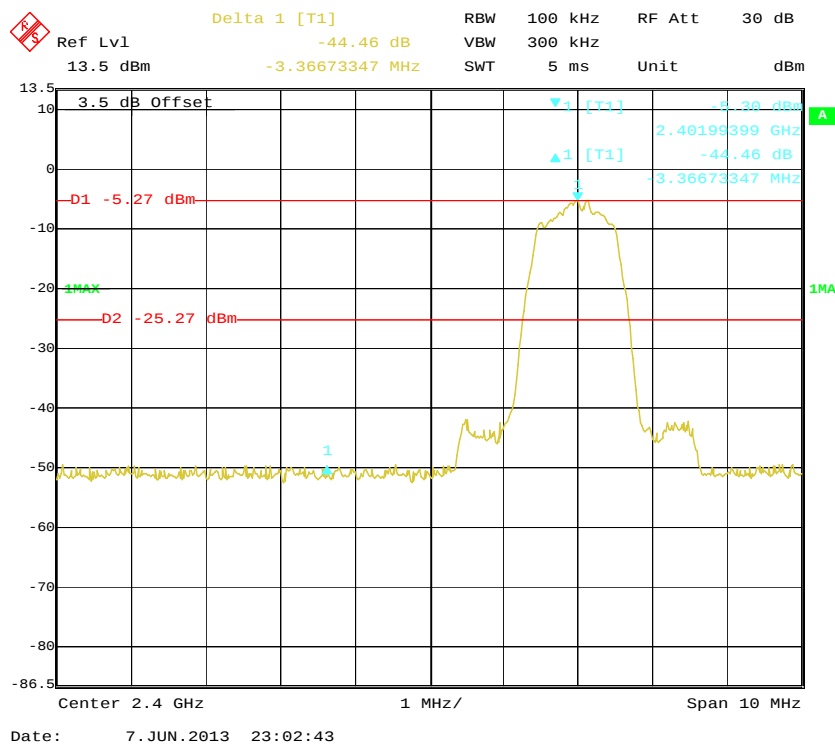**BDR (GFSK): Band Edge-Right Side****EDR ( $\pi/4$ -DQPSK): Band Edge-Left Side**

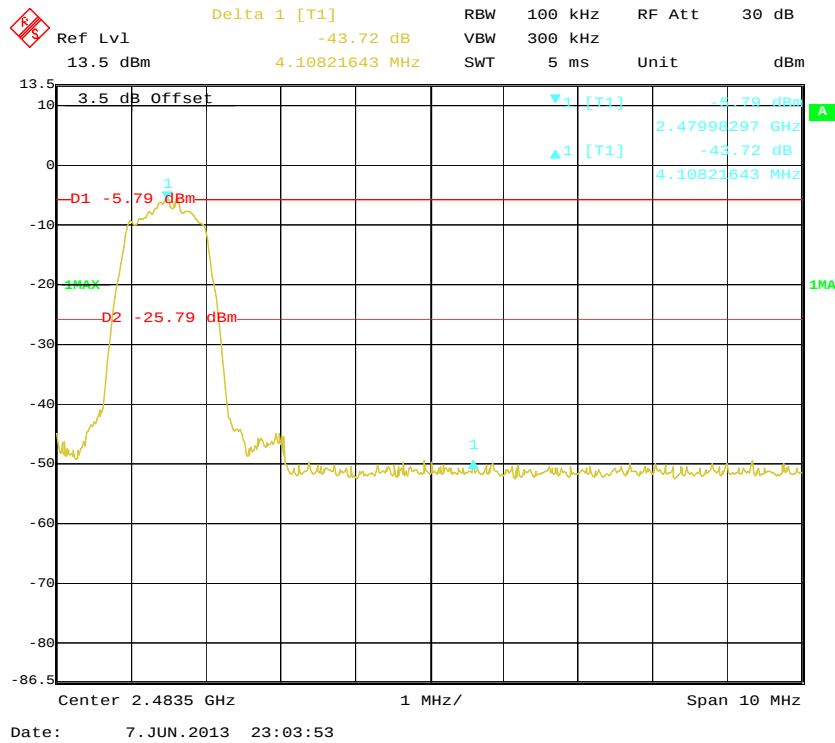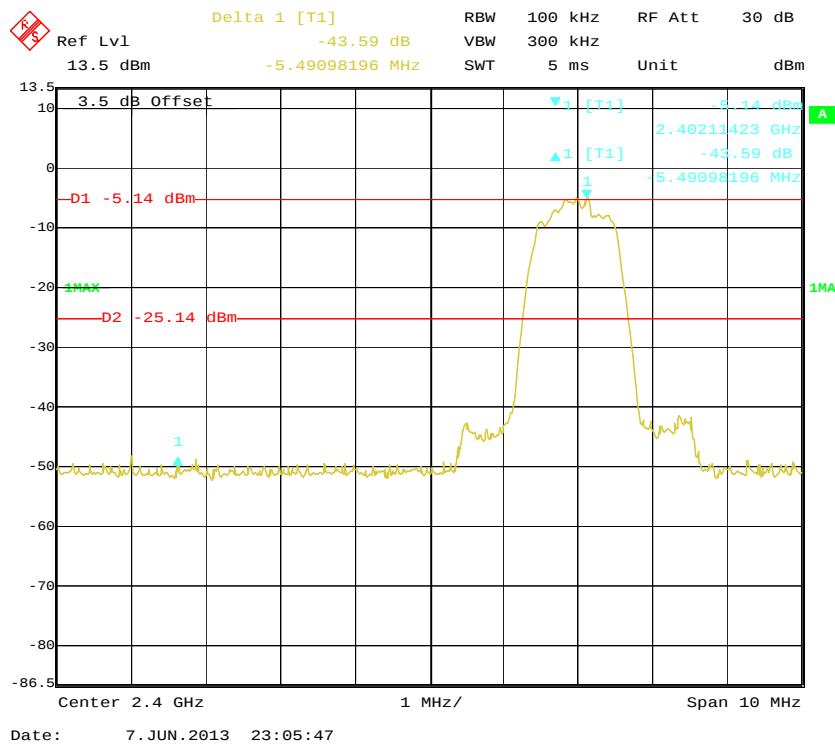**EDR ( $\pi/4$ -DQPSK): Band Edge-Right Side****EDR (8DPSK): Band Edge-Left Side**

**BDR (8DPSK): Band Edge-Right Side**

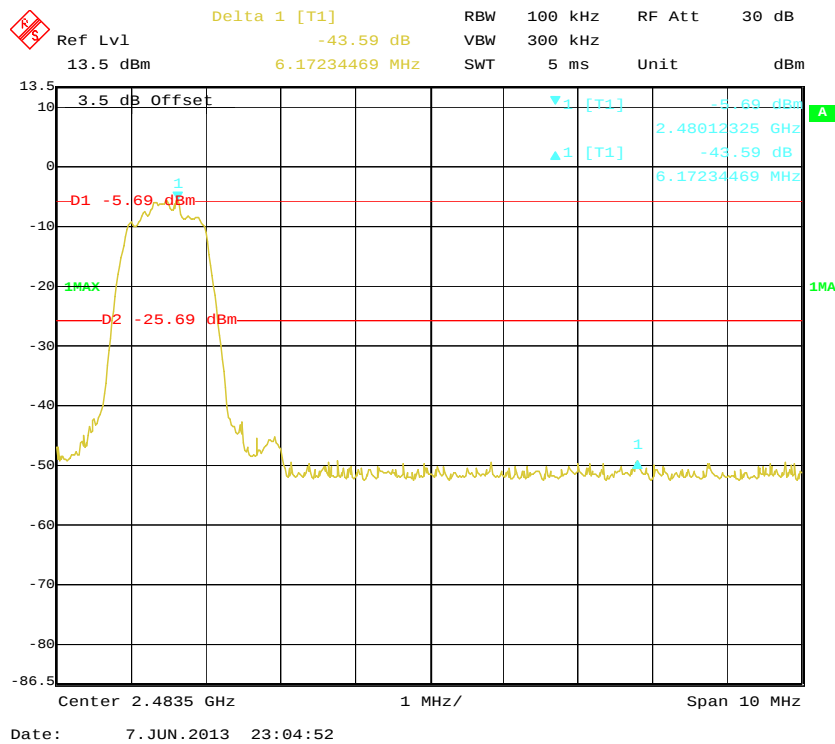

\*\*\*\*\* END OF REPORT \*\*\*\*\*