



Accredited testing laboratory

DAR registration number: DAT-P-176/94-D1

Test report no. : 1-0880-01-04/08
Type identification : TM5-J01
Test specification : IEEE 1528-2003
FCC-ID : SP2-TM5-J01

Annex 1 Photo documentation

Photo 1: Measurement System DASY 4

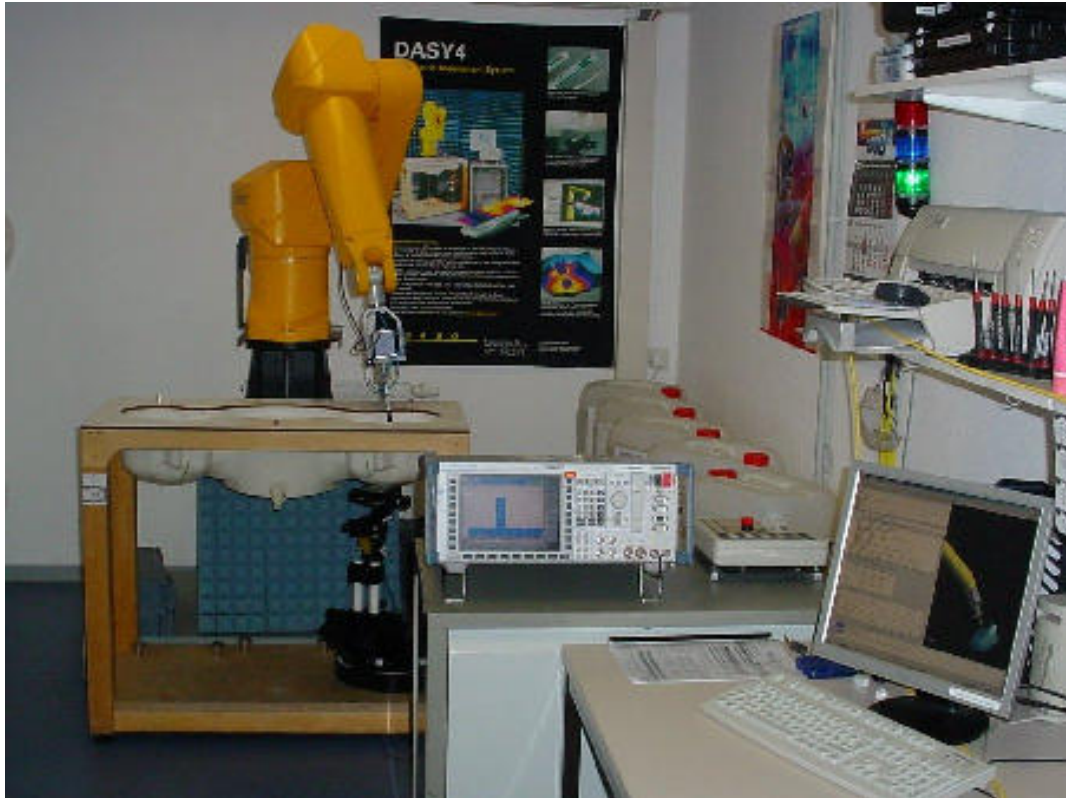


Photo 2: DUT - front view

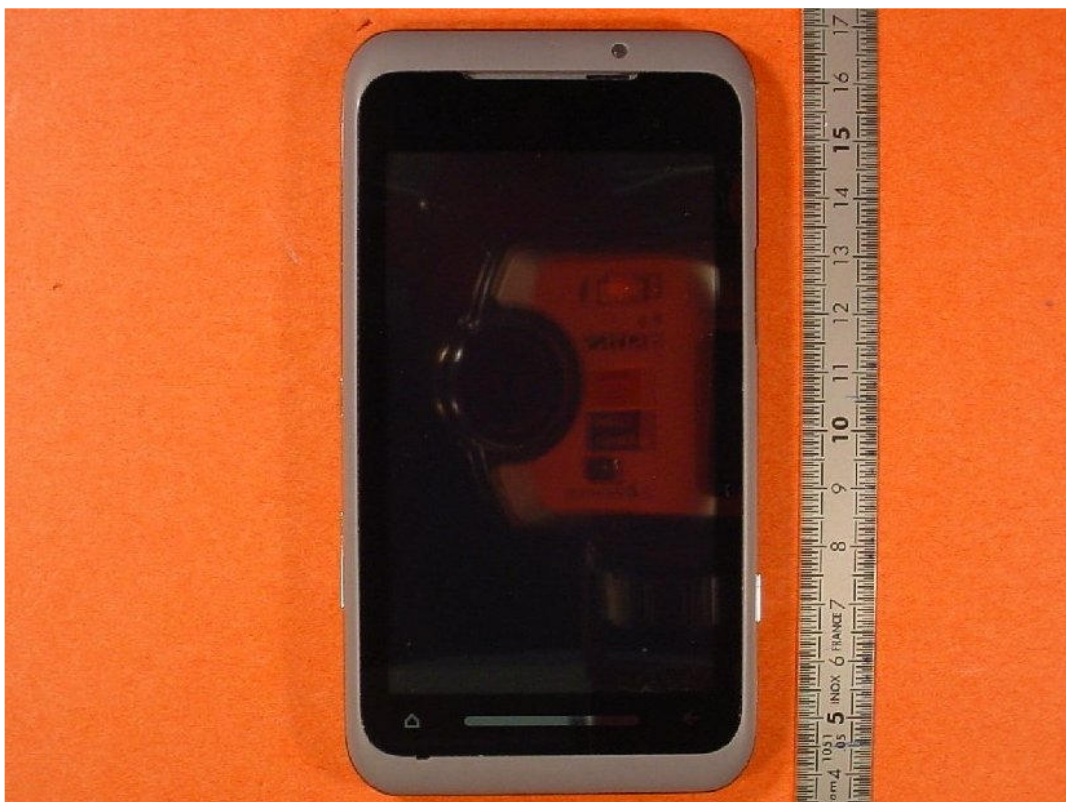


Photo 3: DUT - rear view



Photo 4: DUT - side view



Photo 5: DUT - rear view (open)



Photo 6: DUT - rear view (open) without battery



Photo 7: DUT - rear view (label)

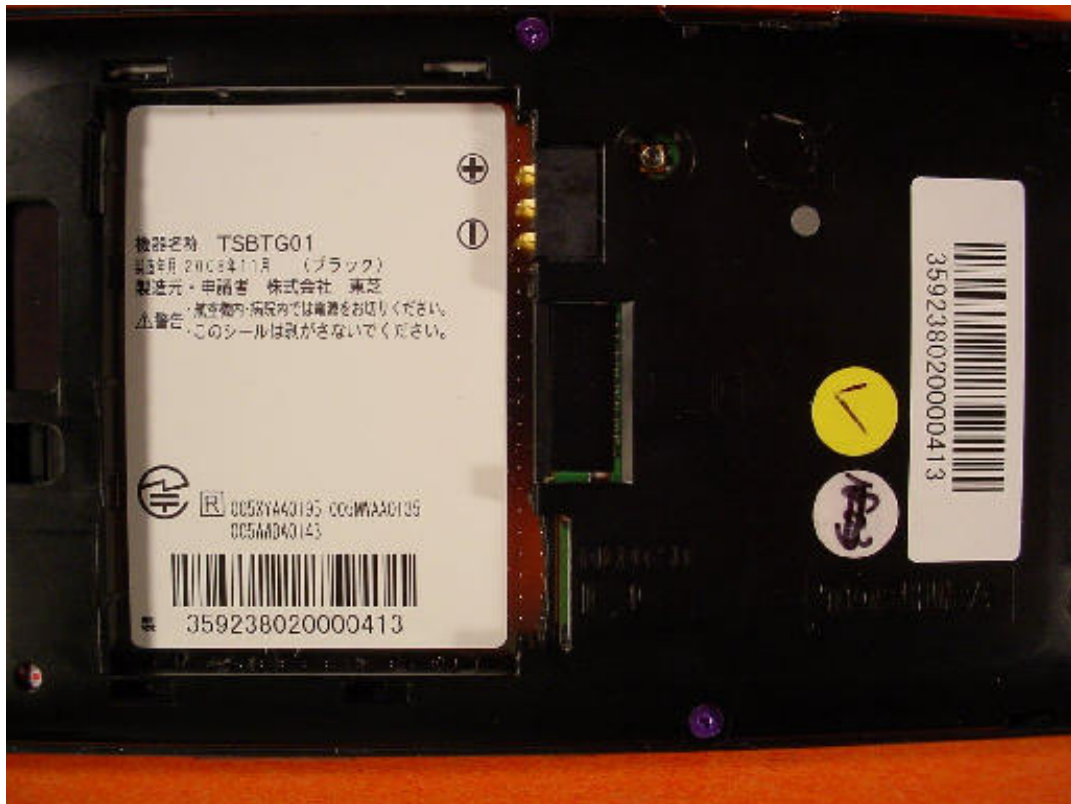


Photo 8: Distance between Bluetooth / Wi-Fi antenna and Main antenna

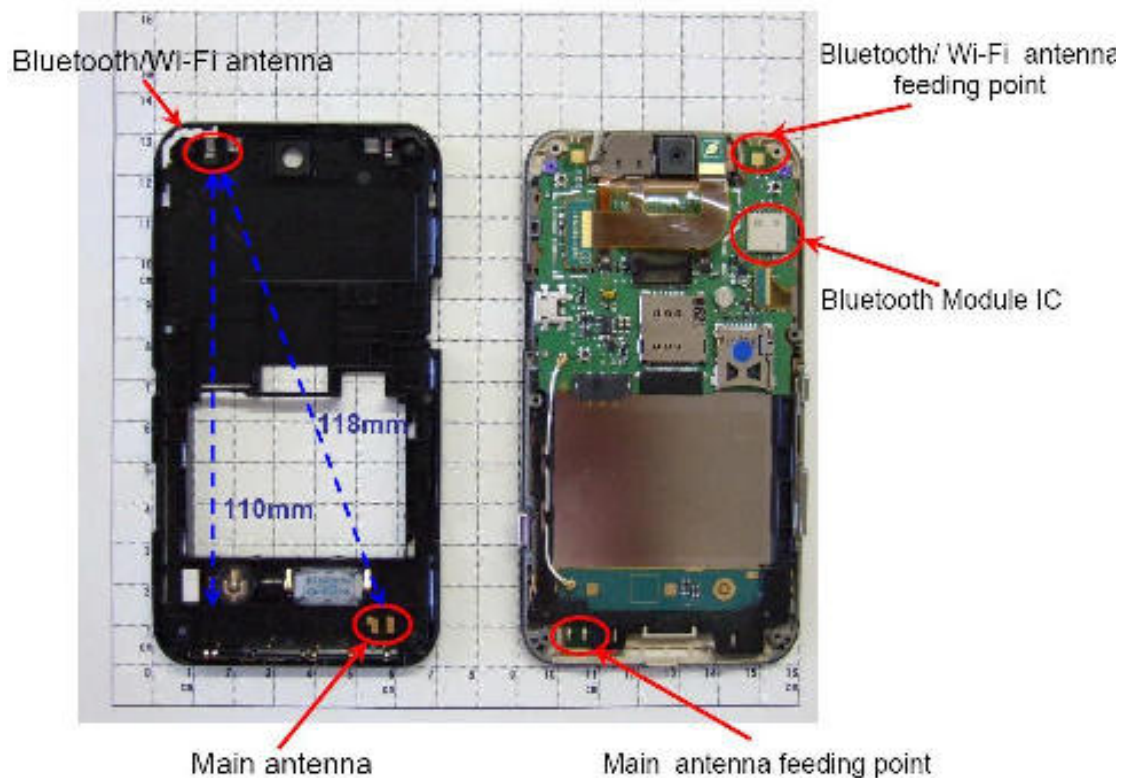


Photo 9: Test position left hand touched

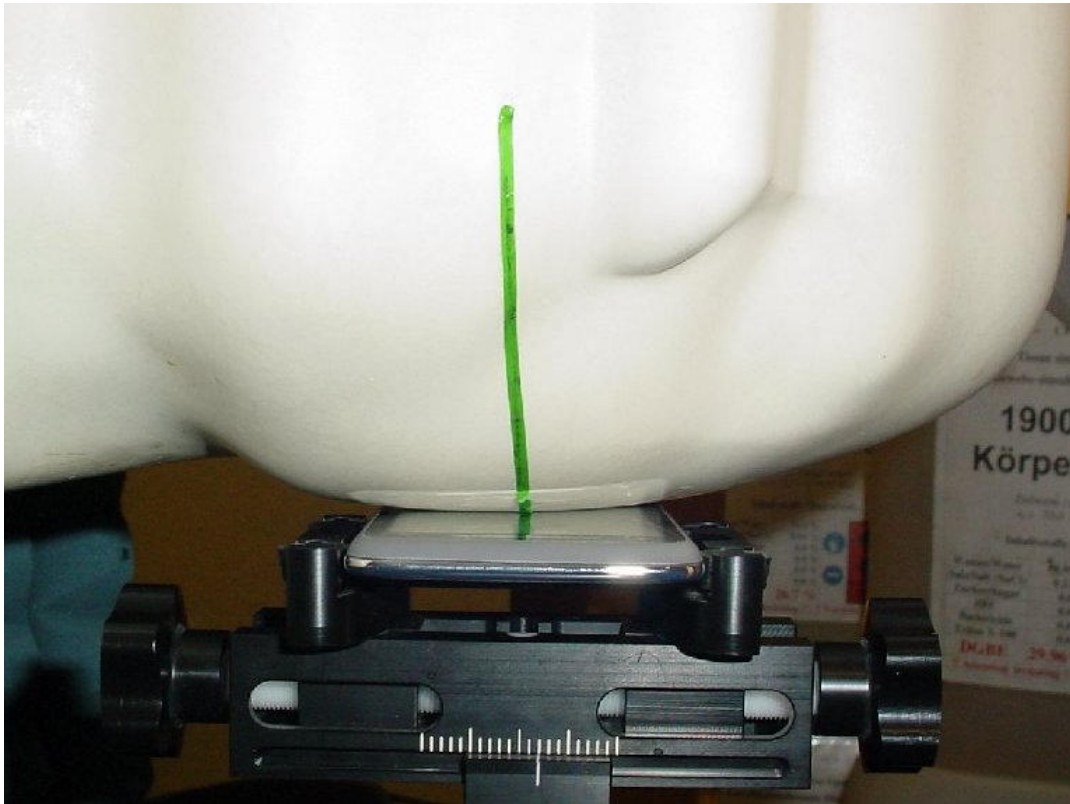


Photo 10: Test position left hand touched



Photo 11: Test position left hand touched



Photo 12: Test position left hand tilted 15°

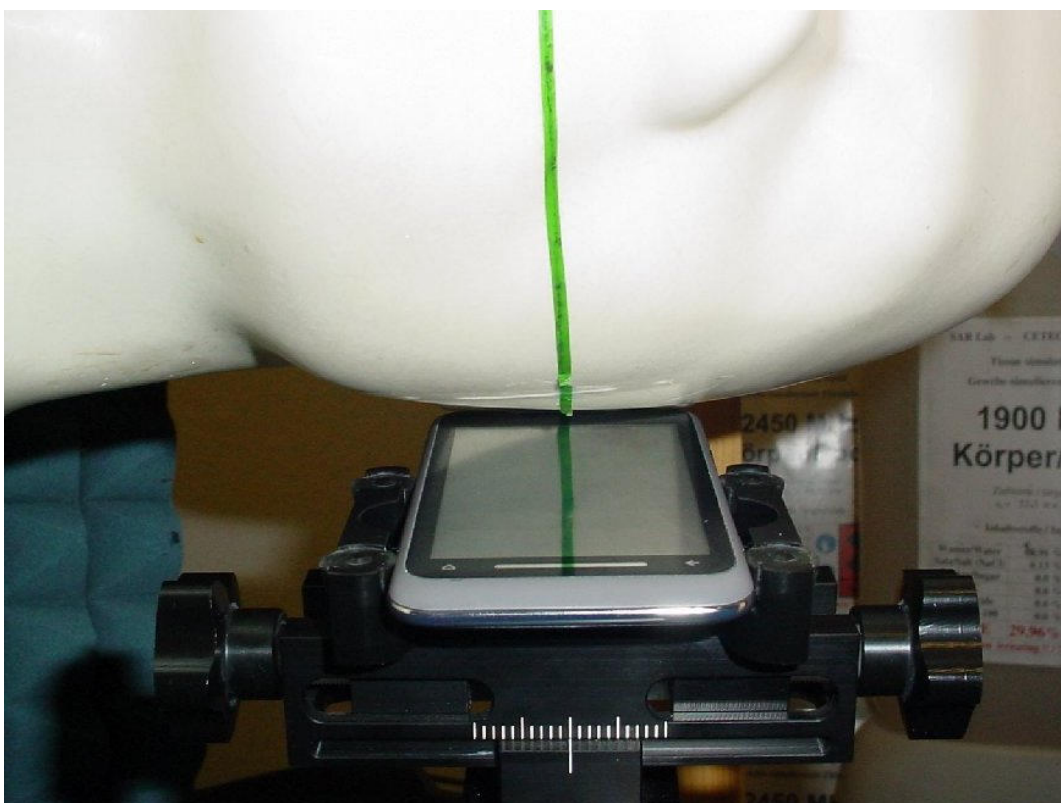


Photo 13: Test position left hand tilted 15°



Photo 14: Test position right hand touched

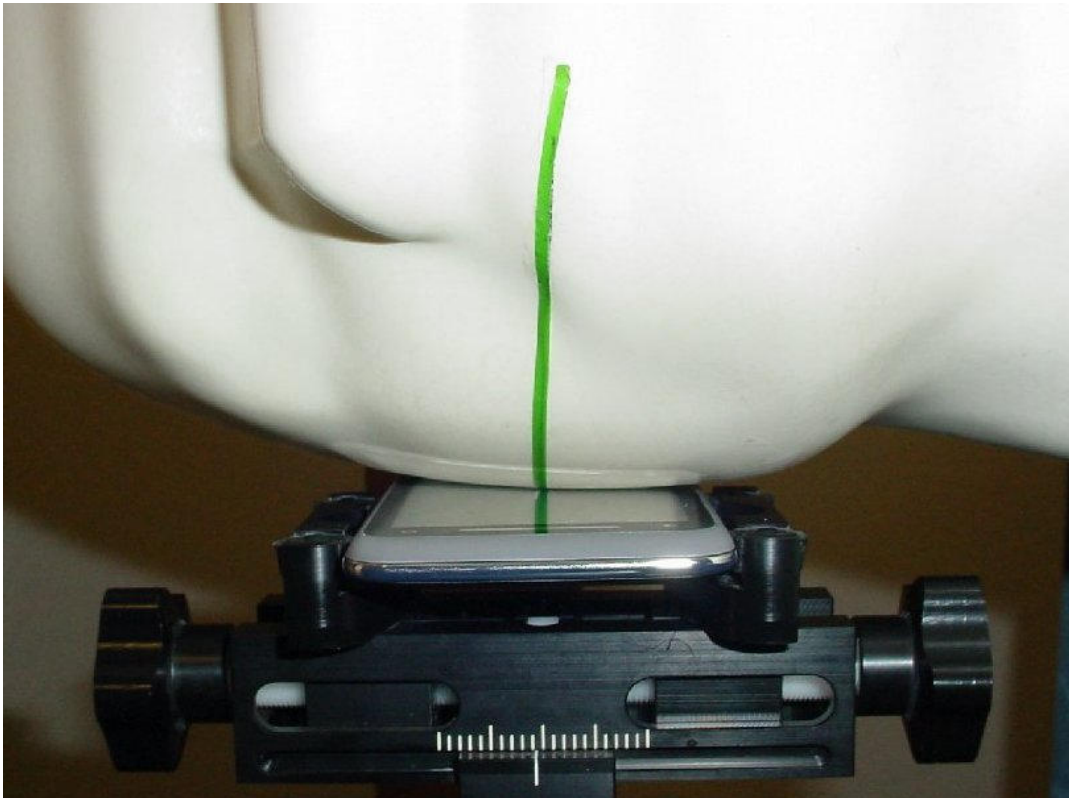


Photo 15: Test position right hand touched



Photo 16: Test position right hand touched



Photo 17: Test position right hand tilted 15°

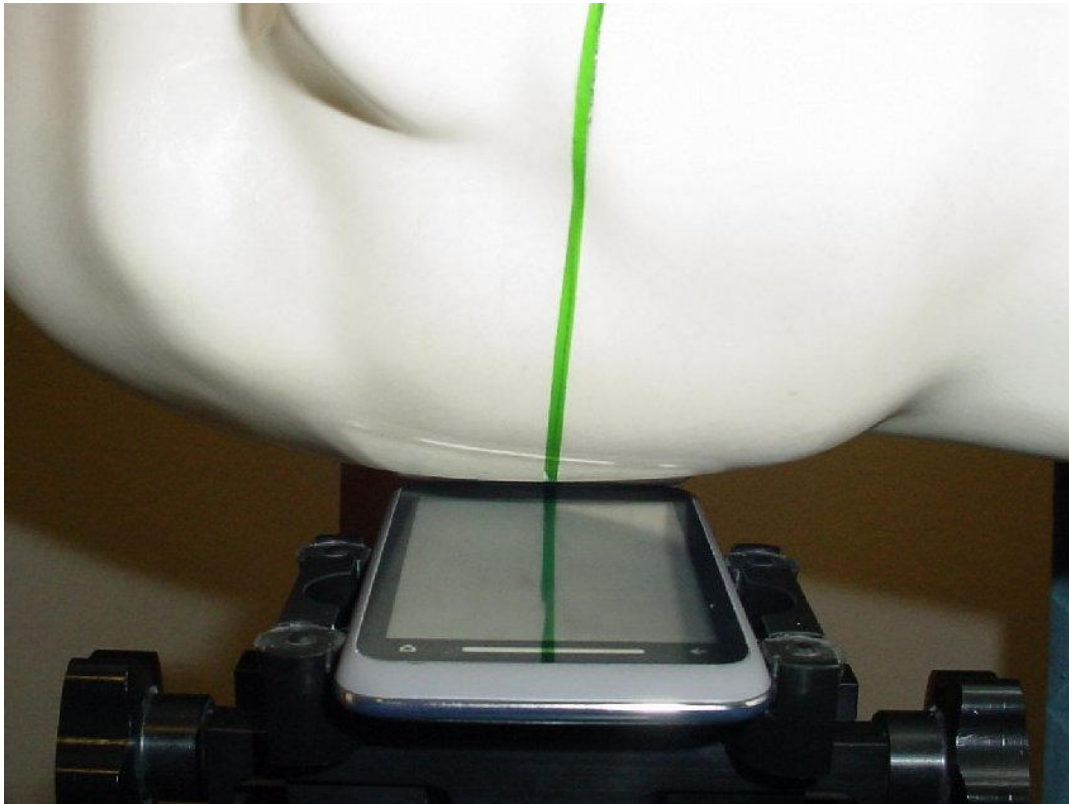


Photo 18: Test position right hand tilted 15°

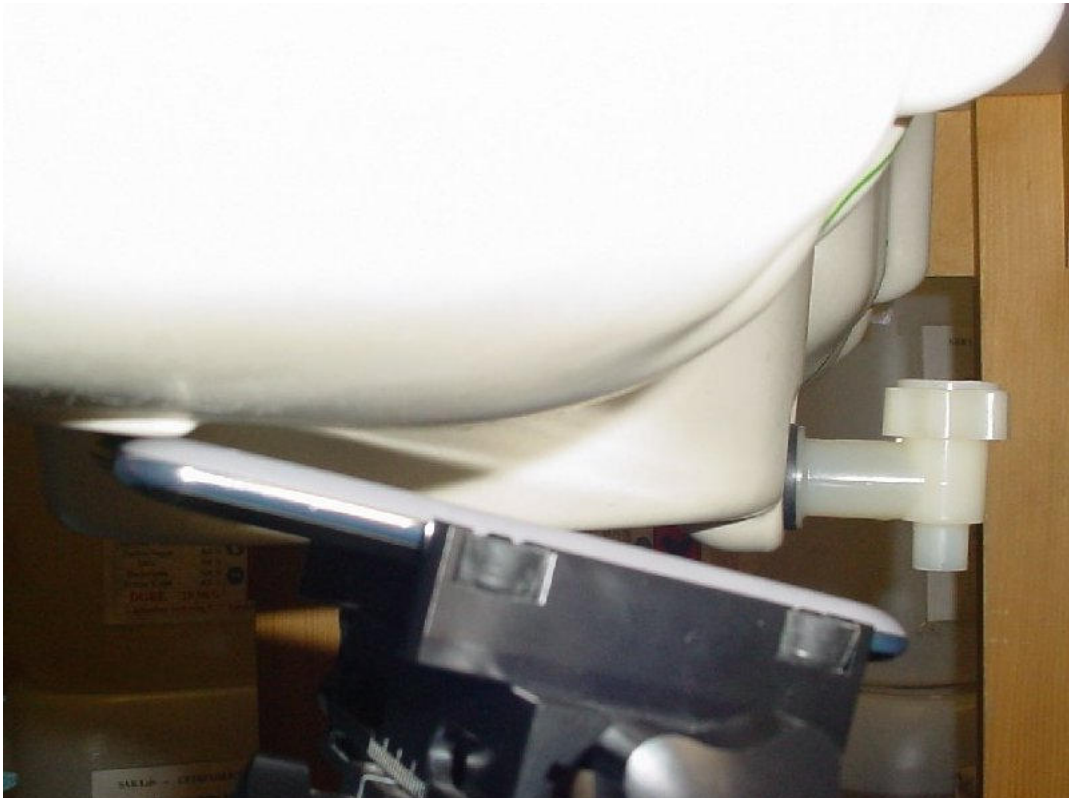


Photo 19: Test position body worn front side (15 mm distance)



Photo 20: Test position body worn front side (15 mm distance)



Photo 21: Test position body worn rear side (15 mm distance)



Photo 22: Test position body worn rear side (15 mm distance)



Annex 1.1 Liquid depth

Photo 23: Liquid depth 850 MHz head simulating liquid



Photo 24: Liquid depth 850 MHz body simulating liquid



Photo 25: Liquid depth 1900 MHz head simulating liquid

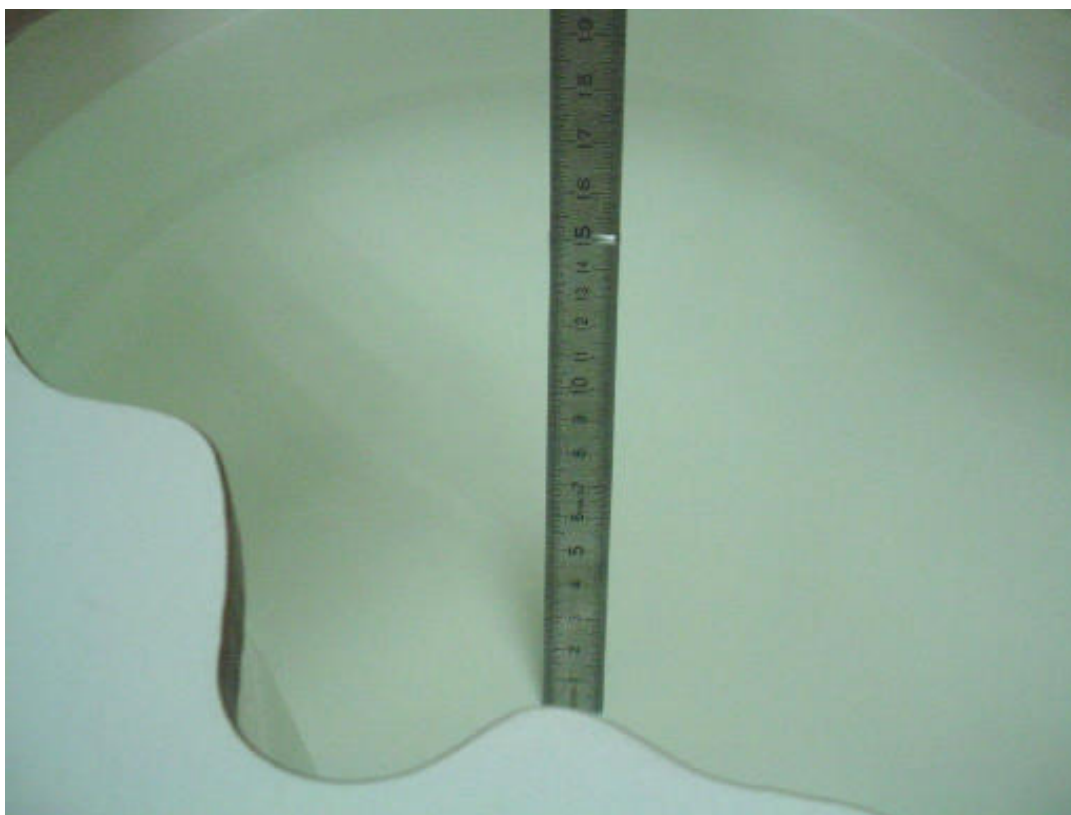


Photo 26: Liquid depth 1900 MHz body simulating liquid

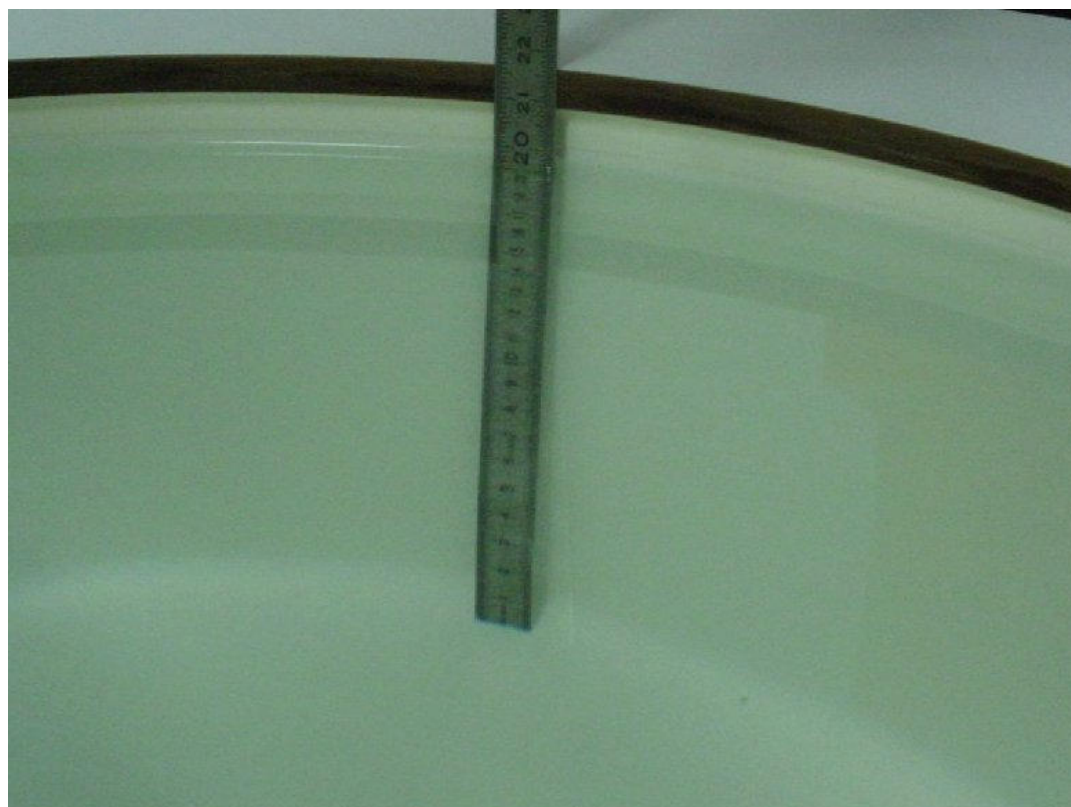


Photo 27: Liquid depth 2450 MHz head simulating liquid

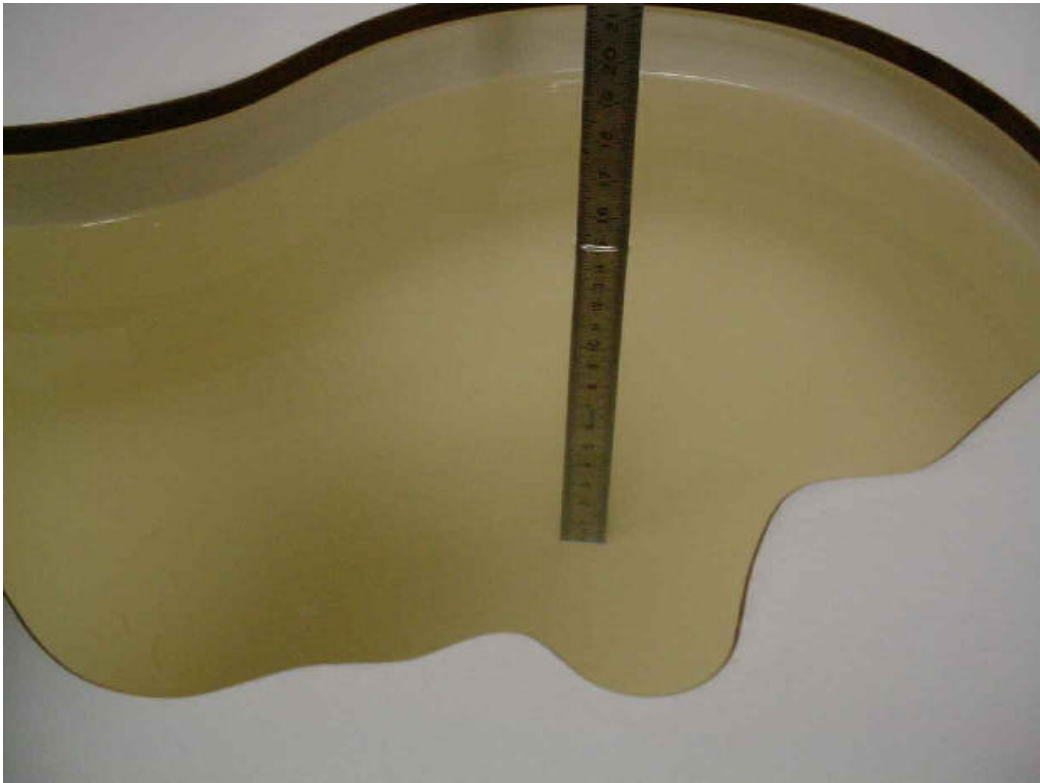


Photo 28: Liquid depth 2450 MHz body simulating liquid

