

FCC Part 15

EMI TEST REPORT

of

E.U.T. : Bluetooth Speakerphone
Model : BT-33A1,
BT-XXXX(X=0~9 or A~Z)
FCC ID : SPEBT33A1

for

APPLICANT : CELLTREND INTERNATIONAL CO., LTD.
ADDRESS : 3B02, NO.5, HSIN-YI ROAD, SEC.5,
TAIPEI 110, TAIWAN. R.O.C.

Test Performed by

ELECTRONICS TESTING CENTER, TAIWAN
NO. 34, LIN 5 , DING FU TSUN, LINKOU HSIANG,
TAIPEI HSIEN, TAIWA, R.O.C.

Tel:(02)26023052 Fax:(02)26010910
<http://www.etc.org.tw> ; e-mail:r00@etc.org.tw

Report Number : 06-01-RBF-049-01

TEST REPORT CERTIFICATION

Applicant : CELLTREND INTERNATIONAL CO., LTD.
3B02, NO.5, HSIN-YI ROAD, SEC.5, TAIPEI 110,
TAIWAN. R.O.C.

Manufacture : SUNITEC ENTERPRISE CO., LTD.
TONG FU YU IND., KU KENG VILLAGE. GUAN LAN, BAO
AN DISTRICT, SHENZHEN, CHINA.

Description of Device :
a) Type of EUT : Bluetooth Speakerphone
b) Trade Name : CELLTREND
c) Model No. : BT-33A1; BT-XXXX(X=0~9 or A~Z)
d) Power Supply : 3.7V 850mAh Battery

Regulation Applied : FCC Rules and Regulations Part 15 Subpart C (2005)

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.4, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.
2. The testing report shall not be reproduced expect in full, without the written approval of ETC.

Date Test Item Received : Jan. 11, 2006
Date Test Campaign Completed : Feb. 16, 2006
Date of Issue : Mar. 14, 2006

Test Engineer : Vincent Chang
(Vincent Chang)

Approve & Authorized : Will Yauo
Will Yauo, Manager
EMC Dept. II of ELECTRONICS
TESTING CENTER, TAIWAN

Table of Contents	Page
1 GENERAL INFORMATION	1
1.1 Product Description.....	1
1.2 Characteristics of Device	1
1.3 Test Methodology.....	1
1.4 Test Facility.....	1
2 PROVISIONS APPLICABLE	2
2.1 Definition	2
2.2 Requirement for Compliance	3
2.3 Restricted Bands of Operation	5
2.4 Labeling Requirement	6
2.5 User Information	6
3 SYSTEM TEST CONFIGURATION	7
3.1 Justification	7
3.2 Devices for Tested System	7
4 RADIATED EMISSION MEASUREMENT	8
4.1 Applicable Standard	8
4.2 Measurement Procedure	8
4.3 Measuring Instrument.....	10
4.4 Radiated Emission Data	11
4.5 Field Strength Calculation.....	16
4.6 Photos of Radiation Measuring Setup	17
5 CONDUCTED EMISSION MEASUREMENT	18
5.1 Standard Applicable	18
6 ANTENNA REQUIREMENT	19
6.1 Standard Applicable	19
6.2 Antenna Construction.....	19
7 HOPPING CHANNEL SEPARATION	20
7.1 Standard Applicable	20
7.2 Measurement Procedure	20
7.3 Measurement Equipment.....	21
7.4 Measurement Data.....	21
8 NUMBER OF HOPPING FREQUENCY USED	22
8.1 Standard Applicable	22
8.2 Measurement Procedure	22

8.3 Measurement Equipment.....	22
8.4 Measurement Data.....	23
9 CHANNEL BANDWIDTH	24
9.1 Standard Applicable	24
9.2 Measurement Procedure	24
9.3 Measurement Equipment.....	25
9.4 Measurement Data.....	25
10 DWELL TIME ON EACH CHANNEL.....	26
10.1 Standard Applicable	26
10.2 Measurement Procedure	26
10.3 Measurement Equipment.....	26
10.4 Measurement Data.....	27
11 OUTPUT POWER MEASUREMENT	28
11.1 Standard Applicable	28
11.2 Measurement Procedure	28
11.3 Measurement Equipment.....	28
11.4 Measurement Data.....	29
12 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT	30
12.1 Standard Applicable	30
12.2 Measurement Procedure	30
12.3 Measurement Equipment.....	30
12.4 Measurement Data.....	31
13 OUT-OF-BAND CONDUCTED EMISSION MEASUREMENT.....	32
13.1 Standard Applicable	32
13.2 Measurement Procedure	32
13.3 Measurement Equipment.....	32
13.4 Measurement Data.....	33
14 PEAK POWER SPECTRAL DENSITY MEASUREMENT.....	34
14.1 Standard Applicable	34
14.2 Measurement Procedure	34
14.3 Measurement Equipment.....	34
14.4 Measurement Data.....	35
APPENDIX 1 : PLOTTED DATA FOR SEPARATION OF ADJACENT CHANNEL	1
APPENDIX 2 : PLOTTED DATA FOR TOTAL USED HOPPING FREQUENCIES.....	5

APPENDIX 3 : PLOTTED DATA FOR CHANNEL BANDWIDTH.....	8
APPENDIX 4 : PLOTTED DATA FOR CHANNEL DWELL TIME	12
APPENDIX 5 : PLOTTED DATA FOR OUTPUT PEAK POWER.....	22
APPENDIX 6 : PLOTTED DATA FOR 100 kHz BANDWIDTH FROM BAND EDGE	26
APPENDIX 7 : PLOTTED DATA FOR OUT-OF-BAND CONDUCTED EMISSION.....	29
APPENDIX 8 : PLOTTED DATA FOR PEAK POWER SPECTRAL DENSITY.....	36

1 GENERAL INFORMATION

1.1 Product Description

- a) Type of EUT : Bluetooth Speakerphone
- b) Trade Name : CELLTREND
- c) Model No. : BT-33A1; BT-XXXX(X=0~9 or A~Z)
- d) Power Supply : 3.7V 850mAh Battery

1.2 Characteristics of Device

Bluetooth is a worldwide standard for the wireless exchange of data between two compatible device. It utilizes short-distance radio link technology and replaces the traditional cable connections to enable wireless connections between desktop and laptop computers, cellular phones, scanners, digital cameras, printers, and other devices. You can now transfer files between two computers, dial up to the internet using the host computer's modem or cell phone, or even share a network connection without literally attaching your cables to a device. To put it simply, Bluetooth unplugs all your cables and forget about cable clutter for a change.

1.3 Test Methodology

For Bluetooth Speakerphone, both conducted and radiated emissions were performed according to the procedures illustrated in ANSI C63.4 (2003). Other required measurements were illustrated in separate sections of this test report for details.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the roof top of Building at No.34, Lin 5, Ding Fu Tsun, Linkou Hsiang, Taipei Hsien, Taiwan, R.O.C.

This site has been fully described in a report submitted to your office, and accepted in a letter dated June 30, 2006.

2 PROVISIONS APPLICABLE

2.1 Definition

Unintentional radiator:

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

Class B Digital Device :

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business of industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

2.2 Requirement for Compliance

(1) Conducted Emission Requirement

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency MHz	Quasi Peak dB μ V	Average dB μ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

* Decreases with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limits is same as above table.

(2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB μ V/m	Radiated μ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

(3) Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

(4) Hopping Channel Separation

According to 15.247(a)(1), frequency hopping system shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

(5) Number of Hopping frequencies used

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels.

(6) Hopping Channel Bandwidth

According to 15.247(a)(1)(ii), for frequency hopping system operating in the 5725-5850 MHz band, the maximum 20dB bandwidth of the hopping channel is 1MHz.

(7) Dwell Time of each frequency

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2400-2483.5 band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

(8) Output Power Requirement

According to 15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

(9) 100 kHz Bandwidth of Frequency Band Edges Requirement

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

(10) Out-of-Band Conducted Emission Requirement

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

(11) Peak Power Spectral Density Requirement

According to 15.247(d), for digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.15
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3360-4400	Above 38.6
13.36-13.41			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions : (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

3 SYSTEM TEST CONFIGURATION

3.1 Justification

For both radiated and conducted emissions below 1 GHz, the system was configured for testing in a typical fashion as a customer would normally use it. The peripherals other than EUT were connected in normally standing by situation. Measurement was performed under the condition that a computer program was exercised to simulate data communication of EUT, and the transmission rate was set to maximum allowed by EUT. Three highest emissions were verified with varying placement of the transmitting antenna connected to EUT to maximize the emission from EUT.

For Bluetooth Speakerphone conducted emissions, only measured on TX and RX operation, for the digital circuits portion also function normally whenever TX or RX is operated. For radiated emissions, whichever RF channel is operated, the digital circuits' function identically. As the reason, measurement of radiated emissions from digital circuits is only performed with channel 11 by transmitting mode.

3.2 Devices for Tested System

Device	Manufacture	Model / FCC ID.	Description
Bluetooth Speakerphone *	SUNITEC ENTERPRISE CO., LTD.	BT-33A1, BT-XXXX(X=0~9 or A~Z) / SPEBT33A1	1.0m Unshielded Earphone Line
Notebook PC	Compaq	Presario 2800	1.8m Unshielded AC Power Cord

Remark “*” means equipment under test.

4 RADIATED EMISSION MEASUREMENT

4.1 Applicable Standard

For unintentional radiator, the radiated emission shall comply with §15.109(a).

For intentional radiators, according to §15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with §15.247 (c)

4.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.

Note : A band pass filter was used to avoid pre-amplifier saturated when measure TX operation mode in frequency band above 1 GHz.

5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the placement of cables associated with EUT to obtain the worse case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration


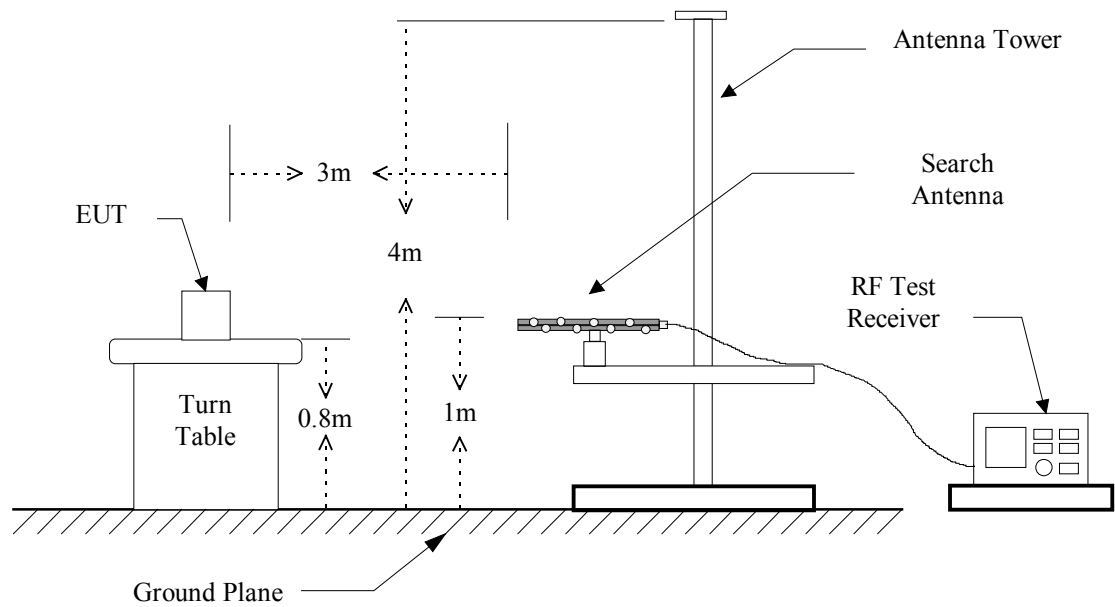


Figure 2 : Frequencies measured above 1 GHz configuration

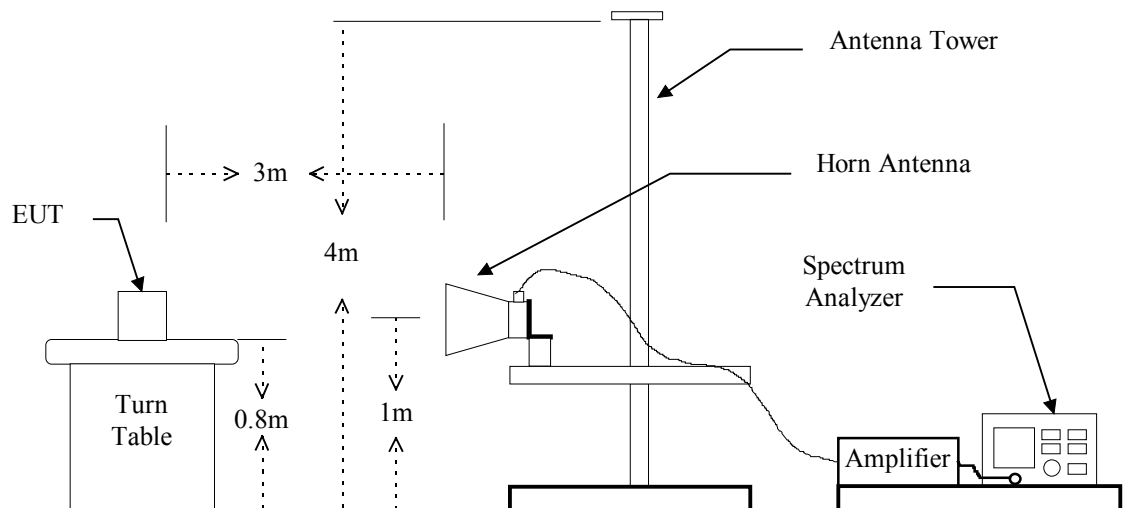

4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement:

Equipment	Manufacturer	Model No.	Next Cal. Due
RF Test Receiver	Rohde & Schwarz	ESCI	2006/11/28
Spectrum	Rohde & Schwarz	FSP40	2006/07/05
Horn Antenna	EMCO	3115	2006/08/18
Log periodic Antenna	EMCO	3146	2006/10/10
Biconical Antenna	EMCO	3110B	2006/10/04
Horn Antenna	EMCO	3115	2006/04/13
Preamplifier	Hewlett-Packard	8449B	2006/09/13
Amplifier	Hewlett-Packard	83051A	2006/04/18
Preamplifier	Hewlett-Packard	8447D	2006/10/23
Spectrum Analyzer	Hewlett-Packard	8564E	2006/08/08

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	N/A
	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz

4.4 Radiated Emission Data

4.4.1 Tx Portion

A. Channel Low

Operation Mode : Receiving / Transmitting

Fundamental Frequency : 2402.000 MHz (Local Frequency : 2402.000 MHz)

Test Date : Feb. 16, 2006 Temperature : 25 °C Humidity : 65 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	Peak	Ave	Peak	Ave		Peak	Ave	Peak	Ave			
* 2402.000	48.5	***	47.5	***	-3.1	45.4	***	74.0	54.0	-28.6	185	1.5
* 4804.000	---	---	---	---	2.5	---	---	74.0	54.0	---	---	---
* 7206.000	---	---	---	---	5.7	---	---	74.0	54.0	---	---	---
* 9608.000	---	---	---	---	7.2	---	---	74.0	54.0	---	---	---
* 12010.000	---	---	---	---	9.2	---	---	74.0	54.0	---	---	---
4804.000	46.0	***	45.4	***	2.5	48.5	***	74.0	54.0	-25.5	195	1.5
7206.000	---	---	---	---	5.7	---	---	74.0	54.0	---	---	---
9608.000	---	---	---	---	7.2	---	---	74.0	54.0	---	---	---
12010.000	---	---	---	---	9.2	---	---	74.0	54.0	---	---	---
14412.000	---	---	---	---	11.5	---	---	74.0	54.0	---	---	---
16814.000	---	---	---	---	11.7	---	---	74.0	54.0	---	---	---
19216.000	---	---	---	---	8.9	---	---	74.0	54.0	---	---	---
21618.000	---	---	---	---	9.7	---	---	74.0	54.0	---	---	---
24020.000	---	---	---	---	10.3	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark "****" means that Peak result is meet average limit.
3. Remark "---" means that the emissions level is too low to be measured.
4. Remark "*" means the local oscillator frequency and its harmonics.
5. Item "Margin" referred to Average limit while there is only peak result.
6. The expanded uncertainty of the radiated emission tests is 3.53 dB.

B. Channel MiddleOperation Mode : Receiving / TransmittingFundamental Frequency : 2441.000 MHz (Local Frequency : 2441.000 MHz)Test Date : Feb. 16, 2006 Temperature : 25 °C Humidity : 65 %

Frequency (MHz)	Reading (dBUV)				Factor (dB) Corr.	Result @3m (dBUV/m)		Limit @3m (dBUV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H Peak	Ave	V Peak	Ave		Peak	Ave	Peak	Ave			
* 2441.000	43.1	***	42.0	***	-2.9	46.0	***	74.0	54.0	***	192	1.5
* 4882.000	---	---	---	---	2.7	---	---	74.0	54.0	---	---	---
* 7323.000	---	---	---	---	5.9	---	---	74.0	54.0	---	---	---
* 9764.000	---	---	---	---	7.3	---	---	74.0	54.0	---	---	---
* 12205.000	---	---	---	---	9.3	---	---	74.0	54.0	---	---	---
4802.000	46.1	***	44.8	***	2.7	48.8	***	74.0	54.0	***	175	1.5
7323.000	---	---	---	---	5.9	---	---	74.0	54.0	---	---	---
9764.000	---	---	---	---	7.3	---	---	74.0	54.0	---	---	---
12205.000	---	---	---	---	9.3	---	---	74.0	54.0	---	---	---
14646.000	---	---	---	---	11.6	---	---	74.0	54.0	---	---	---
17087.000	---	---	---	---	13.3	---	---	74.0	54.0	---	---	---
19528.000	---	---	---	---	8.5	---	---	74.0	54.0	---	---	---
21969.000	---	---	---	---	9.9	---	---	74.0	54.0	---	---	---
24410.000	---	---	---	---	10.7	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark "****" means that Peak result is meet average limit.
3. Remark "---" means that the emissions level is too low to be measured.
4. Remark "*" means the local oscillator frequency and its harmonics.
5. Item "Margin" referred to Average limit while there is only peak result.
6. The expanded uncertainty of the radiated emission tests is 3.53 dB.

C. Channel HighOperation Mode : Receiving / TransmittingFundamental Frequency : 2480.000 MHz (Local Frequency : 2480.000 MHz)Test Date : Feb. 16, 2006 Temperature : 25 °C Humidity : 65 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H Peak	V Ave	H Peak	V Ave		Peak	Ave	Peak	Ave			
* 2480.000	47.7	***	46.7	***	-2.8	44.9	***	74.0	54.0	-29.1	179	1.5
* 4960.000	---	---	---	---	2.8	---	---	74.0	54.0	---	---	---
* 7440.000	---	---	---	---	6.1	---	---	74.0	54.0	---	---	---
* 9920.000	---	---	---	---	7.4	---	---	74.0	54.0	---	---	---
* 12400.000	---	---	---	---	9.4	---	---	74.0	54.0	---	---	---
4960.000	46.2	***	45.0	***	2.8	49.0	***	74.0	54.0	-25.0	182	1.5
7440.000	---	---	---	---	6.1	---	---	74.0	54.0	---	---	---
9920.000	---	---	---	---	7.4	---	---	74.0	54.0	---	---	---
12400.000	---	---	---	---	9.4	---	---	74.0	54.0	---	---	---
14880.000	---	---	---	---	11.5	---	---	74.0	54.0	---	---	---
17360.000	---	---	---	---	15.2	---	---	74.0	54.0	---	---	---
19840.000	---	---	---	---	8.6	---	---	74.0	54.0	---	---	---
22320.000	---	---	---	---	10.2	---	---	74.0	54.0	---	---	---
24800.000	---	---	---	---	11.0	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark “***” means that Peak result is meet average limit.
3. Remark “---” means that the emissions level is too low to be measured.
4. Remark “*” means the local oscillator frequency and its harmonics.
5. Item “Margin” referred to Average limit while there is only peak result.
6. The expanded uncertainty of the radiated emission tests is 3.53 dB.

4.4.2 Radiated Emissions in Restricted BandsOperation Mode : Receiving /TransmittingTest Date : Feb. 13, 2006 Temperature : 25 °C Humidity : 65 %**Operation Mode :CH Low Restricted Frequency band : 2310MHz-2390MHz**

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H Peak	V Ave	H Peak	V Ave		Peak	Ave	Peak	Ave.			
2342.770	49.4	***	51.2	***	-3.3	47.9	***	74.0	54.0	-6.1	88	1.50
2369.120	47.2	***	50.3	***	-3.2	47.1	***	74.0	54.0	-6.9	94	1.50

Operation Mode : CH High Restricted Frequency band : 2483.5MHz-2500MHz

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H Peak	V Ave	H Peak	V Ave		Peak	Ave	Peak	Ave.			
2490.120	47.8	***	48.9	***	-2.7	46.2	***	74.0	54.0	-7.8	94	1.50
2497.880	46.5	***	49.0	***	-2.7	46.3	***	74.0	54.0	-7.7	89	1.50

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark “***” means that Peak result is meet average limit.
3. Remark “---” means that the emissions level is too low to be measured.
4. Item “Margin” referred to Average limit while there is only peak result.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

4.4.3 Other Emissions

a) Emission frequencies below 1 GHz

1. Operation Mode : Bluetooth Charge & Operation

Test Date : Feb. 13, 2006 Temperature : 25 °C Humidity : 65 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
78.920	H	35.0	-15.2	19.8	40.0	-20.2	89	1.5
149.210	H	31.3	-10.1	21.2	43.5	-22.3	77	1.5
230.115	H	29.2	-5.1	24.1	46.0	-21.9	78	1.5
319.220	H	46.4	-6.8	39.6	46.0	-6.4	92	1.5
418.520	H	43.5	-5.7	37.8	46.0	-8.2	75	1.5
670.120	H	41.1	-1.4	39.7	46.0	-6.3	92	1.5

2. Operation Mode : Bluetooth TX

Test Date : Feb. 13, 2006 Temperature : 25 °C Humidity : 65 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
49.140	H	31.1	-13.9	17.2	40.0	-22.8	88	1.5
89.120	H	33.9	-14.1	19.8	43.5	-23.7	92	1.5
188.920	H	31.4	-8.5	22.9	43.5	-20.6	74	1.5
307.120	H	47.0	-6.9	40.1	46.0	-5.9	88	1.5
477.140	H	45.4	-4.5	40.9	46.0	-5.1	92	1.5
518.120	H	46.6	-4.8	41.8	46.0	-4.2	79	1.5

Note :

1. Remark "---" means that the emissions level is too low to be measured.
2. The expanded uncertainty of the radiated emission tests is 3.53 dB.

3. Operation Mode : Bluetooth RXTest Date : Feb. 13, 2006 Temperature : 25 °C Humidity : 65 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
51.440	H	33.3	-14.4	18.9	40.0	-21.1	88	1.5
98.120	H	34.1	-13.9	20.2	43.5	-23.3	92	1.5
223.110	H	29.4	-5.6	23.8	46.0	-22.2	74	1.5
345.920	H	48.8	-9.9	38.9	46.0	-7.1	88	1.5
478.190	H	45.7	-4.5	41.2	46.0	-4.8	92	1.5
588.970	H	46.7	-4.9	41.8	46.0	-4.2	72	1.5

Note :

1. Remark "---" means that the emissions level is too low to be measured.
2. The expanded uncertainty of the radiated emission tests is 3.53 dB.

b) Emission frequencies above 1 GHz

Radiated emission frequencies above 1 GHz to 25 GHz were too low to be measured with a pre-amplifier of 35 dB.

4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss (if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

where Corrected Factor

$$= \text{Antenna FACTOR} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

4.6 Photos of Radiation Measuring Setup



5 CONDUCTED EMISSION MEASUREMENT

5.1 Standard Applicable

This EUT is excused from investigation of conducted emission, for it is powered by battery only DC 3.7V. According to §15.207 (c), measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

For intentional device, Line Conducted Emission Limits are in accordance to §15.207(a)

6 ANTENNA REQUIREMENT

6.1 Standard Applicable

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.2 Antenna Construction

The antenna is permanently mounted on RF Board, no consideration of replacement.
Please see photos submitted in Exhibit B.

7 HOPPING CHANNEL SEPARATION


7.1 Standard Applicable

According to 15.247(a)(1), frequency hopping system shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled. Then set it to any one convenient frequency within its operating range.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels
Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span
Video (or Average) Bandwidth (VBW) $\geq$ RBW
Sweep = auto
Detector function = peak
Trace = max hold
4. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

Figure 4 : Measurement configuration.



7.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	2006/07/05
Attenuator	Weinschel Engineering	1	N/A

7.4 Measurement Data

Test Date : Feb. 13, 2006 Temperature : 25 °C Humidity : 65 %

- a) Channel Low : Adjacent Hopping Channel Separation is 1000 kHz
- b) Channel Middle : Adjacent Hopping Channel Separation is 1000 kHz
- c) Channel High : Adjacent Hopping Channel Separation is 1000 kHz

Note : 1. Please see appendix 1 for Plotted Data

2. The expanded uncertainty of the hopping channel separation tests is 2dB.

8 NUMBER OF HOPPING FREQUENCY USED

8.1 Standard Applicable

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels.

8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled.
3. Use the following spectrum analyzer settings:
Span = the frequency band of operation
RBW $\geq$ 1% of the span
VBW $\geq$ RBW
Sweep = auto
Detector function = peak
Trace = max hold
4. Allow the trace to stabilize. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

8.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	2006/07/05
Attenuator	Weinschel Engineering	1	N/A

8.4 Measurement Data

Test Date : Feb. 13, 2006 Temperature : 25 °C Humidity : 65 %

There are 79 hopping frequencies used.

Note : 1. Please see appendix 2 for Plotted Data

2. The expanded uncertainty of number of hopping frequency used tests is 2dB.

9 CHANNEL BANDWIDTH

9.1 Standard Applicable

According to 15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. Use the following spectrum analyzer settings:
 - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
 - RBW $\geq$ 1% of the 20 dB bandwidth
 - VBW $\geq$ RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

9.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Rohde & Schwarz	FSP	2006/07/05
Attenuator	Weinschel Engineering	1	N/A

9.4 Measurement Data

Test Date : Feb. 13, 2006 Temperature : 25 °C Humidity : 65 %

- a) Channel Low : Channel Bandwidth is 870 kHz
- b) Channel Middle : Channel Bandwidth is 858 kHz
- c) Channel High : Channel Bandwidth is 846 kHz

Note : 1. Please see appendix 3 for Plotted Data

2. The expanded uncertainty of channel bandwidth tests is 2dB.

10 DWELL TIME ON EACH CHANNEL

10.1 Standard Applicable

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2400-2483.5 band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

10.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled.
3. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel
RBW = 1 MHz
VBW $\geq$ RBW
Sweep = as necessary to capture the entire dwell time per hopping channel
Detector function = peak
Trace = max hold
4. Use the marker-delta function to determine the dwell time. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

10.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	2006/07/05
Attenuator	Weinschel Engineering	1	N/A

10.4 Measurement Data

Test Date : Feb. 13, 2006 Temperature : 25 °C Humidity : 65 %

$$\text{Period} = 0.4(\text{seconds}) \times 79(\text{channels}) = 31.6 \text{ seconds}$$

A. DH1 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH1 data rate operates on a one-slot transmission and one-slot receiving basis. Thus there are $1600/(1+1) = 800$ transmissions per second. In one period for each particular channel there are $10.13 \times 31.6 = 320.1$ times of transmissions.

- a) Channel Low : the dwell time is $0.48\text{ms} \times 320.1 = 153.648\text{ms}$
- b) Channel Middle : the dwell time is $0.52\text{ms} \times 320.1 = 166.452\text{ms}$
- c) Channel High : the dwell time is $0.50\text{ms} \times 320.1 = 160.050\text{ms}$

The maximum time of occupancy for a particular channel is 166.452ms in any 31.6 second period, which is less than the 400ms allowed by the rules; therefore, it meets the requirements of this section.

B. DH3 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH3 data rate operates on a three-slot transmission and one-slot receiving basis. Thus there are $1600/(3+1) = 400$ transmissions per second. In one period for each particular channel there are $5.06 \times 31.6 = 159.9$ times of transmissions.

- a) Channel Low : the dwell time is $1.74\text{ms} \times 159.9 = 278.226\text{ms}$
- b) Channel Middle : the dwell time is $1.84\text{ms} \times 159.9 = 294.216\text{ms}$
- c) Channel High : the dwell time is $1.74\text{ms} \times 159.9 = 278.226\text{ms}$

The maximum time of occupancy for a particular channel is 294.216ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

C. DH5 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH5 data rate operates on a five-slot transmission and one-slot receiving basis. Thus there are $1600/(5+1) = 266.7$ transmissions per second. In one period for each particular channel there are $3.38 \times 31.6 = 106.81$ times of transmissions.

- a) Channel Low : the dwell time is $3.0\text{ms} \times 106.81 = 320.430\text{ms}$
- b) Channel Middle : the dwell time is $3.04\text{ms} \times 106.81 = 324.702\text{ms}$
- c) Channel High : the dwell time is $3.0\text{ms} \times 106.81 = 320.430\text{ms}$

The maximum time of occupancy for a particular channel is 324.702ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

Note : 1. Please see appendix 4 for Plotted Data

2. The expanded uncertainty of dwell time on each channel tests is 2dB.

11 OUTPUT POWER MEASUREMENT

11.1 Standard Applicable

According to 15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
RBW > the 20 dB bandwidth of the emission being measured
VBW $\geq$ RBW
Sweep = auto
Detector function = peak
Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

11.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	2006/07/05
Attenuator	Weinschel Engineering	1	N/A

11.4 Measurement Data

Test Date : Feb. 13, 2006 Temperature : 25 °C Humidity : 65 %

- a) Channel Low : Output Peak Power is 2.15 dBm = **1.64** mW
- b) Channel Middle : Output Peak Power is 1.15 dBm = **1.30** mW
- c) Channel High : Output Peak Power is -0.6 dBm = **0.87** mW

Note : 1. Please see appendix 5 for Plotted Data

2. The expanded uncertainty of output power measurement tests is 2dB.

12 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT

12.1 Standard Applicable

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

12.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
 - Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation
 - RBW $\geq$ 1% of the span
 - VBW $\geq$ RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
4. Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

12.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	2006/07/05
Attenuator	Weinschel Engineering	1	N/A

12.4 Measurement Data

Test Date : Feb. 13, 2006 Temperature : 25 °C Humidity : 65 %

- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

Note : 1. Please see appendix 6 for Plotted Data

2. The expanded uncertainty of the 100 KHz bandwidth of band edges tests is 1000Hz.

13 OUT-OF-BAND CONDUCTED EMISSION MEASUREMENT

13.1 Standard Applicable

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

13.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.

3. Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold.

4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

13.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	2006/07/05
Attenuator	Weinschel Engineering	1	N/A

13.4 Measurement Data

Mode : Low Channel

Test Date : Feb. 13, 2006 Temperature : 25 °C Humidity : 65 %

- a) 1 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Mode : Mid Channel

Test Date : Feb. 13, 2006 Temperature : 25 °C Humidity : 65 %

- a) 1 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Mode : Hi Channel

Test Date : Feb. 13, 2006 Temperature : 25 °C Humidity : 65 %

- a) 1 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Note : 1. Please see appendix 7 for Plotted Data

2. The expanded uncertainty of the out-of-band conducted emission tests is 2dB.

14 PEAK POWER SPECTRAL DENSITY MEASUREMENT

14.1 Standard Applicable

According to 15.247(d), for digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

14.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set EUT to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
Span = 300 kHz, centered on highest level appearing on spectral display
RBW = 3 kHz
VBW $\geq$ RBW
Sweep = 100 s
Detector function = peak
Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

14.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Next Cal. Due
Spectrum Analyzer	Rohde & Schwarz	FSP40	2006/07/05
Attenuator	Weinschel Engineering	1	N/A

14.4 Measurement Data


Test Date : Feb. 13, 2006 Temperature : 25 °C Humidity : 65 %


- a) Channel Low : Maximun Power Density of 3 kHz Bandwidth is -11.55dBm
- b) Channel Middle : Maximun Power Density of 3 kHz Bandwidth is -10.47dBm
- c) Channel High : Maximun Power Density of 3 kHz Bandwidth is -11.66dBm


Note : 1. Please see appendix 8 for Plotted Data

2. The expanded uncertainty of the power density tests is 2dB.


Appendix 1 : Plotted Data for Separation of Adjacent Channel

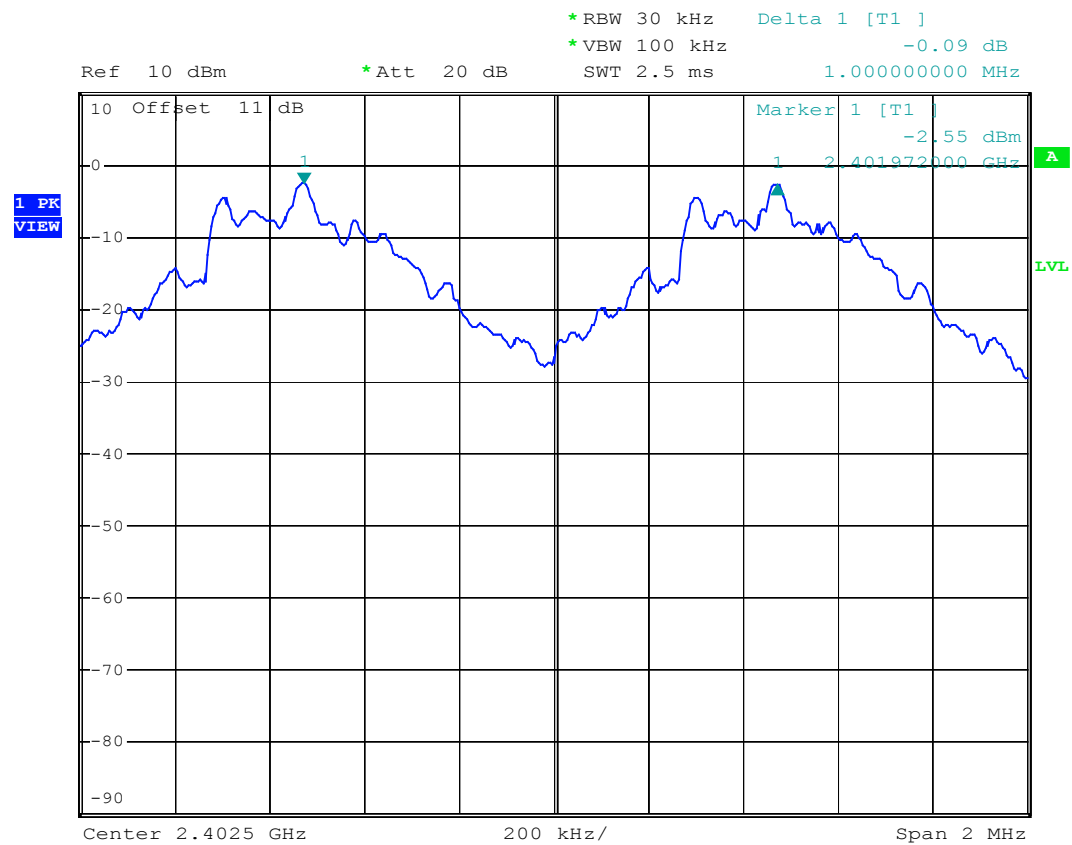


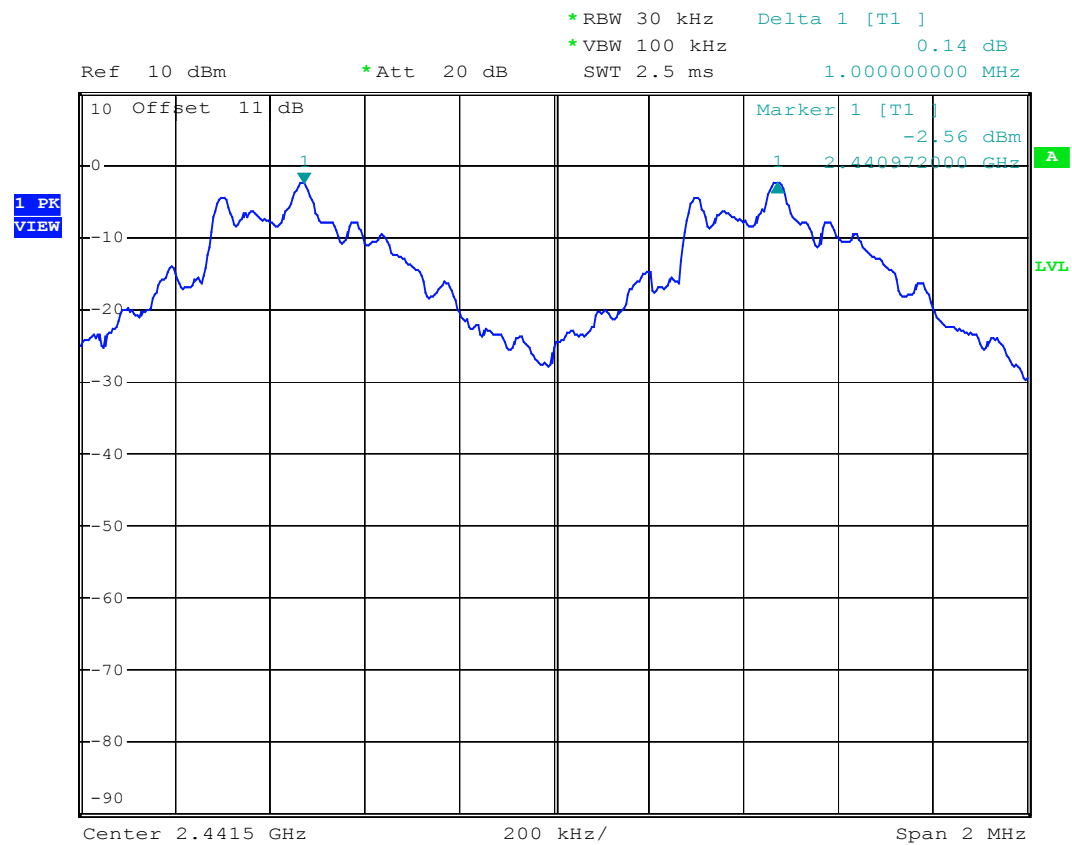

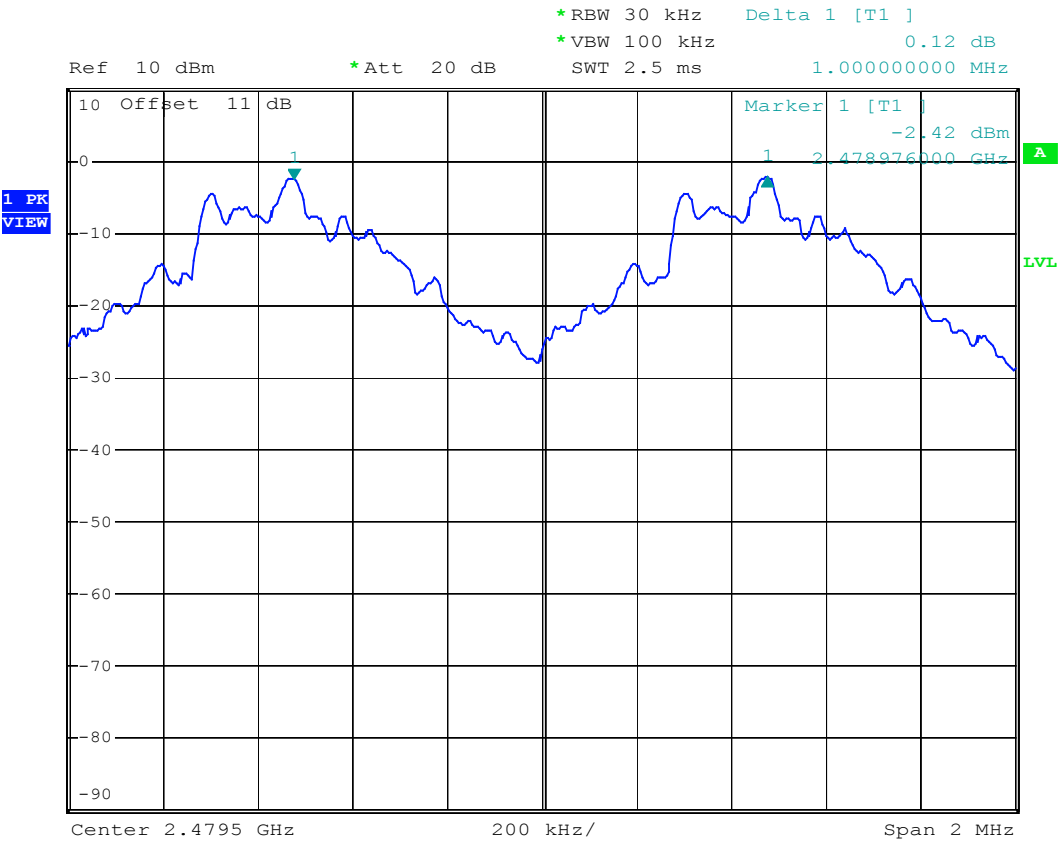



Appendix 2 : Plotted Data for Total Used Hopping Frequencies

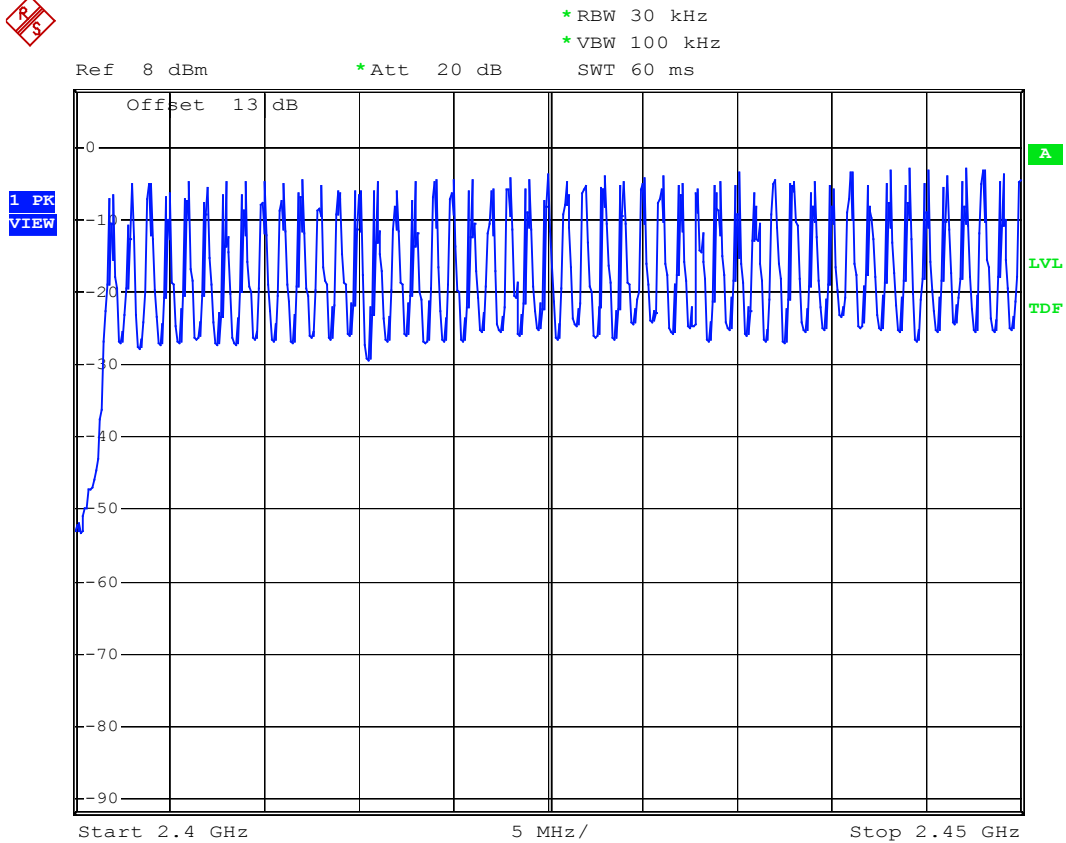


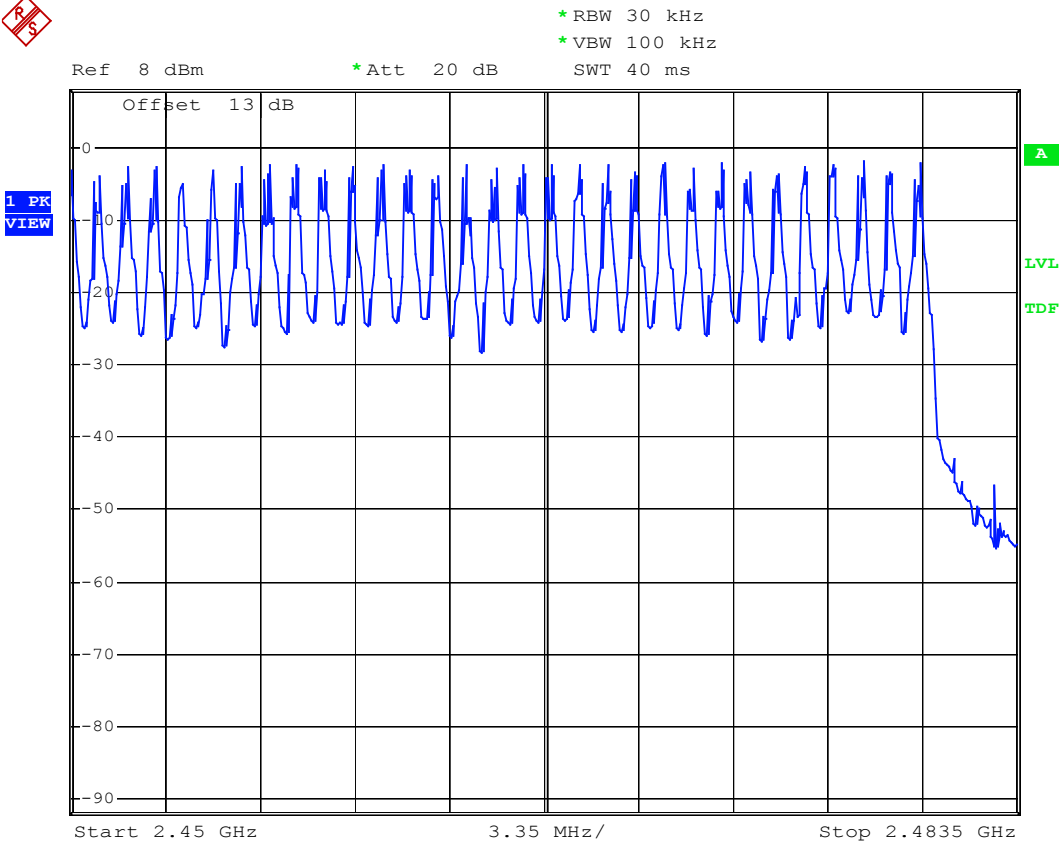

Appendix 3 : Plotted Data for Channel Bandwidth

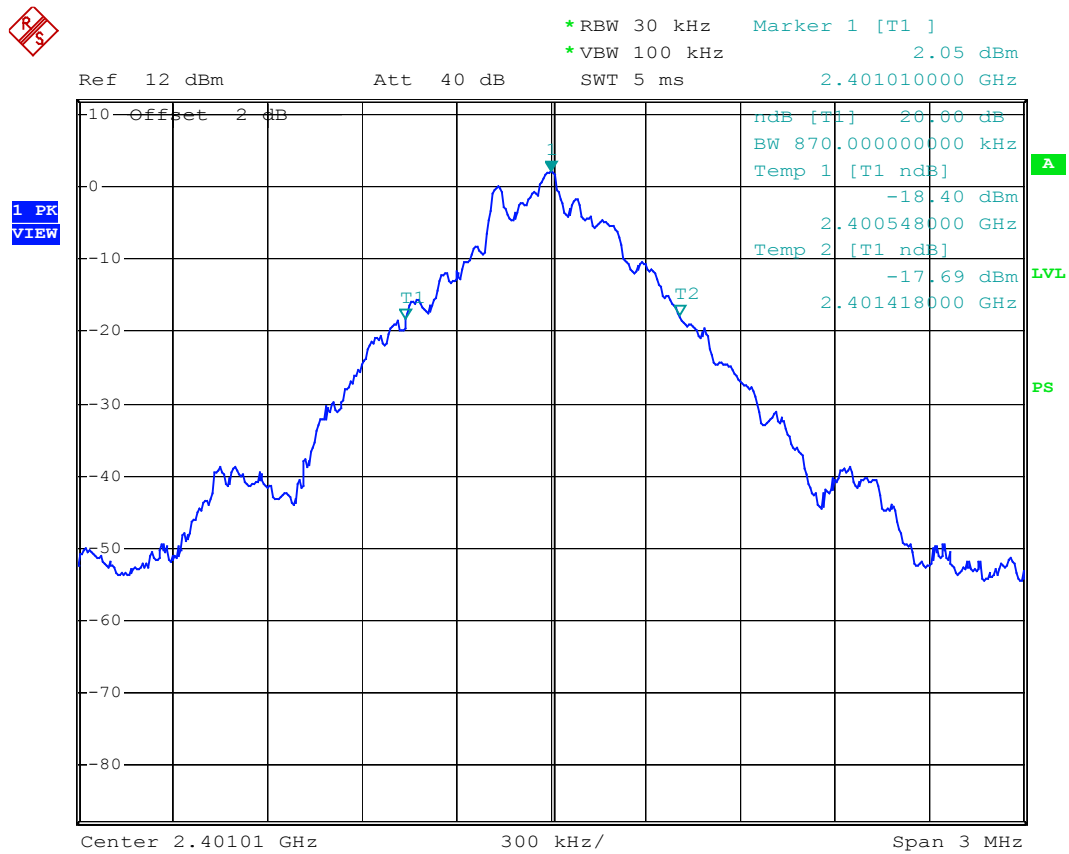


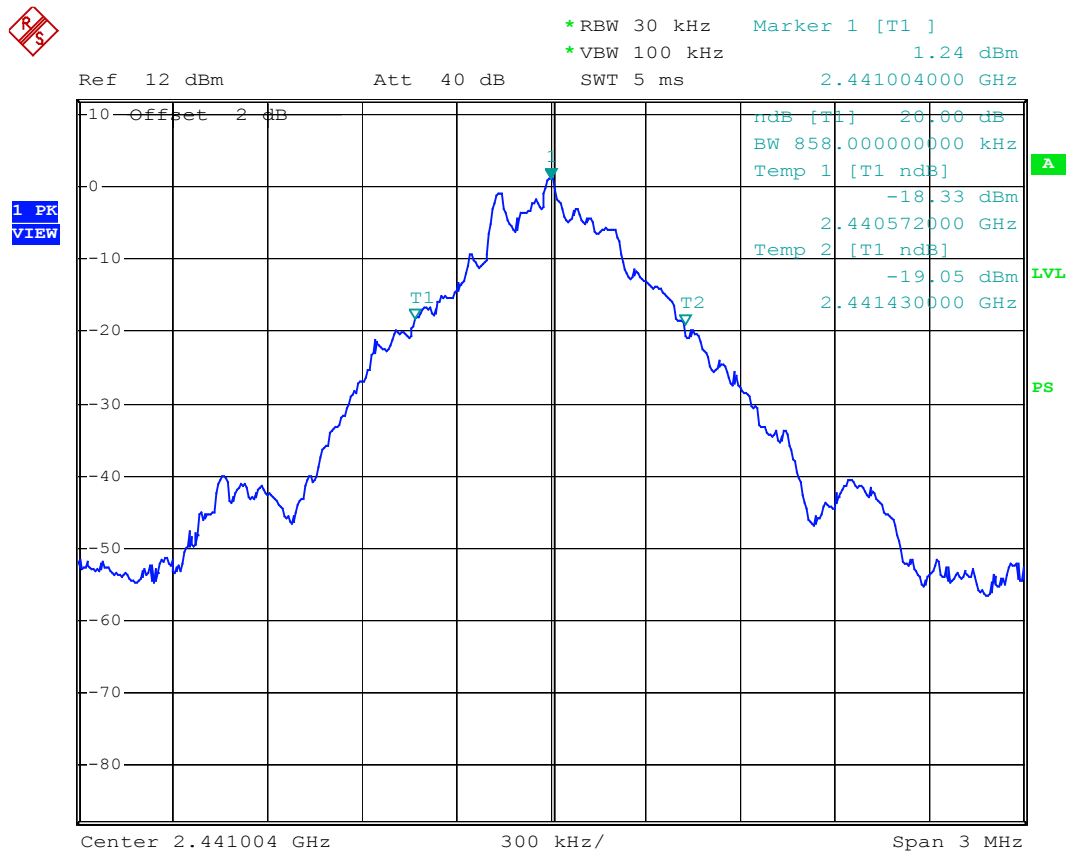

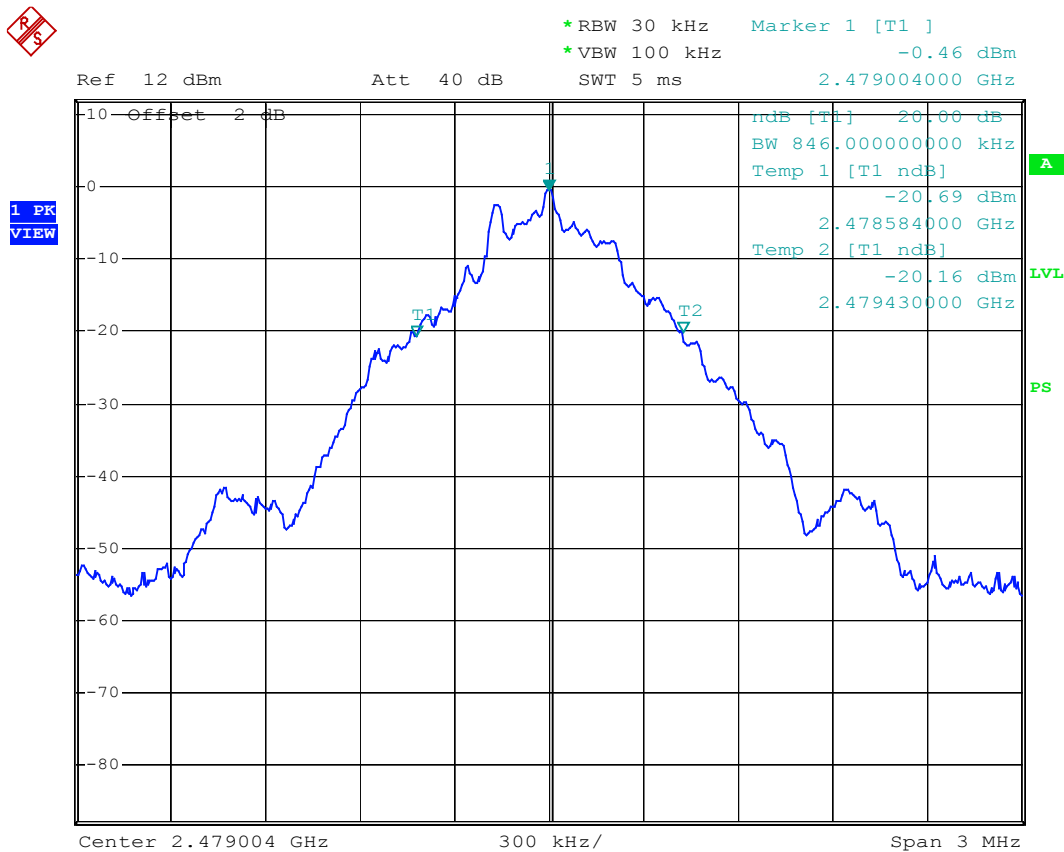


Appendix 4 : Plotted Data for Channel Dwell Time


Mode: DH1; Channel Low

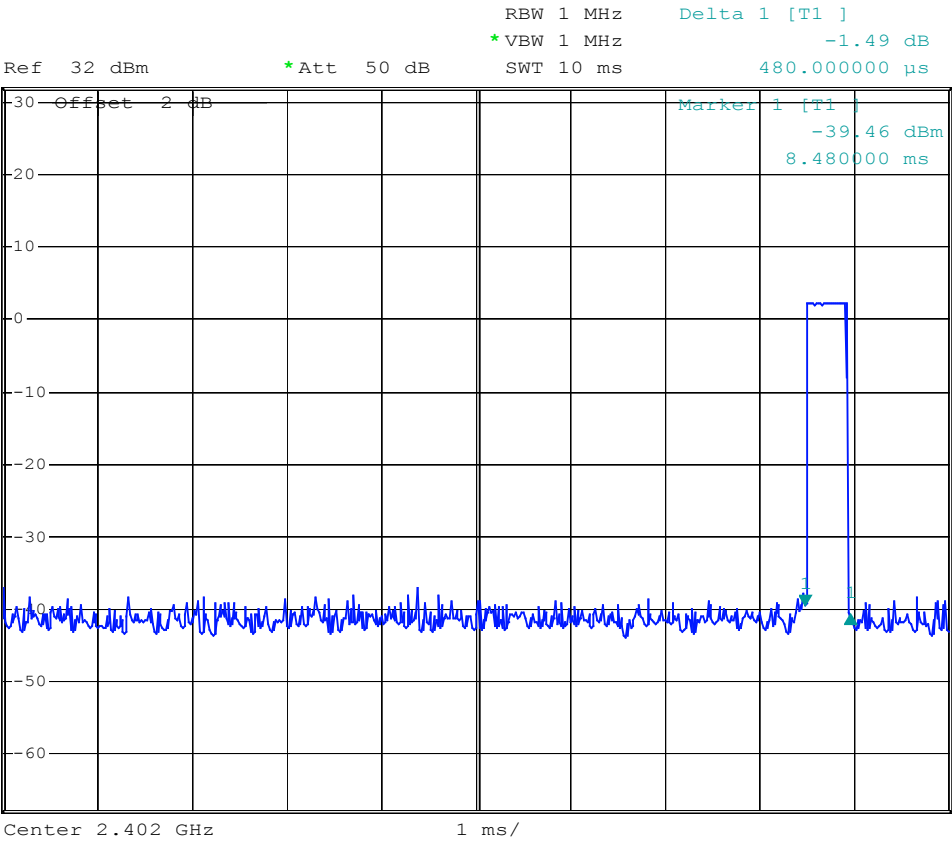


Mode: DH1; Channel Middle

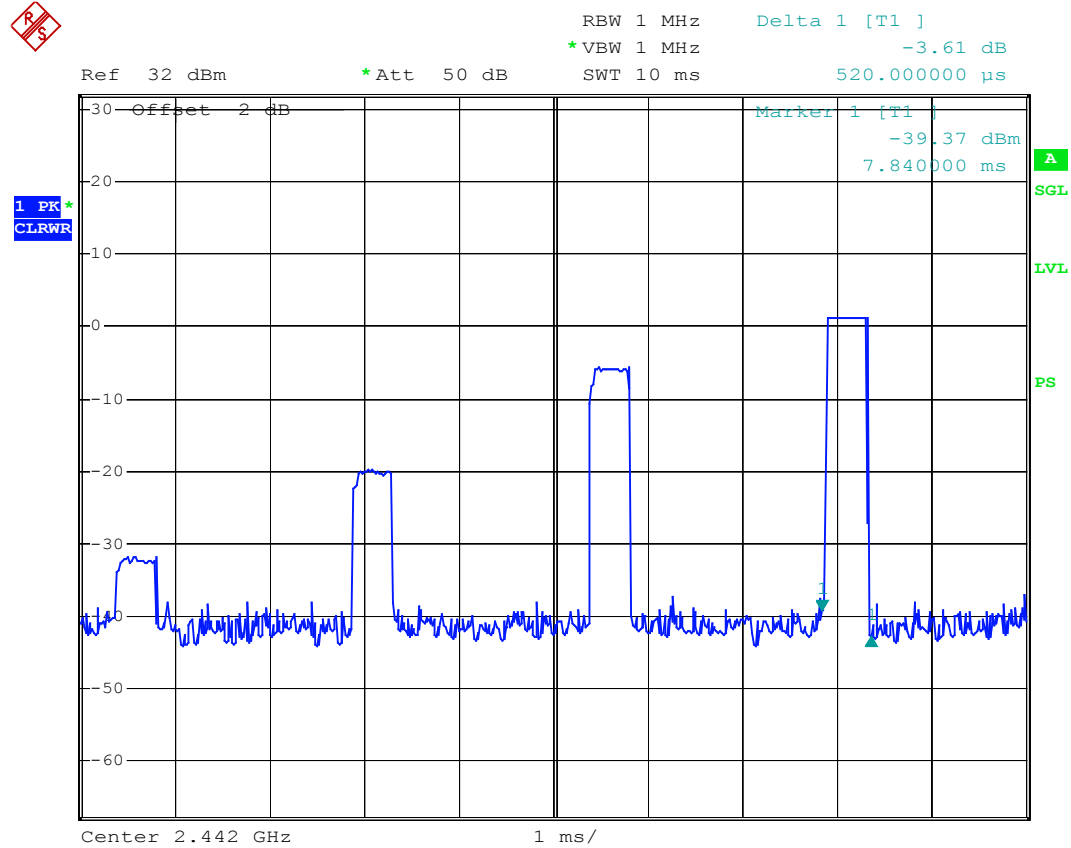


Mode: DH1; Channel High

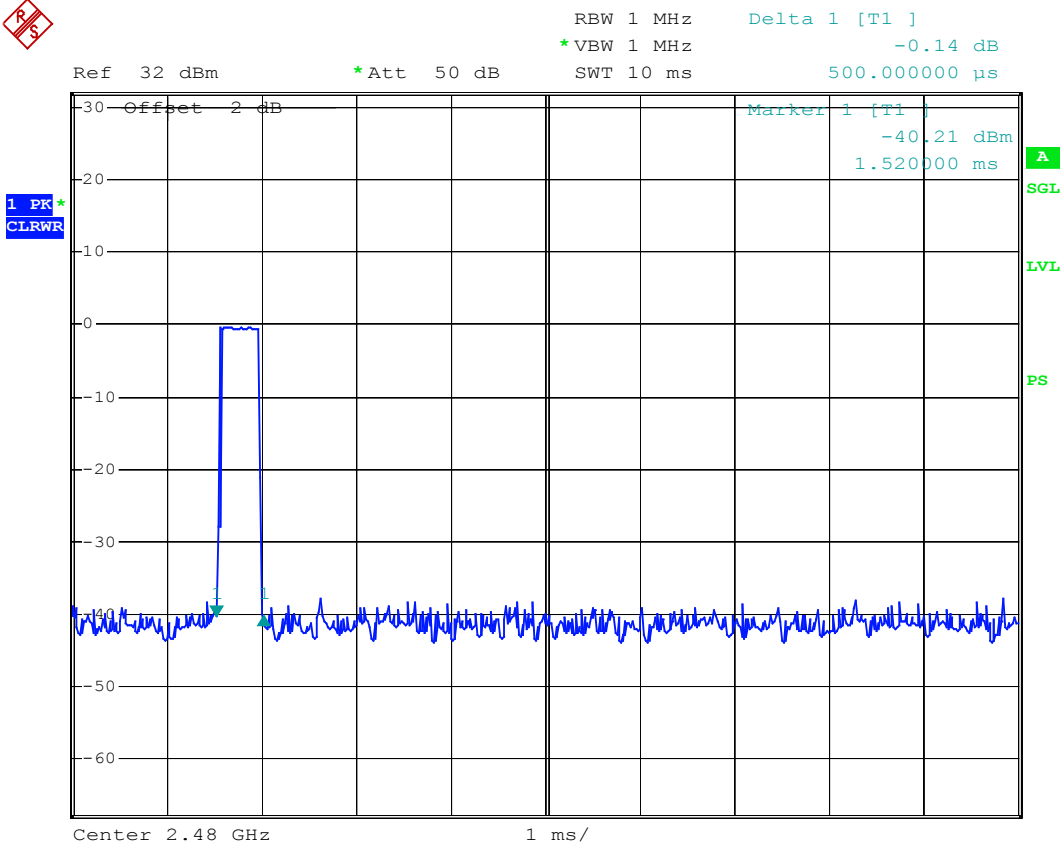

Mode: DH3; Channel Low

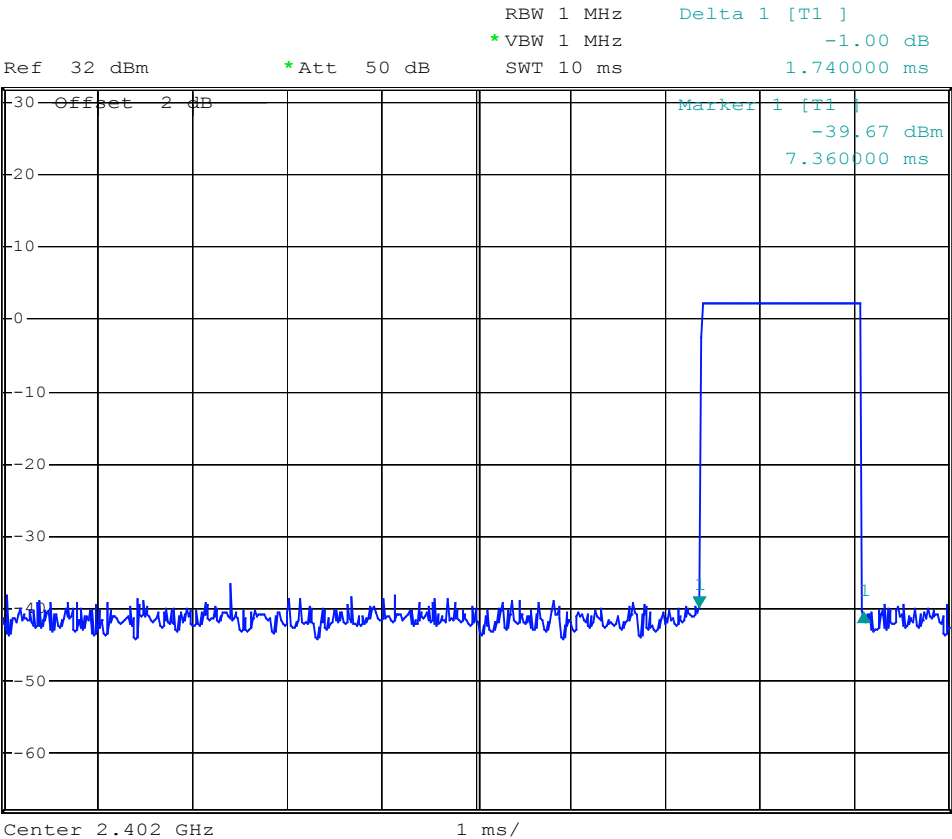

Mode: DH3; Channel Middle

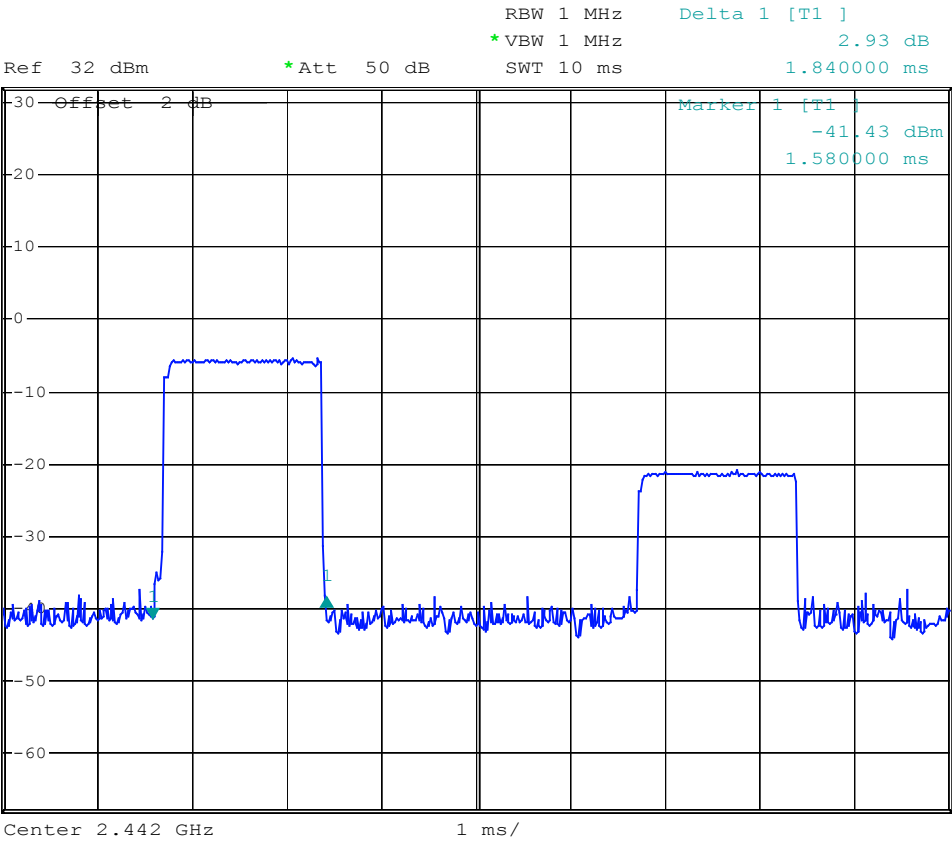


Mode: DH3; Channel High



RBW 1 MHz Delta 1 [T1]
*VBW 1 MHz 2.45 dB
Ref 32 dBm *Att 50 dB SWT 10 ms 1.740000 ms

1 PK*
CLRWR

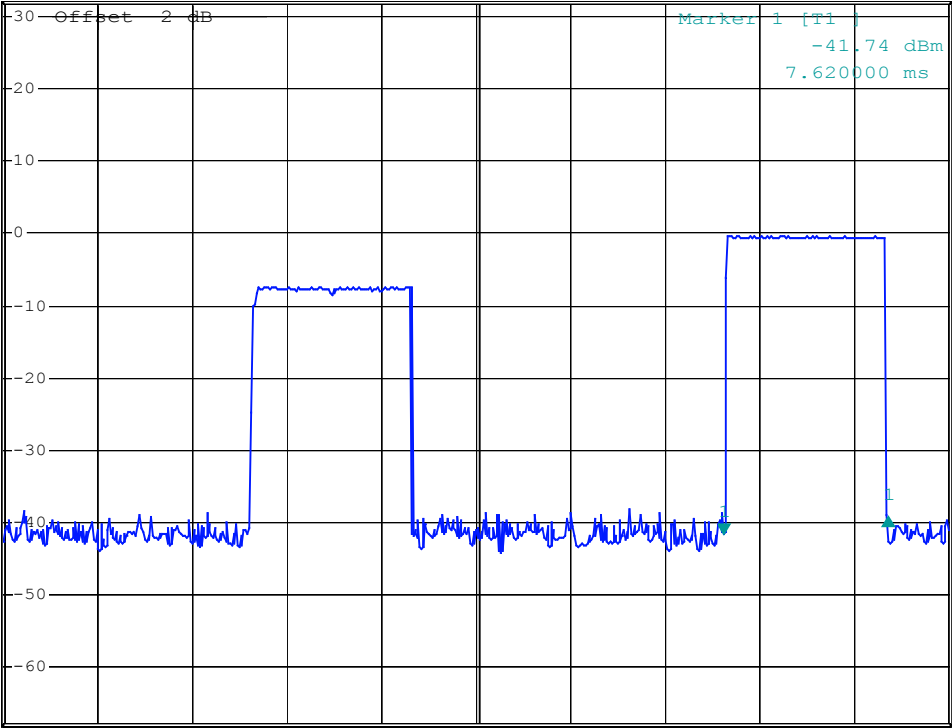


A


SGL

LVL


Mode: DH5; Channel Low

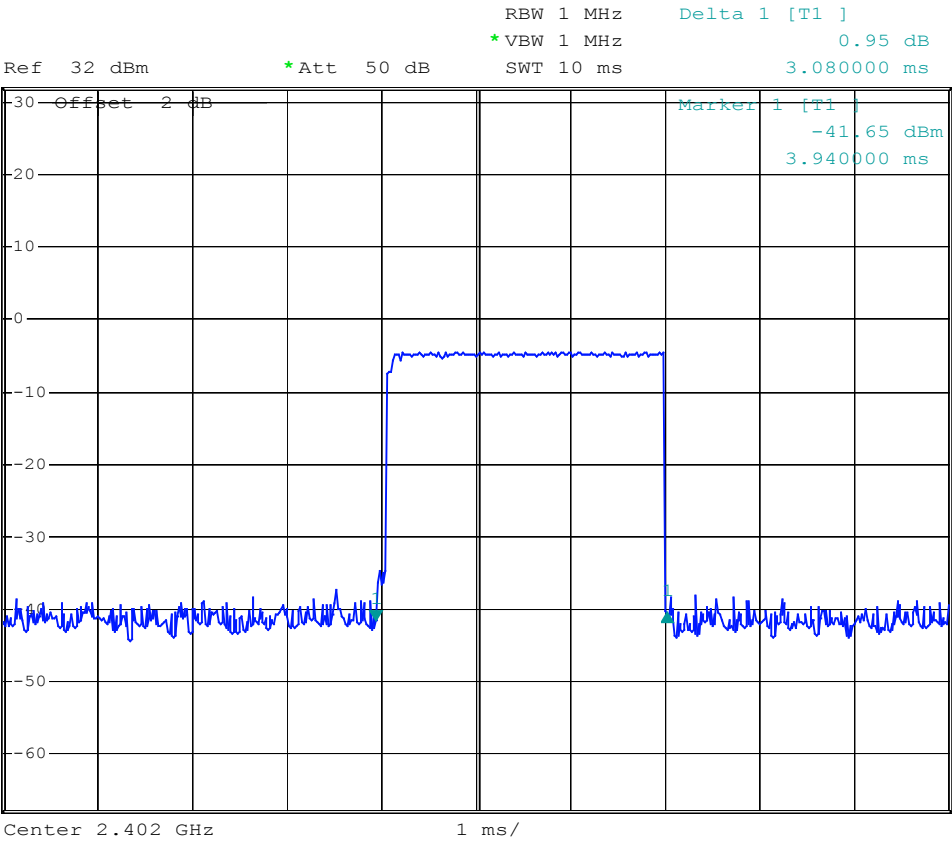



Mode: DH5; Channel Middle

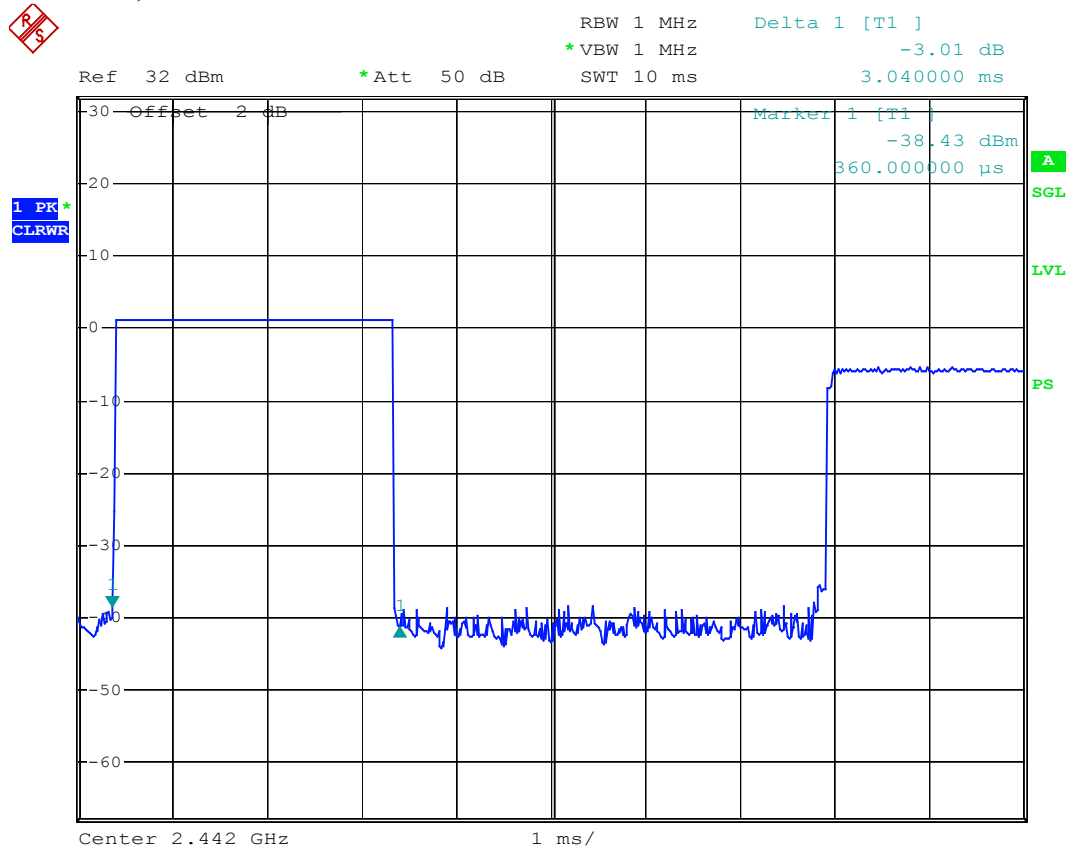


Appendix 5 : Plotted Data for Output Peak Power

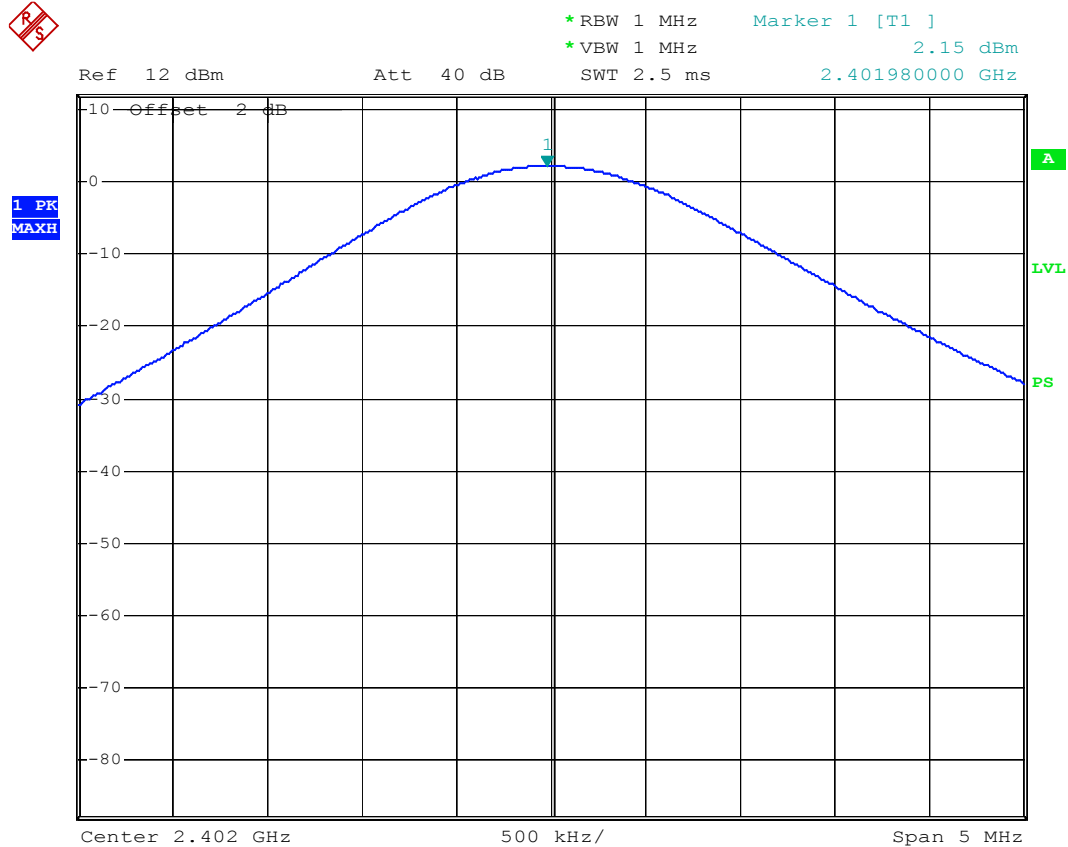


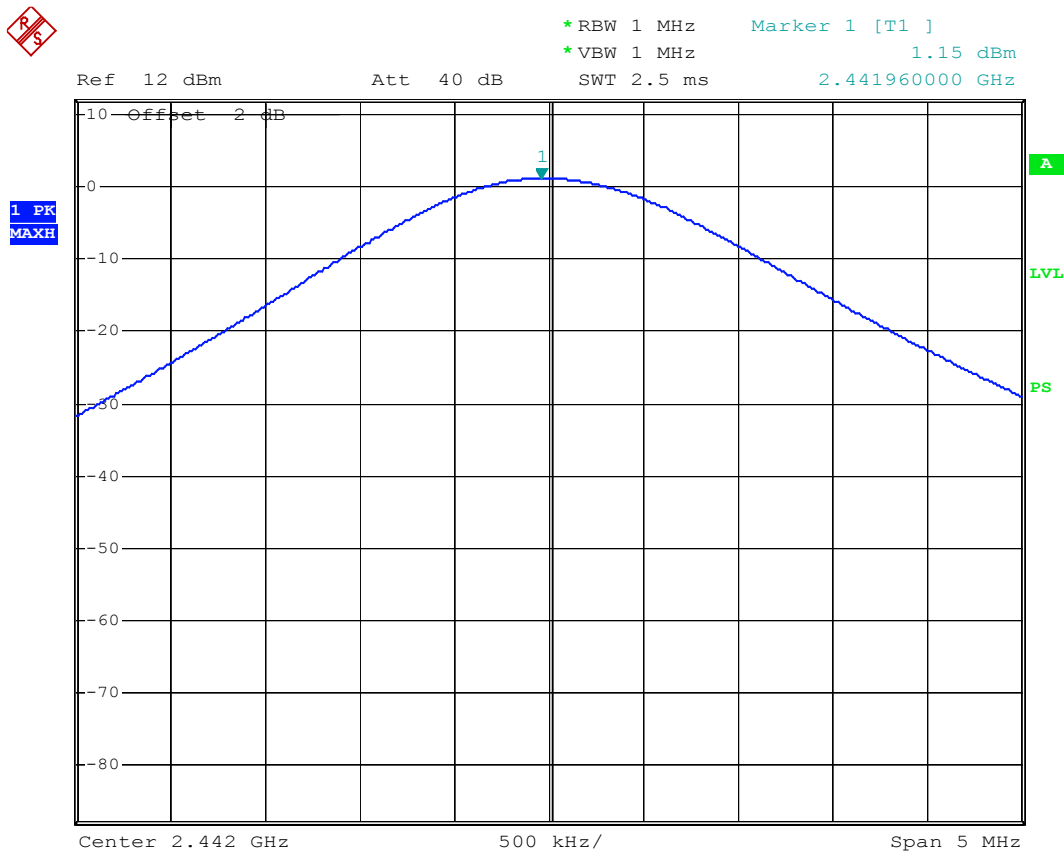

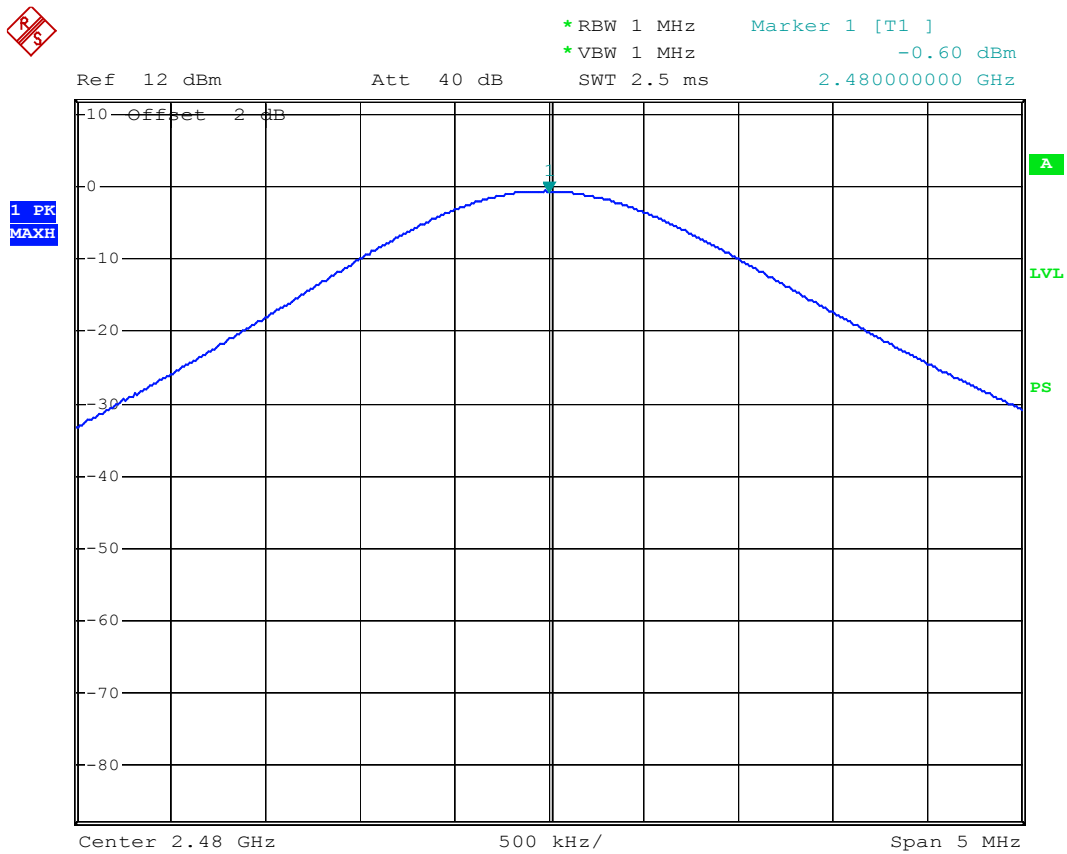



Appendix 6 : Plotted Data for 100 kHz Bandwidth from Band Edge

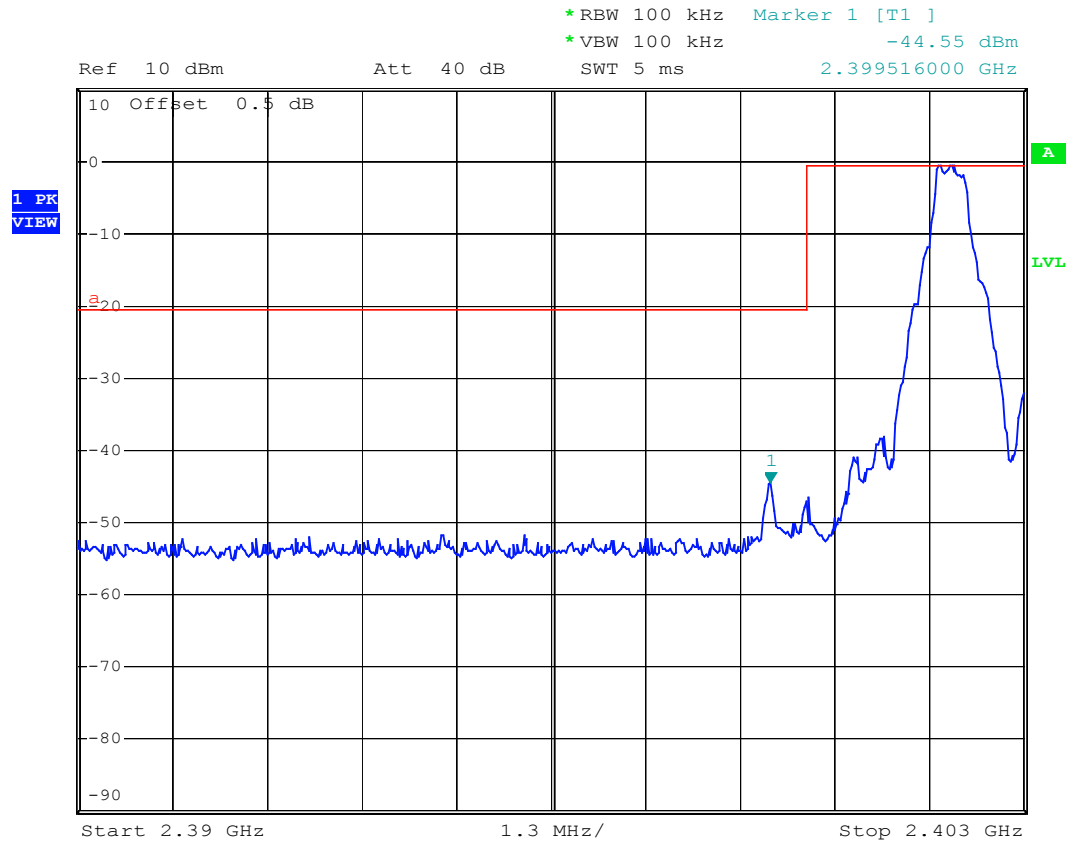

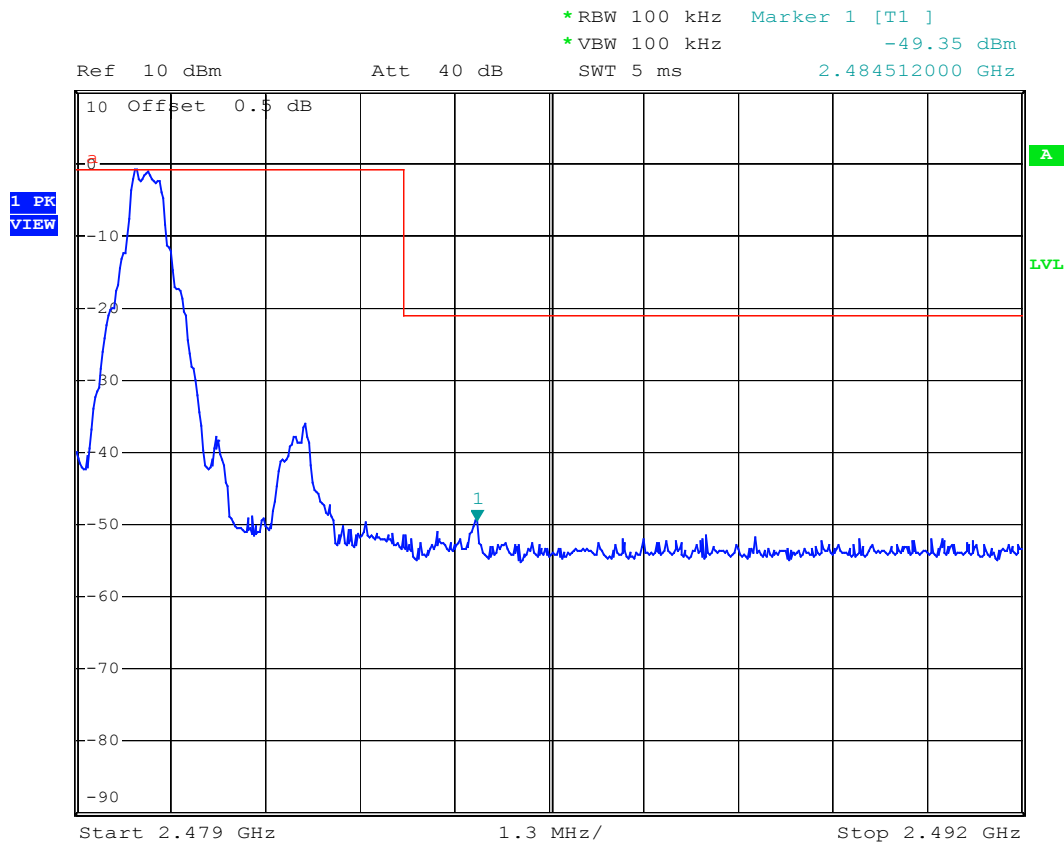



Appendix 7 : Plotted Data for Out-of-Band Conducted Emission

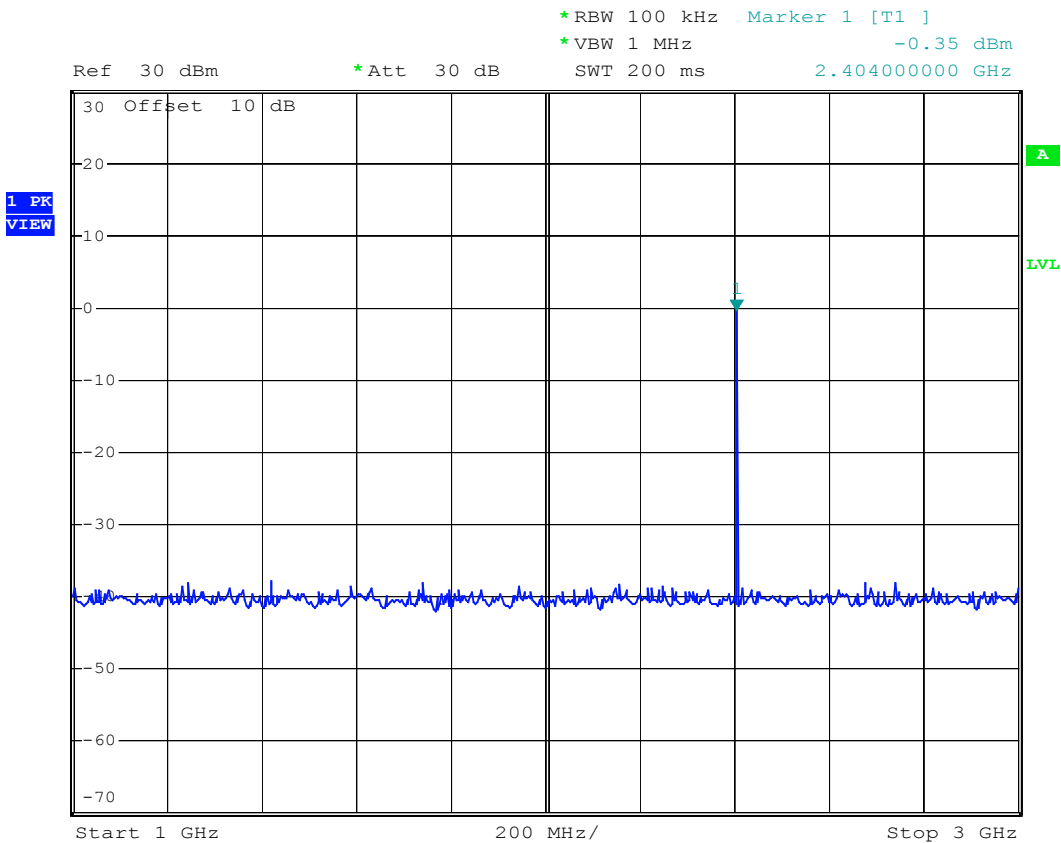


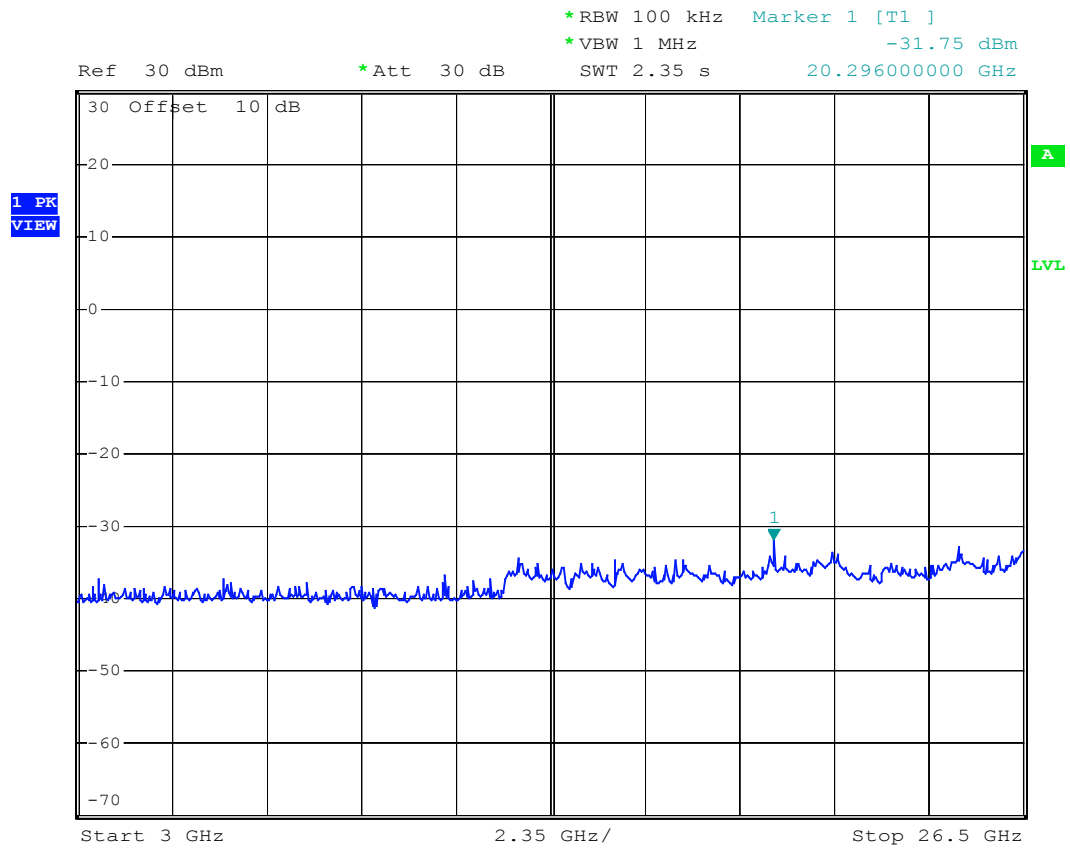


1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

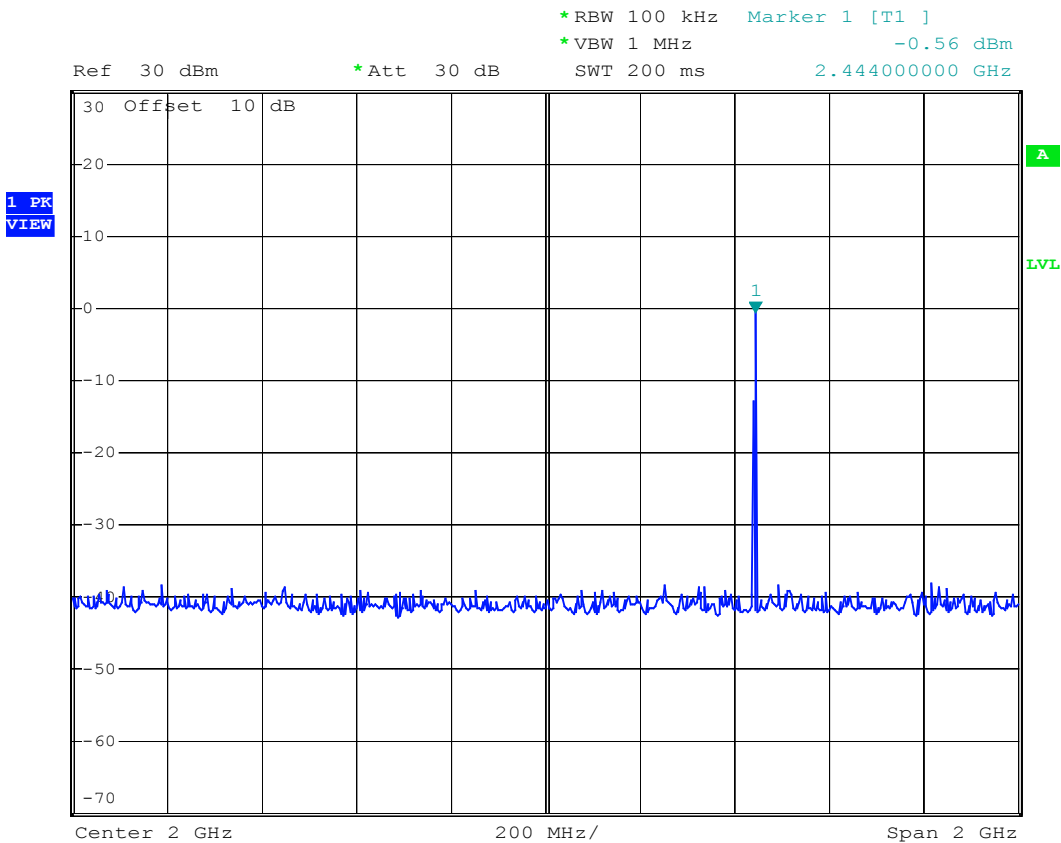

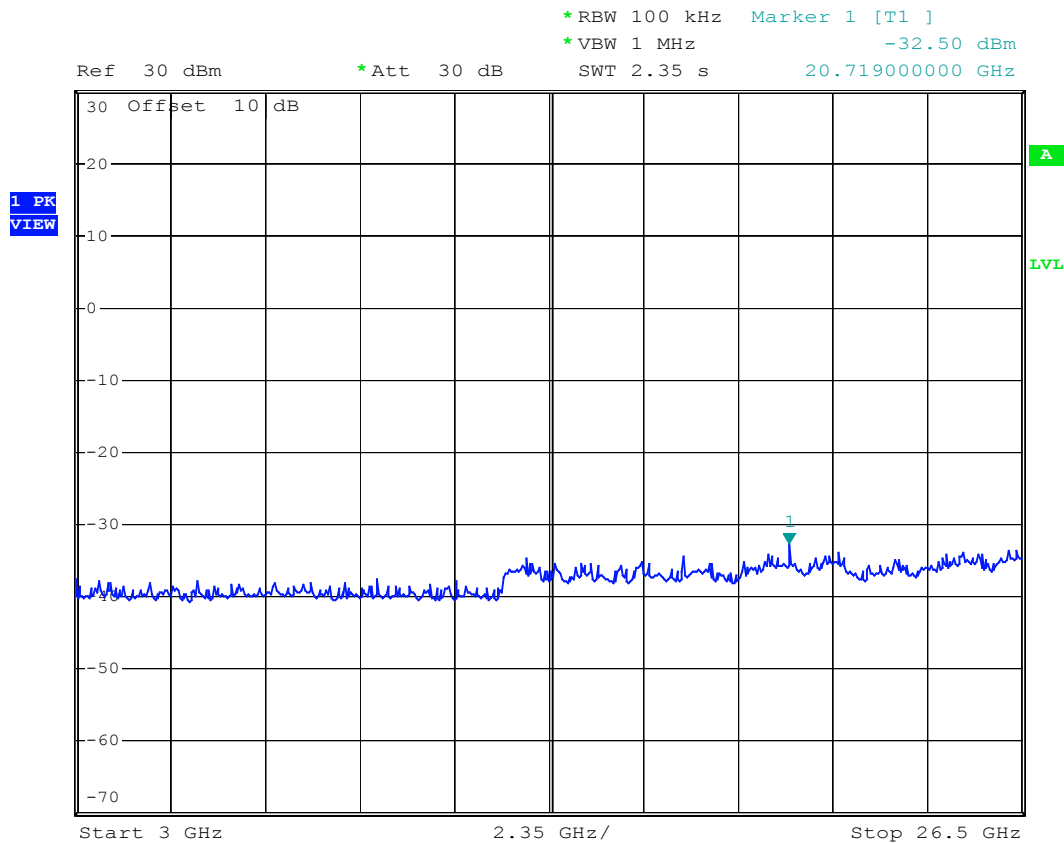

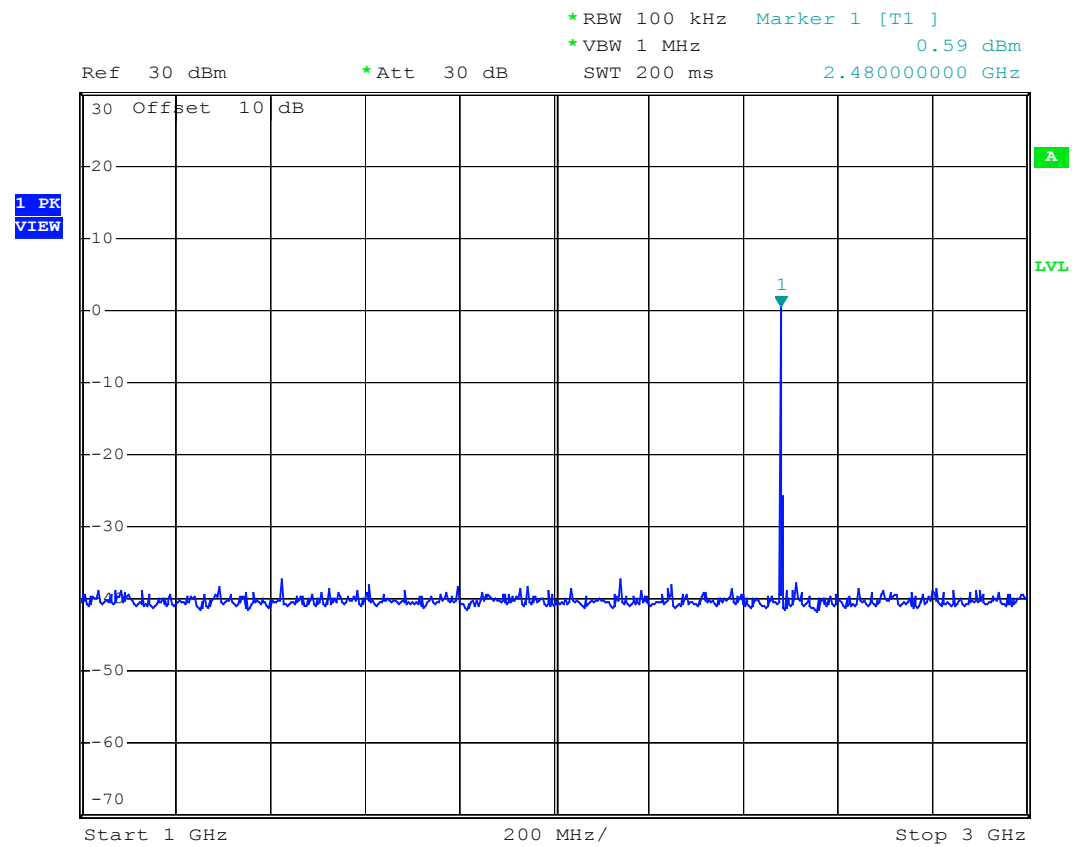

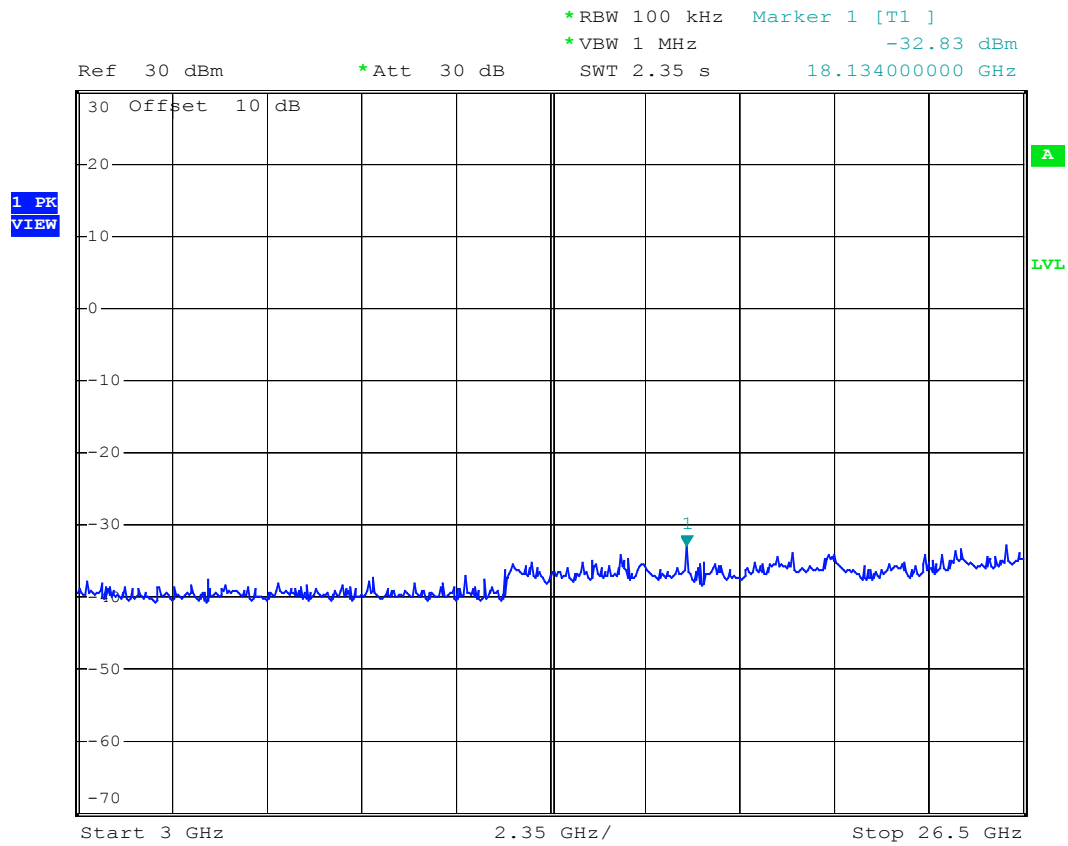

Appendix 8 : Plotted Data for Peak Power Spectral Density



