

# FCC Test Report

Equipment : Wireless Presentation System  
Model No. : WGA-510P  
FCC ID : SQ3WGA510P16  
Standard : 47 CFR FCC Part 15.407  
RF Specification : Wi-Fi  
Frequency : 5150 MHz – 5250 MHz  
5725 MHz – 5850 MHz  
FCC Classification : NII  
Applicant / Manufacturer : Awind Inc.  
33F., No. 16, Xinzhan Rd., Banqiao Dist., New Taipei City 220,  
Taiwan

The product sample received on Nov. 21, 2016 and completely tested on Dec. 23, 2016. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

  
Phoenix Chen / Assistant Manager



## Table of Contents

|          |                                                  |           |
|----------|--------------------------------------------------|-----------|
| <b>1</b> | <b>GENERAL DESCRIPTION .....</b>                 | <b>5</b>  |
| 1.1      | Information.....                                 | 5         |
| 1.2      | Testing Applied Standards .....                  | 7         |
| 1.3      | Testing Location Information.....                | 7         |
| 1.4      | Measurement Uncertainty .....                    | 8         |
| <b>2</b> | <b>TEST CONFIGURATION OF EUT .....</b>           | <b>9</b>  |
| 2.1      | Test Condition .....                             | 9         |
| 2.2      | Test Channel Mode .....                          | 10        |
| 2.3      | The Worst Case Measurement Configuration.....    | 11        |
| 2.4      | Accessories and Support Equipment.....           | 12        |
| 2.5      | Test Setup Diagram .....                         | 13        |
| <b>3</b> | <b>TRANSMITTER TEST RESULT .....</b>             | <b>14</b> |
| 3.1      | AC Power-line Conducted Emissions .....          | 14        |
| 3.2      | Emission Bandwidth .....                         | 15        |
| 3.3      | Maximum Conducted Output Power .....             | 16        |
| 3.4      | Peak Power Spectral Density.....                 | 18        |
| 3.5      | Unwanted Emissions.....                          | 20        |
| 3.6      | Frequency Stability.....                         | 24        |
| <b>4</b> | <b>TEST EQUIPMENT AND CALIBRATION DATA .....</b> | <b>25</b> |

### **Appendix I. Test Result of AC Power-line Conducted Emissions**

#### **Appendix A. Test Result of Emission Bandwidth**

#### **Appendix B. Test Result of Maximum Conducted Output Power**

#### **Appendix C. Test Result of Power Spectral Density**

#### **Appendix D.1~D.2. Test Result of Unwanted Emissions**

#### **Appendix E. Test Result of Frequency Stability**

#### **Appendix F. Test Photos**

#### **Photographs of EUT v01**

## Summary of Test Result

| Conformance Test Specifications |                  |                                   |          |
|---------------------------------|------------------|-----------------------------------|----------|
| Report Clause                   | Ref. Std. Clause | Description                       | Result   |
| 1.1.3                           | 15.203           | Antenna Requirement               | Complied |
| 3.1                             | 15.207           | AC Power-line Conducted Emissions | Complied |
| 3.2                             | 15.407(a)        | Emission Bandwidth                | Complied |
| 3.3                             | 15.407(a)        | Maximum Conducted Output Power    | Complied |
| 3.4                             | 15.407(a)        | Peak Power Spectral Density       | Complied |
| 3.5                             | 15.407(b)        | Unwanted Emissions                | Complied |
| 3.6                             | 15.407(g)        | Frequency Stability               | Complied |



**SPORTON INTERNATIONAL INC.**  
TEL : 886-3-327-3456  
FAX : 886-3-327-0973

# 1 General Description

## 1.1 Information

### 1.1.1 Product Details

|                                                    |                       |
|----------------------------------------------------|-----------------------|
| The difference between the report no. : FR6N1731AN |                       |
| The Difference                                     | Enclosure is replaced |

|                      |                                         |
|----------------------|-----------------------------------------|
| Evaluated Test Items | AC Power-line Conducted Emissions       |
|                      | Transmitter Radiated Unwanted Emissions |

### 1.1.2 RF General Information

| Frequency Range (MHz) | IEEE Std. 802.11 | Ch. Frequency (MHz) | Channel Number |
|-----------------------|------------------|---------------------|----------------|
| 5150-5250             | a, n (HT20)      | 5180-5240           | 36-48 [4]      |
| 5725-5850             |                  | 5745-5825           | 149-165 [5]    |
| 5150-5250             | n (HT40)         | 5190-5230           | 38-46 [2]      |
| 5725-5850             |                  | 5755-5795           | 151-159 [2]    |

| Band          | Mode         | BWch (MHz) | Nant |
|---------------|--------------|------------|------|
| 5.15-5.25GHz  | 802.11a      | 20         | 2TX  |
| 5.15-5.25GHz  | 802.11n HT20 | 20         | 2TX  |
| 5.15-5.25GHz  | 802.11n HT40 | 40         | 2TX  |
| 5.725-5.85GHz | 802.11a      | 20         | 2TX  |
| 5.725-5.85GHz | 802.11n HT20 | 20         | 2TX  |
| 5.725-5.85GHz | 802.11n HT40 | 40         | 2TX  |

**Note:**

- ♦ 5.2G is the 5.2GHz Band (5.15-5.25GHz).
- ♦ 5.8G is the 5.8GHz Band (5.725-5.850GHz).
- ♦ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ BWch is the nominal channel bandwidth.

**1.1.3 Antenna Information**

| Antenna Category                    |                                                                                                                                                                                                                                                                                                                   |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <input type="checkbox"/>            | Equipment placed on the market without antennas                                                                                                                                                                                                                                                                   |
| <input type="checkbox"/>            | Integral antenna (antenna permanently attached)                                                                                                                                                                                                                                                                   |
| <input type="checkbox"/>            | Temporary RF connector provided                                                                                                                                                                                                                                                                                   |
| <input type="checkbox"/>            | No temporary RF connector provided<br>Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path. |
| <input checked="" type="checkbox"/> | External antenna (dedicated antennas)                                                                                                                                                                                                                                                                             |
| <input checked="" type="checkbox"/> | Single power level with corresponding antenna(s).                                                                                                                                                                                                                                                                 |
| <input type="checkbox"/>            | Multiple power level and corresponding antenna(s).                                                                                                                                                                                                                                                                |

| No. | Ant. Cat. | Ant. Type | Model No.     | Gain (dBi) |
|-----|-----------|-----------|---------------|------------|
| 1   | External  | Dipole    | AN2450-4828RS | 2          |
| 2   | External  | Dipole    | AN2450-4828RS | 2          |

**1.1.4 Type of EUT**

| Identify EUT                        |                                                                                                                                   |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| EUT Serial Number                   | N/A                                                                                                                               |
| Presentation of Equipment           | <input checked="" type="checkbox"/> Production ; <input type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype     |
| Type of EUT                         |                                                                                                                                   |
| <input checked="" type="checkbox"/> | Stand-alone                                                                                                                       |
| <input type="checkbox"/>            | Combined (EUT where the radio part is fully integrated within another device)<br>Combined Equipment - Brand Name / Model No.: ... |
| <input type="checkbox"/>            | Plug-in radio (EUT intended for a variety of host systems)<br>Host System - Brand Name / Model No.: ...                           |
| <input type="checkbox"/>            | Other:                                                                                                                            |

### 1.1.5 Mode Test Duty Cycle

| Mode | DC | T(s)                 | VBW(Hz) $\geq 1/T$   |
|------|----|----------------------|----------------------|
| 11a  | 1  | n/a (DC $\geq$ 0.98) | n/a (DC $\geq$ 0.98) |
| HT20 | 1  | n/a (DC $\geq$ 0.98) | n/a (DC $\geq$ 0.98) |
| HT40 | 1  | n/a (DC $\geq$ 0.98) | n/a (DC $\geq$ 0.98) |

### 1.1.6 EUT Operational Condition

|                   |                                                         |                                             |                                  |
|-------------------|---------------------------------------------------------|---------------------------------------------|----------------------------------|
| Supply Voltage    | <input checked="" type="checkbox"/> AC mains            | <input type="checkbox"/> DC                 |                                  |
| Type of DC Source | <input checked="" type="checkbox"/> External AC adapter | <input type="checkbox"/> Internal DC supply | <input type="checkbox"/> Battery |

### 1.1.7 TPC Information

| Items                    | Description                         |                   |                                     |                      |
|--------------------------|-------------------------------------|-------------------|-------------------------------------|----------------------|
| TPC Function             | <input type="checkbox"/>            | With TPC          | <input checked="" type="checkbox"/> | Without TPC          |
| TDWR Band (5600~5650MHz) | <input type="checkbox"/>            | With 5600~5650MHz | <input checked="" type="checkbox"/> | Without 5600~5650MHz |
| Beamforming Function     | <input type="checkbox"/>            | With beamforming  | <input checked="" type="checkbox"/> | Without beamforming  |
| Operate Condition        | <input checked="" type="checkbox"/> | Indoor            | <input type="checkbox"/>            | Outdoor              |
|                          | <input type="checkbox"/>            | Fixed P2P         | <input type="checkbox"/>            | Client               |
| Operate Mode             | <input checked="" type="checkbox"/> | Master            |                                     |                      |

## 1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ KDB 789033 D02 v01r03
- ♦ KDB 662911 D01 v02r01

## 1.3 Testing Location Information

| Testing Location                    |               |                                                                                                         |                  |            |
|-------------------------------------|---------------|---------------------------------------------------------------------------------------------------------|------------------|------------|
| <input checked="" type="checkbox"/> | HWA YA        | ADD : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. |                  |            |
|                                     |               | TEL : 886-3-327-3456 FAX : 886-3-327-0973                                                               |                  |            |
| Test Condition                      | Test Site No. | Test Engineer                                                                                           | Test Environment | Test Date  |
| AC Conduction                       | CO04-HY       | Ryan                                                                                                    | 23°C / 58%       | 23/12/2016 |
| RF Conducted                        | TH01-HY       | Ryan                                                                                                    | 22.5°C / 62%     | 19/12/2016 |
| Radiated Emission                   | 03CH02-HY     | Edwen                                                                                                   | 23.5°C / 65%     | 15/12/2016 |

Test site registered number [ 553509 ] with FCC.

## 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

| Measurement Uncertainty            |               |             |
|------------------------------------|---------------|-------------|
| Test Item                          |               | Uncertainty |
| AC power-line conducted emissions  |               | ±2.26 dB    |
| Emission bandwidth, 26dB bandwidth |               | ±1.42 %     |
| RF output power, conducted         |               | ±0.63 dB    |
| Power density, conducted           |               | ±0.81 dB    |
| Unwanted emissions, conducted      | 9 – 150 kHz   | ±0.38 dB    |
|                                    | 0.15 – 30 MHz | ±0.42 dB    |
|                                    | 30 – 1000 MHz | ±0.51 dB    |
|                                    | 1 – 18 GHz    | ±0.67 dB    |
|                                    | 18 – 40 GHz   | ±0.83 dB    |
|                                    | 40 – 200 GHz  | N/A         |
| All emissions, radiated            | 9 – 150 kHz   | ±2.49 dB    |
|                                    | 0.15 – 30 MHz | ±2.28 dB    |
|                                    | 30 – 1000 MHz | ±2.56 dB    |
|                                    | 1 – 18 GHz    | ±3.59 dB    |
|                                    | 18 – 40 GHz   | ±3.82 dB    |
|                                    | 40 – 200 GHz  | N/A         |
| Temperature                        |               | ±0.8 °C     |
| Humidity                           |               | ±3 %        |
| DC and low frequency voltages      |               | ±3 %        |
| Time                               |               | ±1.42 %     |
| Duty Cycle                         |               | ±1.42 %     |



## 2 Test Configuration of EUT

### 2.1 Test Condition

| RF Conducted               | Abbreviation        | Remark        |
|----------------------------|---------------------|---------------|
| TN,VN                      | TN                  | 20°C          |
| -                          | VN                  | 120V          |
| <b>TX-Radiated &lt; 1G</b> | <b>Remark</b>       | -             |
| AC Adapter                 | 6A-161WP05          | -             |
| <b>TX-Radiated &gt; 1G</b> | <b>Remark</b>       | -             |
| AC Adapter                 | 6A-161WP05          | -             |
| <b>Freq. Stability</b>     | <b>Abbreviation</b> | <b>Remark</b> |
| TN,VN                      | VN                  | 120V          |
| TN,VL                      | VL                  | 108V          |
| TN,VH                      | VH                  | 138V          |
| T40,VN                     | T40                 | 40°C          |
| T30,VN                     | T30                 | 30°C          |
| T20,VN                     | T20                 | 20°C          |
| T10,VN                     | T10                 | 10°C          |
| T0,VN                      | T0                  | 0°C           |

## 2.2 Test Channel Mode

|                       |                 |
|-----------------------|-----------------|
| Test Software Version | RF Test/ver 0.1 |
|-----------------------|-----------------|

| Mode                         | Power Setting |
|------------------------------|---------------|
| 802.11a_Nss1_2TX             | -             |
| 5180MHz                      | 19,27         |
| 5200MHz                      | 21,28         |
| 5240MHz                      | 22,28         |
| 802.11n HT20_Nss1,(MCS0)_2TX | -             |
| 5180MHz                      | 19,26         |
| 5200MHz                      | 20,27         |
| 5240MHz                      | 18,24         |
| 802.11n HT40_Nss1,(MCS0)_2TX | -             |
| 5190MHz                      | 11,19         |
| 5230MHz                      | 19,25         |
| 802.11a_Nss1_2TX             | -             |
| 5745MHz                      | 19,19         |
| 5785MHz                      | 21,21         |
| 5825MHz                      | 21,21         |
| 802.11n HT20_Nss1,(MCS0)_2TX | -             |
| 5745MHz                      | 19,19         |
| 5785MHz                      | 20,19         |
| 5825MHz                      | 20,20         |
| 802.11n HT40_Nss1,(MCS0)_2TX | -             |
| 5755MHz                      | 20,19         |
| 5795MHz                      | 20,20         |

## 2.3 The Worst Case Measurement Configuration

| The Worst Case Mode for Following Conformance Tests |                                                                                         |                                                                                    |                                                                                     |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Tests Item</b>                                   | AC power-line conducted emissions                                                       |                                                                                    |                                                                                     |
| <b>Condition</b>                                    | AC power-line conducted measurement for line and neutral<br>Test Voltage: 120Vac / 60Hz |                                                                                    |                                                                                     |
| <b>Operating Mode</b>                               | Operating Mode Description                                                              |                                                                                    |                                                                                     |
| 1                                                   | Adapter Mode                                                                            |                                                                                    |                                                                                     |
| <b>Orthogonal Planes of EUT</b>                     | <b>X Plane</b>                                                                          | <b>Y Plane</b>                                                                     | <b>Z Plane</b>                                                                      |
|                                                     |        |  |  |
| <b>Worst Planes of EUT</b>                          | V                                                                                       |                                                                                    |                                                                                     |
| <b>Worst Planes of Ant.</b>                         |                                                                                         |                                                                                    | V                                                                                   |

| The Worst Case Mode for Following Conformance Tests |                                                                                                      |
|-----------------------------------------------------|------------------------------------------------------------------------------------------------------|
| <b>Tests Item</b>                                   | Emission Bandwidth, Maximum Conducted Output Power, Peak Power Spectral Density, Frequency Stability |
| <b>Test Condition</b>                               | Conducted measurement at transmit chains                                                             |

| The Worst Case Mode for Following Conformance Tests |                                                                                                                                                                                                                                                     |                                                                                      |                                                                                       |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Tests Item</b>                                   | Unwanted Emissions                                                                                                                                                                                                                                  |                                                                                      |                                                                                       |
| <b>Test Condition</b>                               | Radiated measurement<br>If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type. |                                                                                      |                                                                                       |
| <b>User Position</b>                                | <input type="checkbox"/> EUT will be placed in fixed position.                                                                                                                                                                                      |                                                                                      |                                                                                       |
|                                                     | <input checked="" type="checkbox"/> EUT will be placed in mobile position and operating multiple positions.                                                                                                                                         |                                                                                      |                                                                                       |
|                                                     | <input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions.                                                                                                                             |                                                                                      |                                                                                       |
| <b>Operating Mode &lt; 1GHz</b>                     | <input checked="" type="checkbox"/> 1. Adapter Mode                                                                                                                                                                                                 |                                                                                      |                                                                                       |
| <b>Orthogonal Planes of EUT</b>                     | <b>X Plane</b>                                                                                                                                                                                                                                      | <b>Y Plane</b>                                                                       | <b>Z Plane</b>                                                                        |
|                                                     |                                                                                                                                                                  |  |  |
| <b>Worst Planes of EUT</b>                          | V                                                                                                                                                                                                                                                   |                                                                                      |                                                                                       |
| <b>Worst Planes of Ant.</b>                         | V                                                                                                                                                                                                                                                   |                                                                                      |                                                                                       |

## 2.4 Accessories and Support Equipment

| Specification of Accessory |              |                                                   |            |            |
|----------------------------|--------------|---------------------------------------------------|------------|------------|
| AC Adapter                 | Brand Name   | ENG                                               | Model Name | 6A-161WP05 |
|                            | Power Rating | I/P: 100 – 240 Vac, 600 mA, O/P: 5.0 Vdc, 2600 mA |            |            |
|                            | Power Cord   | 1.53 meter, non-shielded cable, with ferrite core |            |            |


Reminder: Regarding to more detail and other information, please refer to user manual.

| Support Equipment - RF Conducted |                |            |            |        |
|----------------------------------|----------------|------------|------------|--------|
| No.                              | Equipment      | Brand Name | Model Name | FCC ID |
| 1                                | Notebook       | DELL       | E6400      | DoC    |
| 2                                | Adapter for NB | DELL       | HA65NM130  | DoC    |


| Support Equipment - AC Conduction and Radiated Emission |           |            |            |        |
|---------------------------------------------------------|-----------|------------|------------|--------|
| No.                                                     | Equipment | Brand Name | Model Name | FCC ID |
| 1                                                       | -         | -          | -          | -      |

## 2.5 Test Setup Diagram

Test Setup Diagram – AC Line Conducted Emission Test

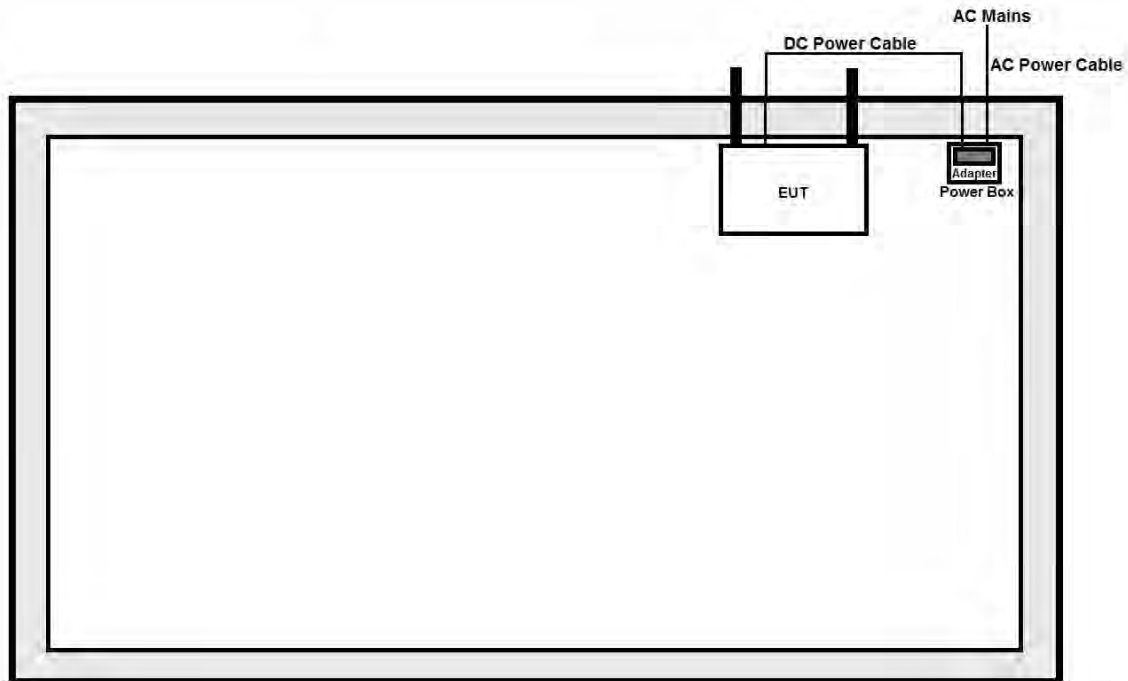

Test Setup Diagram - Radiated Test

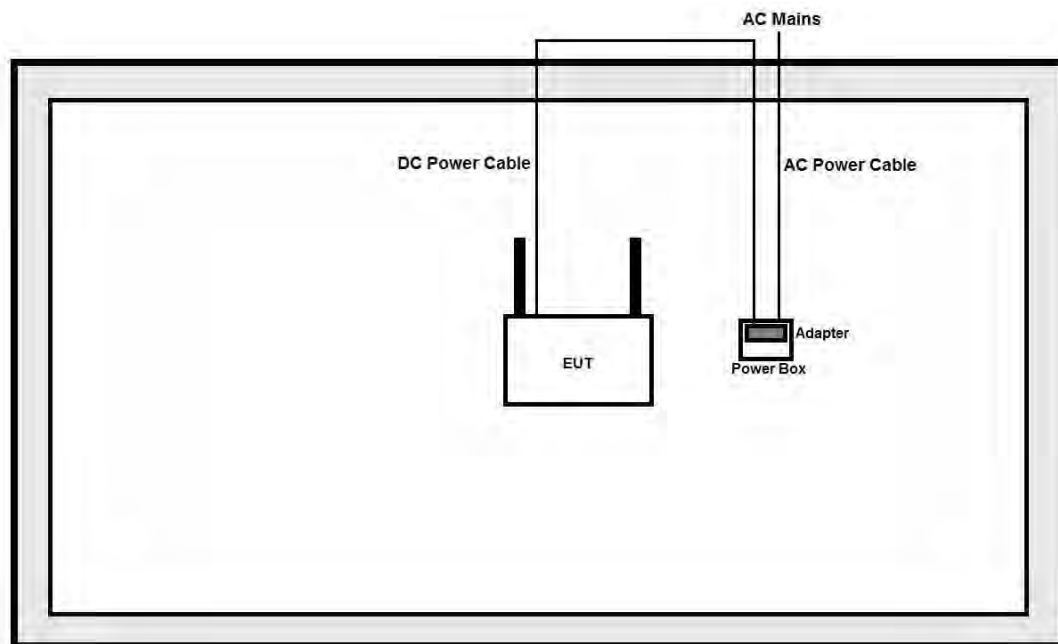

### 3 Transmitter Test Result

### 3.1 AC Power-line Conducted Emissions

### 3.1.1 AC Power-line Conducted Emissions Limit

| AC Power-line Conducted Emissions Limit |            |           |
|-----------------------------------------|------------|-----------|
| Frequency Emission (MHz)                | Quasi-Peak | Average   |
| 0.15-0.5                                | 66 - 56 *  | 56 - 46 * |
| 0.5-5                                   | 56         | 46        |
| 5-30                                    | 60         | 50        |

Note 1: \* Decreases with the logarithm of the frequency.


### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.1.3 Test Procedures

| Test Method                                                                                                      |
|------------------------------------------------------------------------------------------------------------------|
| <input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions. |

### 3.1.4 Test Setup

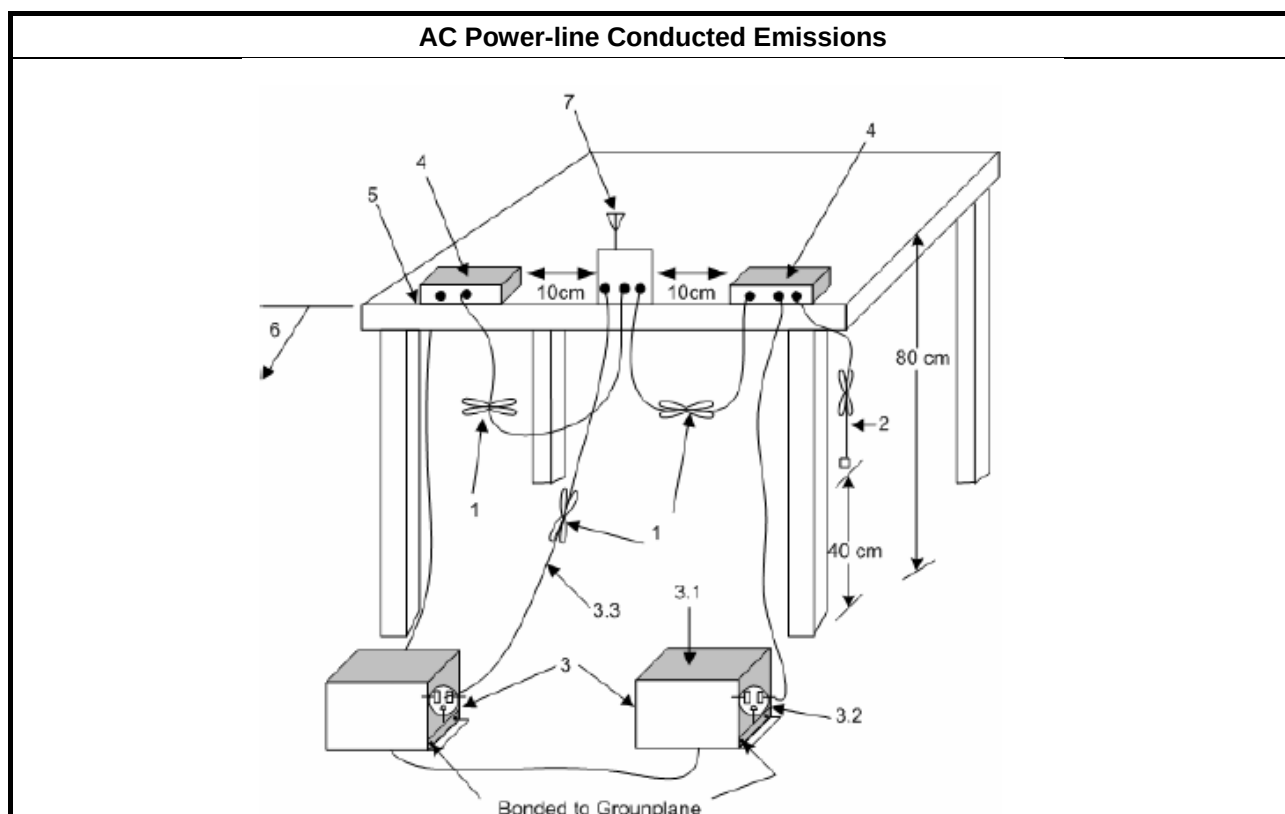

### 3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix I

## 3.2 Emission Bandwidth

### 3.2.1 Emission Bandwidth Limit

| Emission Bandwidth Limit            |                                                                                                                                                                             |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>UNII Devices</b>                 |                                                                                                                                                                             |
| <input checked="" type="checkbox"/> | For the 5.15-5.25 GHz band, N/A                                                                                                                                             |
| <input type="checkbox"/>            | For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.  |
| <input type="checkbox"/>            | For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. |
| <input checked="" type="checkbox"/> | For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.                                                                                                         |


### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.2.3 Test Procedures

| Test Method                                                                                                                    |                                                                         |
|--------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>For the emission bandwidth shall be measured using one of the options below:</li> </ul> |                                                                         |
| <input checked="" type="checkbox"/>                                                                                            | Refer as KDB 789033, clause C for EBW and clause D for OBW measurement. |
| <input type="checkbox"/>                                                                                                       | Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.      |
| <input type="checkbox"/>                                                                                                       | Refer as IC RSS-Gen, clause 6.6 for bandwidth testing.                  |

### 3.2.4 Test Setup

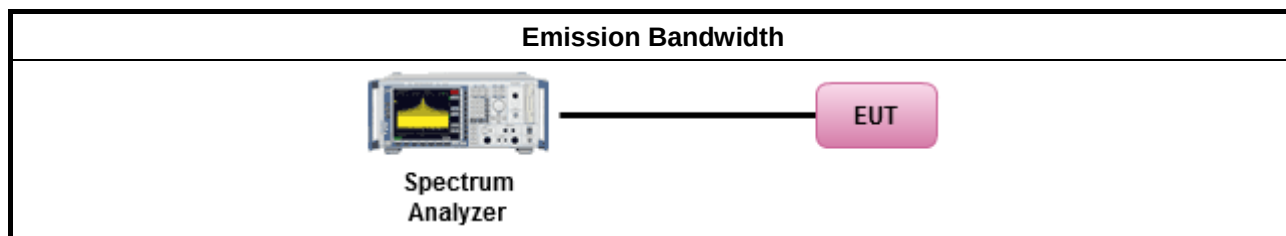

### 3.2.5 Test Result of Emission Bandwidth

Refer as Appendix A

### 3.3 Maximum Conducted Output Power

#### 3.3.1 Maximum Conducted Output Power Limit

| Maximum Conducted Output Power Limit                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>UNII Devices</b>                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                |
| <ul style="list-style-type: none"> <li>For the 5.15-5.25 GHz band:</li> </ul>                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                                                                                                                                                                                                        | <ul style="list-style-type: none"> <li>Outdoor AP: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math>. e.i.r.p. at any elevation angle above 30 degrees <math>\leq 125</math>mW [21dBm]</li> </ul> |
|                                                                                                                                                                                                                                                                                                                                        | <ul style="list-style-type: none"> <li>Indoor AP: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math></li> </ul>                                                                                    |
|                                                                                                                                                                                                                                                                                                                                        | <ul style="list-style-type: none"> <li>Point-to-point AP: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 23</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 23)</math>.</li> </ul>                                                                         |
|                                                                                                                                                                                                                                                                                                                                        | <ul style="list-style-type: none"> <li>Mobile or Portable Client: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 250 mW. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 24 - (G_{TX} - 6)</math>.</li> </ul>                                                                |
| <ul style="list-style-type: none"> <li>For the 5.25-5.35 GHz band, the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 24 - (G_{TX} - 6)</math>.</li> </ul>  |                                                                                                                                                                                                                                                                                                                                |
| <ul style="list-style-type: none"> <li>For the 5.47-5.725 GHz band, the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 24 - (G_{TX} - 6)</math>.</li> </ul> |                                                                                                                                                                                                                                                                                                                                |
| <ul style="list-style-type: none"> <li>For the 5.725-5.85 GHz band:</li> </ul>                                                                                                                                                                                                                                                         |                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                                                                                                                                                                                                        | <ul style="list-style-type: none"> <li>Point-to-multipoint systems (P2M): the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math>.</li> </ul>                                                           |
|                                                                                                                                                                                                                                                                                                                                        | <ul style="list-style-type: none"> <li>Point-to-point systems (P2P): the maximum conducted output power (<math>P_{Out}</math>) shall not exceed the lesser of 1 W.</li> </ul>                                                                                                                                                  |
| $P_{Out}$ = maximum conducted output power in dBm,<br>$G_{TX}$ = the maximum transmitting antenna directional gain in dBi.                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                |

#### 3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



### 3.3.3 Test Procedures

| Test Method                                                                      |                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>Maximum Conducted Output Power</li> </ul> |                                                                                                                                                                                                                                                                                                                                                                    |
|                                                                                  | Duty cycle $\geq 98\%$                                                                                                                                                                                                                                                                                                                                             |
| <input checked="" type="checkbox"/>                                              | Refer as KDB 789033, clause E Method SA-2 (spectral trace averaging).                                                                                                                                                                                                                                                                                              |
|                                                                                  | Duty cycle $< 98\%$                                                                                                                                                                                                                                                                                                                                                |
| <input type="checkbox"/>                                                         | Refer as KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)                                                                                                                                                                                                                                                                               |
|                                                                                  | Wideband RF power meter and average over on/off periods with duty factor                                                                                                                                                                                                                                                                                           |
| <input type="checkbox"/>                                                         | Refer as KDB 789033, clause E Method PM (using an RF average power meter).                                                                                                                                                                                                                                                                                         |
| <ul style="list-style-type: none"> <li>For conducted measurement.</li> </ul>     |                                                                                                                                                                                                                                                                                                                                                                    |
|                                                                                  | <ul style="list-style-type: none"> <li>If the EUT supports multiple transmit chains using options given below:<br/>Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.</li> </ul> |
|                                                                                  | <ul style="list-style-type: none"> <li>If multiple transmit chains, EIRP calculation could be following as methods:<br/> <math>P_{total} = P_1 + P_2 + \dots + P_n</math><br/> (calculated in linear unit [mW] and transfer to log unit [dBm])<br/> <math>EIRP_{total} = P_{total} + DG</math> </li> </ul>                                                         |

### 3.3.4 Test Setup

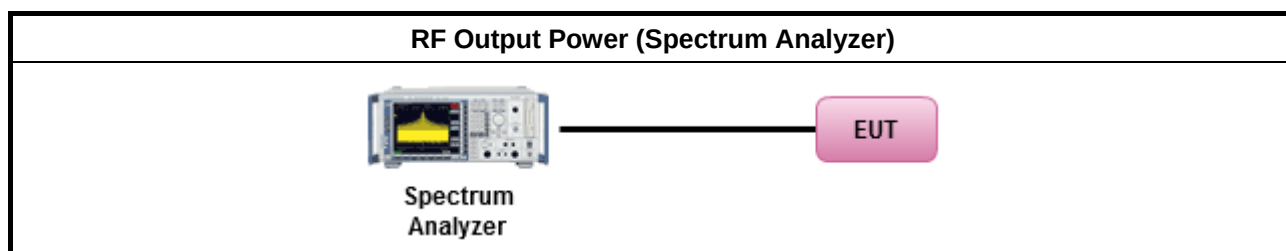

### 3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix B

### 3.4 Peak Power Spectral Density

#### 3.4.1 Peak Power Spectral Density Limit

| Peak Power Spectral Density Limit                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                             |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>UNII Devices</b>                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                             |
| <ul style="list-style-type: none"> <li>For the 5.15-5.25 GHz band:</li> </ul>                                                                                                                                                                                                                              |                                                                                                                                                                                                                                             |
|                                                                                                                                                                                                                                                                                                            | <ul style="list-style-type: none"> <li>Outdoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 17 - (G_{TX} - 6)</math>.</li> </ul>            |
|                                                                                                                                                                                                                                                                                                            | <ul style="list-style-type: none"> <li>Indoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 17 - (G_{TX} - 6)</math>.</li> </ul>             |
|                                                                                                                                                                                                                                                                                                            | <ul style="list-style-type: none"> <li>Point-to-point AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If <math>G_{TX} &gt; 23</math> dBi, then <math>P_{Out} = 17 - (G_{TX} - 23)</math>.</li> </ul>   |
|                                                                                                                                                                                                                                                                                                            | <ul style="list-style-type: none"> <li>Mobile or Portable Client: the peak power spectral density (PPSD) <math>\leq 11</math> dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>PPSD = 11 - (G_{TX} - 6)</math>.</li> </ul>            |
| <ul style="list-style-type: none"> <li>For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) <math>\leq 11</math> dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>PPSD = 11 - (G_{TX} - 6)</math>.</li> </ul>                                                                          |                                                                                                                                                                                                                                             |
| <ul style="list-style-type: none"> <li>For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) <math>\leq 11</math> dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>PPSD = 11 - (G_{TX} - 6)</math>.</li> </ul>                                                                         |                                                                                                                                                                                                                                             |
| <ul style="list-style-type: none"> <li>For the 5.725-5.85 GHz band:</li> </ul>                                                                                                                                                                                                                             |                                                                                                                                                                                                                                             |
|                                                                                                                                                                                                                                                                                                            | <ul style="list-style-type: none"> <li>Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) <math>\leq 30</math> dBm/500kHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>PPSD = 30 - (G_{TX} - 6)</math>.</li> </ul> |
|                                                                                                                                                                                                                                                                                                            | <ul style="list-style-type: none"> <li>Point-to-point systems (P2P): the peak power spectral density (PPSD) <math>\leq 30</math> dBm/500kHz.</li> </ul>                                                                                     |
| <p><b>PPSD</b> = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz</p> <p><b>G<sub>TX</sub></b> = the maximum transmitting antenna directional gain in dBi.</p> |                                                                                                                                                                                                                                             |


#### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.4.3 Test Procedures

| Test Method                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| <ul style="list-style-type: none"> <li>Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:</li> </ul>                                                                                                                                                                                                                                                                                                                        |                  |
| <input type="checkbox"/> Refer as KDB 789033, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Duty cycle ≥ 98% |
| <input checked="" type="checkbox"/> Refer as KDB 789033, clause E Method SA-2 (spectral trace averaging).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Duty cycle < 98% |
| <input type="checkbox"/> Refer as KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                  |
| <ul style="list-style-type: none"> <li>For conducted measurement.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                  |
| <ul style="list-style-type: none"> <li>If the EUT supports multiple transmit chains using options given below:</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                  |
| <input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N <sub>TX</sub> output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace. |                  |
| <input type="checkbox"/> Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,                                                                                                                                                                                                                            |                  |
| <input type="checkbox"/> Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.                                                                                                                                                                                                                                                                                                                                         |                  |
| <ul style="list-style-type: none"> <li>If multiple transmit chains, EIRP PPSD calculation could be following as methods:<br/> <math display="block">PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n</math>           (calculated in linear unit [mW] and transfer to log unit [dBm])<br/> <math display="block">EIRP_{total} = PPSD_{total} + DG</math> </li> </ul>                                                                                                                                                                                                                                                                                                                                                    |                  |

### 3.4.4 Test Setup

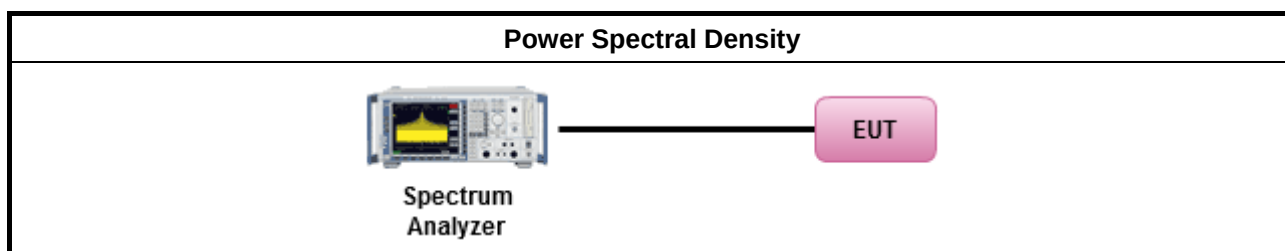

### 3.4.5 Test Result of Peak Power Spectral Density

Refer as Appendix C

### 3.5 Unwanted Emissions

#### 3.5.1 Transmitter Radiated Unwanted Emissions Limit

| Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit |                       |                         |                      |
|-------------------------------------------------------------------------------|-----------------------|-------------------------|----------------------|
| Frequency Range (MHz)                                                         | Field Strength (uV/m) | Field Strength (dBuV/m) | Measure Distance (m) |
| 0.009~0.490                                                                   | 2400/F(kHz)           | 48.5 - 13.8             | 300                  |
| 0.490~1.705                                                                   | 24000/F(kHz)          | 33.8 - 23               | 30                   |
| 1.705~30.0                                                                    | 30                    | 29                      | 30                   |
| 30~88                                                                         | 100                   | 40                      | 3                    |
| 88~216                                                                        | 150                   | 43.5                    | 3                    |
| 216~960                                                                       | 200                   | 46                      | 3                    |
| Above 960                                                                     | 500                   | 54                      | 3                    |

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

| Un-restricted band emissions above 1GHz Limit |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating Band                                | Limit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 5.15 - 5.25 GHz                               | e.i.r.p. -27 dBm [68.2 dBuV/m@3m]                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 5.25 - 5.35 GHz                               | e.i.r.p. -27 dBm [68.2 dBuV/m@3m]                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 5.47 - 5.725 GHz                              | e.i.r.p. -27 dBm [68.2 dBuV/m@3m]                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 5.725 - 5.85 GHz                              | 5.650 - 5700 GHz: e.i.r.p. -27 ~ 10 dBm [68.2 ~ 105.2 dBuV/m@3m]<br>5.700 - 5720 GHz: e.i.r.p. 10 ~ 15.6 dBm [105.2 ~ 110.8 dBuV/m@3m]<br>5.720 - 5725 GHz: e.i.r.p. 15.6 ~ 27 dBm [110.8 ~ 122.2 dBuV/m@3m]<br>5.850 - 5.855 GHz: e.i.r.p. 27 ~ 15.6 dBm [122.2 ~ 110.8 dBuV/m@3m]<br>5.855 - 5.875 GHz: e.i.r.p. 15.6 ~ 10 dBm [110.8 ~ 105.2 dBuV/m@3m]<br>5.875 - 5.925 GHz: e.i.r.p. 10 ~ -27 dBm [105.2 ~ 68.2dBuV/m@3m]<br>Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m] |

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


### 3.5.3 Test Procedures

| Test Method                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                              |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).</li> </ul> |                                                                                                                                                                                                              |
| <ul style="list-style-type: none"> <li>The average emission levels shall be measured in [duty cycle <math>\geq</math> 98 or duty factor].</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                              |
| <ul style="list-style-type: none"> <li>For the transmitter unwanted emissions shall be measured using following options below:</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                              |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <ul style="list-style-type: none"> <li>Refer as KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.</li> </ul>                                                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <ul style="list-style-type: none"> <li>Refer as KDB 789033, clause G)1) for unwanted emissions into restricted bands.</li> </ul>                                                                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input type="checkbox"/> Refer as KDB 789033, G)6) Method AD (Trace Averaging).                                                                                                                              |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input checked="" type="checkbox"/> Refer as KDB 789033, G)6) Method VB (Reduced VBW).                                                                                                                       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.                                                                                        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.4 average value of pulsed emissions.                                                                                                           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input checked="" type="checkbox"/> Refer as KDB 789033, clause G)5) measurement procedure peak limit.                                                                                                       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <input type="checkbox"/> Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.                                                                                                            |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <ul style="list-style-type: none"> <li>For radiated measurement.</li> </ul>                                                                                                                                  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <ul style="list-style-type: none"> <li>Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.</li> </ul>                                                              |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <ul style="list-style-type: none"> <li>Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.</li> </ul>                                                           |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <ul style="list-style-type: none"> <li>Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.<br/>For 1 GHz to 5 GHz, test distance is 3m; For 5 GHz to 40 GHz, test distance is 3m.</li> </ul> |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <ul style="list-style-type: none"> <li>The any unwanted emissions level shall not exceed the fundamental emission level.</li> </ul>                                                                          |
| <ul style="list-style-type: none"> <li>All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                              |

| Test Method                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>For conducted and cabinet radiation measurement, refer as KDB 789033, clause G)3).</li> </ul> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|                                                                                                                                      | <ul style="list-style-type: none"> <li>For conducted unwanted emissions into non-restricted bands (relative emission limits).<br/>Devices with multiple transmit chains:<br/>Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.</li> </ul> |
|                                                                                                                                      | <ul style="list-style-type: none"> <li>For conducted unwanted emissions into restricted bands (absolute emission limits).<br/>Devices with multiple transmit chains using options given below:<br/>(1) Measure and sum the spectra across the outputs or<br/>(2) Measure and add 10 log(N) dB</li> </ul>                                                                                                                                                                            |
|                                                                                                                                      | <ul style="list-style-type: none"> <li>For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.</li> </ul>                                                                                      |


### 3.5.4 Test Setup

#### Transmitter Spurious and Out of Band Emissions (9 kHz - 30 MHz)

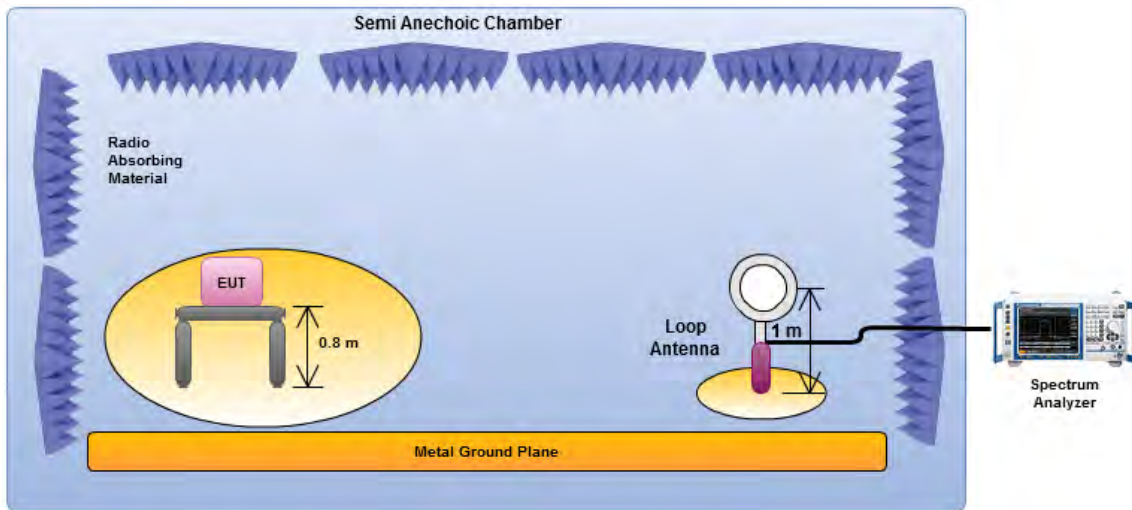


Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna.

#### Transmitter Radiated Unwanted Emissions (below 1GHz)

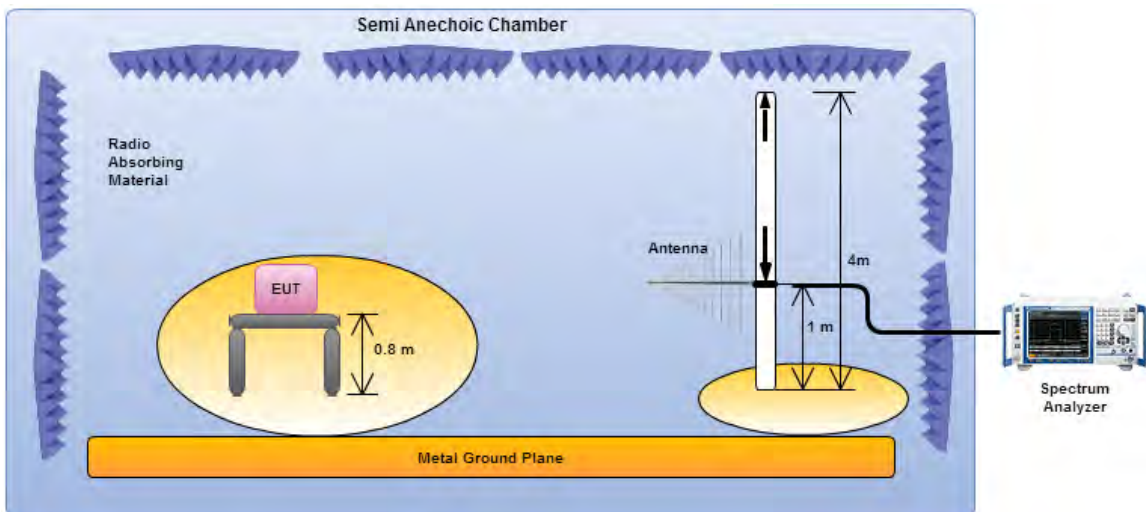

Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna.

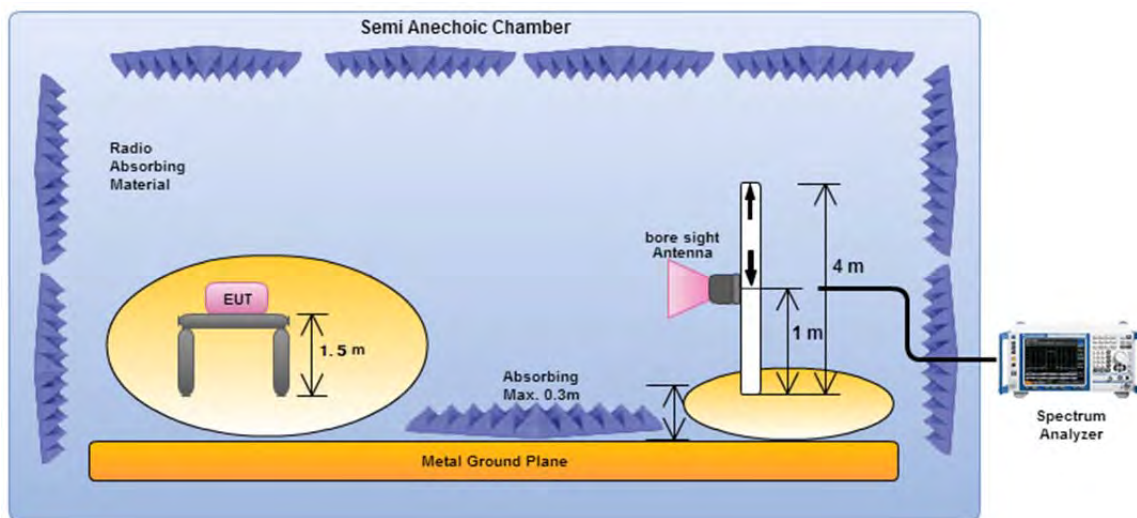

**Transmitter Radiated Unwanted Emissions (above 1GHz)**


Electric field tests shall be performed in the frequency range of 1 GHz to 10th harmonic of highest fundamental frequency or 40 GHz using a calibrated horn antenna.

**3.5.5 Transmitter Unwanted Emissions (Below 30MHz)**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported. Any spurious which has more than 20 dB of margin compared to the applicable limit is not necessarily reported.

**3.5.6 Transmitter Unwanted Emissions**

Refer as Appendix D.1~D.2

## 3.6 Frequency Stability

### 3.6.1 Frequency Stability Limit

| Frequency Stability Limit                                                                                                                                                                 |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <b>UNII Devices</b>                                                                                                                                                                       |  |
| <ul style="list-style-type: none"> <li>In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.</li> </ul> |  |
| <b>IEEE Std. 802.11</b>                                                                                                                                                                   |  |
| <ul style="list-style-type: none"> <li>The transmitter center frequency tolerance shall be <math>\pm 20</math> ppm maximum for the 5 GHz band.</li> </ul>                                 |  |


### 3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.6.3 Test Procedures

| Test Method                                                                                                      |                                                                                                           |
|------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>Refer as ANSI C63.10, clause 6.8 for frequency stability tests</li> </ul> |                                                                                                           |
|                                                                                                                  | <ul style="list-style-type: none"> <li>Frequency stability with respect to ambient temperature</li> </ul> |
|                                                                                                                  | <ul style="list-style-type: none"> <li>Frequency stability when varying supply voltage</li> </ul>         |

### 3.6.4 Test Setup

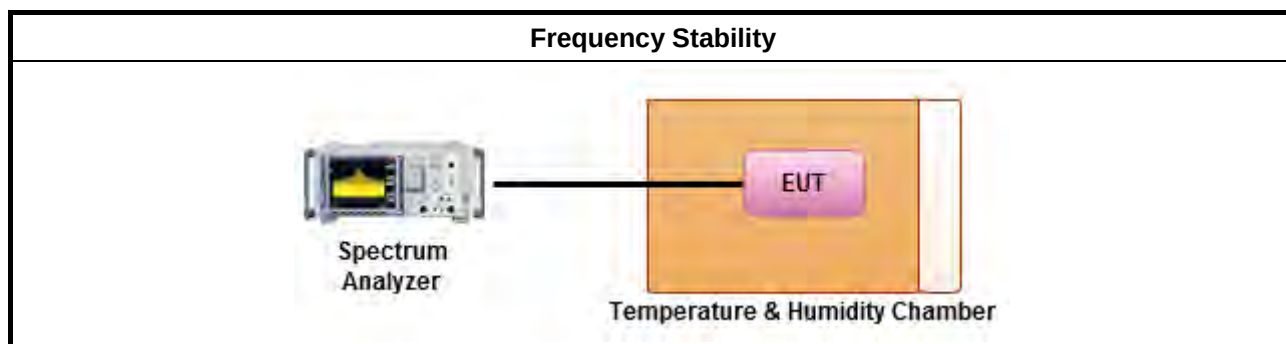

### 3.6.5 Test Result of Frequency Stability

Refer as Appendix E



## 4 Test Equipment and Calibration Data

### < Conducted Test >

| Instrument                 | Manufacturer | Model No.        | Serial No.  | Spec.             | Calibration Date | Calibration Due Date |
|----------------------------|--------------|------------------|-------------|-------------------|------------------|----------------------|
| Spectrum Analyzer          | R&S          | FSV 40           | 101013      | 9 kHz ~ 40 GHz    | 16/02/2016       | 15/02/ 2017          |
| Power Sensor               | Anritsu      | MA2411B          | 1027452     | 300 MHz ~ 40 GHz  | 22/02/2016       | 21/02/2017           |
| Power Meter                | Anritsu      | ML2495A          | 1124009     | 300 MHz ~ 40 GHz  | 22/02/2016       | 21/02/2017           |
| Signal Generator           | R&S          | SMR40            | 100116      | 10 MHz ~ 40 GHz   | 21/07/2016       | 20/07/2017           |
| AC Power Source            | G.W          | APS-9102         | EL920581    | AC 0V ~ 300V      | 04/06/2016       | 03/06/2017           |
| Temp. and Humidity Chamber | Giant Force  | GTH-225-20-SP-SD | MAA1611-005 | -40 ~ 100℃        | 21/11/2016       | 20/11/2018           |
| RF Cable-0.2m              | HUBER+SUHNER | SUCOFLEX_104     | MY677/3     | 30 MHz ~ 26.5 GHz | 02/10/2016       | 01/10/2017           |
| RF Cable-0.2m              | HUBER+SUHNER | SUCOFLEX_104     | MY678/3     | 30 MHz ~ 26.5 GHz | 02/10/2016       | 01/10/2017           |
| RF Cable-0.5m              | HUBER+SUHNER | SUCOFLEX_104     | MY10717/4   | 30 MHz ~ 26.5 GHz | 02/10/2016       | 01/10/2017           |
| RF Cable-1.5m              | HUBER+SUHNER | SUCOFLEX_104     | MY12586/4   | 30 MHz ~ 26.5 GHz | 02/10/2016       | 01/10/2017           |

### < Radiated Test >

| Instrument               | Manufacturer   | Model No.           | Serial No.      | Spec.                | Calibration Date | Calibration Due Date |
|--------------------------|----------------|---------------------|-----------------|----------------------|------------------|----------------------|
| Spectrum Analyzer        | R&S            | FSP40               | 100593          | 9 kHz ~ 40GHz        | 26/10/2016       | 25/10/2017           |
| 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M              | 03CH02-HY       | 30 MHz ~1 GHz<br>3M  | 03/06/2016       | 02/06/2017           |
| 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M              | 03CH02-HY       | 1 GHz ~ 18 GHz<br>3M | 03/06/2016       | 02/06/2017           |
| Amplifier                | Agilent        | 8447D               | 2944A11149      | 100 kHz ~ 1.3 GHz    | 01/07/2016       | 30/06/2017           |
| Amplifier                | Agilent        | 8449B               | 3008A02373      | 1 GHz ~ 26.5 GHz     | 02/09/2016       | 01/09/2017           |
| Amplifier                | MITEQ          | JS44-18004000-33-8P | 1840917         | 18 GHz ~ 40 GHz      | 01/06/2015       | 31/05/2017           |
| Horn Antenna             | SCHWARZBECK    | BBHA9120D           | BBHA9120D 01543 | 1 GHz ~ 18 GHz       | 22/04/2016       | 21/04/2017           |
| Horn Antenna             | SCHWARZBECK    | BBHA9170            | BBHA9170154     | 18 GHz ~ 40 GHz      | 29/01/2016       | 28/01/2017           |
| Bilog Antenna            | SCHAFFNER      | CBL6112B            | 2723            | 30 MHz ~ 1 GHz       | 01/10/2016       | 30/09/2017           |
| Loop Antenna             | TESEQ          | HLA 6120            | 31244           | 9 kHz ~ 30 MHz       | 02/02/2015       | 01/02/2017           |
| RF Cable-R03m            | Jye Bao        | RG142               | CB021           | 9 kHz ~ 1 GHz        | 05/11/2016       | 04/11/2017           |
| RF Cable-high            | SUHNER         | SUCOFLEX106         | MY17173/4       | 1 GHz ~ 40 GHz       | 03/03/2016       | 02/03/2017           |


**< AC Conduction >**

| Instrument             | Manufacturer                   | Model No. | Serial No.     | Spec.           | Calibration Date | Calibration Due Date |
|------------------------|--------------------------------|-----------|----------------|-----------------|------------------|----------------------|
| EMC Receiver           | R&S                            | ESR-3     | 102051         | 9 kHz ~ 3.6 GHz | 19/04/2016       | 18/04/2017           |
| LISN                   | SCHWARZBECK<br>MESS-ELEKTRONIK | NSLK 8127 | 8127-477       | 9 kHz ~ 30 MHz  | 26/01/2016       | 25/01/2017           |
| LISN<br>(Support Unit) | R&S                            | ENV216    | 101295         | 9 kHz ~ 30 MHz  | NCR              | NCR                  |
| RF Cable-CON           | HUBER+SUHNER                   | RG213/U   | 07611832020001 | 9 kHz ~ 30 MHz  | 24/10/2016       | 23/10/2017           |
| EMI Filter             | LINDGREN                       | LRE-2030  | 2651           | < 450 Hz        | NCR              | NCR                  |

NCR: Non Calibration Require.

## AC Power-line Conducted Emissions Result

|                    |              |             |         |
|--------------------|--------------|-------------|---------|
| Operating Mode     | Adapter Mode | Power Phase | Neutral |
| Operating Function | Normal Link  |             |         |

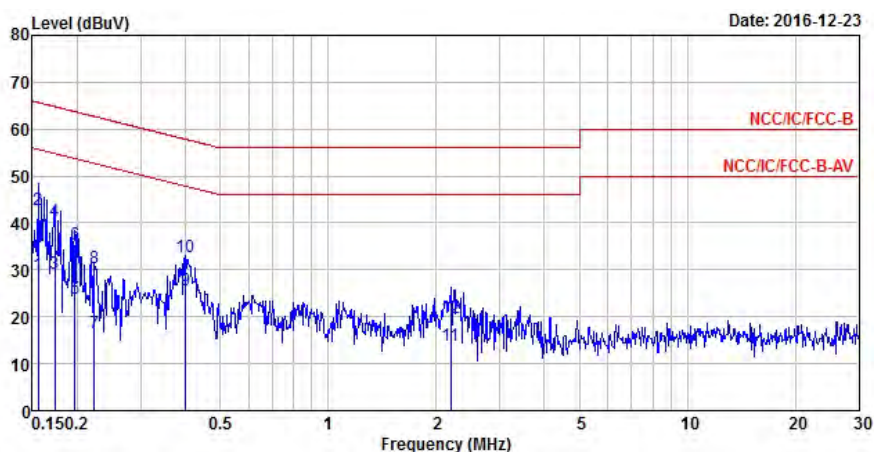


|       | Freq | Level | Over   | Limit | Read  | LISN   | Cable |         |
|-------|------|-------|--------|-------|-------|--------|-------|---------|
|       | MHz  | dBuV  | Limit  | Line  | Level | Factor | Loss  | Remark  |
|       |      |       | dB     | dBuV  | dBuV  | dB     | dB    |         |
| 1     | 0.16 | 28.88 | -26.81 | 55.69 | 28.55 | 0.10   | 0.23  | Average |
| 2     | 0.16 | 42.68 | -23.01 | 65.69 | 42.35 | 0.10   | 0.23  | QP      |
| 3     | 0.17 | 29.31 | -25.50 | 54.81 | 28.95 | 0.10   | 0.26  | Average |
| 4     | 0.17 | 40.46 | -24.35 | 64.81 | 40.10 | 0.10   | 0.26  | QP      |
| 5     | 0.20 | 23.79 | -29.97 | 53.76 | 23.38 | 0.11   | 0.30  | Average |
| 6     | 0.20 | 35.30 | -28.46 | 63.76 | 34.89 | 0.11   | 0.30  | QP      |
| 7     | 0.22 | 16.49 | -36.21 | 52.70 | 16.11 | 0.11   | 0.27  | Average |
| 8     | 0.22 | 30.54 | -32.16 | 62.70 | 30.16 | 0.11   | 0.27  | QP      |
| 9 MAX | 0.40 | 25.81 | -22.05 | 47.86 | 25.59 | 0.12   | 0.10  | Average |
| 10    | 0.40 | 32.65 | -25.21 | 57.86 | 32.43 | 0.12   | 0.10  | QP      |
| 11    | 2.19 | 13.76 | -32.24 | 46.00 | 13.34 | 0.15   | 0.27  | Average |
| 12    | 2.19 | 19.75 | -36.25 | 56.00 | 19.33 | 0.15   | 0.27  | QP      |

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

### AC Power-line Conducted Emissions Result

|                    |              |             |      |
|--------------------|--------------|-------------|------|
| Operating Mode     | Adapter Mode | Power Phase | Line |
| Operating Function | Normal Link  |             |      |

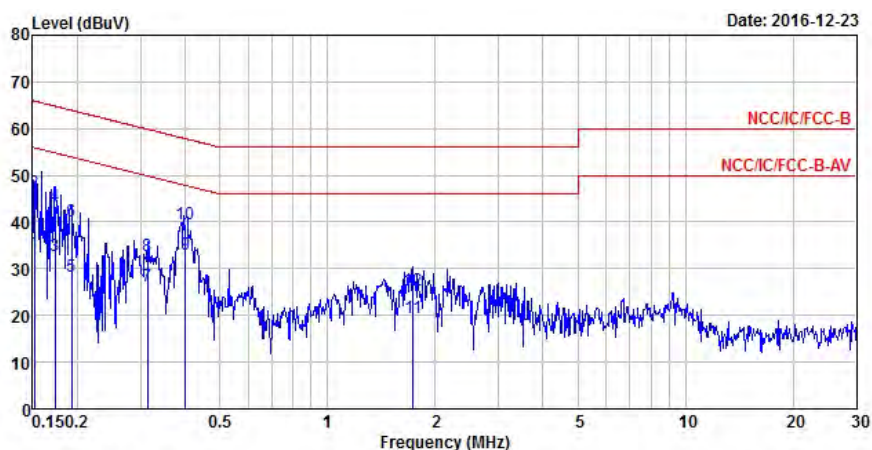

|       | Freq | Level | Over   | Limit | Read  | LISN   | Cable | Remark  |
|-------|------|-------|--------|-------|-------|--------|-------|---------|
|       | MHz  | dBuV  | Limit  | Line  | Level | Factor | Loss  |         |
|       |      |       | dB     | dBuV  | dBuV  | dB     | dB    |         |
| 1     | 0.15 | 33.47 | -22.44 | 55.91 | 33.14 | 0.11   | 0.22  | Average |
| 2     | 0.15 | 46.24 | -19.67 | 65.91 | 45.91 | 0.11   | 0.22  | QP      |
| 3     | 0.17 | 32.89 | -21.92 | 54.81 | 32.52 | 0.11   | 0.26  | Average |
| 4     | 0.17 | 43.46 | -21.35 | 64.81 | 43.09 | 0.11   | 0.26  | QP      |
| 5     | 0.19 | 28.42 | -25.51 | 53.93 | 28.02 | 0.11   | 0.29  | Average |
| 6     | 0.19 | 40.01 | -23.92 | 63.93 | 39.61 | 0.11   | 0.29  | QP      |
| 7     | 0.31 | 26.13 | -23.75 | 49.88 | 25.84 | 0.12   | 0.17  | Average |
| 8     | 0.31 | 32.84 | -27.04 | 59.88 | 32.55 | 0.12   | 0.17  | QP      |
| 9 MAX | 0.40 | 32.95 | -14.89 | 47.84 | 32.73 | 0.12   | 0.10  | Average |
| 10    | 0.40 | 39.67 | -18.17 | 57.84 | 39.45 | 0.12   | 0.10  | QP      |
| 11    | 1.73 | 19.58 | -26.42 | 46.00 | 19.17 | 0.15   | 0.26  | Average |
| 12    | 1.73 | 25.33 | -30.67 | 56.00 | 24.92 | 0.15   | 0.26  | QP      |

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.  
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

**Summary**

| Mode                         | Max-N dB<br>(Hz) | Max-OBW<br>(Hz) | ITU-Code | Min-N dB<br>(Hz) | Min-OBW<br>(Hz) |
|------------------------------|------------------|-----------------|----------|------------------|-----------------|
| 802.11a_Nss1_2TX             | -                | -               | -        | -                | -               |
| 5.15-5.25GHz                 | 38.375M          | 16.8M           | 16M8D1D  | 20.075M          | 16.45M          |
| 802.11n HT20_Nss1,(MCS0)_2TX | -                | -               | -        | -                | -               |
| 5.15-5.25GHz                 | 42.575M          | 17.625M         | 17M6D1D  | 20.075M          | 17.45M          |
| 802.11n HT40_Nss1,(MCS0)_2TX | -                | -               | -        | -                | -               |
| 5.15-5.25GHz                 | 67.35M           | 36.45M          | 36M4D1D  | 45M              | 36.3M           |
| 802.11a_Nss1_2TX             | -                | -               | -        | -                | -               |
| 5.725-5.85GHz                | 16.475M          | 16.6M           | 16M6D1D  | 16.375M          | 16.4M           |
| 802.11n HT20_Nss1,(MCS0)_2TX | -                | -               | -        | -                | -               |
| 5.725-5.85GHz                | 17.575M          | 17.55M          | 17M5D1D  | 17.025M          | 17.475M         |
| 802.11n HT40_Nss1,(MCS0)_2TX | -                | -               | -        | -                | -               |
| 5.725-5.85GHz                | 36.35M           | 36.3M           | 36M3D1D  | 36.25M           | 36.2M           |

**Max-N dB** = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;

**Max-OBW** = Maximum 99% occupied bandwidth;

**Min-N dB** = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;


**Min-OBW** = Minimum 99% occupied bandwidth;


**Result**

| Mode                         | Result | Limit<br>(Hz) | Port 1-N dB<br>(Hz) | Port 1-OBW<br>(Hz) | Port 2-N dB<br>(Hz) | Port 2-OBW<br>(Hz) |
|------------------------------|--------|---------------|---------------------|--------------------|---------------------|--------------------|
| 802.11a_Nss1_2TX             | -      | -             | -                   | -                  | -                   | -                  |
| 5180MHz                      | Pass   | Inf           | 21.45M              | 16.45M             | 34.575M             | 16.7M              |
| 5200MHz                      | Pass   | Inf           | 20.075M             | 16.5M              | 38.375M             | 16.8M              |
| 5240MHz                      | Pass   | Inf           | 21.325M             | 16.475M            | 36.625M             | 16.625M            |
| 802.11n HT20_Nss1,(MCS0)_2TX | -      | -             | -                   | -                  | -                   | -                  |
| 5180MHz                      | Pass   | Inf           | 20.125M             | 17.5M              | 40.3M               | 17.575M            |
| 5200MHz                      | Pass   | Inf           | 20.175M             | 17.5M              | 42.575M             | 17.625M            |
| 5240MHz                      | Pass   | Inf           | 20.075M             | 17.45M             | 28.725M             | 17.525M            |
| 802.11n HT40_Nss1,(MCS0)_2TX | -      | -             | -                   | -                  | -                   | -                  |
| 5190MHz                      | Pass   | Inf           | 45M                 | 36.3M              | 59.4M               | 36.35M             |
| 5230MHz                      | Pass   | Inf           | 45M                 | 36.35M             | 67.35M              | 36.45M             |
| 802.11a_Nss1_2TX             | -      | -             | -                   | -                  | -                   | -                  |
| 5745MHz                      | Pass   | 500k          | 16.375M             | 16.4M              | 16.45M              | 16.55M             |
| 5785MHz                      | Pass   | 500k          | 16.475M             | 16.5M              | 16.45M              | 16.575M            |
| 5825MHz                      | Pass   | 500k          | 16.375M             | 16.475M            | 16.4M               | 16.6M              |
| 802.11n HT20_Nss1,(MCS0)_2TX | -      | -             | -                   | -                  | -                   | -                  |
| 5745MHz                      | Pass   | 500k          | 17.55M              | 17.525M            | 17.075M             | 17.475M            |
| 5785MHz                      | Pass   | 500k          | 17.55M              | 17.55M             | 17.025M             | 17.5M              |
| 5825MHz                      | Pass   | 500k          | 17.5M               | 17.5M              | 17.575M             | 17.525M            |
| 802.11n HT40_Nss1,(MCS0)_2TX | -      | -             | -                   | -                  | -                   | -                  |
| 5755MHz                      | Pass   | 500k          | 36.35M              | 36.2M              | 36.35M              | 36.3M              |
| 5795MHz                      | Pass   | 500k          | 36.3M               | 36.3M              | 36.25M              | 36.3M              |


**Port X-N dB** = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band




**Port X-OBW** = Port X 99% occupied bandwidth;



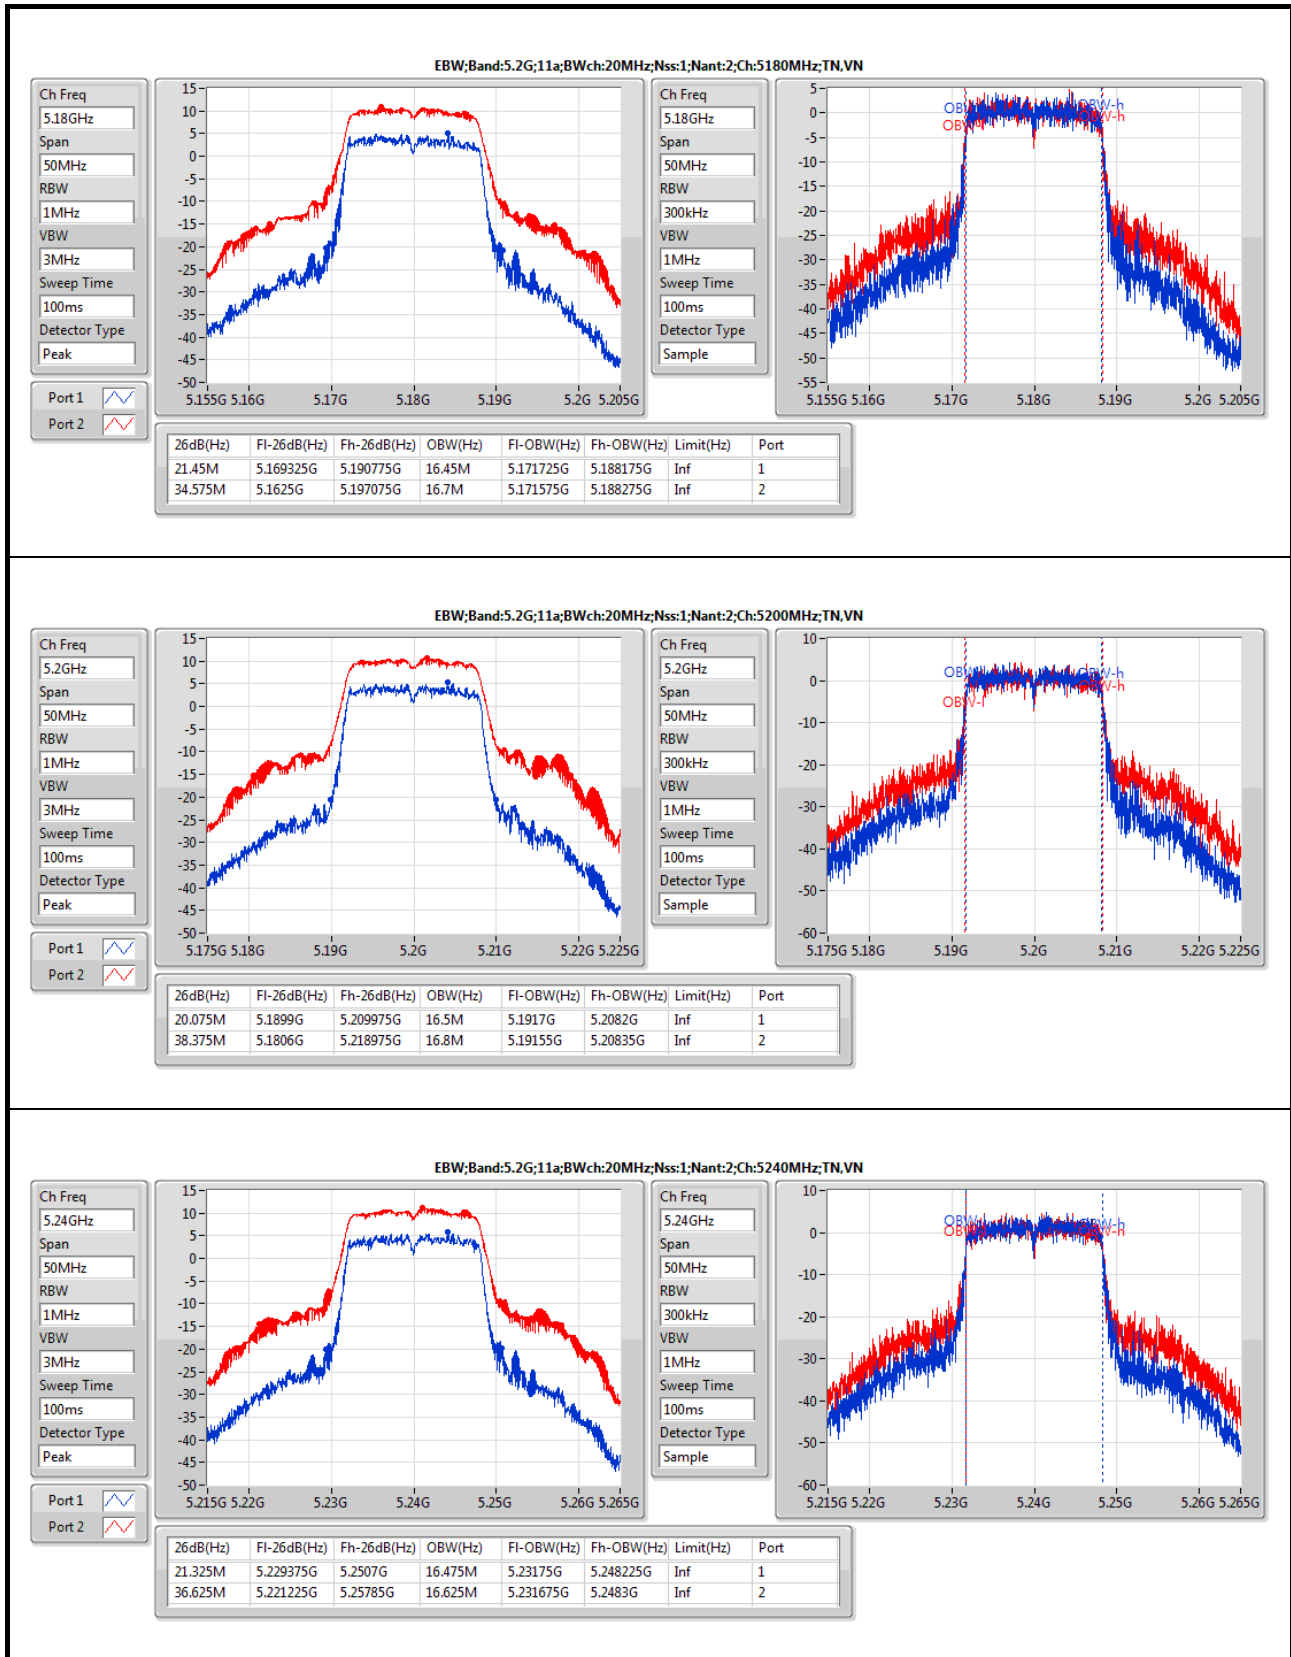


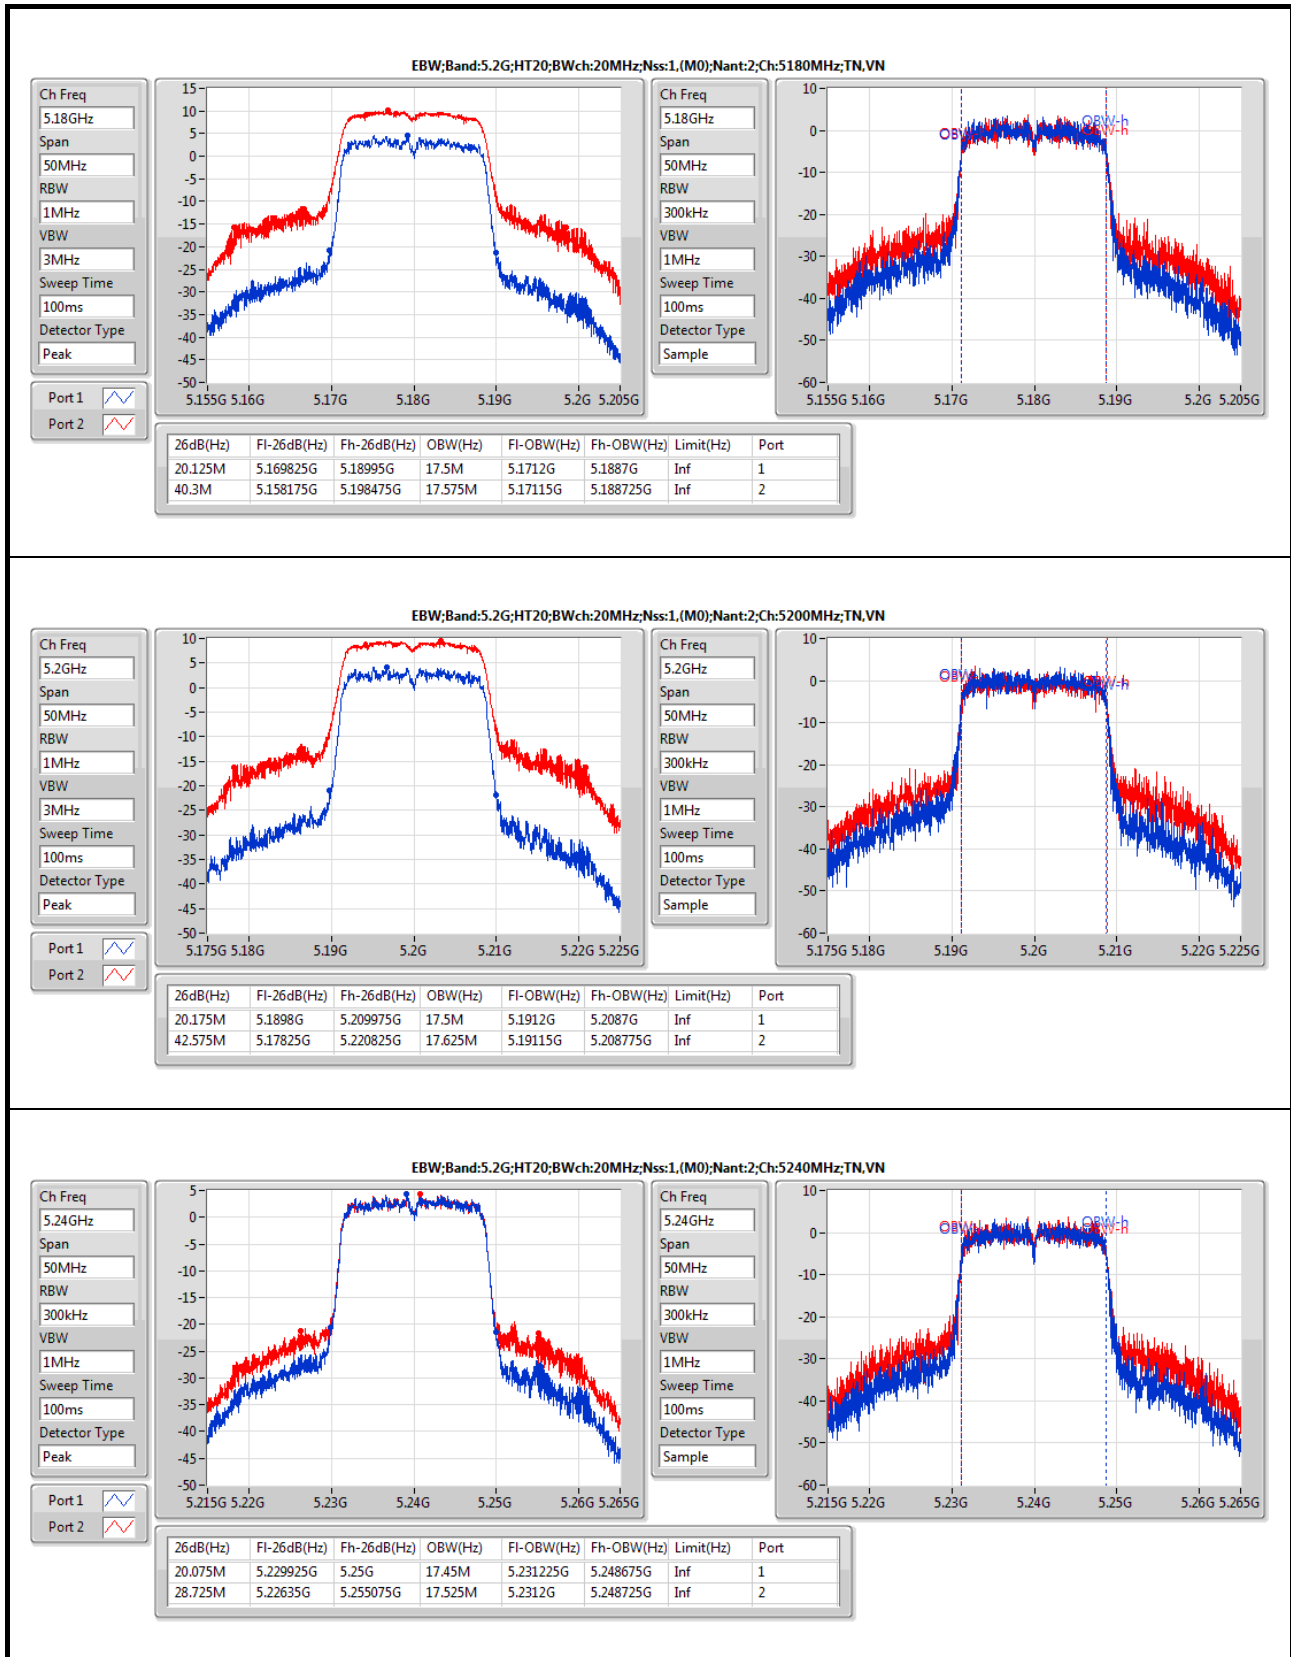




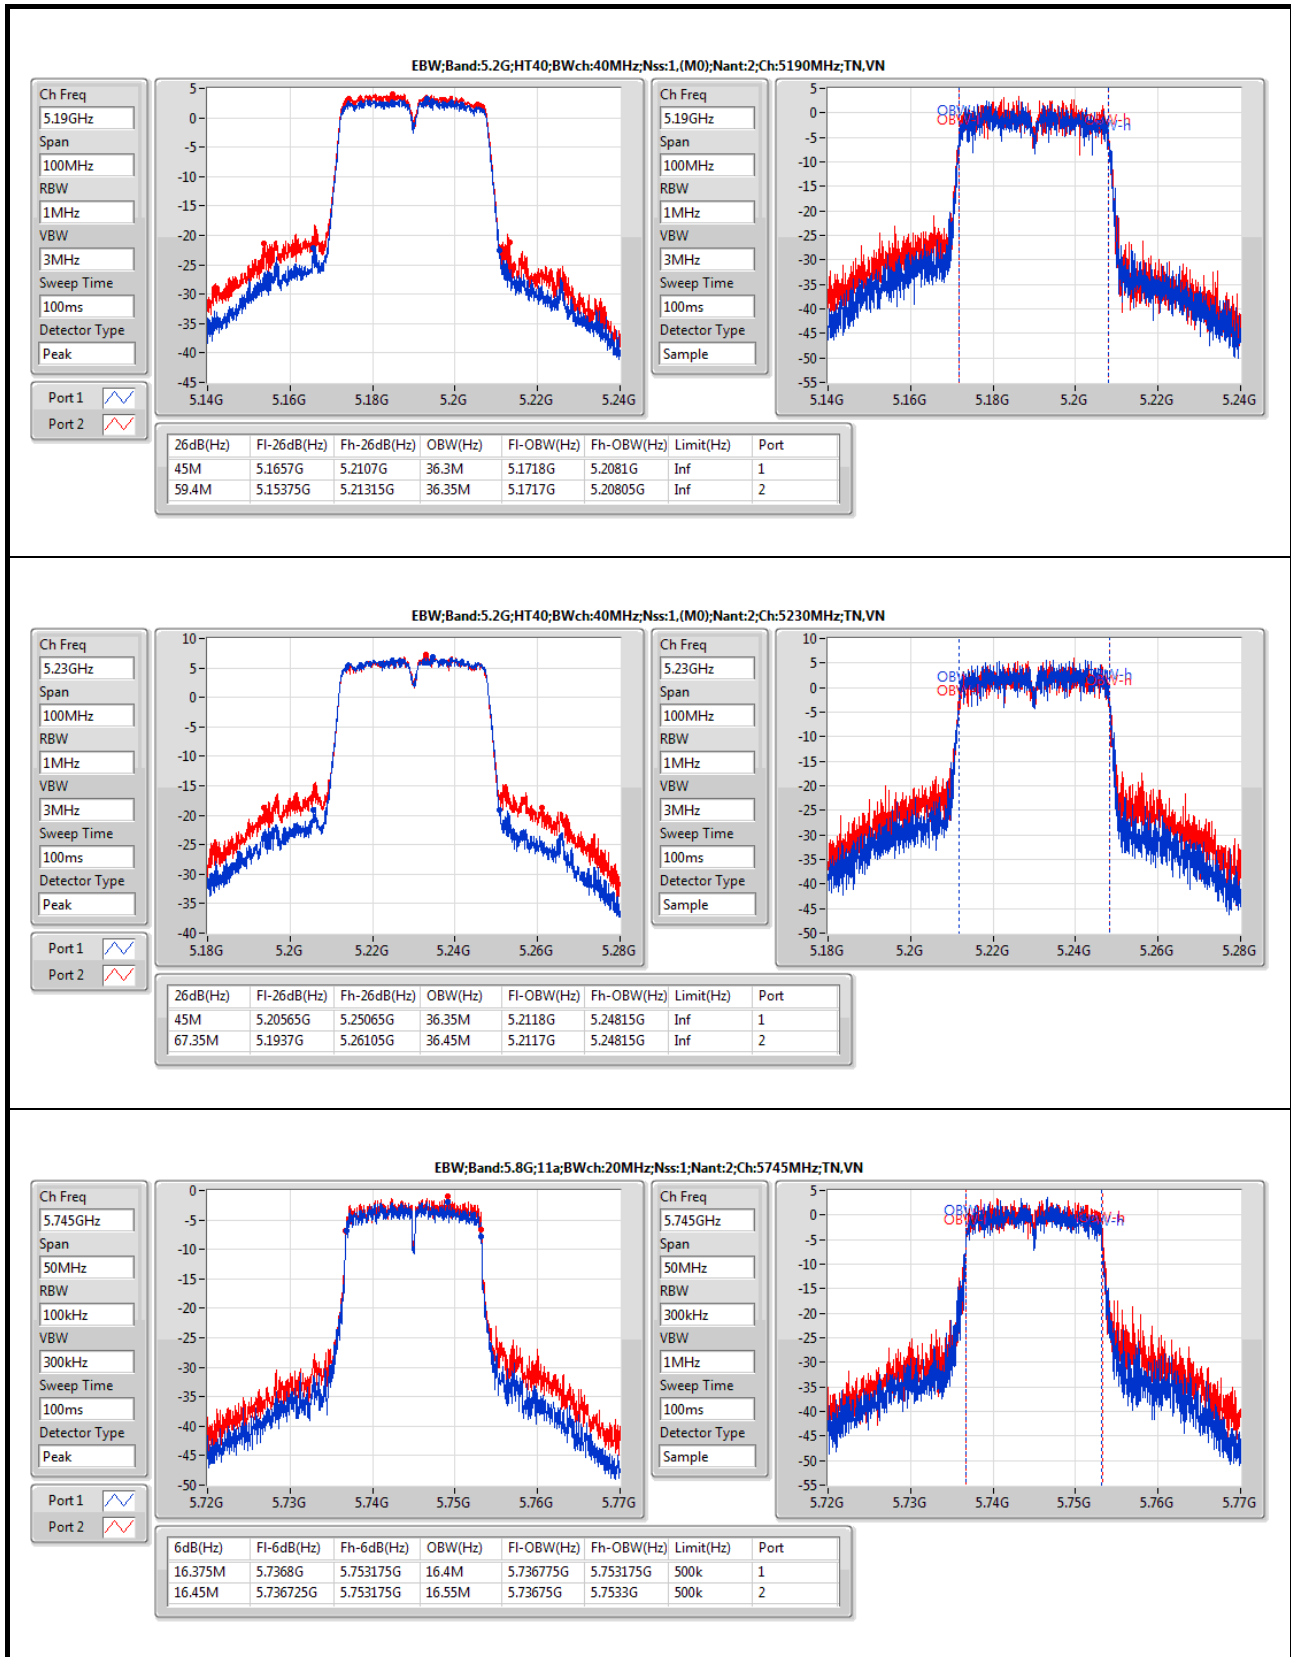

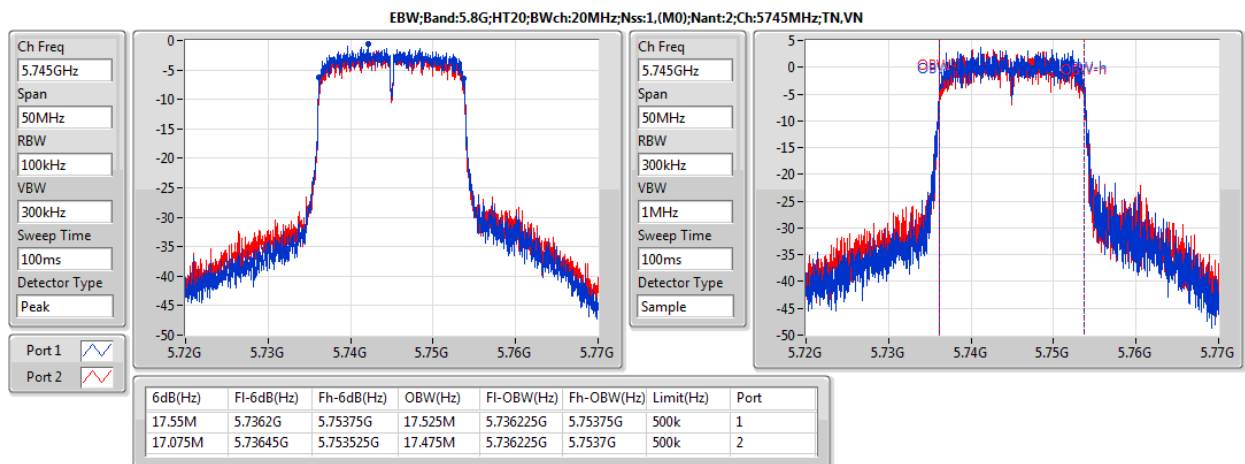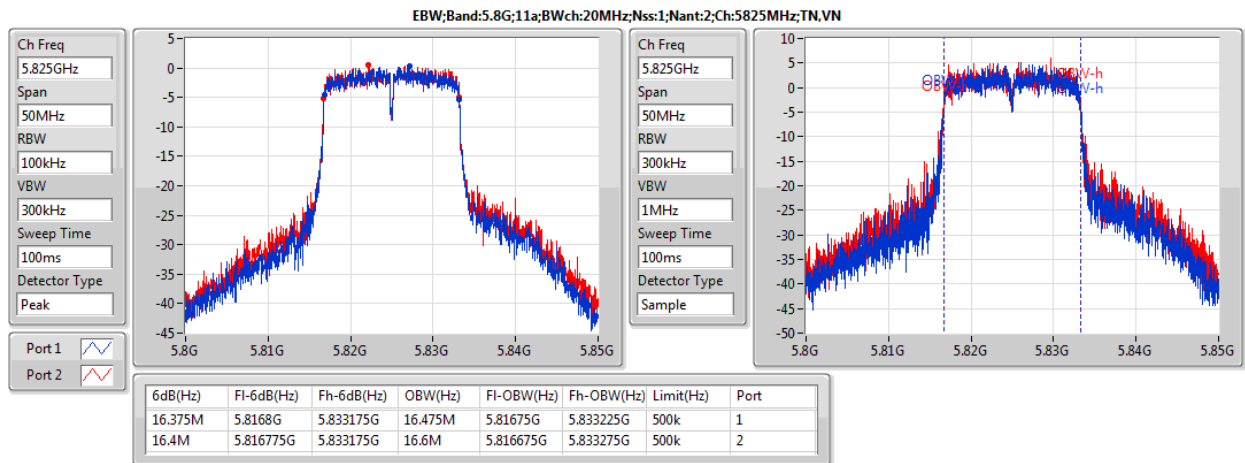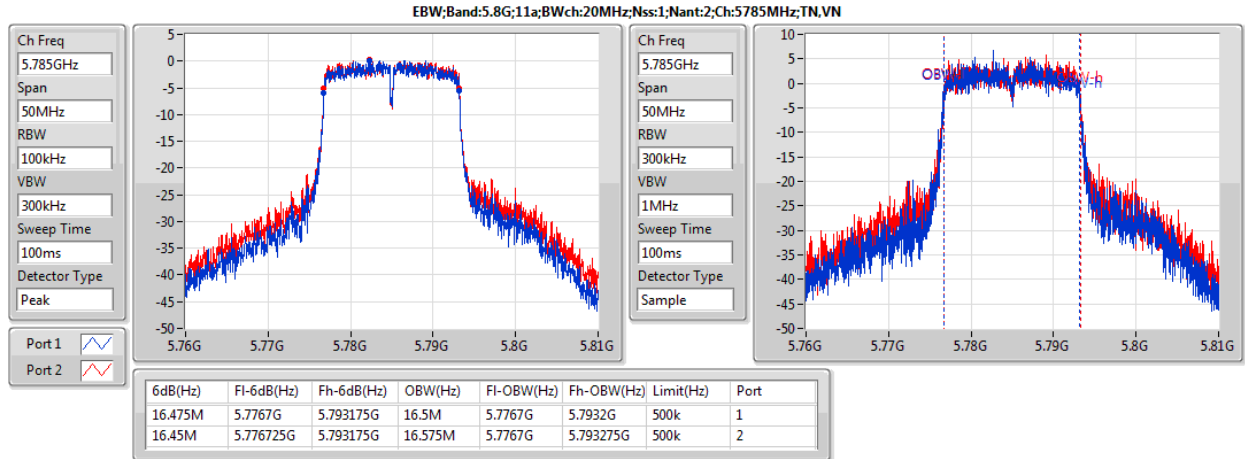

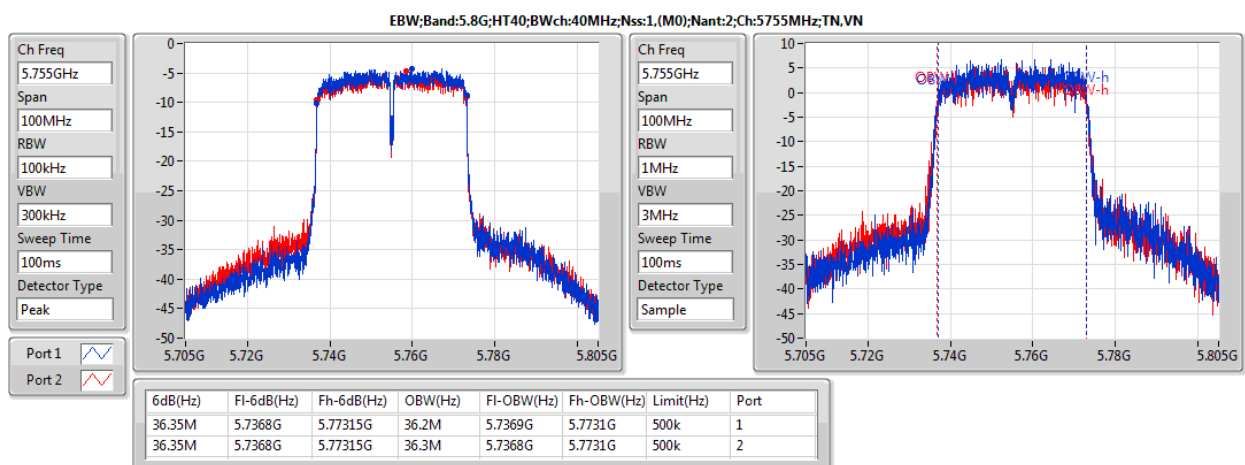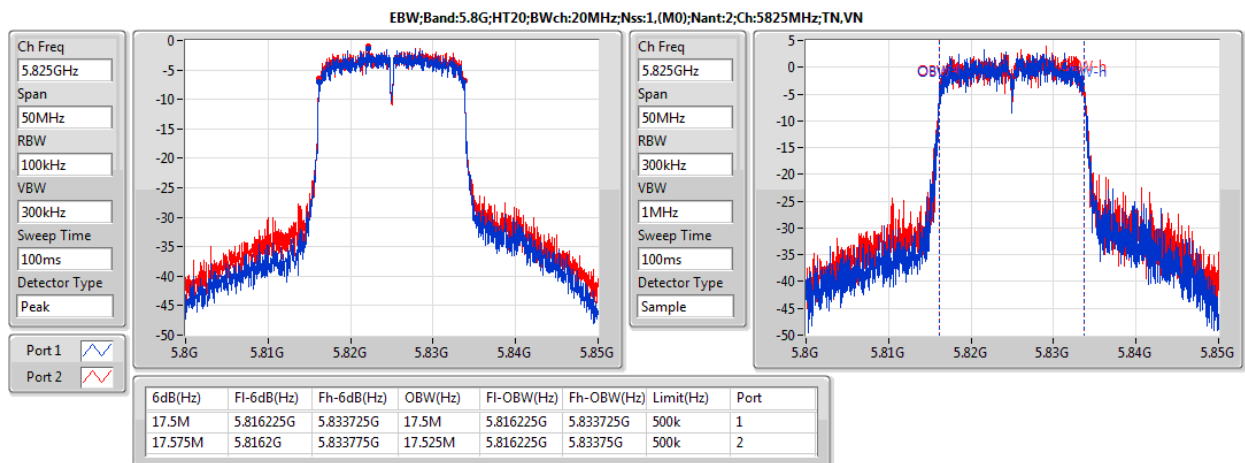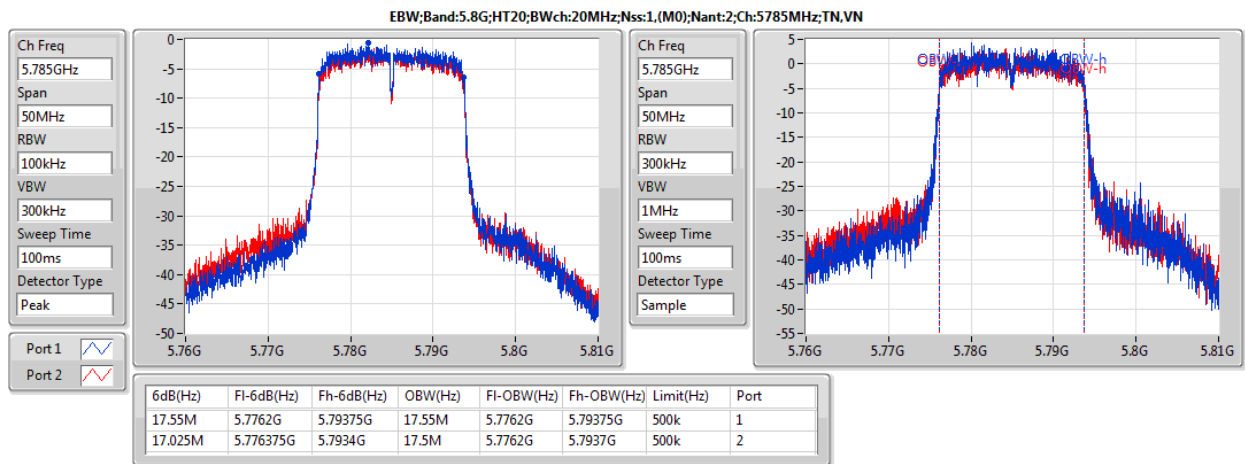

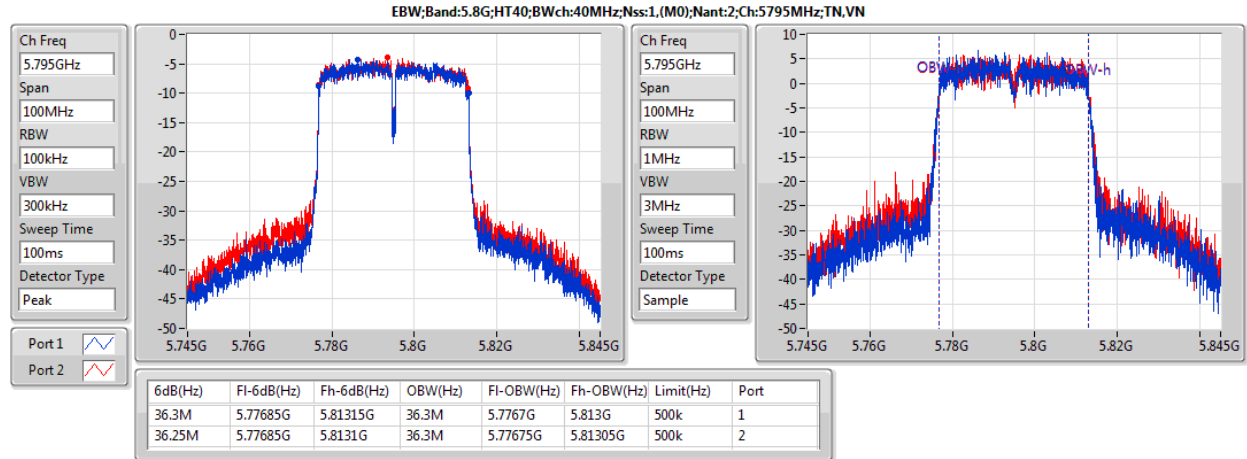

**Summary**

| Mode                         | Sum<br>(dBm) | Total Power<br>(W) | EIRP<br>(dBm) | EIRP<br>(W) |
|------------------------------|--------------|--------------------|---------------|-------------|
| 802.11a_Nss1_2TX             | -            | -                  | -             | -           |
| 5.15-5.25GHz                 | 16.74        | 0.04721            | 21.75         | 0.14962     |
| 802.11n HT20_Nss1,(MCS0)_2TX | -            | -                  | -             | -           |
| 5.15-5.25GHz                 | 15.96        | 0.03945            | 20.97         | 0.12503     |
| 802.11n HT40_Nss1,(MCS0)_2TX | -            | -                  | -             | -           |
| 5.15-5.25GHz                 | 15.85        | 0.03846            | 20.86         | 0.12190     |
| 802.11a_Nss1_2TX             | -            | -                  | -             | -           |
| 5.725-5.85GHz                | 16.76        | 0.04742            | 21.77         | 0.15031     |
| 802.11n HT20_Nss1,(MCS0)_2TX | -            | -                  | -             | -           |
| 5.725-5.85GHz                | 15.83        | 0.03828            | 20.84         | 0.12134     |
| 802.11n HT40_Nss1,(MCS0)_2TX | -            | -                  | -             | -           |
| 5.725-5.85GHz                | 15.90        | 0.03890            | 20.91         | 0.12331     |

**Result**

| Mode                         | Result | DG<br>(dBi) | Sum<br>(dBm) | Sum Lim.<br>(dBm) | EIRP<br>(dBm) | EIRP Lim.<br>(dBm) | P1<br>(dBm) | P2<br>(dBm) |
|------------------------------|--------|-------------|--------------|-------------------|---------------|--------------------|-------------|-------------|
| 802.11a_Nss1_2TX             | -      | -           | -            | -                 | -             | -                  | -           | -           |
| 5180MHz                      | Pass   | 5.01        | 16.55        | 30.00             | 21.56         | 36.00              | 13.41       | 13.66       |
| 5200MHz                      | Pass   | 5.01        | 16.63        | 30.00             | 21.64         | 36.00              | 13.63       | 13.61       |
| 5240MHz                      | Pass   | 5.01        | 16.74        | 30.00             | 21.75         | 36.00              | 13.68       | 13.78       |
| 802.11n HT20_Nss1,(MCS0)_2TX | -      | -           | -            | -                 | -             | -                  | -           | -           |
| 5180MHz                      | Pass   | 5.01        | 15.96        | 30.00             | 20.97         | 36.00              | 12.98       | 12.92       |
| 5200MHz                      | Pass   | 5.01        | 15.90        | 30.00             | 20.91         | 36.00              | 13.10       | 12.66       |
| 5240MHz                      | Pass   | 5.01        | 15.84        | 30.00             | 20.85         | 36.00              | 12.76       | 12.90       |
| 802.11n HT40_Nss1,(MCS0)_2TX | -      | -           | -            | -                 | -             | -                  | -           | -           |
| 5190MHz                      | Pass   | 5.01        | 13.78        | 30.00             | 18.79         | 36.00              | 10.35       | 11.15       |
| 5230MHz                      | Pass   | 5.01        | 15.85        | 30.00             | 20.86         | 36.00              | 12.87       | 12.80       |
| 802.11a_Nss1_2TX             | -      | -           | -            | -                 | -             | -                  | -           | -           |
| 5745MHz                      | Pass   | 5.01        | 16.10        | 30.00             | 21.11         | 36.00              | 12.68       | 13.47       |
| 5785MHz                      | Pass   | 5.01        | 16.64        | 30.00             | 21.65         | 36.00              | 13.54       | 13.72       |
| 5825MHz                      | Pass   | 5.01        | 16.76        | 30.00             | 21.77         | 36.00              | 13.55       | 13.95       |
| 802.11n HT20_Nss1,(MCS0)_2TX | -      | -           | -            | -                 | -             | -                  | -           | -           |
| 5745MHz                      | Pass   | 5.01        | 15.77        | 30.00             | 20.78         | 36.00              | 12.58       | 12.93       |
| 5785MHz                      | Pass   | 5.01        | 15.83        | 30.00             | 20.84         | 36.00              | 13.09       | 12.53       |
| 5825MHz                      | Pass   | 5.01        | 15.74        | 30.00             | 20.75         | 36.00              | 12.52       | 12.93       |
| 802.11n HT40_Nss1,(MCS0)_2TX | -      | -           | -            | -                 | -             | -                  | -           | -           |
| 5755MHz                      | Pass   | 5.01        | 15.78        | 30.00             | 20.79         | 36.00              | 13.04       | 12.49       |
| 5795MHz                      | Pass   | 5.01        | 15.90        | 30.00             | 20.91         | 36.00              | 12.77       | 13.01       |

**DG** = Directional Gain; **Port X** = Port X output power

**Summary**

| Mode                         | PD<br>(dBm/RBW) | EIRP.PD<br>(dBm/RBW) |
|------------------------------|-----------------|----------------------|
| 802.11a_Nss1_2TX             | -               | -                    |
| 5.15-5.25GHz                 | 3.66            | 8.67                 |
| 802.11n HT20_Nss1,(MCS0)_2TX | -               | -                    |
| 5.15-5.25GHz                 | 2.50            | 7.51                 |
| 802.11n HT40_Nss1,(MCS0)_2TX | -               | -                    |
| 5.15-5.25GHz                 | -0.92           | 4.09                 |
| 802.11a_Nss1_2TX             | -               | -                    |
| 5.725-5.85GHz                | 3.37            | 8.38                 |
| 802.11n HT20_Nss1,(MCS0)_2TX | -               | -                    |
| 5.725-5.85GHz                | 2.59            | 7.60                 |
| 802.11n HT40_Nss1,(MCS0)_2TX | -               | -                    |
| 5.725-5.85GHz                | -0.45           | 4.56                 |

**RBW** = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


**Result**


| Mode                         | Result | DG<br>(dBi) | PD<br>(dBm/RBW) | PD.Limit<br>(dBm/RBW) | EIRP.PD<br>(dBm/RBW) | EIRP.PD.Lim<br>(dBm/RBW) | P1<br>(dBm/RBW) | P2<br>(dBm/RBW) |
|------------------------------|--------|-------------|-----------------|-----------------------|----------------------|--------------------------|-----------------|-----------------|
| 802.11a_Nss1_2TX             | -      | -           | -               | -                     | -                    | -                        | -               | -               |
| 5180MHz                      | Pass   | 5.01        | 3.15            | 17.00                 | 8.16                 | Inf                      | 0.07            | 0.27            |
| 5200MHz                      | Pass   | 5.01        | 3.13            | 17.00                 | 8.14                 | Inf                      | 0.18            | 0.11            |
| 5240MHz                      | Pass   | 5.01        | 3.66            | 17.00                 | 8.67                 | Inf                      | 0.62            | 0.68            |
| 802.11n HT20_Nss1,(MCS0)_2TX | -      | -           | -               | -                     | -                    | -                        | -               | -               |
| 5180MHz                      | Pass   | 5.01        | 2.50            | 17.00                 | 7.51                 | Inf                      | -0.43           | -0.52           |
| 5200MHz                      | Pass   | 5.01        | 2.07            | 17.00                 | 7.08                 | Inf                      | -0.64           | -1.12           |
| 5240MHz                      | Pass   | 5.01        | 2.32            | 17.00                 | 7.33                 | Inf                      | -0.71           | -0.65           |
| 802.11n HT40_Nss1,(MCS0)_2TX | -      | -           | -               | -                     | -                    | -                        | -               | -               |
| 5190MHz                      | Pass   | 5.01        | -3.37           | 17.00                 | 1.64                 | Inf                      | -6.73           | -5.95           |
| 5230MHz                      | Pass   | 5.01        | -0.92           | 17.00                 | 4.09                 | Inf                      | -3.91           | -3.87           |
| 802.11a_Nss1_2TX             | -      | -           | -               | -                     | -                    | -                        | -               | -               |
| 5745MHz                      | Pass   | 5.01        | 1.38            | 30.00                 | 6.39                 | Inf                      | -1.48           | -1.31           |
| 5785MHz                      | Pass   | 5.01        | 3.37            | 30.00                 | 8.38                 | Inf                      | 0.64            | 0.47            |
| 5825MHz                      | Pass   | 5.01        | 2.36            | 30.00                 | 7.37                 | Inf                      | -0.38           | -0.46           |
| 802.11n HT20_Nss1,(MCS0)_2TX | -      | -           | -               | -                     | -                    | -                        | -               | -               |
| 5745MHz                      | Pass   | 5.01        | 1.45            | 30.00                 | 6.46                 | Inf                      | -1.71           | -1.08           |
| 5785MHz                      | Pass   | 5.01        | 2.59            | 30.00                 | 7.60                 | Inf                      | 0.33            | -0.99           |
| 5825MHz                      | Pass   | 5.01        | 1.75            | 30.00                 | 6.76                 | Inf                      | -0.87           | -1.02           |
| 802.11n HT40_Nss1,(MCS0)_2TX | -      | -           | -               | -                     | -                    | -                        | -               | -               |
| 5755MHz                      | Pass   | 5.01        | -1.12           | 30.00                 | 3.89                 | Inf                      | -3.28           | -4.23           |
| 5795MHz                      | Pass   | 5.01        | -0.45           | 30.00                 | 4.56                 | Inf                      | -2.96           | -3.45           |


**DG** = Directional Gain; **RBW** = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


**PD** = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;




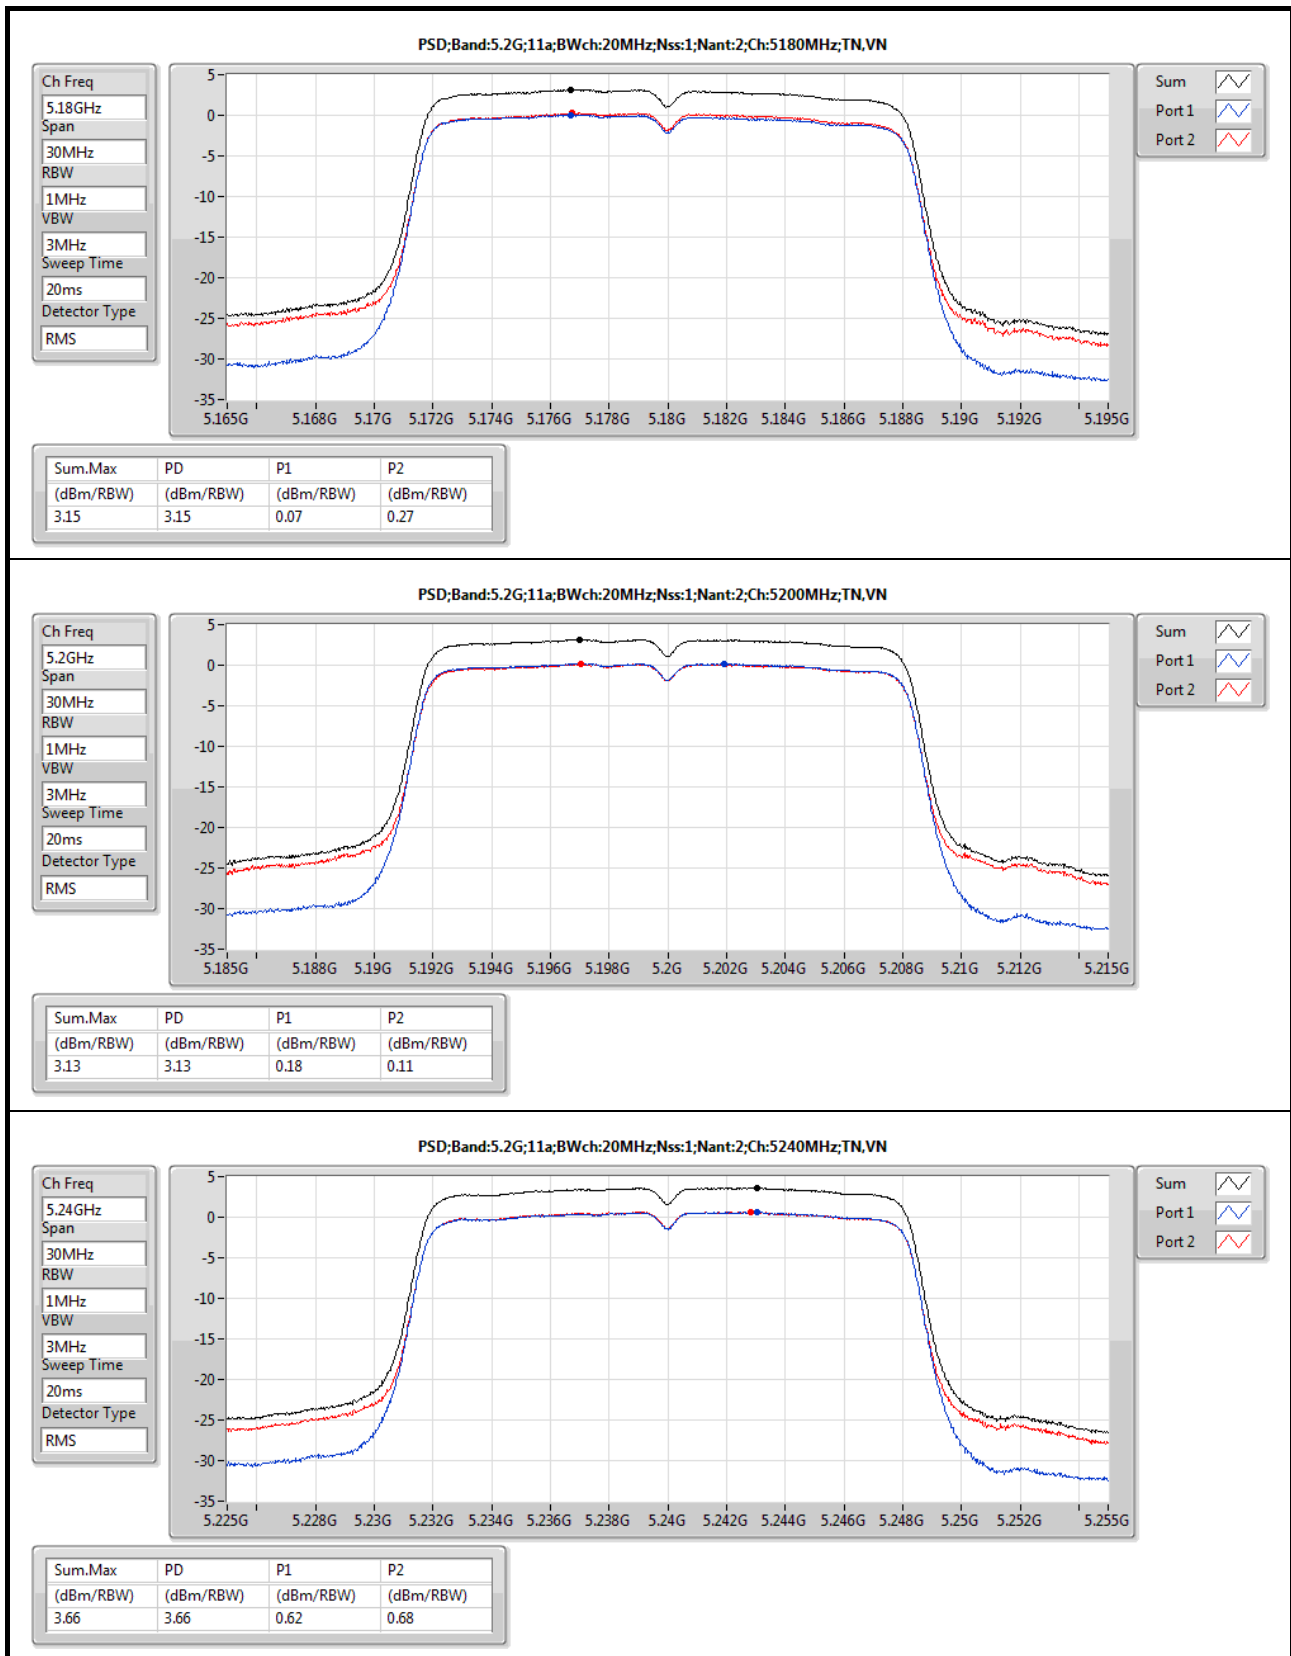


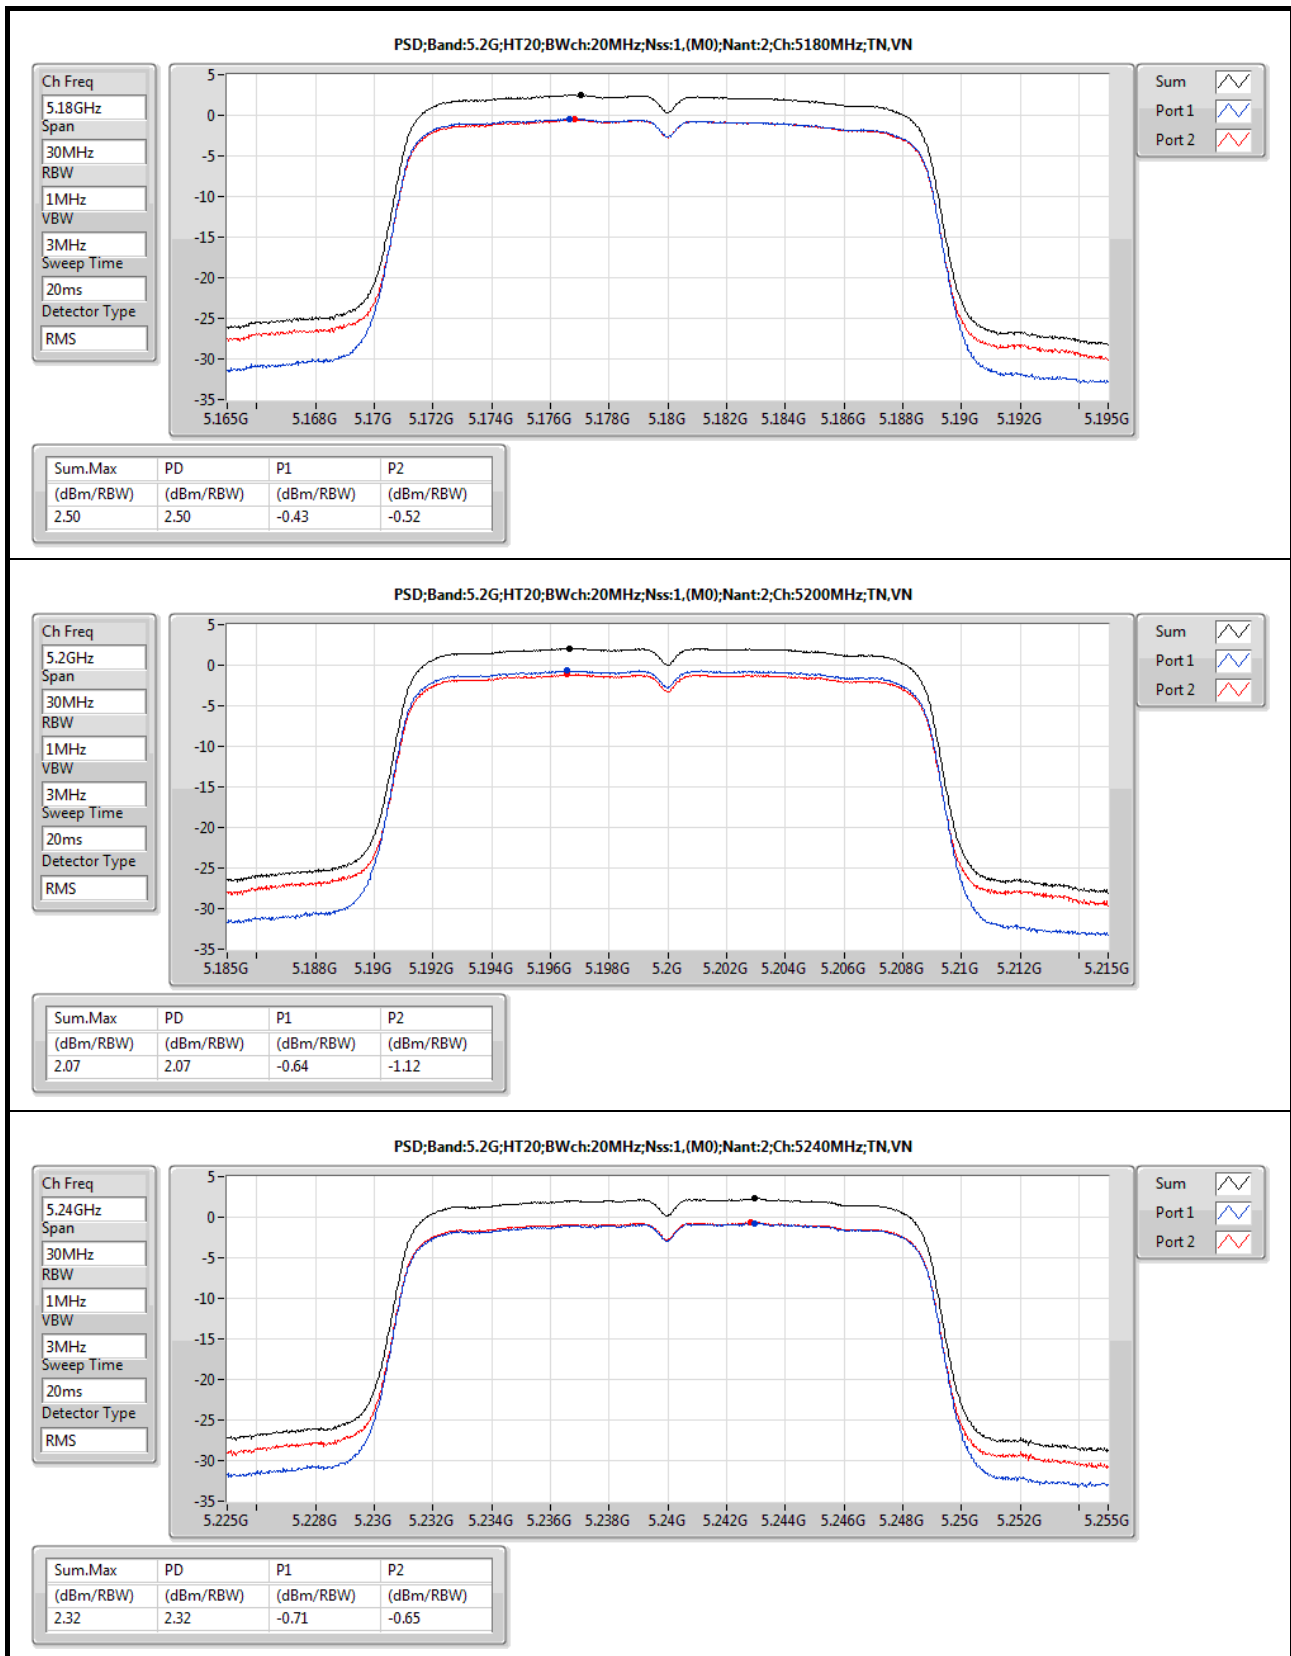

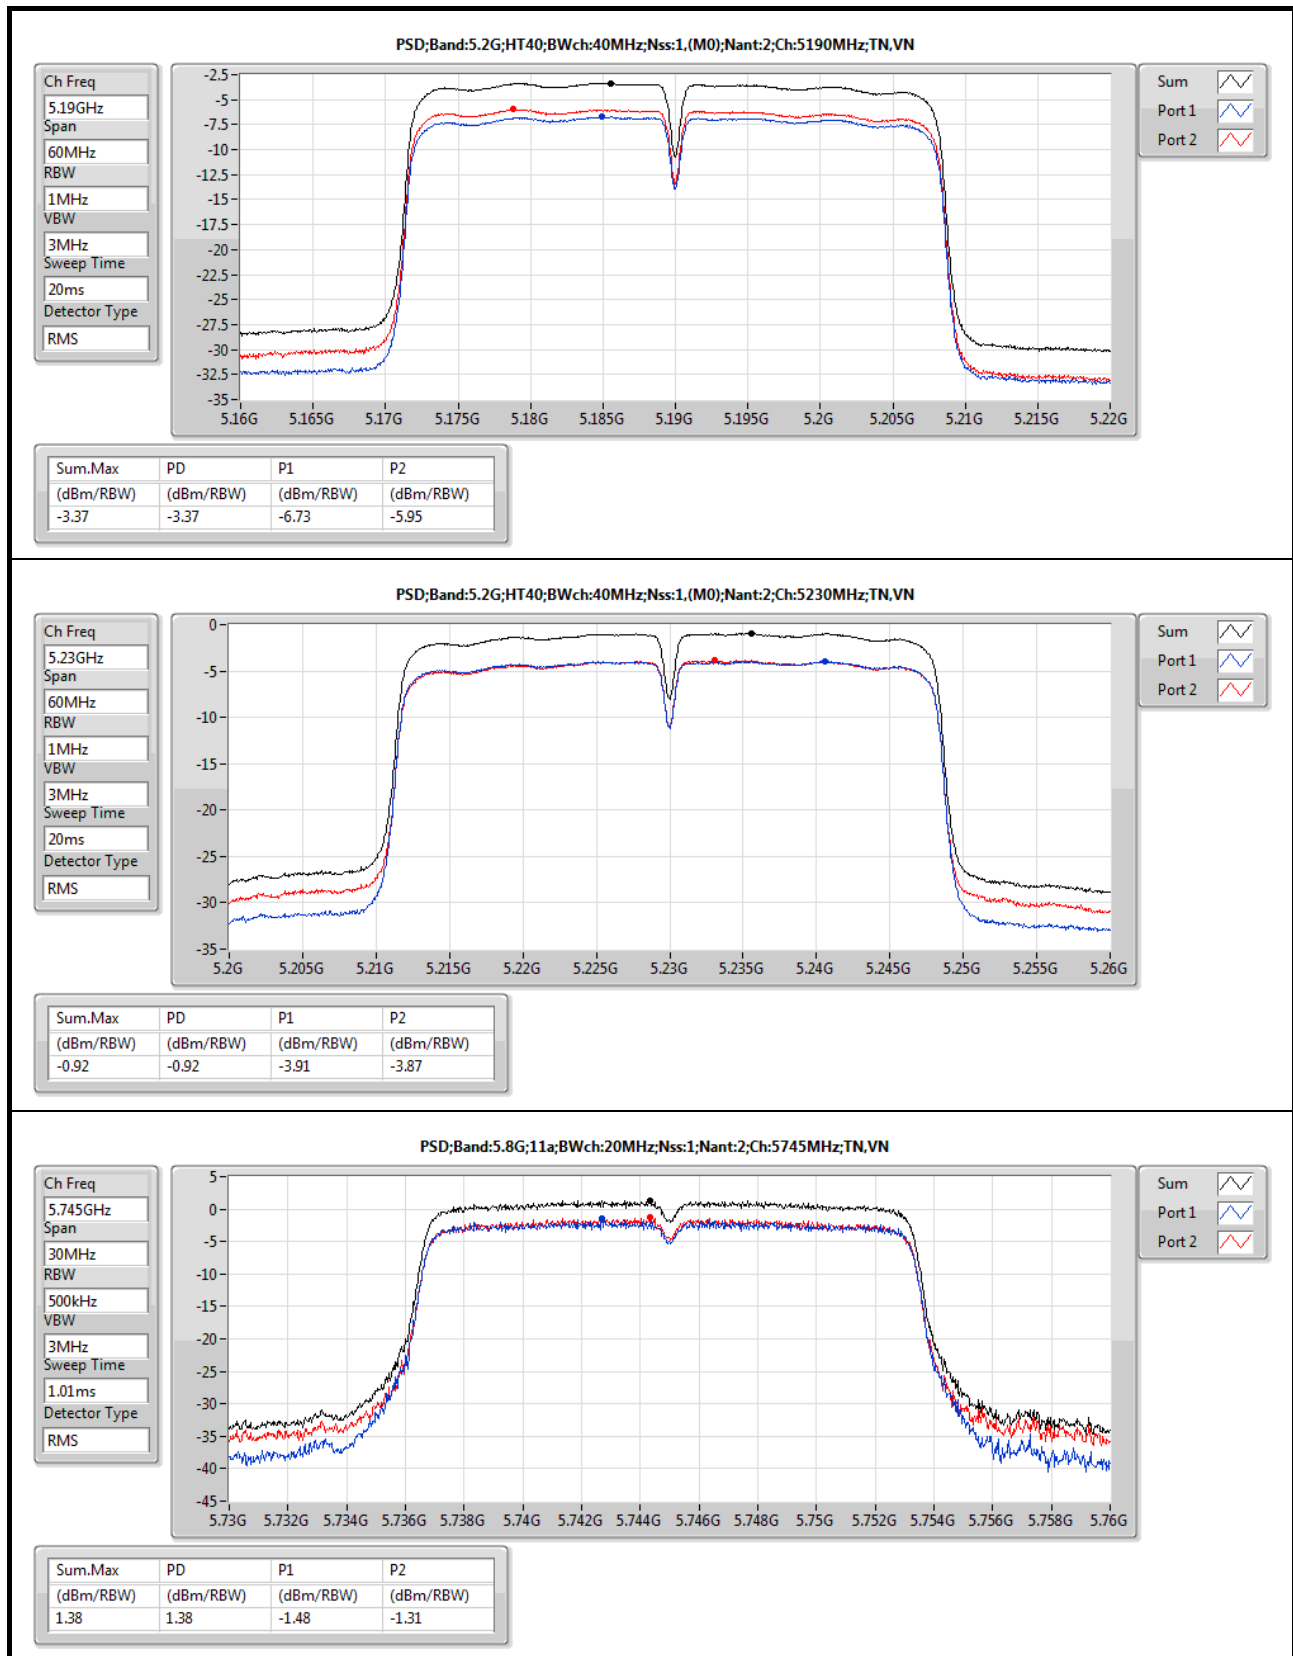

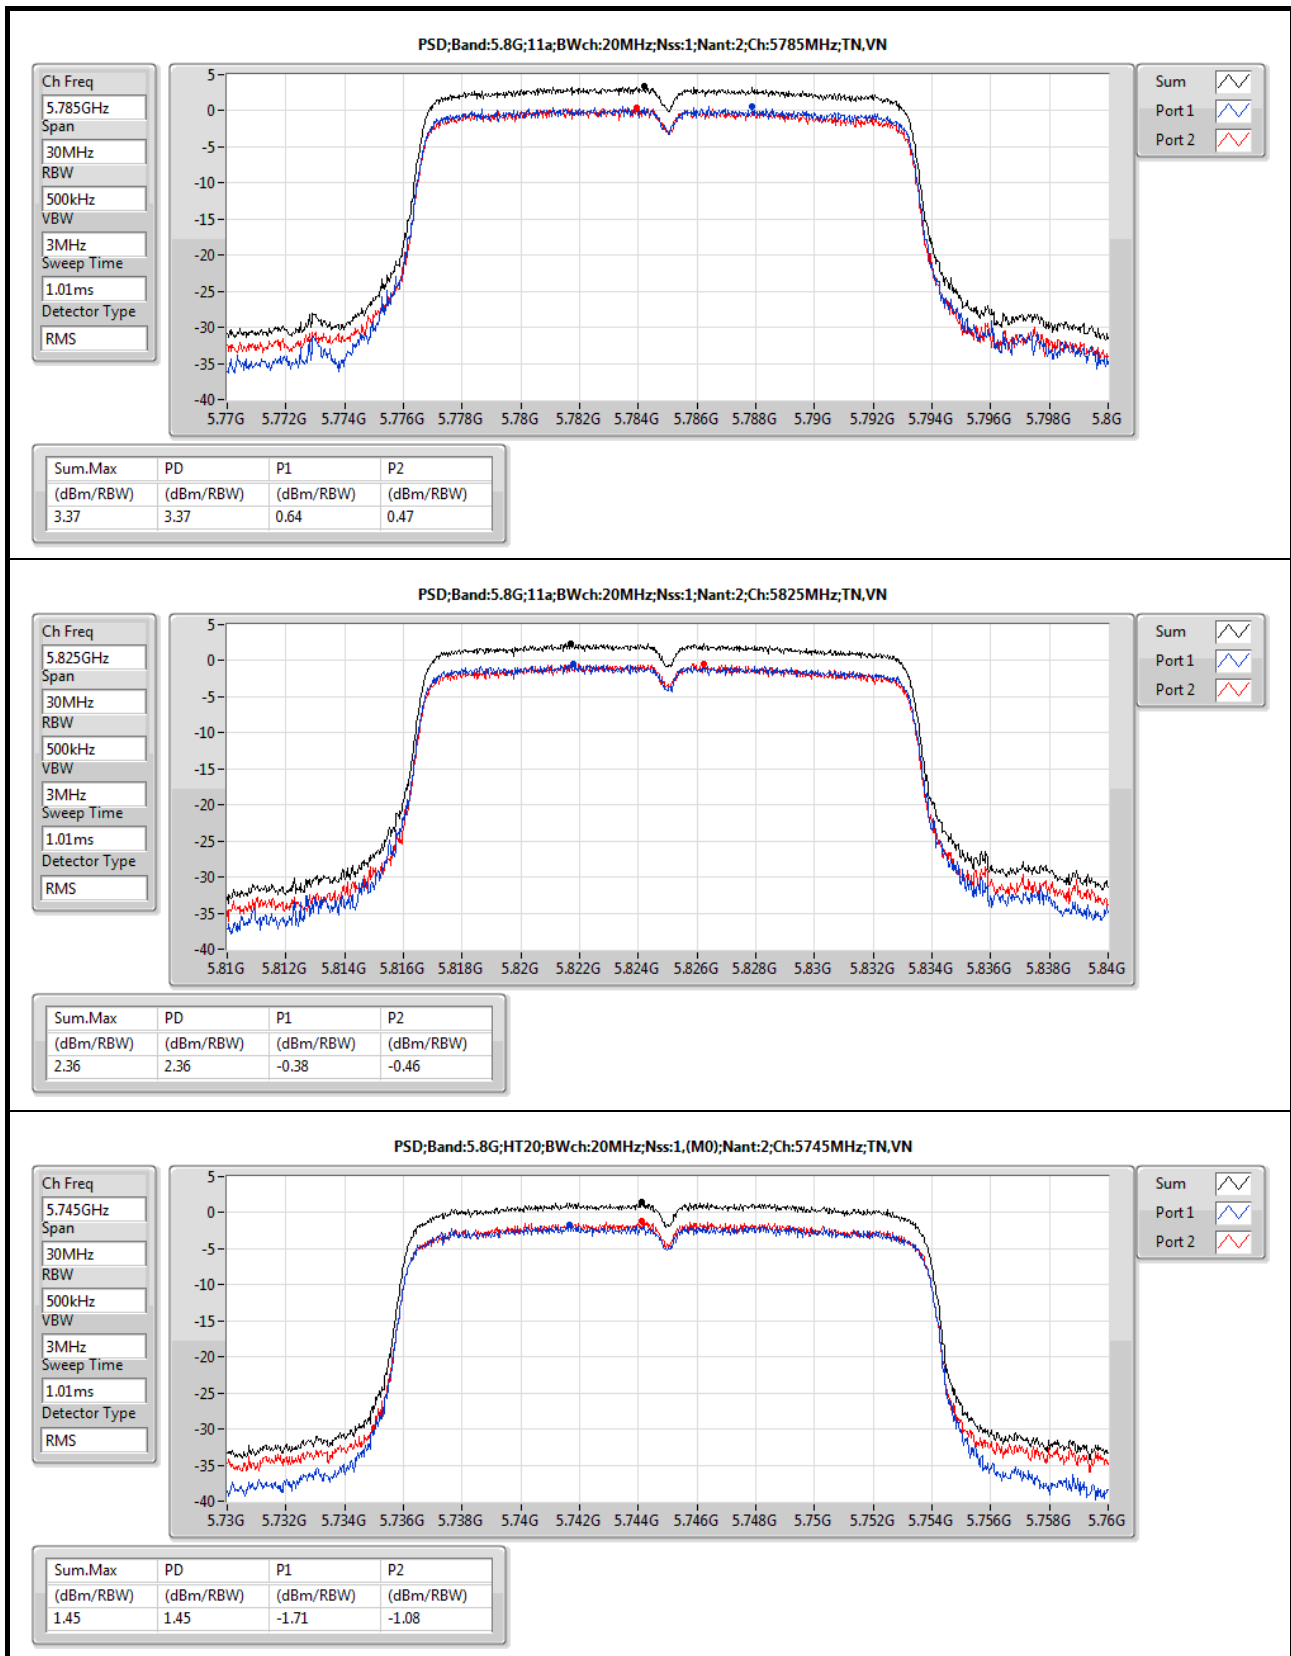

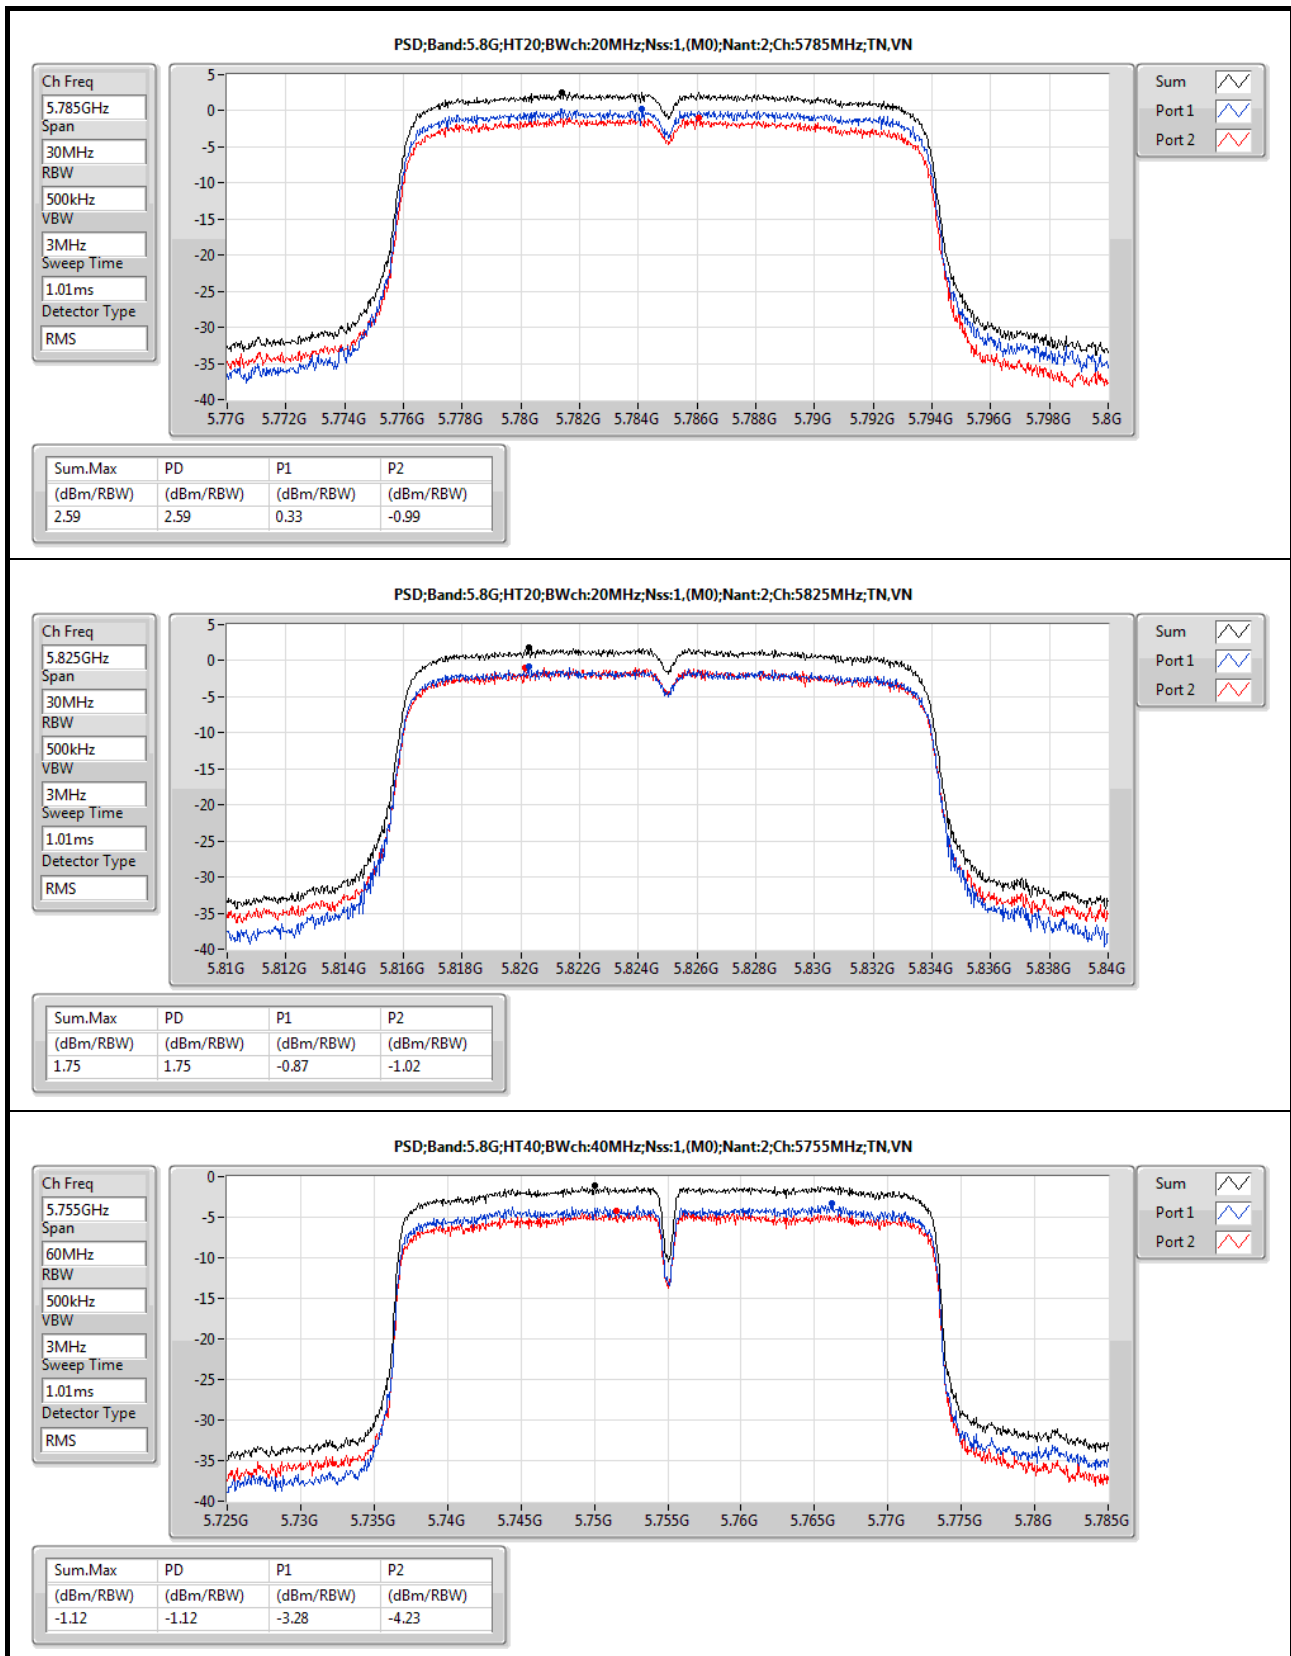

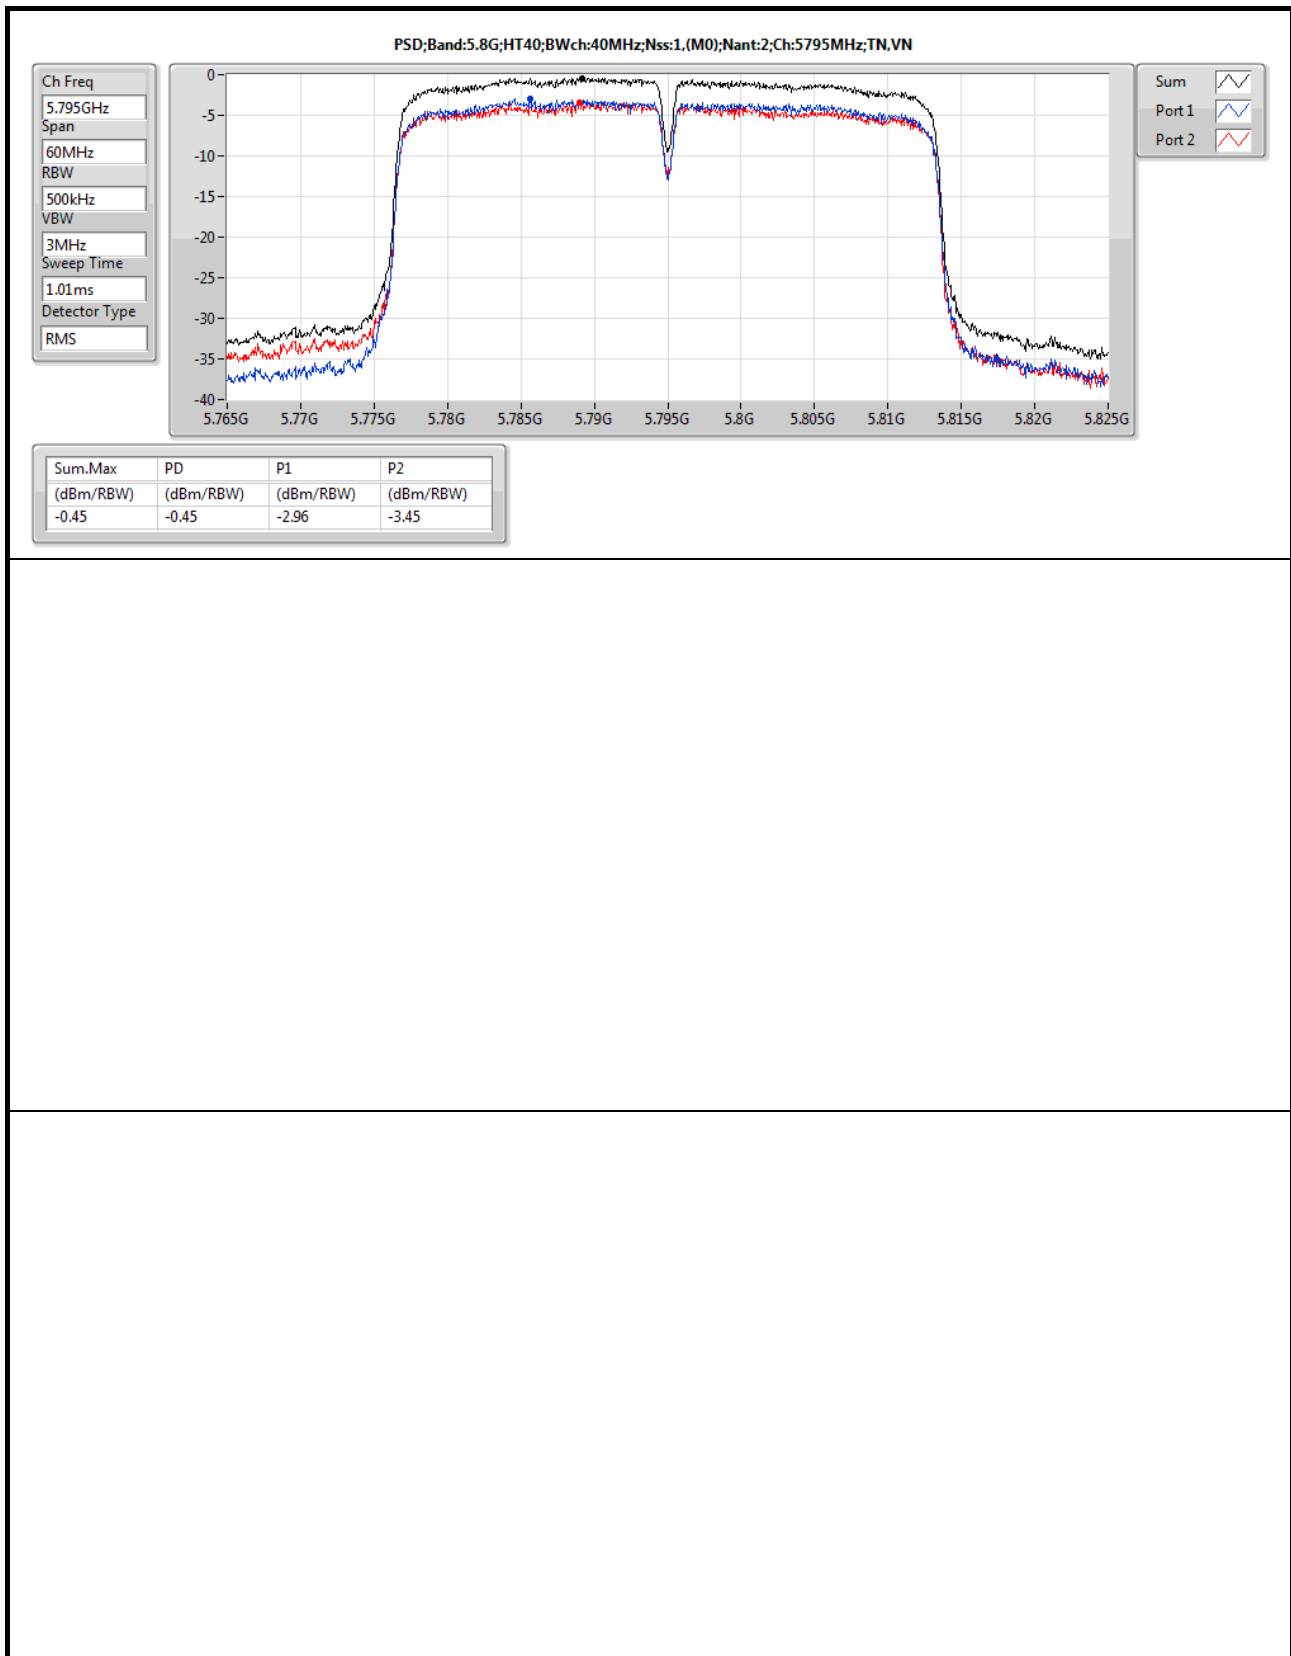



## RSE TX below 1GHz Result

## Appendix D.1

### Summary


| Mode                         | Result | Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Pol.<br>(H/V) | Azimuth<br>(°) | Height<br>(m) | Comments |
|------------------------------|--------|------|--------------|-------------------|-------------------|----------------|----------------|-------------|---------------|----------------|---------------|----------|
| 802.11n HT40_Nss1,(MCS0)_2TX | -      | -    | -            | -                 | -                 | -              | -              | -           | -             | -              | -             | -        |
| 5.15-5.25GHz                 | Pass   | PK   | 33.88M       | 29.97             | 40.00             | -10.03         | -6.15          | 3           | V             | NaN            | NaN           | -        |

## Result

| Mode                         | Result | Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Pol.<br>(H/V) | Azimuth<br>(°) | Height<br>(m) | Comments |
|------------------------------|--------|------|--------------|-------------------|-------------------|----------------|----------------|-------------|---------------|----------------|---------------|----------|
| 802.11n HT40_Nss1,(MCS0)_2TX | -      | -    | -            | -                 | -                 | -              | -              | -           | -             | -              | -             | -        |
| 5230MHz                      | Pass   | PK   | 33.88M       | 23.38             | 40.00             | -16.62         | -6.15          | 3           | H             | NaN            | NaN           | -        |
| 5230MHz                      | Pass   | PK   | 99.84M       | 23.16             | 43.50             | -20.34         | -10.50         | 3           | H             | NaN            | NaN           | -        |
| 5230MHz                      | Pass   | PK   | 198.78M      | 23.81             | 43.50             | -19.69         | -10.90         | 3           | H             | NaN            | NaN           | -        |
| 5230MHz                      | Pass   | PK   | 476.2M       | 25.13             | 46.00             | -20.87         | -2.76          | 3           | H             | NaN            | NaN           | -        |
| 5230MHz                      | Pass   | PK   | 722.58M      | 28.14             | 46.00             | -17.86         | 0.15           | 3           | H             | NaN            | NaN           | -        |
| 5230MHz                      | Pass   | PK   | 875.84M      | 33.30             | 46.00             | -12.70         | 2.66           | 3           | H             | NaN            | NaN           | -        |
| 5230MHz                      | Pass   | PK   | 33.88M       | 29.97             | 40.00             | -10.03         | -6.15          | 3           | V             | NaN            | NaN           | -        |
| 5230MHz                      | Pass   | PK   | 99.84M       | 28.30             | 43.50             | -15.20         | -10.50         | 3           | V             | NaN            | NaN           | -        |
| 5230MHz                      | Pass   | PK   | 146.4M       | 24.91             | 43.50             | -18.59         | -10.19         | 3           | V             | NaN            | NaN           | -        |
| 5230MHz                      | Pass   | PK   | 330.7M       | 23.04             | 46.00             | -22.96         | -6.01          | 3           | V             | NaN            | NaN           | -        |
| 5230MHz                      | Pass   | PK   | 579.02M      | 27.50             | 46.00             | -18.50         | -1.08          | 3           | V             | NaN            | NaN           | -        |
| 5230MHz                      | Pass   | PK   | 875.84M      | 31.61             | 46.00             | -14.39         | 2.66           | 3           | V             | NaN            | NaN           | -        |



RE TX below 1GHz;Band:5.2G;HT40;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:5230MHz; AC Adapter 1

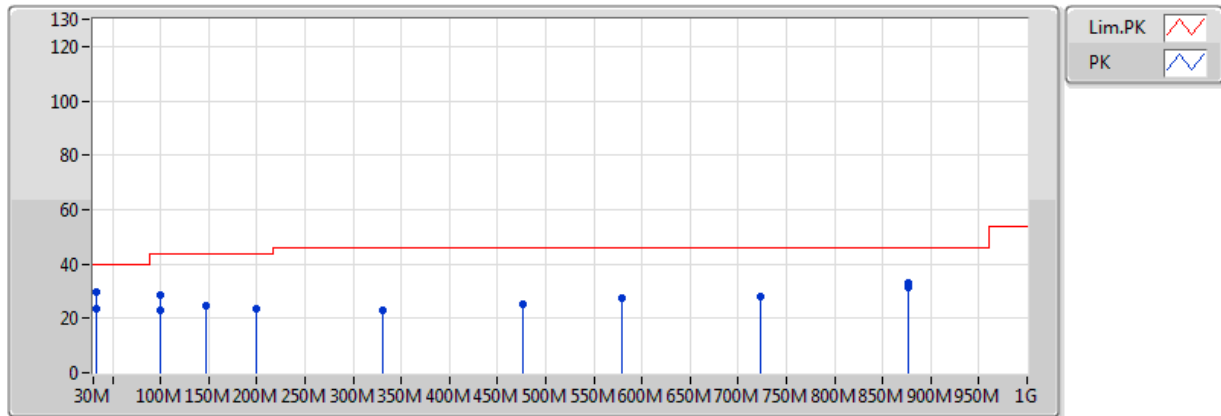

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| PK   | 33.88M   | 23.38         | 40.00         | -16.62     | -6.15      | 3       | H         | NaN        | NaN       | -        |
| PK   | 99.84M   | 23.16         | 43.50         | -20.34     | -10.50     | 3       | H         | NaN        | NaN       | -        |
| PK   | 198.78M  | 23.81         | 43.50         | -19.69     | -10.90     | 3       | H         | NaN        | NaN       | -        |
| PK   | 476.2M   | 25.13         | 46.00         | -20.87     | -2.76      | 3       | H         | NaN        | NaN       | -        |
| PK   | 722.58M  | 28.14         | 46.00         | -17.86     | 0.15       | 3       | H         | NaN        | NaN       | -        |
| PK   | 875.84M  | 33.30         | 46.00         | -12.70     | 2.66       | 3       | H         | NaN        | NaN       | -        |
| PK   | 33.88M   | 29.97         | 40.00         | -10.03     | -6.15      | 3       | V         | NaN        | NaN       | -        |
| PK   | 99.84M   | 28.30         | 43.50         | -15.20     | -10.50     | 3       | V         | NaN        | NaN       | -        |
| PK   | 146.4M   | 24.91         | 43.50         | -18.59     | -10.19     | 3       | V         | NaN        | NaN       | -        |
| PK   | 330.7M   | 23.04         | 46.00         | -22.96     | -6.01      | 3       | V         | NaN        | NaN       | -        |
| PK   | 579.02M  | 27.50         | 46.00         | -18.50     | -1.08      | 3       | V         | NaN        | NaN       | -        |
| PK   | 875.84M  | 31.61         | 46.00         | -14.39     | 2.66       | 3       | V         | NaN        | NaN       | -        |

**Summary**

| Mode                         | Result | Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Pol.<br>(H/V) | Azimuth<br>(°) | Height<br>(m) | Comments |
|------------------------------|--------|------|--------------|-------------------|-------------------|----------------|----------------|-------------|---------------|----------------|---------------|----------|
| 802.11n HT40_Nss1,(MCS0)_2TX | -      | -    | -            | -                 | -                 | -              | -              | -           | -             | -              | -             | -        |
| 5.15-5.25GHz                 | Pass   | AV   | 5.14972G     | 52.79             | 54.00             | -1.21          | 1.57           | 3           | H             | NaN            | NaN           | -        |
| 802.11a_Nss1_2TX             | -      | -    | -            | -                 | -                 | -              | -              | -           | -             | -              | -             | -        |
| 5.725-5.85GHz                | Pass   | AV   | 11.49G       | 52.40             | 54.00             | -1.60          | 11.66          | 3           | V             | NaN            | NaN           | -        |

**Result**

| Mode                         | Result | Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Pol.<br>(H/V) | Azimuth<br>(°) | Height<br>(m) | Comments |
|------------------------------|--------|------|--------------|-------------------|-------------------|----------------|----------------|-------------|---------------|----------------|---------------|----------|
| 802.11a_Nss1_2TX             | -      | -    | -            | -                 | -                 | -              | -              | -           | -             | -              | -             | -        |
| 5180MHz                      | Pass   | AV   | 5.149995G    | 49.82             | 54.00             | -4.18          | 1.57           | 3           | H             | NaN            | NaN           | -        |
| 5180MHz                      | Pass   | AV   | 5.179G       | 97.29             | Inf               | -Inf           | 1.62           | 3           | H             | NaN            | NaN           | -        |
| 5180MHz                      | Pass   | PK   | 5.1494G      | 65.65             | 74.00             | -8.35          | 1.57           | 3           | H             | NaN            | NaN           | -        |
| 5180MHz                      | Pass   | PK   | 5.1792G      | 106.93            | Inf               | -Inf           | 1.62           | 3           | H             | NaN            | NaN           | -        |
| 5180MHz                      | Pass   | AV   | 15.540G      | 44.74             | 54.00             | -9.26          | 12.18          | 3           | H             | NaN            | NaN           | -        |
| 5180MHz                      | Pass   | PK   | 8.023G       | 49.90             | 68.20             | -24.10         | 7.72           | 3           | H             | NaN            | NaN           | -        |
| 5180MHz                      | Pass   | PK   | 10.360G      | 60.33             | 68.20             | -7.87          | 10.72          | 3           | H             | NaN            | NaN           | -        |
| 5180MHz                      | Pass   | PK   | 15.540G      | 59.58             | 74.00             | -14.42         | 12.18          | 3           | H             | NaN            | NaN           | -        |
| 5180MHz                      | Pass   | AV   | 7.608G       | 36.92             | 54.00             | -17.08         | 7.06           | 3           | V             | NaN            | NaN           | -        |
| 5180MHz                      | Pass   | AV   | 15.540G      | 46.76             | 54.00             | -7.24          | 12.18          | 3           | V             | NaN            | NaN           | -        |
| 5180MHz                      | Pass   | PK   | 7.608G       | 49.33             | 74.00             | -24.67         | 7.06           | 3           | V             | NaN            | NaN           | -        |
| 5180MHz                      | Pass   | PK   | 10.360G      | 65.20             | 68.20             | -3.00          | 10.72          | 3           | V             | NaN            | NaN           | -        |
| 5180MHz                      | Pass   | PK   | 15.540G      | 59.63             | 74.00             | -14.37         | 12.18          | 3           | V             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | AV   | 5.1474G      | 49.31             | 54.00             | -4.69          | 1.57           | 3           | H             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | AV   | 5.2068G      | 97.74             | Inf               | -Inf           | 1.66           | 3           | H             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | AV   | 5.379G       | 41.67             | 54.00             | -12.33         | 1.92           | 3           | H             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | PK   | 5.1462G      | 60.29             | 74.00             | -13.71         | 1.57           | 3           | H             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | PK   | 5.2068G      | 107.35            | Inf               | -Inf           | 1.66           | 3           | H             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | PK   | 5.3634G      | 55.44             | 74.00             | -18.56         | 1.90           | 3           | H             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | AV   | 7.640G       | 35.31             | 54.00             | -18.69         | 7.12           | 3           | H             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | AV   | 15.560G      | 44.01             | 54.00             | -9.99          | 11.91          | 3           | H             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | PK   | 7.640G       | 49.30             | 74.00             | -24.70         | 7.12           | 3           | H             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | PK   | 10.400G      | 62.86             | 68.20             | -5.34          | 10.81          | 3           | H             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | PK   | 15.560G      | 57.78             | 74.00             | -16.22         | 11.91          | 3           | H             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | AV   | 15.600G      | 47.19             | 54.00             | -6.81          | 11.91          | 3           | V             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | PK   | 7.780G       | 50.30             | 68.20             | -23.70         | 7.36           | 3           | V             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | PK   | 10.400G      | 66.01             | 68.20             | -2.19          | 10.81          | 3           | V             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | PK   | 15.600G      | 58.47             | 74.00             | -15.53         | 11.91          | 3           | V             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | AV   | 5.1036G      | 42.52             | 54.00             | -11.48         | 1.51           | 3           | H             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | AV   | 5.2386G      | 96.65             | Inf               | -Inf           | 1.71           | 3           | H             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | AV   | 5.3952G      | 42.06             | 54.00             | -11.94         | 1.94           | 3           | H             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | PK   | 5.1198G      | 55.27             | 74.00             | -18.73         | 1.53           | 3           | H             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | PK   | 5.2374G      | 106.20            | Inf               | -Inf           | 1.71           | 3           | H             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | PK   | 5.379G       | 54.74             | 74.00             | -19.26         | 1.92           | 3           | H             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | AV   | 7.704G       | 35.67             | 54.00             | -18.33         | 7.24           | 3           | H             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | AV   | 15.720G      | 42.05             | 54.00             | -11.95         | 11.37          | 3           | H             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | PK   | 7.704G       | 49.84             | 74.00             | -24.16         | 7.24           | 3           | H             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | PK   | 10.480G      | 61.96             | 68.20             | -6.24          | 11.00          | 3           | H             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | PK   | 15.720G      | 56.23             | 74.00             | -17.77         | 11.37          | 3           | H             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | AV   | 15.720G      | 43.57             | 54.00             | -10.43         | 11.37          | 3           | V             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | PK   | 7.908G       | 50.40             | 68.20             | -17.80         | 7.58           | 3           | V             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | PK   | 10.480G      | 65.79             | 68.20             | -2.41          | 11.00          | 3           | V             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | PK   | 15.720G      | 58.08             | 74.00             | -15.92         | 11.37          | 3           | V             | NaN            | NaN           | -        |
| 802.11n HT20_Nss1,(MCS0)_2TX | -      | -    | -            | -                 | -                 | -              | -              | -           | -             | -              | -             | -        |
| 5180MHz                      | Pass   | AV   | 5.149995G    | 48.72             | 54.00             | -5.28          | 1.57           | 3           | H             | NaN            | NaN           | -        |
| 5180MHz                      | Pass   | AV   | 5.1786G      | 92.68             | Inf               | -Inf           | 1.62           | 3           | H             | NaN            | NaN           | -        |
| 5180MHz                      | Pass   | PK   | 5.1486G      | 65.16             | 74.00             | -8.84          | 1.57           | 3           | H             | NaN            | NaN           | -        |



## RSE TX above 1GHz Result

## Appendix D.2

| Mode                         | Result | Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Pol.<br>(H/V) | Azimuth<br>(°) | Height<br>(m) | Comments |
|------------------------------|--------|------|--------------|-------------------|-------------------|----------------|----------------|-------------|---------------|----------------|---------------|----------|
| 5180MHz                      | Pass   | PK   | 5.178G       | 102.63            | Inf               | -Inf           | 1.62           | 3           | H             | NaN            | NaN           | -        |
| 5180MHz                      | Pass   | AV   | 15.540G      | 44.78             | 54.00             | -9.22          | 12.18          | 3           | H             | NaN            | NaN           | -        |
| 5180MHz                      | Pass   | PK   | 8.002G       | 50.50             | 68.20             | -23.50         | 7.73           | 3           | H             | NaN            | NaN           | -        |
| 5180MHz                      | Pass   | PK   | 10.360G      | 62.81             | 68.20             | -5.39          | 10.72          | 3           | H             | NaN            | NaN           | -        |
| 5180MHz                      | Pass   | PK   | 15.540G      | 58.76             | 74.00             | -15.24         | 12.18          | 3           | H             | NaN            | NaN           | -        |
| 5180MHz                      | Pass   | AV   | 8.232G       | 36.11             | 54.00             | -17.89         | 7.64           | 3           | V             | NaN            | NaN           | -        |
| 5180MHz                      | Pass   | AV   | 15.540G      | 45.73             | 54.00             | -8.27          | 12.18          | 3           | V             | NaN            | NaN           | -        |
| 5180MHz                      | Pass   | PK   | 8.232G       | 50.35             | 74.00             | -23.65         | 7.64           | 3           | V             | NaN            | NaN           | -        |
| 5180MHz                      | Pass   | PK   | 10.360G      | 66.84             | 68.20             | -1.36          | 10.72          | 3           | V             | NaN            | NaN           | -        |
| 5180MHz                      | Pass   | PK   | 15.540G      | 60.27             | 74.00             | -13.73         | 12.18          | 3           | V             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | AV   | 5.148G       | 47.23             | 54.00             | -6.77          | 1.57           | 3           | H             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | AV   | 5.193G       | 93.59             | Inf               | -Inf           | 1.64           | 3           | H             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | AV   | 5.3952G      | 41.58             | 54.00             | -12.42         | 1.94           | 3           | H             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | PK   | 5.1474G      | 58.93             | 74.00             | -15.07         | 1.57           | 3           | H             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | PK   | 5.1924G      | 103.23            | Inf               | -Inf           | 1.64           | 3           | H             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | PK   | 5.3982G      | 54.61             | 74.00             | -19.39         | 1.95           | 3           | H             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | AV   | 8.124G       | 35.79             | 54.00             | -18.21         | 7.68           | 3           | H             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | AV   | 15.600G      | 43.79             | 54.00             | -10.21         | 11.91          | 3           | H             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | PK   | 8.124G       | 49.99             | 74.00             | -24.01         | 7.68           | 3           | H             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | PK   | 10.400G      | 62.30             | 68.20             | -5.90          | 10.81          | 3           | H             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | PK   | 15.600G      | 58.81             | 74.00             | -15.19         | 11.91          | 3           | H             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | AV   | 15.600G      | 44.43             | 54.00             | -9.57          | 11.91          | 3           | V             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | PK   | 7.892G       | 49.23             | 68.20             | -18.97         | 7.56           | 3           | V             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | PK   | 10.400G      | 65.12             | 68.20             | -3.08          | 10.81          | 3           | V             | NaN            | NaN           | -        |
| 5200MHz                      | Pass   | PK   | 15.600G      | 58.59             | 74.00             | -15.41         | 11.91          | 3           | V             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | AV   | 5.1468G      | 42.08             | 54.00             | -11.92         | 1.57           | 3           | H             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | AV   | 5.2386G      | 95.87             | Inf               | -Inf           | 1.71           | 3           | H             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | AV   | 5.4G         | 41.51             | 54.00             | -12.49         | 1.95           | 3           | H             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | PK   | 5.1252G      | 55.89             | 74.00             | -18.11         | 1.54           | 3           | H             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | PK   | 5.2392G      | 105.83            | Inf               | -Inf           | 1.71           | 3           | H             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | PK   | 5.3778G      | 54.71             | 74.00             | -19.29         | 1.92           | 3           | H             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | AV   | 8.124G       | 36.80             | 54.00             | -17.20         | 7.68           | 3           | H             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | AV   | 15.720G      | 41.76             | 54.00             | -12.24         | 11.37          | 3           | H             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | PK   | 8.124G       | 50.55             | 74.00             | -23.45         | 7.68           | 3           | H             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | PK   | 10.480G      | 59.85             | 68.20             | -8.35          | 11.00          | 3           | H             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | PK   | 15.720G      | 56.04             | 74.00             | -17.96         | 11.37          | 3           | H             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | AV   | 15.720G      | 41.98             | 54.00             | -12.02         | 11.37          | 3           | V             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | PK   | 7.246G       | 48.82             | 68.20             | -25.18         | 6.28           | 3           | V             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | PK   | 10.480G      | 65.28             | 68.20             | -2.92          | 11.00          | 3           | V             | NaN            | NaN           | -        |
| 5240MHz                      | Pass   | PK   | 15.720G      | 56.10             | 74.00             | -17.90         | 11.37          | 3           | V             | NaN            | NaN           | -        |
| 802.11n HT40_Nss1,(MCS0)_2TX | -      | -    | -            | -                 | -                 | -              | -              | -           | -             | -              | -             | -        |
| 5190MHz                      | Pass   | AV   | 5.14972G     | 52.79             | 54.00             | -1.21          | 1.57           | 3           | H             | NaN            | NaN           | -        |
| 5190MHz                      | Pass   | AV   | 5.19152G     | 90.68             | Inf               | -Inf           | 1.64           | 3           | H             | NaN            | NaN           | -        |
| 5190MHz                      | Pass   | PK   | 5.149995G    | 67.76             | 74.00             | -6.24          | 1.57           | 3           | H             | NaN            | NaN           | -        |
| 5190MHz                      | Pass   | PK   | 5.188G       | 100.48            | Inf               | -Inf           | 1.63           | 3           | H             | NaN            | NaN           | -        |
| 5190MHz                      | Pass   | AV   | 8.052G       | 36.80             | 54.00             | -17.20         | 7.71           | 3           | H             | NaN            | NaN           | -        |
| 5190MHz                      | Pass   | AV   | 15.570G      | 44.26             | 54.00             | -9.74          | 12.04          | 3           | H             | NaN            | NaN           | -        |
| 5190MHz                      | Pass   | PK   | 8.052G       | 49.82             | 74.00             | -24.18         | 7.71           | 3           | H             | NaN            | NaN           | -        |
| 5190MHz                      | Pass   | PK   | 10.380G      | 54.37             | 68.20             | -13.83         | 10.77          | 3           | H             | NaN            | NaN           | -        |



## RSE TX above 1GHz Result

## Appendix D.2

| Mode             | Result | Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Pol.<br>(H/V) | Azimuth<br>(°) | Height<br>(m) | Comments |
|------------------|--------|------|--------------|-------------------|-------------------|----------------|----------------|-------------|---------------|----------------|---------------|----------|
| 5190MHz          | Pass   | PK   | 15.570G      | 58.45             | 74.00             | -15.55         | 12.04          | 3           | H             | NaN            | NaN           | -        |
| 5190MHz          | Pass   | AV   | 15.570G      | 44.10             | 54.00             | -9.90          | 12.04          | 3           | V             | NaN            | NaN           | -        |
| 5190MHz          | Pass   | PK   | 7.888G       | 50.16             | 68.20             | -18.04         | 7.55           | 3           | V             | NaN            | NaN           | -        |
| 5190MHz          | Pass   | PK   | 10.380G      | 58.70             | 68.20             | -9.50          | 10.77          | 3           | V             | NaN            | NaN           | -        |
| 5190MHz          | Pass   | PK   | 15.570G      | 58.58             | 74.00             | -15.42         | 12.04          | 3           | V             | NaN            | NaN           | -        |
| 5230MHz          | Pass   | AV   | 5.1276G      | 45.92             | 54.00             | -8.08          | 1.54           | 3           | H             | NaN            | NaN           | -        |
| 5230MHz          | Pass   | AV   | 5.2284G      | 93.16             | Inf               | -Inf           | 1.69           | 3           | H             | NaN            | NaN           | -        |
| 5230MHz          | Pass   | AV   | 5.3676G      | 41.88             | 54.00             | -12.12         | 1.90           | 3           | H             | NaN            | NaN           | -        |
| 5230MHz          | Pass   | PK   | 5.127G       | 57.64             | 74.00             | -16.36         | 1.54           | 3           | H             | NaN            | NaN           | -        |
| 5230MHz          | Pass   | PK   | 5.2278G      | 103.28            | Inf               | -Inf           | 1.69           | 3           | H             | NaN            | NaN           | -        |
| 5230MHz          | Pass   | PK   | 5.3982G      | 54.76             | 74.00             | -19.24         | 1.95           | 3           | H             | NaN            | NaN           | -        |
| 5230MHz          | Pass   | AV   | 15.690G      | 42.31             | 54.00             | -11.69         | 11.50          | 3           | H             | NaN            | NaN           | -        |
| 5230MHz          | Pass   | PK   | 8.012G       | 50.03             | 68.20             | -18.17         | 7.73           | 3           | H             | NaN            | NaN           | -        |
| 5230MHz          | Pass   | PK   | 10.460G      | 55.39             | 68.20             | -12.81         | 10.95          | 3           | H             | NaN            | NaN           | -        |
| 5230MHz          | Pass   | PK   | 15.690G      | 56.65             | 74.00             | -17.35         | 11.50          | 3           | H             | NaN            | NaN           | -        |
| 5230MHz          | Pass   | AV   | 8.288G       | 35.98             | 54.00             | -18.02         | 7.61           | 3           | V             | NaN            | NaN           | -        |
| 5230MHz          | Pass   | AV   | 15.690G      | 42.44             | 54.00             | -11.56         | 11.50          | 3           | V             | NaN            | NaN           | -        |
| 5230MHz          | Pass   | PK   | 8.288G       | 50.09             | 74.00             | -23.91         | 7.61           | 3           | V             | NaN            | NaN           | -        |
| 5230MHz          | Pass   | PK   | 10.460G      | 60.95             | 68.20             | -7.25          | 10.95          | 3           | V             | NaN            | NaN           | -        |
| 5230MHz          | Pass   | PK   | 15.690G      | 56.51             | 74.00             | -17.49         | 11.50          | 3           | V             | NaN            | NaN           | -        |
| 802.11a_Nss1_2TX | -      | -    | -            | -                 | -                 | -              | -              | -           | -             | -              | -             | -        |
| 5745MHz          | Pass   | AV   | 5.63384G     | 41.93             | Inf               | -Inf           | 2.33           | 3           | H             | NaN            | NaN           | -        |
| 5745MHz          | Pass   | AV   | 5.6926G      | 42.41             | Inf               | -Inf           | 2.43           | 3           | H             | NaN            | NaN           | -        |
| 5745MHz          | Pass   | AV   | 5.7199G      | 47.90             | Inf               | -Inf           | 2.47           | 3           | H             | NaN            | NaN           | -        |
| 5745MHz          | Pass   | AV   | 5.72484G     | 53.07             | Inf               | -Inf           | 2.48           | 3           | H             | NaN            | NaN           | -        |
| 5745MHz          | Pass   | AV   | 5.74668G     | 92.53             | Inf               | -Inf           | 2.51           | 3           | H             | NaN            | NaN           | -        |
| 5745MHz          | Pass   | PK   | 5.62656G     | 55.34             | 68.20             | -12.86         | 2.32           | 3           | H             | NaN            | NaN           | -        |
| 5745MHz          | Pass   | PK   | 5.6796G      | 55.39             | 90.10             | -34.71         | 2.41           | 3           | H             | NaN            | NaN           | -        |
| 5745MHz          | Pass   | PK   | 5.71886G     | 61.92             | 110.48            | -48.56         | 2.47           | 3           | H             | NaN            | NaN           | -        |
| 5745MHz          | Pass   | PK   | 5.72406G     | 66.07             | 120.06            | -53.99         | 2.48           | 3           | H             | NaN            | NaN           | -        |
| 5745MHz          | Pass   | PK   | 5.74668G     | 101.98            | Inf               | -Inf           | 2.51           | 3           | H             | NaN            | NaN           | -        |
| 5745MHz          | Pass   | AV   | 11.49G       | 44.97             | 54.00             | -9.03          | 11.66          | 3           | H             | NaN            | NaN           | -        |
| 5745MHz          | Pass   | PK   | 7.804G       | 49.59             | 68.20             | -18.61         | 7.40           | 3           | H             | NaN            | NaN           | -        |
| 5745MHz          | Pass   | PK   | 11.49G       | 58.79             | 74.00             | -15.21         | 11.66          | 3           | H             | NaN            | NaN           | -        |
| 5745MHz          | Pass   | PK   | 17.235G      | 61.15             | 68.20             | -7.05          | 16.03          | 3           | H             | NaN            | NaN           | -        |
| 5745MHz          | Pass   | AV   | 11.49G       | 52.40             | 54.00             | -1.60          | 11.66          | 3           | V             | NaN            | NaN           | -        |
| 5745MHz          | Pass   | PK   | 7.108G       | 48.34             | 68.20             | -19.86         | 5.95           | 3           | V             | NaN            | NaN           | -        |
| 5745MHz          | Pass   | PK   | 11.49G       | 67.21             | 74.00             | -6.79          | 11.66          | 3           | V             | NaN            | NaN           | -        |
| 5745MHz          | Pass   | PK   | 17.235G      | 61.53             | 68.20             | -6.67          | 16.03          | 3           | V             | NaN            | NaN           | -        |
| 5785MHz          | Pass   | AV   | 5.63085G     | 42.91             | Inf               | -Inf           | 2.33           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz          | Pass   | AV   | 5.6939G      | 42.99             | Inf               | -Inf           | 2.43           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz          | Pass   | AV   | 5.7173G      | 44.46             | Inf               | -Inf           | 2.47           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz          | Pass   | AV   | 5.72055G     | 43.85             | Inf               | -Inf           | 2.47           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz          | Pass   | AV   | 5.7784G      | 97.75             | Inf               | -Inf           | 2.57           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz          | Pass   | AV   | 5.8525G      | 43.82             | Inf               | -Inf           | 2.68           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz          | Pass   | AV   | 5.8603G      | 42.96             | Inf               | -Inf           | 2.70           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz          | Pass   | AV   | 5.87915G     | 43.01             | Inf               | -Inf           | 2.73           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz          | Pass   | AV   | 5.9383G      | 42.69             | Inf               | -Inf           | 2.83           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz          | Pass   | PK   | 5.63345G     | 55.51             | 68.20             | -12.69         | 2.33           | 3           | H             | NaN            | NaN           | -        |



## RSE TX above 1GHz Result

## Appendix D.2

| Mode                         | Result | Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Pol.<br>(H/V) | Azimuth<br>(°) | Height<br>(m) | Comments |
|------------------------------|--------|------|--------------|-------------------|-------------------|----------------|----------------|-------------|---------------|----------------|---------------|----------|
| 5785MHz                      | Pass   | PK   | 5.6939G      | 54.81             | 100.69            | -45.88         | 2.43           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz                      | Pass   | PK   | 5.71795G     | 56.32             | 110.23            | -53.91         | 2.47           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz                      | Pass   | PK   | 5.7225G      | 55.52             | 116.50            | -60.98         | 2.48           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz                      | Pass   | PK   | 5.77775G     | 106.99            | Inf               | -Inf           | 2.56           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz                      | Pass   | PK   | 5.8512G      | 55.98             | 119.46            | -63.48         | 2.68           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz                      | Pass   | PK   | 5.859G       | 55.60             | 109.68            | -54.08         | 2.69           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz                      | Pass   | PK   | 5.8915G      | 55.79             | 92.99             | -37.20         | 2.75           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz                      | Pass   | PK   | 5.9383G      | 54.76             | 68.20             | -13.44         | 2.83           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz                      | Pass   | AV   | 11.57G       | 43.47             | 54.00             | -10.53         | 11.57          | 3           | H             | NaN            | NaN           | -        |
| 5785MHz                      | Pass   | PK   | 8.54G        | 50.82             | 68.20             | -17.38         | 7.59           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz                      | Pass   | PK   | 11.57G       | 56.91             | 74.00             | -17.09         | 11.57          | 3           | H             | NaN            | NaN           | -        |
| 5785MHz                      | Pass   | PK   | 17.355G      | 62.54             | 68.20             | -5.66          | 16.77          | 3           | H             | NaN            | NaN           | -        |
| 5785MHz                      | Pass   | AV   | 11.57G       | 51.74             | 54.00             | -2.26          | 11.57          | 3           | V             | NaN            | NaN           | -        |
| 5785MHz                      | Pass   | PK   | 8.624G       | 50.88             | 68.20             | -17.32         | 7.71           | 3           | V             | NaN            | NaN           | -        |
| 5785MHz                      | Pass   | PK   | 11.57G       | 66.08             | 74.00             | -7.92          | 11.57          | 3           | V             | NaN            | NaN           | -        |
| 5785MHz                      | Pass   | PK   | 17.355G      | 62.41             | 68.20             | -5.79          | 16.77          | 3           | V             | NaN            | NaN           | -        |
| 5825MHz                      | Pass   | AV   | 5.83039G     | 94.04             | Inf               | -Inf           | 2.65           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz                      | Pass   | AV   | 5.8501G      | 47.10             | Inf               | -Inf           | 2.68           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz                      | Pass   | AV   | 5.85523G     | 44.51             | Inf               | -Inf           | 2.69           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz                      | Pass   | AV   | 5.8771G      | 44.96             | Inf               | -Inf           | 2.72           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz                      | Pass   | AV   | 5.93137G     | 42.83             | Inf               | -Inf           | 2.81           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz                      | Pass   | PK   | 5.82904G     | 103.67            | Inf               | -Inf           | 2.65           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz                      | Pass   | PK   | 5.8501G      | 62.04             | 121.97            | -59.93         | 2.68           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz                      | Pass   | PK   | 5.85523G     | 57.18             | 110.74            | -53.56         | 2.69           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz                      | Pass   | PK   | 5.87737G     | 56.15             | 103.45            | -47.30         | 2.72           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz                      | Pass   | PK   | 5.93056G     | 55.78             | 68.20             | -12.42         | 2.81           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz                      | Pass   | AV   | 8.1G         | 35.81             | 54.00             | -18.19         | 7.69           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz                      | Pass   | AV   | 11.65G       | 43.51             | 54.00             | -10.49         | 11.48          | 3           | H             | NaN            | NaN           | -        |
| 5825MHz                      | Pass   | PK   | 8.1G         | 50.50             | 74.00             | -23.50         | 7.69           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz                      | Pass   | PK   | 11.65G       | 57.48             | 74.00             | -16.52         | 11.48          | 3           | H             | NaN            | NaN           | -        |
| 5825MHz                      | Pass   | PK   | 17.475G      | 62.14             | 68.20             | -6.06          | 17.51          | 3           | H             | NaN            | NaN           | -        |
| 5825MHz                      | Pass   | AV   | 11.65G       | 51.02             | 54.00             | -2.98          | 11.48          | 3           | V             | NaN            | NaN           | -        |
| 5825MHz                      | Pass   | PK   | 7.788G       | 49.64             | 68.20             | -18.56         | 7.37           | 3           | V             | NaN            | NaN           | -        |
| 5825MHz                      | Pass   | PK   | 11.65G       | 64.76             | 74.00             | -9.24          | 11.48          | 3           | V             | NaN            | NaN           | -        |
| 5825MHz                      | Pass   | PK   | 17.475G      | 61.57             | 68.20             | -6.63          | 17.51          | 3           | V             | NaN            | NaN           | -        |
| 802.11n HT20_Nss1_(MCS0)_2TX | -      | -    | -            | -                 | -                 | -              | -              | -           | -             | -              | -             | -        |
| 5745MHz                      | Pass   | AV   | 5.63202G     | 42.74             | Inf               | -Inf           | 2.33           | 3           | H             | NaN            | NaN           | -        |
| 5745MHz                      | Pass   | AV   | 5.69208G     | 43.12             | Inf               | -Inf           | 2.43           | 3           | H             | NaN            | NaN           | -        |
| 5745MHz                      | Pass   | AV   | 5.7199G      | 47.96             | Inf               | -Inf           | 2.47           | 3           | H             | NaN            | NaN           | -        |
| 5745MHz                      | Pass   | AV   | 5.72484G     | 53.89             | Inf               | -Inf           | 2.48           | 3           | H             | NaN            | NaN           | -        |
| 5745MHz                      | Pass   | AV   | 5.74798G     | 92.30             | Inf               | -Inf           | 2.52           | 3           | H             | NaN            | NaN           | -        |
| 5745MHz                      | Pass   | PK   | 5.63384G     | 55.38             | 68.20             | -12.82         | 2.33           | 3           | H             | NaN            | NaN           | -        |
| 5745MHz                      | Pass   | PK   | 5.6718G      | 54.94             | 84.33             | -29.39         | 2.39           | 3           | H             | NaN            | NaN           | -        |
| 5745MHz                      | Pass   | PK   | 5.71964G     | 64.10             | 110.70            | -46.60         | 2.47           | 3           | H             | NaN            | NaN           | -        |
| 5745MHz                      | Pass   | PK   | 5.72276G     | 67.77             | 117.09            | -49.32         | 2.48           | 3           | H             | NaN            | NaN           | -        |
| 5745MHz                      | Pass   | PK   | 5.74668G     | 101.78            | Inf               | -Inf           | 2.51           | 3           | H             | NaN            | NaN           | -        |
| 5745MHz                      | Pass   | AV   | 11.49G       | 44.78             | 54.00             | -9.22          | 11.66          | 3           | H             | NaN            | NaN           | -        |
| 5745MHz                      | Pass   | PK   | 8.595G       | 49.72             | 68.20             | -18.48         | 7.66           | 3           | H             | NaN            | NaN           | -        |
| 5745MHz                      | Pass   | PK   | 11.49G       | 58.85             | 74.00             | -15.15         | 11.66          | 3           | H             | NaN            | NaN           | -        |



## RSE TX above 1GHz Result

## Appendix D.2

| Mode    | Result | Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Pol.<br>(H/V) | Azimuth<br>(°) | Height<br>(m) | Comments |
|---------|--------|------|--------------|-------------------|-------------------|----------------|----------------|-------------|---------------|----------------|---------------|----------|
| 5745MHz | Pass   | PK   | 17.235G      | 60.98             | 68.20             | -7.22          | 16.03          | 3           | H             | NaN            | NaN           | -        |
| 5745MHz | Pass   | AV   | 11.49G       | 51.60             | 54.00             | -2.40          | 11.66          | 3           | V             | NaN            | NaN           | -        |
| 5745MHz | Pass   | PK   | 7.898G       | 50.40             | 68.20             | -17.80         | 7.57           | 3           | V             | NaN            | NaN           | -        |
| 5745MHz | Pass   | PK   | 11.49G       | 66.21             | 74.00             | -7.79          | 11.66          | 3           | V             | NaN            | NaN           | -        |
| 5745MHz | Pass   | PK   | 17.235G      | 60.78             | 68.20             | -7.42          | 16.03          | 3           | V             | NaN            | NaN           | -        |
| 5785MHz | Pass   | AV   | 5.6276G      | 43.03             | Inf               | -Inf           | 2.32           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz | Pass   | AV   | 5.6978G      | 43.03             | Inf               | -Inf           | 2.44           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz | Pass   | AV   | 5.7173G      | 44.60             | Inf               | -Inf           | 2.47           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz | Pass   | AV   | 5.72055G     | 44.12             | Inf               | -Inf           | 2.47           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz | Pass   | AV   | 5.7797G      | 96.50             | Inf               | -Inf           | 2.57           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz | Pass   | AV   | 5.85315G     | 43.03             | Inf               | -Inf           | 2.69           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz | Pass   | AV   | 5.8707G      | 42.77             | Inf               | -Inf           | 2.71           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz | Pass   | AV   | 5.87655G     | 42.78             | Inf               | -Inf           | 2.72           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz | Pass   | AV   | 5.9396G      | 42.63             | Inf               | -Inf           | 2.83           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz | Pass   | PK   | 5.63865G     | 55.75             | 68.20             | -12.45         | 2.34           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz | Pass   | PK   | 5.66465G     | 56.23             | 79.04             | -22.81         | 2.38           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz | Pass   | PK   | 5.7173G      | 56.56             | 110.04            | -53.48         | 2.47           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz | Pass   | PK   | 5.72055G     | 55.50             | 112.05            | -56.55         | 2.47           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz | Pass   | PK   | 5.78035G     | 106.59            | Inf               | -Inf           | 2.57           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz | Pass   | PK   | 5.8512G      | 55.19             | 119.46            | -64.27         | 2.68           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz | Pass   | PK   | 5.8603G      | 55.36             | 109.32            | -53.96         | 2.70           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz | Pass   | PK   | 5.89475G     | 55.00             | 90.59             | -35.59         | 2.75           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz | Pass   | PK   | 5.93895G     | 54.66             | 68.20             | -13.54         | 2.83           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz | Pass   | AV   | 11.57G       | 42.72             | 54.00             | -11.28         | 11.57          | 3           | H             | NaN            | NaN           | -        |
| 5785MHz | Pass   | PK   | 7.104G       | 48.41             | 68.20             | -19.79         | 5.94           | 3           | H             | NaN            | NaN           | -        |
| 5785MHz | Pass   | PK   | 11.57G       | 57.38             | 74.00             | -16.62         | 11.57          | 3           | H             | NaN            | NaN           | -        |
| 5785MHz | Pass   | PK   | 17.355G      | 62.82             | 68.20             | -5.38          | 16.77          | 3           | H             | NaN            | NaN           | -        |
| 5785MHz | Pass   | AV   | 11.57G       | 49.84             | 54.00             | -4.16          | 11.57          | 3           | V             | NaN            | NaN           | -        |
| 5785MHz | Pass   | PK   | 8.636G       | 50.03             | 68.20             | -18.17         | 7.72           | 3           | V             | NaN            | NaN           | -        |
| 5785MHz | Pass   | PK   | 11.57G       | 65.69             | 74.00             | -8.31          | 11.57          | 3           | V             | NaN            | NaN           | -        |
| 5785MHz | Pass   | PK   | 17.355G      | 61.39             | 68.20             | -6.81          | 16.77          | 3           | V             | NaN            | NaN           | -        |
| 5825MHz | Pass   | AV   | 5.82796G     | 93.27             | Inf               | -Inf           | 2.64           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz | Pass   | AV   | 5.8501G      | 46.66             | Inf               | -Inf           | 2.68           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz | Pass   | AV   | 5.8555G      | 44.26             | Inf               | -Inf           | 2.69           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz | Pass   | AV   | 5.87683G     | 44.28             | Inf               | -Inf           | 2.72           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz | Pass   | AV   | 5.93488G     | 42.78             | Inf               | -Inf           | 2.82           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz | Pass   | PK   | 5.82823G     | 102.95            | Inf               | -Inf           | 2.65           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz | Pass   | PK   | 5.85145G     | 62.13             | 118.89            | -56.76         | 2.68           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz | Pass   | PK   | 5.85523G     | 58.18             | 110.74            | -52.56         | 2.69           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz | Pass   | PK   | 5.8771G      | 55.77             | 103.65            | -47.88         | 2.72           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz | Pass   | PK   | 5.92948G     | 55.43             | 68.20             | -12.77         | 2.81           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz | Pass   | AV   | 8.128G       | 35.94             | 54.00             | -18.06         | 7.68           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz | Pass   | AV   | 11.65G       | 43.07             | 54.00             | -10.93         | 11.48          | 3           | H             | NaN            | NaN           | -        |
| 5825MHz | Pass   | PK   | 8.128G       | 49.69             | 74.00             | -24.31         | 7.68           | 3           | H             | NaN            | NaN           | -        |
| 5825MHz | Pass   | PK   | 11.65G       | 58.60             | 74.00             | -15.40         | 11.48          | 3           | H             | NaN            | NaN           | -        |
| 5825MHz | Pass   | PK   | 17.475G      | 62.53             | 68.20             | -5.67          | 17.51          | 3           | H             | NaN            | NaN           | -        |
| 5825MHz | Pass   | AV   | 7.388G       | 34.66             | 54.00             | -19.34         | 6.62           | 3           | V             | NaN            | NaN           | -        |
| 5825MHz | Pass   | AV   | 11.65G       | 49.46             | 54.00             | -4.54          | 11.48          | 3           | V             | NaN            | NaN           | -        |
| 5825MHz | Pass   | PK   | 7.388G       | 48.86             | 74.00             | -25.14         | 6.62           | 3           | V             | NaN            | NaN           | -        |




## RSE TX above 1GHz Result

## Appendix D.2

| Mode                         | Result | Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Pol.<br>(H/V) | Azimuth<br>(°) | Height<br>(m) | Comments |
|------------------------------|--------|------|--------------|-------------------|-------------------|----------------|----------------|-------------|---------------|----------------|---------------|----------|
| 5825MHz                      | Pass   | PK   | 11.65G       | 64.82             | 74.00             | -9.18          | 11.48          | 3           | V             | NaN            | NaN           | -        |
| 5825MHz                      | Pass   | PK   | 17.475G      | 62.38             | 68.20             | -5.82          | 17.51          | 3           | V             | NaN            | NaN           | -        |
| 802.11n HT40_Nss1,(MCS0)_2TX | -      | -    | -            | -                 | -                 | -              | -              | -           | -             | -              | -             | -        |
| 5755MHz                      | Pass   | AV   | 5.64949G     | 43.05             | Inf               | -Inf           | 2.36           | 3           | H             | NaN            | NaN           | -        |
| 5755MHz                      | Pass   | AV   | 5.69816G     | 45.62             | Inf               | -Inf           | 2.44           | 3           | H             | NaN            | NaN           | -        |
| 5755MHz                      | Pass   | AV   | 5.71831G     | 55.57             | Inf               | -Inf           | 2.47           | 3           | H             | NaN            | NaN           | -        |
| 5755MHz                      | Pass   | AV   | 5.72017G     | 54.93             | Inf               | -Inf           | 2.47           | 3           | H             | NaN            | NaN           | -        |
| 5755MHz                      | Pass   | AV   | 5.75675G     | 94.39             | Inf               | -Inf           | 2.53           | 3           | H             | NaN            | NaN           | -        |
| 5755MHz                      | Pass   | PK   | 5.63926G     | 55.19             | 68.20             | -13.01         | 2.34           | 3           | H             | NaN            | NaN           | -        |
| 5755MHz                      | Pass   | PK   | 5.69754G     | 58.65             | 103.38            | -44.73         | 2.44           | 3           | H             | NaN            | NaN           | -        |
| 5755MHz                      | Pass   | PK   | 5.71986G     | 69.43             | 110.76            | -41.33         | 2.47           | 3           | H             | NaN            | NaN           | -        |
| 5755MHz                      | Pass   | PK   | 5.72141G     | 69.12             | 114.01            | -44.89         | 2.47           | 3           | H             | NaN            | NaN           | -        |
| 5755MHz                      | Pass   | PK   | 5.75644G     | 103.21            | Inf               | -Inf           | 2.53           | 3           | H             | NaN            | NaN           | -        |
| 5755MHz                      | Pass   | AV   | 8.032G       | 35.82             | 54.00             | -18.18         | 7.72           | 3           | H             | NaN            | NaN           | -        |
| 5755MHz                      | Pass   | AV   | 11.51G       | 43.28             | 54.00             | -10.72         | 11.64          | 3           | H             | NaN            | NaN           | -        |
| 5755MHz                      | Pass   | PK   | 8.032G       | 49.71             | 74.00             | -24.29         | 7.72           | 3           | H             | NaN            | NaN           | -        |
| 5755MHz                      | Pass   | PK   | 11.51G       | 56.80             | 74.00             | -17.20         | 11.64          | 3           | H             | NaN            | NaN           | -        |
| 5755MHz                      | Pass   | PK   | 17.265G      | 60.96             | 68.20             | -7.24          | 16.21          | 3           | H             | NaN            | NaN           | -        |
| 5755MHz                      | Pass   | AV   | 7.6G         | 35.10             | 54.00             | -18.90         | 7.05           | 3           | V             | NaN            | NaN           | -        |
| 5755MHz                      | Pass   | AV   | 11.51G       | 49.07             | 54.00             | -4.93          | 11.64          | 3           | V             | NaN            | NaN           | -        |
| 5755MHz                      | Pass   | PK   | 7.6G         | 49.14             | 74.00             | -24.86         | 7.05           | 3           | V             | NaN            | NaN           | -        |
| 5755MHz                      | Pass   | PK   | 11.51G       | 62.10             | 74.00             | -11.90         | 11.64          | 3           | V             | NaN            | NaN           | -        |
| 5755MHz                      | Pass   | PK   | 17.265G      | 61.13             | 68.20             | -7.07          | 16.21          | 3           | V             | NaN            | NaN           | -        |
| 5795MHz                      | Pass   | AV   | 5.79304G     | 90.25             | Inf               | -Inf           | 2.59           | 3           | H             | NaN            | NaN           | -        |
| 5795MHz                      | Pass   | AV   | 5.85028G     | 44.39             | Inf               | -Inf           | 2.68           | 3           | H             | NaN            | NaN           | -        |
| 5795MHz                      | Pass   | AV   | 5.85532G     | 43.83             | Inf               | -Inf           | 2.69           | 3           | H             | NaN            | NaN           | -        |
| 5795MHz                      | Pass   | AV   | 5.89816G     | 43.59             | Inf               | -Inf           | 2.76           | 3           | H             | NaN            | NaN           | -        |
| 5795MHz                      | Pass   | AV   | 5.92948G     | 42.81             | Inf               | -Inf           | 2.81           | 3           | H             | NaN            | NaN           | -        |
| 5795MHz                      | Pass   | PK   | 5.79304G     | 99.95             | Inf               | -Inf           | 2.59           | 3           | H             | NaN            | NaN           | -        |
| 5795MHz                      | Pass   | PK   | 5.85064G     | 55.89             | 120.74            | -64.85         | 2.68           | 3           | H             | NaN            | NaN           | -        |
| 5795MHz                      | Pass   | PK   | 5.85604G     | 55.17             | 110.51            | -55.34         | 2.69           | 3           | H             | NaN            | NaN           | -        |
| 5795MHz                      | Pass   | PK   | 5.90392G     | 54.94             | 83.80             | -28.86         | 2.77           | 3           | H             | NaN            | NaN           | -        |
| 5795MHz                      | Pass   | PK   | 5.93128G     | 54.80             | 68.20             | -13.40         | 2.81           | 3           | H             | NaN            | NaN           | -        |
| 5795MHz                      | Pass   | AV   | 11.59G       | 41.91             | 54.00             | -12.09         | 11.55          | 3           | H             | NaN            | NaN           | -        |
| 5795MHz                      | Pass   | PK   | 8.64G        | 49.49             | 68.20             | -18.71         | 7.73           | 3           | H             | NaN            | NaN           | -        |
| 5795MHz                      | Pass   | PK   | 11.59G       | 55.73             | 74.00             | -18.27         | 11.55          | 3           | H             | NaN            | NaN           | -        |
| 5795MHz                      | Pass   | PK   | 17.385G      | 61.65             | 68.20             | -6.55          | 16.95          | 3           | H             | NaN            | NaN           | -        |
| 5795MHz                      | Pass   | AV   | 11.59G       | 48.31             | 54.00             | -5.69          | 11.55          | 3           | V             | NaN            | NaN           | -        |
| 5795MHz                      | Pass   | PK   | 7.888G       | 49.57             | 68.20             | -18.63         | 7.55           | 3           | V             | NaN            | NaN           | -        |
| 5795MHz                      | Pass   | PK   | 11.59G       | 61.53             | 74.00             | -12.47         | 11.55          | 3           | V             | NaN            | NaN           | -        |
| 5795MHz                      | Pass   | PK   | 17.385G      | 61.90             | 68.20             | -6.30          | 16.95          | 3           | V             | NaN            | NaN           | -        |




RE TX above 1GHz;Band:5.2G;11a;BWch:20MHz;Nss:1;Nant:2;Ch:5180MHz;TX

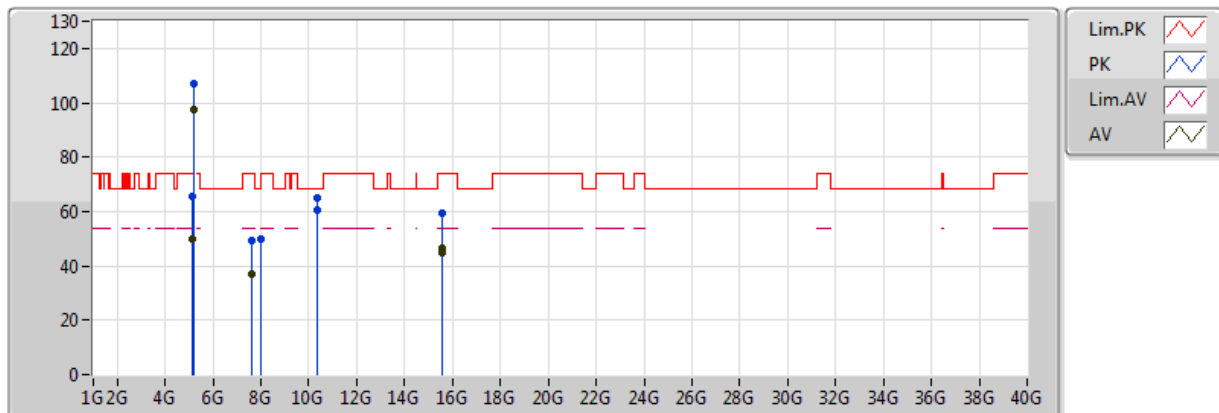

EUT = X axis , ANT = X axis

| Type | Freq(Hz)  | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|-----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.149995G | 49.82         | 54.00         | -4.18      | 1.57       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.179G    | 97.29         | Inf           | -Inf       | 1.62       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.1494G   | 65.65         | 74.00         | -8.35      | 1.57       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.1792G   | 106.93        | Inf           | -Inf       | 1.62       | 3       | H         | NaN        | NaN       | -        |
| AV   | 15.540G   | 44.74         | 54.00         | -9.26      | 12.18      | 3       | H         | NaN        | NaN       | -        |
| PK   | 8.023G    | 49.90         | 68.20         | -24.10     | 7.72       | 3       | H         | NaN        | NaN       | -        |
| PK   | 10.360G   | 60.33         | 68.20         | -7.87      | 10.72      | 3       | H         | NaN        | NaN       | -        |
| PK   | 15.540G   | 59.58         | 74.00         | -14.42     | 12.18      | 3       | H         | NaN        | NaN       | -        |
| AV   | 7.608G    | 36.92         | 54.00         | -17.08     | 7.06       | 3       | V         | NaN        | NaN       | -        |
| AV   | 15.540G   | 46.76         | 54.00         | -7.24      | 12.18      | 3       | V         | NaN        | NaN       | -        |
| PK   | 7.608G    | 49.33         | 74.00         | -24.67     | 7.06       | 3       | V         | NaN        | NaN       | -        |
| PK   | 10.360G   | 65.20         | 68.20         | -3.00      | 10.72      | 3       | V         | NaN        | NaN       | -        |
| PK   | 15.540G   | 59.63         | 74.00         | -14.37     | 12.18      | 3       | V         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.2G;11a;BWch:20MHz;Nss:1;Nant:2;Ch:5180MHz;TX

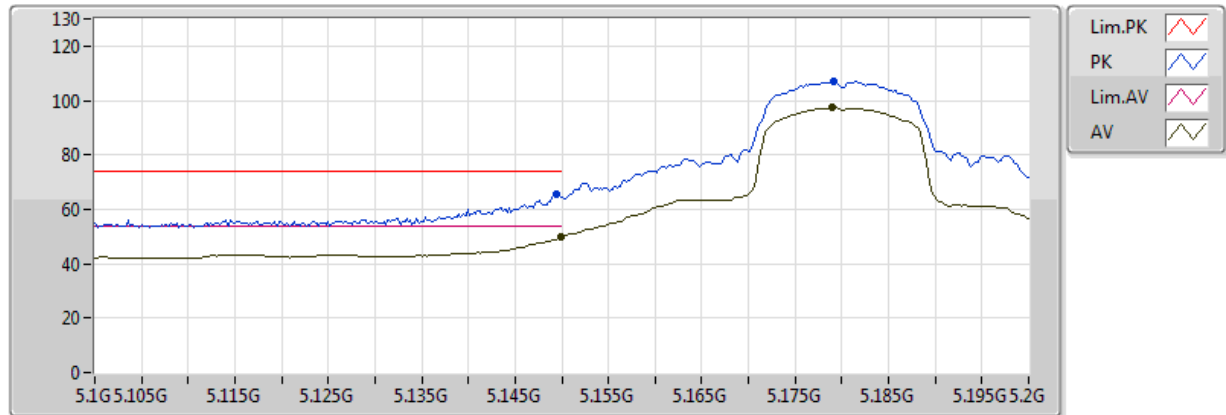

EUT = X axis , ANT = X axis

| Type | Freq(Hz)  | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|-----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.149995G | 49.82         | 54.00         | -4.18      | 1.57       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.179G    | 97.29         | Inf           | -Inf       | 1.62       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.1494G   | 65.65         | 74.00         | -8.35      | 1.57       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.1792G   | 106.93        | Inf           | -Inf       | 1.62       | 3       | H         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.2G;11a;BWch:20MHz;Nss:1;Nant:2;Ch:5200MHz;TX

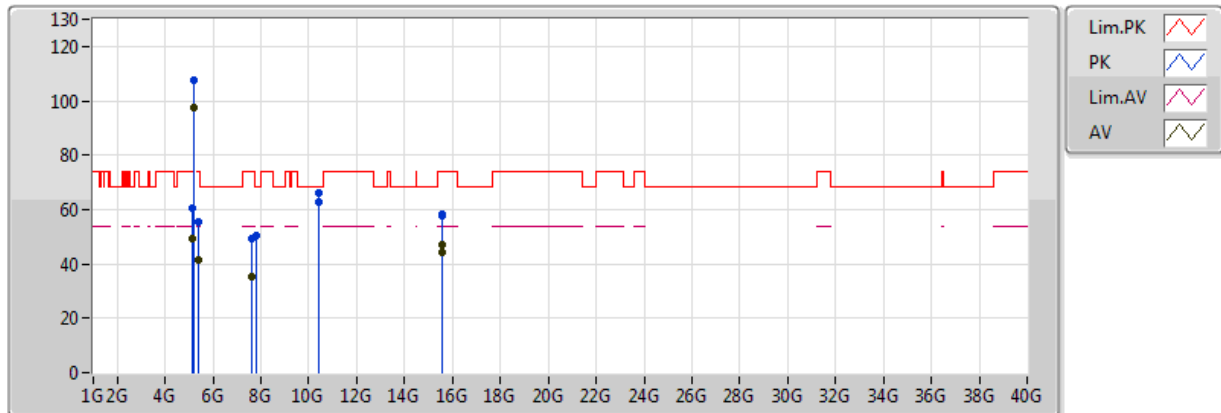

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.1474G  | 49.31         | 54.00         | -4.69      | 1.57       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.2068G  | 97.74         | Inf           | -Inf       | 1.66       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.379G   | 41.67         | 54.00         | -12.33     | 1.92       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.1462G  | 60.29         | 74.00         | -13.71     | 1.57       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.2068G  | 107.35        | Inf           | -Inf       | 1.66       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.3634G  | 55.44         | 74.00         | -18.56     | 1.90       | 3       | H         | NaN        | NaN       | -        |
| AV   | 7.640G   | 35.31         | 54.00         | -18.69     | 7.12       | 3       | H         | NaN        | NaN       | -        |
| AV   | 15.560G  | 44.01         | 54.00         | -9.99      | 11.91      | 3       | H         | NaN        | NaN       | -        |
| PK   | 7.640G   | 49.30         | 74.00         | -24.70     | 7.12       | 3       | H         | NaN        | NaN       | -        |
| PK   | 10.400G  | 62.86         | 68.20         | -5.34      | 10.81      | 3       | H         | NaN        | NaN       | -        |
| PK   | 15.560G  | 57.78         | 74.00         | -16.22     | 11.91      | 3       | H         | NaN        | NaN       | -        |
| AV   | 15.600G  | 47.19         | 54.00         | -6.81      | 11.91      | 3       | V         | NaN        | NaN       | -        |
| PK   | 7.780G   | 50.30         | 68.20         | -23.70     | 7.36       | 3       | V         | NaN        | NaN       | -        |
| PK   | 10.400G  | 66.01         | 68.20         | -2.19      | 10.81      | 3       | V         | NaN        | NaN       | -        |
| PK   | 15.600G  | 58.47         | 74.00         | -15.53     | 11.91      | 3       | V         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.2G;11a;BWch:20MHz;Nss:1;Nant:2;Ch:5200MHz;TX

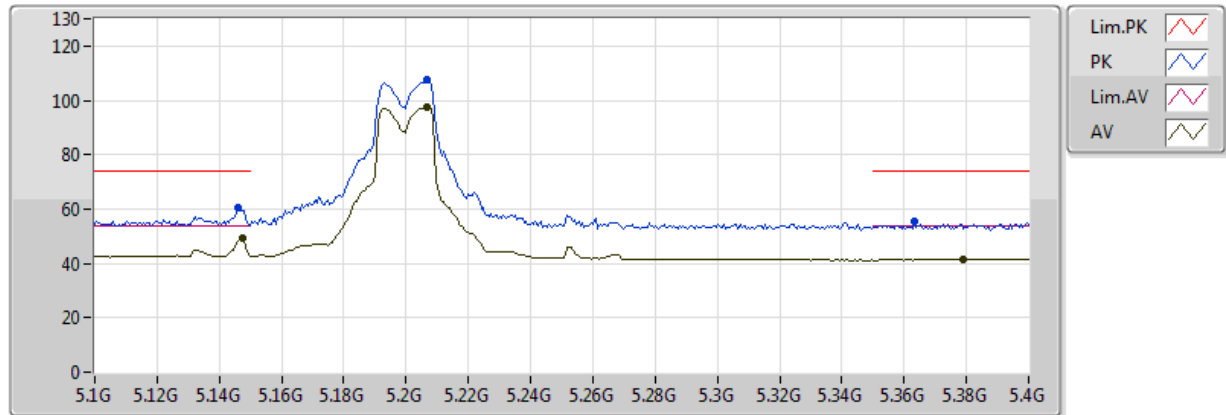

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.1474G  | 49.31         | 54.00         | -4.69      | 1.57       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.2068G  | 97.74         | Inf           | -Inf       | 1.66       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.379G   | 41.67         | 54.00         | -12.33     | 1.92       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.1462G  | 60.29         | 74.00         | -13.71     | 1.57       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.2068G  | 107.35        | Inf           | -Inf       | 1.66       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.3634G  | 55.44         | 74.00         | -18.56     | 1.90       | 3       | H         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.2G;11a;BWch:20MHz;Nss:1;Nant:2;Ch:5240MHz;TX

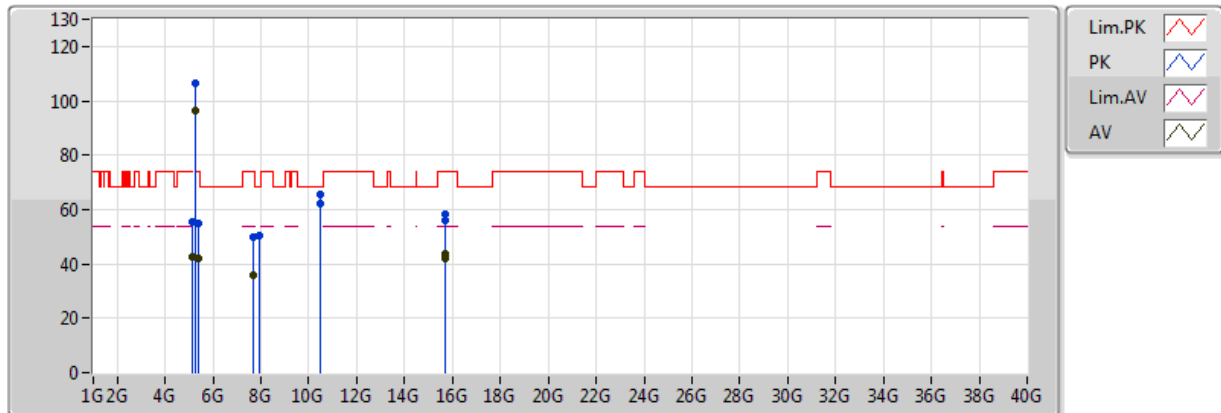

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.1036G  | 42.52         | 54.00         | -11.48     | 1.51       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.2386G  | 96.65         | Inf           | -Inf       | 1.71       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.3952G  | 42.06         | 54.00         | -11.94     | 1.94       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.1198G  | 55.27         | 74.00         | -18.73     | 1.53       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.2374G  | 106.20        | Inf           | -Inf       | 1.71       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.379G   | 54.74         | 74.00         | -19.26     | 1.92       | 3       | H         | NaN        | NaN       | -        |
| AV   | 7.704G   | 35.67         | 54.00         | -18.33     | 7.24       | 3       | H         | NaN        | NaN       | -        |
| AV   | 15.720G  | 42.05         | 54.00         | -11.95     | 11.37      | 3       | H         | NaN        | NaN       | -        |
| PK   | 7.704G   | 49.84         | 74.00         | -24.16     | 7.24       | 3       | H         | NaN        | NaN       | -        |
| PK   | 10.480G  | 61.96         | 68.20         | -6.24      | 11.00      | 3       | H         | NaN        | NaN       | -        |
| PK   | 15.720G  | 56.23         | 74.00         | -17.77     | 11.37      | 3       | H         | NaN        | NaN       | -        |
| AV   | 15.720G  | 43.57         | 54.00         | -10.43     | 11.37      | 3       | V         | NaN        | NaN       | -        |
| PK   | 7.908G   | 50.40         | 68.20         | -17.80     | 7.58       | 3       | V         | NaN        | NaN       | -        |
| PK   | 10.480G  | 65.79         | 68.20         | -2.41      | 11.00      | 3       | V         | NaN        | NaN       | -        |
| PK   | 15.720G  | 58.08         | 74.00         | -15.92     | 11.37      | 3       | V         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.2G;11a;BWch:20MHz;Nss:1;Nant:2;Ch:5240MHz;TX

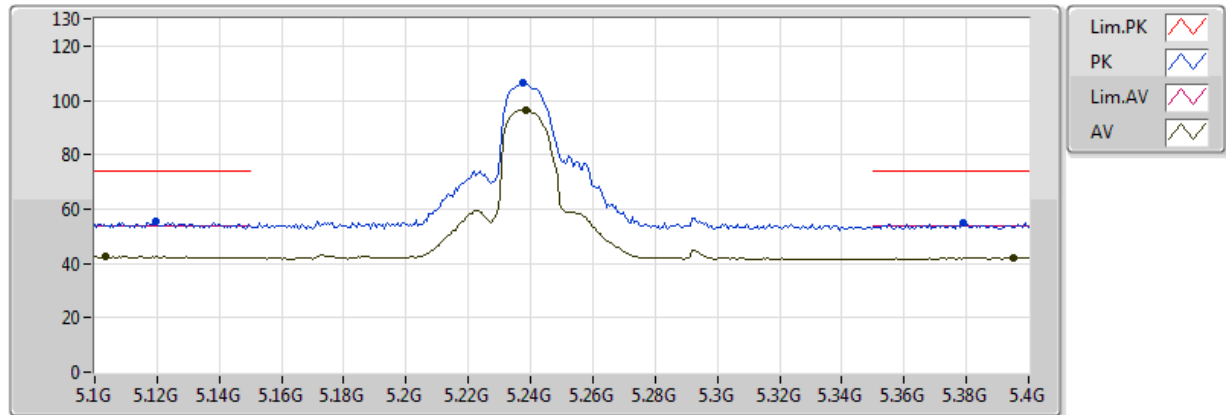

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.1036G  | 42.52         | 54.00         | -11.48     | 1.51       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.2386G  | 96.65         | Inf           | -Inf       | 1.71       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.3952G  | 42.06         | 54.00         | -11.94     | 1.94       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.1198G  | 55.27         | 74.00         | -18.73     | 1.53       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.2374G  | 106.20        | Inf           | -Inf       | 1.71       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.379G   | 54.74         | 74.00         | -19.26     | 1.92       | 3       | H         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.2G;HT20;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:5180MHz;TX

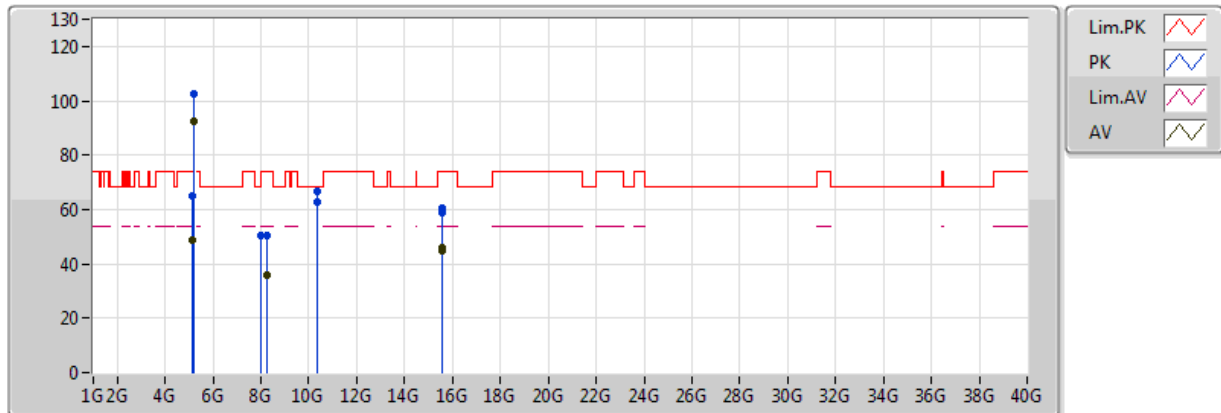

EUT = X axis , ANT = X axis

| Type | Freq(Hz)  | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|-----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.149995G | 48.72         | 54.00         | -5.28      | 1.57       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.1786G   | 92.68         | Inf           | -Inf       | 1.62       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.1486G   | 65.16         | 74.00         | -8.84      | 1.57       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.178G    | 102.63        | Inf           | -Inf       | 1.62       | 3       | H         | NaN        | NaN       | -        |
| AV   | 15.540G   | 44.78         | 54.00         | -9.22      | 12.18      | 3       | H         | NaN        | NaN       | -        |
| PK   | 8.002G    | 50.50         | 68.20         | -23.50     | 7.73       | 3       | H         | NaN        | NaN       | -        |
| PK   | 10.360G   | 62.81         | 68.20         | -5.39      | 10.72      | 3       | H         | NaN        | NaN       | -        |
| PK   | 15.540G   | 58.76         | 74.00         | -15.24     | 12.18      | 3       | H         | NaN        | NaN       | -        |
| AV   | 8.232G    | 36.11         | 54.00         | -17.89     | 7.64       | 3       | V         | NaN        | NaN       | -        |
| AV   | 15.540G   | 45.73         | 54.00         | -8.27      | 12.18      | 3       | V         | NaN        | NaN       | -        |
| PK   | 8.232G    | 50.35         | 74.00         | -23.65     | 7.64       | 3       | V         | NaN        | NaN       | -        |
| PK   | 10.360G   | 66.84         | 68.20         | -1.36      | 10.72      | 3       | V         | NaN        | NaN       | -        |
| PK   | 15.540G   | 60.27         | 74.00         | -13.73     | 12.18      | 3       | V         | NaN        | NaN       | -        |

RE TX above 1GHz;Band:5.2G;HT20;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:5180MHz;TX

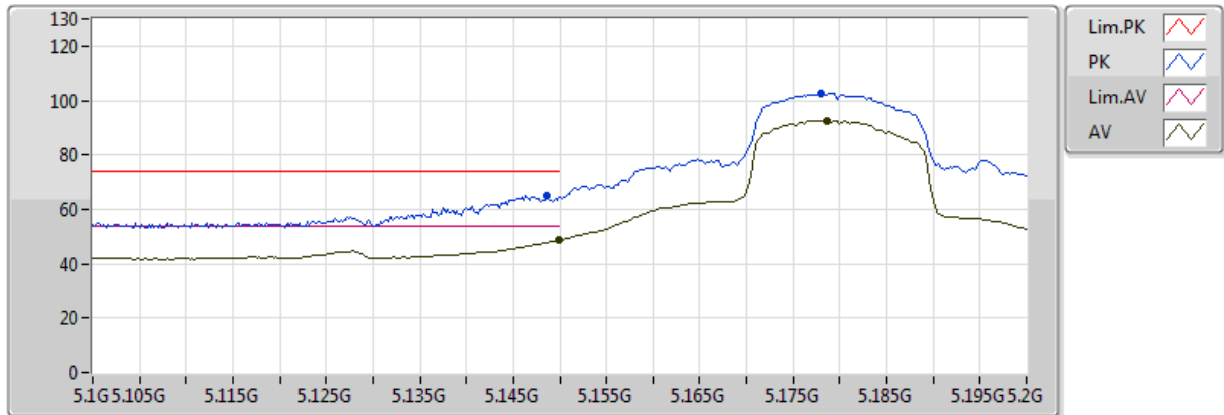


EUT = X axis , ANT = X axis

| Type | Freq(Hz)  | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|-----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.149995G | 48.72         | 54.00         | -5.28      | 1.57       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.1786G   | 92.68         | Inf           | -Inf       | 1.62       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.1486G   | 65.16         | 74.00         | -8.84      | 1.57       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.178G    | 102.63        | Inf           | -Inf       | 1.62       | 3       | H         | NaN        | NaN       | -        |




RE TX above 1GHz;Band:5.2G;HT20;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:5200MHz;TX

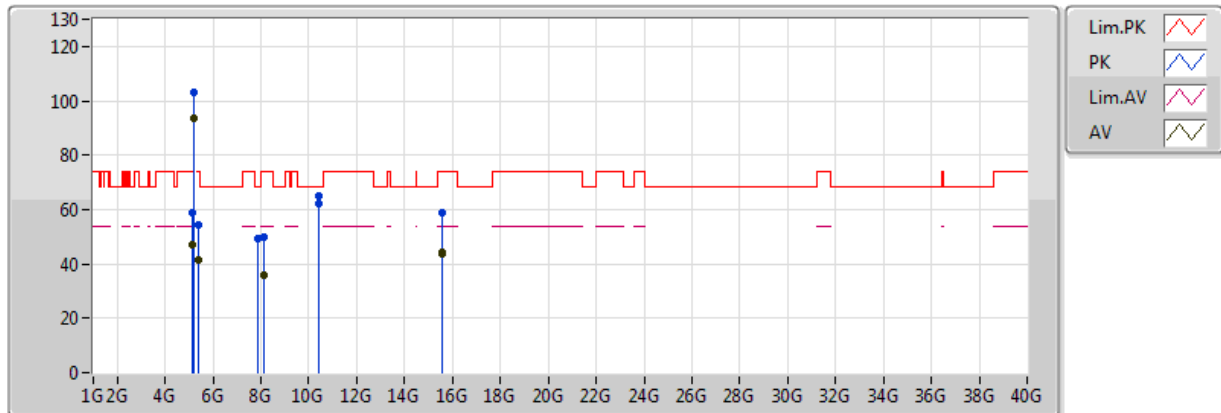

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.148G   | 47.23         | 54.00         | -6.77      | 1.57       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.193G   | 93.59         | Inf           | -Inf       | 1.64       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.3952G  | 41.58         | 54.00         | -12.42     | 1.94       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.1474G  | 58.93         | 74.00         | -15.07     | 1.57       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.1924G  | 103.23        | Inf           | -Inf       | 1.64       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.3982G  | 54.61         | 74.00         | -19.39     | 1.95       | 3       | H         | NaN        | NaN       | -        |
| AV   | 8.124G   | 35.79         | 54.00         | -18.21     | 7.68       | 3       | H         | NaN        | NaN       | -        |
| AV   | 15.600G  | 43.79         | 54.00         | -10.21     | 11.91      | 3       | H         | NaN        | NaN       | -        |
| PK   | 8.124G   | 49.99         | 74.00         | -24.01     | 7.68       | 3       | H         | NaN        | NaN       | -        |
| PK   | 10.400G  | 62.30         | 68.20         | -5.90      | 10.81      | 3       | H         | NaN        | NaN       | -        |
| PK   | 15.600G  | 58.81         | 74.00         | -15.19     | 11.91      | 3       | H         | NaN        | NaN       | -        |
| AV   | 15.600G  | 44.43         | 54.00         | -9.57      | 11.91      | 3       | V         | NaN        | NaN       | -        |
| PK   | 7.892G   | 49.23         | 68.20         | -18.97     | 7.56       | 3       | V         | NaN        | NaN       | -        |
| PK   | 10.400G  | 65.12         | 68.20         | -3.08      | 10.81      | 3       | V         | NaN        | NaN       | -        |
| PK   | 15.600G  | 58.59         | 74.00         | -15.41     | 11.91      | 3       | V         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.2G;HT20;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:5200MHz;TX

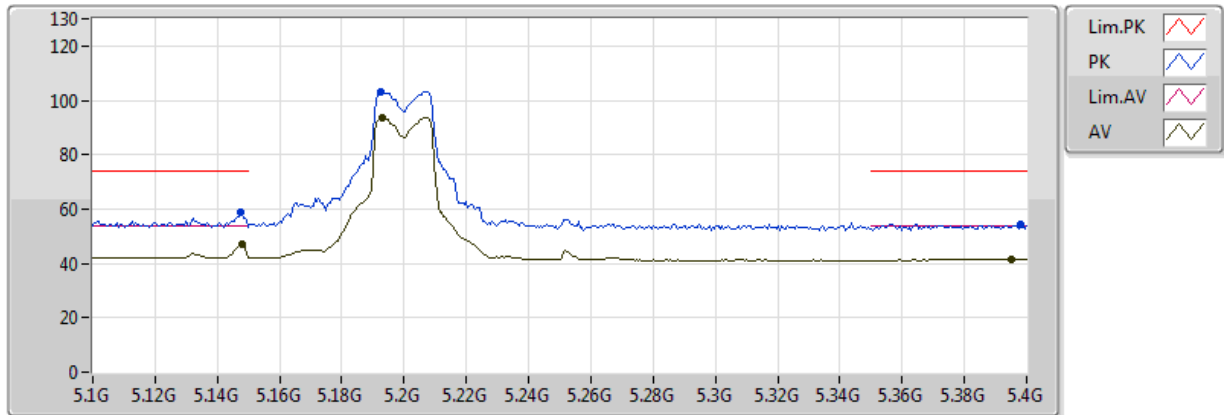

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.148G   | 47.23         | 54.00         | -6.77      | 1.57       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.193G   | 93.59         | Inf           | -Inf       | 1.64       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.3952G  | 41.58         | 54.00         | -12.42     | 1.94       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.1474G  | 58.93         | 74.00         | -15.07     | 1.57       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.1924G  | 103.23        | Inf           | -Inf       | 1.64       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.3982G  | 54.61         | 74.00         | -19.39     | 1.95       | 3       | H         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.2G;HT20;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:5240MHz;TX

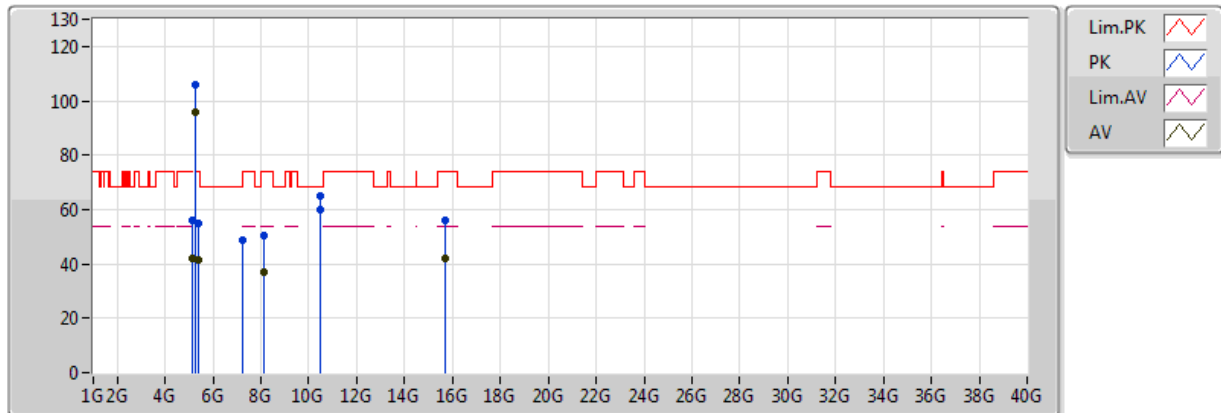

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.1468G  | 42.08         | 54.00         | -11.92     | 1.57       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.2386G  | 95.87         | Inf           | -Inf       | 1.71       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.4G     | 41.51         | 54.00         | -12.49     | 1.95       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.1252G  | 55.89         | 74.00         | -18.11     | 1.54       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.2392G  | 105.83        | Inf           | -Inf       | 1.71       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.3778G  | 54.71         | 74.00         | -19.29     | 1.92       | 3       | H         | NaN        | NaN       | -        |
| AV   | 8.124G   | 36.80         | 54.00         | -17.20     | 7.68       | 3       | H         | NaN        | NaN       | -        |
| AV   | 15.720G  | 41.76         | 54.00         | -12.24     | 11.37      | 3       | H         | NaN        | NaN       | -        |
| PK   | 8.124G   | 50.55         | 74.00         | -23.45     | 7.68       | 3       | H         | NaN        | NaN       | -        |
| PK   | 10.480G  | 59.85         | 68.20         | -8.35      | 11.00      | 3       | H         | NaN        | NaN       | -        |
| PK   | 15.720G  | 56.04         | 74.00         | -17.96     | 11.37      | 3       | H         | NaN        | NaN       | -        |
| AV   | 15.720G  | 41.98         | 54.00         | -12.02     | 11.37      | 3       | V         | NaN        | NaN       | -        |
| PK   | 7.246G   | 48.82         | 68.20         | -25.18     | 6.28       | 3       | V         | NaN        | NaN       | -        |
| PK   | 10.480G  | 65.28         | 68.20         | -2.92      | 11.00      | 3       | V         | NaN        | NaN       | -        |
| PK   | 15.720G  | 56.10         | 74.00         | -17.90     | 11.37      | 3       | V         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.2G;HT20;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:5240MHz;TX

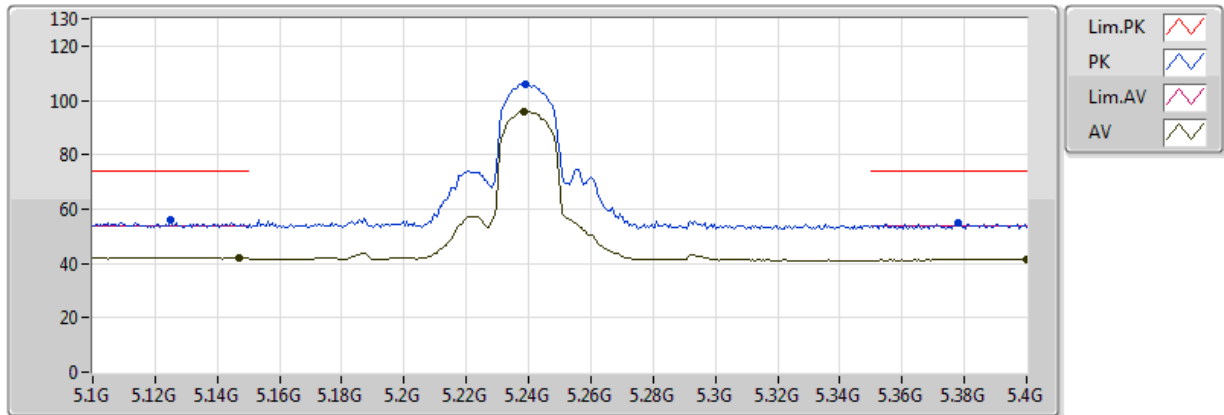

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.1468G  | 42.08         | 54.00         | -11.92     | 1.57       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.2386G  | 95.87         | Inf           | -Inf       | 1.71       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.4G     | 41.51         | 54.00         | -12.49     | 1.95       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.1252G  | 55.89         | 74.00         | -18.11     | 1.54       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.2392G  | 105.83        | Inf           | -Inf       | 1.71       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.3778G  | 54.71         | 74.00         | -19.29     | 1.92       | 3       | H         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.2G;HT40;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:5190MHz;TX

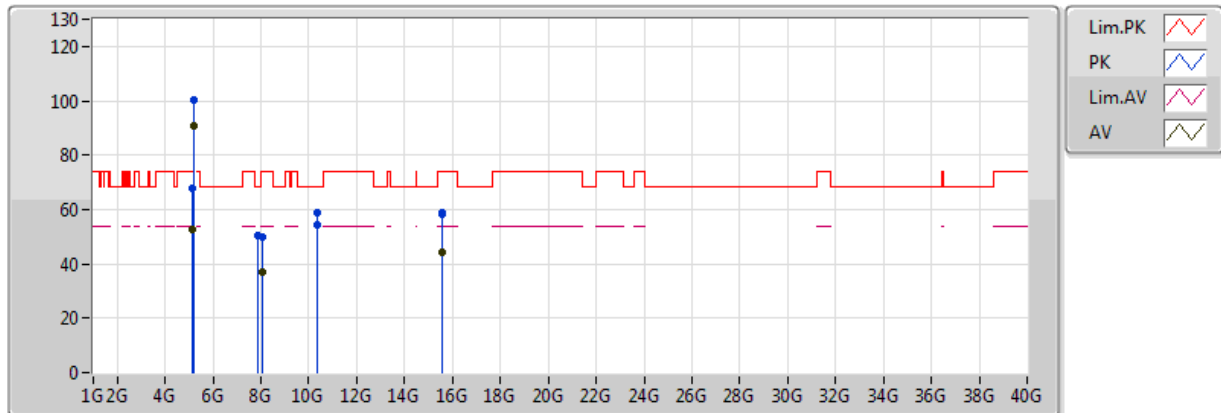

EUT = X axis , ANT = X axis

| Type | Freq(Hz)  | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|-----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.14972G  | 52.79         | 54.00         | -1.21      | 1.57       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.19152G  | 90.68         | Inf           | -Inf       | 1.64       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.149995G | 67.76         | 74.00         | -6.24      | 1.57       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.188G    | 100.48        | Inf           | -Inf       | 1.63       | 3       | H         | NaN        | NaN       | -        |
| AV   | 8.052G    | 36.80         | 54.00         | -17.20     | 7.71       | 3       | H         | NaN        | NaN       | -        |
| AV   | 15.570G   | 44.26         | 54.00         | -9.74      | 12.04      | 3       | H         | NaN        | NaN       | -        |
| PK   | 8.052G    | 49.82         | 74.00         | -24.18     | 7.71       | 3       | H         | NaN        | NaN       | -        |
| PK   | 10.380G   | 54.37         | 68.20         | -13.83     | 10.77      | 3       | H         | NaN        | NaN       | -        |
| PK   | 15.570G   | 58.45         | 74.00         | -15.55     | 12.04      | 3       | H         | NaN        | NaN       | -        |
| AV   | 15.570G   | 44.10         | 54.00         | -9.90      | 12.04      | 3       | V         | NaN        | NaN       | -        |
| PK   | 7.888G    | 50.16         | 68.20         | -18.04     | 7.55       | 3       | V         | NaN        | NaN       | -        |
| PK   | 10.380G   | 58.70         | 68.20         | -9.50      | 10.77      | 3       | V         | NaN        | NaN       | -        |
| PK   | 15.570G   | 58.58         | 74.00         | -15.42     | 12.04      | 3       | V         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.2G;HT40;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:5190MHz;TX

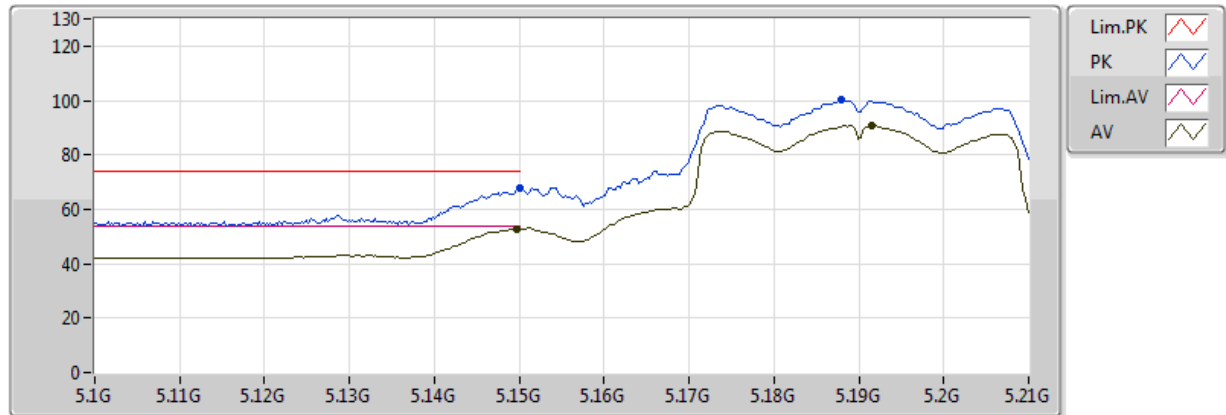

EUT = X axis , ANT = X axis

| Type | Freq(Hz)  | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|-----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.19152G  | 90.68         | Inf           | -Inf       | 1.64       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.14972G  | 52.79         | 54.00         | -1.21      | 1.57       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.188G    | 100.48        | Inf           | -Inf       | 1.63       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.149995G | 67.76         | 74.00         | -6.24      | 1.57       | 3       | H         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.2G;HT40;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:5230MHz;TX

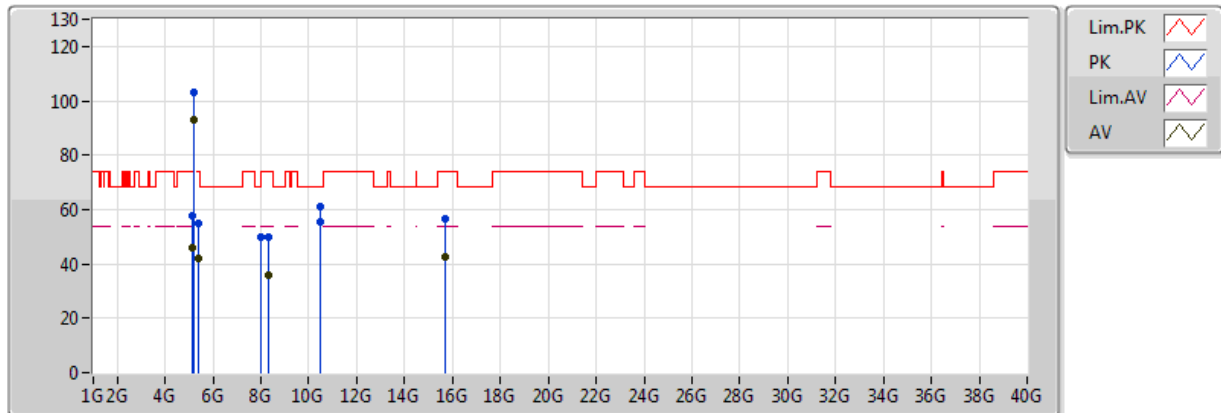

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.1276G  | 45.92         | 54.00         | -8.08      | 1.54       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.2284G  | 93.16         | Inf           | -Inf       | 1.69       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.3676G  | 41.88         | 54.00         | -12.12     | 1.90       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.127G   | 57.64         | 74.00         | -16.36     | 1.54       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.2278G  | 103.28        | Inf           | -Inf       | 1.69       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.3982G  | 54.76         | 74.00         | -19.24     | 1.95       | 3       | H         | NaN        | NaN       | -        |
| AV   | 15.690G  | 42.31         | 54.00         | -11.69     | 11.50      | 3       | H         | NaN        | NaN       | -        |
| PK   | 8.012G   | 50.03         | 68.20         | -18.17     | 7.73       | 3       | H         | NaN        | NaN       | -        |
| PK   | 10.460G  | 55.39         | 68.20         | -12.81     | 10.95      | 3       | H         | NaN        | NaN       | -        |
| PK   | 15.690G  | 56.65         | 74.00         | -17.35     | 11.50      | 3       | H         | NaN        | NaN       | -        |
| AV   | 8.288G   | 35.98         | 54.00         | -18.02     | 7.61       | 3       | V         | NaN        | NaN       | -        |
| AV   | 15.690G  | 42.44         | 54.00         | -11.56     | 11.50      | 3       | V         | NaN        | NaN       | -        |
| PK   | 8.288G   | 50.09         | 74.00         | -23.91     | 7.61       | 3       | V         | NaN        | NaN       | -        |
| PK   | 10.460G  | 60.95         | 68.20         | -7.25      | 10.95      | 3       | V         | NaN        | NaN       | -        |
| PK   | 15.690G  | 56.51         | 74.00         | -17.49     | 11.50      | 3       | V         | NaN        | NaN       | -        |

RE TX above 1GHz;Band:5.2G;HT40;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:5230MHz;TX

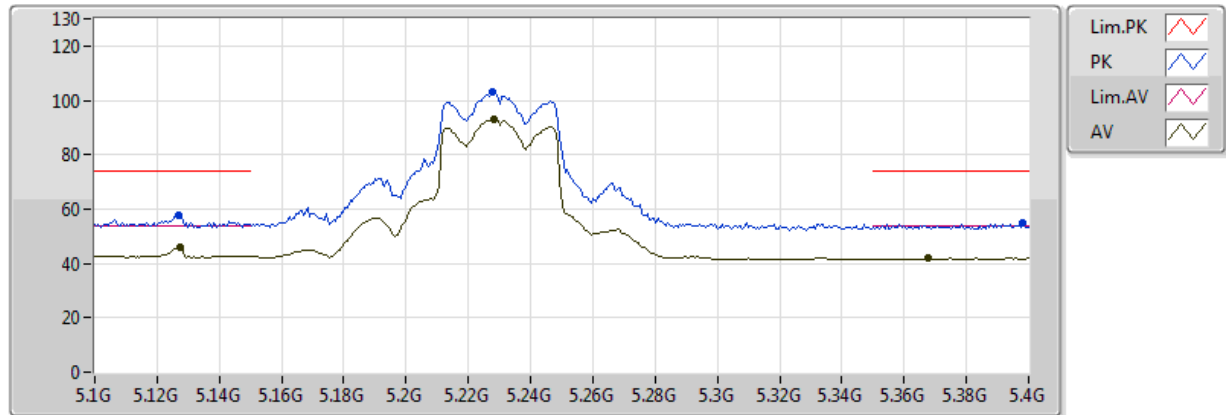


EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.1276G  | 45.92         | 54.00         | -8.08      | 1.54       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.2284G  | 93.16         | Inf           | -Inf       | 1.69       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.3676G  | 41.88         | 54.00         | -12.12     | 1.90       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.127G   | 57.64         | 74.00         | -16.36     | 1.54       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.2278G  | 103.28        | Inf           | -Inf       | 1.69       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.3982G  | 54.76         | 74.00         | -19.24     | 1.95       | 3       | H         | NaN        | NaN       | -        |




RE TX above 1GHz;Band:5.8G;11a;BWch:20MHz;Nss:1;Nant:2;Ch:5745MHz;TX

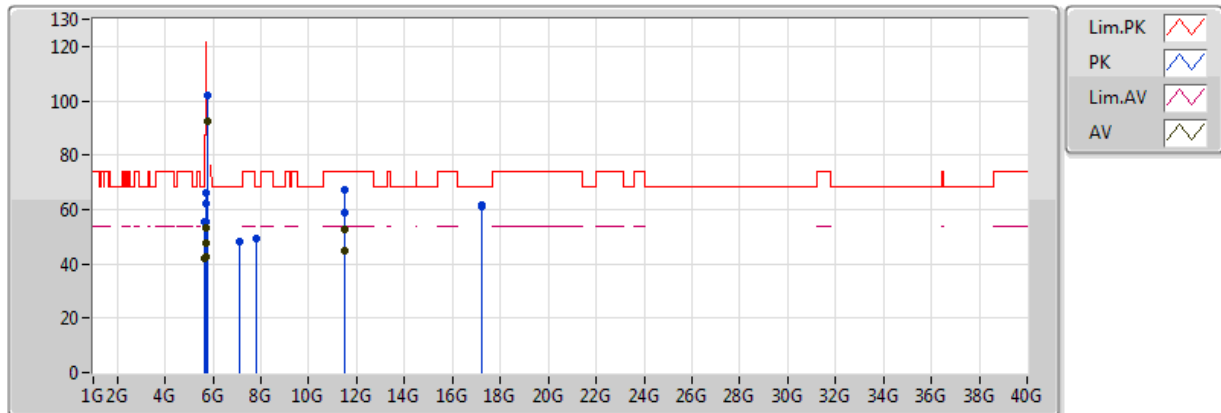

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.63384G | 41.93         | Inf           | -Inf       | 2.33       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.6926G  | 42.41         | Inf           | -Inf       | 2.43       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.7199G  | 47.90         | Inf           | -Inf       | 2.47       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.72484G | 53.07         | Inf           | -Inf       | 2.48       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.74668G | 92.53         | Inf           | -Inf       | 2.51       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.62656G | 55.34         | 68.20         | -12.86     | 2.32       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.6796G  | 55.39         | 90.10         | -34.71     | 2.41       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.71886G | 61.92         | 110.48        | -48.56     | 2.47       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.72406G | 66.07         | 120.06        | -53.99     | 2.48       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.74668G | 101.98        | Inf           | -Inf       | 2.51       | 3       | H         | NaN        | NaN       | -        |
| AV   | 11.49G   | 44.97         | 54.00         | -9.03      | 11.66      | 3       | H         | NaN        | NaN       | -        |
| PK   | 7.804G   | 49.59         | 68.20         | -18.61     | 7.40       | 3       | H         | NaN        | NaN       | -        |
| PK   | 11.49G   | 58.79         | 74.00         | -15.21     | 11.66      | 3       | H         | NaN        | NaN       | -        |
| PK   | 17.235G  | 61.15         | 68.20         | -7.05      | 16.03      | 3       | H         | NaN        | NaN       | -        |
| AV   | 11.49G   | 52.40         | 54.00         | -1.60      | 11.66      | 3       | V         | NaN        | NaN       | -        |
| PK   | 7.108G   | 48.34         | 68.20         | -19.86     | 5.95       | 3       | V         | NaN        | NaN       | -        |
| PK   | 11.49G   | 67.21         | 74.00         | -6.79      | 11.66      | 3       | V         | NaN        | NaN       | -        |
| PK   | 17.235G  | 61.53         | 68.20         | -6.67      | 16.03      | 3       | V         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.8G;11a;BWch:20MHz;Nss:1;Nant:2;Ch:5745MHz;TX

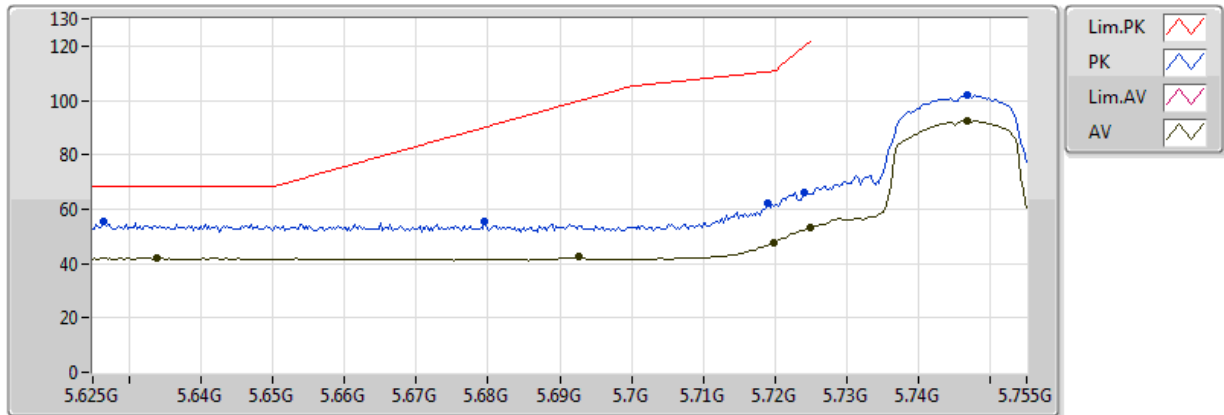

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.63384G | 41.93         | Inf           | -Inf       | 2.33       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.6926G  | 42.41         | Inf           | -Inf       | 2.43       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.7199G  | 47.90         | Inf           | -Inf       | 2.47       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.72484G | 53.07         | Inf           | -Inf       | 2.48       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.74668G | 92.53         | Inf           | -Inf       | 2.51       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.62656G | 55.34         | 68.20         | -12.86     | 2.32       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.6796G  | 55.39         | 90.10         | -34.71     | 2.41       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.71886G | 61.92         | 110.48        | -48.56     | 2.47       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.72406G | 66.07         | 120.06        | -53.99     | 2.48       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.74668G | 101.98        | Inf           | -Inf       | 2.51       | 3       | H         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.8G;11a;BWch:20MHz;Nss:1;Nant:2;Ch:5785MHz;TX

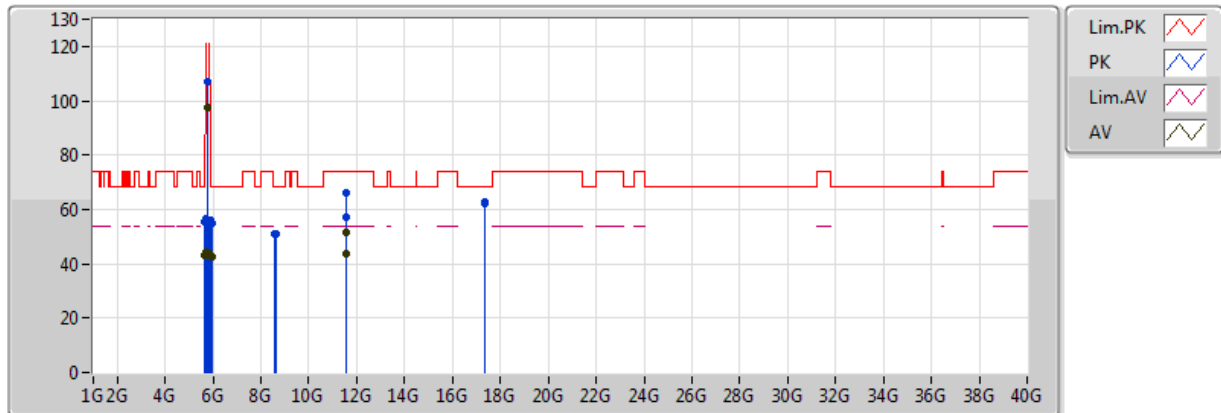

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.63085G | 42.91         | Inf           | -Inf       | 2.33       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.6939G  | 42.99         | Inf           | -Inf       | 2.43       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.7173G  | 44.46         | Inf           | -Inf       | 2.47       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.72055G | 43.85         | Inf           | -Inf       | 2.47       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.7784G  | 97.75         | Inf           | -Inf       | 2.57       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.8525G  | 43.82         | Inf           | -Inf       | 2.68       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.8603G  | 42.96         | Inf           | -Inf       | 2.70       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.87915G | 43.01         | Inf           | -Inf       | 2.73       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.9383G  | 42.69         | Inf           | -Inf       | 2.83       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.63345G | 55.51         | 68.20         | -12.69     | 2.33       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.6939G  | 54.81         | 100.69        | -45.88     | 2.43       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.71795G | 56.32         | 110.23        | -53.91     | 2.47       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.7225G  | 55.52         | 116.50        | -60.98     | 2.48       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.77775G | 106.99        | Inf           | -Inf       | 2.56       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.8512G  | 55.98         | 119.46        | -63.48     | 2.68       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.859G   | 55.60         | 109.68        | -54.08     | 2.69       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.8915G  | 55.79         | 92.99         | -37.20     | 2.75       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.9383G  | 54.76         | 68.20         | -13.44     | 2.83       | 3       | H         | NaN        | NaN       | -        |
| AV   | 11.57G   | 43.47         | 54.00         | -10.53     | 11.57      | 3       | H         | NaN        | NaN       | -        |
| PK   | 8.54G    | 50.82         | 68.20         | -17.38     | 7.59       | 3       | H         | NaN        | NaN       | -        |
| PK   | 11.57G   | 56.91         | 74.00         | -17.09     | 11.57      | 3       | H         | NaN        | NaN       | -        |
| PK   | 17.355G  | 62.54         | 68.20         | -5.66      | 16.77      | 3       | H         | NaN        | NaN       | -        |
| AV   | 11.57G   | 51.74         | 54.00         | -2.26      | 11.57      | 3       | V         | NaN        | NaN       | -        |
| PK   | 8.624G   | 50.88         | 68.20         | -17.32     | 7.71       | 3       | V         | NaN        | NaN       | -        |
| PK   | 11.57G   | 66.08         | 74.00         | -7.92      | 11.57      | 3       | V         | NaN        | NaN       | -        |
| PK   | 17.355G  | 62.41         | 68.20         | -5.79      | 16.77      | 3       | V         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.8G;11a;BWch:20MHz;Nss:1;Nant:2;Ch:5785MHz;TX

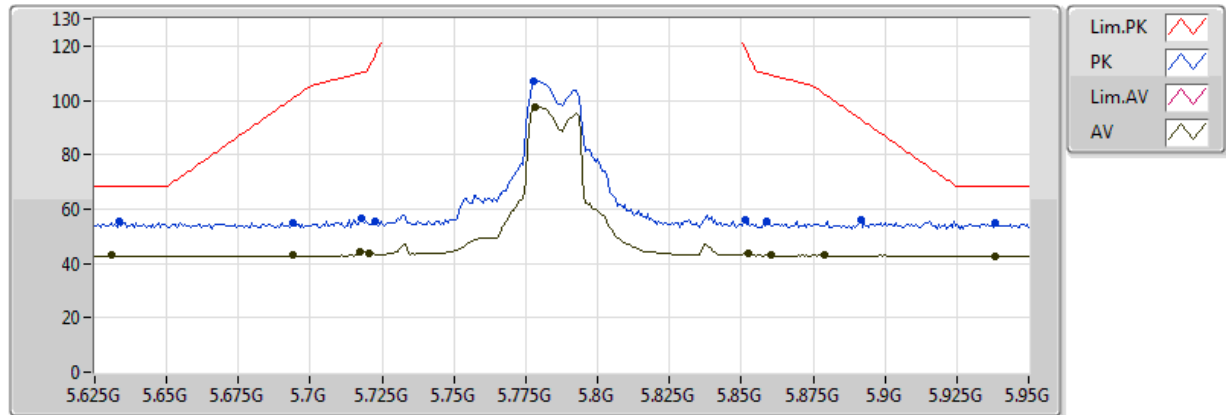

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.63085G | 42.91         | Inf           | -Inf       | 2.33       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.6939G  | 42.99         | Inf           | -Inf       | 2.43       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.7173G  | 44.46         | Inf           | -Inf       | 2.47       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.72055G | 43.85         | Inf           | -Inf       | 2.47       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.7784G  | 97.75         | Inf           | -Inf       | 2.57       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.8525G  | 43.82         | Inf           | -Inf       | 2.68       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.8603G  | 42.96         | Inf           | -Inf       | 2.70       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.87915G | 43.01         | Inf           | -Inf       | 2.73       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.9383G  | 42.69         | Inf           | -Inf       | 2.83       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.63345G | 55.51         | 68.20         | -12.69     | 2.33       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.6939G  | 54.81         | 100.69        | -45.88     | 2.43       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.71795G | 56.32         | 110.23        | -53.91     | 2.47       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.7225G  | 55.52         | 116.50        | -60.98     | 2.48       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.77775G | 106.99        | Inf           | -Inf       | 2.56       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.8512G  | 55.98         | 119.46        | -63.48     | 2.68       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.859G   | 55.60         | 109.68        | -54.08     | 2.69       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.8915G  | 55.79         | 92.99         | -37.20     | 2.75       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.9383G  | 54.76         | 68.20         | -13.44     | 2.83       | 3       | H         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.8G;11a;BWch:20MHz;Nss:1;Nant:2;Ch:5825MHz;TX

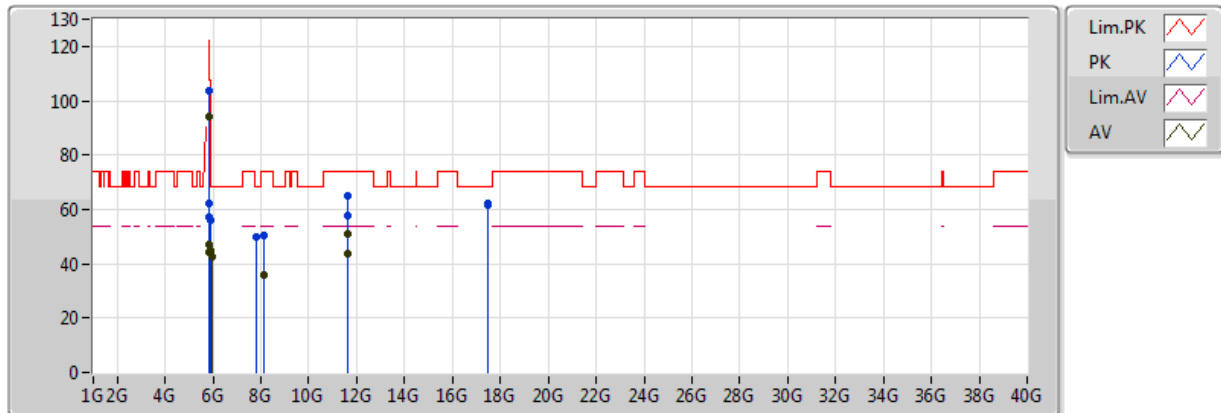

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.83039G | 94.04         | Inf           | -Inf       | 2.65       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.8501G  | 47.10         | Inf           | -Inf       | 2.68       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.85523G | 44.51         | Inf           | -Inf       | 2.69       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.8771G  | 44.96         | Inf           | -Inf       | 2.72       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.93137G | 42.83         | Inf           | -Inf       | 2.81       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.82904G | 103.67        | Inf           | -Inf       | 2.65       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.8501G  | 62.04         | 121.97        | -59.93     | 2.68       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.85523G | 57.18         | 110.74        | -53.56     | 2.69       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.87737G | 56.15         | 103.45        | -47.30     | 2.72       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.93056G | 55.78         | 68.20         | -12.42     | 2.81       | 3       | H         | NaN        | NaN       | -        |
| AV   | 8.1G     | 35.81         | 54.00         | -18.19     | 7.69       | 3       | H         | NaN        | NaN       | -        |
| AV   | 11.65G   | 43.51         | 54.00         | -10.49     | 11.48      | 3       | H         | NaN        | NaN       | -        |
| PK   | 8.1G     | 50.50         | 74.00         | -23.50     | 7.69       | 3       | H         | NaN        | NaN       | -        |
| PK   | 11.65G   | 57.48         | 74.00         | -16.52     | 11.48      | 3       | H         | NaN        | NaN       | -        |
| PK   | 17.475G  | 62.14         | 68.20         | -6.06      | 17.51      | 3       | H         | NaN        | NaN       | -        |
| AV   | 11.65G   | 51.02         | 54.00         | -2.98      | 11.48      | 3       | V         | NaN        | NaN       | -        |
| PK   | 7.788G   | 49.64         | 68.20         | -18.56     | 7.37       | 3       | V         | NaN        | NaN       | -        |
| PK   | 11.65G   | 64.76         | 74.00         | -9.24      | 11.48      | 3       | V         | NaN        | NaN       | -        |
| PK   | 17.475G  | 61.57         | 68.20         | -6.63      | 17.51      | 3       | V         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.8G;11a;BWch:20MHz;Nss:1;Nant:2;Ch:5825MHz;TX

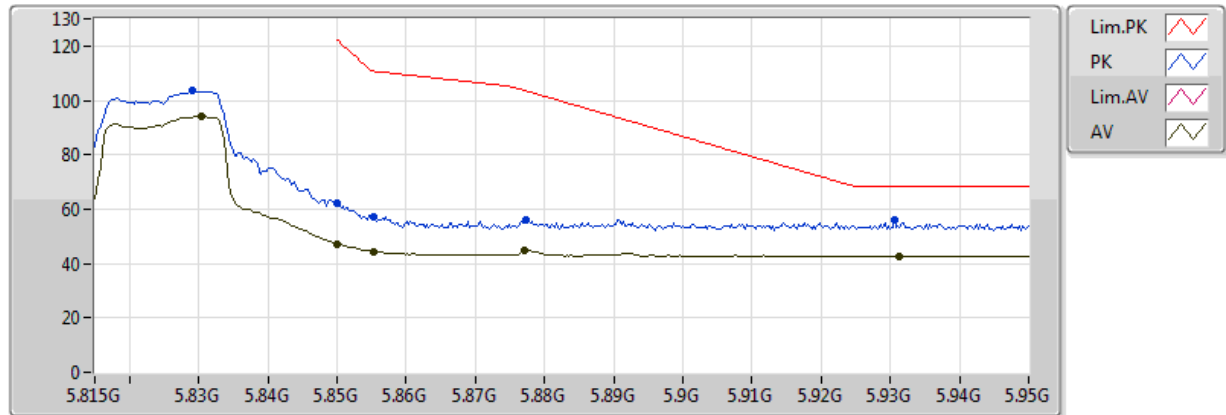

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.83039G | 94.04         | Inf           | -Inf       | 2.65       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.8501G  | 47.10         | Inf           | -Inf       | 2.68       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.85523G | 44.51         | Inf           | -Inf       | 2.69       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.8771G  | 44.96         | Inf           | -Inf       | 2.72       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.93137G | 42.83         | Inf           | -Inf       | 2.81       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.82904G | 103.67        | Inf           | -Inf       | 2.65       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.8501G  | 62.04         | 121.97        | -59.93     | 2.68       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.85523G | 57.18         | 110.74        | -53.56     | 2.69       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.87737G | 56.15         | 103.45        | -47.30     | 2.72       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.93056G | 55.78         | 68.20         | -12.42     | 2.81       | 3       | H         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.8G;HT20;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:5745MHz;TX

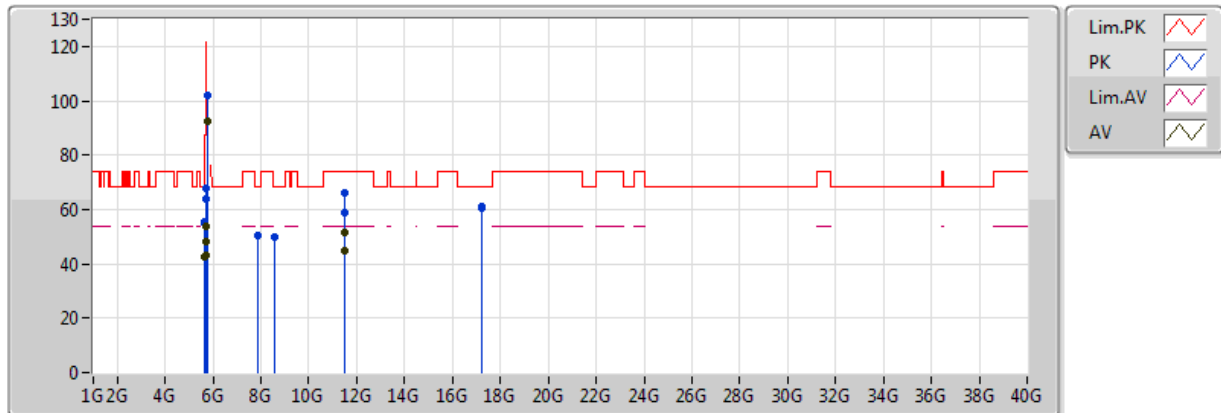

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.63202G | 42.74         | Inf           | -Inf       | 2.33       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.69208G | 43.12         | Inf           | -Inf       | 2.43       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.7199G  | 47.96         | Inf           | -Inf       | 2.47       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.72484G | 53.89         | Inf           | -Inf       | 2.48       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.74798G | 92.30         | Inf           | -Inf       | 2.52       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.63384G | 55.38         | 68.20         | -12.82     | 2.33       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.6718G  | 54.94         | 84.33         | -29.39     | 2.39       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.71964G | 64.10         | 110.70        | -46.60     | 2.47       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.72276G | 67.77         | 117.09        | -49.32     | 2.48       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.74668G | 101.78        | Inf           | -Inf       | 2.51       | 3       | H         | NaN        | NaN       | -        |
| AV   | 11.49G   | 44.78         | 54.00         | -9.22      | 11.66      | 3       | H         | NaN        | NaN       | -        |
| PK   | 8.595G   | 49.72         | 68.20         | -18.48     | 7.66       | 3       | H         | NaN        | NaN       | -        |
| PK   | 11.49G   | 58.85         | 74.00         | -15.15     | 11.66      | 3       | H         | NaN        | NaN       | -        |
| PK   | 17.235G  | 60.98         | 68.20         | -7.22      | 16.03      | 3       | H         | NaN        | NaN       | -        |
| AV   | 11.49G   | 51.60         | 54.00         | -2.40      | 11.66      | 3       | V         | NaN        | NaN       | -        |
| PK   | 7.898G   | 50.40         | 68.20         | -17.80     | 7.57       | 3       | V         | NaN        | NaN       | -        |
| PK   | 11.49G   | 66.21         | 74.00         | -7.79      | 11.66      | 3       | V         | NaN        | NaN       | -        |
| PK   | 17.235G  | 60.78         | 68.20         | -7.42      | 16.03      | 3       | V         | NaN        | NaN       | -        |

RE TX above 1GHz;Band:5.8G;HT20;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:5745MHz;TX

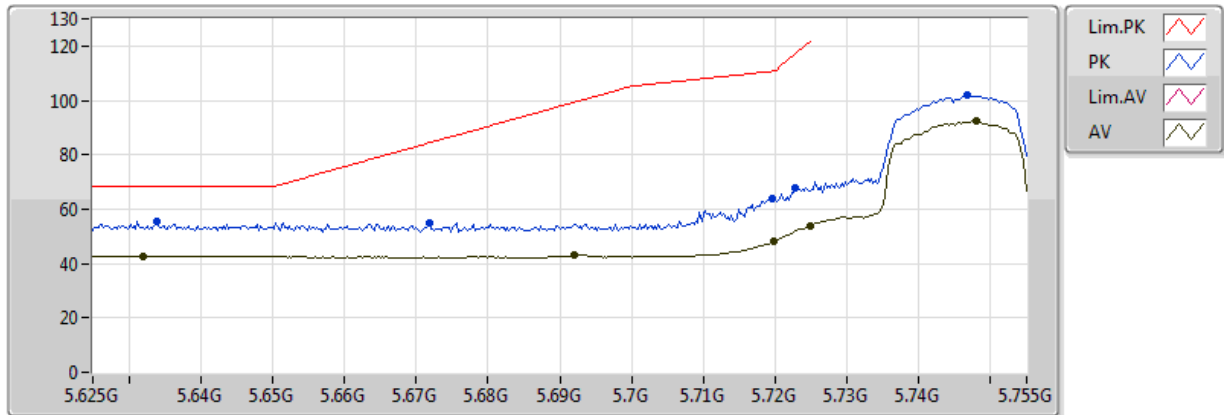


EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.63202G | 42.74         | Inf           | -Inf       | 2.33       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.69208G | 43.12         | Inf           | -Inf       | 2.43       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.7199G  | 47.96         | Inf           | -Inf       | 2.47       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.72484G | 53.89         | Inf           | -Inf       | 2.48       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.74798G | 92.30         | Inf           | -Inf       | 2.52       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.63384G | 55.38         | 68.20         | -12.82     | 2.33       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.6718G  | 54.94         | 84.33         | -29.39     | 2.39       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.71964G | 64.10         | 110.70        | -46.60     | 2.47       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.72276G | 67.77         | 117.09        | -49.32     | 2.48       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.74668G | 101.78        | Inf           | -Inf       | 2.51       | 3       | H         | NaN        | NaN       | -        |




RE TX above 1GHz;Band:5.8G;HT20;BWch:20MHz;Nss:1.(M0);Nant:2;Ch:5785MHz;TX

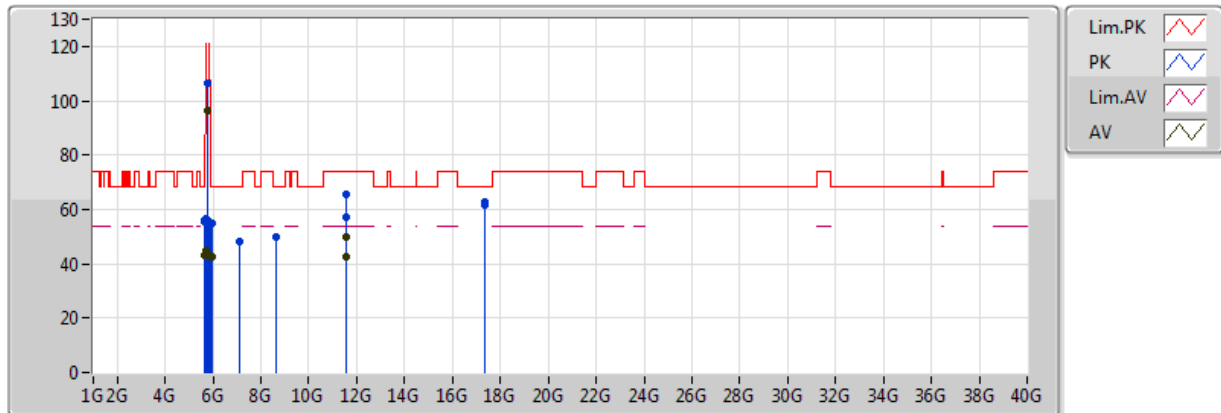

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.6276G  | 43.03         | Inf           | -Inf       | 2.32       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.6978G  | 43.03         | Inf           | -Inf       | 2.44       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.7173G  | 44.60         | Inf           | -Inf       | 2.47       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.72055G | 44.12         | Inf           | -Inf       | 2.47       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.7797G  | 96.50         | Inf           | -Inf       | 2.57       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.85315G | 43.03         | Inf           | -Inf       | 2.69       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.8707G  | 42.77         | Inf           | -Inf       | 2.71       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.87655G | 42.78         | Inf           | -Inf       | 2.72       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.9396G  | 42.63         | Inf           | -Inf       | 2.83       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.63865G | 55.75         | 68.20         | -12.45     | 2.34       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.66465G | 56.23         | 79.04         | -22.81     | 2.38       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.7173G  | 56.56         | 110.04        | -53.48     | 2.47       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.72055G | 55.50         | 112.05        | -56.55     | 2.47       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.78035G | 106.59        | Inf           | -Inf       | 2.57       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.8512G  | 55.19         | 119.46        | -64.27     | 2.68       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.8603G  | 55.36         | 109.32        | -53.96     | 2.70       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.89475G | 55.00         | 90.59         | -35.59     | 2.75       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.93895G | 54.66         | 68.20         | -13.54     | 2.83       | 3       | H         | NaN        | NaN       | -        |
| AV   | 11.57G   | 42.72         | 54.00         | -11.28     | 11.57      | 3       | H         | NaN        | NaN       | -        |
| PK   | 7.104G   | 48.41         | 68.20         | -19.79     | 5.94       | 3       | H         | NaN        | NaN       | -        |
| PK   | 11.57G   | 57.38         | 74.00         | -16.62     | 11.57      | 3       | H         | NaN        | NaN       | -        |
| PK   | 17.355G  | 62.82         | 68.20         | -5.38      | 16.77      | 3       | H         | NaN        | NaN       | -        |
| AV   | 11.57G   | 49.84         | 54.00         | -4.16      | 11.57      | 3       | V         | NaN        | NaN       | -        |
| PK   | 8.636G   | 50.03         | 68.20         | -18.17     | 7.72       | 3       | V         | NaN        | NaN       | -        |
| PK   | 11.57G   | 65.69         | 74.00         | -8.31      | 11.57      | 3       | V         | NaN        | NaN       | -        |
| PK   | 17.355G  | 61.39         | 68.20         | -6.81      | 16.77      | 3       | V         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.8G;HT20;BWch:20MHz;Nss:1.(M0);Nant:2;Ch:5785MHz;TX

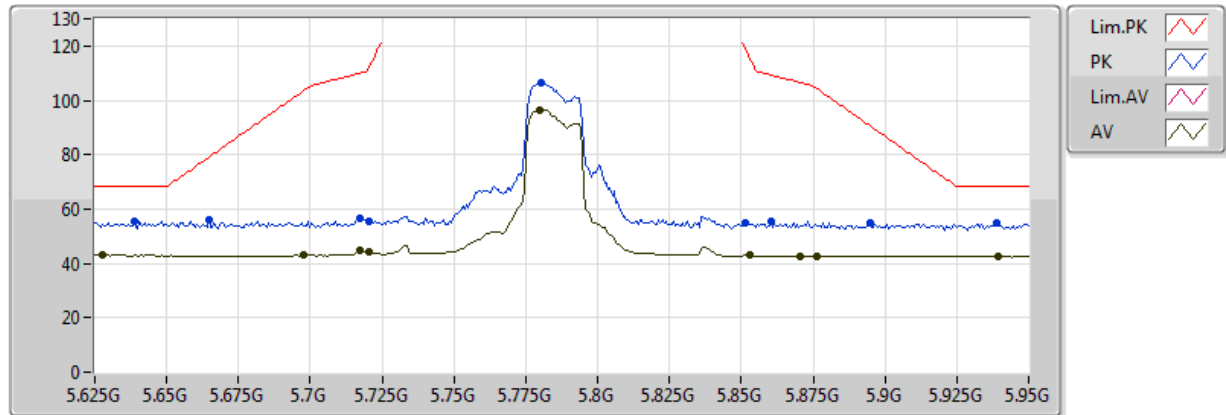

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.6276G  | 43.03         | Inf           | -Inf       | 2.32       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.6978G  | 43.03         | Inf           | -Inf       | 2.44       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.7173G  | 44.60         | Inf           | -Inf       | 2.47       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.72055G | 44.12         | Inf           | -Inf       | 2.47       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.7797G  | 96.50         | Inf           | -Inf       | 2.57       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.85315G | 43.03         | Inf           | -Inf       | 2.69       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.8707G  | 42.77         | Inf           | -Inf       | 2.71       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.87655G | 42.78         | Inf           | -Inf       | 2.72       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.9396G  | 42.63         | Inf           | -Inf       | 2.83       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.63865G | 55.75         | 68.20         | -12.45     | 2.34       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.66465G | 56.23         | 79.04         | -22.81     | 2.38       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.7173G  | 56.56         | 110.04        | -53.48     | 2.47       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.72055G | 55.50         | 112.05        | -56.55     | 2.47       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.78035G | 106.59        | Inf           | -Inf       | 2.57       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.8512G  | 55.19         | 119.46        | -64.27     | 2.68       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.8603G  | 55.36         | 109.32        | -53.96     | 2.70       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.89475G | 55.00         | 90.59         | -35.59     | 2.75       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.93895G | 54.66         | 68.20         | -13.54     | 2.83       | 3       | H         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.8G;HT20;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:5825MHz;TX

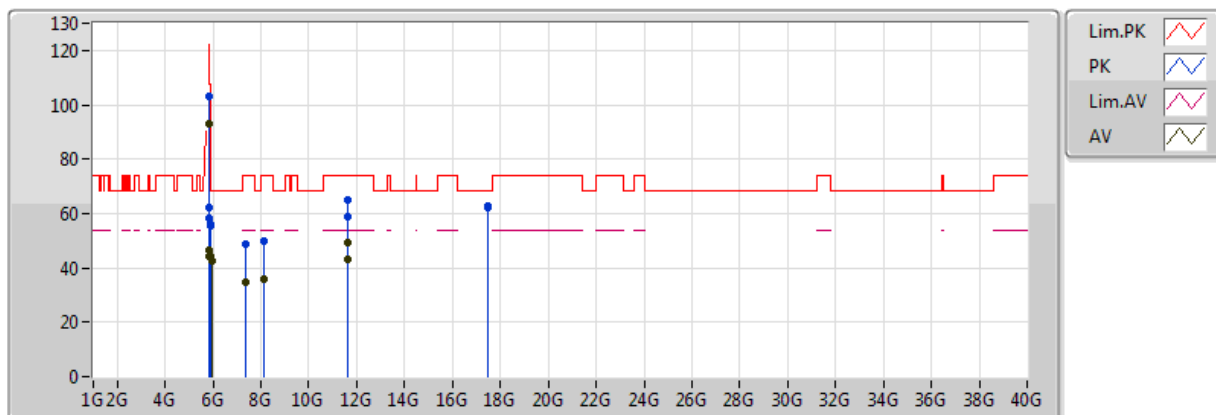

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.82796G | 93.27         | Inf           | -Inf       | 2.64       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.8501G  | 46.66         | Inf           | -Inf       | 2.68       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.8555G  | 44.26         | Inf           | -Inf       | 2.69       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.87683G | 44.28         | Inf           | -Inf       | 2.72       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.93488G | 42.78         | Inf           | -Inf       | 2.82       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.82823G | 102.95        | Inf           | -Inf       | 2.65       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.85145G | 62.13         | 118.89        | -56.76     | 2.68       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.85523G | 58.18         | 110.74        | -52.56     | 2.69       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.8771G  | 55.77         | 103.65        | -47.88     | 2.72       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.92948G | 55.43         | 68.20         | -12.77     | 2.81       | 3       | H         | NaN        | NaN       | -        |
| AV   | 8.128G   | 35.94         | 54.00         | -18.06     | 7.68       | 3       | H         | NaN        | NaN       | -        |
| AV   | 11.65G   | 43.07         | 54.00         | -10.93     | 11.48      | 3       | H         | NaN        | NaN       | -        |
| PK   | 8.128G   | 49.69         | 74.00         | -24.31     | 7.68       | 3       | H         | NaN        | NaN       | -        |
| PK   | 11.65G   | 58.60         | 74.00         | -15.40     | 11.48      | 3       | H         | NaN        | NaN       | -        |
| PK   | 17.475G  | 62.53         | 68.20         | -5.67      | 17.51      | 3       | H         | NaN        | NaN       | -        |
| AV   | 7.388G   | 34.66         | 54.00         | -19.34     | 6.62       | 3       | V         | NaN        | NaN       | -        |
| AV   | 11.65G   | 49.46         | 54.00         | -4.54      | 11.48      | 3       | V         | NaN        | NaN       | -        |
| PK   | 7.388G   | 48.86         | 74.00         | -25.14     | 6.62       | 3       | V         | NaN        | NaN       | -        |
| PK   | 11.65G   | 64.82         | 74.00         | -9.18      | 11.48      | 3       | V         | NaN        | NaN       | -        |
| PK   | 17.475G  | 62.38         | 68.20         | -5.82      | 17.51      | 3       | V         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.8G;HT20;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:5825MHz;TX

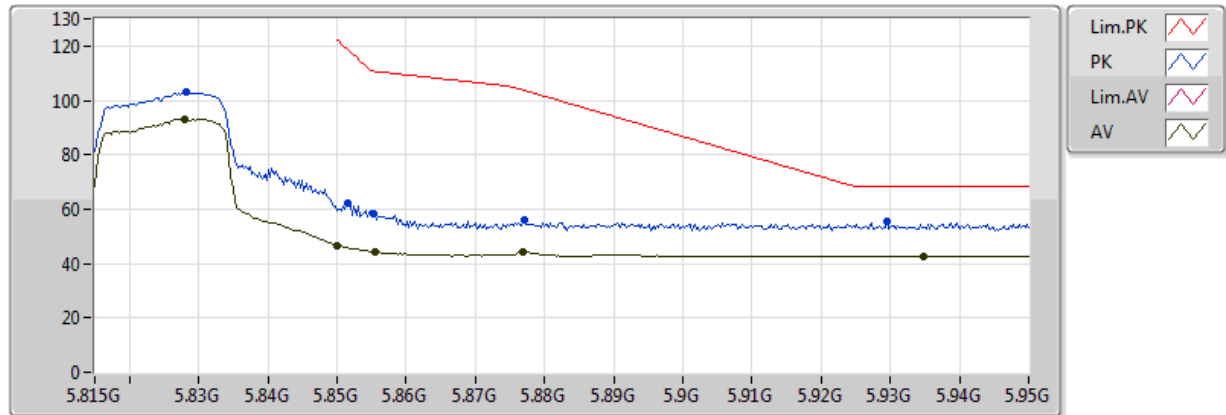

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.82796G | 93.27         | Inf           | -Inf       | 2.64       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.8501G  | 46.66         | Inf           | -Inf       | 2.68       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.8555G  | 44.26         | Inf           | -Inf       | 2.69       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.87683G | 44.28         | Inf           | -Inf       | 2.72       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.93488G | 42.78         | Inf           | -Inf       | 2.82       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.82823G | 102.95        | Inf           | -Inf       | 2.65       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.85145G | 62.13         | 118.89        | -56.76     | 2.68       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.85523G | 58.18         | 110.74        | -52.56     | 2.69       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.8771G  | 55.77         | 103.65        | -47.88     | 2.72       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.92948G | 55.43         | 68.20         | -12.77     | 2.81       | 3       | H         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.8G;HT40;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:5755MHz;TX

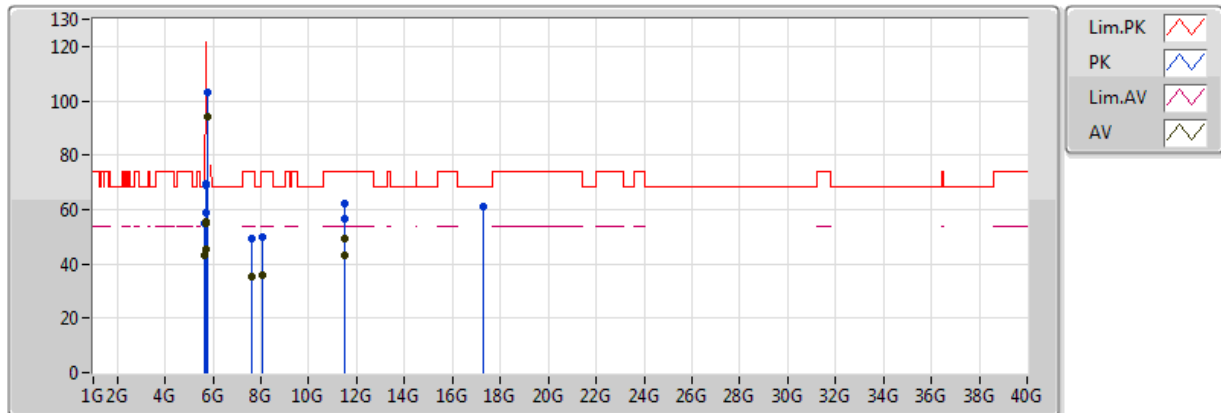

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.64949G | 43.05         | Inf           | -Inf       | 2.36       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.69816G | 45.62         | Inf           | -Inf       | 2.44       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.71831G | 55.57         | Inf           | -Inf       | 2.47       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.72017G | 54.93         | Inf           | -Inf       | 2.47       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.75675G | 94.39         | Inf           | -Inf       | 2.53       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.63926G | 55.19         | 68.20         | -13.01     | 2.34       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.69754G | 58.65         | 103.38        | -44.73     | 2.44       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.71986G | 69.43         | 110.76        | -41.33     | 2.47       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.72141G | 69.12         | 114.01        | -44.89     | 2.47       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.75644G | 103.21        | Inf           | -Inf       | 2.53       | 3       | H         | NaN        | NaN       | -        |
| AV   | 8.032G   | 35.82         | 54.00         | -18.18     | 7.72       | 3       | H         | NaN        | NaN       | -        |
| AV   | 11.51G   | 43.28         | 54.00         | -10.72     | 11.64      | 3       | H         | NaN        | NaN       | -        |
| PK   | 8.032G   | 49.71         | 74.00         | -24.29     | 7.72       | 3       | H         | NaN        | NaN       | -        |
| PK   | 11.51G   | 56.80         | 74.00         | -17.20     | 11.64      | 3       | H         | NaN        | NaN       | -        |
| PK   | 17.265G  | 60.96         | 68.20         | -7.24      | 16.21      | 3       | H         | NaN        | NaN       | -        |
| AV   | 7.6G     | 35.10         | 54.00         | -18.90     | 7.05       | 3       | V         | NaN        | NaN       | -        |
| AV   | 11.51G   | 49.07         | 54.00         | -4.93      | 11.64      | 3       | V         | NaN        | NaN       | -        |
| PK   | 7.6G     | 49.14         | 74.00         | -24.86     | 7.05       | 3       | V         | NaN        | NaN       | -        |
| PK   | 11.51G   | 62.10         | 74.00         | -11.90     | 11.64      | 3       | V         | NaN        | NaN       | -        |
| PK   | 17.265G  | 61.13         | 68.20         | -7.07      | 16.21      | 3       | V         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.8G;HT40;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:5755MHz;TX

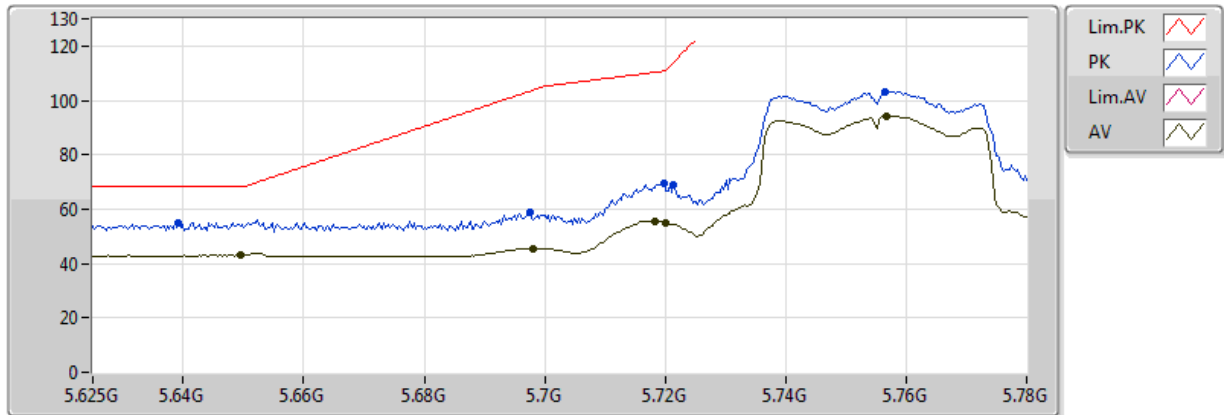

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.64949G | 43.05         | Inf           | -Inf       | 2.36       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.69816G | 45.62         | Inf           | -Inf       | 2.44       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.71831G | 55.57         | Inf           | -Inf       | 2.47       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.72017G | 54.93         | Inf           | -Inf       | 2.47       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.75675G | 94.39         | Inf           | -Inf       | 2.53       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.63926G | 55.19         | 68.20         | -13.01     | 2.34       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.69754G | 58.65         | 103.38        | -44.73     | 2.44       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.71986G | 69.43         | 110.76        | -41.33     | 2.47       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.72141G | 69.12         | 114.01        | -44.89     | 2.47       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.75644G | 103.21        | Inf           | -Inf       | 2.53       | 3       | H         | NaN        | NaN       | -        |


RE TX above 1GHz;Band:5.8G;HT40;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:5795MHz;TX

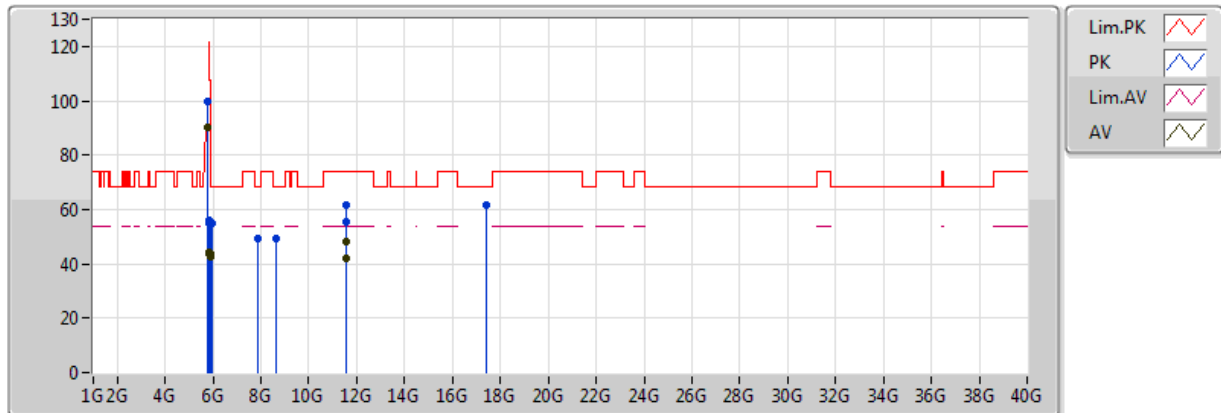

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.79304G | 90.25         | Inf           | -Inf       | 2.59       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.85028G | 44.39         | Inf           | -Inf       | 2.68       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.85532G | 43.83         | Inf           | -Inf       | 2.69       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.89816G | 43.59         | Inf           | -Inf       | 2.76       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.92948G | 42.81         | Inf           | -Inf       | 2.81       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.79304G | 99.95         | Inf           | -Inf       | 2.59       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.85064G | 55.89         | 120.74        | -64.85     | 2.68       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.85604G | 55.17         | 110.51        | -55.34     | 2.69       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.90392G | 54.94         | 83.80         | -28.86     | 2.77       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.93128G | 54.80         | 68.20         | -13.40     | 2.81       | 3       | H         | NaN        | NaN       | -        |
| AV   | 11.59G   | 41.91         | 54.00         | -12.09     | 11.55      | 3       | H         | NaN        | NaN       | -        |
| PK   | 8.64G    | 49.49         | 68.20         | -18.71     | 7.73       | 3       | H         | NaN        | NaN       | -        |
| PK   | 11.59G   | 55.73         | 74.00         | -18.27     | 11.55      | 3       | H         | NaN        | NaN       | -        |
| PK   | 17.385G  | 61.65         | 68.20         | -6.55      | 16.95      | 3       | H         | NaN        | NaN       | -        |
| AV   | 11.59G   | 48.31         | 54.00         | -5.69      | 11.55      | 3       | V         | NaN        | NaN       | -        |
| PK   | 7.888G   | 49.57         | 68.20         | -18.63     | 7.55       | 3       | V         | NaN        | NaN       | -        |
| PK   | 11.59G   | 61.53         | 74.00         | -12.47     | 11.55      | 3       | V         | NaN        | NaN       | -        |
| PK   | 17.385G  | 61.90         | 68.20         | -6.30      | 16.95      | 3       | V         | NaN        | NaN       | -        |

RE TX above 1GHz;Band:5.8G;HT40;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:5795MHz;TX

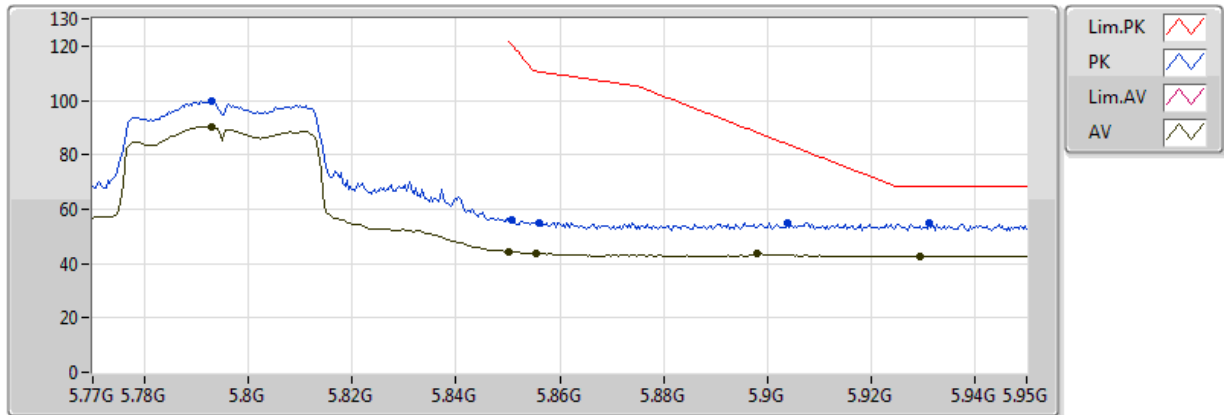

EUT = X axis , ANT = X axis

| Type | Freq(Hz) | Level(dBuV/m) | Limit(dBuV/m) | Margin(dB) | Factor(dB) | Dist(m) | Pol.(H/V) | Azimuth(°) | Height(m) | Comments |
|------|----------|---------------|---------------|------------|------------|---------|-----------|------------|-----------|----------|
| AV   | 5.79304G | 90.25         | Inf           | -Inf       | 2.59       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.85028G | 44.39         | Inf           | -Inf       | 2.68       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.85532G | 43.83         | Inf           | -Inf       | 2.69       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.89816G | 43.59         | Inf           | -Inf       | 2.76       | 3       | H         | NaN        | NaN       | -        |
| AV   | 5.92948G | 42.81         | Inf           | -Inf       | 2.81       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.79304G | 99.95         | Inf           | -Inf       | 2.59       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.85064G | 55.89         | 120.74        | -64.85     | 2.68       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.85604G | 55.17         | 110.51        | -55.34     | 2.69       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.90392G | 54.94         | 83.80         | -28.86     | 2.77       | 3       | H         | NaN        | NaN       | -        |
| PK   | 5.93128G | 54.80         | 68.20         | -13.40     | 2.81       | 3       | H         | NaN        | NaN       | -        |





## Frequency Stability Result

Appendix E

### Summary

| Mode             | Result | Ch<br>(Hz) | Center<br>(Hz) | ppm | Limit<br>(ppm) | Port | Remark |
|------------------|--------|------------|----------------|-----|----------------|------|--------|
| 802.11a_Nss1_1TX | -      | -          | -              | -   | -              | -    | -      |
| 5.15-5.25GHz     | Pass   | 5.2G       | 5.20003536G    | 6.8 | 20             | 1    | 5 min  |

**Result**

| Mode             | Result | Ch<br>(Hz) | Center<br>(Hz) | ppm   | Limit<br>(ppm) | Port | Remark |
|------------------|--------|------------|----------------|-------|----------------|------|--------|
| 802.11a_Nss1_1TX | -      | -          | -              | -     | -              | -    | -      |
| 5200MHz_TN,VN    | Pass   | 5.2G       | 5.19998296G    | 3.277 | 20             | 1    | 0 min  |
| 5200MHz_TN,VN    | Pass   | 5.2G       | 5.19998297G    | 3.275 | 20             | 1    | 2 min  |
| 5200MHz_TN,VN    | Pass   | 5.2G       | 5.19998301G    | 3.267 | 20             | 1    | 5 min  |
| 5200MHz_TN,VN    | Pass   | 5.2G       | 5.19998298G    | 3.272 | 20             | 1    | 10 min |
| 5200MHz_TN,VL    | Pass   | 5.2G       | 5.19998052G    | 3.746 | 20             | 1    | 0 min  |
| 5200MHz_TN,VL    | Pass   | 5.2G       | 5.19998056G    | 3.739 | 20             | 1    | 2 min  |
| 5200MHz_TN,VL    | Pass   | 5.2G       | 5.19998058G    | 3.734 | 20             | 1    | 5 min  |
| 5200MHz_TN,VL    | Pass   | 5.2G       | 5.19998061G    | 3.73  | 20             | 1    | 10 min |
| 5200MHz_TN,VH    | Pass   | 5.2G       | 5.19998591G    | 2.71  | 20             | 1    | 0 min  |
| 5200MHz_TN,VH    | Pass   | 5.2G       | 5.19998596G    | 2.7   | 20             | 1    | 2 min  |
| 5200MHz_TN,VH    | Pass   | 5.2G       | 5.19998601G    | 2.69  | 20             | 1    | 5 min  |
| 5200MHz_TN,VH    | Pass   | 5.2G       | 5.19998598G    | 2.696 | 20             | 1    | 10 min |
| 5200MHz_T40,VN   | Pass   | 5.2G       | 5.20003533G    | 6.794 | 20             | 1    | 0 min  |
| 5200MHz_T40,VN   | Pass   | 5.2G       | 5.20003526G    | 6.78  | 20             | 1    | 2 min  |
| 5200MHz_T40,VN   | Pass   | 5.2G       | 5.20003536G    | 6.8   | 20             | 1    | 5 min  |
| 5200MHz_T40,VN   | Pass   | 5.2G       | 5.20003529G    | 6.787 | 20             | 1    | 10 min |
| 5200MHz_T30,VN   | Pass   | 5.2G       | 5.20000245G    | 0.471 | 20             | 1    | 0 min  |
| 5200MHz_T30,VN   | Pass   | 5.2G       | 5.20000242G    | 0.465 | 20             | 1    | 2 min  |
| 5200MHz_T30,VN   | Pass   | 5.2G       | 5.20000237G    | 0.456 | 20             | 1    | 5 min  |
| 5200MHz_T30,VN   | Pass   | 5.2G       | 5.20000225G    | 0.433 | 20             | 1    | 10 min |
| 5200MHz_T20,VN   | Pass   | 5.2G       | 5.19998324G    | 3.223 | 20             | 1    | 0 min  |
| 5200MHz_T20,VN   | Pass   | 5.2G       | 5.19998327G    | 3.217 | 20             | 1    | 2 min  |
| 5200MHz_T20,VN   | Pass   | 5.2G       | 5.19998325G    | 3.221 | 20             | 1    | 5 min  |
| 5200MHz_T20,VN   | Pass   | 5.2G       | 5.1999833G     | 3.211 | 20             | 1    | 10 min |
| 5200MHz_T10,VN   | Pass   | 5.2G       | 5.19997528G    | 4.754 | 20             | 1    | 0 min  |
| 5200MHz_T10,VN   | Pass   | 5.2G       | 5.19997531G    | 4.748 | 20             | 1    | 2 min  |
| 5200MHz_T10,VN   | Pass   | 5.2G       | 5.19997532G    | 4.747 | 20             | 1    | 5 min  |
| 5200MHz_T10,VN   | Pass   | 5.2G       | 5.19997528G    | 4.754 | 20             | 1    | 10 min |
| 5200MHz_T0,VN    | Pass   | 5.2G       | 5.1999786G     | 4.116 | 20             | 1    | 0 min  |
| 5200MHz_T0,VN    | Pass   | 5.2G       | 5.19997828G    | 4.176 | 20             | 1    | 2 min  |
| 5200MHz_T0,VN    | Pass   | 5.2G       | 5.19997798G    | 4.235 | 20             | 1    | 5 min  |
| 5200MHz_T0,VN    | Pass   | 5.2G       | 5.19997776G    | 4.277 | 20             | 1    | 10 min |