


P/N	C467AM-925
-----	------------

Alternative Connectors

- .SMA Reverse Polarity Plug(female)
P/N: C467AH-925
- .SMA Reverse Thread Plug(male)
P/N: C467AT-925

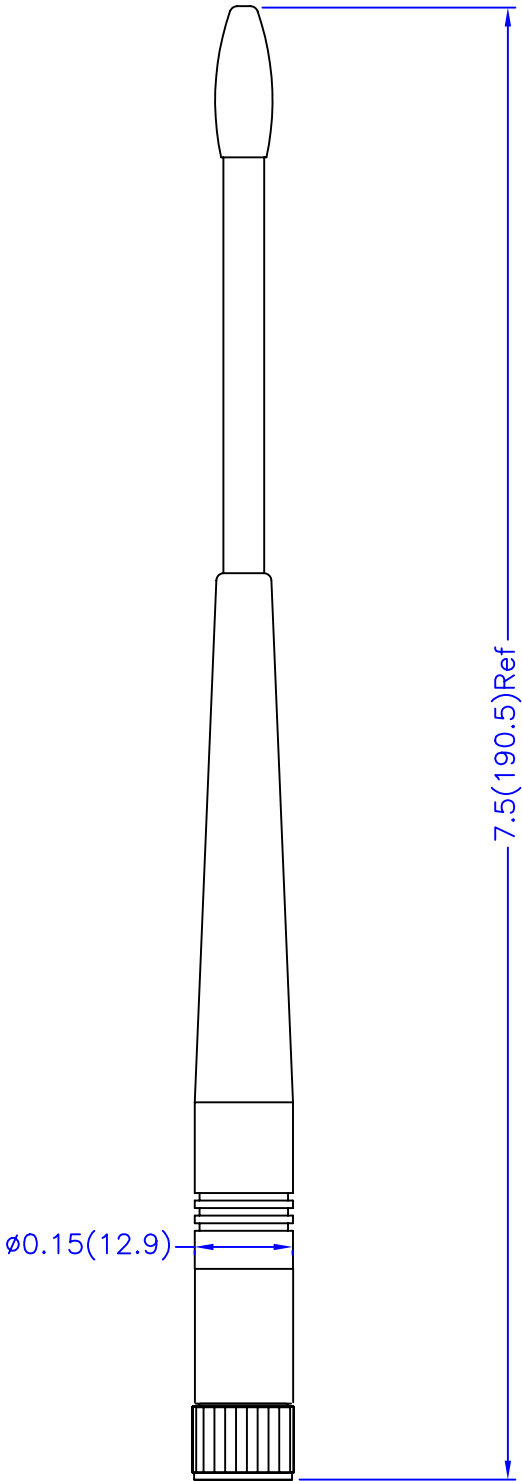

Electrical Properties:

Frequency Range: 890~960 MHz
 Impedance: 50Ω nominal
 VSWR: <2.0:1
 Gain: 2.0 dBi
 Radiation: Omni
 Polarization: Vertical
 Wave: Half Wave Dipole

Mechanical Properties:

Connector: SMA Plug(male)
 Material:
 Whip: Polyurethane(Black)
 Connector: Brass with
 black chrome plating
 Operation Temp.: -20°C to +65°C
 Storage Temp.: -30°C to +75°C

TITLE		GSM Cellular Band Straight Antenna – 467 model		DATE	SHEET
					1 OF 1
UNIT	DWG. NO.	C467AM–925			A4
in(mm)	NEARSON				
SCALE					
NONE					