

FCC Test report for Parts 15.247 (DSS), 15.209, 15.109, 15.107 and 15.207

Product name : RF Module 915 MHz
Applicant : Tyro Products B.V.
FCC ID : SQLRXTX-02

Test report No. : 191001881 001 v2.00

Laboratory information

Accreditation

Telefication complies with the accreditation criteria for test laboratories as laid down in ISO/IEC 17025:2017. The accreditation covers the quality system of the laboratory as well as the specific activities as described in the authorized annex bearing the accreditation number L021 and is granted on 30 November 1990 by the Dutch Council For Accreditation (RvA: Raad voor Accreditatie).

Telefication is designated by the FCC as an Accredited Test Firm for compliance testing of equipment subject to Certification under Parts 15 & 18. The Designation number is: NL0001.

Telefication is a Wireless Device Testing laboratory recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements.

Telefication is a registered Conformity Assessment body (CAB) under the Japan-EC MRA (Agreement on Mutual Recognition between Japan and the European Community). The registration number is: 201.

Documentation

The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 10 years at Telefication Netherlands.

Testing Location

Test Site	Kiwa Telefication BV
Test Site location	Wilmersdorf 50 7327 AC Apeldoorn The Netherlands Tel. +31 88998 3393
Test Site FCC	NL0001

Revision History

Version	Date	Remarks	By
v0.50	29-03-2020	First draft	RvB
v1.00	07-04-2020	Initial release	RvB
v1.50	08-02-2021	Frequency range update	RvB
V2.00	04-03-2021	Release version	RvB

Table of Contents

Revision History	2
Summary of Test results.....	6
1 General Description.....	7
1.1 Applicant.....	7
1.2 Manufacturer	7
1.3 Tested Equipment Under Test (EUT)	7
1.4 Product specifications of Equipment under test	8
1.5 Environmental conditions.....	8
1.6 Measurement standards	8
1.7 Applicable standards	8
1.8 Observation and remarks	8
1.9 Conclusions.....	9
2 Test configuration of the Equipment Under Test	10
2.1 Test mode	10
2.2 Tested channels and Data rates	10
2.3 Test setups.....	10
2.4 Equipment used in the test configuration	12
2.5 Sample calculations	12
3 Test results	13
3.1 20dB bandwidth Measurement.....	13
3.1.1 Limit.....	13
3.1.2 Measurement instruments	13
3.1.3 Test setup.....	13
3.1.4 Test procedure	13
3.1.5 Test Results of the 6 dB bandwidth Measurement.....	13
3.1.6 Plots of the 20 dB bandwidth measurement	14
3.2 Output Power Measurement	15
3.2.1 Limit.....	15
3.2.2 Measurement instruments	15
3.2.3 Test setup.....	15
3.2.4 Test procedure	15
3.2.5 Test results of Output Power Measurement.....	15
3.2.6 Plots of the Output power measurement	16
3.3 Dwell time.....	17
3.3.1 Limit.....	17
3.3.2 Measurement instruments	17
3.3.3 Test setup.....	17

3.3.4	Test procedure	17
3.3.5	Uncertainty.....	17
3.3.6	Test results of Dwell time Measurement.	17
3.3.7	Plots for the Dwell time measurement.	17
3.4	Channel separation.....	19
3.4.1	Limit.....	19
3.4.2	Measurement instruments	19
3.4.3	Test setup.....	19
3.4.4	Test procedure	19
3.4.5	Test results of Channel separation Measurement.	19
3.5	Number of hopping channels	20
3.5.1	Limit.....	20
3.5.2	Measurement instruments	20
3.5.3	Test setup.....	20
3.5.4	Test procedure	20
3.5.5	Test results of Dwell time Measurement.	20
3.6	Band edge Measurement	21
3.6.1	Limit.....	21
3.6.2	Measurement instruments	21
3.6.3	Test setup.....	21
3.6.4	Test procedure	21
3.6.5	Test results of the Band edge Measurements	21
3.6.6	Plots of the Band edge Measurements.....	22
3.7	Radiated spurious emissions	23
3.7.1	Limit.....	23
3.7.2	Measurement instruments	23
3.7.3	Test setup.....	23
3.7.4	Test procedure	23
3.7.5	Measurement Uncertainty.....	23
3.7.6	Plots of the Radiated Spurious Emissions Measurement.....	24
3.8	Conducted emissions.....	38
3.8.1	Limit.....	38
3.8.2	Measurement instruments	38
3.8.3	Test setup.....	38
3.8.4	Test procedure	38
3.8.5	Test results and plots of the AC mains conducted measurement	38
3.8.6	Measurement uncertainty	38
3.8.7	Plots of the AC mains conducted spurious measurement	39

4	Sample calculations	40
---	---------------------------	----

Summary of Test results

FCC	Description	Section in report	Verdict
15.247 (a)	20 dB bandwidth	3.1	Pass
15.247 (b)	RF output power	3.2	Pass
15.247 (a)	Dwell time	3.3	Pass
15.247 (a)	Channel separation	3.4	Pass
15.247 (a)	Number of hopping channels	3.5	Pass
15.247 (d)	Band edge	3.6	Pass
15.247(a)	Radiated spurious emissions	3.7	Pass
15.205 (a)	Spurious emissions in the restricted bands	3.7	Pass
15.109 (d)	RX Radiated Spurious emissions	3.7	Pass
15.207 (c) 15.107	Conducted spurious emissions	3.8	Pass

1 General Description

1.1 Applicant

Client name:	Tyro Products B.V.
Address	Bedrijvenpark Twente 299, 7602 KK Almelo
Telephone:	0546 588790
E-mail:	m.krisman@tyroremotes.eu
Contact name:	Mr. M. Krisman

1.2 Manufacturer

Manufacturer name:	Tyro Products B.V.
Address:	Bedrijvenpark Twente 299, 7602 KK Almelo
Telephone:	0546 588790
E-mail:	m.krisman@tyroremotes.eu
Contact name:	Mr. M. Krisman

1.3 Tested Equipment Under Test (EUT)

Product name:	RF Module 915 MHz
Brand name:	--
FCC ID:	SQLRXTX-02
Product type:	Wireless transceiver
Software version:	--
Hardware version:	--
Date of receipt	08-11-2019
Tests started:	08-11-2019
Testing ended:	01-12-2020

1.4 Product specifications of Equipment under test

Tx Frequency (MHz):	902 -928
Rx frequency (MHz):	902 -928
Maximum output Power to antenna (dBm)	13.42
Antenna type	½ wave dipole
Antenna Gain (dBi)	1.2
Type of modulation:	GFSK
Emission designator	614K4G1D

Note: The antenna gain is declared by the manufacturer

1.5 Environmental conditions

Test date	08-11-2019	18-03-2020	30-03-2020	25-11-2020	01-12-2021
Ambient temperature	20.2°C	20.5°C	21.4°C	21.3°C	19.9°C
Humidity	44.1 %	37.0%	29.2%	32.5%	29.7%

1.6 Measurement standards

- ANSI C63.4:2014
- ANSI C63.10:2013
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05

1.7 Applicable standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart B §15.107
- FCC Part 15 Subpart B §15.109
- FCC Part 15 Subpart C §15.207
- FCC Part 15 Subpart C §15.209
- FCC Part 15 Subpart C §15.247

1.8 Observation and remarks

The EUT has been updated to include a larger frequency range (902 – 928 MHz).

Pseudo random Channel usage:

Every device has a unique identification (UID). This UID is used as a seed to generate a pseudo random sequence of 50 channels where each channel from 1-50 will be used only once. Using unique identification numbers as a seed to generate the sequence results in different pseudo random sequences for every device.

Devices communicating with each other use the UID of one device in the group to determine the pseudo random sequence.

1.9 Conclusions

The sample of the product showed NO NON-COMPLIANCES to the specifications stated in paragraph 1.7 of this report.

The results of the test as stated in this report, are exclusively applicable to the product items as identified in this report. Telefication accepts no responsibility for any properties of product items in this test report, which are not supported by the tests as specified in paragraph 1.7 "*Applicable standards*".

All conducted tests are performed by:

Name : ing. R. van Barneveld

Review of test methods and report by:

Name : P. van Wanrooij, BASc

The above conclusions have been verified by the following signatory:

Date : 04-03-2021

Name : P. van Wanrooij

Function : Test Engineer

Signature :



2 Test configuration of the Equipment Under Test

2.1 Test mode


The applicant provided test mode firmware for the EUT, in which it was possible to configure the radio to transmit continuously.

2.2 Tested channels and Data rates


Technology	Channels	Data rate	Frequency (MHz)
Proprietary	1	50 kbps	902.5
	25	50 kbps	914.5
	50	50 kbps	927.0

2.3 Test setups


Radiated emissions test setup 9 kHz – 30 MHz

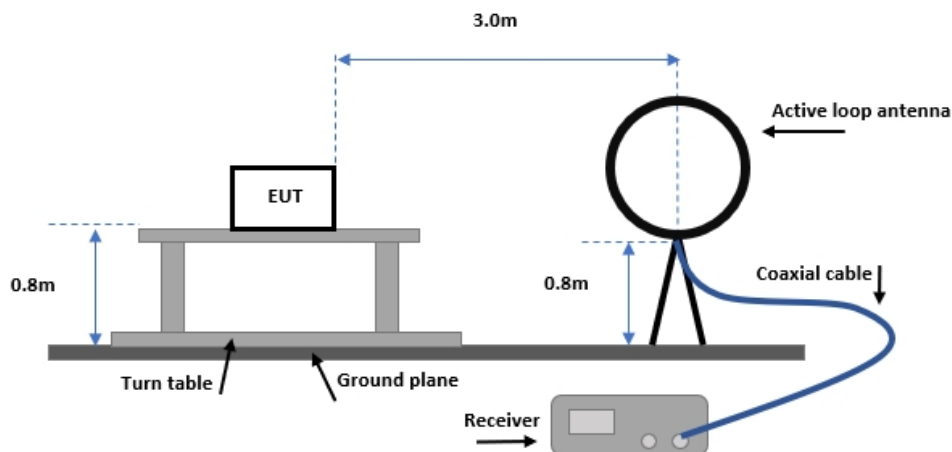

Radiated emissions test setup 30 MHz - 1 GHz

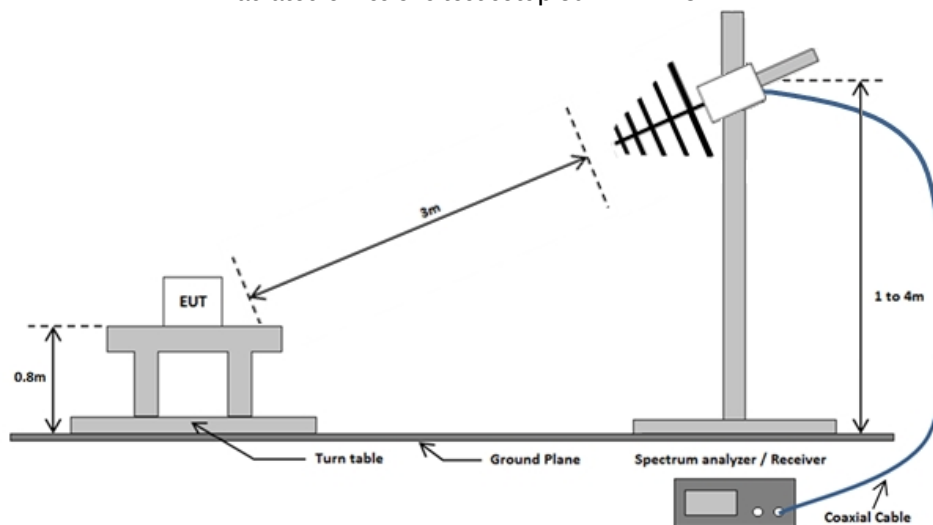


Radiated emissions test setup above 1 GHz

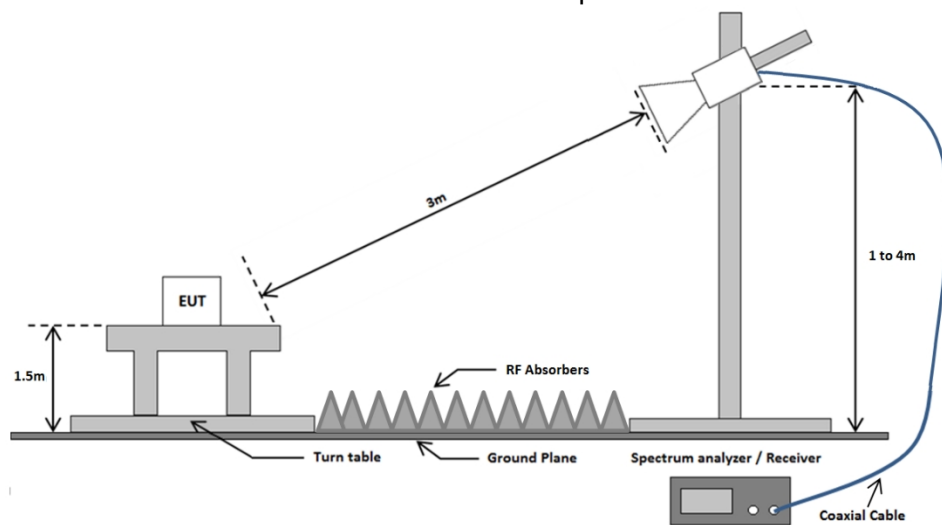

Conducted test setup

Conducted Emissions test at AC mains

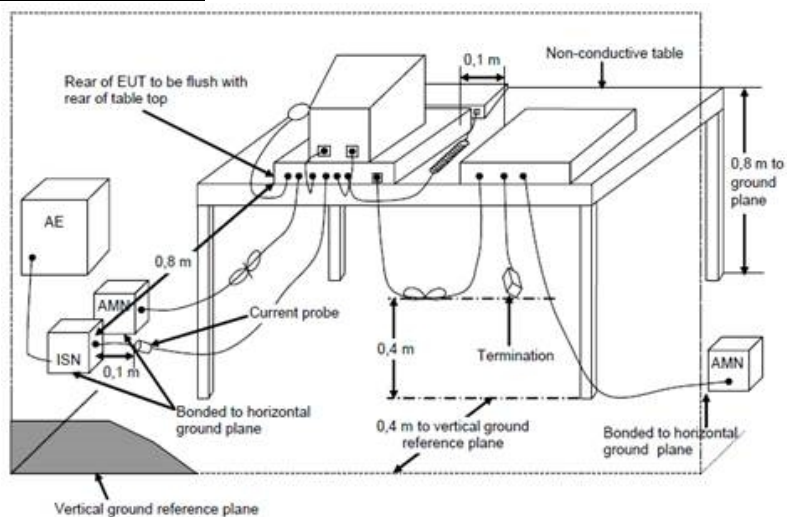

2.4 Equipment used in the test configuration

Description	Manufacturer	Model	ID	Used at Par.
EMI Receiver	Rohde & Schwarz	ESCI	TE11128	3.8
LISN	Rohde & Schwarz	ENV216	TE11176	3.8
EMI Receiver	Rohde & Schwarz	ESR7	TE01220	3.6 -3.7
Spectrum analyzer	Rohde & Schwarz	FSP40	TE11125	3.6 -3.7
Spectrum Analyzer	Rohde & Schwarz	FSV40	TE01269	3.1 – 3.5
1.1 GHz HPF	Wainwright	WHK1.1/15G-10EF	TE01139	3.6 -3.7
Active loop antenna	EMCO	6502	TE11171	3.6 -3.7
Biconilog antenna	Chase	CBL6112A	TE00967	3.6 -3.7
Horn antenna	EMCO	3115	TE00531	3.6 -3.7
Preamplifier 1-18 GHz	µComp Nordic	MCNA-40-0010800- 25-10P	TE11175	3.6 -3.7

2.5 Sample calculations

All formulas for data conversions and conversion factors are reported in chapter 4 of this test report.

3 Test results

3.1 20dB bandwidth Measurement

3.1.1 Limit

For frequency hopping systems operating in the 902 – 928 MHz: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period. The Maximum 20 dB Bandwidth shall be 500 kHz.

3.1.2 Measurement instruments

The measurement instruments are listed in chapter 2.4 of this report.

3.1.3 Test setup

The test setup is as shown in chapter 2.3 of this report.

3.1.4 Test procedure

Tests according to ANSI C63.10


IRN 017 - Occupied bandwidth (Hz) Method 4 – DTS Bandwidth.

3.1.5 Test Results of the 6 dB bandwidth Measurement


Technology Std.	Channel	Frequency (MHz)	Data rate	20 dB bandwidth (kHz)
Proprietary	1	902.5	50 kbps	85.7
	25	914.5	50 kbps	90.1
	50	927.0	50 kbps	90.2
Uncertainty	± 4.4 kHz			

3.1.6 Plots of the 20 dB bandwidth measurement


Channel 1

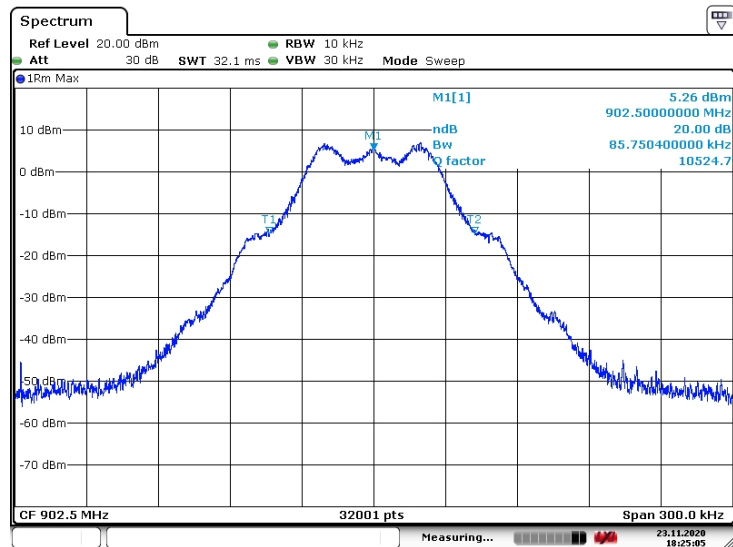

Channel 25

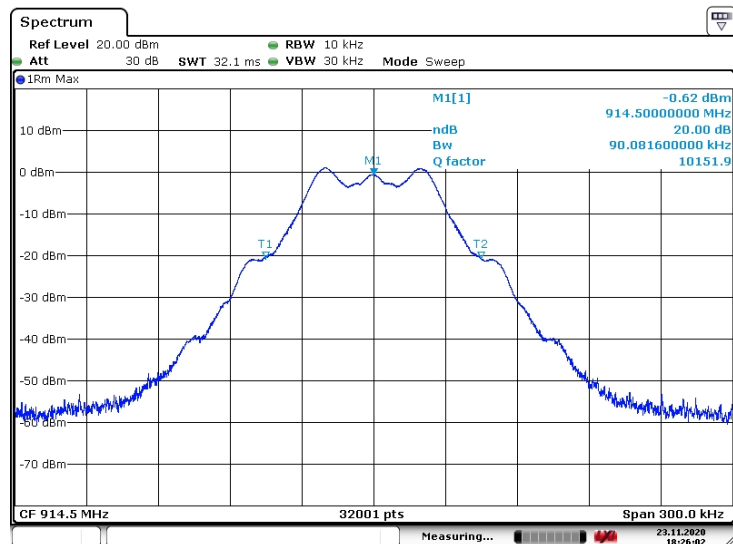

Channel 50

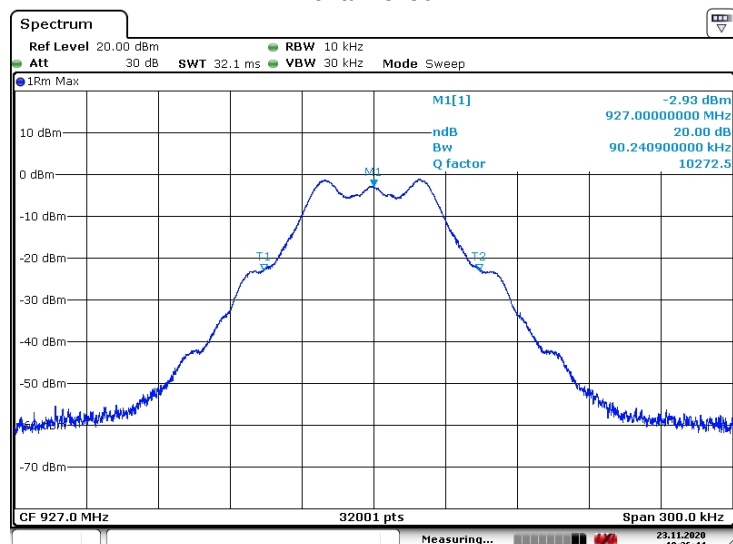

3.2 Output Power Measurement

3.2.1 Limit

For frequency hopping systems operating in the 902 – 928 MHz: 1 Watt for systems employing at least 50 hopping channels; and 0.25 Watts for systems employing less than 50 hopping channels.

3.2.2 Measurement instruments

The measurement instruments are listed in chapter 2.4 of this report.

3.2.3 Test setup

The test setup is as shown in chapter 2.3 of this report.

3.2.4 Test procedure

The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05.


IRN 014 - RF power (W) - Method 1 – AVGSA (DTS) according to ANSI C63.10.

3.2.5 Test results of Output Power Measurement


Peak method				
Technology Std.	Channel	Frequency (MHz)	Data rate	Peak output power (dBm)
Proprietary	1	902.5	50 kbps	14.63
	25	914.5	50 kbps	14.08
	50	927.0	50 kbps	13.15
Uncertainty	±0.71 dB			

3.2.6 Plots of the Output power measurement


Channel 1

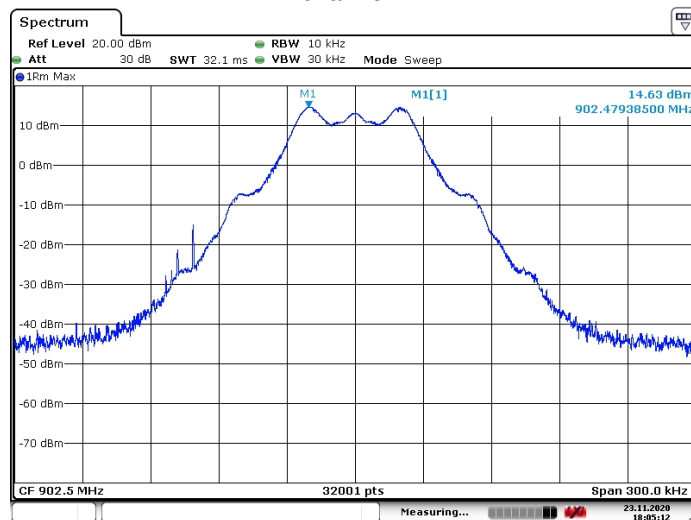

Channel 25

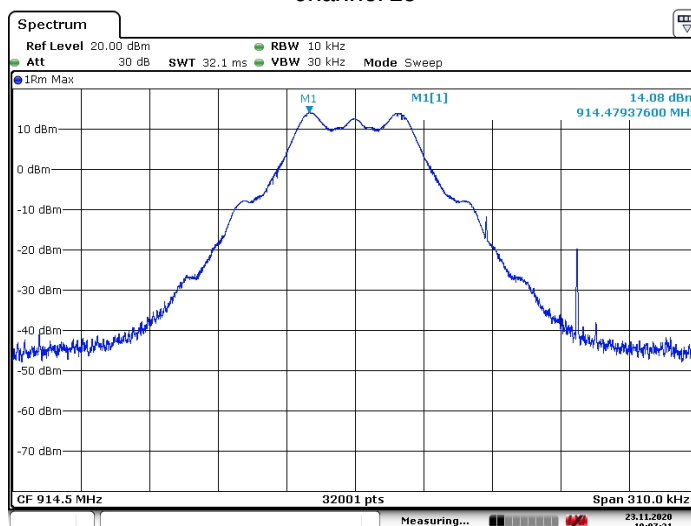

Channel 50

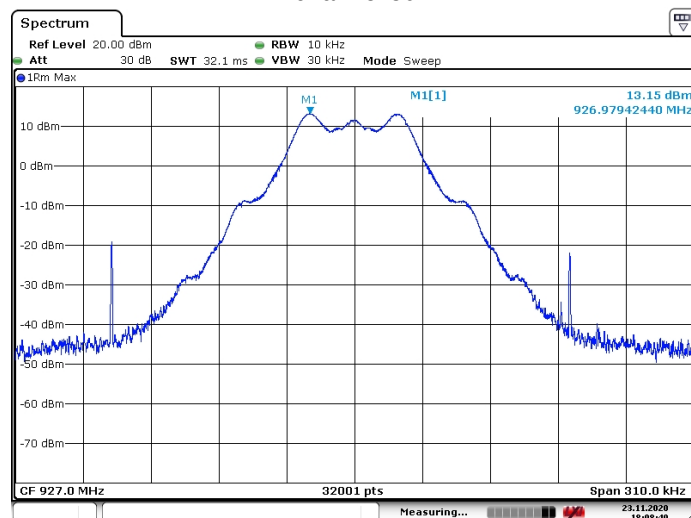

3.3 Dwell time

3.3.1 Limit

For frequency hopping systems operating in the 902 – 928 MHz: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.

3.3.2 Measurement instruments

The measurement instruments are listed in chapter 2.4 of this report.

3.3.3 Test setup

The test setup is as shown in chapter 2.3 of this report.

3.3.4 Test procedure

The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05.
IRN 013 - Method 2

3.3.5 Uncertainty

+/- 2.85 %

3.3.6 Test results of Dwell time Measurement.

Ton = 7.612 ms


Toff = 5.391 s

In 20 seconds the Ton time = $7.612\text{ms} \times 4 = 30.45\text{ms}$.


3.3.7 Plots for the Dwell time measurement.

See next page.

Packet time

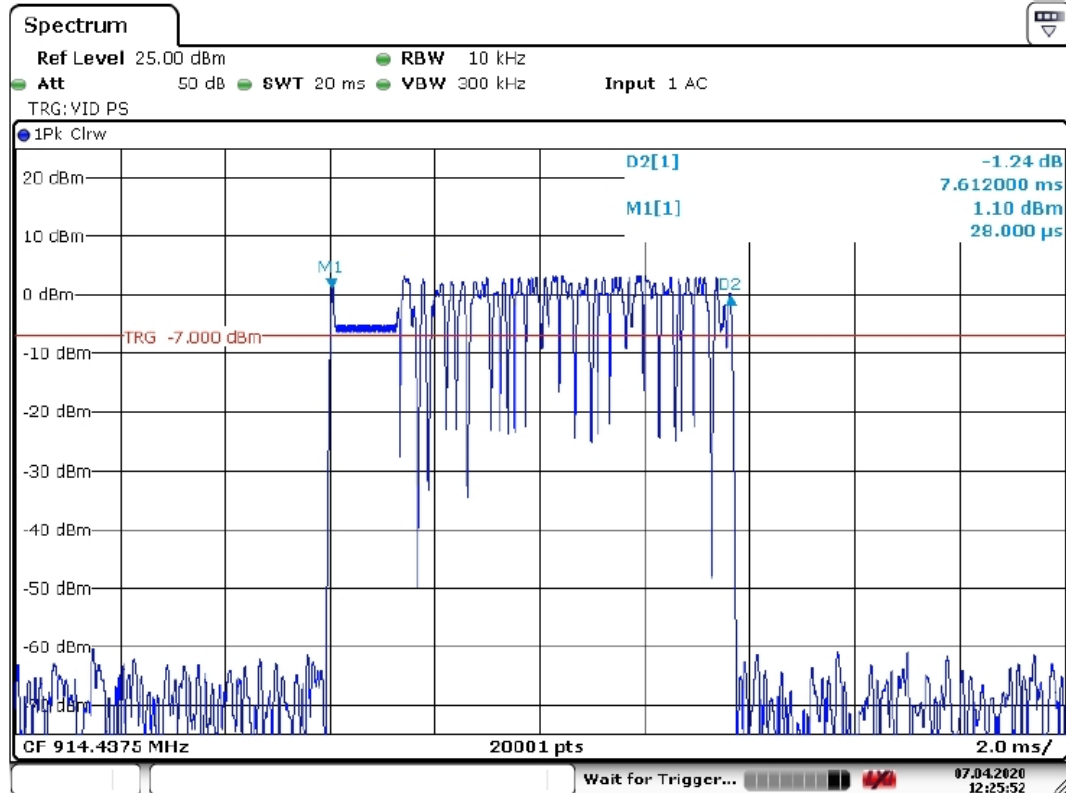

Packets in 20 second period

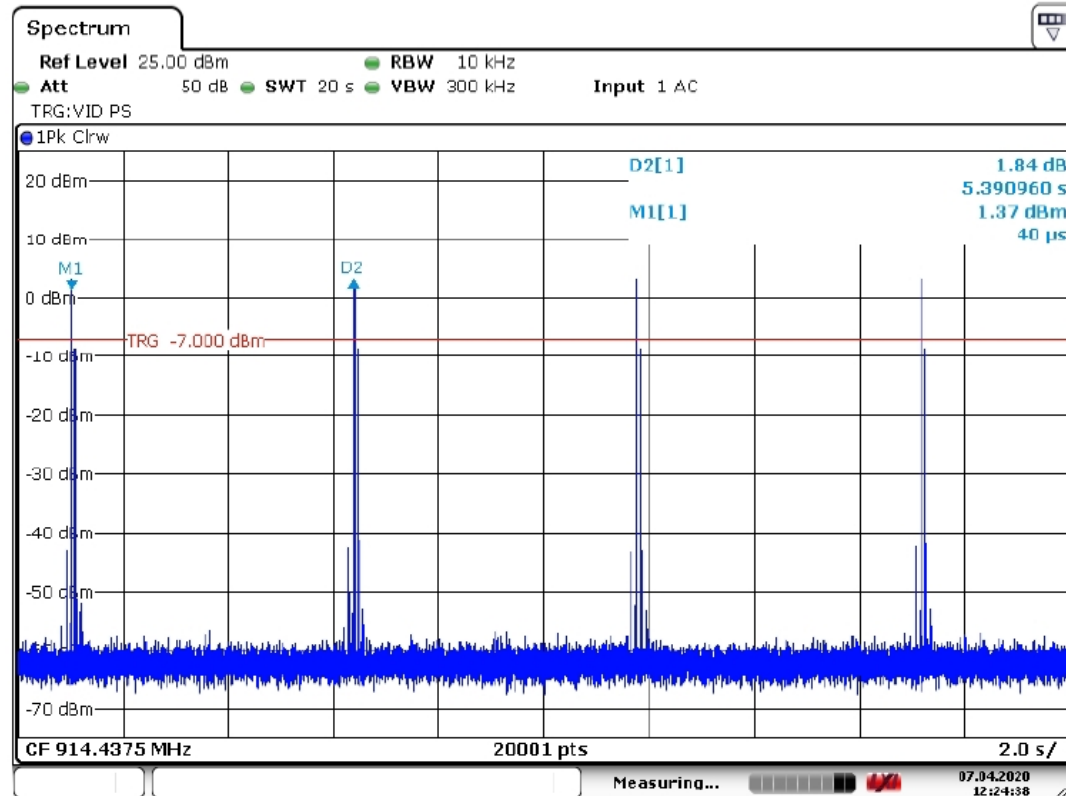

3.4 Channel separation

3.4.1 Limit

Frequency hopping systems operating in the 902 – 928 MHz shall have hopping frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

3.4.2 Measurement instruments

The measurement instruments are listed in chapter 2.4 of this report.

3.4.3 Test setup

The test setup is as shown in chapter 2.3 of this report.

3.4.4 Test procedure

The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05.


IRN 005 - Method 2

3.4.5 Test results of Channel separation Measurement.

F1=914.498 MHz

F2=915.001 MHz

Channel Separation = 503 kHz

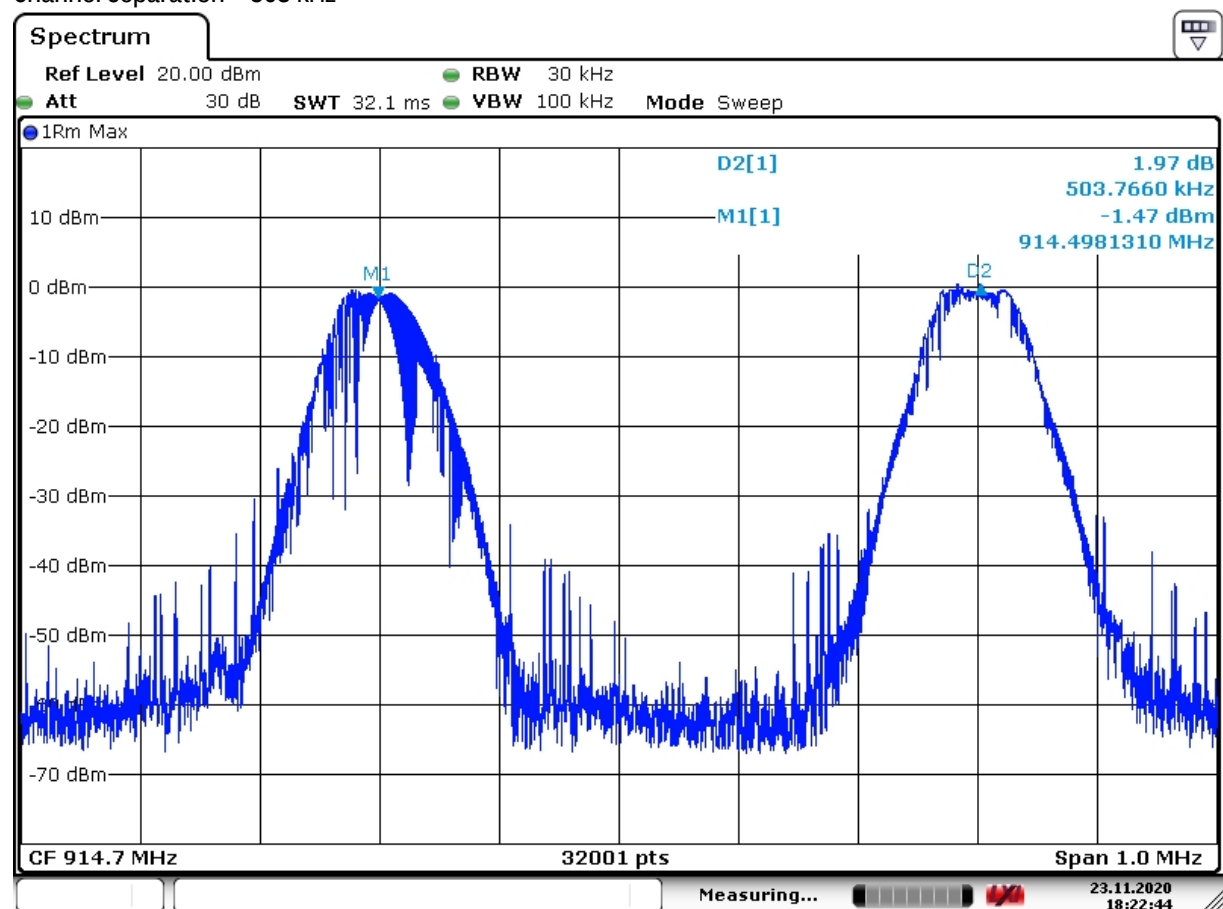

3.5 Number of hopping channels

3.5.1 Limit

For frequency hopping systems operating in the 902 – 928 MHz: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies.

3.5.2 Measurement instruments

The measurement instruments are listed in chapter 2.4 of this report.

3.5.3 Test setup

The test setup is as shown in chapter 2.3 of this report.


3.5.4 Test procedure

The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05.

IRN 005 - Method 2

3.5.5 Test results of Dwell time Measurement.

The EUT uses 50 hopping channels

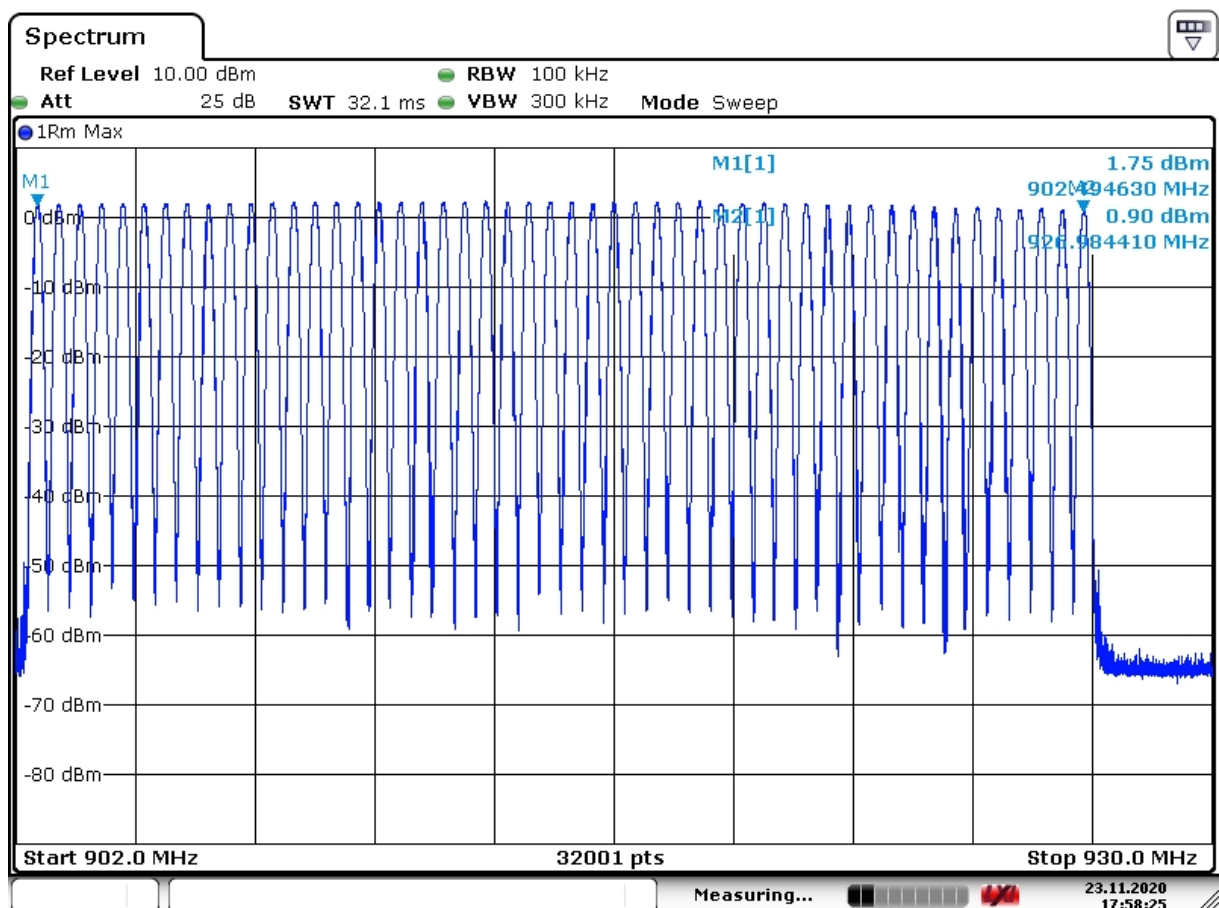

3.6 Band edge Measurement

3.6.1 Limit

Band edge:

At the edge of the authorized band the RF power shall be at least 20 dB down.

3.6.2 Measurement instruments

The measurement instruments are listed in chapter 2.4 of this report.

3.6.3 Test setup

The test setup is as shown in chapter 2.3 of this report.

3.6.4 Test procedure

The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05, sections 11.3 and 12.1.


IRN 026 - Radiated electrical disturbance (V per m) Method 6 – Radiated electrical disturbance at the Authorized band edge.

3.6.5 Test results of the Band edge Measurements


Technology	Channels	Frequency (MHz)	Data rate	Band edge (dBm)	Limit (dBm)
Proprietary	1	902.4	50 kbps	< - 40	-5.31
	50	927.0	50 kbps	< - 40	-6.87
Uncertainty	± 2.0 dB.				

3.6.6 Plots of the Band edge Measurements

Lower band edge (Channel 1)

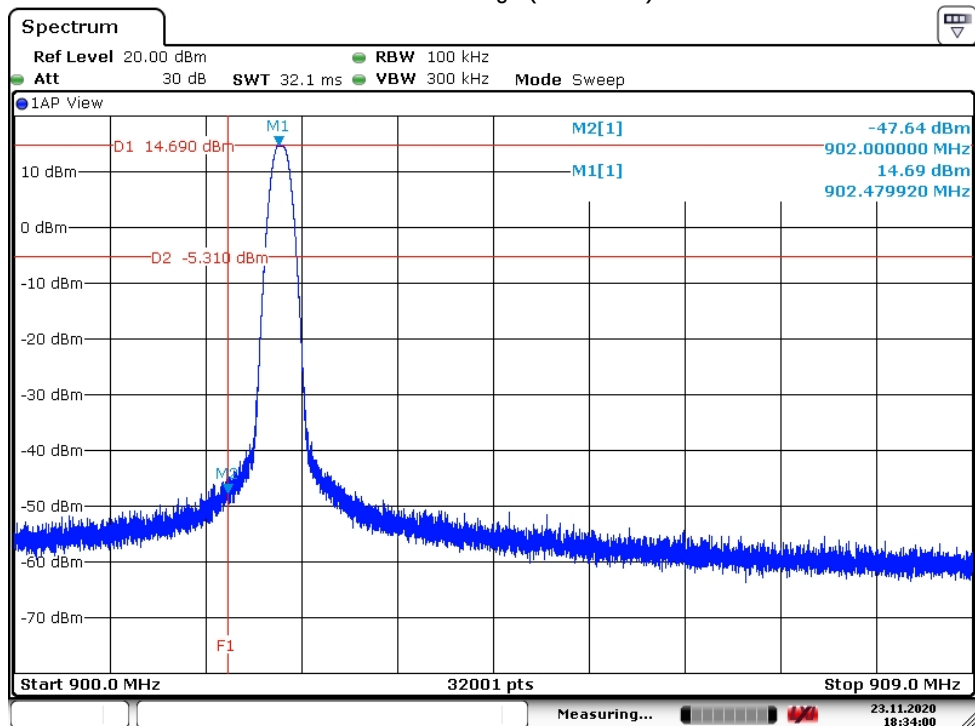

Upper band edge (Channel 50)

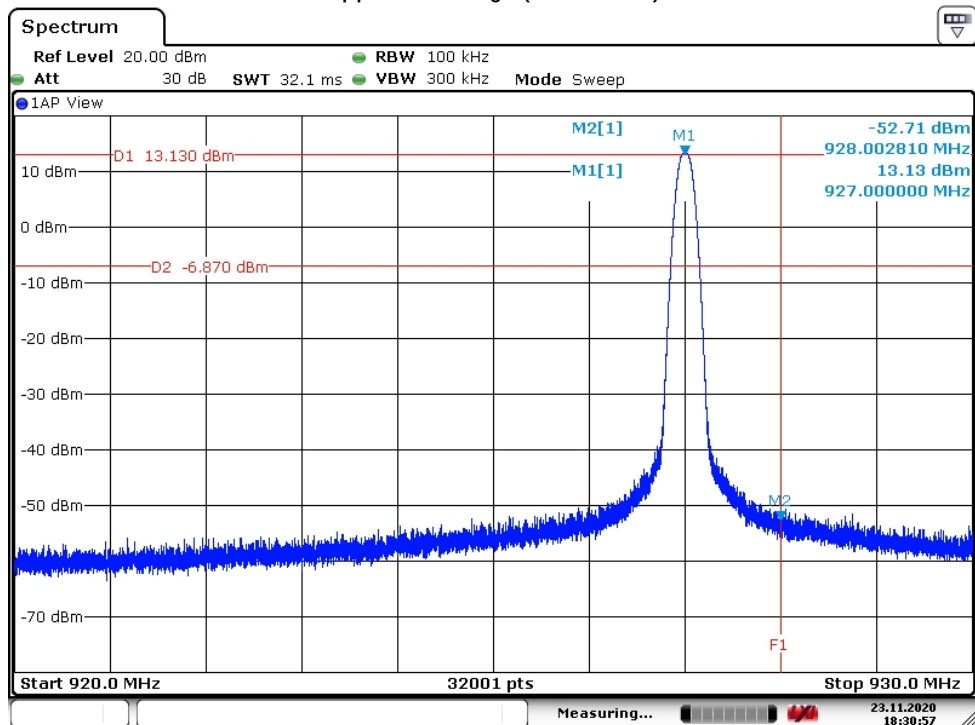

3.7 Radiated spurious emissions

3.7.1 Limit

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Field strength ($\text{dB}\mu\text{V/m}$)	Measurement distance(m)
0.009 – 0.490	$2400/F(\text{kHz})$	$20*\{\log[2400]-\log[F(\text{kHz})]\}$	300*
0.490 – 1.705	$24000/F(\text{kHz})$	$20*\{\log[24000]-\log[F(\text{kHz})]\}$	30*
1.705 – 13.11 14.01 – 30.0	30	29.5	30*
30 -88	100	40	3
88 - 216	150	43,5	3
216-960	200	46	3
Above 960	500	54	3

*Note: Limit lines in the plots corrected to 3m measurement distance according to the method described in ANSI C63.10-2013, clause 6.4

3.7.2 Measurement instruments

The measurement instruments are listed in chapter 2.3 of this report.

3.7.3 Test setup

The test setup is as shown in chapter 2.2 of this report.

3.7.4 Test procedure

9 kHz – 30 MHz: According to ANSI C63.4-2014, section 5.4.2 and 8.2.3

30 MHz to 26.5 GHz: According to ANSI C63.4-2014, section 8.3

9 kHz to 30 MHz: IRN 026 – Method 10

30 MHz to 1 GHz: IRN 026 – Method 1


1 GHz to 18 GHz: IRN 026 – Method 2

3.7.5 Measurement Uncertainty


Frequency range	Polarization	Uncertainty
9 kHz – 30 MHz	--	± 1.6 dB
30 – 200 MHz	Horizontal	± 4.5 dB
	Vertical	± 5.4 dB
200 -1000 MHz	Horizontal	± 3.6 dB
	Vertical	± 4.6 dB
1 – 18 GHz	Horizontal	± 5.7 dB
	Vertical	± 5.7 dB

3.7.6 Plots of the Radiated Spurious Emissions Measurement

9 kHz – 150 kHz

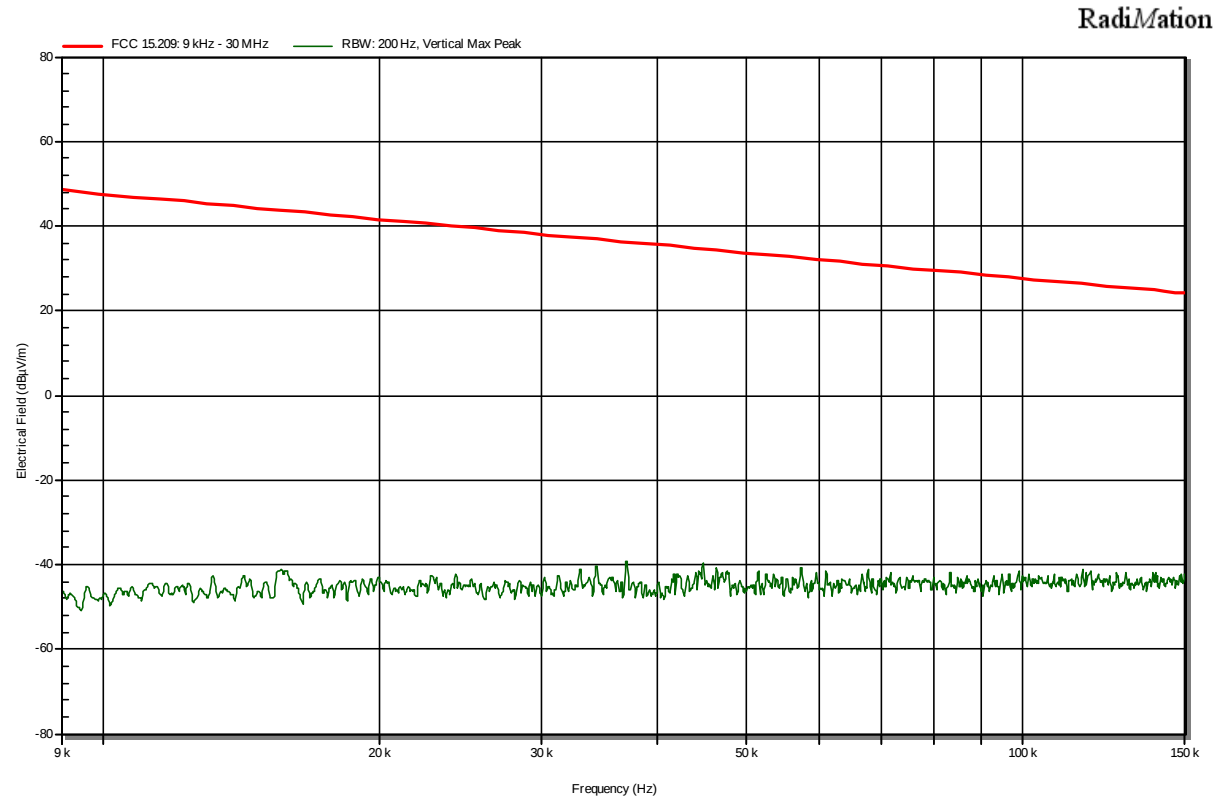


150 kHz – 30 MHz

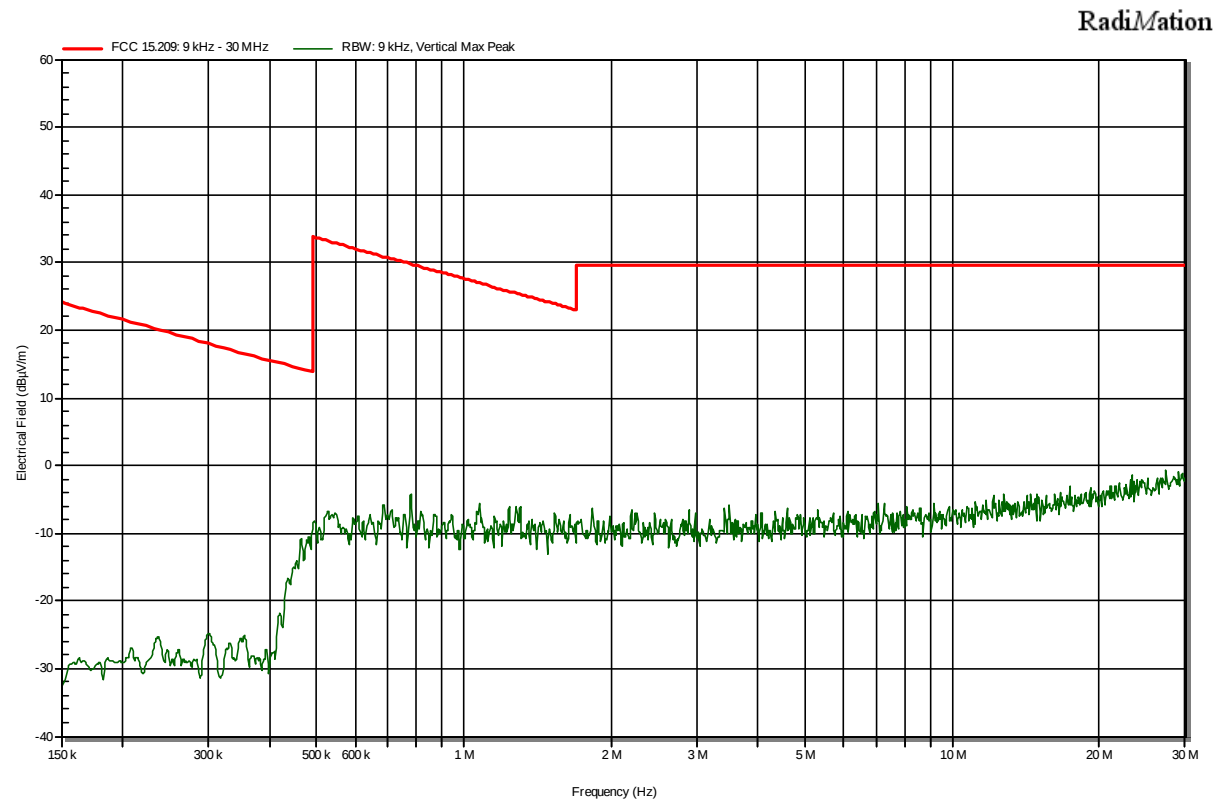

30 -1000 MHz
Low channel


Vertical polarization

RadiMation

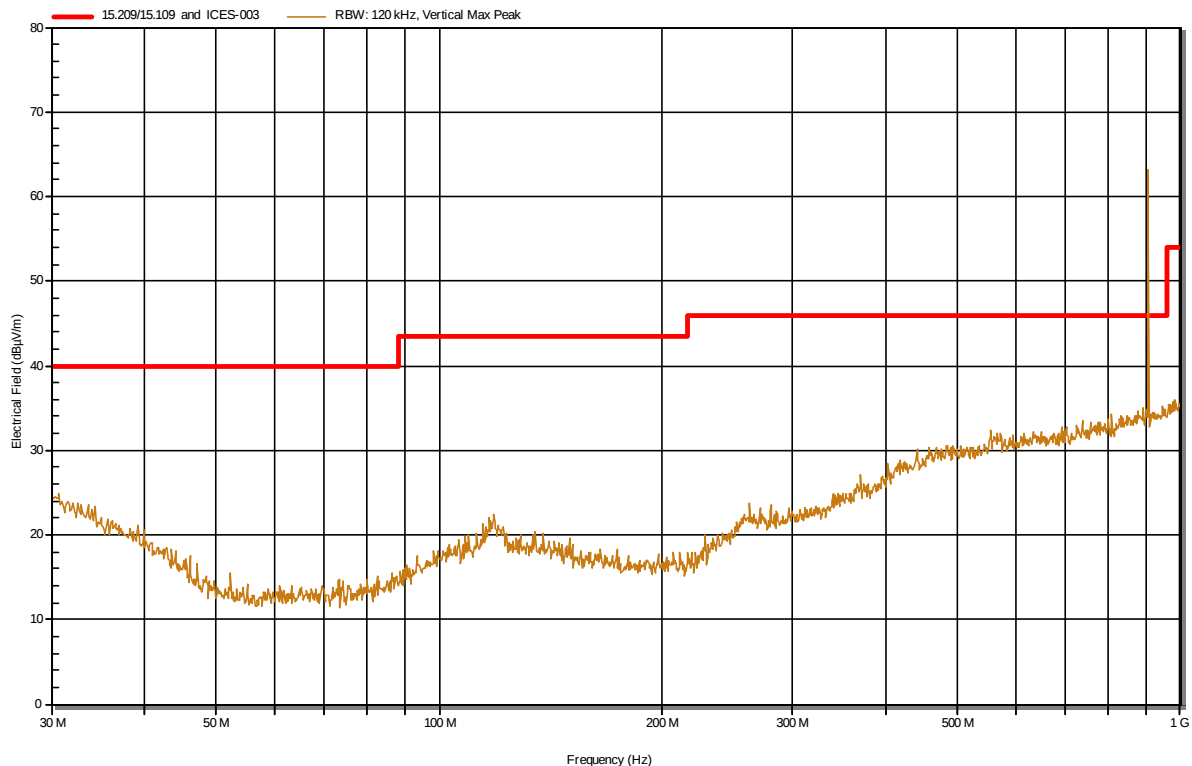

Horizontal polarization

RadiMation

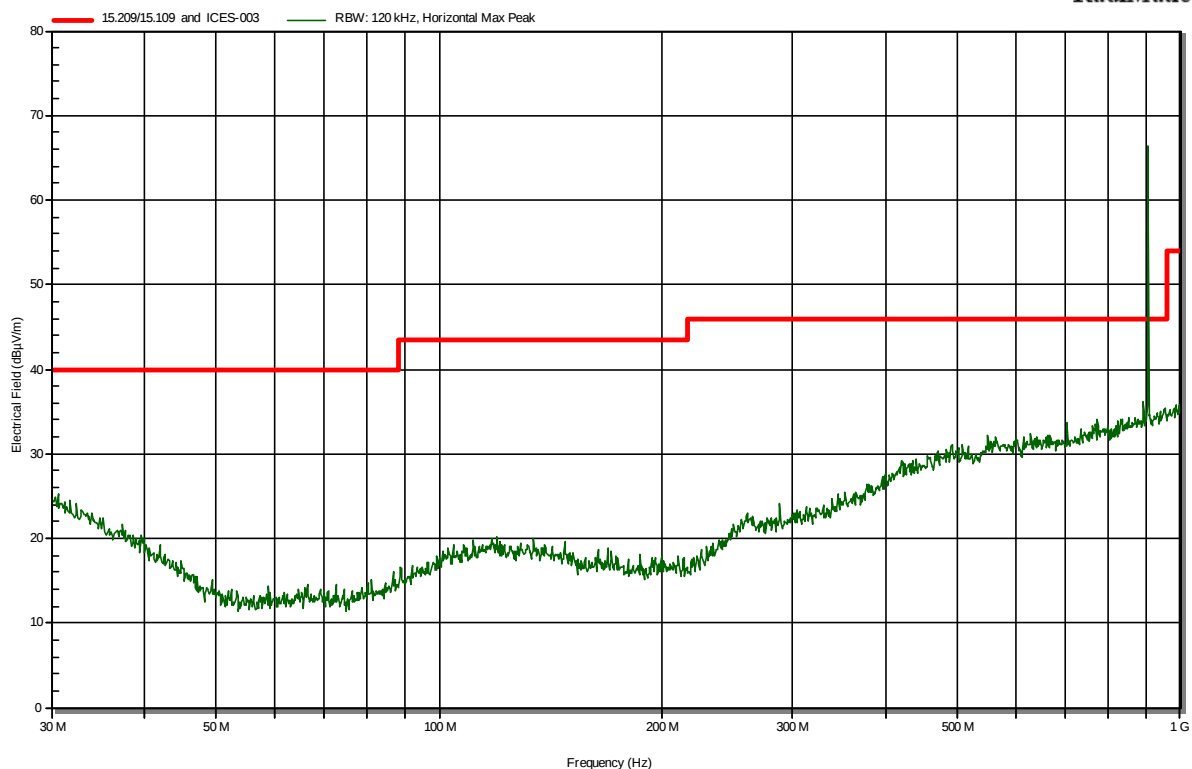


Note: the peak seen in the 900 MHz range, is the transmission frequency and is not subject to the spurious emission limit

30 -1000 MHz
Middle channel


Vertical polarization

RadiMation

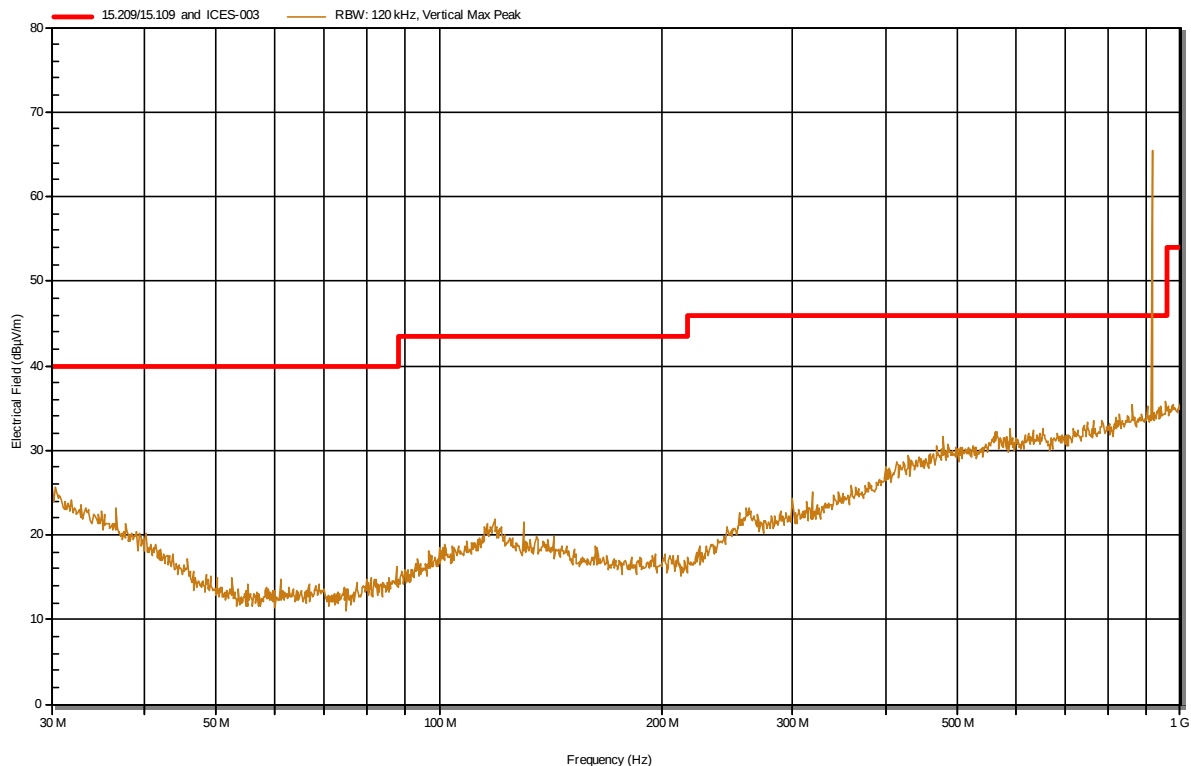

Horizontal polarization

RadiMation

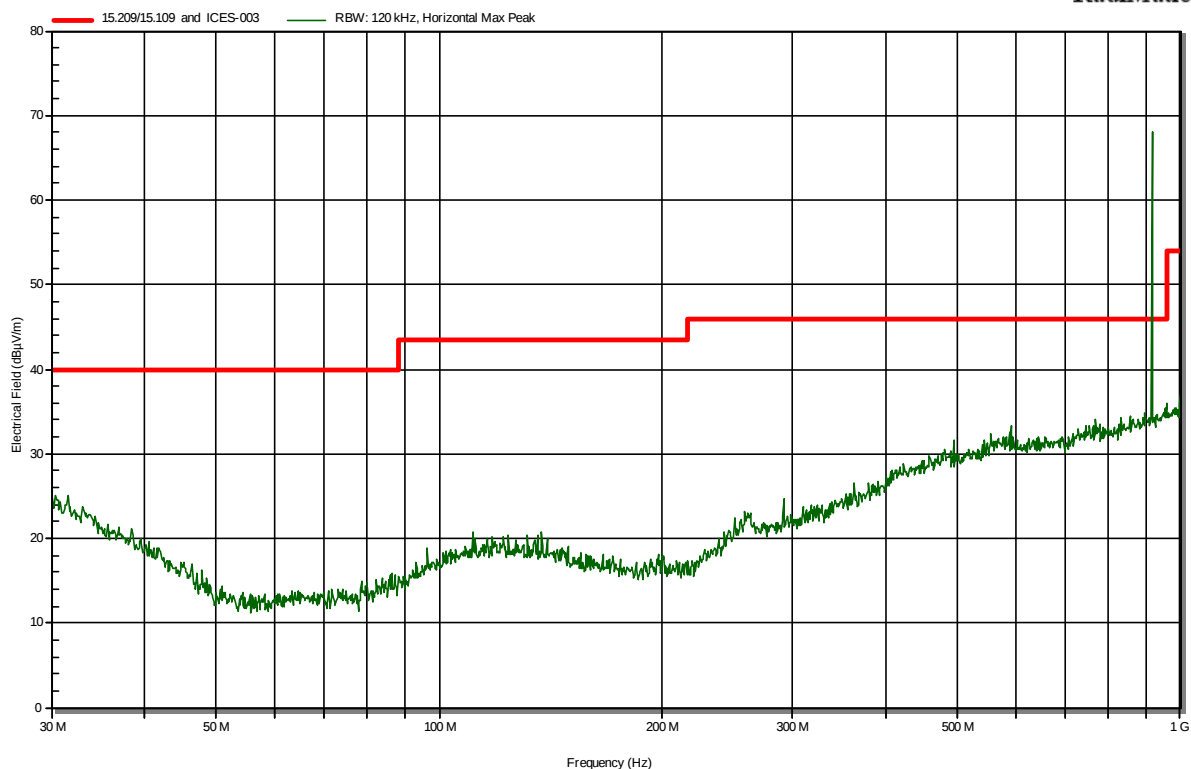


Note: the peak seen in the 900 MHz range, is the transmission frequency and is not subject to the spurious emission limit.

30 -1000 MHz
High Channel


Vertical polarization

RadiMation

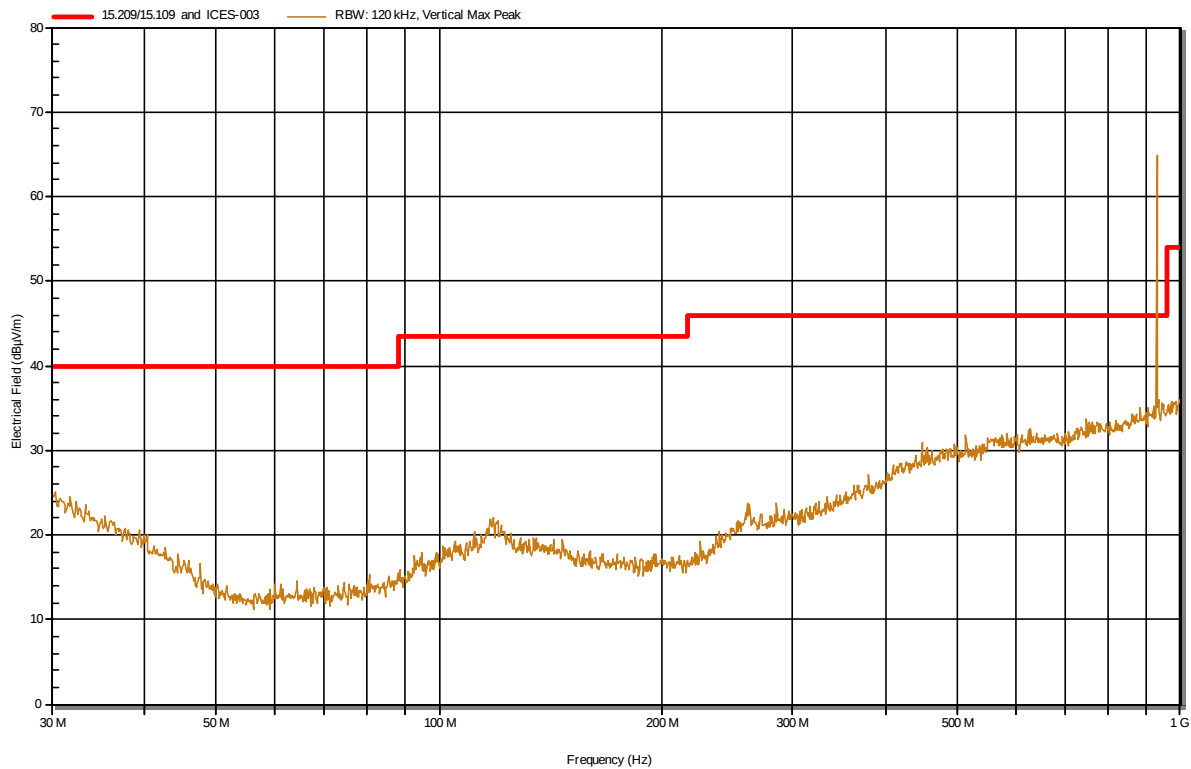

Horizontal polarization

RadiMation

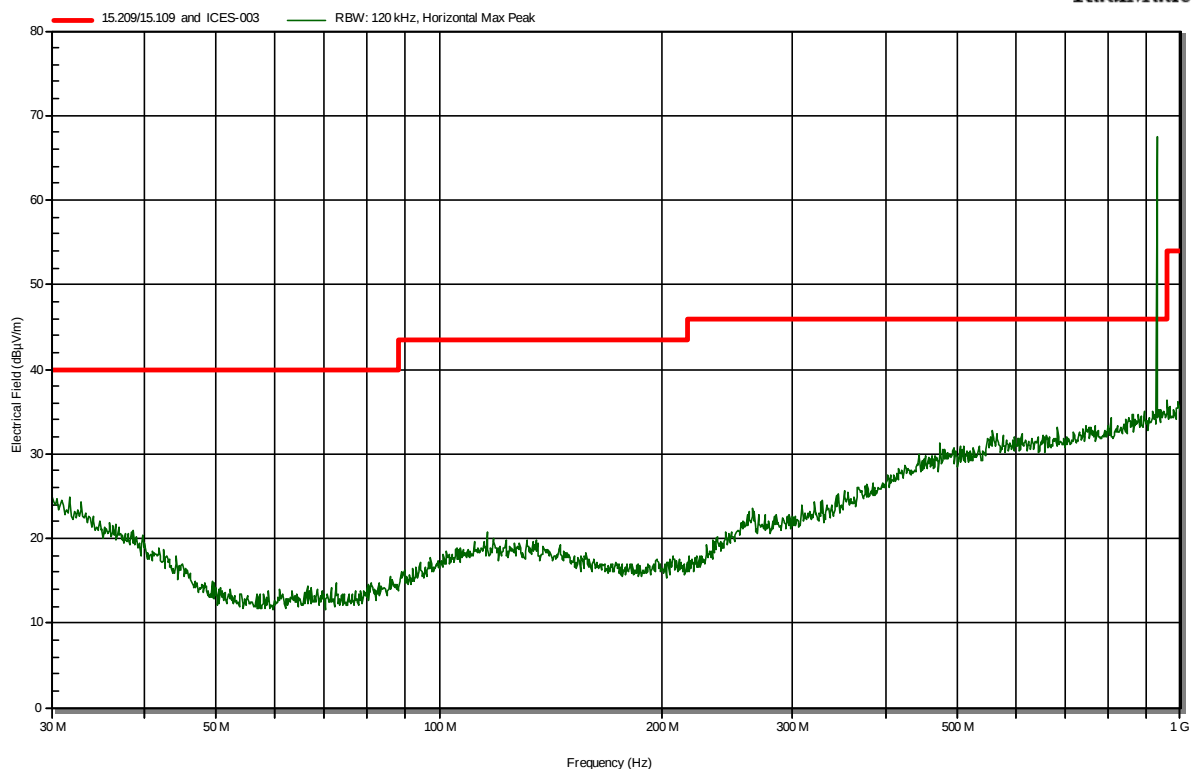


Note: the peak seen in the 900 MHz range, is the transmission frequency and is not subject to the spurious emission limit

1 -10 GHz
Low channel


Vertical polarization

RadiMation

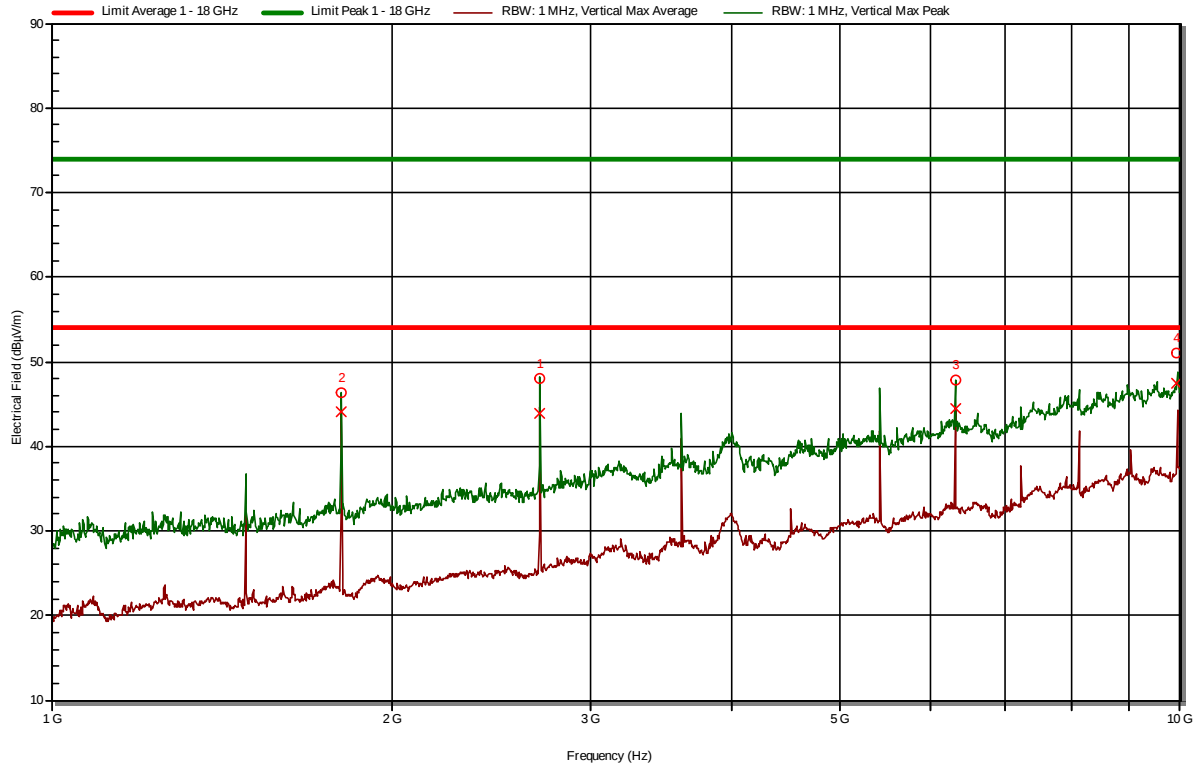

Horizontal polarization


RadiMation

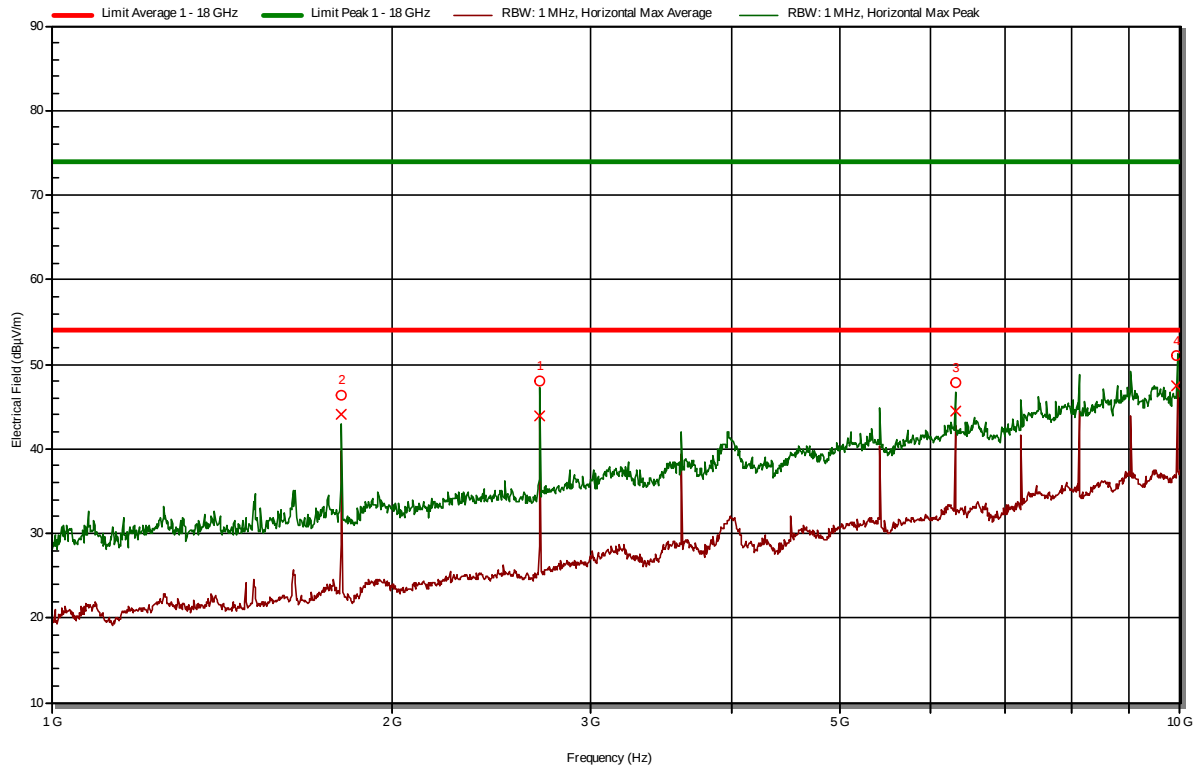

1 -10 GHz
Middle channel


Vertical polarization

RadiMation

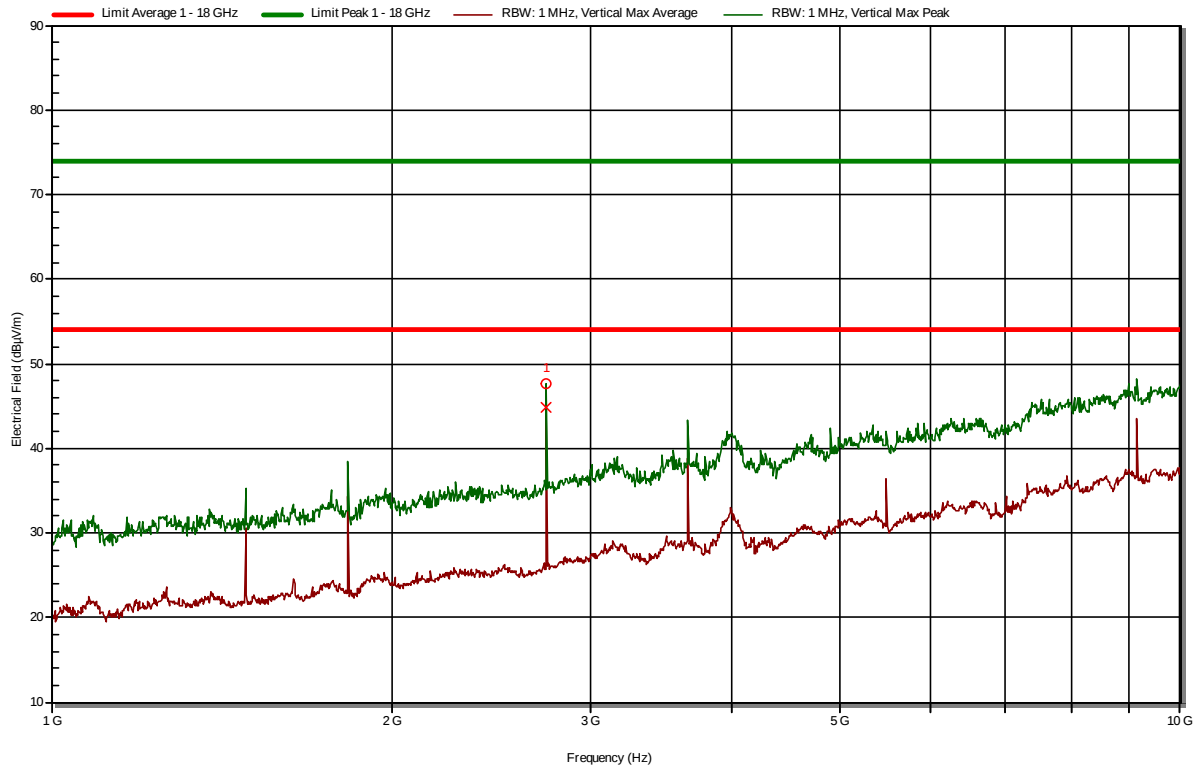

Horizontal polarization


RadiMation

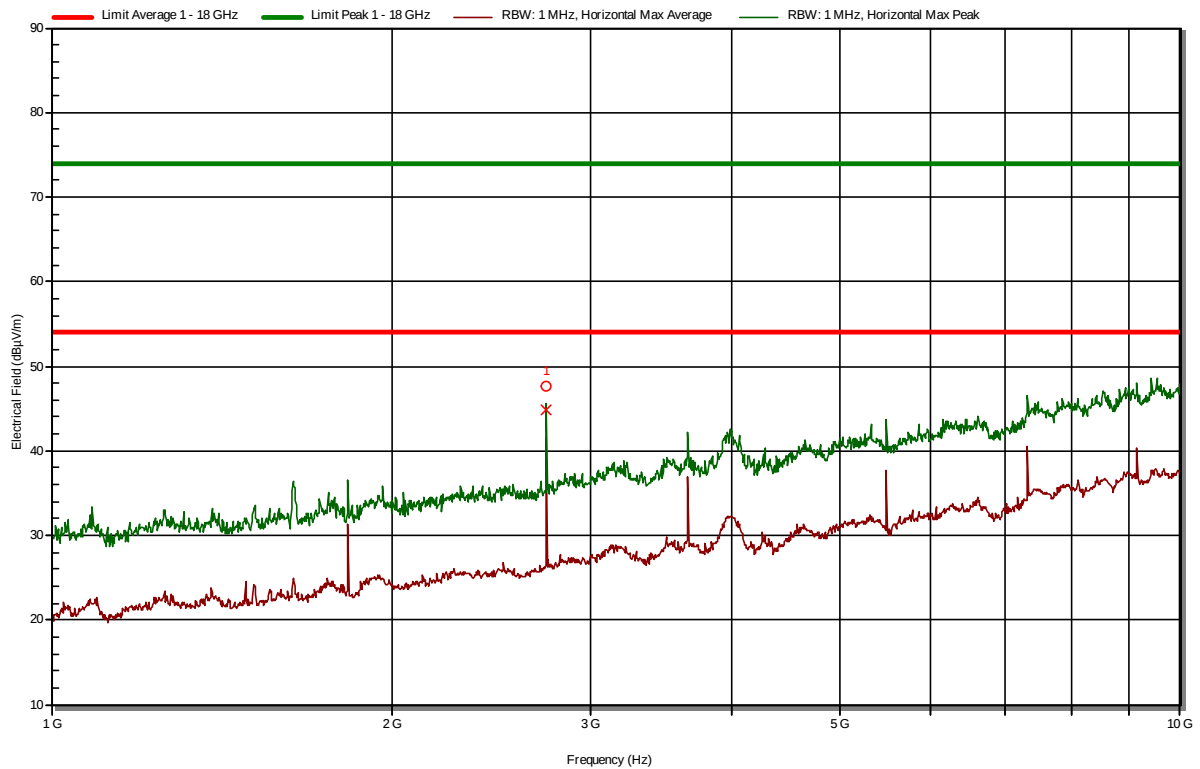

1 -10 GHz
High Channel


Vertical polarization

RadiMation

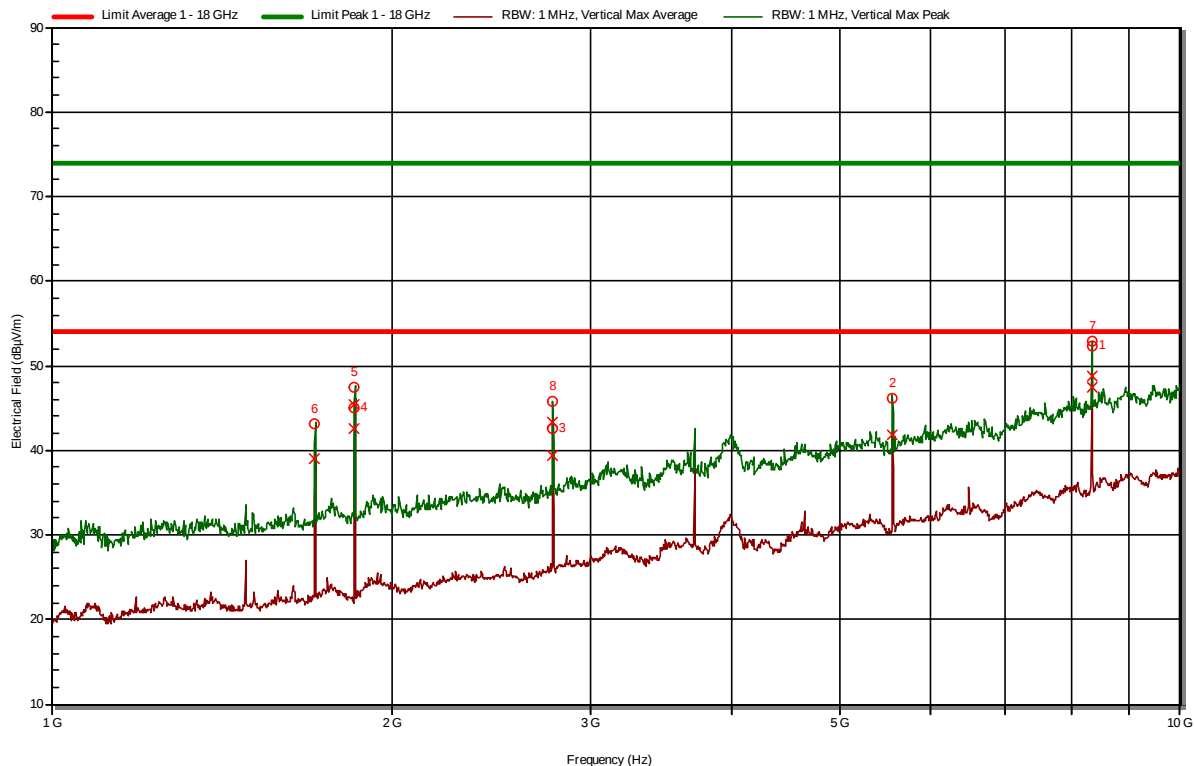

Horizontal polarization

RadiMation

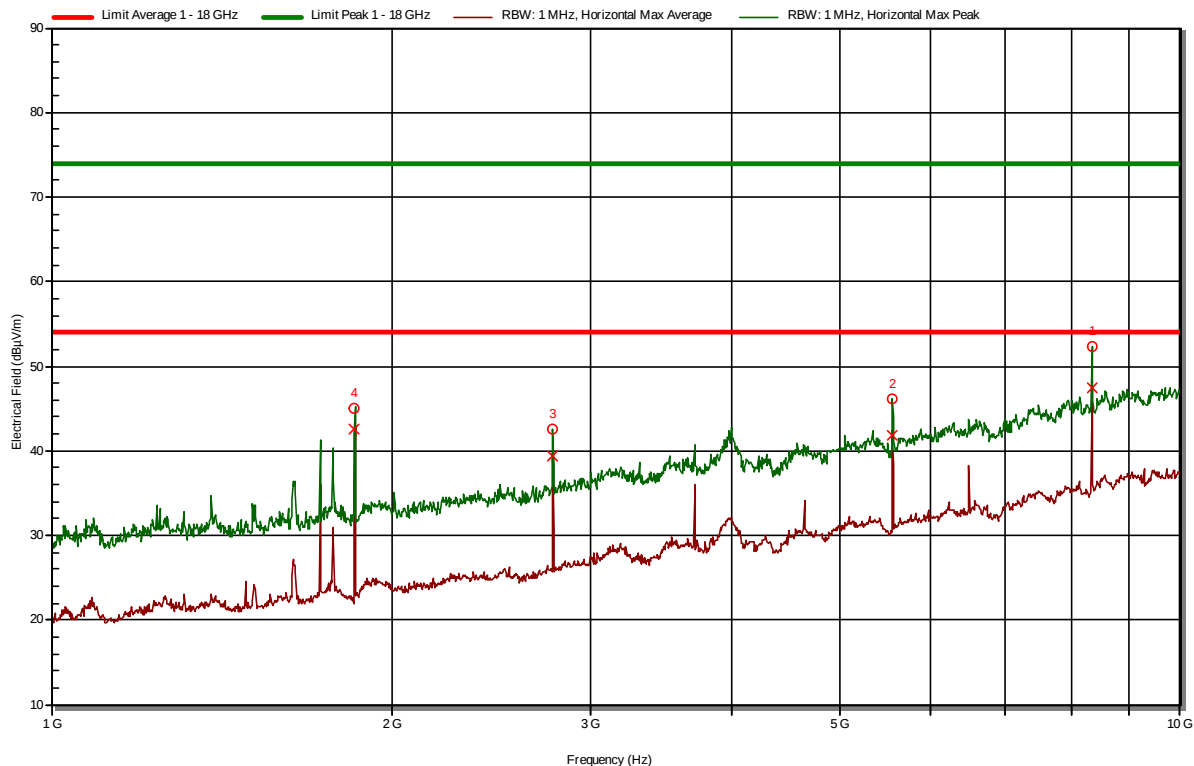

Measured Peaks
Low Channel

Frequency	Peak	Peak Limit	Average	Average Limit	Status	Angle	Height	Polarization
8,344 GHz	52,3 dB μ V/m	74 dB μ V/m	47,5 dB μ V/m	54 dB μ V/m	Pass	281 degrees	1 m	Horizontal
5,562 GHz	46,1 dB μ V/m	74 dB μ V/m	41,8 dB μ V/m	54 dB μ V/m	Pass	70 degrees	3 m	Horizontal
2,781 GHz	42,6 dB μ V/m	74 dB μ V/m	39,4 dB μ V/m	54 dB μ V/m	Pass	154 degrees	2,5 m	Horizontal
1,854 GHz	45 dB μ V/m	74 dB μ V/m	42,6 dB μ V/m	54 dB μ V/m	Pass	93 degrees	4 m	Horizontal

Middle Channel

Frequency	Peak	Peak Limit	Average	Average Limit	Status	Angle	Height	Polarization
2,744 GHz	47,6 dB μ V/m	74 dB μ V/m	44,8 dB μ V/m	54 dB μ V/m	Pass	97 degrees	1,5 m	Vertical


High channel

Frequency	Peak	Peak Limit	Average	Average Limit	Status	Angle	Height	Polarization
8,344 GHz	52,3 dB μ V/m	74 dB μ V/m	47,5 dB μ V/m	54 dB μ V/m	Pass	281 degrees	1 m	Horizontal
5,562 GHz	46,1 dB μ V/m	74 dB μ V/m	41,8 dB μ V/m	54 dB μ V/m	Pass	70 degrees	3 m	Horizontal
2,781 GHz	42,6 dB μ V/m	74 dB μ V/m	39,4 dB μ V/m	54 dB μ V/m	Pass	154 degrees	2,5 m	Horizontal
1,854 GHz	45 dB μ V/m	74 dB μ V/m	42,6 dB μ V/m	54 dB μ V/m	Pass	93 degrees	4 m	Horizontal
1,854 GHz	47,5 dB μ V/m	74 dB μ V/m	45,4 dB μ V/m	54 dB μ V/m	Pass	59 degrees	4 m	Vertical
1,711 GHz	43,2 dB μ V/m	74 dB μ V/m	39 dB μ V/m	54 dB μ V/m	Pass	39 degrees	2 m	Vertical
8,343 GHz	53 dB μ V/m	74 dB μ V/m	48,8 dB μ V/m	54 dB μ V/m	Pass	123 degrees	1 m	Vertical
2,781 GHz	45,7 dB μ V/m	74 dB μ V/m	43,3 dB μ V/m	54 dB μ V/m	Pass	123 degrees	1 m	Vertical

30 -1000 MHz(RX)
Low channel


Vertical polarization

RadiMation

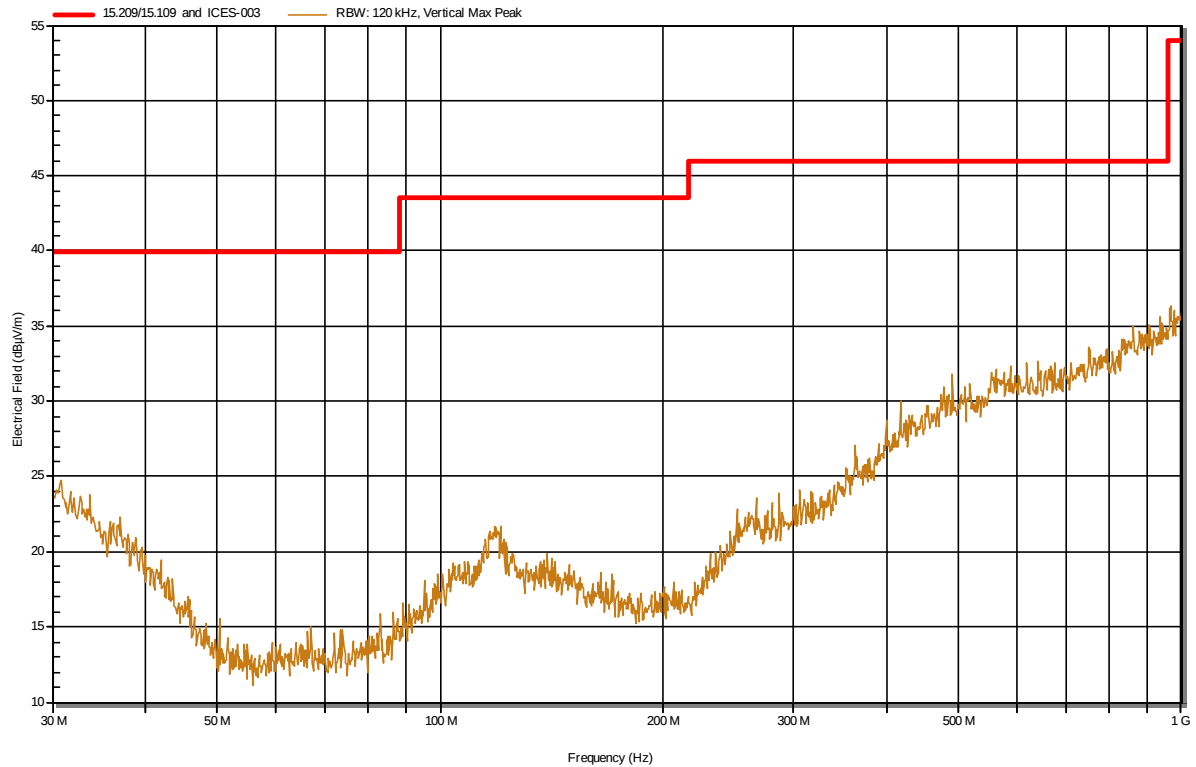

Horizontal polarization


RadiMation

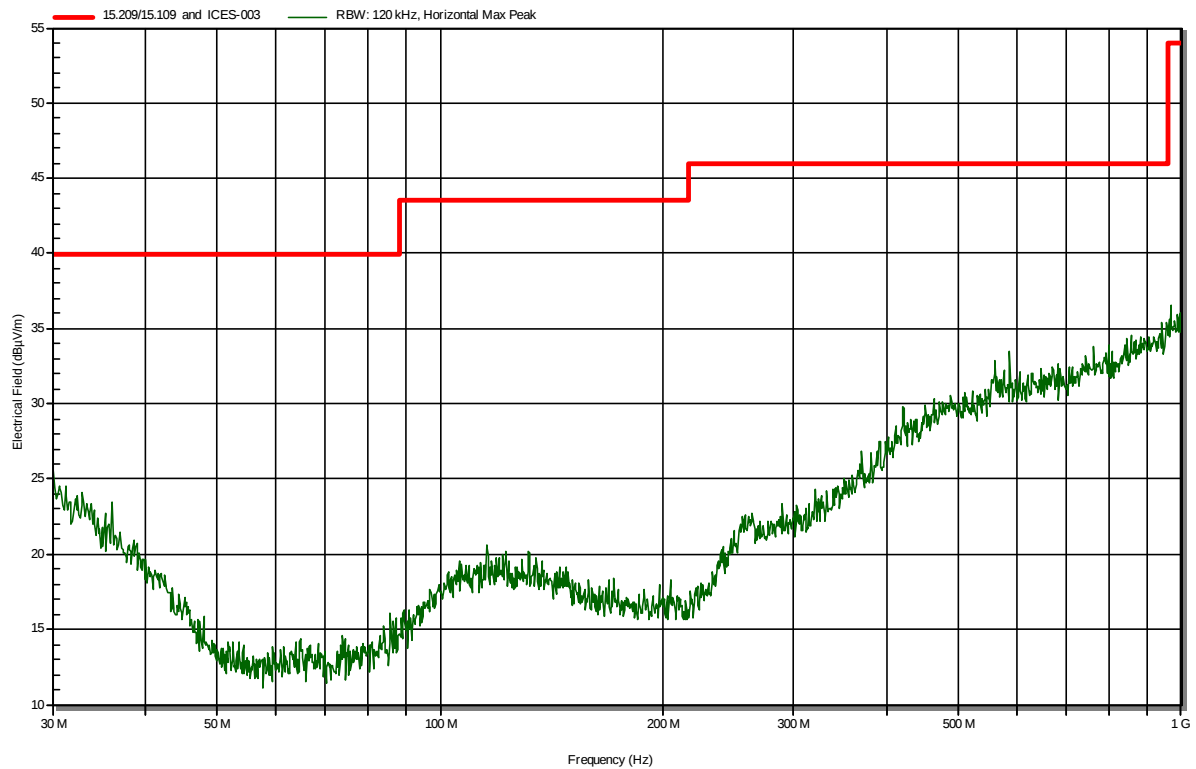

30 -1000 MHz(RX)
Middle channel


Vertical polarization

RadiMation

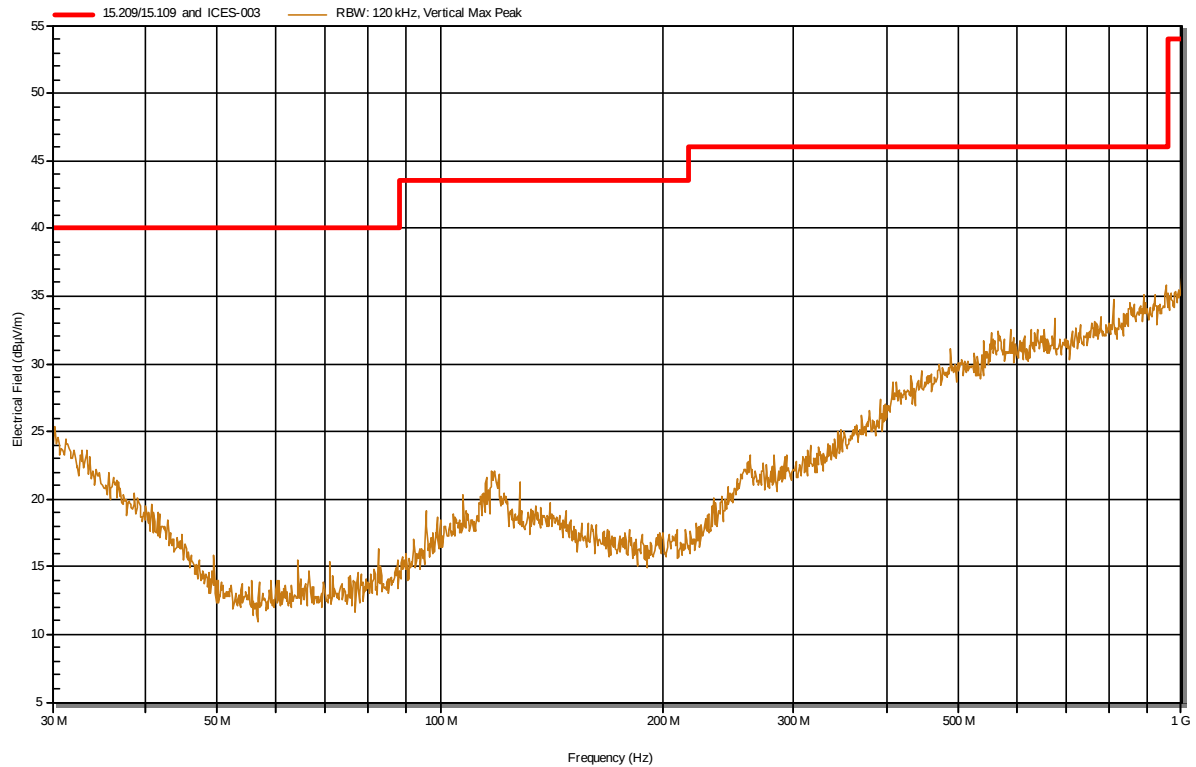

Horizontal polarization


RadiMation

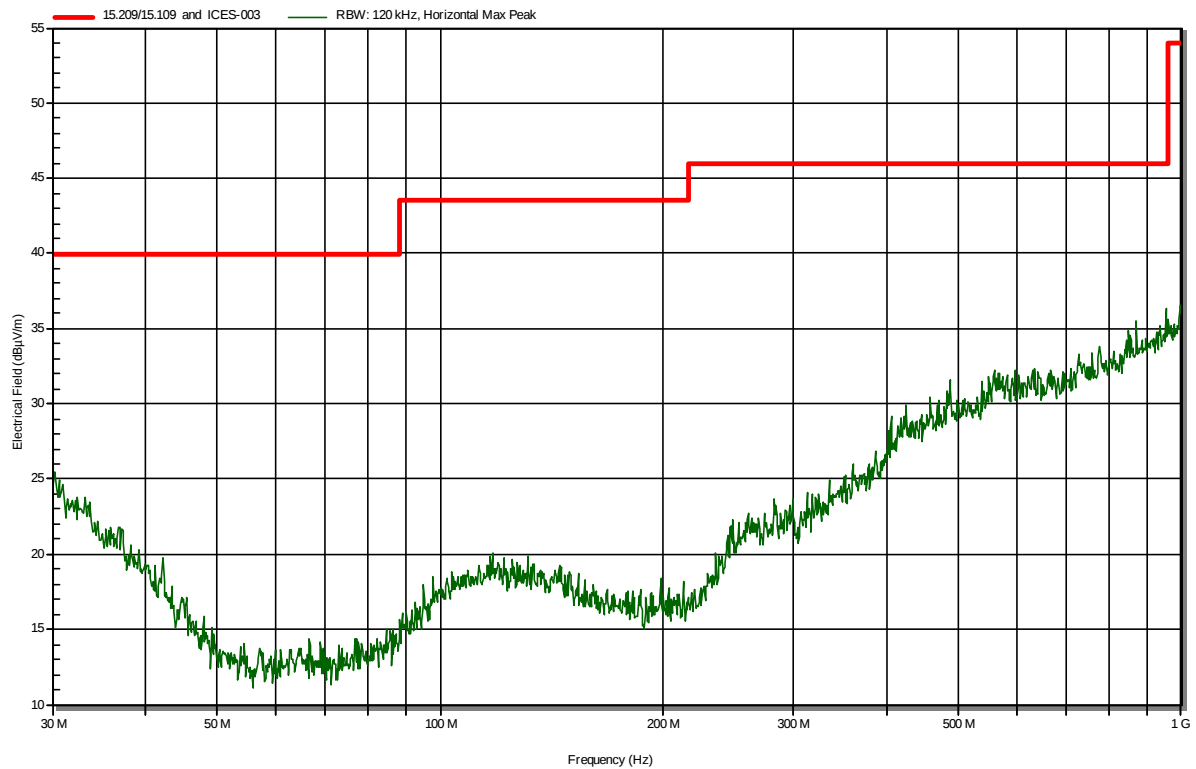

30 -1000 MHz(RX)
High Channel


Vertical polarization

RadiMation

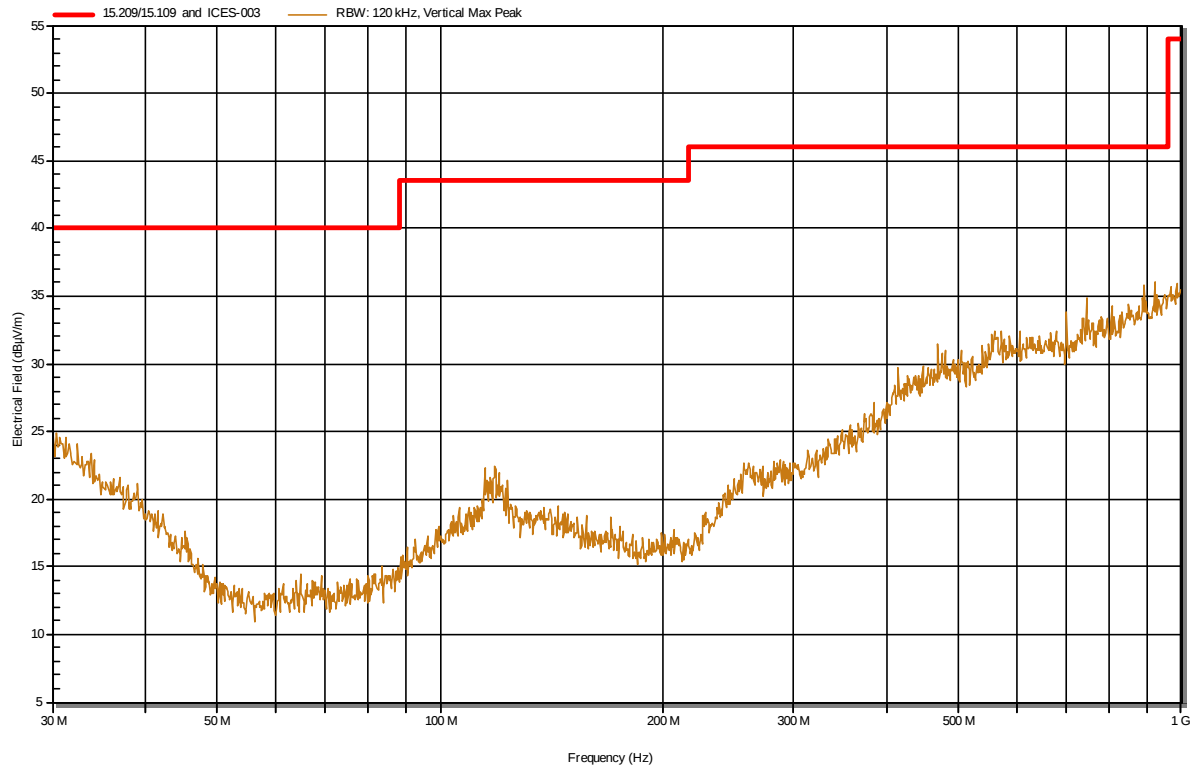

Horizontal polarization


RadiMation

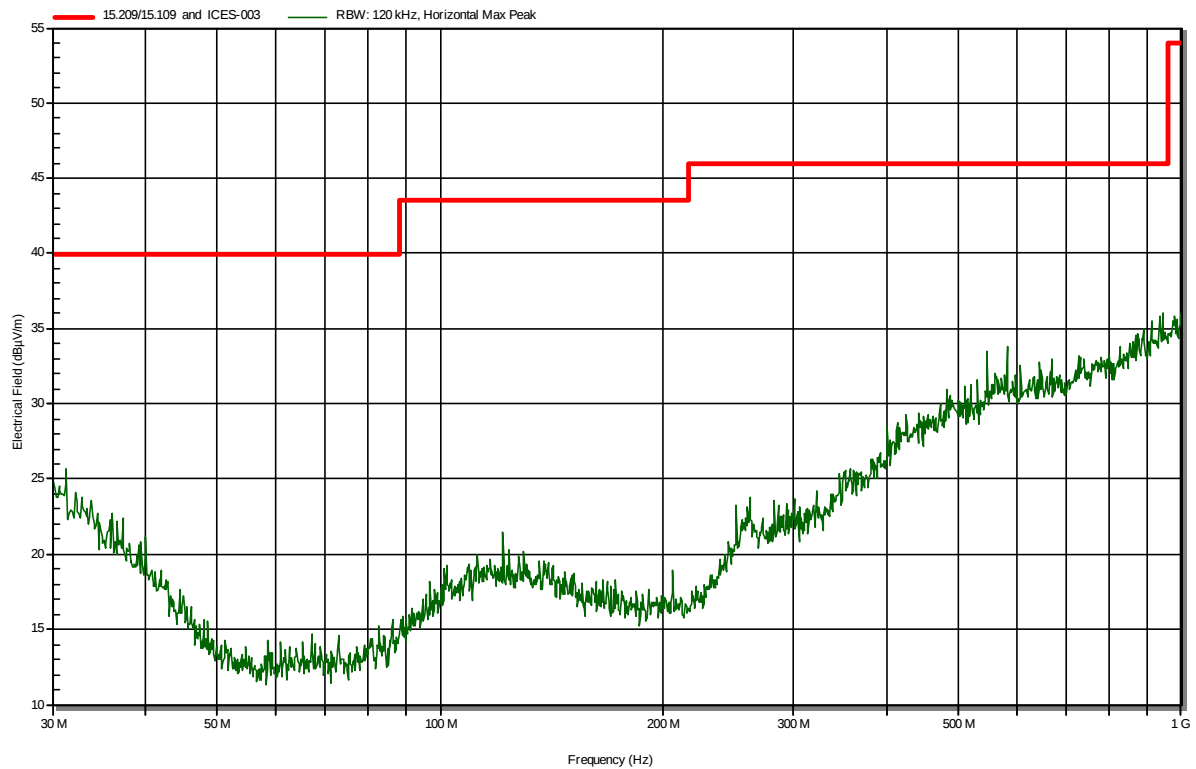

1 -10 GHz (RX)
Low channel


Vertical polarization

RadiMation

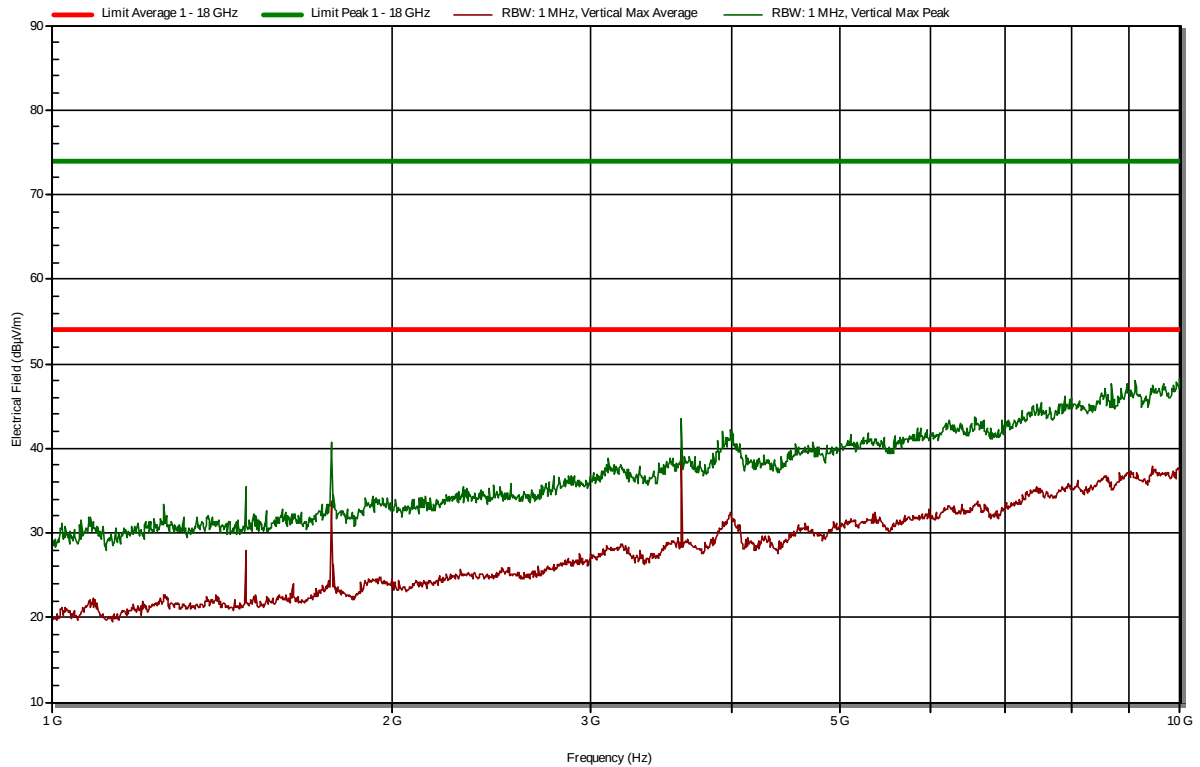

Horizontal polarization


RadiMation

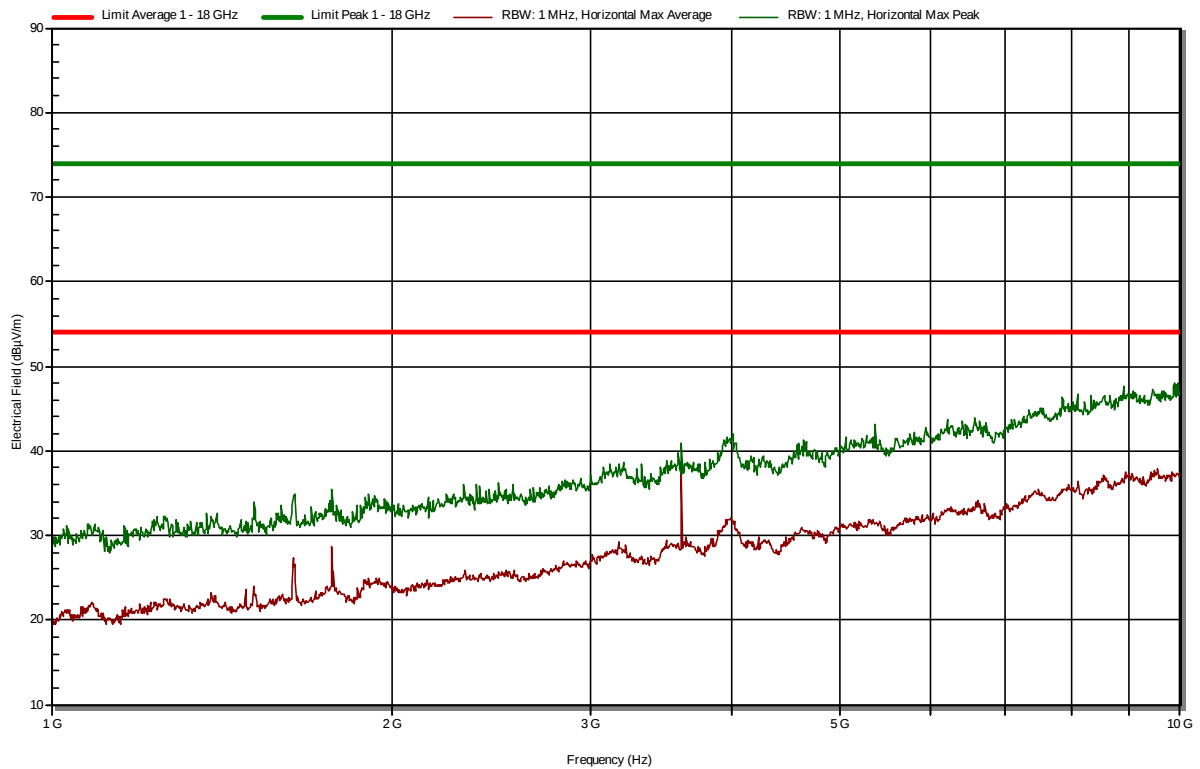

1 -10 GHz (RX)
Middle channel


Vertical polarization

RadiMation

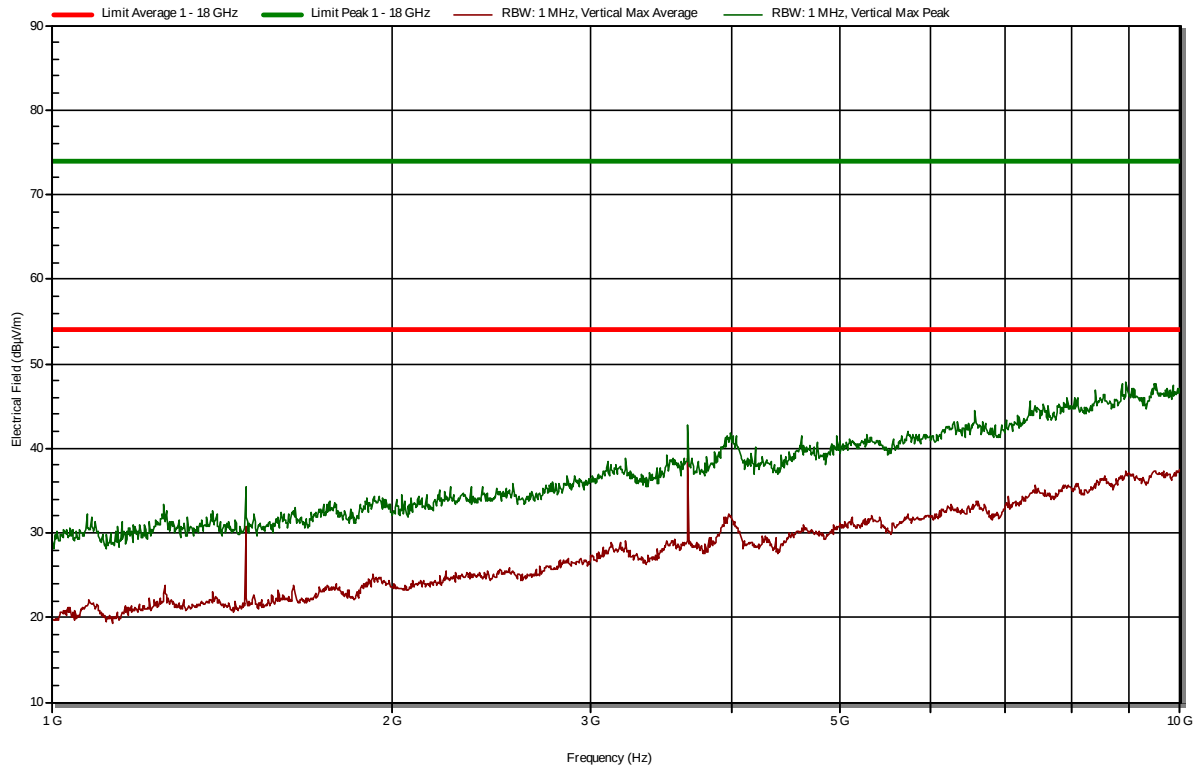

Horizontal polarization


RadiMation

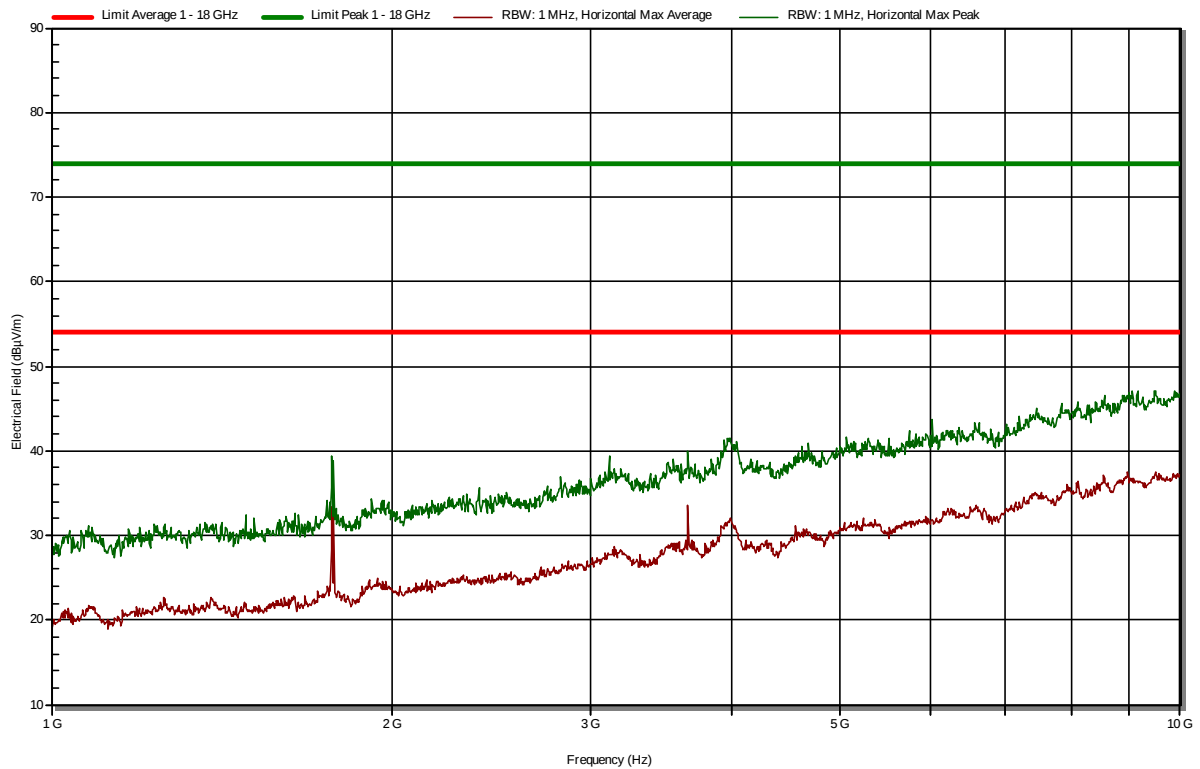

1 -10 GHz (RX)
High Channel


Vertical polarization

RadiMation

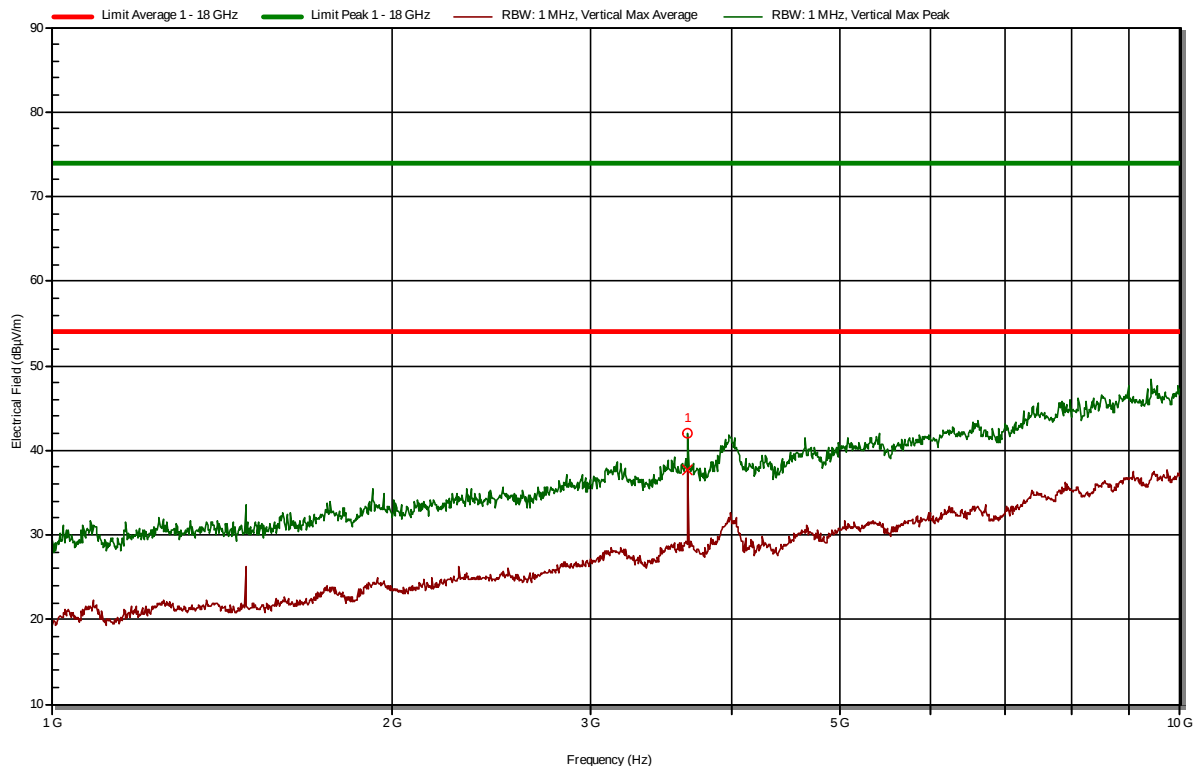

Horizontal polarization

RadiMation

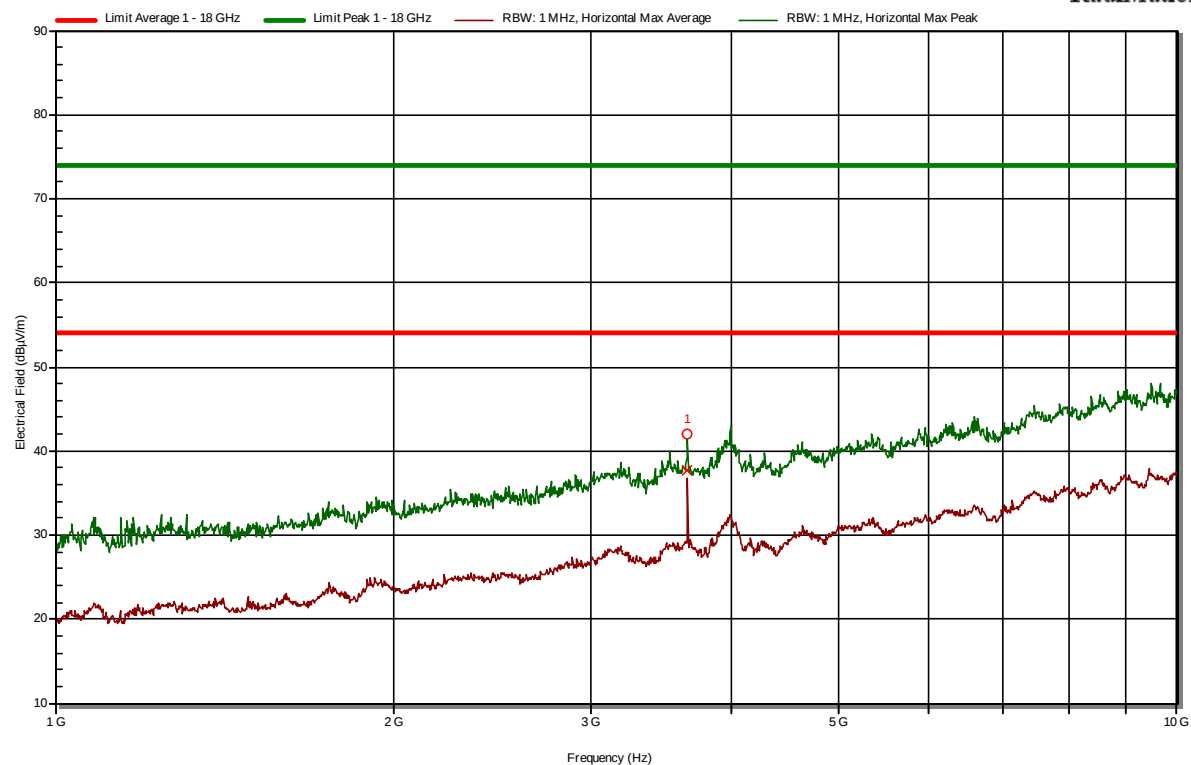

3.8 Conducted emissions

3.8.1 Limit

According to 15.207 (c)

Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

*Decreases with the logarithm of the frequency.

3.8.2 Measurement instruments

The measurement instruments are listed in chapter 2.3 of this report.

3.8.3 Test setup

The test setup is as shown in chapter 2.2 of this report.

3.8.4 Test procedure

According to ANSI C63.4: 2014, section 13.3

IRN 029 – Method 1

3.8.5 Test results and plots of the AC mains conducted measurement


See next page.

3.8.6 Measurement uncertainty


+/- 3.6 dB

3.8.7 Plots of the AC mains conducted spurious measurement

Phase

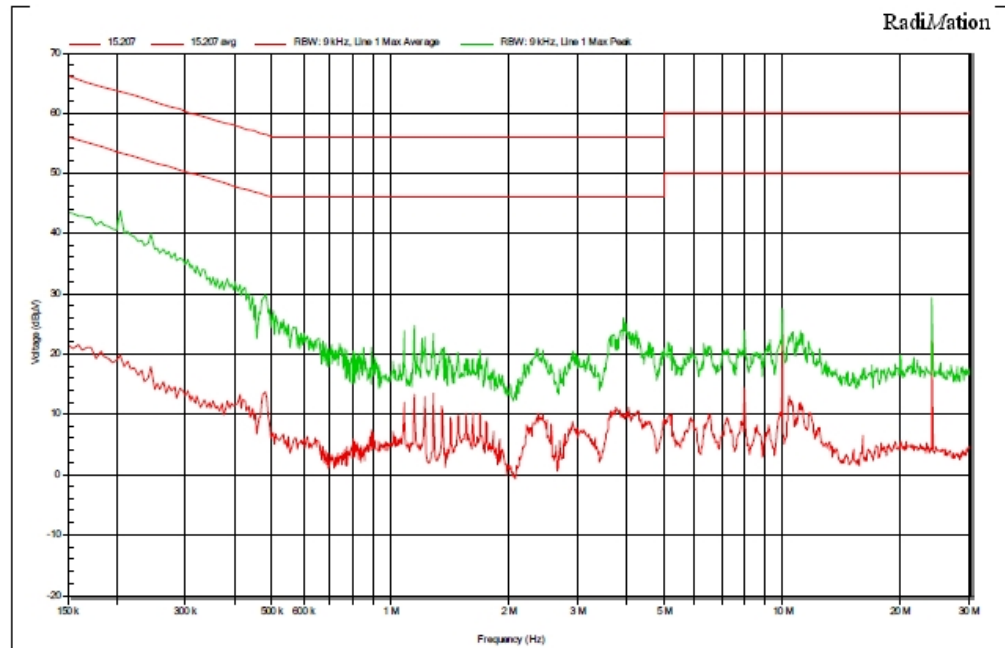

Neutral

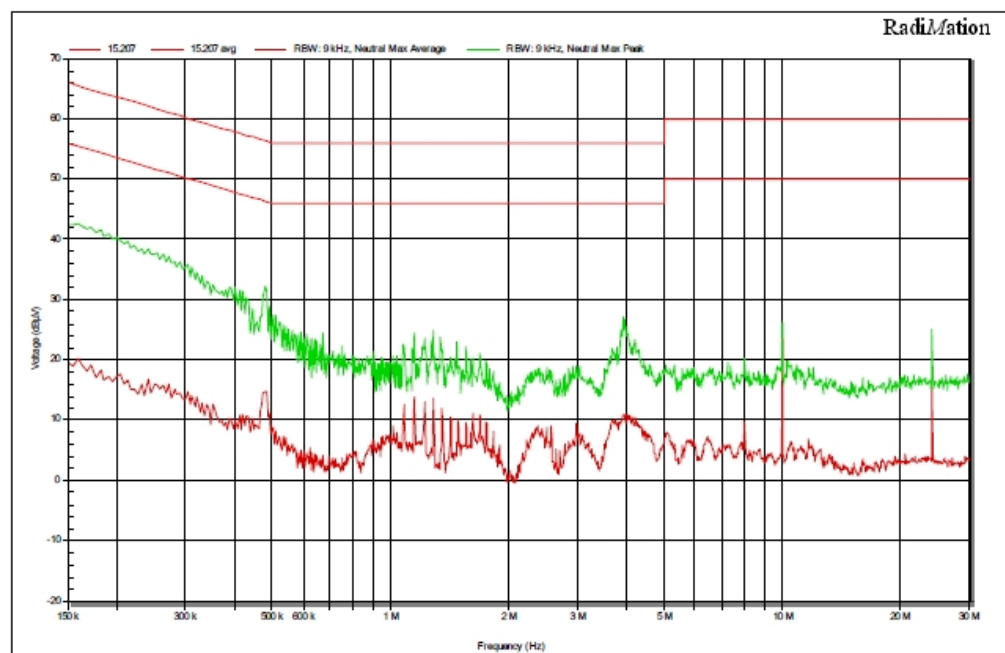

4 Sample calculations

All formulas for data conversions and conversion factors are reported in this chapter.

Conducted emission Measurement:

$$U_{\text{lisn}} (\text{dB}\mu\text{V}) = U (\text{dB}\mu\text{V}) + \text{Corr. (dB)}$$

Where:

U = Measuring receiver voltage

LISN insertion loss = Voltage division factor of LISN

Corr. = sum of single correction factors of used LISN, cables and pulse limiter.

Linear interpolation will be used for frequencies in between the values in the table.

Frequency (Mhz)	Voltage division LISN (db)	Insertion Loss Pulse limiter (dB)	Cable loss (dB)	Corr. (dB)
	TE 00208 SN: 892785/004 Rohde & Schwarz ESH3-Z5	TE 00756 SN: 5SM03153 Rohde & Schwarz ESH3-Z2	TE 11134	
0,15	0,09	9,87	0,02	9,98
0,2	0,1	9,87	0,03	10
0,3	0,1	9,87	0,03	10
0,5	0,1	9,87	0,08	10,05
0,7	0,12	9,87	0,25	10,24
0,8	0,12	9,87	0,25	10,24
1	0,13	9,87	0,11	10,11
2	0,16	9,87	0,15	10,18
3	0,19	9,87	0,21	10,27
5	0,26	9,88	0,21	10,35
7	0,36	9,89	0,25	10,5
8	0,39	9,89	0,25	10,53
10	0,46	9,91	0,29	10,66
15	0,77	9,93	0,34	11,04
20	0,95	9,96	0,37	11,28
25	1,12	9,99	0,43	11,54
30	1,1	10,04	0,45	11,59

Field Strength Measurement:

$$E \text{ (dB}\mu\text{V/m)} = U \text{ (dB}\mu\text{V)} + AF \text{ (dB/m)} + \text{Corr. (dB)}$$

Where:

E = Electric field strength

U = Measuring receiver voltage

AF = Antenna factor

CL = Cable loss

Corr. = sum of single correction factors of used cable and amplifier (if applicable).

Linear interpolation will be used for frequencies in between the values in the table.

Tables shows an extract of the values.

Frequency (Mhz)	AF (dB/m)	Cable loss (dB)	Corr. (dB)
	TE 00967 Chase CBL6112A SN: 2308	Id: SAR cable	
30	18,6	0,68	19,28
100	10,7	1,15	11,85
150	10,6	1,41	12,01
200	9,3	1,63	10,93
250	12,6	1,93	14,53
300	13,3	2,12	15,42
350	14,6	2,2	16,8
400	15,5	2,29	17,79
450	16,9	2,53	19,43
500	17,5	2,67	20,17
550	18,4	2,9	21,3
600	18,8	3,02	21,82
650	19,2	3,09	22,29
700	19	3,22	22,22
750	19,8	3,56	23,36
800	19,7	3,69	23,39
900	20,4	3,81	24,21
950	20,8	3,91	24,71
1000	21,2	4,3	25,5

Frequency (Mhz)	AF (dB/m)	Gain (dB)	Cable loss (dB)	Corr. (dB)
	TE 00531 Emco 3115 SN: 9412-4377	TE 11132 Miteq JS4-18004000-30-8P-A1	TE 01315	
1000	23,6	40,4	2,0	66
1500	25,1	40,5	2,4	68
2000	27,1	40,5	2,7	70,3
2500	28,6	40,7	3,2	72,5
3000	30,5	40,7	3,2	74,4
3500	31,2	40,7	3,4	75,3
4000	32,7	40,9	4,9	78,5
4500	32,4	40,9	4,4	77,7
5000	33,2	40,7	4,6	78,5
5500	34,0	40,5	4,5	79
6000	34,6	40,0	5,2	79,8
6500	34,3	39,4	5,9	79,6
7000	35,2	38,6	5,7	79,5
7500	36,4	39,2	5,9	81,5
8000	37,0	38,9	6,3	82,2
8500	37,5	38,4	6,4	82,3
9000	38,1	37,4	6,5	82
9500	37,8	37,0	7,1	81,9
10000	38,2	36,5	7,3	82
10500	38,1	36,7	7,6	82,4
11000	38,3	36,9	8,3	83,5
11500	38,5	37,6	8,1	84,2
12000	39,1	38,3	8,4	85,8
12500	38,7	38,5	8,3	85,5
13000	39,2	38,9	9,2	87,3
13500	40,5	40,2	8,3	89
14000	41,1	40,0	8,2	89,3
14500	41,4	40,1	8,2	89,7
15000	40,2	41,4	8,3	89,9
15500	37,9	41,4	8,6	87,9
16000	37,5	42,8	9,2	89,5
16500	38,6	42,3	8,8	89,7
17000	41,1	43,1	9,4	93,6
17500	42,7	43,2	9,4	95,3
18000	44,0	44,2	9,8	98