

...the broadest narrowband money can buy



TEST REPORT

Racom_121114TR_FCC version: A

Test of RipEX-160 Radio modem

The tests have been carried out with reference to 47CFR Parts 2 and 90

Measured by: Radek Holý

Approved by: Karel Daněš

CONTENTS

(PAGE)

1.	TECHNICAL SUMMARY AND TEST RESULTS.....	4
1.1	Technical Summary.....	4
1.2	Test Results 154.0125 MHz.....	5
1.2.1.	RF POWER OUTPUT AT TERMINALS (10.0 W)	6
1.2.2.	RF POWER OUTPUT AT TERMINALS (2.0 W)	7
1.2.3.	FREQUENCY STABILITY WITH TEMPERATURE VARIATION.....	8
1.2.4.	FREQUENCY STABILITY WITH PRIMARY VOLTAGE VARIATION.....	10
1.2.5.	TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (0.1 W)	12
1.2.6.	TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (10.0 W)	13
1.2.7.	TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (2.0 W)	14
1.2.8.	TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (0.5 W)	15
1.2.9.	TRANSMITTER UNWANTED EMISSIONS: RADIATED SPURIOUS (0.1 W)	16
1.2.10.	TRANSMITTER UNWANTED EMISSIONS: RADIATED SPURIOUS (10.0 W)	17
1.2.13.	TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (12.5 kHz).....	18
1.2.14.	TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (6.25 kHz).....	19
1.2.15.	TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (12.5 kHz).....	20
1.2.16.	TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (6.25 kHz).....	21
1.2.17.	TRANSMITTER OCCUPIED BANDWIDTH	22
1.2.18.	TRANSMITTER OCCUPIED BANDWIDTH (4-CPFSK, 10.0 W, 6.25 kHz)	23
1.2.19.	TRANSMITTER OCCUPIED BANDWIDTH (16-DEQAM, 2.0 W, 6.25 kHz)	24
1.2.20.	TRANSMITTER OCCUPIED BANDWIDTH (D8PSK, 2.0 W, 6.25 kHz).....	25
1.2.21.	TRANSMITTER OCCUPIED BANDWIDTH ($\pi/4$ -DQPSK, 2.0 W, 6.25 kHz)	26
1.2.22.	TRANSMITTER OCCUPIED BANDWIDTH (4-CPFSK, 10.0 W, 12.5 kHz)	27
1.2.23.	TRANSMITTER OCCUPIED BANDWIDTH (16-DEQAM, 2.0 W, 12.5 kHz)	28
1.2.24.	TRANSMITTER OCCUPIED BANDWIDTH (D8PSK, 2.0 W, 12.5 kHz).....	29
1.2.25.	TRANSMITTER OCCUPIED BANDWIDTH ($\pi/4$ -DQPSK, 2.0 W, 12.5 kHz)	30
1.3	Test Results 164.0250 MHz.....	31
1.3.1.	RF POWER OUTPUT AT TERMINALS (10.0 W)	32
1.3.2.	RF POWER OUTPUT AT TERMINALS (2.0 W)	33
1.3.3.	FREQUENCY STABILITY WITH TEMPERATURE VARIATION.....	34
1.3.4.	FREQUENCY STABILITY WITH PRIMARY VOLTAGE VARIATION.....	36
1.3.5.	TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (0.1 W)	38
1.3.6.	TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (10.0 W)	39
1.3.7.	TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (2.0 W)	40
1.3.8.	TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (0.5 W)	41
1.3.9.	TRANSMITTER UNWANTED EMISSIONS: RADIATED SPURIOUS (0.1 W)	42
1.3.10.	TRANSMITTER UNWANTED EMISSIONS: RADIATED SPURIOUS (10.0 W)	43
1.3.13.	TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (12.5 kHz).....	44
1.3.14.	TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (6.25 kHz).....	45
1.3.15.	TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (12.5 kHz).....	46
1.3.16.	TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (6.25 kHz).....	47
1.3.17.	TRANSMITTER OCCUPIED BANDWIDTH	48
1.3.18.	TRANSMITTER OCCUPIED BANDWIDTH (4-CPFSK, 10.0 W, 6.25 kHz)	49
1.3.19.	TRANSMITTER OCCUPIED BANDWIDTH (16-DEQAM, 2.0 W, 6.25 kHz)	50
1.3.20.	TRANSMITTER OCCUPIED BANDWIDTH (D8PSK, 2.0 W, 6.25 kHz).....	51
1.3.21.	TRANSMITTER OCCUPIED BANDWIDTH ($\pi/4$ -DQPSK, 2.0 W, 6.25 kHz)	52
1.3.22.	TRANSMITTER OCCUPIED BANDWIDTH (4-CPFSK, 10.0 W, 12.5 kHz)	53
1.3.23.	TRANSMITTER OCCUPIED BANDWIDTH (16-DEQAM, 2.0 W, 12.5 kHz)	54

1.3.24. TRANSMITTER OCCUPIED BANDWIDTH (D8PSK, 2.0 W, 12.5 kHz).....	55
1.3.25. TRANSMITTER OCCUPIED BANDWIDTH ($\pi/4$ -DQPSK, 2.0 W, 12.5 kHz)	56
1.4 Test Results 173.9875 MHz.....	57
1.4.1. RF POWER OUTPUT AT TERMINALS (10.0 W)	58
1.4.2. RF POWER OUTPUT AT TERMINALS (2.0 W)	59
1.4.3. FREQUENCY STABILITY WITH TEMPERATURE VARIATION.....	60
1.4.4. FREQUENCY STABILITY WITH PRIMARY VOLTAGE VARIATION.....	62
1.4.5. TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (0.1 W)	64
1.4.6. TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (10.0 W)	65
1.4.7. TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (2.0 W)	66
1.4.8. TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (0.5 W)	67
1.4.9. TRANSMITTER UNWANTED EMISSIONS: RADIATED SPURIOUS (0.1 W)	68
1.4.10. TRANSMITTER UNWANTED EMISSIONS: RADIATED SPURIOUS (10.0 W)	69
1.4.13. TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (12.5 kHz).....	70
1.4.14. TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (6.25 kHz).....	71
1.4.15. TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (12.5 kHz).....	72
1.4.16. TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (6.25 kHz).....	73
1.4.17. TRANSMITTER OCCUPIED BANDWIDTH	74
1.4.18. TRANSMITTER OCCUPIED BANDWIDTH (4-CPFSK, 10.0 W, 6.25 kHz)	75
1.4.19. TRANSMITTER OCCUPIED BANDWIDTH (16-DEQAM, 2.0 W, 6.25 kHz)	76
1.4.20. TRANSMITTER OCCUPIED BANDWIDTH (D8PSK, 2.0 W, 6.25 kHz).....	77
1.4.21. TRANSMITTER OCCUPIED BANDWIDTH ($\pi/4$ -DQPSK, 2.0 W, 6.25 kHz)	78
1.4.22. TRANSMITTER OCCUPIED BANDWIDTH (4-CPFSK, 10.0 W, 12.5 kHz)	79
1.4.23. TRANSMITTER OCCUPIED BANDWIDTH (16-DEQAM, 2.0 W, 12.5 kHz)	80
1.4.24. TRANSMITTER OCCUPIED BANDWIDTH (D8PSK, 2.0 W, 12.5 kHz).....	81
1.4.25. TRANSMITTER OCCUPIED BANDWIDTH ($\pi/4$ -DQPSK, 2.0 W, 12,5 kHz)	82
1.5 Summary of Test Results	83
2. TEST EQUIPMENT	86
3. ADDITIONAL INFORMATION	87
4. GRAPHS.....	88
4.1 Graphs – 154.0125 MHz.....	90
4.2 Graphs – 164.0125 MHz	102
4.3 Graphs – 173.9875 MHz.....	114

1. Technical Summary And Test Results

1.1 Technical Summary

Applicant: **Racom s r.o.**
Mírová 1283
592 31 Nové Město na Moravě

Manufacturer: **Racom s.r.o.**
Mírová 1283
592 31 Nové Město na Moravě
Czech Republic

Produced By: **Racom s.r.o., Czech Republic**

Kind Of Equipment: **Radio modem**

Type Designation(s): **RipEX-160**
Code: **RipEX-154**

RF Power: **4-CPFSK 0.1 W to 10 W**
16-DEQAM 0.5W to 2W
D8PSK 0.5W to 2W
 $\pi/4$ -DQPSK 0.5W to 2W

Alignment Range: **154 MHz to 174 MHz**

Switching Range: **20 MHz**

Number Of Units: **1**

Finish Of Test: **20.8. 2012**
Test made in **Racom s r.o.**
Mírová 1283
592 31 Nové Město na Moravě

1.2 Test Results 154.0125 MHz

Type Designation: **RipEX-160**
Code: **RipEX-154**
Serial No.: **12540214**
Channel Separation: **6.25 kHz, 12.5 kHz**
FW version **1.2.6.0**

Transmitter Part:
CH 1 **154.0125 MHz**

Receiver Part:
CH 1 **154.0125 MHz**

Power Supply Range: **Vnom = 20.0 V DC**
Vmin = 10.0 V DC
Vmax = 30.0 V DC

Temperature Range: **Tnom = Ambient temperature**
Tmin = -30 °C
Tmax = +60 °C

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 10.0 W (unmodulated carrier - constant envelope modulation)

1.2.1. RF POWER OUTPUT AT TERMINALS (10.0 W)

RULE PART NUMBER: 2.1046

TEST METHOD: TIA-603-D; 2.2.1

TEST RESULTS:

TEST CONDITIONS		TRANSMITTER POWER [W]		
		CH 1	CH 2	CH 3
Tnom	Vnom	8.22	- -	- -
Measurement uncertainty		±0.6 dB		

LIMIT: - -

TEST EQUIPMENT USED: 10276; 900000611; 900000609; 10173

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 2.0 W (unmodulated carrier - constant envelope modulation)

1.2.2. RF POWER OUTPUT AT TERMINALS (2.0 W)

RULE PART NUMBER: 2.1046
TEST METHOD: TIA-603-D; 2.2.1

TEST RESULTS:

TEST CONDITIONS		TRANSMITTER POWER [W]		
		CH 1	CH 2	CH 3
Tnom	Vnom	2.28	- -	- -
Measurement uncertainty		±0.6 dB		

LIMIT: - -

TEST EQUIPMENT USED: 10276; 900000611; 900000609; 10173

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

The measurement was carried out at maximum power level (open loop)

1.2.3. FREQUENCY STABILITY WITH TEMPERATURE VARIATION

RULE PART NUMBER: 2.1055; 90.213

TEST METHOD: TIA-603-D; 2.2.2

TEST RESULTS:

TEST CONDITIONS Temperature (°C)	FREQUENCY ERROR [ppm]		
	CH 1	CH 2	CH 3
-30	-0.07	--	--
-20	0.02	--	--
-10	0.29	--	--
0	0.06	--	--
10	0.19	--	--
20	0.16	--	--
30	0.02	--	--
40	0.12	--	--
50	-0.08	--	--
60	-0.06	--	--
Maximum frequency error	-0.08/+0.29 (limit 2.0ppm mobile; 1.0 base station)		
Measurement uncertainty	±45 Hz		

LIMIT:

Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
Below 25	^{1,2,3} 100	100	200
25-50	20	20	50
72-76	5		50
150-174	^{5,11} 5	⁶ 5	^{4,6} 50
216-220	1.0		50

220-222	0.1	1.5	1.0
421-512	^{7,11,14} 2.5	⁸ 5	⁸ 5
806-809	¹⁴ 1.0	1.5	1.5
809-824	¹⁴ 1.5	2.5	2.5
851-854	1.0	1.5	1.5
854-869	1.5	2.5	2.5
896-901	¹⁴ 0.1	1.5	1.5
902-928	2.5	2.5	2.5
929-930	1.5		
935-940	0.1	1.5	1.5
1427-1435	⁸ 300	300	300
Above 2450			
Note: ^{1,2,3,4,5,6,7,8,9,10,11,12,13,14} FCC Part 90.213			

TEST EQUIPMENT USED: 10276; 900000611; 900000609; 10173

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

The measurement was carried out at maximum power level (open loop)

1.2.4. FREQUENCY STABILITY WITH PRIMARY VOLTAGE VARIATION

RULE PART NUMBER: 2.1055; 90.213

TEST METHOD: TIA-603-D; 2.2.2

TEST RESULTS:

TEST CONDITIONS Temperature (°C)	FREQUENCY ERROR [ppm]		
	CH 1	CH 2	CH 3
10.0V	0.06	--	--
15.0V	0.06	--	--
20.0V	0.06	--	--
25.0V	0.06	--	--
30.0V	0.06	--	--
Maximum frequency error	0.06 (limit 2.0ppm mobile; 1.0 base station)		
Measurement uncertainty	±45 Hz		

LIMIT:

Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
Below 25	^{1,2,3} 100	100	200
25-50	20	20	50
72-76	5		50
150-174	^{5,11} 5	⁶ 5	^{4,6} 50
216-220	1.0		50
220-222	0.1	1.5	1.0
421-512	^{7,11,14} 2.5	⁸ 5	⁸ 5
806-809	¹⁴ 1.0	1.5	1.5
809-824	¹⁴ 1.5	2.5	2.5
851-854	1.0	1.5	1.5

854-869	1.5	2.5	2.5
896-901	¹⁴ 0.1	1.5	1.5
902-928	2.5	2.5	2.5
929-930	1.5		
935-940	0.1	1.5	1.5
1427-1435	⁸ 300	300	300
Above 2450			
Note: ^{1,2,3,4,5,6,7,8,9,10,11,12,13,14} FCC Part 90.213			

TEST EQUIPMENT USED: 10276; 900000611; 900000609; 10173

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Rated output power: 0.1 W

Test signal: 4-CPFSK, 10.42kbps; Random bit sequence

1.2.5. TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (0.1 W)

RULE PART NUMBER: 2.1051, 90.210 (c,3)(d,3)(e,3)

TEST METHOD: TIA-603-D, 2.2.13

TEST RESULTS:

SPURIOUS EMISSIONS								
CH1			CH2			CH3		
Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]
For all frequencies the spurious emissions were detected at least 20 dB below the limit.								
Measurement uncertainty			+2.8 dB/-3.3 dB					

LIMIT:

CHANNEL BANDWIDTH	6.25 kHz	12.5 kHz	25.0 kHz
FREQUENCY RANGE	$f_o > 4.6 \text{ kHz}$	$f_o > 12.5$	$f_o > 250\%Bw$
SPURIOUS EMISSION LEVEL [dBc]	$55+10\log_{10}(P)$ or 65	$50+10\log_{10}(P)$ or 70	$43+10\log_{10}(P)$

$\text{Limit}_{(\text{dBc})} = 55+10\log_{10}(P) = 55+10\log_{10}(0.1) = 45 \text{ dBc}$

where P = RF output power in watts

$\text{Limit}_{(\text{dBc})} = 50+10\log_{10}(P) = 50+10\log_{10}(0.1) = 40 \text{ dBc}$

where P = RF output power in watts

TEST EQUIPMENT USED: 10276; 900000611; 900000609;

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Rated output power: 10 W

Test signal: 4-CPFSK, 10.42kbps; Random bit sequence

1.2.6. TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (10.0 W)

RULE PART NUMBER: 2.1051, 90.210 (c,3)(d,3)(e,3)

TEST METHOD: TIA-603-D, 2.2.13

TEST RESULTS:

SPURIOUS EMISSIONS								
CH1			CH2			CH3		
Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]
For all frequencies the spurious emissions were detected at least 10 dB below the limit.								
Measurement uncertainty			+2.8 dB/-3.3 dB					

LIMIT:

CHANNEL BANDWIDTH	6.25 kHz	12.5 kHz	25.0 kHz
FREQUENCY RANGE	$f_o > 4.6 \text{ kHz}$	$f_o > 12.5$	$f_o > 250\%Bw$
SPURIOUS EMISSION LEVEL [dBc]	$55+10\log_{10}(P)$ or 65	$50+10\log_{10}(P)$ or 70	$43+10\log_{10}(P)$

$\text{Limit}_{(\text{dBc})} = 55+10\log_{10}(P) = 55+10\log_{10}(10) = 65 \text{ dBc}$

where P = RF output power in watts

$\text{Limit}_{(\text{dBc})} = 50+10\log_{10}(P) = 50+10\log_{10}(10) = 60 \text{ dBc}$

where P = RF output power in watts

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Rated output power: 2.0 W

Test signal: 16-DEQAM 34.72kbps; Random bit sequence

1.2.7. TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (2.0 W)

RULE PART NUMBER: 2.1051, 90.210 (c,3)(d,3)(e,3)

TEST METHOD: TIA-603-D, 2.2.13

TEST RESULTS:

SPURIOUS EMISSIONS								
CH1			CH2			CH3		
Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]
For all frequencies the spurious emissions were detected at least 20 dB below the limit.								
Measurement uncertainty			+2.8 dB/-3.3 dB					

LIMIT:

CHANNEL BANDWIDTH	6.25 kHz	12.5 kHz	25.0 kHz
FREQUENCY RANGE	$f_o > 4.6$ kHz	$f_o > 12.5$	$f_o > 250\%Bw$
SPURIOUS EMISSION LEVEL [dBc]	$55+10\log_{10}(P)$ or 65	$50+10\log_{10}(P)$ or 70	$43+10\log_{10}(P)$

$\text{Limit}_{(dBc)} = 55+10\log_{10}(P) = 55+10\log_{10}(2.0) = 58$ dBc

where P = RF output power in watts

$\text{Limit}_{(dBc)} = 50+10\log_{10}(P) = 50+10\log_{10}(2.0) = 53$ dBc

where P = RF output power in watts

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Rated output power: 0.5 W

Test signal: 16-DEQAM 34.72kbps; Random bit sequence

1.2.8. TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (0.5 W)

RULE PART NUMBER: 2.1051, 90.210 (c,3)(d,3)(e,3)

TEST METHOD: TIA-603-D, 2.2.13

TEST RESULTS:

SPURIOUS EMISSIONS								
CH1			CH2			CH3		
Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]
For all frequencies the spurious emissions were detected at least 20 dB below the limit.								
Measurement uncertainty			+2.8 dB/-3.3 dB					

LIMIT:

CHANNEL BANDWIDTH	6.25 kHz	12.5 kHz	25.0 kHz
FREQUENCY RANGE	$f_o > 4.6$ kHz	$f_o > 12.5$	$f_o > 250\%Bw$
SPURIOUS EMISSION LEVEL [dBc]	$55+10\log_{10}(P)$ or 65	$50+10\log_{10}(P)$ or 70	$43+10\log_{10}(P)$

$$\text{Limit}_{(dBc)} = 55+10\log_{10}(P) = 55+10\log_{10}(0.5) = 52 \text{ dBc}$$

where P = RF output power in watts

$$\text{Limit}_{(dBc)} = 50+10\log_{10}(P) = 50+10\log_{10}(0.5) = 47 \text{ dBc}$$

where P = RF output power in watts

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Transmitter operating unmodulated

The measurement was carried out at minimum power level

1.2.9. TRANSMITTER UNWANTED EMISSIONS: RADIATED SPURIOUS (0.1 W)

RULE PART NUMBER: 2.1053, 90.210 (c,3)(d,3)(e,3)

TEST METHOD: TIA-603-D, 2.2.12

TEST RESULTS:

SPURIOUS EMISSIONS								
CH1			CH2			CH3		
Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]
For all frequencies the spurious emissions were detected at least 10 dB below the limit.								
Measurement uncertainty			+4.4 dB/-4.5 dB					

LIMIT:

CHANNEL BANDWIDTH	6.25 kHz	12.5 kHz	25.0 kHz
FREQUENCY RANGE	$f_o > 4.6$ kHz	$f_o > 12.5$	$f_o > 250\%Bw$
SPURIOUS EMISSION LEVEL [dBc]	$55+10\log_{10}(P)$ or 65	$50+10\log_{10}(P)$ or 70	$43+10\log_{10}(P)$

TEST EQUIPMENT USED: - -

REMARKS: Measured in CMI – Laboratory TESTCOM Praha; Test report Ref. No.: 8551-PT-R0237-12 Annex 1

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Transmitter operating unmodulated

The measurement was carried out at maximum power level

1.2.10. TRANSMITTER UNWANTED EMISSIONS: RADIATED SPURIOUS (10.0 W)

RULE PART NUMBER: 2.1053, 90.210 (c,3)(d,3)(e,3)

TEST METHOD: TIA-603-D, 2.2.12

TEST RESULTS:

SPURIOUS EMISSIONS								
CH1			CH2			CH3		
Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]
864.030	100	-42.2	-.-	-.-	-.-	-.-	-.-	-.-
For all other frequencies the spurious emissions were detected at least 10 dB below the limit.								
Measurement uncertainty								

LIMIT:

CHANNEL BANDWIDTH	6.25 kHz	12.5 kHz	25.0 kHz
FREQUENCY RANGE	$f_0 > 4.6 \text{ kHz}$	$f_0 > 12.5$	$f_0 > 250\%Bw$
SPURIOUS EMISSION LEVEL [dBc]	$55+10\log_{10}(P)$ or 65	$50+10\log_{10}(P)$ or 70	$43+10\log_{10}(P)$

TEST EQUIPMENT USED: - -

REMARKS: Measured in CMI – Laboratory TESTCOM Praha; Test report Ref. No.: 8551-PT-R0237-12 Annex 1

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Transmitter operating unmodulated (unmodulated carrier - constant envelope modulation)

The measurement was carried out at maximum power level

1.2.13. TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (12.5 kHz)

RULE PART NUMBER: 90.214

TEST METHOD: TIA-603-D; 2.2.19

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 1, GRAPH 2)

LIMIT:

TRANSIENT FREQUENCY BEHAVIOR				
TIME INTERVAL		MAXIMUM FREQUENCY DIFFERENCE [kHz]	TIME [ms]	
			150-174 MHz	421-512 MHz
T1	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
T2	for 6.25 kHz channel separation	+/-3.125	20	25
	for 12.5 kHz channel separation	+/-6.25	20	25
	for 25.0 kHz channel separation	+/-12.5	20	25
T3	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
Measurement uncertainty		±45 Hz		

TEST EQUIPMENT USED: 10258; 10173; 10293; 900000609; 900000611

REMARKS: See chapter 4 for plots of frequency and power versus time,

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Transmitter operating unmodulated (unmodulated carrier - constant envelope modulation)

The measurement was carried out at maximum power level

1.2.14. TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (6.25 kHz)

RULE PART NUMBER: 90.214

TEST METHOD: TIA-603-D; 2.2.19

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 3,GRAPH 4)

LIMIT:

TRANSIENT FREQUENCY BEHAVIOR				
TIME INTERVAL		MAXIMUM FREQUENCY DIFFERENCE [kHz]	TIME [ms]	
			150-174 MHz	421-512 MHz
T1	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
T2	for 6.25 kHz channel separation	+/-3.125	20	25
	for 12.5 kHz channel separation	+/-6.25	20	25
	for 25.0 kHz channel separation	+/-12.5	20	25
T3	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
Measurement uncertainty		±45 Hz		

TEST EQUIPMENT USED: 10258; 10173; 10293; 900000609; 900000611

REMARKS: See chapter 4 for plots of frequency and power versus time,

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Transmitter operating unmodulated (unmodulated carrier - non-constant envelope modulation)

The measurement was carried out at maximum power level

1.2.15. TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (12.5 kHz)

RULE PART NUMBER: 90.214

TEST METHOD: TIA-603-D; 2.2.19

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 5, GRAPH 6)

LIMIT:

TRANSIENT FREQUENCY BEHAVIOR				
TIME INTERVAL		MAXIMUM FREQUENCY DIFFERENCE [kHz]	TIME [ms]	
			150-174 MHz	421-512 MHz
T1	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
T2	for 6.25 kHz channel separation	+/-3.125	20	25
	for 12.5 kHz channel separation	+/-6.25	20	25
	for 25.0 kHz channel separation	+/-12.5	20	25
T3	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
Measurement uncertainty		±45 Hz		

TEST EQUIPMENT USED: 10258; 10173; 10293; 900000609; 900000611

REMARKS: See chapter 4 for plots of frequency and power versus time,

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Transmitter operating unmodulated (unmodulated carrier - non-constant envelope modulation)

The measurement was carried out at maximum power level

1.2.16. TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (6.25 kHz)

RULE PART NUMBER: 90.214

TEST METHOD: TIA-603-D; 2.2.19

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 7, GRAPH 8)

LIMIT:

TRANSIENT FREQUENCY BEHAVIOR				
TIME INTERVAL		MAXIMUM FREQUENCY DIFFERENCE [kHz]	TIME [ms]	
			150-174 MHz	421-512 MHz
T1	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
T2	for 6.25 kHz channel separation	+/-3.125	20	25
	for 12.5 kHz channel separation	+/-6.25	20	25
	for 25.0 kHz channel separation	+/-12.5	20	25
T3	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
Measurement uncertainty		±45 Hz		

TEST EQUIPMENT USED: 10258; 10173; 10293; 900000609; 900000611

REMARKS: See chapter 4 for plots of frequency and power versus time,

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

The measurement at maximum power level

1.2.17. TRANSMITTER OCCUPIED BANDWIDTH

RULE PART NUMBER: 2.201, 2.202, 2.1033 (C) (14), 2.1049 (H), 2.1041; 90.203(J) (3)

TEST METHOD: TIA-603-D

TEST RESULTS:

Channel Spacing	6.25 kHz	12.5 kHz	6.25 kHz	6.25 kHz	6.25 kHz	12.5 kHz
Emission Type	4K35F1DDN	8K90F1DDN	5K00D1DEN	5K00G1DEN	5K00G1DDN	10K0D1DEN
Modulation	4-CPFSK	4-CPFSK	16-DEQAM	D8PSK	$\pi/4$ -DQPSK	16-DEQAM
Data Rate	5.21 kbit/s	10.42 kbit/s	17.36 kbit/s	13.02 kbit/s	8.68 kbit/s	34.72 kbit/s
Measured Peak Deviation	1.88 kHz	4.00 kHz	---	---	---	---
Measured 99% Occupied BW	4.10 kHz	8.71 kHz	4.94 kHz	4.93 kHz	4.93 kHz	9.85 kHz

Channel Spacing	12.5 kHz	12.5 kHz				
Emission Type	10K0G1DEN	10K0G1DDN				
Modulation	D8PSK	$\pi/4$ -DQPSK				
Data Rate	26.04 kbit/s	17.36 kbit/s				
Measured Peak Deviation	---	---				
Measured 99% Occupied BW	9.94 kHz	9.87 kHz				

TEST EQUIPMENT USED: 10276; 900000611; 900000609; 10173

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 10.0 W

Test signal: 4-CPFSK 5.21kbps; Random bit sequence

1.2.18. TRANSMITTER OCCUPIED BANDWIDTH (4-CPFSK, 10.0 W, 6.25 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 9)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30+16.67*(f_d-3\text{kHz})$ or $55+10*\log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55+10*\log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27*(f_d-2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50+10*\log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83*\log_{10}(f_d/5)$	$5 < f_o < 10$
	$29*\log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43+10*\log_{10}(P)$	$250\%Bw < f_o$
	<i>Note: P is output power in W; f_d displacement frequency in kHz</i>	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 2.0 W

Test signal: 16-DEQAM 17.36kbps; Random bit sequence

1.2.19. TRANSMITTER OCCUPIED BANDWIDTH (16-DEQAM, 2.0 W, 6.25 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 10)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30 + 16.67 \cdot (f_d - 3\text{kHz})$ or $55 + 10 \cdot \log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55 + 10 \cdot \log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27 \cdot (f_d - 2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50 + 10 \cdot \log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83 \cdot \log_{10}(f_d/5)$	$5 < f_o < 10$
	$29 \cdot \log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43 + 10 \cdot \log_{10}(P)$	$250\%Bw < f_o$
	<i>Note: P is output power in W; f_d displacement frequency in kHz</i>	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 2.0 W

Test signal: D8PSK 13.02kbps; Random bit sequence

1.2.20. TRANSMITTER OCCUPIED BANDWIDTH (D8PSK, 2.0 W, 6.25 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 11)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30 + 16.67 \cdot (f_d - 3\text{kHz})$ or $55 + 10 \cdot \log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55 + 10 \cdot \log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27 \cdot (f_d - 2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50 + 10 \cdot \log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83 \cdot \log_{10}(f_d/5)$	$5 < f_o < 10$
	$29 \cdot \log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43 + 10 \cdot \log_{10}(P)$	$250\%Bw < f_o$
	<i>Note: P is output power in W; f_d displacement frequency in kHz</i>	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 2.0 W

Test signal: $\pi/4$ -DQPSK 8.68kbps; Random bit sequence

1.2.21. TRANSMITTER OCCUPIED BANDWIDTH ($\pi/4$ -DQPSK, 2.0 W, 6.25 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 12)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30+16.67*(f_d-3\text{kHz})$ or $55+10*\log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55+10*\log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27*(f_d-2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50+10*\log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83*\log_{10}(f_d/5)$	$5 < f_o < 10$
	$29*\log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43+10*\log_{10}(P)$	$250\%Bw < f_o$
	<i>Note: P is output power in W; f_d displacement frequency in kHz</i>	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 10 W

Test signal: 4-CPFSK 10.42kbps; Random bit sequence

1.2.22. TRANSMITTER OCCUPIED BANDWIDTH (4-CPFSK, 10.0 W, 12.5 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 13)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30 + 16.67 \cdot (f_d - 3\text{kHz})$ or $55 + 10 \cdot \log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55 + 10 \cdot \log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27 \cdot (f_d - 2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50 + 10 \cdot \log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83 \cdot \log_{10}(f_d/5)$	$5 < f_o < 10$
	$29 \cdot \log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43 + 10 \cdot \log_{10}(P)$	$250\%Bw < f_o$
	<i>Note: P is output power in W; f_d displacement frequency in kHz</i>	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 2.0 W

Test signal: 16-DEQAM 34.72kbps; Random bit sequence

1.2.23. TRANSMITTER OCCUPIED BANDWIDTH (16-DEQAM, 2.0 W, 12.5 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 14)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30 + 16.67 \cdot (f_d - 3\text{kHz})$ or $55 + 10 \cdot \log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55 + 10 \cdot \log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27 \cdot (f_d - 2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50 + 10 \cdot \log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83 \cdot \log_{10}(f_d/5)$	$5 < f_o < 10$
	$29 \cdot \log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43 + 10 \cdot \log_{10}(P)$	$250\%Bw < f_o$
	<i>Note: P is output power in W; f_d displacement frequency in kHz</i>	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 2.0 W

Test signal: D8PSK 26.04kbps; Random bit sequence

1.2.24. TRANSMITTER OCCUPIED BANDWIDTH (D8PSK, 2.0 W, 12.5 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 15)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30 + 16.67 \cdot (f_d - 3\text{kHz})$ or $55 + 10 \cdot \log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55 + 10 \cdot \log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27 \cdot (f_d - 2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50 + 10 \cdot \log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83 \cdot \log_{10}(f_d/5)$	$5 < f_o < 10$
	$29 \cdot \log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43 + 10 \cdot \log_{10}(P)$	$250\%Bw < f_o$
	<i>Note: P is output power in W; f_d displacement frequency in kHz</i>	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 2.0 W

Test signal: $\pi/4$ -DQPSK 17.36kbps; Random bit sequence

1.2.25. TRANSMITTER OCCUPIED BANDWIDTH ($\pi/4$ -DQPSK, 2.0 W, 12.5 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 16)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30+16.67*(f_d-3\text{kHz})$ or $55+10*\log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55+10*\log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27*(f_d-2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50+10*\log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83*\log_{10}(f_d/5)$	$5 < f_o < 10$
	$29*\log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43+10*\log_{10}(P)$	$250\%Bw < f_o$
	<i>Note: P is output power in W; f_d displacement frequency in kHz</i>	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

1.3 Test Results 164.0250 MHz

Type Designation: **RipEX-160**
Code: **RipEX-154**
Serial No.: **12540214**
Channel Separation: **6.25 kHz, 12.5 kHz**
FW version **1.2.6.0**

Transmitter Part:
CH 1 **164.0250 MHz**

Receiver Part:
CH 1 **164.0250 MHz**

Power Supply Range: **Vnom = 20.0 V DC**
Vmin = 10.0 V DC
Vmax = 30.0 V DC

Temperature Range: **Tnom = Ambient temperature**
Tmin = -30 °C
Tmax = +60 °C

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 10.0 W (unmodulated carrier - constant envelope modulation)

1.3.1. RF POWER OUTPUT AT TERMINALS (10.0 W)

RULE PART NUMBER: 2.1046
TEST METHOD: TIA-603-D; 2.2.1

TEST RESULTS:

TEST CONDITIONS		TRANSMITTER POWER [W]		
		CH 1	CH 2	CH 3
Tnom	Vnom	9.14	- -	- -
Measurement uncertainty		±0.6 dB		

LIMIT: - -

TEST EQUIPMENT USED: 10276; 900000611; 900000609; 10173

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 2.0 W (unmodulated carrier - non-constant envelope modulation)

1.3.2. RF POWER OUTPUT AT TERMINALS (2.0 W)

RULE PART NUMBER: 2.1046
TEST METHOD: TIA-603-D; 2.2.1

TEST RESULTS:

TEST CONDITIONS		TRANSMITTER POWER [W]		
		CH 1	CH 2	CH 3
Tnom	Vnom	2.25	- -	- -
Measurement uncertainty		±0.6 dB		

LIMIT: - -

TEST EQUIPMENT USED: 10276; 900000611; 900000609; 10173

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

The measurement was carried out at maximum power level (open loop)

1.3.3. FREQUENCY STABILITY WITH TEMPERATURE VARIATION

RULE PART NUMBER: 2.1055; 90.213

TEST METHOD: TIA-603-D; 2.2.2

TEST RESULTS:

TEST CONDITIONS Temperature (°C)	FREQUENCY ERROR [ppm]		
	CH 1	CH 2	CH 3
-30	-0.07	--	--
-20	0.02	--	--
-10	0.29	--	--
0	0.06	--	--
10	0.18	--	--
20	0.14	--	--
30	0.01	--	--
40	0.12	--	--
50	-0.09	--	--
60	-0.07	--	--
Maximum frequency error	-0.09/+0.29 (limit 2.0ppm mobile; 1.0 base station)		
Measurement uncertainty	±45 Hz		

LIMIT:

Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
Below 25	^{1,2,3} 100	100	200
25-50	20	20	50
72-76	5		50
150-174	^{5,11} 5	⁶ 5	^{4,6} 50
216-220	1.0		50

220-222	0.1	1.5	1.0
421-512	^{7,11,14} 2.5	⁸ 5	⁸ 5
806-809	¹⁴ 1.0	1.5	1.5
809-824	¹⁴ 1.5	2.5	2.5
851-854	1.0	1.5	1.5
854-869	1.5	2.5	2.5
896-901	¹⁴ 0.1	1.5	1.5
902-928	2.5	2.5	2.5
929-930	1.5		
935-940	0.1	1.5	1.5
1427-1435	⁸ 300	300	300
Above 2450			
Note: ^{1,2,3,4,5,6,7,8,9,10,11,12,13,14} FCC Part 90.213			

TEST EQUIPMENT USED: 10276; 900000611; 900000609; 10173

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

The measurement was carried out at maximum power level (open loop)

1.3.4. FREQUENCY STABILITY WITH PRIMARY VOLTAGE VARIATION

RULE PART NUMBER: 2.1055; 90.213

TEST METHOD: TIA-603-D; 2.2.2

TEST RESULTS:

TEST CONDITIONS Temperature (°C)	FREQUENCY ERROR [ppm]		
	CH 1	CH 2	CH 3
10.0V	0.01	--	--
15.0V	0.01	--	--
20.0V	0.01	--	--
25.0V	0.01	--	--
30.0V	0.01	--	--
Maximum frequency error	0.01 (limit 2.0ppm mobile; 1.0 base station)		
Measurement uncertainty	±45 Hz		

LIMIT:

Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
Below 25	^{1,2,3} 100	100	200
25-50	20	20	50
72-76	5		50
150-174	^{5,11} 5	⁶ 5	^{4,6} 50
216-220	1.0		50
220-222	0.1	1.5	1.0
421-512	^{7,11,14} 2.5	⁸ 5	⁸ 5
806-809	¹⁴ 1.0	1.5	1.5
809-824	¹⁴ 1.5	2.5	2.5
851-854	1.0	1.5	1.5

854-869	1.5	2.5	2.5
896-901	¹⁴ 0.1	1.5	1.5
902-928	2.5	2.5	2.5
929-930	1.5		
935-940	0.1	1.5	1.5
1427-1435	⁸ 300	300	300
Above 2450			
Note: ^{1,2,3,4,5,6,7,8,9,10,11,12,13,14} FCC Part 90.213			

TEST EQUIPMENT USED: 10276; 900000611; 900000609; 10173

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Rated output power: 0.1 W

Test signal: 4-CPFSK, 10.42kbps; Random bit sequence

1.3.5. TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (0.1 W)

RULE PART NUMBER: 2.1051, 90.210 (c,3)(d,3)(e,3)

TEST METHOD: TIA-603-D, 2.2.13

TEST RESULTS:

SPURIOUS EMISSIONS								
CH1			CH2			CH3		
Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]
For all frequencies the spurious emissions were detected at least 20 dB below the limit.								
Measurement uncertainty			+2.8 dB/-3.3 dB					

LIMIT:

CHANNEL BANDWIDTH	6.25 kHz	12.5 kHz	25.0 kHz
FREQUENCY RANGE	$f_o > 4.6$ kHz	$f_o > 12.5$	$f_o > 250\%Bw$
SPURIOUS EMISSION LEVEL [dBc]	$55+10\log_{10}(P)$ or 65	$50+10\log_{10}(P)$ or 70	$43+10\log_{10}(P)$

$\text{Limit}_{(dBc)} = 55+10\log_{10}(P) = 55+10\log_{10}(0.1) = 45$ dBc

where P = RF output power in watts

$\text{Limit}_{(dBc)} = 50+10\log_{10}(P) = 50+10\log_{10}(0.1) = 40$ dBc

where P = RF output power in watts

TEST EQUIPMENT USED: 10276; 900000611; 900000609;

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Rated output power: 10.0 W

Test signal: 4-CPFSK, 10.42kbps; Random bit sequence

1.3.6. TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (10.0 W)

RULE PART NUMBER: 2.1051, 90.210 (c,3)(d,3)(e,3)

TEST METHOD: TIA-603-D, 2.2.13

TEST RESULTS:

SPURIOUS EMISSIONS								
CH1			CH2			CH3		
Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]
For all frequencies the spurious emissions were detected at least 10 dB below the limit.								
Measurement uncertainty			+2.8 dB/-3.3 dB					

LIMIT:

CHANNEL BANDWIDTH	6.25 kHz	12.5 kHz	25.0 kHz
FREQUENCY RANGE	$f_o > 4.6 \text{ kHz}$	$f_o > 12.5$	$f_o > 250\%Bw$
SPURIOUS EMISSION LEVEL [dBc]	$55+10\log_{10}(P)$ or 65	$50+10\log_{10}(P)$ or 70	$43+10\log_{10}(P)$

$$\text{Limit}_{(\text{dBc})} = 55+10\log_{10}(P) = 55+10\log_{10}(10) = 65 \text{ dBc}$$

where P = RF output power in watts

$$\text{Limit}_{(\text{dBc})} = 50+10\log_{10}(P) = 50+10\log_{10}(10) = 60 \text{ dBc}$$

where P = RF output power in watts

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Rated output power: 2.0 W

Test signal: 16-DEQAM 34.72kbps; Random bit sequence

1.3.7. TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (2.0 W)

RULE PART NUMBER: 2.1051, 90.210 (c,3)(d,3)(e,3)

TEST METHOD: TIA-603-D, 2.2.13

TEST RESULTS:

SPURIOUS EMISSIONS								
CH1			CH2			CH3		
Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]
For all frequencies the spurious emissions were detected at least 20 dB below the limit.								
Measurement uncertainty			+2.8 dB/-3.3 dB					

LIMIT:

CHANNEL BANDWIDTH	6.25 kHz	12.5 kHz	25.0 kHz
FREQUENCY RANGE	f _o > 4.6 kHz	f _o > 12.5	f _o > 250%Bw
SPURIOUS EMISSION LEVEL [dBc]	55+10log ₁₀ (P) or 65	50+10log ₁₀ (P) or 70	43+10log ₁₀ (P)

Limit_(dBc)= 55+10log₁₀(P)= 55+10log₁₀(2.0)= 65 dBc

Limit_(dBc)= 50+10log₁₀(P)= 50+10log₁₀(2.0)= 60 dBc

where P = RF output power in watts

where P = RF output power in watts

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Rated output power: 0.5 W

Test signal: 16-DEQAM 34.72kbps; Random bit sequence

1.3.8. TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (0.5 W)

RULE PART NUMBER: 2.1051, 90.210 (c,3)(d,3)(e,3)

TEST METHOD: TIA-603-D, 2.2.13

TEST RESULTS:

SPURIOUS EMISSIONS								
CH1			CH2			CH3		
Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]
For all frequencies the spurious emissions were detected at least 20 dB below the limit.								
Measurement uncertainty			+2.8 dB/-3.3 dB					

LIMIT:

CHANNEL BANDWIDTH	6.25 kHz	12.5 kHz	25.0 kHz
FREQUENCY RANGE	$f_o > 4.6$ kHz	$f_o > 12.5$	$f_o > 250\%Bw$
SPURIOUS EMISSION LEVEL [dBc]	$55+10\log_{10}(P)$ or 65	$50+10\log_{10}(P)$ or 70	$43+10\log_{10}(P)$

$$\text{Limit}_{(dBc)} = 55+10\log_{10}(P) = 55+10\log_{10}(0.5) = 52 \text{ dBc}$$

where P = RF output power in watts

$$\text{Limit}_{(dBc)} = 50+10\log_{10}(P) = 50+10\log_{10}(0.5) = 47 \text{ dBc}$$

where P = RF output power in watts

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Transmitter operating unmodulated

The measurement was carried out at minimum power level

1.3.9. TRANSMITTER UNWANTED EMISSIONS: RADIATED SPURIOUS (0.1 W)

RULE PART NUMBER: 2.1053, 90.210 (c,3)(d,3)(e,3)

TEST METHOD: TIA-603-D, 2.2.12

TEST RESULTS:

SPURIOUS EMISSIONS								
CH1			CH2			CH3		
Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]
For all frequencies the spurious emissions were detected at least 10 dB below the limit.								
Measurement uncertainty			+4.4 dB/-4.5 dB					

LIMIT:

CHANNEL BANDWIDTH	6.25 kHz	12.5 kHz	25.0 kHz
FREQUENCY RANGE	$f_o > 4.6 \text{ kHz}$	$f_o > 12.5$	$f_o > 250\%Bw$
SPURIOUS EMISSION LEVEL [dBc]	$55+10\log_{10}(P)$ or 65	$50+10\log_{10}(P)$ or 70	$43+10\log_{10}(P)$

TEST EQUIPMENT USED: - -

REMARKS: Measured in CMI – Laboratory TESTCOM Praha; Test report Ref. No.: 8551-PT-R0237-12 Annex 1

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Transmitter operating unmodulated

The measurement was carried out at maximum power level

1.3.10. TRANSMITTER UNWANTED EMISSIONS: RADIATED SPURIOUS (10.0 W)

RULE PART NUMBER: 2.1053, 90.210 (c,3)(d,3)(e,3)

TEST METHOD: TIA-603-D, 2.2.12

TEST RESULTS:

SPURIOUS EMISSIONS								
CH1			CH2			CH3		
Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]
902.057	100	-38.1	--	--	--	--	--	--
For all frequencies the spurious emissions were detected at least 10 dB below the limit.								
Measurement uncertainty			+4.4 dB/-4.5 dB					

LIMIT:

CHANNEL BANDWIDTH	6.25 kHz	12.5 kHz	25.0 kHz
FREQUENCY RANGE	$f_o > 4.6 \text{ kHz}$	$f_o > 12.5$	$f_o > 250\%Bw$
SPURIOUS EMISSION LEVEL [dBc]	$55+10\log_{10}(P)$ or 65	$50+10\log_{10}(P)$ or 70	$43+10\log_{10}(P)$

TEST EQUIPMENT USED: - -

REMARKS: Measured in CMI – Laboratory TESTCOM Praha; Test report Ref. No.: 8551-PT-R0237-12 Annex 1

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Transmitter operating unmodulated (unmodulated carrier - constant envelope modulation)

The measurement was carried out at maximum power level

1.3.13. TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (12.5 kHz)

RULE PART NUMBER: 90.214

TEST METHOD: TIA-603-D; 2.2.19

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 17,GRAPH 18)

LIMIT:

TRANSIENT FREQUENCY BEHAVIOR				
TIME INTERVAL		MAXIMUM FREQUENCY DIFFERENCE [kHz]	TIME [ms]	
			150-174 MHz	421-512 MHz
T1	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
T2	for 6.25 kHz channel separation	+/-3.125	20	25
	for 12.5 kHz channel separation	+/-6.25	20	25
	for 25.0 kHz channel separation	+/-12.5	20	25
T3	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
Measurement uncertainty		±45 Hz		

TEST EQUIPMENT USED: 10258; 10173; 10293; 900000609; 900000611

REMARKS: See chapter 4 for plots of frequency and power versus time,

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Transmitter operating unmodulated (unmodulated carrier - constant envelope modulation)

The measurement was carried out at maximum power level

1.3.14. TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (6.25 kHz)

RULE PART NUMBER: 90.214
TEST METHOD: TIA-603-D; 2.2.19

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 19, GRAPH 20)

LIMIT:

TRANSIENT FREQUENCY BEHAVIOR				
TIME INTERVAL		MAXIMUM FREQUENCY DIFFERENCE [kHz]	TIME [ms]	
			150-174 MHz	421-512 MHz
T1	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
T2	for 6.25 kHz channel separation	+/-3.125	20	25
	for 12.5 kHz channel separation	+/-6.25	20	25
	for 25.0 kHz channel separation	+/-12.5	20	25
T3	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
Measurement uncertainty		±45 Hz		

TEST EQUIPMENT USED: 10258; 10173; 10293; 900000609; 900000611

REMARKS: See chapter 4 for plots of frequency and power versus time,

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Transmitter operating unmodulated (unmodulated carrier - non-constant envelope modulation)

The measurement was carried out at maximum power level

1.3.15. TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (12.5 kHz)

RULE PART NUMBER: 90.214

TEST METHOD: TIA-603-D; 2.2.19

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 21, GRAPH 22)

LIMIT:

TRANSIENT FREQUENCY BEHAVIOR				
TIME INTERVAL		MAXIMUM FREQUENCY DIFFERENCE [kHz]	TIME [ms]	
			150-174 MHz	421-512 MHz
T1	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
T2	for 6.25 kHz channel separation	+/-3.125	20	25
	for 12.5 kHz channel separation	+/-6.25	20	25
	for 25.0 kHz channel separation	+/-12.5	20	25
T3	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
Measurement uncertainty		±45 Hz		

TEST EQUIPMENT USED: 10258; 10173; 10293; 900000609; 900000611

REMARKS: See chapter 4 for plots of frequency and power versus time,

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Transmitter operating unmodulated (unmodulated carrier - non-constant envelope modulation)

The measurement was carried out at maximum power level

1.3.16. TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (6.25 kHz)

RULE PART NUMBER: 90.214

TEST METHOD: TIA-603-D; 2.2.19

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 23, GRAPH 24)

LIMIT:

TRANSIENT FREQUENCY BEHAVIOR				
TIME INTERVAL		MAXIMUM FREQUENCY DIFFERENCE [kHz]	TIME [ms]	
			150-174 MHz	421-512 MHz
T1	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
T2	for 6.25 kHz channel separation	+/-3.125	20	25
	for 12.5 kHz channel separation	+/-6.25	20	25
	for 25.0 kHz channel separation	+/-12.5	20	25
T3	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
Measurement uncertainty		±45 Hz		

TEST EQUIPMENT USED: 10258; 10173; 10293; 900000609; 900000611

REMARKS: See chapter 4 for plots of frequency and power versus time,

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

The measurement at maximum power level

1.3.17. TRANSMITTER OCCUPIED BANDWIDTH

RULE PART NUMBER: 2.201, 2.202, 2.1033 (C) (14), 2.1049 (H), 2.1041; 90.203(J) (3)

TEST METHOD: TIA-603-D

TEST RESULTS:

Channel Spacing	6.25 kHz	12.5 kHz	6.25 kHz	6.25 kHz	6.25 kHz	12.5 kHz
Emission Type	4K35F1DDN	8K90F1DDN	5K00D1DEN	5K00G1DEN	5K00G1DDN	10K0D1DEN
Modulation	4-CPFSK	4-CPFSK	16-DEQAM	D8PSK	$\pi/4$ -DQPSK	16-DEQAM
Data Rate	5.21 kbit/s	10.42 kbit/s	17.36 kbit/s	13.02 kbit/s	8.68 kbit/s	34.72 kbit/s
Measured Peak Deviation	1.90 kHz	4.00 kHz	---	---	---	---
Measured 99% Occupied BW	4.10 kHz	8.84 kHz	4.93 kHz	4.97 kHz	4.97 kHz	9.86 kHz

Channel Spacing	12.5 kHz	12.5 kHz				
Emission Type	10K0G1DEN	10K0G1DDN				
Modulation	D8PSK	$\pi/4$ -DQPSK				
Data Rate	26.04 kbit/s	17.36 kbit/s				
Measured Peak Deviation	---	---				
Measured 99% Occupied BW	9.90 kHz	9.89 kHz				

TEST EQUIPMENT USED: 10276; 900000611; 900000609; 10173

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 10.0 W

Test signal: 4-CPFSK 5.21kbps; Random bit sequence

1.3.18. TRANSMITTER OCCUPIED BANDWIDTH (4-CPFSK, 10.0 W, 6.25 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 25)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30+16.67*(f_d-3\text{kHz})$ or $55+10*\log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55+10*\log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27*(f_d-2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50+10*\log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83*\log_{10}(f_d/5)$	$5 < f_o < 10$
	$29*\log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43+10*\log_{10}(P)$	$250\%Bw < f_o$
	<i>Note: P is output power in W; f_d displacement frequency in kHz</i>	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 2.0 W

Test signal: 16-DEQAM 17.36kbps; Random bit sequence

1.3.19. TRANSMITTER OCCUPIED BANDWIDTH (16-DEQAM, 2.0 W, 6.25 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 26)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30 + 16.67 \cdot (f_d - 3\text{kHz})$ or $55 + 10 \cdot \log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55 + 10 \cdot \log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27 \cdot (f_d - 2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50 + 10 \cdot \log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83 \cdot \log_{10}(f_d/5)$	$5 < f_o < 10$
	$29 \cdot \log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43 + 10 \cdot \log_{10}(P)$	$250\%Bw < f_o$
	<i>Note: P is output power in W; f_d displacement frequency in kHz</i>	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 2.0 W

Test signal: D8PSK 13.02kbps; Random bit sequence

1.3.20. TRANSMITTER OCCUPIED BANDWIDTH (D8PSK, 2.0 W, 6.25 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 27)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30 + 16.67 \cdot (f_d - 3\text{kHz})$ or $55 + 10 \cdot \log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55 + 10 \cdot \log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27 \cdot (f_d - 2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50 + 10 \cdot \log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83 \cdot \log_{10}(f_d/5)$	$5 < f_o < 10$
	$29 \cdot \log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43 + 10 \cdot \log_{10}(P)$	$250\%Bw < f_o$
	<i>Note: P is output power in W; f_d displacement frequency in kHz</i>	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 2.0 W

Test signal: $\pi/4$ -DQPSK 8.68kbps; Random bit sequence

1.3.21. TRANSMITTER OCCUPIED BANDWIDTH ($\pi/4$ -DQPSK, 2.0 W, 6.25 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 28)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30+16.67*(f_d-3\text{kHz})$ or $55+10*\log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55+10*\log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27*(f_d-2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50+10*\log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83*\log_{10}(f_d/5)$	$5 < f_o < 10$
	$29*\log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43+10*\log_{10}(P)$	$250\%Bw < f_o$
	<i>Note: P is output power in W; f_d displacement frequency in kHz</i>	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 10 W

Test signal: 4-CPFSK 10.42kbps; Random bit sequence

1.3.22. TRANSMITTER OCCUPIED BANDWIDTH (4-CPFSK, 10.0 W, 12.5 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 29)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30+16.67*(f_d-3\text{kHz})$ or $55+10*\log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55+10*\log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27*(f_d-2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50+10*\log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83*\log_{10}(f_d/5)$	$5 < f_o < 10$
	$29*\log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43+10*\log_{10}(P)$	$250\%Bw < f_o$
	<i>Note: P is output power in W; f_d displacement frequency in kHz</i>	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 2.0 W

Test signal: 16-DEQAM 34.72kbps; Random bit sequence

1.3.23. TRANSMITTER OCCUPIED BANDWIDTH (16-DEQAM, 2.0 W, 12.5 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 30)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30 + 16.67 \cdot (f_d - 3\text{kHz})$ or $55 + 10 \cdot \log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55 + 10 \cdot \log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27 \cdot (f_d - 2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50 + 10 \cdot \log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83 \cdot \log_{10}(f_d/5)$	$5 < f_o < 10$
	$29 \cdot \log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43 + 10 \cdot \log_{10}(P)$	$250\%Bw < f_o$
	<i>Note: P is output power in W; f_d displacement frequency in kHz</i>	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 2.0 W

Test signal: D8PSK 26.04kbps; Random bit sequence

1.3.24. TRANSMITTER OCCUPIED BANDWIDTH (D8PSK, 2.0 W, 12.5 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 31)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30 + 16.67 \cdot (f_d - 3\text{kHz})$ or $55 + 10 \cdot \log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55 + 10 \cdot \log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27 \cdot (f_d - 2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50 + 10 \cdot \log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83 \cdot \log_{10}(f_d/5)$	$5 < f_o < 10$
	$29 \cdot \log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43 + 10 \cdot \log_{10}(P)$	$250\%Bw < f_o$
	<i>Note: P is output power in W; f_d displacement frequency in kHz</i>	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 2.0 W

Test signal: $\pi/4$ -DQPSK 17.36kbps; Random bit sequence

1.3.25. TRANSMITTER OCCUPIED BANDWIDTH ($\pi/4$ -DQPSK, 2.0 W, 12.5 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 32)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30+16.67*(f_d-3\text{kHz})$ or $55+10*\log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55+10*\log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27*(f_d-2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50+10*\log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83*\log_{10}(f_d/5)$	$5 < f_o < 10$
	$29*\log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43+10*\log_{10}(P)$	$250\%Bw < f_o$
	<i>Note: P is output power in W; f_d displacement frequency in kHz</i>	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

1.4 Test Results 173.9875 MHz

Type Designation: **RipEX-160**
Code: **RipEX-154**
Serial No.: **125400214**
Channel Separation: **6.25 kHz, 12.5 kHz**
FW version **1.2.6.0**

Transmitter Part:
CH 1 **173.9875 MHz**

Receiver Part:
CH 1 **173.9875 MHz**

Power Supply Range: **Vnom = 20.0 V DC**
Vmin = 10.0 V DC
Vmax = 30.0 V DC

Temperature Range: **Tnom = Ambient temperature**
Tmin = -30 °C
Tmax = +60 °C

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 10.0 W (unmodulated carrier - constant envelope modulation)

1.4.1. RF POWER OUTPUT AT TERMINALS (10.0 W)

RULE PART NUMBER: 2.1046
TEST METHOD: TIA-603-D; 2.2.1
TEST RESULTS:

TEST CONDITIONS		TRANSMITTER POWER [W]		
		CH 1	CH 2	CH 3
Tnom	Vnom	8.73	- -	- -
Measurement uncertainty		±0.6 dB		

LIMIT: - -

TEST EQUIPMENT USED: 10276; 900000611; 900000609; 10173

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 2.0 W (unmodulated carrier - non-constant envelope modulation)

1.4.2. RF POWER OUTPUT AT TERMINALS (2.0 W)

RULE PART NUMBER: 2.1046
TEST METHOD: TIA-603-D; 2.2.1

TEST RESULTS:

TEST CONDITIONS		TRANSMITTER POWER [W]		
		CH 1	CH 2	CH 3
Tnom	Vnom	2.28	- -	- -
Measurement uncertainty		±0.6 dB		

LIMIT: - -

TEST EQUIPMENT USED: 10276; 900000611; 900000609; 10173

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

The measurement was carried out at maximum power level (open loop)

1.4.3. FREQUENCY STABILITY WITH TEMPERATURE VARIATION

RULE PART NUMBER: 2.1055; 90.213

TEST METHOD: TIA-603-D; 2.2.2

TEST RESULTS:

TEST CONDITIONS Temperature (°C)	FREQUENCY ERROR [ppm]		
	CH 1	CH 2	CH 3
-30	-0.06	--	--
-20	0.00	--	--
-10	0.29	--	--
0	0.06	--	--
10	0.17	--	--
20	0.19	--	--
30	0.00	--	--
40	0.11	--	--
50	-0.09	--	--
60	-0.08	--	--
Maximum frequency error	-0.09/+0.29 (limit 2.0ppm mobile; 1.0 base station)		
Measurement uncertainty	±45 Hz		

LIMIT:

Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
Below 25	^{1,2,3} 100	100	200
25-50	20	20	50
72-76	5		50
150-174	^{5,11} 5	⁶ 5	^{4,6} 50
216-220	1.0		50

220-222	0.1	1.5	1.0
421-512	^{7,11,14} 2.5	⁸ 5	⁸ 5
806-809	¹⁴ 1.0	1.5	1.5
809-824	¹⁴ 1.5	2.5	2.5
851-854	1.0	1.5	1.5
854-869	1.5	2.5	2.5
896-901	¹⁴ 0.1	1.5	1.5
902-928	2.5	2.5	2.5
929-930	1.5		
935-940	0.1	1.5	1.5
1427-1435	⁸ 300	300	300
Above 2450			
Note: ^{1,2,3,4,5,6,7,8,9,10,11,12,13,14} FCC Part 90.213			

TEST EQUIPMENT USED: 10276; 900000611; 900000609; 10173

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

The measurement was carried out at maximum power level (open loop)

1.4.4. FREQUENCY STABILITY WITH PRIMARY VOLTAGE VARIATION

RULE PART NUMBER: 2.1055; 90.213

TEST METHOD: TIA-603-D; 2.2.2

TEST RESULTS:

TEST CONDITIONS Temperature (°C)	FREQUENCY ERROR [ppm]		
	CH 1	CH 2	CH 3
10.0V	0.02	--	--
15.0V	0.02	--	--
20.0V	0.02	--	--
25.0V	0.02	--	--
30.0V	0.02	--	--
Maximum frequency error	0.02 (limit 2.0ppm mobile; 1.0 base station)		
Measurement uncertainty	±45 Hz		

LIMIT:

Frequency range (MHz)	Fixed and base stations	Mobile stations	
		Over 2 watts output power	2 watts or less output power
Below 25	^{1,2,3} 100	100	200
25-50	20	20	50
72-76	5		50
150-174	^{5,11} 5	⁶ 5	^{4,6} 50
216-220	1.0		50
220-222	0.1	1.5	1.0
421-512	^{7,11,14} 2.5	⁸ 5	⁸ 5
806-809	¹⁴ 1.0	1.5	1.5
809-824	¹⁴ 1.5	2.5	2.5
851-854	1.0	1.5	1.5

854-869	1.5	2.5	2.5
896-901	¹⁴ 0.1	1.5	1.5
902-928	2.5	2.5	2.5
929-930	1.5		
935-940	0.1	1.5	1.5
1427-1435	⁸ 300	300	300
Above 2450			
Note: ^{1,2,3,4,5,6,7,8,9,10,11,12,13,14} FCC Part 90.213			

TEST EQUIPMENT USED: 10276; 900000611; 900000609; 10173

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Rated output power: 0.1 W

Test signal: 4-CPFSK, 10.42kbps; Random bit sequence

1.4.5. TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (0.1 W)

RULE PART NUMBER: 2.1051, 90.210 (c,3)(d,3)(e,3)

TEST METHOD: TIA-603-D, 2.2.13

TEST RESULTS:

SPURIOUS EMISSIONS								
CH1			CH2			CH3		
Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]
For all frequencies the spurious emissions were detected at least 20 dB below the limit.								
Measurement uncertainty			+2.8 dB/-3.3 dB					

LIMIT:

CHANNEL BANDWIDTH	6.25 kHz	12.5 kHz	25.0 kHz
FREQUENCY RANGE	$f_o > 4.6 \text{ kHz}$	$f_o > 12.5$	$f_o > 250\%Bw$
SPURIOUS EMISSION LEVEL [dBc]	$55+10\log_{10}(P)$ or 65	$50+10\log_{10}(P)$ or 70	$43+10\log_{10}(P)$

$\text{Limit}_{(\text{dBc})} = 55+10\log_{10}(P) = 55+10\log_{10}(0.1) = 45 \text{ dBc}$

where P = RF output power in watts

$\text{Limit}_{(\text{dBc})} = 50+10\log_{10}(P) = 50+10\log_{10}(0.1) = 40 \text{ dBc}$

where P = RF output power in watts

TEST EQUIPMENT USED: 10276; 900000611; 900000609;

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Rated output power: 10.0 W

Test signal: 4-CPFSK, 10.42kbps; Random bit sequence

1.4.6. TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (10.0 W)

RULE PART NUMBER: 2.1051, 90.210 (c,3)(d,3)(e,3)
TEST METHOD: TIA-603-D, 2.2.13

TEST RESULTS:

SPURIOUS EMISSIONS								
CH1			CH2			CH3		
Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]
For all frequencies the spurious emissions were detected at least 10 dB below the limit.								
Measurement uncertainty			+2.8 dB/-3.3 dB					

LIMIT:

CHANNEL BANDWIDTH	6.25 kHz	12.5 kHz	25.0 kHz
FREQUENCY RANGE	f _o > 4.6 kHz	f _o > 12.5	f _o > 250%Bw
SPURIOUS EMISSION LEVEL [dBc]	55+10log ₁₀ (P) or 65	50+10log ₁₀ (P) or 70	43+10log ₁₀ (P)

Limit_(dBc)= 55+10log₁₀(P)= 55+10log₁₀(10)= 65 dBc

Limit_(dBc)= 50+10log₁₀(P)= 50+10log₁₀(10)= 60 dBc

where P = RF output power in watts

where P = RF output power in watts

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Rated output power: 2.0 W

Test signal: 16-DEQAM 34.72kbps; Random bit sequence

1.4.7. TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (2.0 W)

RULE PART NUMBER: 2.1051, 90.210 (c,3)(d,3)(e,3)

TEST METHOD: TIA-603-D, 2.2.13

TEST RESULTS:

SPURIOUS EMISSIONS								
CH1			CH2			CH3		
Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]
For all frequencies the spurious emissions were detected at least 20 dB below the limit.								
Measurement uncertainty			+2.8 dB/-3.3 dB					

LIMIT:

CHANNEL BANDWIDTH	6.25 kHz	12.5 kHz	25.0 kHz
FREQUENCY RANGE	$f_o > 4.6 \text{ kHz}$	$f_o > 12.5$	$f_o > 250\%Bw$
SPURIOUS EMISSION LEVEL [dBc]	$55+10\log_{10}(P)$ or 65	$50+10\log_{10}(P)$ or 70	$43+10\log_{10}(P)$

$\text{Limit}_{(\text{dBc})} = 55+10\log_{10}(P) = 55+10\log_{10}(2.0) = 58 \text{ dBc}$

where P = RF output power in watts

$\text{Limit}_{(\text{dBc})} = 50+10\log_{10}(P) = 50+10\log_{10}(2.0) = 53 \text{ dBc}$

where P = RF output power in watts

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Rated output power: 0.5 W

Test signal: 16-DEQAM 34.72kbps; Random bit sequence

1.4.8. TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS (0.5 W)

RULE PART NUMBER: 2.1051, 90.210 (c,3)(d,3)(e,3)

TEST METHOD: TIA-603-D, 2.2.13

TEST RESULTS:

SPURIOUS EMISSIONS								
CH1			CH2			CH3		
Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]
For all frequencies the spurious emissions were detected at least 20 dB below the limit.								
Measurement uncertainty			+2.8 dB/-3.3 dB					

LIMIT:

CHANNEL BANDWIDTH	6.25 kHz	12.5 kHz	25.0 kHz
FREQUENCY RANGE	$f_o > 4.6$ kHz	$f_o > 12.5$	$f_o > 250\%Bw$
SPURIOUS EMISSION LEVEL [dBc]	$55+10\log_{10}(P)$ or 65	$50+10\log_{10}(P)$ or 70	$43+10\log_{10}(P)$

$\text{Limit}_{(dBc)} = 55+10\log_{10}(P) = 55+10\log_{10}(0.5) = 52$ dBc

where P = RF output power in watts

$\text{Limit}_{(dBc)} = 50+10\log_{10}(P) = 50+10\log_{10}(0.5) = 47$ dBc

where P = RF output power in watts

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Transmitter operating unmodulated

The measurement was carried out at minimum power level

1.4.9. TRANSMITTER UNWANTED EMISSIONS: RADIATED SPURIOUS (0.1 W)

RULE PART NUMBER: 2.1053, 90.210 (c,3)(d,3)(e,3)

TEST METHOD: TIA-603-D, 2.2.12

TEST RESULTS:

SPURIOUS EMISSIONS								
CH1			CH2			CH3		
Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]
For all frequencies the spurious emissions were detected at least 10 dB below the limit.								
Measurement uncertainty			+4.4 dB/-4.5 dB					

LIMIT:

CHANNEL BANDWIDTH	6.25 kHz	12.5 kHz	25.0 kHz
FREQUENCY RANGE	$f_0 > 4.6 \text{ kHz}$	$f_0 > 12.5$	$f_0 > 250\%Bw$
SPURIOUS EMISSION LEVEL [dBc]	$55+10\log_{10}(P)$ or 65	$50+10\log_{10}(P)$ or 70	$43+10\log_{10}(P)$

TEST EQUIPMENT USED: - -

REMARKS: Measured in CMI – Laboratory TESTCOM Praha; Test report Ref. No.: 8551-PT-R0237-12 Annex 1

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Transmitter operating unmodulated

The measurement was carried out at maximum power level

1.4.10. TRANSMITTER UNWANTED EMISSIONS: RADIATED SPURIOUS (10.0 W)

RULE PART NUMBER: 2.1053, 90.210 (c,3)(d,3)(e,3)

TEST METHOD: TIA-603-D, 2.2.12

TEST RESULTS:

SPURIOUS EMISSIONS								
CH1			CH2			CH3		
Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]	Freq. [MHz]	Bandwidth [kHz]	Level [dBm]
695.948	100	-42.2	--	10	--	--	--	--
For all others frequencies the spurious emissions were detected at least 10 dB below the limit.								
Measurement uncertainty			+4.4 dB/-4.5 dB					

LIMIT:

CHANNEL BANDWIDTH	6.25 kHz	12.5 kHz	25.0 kHz
FREQUENCY RANGE	$f_o > 4.6 \text{ kHz}$	$f_o > 12.5$	$f_o > 250\%Bw$
SPURIOUS EMISSION LEVEL [dBc]	$55+10\log_{10}(P)$ or 65	$50+10\log_{10}(P)$ or 70	$43+10\log_{10}(P)$

TEST EQUIPMENT USED: - -

REMARKS: Measured in CMI – Laboratory TESTCOM Praha; Test report Ref. No.: 8551-PT-R0237-12 Annex 1

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Transmitter operating unmodulated (unmodulated carrier - constant envelope modulation)

The measurement was carried out at maximum power level

1.4.13. TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (12.5 kHz)

RULE PART NUMBER: 90.214

TEST METHOD: TIA-603-D; 2.2.19

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 33,GRAPH 34)

LIMIT:

TRANSIENT FREQUENCY BEHAVIOR				
TIME INTERVAL		MAXIMUM FREQUENCY DIFFERENCE [kHz]	TIME [ms]	
			150-174 MHz	421-512 MHz
T1	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
T2	for 6.25 kHz channel separation	+/-3.125	20	25
	for 12.5 kHz channel separation	+/-6.25	20	25
	for 25.0 kHz channel separation	+/-12.5	20	25
T3	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
Measurement uncertainty		±45 Hz		

TEST EQUIPMENT USED: 10258; 10173; 10293; 900000609; 900000611

REMARKS: See chapter 4 for plots of frequency and power versus time,

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Transmitter operating unmodulated (unmodulated carrier - constant envelope modulation)

The measurement was carried out at maximum power level

1.4.14. TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (6.25 kHz)

RULE PART NUMBER: 90.214

TEST METHOD: TIA-603-D; 2.2.19

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 35, GRAPH 36)

LIMIT:

TRANSIENT FREQUENCY BEHAVIOR				
TIME INTERVAL		MAXIMUM FREQUENCY DIFFERENCE [kHz]	TIME [ms]	
			150-174 MHz	421-512 MHz
T1	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
T2	for 6.25 kHz channel separation	+/-3.125	20	25
	for 12.5 kHz channel separation	+/-6.25	20	25
	for 25.0 kHz channel separation	+/-12.5	20	25
T3	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
Measurement uncertainty		±45 Hz		

TEST EQUIPMENT USED: 10258; 10173; 10293; 900000609; 900000611

REMARKS: See chapter 4 for plots of frequency and power versus time,

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Transmitter operating unmodulated (unmodulated carrier - non-constant envelope modulation)

The measurement was carried out at maximum power level

1.4.15. TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (12.5 kHz)

RULE PART NUMBER: 90.214

TEST METHOD: TIA-603-D; 2.2.19

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 37, GRAPH 38)

LIMIT:

TRANSIENT FREQUENCY BEHAVIOR				
TIME INTERVAL		MAXIMUM FREQUENCY DIFFERENCE [kHz]	TIME [ms]	
			150-174 MHz	421-512 MHz
T1	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
T2	for 6.25 kHz channel separation	+/-3.125	20	25
	for 12.5 kHz channel separation	+/-6.25	20	25
	for 25.0 kHz channel separation	+/-12.5	20	25
T3	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
Measurement uncertainty		±45 Hz		

TEST EQUIPMENT USED: 10258; 10173; 10293; 900000609; 900000611

REMARKS: See chapter 4 for plots of frequency and power versus time,

Ambient temperature: (22±1) °C

Relative humidity: (47±10) %

Transmitter operating unmodulated (unmodulated carrier - non-constant envelope modulation)

The measurement was carried out at maximum power level

1.4.16. TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER (6.25 kHz)

RULE PART NUMBER: 90.214

TEST METHOD: TIA-603-D; 2.2.19

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 39, GRAPH 40)

LIMIT:

TRANSIENT FREQUENCY BEHAVIOR				
TIME INTERVAL		MAXIMUM FREQUENCY DIFFERENCE [kHz]	TIME [ms]	
			150-174 MHz	421-512 MHz
T1	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
T2	for 6.25 kHz channel separation	+/-3.125	20	25
	for 12.5 kHz channel separation	+/-6.25	20	25
	for 25.0 kHz channel separation	+/-12.5	20	25
T3	for 6.25 kHz channel separation	+/-6.25	5.0	10
	for 12.5 kHz channel separation	+/-12.5	5.0	10
	for 25.0 kHz channel separation	+/-25.0	5.0	10
Measurement uncertainty		±45 Hz		

TEST EQUIPMENT USED: 10258; 10173; 10293; 900000609; 900000611

REMARKS: See chapter 4 for plots of frequency and power versus time,

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

The measurement at maximum power level

1.4.17. TRANSMITTER OCCUPIED BANDWIDTH

RULE PART NUMBER: 2.201, 2.202, 2.1033 (C) (14), 2.1049 (H), 2.1041; 90.203(J) (3)

TEST METHOD: TIA-603-D

TEST RESULTS:

Channel Spacing	6.25 kHz	12.5 kHz	6.25 kHz	6.25 kHz	6.25 kHz	12.5 kHz
Emission Type	4K35F1DDN	8K90F1DDN	5K00D1DEN	5K00G1DEN	5K00G1DDN	10K0D1DEN
Modulation	4-CPFSK	4-CPFSK	16-DEQAM	D8PSK	$\pi/4$ -DQPSK	16-DEQAM
Data Rate	5.21 kbit/s	10.42 kbit/s	17.36 kbit/s	13.02 kbit/s	8.68 kbit/s	34.72 kbit/s
Measured Peak Deviation	1.85 kHz	4.00 kHz	---	---	---	---
Measured 99% Occupied BW	4.08 kHz	8.60 kHz	4.86 kHz	4.90 kHz	4.93 kHz	9.93 kHz

Channel Spacing	12.5 kHz	12.5 kHz				
Emission Type	10K0G1DEN	10K0G1DDN				
Modulation	D8PSK	$\pi/4$ -DQPSK				
Data Rate	26.04 kbit/s	17.36 kbit/s				
Measured Peak Deviation	---	---				
Measured 99% Occupied BW	9.82 kHz	9.83 kHz				

TEST EQUIPMENT USED: 10276; 900000611; 900000609; 10173

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 10 W

Test signal: 4-CPFSK 5.21kbps; Random bit sequence

1.4.18. TRANSMITTER OCCUPIED BANDWIDTH (4-CPFSK, 10.0 W, 6.25 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 41)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30 + 16.67 \cdot (f_d - 3\text{kHz})$ or $55 + 10 \cdot \log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55 + 10 \cdot \log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27 \cdot (f_d - 2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50 + 10 \cdot \log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83 \cdot \log_{10}(f_d/5)$	$5 < f_o < 10$
	$29 \cdot \log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43 + 10 \cdot \log_{10}(P)$	$250\%Bw < f_o$
	<i>Note: P is output power in W; f_d displacement frequency in kHz</i>	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 2.0 W

Test signal: 16-DEQAM 17.36kbps; Random bit sequence

1.4.19. TRANSMITTER OCCUPIED BANDWIDTH (16-DEQAM, 2.0 W, 6.25 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 42)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30 + 16.67 \cdot (f_d - 3\text{kHz})$ or $55 + 10 \cdot \log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55 + 10 \cdot \log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27 \cdot (f_d - 2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50 + 10 \cdot \log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83 \cdot \log_{10}(f_d/5)$	$5 < f_o < 10$
	$29 \cdot \log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43 + 10 \cdot \log_{10}(P)$	$250\%Bw < f_o$
	Note: P is output power in W; f_d displacement frequency in kHz	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 2.0 W

Test signal: D8PSK 13.02kbps; Random bit sequence

1.4.20. TRANSMITTER OCCUPIED BANDWIDTH (D8PSK, 2.0 W, 6.25 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 43)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30 + 16.67 \cdot (f_d - 3\text{kHz})$ or $55 + 10 \cdot \log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55 + 10 \cdot \log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27 \cdot (f_d - 2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50 + 10 \cdot \log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83 \cdot \log_{10}(f_d/5)$	$5 < f_o < 10$
	$29 \cdot \log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43 + 10 \cdot \log_{10}(P)$	$250\%Bw < f_o$
	<i>Note: P is output power in W; f_d displacement frequency in kHz</i>	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 2.0 W

Test signal: $\pi/4$ -DQPSK 8.68kbps; Random bit sequence

1.4.21. TRANSMITTER OCCUPIED BANDWIDTH ($\pi/4$ -DQPSK, 2.0 W, 6.25 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 44)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30+16.67*(f_d-3\text{kHz})$ or $55+10*\log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55+10*\log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27*(f_d-2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50+10*\log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83*\log_{10}(f_d/5)$	$5 < f_o < 10$
	$29*\log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43+10*\log_{10}(P)$	$250\%Bw < f_o$
	<i>Note: P is output power in W; f_d displacement frequency in kHz</i>	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 10.0 W

Test signal: 4-CPFSK 10.42kbps; Random bit sequence

1.4.22. TRANSMITTER OCCUPIED BANDWIDTH (4-CPFSK, 10.0 W, 12.5 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 45)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30 + 16.67 \cdot (f_d - 3\text{kHz})$ or $55 + 10 \cdot \log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55 + 10 \cdot \log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27 \cdot (f_d - 2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50 + 10 \cdot \log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83 \cdot \log_{10}(f_d/5)$	$5 < f_o < 10$
	$29 \cdot \log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43 + 10 \cdot \log_{10}(P)$	$250\%Bw < f_o$
	<i>Note: P is output power in W; f_d displacement frequency in kHz</i>	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 2.0 W

Test signal: 16-DEQAM 34.72kbps; Random bit sequence

1.4.23. TRANSMITTER OCCUPIED BANDWIDTH (16-DEQAM, 2.0 W, 12.5 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 46)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30+16.67*(f_d-3\text{kHz})$ or $55+10*\log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55+10*\log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27*(f_d-2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50+10*\log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83*\log_{10}(f_d/5)$	$5 < f_o < 10$
	$29*\log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43+10*\log_{10}(P)$	$250\%Bw < f_o$
	<i>Note: P is output power in W; f_d displacement frequency in kHz</i>	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 2.0 W

Test signal: D8PSK 26.04kbps; Random bit sequence

1.4.24. TRANSMITTER OCCUPIED BANDWIDTH (D8PSK, 2.0 W, 12.5 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 47)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30 + 16.67 \cdot (f_d - 3\text{kHz})$ or $55 + 10 \cdot \log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55 + 10 \cdot \log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27 \cdot (f_d - 2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50 + 10 \cdot \log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83 \cdot \log_{10}(f_d/5)$	$5 < f_o < 10$
	$29 \cdot \log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43 + 10 \cdot \log_{10}(P)$	$250\%Bw < f_o$
	<i>Note: P is output power in W; f_d displacement frequency in kHz</i>	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

Ambient temperature: (22±1) °C

Relative humidity: (53±10) %

Rated output power: 2.0 W

Test signal: $\pi/4$ -DQPSK 17.36kbps; Random bit sequence

1.4.25. TRANSMITTER OCCUPIED BANDWIDTH ($\pi/4$ -DQPSK, 2.0 W, 12,5 kHz)

RULE PART NUMBER: 2.1049, 90.210

TEST METHOD: TIA-603-D; 3.2.11

TEST RESULTS: Meets minimum standards (See chapter 4, GRAPH 48)

LIMIT:

	Attenuator [dB]	Frequency offset [kHz]
Mask E	0.0 dB	$f_o < 3$
	$30+16.67*(f_d-3\text{kHz})$ or $55+10*\log_{10}(P)$ or 65	$3 < f_o < 4.6$
	$55+10*\log_{10}(P)$ or 65	$f_o > 4.6$
Mask D	0.0 dB	$f_o < 5.625$
	$7.27*(f_d-2.88\text{kHz})$	$5.625 < f_o < 12.5$
	$50+10*\log_{10}(P)$ or 70	$f_o > 12.5$
Mask C	0.0 dB	$f_o < 5$
	$83*\log_{10}(f_d/5)$	$5 < f_o < 10$
	$29*\log_{10}(f_d^2/11)$ or 50	$10 < f_o < 250\%Bw$
	$43+10*\log_{10}(P)$	$250\%Bw < f_o$
	<i>Note: P is output power in W; f_d displacement frequency in kHz</i>	

TEST EQUIPMENT USED: 10276; 900000611; 900000609

REMARKS: - -

1.5 Summary of Test Results

P = Complied with the requirements of the specification for this test
U = The results were within measurement uncertainties
F = Not complied with the requirements of the specification for this test
N/A = Not applicable

Unit No. 1 (154.0125 MHz)

RF POWER OUTPUT AT TERMINALS	P
FREQUENCY STABILITY WITH PRIMARY VOLTAGE VARIATION.....	P
TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS	P
TRANSMITTER UNWANTED EMISSIONS: RADIATED SPURIOUS	P
TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER	P
TRANSMITTER OCCUPIED BANDWIDTH	P
TRANSMITTER OCCUPIED BANDWIDTH FOR EMISSION DESIGNATORS.....	P

Unit No. 1 (164.0250 MHz)

RF POWER OUTPUT AT TERMINALS	P
FREQUENCY STABILITY WITH PRIMARY VOLTAGE VARIATION.....	P
TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS	P
TRANSMITTER UNWANTED EMISSIONS: RADIATED SPURIOUS	P
TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER	P
TRANSMITTER OCCUPIED BANDWIDTH	P
TRANSMITTER OCCUPIED BANDWIDTH FOR EMISSION DESIGNATORS.....	P

Unit No. 1 (173.9875 MHz)

RF POWER OUTPUT AT TERMINALS P

FREQUENCY STABILITY WITH PRIMARY VOLTAGE VARIATION..... P

TRANSMITTER UNWANTED EMISSIONS: CONDUCTED SPURIOUS P

TRANSMITTER UNWANTED EMISSIONS: RADIATED SPURIOUS P

TRANSIENT FREQUENCY BEHAVIOR OF TRANSMITTER P

TRANSMITTER OCCUPIED BANDWIDTH P

TRANSMITTER OCCUPIED BANDWIDTH FOR EMISSION DESIGNATORS..... P

2. Test Equipment

[illegible]

3. Additional Information

The reference level of the spectral mask is adjusted by the Agilent E4446A analyzer (i.d.10276) itself on the basis of its internal measurement procedure.

4. Graphs



List of graphs:

GRAPH 1: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON	90
GRAPH 2: Transient behaviour, carrier frequency as a function of time, CH 1, switch OFF	91
GRAPH 3: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON	92
GRAPH 4: Transient behaviour, carrier frequency as a function of time, CH 1, switch OFF	93
GRAPH 5: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON	94
GRAPH 6: Transient behaviour, carrier frequency as a function of time, CH 1, switch OFF	95
GRAPH 7: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON	96
GRAPH 8: Transient behaviour, carrier frequency as a function of time, CH 1, switch OFF	97
GRAPH 9: Spectrum for Emission 6.25 kHz 4-CPFSK	98
GRAPH 10: Spectrum for Emission 6.25 kHz 16-DEQAM	98
GRAPH 11: Spectrum for Emission 6.25 kHz D8PSK.....	99
GRAPH 12: Spectrum for Emission 6.25 kHz $\pi/4$ -DQPSK	99
GRAPH 13: Spectrum for Emission 12.5 kHz 4-CPFSK	100
GRAPH 14: Spectrum for Emission 12.5 kHz 16-DEQAM	100
GRAPH 15: Spectrum for Emission 12.5 kHz D8PSK.....	101
GRAPH 16: Spectrum for Emission 12.5 kHz $\pi/4$ -DQPSK	101
GRAPH 17: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON	102
GRAPH 18: Transient behaviour, carrier frequency as a function of time, CH 1, switch OFF	103
GRAPH 19: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON	104
GRAPH 20: Transient behaviour, carrier frequency as a function of time, CH 1, switch OFF	105
GRAPH 21: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON	106
GRAPH 22: Transient behaviour, carrier frequency as a function of time, CH 1, switch OFF	107
GRAPH 23: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON	108
GRAPH 24: Transient behaviour, carrier frequency as a function of time, CH 1, switch OFF	109
GRAPH 25: Spectrum for Emission 6.25 kHz 4-CPFSK	110
GRAPH 26: Spectrum for Emission 6.25 kHz 16-DEQAM	110
GRAPH 27: Spectrum for Emission 6.25 kHz D8PSK.....	111
GRAPH 28: Spectrum for Emission 6.25 kHz $\pi/4$ -DQPSK	111
GRAPH 29: Spectrum for Emission 12.5 kHz 4-CPFSK	112
GRAPH 30: Spectrum for Emission 12.5 kHz 16-DEQAM	112
GRAPH 31: Spectrum for Emission 12.5 kHz D8PSK.....	113
GRAPH 32: Spectrum for Emission 12.5 kHz $\pi/4$ -DQPSK	113
GRAPH 33: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON	114
GRAPH 34: Transient behaviour, carrier frequency as a function of time, CH 1, switch OFF	115
GRAPH 35: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON	116

GRAPH 36: Transient behaviour, carrier frequency as a function of time, CH 1, switch OFF	117
GRAPH 37: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON	118
GRAPH 38: Transient behaviour, carrier frequency as a function of time, CH 1, switch OFF	119
GRAPH 39: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON	120
GRAPH 40: Transient behaviour, carrier frequency as a function of time, CH 1, switch OFF	121
GRAPH 41: Spectrum for Emission 6.25 kHz 4-CPFSK	122
GRAPH 42: Spectrum for Emission 6.25 kHz 16-DEQAM	122
GRAPH 43: Spectrum for Emission 6.25 kHz D8PSK.....	123
GRAPH 44: Spectrum for Emission 6.25 kHz $\pi/4$ -DQPSK	123
GRAPH 45: Spectrum for Emission 12.5 kHz 4-CPFSK	124
GRAPH 46: Spectrum for Emission 12.5 kHz 16-DEQAM	124
GRAPH 47: Spectrum for Emission 12.5 kHz D8PSK.....	125
GRAPH 48: Spectrum for Emission 12.5 kHz $\pi/4$ -DQPSK	125

4.1 Graphs – 154.0125 MHz

GRAPH 1: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON

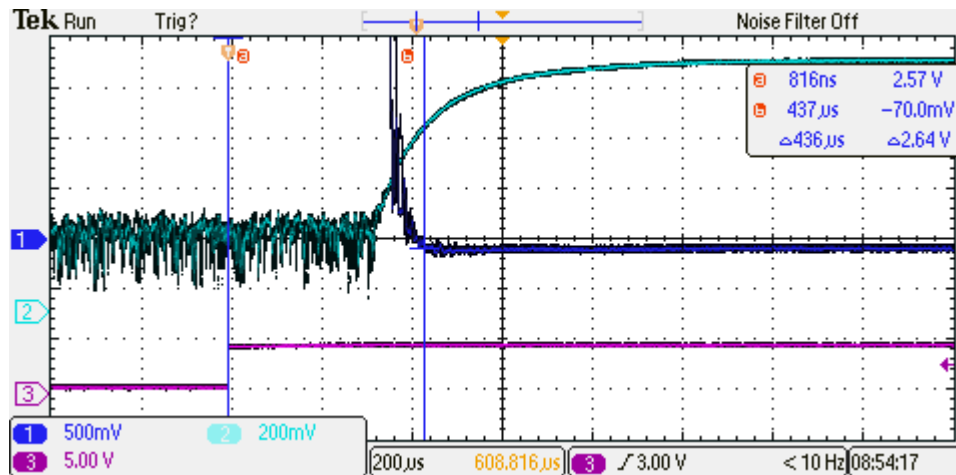
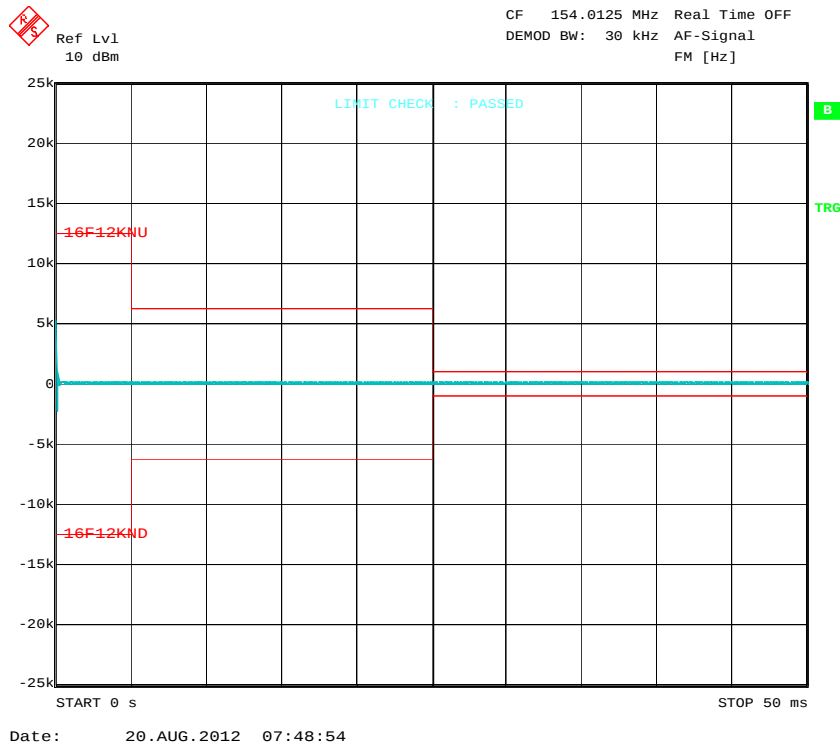


blue – power as a function of time (90 mV/10dB)

dark blue – frequency as a function of time (200mV/1kHz)

violet – PTT

GRAPH 2: Transient behaviour, carrier frequency as a function of time, CH 1, switch OFF

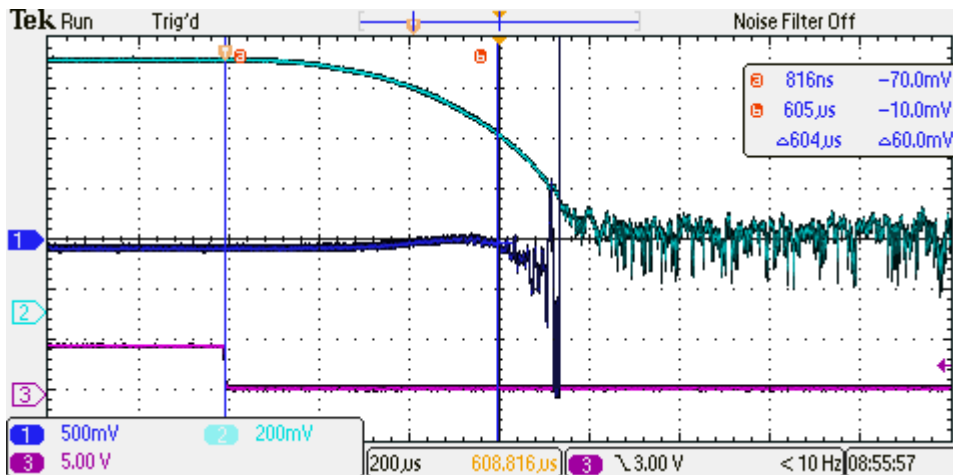
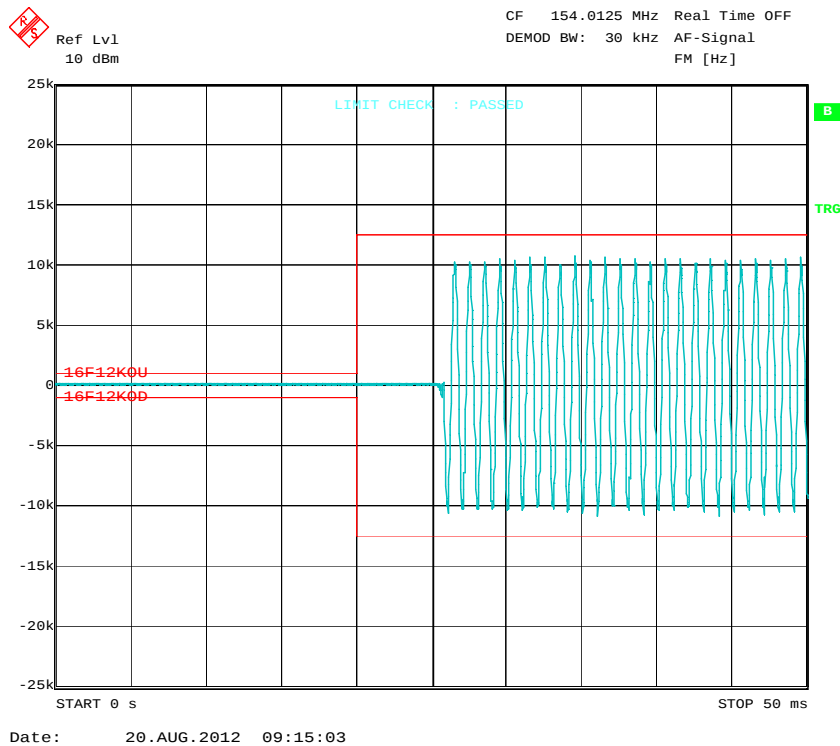


blue – power as a function of time (90 mV/10dB)

dark blue – frequency as a function of time (200mV/1kHz)

violet – PTT

GRAPH 3: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON

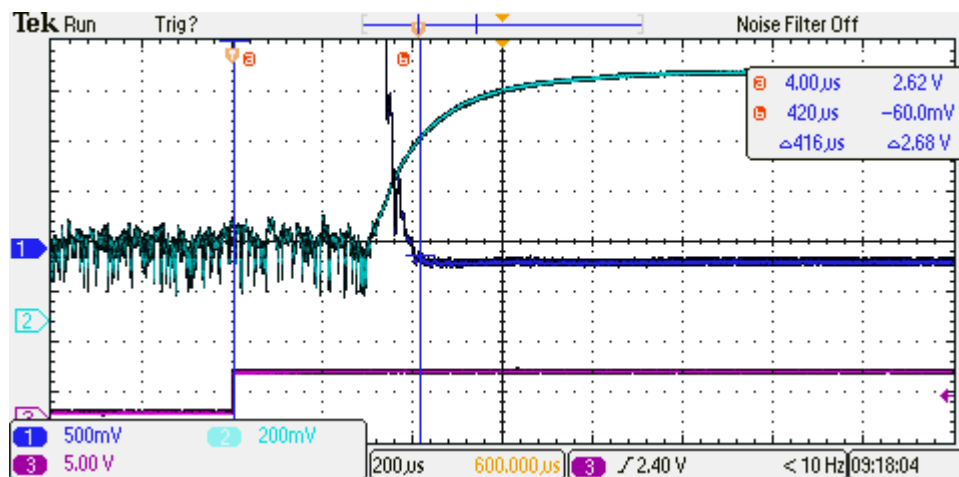
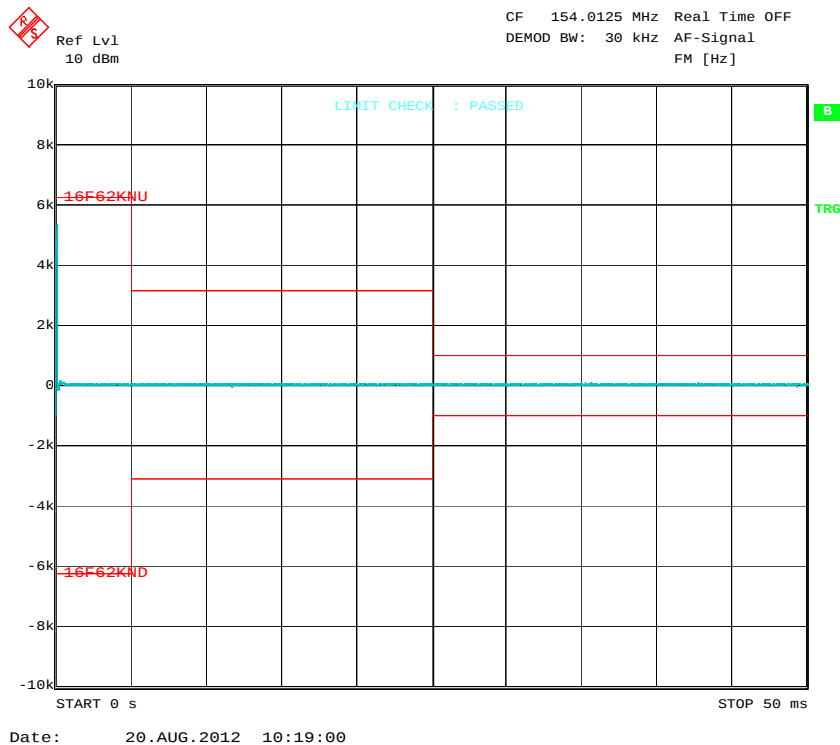


blue – power as a function of time (90 mV/10dB)

dark blue – frequency as a function of time (200mV/1kHz)

violet – PTT

GRAPH 4: Transient behaviour, carrier frequency as a function of time, CH 1, switch OFF

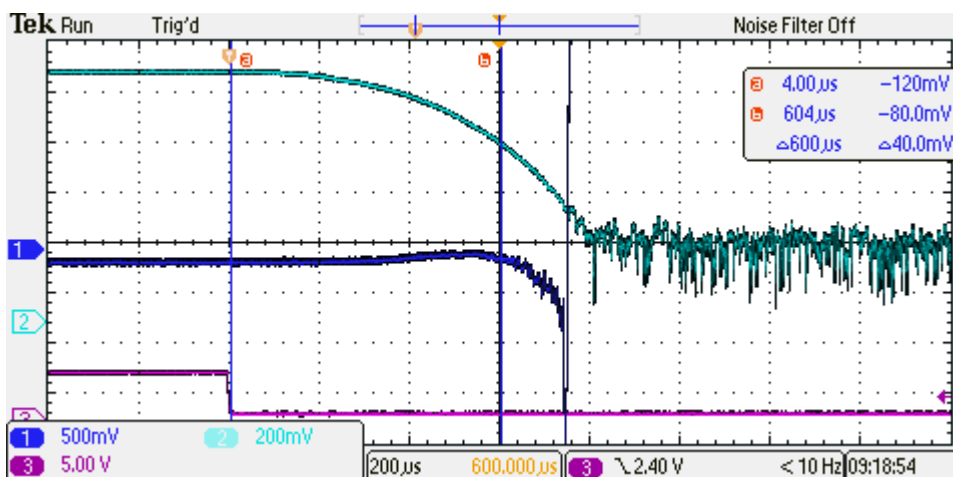
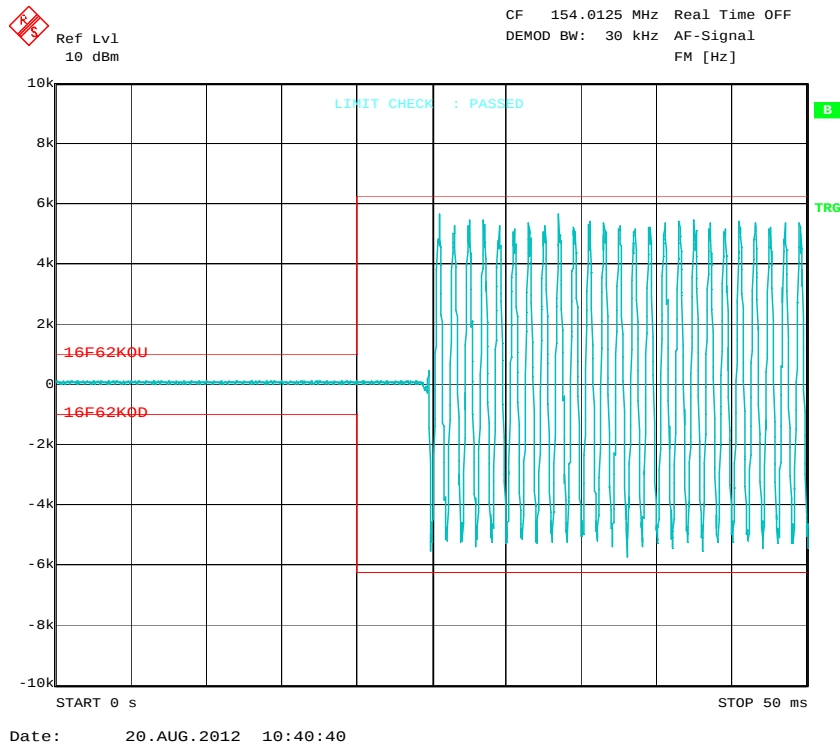


blue – power as a function of time (90 mV/10dB)

dark blue – frequency as a function of time (200mV/1kHz)



violet – PTT

GRAPH 5: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON

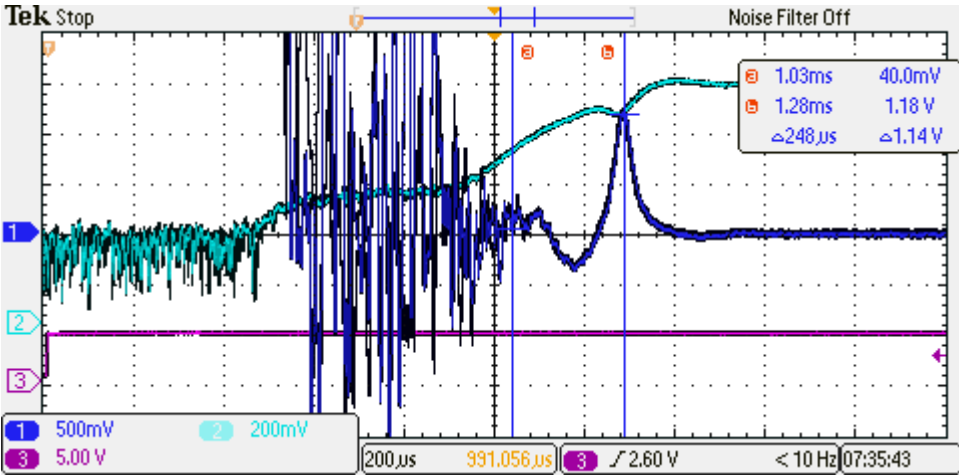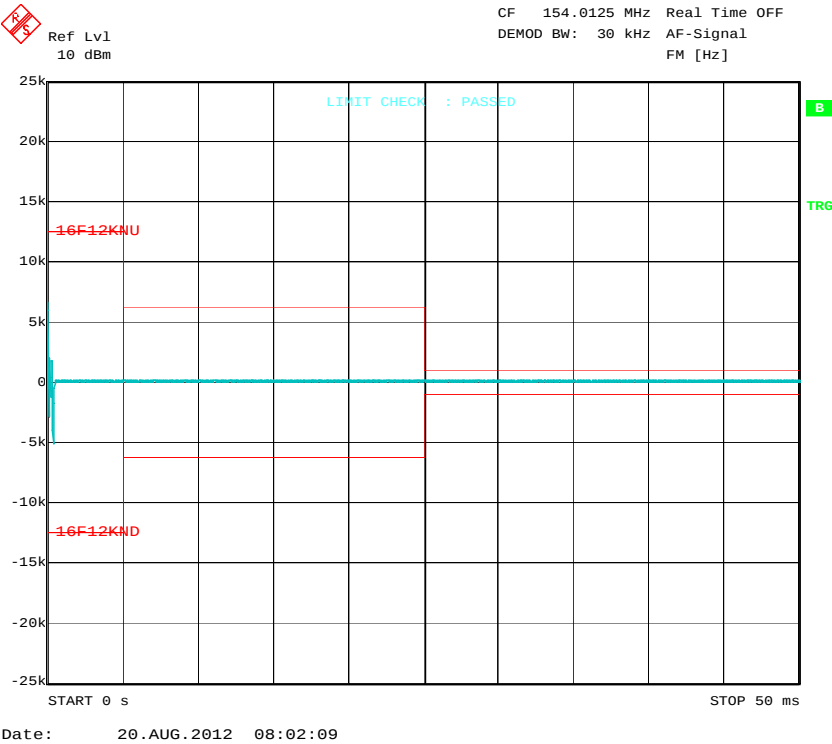

blue – power as a function of time (90 mV/10dB)
dark blue – frequency as a function of time (200mV/1kHz)
violet – PTT

GRAPH 6: Transient behaviour, carrier frequency as a function of time, CH 1, switch OFF

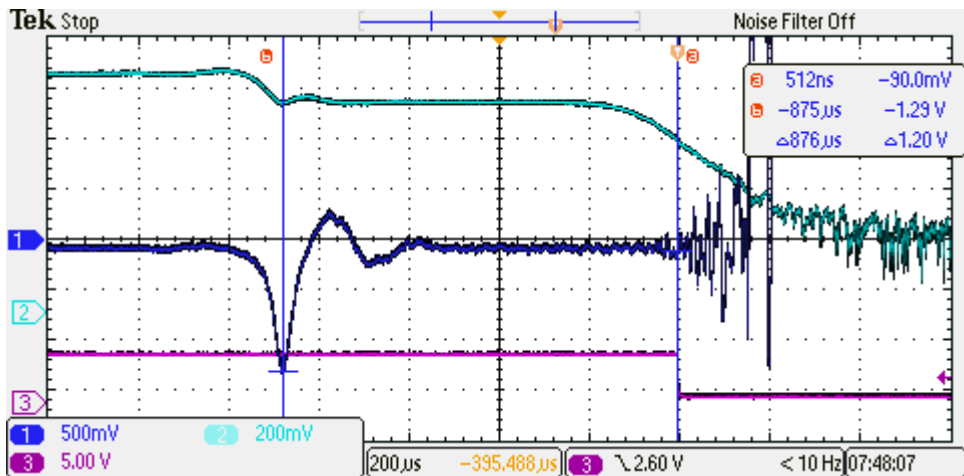
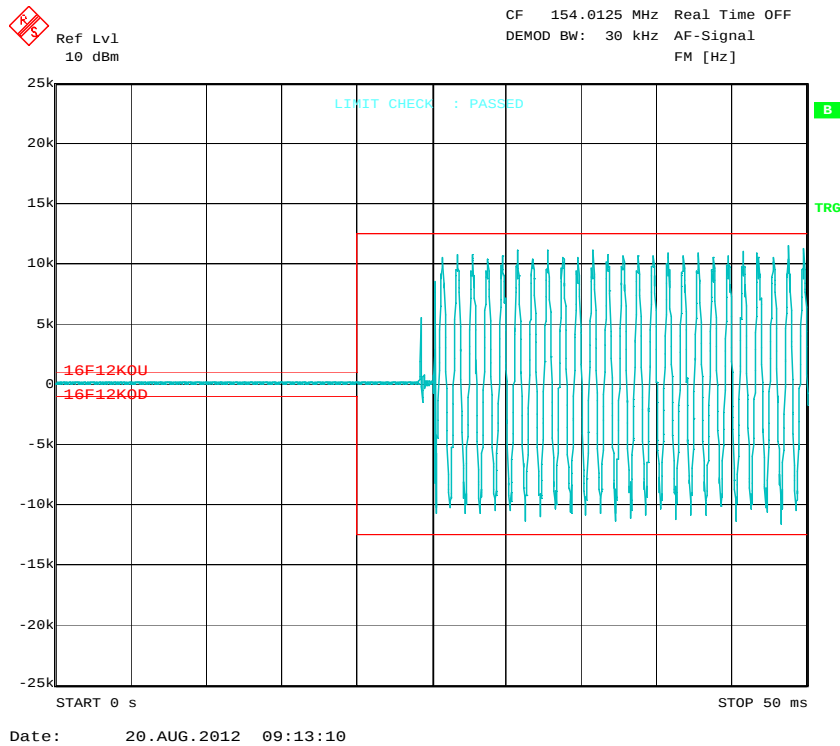


blue – power as a function of time (90 mV/10dB)

dark blue – frequency as a function of time (200mV/1kHz)

violet – PTT

GRAPH 7: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON

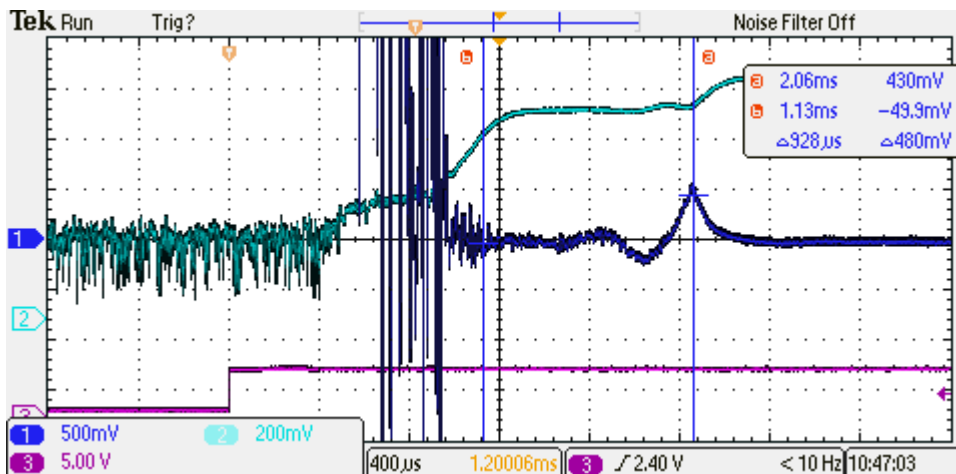
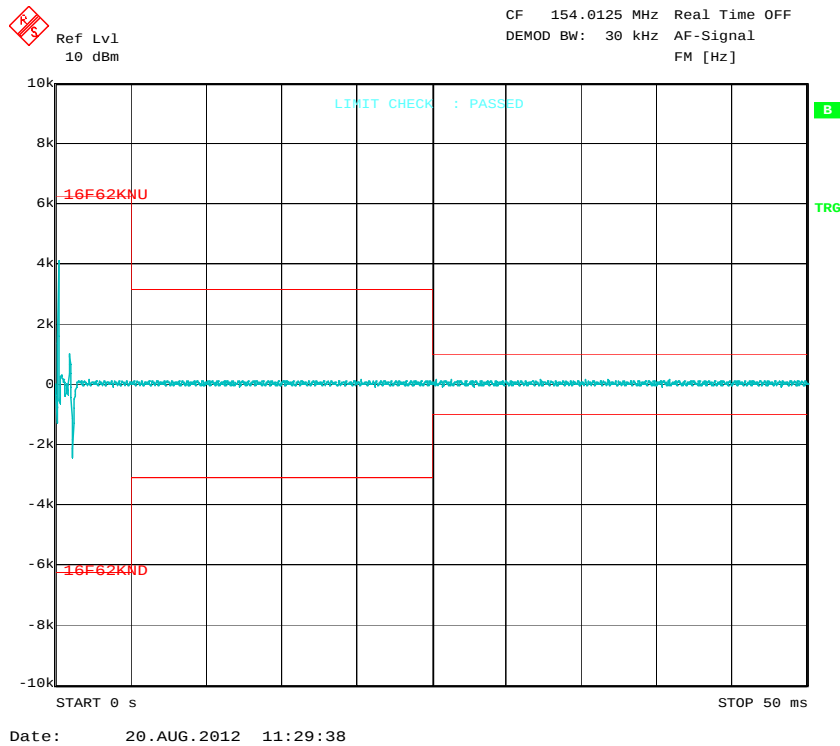


blue – power as a function of time (90 mV/10dB)

dark blue – frequency as a function of time (200mV/1kHz)

violet – PTT

GRAPH 8: Transient behaviour, carrier frequency as a function of time, CH 1, switch OFF

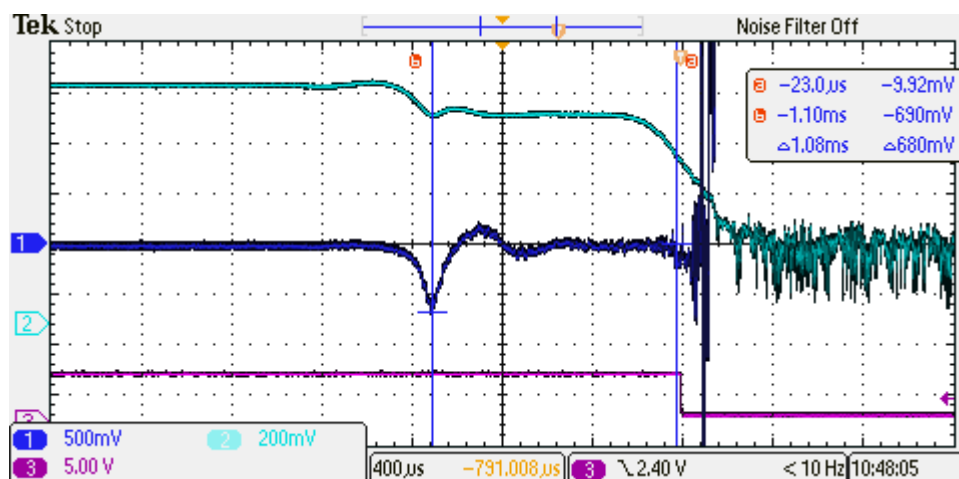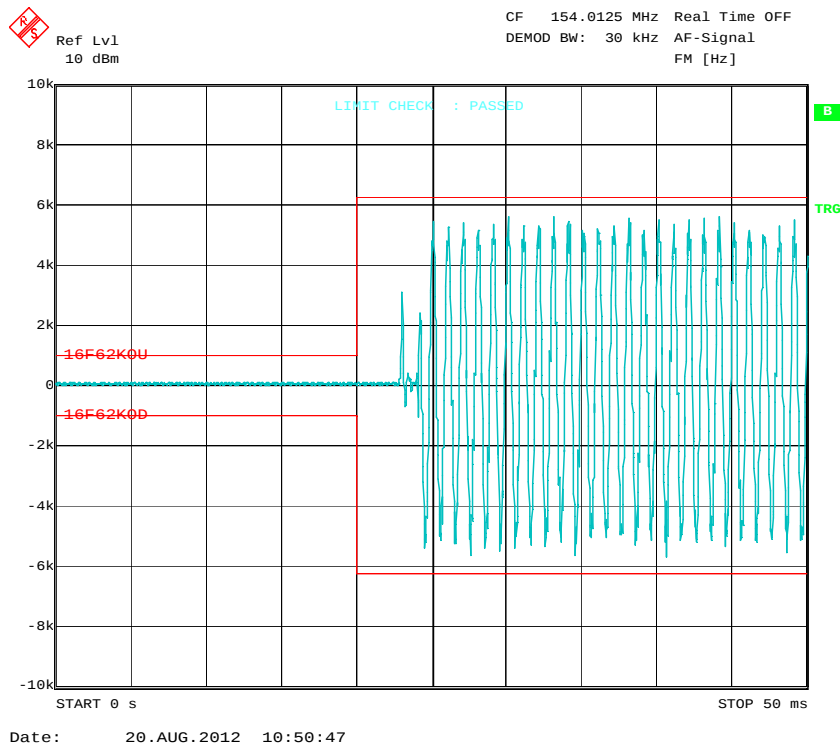

blue – power as a function of time (90 mV/10dB)


dark blue – frequency as a function of time (200mV/1kHz)

violet – PTT

GRAPH 9: Spectrum for Emission 6.25 kHz 4-CPFSK

The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.


✱ Agilent 10:43:57 13 Aug 2012

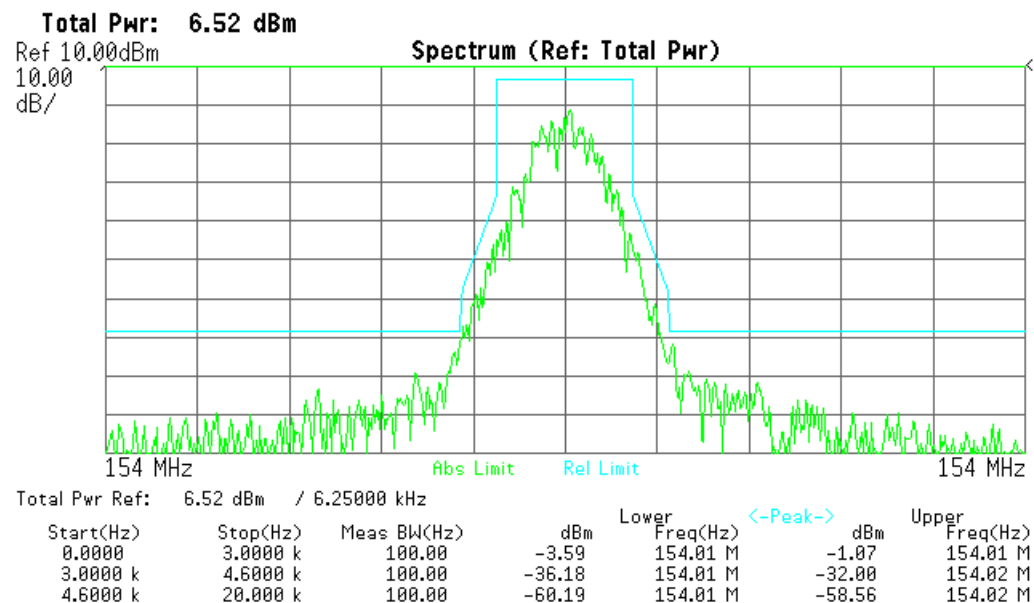

GRAPH 10: Spectrum for Emission 6.25 kHz 16-DEQAM

The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.


✱ Agilent 11:09:52 13 Aug 2012

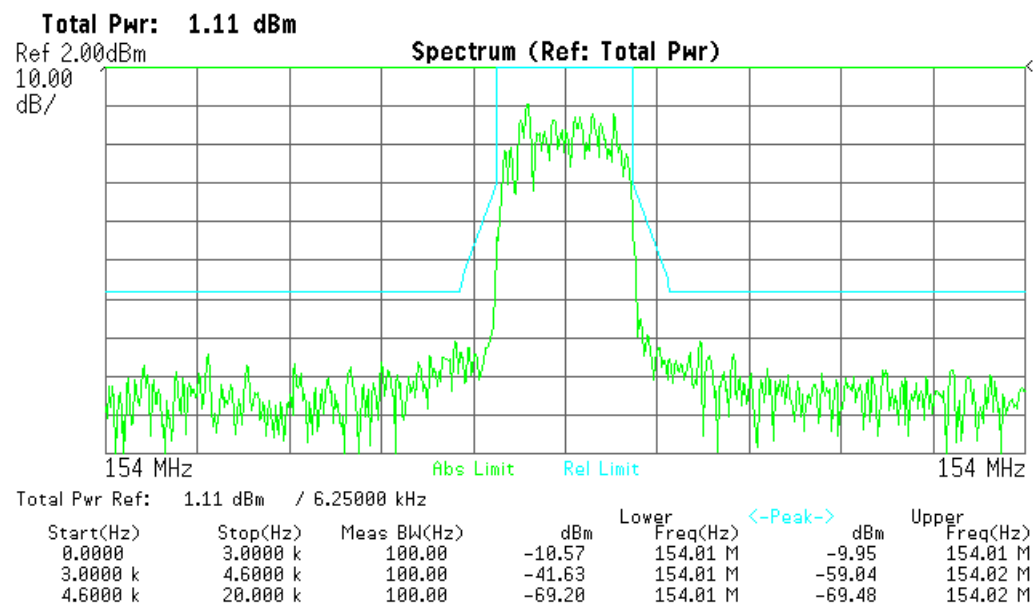

GRAPH 11: Spectrum for Emission 6.25 kHz D8PSK

The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.


✨ Agilent 11:07:15 13 Aug 2012

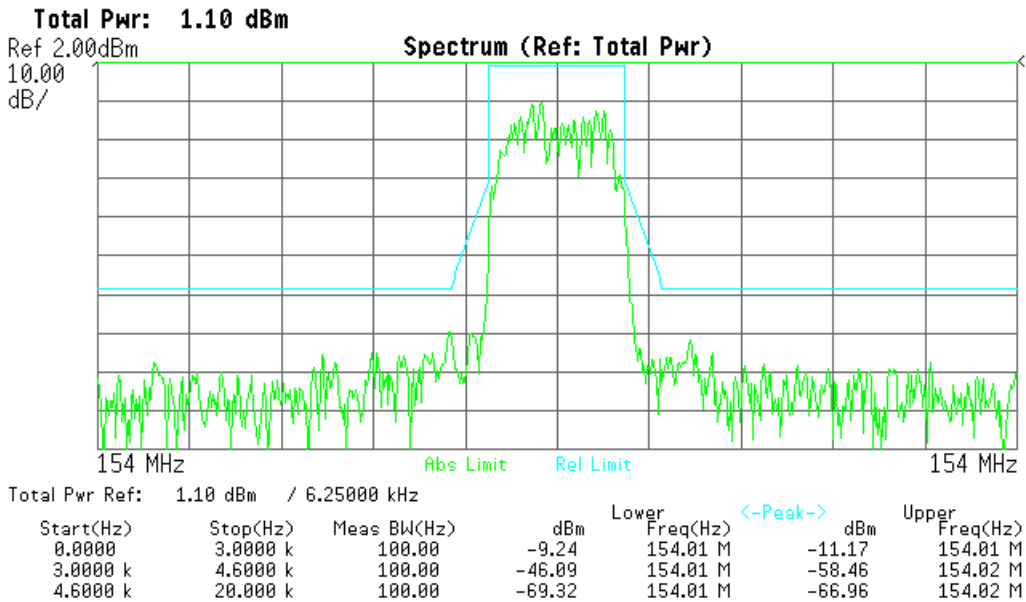

GRAPH 12: Spectrum for Emission 6.25 kHz $\pi/4$ -DQPSK

The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.


✨ Agilent 11:11:14 13 Aug 2012

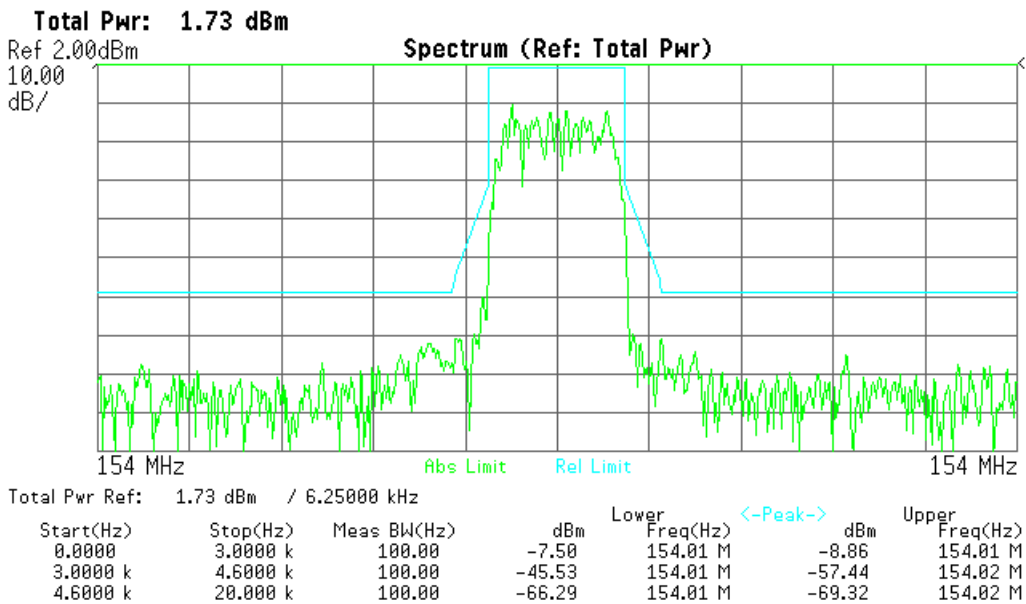

GRAPH 13: Spectrum for Emission 12.5 kHz 4-CPFSK

The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.


Agilent 13:19:37 13 Aug 2012

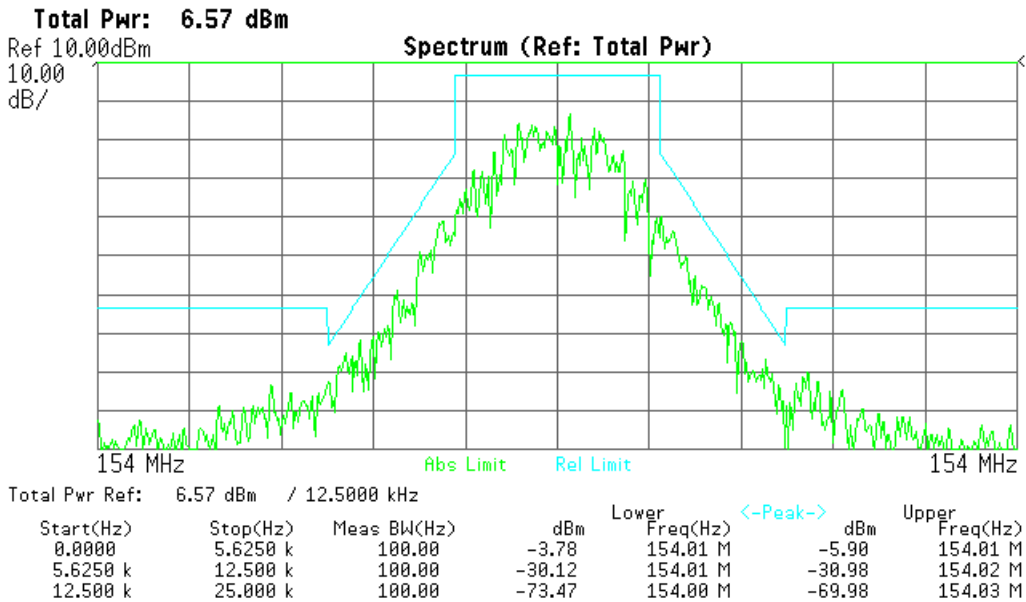

GRAPH 14: Spectrum for Emission 12.5 kHz 16-DEQAM

The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.


Agilent 13:08:10 13 Aug 2012

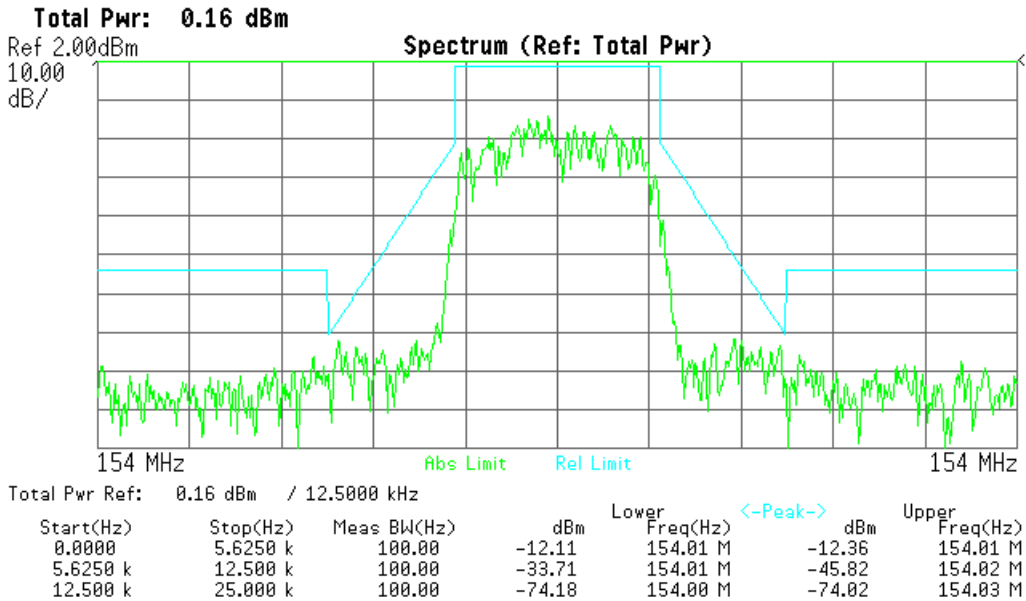

GRAPH 15: Spectrum for Emission 12.5 kHz D8PSK

The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.


Agilent 13:09:27 13 Aug 2012

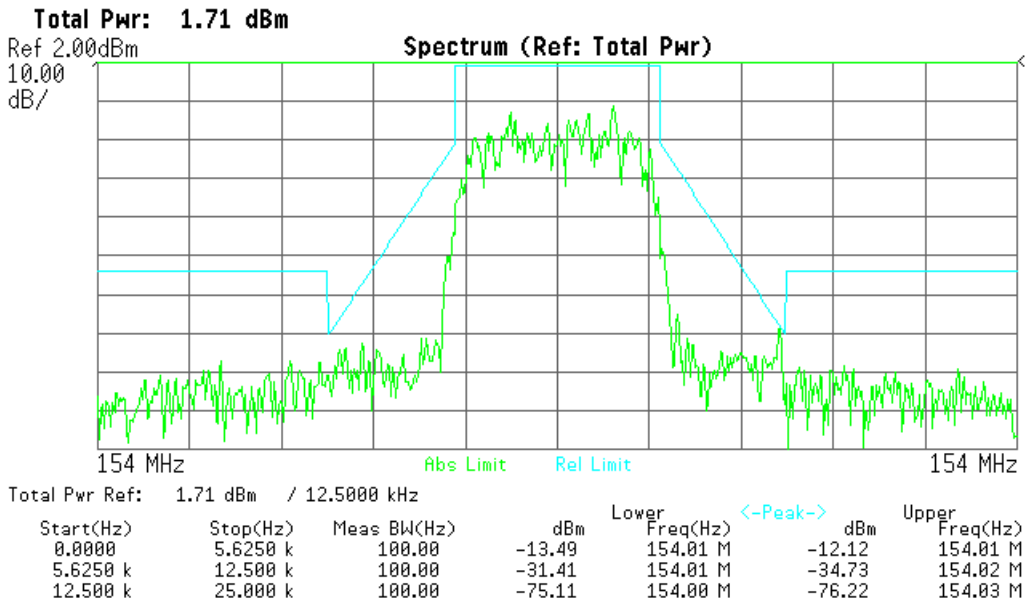

GRAPH 16: Spectrum for Emission 12.5 kHz $\pi/4$ -DQPSK



The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.

Agilent 13:11:31 13 Aug 2012

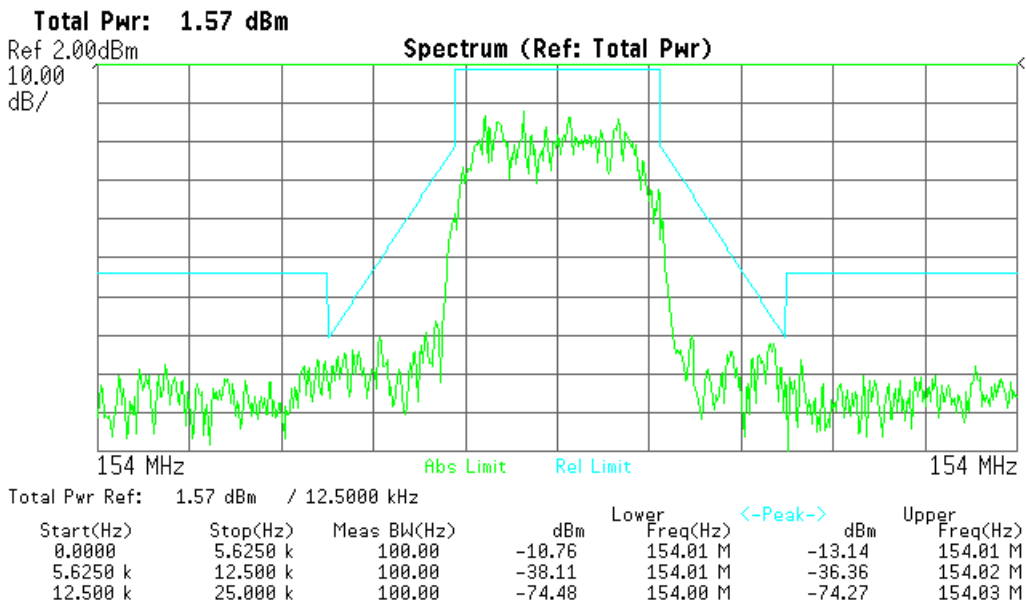

4.2 Graphs – 164.0125 MHz

GRAPH 17: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON

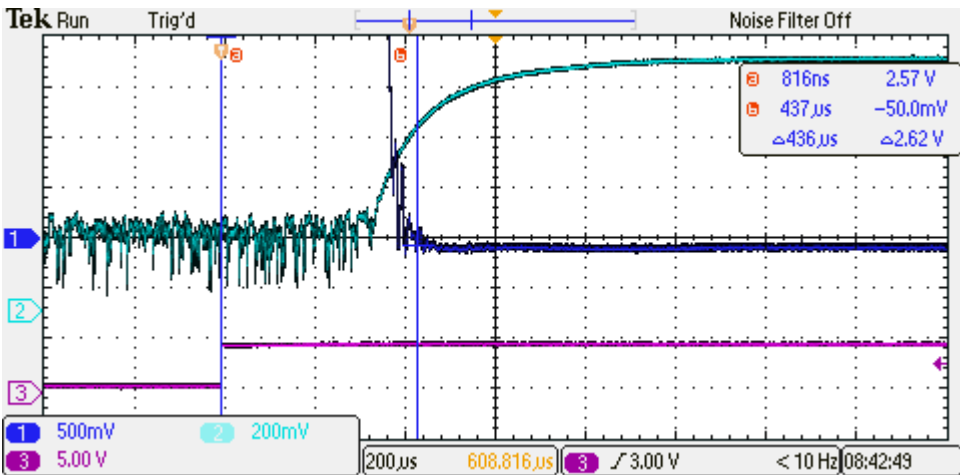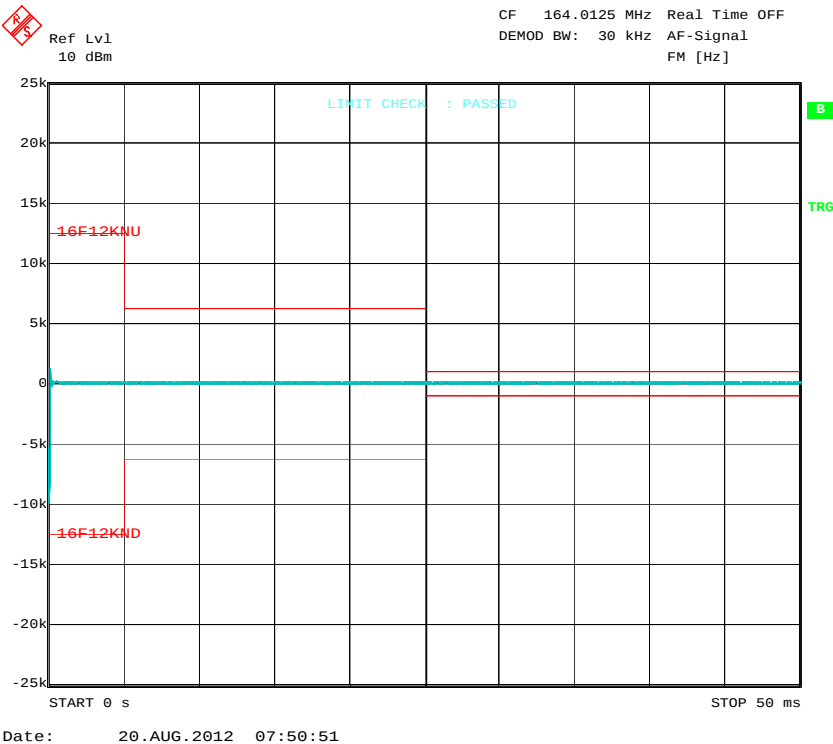

blue – power as a function of time (90 mV/10dB)

dark blue – frequency as a function of time (200mV/1kHz)

violet – PTT

CF 164.0125 MHz Real Time OFF
 DEMOD BW: 30 kHz AF-Signal
 FM [Hz]


Ref Lvl
 10 dBm

LIMIT CHECK : PASSED

16F12K0U
 16F12K0D

START 0 s STOP 50 ms



Date: 20.AUG.2012 07:34:09

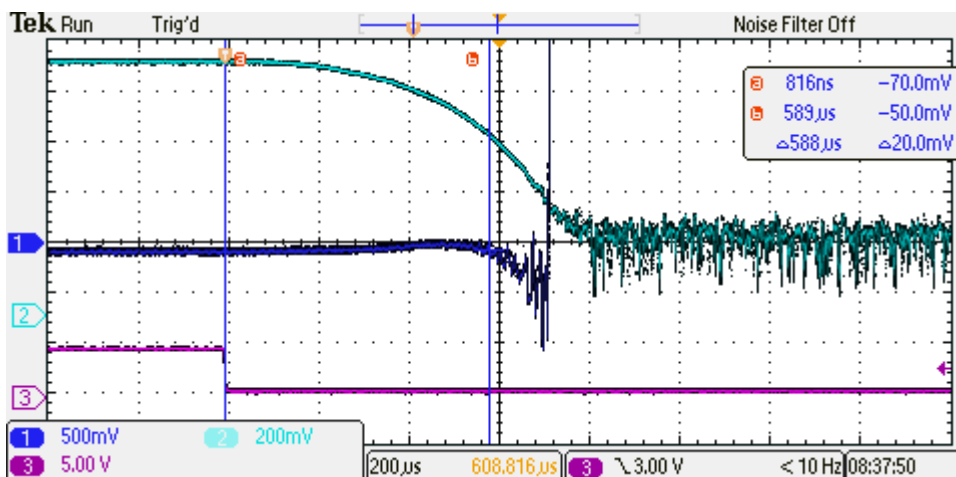

dark blue – frequency as a function of time (200mV/1kHz)



violet – PTT

GRAPH 19: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON

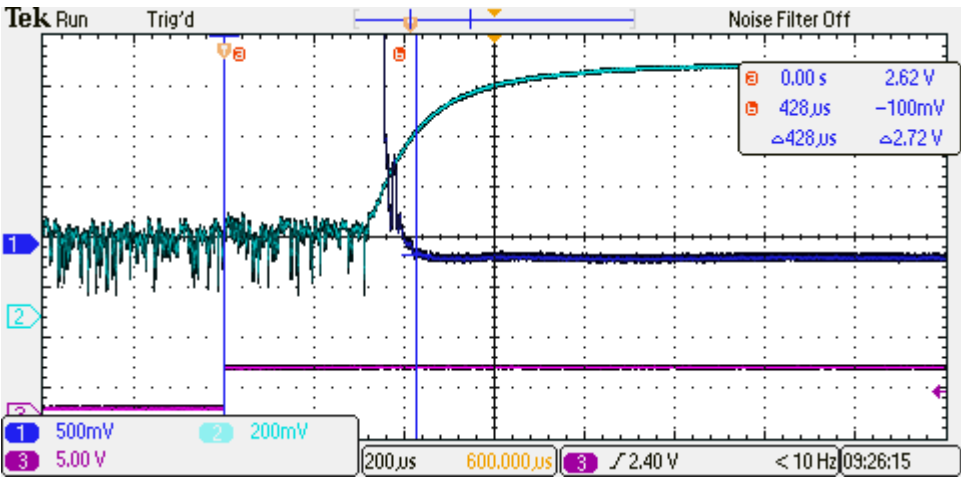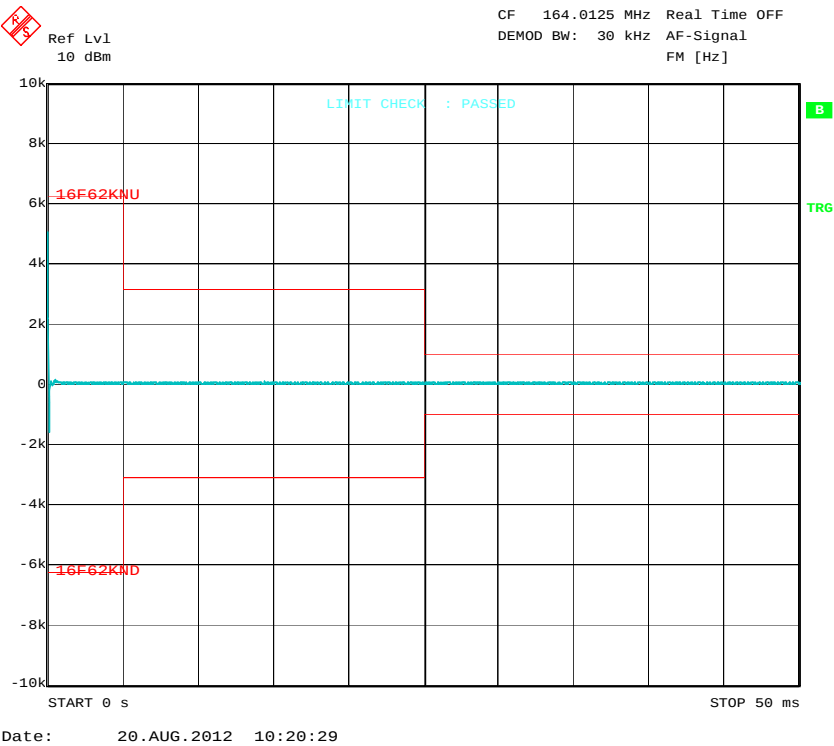

blue – power as a function of time (90 mV/10dB)
dark blue – frequency as a function of time (200mV/1kHz)
violet – PTT

GRAPH 20: Transient behaviour, carrier frequency as a function of time, CH 1, switch OFF

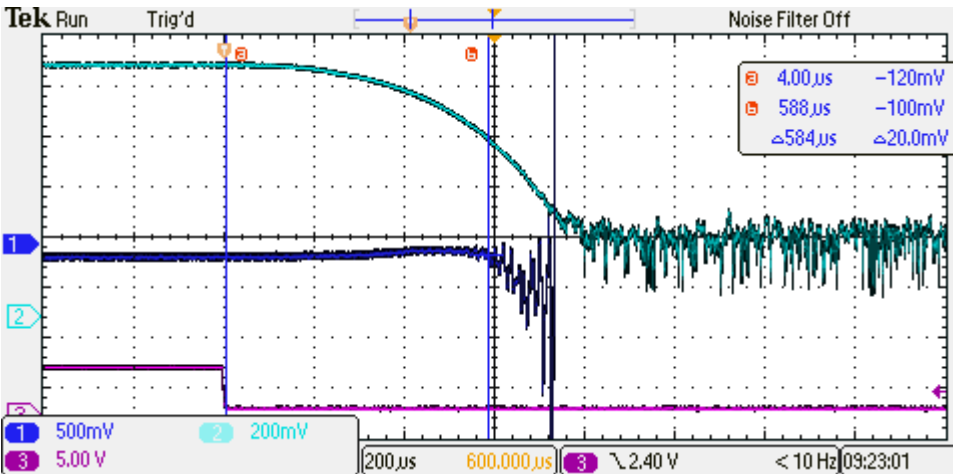
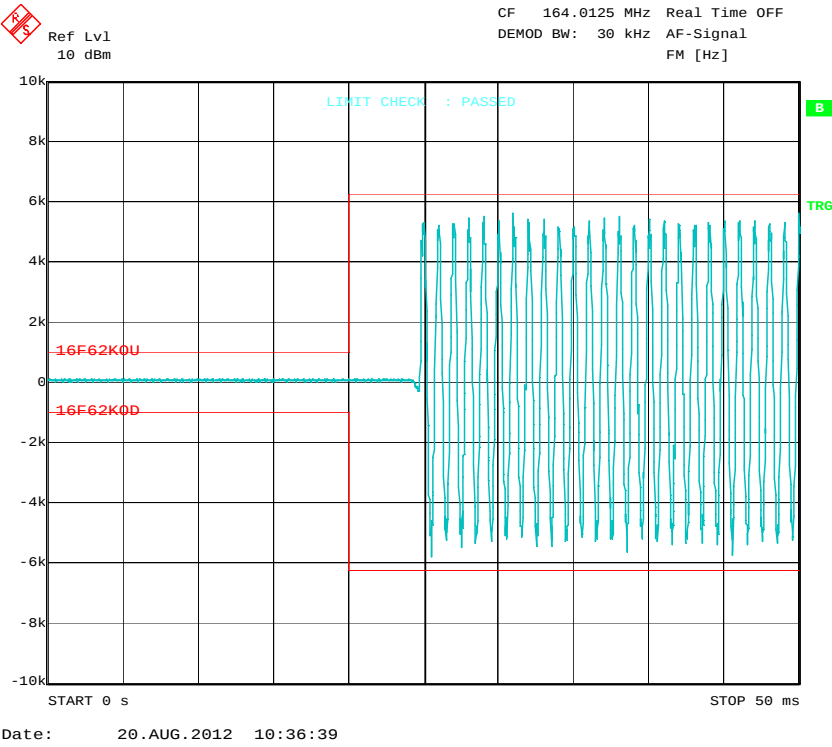


blue – power as a function of time (90 mV/10dB)

dark blue – frequency as a function of time (200mV/1kHz)

violet – PTT

GRAPH 21: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON

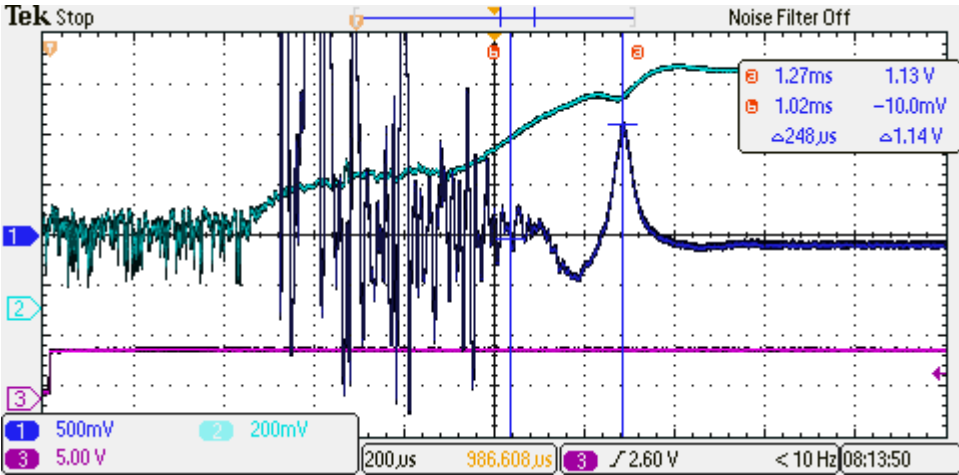
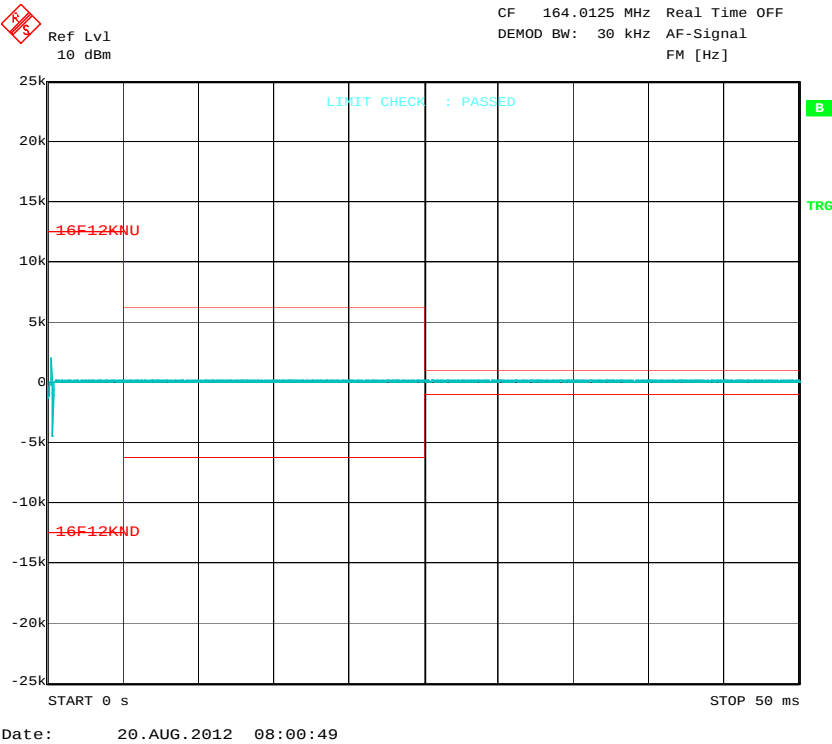


blue – power as a function of time (90 mV/10dB)

dark blue – frequency as a function of time (200mV/1kHz)

violet – PTT

GRAPH 22: Transient behaviour, carrier frequency as a function of time, CH 1, switch OFF

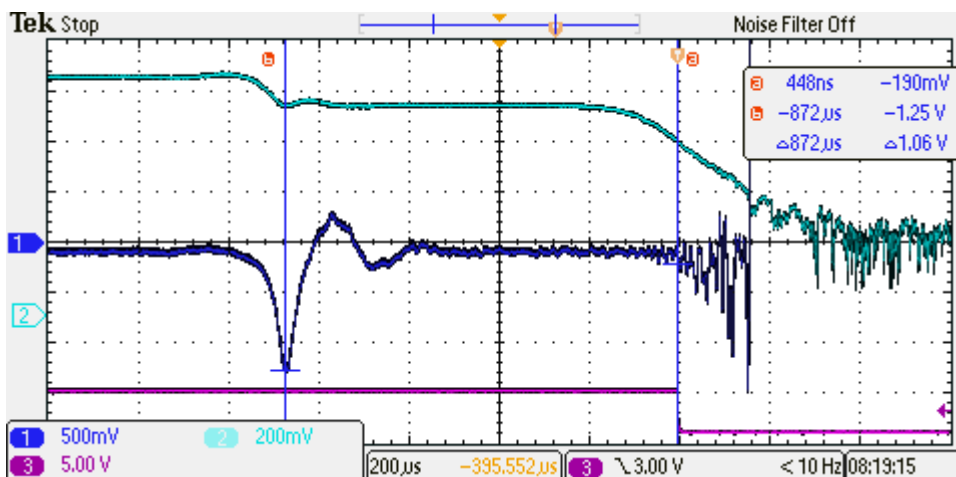
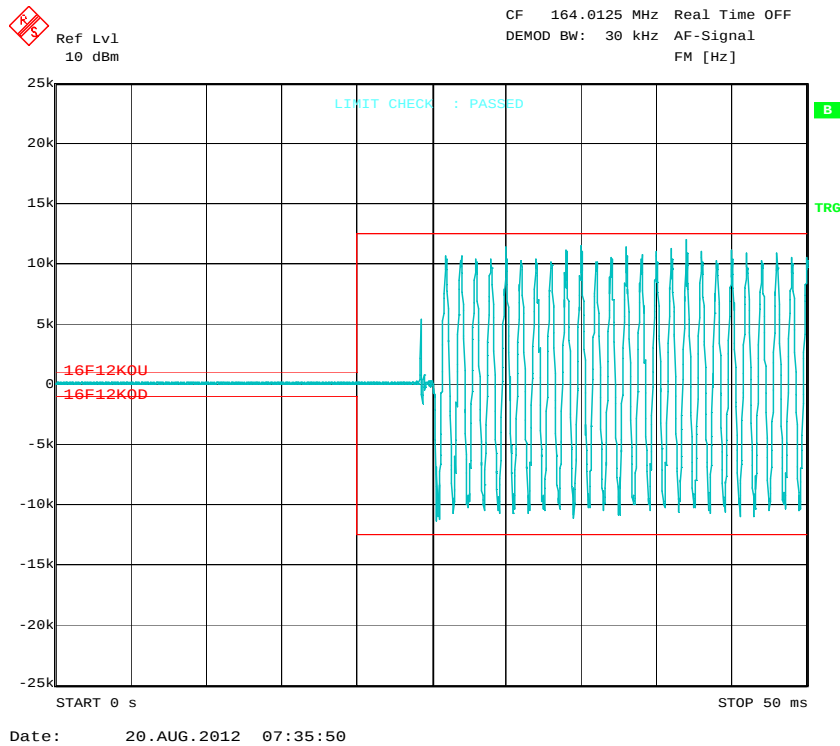


blue – power as a function of time (90 mV/10dB)

dark blue – frequency as a function of time (200mV/1kHz)

violet – PTT

GRAPH 23: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON

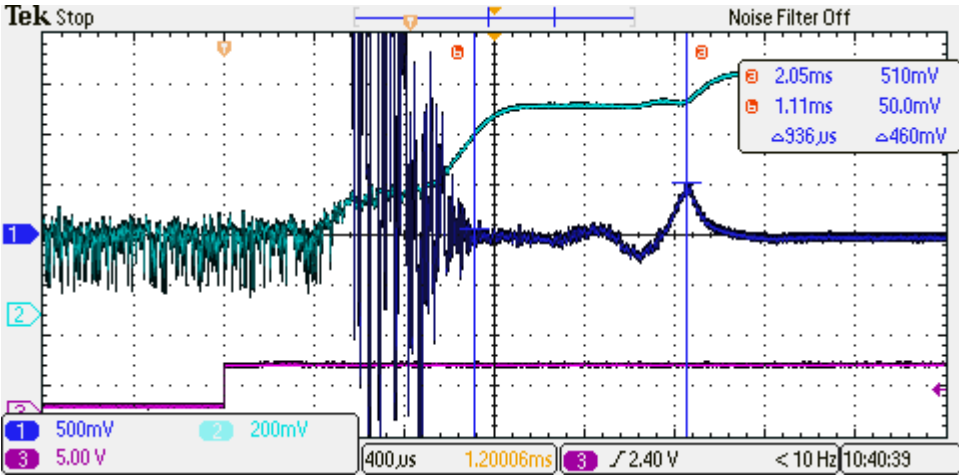
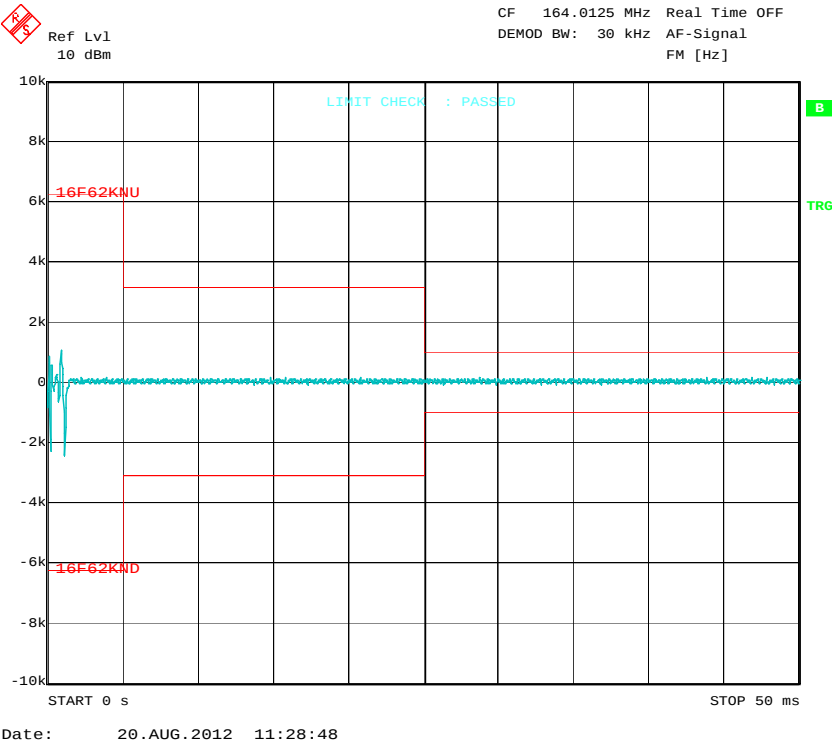


blue – power as a function of time (90 mV/10dB)

dark blue – frequency as a function of time (200mV/1kHz)

violet – PTT

GRAPH 24: Transient behaviour, carrier frequency as a function of time, CH 1, switch OFF

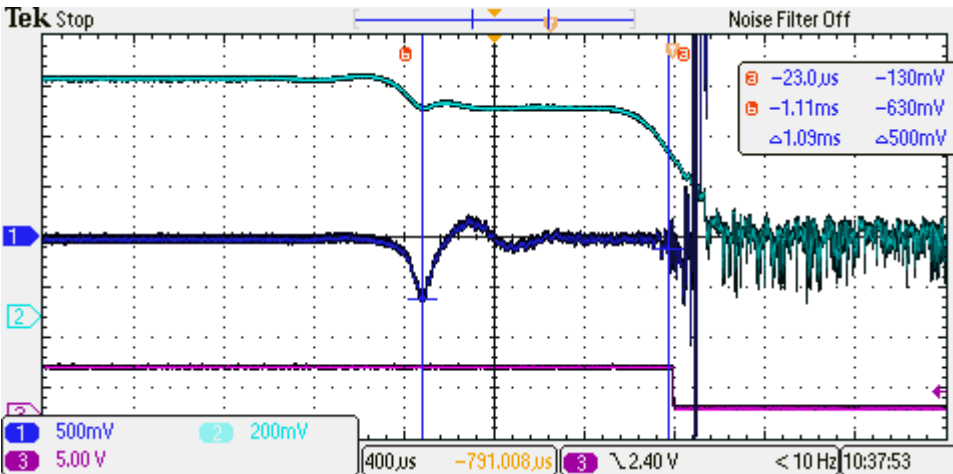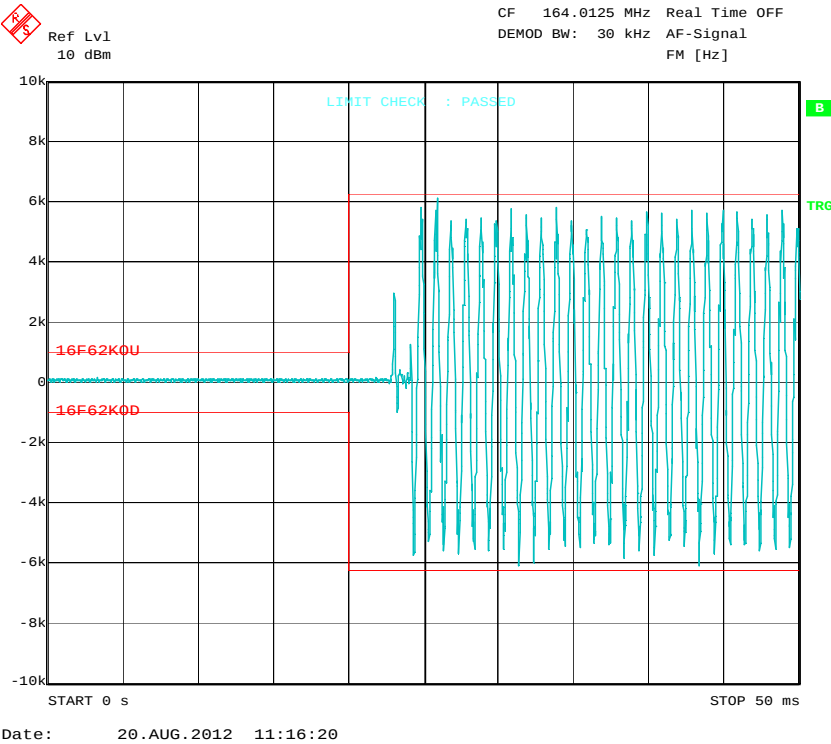

blue – power as a function of time (90 mV/10dB)


dark blue – frequency as a function of time (200mV/1kHz)

violet – PTT

GRAPH 25: Spectrum for Emission 6.25 kHz 4-CPFSK

The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.


✱ Agilent 10:34:54 13 Aug 2012

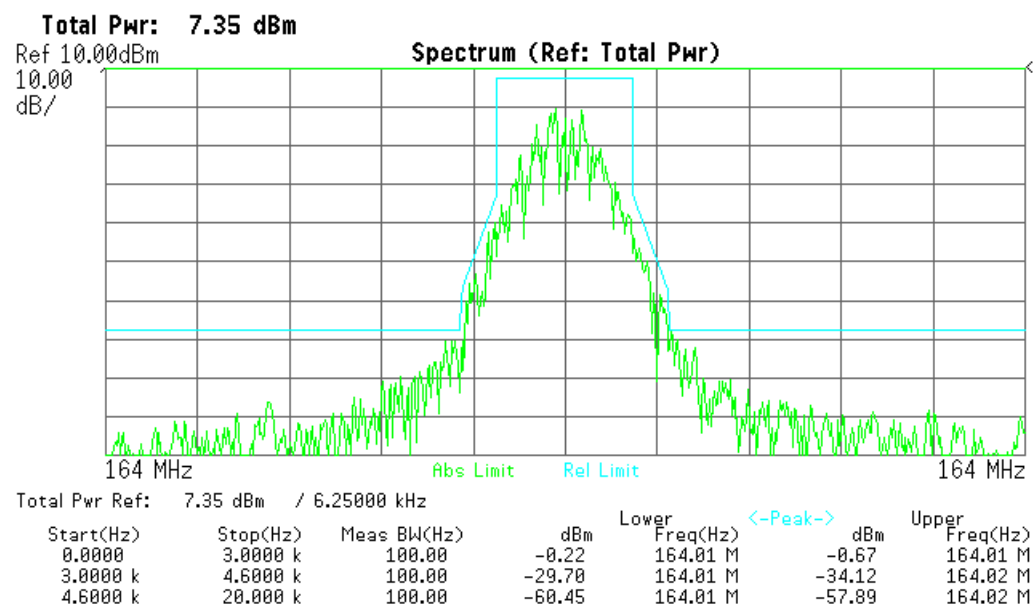

GRAPH 26: Spectrum for Emission 6.25 kHz 16-DEQAM

The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.


✱ Agilent 12:31:00 13 Aug 2012

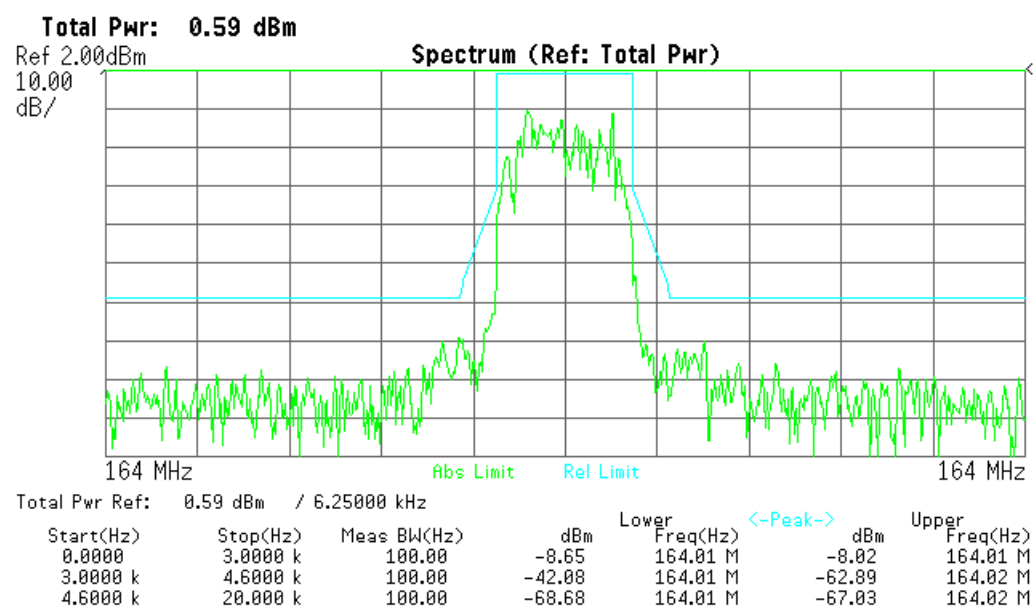

GRAPH 27: Spectrum for Emission 6.25 kHz D8PSK

The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.


Agilent 12:33:24 13 Aug 2012

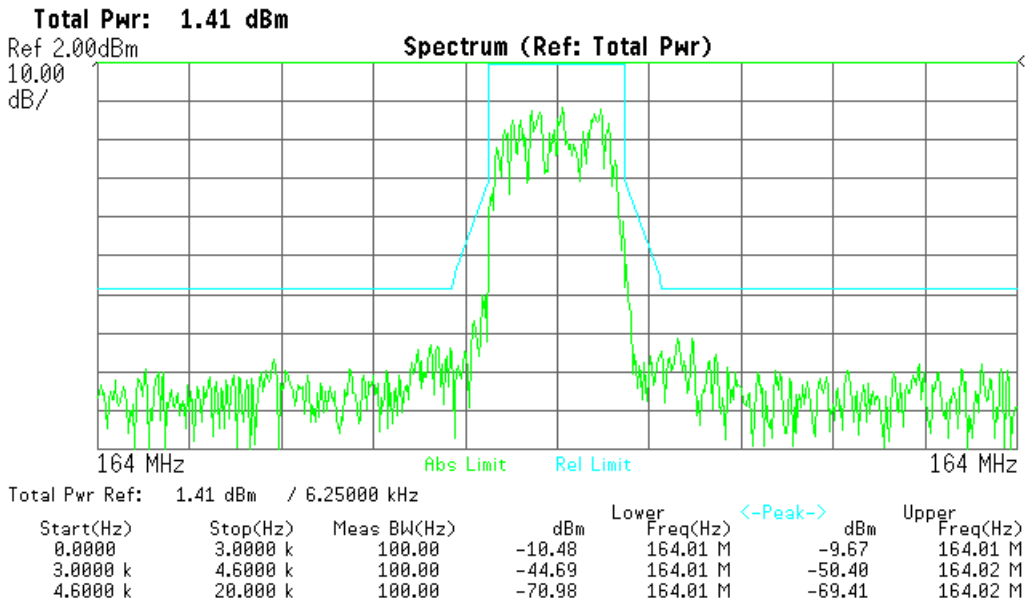

GRAPH 28: Spectrum for Emission 6.25 kHz $\pi/4$ -DQPSK

The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.


Agilent 12:26:25 13 Aug 2012

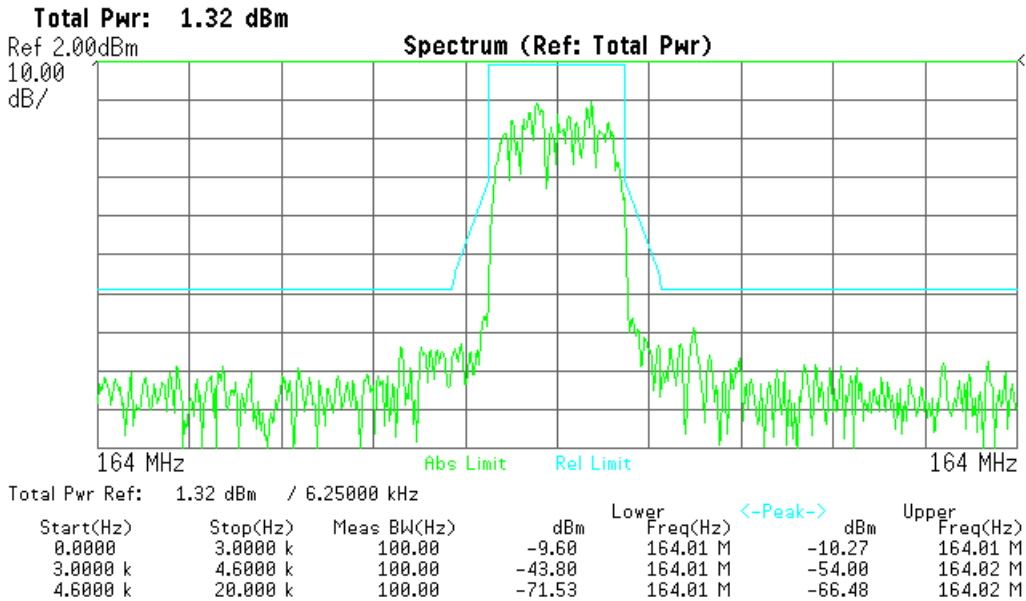

GRAPH 29: Spectrum for Emission 12.5 kHz 4-CPFSK

The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.


✨ Agilent 13:24:02 13 Aug 2012

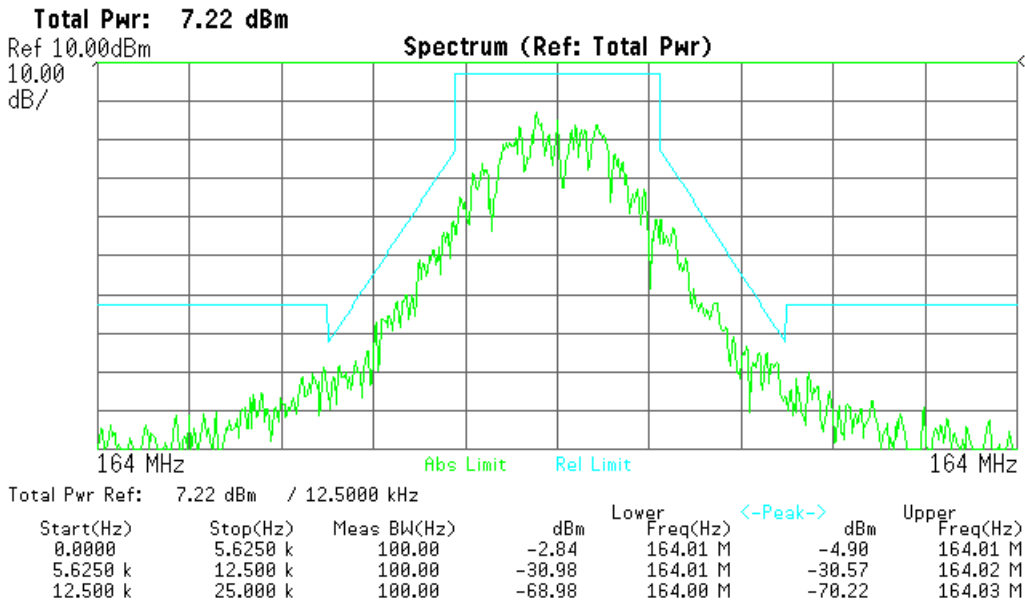

GRAPH 30: Spectrum for Emission 12.5 kHz 16-DEQAM

The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.


✨ Agilent 12:45:56 13 Aug 2012

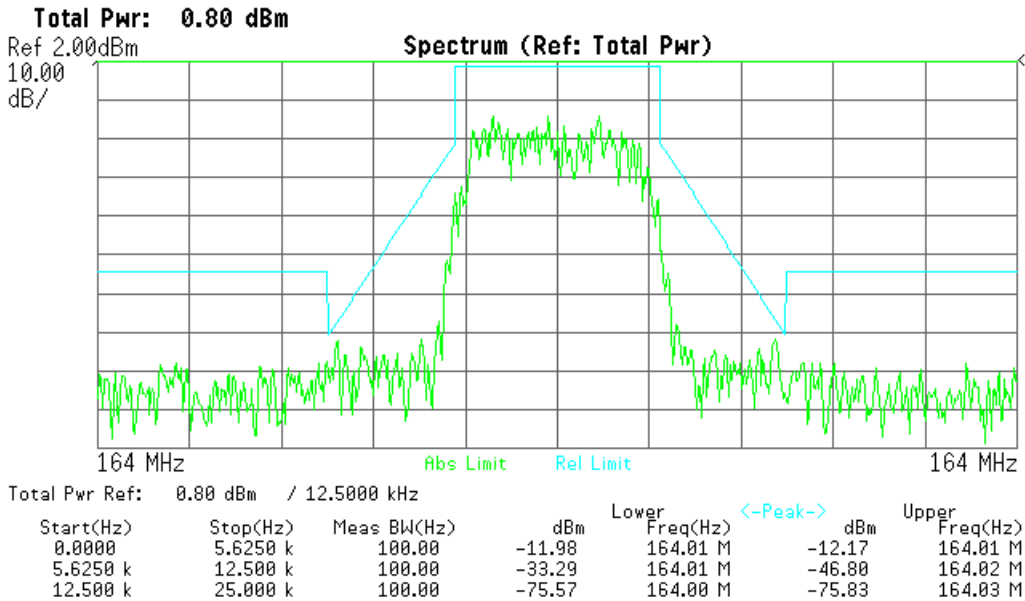

GRAPH 31: Spectrum for Emission 12.5 kHz D8PSK

The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.


Agilent 13:02:56 13 Aug 2012

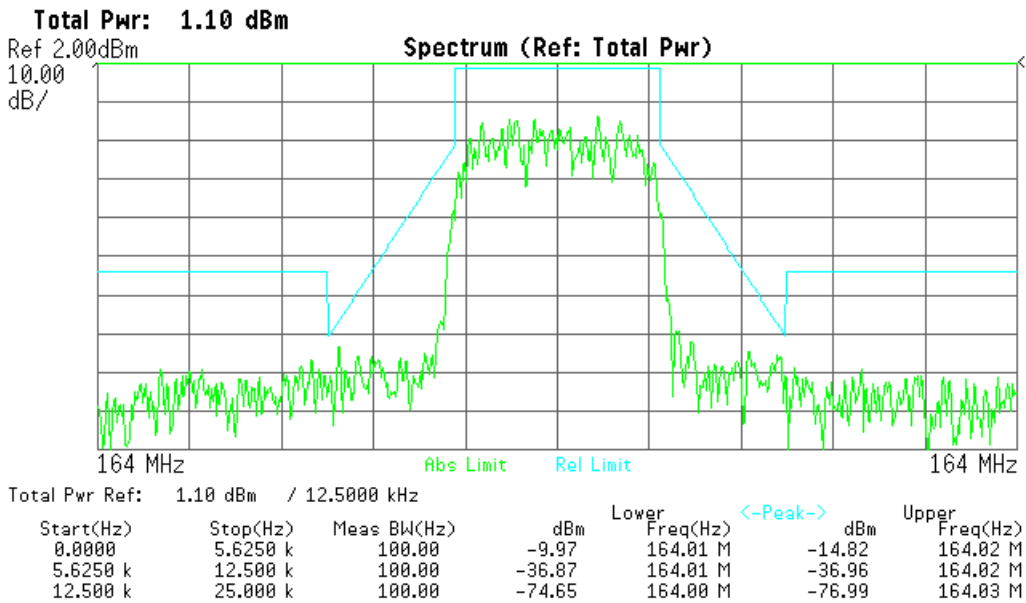

GRAPH 32: Spectrum for Emission 12.5 kHz $\pi/4$ -DQPSK



The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.

Agilent 13:04:57 13 Aug 2012

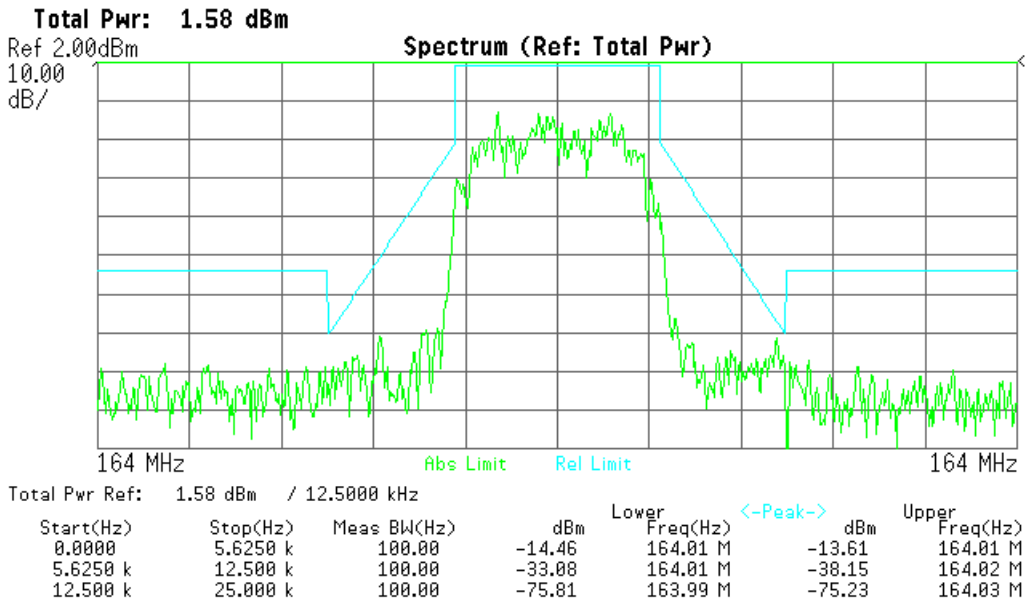

4.3 Graphs – 173.9875 MHz

GRAPH 33: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON

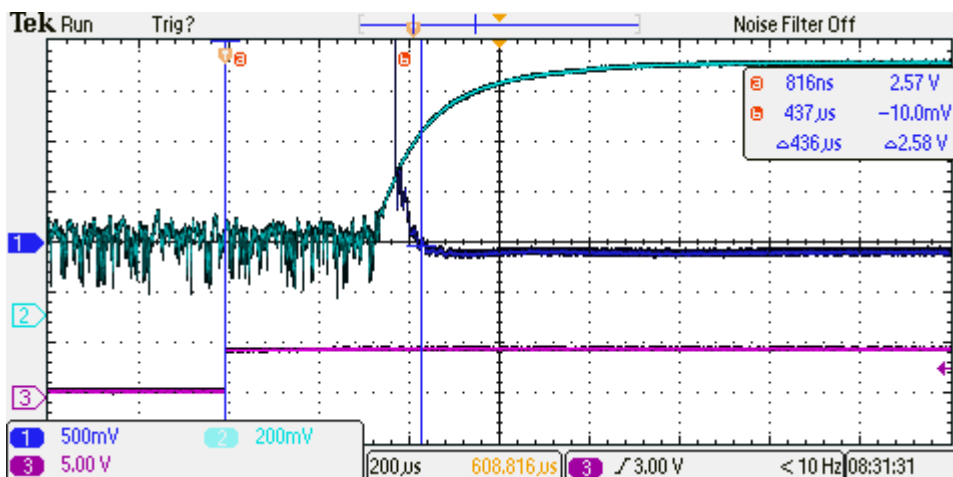
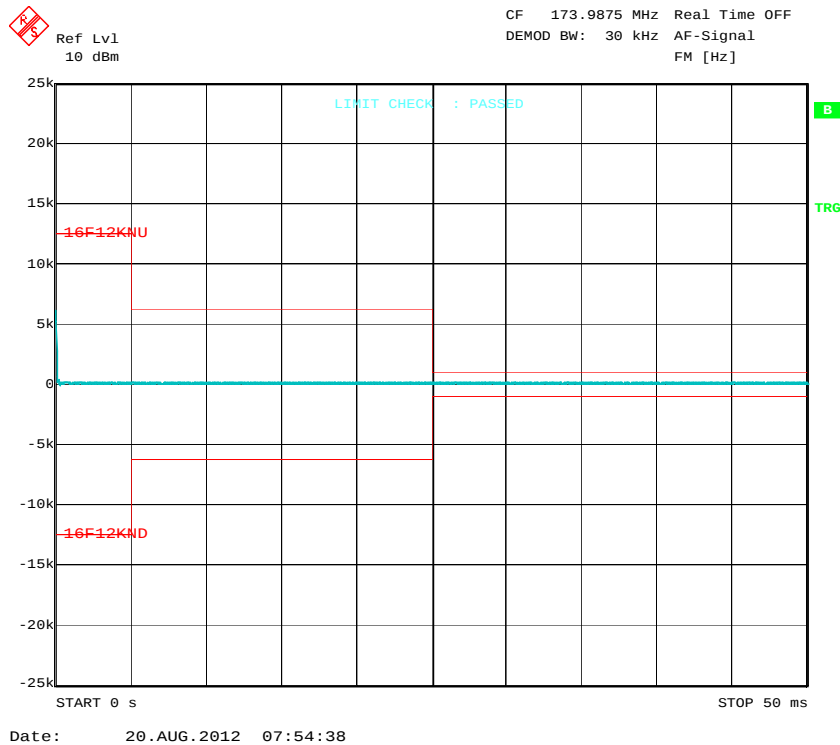


blue – power as a function of time (90 mV/10dB)

dark blue – frequency as a function of time (200mV/1kHz)

violet – PTT

GRAPH 34: Transient behaviour, carrier frequency as a function of time, CH 1, switch OFF

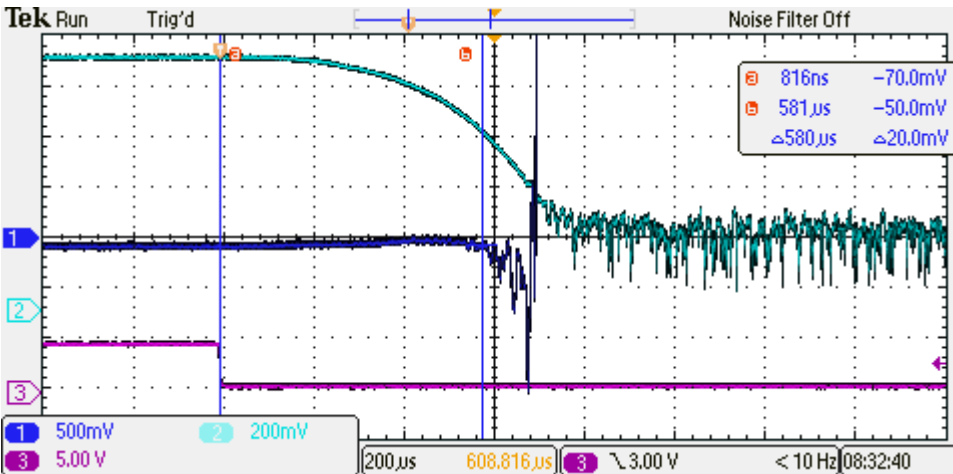
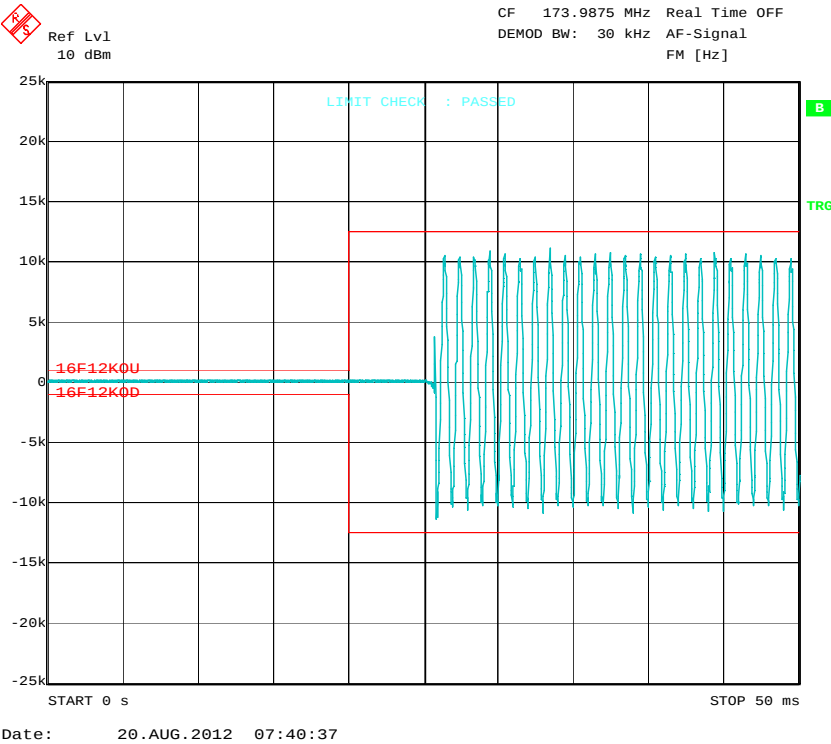


blue – power as a function of time (90 mV/10dB)

dark blue – frequency as a function of time (200mV/1kHz)

violet – PTT

GRAPH 35: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON

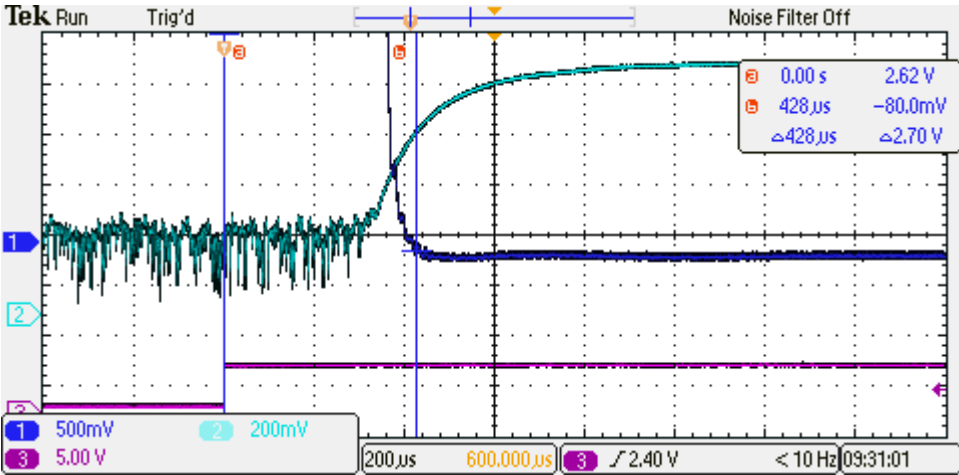
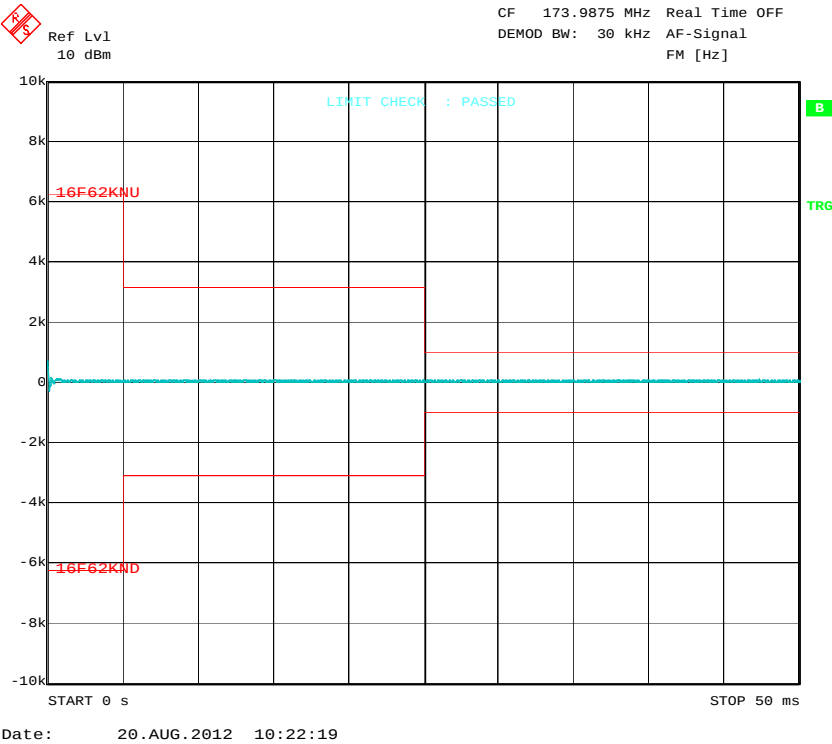


blue – power as a function of time (90 mV/10dB)

dark blue – frequency as a function of time (200mV/1kHz)

violet – PTT

GRAPH 36: Transient behaviour, carrier frequency as a function of time, CH 1, switch OFF

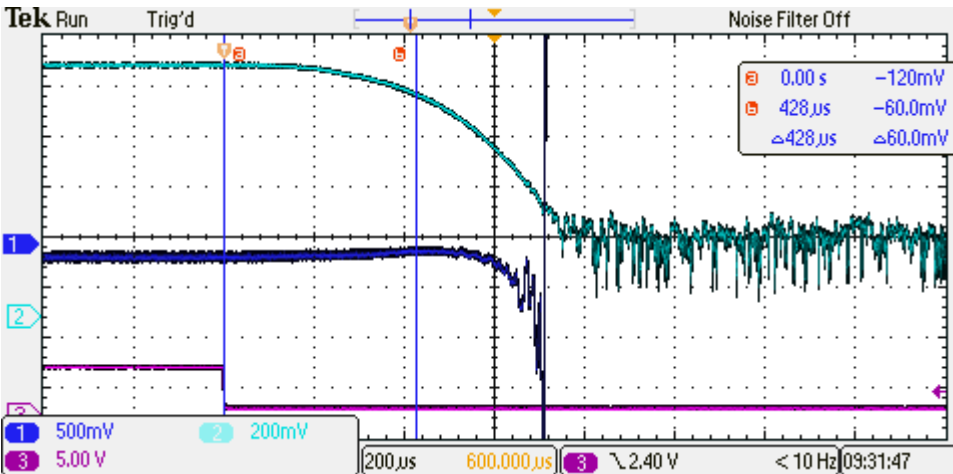
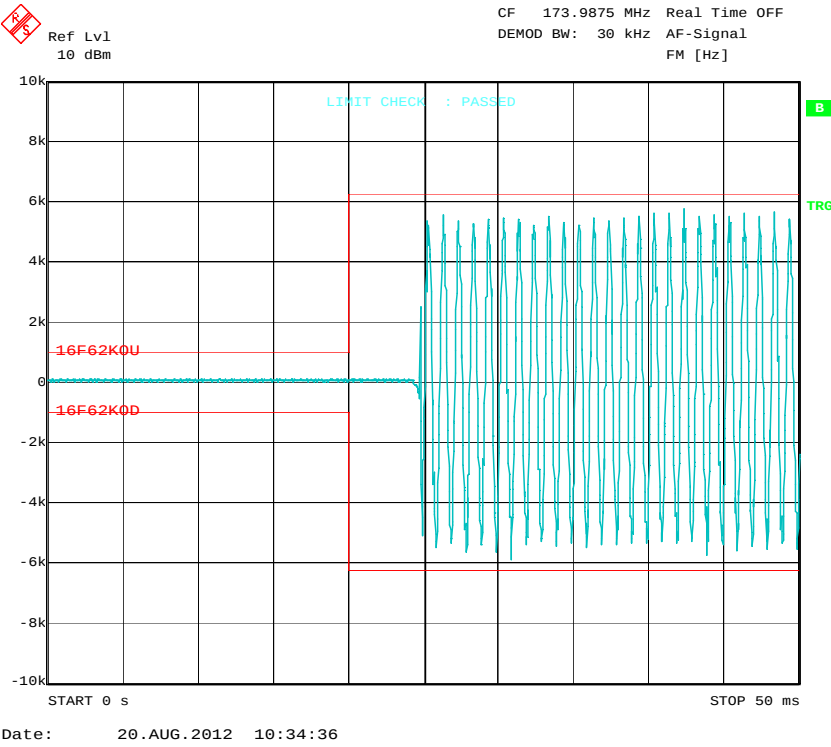


blue – power as a function of time (90 mV/10dB)

dark blue – frequency as a function of time (200mV/1kHz)

violet – PTT

GRAPH 37: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON

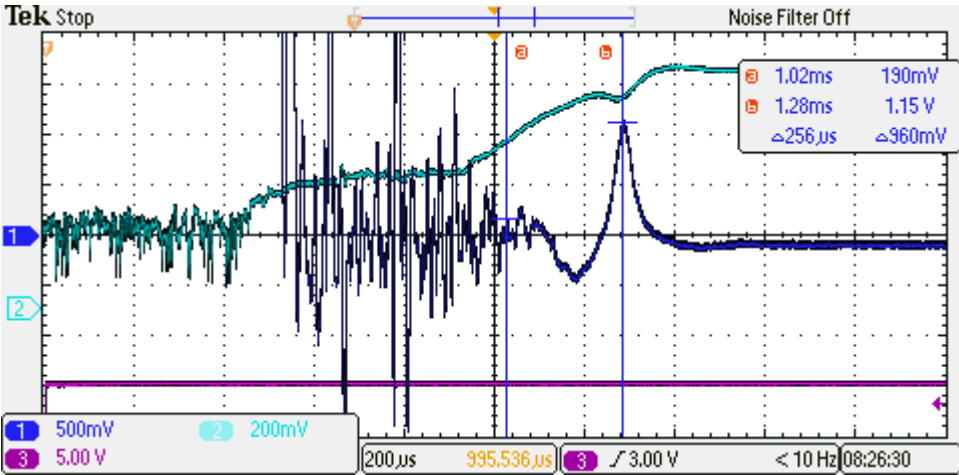
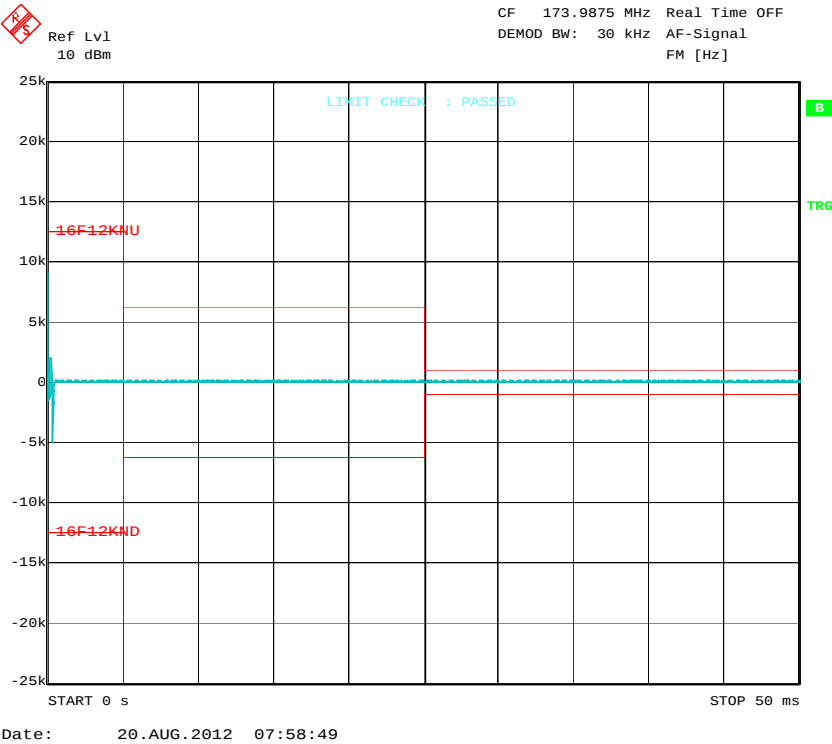


blue – power as a function of time (90 mV/10dB)

dark blue – frequency as a function of time (200mV/1kHz)

violet – PTT

GRAPH 38: Transient behaviour, carrier frequency as a function of time, CH 1, switch OFF

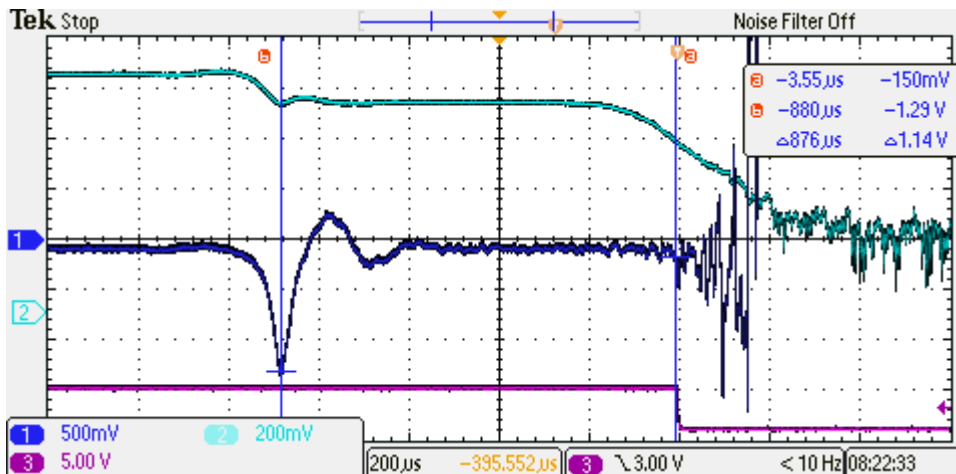
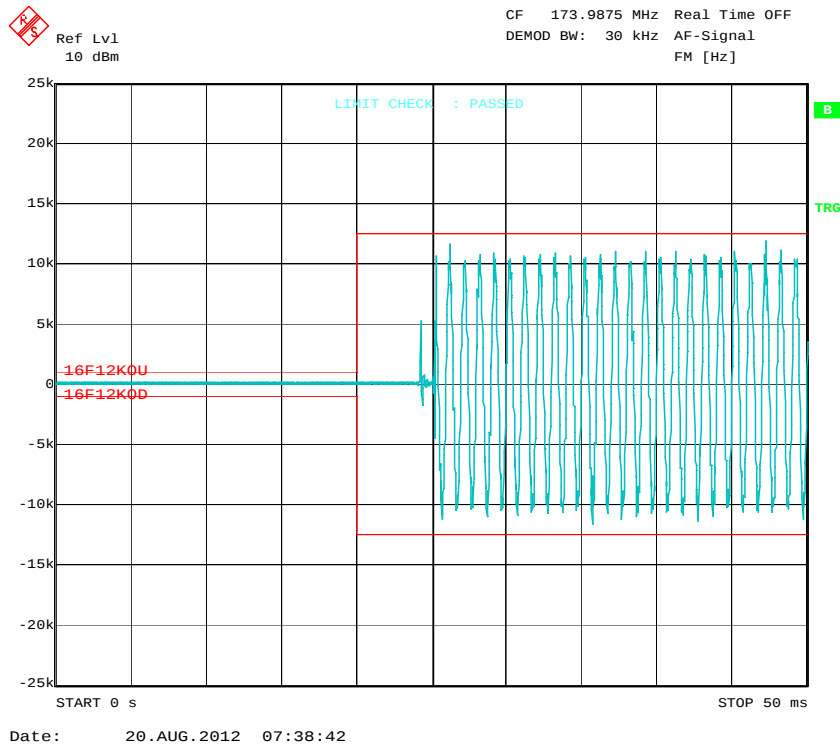


blue – power as a function of time (90 mV/10dB)

dark blue – frequency as a function of time (200mV/1kHz)

violet – PTT

GRAPH 39: Transient behaviour, carrier frequency as a function of time, CH 1, switch ON

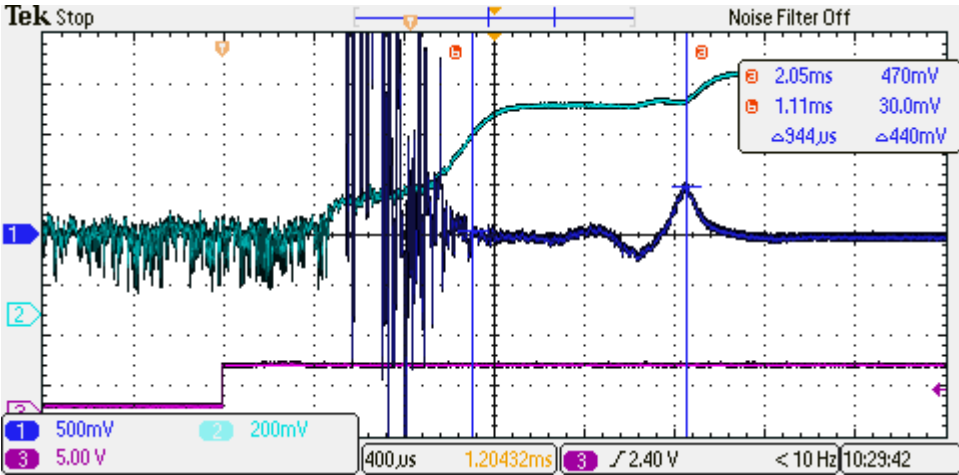
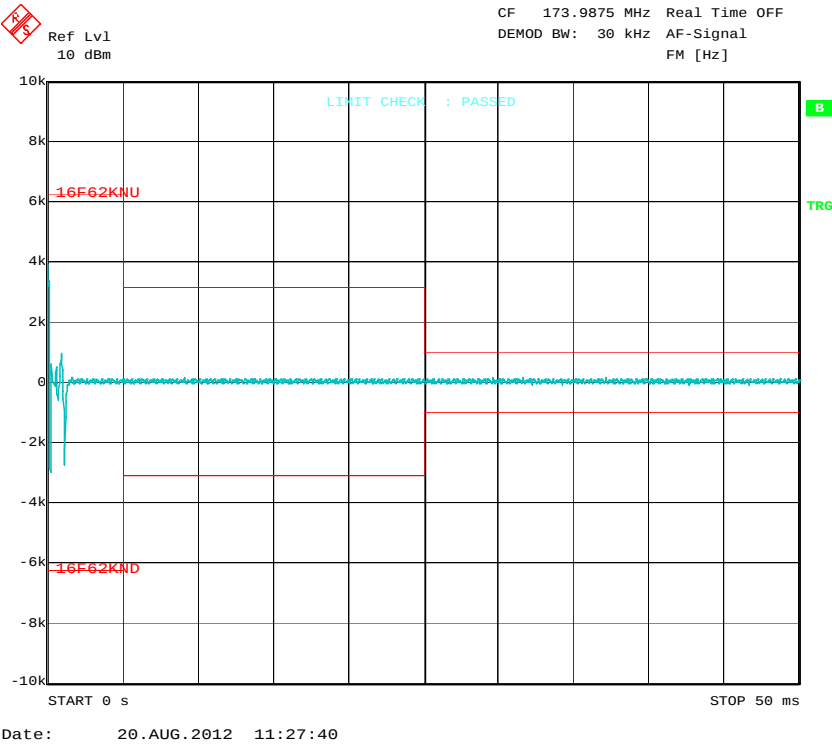


blue – power as a function of time (90 mV/10dB)

dark blue – frequency as a function of time (200mV/1kHz)

violet – PTT

GRAPH 40: Transient behaviour, carrier frequency as a function of time, CH 1, switch OFF

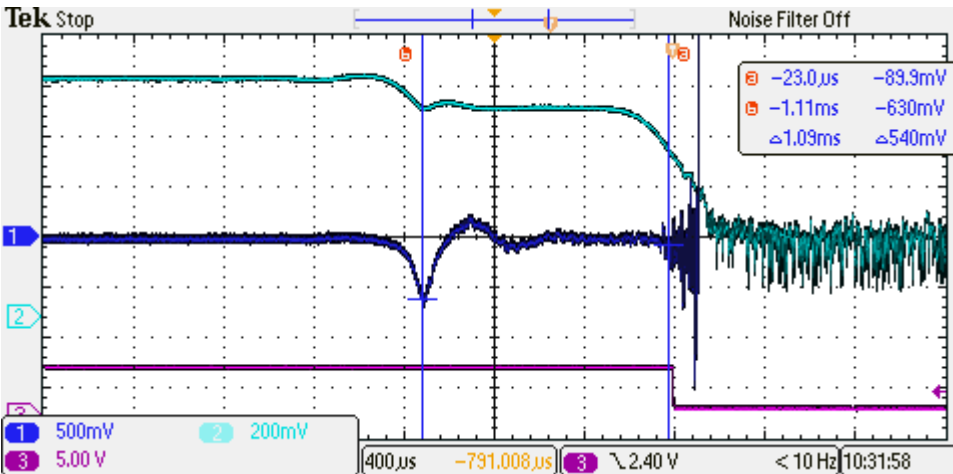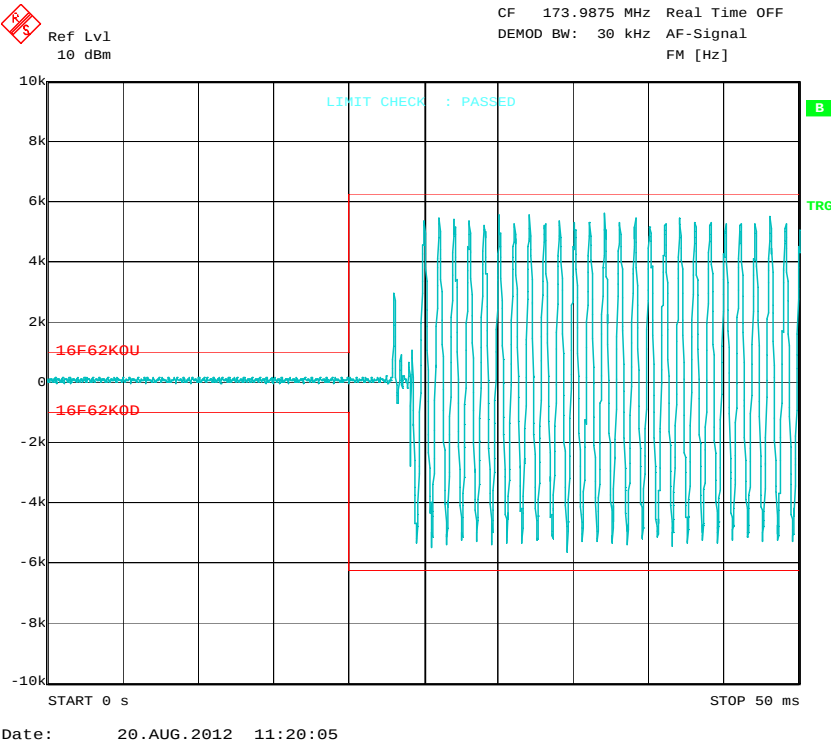

blue – power as a function of time (90 mV/10dB)


dark blue – frequency as a function of time (200mV/1kHz)

violet – PTT

GRAPH 41: Spectrum for Emission 6.25 kHz 4-CPFSK

The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.


✱ Agilent 10:01:55 13 Aug 2012

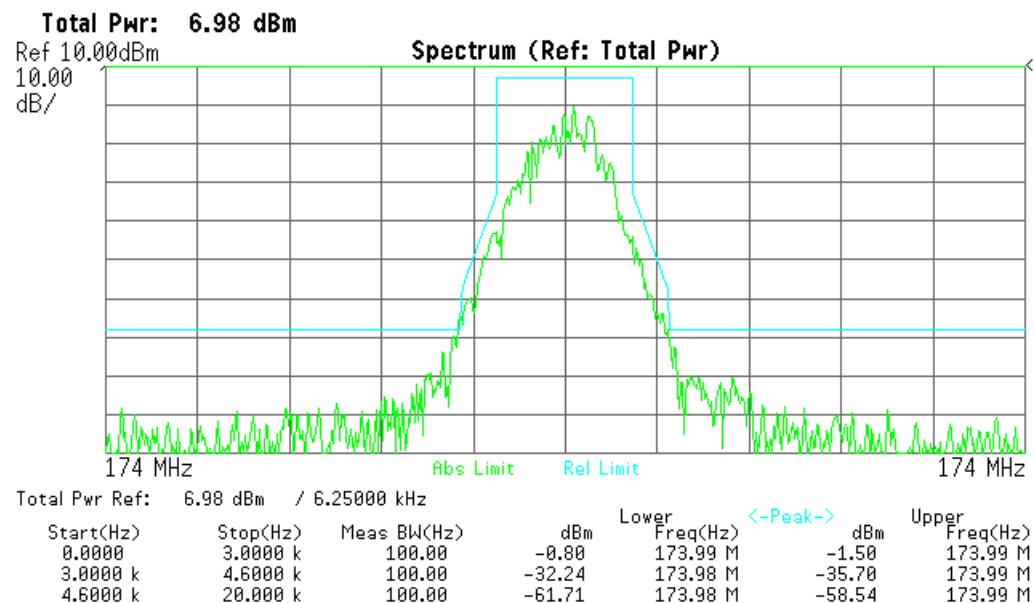

GRAPH 42: Spectrum for Emission 6.25 kHz 16-DEQAM

The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.


✱ Agilent 09:21:16 13 Aug 2012

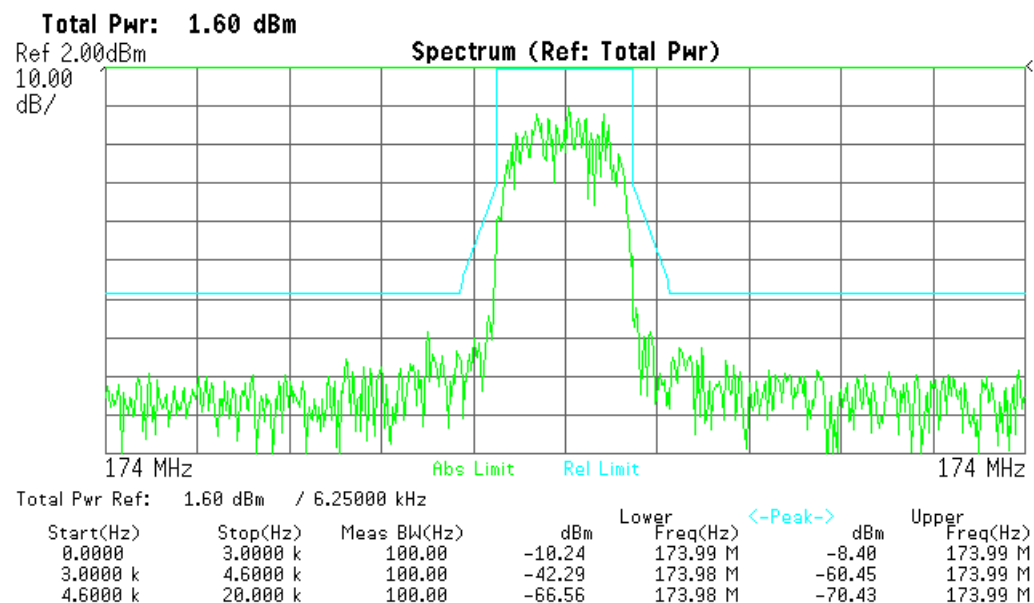

GRAPH 43: Spectrum for Emission 6.25 kHz D8PSK

The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.


Agilent 09:34:38 13 Aug 2012

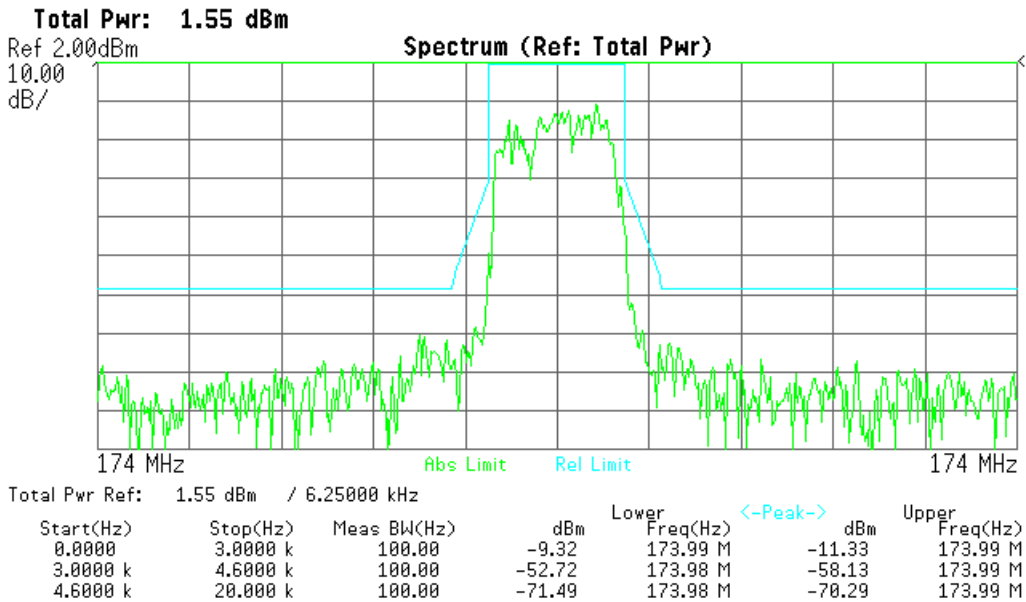

GRAPH 44: Spectrum for Emission 6.25 kHz $\pi/4$ -DQPSK

The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.


Agilent 09:36:11 13 Aug 2012

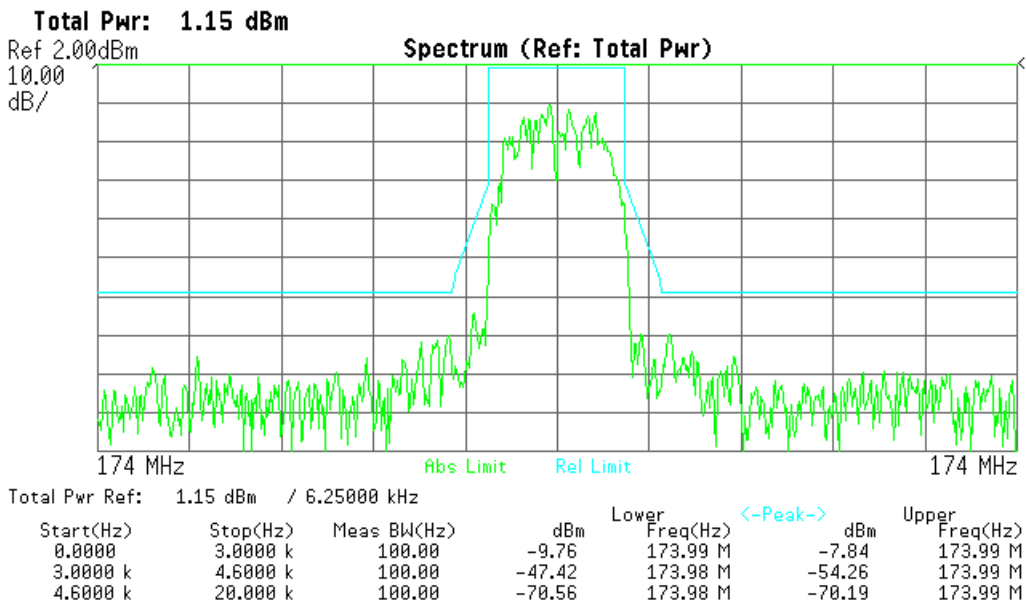

GRAPH 45: Spectrum for Emission 12.5 kHz 4-CPFSK

The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.


✱ Agilent 08:43:32 13 Aug 2012

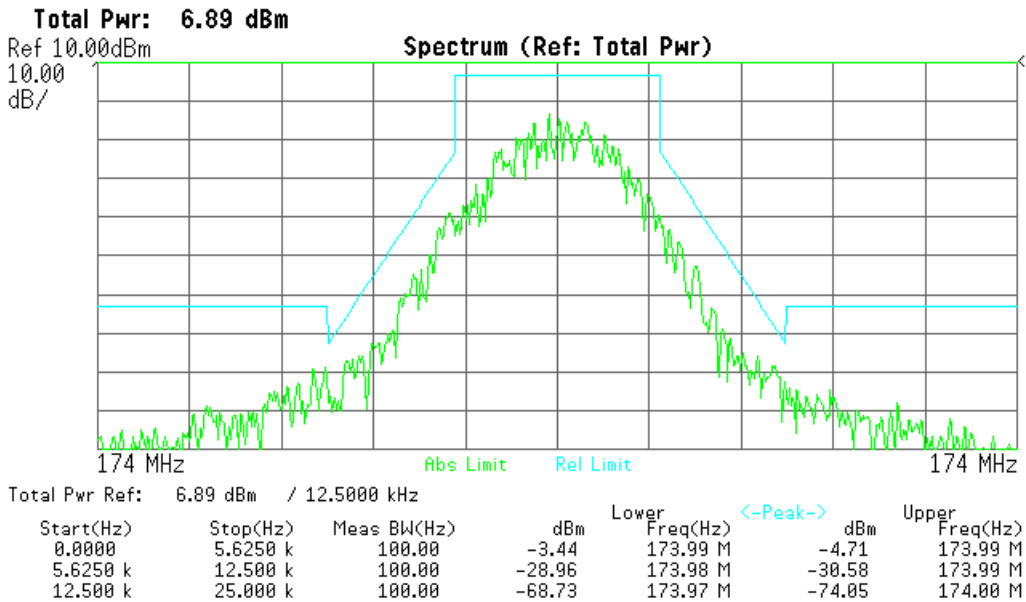

GRAPH 46: Spectrum for Emission 12.5 kHz 16-DEQAM

The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.


✱ Agilent 08:30:18 13 Aug 2012

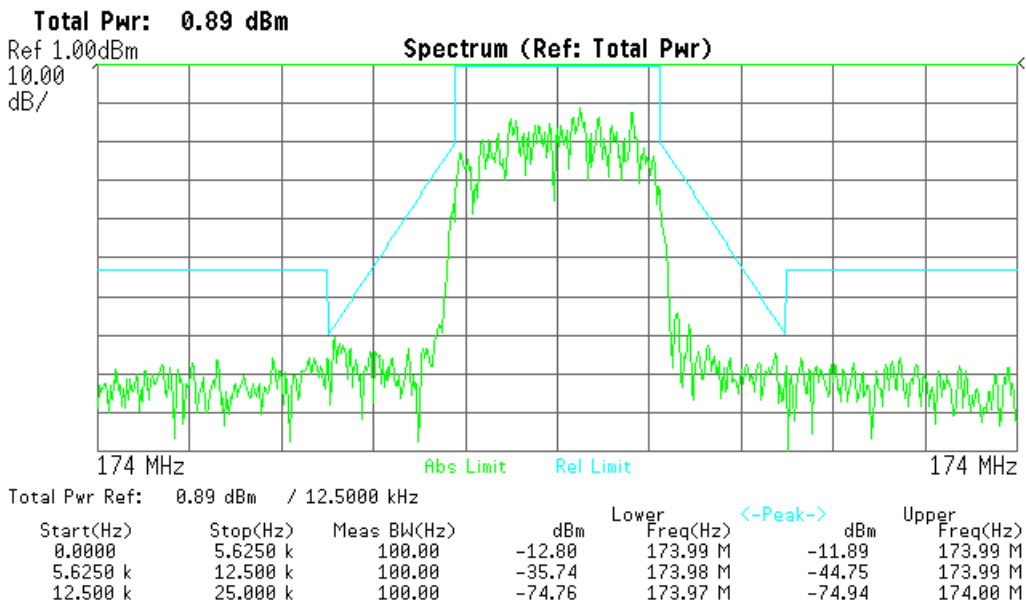

GRAPH 47: Spectrum for Emission 12.5 kHz D8PSK

The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.

Agilent 08:33:17 13 Aug 2012

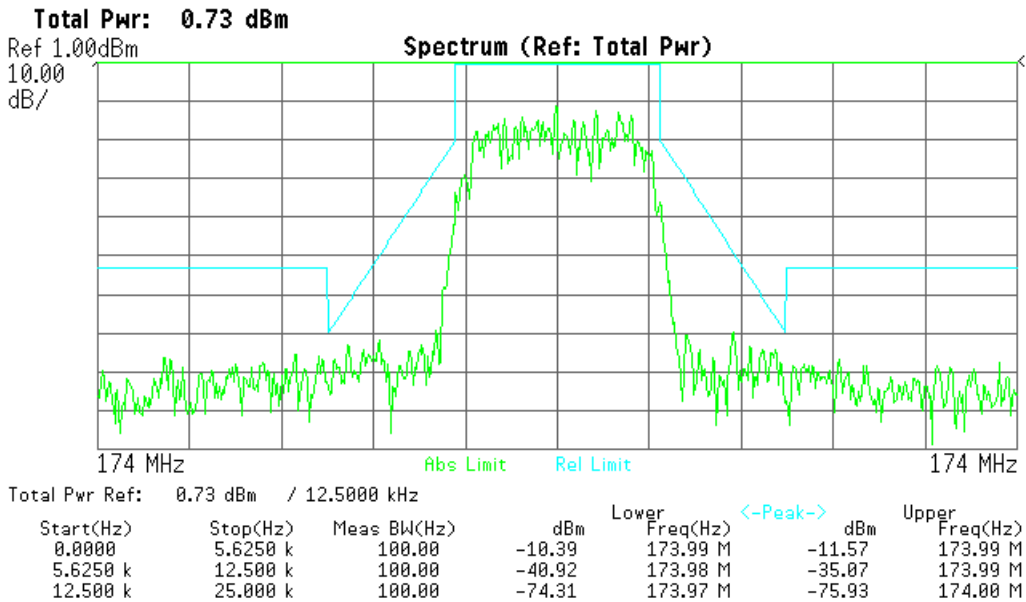

GRAPH 48: Spectrum for Emission 12.5 kHz $\pi/4$ -DQPSK

The total attenuation of the complete measuring assembly (at the frequency of the measurement), consisting of the 30dB attenuator, the losses of the measuring cables and connectors, is 32 dB.

Agilent 08:36:35 13 Aug 2012

