

FCC PART 20.21, PART 22H, PART 24E  
MEASUREMENT AND TEST REPORT

For

**JDTECK INC**

215 Celebration Place, Suite 190 Kissimmee FL

**FCC ID: SQX-JDIR-37-819**

|                                                    |                                                                                                                                                                                                                                                         |
|----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Report Type:</b><br>Original Report             | <b>Product Type:</b><br>JDTECK Industrial Repeater                                                                                                                                                                                                      |
| <b>Test Engineer:</b> <u>Dean Liu</u>              | <i>Dean Liu</i>                                                                                                                                                                                                                                         |
| <b>Report Number:</b> <u>RDG151130013-00</u>       |                                                                                                                                                                                                                                                         |
| <b>Report Date:</b> <u>2015-12-25</u>              |                                                                                                                                                                                                                                                         |
| <b>Reviewed By:</b> <u>Sula Huang</u><br>RF Leader | <i>Sula Huang</i>                                                                                                                                                                                                                                       |
| <b>Test Laboratory:</b>                            | Bay Area Compliance Laboratories Corp. (Dongguan)<br>No.69 Pulongcun, Puxinhu Industrial Zone,<br>Tangxia, Dongguan, Guangdong, China<br>Tel: +86-769-86858888<br>Fax: +86-769-86858891<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

## **TABLE OF CONTENTS**

|                                                                                                                                       |            |
|---------------------------------------------------------------------------------------------------------------------------------------|------------|
| <b>GENERAL INFORMATION.....</b>                                                                                                       | <b>3</b>   |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                                                                              | 3          |
| OBJECTIVE .....                                                                                                                       | 3          |
| RELATED SUBMITTAL(S)/GRANT(S).....                                                                                                    | 3          |
| TEST METHODOLOGY .....                                                                                                                | 3          |
| TEST FACILITY .....                                                                                                                   | 4          |
| <b>SYSTEM TEST CONFIGURATION.....</b>                                                                                                 | <b>5</b>   |
| JUSTIFICATION .....                                                                                                                   | 5          |
| EQUIPMENT MODIFICATIONS .....                                                                                                         | 5          |
| SUPPORT EQUIPMENT LIST AND DETAILS .....                                                                                              | 5          |
| EXTERNAL CABLE.....                                                                                                                   | 5          |
| BLOCK DIAGRAM OF TEST SETUP .....                                                                                                     | 6          |
| <b>SUMMARY OF TEST RESULTS .....</b>                                                                                                  | <b>7</b>   |
| <b>§ 2.1046&amp;§22.913&amp;§24.232 –MEAN OUTPUT POWER AND AMPLIFIER GAIN .....</b>                                                   | <b>8</b>   |
| APPLICABLE STANDARD .....                                                                                                             | 8          |
| TEST PROCEDURE .....                                                                                                                  | 8          |
| TEST EQUIPMENT LIST AND DETAILS.....                                                                                                  | 9          |
| TEST DATA .....                                                                                                                       | 9          |
| <b>KDB 935210 D02 –OUT-OF-BAND REJECTION.....</b>                                                                                     | <b>10</b>  |
| APPLICABLE STANDARD .....                                                                                                             | 10         |
| TEST PROCEDURE .....                                                                                                                  | 10         |
| TEST EQUIPMENT LIST AND DETAILS.....                                                                                                  | 10         |
| TEST DATA .....                                                                                                                       | 10         |
| <b>§ 2.1049&amp;KDB 935410 D02–OCCUPIED BANDWIDTH AND INPUT-VERSUS-OUTPUT SIGNAL<br/>COMPARISON .....</b>                             | <b>13</b>  |
| APPLICABLE STANDARD .....                                                                                                             | 13         |
| TEST PROCEDURE .....                                                                                                                  | 13         |
| TEST EQUIPMENT LIST AND DETAILS.....                                                                                                  | 14         |
| TEST DATA .....                                                                                                                       | 14         |
| <b>§ 2.1051&amp;§ 22.917&amp;§ 24.238&amp;KDB935210 D02- OUT-OF-BAND/BLOCK EMISSIONS(INCLUDING<br/>INTERNODULATION PRODUCTS).....</b> | <b>31</b>  |
| APPLICABLE STANDARDS.....                                                                                                             | 31         |
| TEST PROCEDURE .....                                                                                                                  | 31         |
| TEST EQUIPMENT LIST AND DETAILS.....                                                                                                  | 32         |
| TEST DATA .....                                                                                                                       | 32         |
| <b>§2.1051&amp;§22.917&amp;24.238- SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....</b>                                                  | <b>65</b>  |
| APPLICABLE STANDARDS.....                                                                                                             | 65         |
| TEST PROCEDURE .....                                                                                                                  | 65         |
| TEST EQUIPMENT LIST AND DETAILS.....                                                                                                  | 66         |
| TEST DATA .....                                                                                                                       | 66         |
| <b>§2.1053&amp;§22.917&amp;24.238- RADIATED SPURIOUS EMISSIONS .....</b>                                                              | <b>103</b> |
| APPLICABLE STANDARDS.....                                                                                                             | 103        |
| TEST PROCEDURE .....                                                                                                                  | 103        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                                                                  | 103        |
| TEST DATA .....                                                                                                                       | 104        |
| <b>DECLARATHION LETTER.....</b>                                                                                                       | <b>105</b> |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

The JDTECK INC's product, model number: JDIR-40-90-819 (FCC ID: SQX-JDIR-37-819) or the "EUT" as referred to in this report is a JDTECK Industrial Repeater,

|                                  |                                                                                                          |
|----------------------------------|----------------------------------------------------------------------------------------------------------|
| Radio System Type                | CMRS Industrial Signal Booster                                                                           |
| Frequency Bands                  | Cellular: 824-849MHz (Uplink), 869-894MHz(Downlink)<br>PCS: 1850-1910MHz(Uplink), 1930-1990MHz(Downlink) |
| Max. Gain                        | Uplink:85dB<br>Downlink: 90dB                                                                            |
| Max. Output Power (Antenna Port) | Uplink: 19dBm+/-2dB<br>Downlink: 43dBm+/-2dB                                                             |
| Antenna Gain:                    | Uplink: -2.0dBi<br>Down Link: 3.0dBi                                                                     |
| Nominal Power Supply:            | AC 120V/60Hz                                                                                             |
| External Dimension               | 64.0 cm (L) x 45.5 cm (W) x27.2cm (H)                                                                    |
| Temperature Range                | -25°C to 55°C                                                                                            |

*Note: The series product, model JDIR-40-90-819, JDIR-37-87-819 are electrically identical, the difference between them is just gain and power, we selected JDIR-40-90-819 for fully testing, the details was explained in the attached declaration letter.*

*\*All measurement and test data in this report was gathered from production sample serial number: 151130013 (Assigned by BACL, Dongguan). The EUT supplied by applicant was received on 2015-12-03.*

### Objective

This type approval report is prepared on behalf of JDTECK INC in accordance with Part 2, Part 20, Part 22, part 24 of the Federal Communication Commissions rules, and KDB 935210 D02 Signal Boosters Certification v03.

### Related Submittal(s)/Grant(s)

No related submittal(s).

### Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Applicable Standards: TIA-1037, TIA/EIA 603-D. KDB 935210 D05 Indus Booster Basic Meas v01.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### **Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Justification

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.

### Equipment Modifications

No modifications were made to the EUT.


### Support Equipment List and Details

| Manufacturer | Description                         | Model  | Serial Number |
|--------------|-------------------------------------|--------|---------------|
| Agilent      | MXG Vector Signal Generator         | N5182B | MY513502142   |
| R & S        | Wideband Radio Communication Tester | CMW500 | 114772        |

### External Cable

| Cable Description | Shielding Type | Ferrite Core | Length (m) | From Port | To |
|-------------------|----------------|--------------|------------|-----------|----|
| AC Cable          | No             | No           | 1.68       | /         | /  |

## Block Diagram of Test Setup

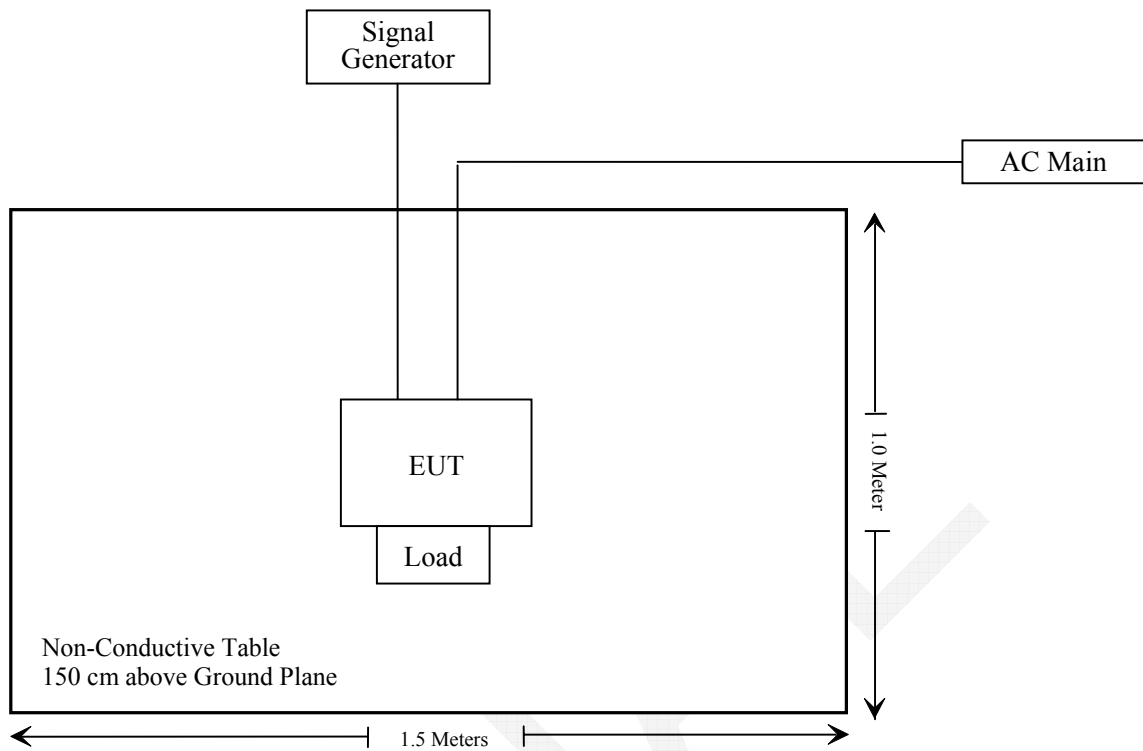

**SUMMARY OF TEST RESULTS**

| FCC Rules                                 | Description of tests                                         | Result           |
|-------------------------------------------|--------------------------------------------------------------|------------------|
| §2.1047, §22.913, §24.232, KDB 935210 D02 | Mean output power and amplifier gain                         | Compliance       |
| KDB 935210 D02                            | Out-of-band rejection                                        | Compliance       |
| §2.1049, KDB 935210 D02                   | Occupied bandwidth and Input-versus-output signal comparison | Compliance       |
| §2.1051, §22.917, §24.238, KDB 935210 D02 | Out-of-band/block (including intermodulation) emissions      | Compliance       |
| §2.1051&§22.917&§24.238                   | Spurious emissions at antenna terminals                      | Compliance       |
| §2.1053&§22.917&§24.238                   | Radiated spurious emissions                                  | Compliance       |
| §2.1055&§22.355&§24.235                   | Frequency tolerance                                          | Not Application* |

Not Application\*: the device is a booster does not alter the input signal.

## § 2.1046&§22.913&§24.232 –MEAN OUTPUT POWER AND AMPLIFIER GAIN

### Applicable Standard

According to § 22.913 (a) *Maximum ERP*. In general, the effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts.

According to §24.232 (a)(1) Base stations with an emission bandwidth of 1 MHz or less are limited to 1640 watts equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.

(2) Base stations with an emission bandwidth greater than 1 MHz are limited to 1640 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.

(3) Base station antenna heights may exceed 300 meters HAAT with a corresponding reduction in power; see Tables 1 and 2 of this section.

(4) The service area boundary limit and microwave protection criteria specified in §§24.236 and 24.237 apply.

### Test Procedure

According to 935210 D05 Indus Booster Basic Meas v01

- a) Connect a signal generator to the input of the EUT.
- b) Configure to generate the AWGN (broadband) test signal.
- c) The frequency of the signal generator shall be set to the frequency of (f<sub>0</sub>) as determined from 3.3.
- d) Connect a spectrum analyzer or power meter to the output of the EUT using appropriate attenuation as necessary.
- e) Set the signal generator output power to a level that produces an EUT output level that is just below the AGC threshold (see 3.2), but not more than 0.5 dB below.
- f) Measure the output power of the EUT and record (see 3.5.3 or 3.5.4 for power measurement guidance).
- g) Remove the EUT from the measurement setup and using the same signal generator settings, repeat the power measurement on the input signal to the EUT and record as input power.
- h) Repeat the procedure with the narrowband test signal.
- i) Repeat the procedure for both test signals with input signal amplitude set to 3 dB above the AGC threshold level.
- j) Repeat for all frequency bands authorized for use by the EUT.

### Method 1: Power measurement with a spectrum or signal analyzer

Guidance for performing input/output power measurements using a spectrum or signal analyzer is provided in 5.2 of KDB Publication 971168.

### Method 2: Power measurement with a power meter

As an alternative to measuring input and output power levels with a spectrum or signal analyzer, a broadband RF power meter may be used with appropriate detector, as specified in 5.2.3 of KDB Publication 971168.

### Calculating the mean amplifier, booster, or repeater gain

NOTE—§§ 20.21 and 2.1033(c) do not require gain test data; inclusion of industrial booster gain test data in test reports submitted for FCC equipment authorization is optional.

After the mean input and output power levels have been measured as described above, the mean gain of the EUT can be determined from:



Gain (dB) = output power (dBm) – input power (dBm).

Report the mean gain for each authorized operating frequency band and each test signal stimulus.

### Test Equipment List and Details

| Manufacturer | Description                 | Model  | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-----------------------------|--------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer           | FSP 38 | 100478        | 2015-05-09       | 2016-05-09           |
| Agilent      | MXG Vector Signal Generator | N5182B | MY51350142    | 2015-03-30       | 2016-03-29           |

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 24.3°C    |
| Relative Humidity: | 45%       |
| ATM Pressure:      | 101.4 kPa |

The testing was performed by Dean Liu on 2015-12-05.

Test Result: Compliance. Please refer to the following table.

| Mode     | Operation Bands | Frequency (MHz) | Signal Type | Signal Level  | Input Power (dBm) | Output Power (dBm) | Gain (dB) |
|----------|-----------------|-----------------|-------------|---------------|-------------------|--------------------|-----------|
| Uplink   | Cellular        | 834.75          | AWGN        | Pre-AGC       | -67.94            | 17.07              | 85.01     |
|          |                 |                 |             | 3dB above AGC | -68.01            | 17.13              | 85.14     |
|          |                 |                 | GSM         | Pre-AGC       | -68.09            | 17.28              | 85.37     |
|          |                 |                 |             | 3dB above AGC | -68.27            | 17.47              | 85.74     |
|          | PCS             | 1868            | AWGN        | Pre-AGC       | -68.12            | 17.08              | 85.2      |
|          |                 |                 |             | 3dB above AGC | -68.15            | 17.14              | 85.29     |
|          |                 |                 | GSM         | Pre-AGC       | -68.51            | 17.44              | 85.95     |
|          |                 |                 |             | 3dB above AGC | -68.44            | 17.7               | 86.14     |
| Downlink | Cellular        | 881.5           | AWGN        | Pre-AGC       | -49.34            | 41.65              | 90.99     |
|          |                 |                 |             | 3dB above AGC | -49.7             | 41.93              | 91.63     |
|          |                 |                 | GSM         | Pre-AGC       | -49.74            | 41.82              | 91.56     |
|          |                 |                 |             | 3dB above AGC | -49.11            | 41.96              | 91.07     |
|          | PCS             | 1941.4          | AWGN        | Pre-AGC       | -49.65            | 41.75              | 91.4      |
|          |                 |                 |             | 3dB above AGC | -49.67            | 41.12              | 90.79     |
|          |                 |                 | GSM         | Pre-AGC       | -49.94            | 41.81              | 91.75     |
|          |                 |                 |             | 3dB above AGC | -49.24            | 41.22              | 90.46     |

## KDB 935210 D02 –OUT-OF-BAND REJECTION

### Applicable Standard

According to KDB935210 D02 Signal Boosters Certification v03, Out-of-band rejection–testing for rejection of out-of-band signals may be appropriate. Alternatively, filter frequency response plots are acceptable.

### Test Procedure

Adjust the internal gain control of the equipment under test to the maximum gain for which equipment certification is sought.

- a) Connect a signal generator to the input of the EUT.
- b) Configure a swept CW signal with the following parameters:
  - 1) Frequency range =  $\pm 250\%$  of the passband from the center of the passband.
  - 2) Level = a sufficient level to affirm that the out-of-band rejection is  $> 20$  dB above the noise floor and will not engage the AGC during the entire sweep.
  - 3) Dwell time = approx. 10 ms.
  - 4) Number of points =  $\text{SPAN}/(\text{RBW}/2)$ .
- c) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation.
- d) Set the span of the spectrum analyzer to the same as the frequency range of the signal generator.
- e) Set the resolution bandwidth of the spectrum analyzer to be 1 % to 5 % of the passband and the video bandwidth shall be set to  $\geq 3 \times \text{RBW}$ .

### Test Equipment List and Details

| Manufacturer | Description                         | Model  | Serial Number         | Calibration Date | Calibration Due Date |
|--------------|-------------------------------------|--------|-----------------------|------------------|----------------------|
| R&S          | Spectrum Analyzer                   | FSP 38 | 100478                | 2015-05-09       | 2016-05-09           |
| R & S        | Wideband Radio Communication Tester | CMW500 | 1201.002K50-146520-wh | 2014-12-19       | 2015-12-19           |

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data


#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 24.3 °C   |
| Relative Humidity: | 45 %      |
| ATM Pressure:      | 101.4 kPa |

The testing was performed by Dean Liu from 2015-12-04 to 2015-12-05.


Test Result: Compliance. Please refer to the following plots.

### Cellular Band Uplink Output

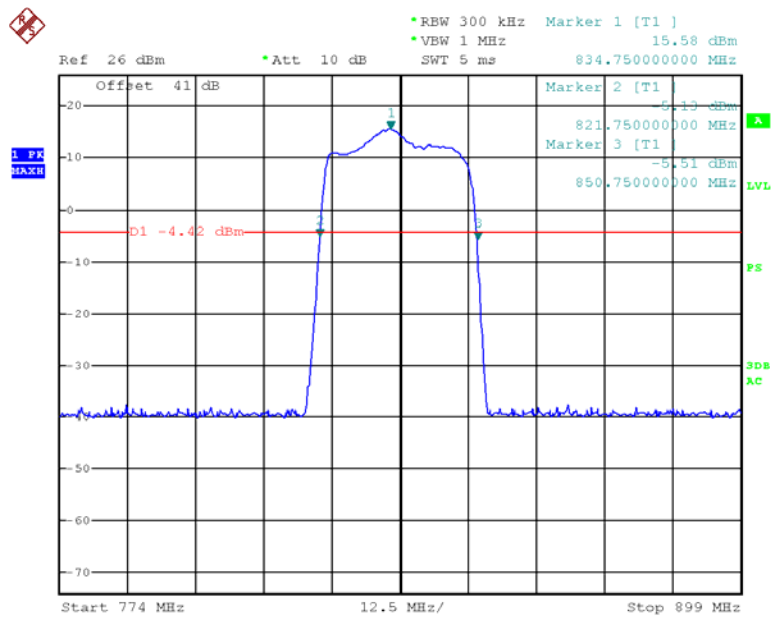

Date: 5.DEC.2015 00:03:35

### Cellular Band Downlink Output

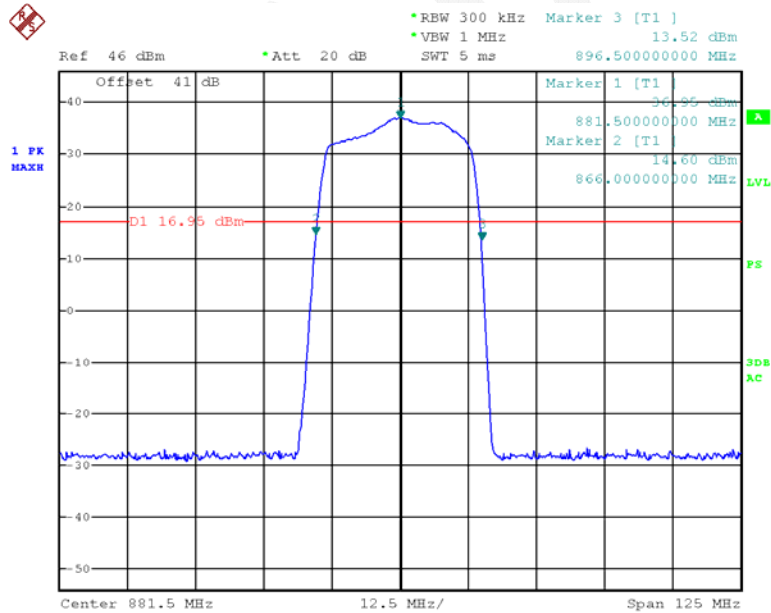

Date: 4.DEC.2015 21:03:03

1. PK  
SEARCH

Ref 26 dBm Att 0 dB VBW 3 MHz SWT 5 ms


Offset 41 dB

Marker 1 [T1] 1.868000000 GHz -8.03 dBm  
Marker 2 [T1] 1.845200000 GHz -8.32 dBm  
Marker 3 [T1] 1.913600000 GHz -8.03 dBm

D1 -5.96 dBm

Start 1.73 GHz 30 MHz/ Stop 2.03 GHz

### PCS Band Downlink Output

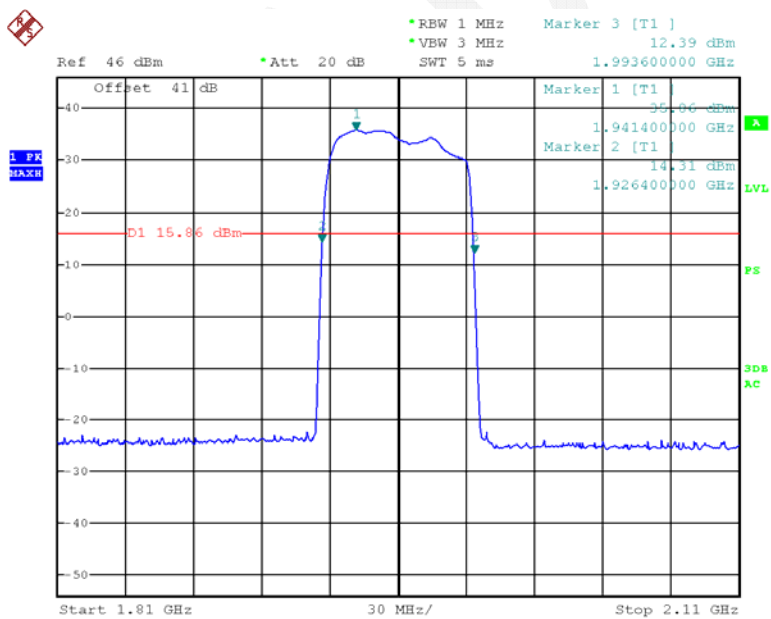

Page 12 of 105

## § 2.1049&KDB 935410 D02–OCCUPIED BANDWIDTH AND INPUT-VERSUS-OUTPUT SIGNAL COMPARISON

### Applicable Standard

According to § 2.1049 and KDB935210 D02 Signal Boosters Certification v03,

Report worst case results for occupied bandwidth comparison and intermodulation tests done with and without any AGC circuitry activated, for devices so equipped.

### Test Procedure

A 26 dB bandwidth measurement shall be performed on the input signal and the output signal (alternatively, the 99% OBW can be measured and used) to demonstrate compliance to the technical requirements specified in §90.219(e)(4)(i) and (ii). See KDB Publication 971168 for more information regarding measuring the OBW.

- a) Connect a signal generator to the input of the EUT.
- b) Configure the signal generator to transmit the AWGN signal.
- c) Configure the signal amplitude to be just below the AGC threshold level (see 3.2), but not more than 0.5 dB below.
- d) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation.
- e) Set the spectrum analyzer center frequency to the center frequency of the operational band under test. The span range of the spectrum analyzer shall be between 2 times to 5 times the EBW or alternatively, the OBW.
- f) The nominal resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the anticipated OBW, and the VBW shall be  $\geq 3 \times \text{RBW}$ .
- g) Set the reference level of the instrument as required to preclude the signal from exceeding the maximum spectrum analyzer input mixer level for linear operation. In general, the peak of the spectral envelope must be more than  $[10 \log (\text{OBW} / \text{RBW})]$  below the reference level.  
NOTE—Steps f) and g) may require iteration to enable adjustments within the specified tolerances.
- h) The noise floor of the spectrum analyzer at the selected RBW shall be at least 36 dB below the reference level.
- i) Set spectrum analyzer detection function to positive peak.
- j) Set the trace mode to max hold.
- k) Determine the reference value: Allow the trace to stabilize. Set the spectrum analyzer marker to the highest amplitude level of the displayed trace (this is the reference value) and record the associated frequency as  $f_0$ .
- l) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the  $-26$  dB down amplitude. The 2 dB emission bandwidth is the positive frequency difference between the two markers.  
NOTE—The spectral envelope may cross the  $-26$  dB down amplitude at multiple points. If so, the lowest or highest frequency shall be selected as the frequencies the furthest removed from the center frequency at which the spectral envelope crosses the  $-26$  dB down amplitude point.
- m) Repeat steps e) to l) with the input signal connected directly to the spectrum analyzer (i.e., input signal measurement).
- n) Compare the spectral plot of the input signal (determined from step m) to the output signal (determined from step l) to affirm that they are similar (in passband and rolloff characteristic features and relative spectral locations), and include plot(s) and descriptions in test report.

- o) Repeat steps a) to n) with the signal generator set to the narrowband signal.  
 p) Repeat the procedure for both test signals with the input signal amplitude set 3 dB above the AGC threshold.  
 q) Repeat for all frequency bands authorized for use by the EUT.

### Test Equipment List and Details

| Manufacturer | Description                         | Model  | Serial Number         | Calibration Date | Calibration Due Date |
|--------------|-------------------------------------|--------|-----------------------|------------------|----------------------|
| R&S          | Spectrum Analyzer                   | FSP 38 | 100478                | 2015-05-09       | 2016-05-09           |
| R & S        | Wideband Radio Communication Tester | CMW500 | 1201.002K50-146520-wh | 2014-12-19       | 2015-12-19           |

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


### Test Data

#### Environmental Conditions


|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 24.3 °C   |
| <b>Relative Humidity:</b> | 45 %      |
| <b>ATM Pressure:</b>      | 101.4 kPa |

*The testing was performed by Dean Liu on 2015-12-05.*


*Test Result: Compliance. Please refer to the following plots.*

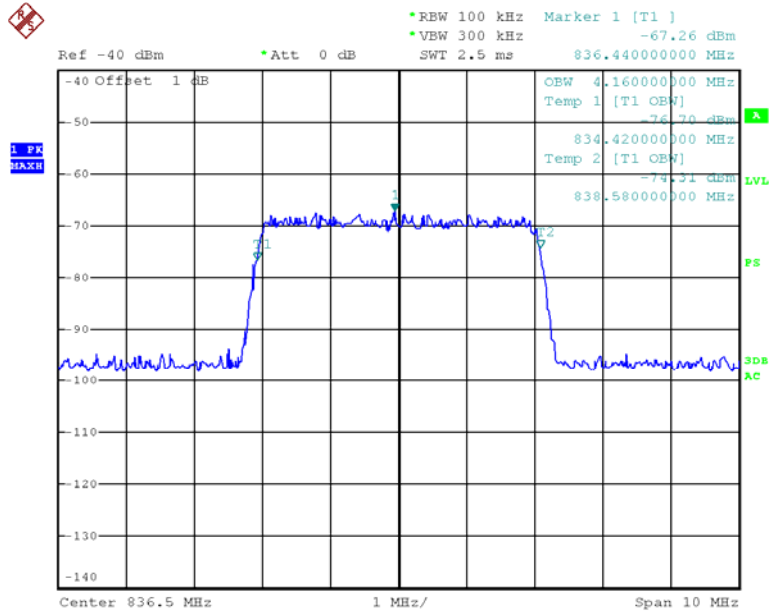**AWGN Signal:****Cellular Band Uplink Pre-AGC Input**


Date: 5.DEC.2015 12:21:22

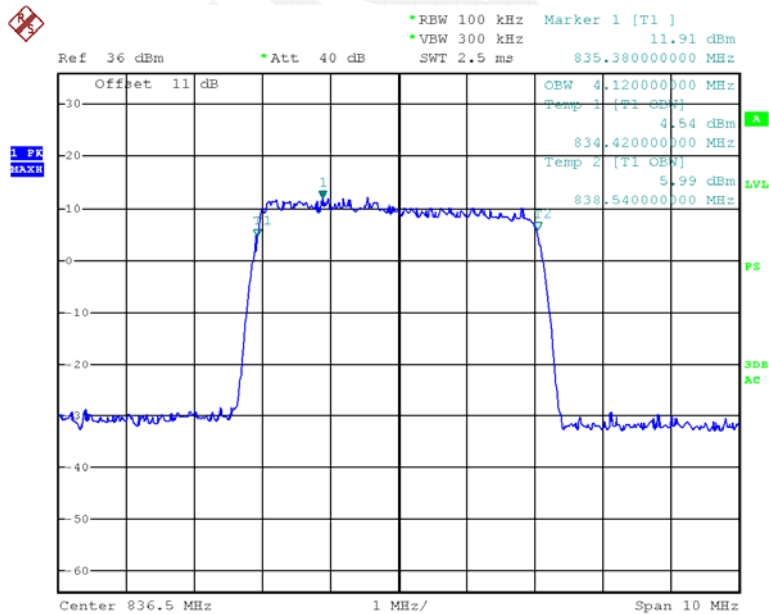**Cellular Band Uplink Pre-AGC Output**

Date: 5.DEC.2015 12:12:53

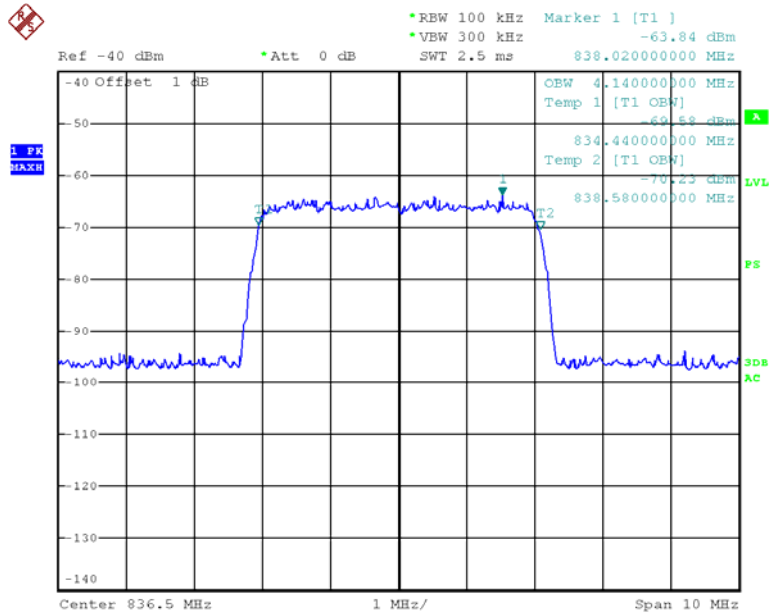**Cellular Band Uplink 3dB above AGC Input**


Date: 5.DEC.2015 12:21:59

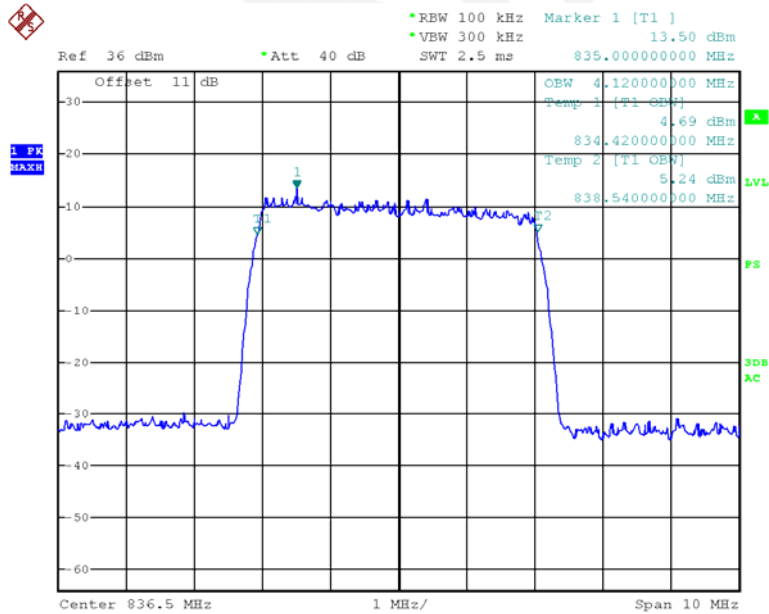**Cellular Band Uplink 3dB above AGC Output**

Date: 5.DEC.2015 12:13:28




### Cellular Band Downlink Pre-AGC Input

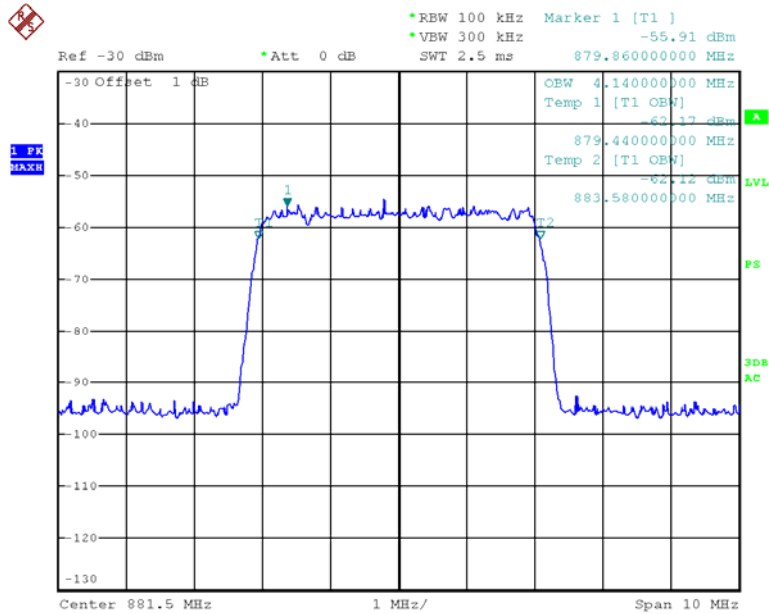


Date: 5.DEC.2015 14:10:55

### Cellular Band Downlink Pre-AGC Output

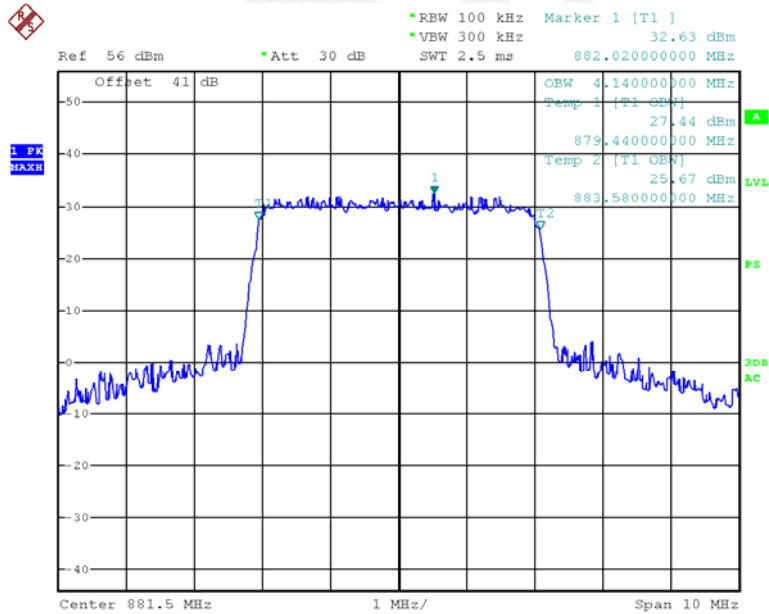


Date: 5.DEC.2015 13:45:47

## Cellular Band Downlink 3dB above AGC Input

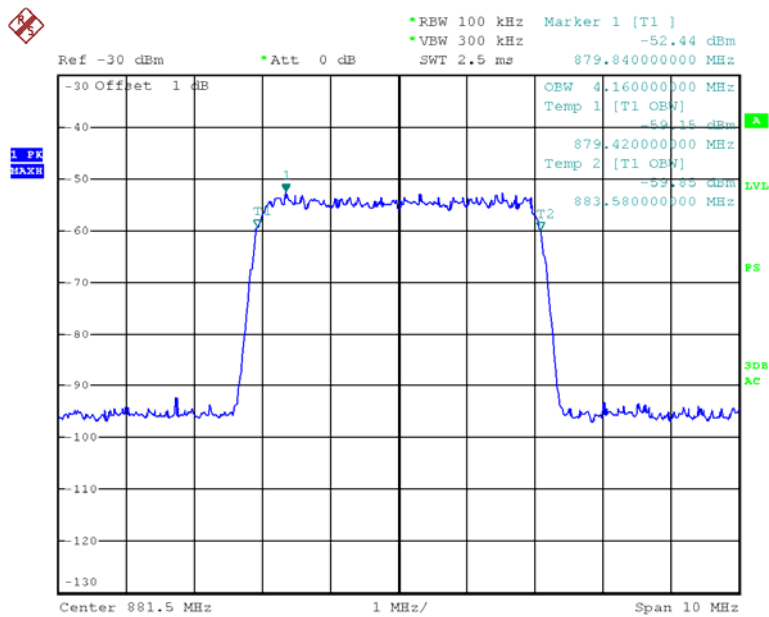


Date: 5.DEC.2015 14:10:25

## Cellular Band Downlink 3dB above AGC Output

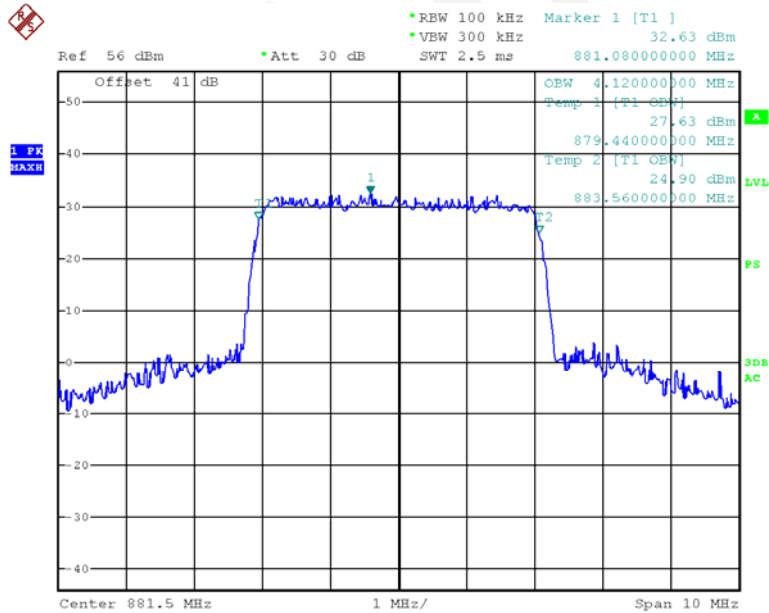


Date: 5.DEC.2015 13:48:12

## PCS Band Uplink Pre-AGC Input

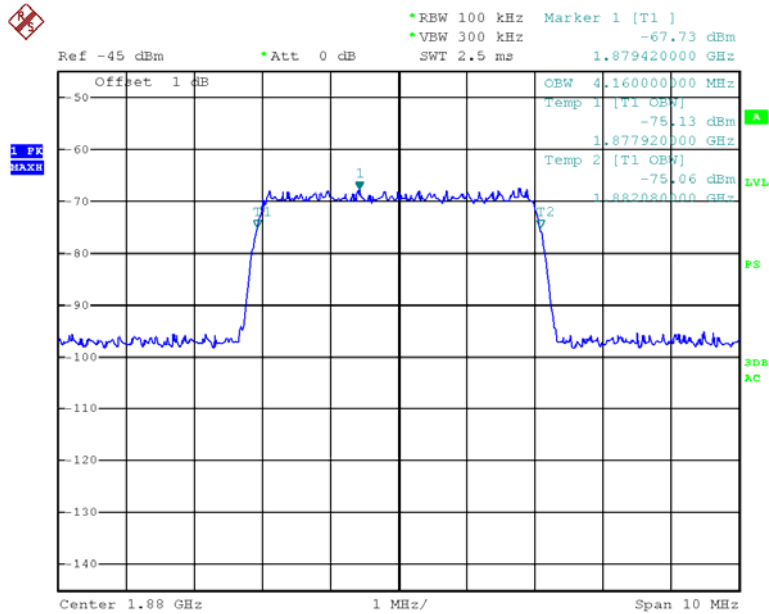


Date: 5.DEC.2015 11:50:18

## PCS Band Uplink Pre-AGC Output

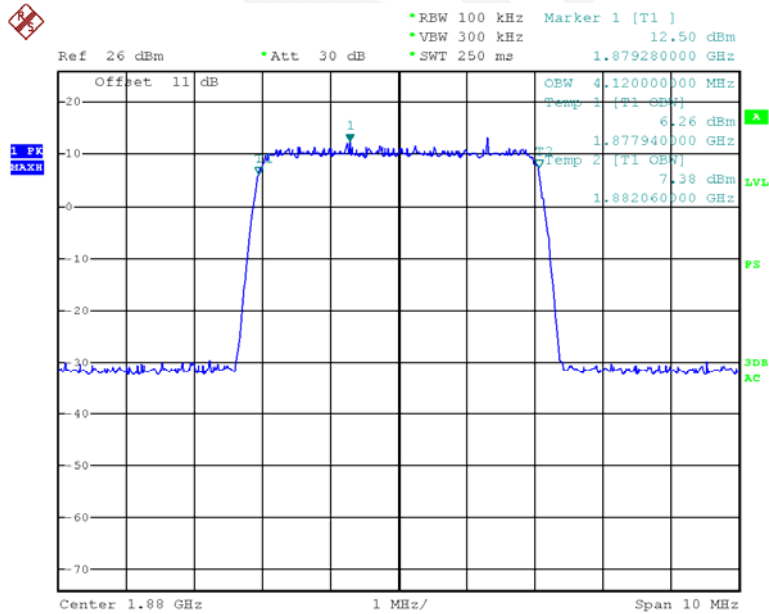


Date: 5.DEC.2015 11:35:12

### PCS Band Uplink 3dB above AGC Input

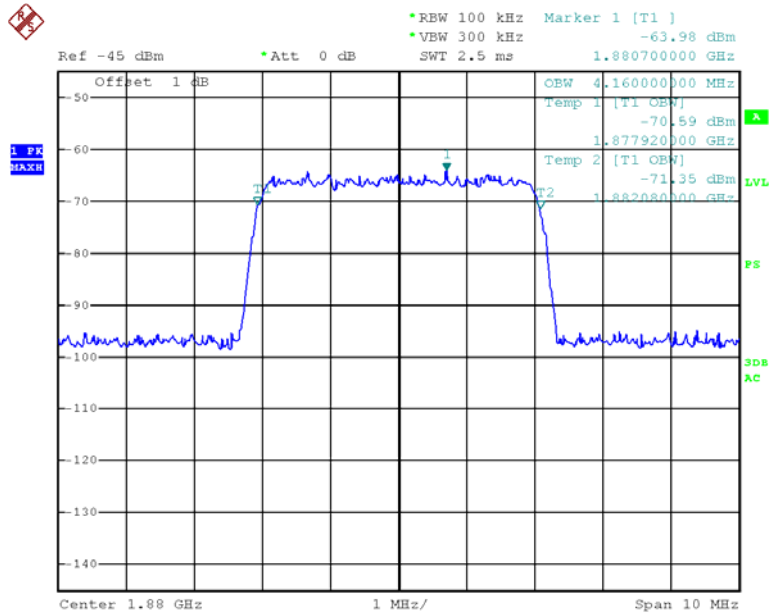


Date: 5.DEC.2015 11:48:36

### PCS Band Uplink 3dB above AGC Output

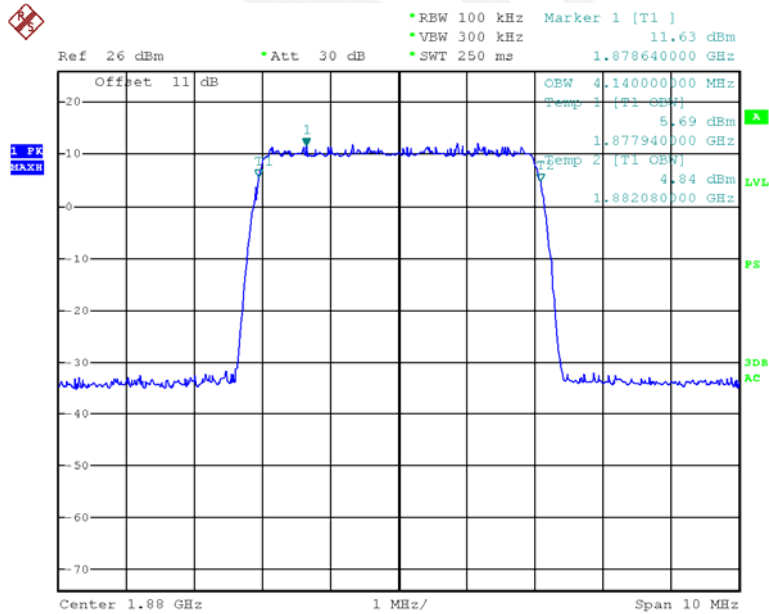


Date: 5.DEC.2015 11:36:14

### PCS Band Downlink Pre-AGC Input

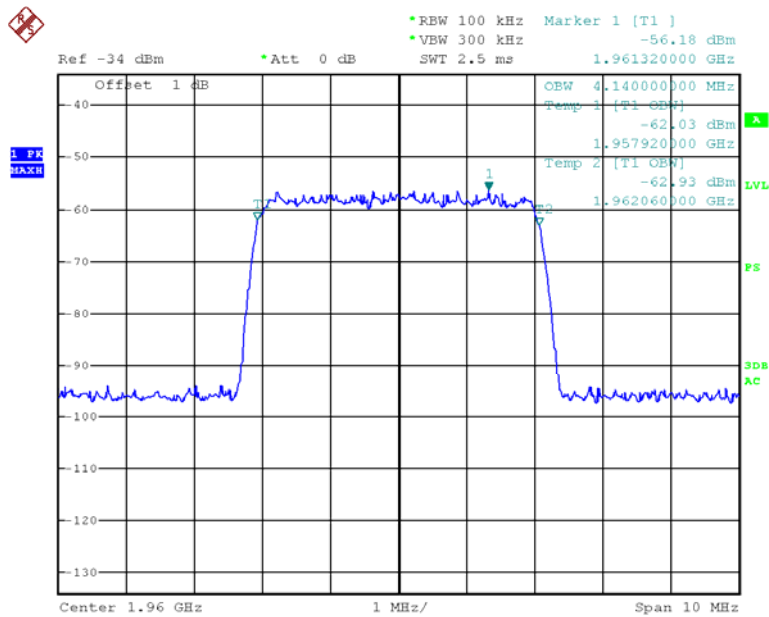


Date: 5.DEC.2015 13:42:04

### PCS Band Downlink Pre-AGC Output

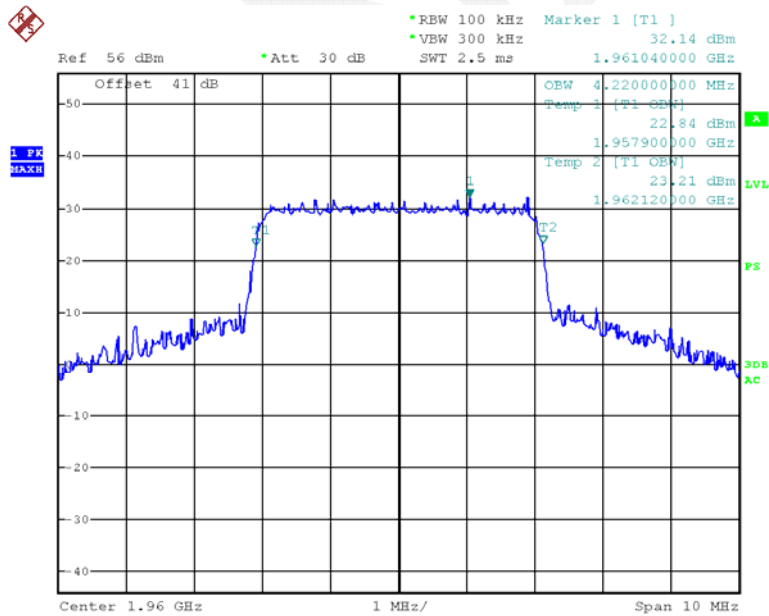


Date: 5.DEC.2015 12:31:02

### PCS Band Downlink 3dB above AGC Input

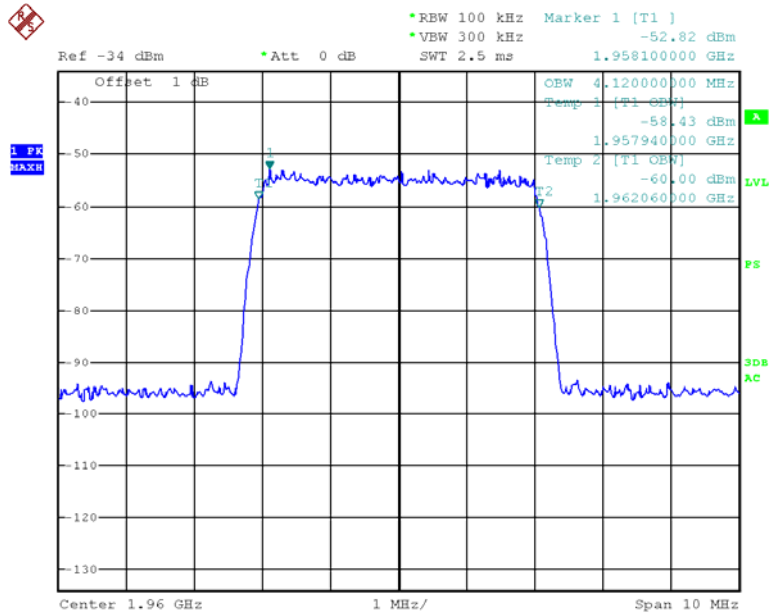


Date: 5.DEC.2015 13:42:39


### PCS Band Downlink 3dB above AGC Output

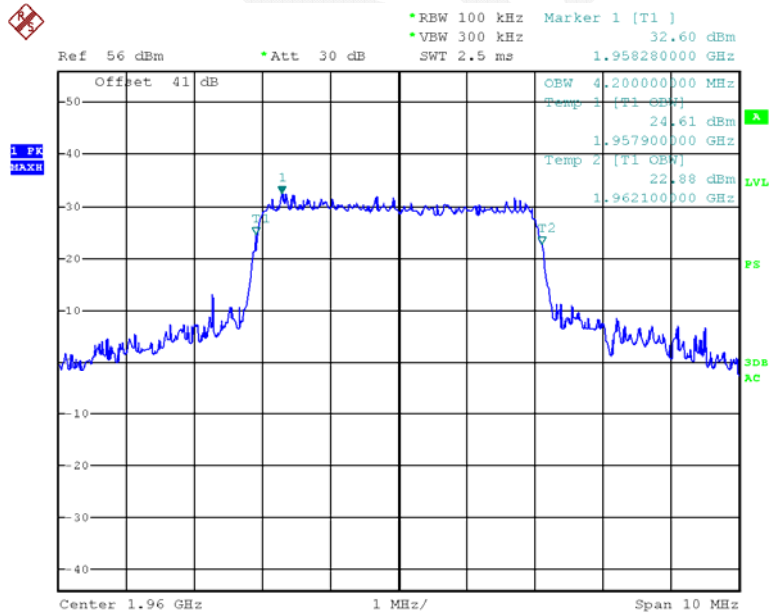


Date: 5.DEC.2015 12:31:29

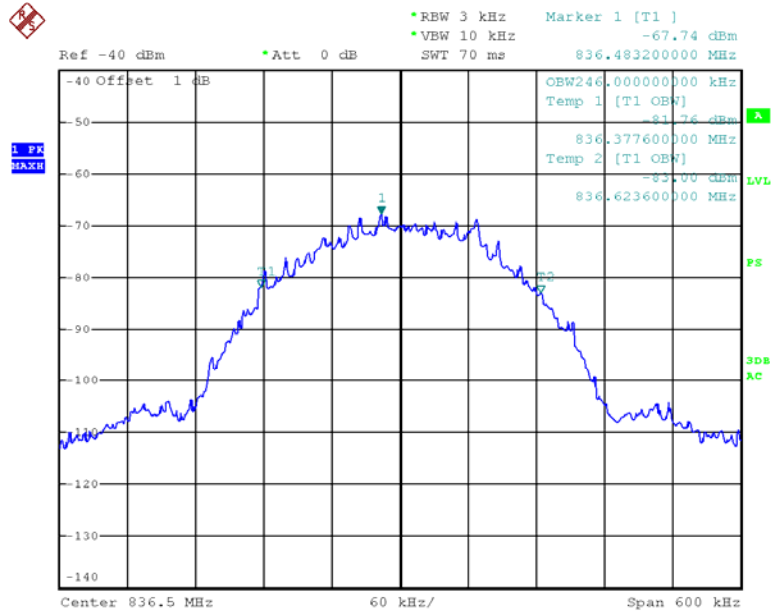**GSM Signal:****Cellular Band Uplink Pre-AGC Input**


Date: 5.DEC.2015 12:18:55

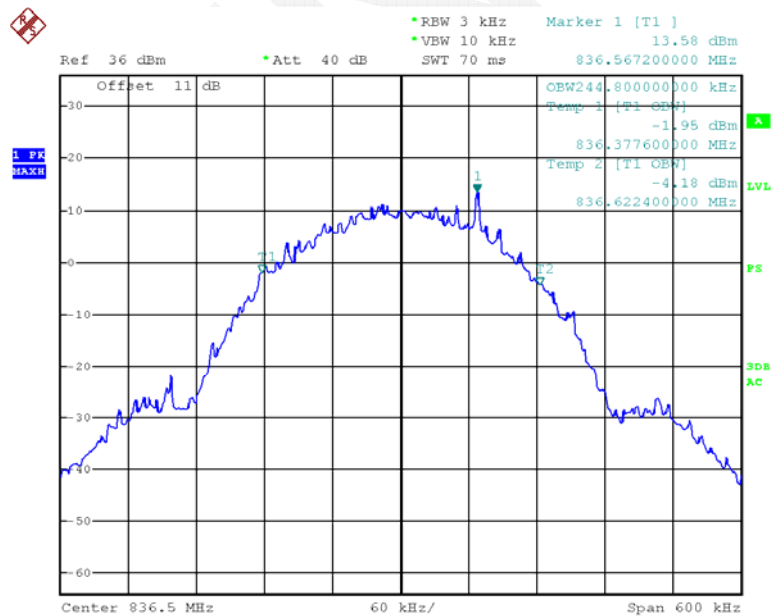**Cellular Band Uplink Pre-AGC Output**

Date: 5.DEC.2015 12:16:25

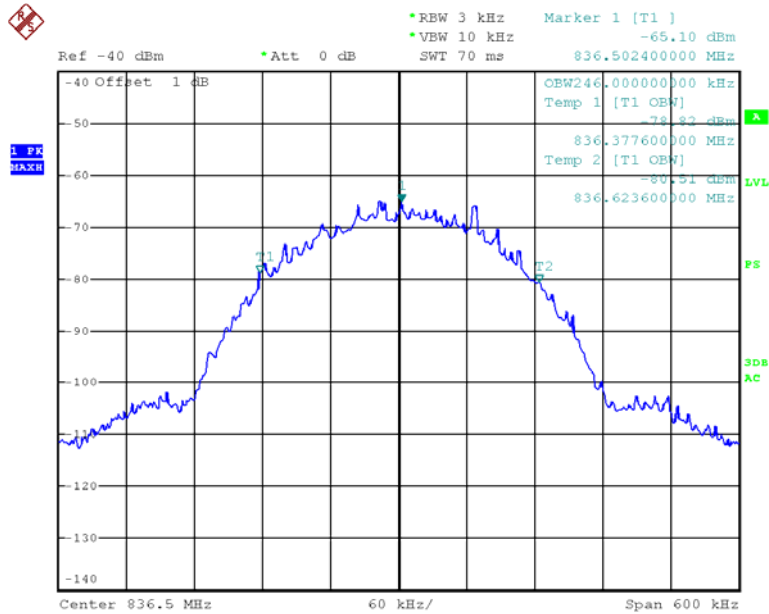
**Cellular Band Uplink 3dB above AGC Input**

Date: 5.DEC.2015 12:19:23

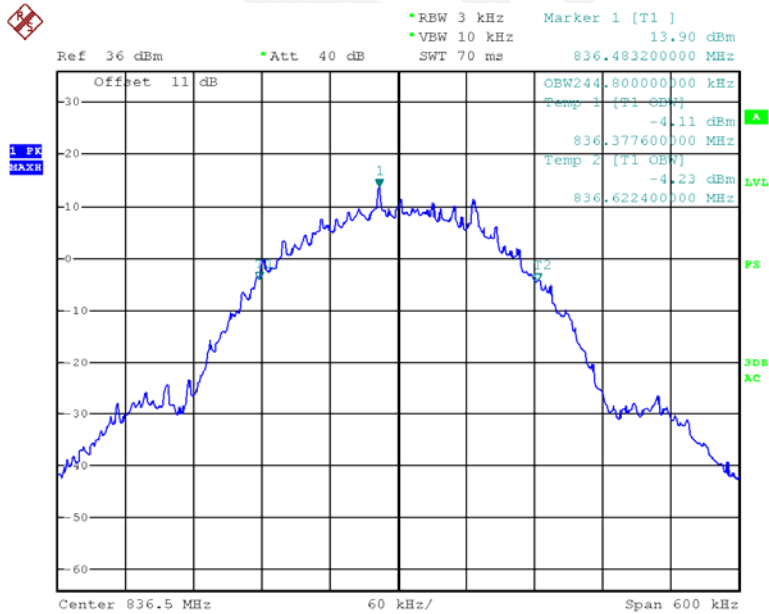
**Cellular Band Uplink 3dB above AGC Output**

Date: 5.DEC.2015 12:15:34

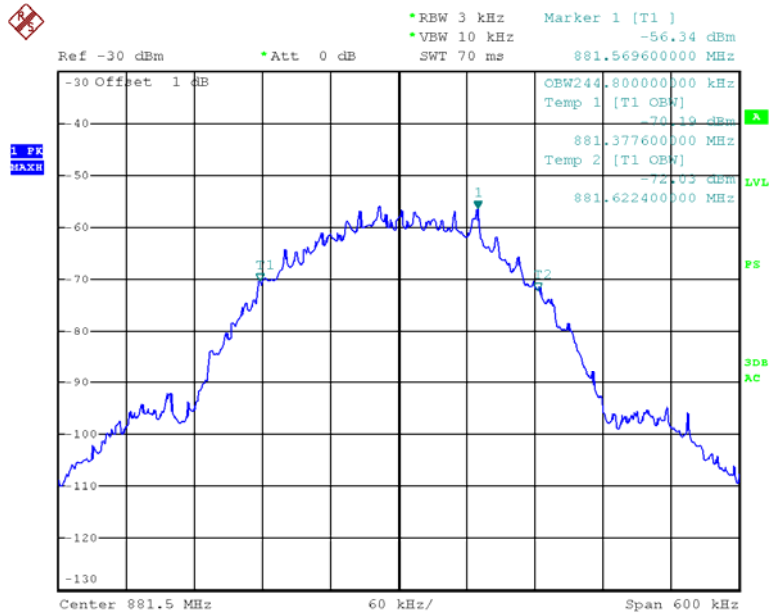


**Cellular Band Downlink Pre-AGC Input**

Date: 5.DEC.2015 14:09:17

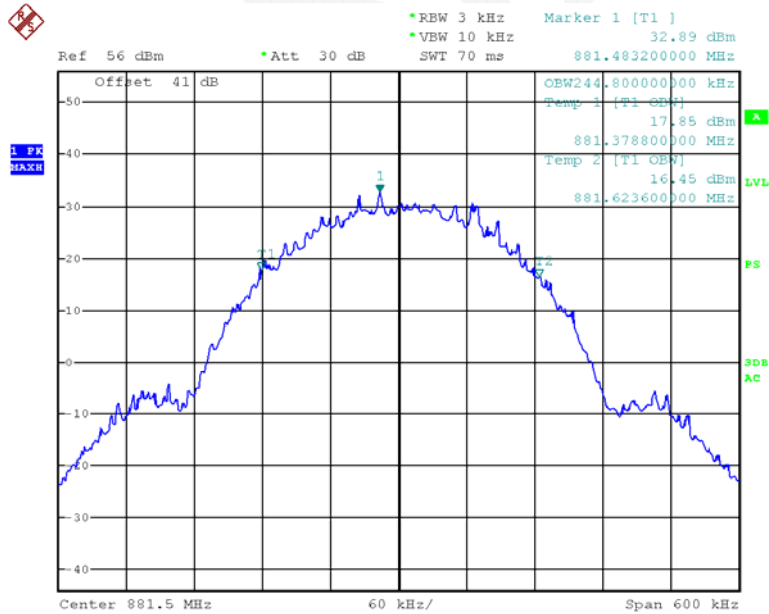**Cellular Band Downlink Pre-AGC Output**


Date: 5.DEC.2015 13:54:45

## Cellular Band Downlink 3dB above AGC Input

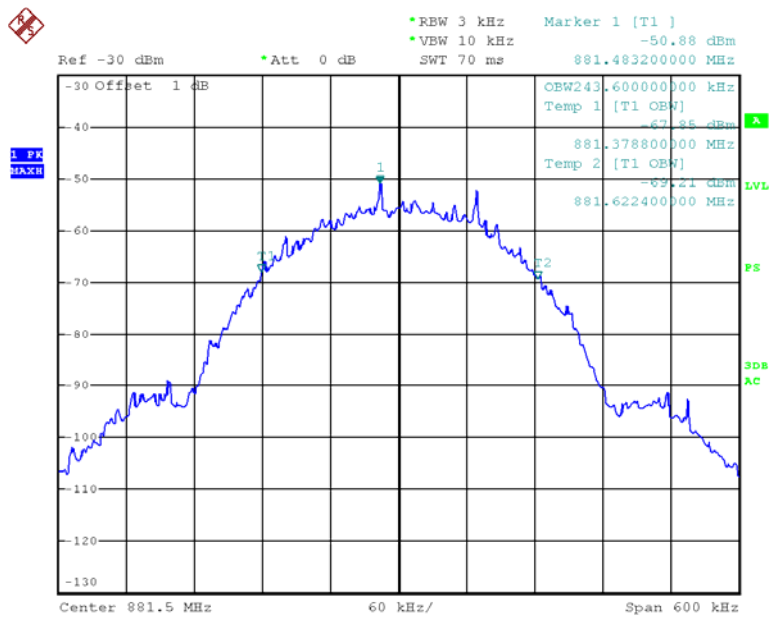


Date: 5.DEC.2015 14:09:52

## Cellular Band Downlink 3dB above AGC Output

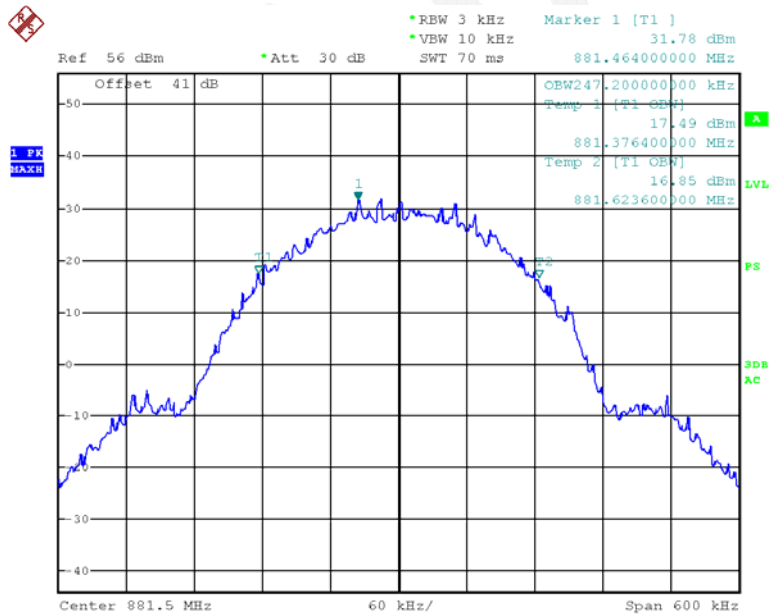


Date: 5.DEC.2015 13:55:18

### PCS Band Uplink Pre-AGC Input

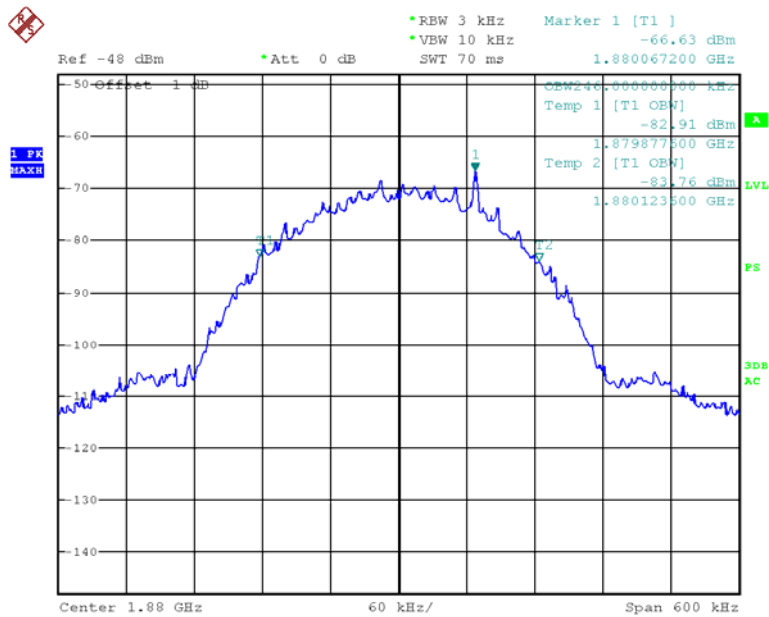


Date: 5.DEC.2015 11:45:45

### PCS Band Uplink Pre-AGC Output

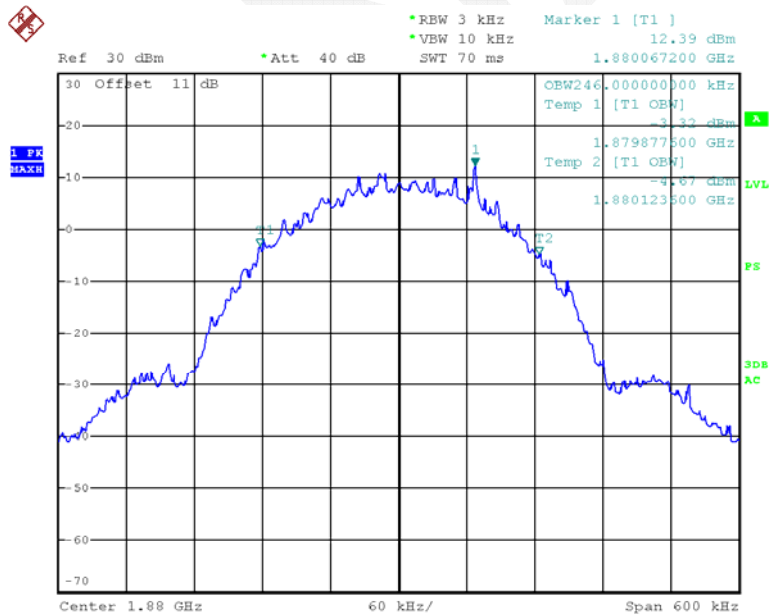


Date: 5.DEC.2015 11:42:15

## PCS Band Uplink 3dB above AGC Input

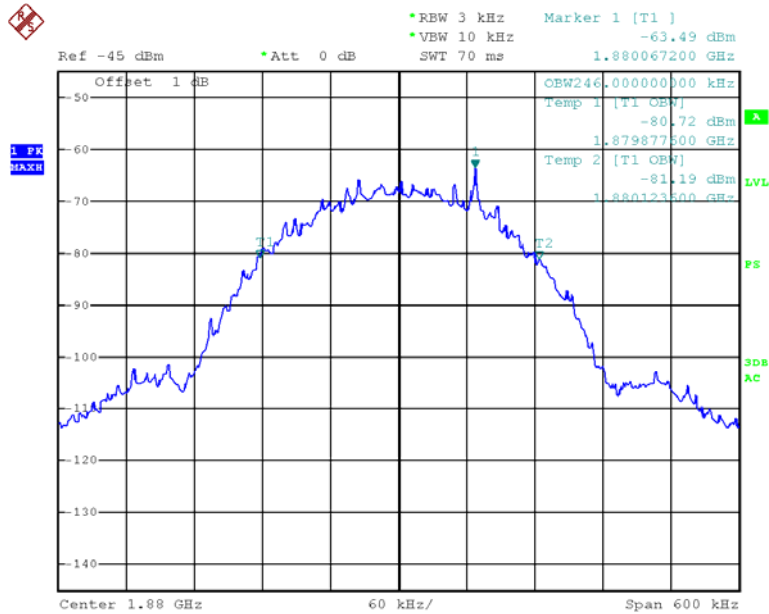


Date: 5.DEC.2015 11:46:32

## PCS Band Uplink 3dB above AGC Output

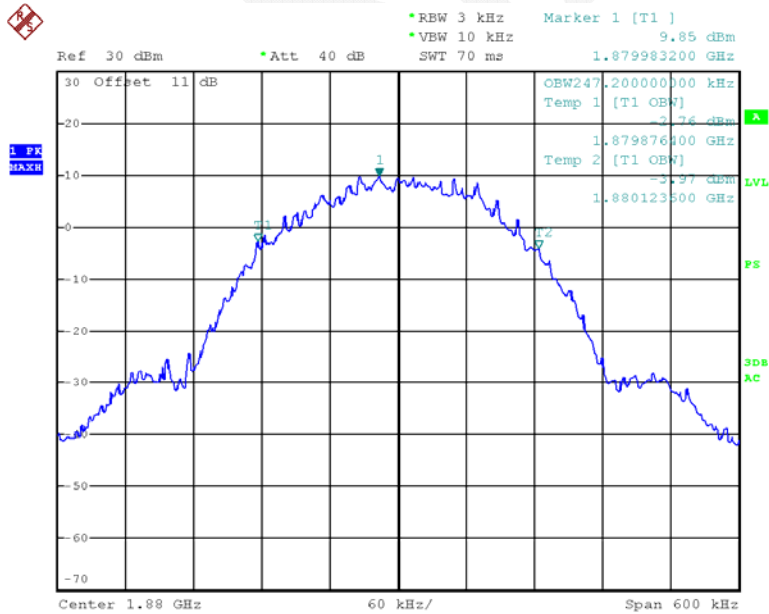


Date: 5.DEC.2015 11:41:39

## PCS Band Downlink Pre-AGC Input

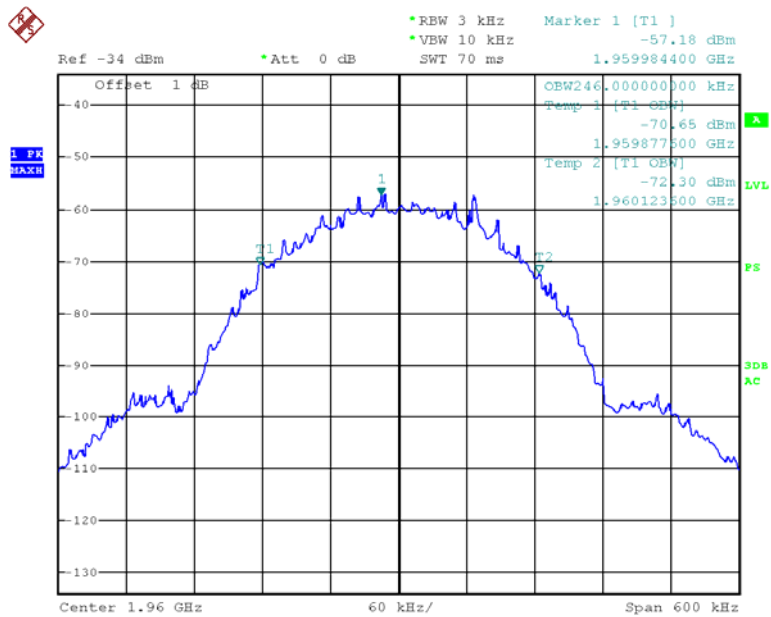


Date: 5.DEC.2015 13:40:33

## PCS Band Downlink Pre-AGC Output

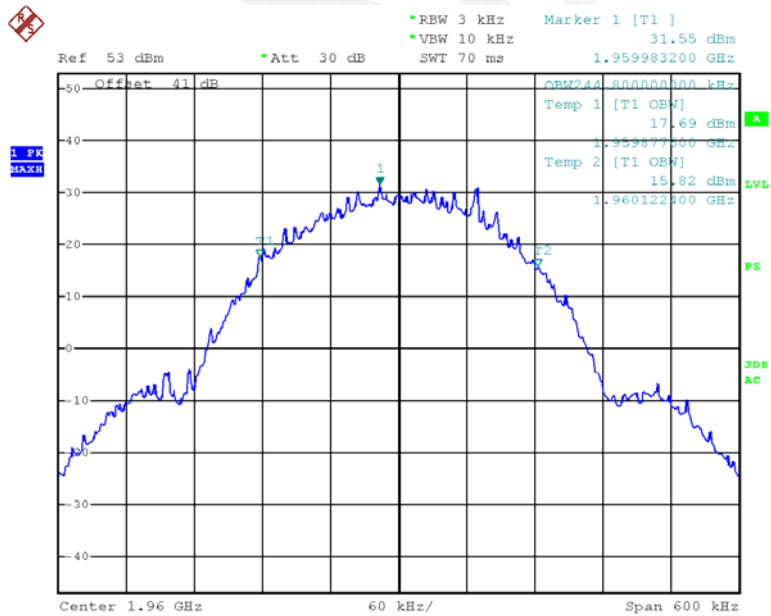


Date: 5.DEC.2015 12:33:57

### PCS Band Downlink 3dB above AGC Input

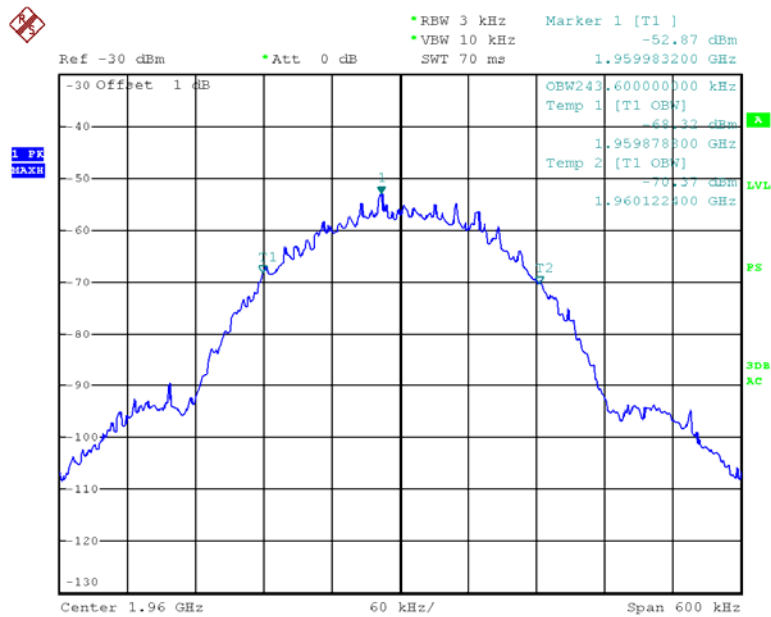

Date: 5.DEC.2015 13:40:04

### PCS Band Downlink 3dB above AGC Output

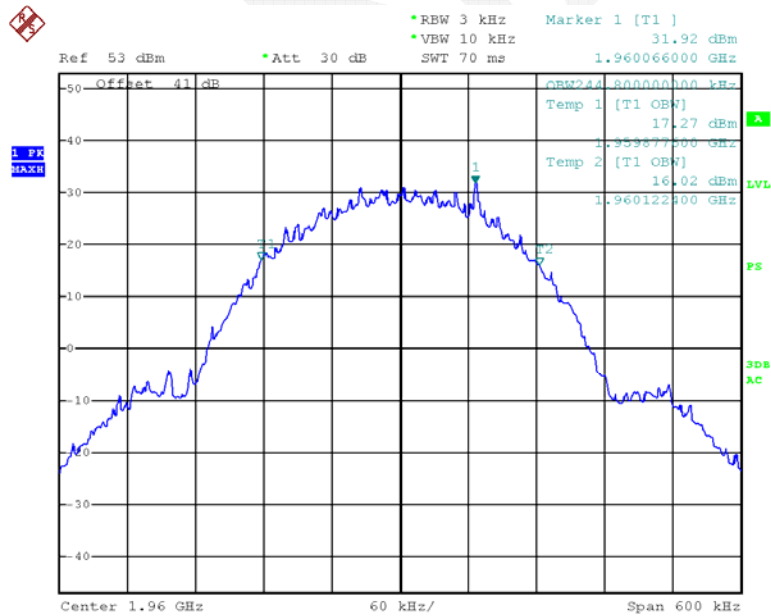

Date: 5.DEC.2015 12:34:40

## § 2.1051&§ 22.917&§ 24.238&KDB935210 D02- OUT-OF-BAND/BLOCK EMISSIONS(INCLUDING INTERNODULATION PRODUCTS)

### Applicable Standards

According to §22.917(a) *Out of band emissions*. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a) *Out of band emissions*. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

KDB935210 D02 Signal Boosters Certification v03: Report worst case results for occupied bandwidth comparison and intermodulation tests done with and without any AGC circuitry activated, for devices so equipped.

### Test Procedure

Out-of-band/block emissions (including intermodulation products) shall be measured under each of the following two stimulus conditions:

- a) two adjacent test signals sequentially tuned to the lower and upper frequency band/block edges;
- b) a single test signal, sequentially tuned to the lowest and highest frequencies or channels within the frequency band/block under examination.

NOTE—Single channel boosters that cannot accommodate two simultaneous signals within the passband, can be excluded from the test stipulated in step a).

#### EUT out-of-band/block emissions conducted measurement

- a) Connect a signal generator to the input of the EUT.

NOTE—If the signal generator is not capable of generating two modulated carriers simultaneously, then two discrete signal generators can be connected with an appropriate combining network to support the two-tone test.

- b) Set the signal generator to produce two AWGN signals as previously described (e.g., 4.1 MHz OBW).
- c) Set the center frequencies such that the AWGN signals occupy adjacent channels, as defined by industry standards such as 3GPP or 3GPP2, at the upper edge of the frequency band or block of interest.
- d) Set the composite power levels such that the input signal is just below the AGC threshold (see 3.2), but not more than 0.5 dB below. The composite power can be measured using the procedures provided in KDB Publication 971168, but it will be necessary to expand the power integration bandwidth so as to include both of the transmit channels. Alternatively, the composite power can be measured using an average power meter as described in KDB Publication 971168.
- e) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation as necessary.
- f) Set the RBW = reference bandwidth in the applicable rule section for the supported frequency band (typically 1 % of the emission bandwidth, 100 kHz, or 1 MHz)
- g) Set the VBW =  $3 \times \text{RBW}$ .
- h) Set the detector to power averaging (rms) detector.
- i) Set the Sweep time = auto-couple.
- j) Set the analyzer start frequency to the upper block edge frequency and the stop frequency to the upper block edge frequency plus 300 kHz or 3 MHz for frequencies below and above 1 GHz, respectively.
- k) Trace average at least 100 traces in power averaging (i.e., rms) mode.

- l) Use the marker function to find the maximum power level.  
 m) Capture the spectrum analyzer trace of the power level for inclusion in the test report.  
 n) Repeat the procedure with the composite input power level set to 3 dB above the AGC threshold.  
 o) Reset the input signals frequencies to the lower edge of the frequency block or band under examination.  
 p) Reset the spectrum analyzer start frequency to the lower block edge frequency minus 300 kHz, or 3 MHz (for frequencies below and above 1 GHz, respectively), and the stop frequency to the lower band or block edge frequency.  
 q) Repeat steps k) to n).  
 r) Repeat steps a) to q) with the signal generator configured for a single test signal tuned as close as possible to the block edges.  
 s) Repeat steps a) to r) with the narrowband test signal.  
 t) Repeat steps a) to s) for all authorized frequency bands or blocks used by the EUT.

### Test Equipment List and Details

| Manufacturer | Description                         | Model  | Serial Number         | Calibration Date | Calibration Due Date |
|--------------|-------------------------------------|--------|-----------------------|------------------|----------------------|
| R&S          | Spectrum Analyzer                   | FSP 38 | 100478                | 2015-05-09       | 2016-05-09           |
| R & S        | Wideband Radio Communication Tester | CMW500 | 1201.002K50-146520-wh | 2014-12-19       | 2015-12-19           |
| R & S        | Wideband Radio Communication Tester | CMW500 | 1201.002K50-146520-wh | 2015-12-19       | 2016-12-19           |
| Agilent      | MXG Vector Signal Generator         | N5182B | MY51350142            | 2015-03-30       | 2016-03-29           |

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

|                           |                 |
|---------------------------|-----------------|
| <b>Temperature:</b>       | 23.4~24.5°C     |
| <b>Relative Humidity:</b> | 40~48 %         |
| <b>ATM Pressure:</b>      | 101.1~102.2 kPa |



*The testing was performed by Dean Liu from 2015-12-05 to 2015-12-23.*

Please refer to the following plots.




**Single channel:**

Uplink:

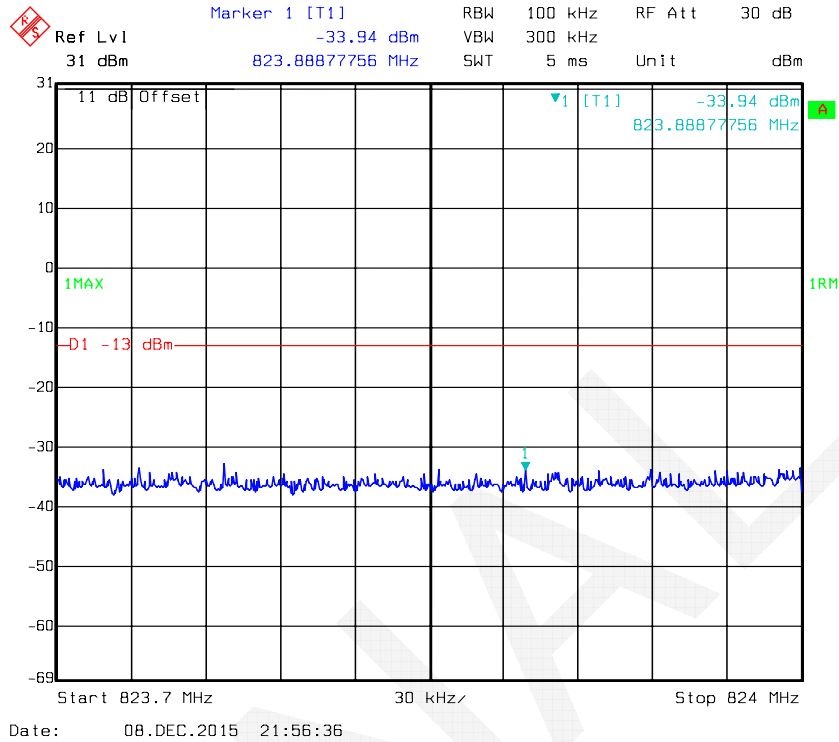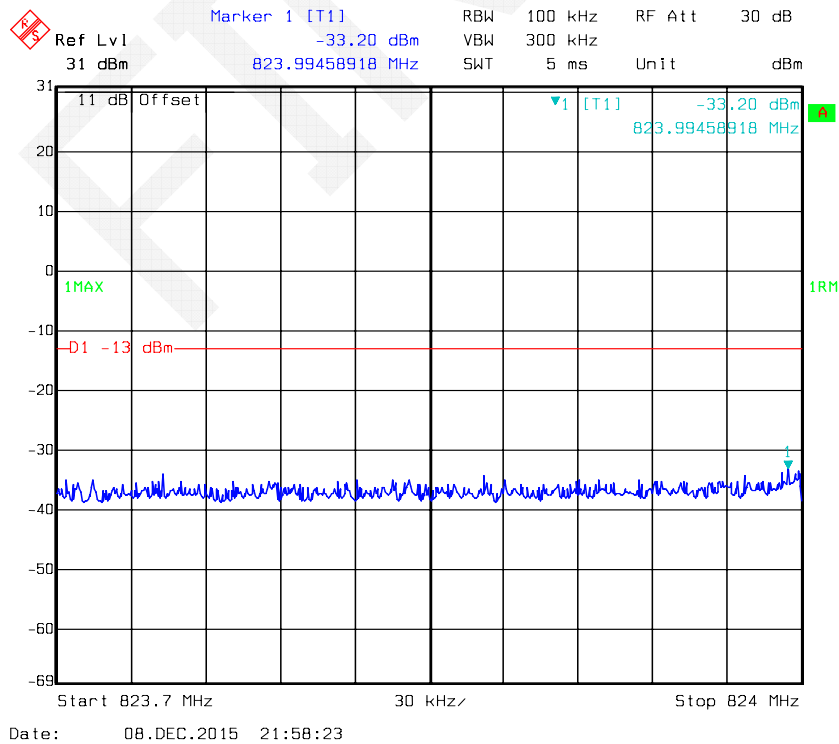
**Cellular Band AWGN Left Side Pre-AGC****Cellular Band AWGN Left Side 3dB Above AGG**

### Cellular Band GSM Left Side Pre-AGC

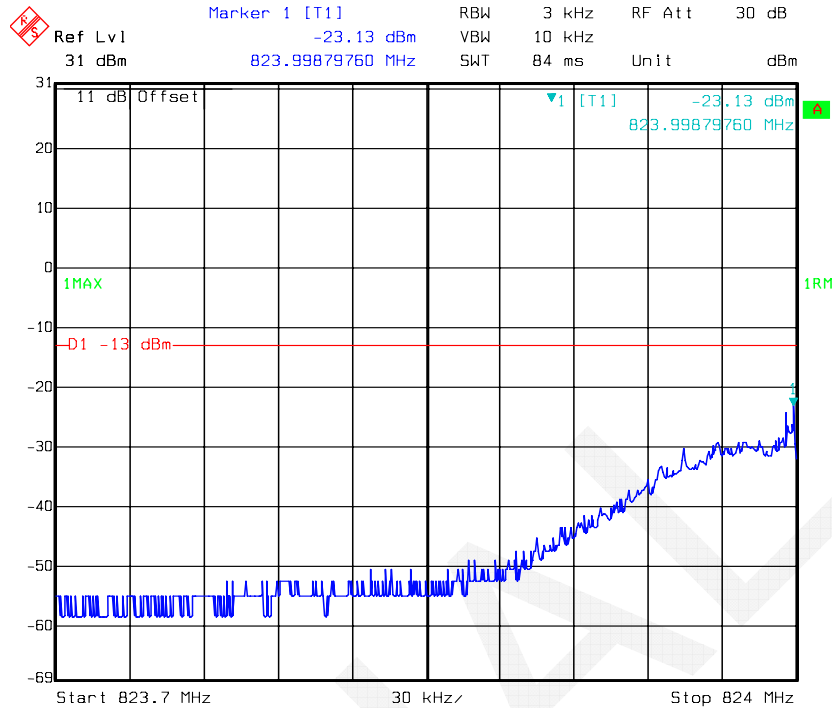


Date: 08.DEC.2015 22:03:32

### Cellular Band GSM Left Side 3dB Above AGC

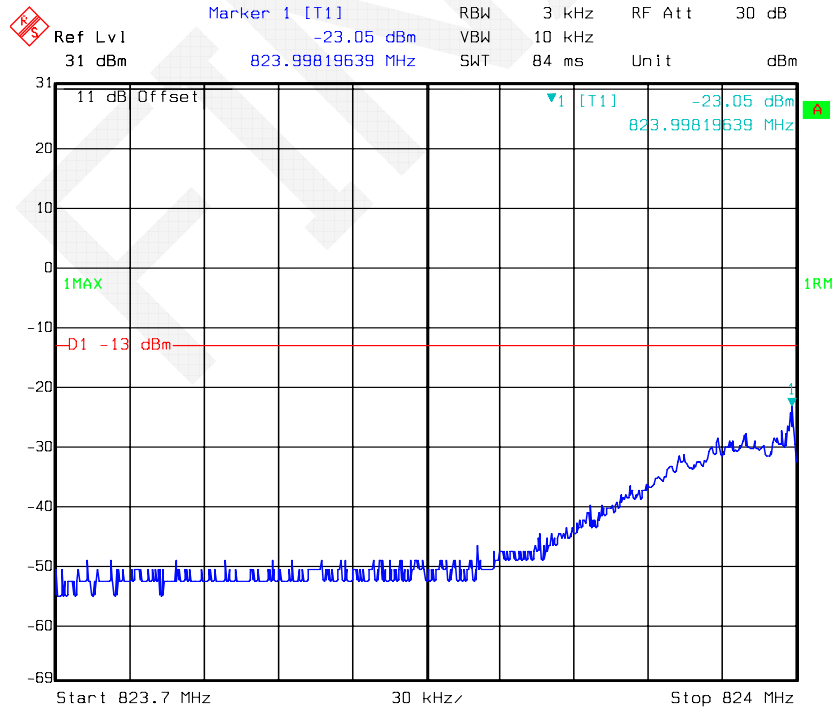


Date: 08.DEC.2015 22:04:43

### Cellular Band AWGN Right Side Pre-AGC

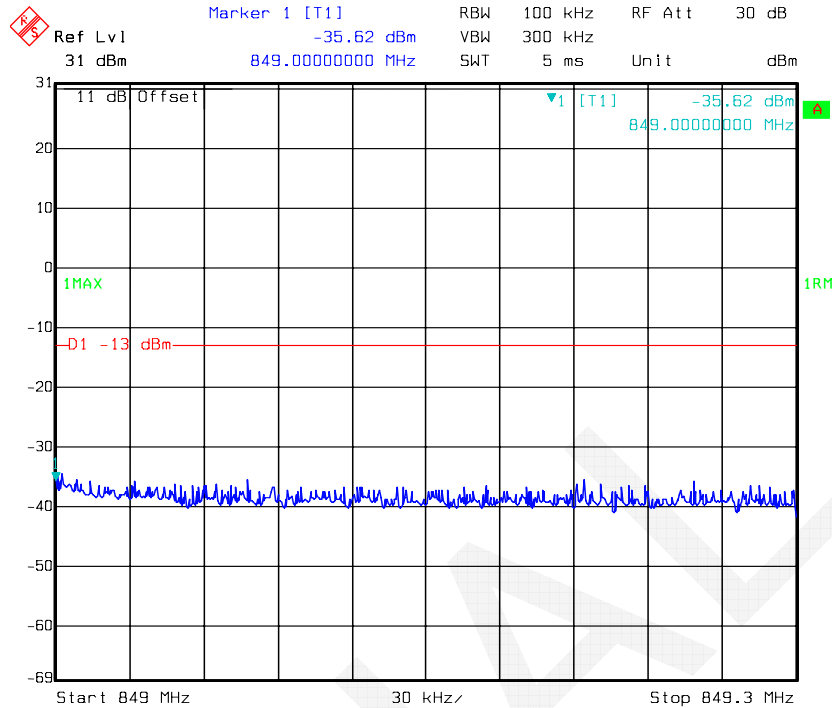


Date: 08.DEC.2015 22:08:38

### Cellular Band AWGN Right Side 3dB Above AGG

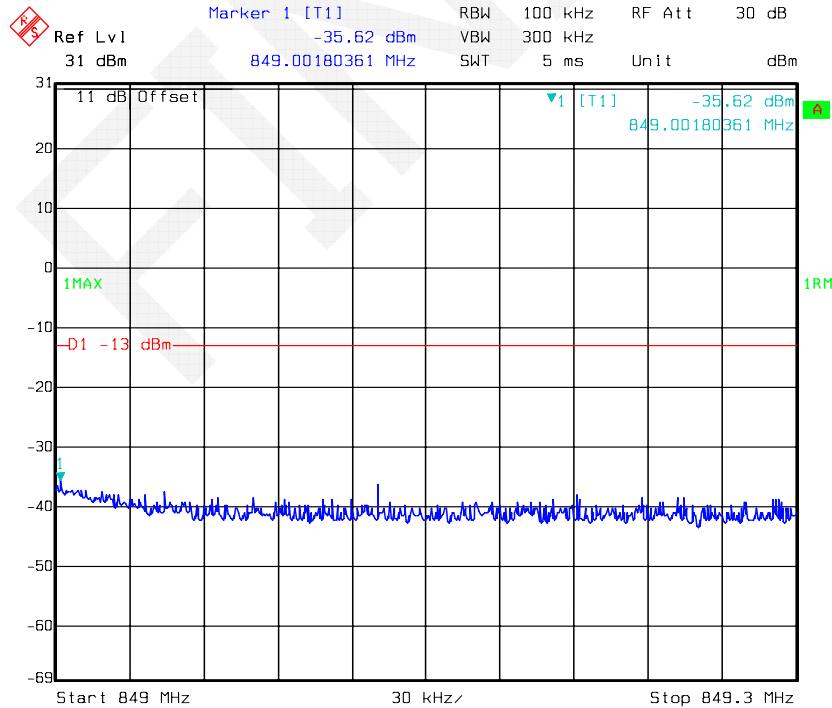

Date: 08.DEC.2015 22:08:21

### Cellular Band GSM Right Side Pre-AGC

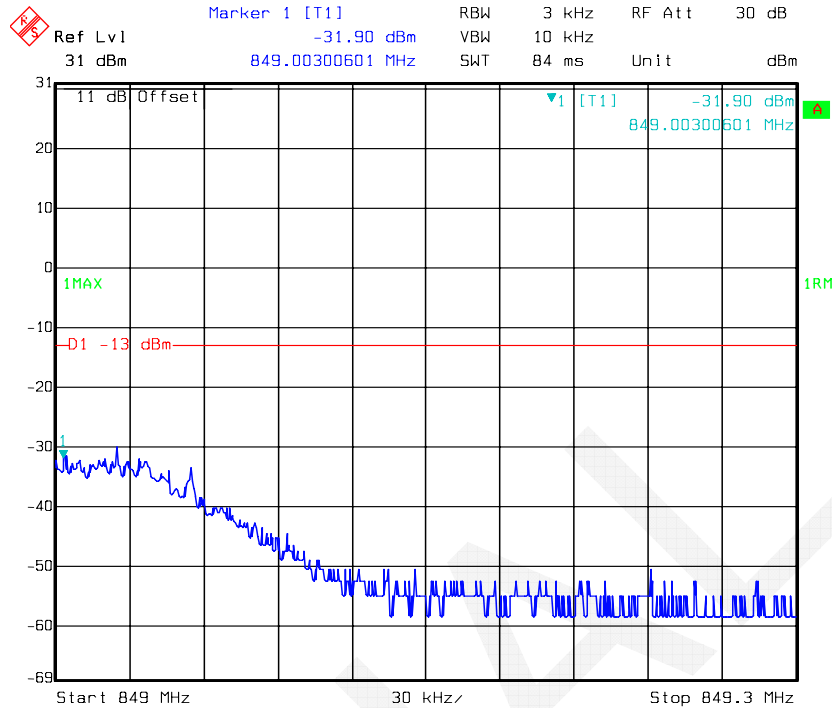


Date: 08.DEC.2015 22:05:35

### Cellular Band GSM Right Side 3dB Above AGC




Date: 08.DEC.2015 22:05:52

### PCS Band AWGN Left Side Pre-AGC

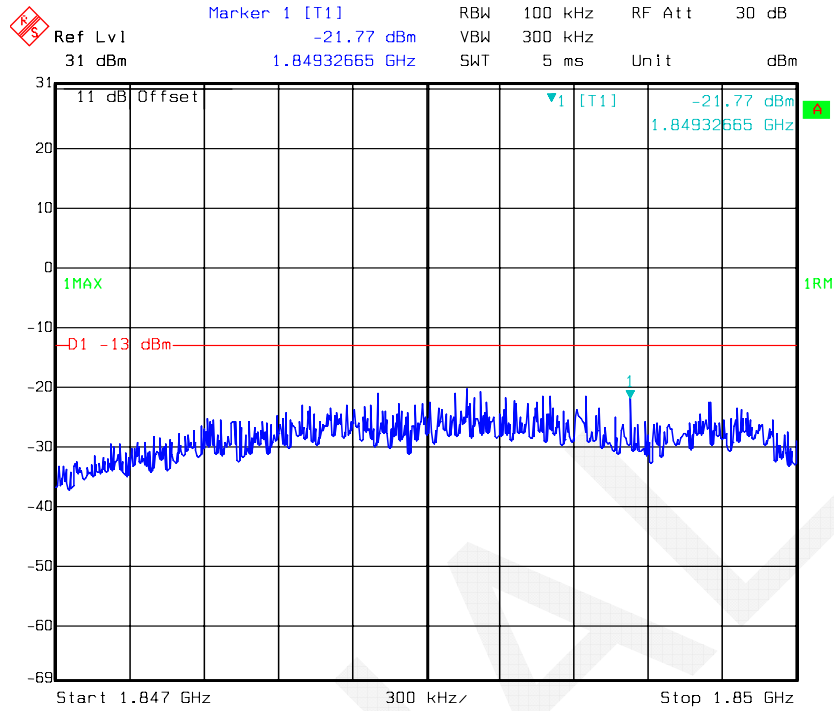


Date: 08.DEC.2015 22:10:21

### PCS Band AWGN Left Side 3dB Above AGC

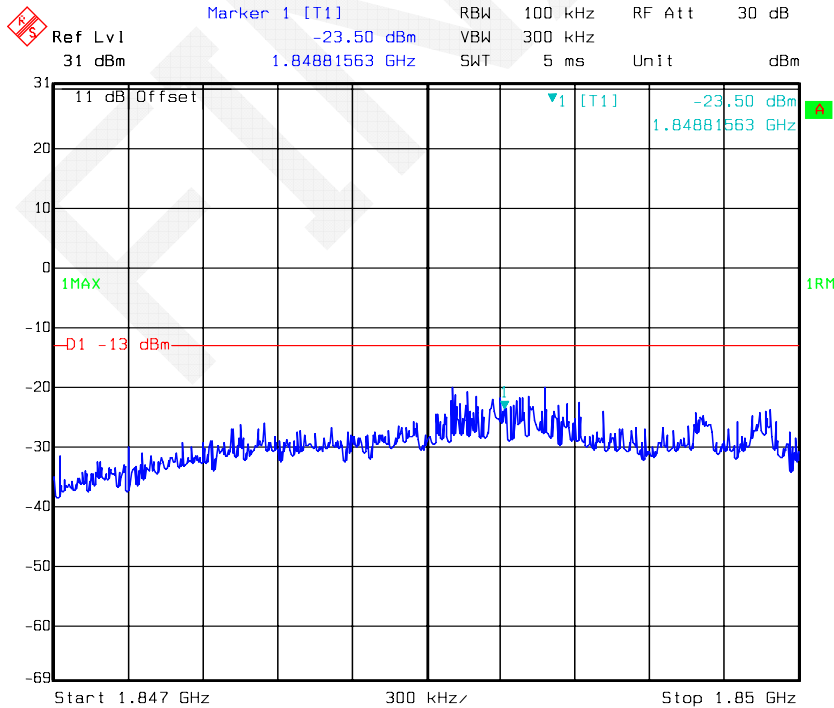


Date: 08.DEC.2015 22:11:26

### PCS Band GSM Left Side Pre-AGC

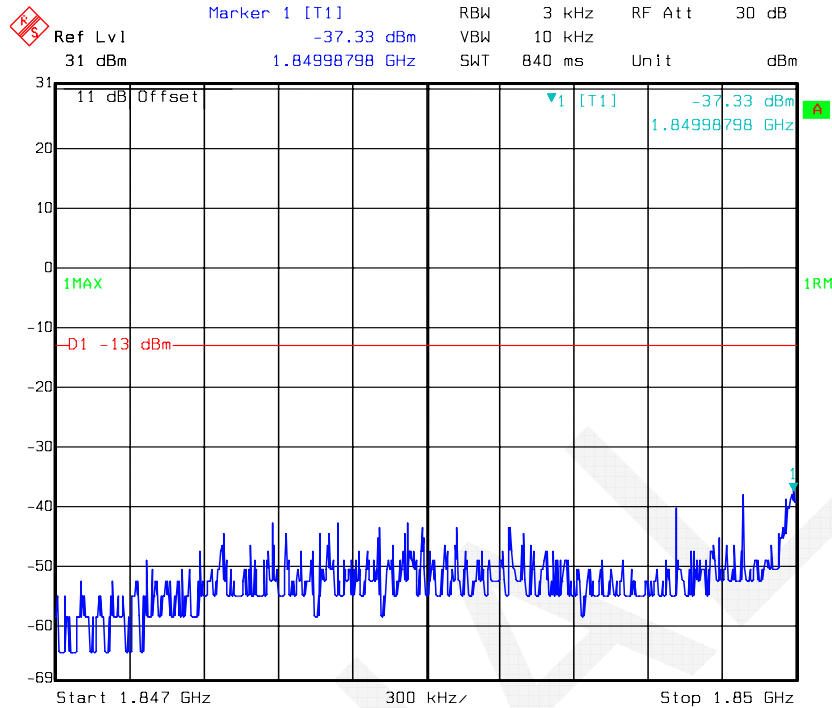


Date: 08.DEC.2015 22:13:34

### PCS Band GSM Left Side Above 3dB AGC

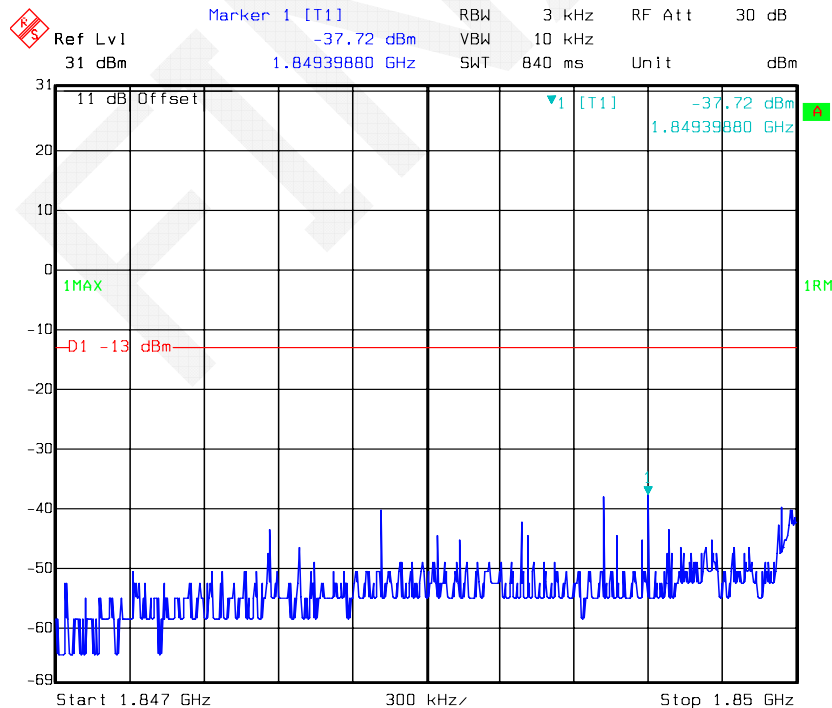


Date: 08.DEC.2015 22:13:54

### PCS Band AWGN Right Side Pre-AGC

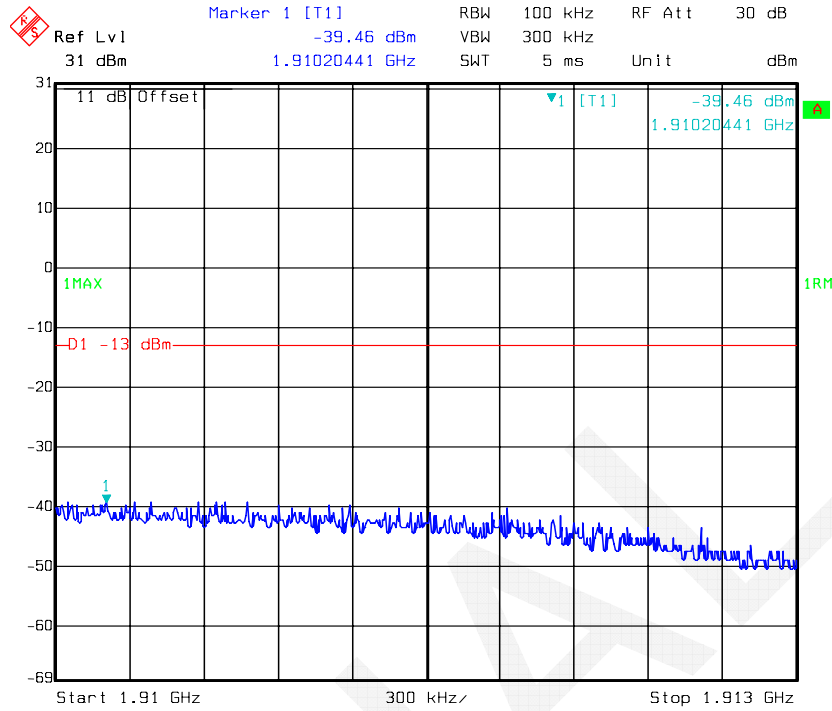


Date: 08.DEC.2015 22:22:41

### PCS Band AWGN Right Side 3dB Above AGC

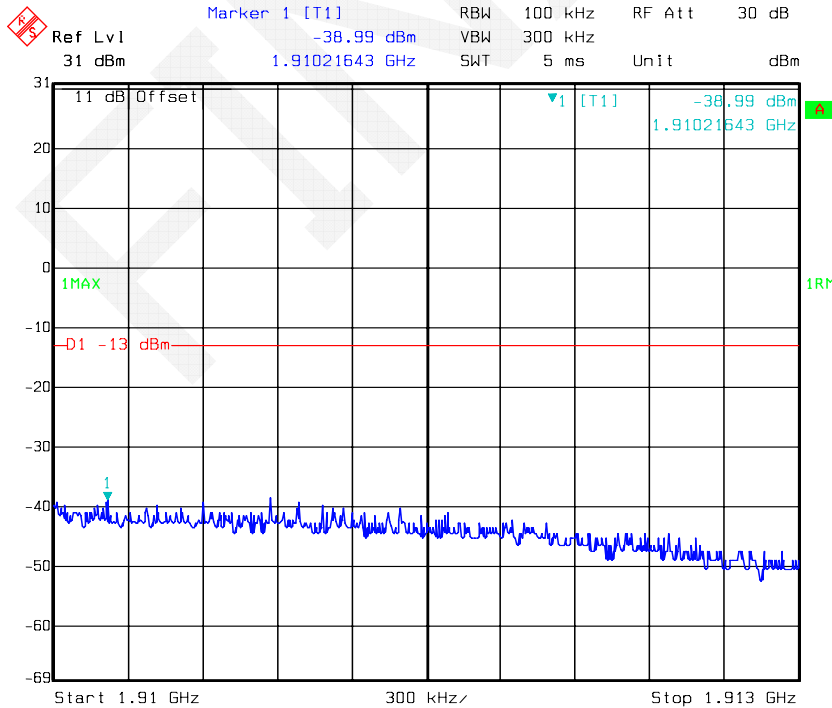


Date: 08.DEC.2015 22:21:49

## PCS Band GSM Right Side Pre-AGC

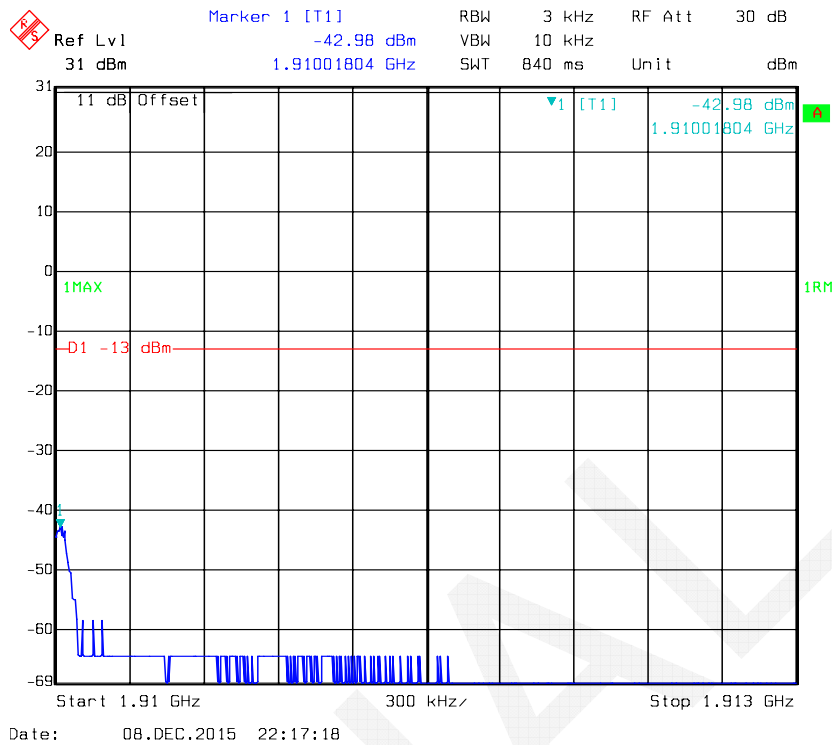


## PCS Band GSM Right Side Above 3dB AGC

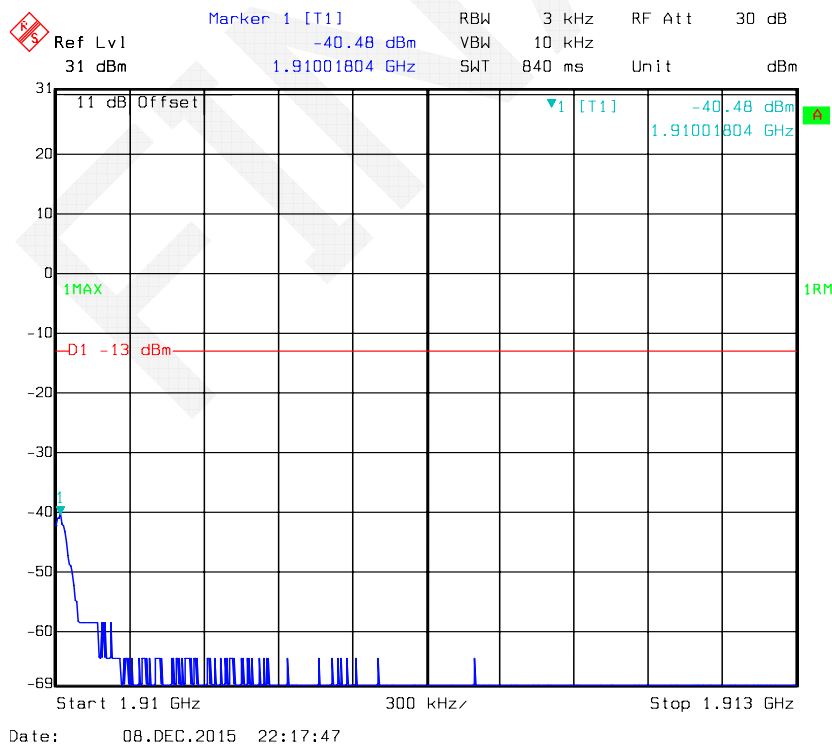




Downlink

Cellular Band AWGN Left Side Pre-AGC

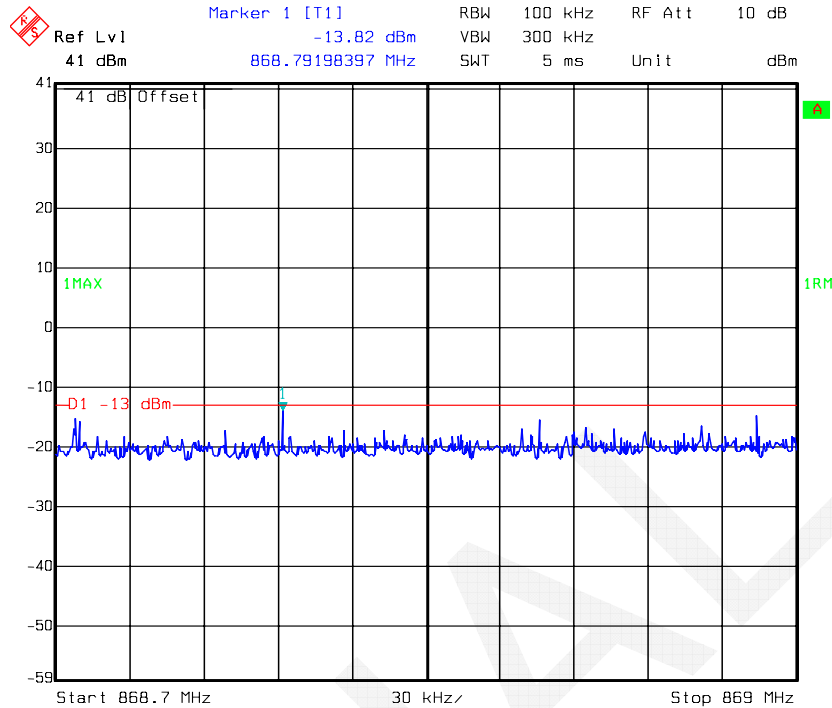


Date: 23.DEC.2015 23:22:48

Cellular Band AWGN Left Side 3dB Above AGG

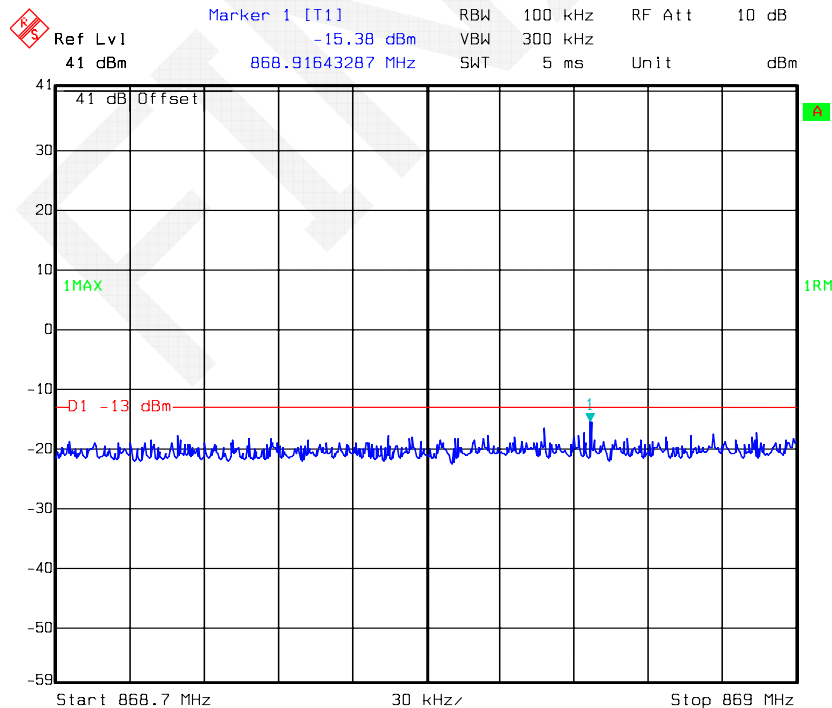


Date: 23.DEC.2015 23:23:07


### Cellular Band GSM Left Side Pre-AGC

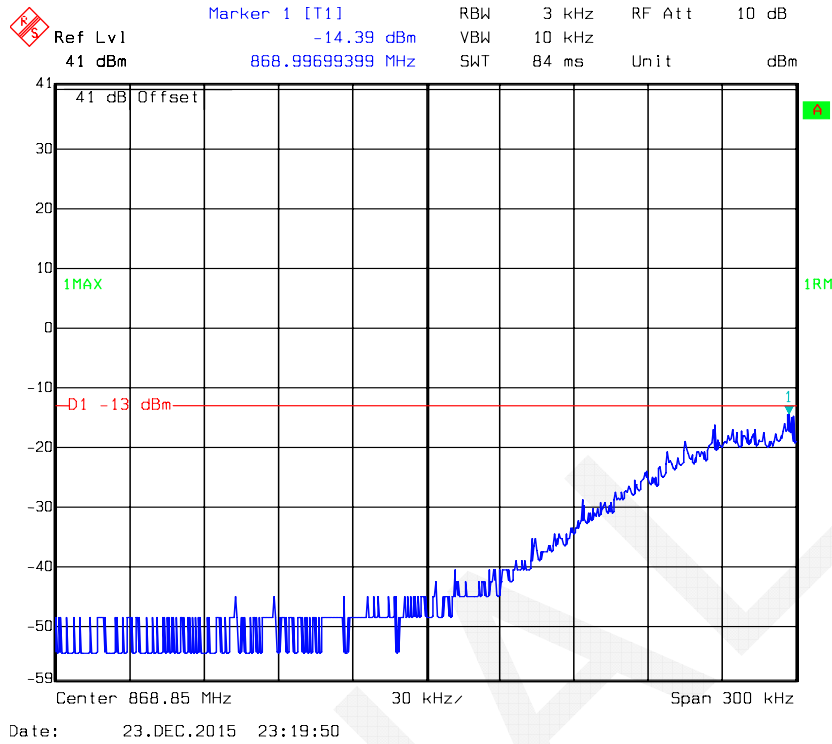


### Cellular Band GSM Left Side 3dB Above AGC

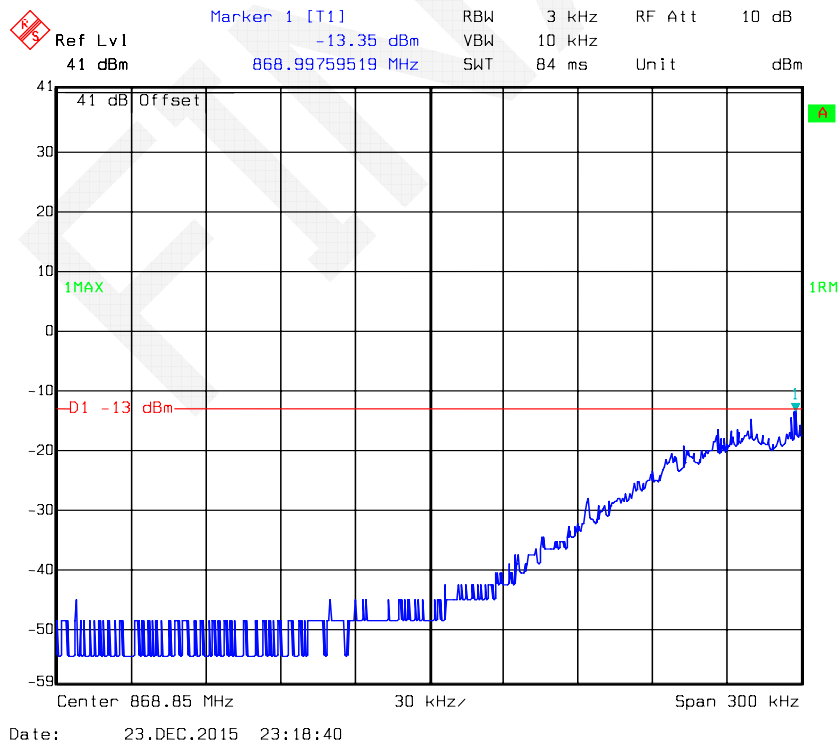


### Cellular Band AWGN Right Side Pre-AGC

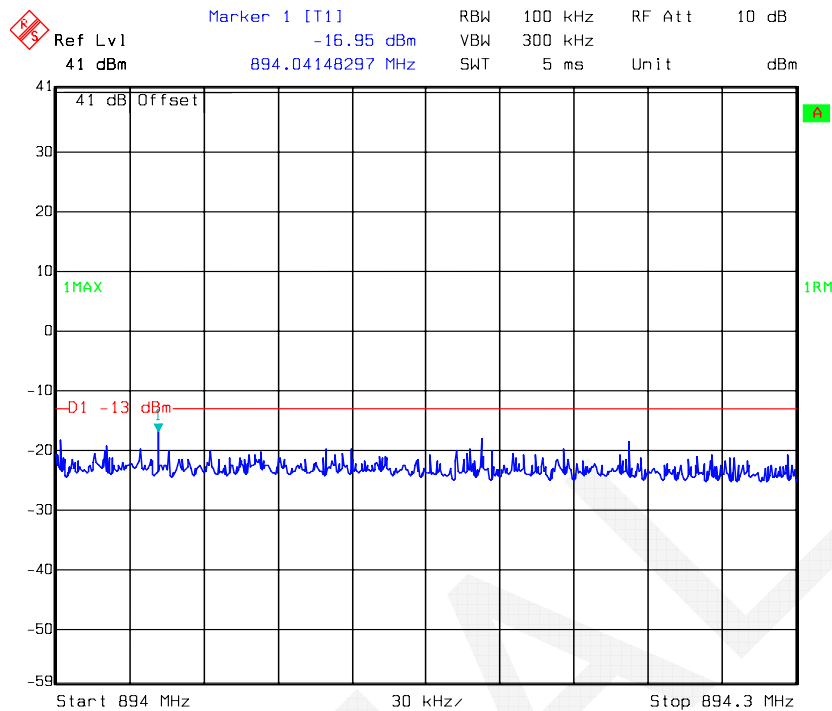

### Cellular Band AWGN Right Side 3dB Above AGG

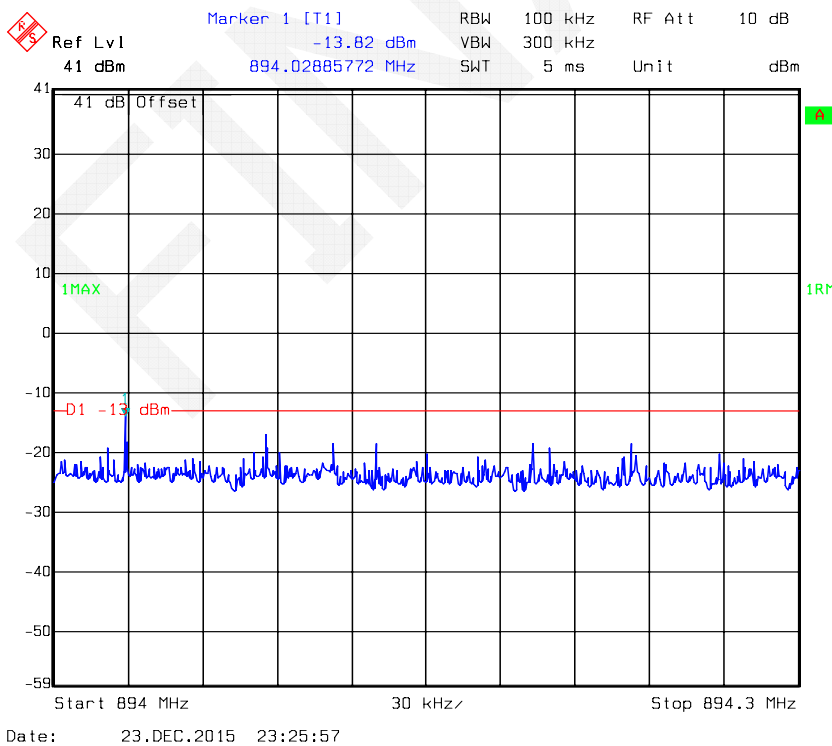


### PCS Band GSM Right Side Pre-AGC

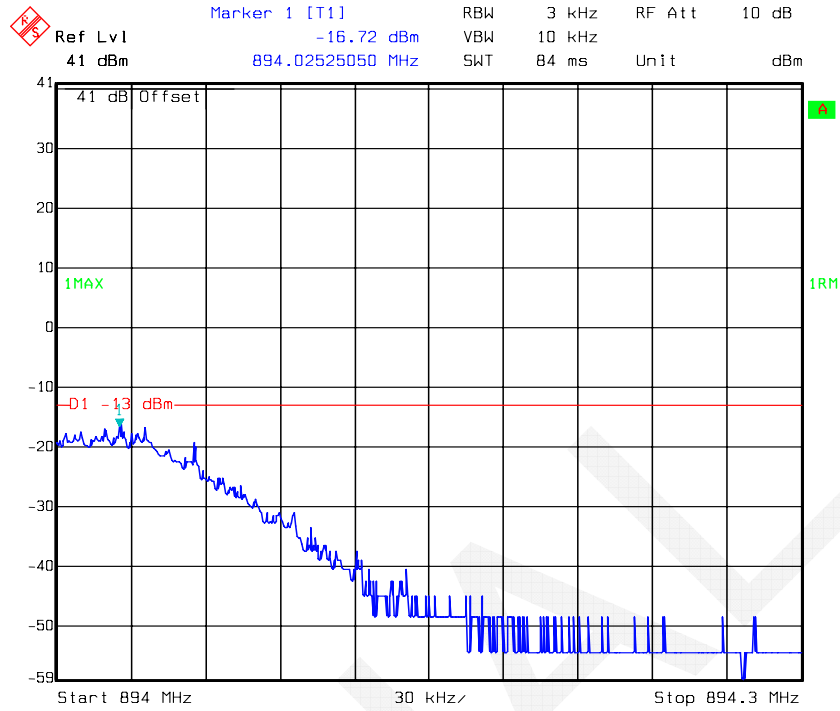


Date: 23.DEC.2015 23:30:24

### PCS Band GSM Right Side 3dB Above AGC

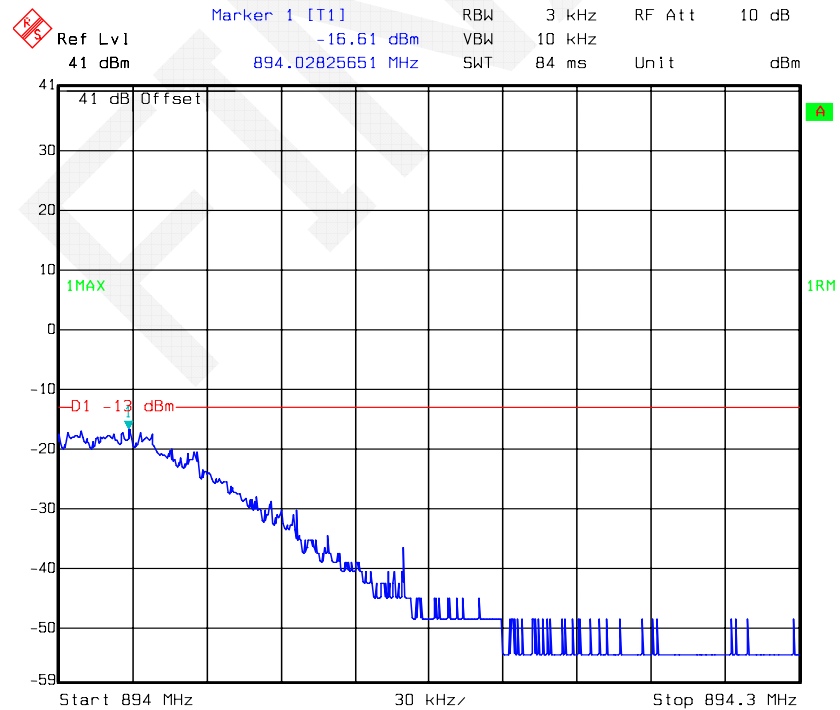


Date: 23.DEC.2015 23:31:10


### PCS Band AWGN Left Side Pre-AGC

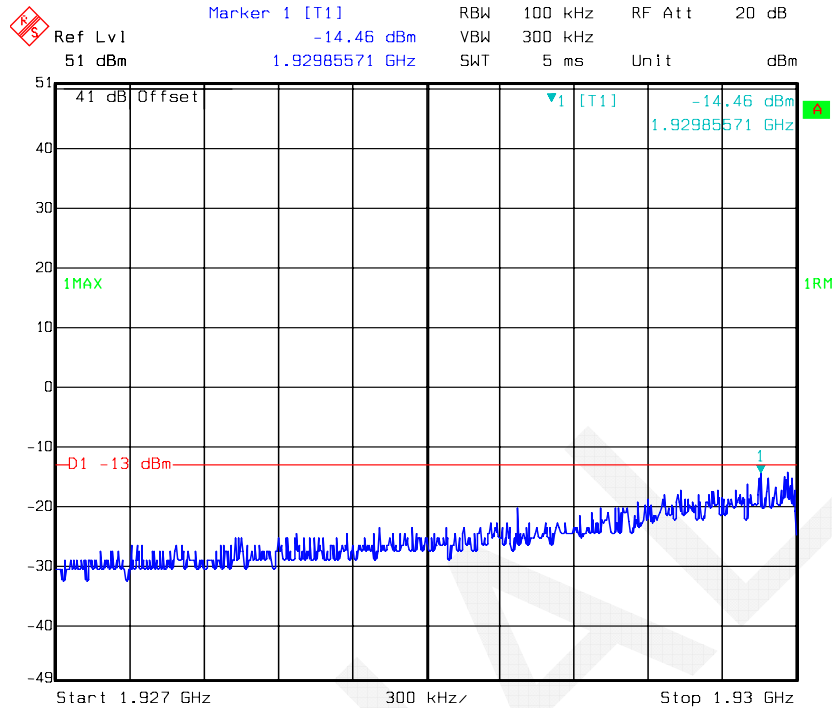

### PCS Band AWGN Left Side 3dB Above AGC

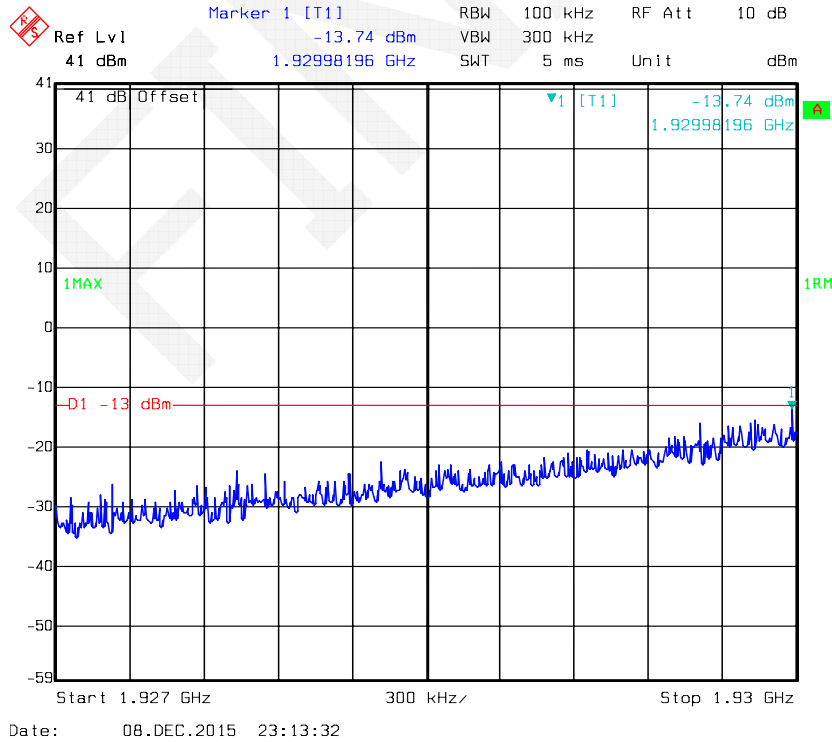


## PCS Band GSM Left Side Pre-AGC

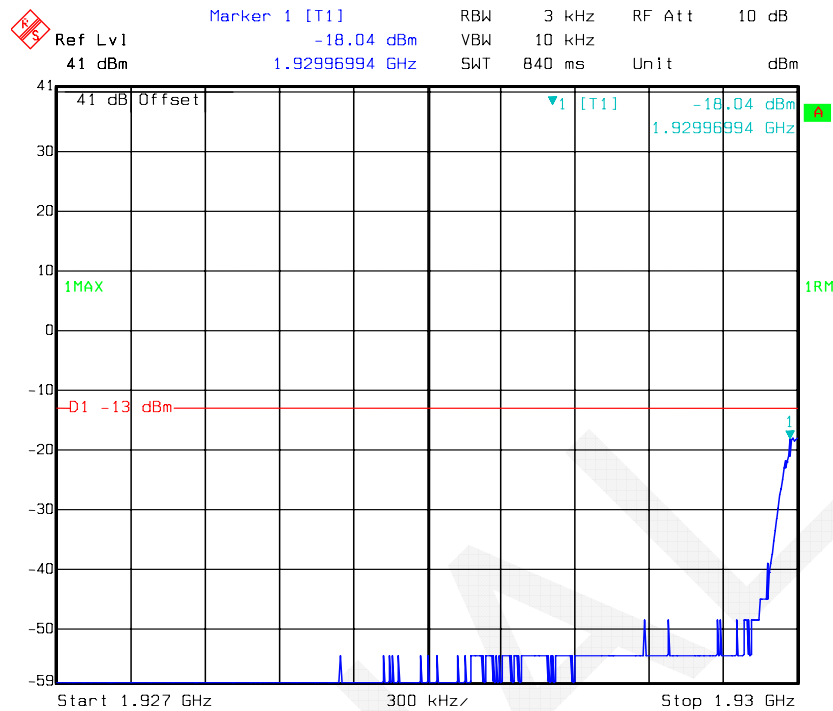


Date: 08.DEC.2015 23:21:01

## PCS Band GSM Left Side Above 3dB AGC

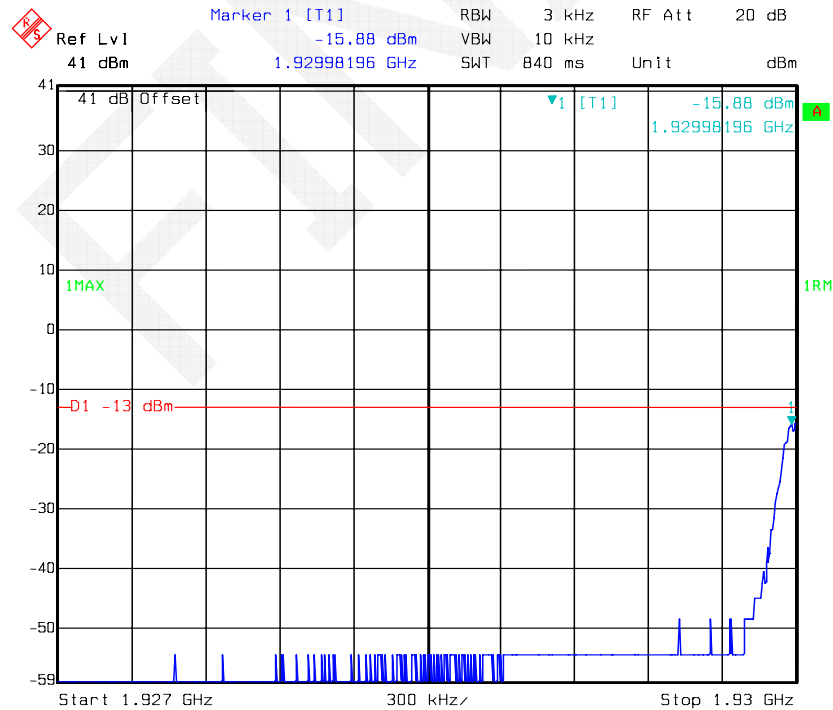


Date: 08.DEC.2015 23:21:41

### PCS Band AWGN Right Side Pre-AGC

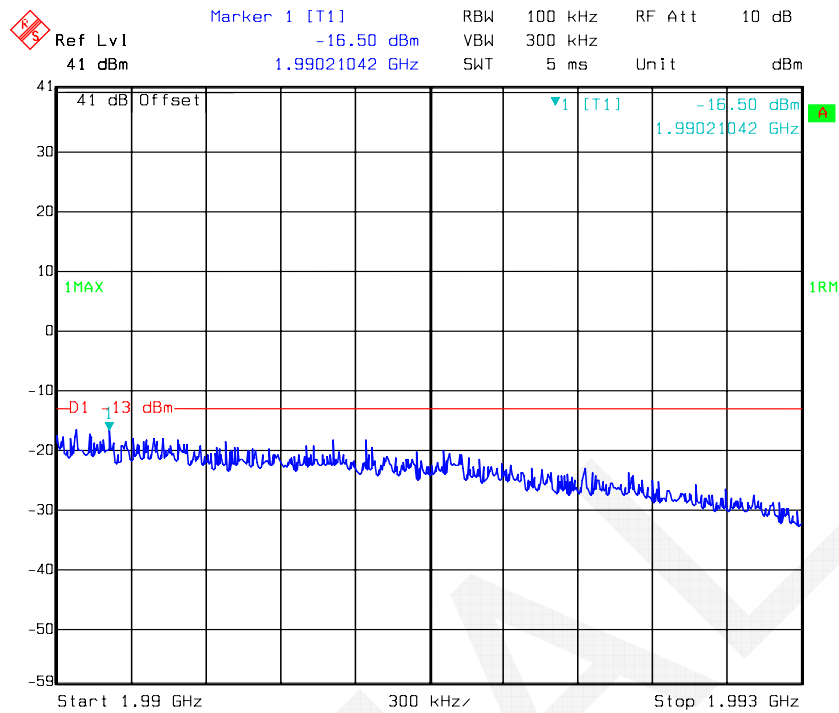


Date: 08.DEC.2015 23:15:50

### PCS Band AWGN Right Side 3dB Above AGC

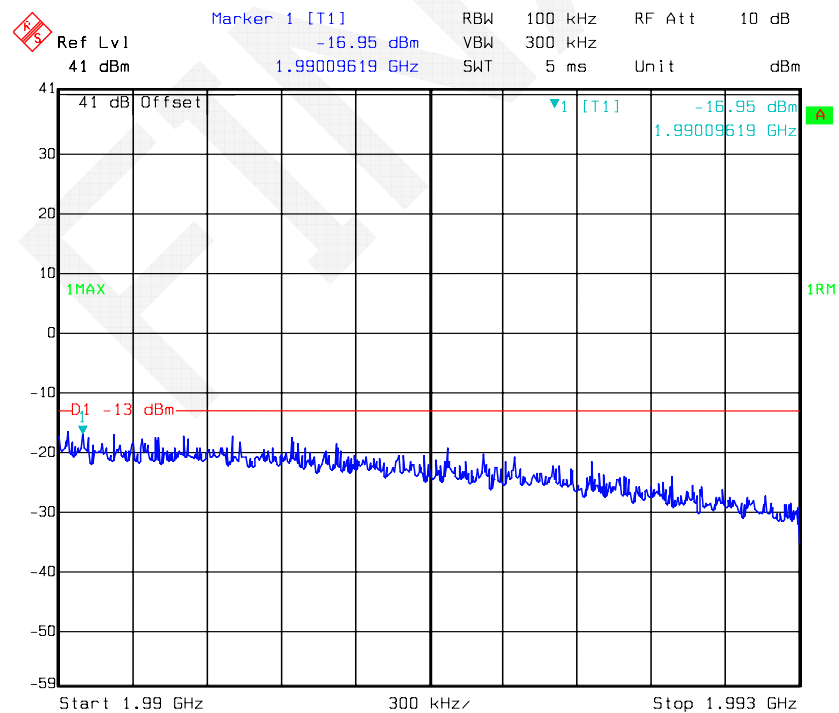


Date: 08.DEC.2015 23:16:38

### PCS Band GSM Right Side Pre-AGC

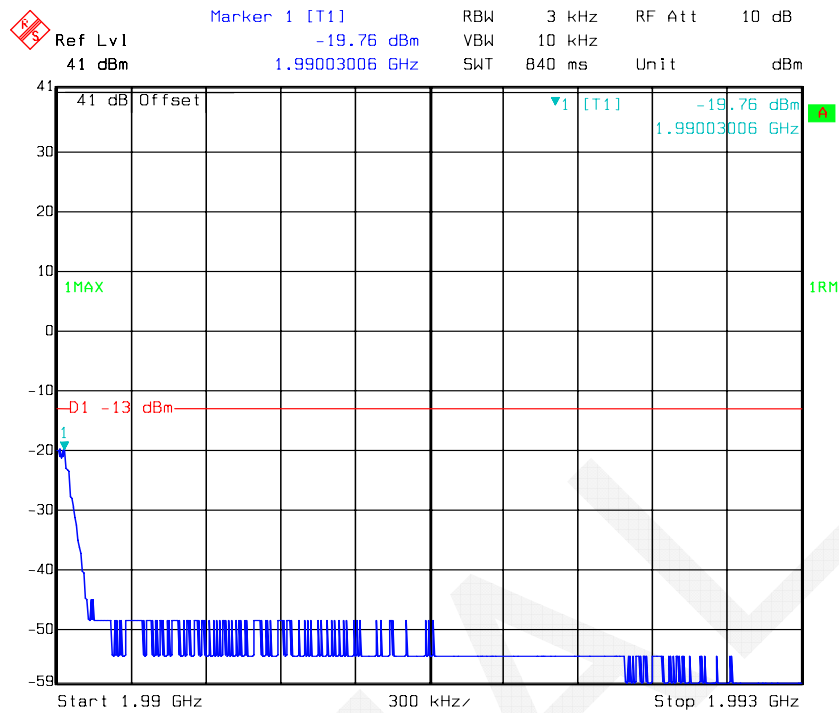

Date: 08.DEC.2015 23:17:51

### PCS Band GSM Right Side Above 3dB AGC

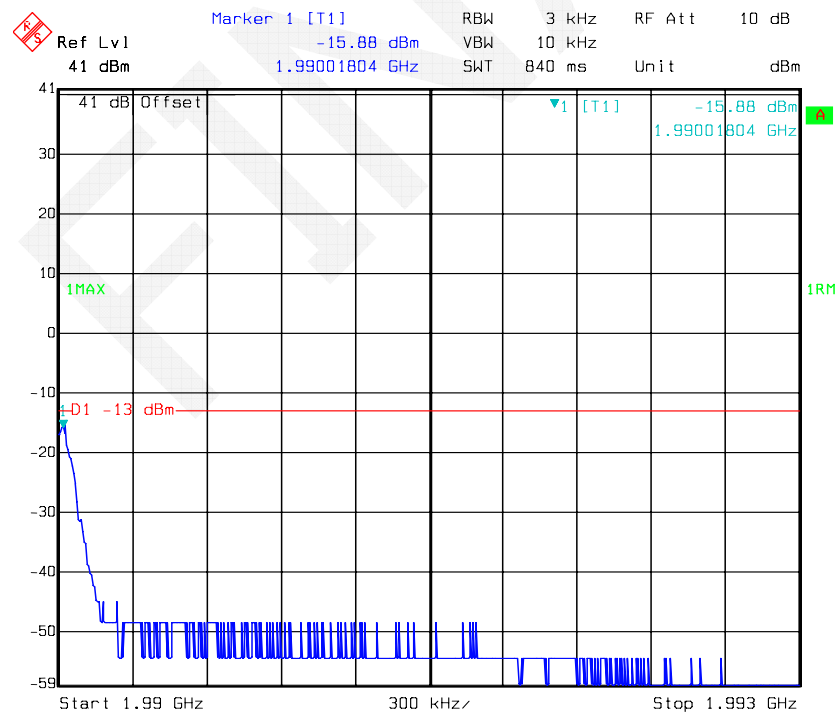


Date: 08.DEC.2015 23:18:22



**Two adjacent channels:**


Uplink:

**Cellular Band AWGN Left Side Pre-AGC**

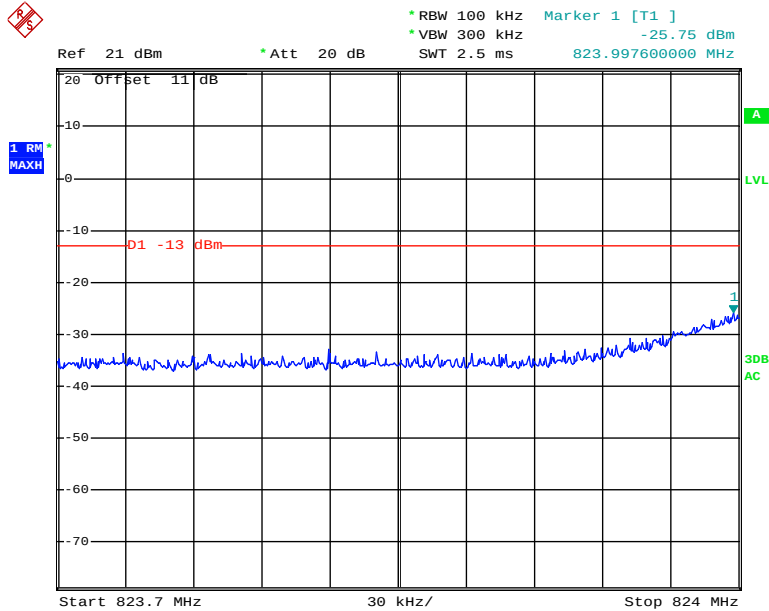


Date: 7.DEC.2015 22:54:31

**Cellular Band AWGN Left Side 3dB Above AGG**

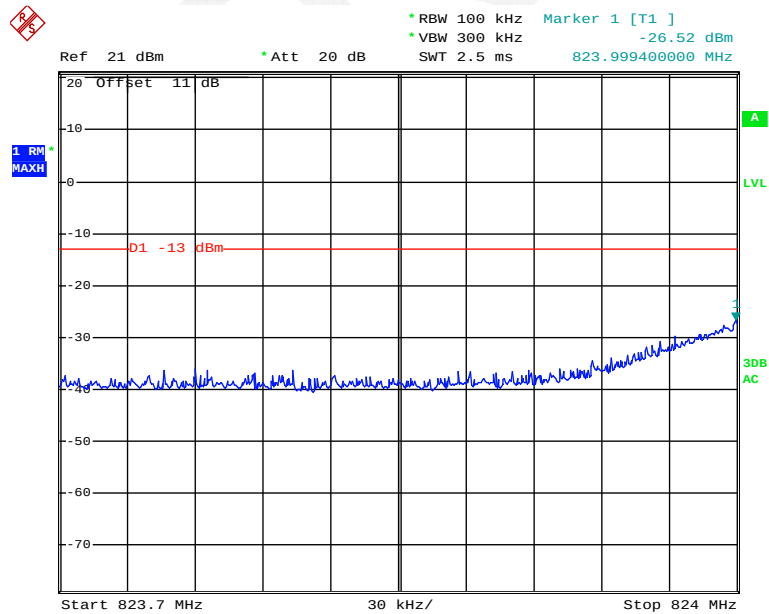


Date: 7.DEC.2015 22:55:16

### Cellular Band GSM Left Side Pre-AGC

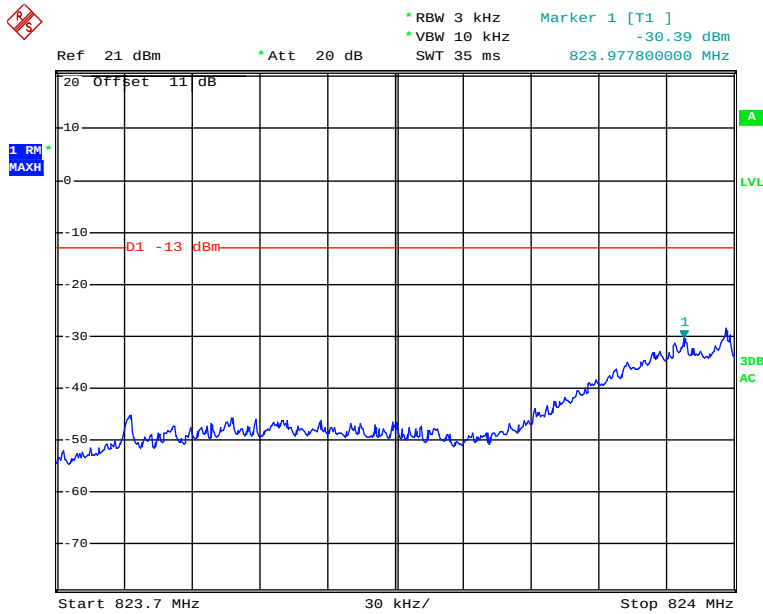


Date: 7.DEC.2015 23:53:40

### Cellular Band GSM Left Side 3dB Above AGC

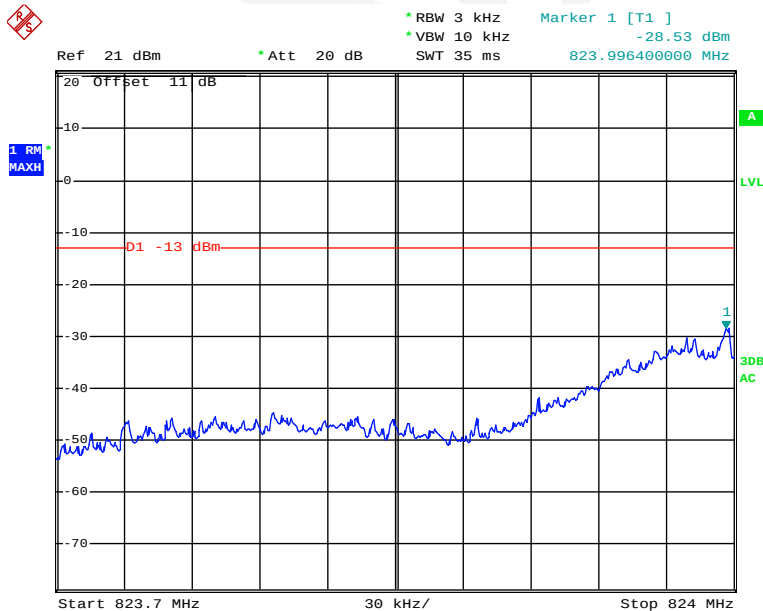


Date: 7.DEC.2015 23:54:00

### Cellular Band AWGN Right Side Pre-AGC

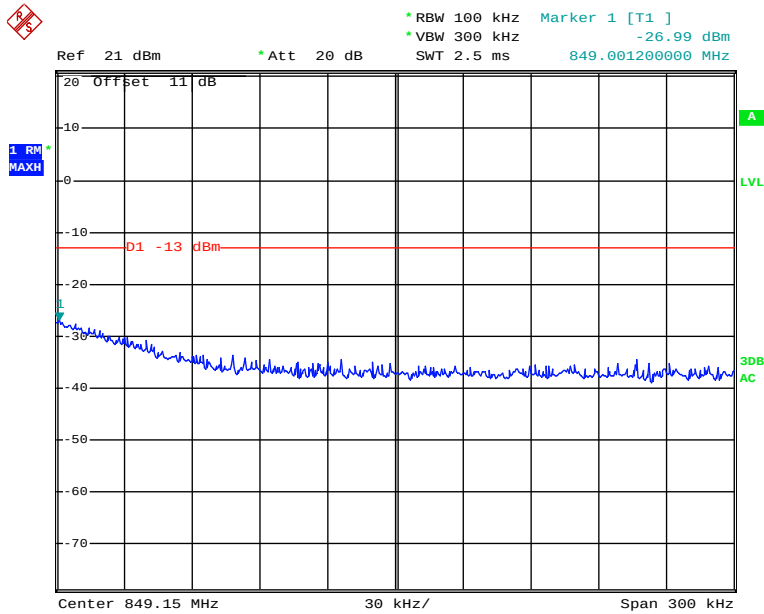


Date: 7.DEC.2015 22:57:32

### Cellular Band AWGN Right Side 3dB Above AGG

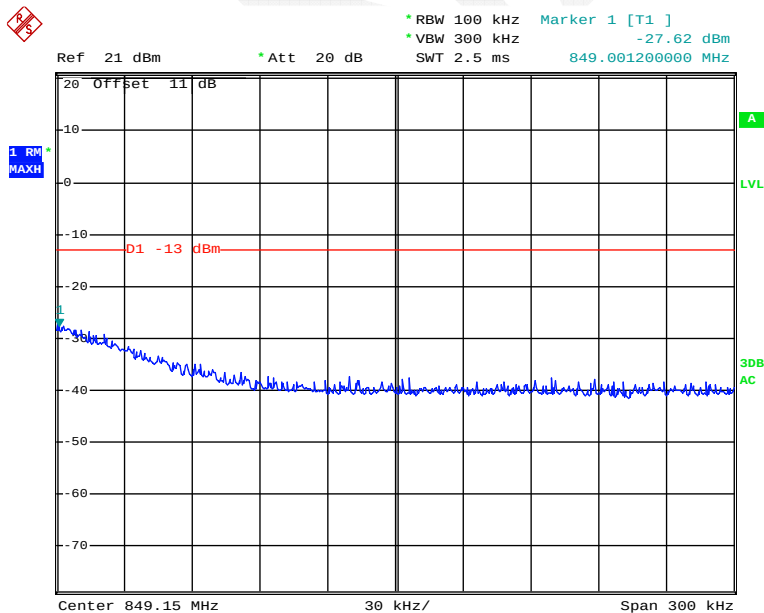


Date: 7.DEC.2015 22:56:57

### Cellular Band GSM Right Side Pre-AGC

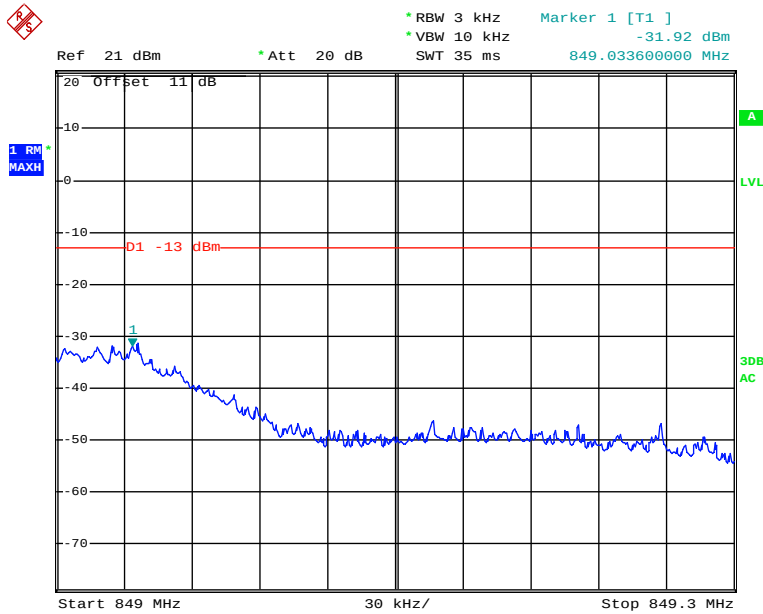


Date: 7.DEC.2015 23:55:30

### Cellular Band GSM Right Side 3dB Above AGC

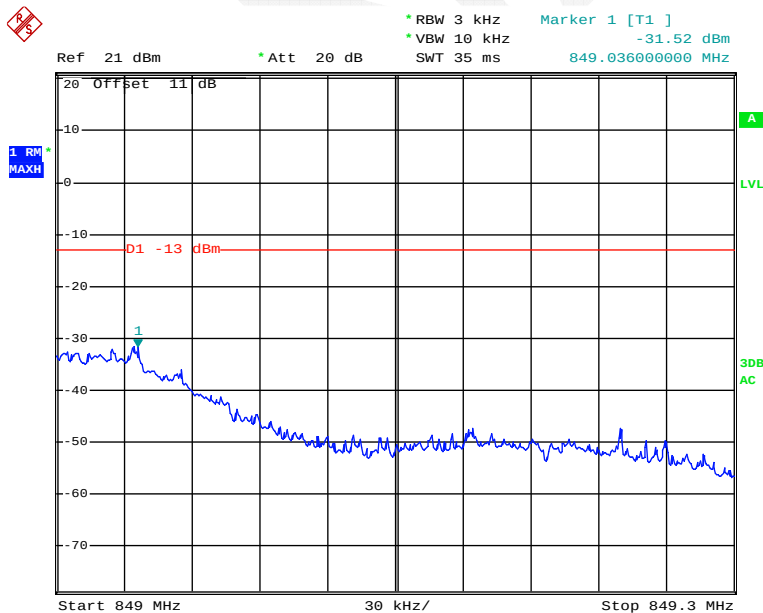


Date: 7.DEC.2015 23:56:33

### PCS Band AWGN Left Side Pre-AGC

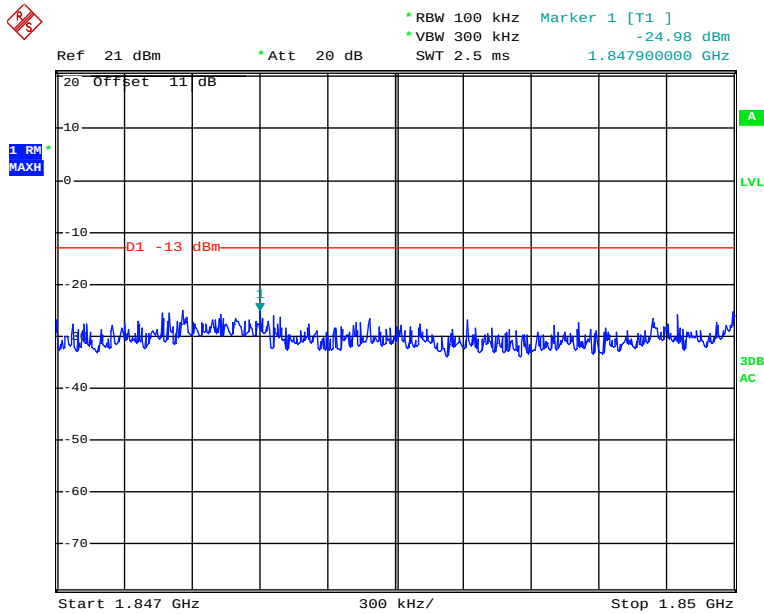


Date: 8.DEC.2015 00:32:31

### PCS Band AWGN Left Side 3dB Above AGC

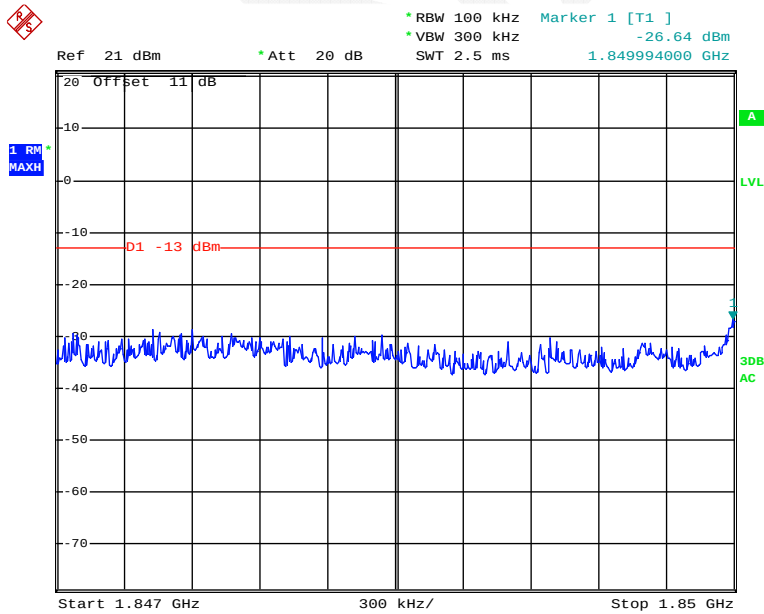


Date: 8.DEC.2015 00:32:52

### PCS Band GSM Left Side Pre-AGC

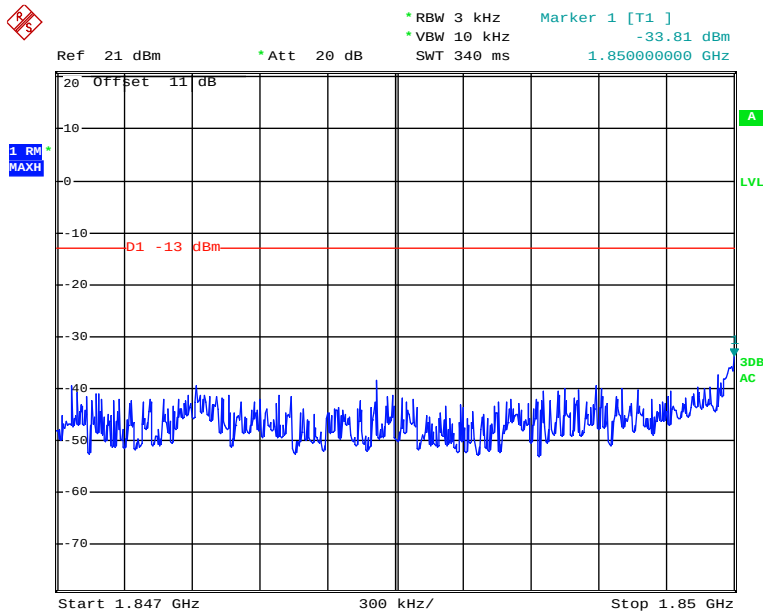


Date: 7.DEC.2015 23:51:38

### PCS Band GSM Left Side Above 3dB AGC

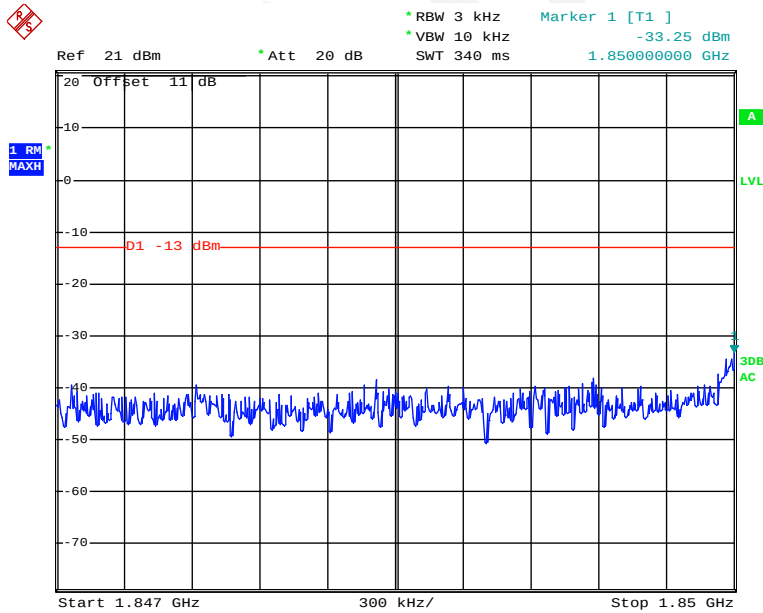


Date: 7.DEC.2015 23:52:06

### PCS Band AWGN Right Side Pre-AGC

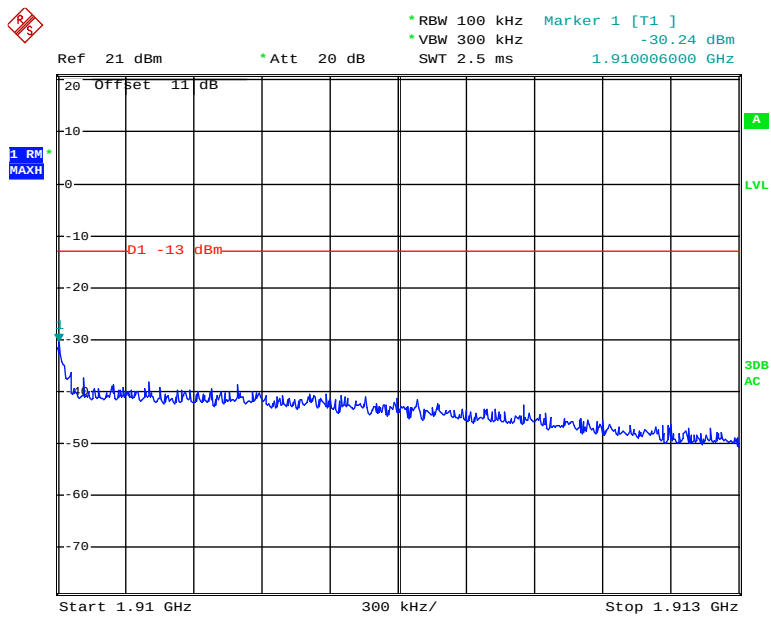


Date: 7.DEC.2015 23:08:57

### PCS Band AWGN Right Side 3dB Above AGC

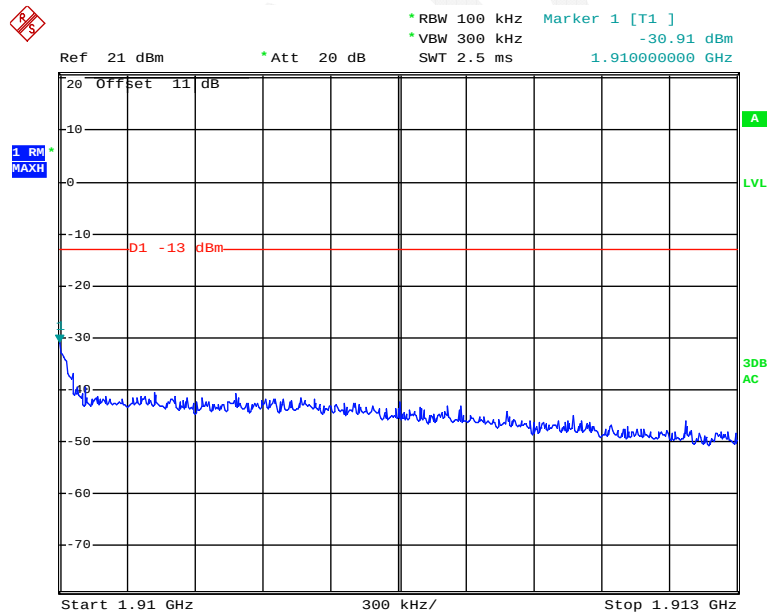


Date: 7.DEC.2015 23:09:26

### PCS Band GSM Right Side Pre-AGC

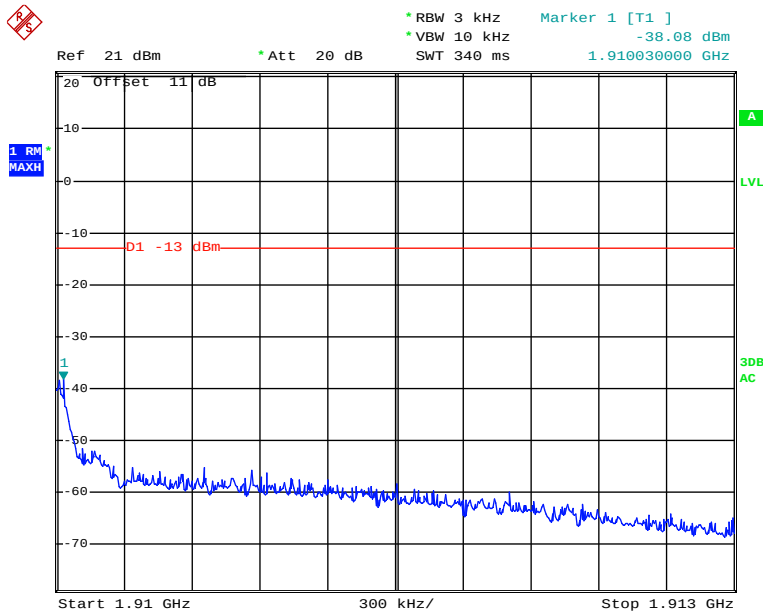

Date: 7.DEC.2015 23:48:55

### PCS Band GSM Right Side Above 3dB AGC

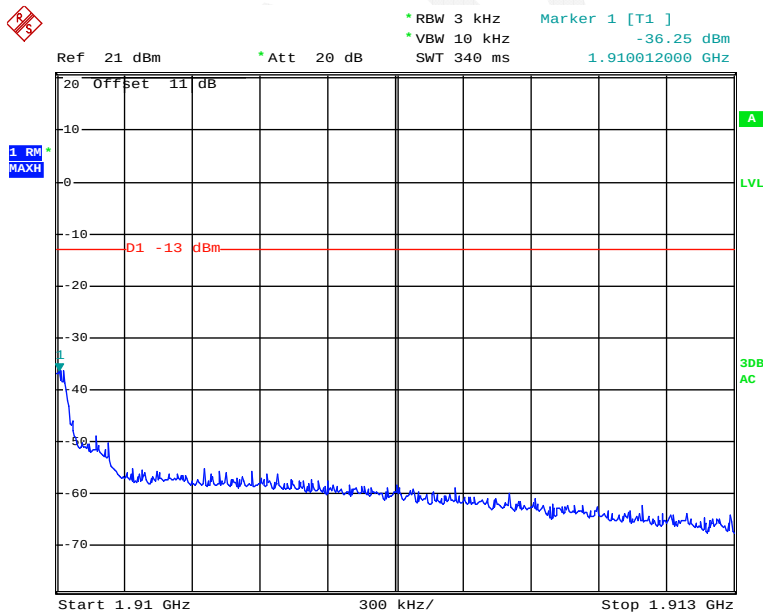


Date: 7.DEC.2015 23:49:34




Downlink

Cellular Band AWGN Left Side Pre-AGC

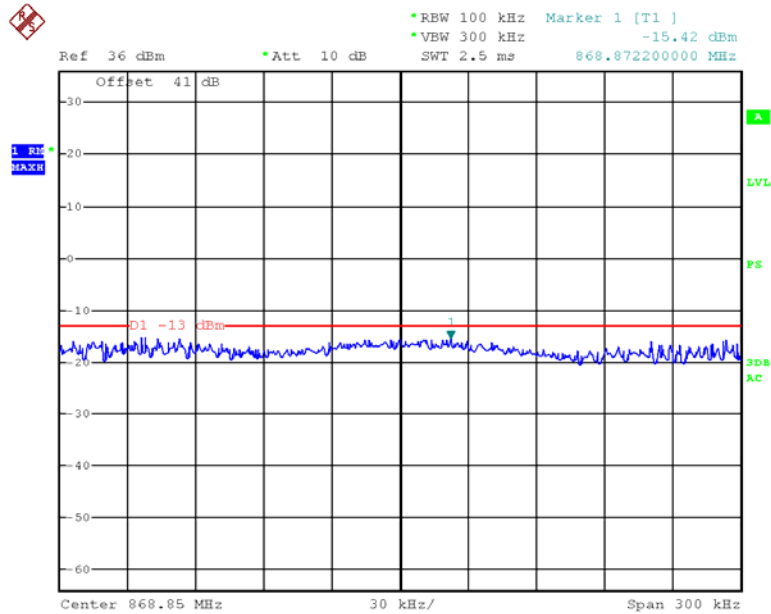


Date: 5.DEC.2015 16:23:35

Cellular Band AWGN Left Side 3dB Above AGG

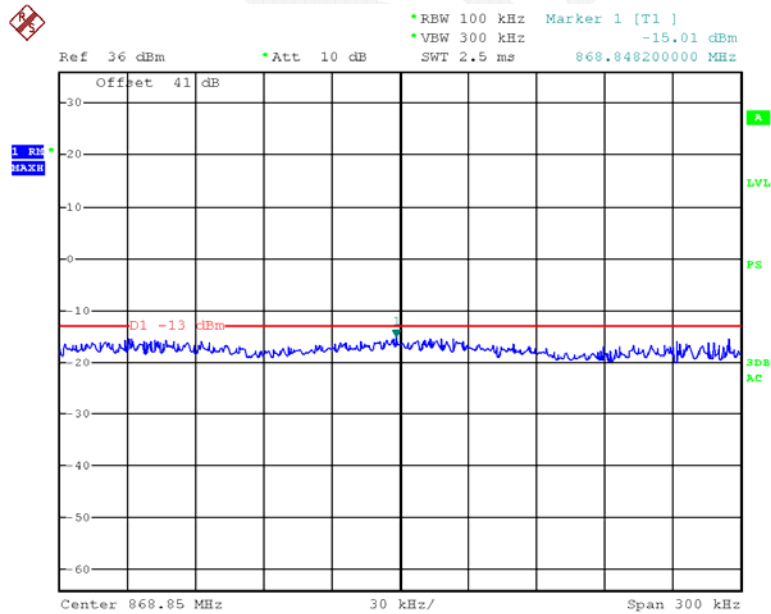


Date: 5.DEC.2015 16:24:52

### Cellular Band GSM Left Side Pre-AGC

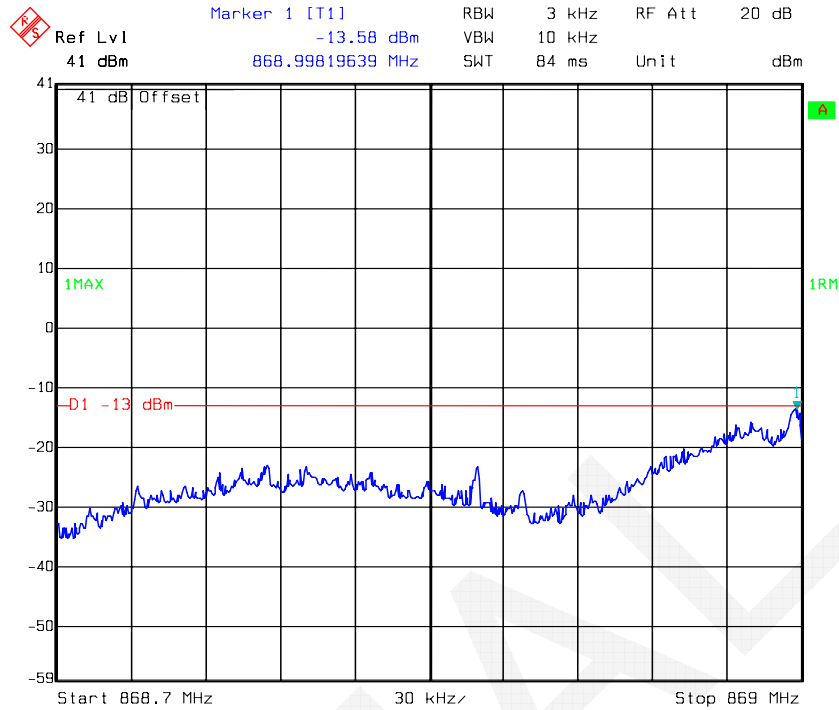


Date: 23.DEC.2015 23:54:51

### Cellular Band GSM Left Side 3dB Above AGC

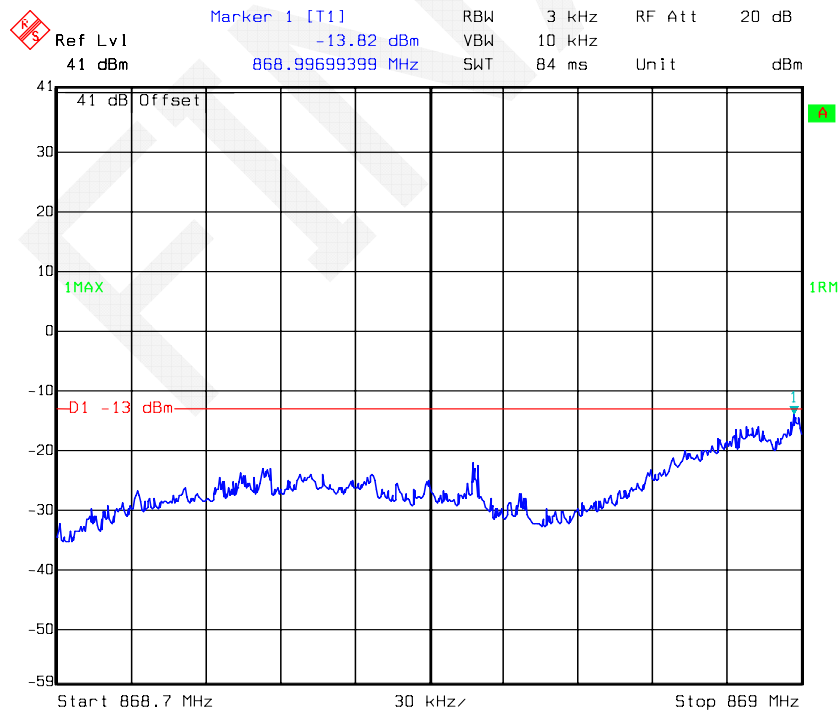


Date: 23.DEC.2015 23:55:27

### Cellular Band AWGN Right Side Pre-AGC

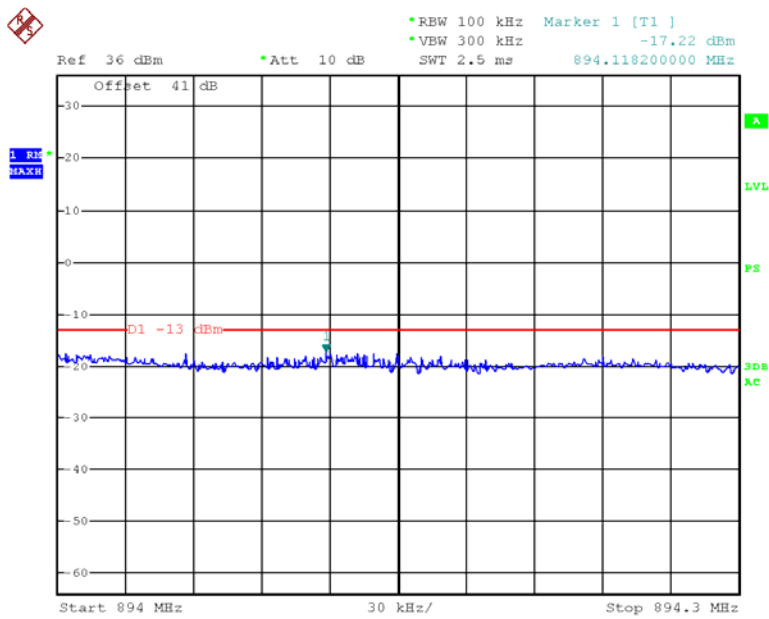


Date: 5.DEC.2015 16:32:29

### Cellular Band AWGN Right Side 3dB Above AGG

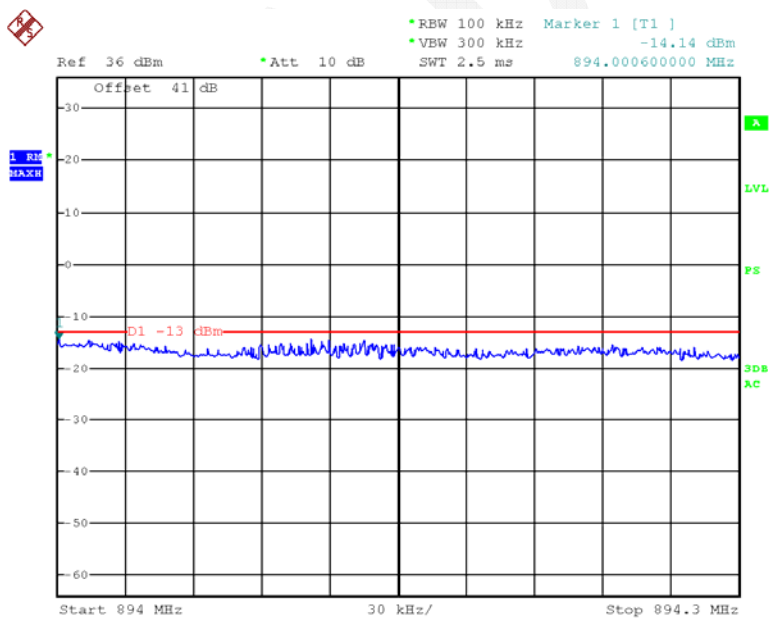


Date: 5.DEC.2015 16:33:37

### Cellular Band GSM Right Side Pre-AGC

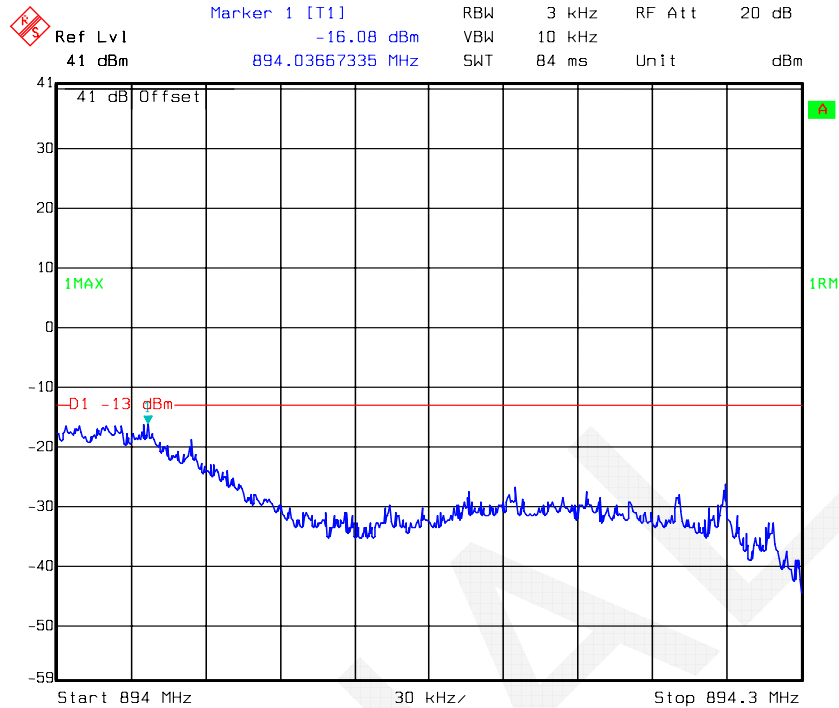


Date: 23.DEC.2015 23:56:14

### Cellular Band GSM Right Side 3dB Above AGC

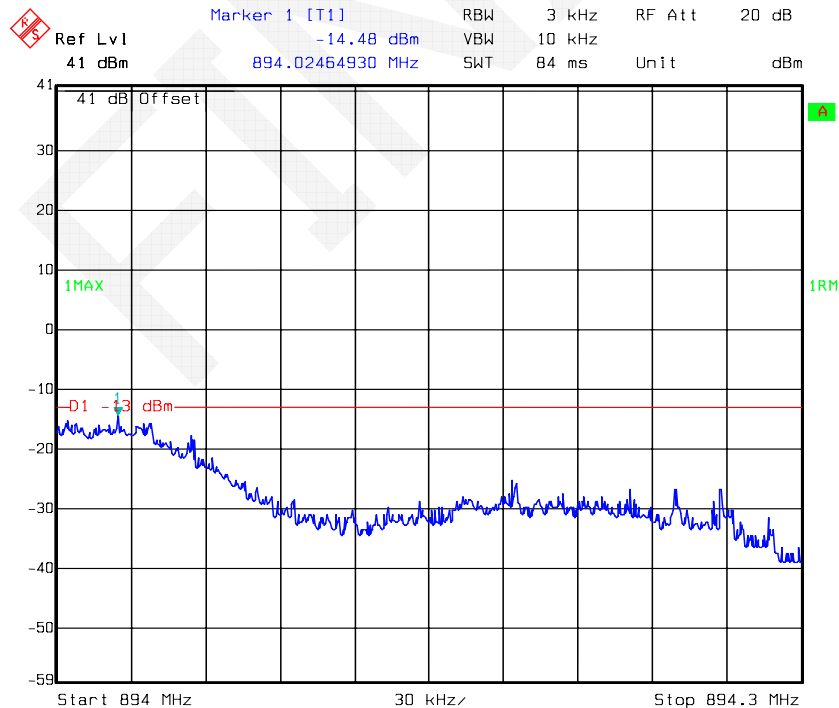


Date: 23.DEC.2015 23:56:41

### PCS Band AWGN Left Side Pre-AGC

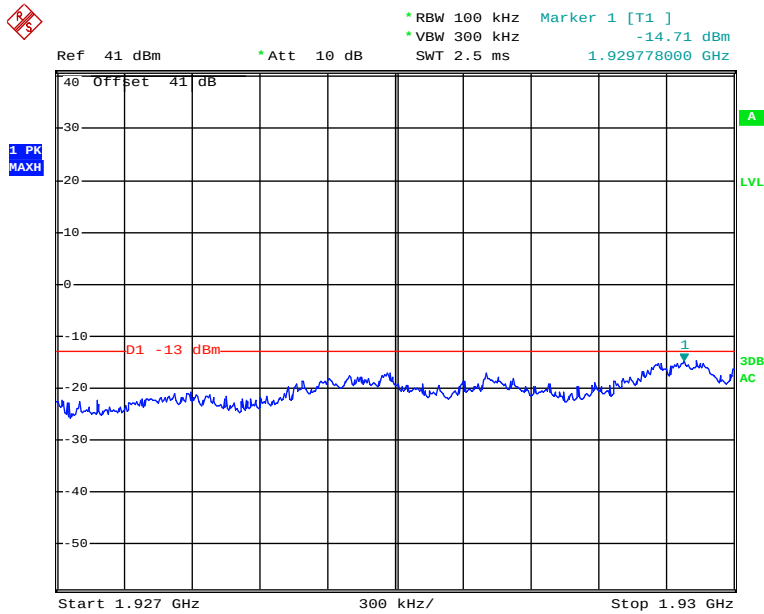


Date: 7.DEC.2015 22:32:10

### PCS Band AWGN Left Side 3dB Above AGC

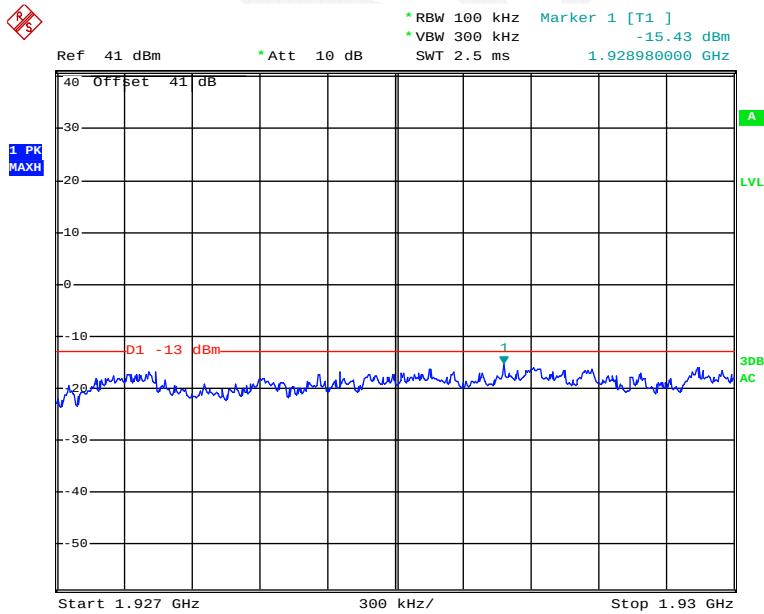


Date: 7.DEC.2015 22:29:46

### PCS Band GSM Left Side Pre-AGC

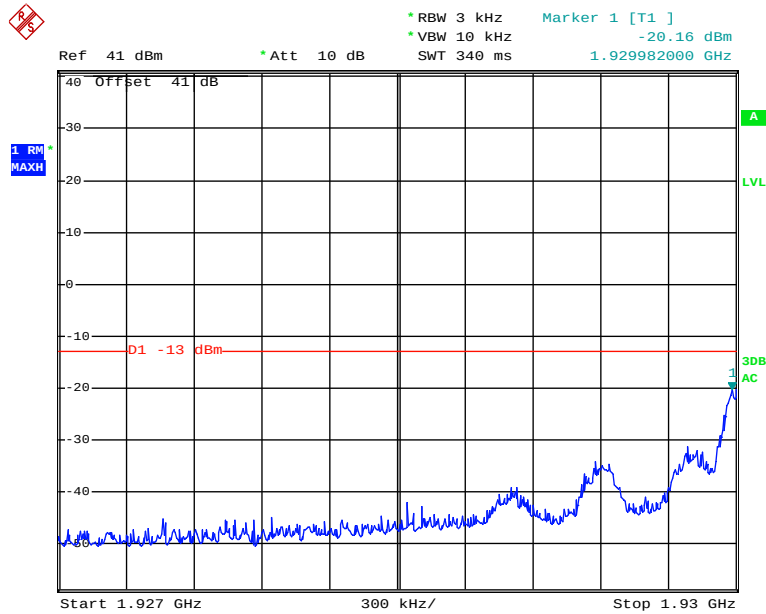


Date: 8.DEC.2015 00:22:05

### PCS Band GSM Left Side Above 3dB AGC

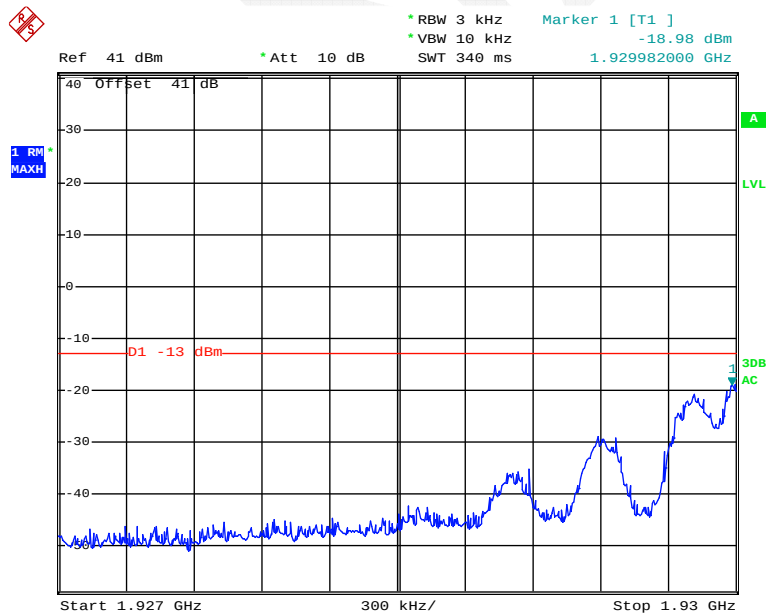


Date: 8.DEC.2015 00:22:39

### PCS Band AWGN Right Side Pre-AGC

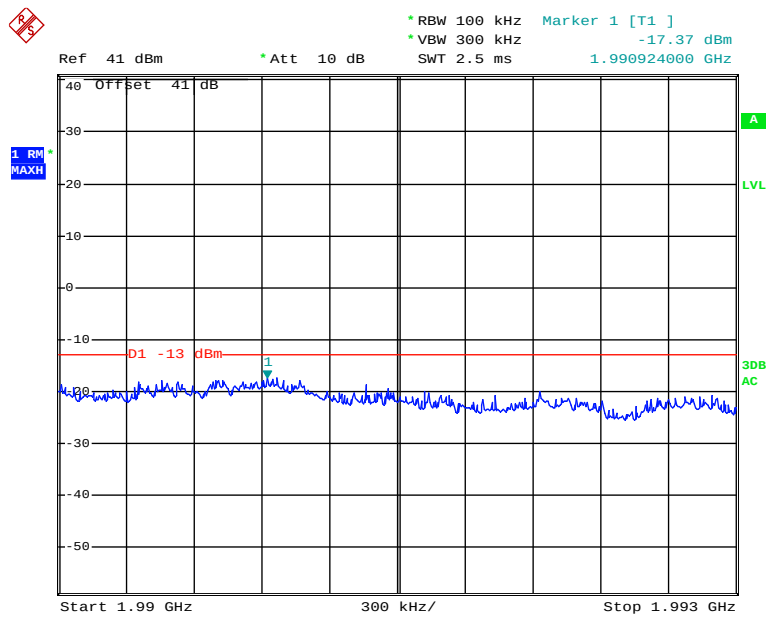


Date: 7.DEC.2015 22:42:38

### PCS Band AWGN Right Side 3dB Above AGC

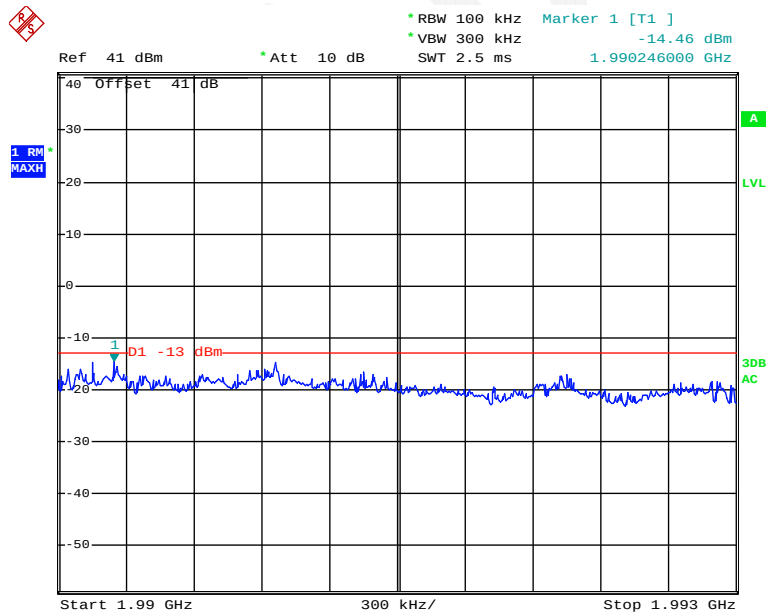


Date: 7.DEC.2015 22:44:05

## PCS Band GSM Right Side Pre-AGC

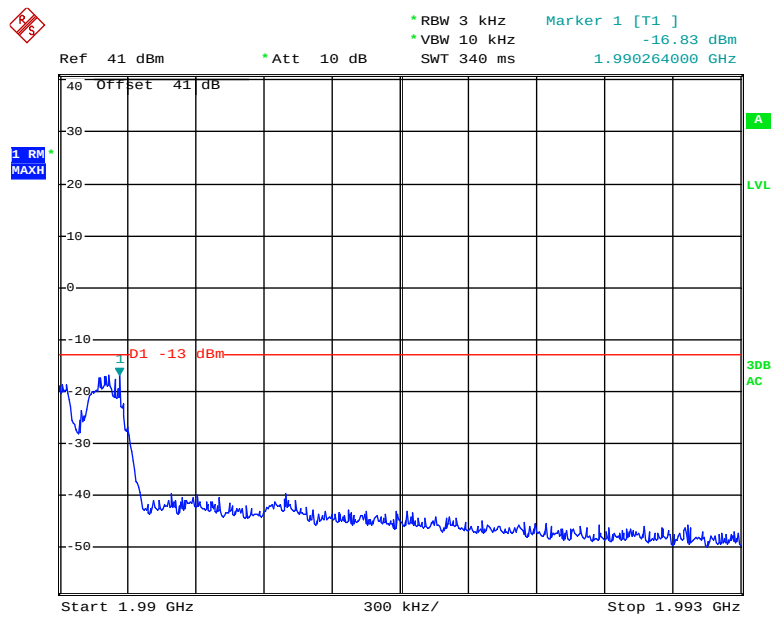

Date: 8.DEC.2015 00:23:37

## PCS Band GSM Right Side Above 3dB AGC

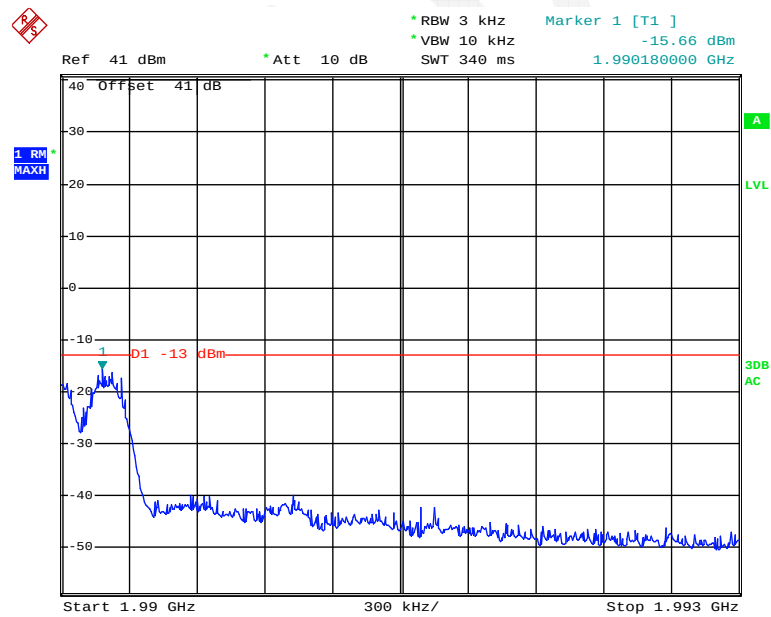

Date: 8.DEC.2015 00:24:10



## §2.1051&§22.917&24.238- SPURIOUS EMISSIONS AT ANTENNA TERMINALS

### Applicable Standards

According to §2.1051 *Measurements required: Spurious emissions at antenna terminals.*

According to §22.917(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### Test Procedure

- a) Connect a signal generator to the input of the EUT.
- b) Set the signal generator to produce the broadband test signal as previously described (e.g., 4.1 MHz OBW AWGN).
- c) Set the center frequency of the test signal to the lowest available channel within the frequency band or block.
- d) Set the EUT input power to a level that is just below the AGC threshold (see 3.2), but not more than 0.5 dB below.
- e) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation as necessary.
- f) Set the RBW = reference bandwidth in the applicable rule section for the supported frequency band of operation (e.g., reference bandwidth is typically 100 kHz or 1 MHz).
- g) Set the VBW  $\geq 3 \times$  RBW.
- h) Set the Sweep time = auto-couple.
- i) Set the analyzer start frequency to the lowest radio frequency signal generated in the equipment, without going below 9 kHz, and the stop frequency to the lower band/block edge frequency minus 100 kHz or 1 MHz, as specified in the applicable rule part.  
NOTE—The number of measurement points in each sweep must be  $\geq (2 \times \text{span}/\text{RBW})$  which may require that the measurement range defined by the start and stop frequencies be subdivided, depending on the available number of measurement points provided by the spectrum analyzer.
- j) Select the power averaging (rms) detector function.
- k) Trace average at least 10 traces in power averaging (i.e., rms) mode.
- l) Use the peak marker function to identify the highest amplitude level over each measured frequency range. Record the frequency and amplitude and capture a plot for inclusion in the test report.
- m) Reset the analyzer start frequency to the upper band/block edge frequency plus 100 kHz or 1 MHz, as specified in the applicable rule part, and the analyzer stop frequency to 10 times the highest frequency of the fundamental emission (see §2.1057). Note that the number of measurement points in each sweep must be  $\geq (2 \times \text{span}/\text{RBW})$  which may require that the measurement range defined by the start and stop frequencies be subdivided, depending on the available number of measurement points provided by the spectrum analyzer.
- n) Trace average at least 10 traces in power averaging (i.e., rms) mode.
- o) Use the peak marker function to identify the highest amplitude level over each of the measured frequency ranges. Record the frequency and amplitude and capture a plot for inclusion in the test report and provide tabular data, if required.
- p) Repeat the procedure with the input test signals tuned to a middle band/block frequency/channel and then a high band/block frequency/channel.

- q) Repeat entire procedure with the narrowband test signal.  
r) Repeat for all authorized frequency bands/blocks used by the EUT.

### Test Equipment List and Details

| Manufacturer | Description                         | Model  | Serial Number         | Calibration Date | Calibration Due Date |
|--------------|-------------------------------------|--------|-----------------------|------------------|----------------------|
| R&S          | Spectrum Analyzer                   | FSP 38 | 100478                | 2015-05-09       | 2016-05-09           |
| R & S        | Wideband Radio Communication Tester | CMW500 | 1201.002K50-146520-wh | 2014-12-19       | 2015-12-19           |
| Agilent      | MXG Vector Signal Generator         | N5182B | MY51350142            | 2015-03-30       | 2016-03-29           |

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions



|                    |                 |
|--------------------|-----------------|
| Temperature:       | 23.4~24.5°C     |
| Relative Humidity: | 40~48 %         |
| ATM Pressure:      | 101.1~102.2 kPa |


*The testing was performed by Dean Liu from 2015-12-09 to 2015-12-23.*

Please refer to the following plots.


**Uplink:**


**Cellular Band Lower Channel AWGN**

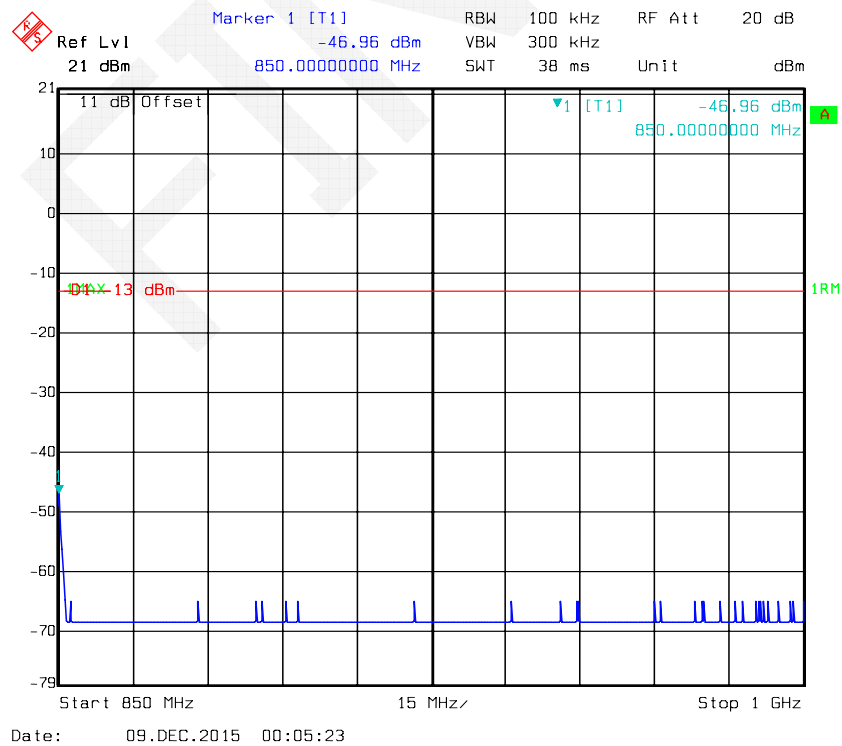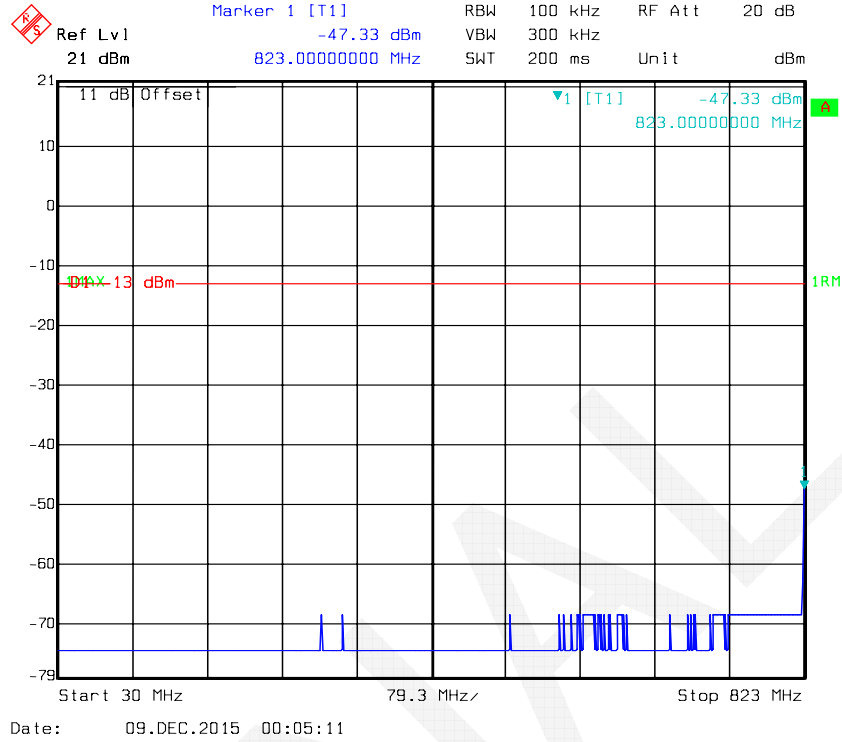


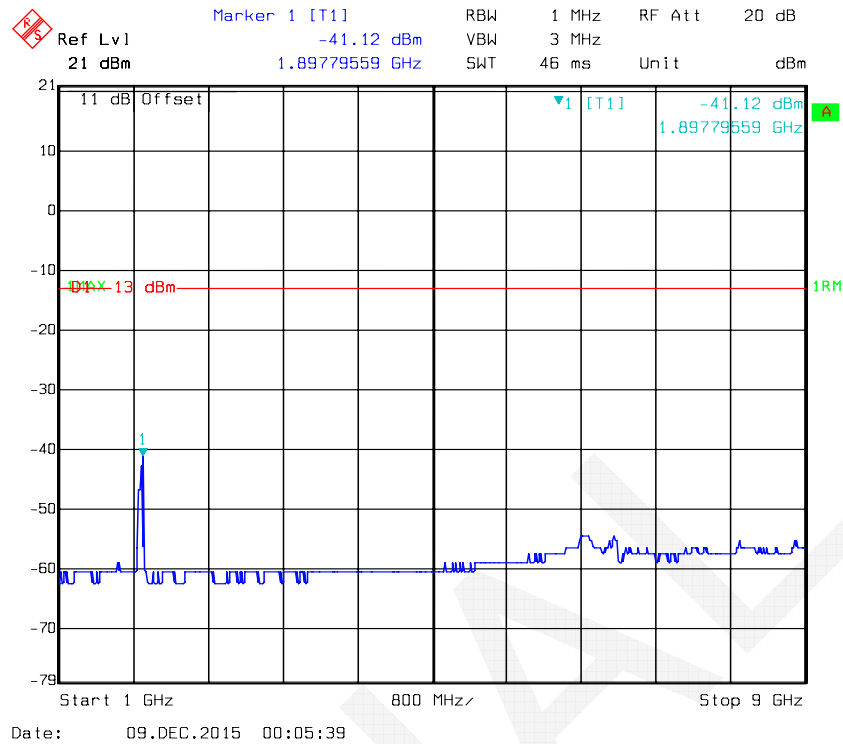



### Cellular Band Middle Channel AWGN

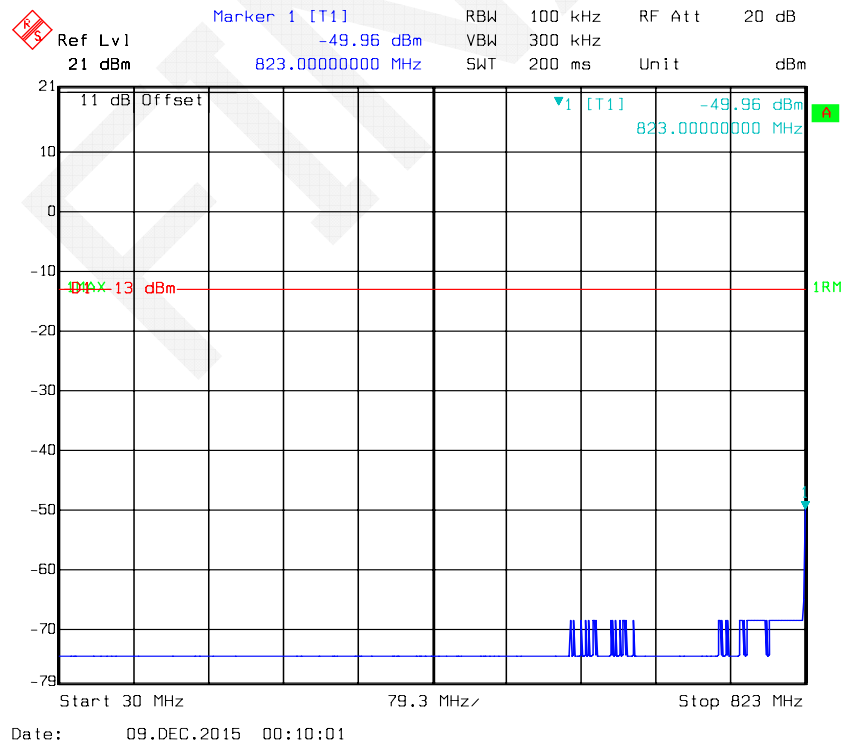

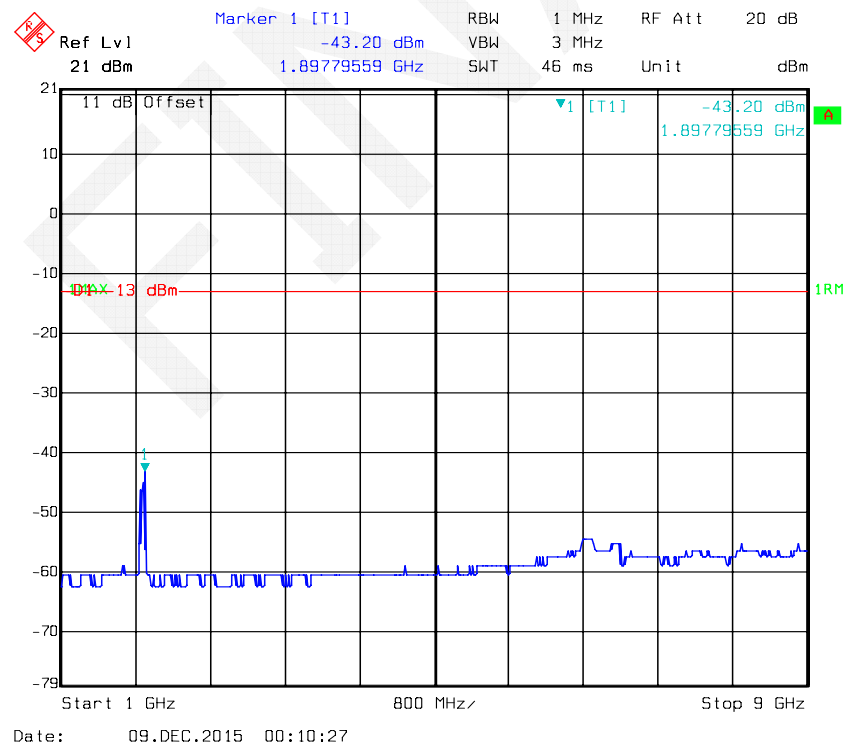



### Cellular Band High Channel AWGN

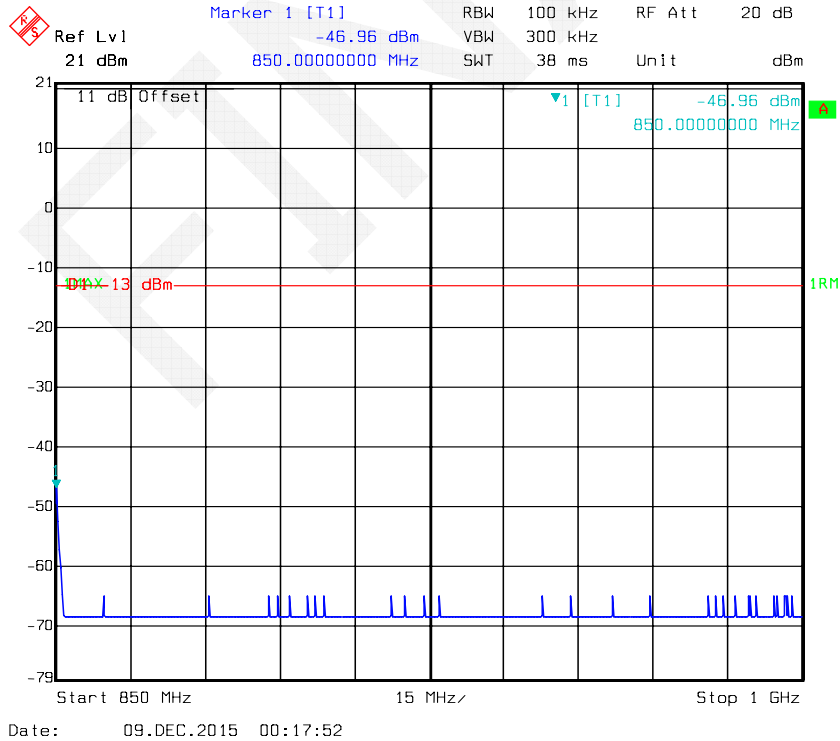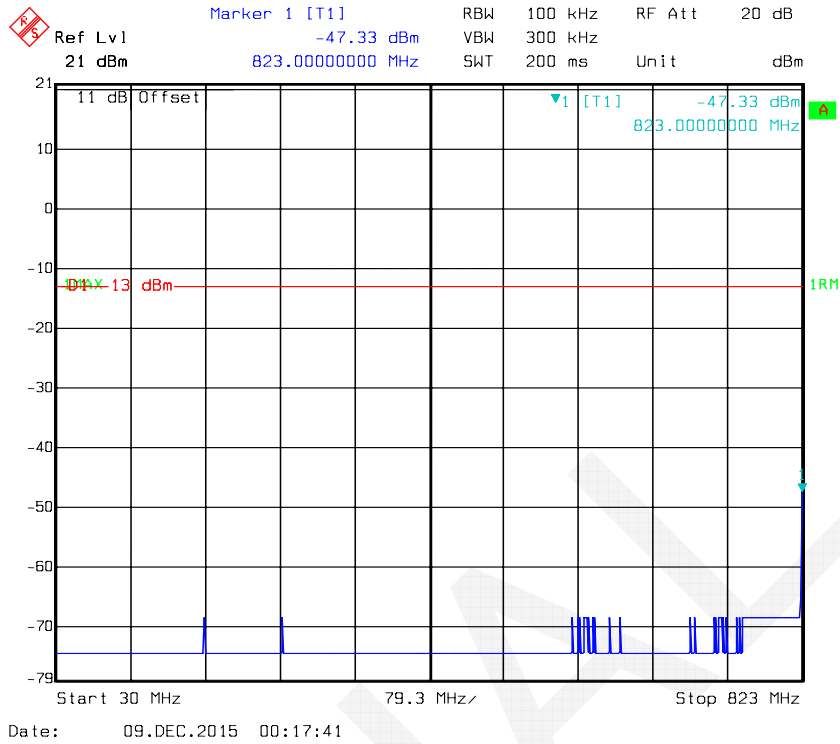

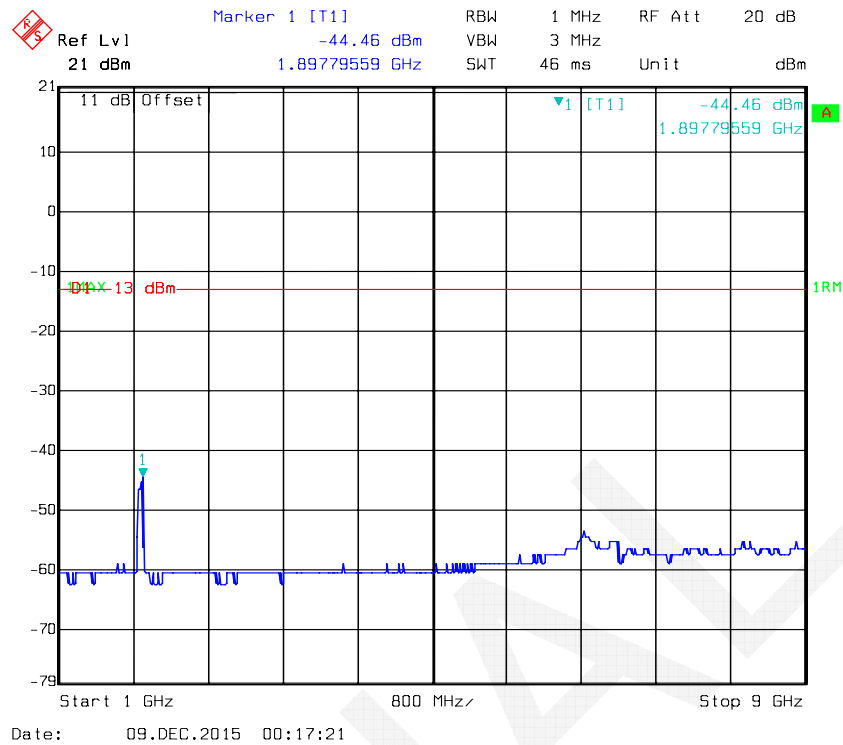



### PCS Band Low Channel AWGN




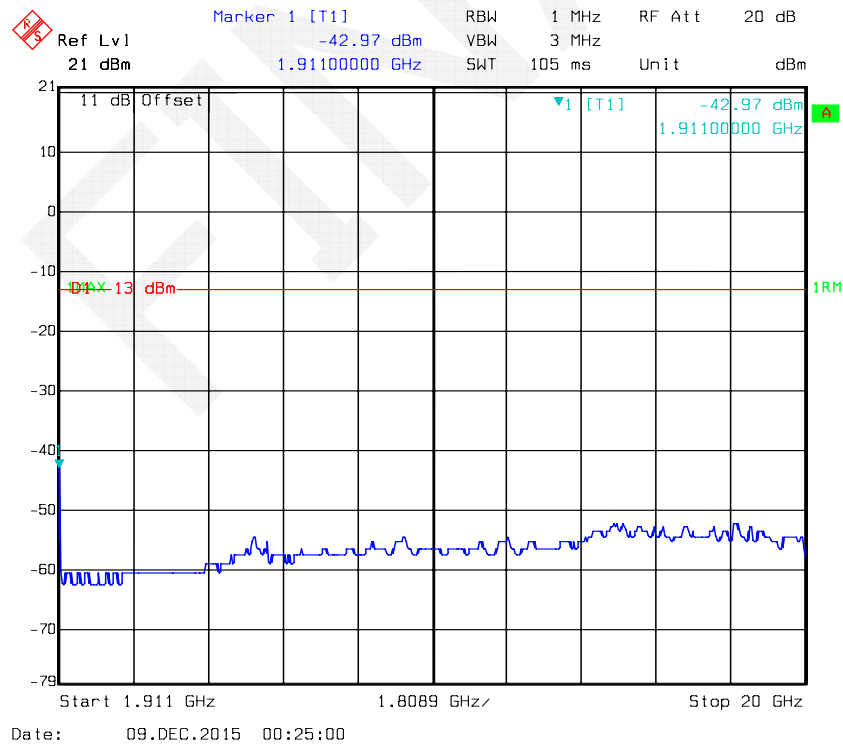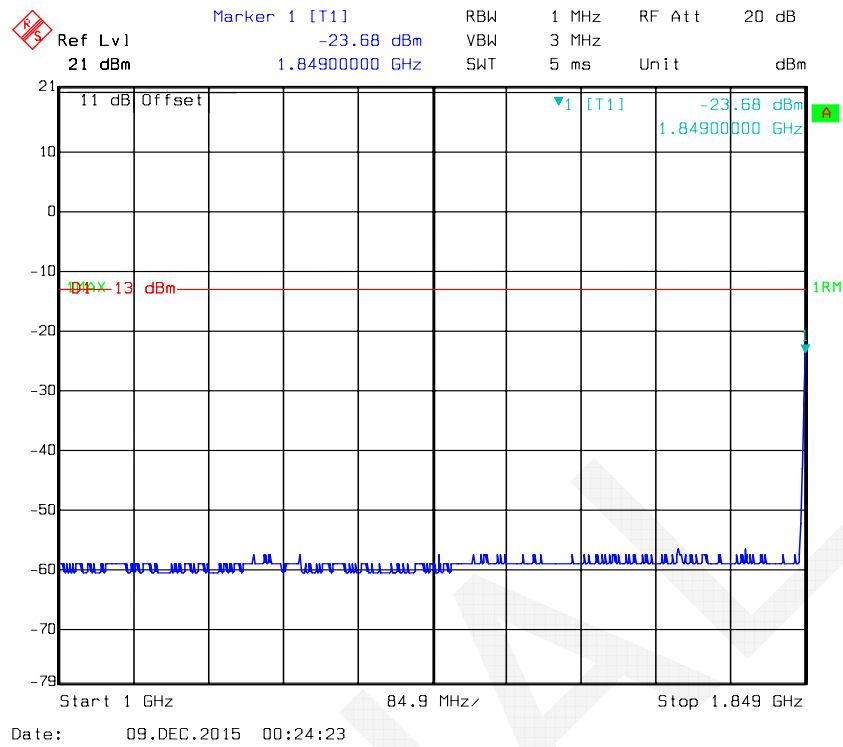





### PCS Band Middle Channel AWGN

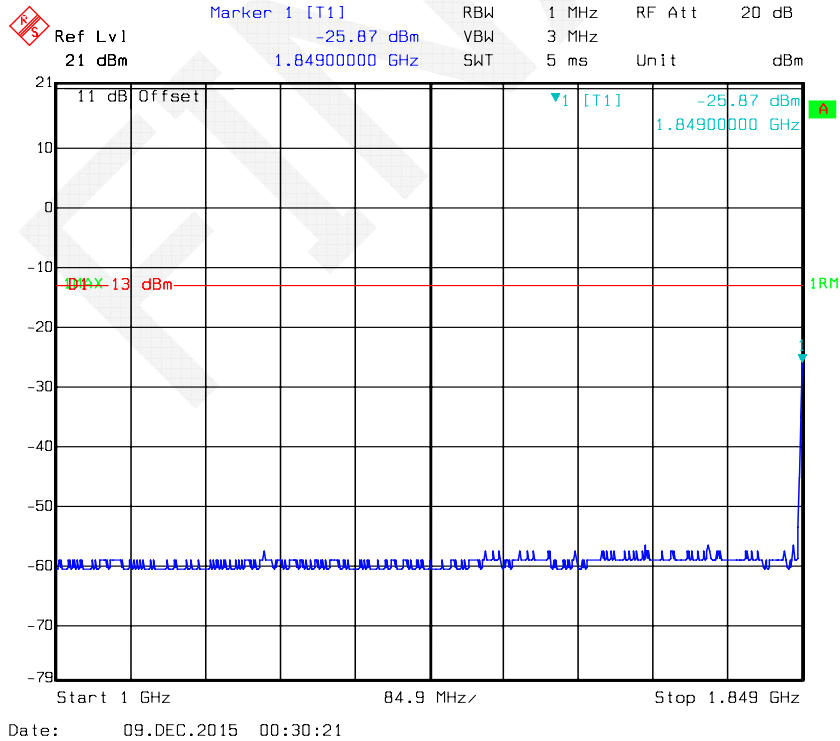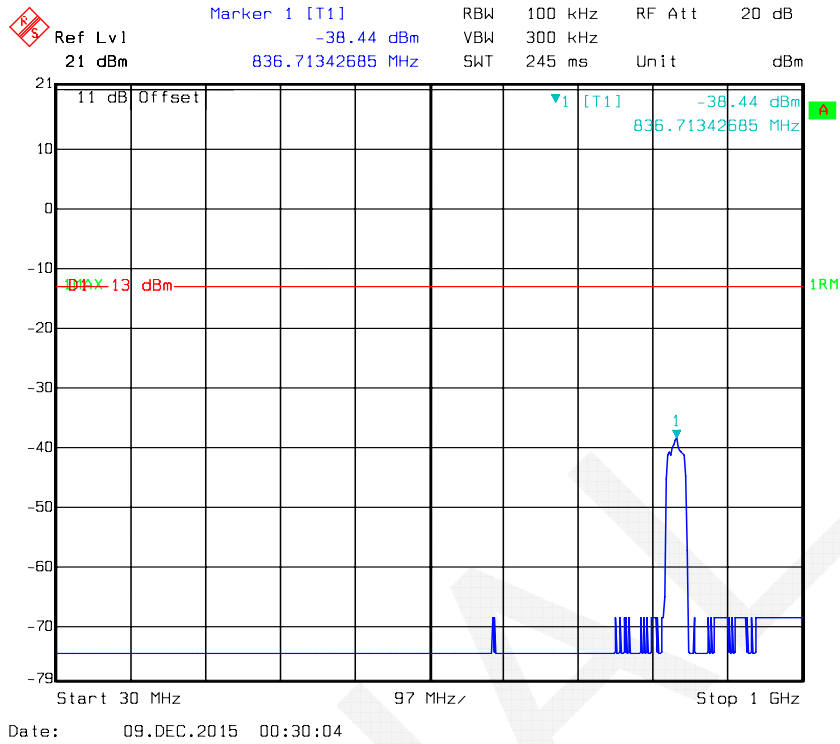


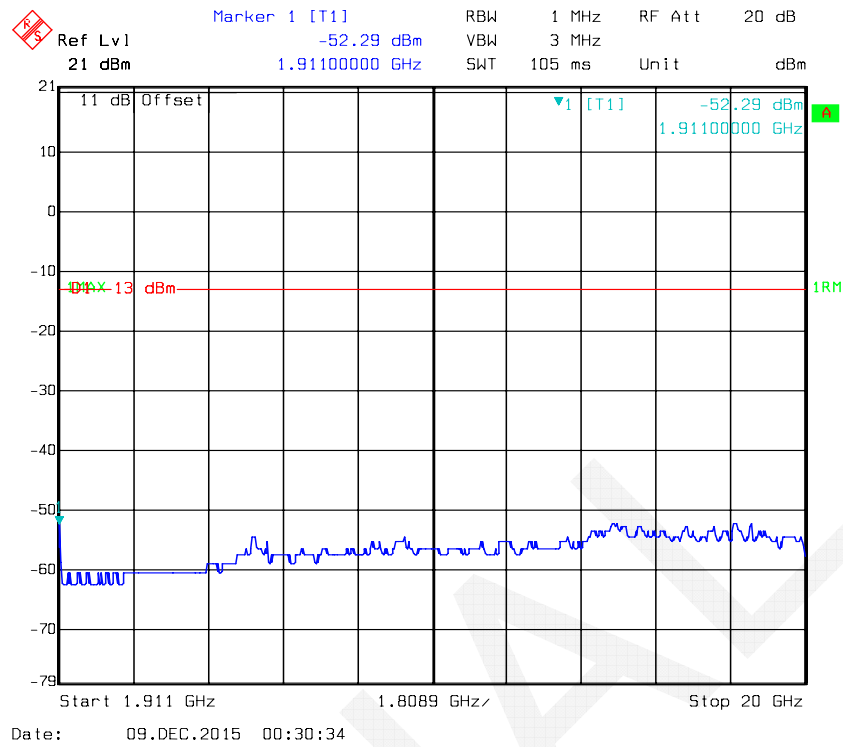



### PCS Band High Channel AWGN

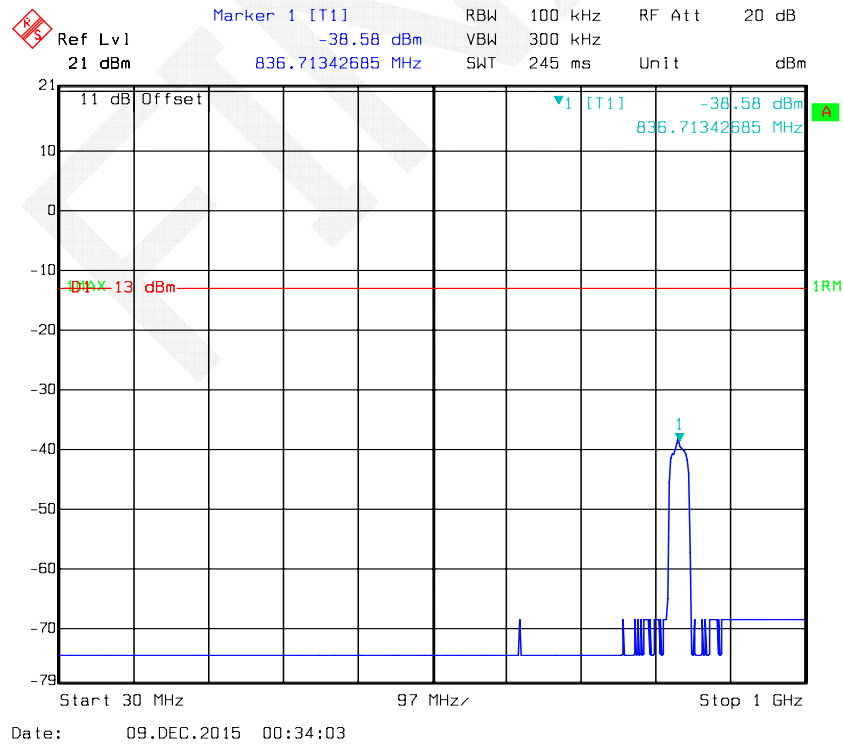

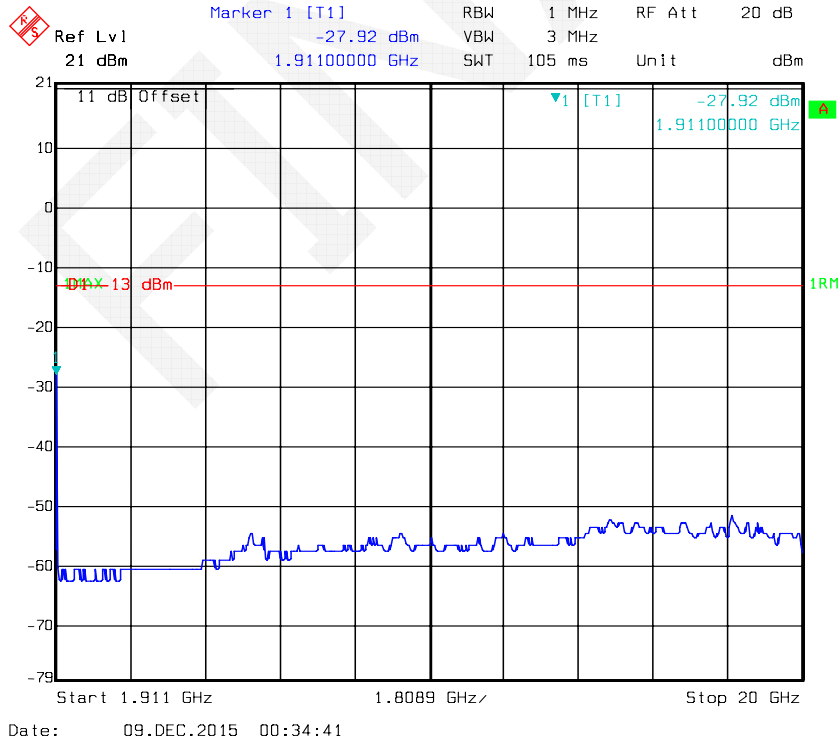




### Cellular Band Lower Channel GSM

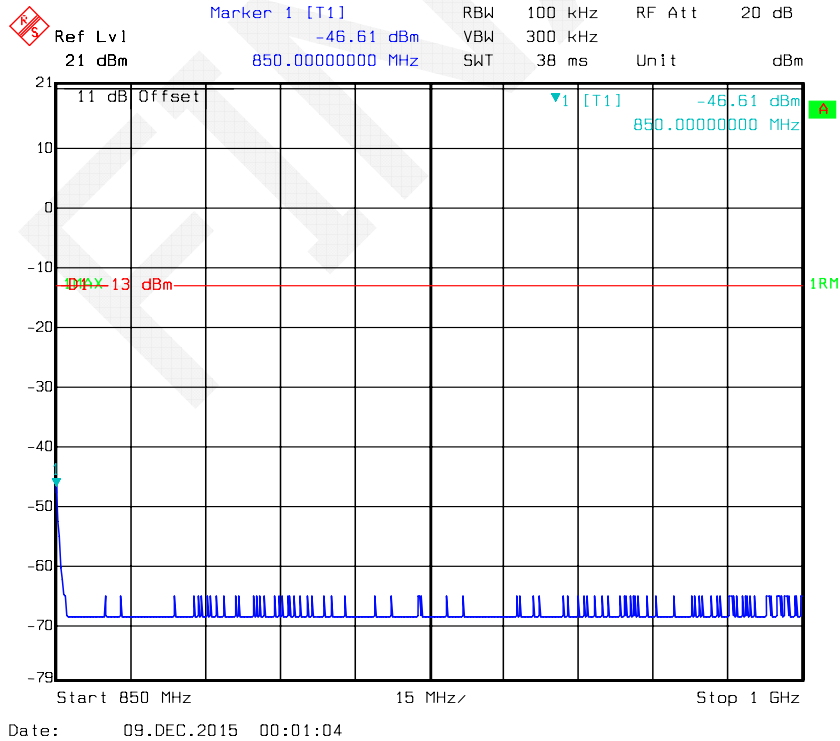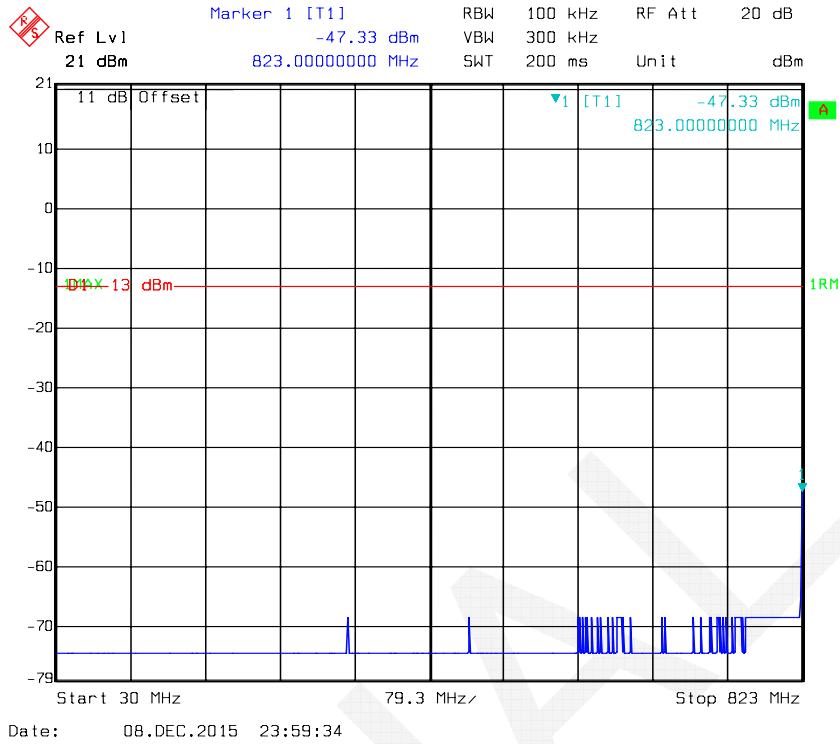


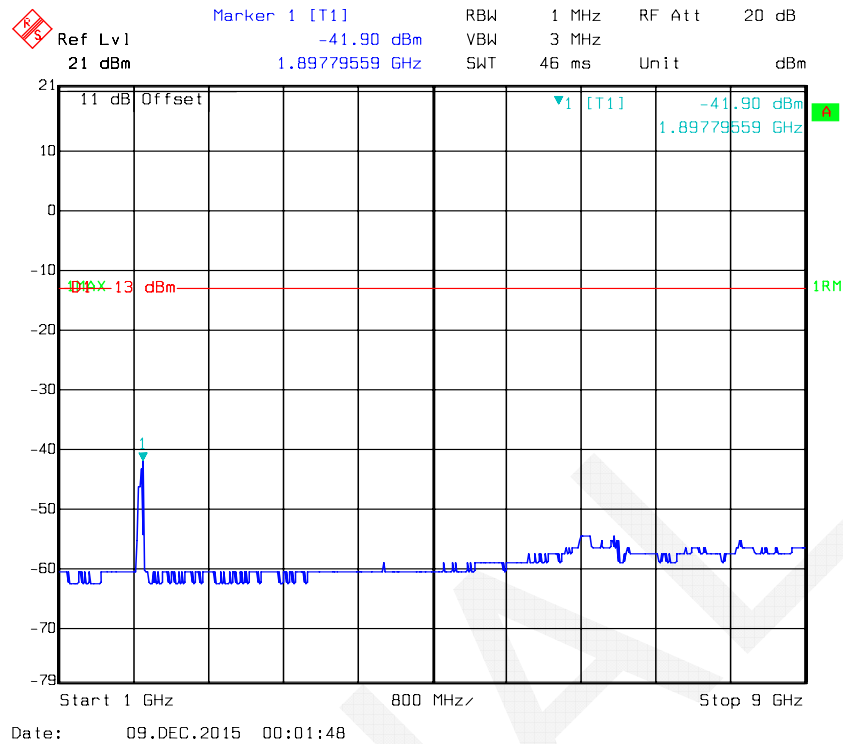



### Cellular Band Middle Channel GSM

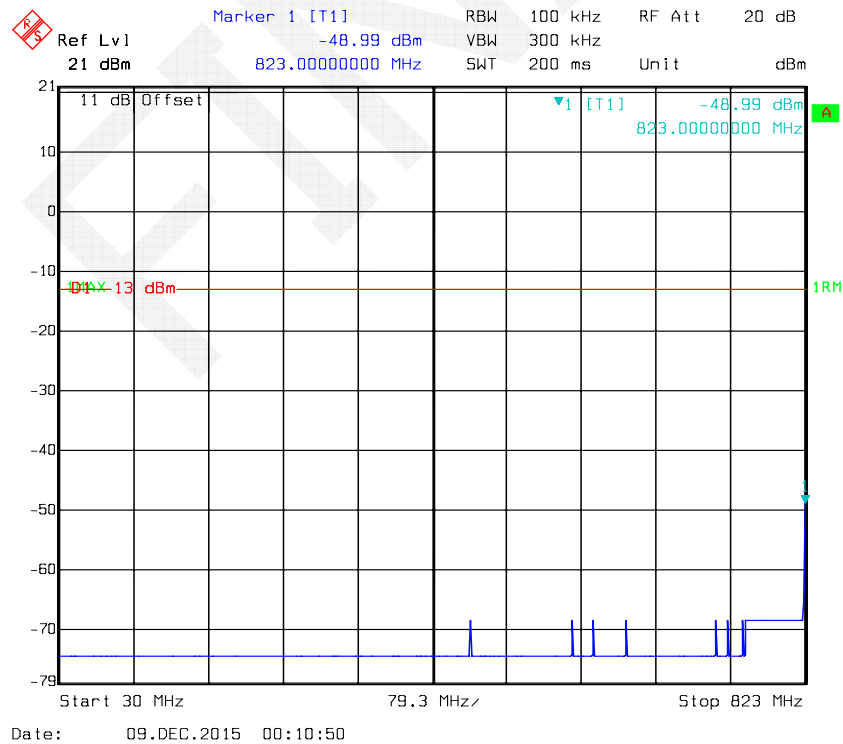

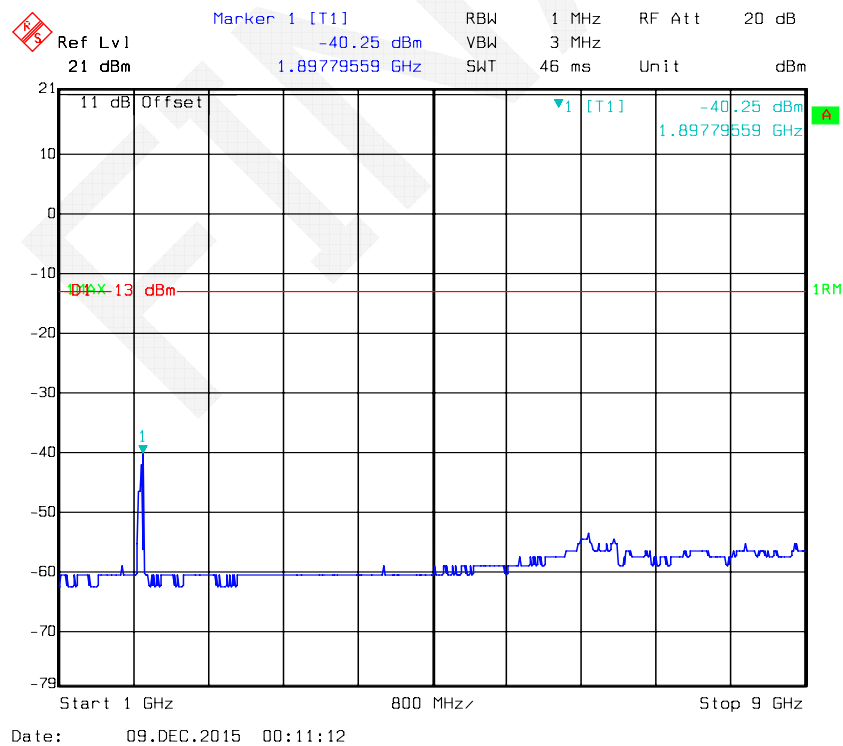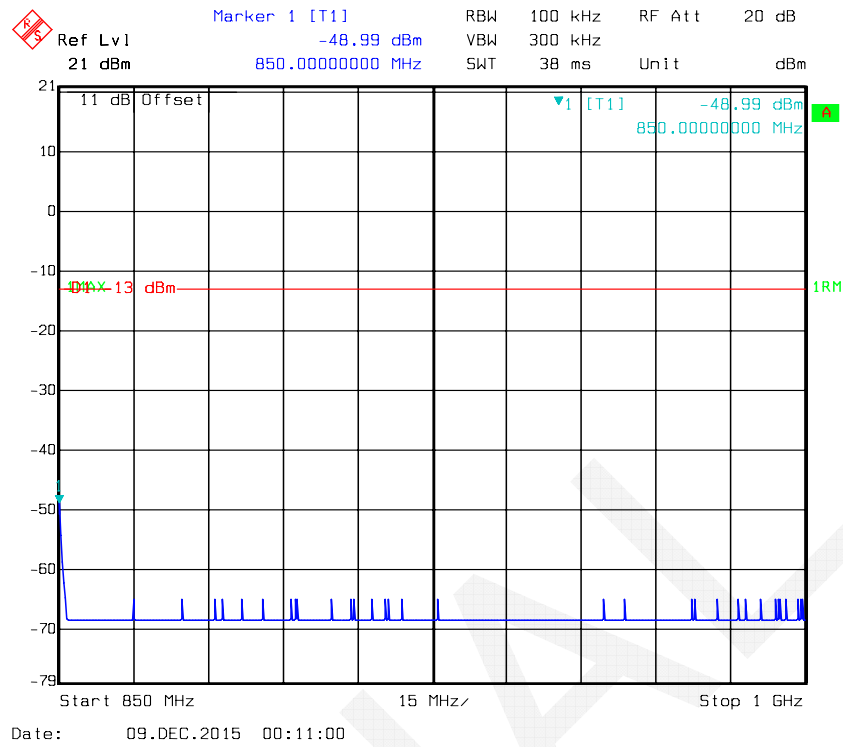

### Cellular Band High Channel GSM

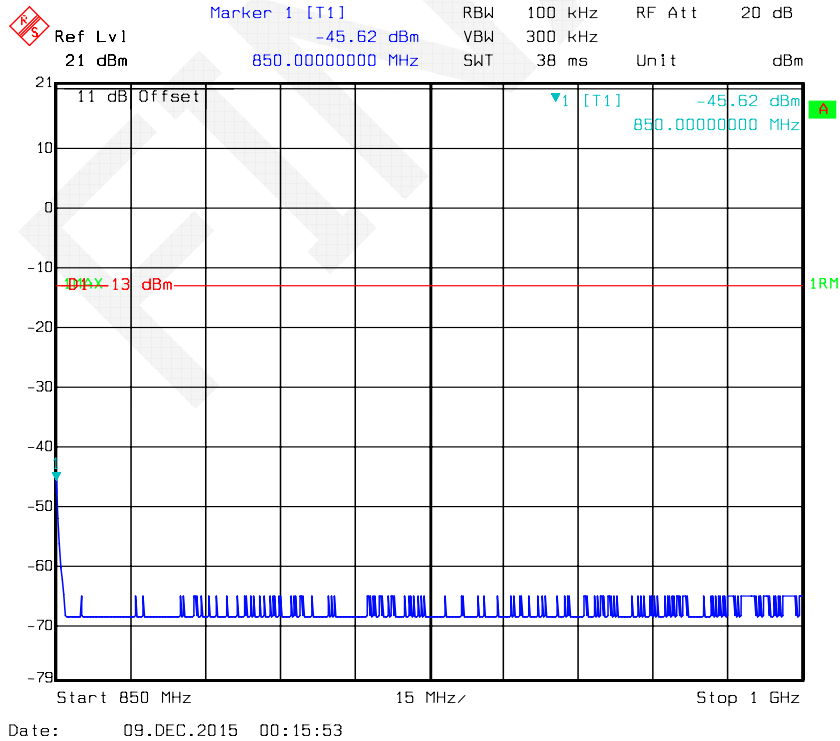
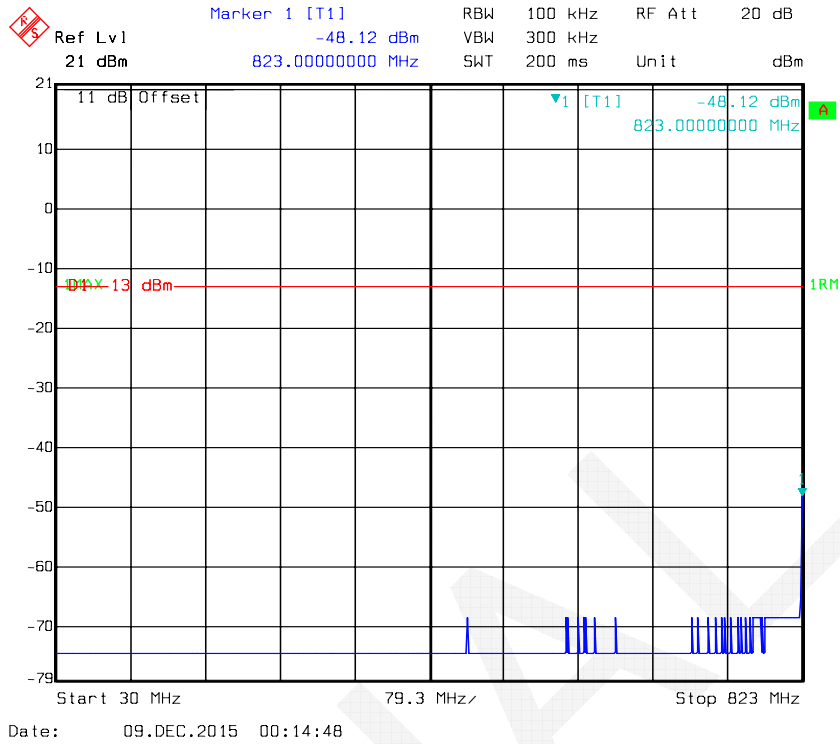


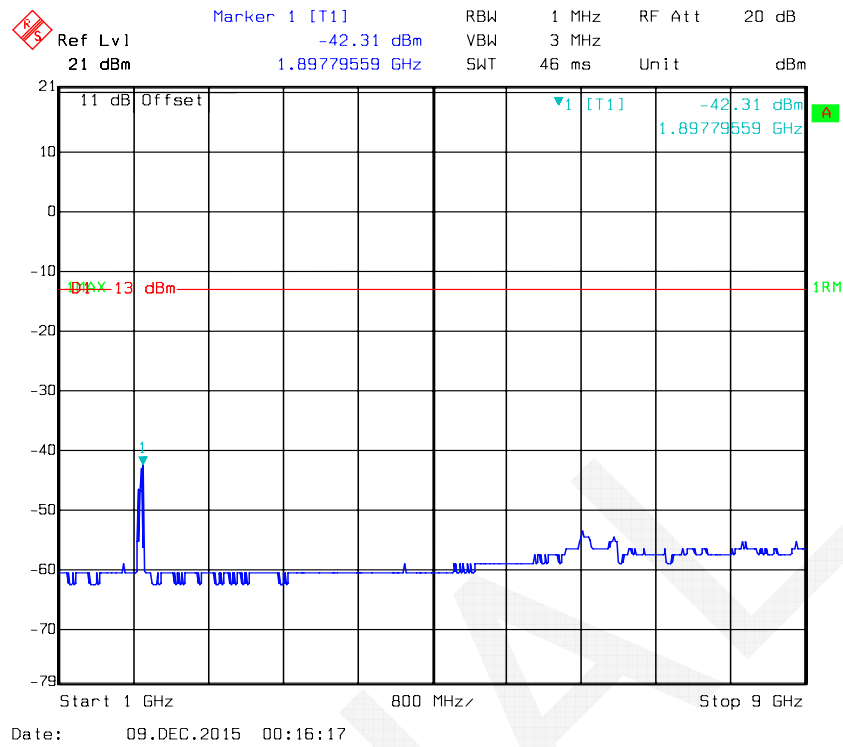


### PCS Band Low Channel GSM






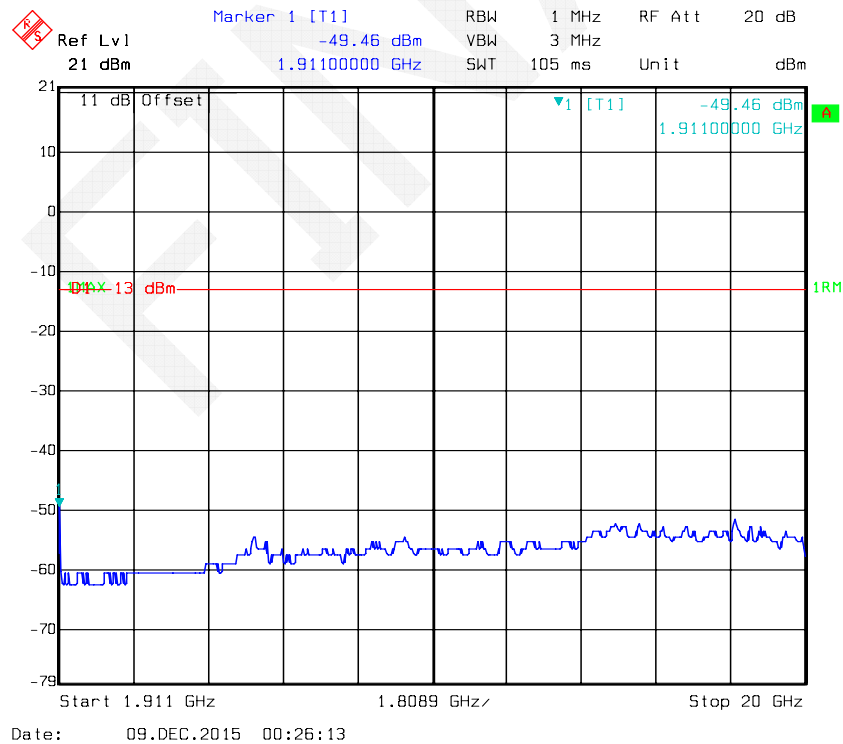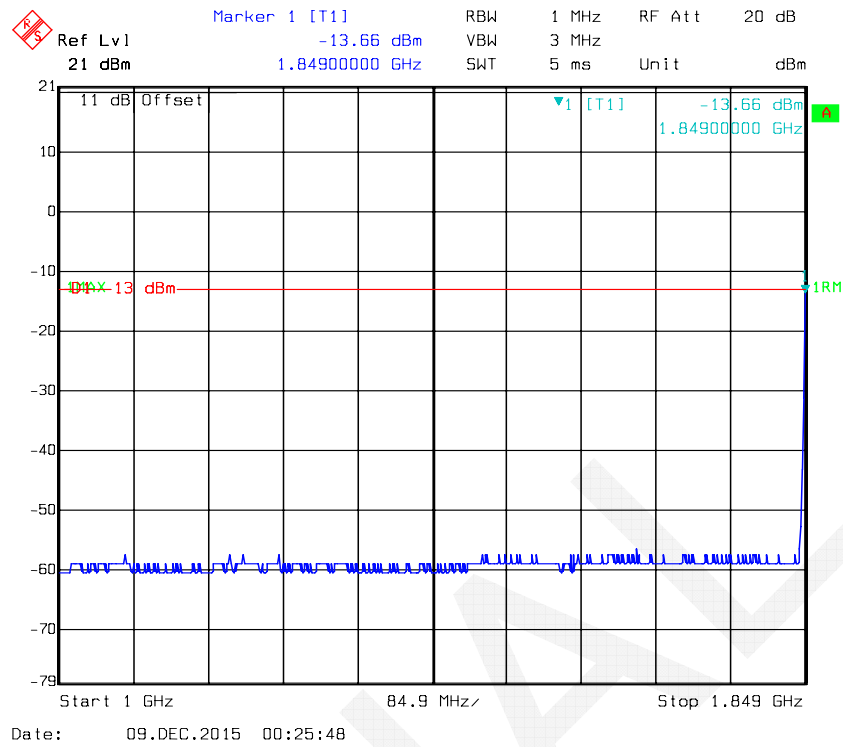



### PCS Band Middle Channel GSM

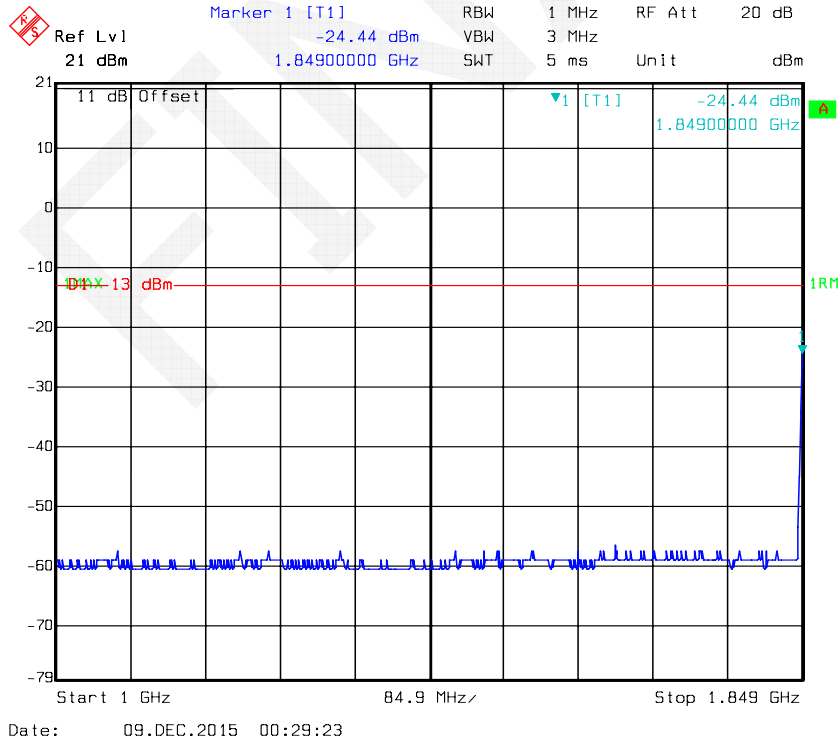

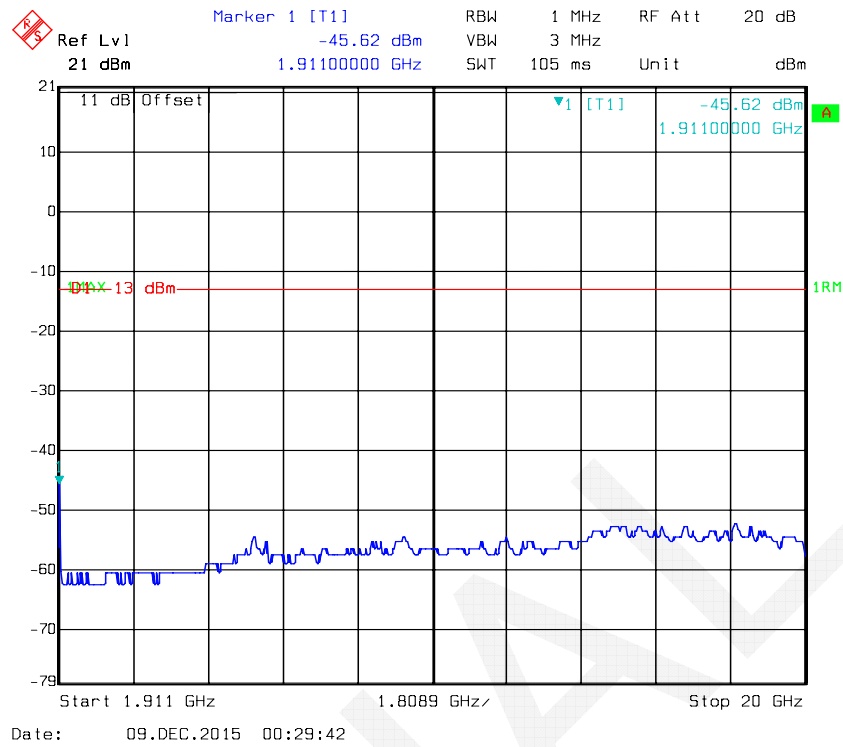



### PCS Band High Channel GSM




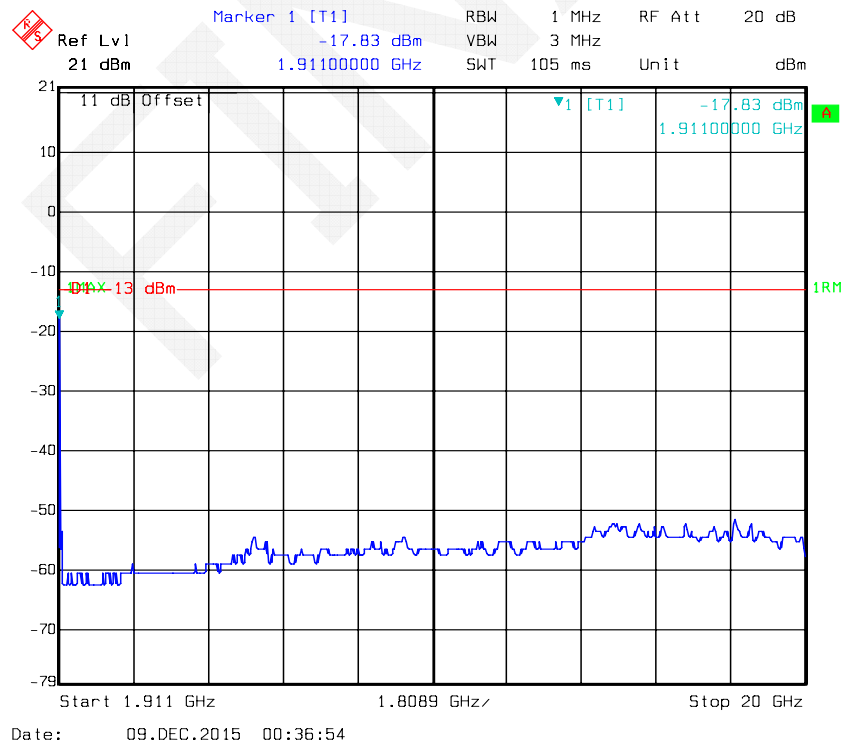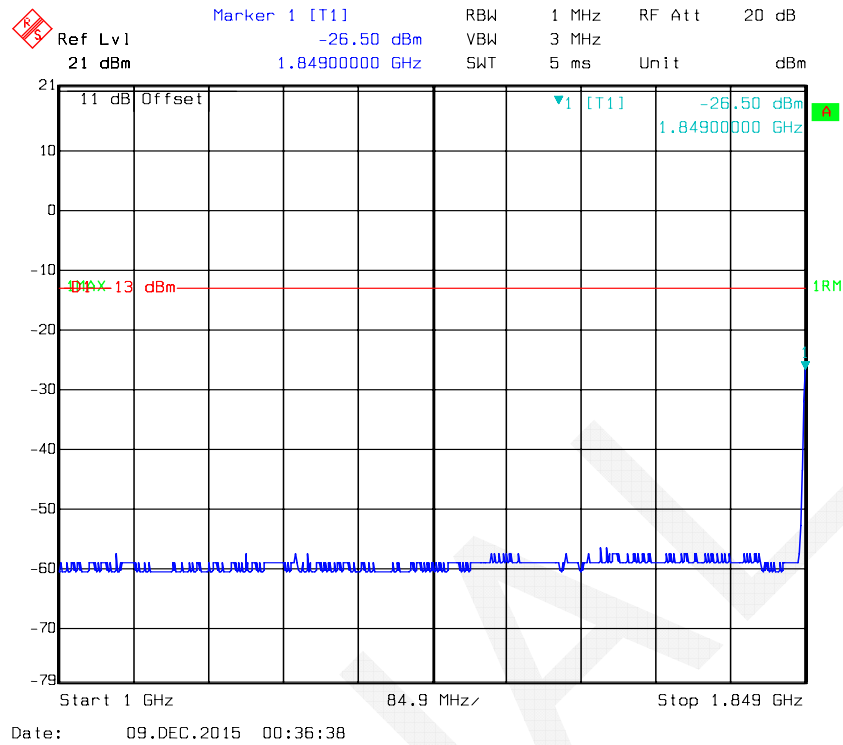


Downlink



Cellular Band Lower Channel AWGN

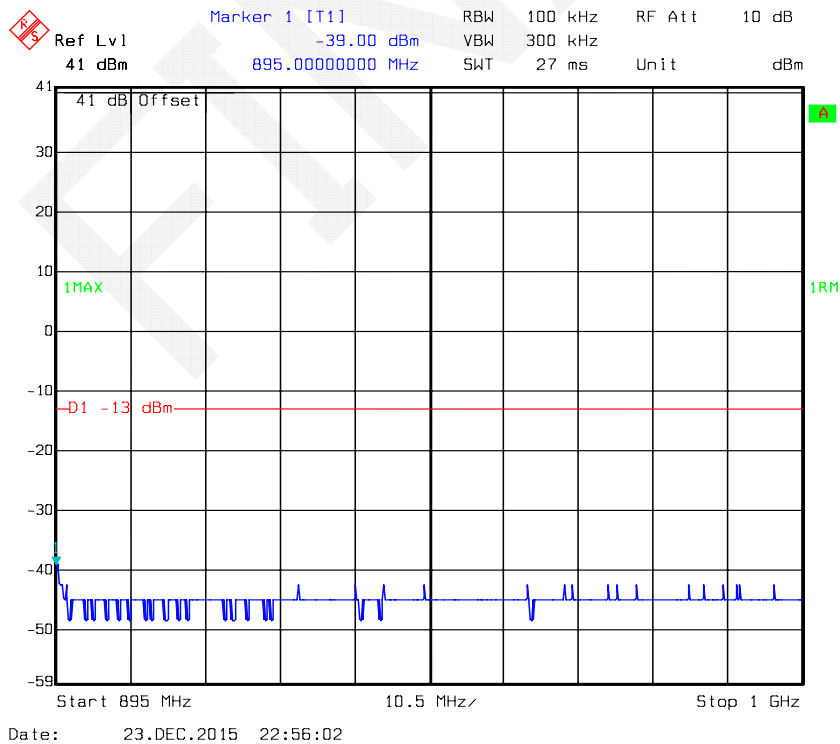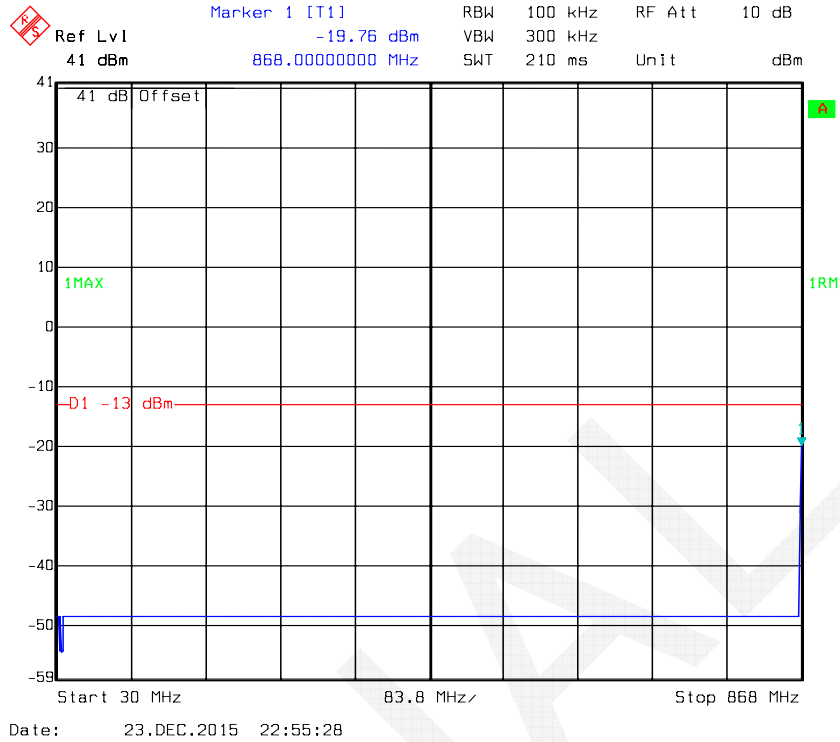


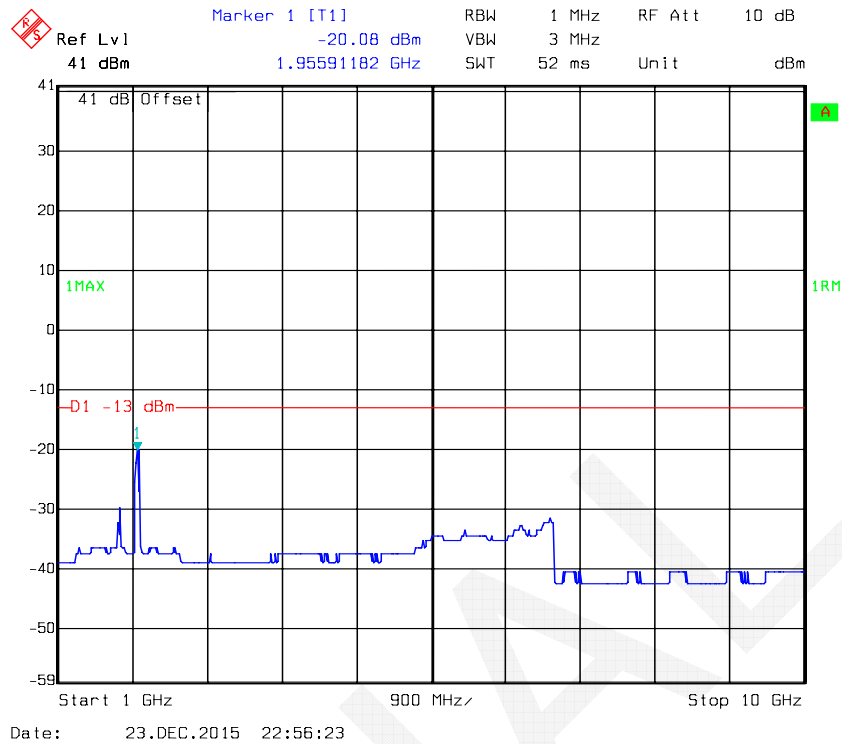


### Cellular Band Middle Channel AWGN

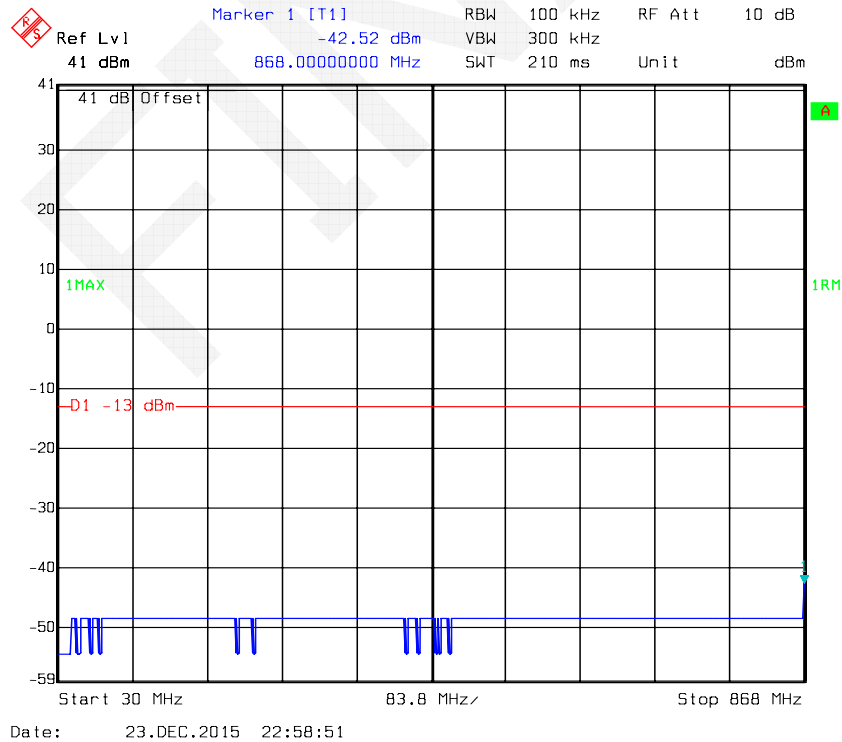


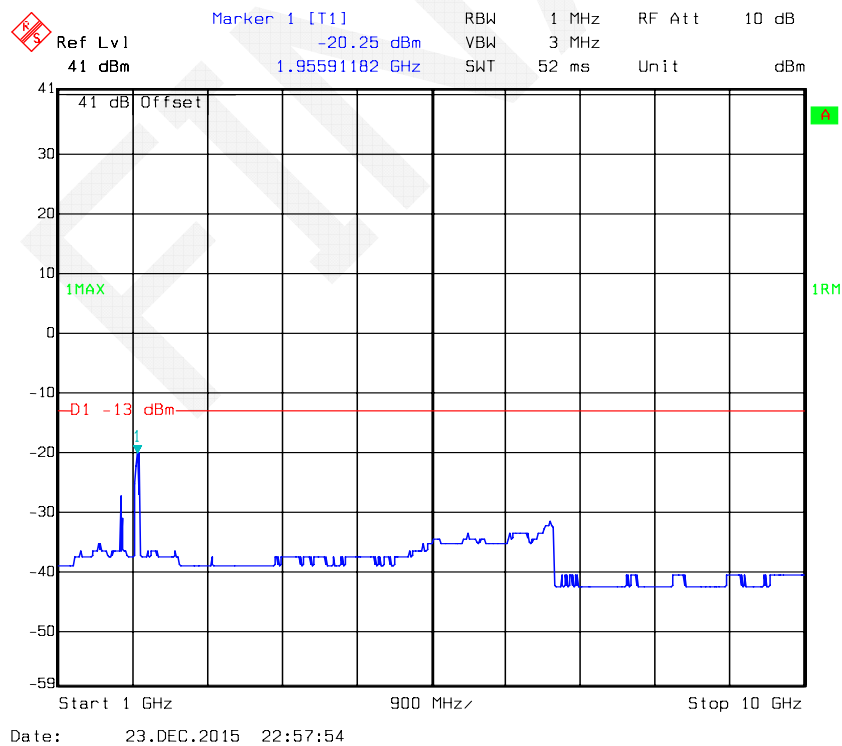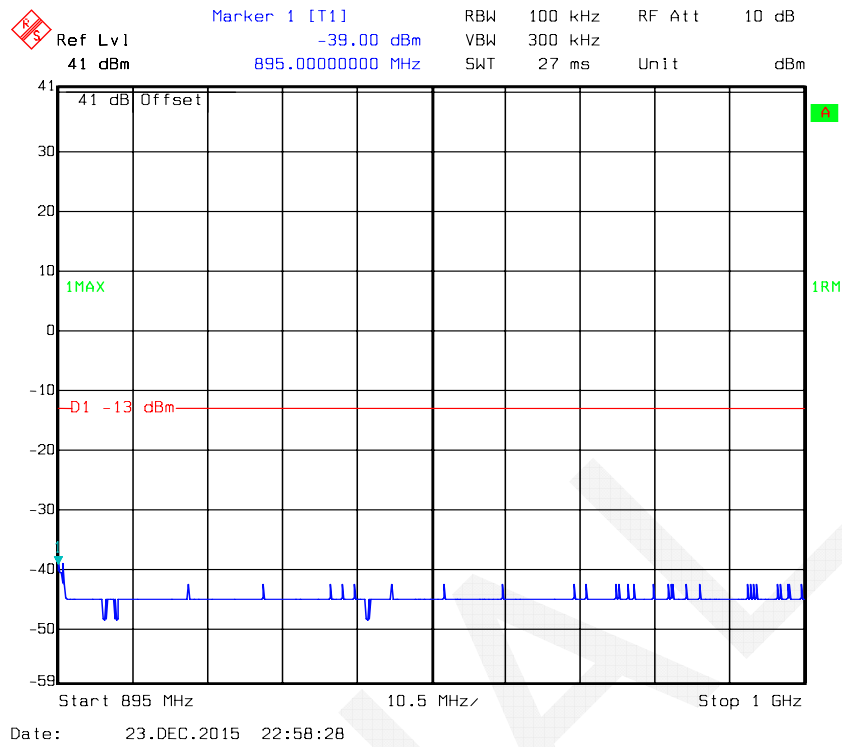


### Cellular Band High Channel AWGN

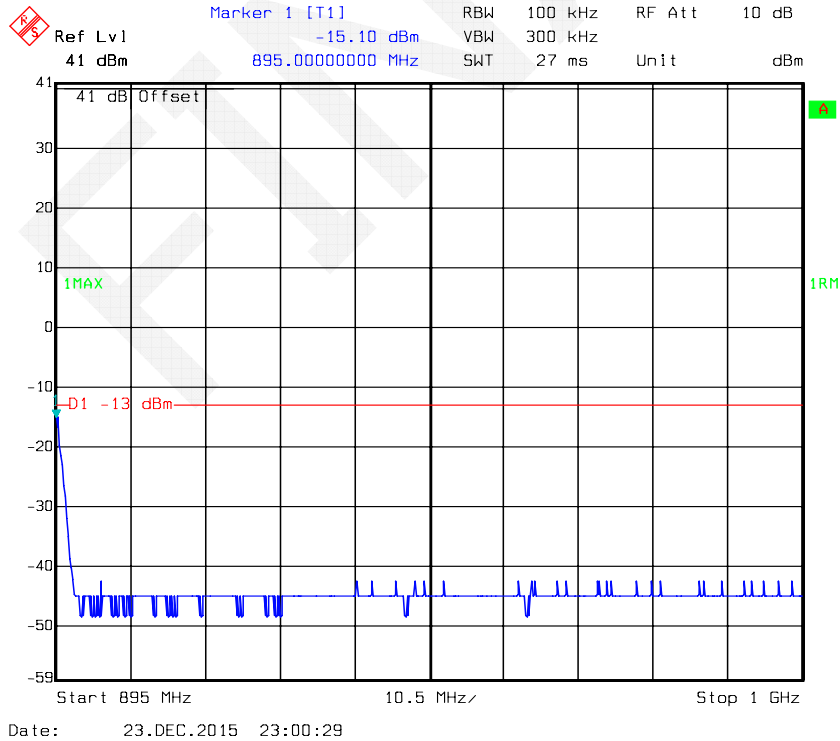
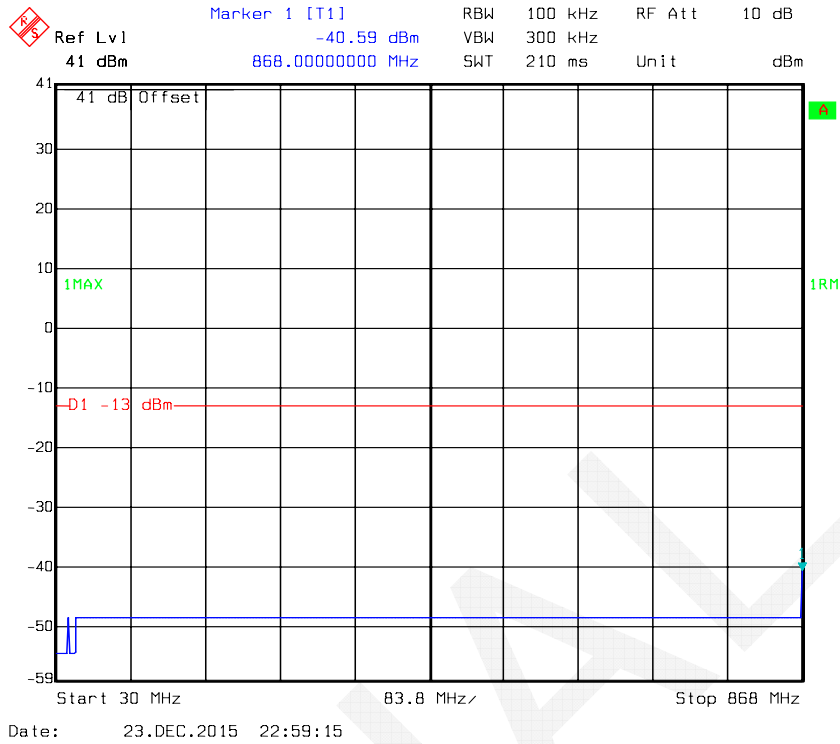





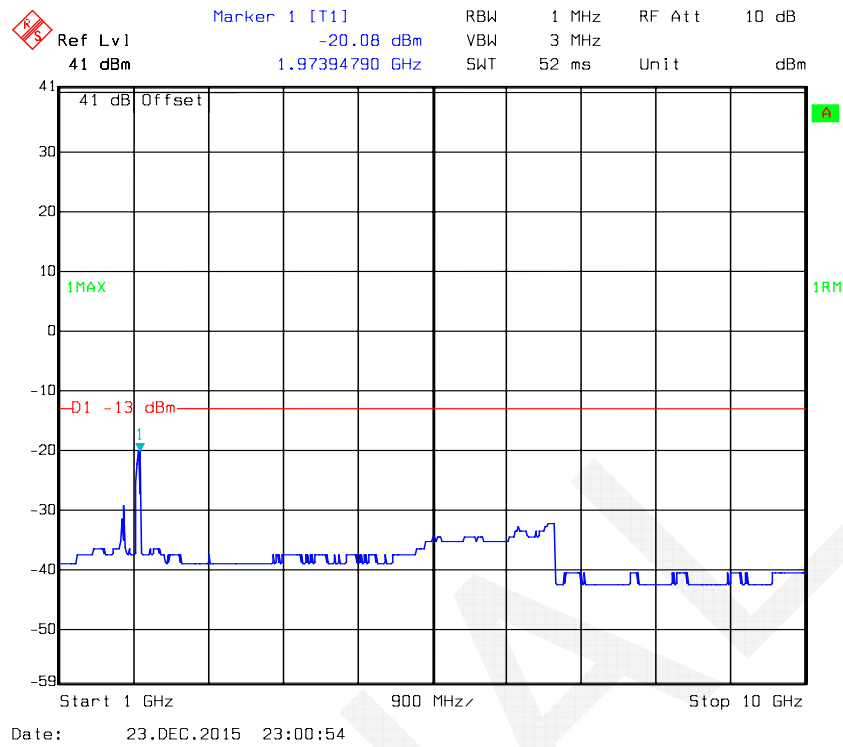



**PCS Band Low channel AWGN**

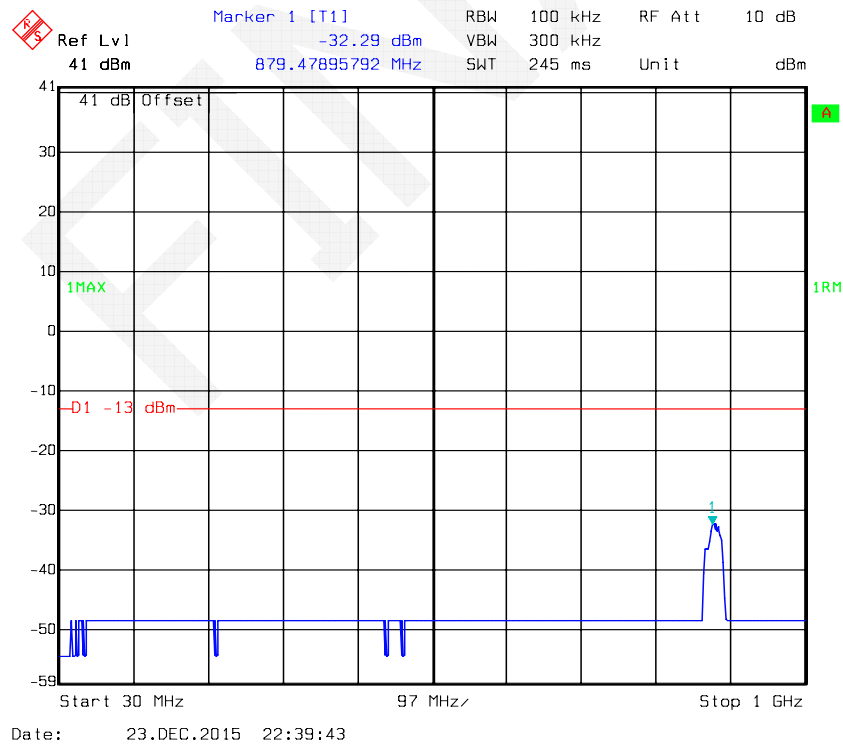

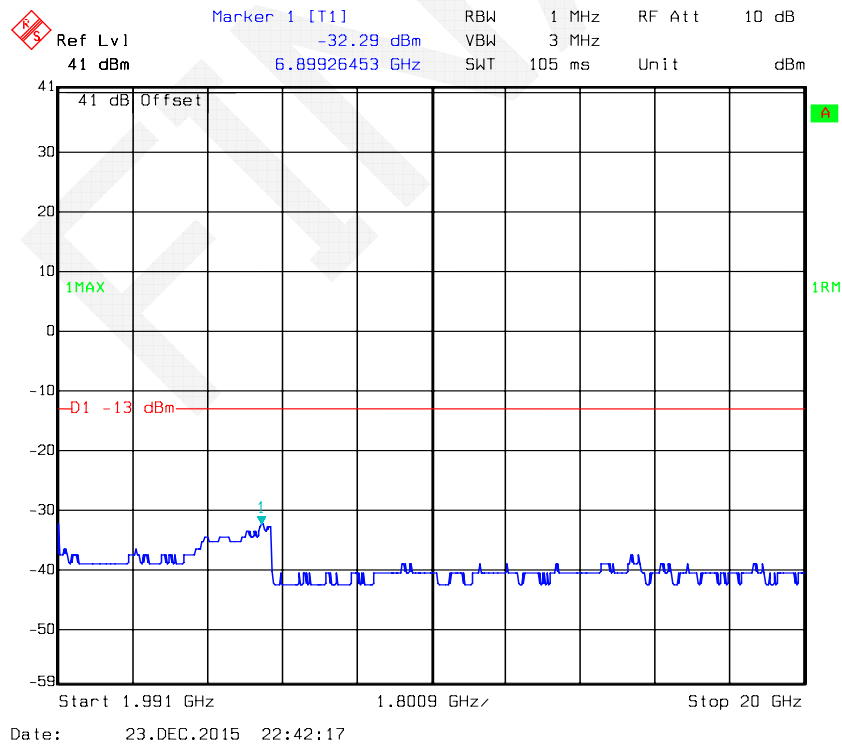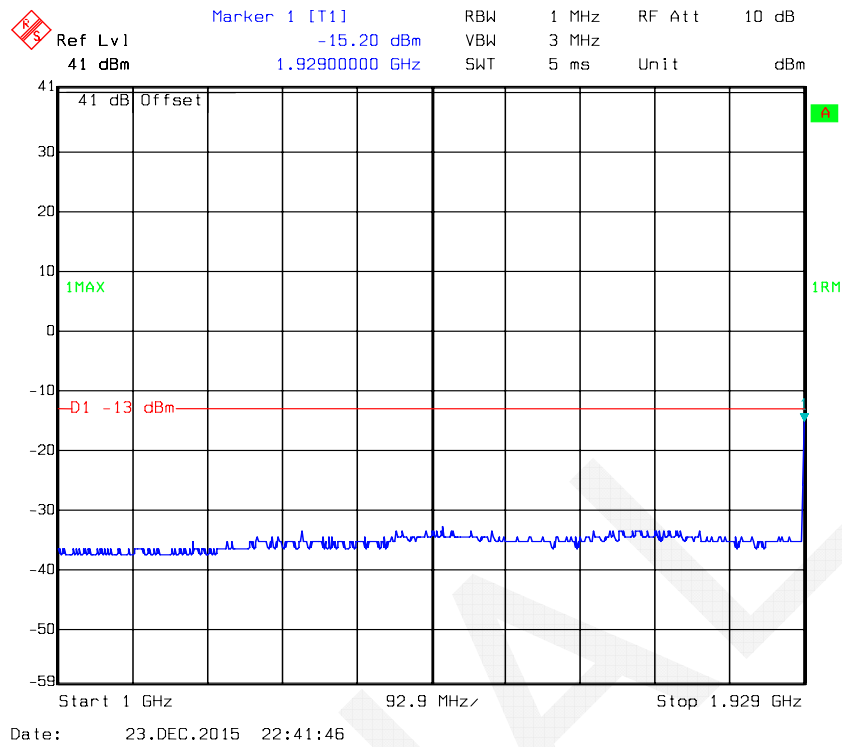




### PCS Band Middle Channel AWGN

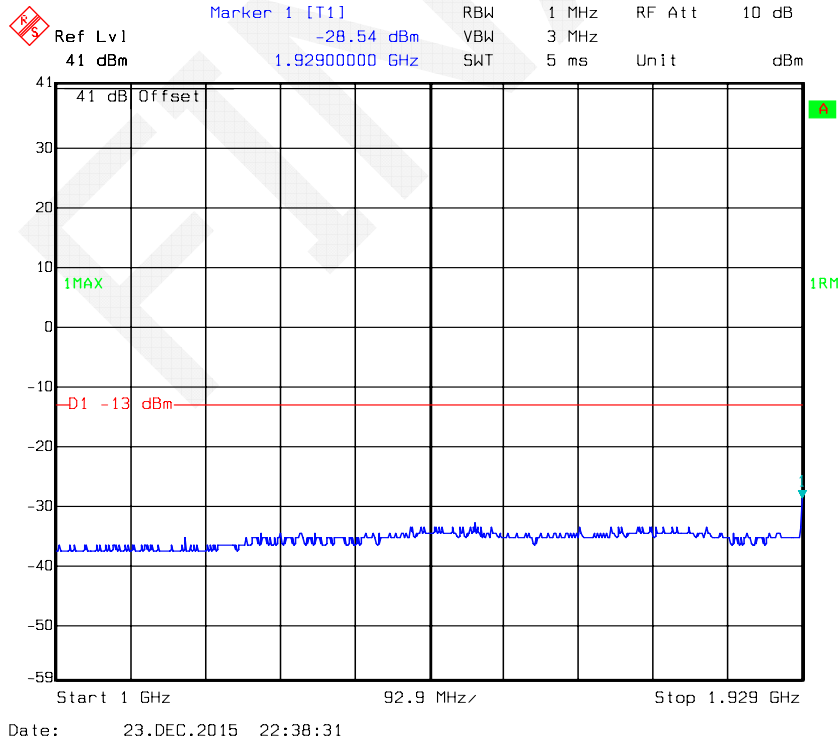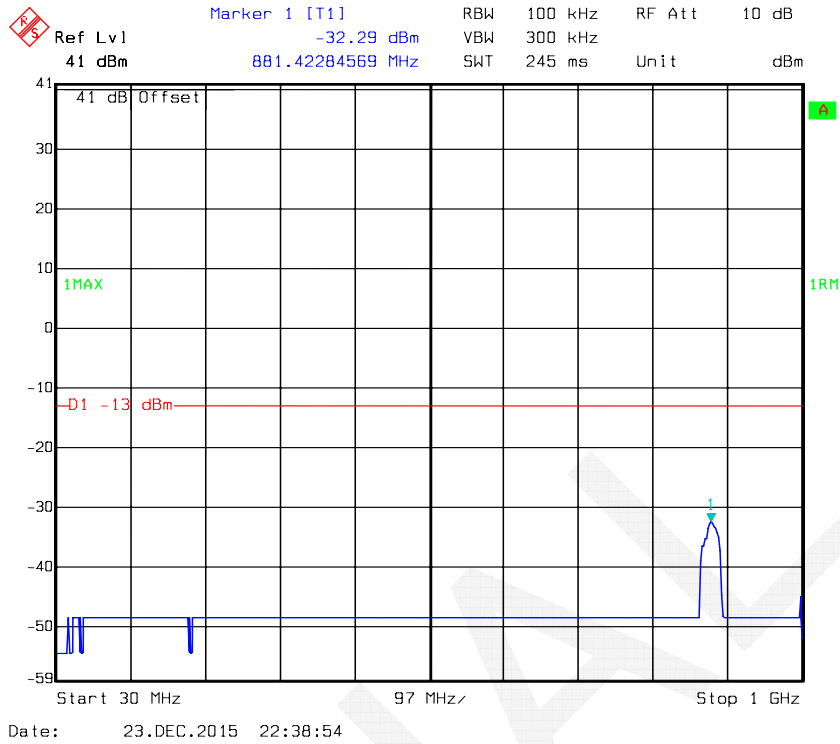


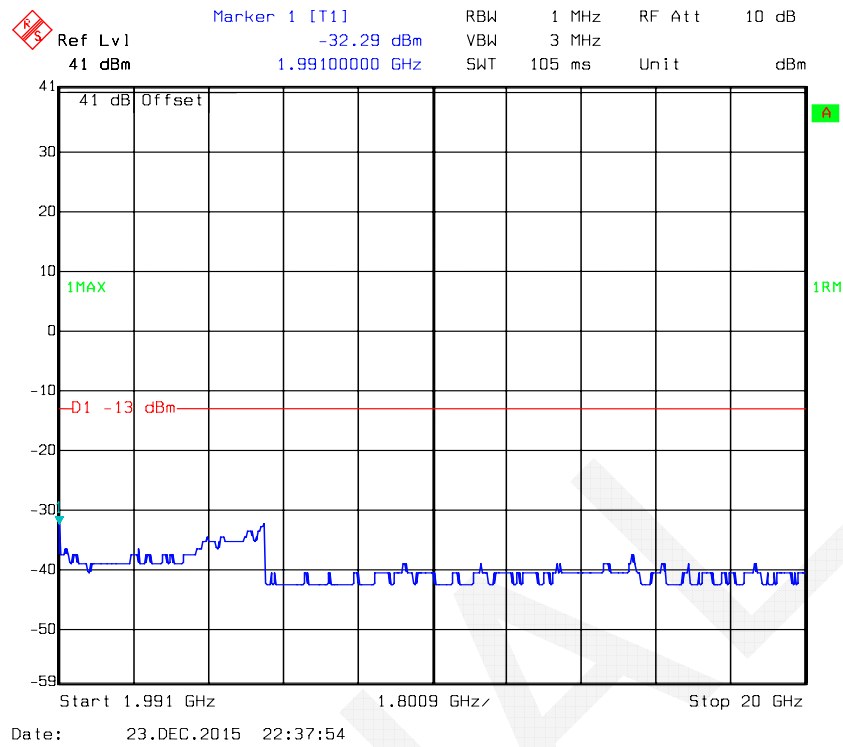


### PCS Band High Channel AWGN

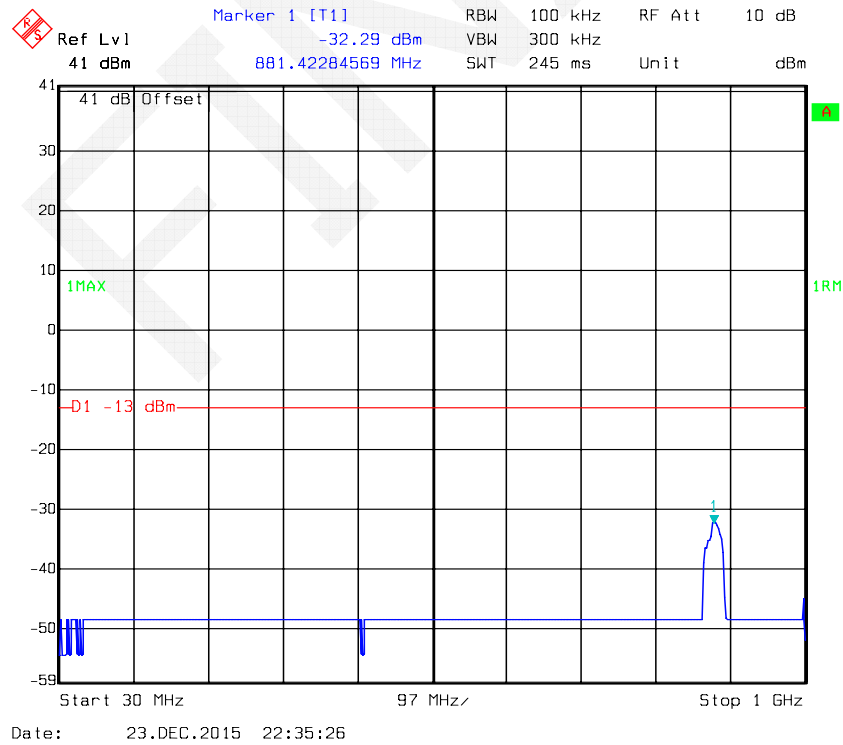

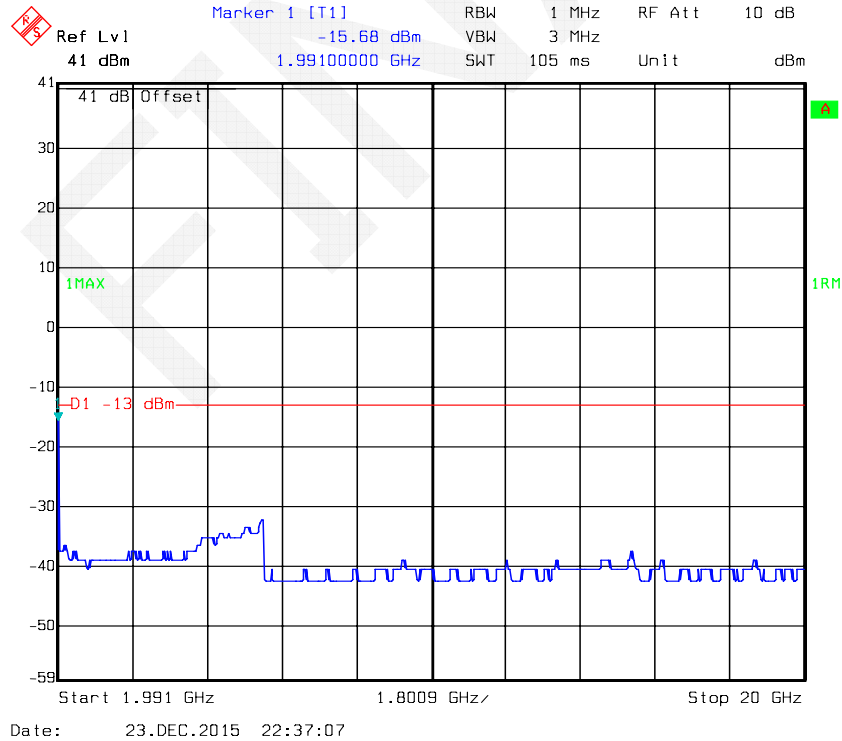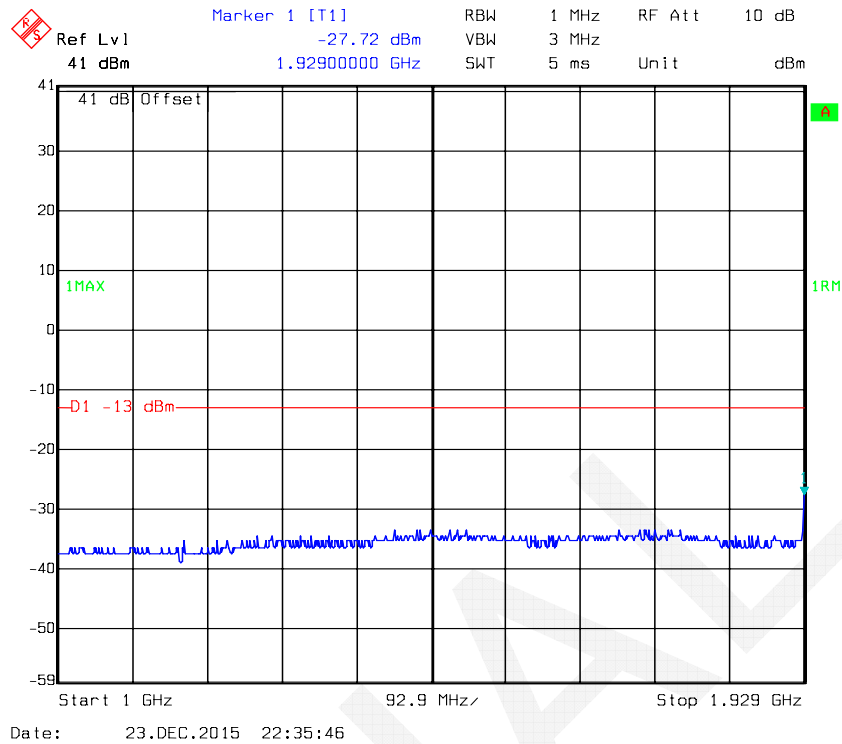




### Cellular Band Low Channel GSM

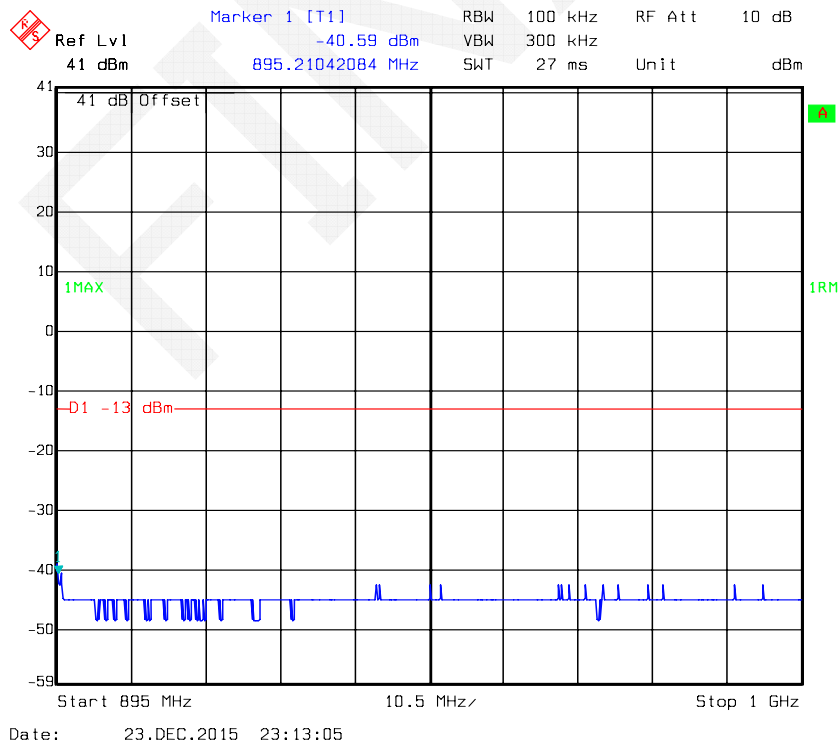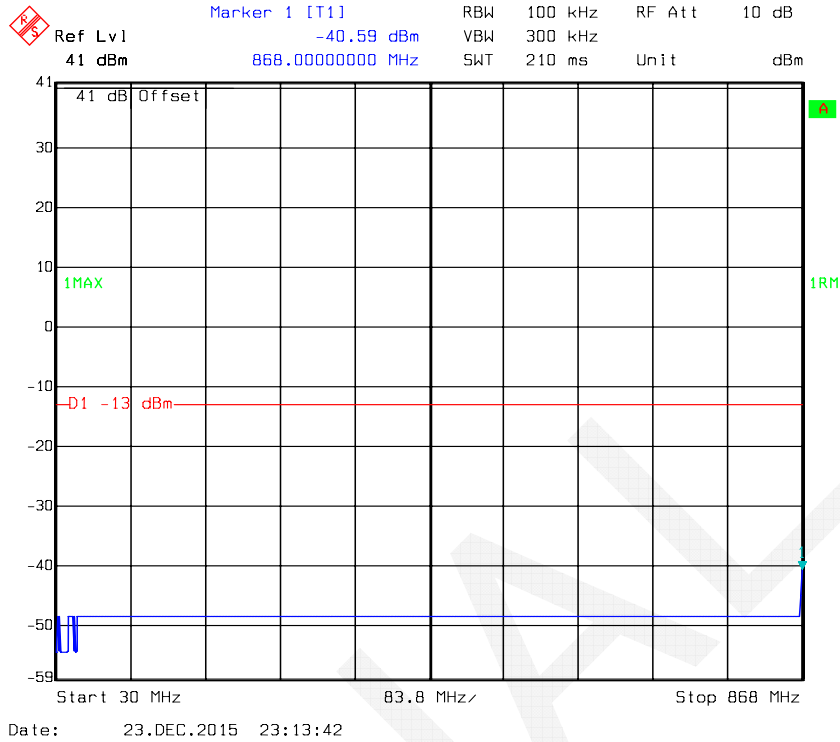





### Cellular Band Middle Channel GSM

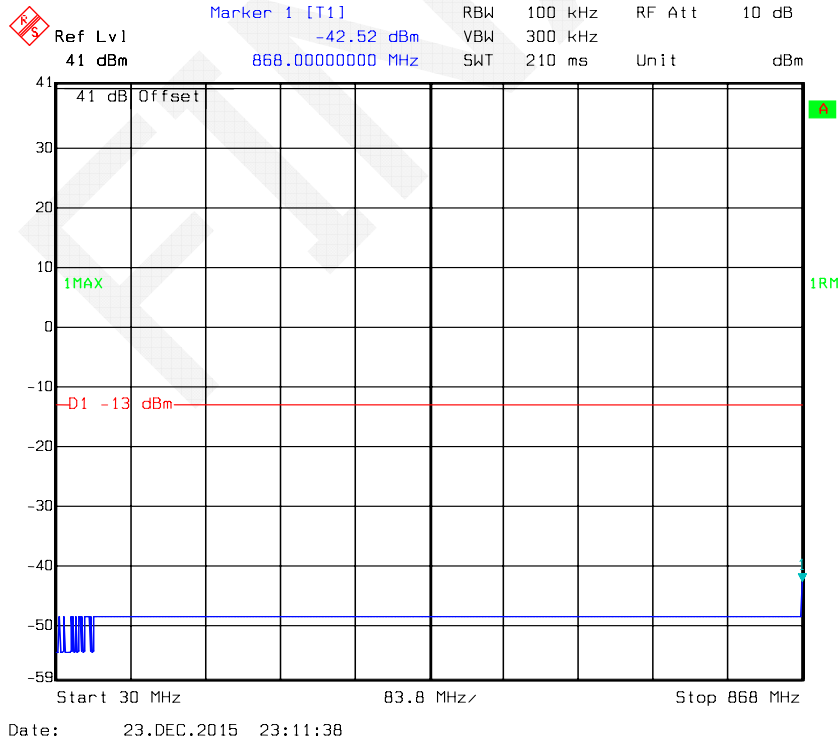


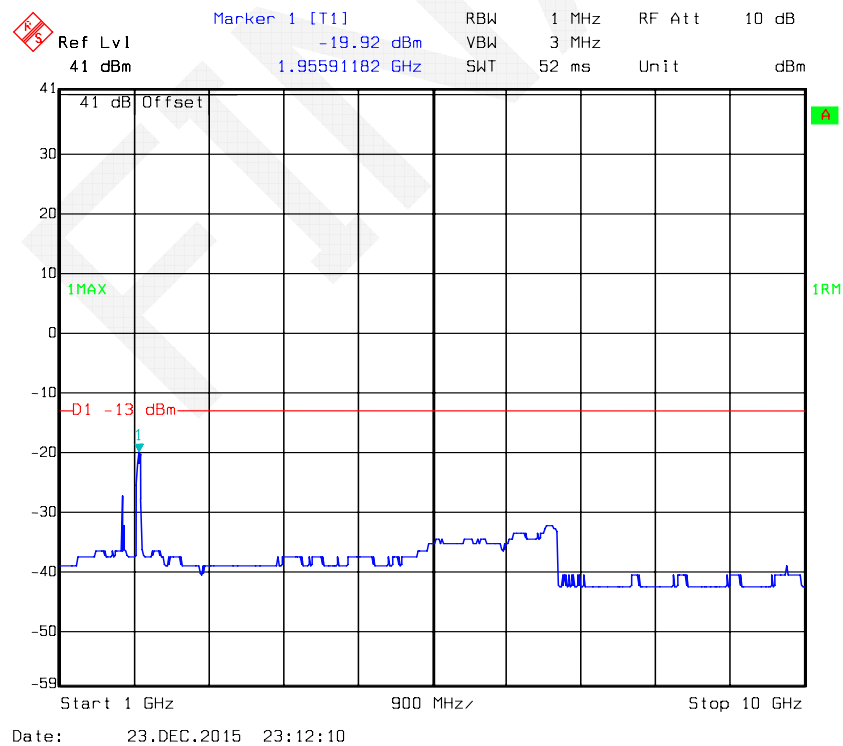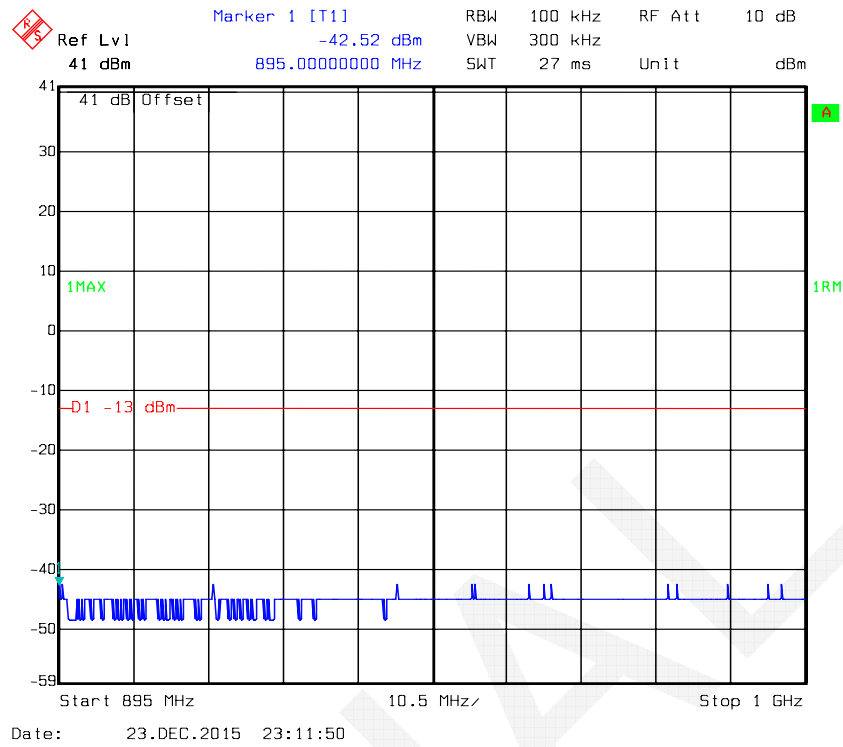






### Cellular Band High Channel GSM

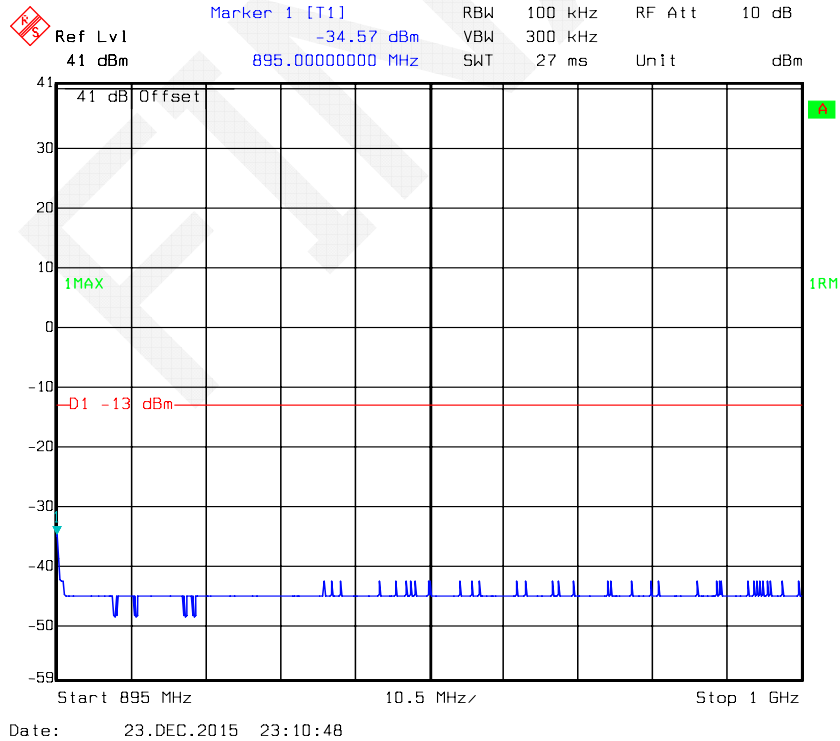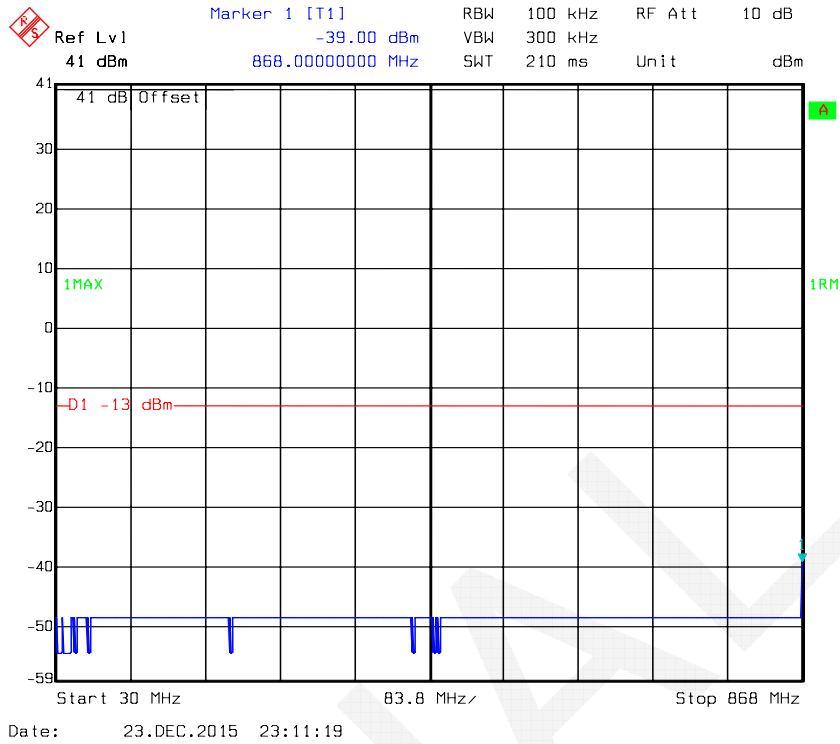

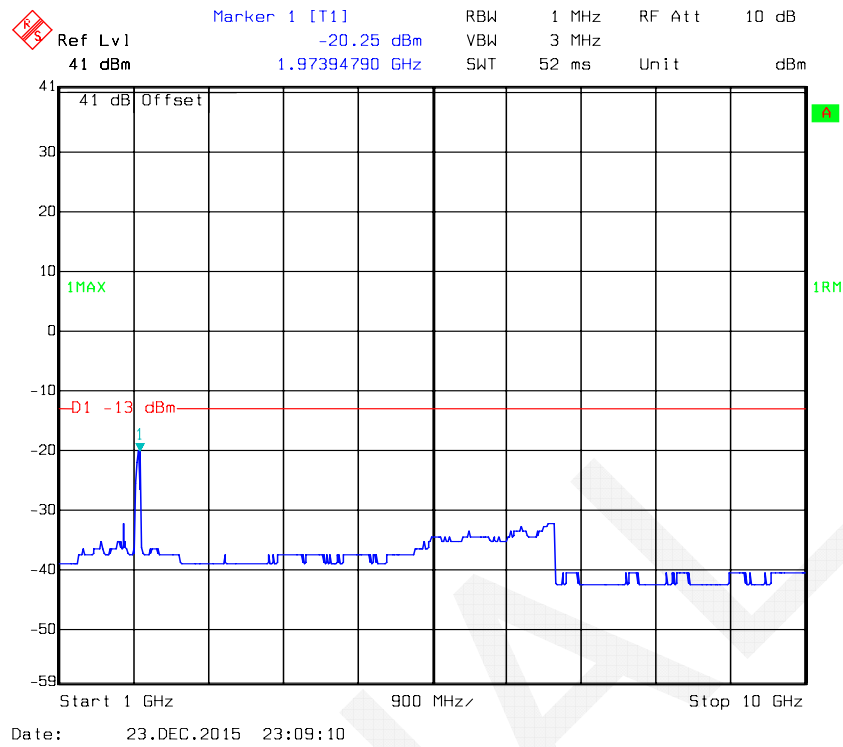



### PCS Band Low Channel GSM

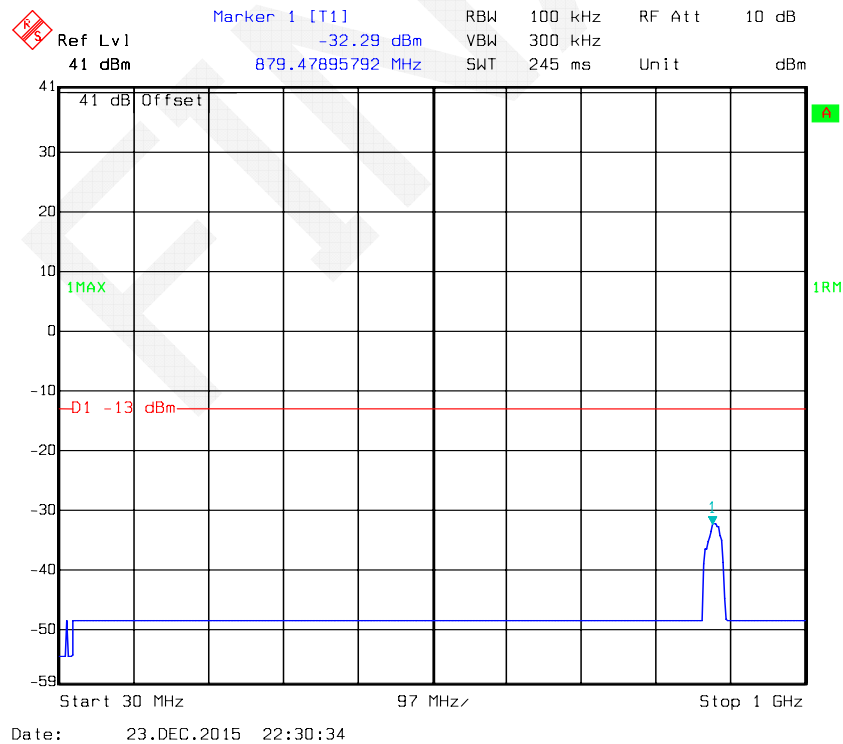

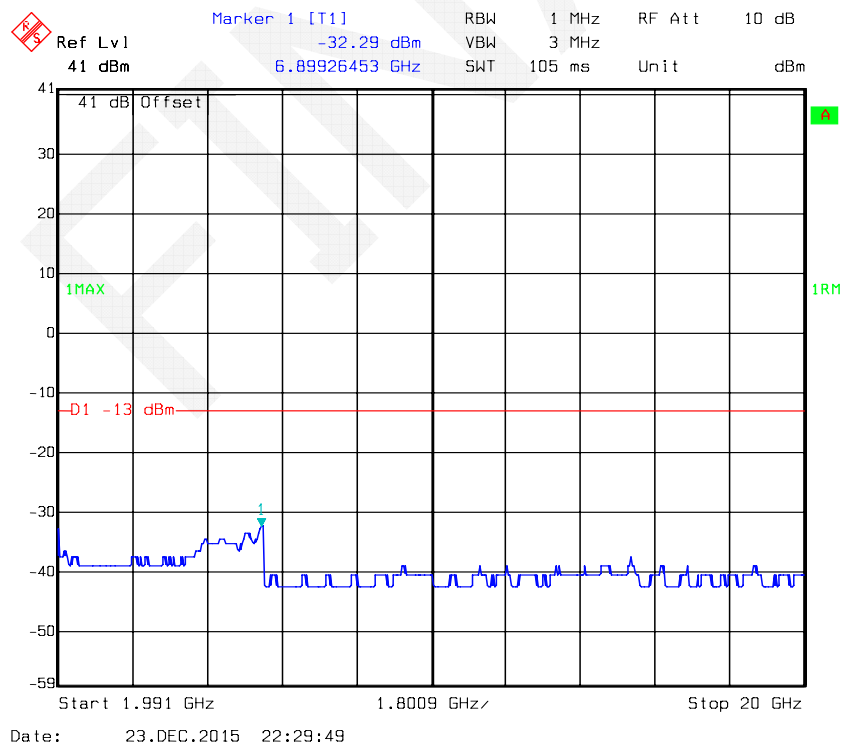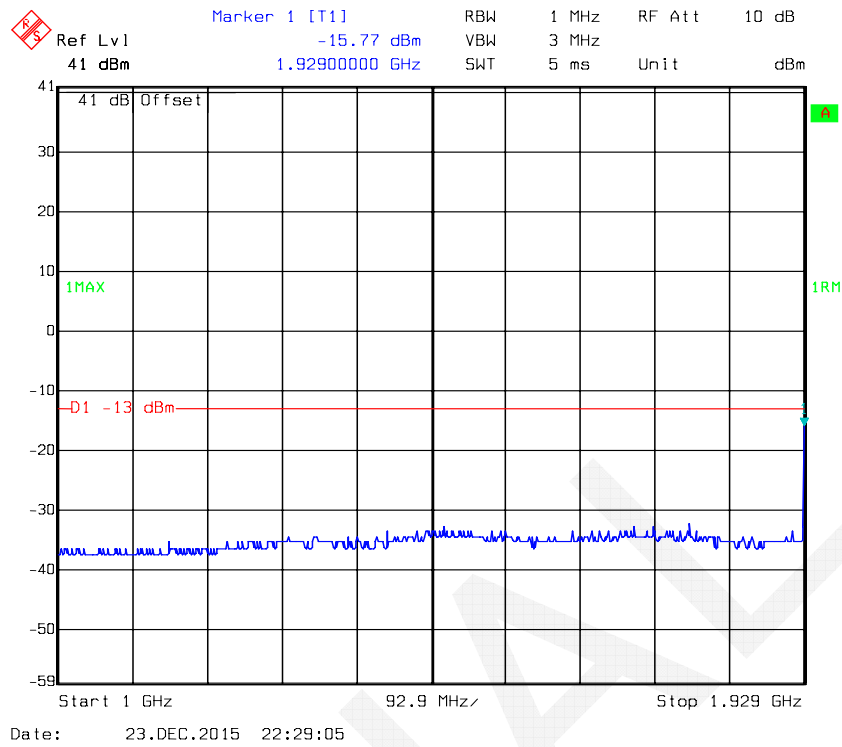




### PCS Band Middle Channel GSM

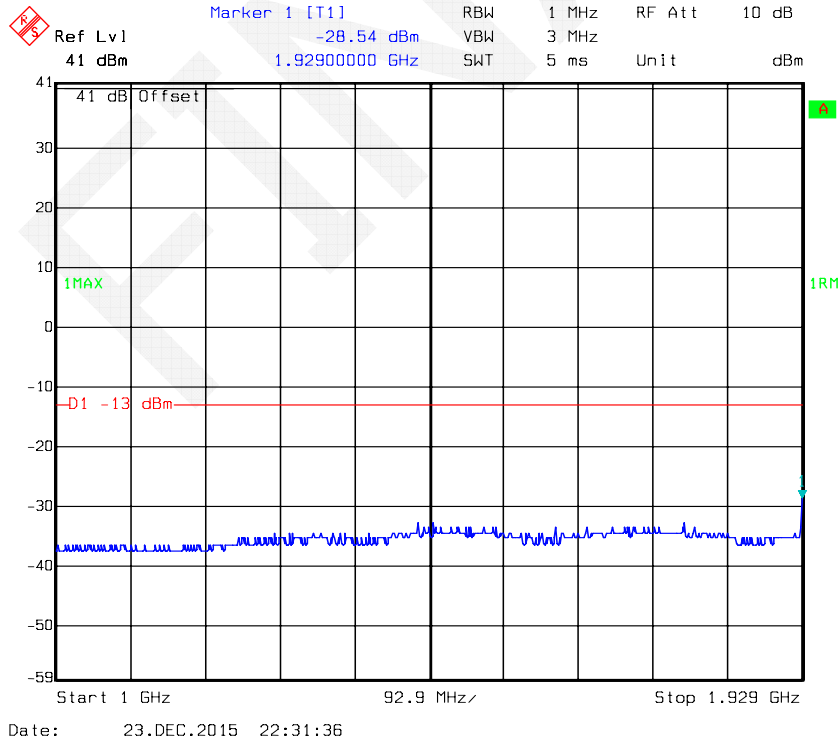

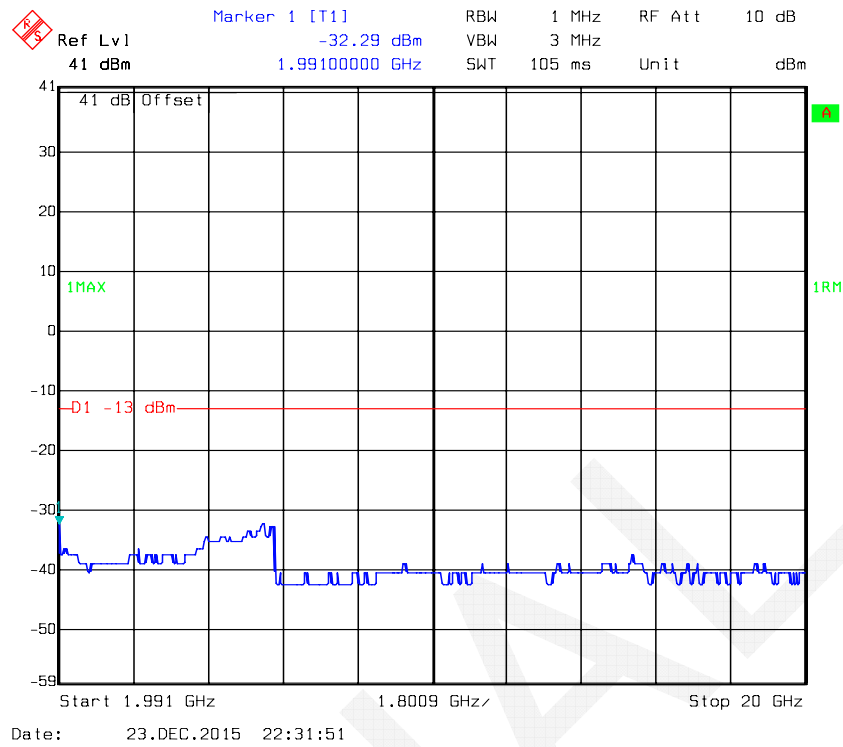

### PCS Band High Channel GSM

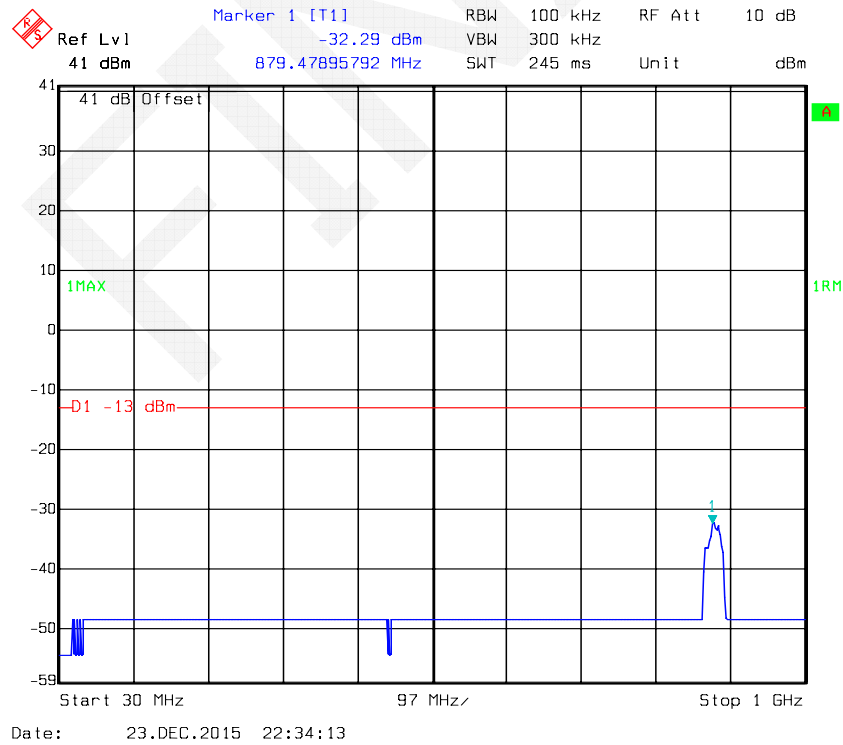

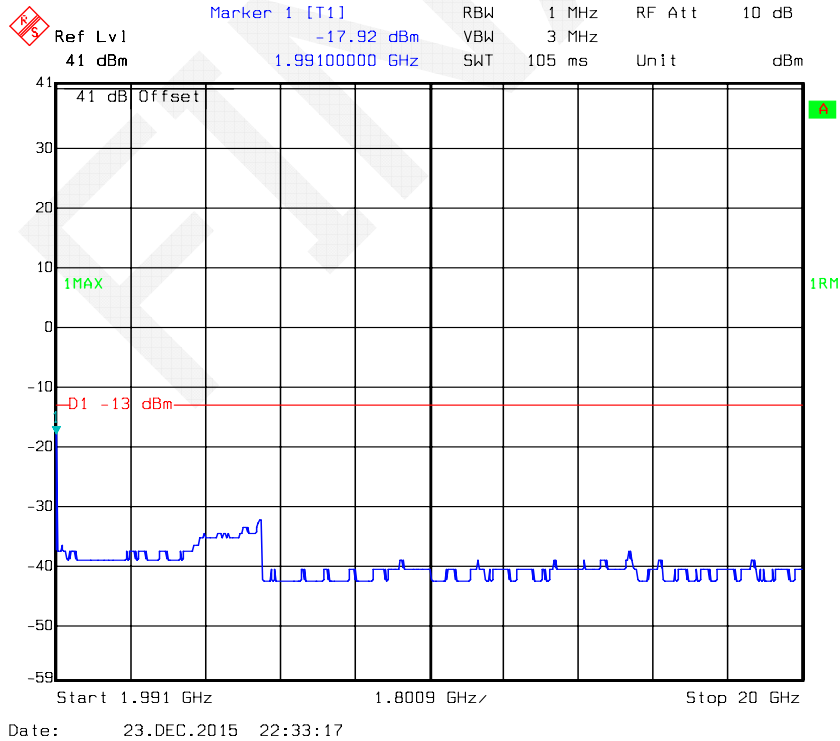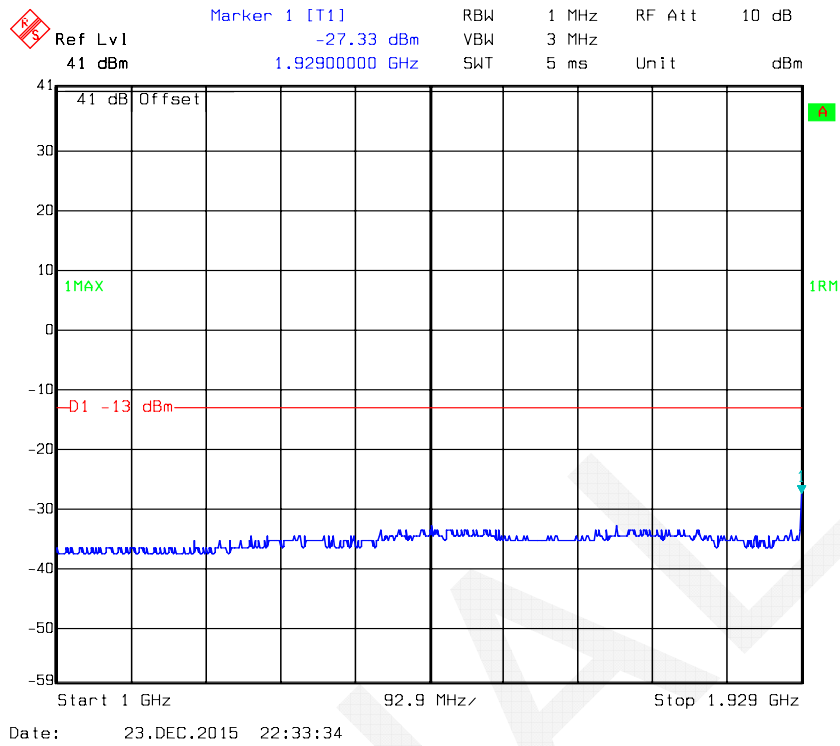

## §2.1053&§22.917&24.238- RADIATED SPURIOUS EMISSIONS

### Applicable Standards

According to §2.1053 Measurements required: Field strength of spurious radiation.

According to §22.917(a) *Out of band emissions*. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a) *Out of band emissions*. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

### Test Procedure

The transmitter was placed on a turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

### Test Equipment List and Details

| Manufacturer          | Description       | Model           | Serial Number      | Calibration Date | Calibration Due Date |
|-----------------------|-------------------|-----------------|--------------------|------------------|----------------------|
| R&S                   | EMI Test Receiver | ESCI            | 100224             | 2015-08-03       | 2016-08-02           |
| Sunol Sciences        | Antenna           | JB3             | A060611-3          | 2014-11-06       | 2017-11-05           |
| HP                    | Amplifier         | 8447E           | 2434A02181         | 2015-09-01       | 2016-09-01           |
| Agilent               | Spectrum Analyzer | E4440A          | SG43360054         | 2015-11-23       | 2016-11-22           |
| ETS-Lindgren          | Horn Antenna      | 3115            | 9808-5557          | 2015-09-06       | 2018-09-06           |
| Mini-Circuit          | Amplifier         | ZVA-213-S+      | 054201245          | 2015-02-19       | 2016-02-19           |
| R&S                   | Spectrum Analyzer | FSP 38          | 100478             | 2015-11-23       | 2016-11-22           |
| Ducommun Technologies | Horn Antenna      | ARH-4223-02     | 1007726-01<br>1304 | 2014-06-16       | 2017-06-15           |
| Quinstar              | Amplifier         | QLW-18405536-JO | 15964001001        | 2015-09-06       | 2016-09-06           |

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 23.4°C    |
| <b>Relative Humidity:</b> | 40 %      |
| <b>ATM Pressure:</b>      | 101.1 kPa |

The testing was performed by Dean Liu on 2015-12-23.

Test mode: Transmitting

| Frequency<br>(MHz)                   | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method     |                              |                    | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|--------------------------------------|----------------|-------------------------------|------------------------|------------------------------|--------------------|----------------------------|----------------|----------------|
|                                      |                |                               | S.G.<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBd/dBi) | Cable Loss<br>(dB) |                            |                |                |
| Uplink, Test Frequency 836.500MHz    |                |                               |                        |                              |                    |                            |                |                |
| 1156.000                             | H              | 47.63                         | -52.7                  | 7.4                          | 1.3                | -46.6                      | -13.0          | 33.6           |
| 1156.000                             | V              | 49.43                         | -50.9                  | 7.4                          | 1.3                | -44.8                      | -13.0          | 31.8           |
| 771.000                              | H              | 51.31                         | -43.3                  | 0.0                          | 0.9                | -44.2                      | -13.0          | 31.2           |
| 771.000                              | V              | 52.68                         | -45.4                  | 0.0                          | 0.9                | -46.3                      | -13.0          | 33.3           |
| Uplink, Test Frequency 1880.000MHz   |                |                               |                        |                              |                    |                            |                |                |
| 1156.000                             | H              | 48.13                         | -52.2                  | 7.4                          | 1.3                | -46.1                      | -13.0          | 33.1           |
| 1156.000                             | V              | 49.36                         | -51                    | 7.4                          | 1.3                | -44.9                      | -13.0          | 31.9           |
| 769.000                              | H              | 50.84                         | -43.9                  | 0.0                          | 0.9                | -44.8                      | -13.0          | 31.8           |
| 769.000                              | V              | 56.39                         | -41.7                  | 0.0                          | 0.9                | -42.6                      | -13.0          | 29.6           |
| Downlink, Test Frequency 881.500MHz  |                |                               |                        |                              |                    |                            |                |                |
| 1763.000                             | H              | 54.37                         | -46.1                  | 11.0                         | 1.4                | -36.5                      | -13.0          | 23.5           |
| 1763.000                             | V              | 60.12                         | -40.7                  | 11.0                         | 1.4                | -31.1                      | -13.0          | 18.1           |
| 2644.500                             | H              | 46.23                         | -49.1                  | 13.2                         | 2.5                | -38.4                      | -13.0          | 25.4           |
| 2644.500                             | V              | 47.85                         | -49.8                  | 13.2                         | 2.5                | -39.1                      | -13.0          | 26.1           |
| 196.000                              | H              | 43.58                         | -60.6                  | 0.0                          | 0.5                | -61.1                      | -13.0          | 48.1           |
| 47.000                               | V              | 47.11                         | -44.1                  | -17.8                        | 0.2                | -62.1                      | -13.0          | 49.1           |
| Downlink, Test Frequency 1960.000MHz |                |                               |                        |                              |                    |                            |                |                |
| 3920.000                             | H              | 51.06                         | -42.1                  | 13.5                         | 3.2                | -31.8                      | -13.0          | 18.8           |
| 3920.000                             | V              | 58.59                         | -33.6                  | 13.5                         | 3.2                | -23.3                      | -13.0          | 10.3           |
| 5880.000                             | H              | 33.75                         | -58.2                  | 14.0                         | 2.5                | -46.7                      | -13.0          | 33.7           |
| 5880.000                             | V              | 39.68                         | -51.1                  | 14.0                         | 2.5                | -39.6                      | -13.0          | 26.6           |
| 196.000                              | H              | 40.35                         | -63.9                  | 0.0                          | 0.5                | -64.4                      | -13.0          | 51.4           |
| 47.000                               | V              | 42.57                         | -48.6                  | -17.8                        | 0.2                | -66.6                      | -13.0          | 53.6           |

**Note:**

- 1) Absolute Level = SG Level - Cable loss + Antenna Gain
- 2) Margin = Limit- Absolute Level



**DECLARATION LETTER**

To Whom It May Concern,

We, **JDTECK INC.**, hereby declare that our **JDTECK Industrial Repeater**, Model Number: **JDIR-37-87-819** is electrically identical with the Model **JDIR-40-90-819** that was certified by **Bay Area Compliance Laboratories Corporation**. They are named differently due to different output power levels and gains achieved by adjusting the potentiometers inside. However they have the same design, PCB board and work diagrams.

The **JDIR-40-90-819** repeater has a factory preset maximum output power of UL 19dBm/ DL 43dBm and maximum gain of UL 85dB/ DL 90dB. However, some users maybe want to use lower power due to different coverage requirements. The 37dBm power is used in some smaller applications. When the output power is preset at UL 19dBm / DL 43dBm and maximum gain of UL 85dB/ DL 90dB, then the model should be **JDIR-40-90-819**; When the output power is preset at UL 17dBm / DL 37dBm and maximum gain of UL 85dB/ DL 87dB, then the model should be **JDIR-37-87-819**.

We have summarized the differences in below table for your better understanding:

| Item | Model Number   | Max. Power<br>UL/DL | Max. Gain<br>UL/DL |
|------|----------------|---------------------|--------------------|
| 1    | JDIR-37-87-819 | 17dBm/37dBm         | 85dB/87dB          |
| 2    | JDIR-40-90-819 | 19dBm/43dBm         | 85dB/90dB          |

Please contact me if there is any question.

Sincerely Yours,

A handwritten signature in black ink, appearing to read "Demnison Jurawan", is written over a horizontal line.

Demnison Jurawan

Technical Sales Manager