

FCC PART 20.21, PART 27
MEASUREMENT AND TEST REPORT

For

JDTECK INC

215 Celebration Place, Suite 190 Kissimmee FL

FCC ID: SQX-JDIR-37-AWS

Report Type: Original Report	Product Type: JDTECK Industrial Repeater
Test Engineer: <u>Dean Liu</u>	<i>Dean Liu</i>
Report Number: <u>RDG151130011-00</u>	
Report Date: <u>2015-12-15</u>	
Reviewed By: <u>Sula Huang</u> RF Leader	<i>Sula Huang</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
§ 2.1046&§27.50 –MEAN OUTPUT POWER AND AMPLIFIER GAIN.....	8
APPLICABLE STANDARD	8
TEST PROCEDURE	8
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST DATA	10
KDB 935210 D02 –OUT-OF-BAND REJECTION.....	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST DATA	11
§ 2.1049&KDB 935410 D02–OCCUPIED BANDWIDTH AND INPUT-VERSUS-OUTPUT SIGNAL COMPARISON	13
APPLICABLE STANDARD	13
TEST PROCEDURE	13
TEST EQUIPMENT LIST AND DETAILS.....	14
TEST DATA	14
§ 2.1051&§ 27.53&KDB935210 D02- OUT-OF-BAND/BLOCK EMISSIONS(INCLUDING INTERNODULATION PRODUCTS).....	23
APPLICABLE STANDARDS.....	23
TEST PROCEDURE	23
TEST EQUIPMENT LIST AND DETAILS.....	24
TEST DATA	24
§2.1051&§27.53- SPURIOUS EMISSIONS AT ANTENNA TERMINALS	41
APPLICABLE STANDARDS.....	41
TEST PROCEDURE	41
TEST EQUIPMENT LIST AND DETAILS.....	42
TEST DATA	42
§2.1053&§27.53- RADIATED SPURIOUS EMISSIONS	61
APPLICABLE STANDARDS.....	61
TEST PROCEDURE	61
TEST EQUIPMENT LIST AND DETAILS.....	61
TEST DATA	62
DECLARATHION LETTER.....	63

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The JDTECK INC's product, model number: JDIR-40-90-AWS, (FCC ID: SQX-JDIR-37-AWS) or the "EUT" as referred to in this report is a JDTECK Industrial Repeater.

Radio System Type	CMRS Industrial Signal Booster
Frequency Bands	AWS:1710-1755MHz(Uplink), 2110-2155(Downlink)
Max. Gain	Uplink:85dB Downlink: 90dB
Max. Output Power (Antenna Port)	Uplink: 19dBm+/-2dB Downlink: 43dBm+/-2dB
Antenna Gain:	Uplink: -2.0 dBi Down Link: 3.0 dBi
AGC:	Uplink:-65 dBm Down Link: -46dBm
Nominal Power Supply:	AC 120V/60Hz by power
External Dimension	56.5 cm (L) x 40.0 cm (W) x21.0 cm (H)
Temperature Range	-25°C to 55°C

Note: The series product, model JDIR-40-90-AWS, JDIR-37-87-AWS are electrically identical, the difference between them is just gain and power, we selected JDIR-40-90-AWS for fully testing, the details was explained in the attached declaration letter.

**All measurement and test data in this report was gathered from production sample serial number: 151130011 (Assigned by BACL, Dongguan). The EUT supplied by applicant was received on 2015-12-01.*

Objective

This type approval report is prepared on behalf of JDTECK INC in accordance with Part 2, Part 20, Part 27 of the Federal Communication Commissions rules, and KDB 935210 D02 Signal Boosters Certification v03.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Applicable Standards: TIA-1037, TIA/EIA 603-D. KDB 935210 D05 Indus Booster Basic Meas v01.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxihu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.

Equipment Modifications

No modifications were made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Agilent	MXG Vector Signal Generator	N5182B	MY513502142
R & S	Wideband Radio Communication Tester	CMW500	114772

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
AC Cable	no	no	1.68	/	/

Block Diagram of Test Setup

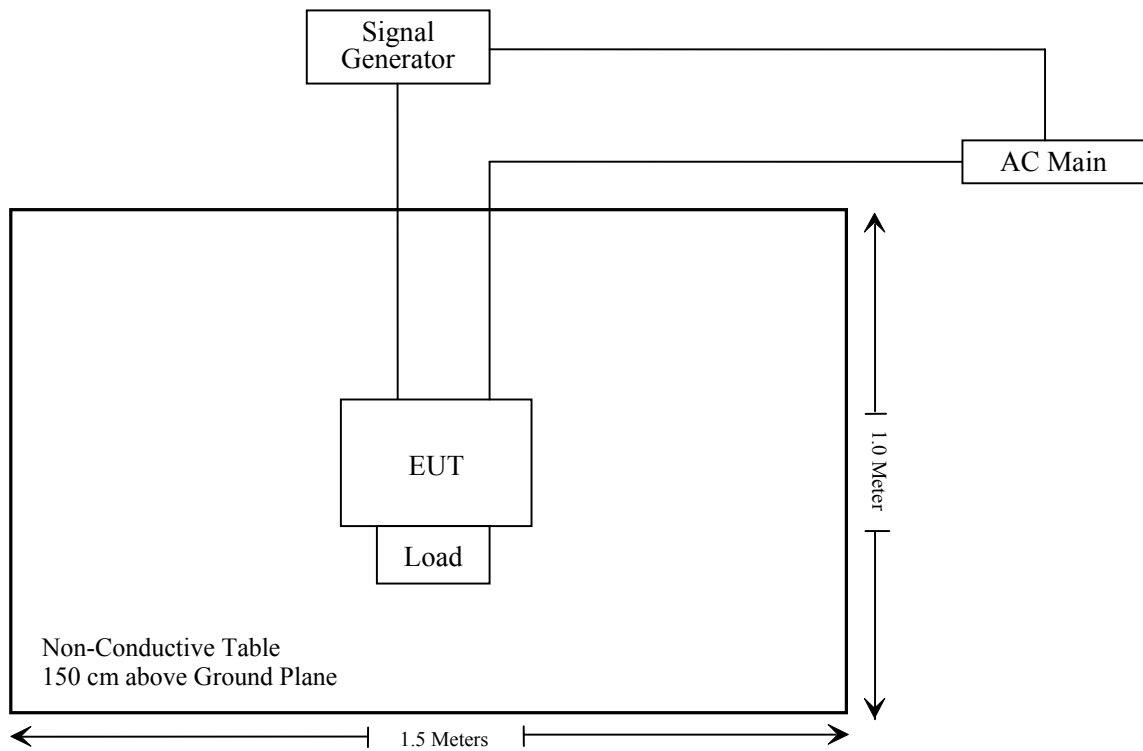

SUMMARY OF TEST RESULTS

FCC Rules	Description of tests	Result
§2.1047, §27.50 KDB 935210 D02	Mean output power and amplifier gain	Compliance
KDB 935210 D02	Out-of-band rejection	Compliance
§2.1049, KDB 935210 D02	Occupied bandwidth and Input-versus-output signal comparison	Compliance
§2.1051, §27.53 KDB 935210 D02	Out-of-band/block (including intermodulation) emissions	Compliance
§2.1051&§27.53	Spurious emissions at antenna terminals	Compliance
§2.1053&§27.53	Radiated spurious emissions	Compliance
§2.1055&§27.54	Frequency tolerance	Not Application*

Not Application*: the device is a booster does not alter the input signal.

§ 2.1046&§27.50 –MEAN OUTPUT POWER AND AMPLIFIER GAIN

Applicable Standard

According to § 27.50(d) The following power and antenna height requirements apply to stations transmitting in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz and 2180-2200 MHz bands:

(1) The power of each fixed or base station transmitting in the 1995-2000 MHz, 2110-2155 MHz, 2155-2180 MHz or 2180-2200 MHz band and located in any county with population density of 100 or fewer persons per square mile, based upon the most recently available population statistics from the Bureau of the Census, is limited to:

(i) An equivalent isotropically radiated power (EIRP) of 3280 watts when transmitting with an emission bandwidth of 1 MHz or less;

(ii) An EIRP of 3280 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz.

(2) The power of each fixed or base station transmitting in the 1995-2000 MHz, the 2110-2155 MHz 2155-2180 MHz band, or 2180-2200 MHz band and situated in any geographic location other than that described in paragraph (d)(1) of this section is limited to:

(i) An equivalent isotropically radiated power (EIRP) of 1640 watts when transmitting with an emission bandwidth of 1 MHz or less;

(ii) An EIRP of 1640 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz.

(3) A licensee operating a base or fixed station in the 2110-2155 MHz band utilizing a power greater than 1640 watts EIRP and greater than 1640 watts/MHz EIRP must coordinate such operations in advance with all Government and non-Government satellite entities in the 2025-2110 MHz band. A licensee operating a base or fixed station in the 2110-2180 MHz band utilizing power greater than 1640 watts EIRP and greater than 1640 watts/MHz EIRP must be coordinated in advance with the following licensees authorized to operate within 120 kilometers (75 miles) of the base or fixed station operating in this band: All Broadband Radio Service (BRS) licensees authorized under this part in the 2155-2160 MHz band and all advanced wireless services (AWS) licensees authorized to operate on adjacent frequency blocks in the 2110-2180 MHz band.

(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

Test Procedure

According to 935210 D05 Indus Booster Basic Meas v01

- a) Connect a signal generator to the input of the EUT.
- b) Configure to generate the AWGN (broadband) test signal.
- c) The frequency of the signal generator shall be set to the frequency of (f₀) as determined from 3.3.
- d) Connect a spectrum analyzer or power meter to the output of the EUT using appropriate attenuation as necessary.

- e) Set the signal generator output power to a level that produces an EUT output level that is just below the AGC threshold (see 3.2), but not more than 0.5 dB below.
- f) Measure the output power of the EUT and record (see 3.5.3 or 3.5.4 for power measurement guidance).
- g) Remove the EUT from the measurement setup and using the same signal generator settings, repeat the power measurement on the input signal to the EUT and record as input power.
- h) Repeat the procedure with the narrowband test signal.
- i) Repeat the procedure for both test signals with input signal amplitude set to 3 dB above the AGC threshold level.
- j) Repeat for all frequency bands authorized for use by the EUT.

Method 1: Power measurement with a spectrum or signal analyzer

Guidance for performing input/output power measurements using a spectrum or signal analyzer is provided in 5.2 of KDB Publication 971168.

Method 2: Power measurement with a power meter

As an alternative to measuring input and output power levels with a spectrum or signal analyzer, a broadband RF power meter may be used with appropriate detector, as specified in 5.2.3 of KDB Publication 971168.

Calculating the mean amplifier, booster, or repeater gain

NOTE—§§ 20.21 and 2.1033(c) do not require gain test data; inclusion of industrial booster gain test data in test reports submitted for FCC equipment authorization is optional.

After the mean input and output power levels have been measured as described above, the mean gain of the EUT can be determined from:

Gain (dB) = output power (dBm) – input power (dBm).

Report the mean gain for each authorized operating frequency band and each test signal stimulus.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
Agilent	MXG Vector Signal Generator	N5182B	MY51350142	2015-03-30	2016-03-29

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25.9°C
Relative Humidity:	51%
ATM Pressure:	101.1 kPa

The testing was performed by Dean Liu on 2015-12-10.

Test Result: Compliance. Please refer to the following table.

Modes	Frequency (MHz)	Signal Type	Signal Level	Input Power (dBm)	Output Power (dBm)	Gain (dB)
Uplink	1725.3	AWGN	Pre-AGC	-65.95	17.75	83.7
			3dB above AGC	-63.01	18	81.01
		GSM	Pre-AGC	-61.54	20.83	82.37
			3dB above AGC	-58.15	21.09	79.24
Downlink	2131.15	AWGN	Pre-AGC	-46.39	41.45	87.84
			3dB above AGC	-43.6	41.75	85.35
		GSM	Pre-AGC	-45.33	44.26	89.59
			3dB above AGC	-42.39	44.8	87.19

KDB 935210 D02 –OUT-OF-BAND REJECTION

Applicable Standard

According to KDB935210 D02 Signal Boosters Certification v03, Out-of-band rejection–testing for rejection of out-of-band signals may be appropriate. Alternatively, filter frequency response plots are acceptable.

Test Procedure

Adjust the internal gain control of the equipment under test to the maximum gain for which equipment certification is sought.

- a) Connect a signal generator to the input of the EUT.
- b) Configure a swept CW signal with the following parameters:
 - 1) Frequency range = $\pm 250\%$ of the passband from the center of the passband.
 - 2) Level = a sufficient level to affirm that the out-of-band rejection is > 20 dB above the noise floor and will not engage the AGC during the entire sweep.
 - 3) Dwell time = approx. 10 ms.
 - 4) Number of points = $\text{SPAN}/(\text{RBW}/2)$.
- c) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation.
- d) Set the span of the spectrum analyzer to the same as the frequency range of the signal generator.
- e) Set the resolution bandwidth of the spectrum analyzer to be 1 % to 5 % of the passband and the video bandwidth shall be set to $\geq 3 \times \text{RBW}$.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
R & S	Wideband Radio Communication Tester	CMW500	1201.002K50-146520-wh	2014-12-19	2015-12-19

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	23.9 °C
Relative Humidity:	48 %
ATM Pressure:	101.2 kPa

The testing was performed by Dean Liu on 2015-12-09.


Test Result: Compliance. Please refer to the following plots.

Uplink

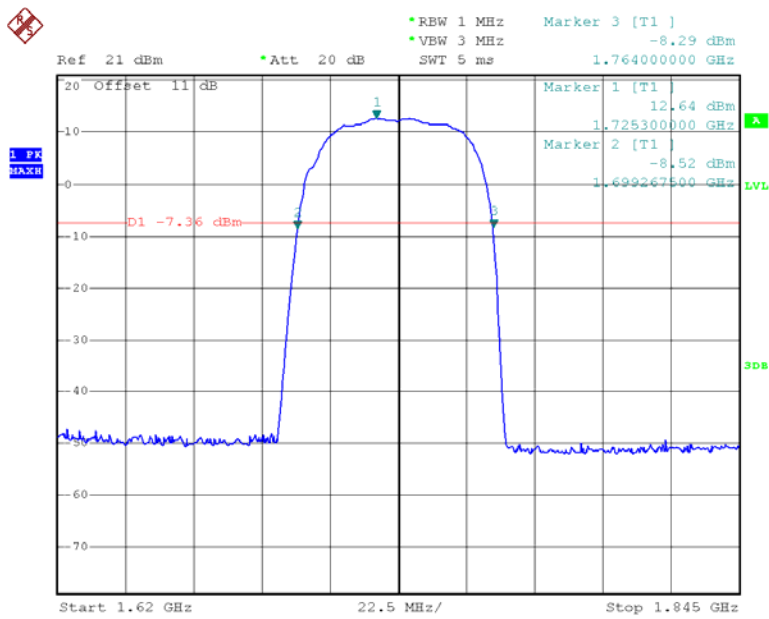

Date: 9.DEC.2015 22:46:41

Downlink

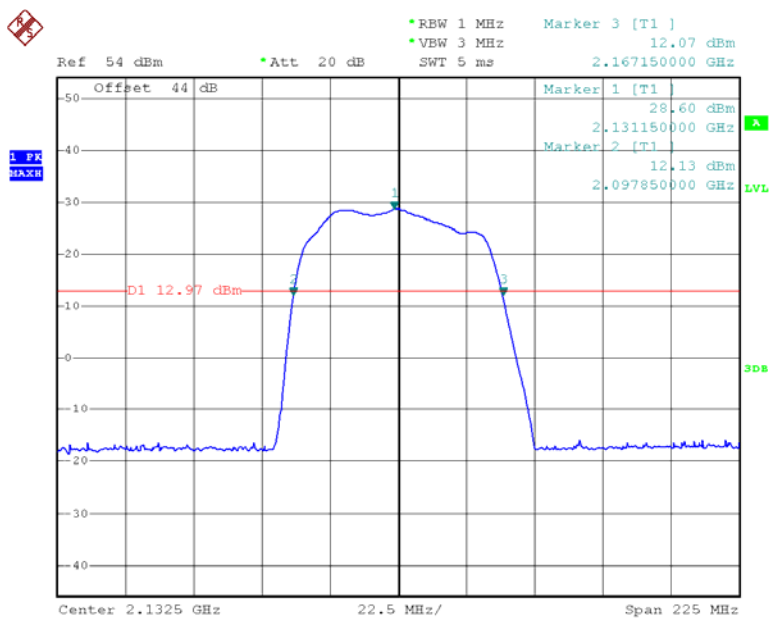

Date: 9.DEC.2015 22:26:28

§ 2.1049&KDB 935410 D02–OCCUPIED BANDWIDTH AND INPUT-VERSUS-OUTPUT SIGNAL COMPARISON

Applicable Standard

According to § 2.1049 and KDB935210 D02 Signal Boosters Certification v03,

Report worst case results for occupied bandwidth comparison and intermodulation tests done with and without any AGC circuitry activated, for devices so equipped.

Test Procedure

A 26 dB bandwidth measurement shall be performed on the input signal and the output signal (alternatively, the 99% OBW can be measured and used) to demonstrate compliance to the technical requirements specified in §90.219(e)(4)(i) and (ii). See KDB Publication 971168 for more information regarding measuring the OBW.

- a) Connect a signal generator to the input of the EUT.
- b) Configure the signal generator to transmit the AWGN signal.
- c) Configure the signal amplitude to be just below the AGC threshold level (see 3.2), but not more than 0.5 dB below.
- d) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation.
- e) Set the spectrum analyzer center frequency to the center frequency of the operational band under test. The span range of the spectrum analyzer shall be between 2 times to 5 times the EBW or alternatively, the OBW.
- f) The nominal resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the anticipated OBW, and the VBW shall be $\geq 3 \times \text{RBW}$.
- g) Set the reference level of the instrument as required to preclude the signal from exceeding the maximum spectrum analyzer input mixer level for linear operation. In general, the peak of the spectral envelope must be more than $[10 \log (\text{OBW} / \text{RBW})]$ below the reference level.
NOTE—Steps f) and g) may require iteration to enable adjustments within the specified tolerances.
- h) The noise floor of the spectrum analyzer at the selected RBW shall be at least 36 dB below the reference level.
- i) Set spectrum analyzer detection function to positive peak.
- j) Set the trace mode to max hold.
- k) Determine the reference value: Allow the trace to stabilize. Set the spectrum analyzer marker to the highest amplitude level of the displayed trace (this is the reference value) and record the associated frequency as f_0 .
- l) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the -26 dB down amplitude. The 2 dB emission bandwidth is the positive frequency difference between the two markers.
NOTE—The spectral envelope may cross the -26 dB down amplitude at multiple points. If so, the lowest or highest frequency shall be selected as the frequencies the furthest removed from the center frequency at which the spectral envelope crosses the -26 dB down amplitude point.
- m) Repeat steps e) to l) with the input signal connected directly to the spectrum analyzer (i.e., input signal measurement).
- n) Compare the spectral plot of the input signal (determined from step m) to the output signal (determined from step l) to affirm that they are similar (in passband and rolloff characteristic features and relative spectral locations), and include plot(s) and descriptions in test report.

- o) Repeat steps a) to n) with the signal generator set to the narrowband signal.
 p) Repeat the procedure for both test signals with the input signal amplitude set 3 dB above the AGC threshold.
 q) Repeat for all frequency bands authorized for use by the EUT.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
R & S	Wideband Radio Communication Tester	CMW500	1201.002K50-146520-wh	2014-12-19	2015-12-19

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	24.1~25.2 °C
Relative Humidity:	43~44 %
ATM Pressure:	100.8~101.3 kPa

The testing was performed by Dean Liu on 2015-12-06.

Test Result: Compliance. Please refer to the following plots.


AWGN Signal:

Uplink Pre-AGC Input

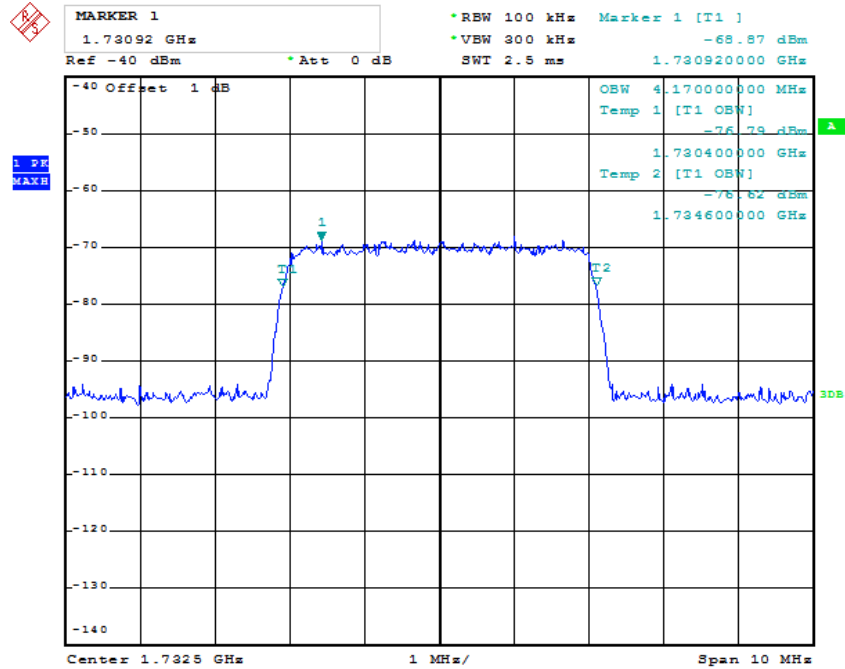


Date: 10.DEC.2015 19:30:22

Uplink Pre-AGC Output

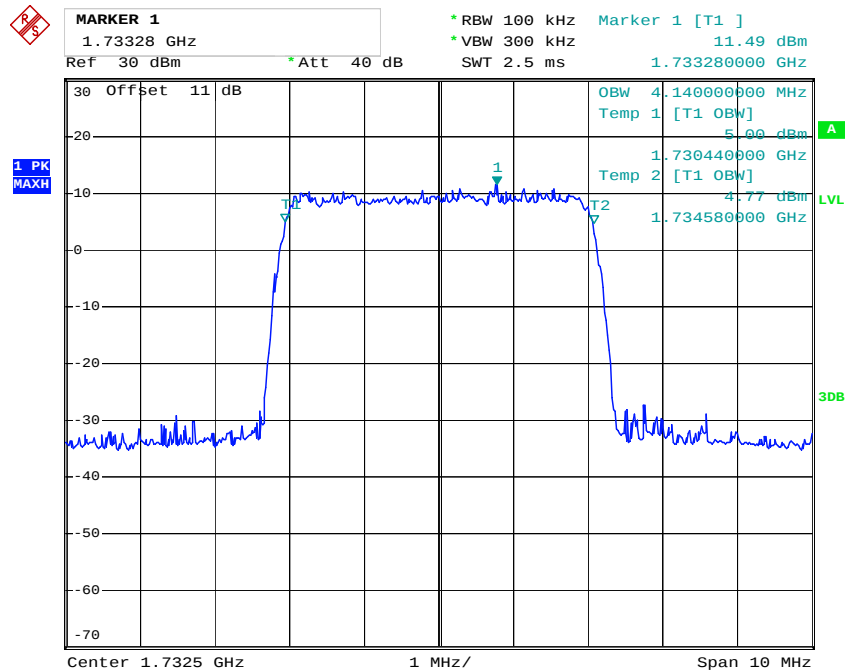


Date: 10.DEC.2015 19:37:03

Uplink 3dB above AGC Input

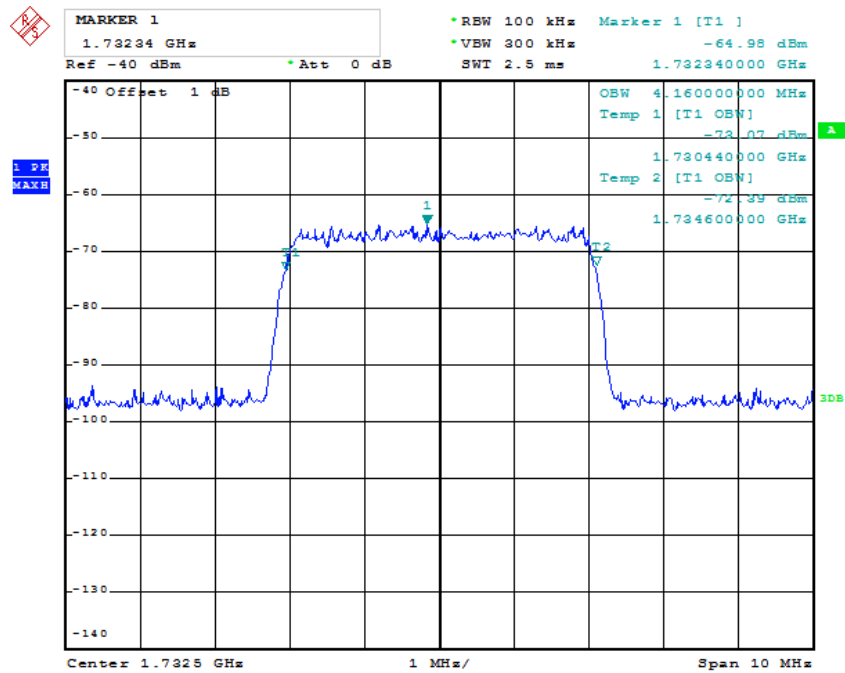


Date: 10.DEC.2015 19:32:33

Uplink 3dB above AGC Output

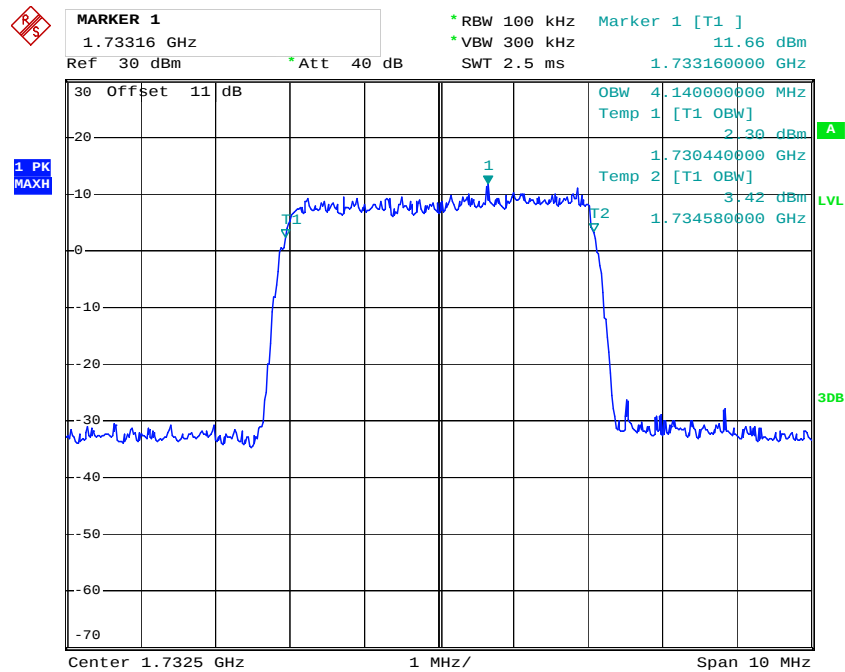


Date: 10.DEC.2015 19:38:22

Downlink Pre-AGC Input

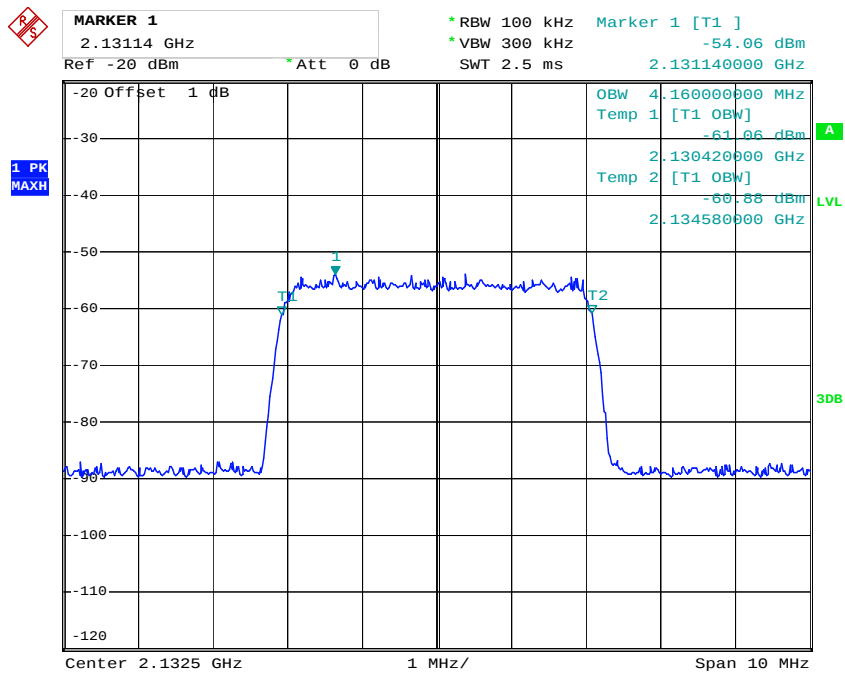


Date: 10.DEC.2015 20:08:40

Downlink Pre-AGC Output

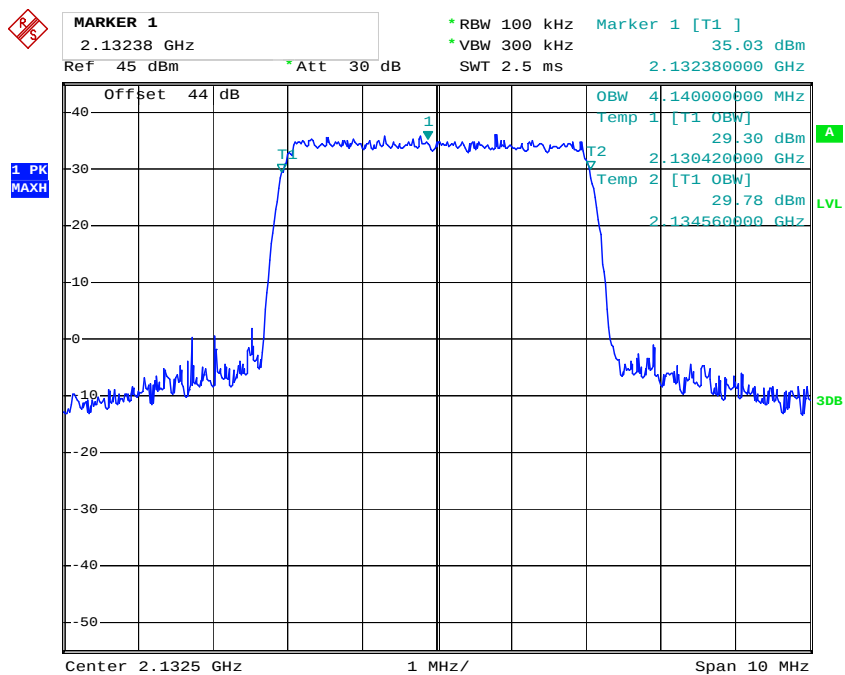


Date: 10.DEC.2015 19:59:06

Downlink 3dB above AGC Input

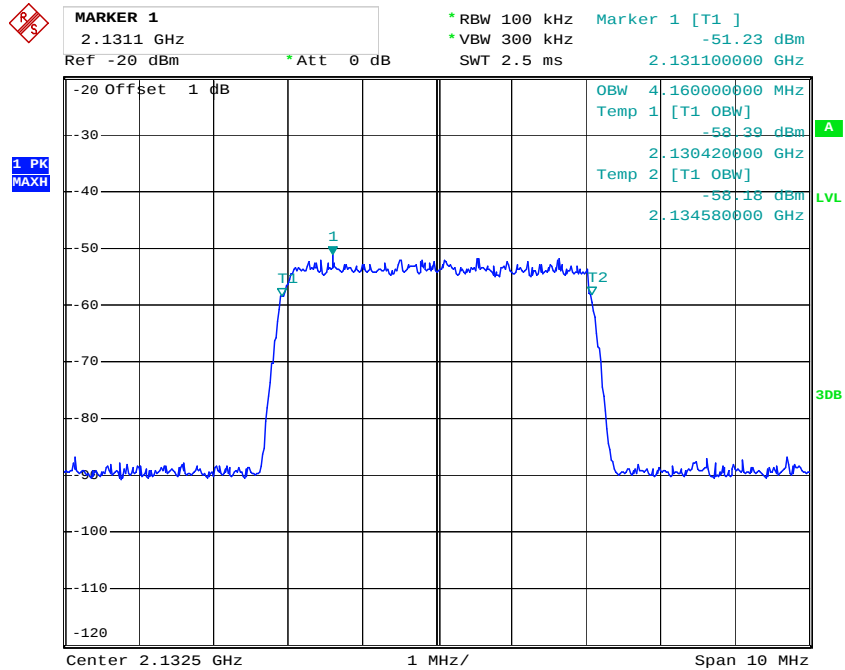


Date: 10.DEC.2015 20:10:28


Downlink 3dB above AGC Output

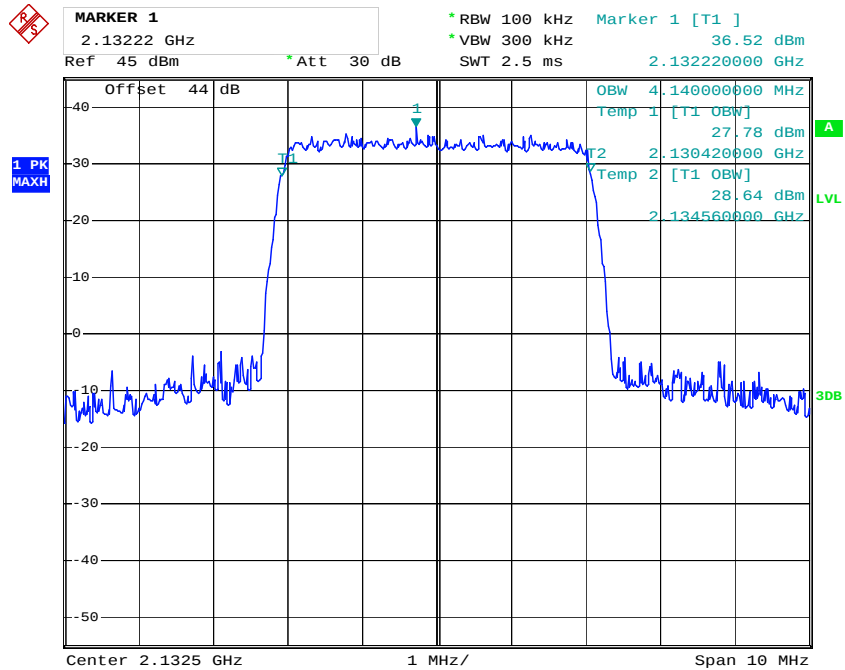

Date: 10.DEC.2015 19:59:56

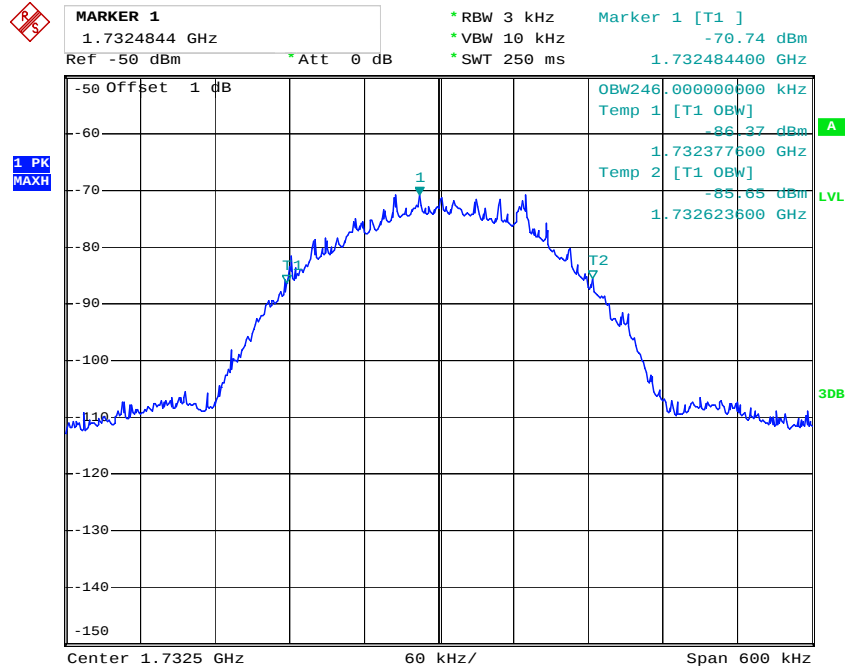
GSM Signal:**Uplink Pre-AGC Input**

Date: 10.DEC.2015 21:33:45

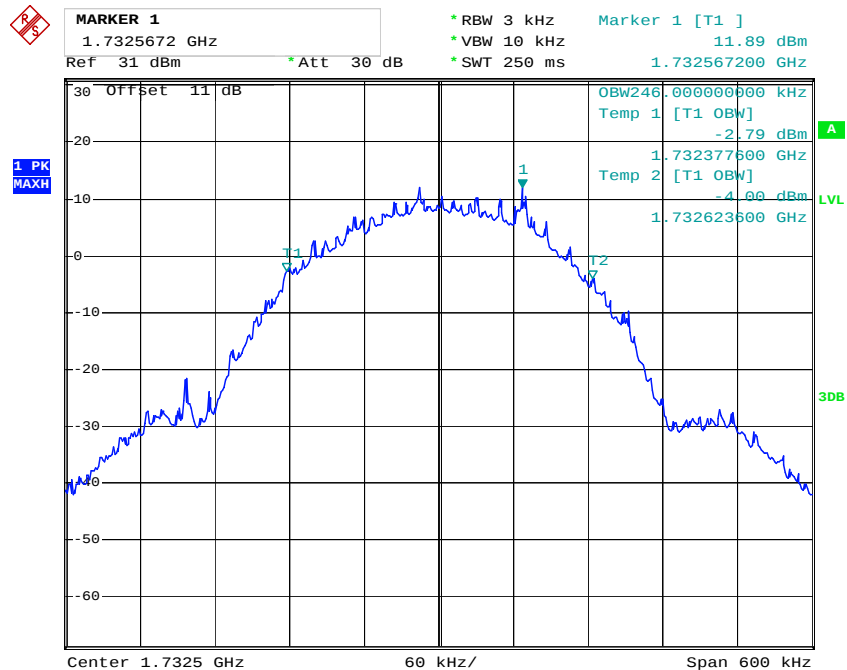Uplink Pre-AGC Output


Date: 10.DEC.2015 21:29:05

Uplink 3dB above AGC Input

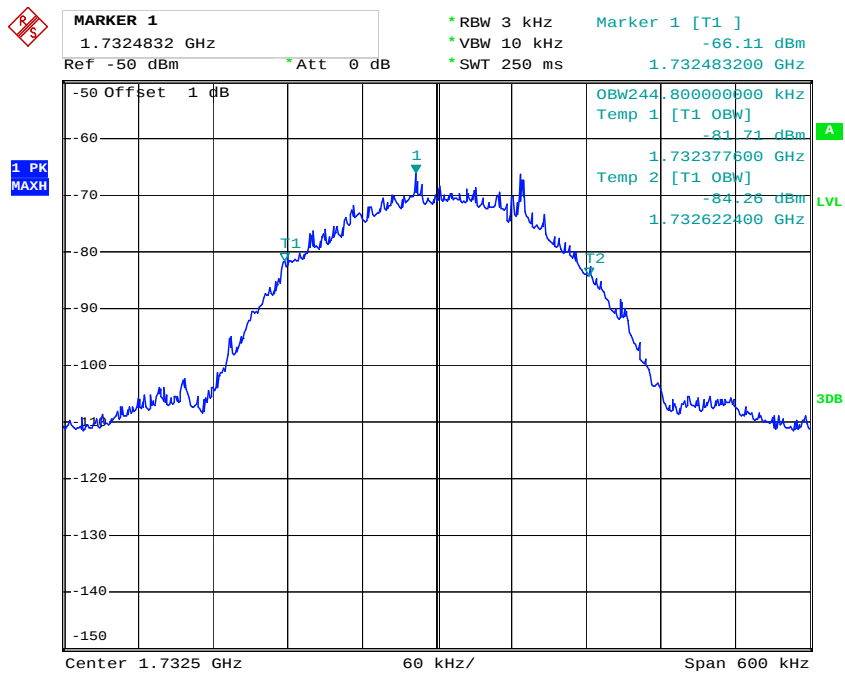


Date: 10.DEC.2015 21:34:19

Uplink 3dB above AGC Output

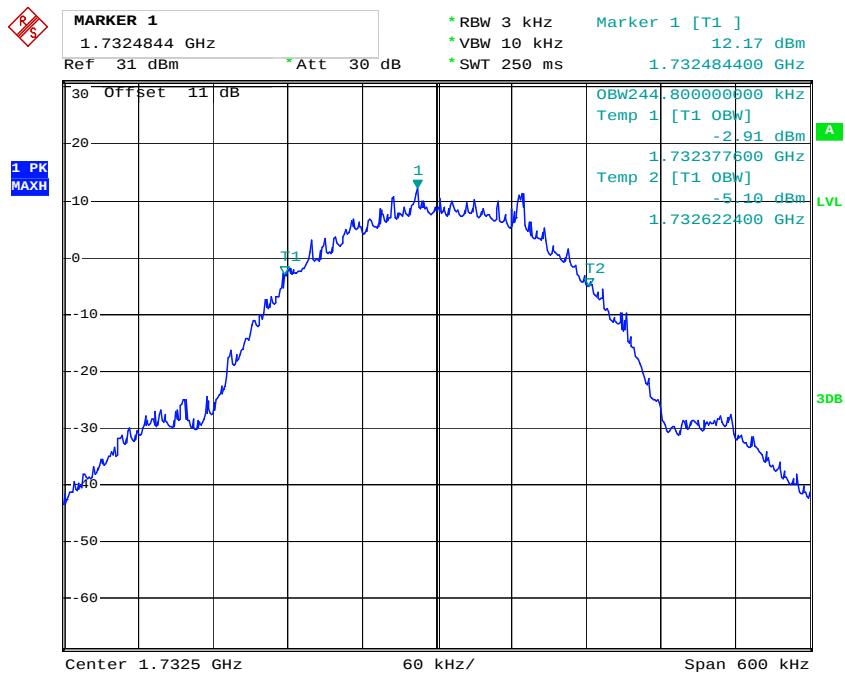


Date: 10.DEC.2015 21:30:15

Downlink Pre-AGC Input

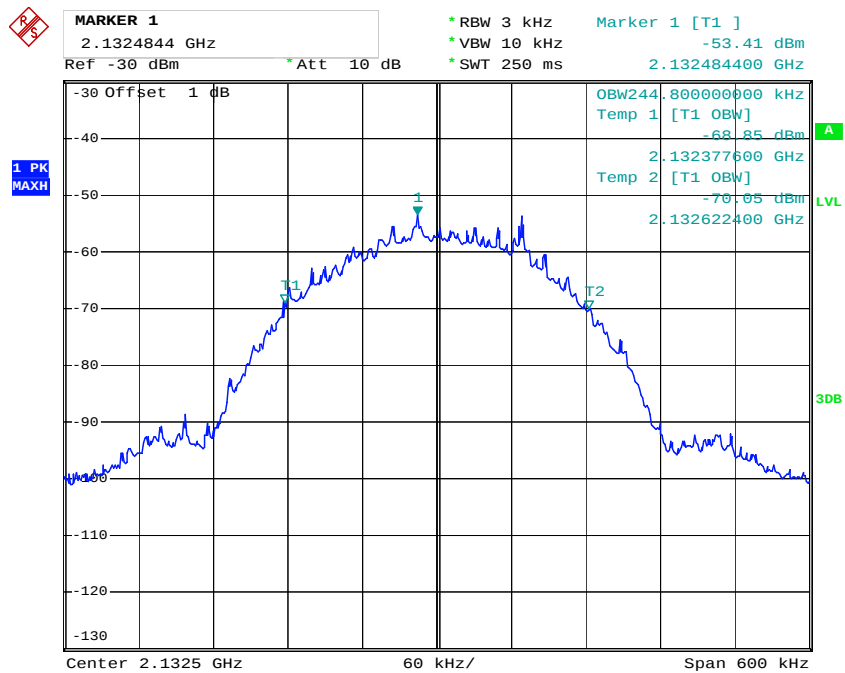


Date: 10.DEC.2015 21:18:48

Downlink Pre-AGC Output

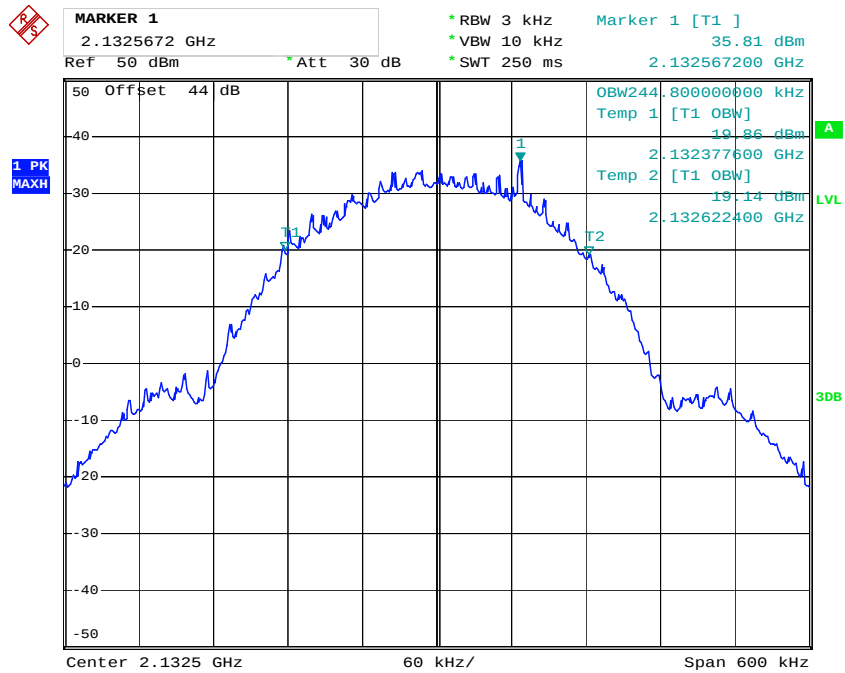


Date: 10.DEC.2015 21:12:44

Downlink 3dB above AGC Input

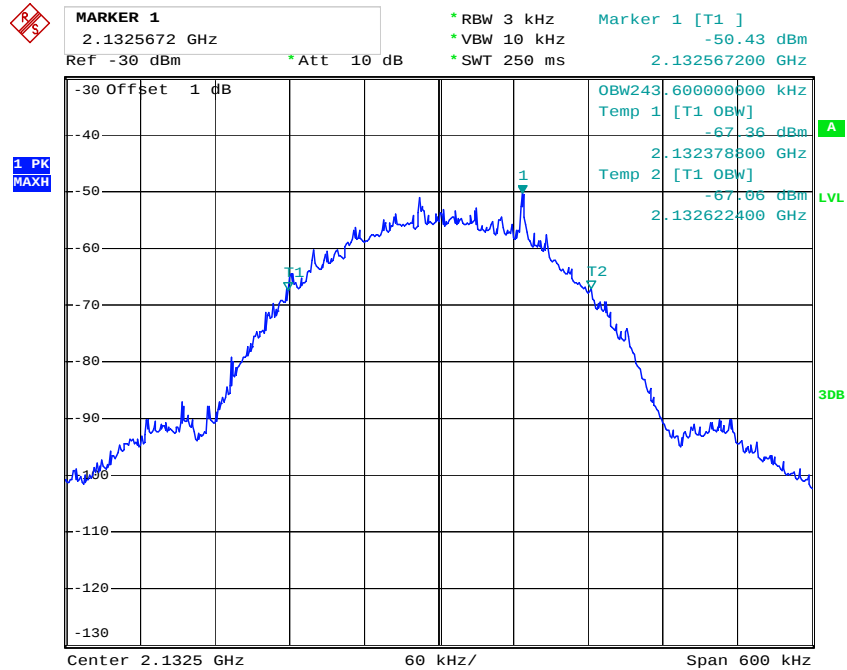

Date: 10.DEC.2015 21:19:28

Downlink 3dB above AGC output

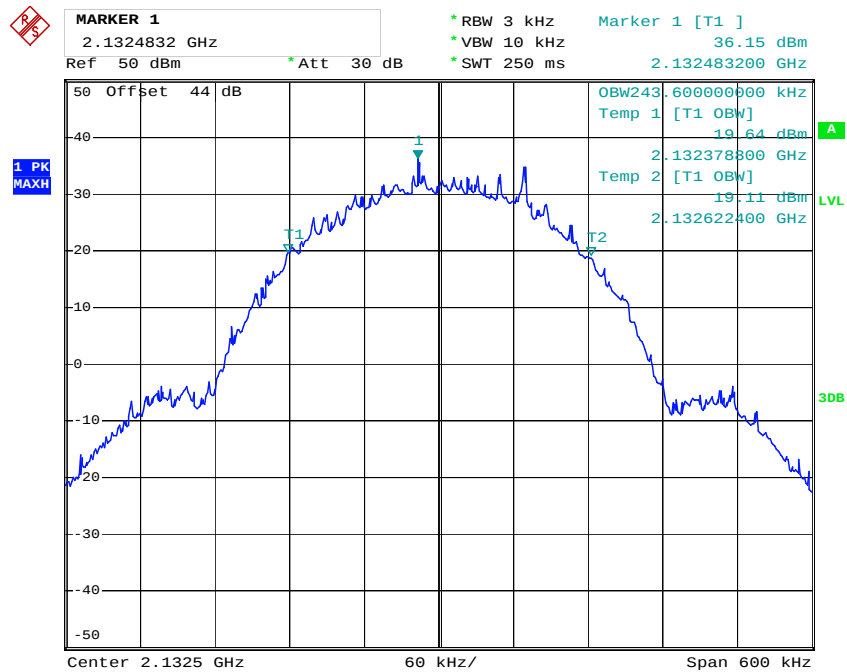

Date: 10.DEC.2015 21:13:35

§ 2.1051&§ 27.53&KDB935210 D02- OUT-OF-BAND/BLOCK EMISSIONS(INCLUDING INTERNODULATION PRODUCTS)

Applicable Standards

According to §27.53(h) *AWS emission limits*—(1) *General protection levels*. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

KDB935210 D02 Signal Boosters Certification v03: Report worst case results for occupied bandwidth comparison and intermodulation tests done with and without any AGC circuitry activated, for devices so equipped.

Test Procedure

Out-of-band/block emissions (including intermodulation products) shall be measured under each of the following two stimulus conditions:

- a) two adjacent test signals sequentially tuned to the lower and upper frequency band/block edges;
- b) a single test signal, sequentially tuned to the lowest and highest frequencies or channels within the frequency band/block under examination.

NOTE—Single channel boosters that cannot accommodate two simultaneous signals within the passband, can be excluded from the test stipulated in step a).

EUT out-of-band/block emissions conducted measurement

- a) Connect a signal generator to the input of the EUT.

NOTE—If the signal generator is not capable of generating two modulated carriers simultaneously, then two discrete signal generators can be connected with an appropriate combining network to support the two-tone test.

- b) Set the signal generator to produce two AWGN signals as previously described (e.g., 4.1 MHz OBW).
- c) Set the center frequencies such that the AWGN signals occupy adjacent channels, as defined by industry standards such as 3GPP or 3GPP2, at the upper edge of the frequency band or block of interest.
- d) Set the composite power levels such that the input signal is just below the AGC threshold (see 3.2), but not more than 0.5 dB below. The composite power can be measured using the procedures provided in KDB Publication 971168, but it will be necessary to expand the power integration bandwidth so as to include both of the transmit channels. Alternatively, the composite power can be measured using an average power meter as described in KDB Publication 971168.
- e) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation as necessary.
- f) Set the RBW = reference bandwidth in the applicable rule section for the supported frequency band (typically 1 % of the emission bandwidth, 100 kHz, or 1 MHz)
- g) Set the VBW = $3 \times$ RBW.
- h) Set the detector to power averaging (rms) detector.
- i) Set the Sweep time = auto-couple.
- j) Set the analyzer start frequency to the upper block edge frequency and the stop frequency to the upper block edge frequency plus 300 kHz or 3 MHz for frequencies below and above 1 GHz, respectively.
- k) Trace average at least 100 traces in power averaging (i.e., rms) mode.
- l) Use the marker function to find the maximum power level.

- m) Capture the spectrum analyzer trace of the power level for inclusion in the test report.
- n) Repeat the procedure with the composite input power level set to 3 dB above the AGC threshold.
- o) Reset the input signals frequencies to the lower edge of the frequency block or band under examination.
- p) Reset the spectrum analyzer start frequency to the lower block edge frequency minus 300 kHz, or 3 MHz (for frequencies below and above 1 GHz, respectively), and the stop frequency to the lower band or block edge frequency.
- q) Repeat steps k) to n).
- r) Repeat steps a) to q) with the signal generator configured for a single test signal tuned as close as possible to the block edges.
- s) Repeat steps a) to r) with the narrowband test signal.
- t) Repeat steps a) to s) for all authorized frequency bands or blocks used by the EUT.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
R & S	Wideband Radio Communication Tester	CMW500	1201.002K50-146520-wh	2014-12-19	2015-12-19
Agilent	MXG Vector Signal Generator	N5182B	MY51350142	2015-03-30	2016-03-29

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions



Temperature:	24.3~24.5°C
Relative Humidity:	47~48 %
ATM Pressure:	101.1~101.2 kPa

The testing was performed by Dean Liu from 2015-12-10 to 2015-12-12.


Please refer to the following plots.

Single channel:


Uplink:

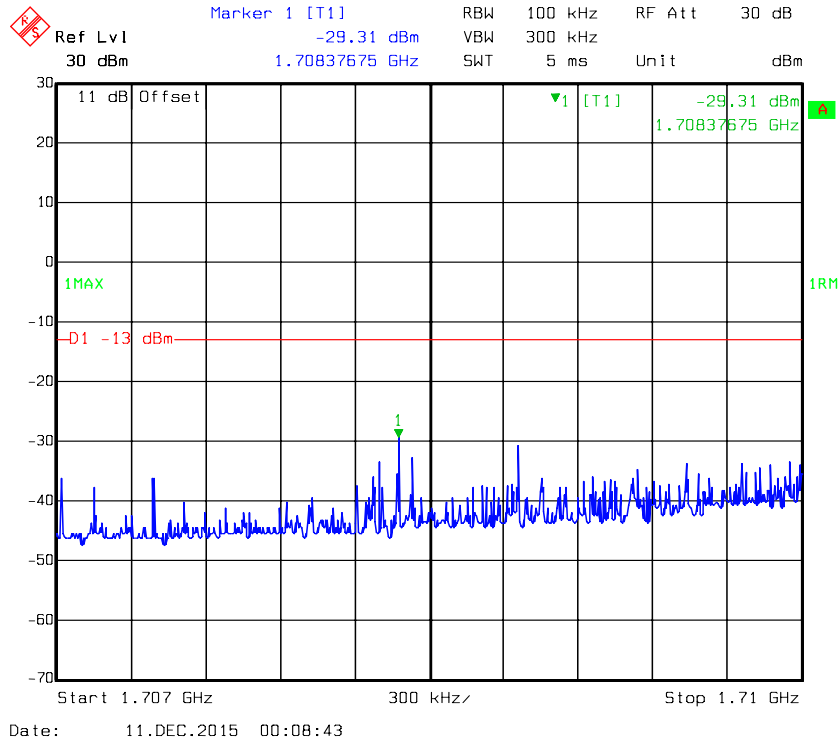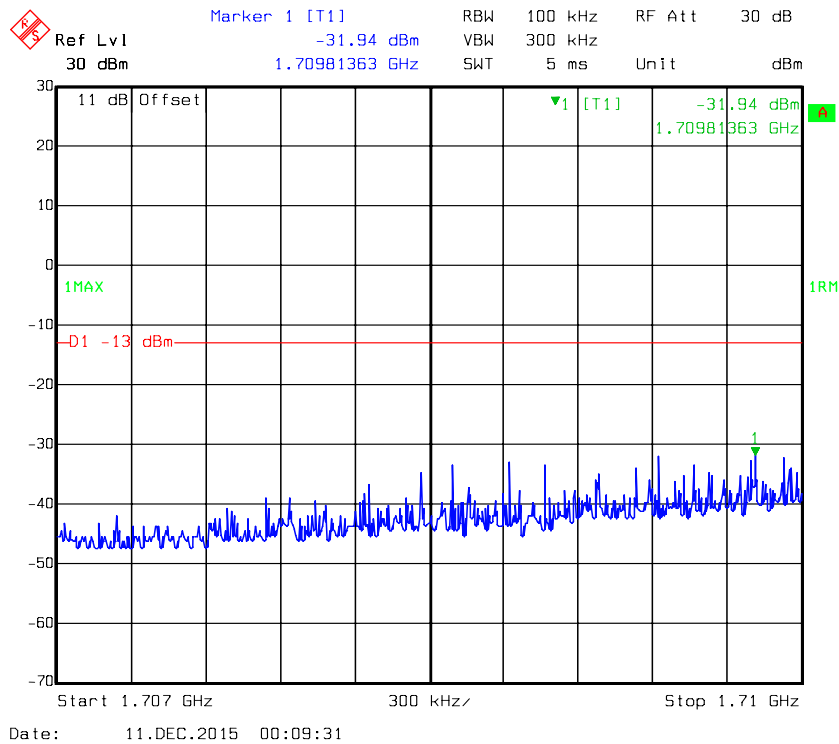AWGN Left Side Pre-AGC**AWGN Left Side 3dB Above AGG**


AWGN Right Side Pre-AGC

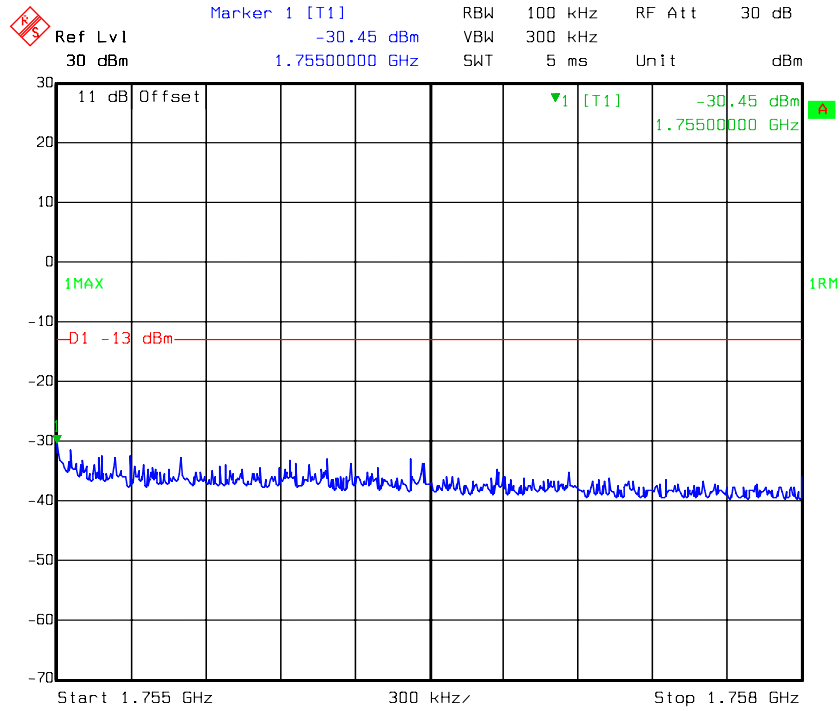


AWGN Right Side 3dB Above AGG

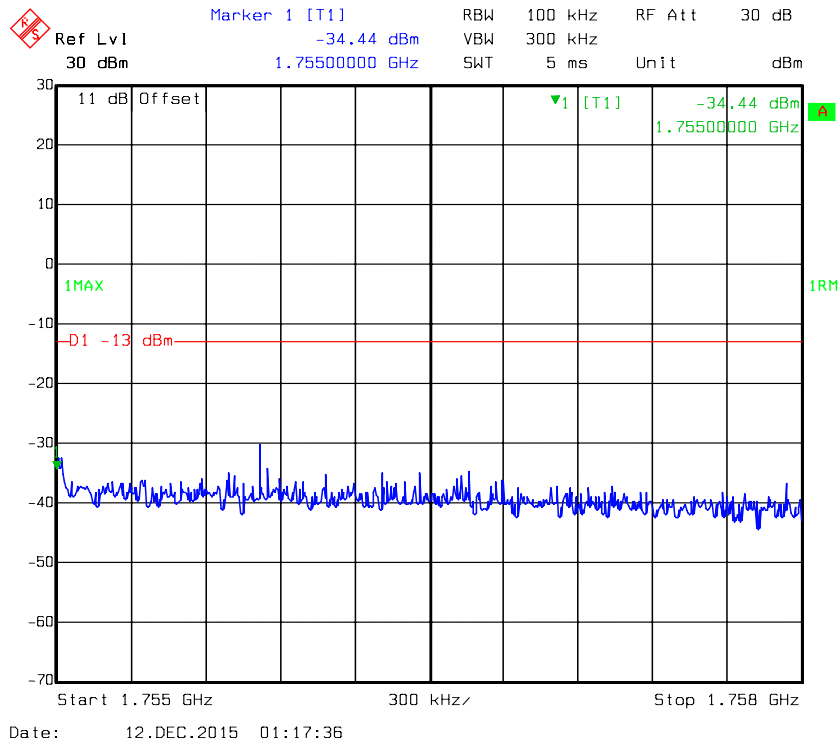


GSM Left Side Pre-AGC

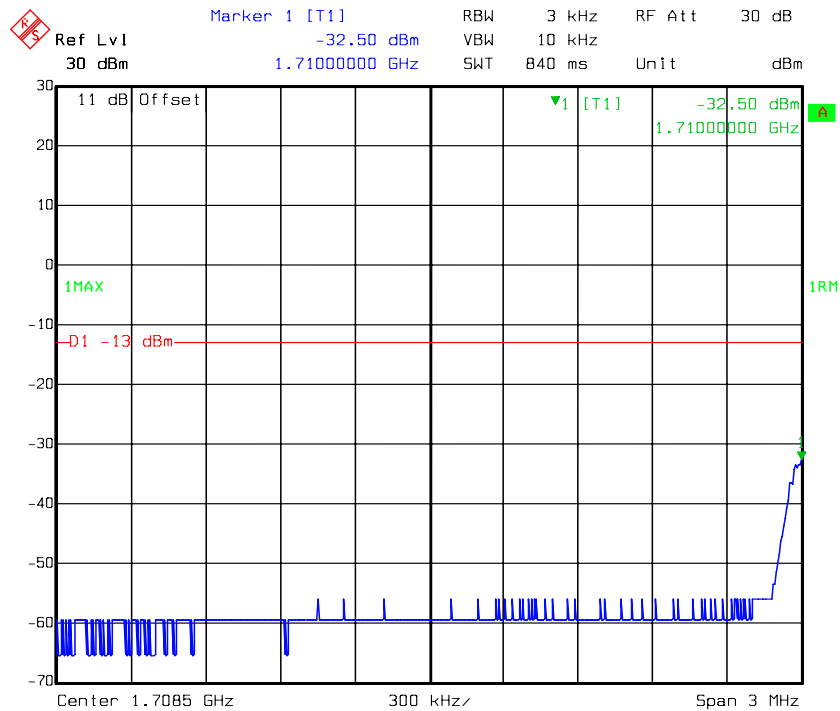

GSM Left Side 3dB Above AGG

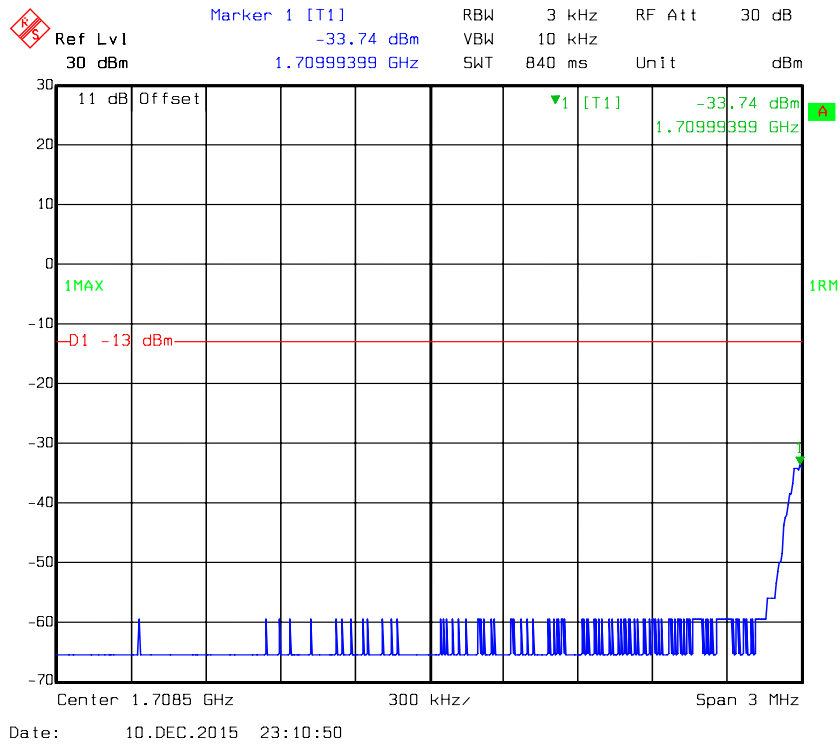


GSM Right Side Pre-AGC

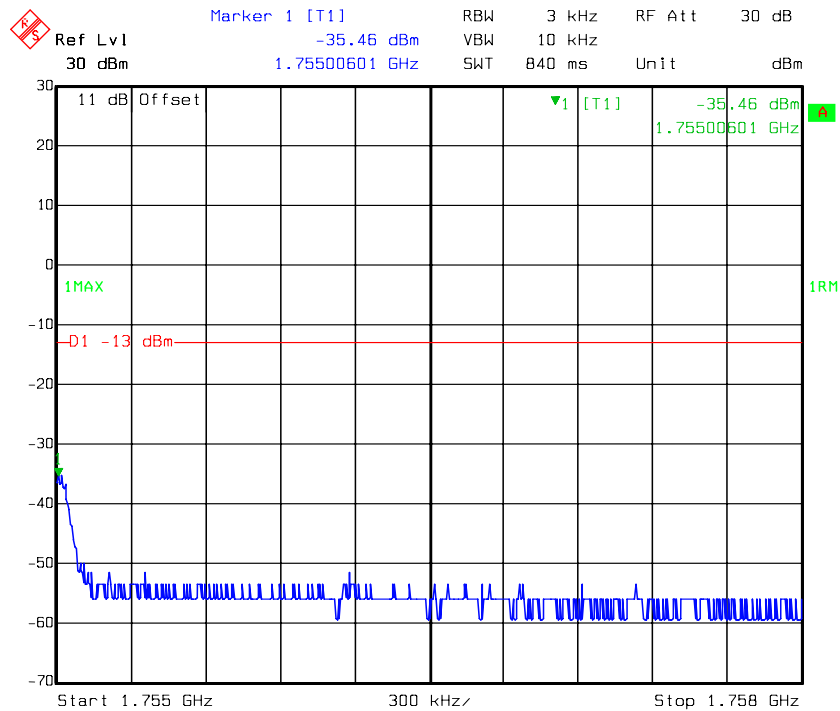


Date: 12.DEC.2015 01:02:57


GSM Right Side 3dB Above AGG

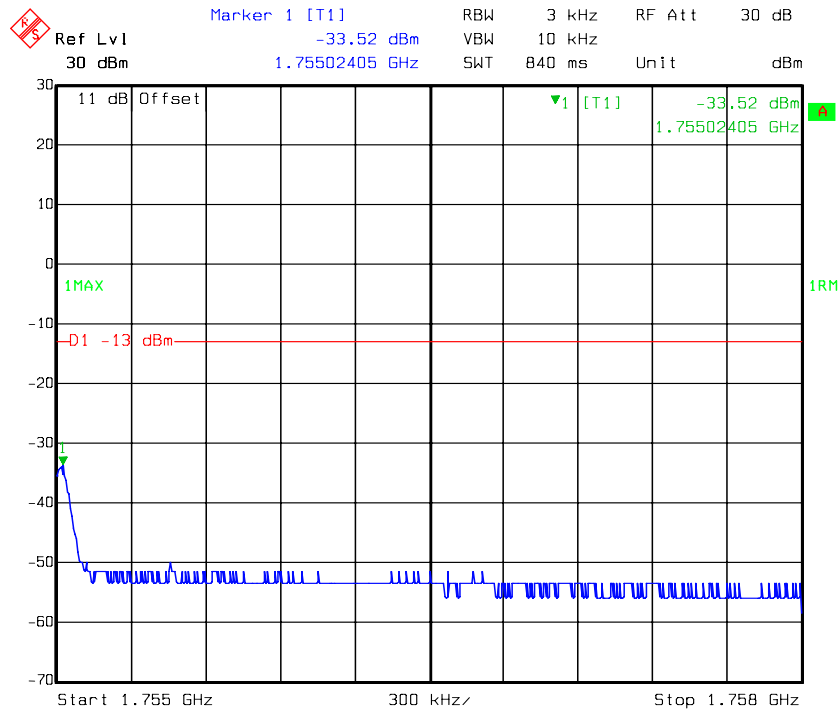

Date: 12.DEC.2015 01:02:24

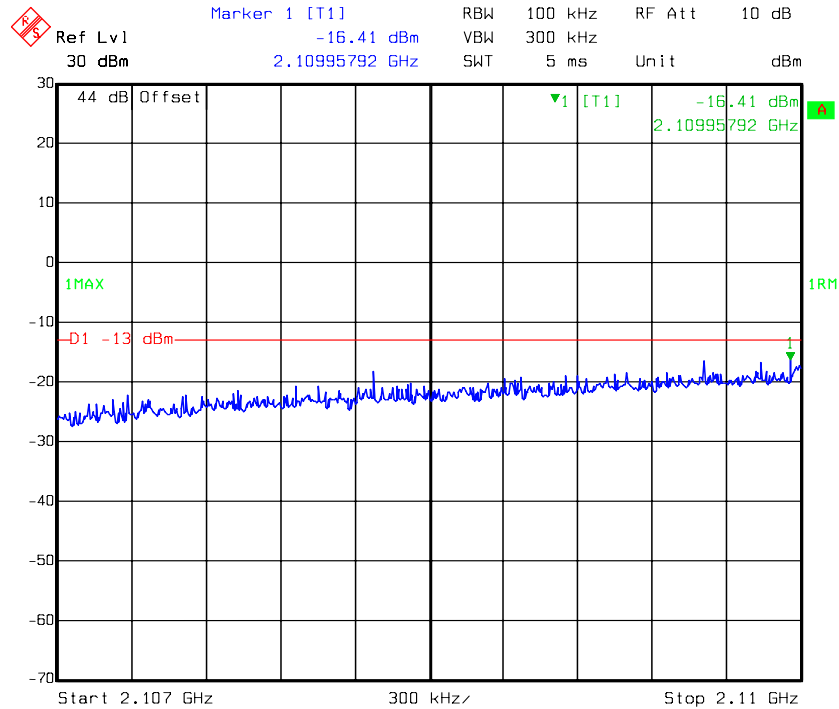
Downlink:**AWGN Left Side Pre-AGC**

Date: 10.DEC.2015 23:57:35

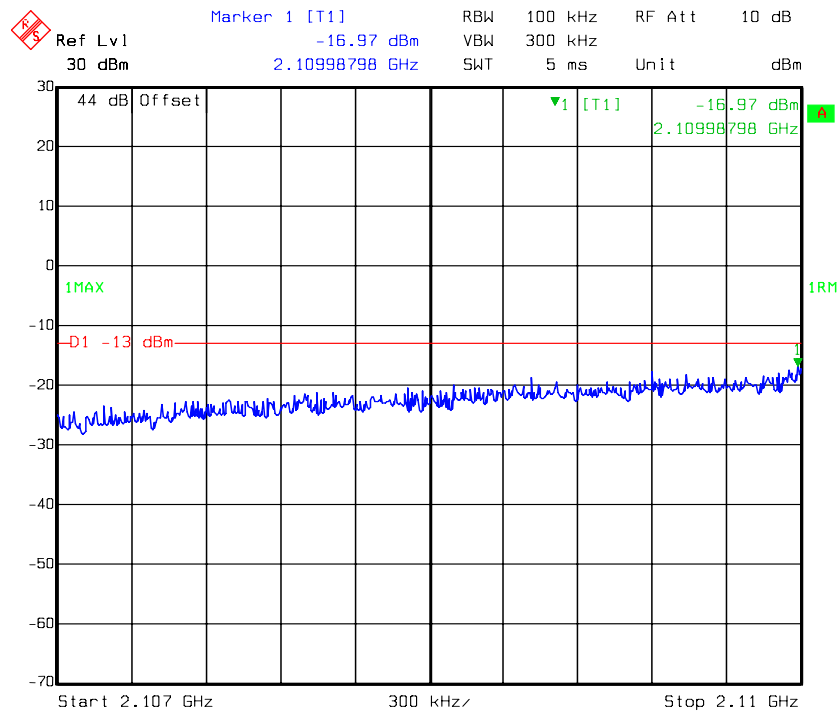AWGN Left Side 3dB Above AGG


Date: 10.DEC.2015 23:57:50

AWGN Right Side Pre-AGC

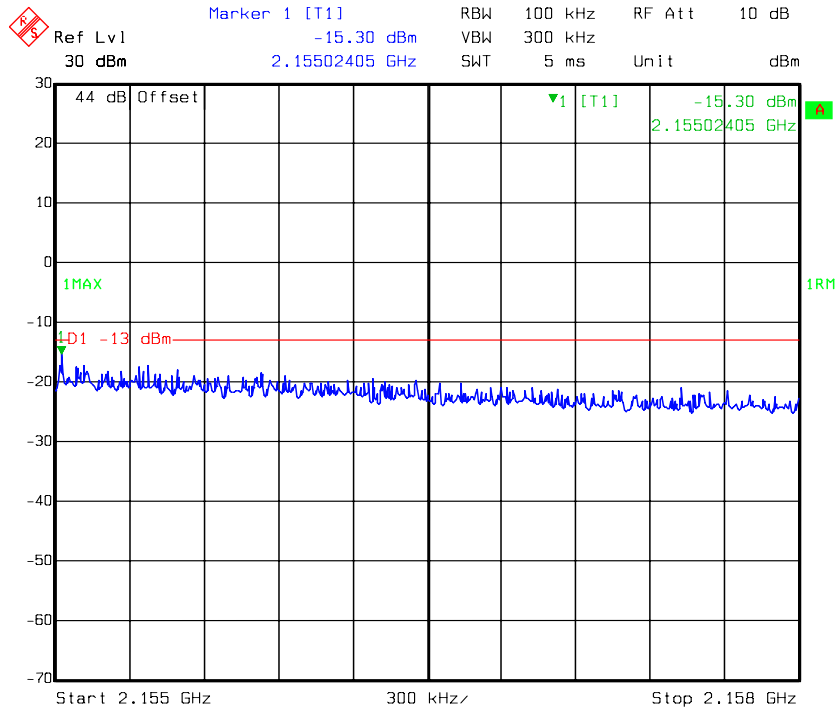


Date: 10.DEC.2015 23:53:44

AWGN Right Side 3dB Above AGG

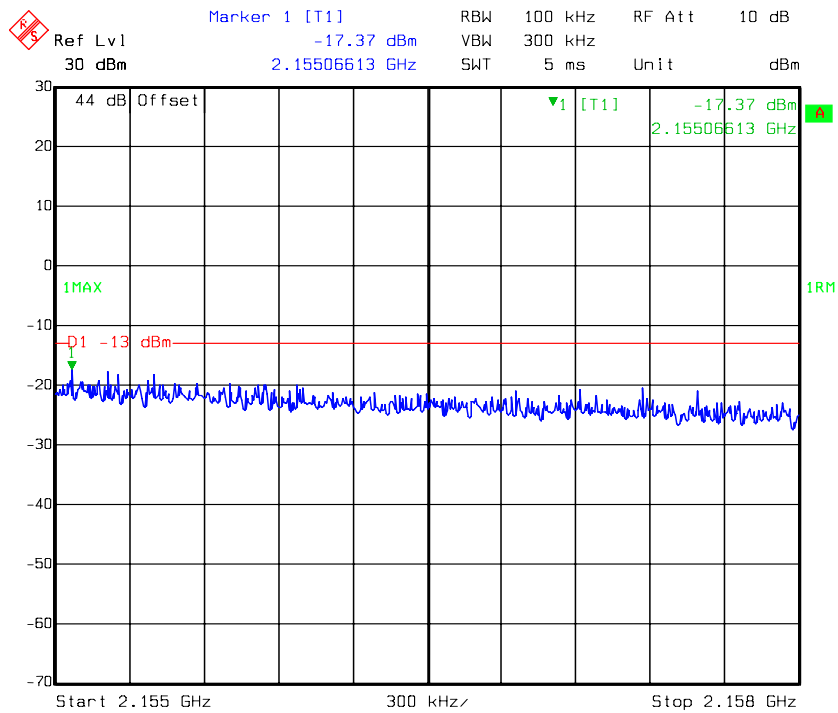


Date: 10.DEC.2015 23:54:08

GSM Left Side Pre-AGC

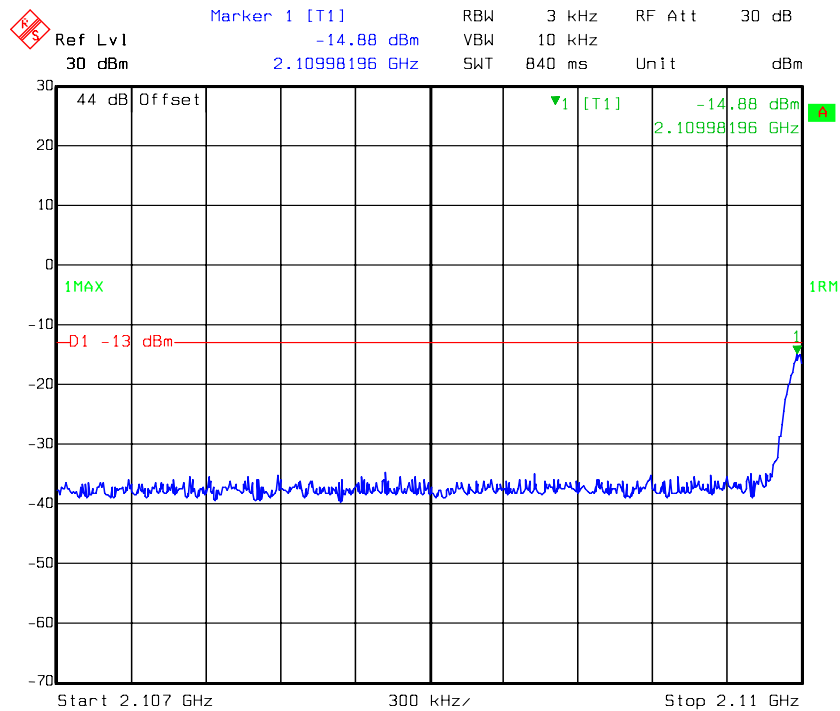


Date: 10.DEC.2015 23:43:13

GSM Left Side 3dB Above AGG

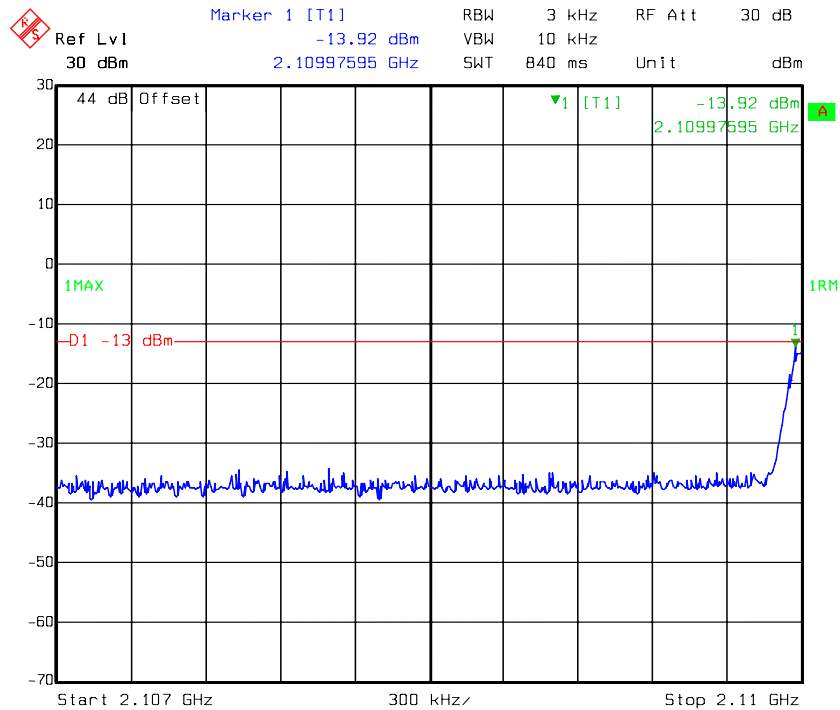


Date: 10.DEC.2015 23:42:52

GSM Right Side Pre-AGC

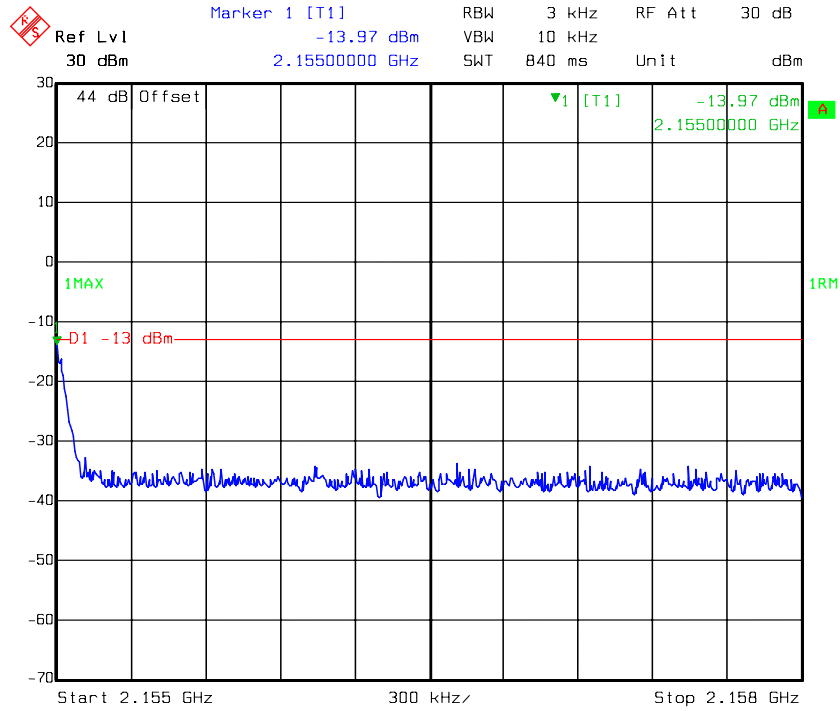

Date: 10.DEC.2015 23:46:59

GSM Right Side 3dB Above AGG

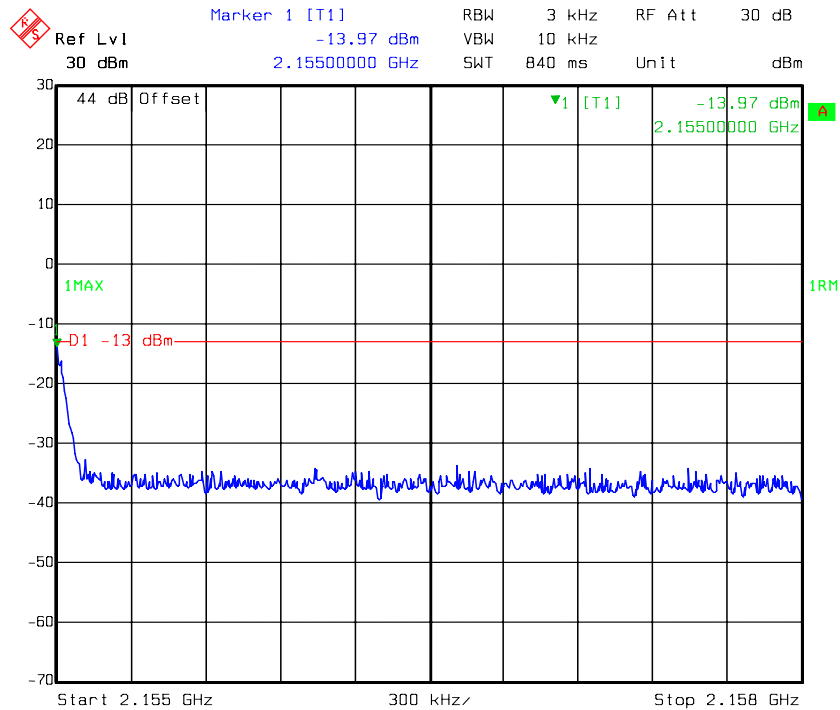


Date: 10.DEC.2015 23:46:59

Two adjacent channels:


Uplink:

AWGN Left Side Pre-AGC

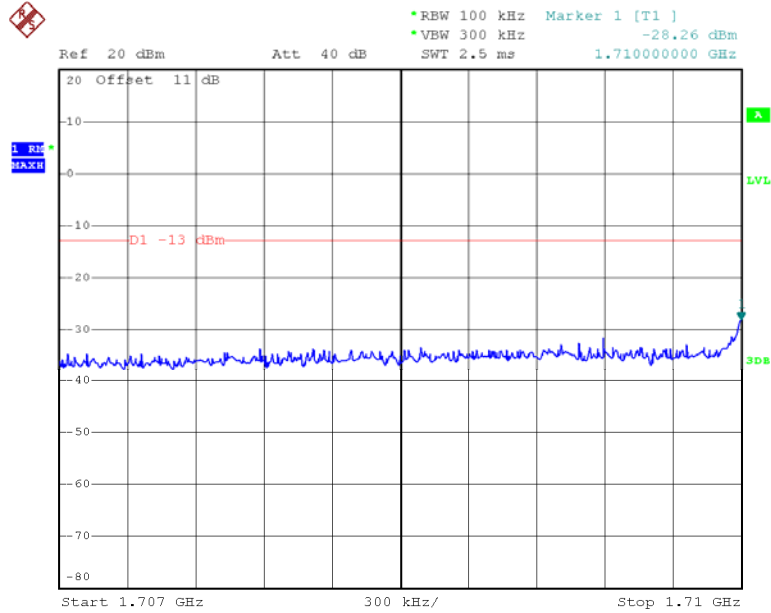


Date: 11.DEC.2015 20:48:54

AWGN Left Side 3dB Above AGG

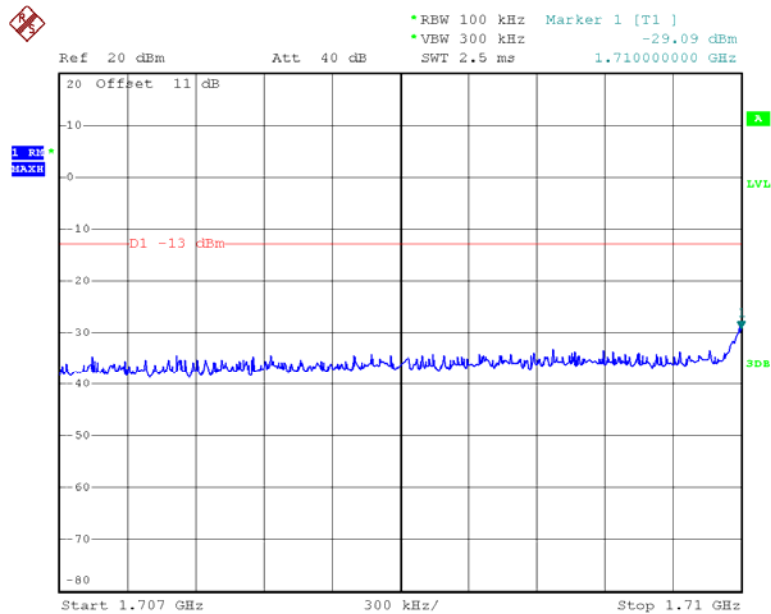


Date: 11.DEC.2015 20:49:06

AWGN Right Side Pre-AGC

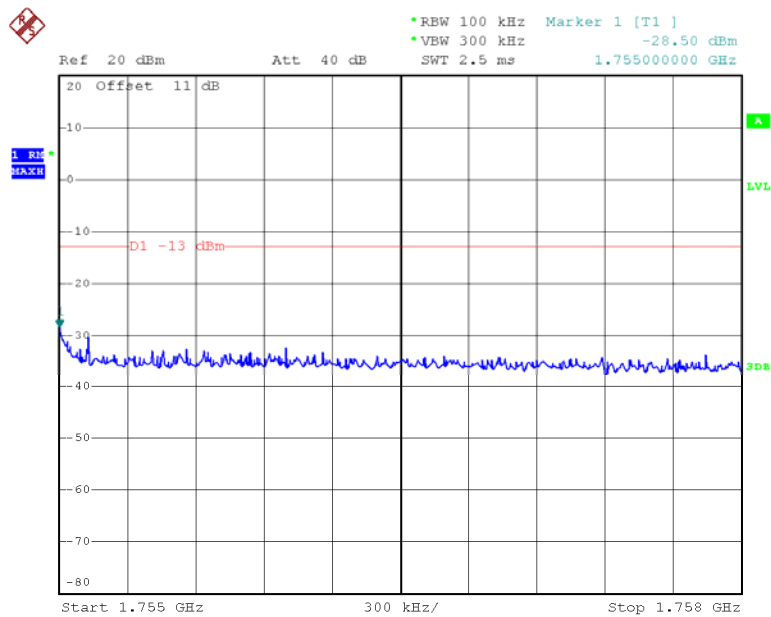


Date: 11.DEC.2015 20:46:30

AWGN Right Side 3dB Above AGG

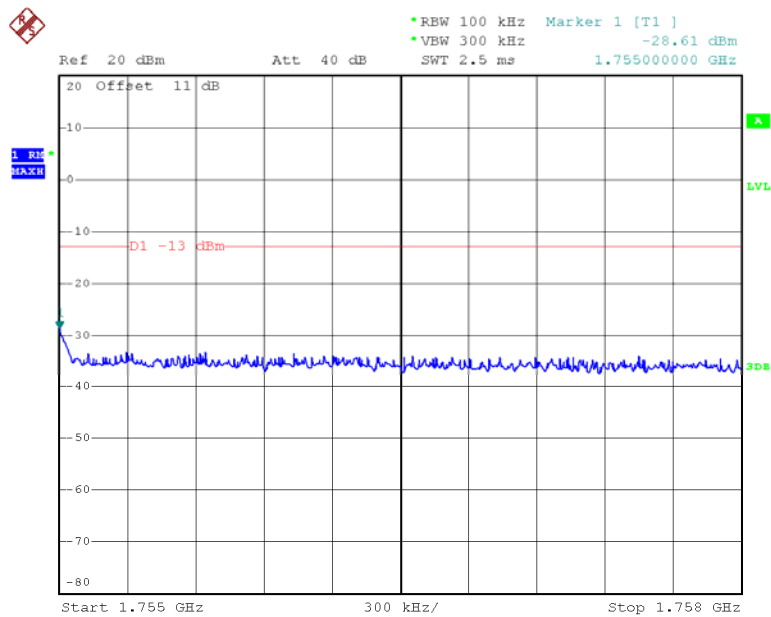


Date: 11.DEC.2015 20:46:58

GSM Left Side Pre-AGC

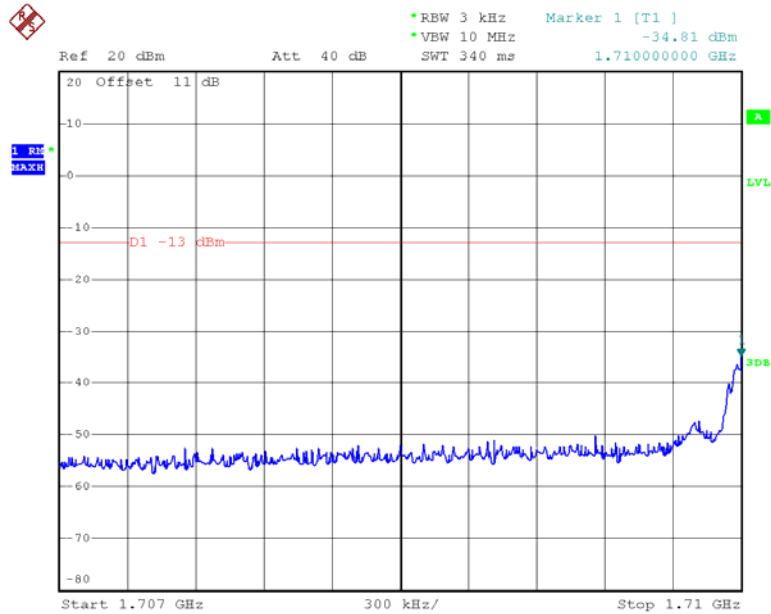


Date: 11.DEC.2015 20:27:36

GSM Left Side 3dB Above AGG

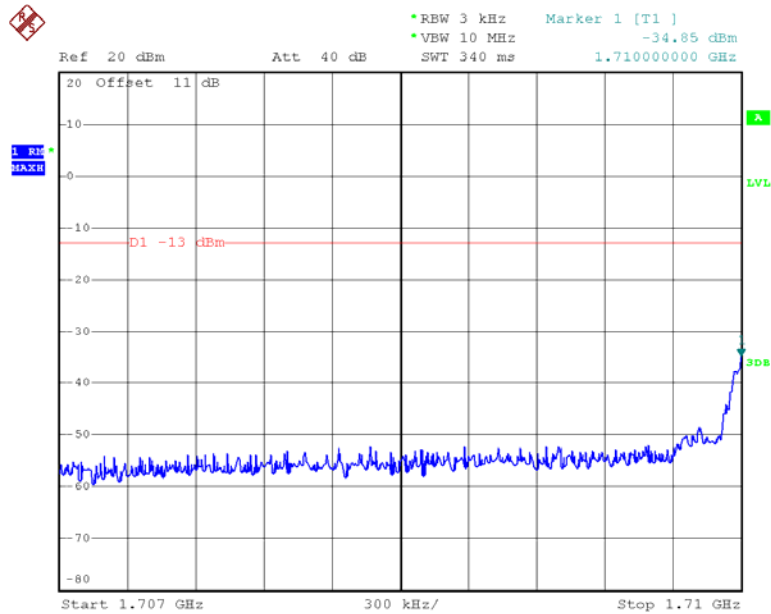


Date: 11.DEC.2015 20:27:49

GSM Right Side Pre-AGC

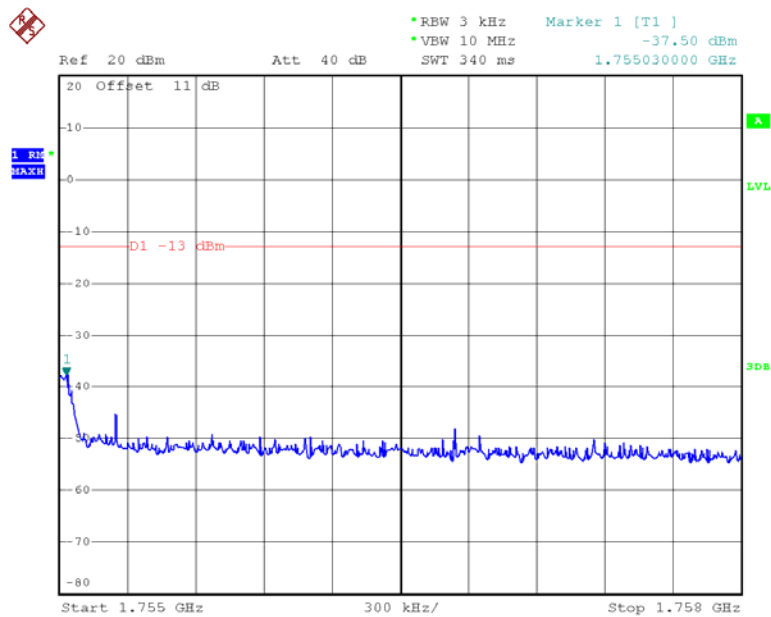

Date: 11.DEC.2015 20:35:29


GSM Right Side 3dB Above AGG

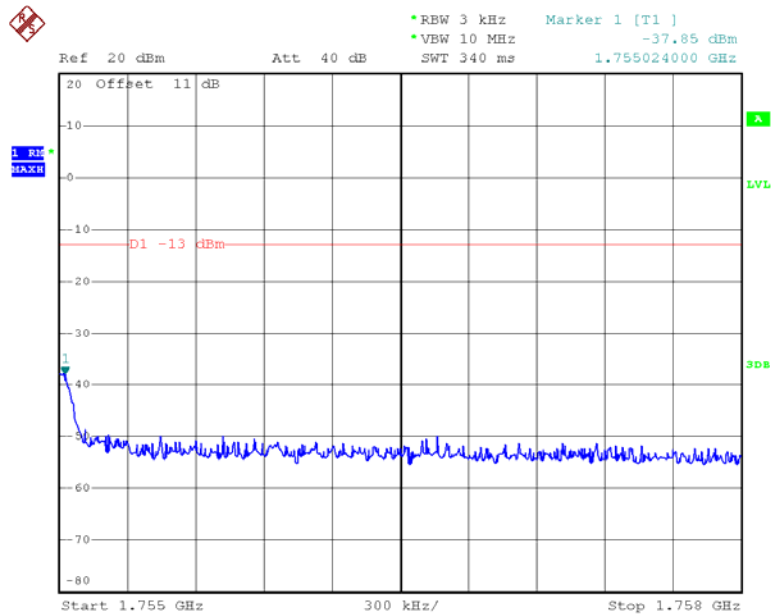

Date: 11.DEC.2015 20:36:09


Downlink:

AWGN Left Side Pre-AGC

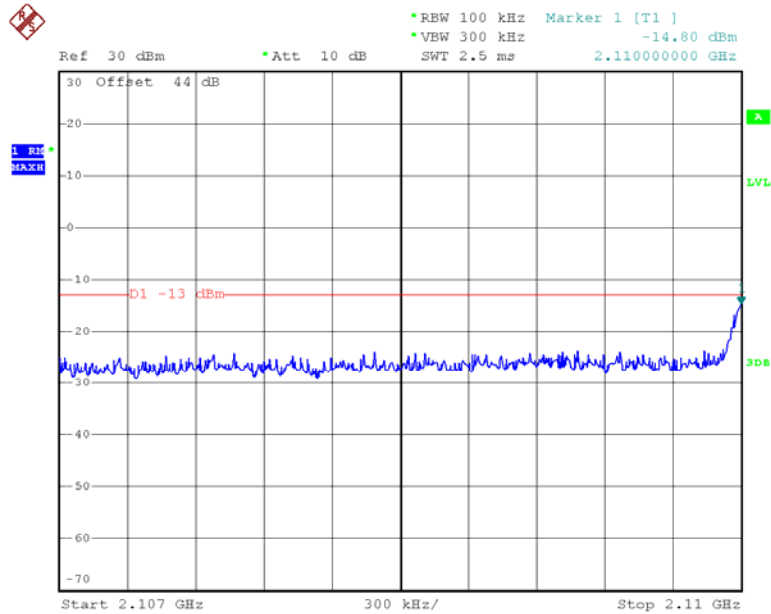


Date: 11.DEC.2015 21:09:28

AWGN Left Side 3dB Above AGG

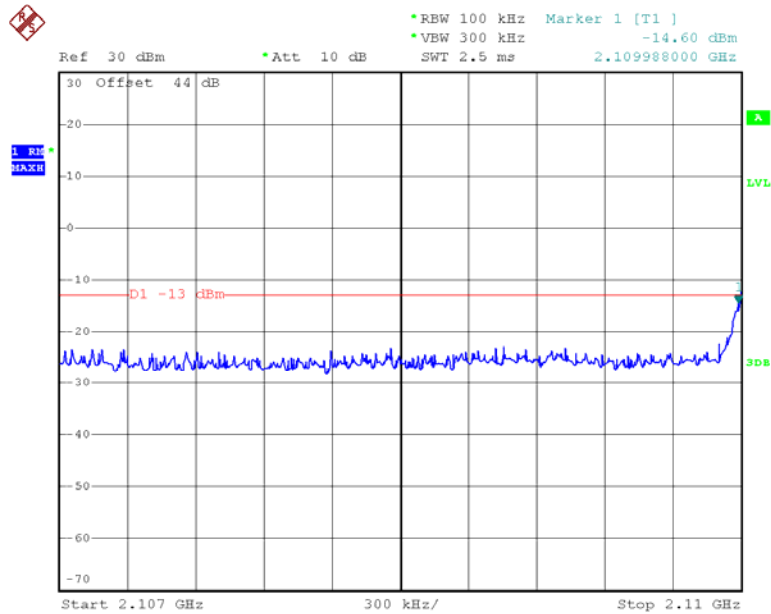


Date: 11.DEC.2015 21:09:42

AWGN Right Side Pre-AGC

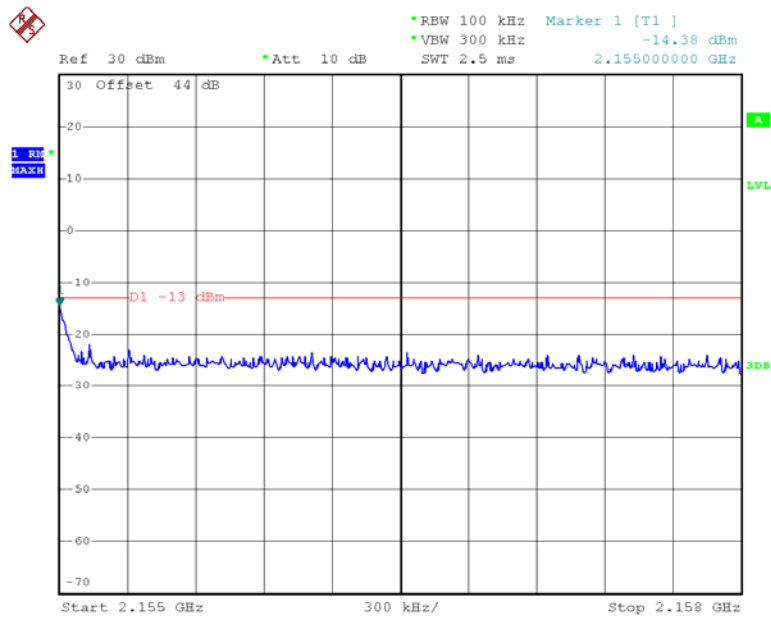


Date: 11.DEC.2015 21:11:56

AWGN Right Side 3dB Above AGG

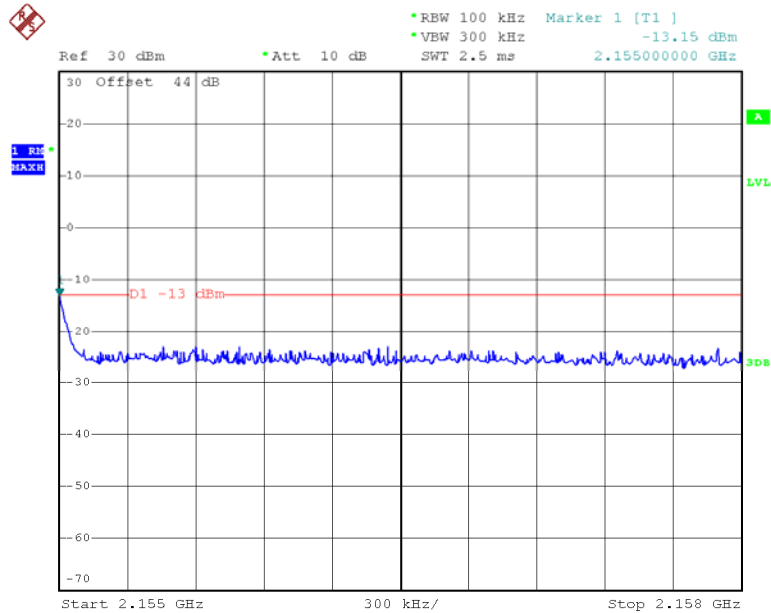


Date: 11.DEC.2015 21:11:43

GSM Left Side Pre-AGC

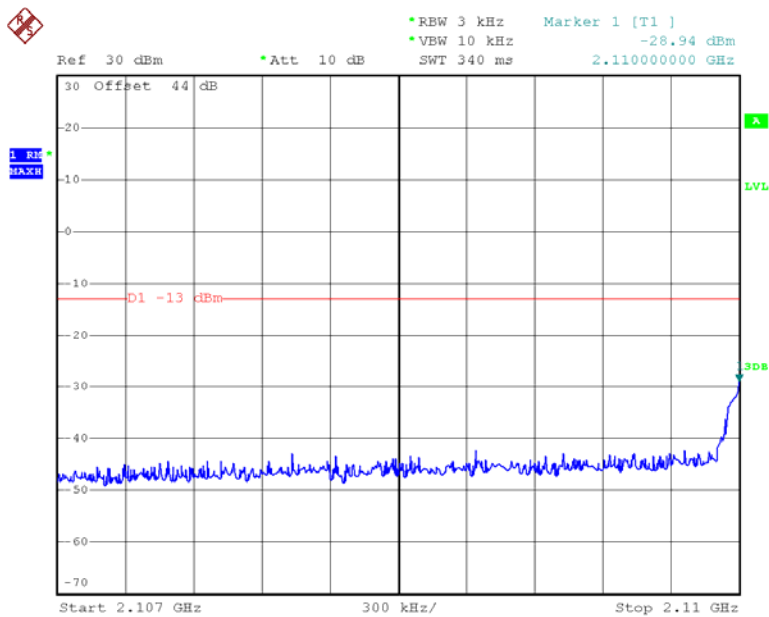


Date: 11.DEC.2015 21:18:47

GSM Left Side 3dB Above AGG

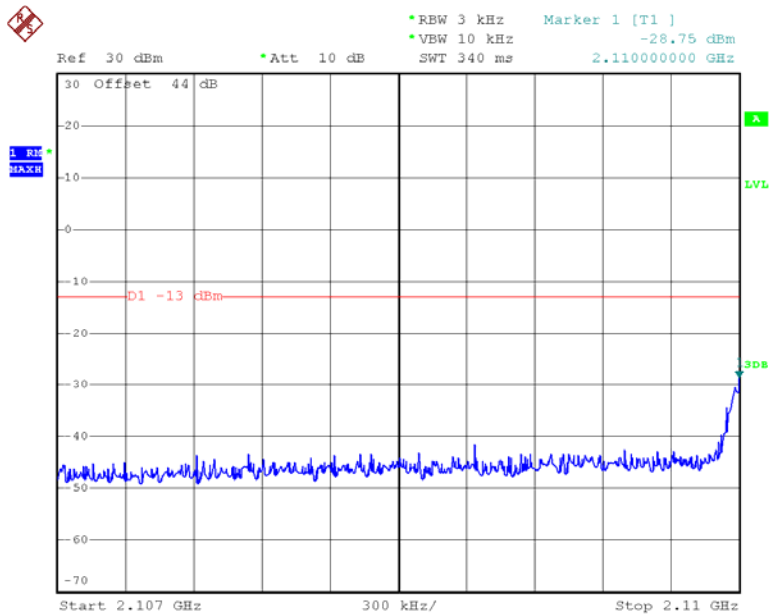


Date: 11.DEC.2015 21:18:59

GSM Right Side Pre-AGC

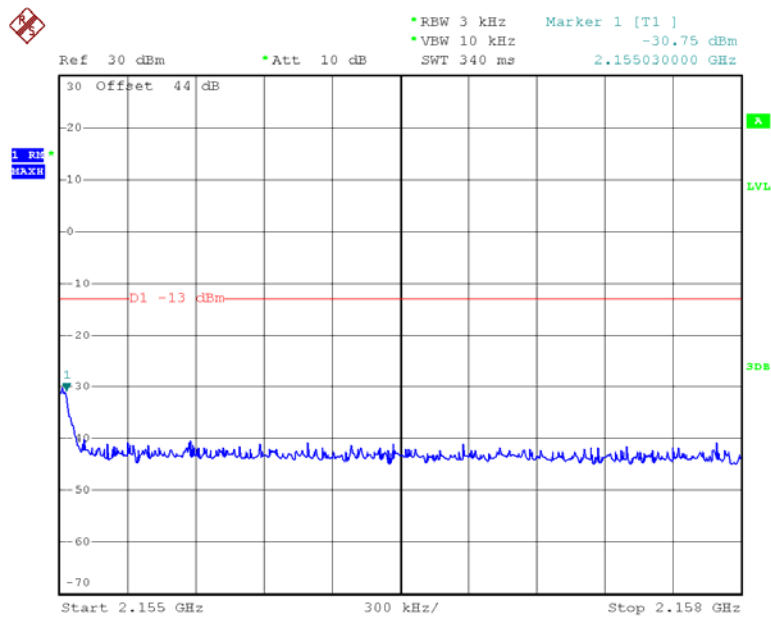

Date: 11.DEC.2015 21:16:56

GSM Right Side 3dB Above AGG

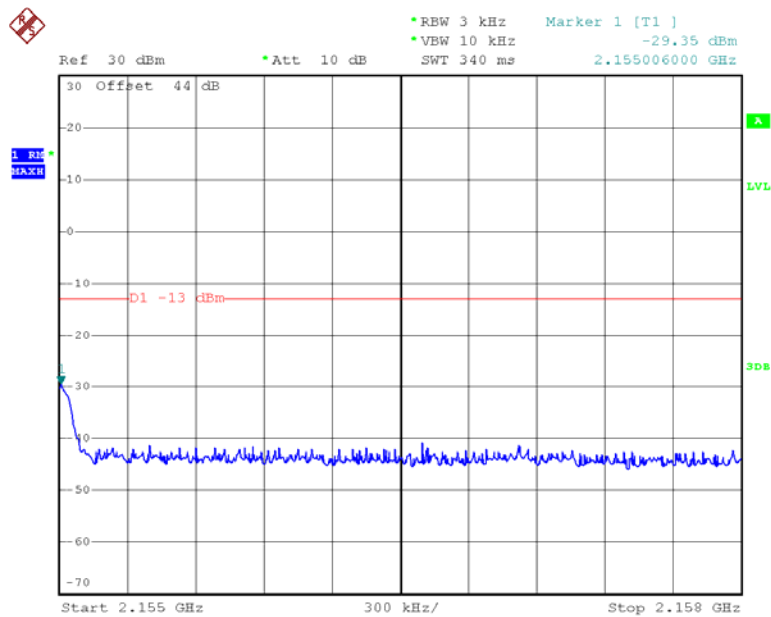

Date: 11.DEC.2015 21:15:33

§2.1051&§27.53- SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standards

According to §2.1051 *Measurements required: Spurious emissions at antenna terminals.*

According to §27.53(h) *AWS emission limits—(1) General protection levels.* Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

Test Procedure

- a) Connect a signal generator to the input of the EUT.
- b) Set the signal generator to produce the broadband test signal as previously described (e.g., 4.1 MHz OBW AWGN).
- c) Set the center frequency of the test signal to the lowest available channel within the frequency band or block.
- d) Set the EUT input power to a level that is just below the AGC threshold (see 3.2), but not more than 0.5 dB below.
- e) Connect a spectrum analyzer to the output of the EUT using appropriate attenuation as necessary.
- f) Set the RBW = reference bandwidth in the applicable rule section for the supported frequency band of operation (e.g., reference bandwidth is typically 100 kHz or 1 MHz).
- g) Set the VBW $\geq 3 \times$ RBW.
- h) Set the Sweep time = auto-couple.
- i) Set the analyzer start frequency to the lowest radio frequency signal generated in the equipment, without going below 9 kHz, and the stop frequency to the lower band/block edge frequency minus 100 kHz or 1 MHz, as specified in the applicable rule part.
NOTE—The number of measurement points in each sweep must be $\geq (2 \times \text{span}/\text{RBW})$ which may require that the measurement range defined by the start and stop frequencies be subdivided, depending on the available number of measurement points provided by the spectrum analyzer.
- j) Select the power averaging (rms) detector function.
- k) Trace average at least 10 traces in power averaging (i.e., rms) mode.
- l) Use the peak marker function to identify the highest amplitude level over each measured frequency range. Record the frequency and amplitude and capture a plot for inclusion in the test report.
- m) Reset the analyzer start frequency to the upper band/block edge frequency plus 100 kHz or 1 MHz, as specified in the applicable rule part, and the analyzer stop frequency to 10 times the highest frequency of the fundamental emission (see §2.1057). Note that the number of measurement points in each sweep must be $\geq (2 \times \text{span}/\text{RBW})$ which may require that the measurement range defined by the start and stop frequencies be subdivided, depending on the available number of measurement points provided by the spectrum analyzer.
- n) Trace average at least 10 traces in power averaging (i.e., rms) mode.
- o) Use the peak marker function to identify the highest amplitude level over each of the measured frequency ranges. Record the frequency and amplitude and capture a plot for inclusion in the test report and provide tabular data, if required.
- p) Repeat the procedure with the input test signals tuned to a middle band/block frequency/channel and then a high band/block frequency/channel.
- q) Repeat entire procedure with the narrowband test signal.
- r) Repeat for all authorized frequency bands/blocks used by the EUT.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
R & S	Wideband Radio Communication Tester	CMW500	1201.002K50-146520-wh	2014-12-19	2015-12-19
Agilent	MXG Vector Signal Generator	N5182B	MY51350142	2015-03-30	2016-03-29

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	24.3~24.5°C
Relative Humidity:	47~48 %
ATM Pressure:	101.1~101.2 kPa

The testing was performed by Dean Liu on 2015-12-11 to 2015-12-12.


Please refer to the following plots.

Uplink:


Low Channel AWGN

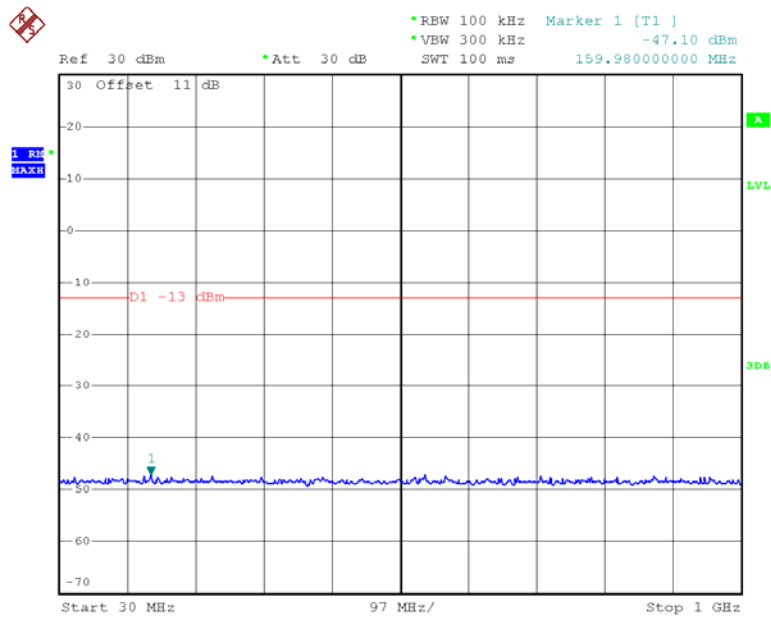

Date: 11.DEC.2015 23:52:16

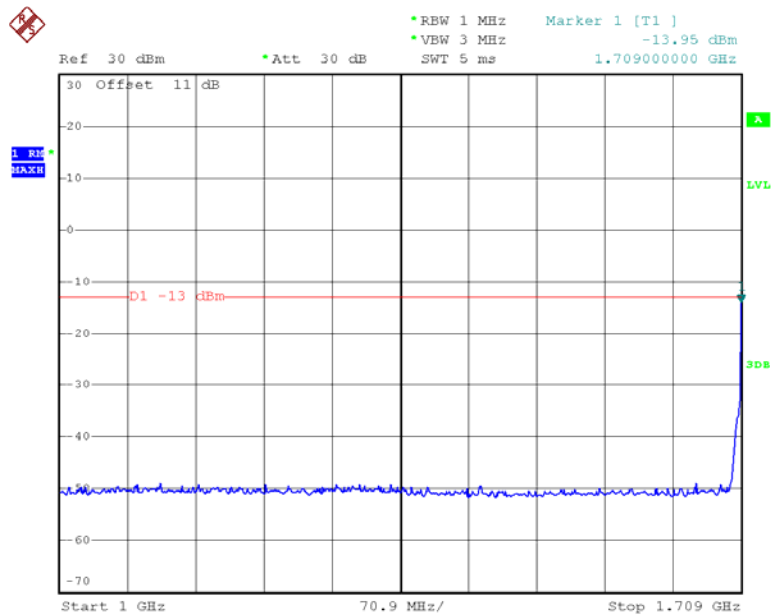


Date: 11.DEC.2015 23:59:00

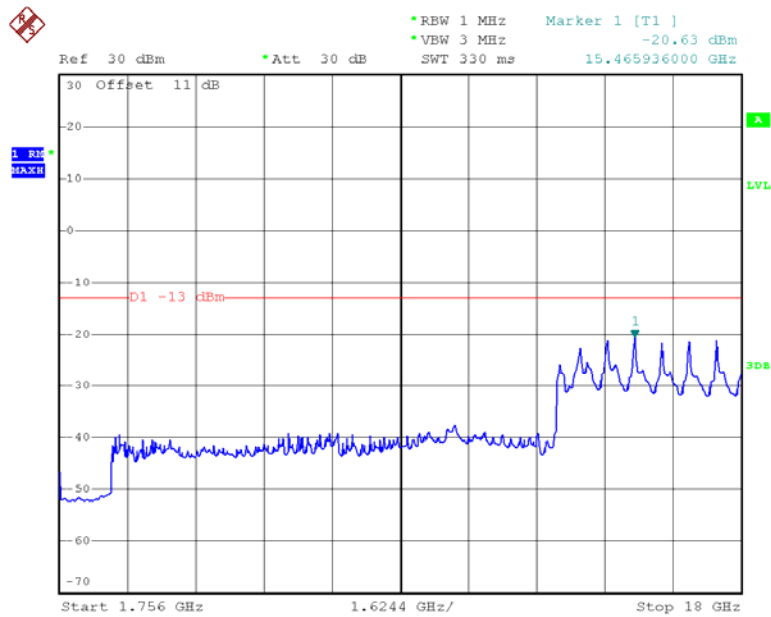


Date: 12.DEC.2015 00:22:54


Middle Channel AWGN

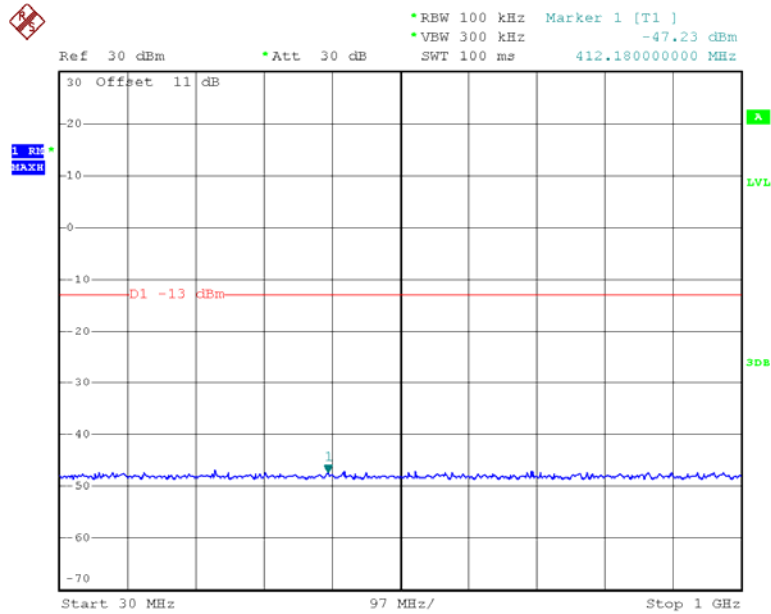

Date: 11.DEC.2015 23:52:01

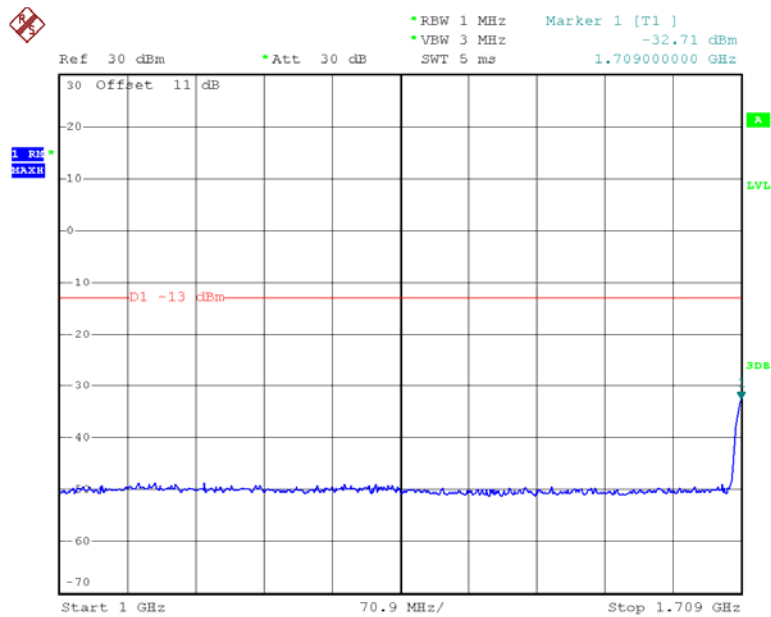


Date: 11.DEC.2015 23:59:46

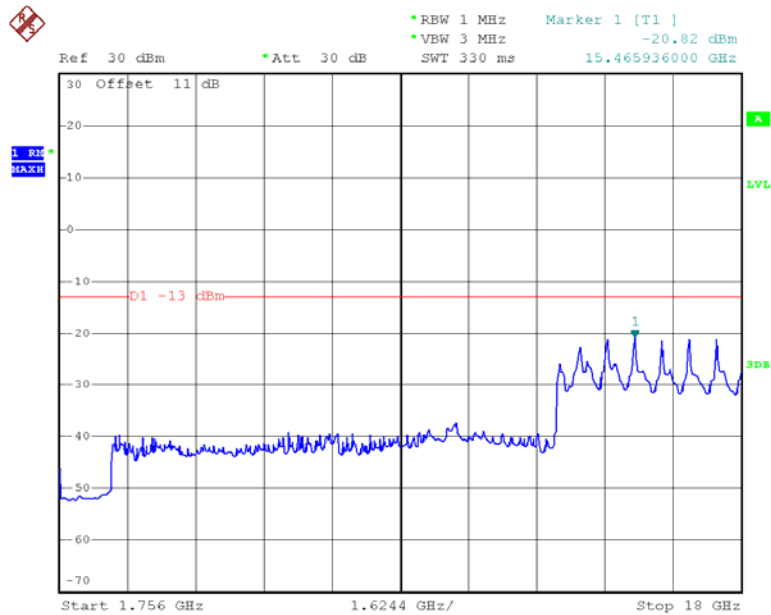


Date: 12.DEC.2015 00:23:08


High Channel AWGN

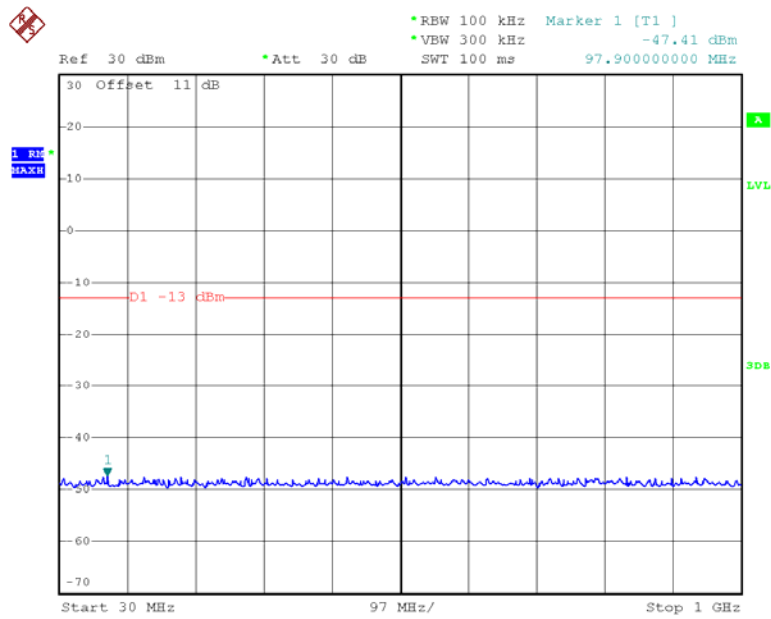

Date: 11.DEC.2015 23:53:05

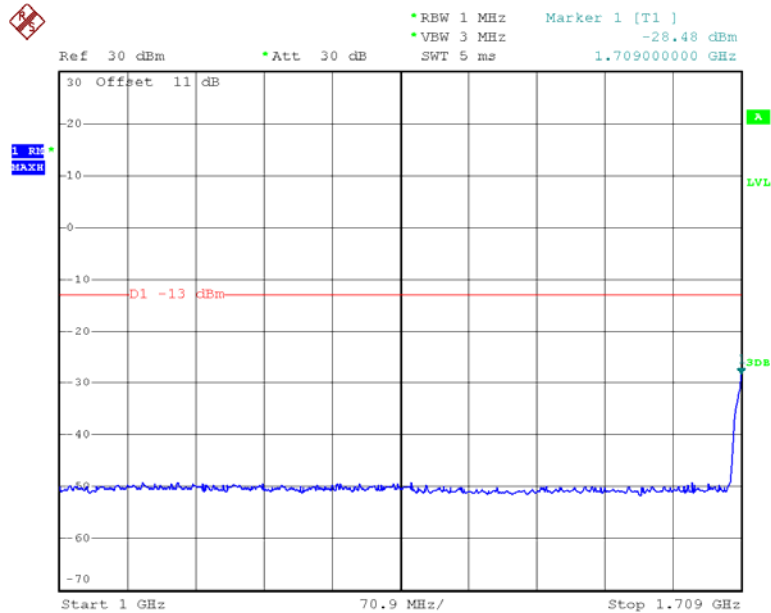


Date: 11.DEC.2015 23:59:59

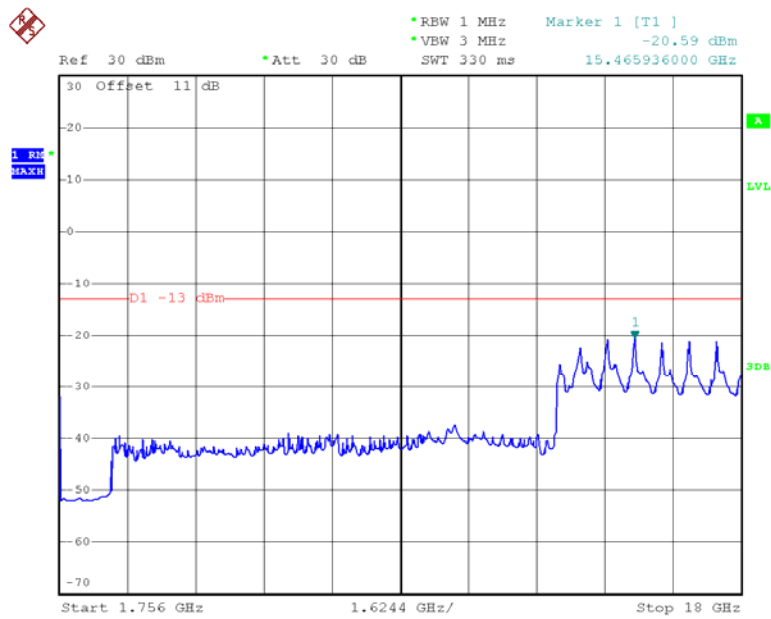


Date: 12.DEC.2015 00:24:02


Low Channel GSM

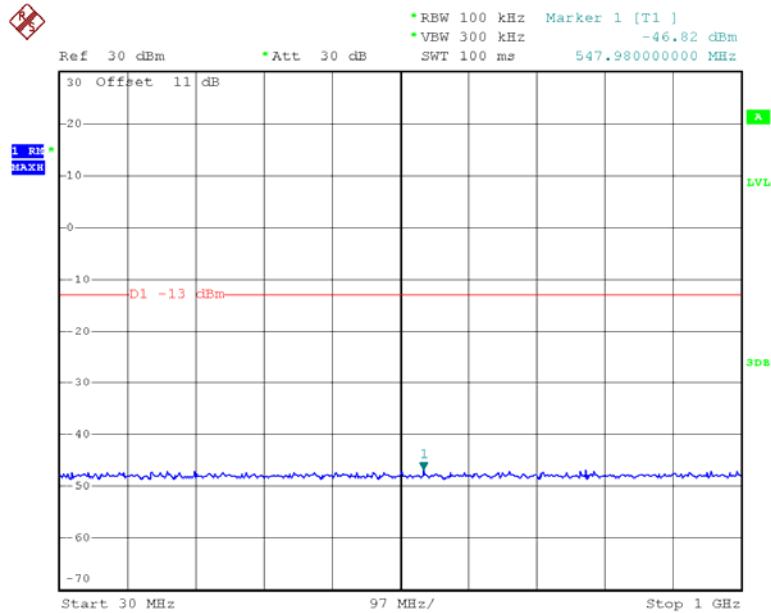

Date: 11.DEC.2015 23:55:03

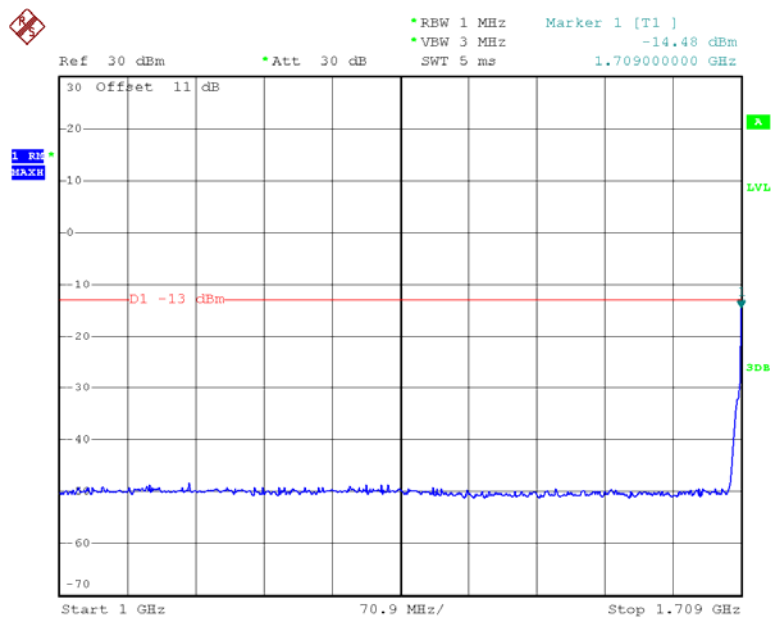


Date: 12.DEC.2015 00:05:31

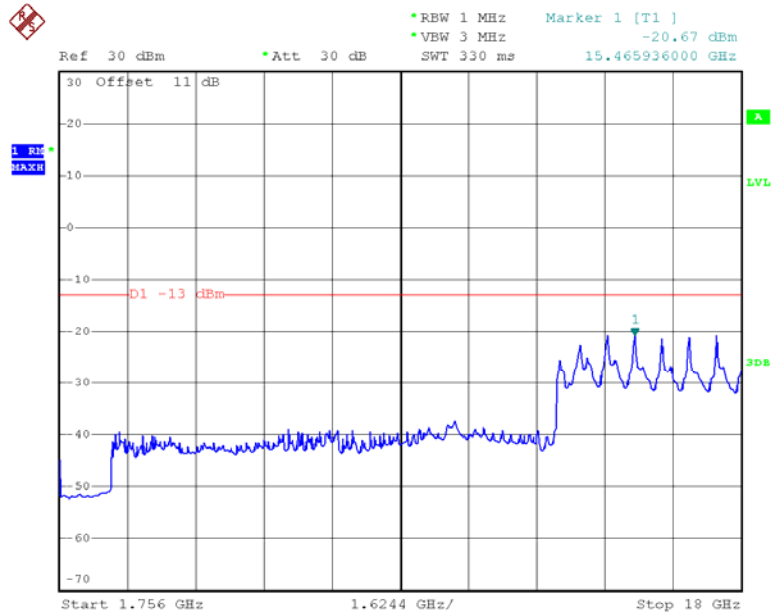


Date: 12.DEC.2015 00:20:12


Middle Channel GSM

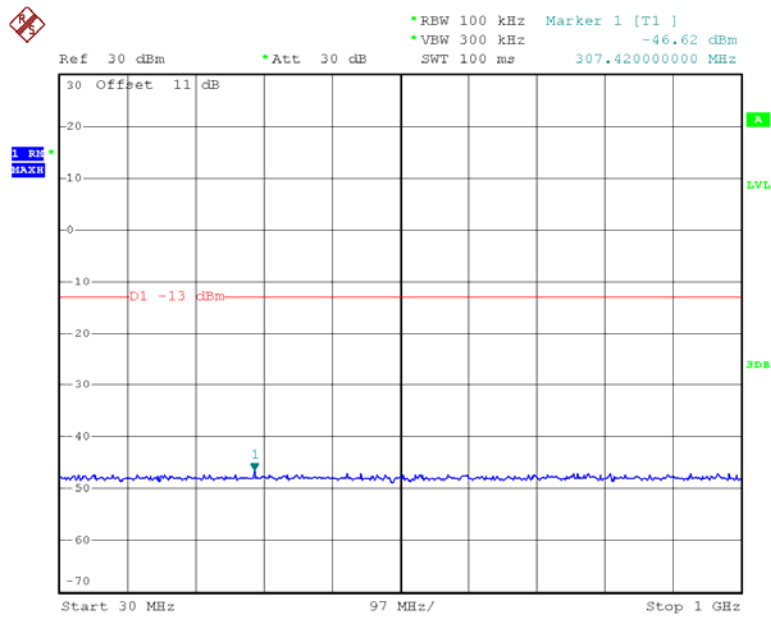

Date: 11.DEC.2015 23:55:56

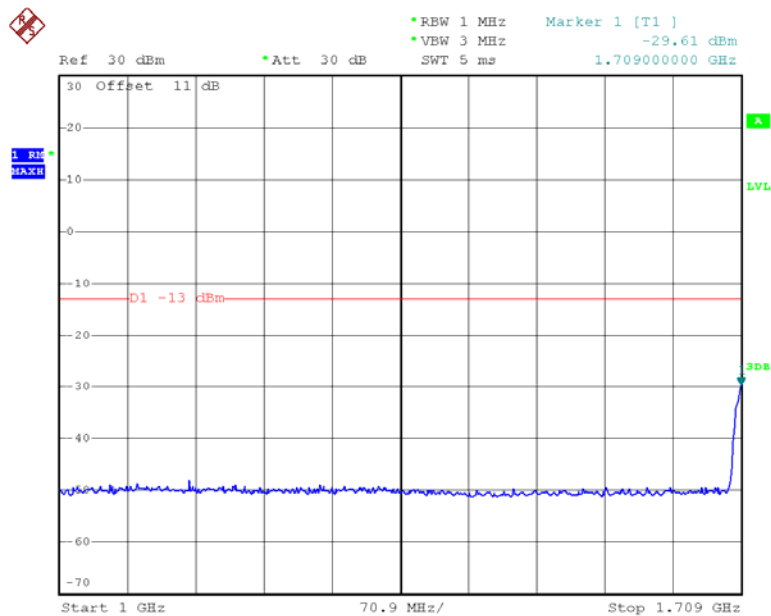


Date: 12.DEC.2015 00:03:37

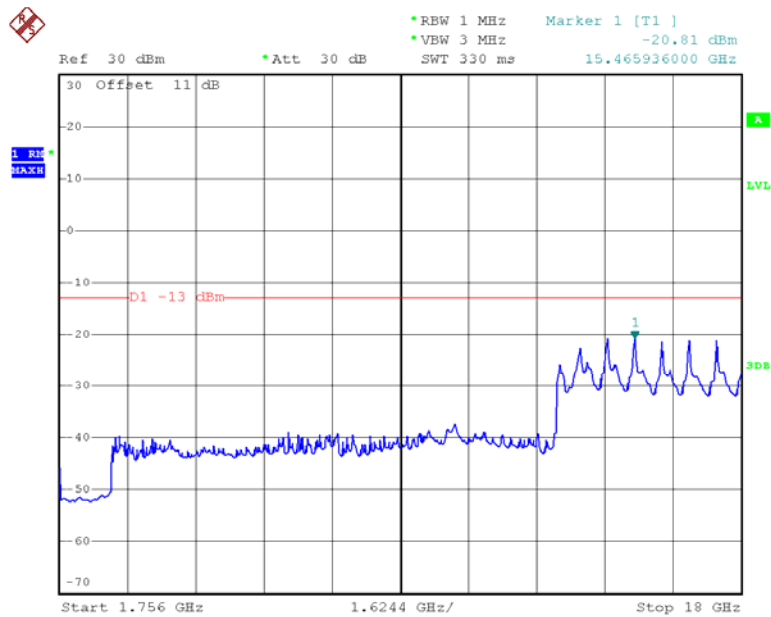


Date: 12.DEC.2015 00:20:30


High Channel GSM

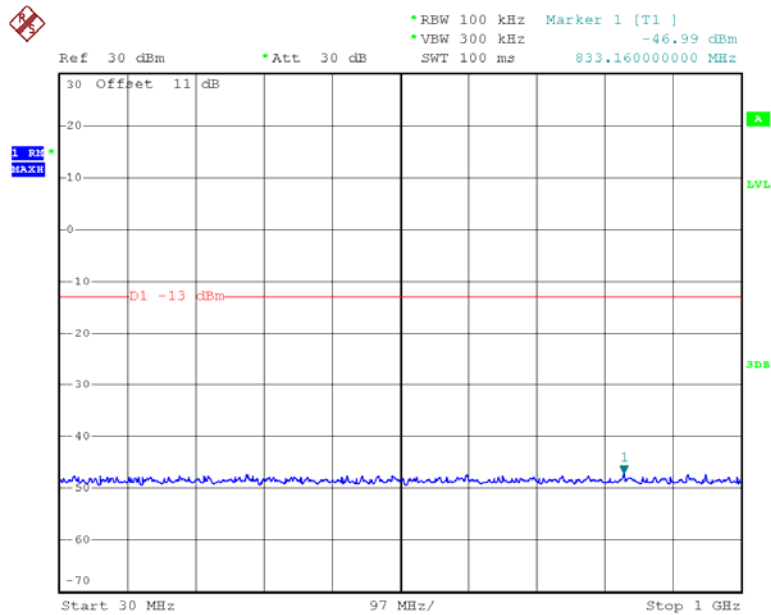

Date: 11.DEC.2015 23:54:04

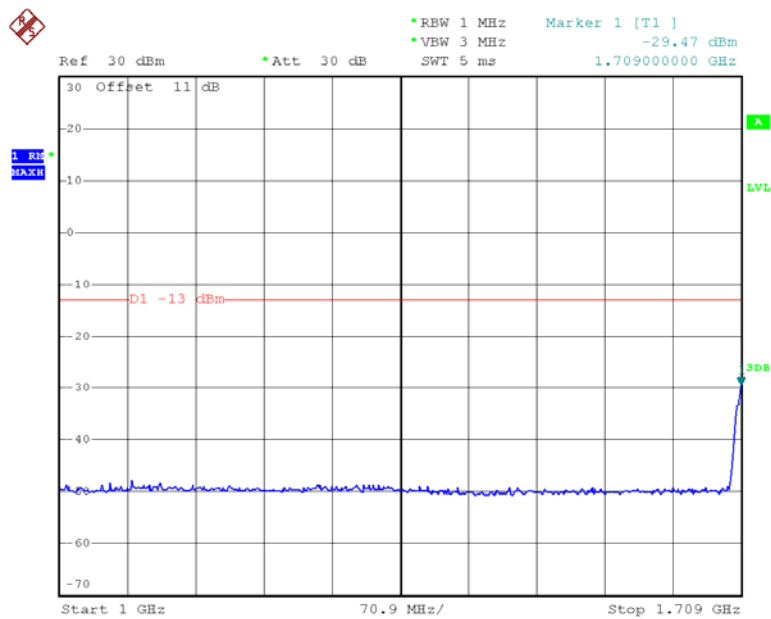


Date: 12.DEC.2015 00:03:19

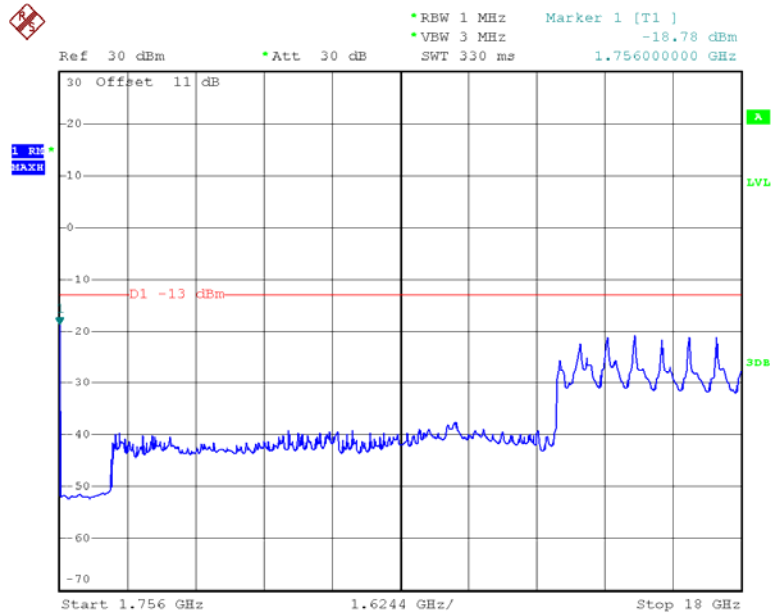


Date: 12.DEC.2015 00:21:18

Downlink:


Low Channel AWGN

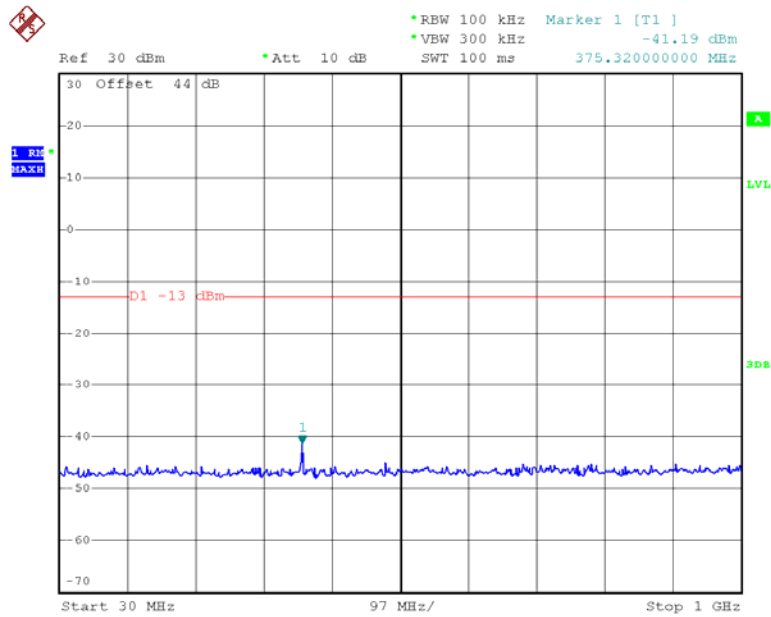

Date: 11.DEC.2015 23:45:41

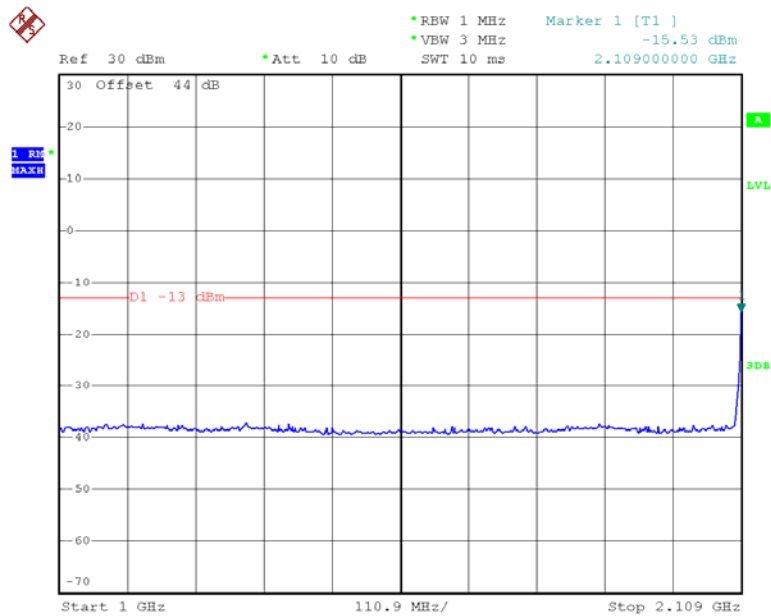


Date: 11.DEC.2015 23:43:29

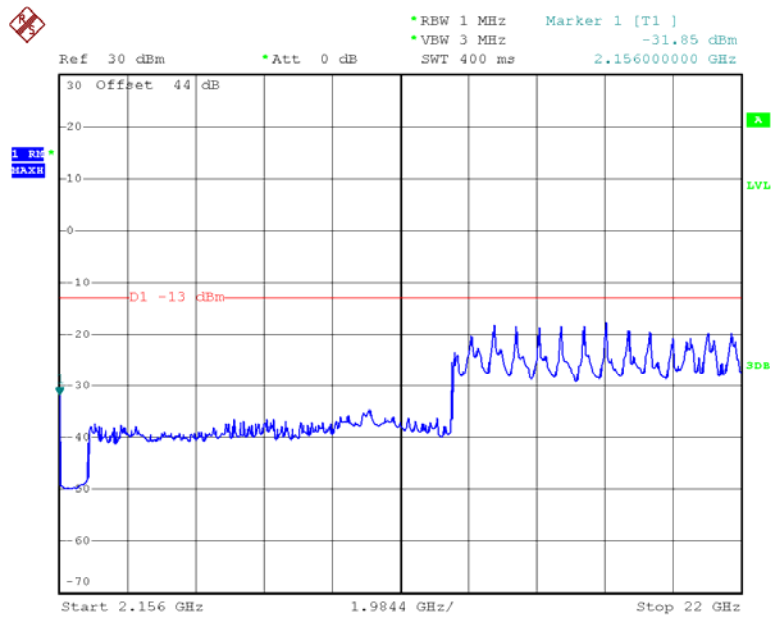


Date: 11.DEC.2015 23:12:05


Middle Channel AWGN

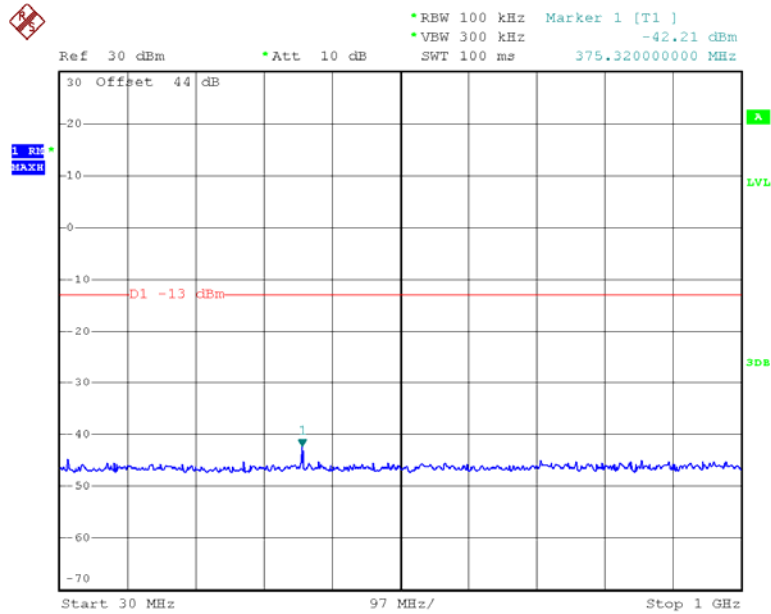

Date: 11.DEC.2015 23:45:15

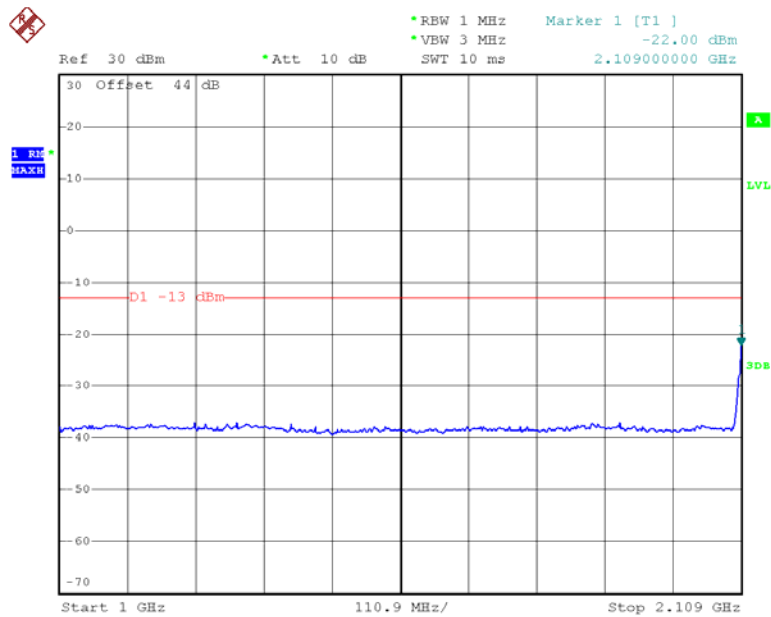


Date: 11.DEC.2015 23:43:14

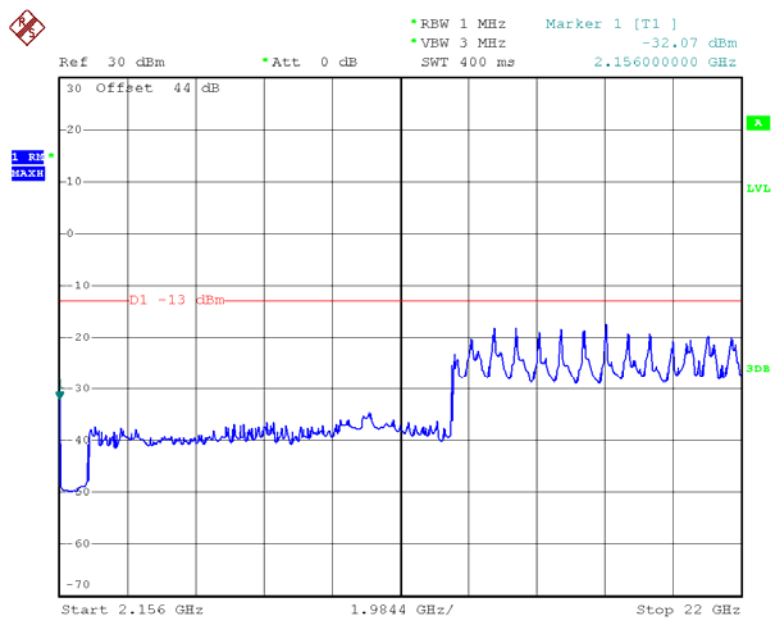


Date: 11.DEC.2015 23:12:27


High Channel AWGN

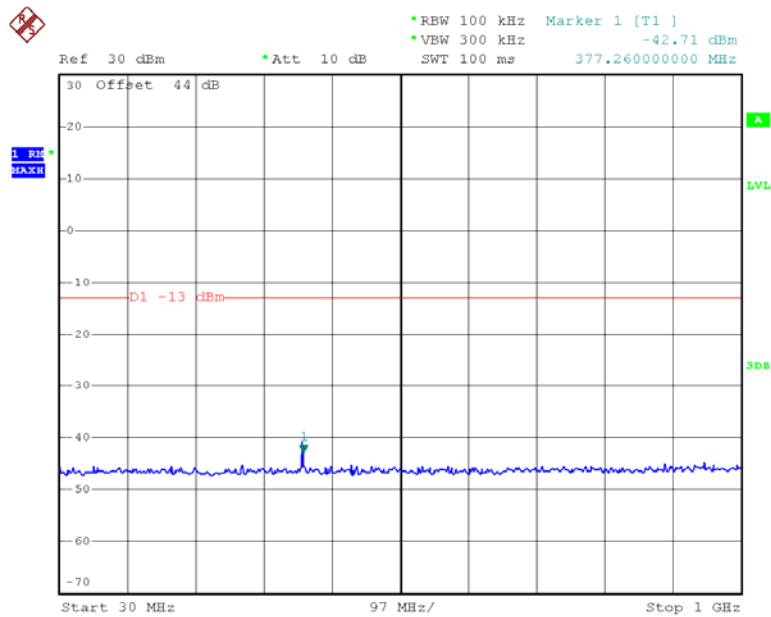

Date: 11.DEC.2015 23:45:03

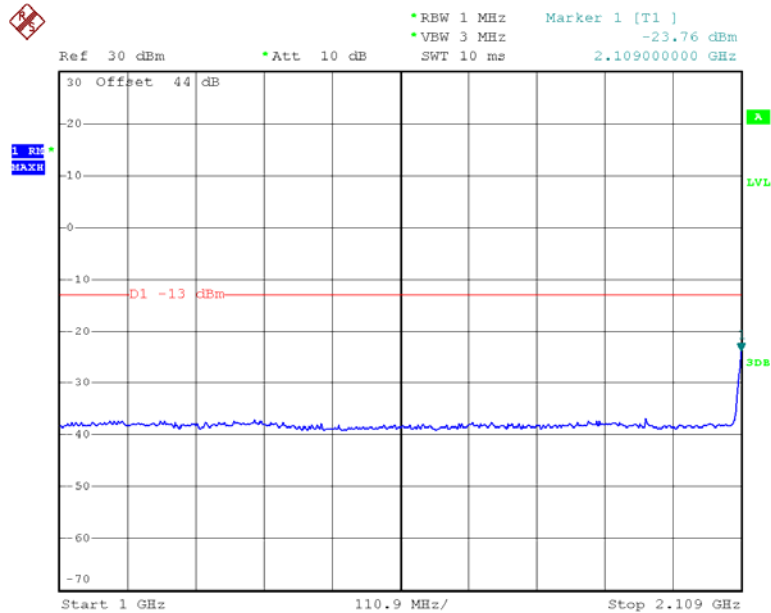


Date: 11.DEC.2015 23:42:45

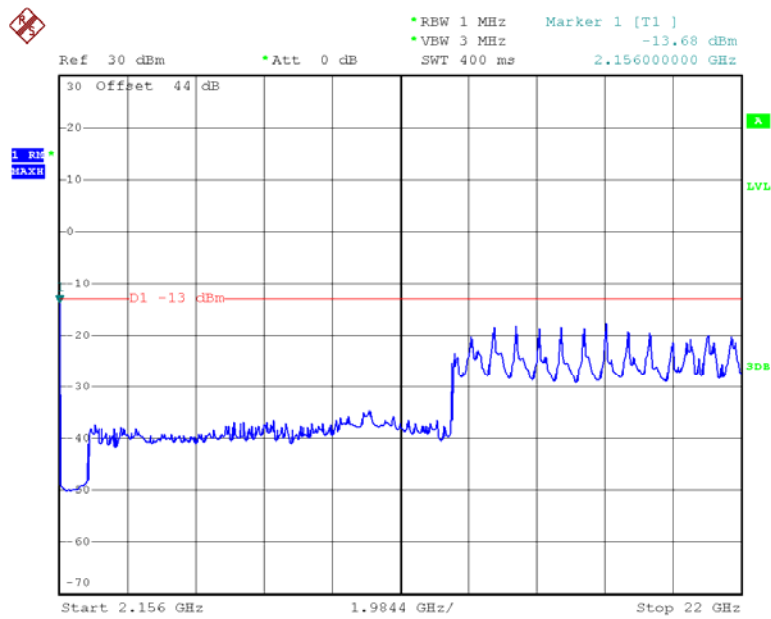


Date: 11.DEC.2015 23:13:30


Low channel GSM

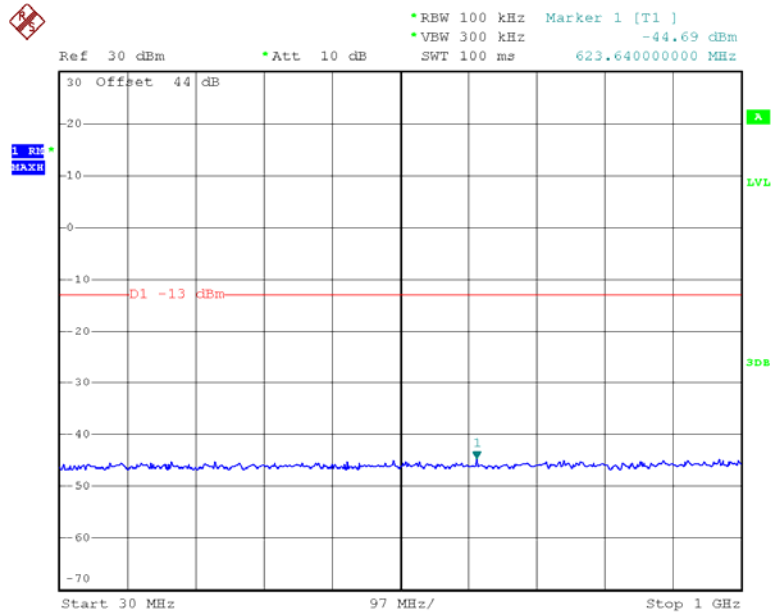

Date: 11.DEC.2015 22:18:12

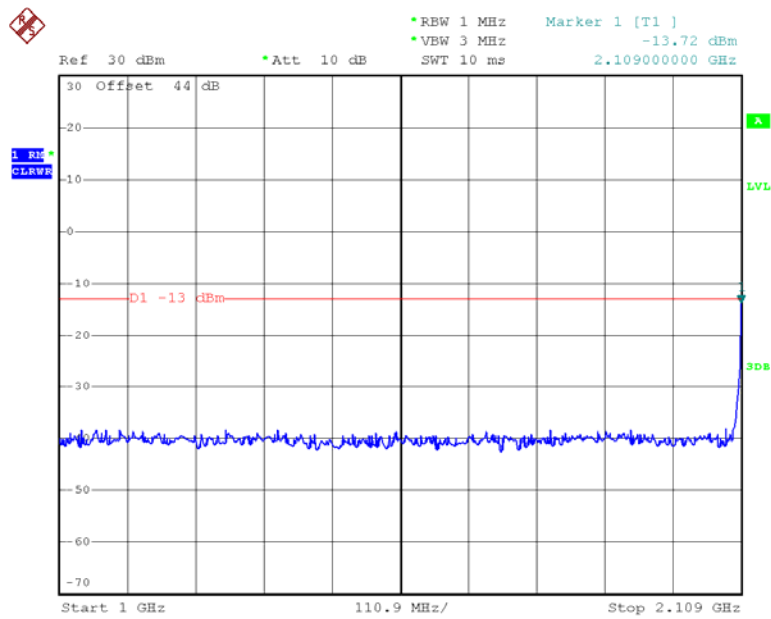


Date: 11.DEC.2015 22:50:21

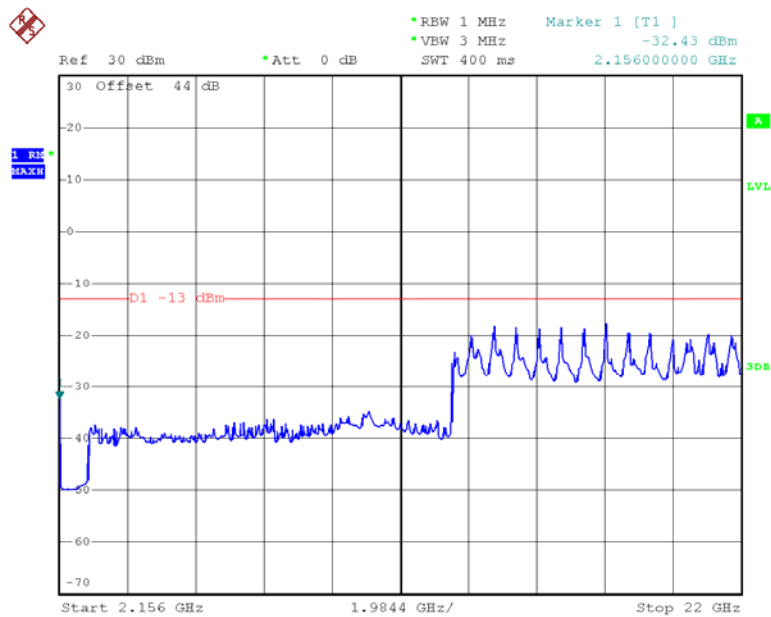


Date: 11.DEC.2015 23:09:40


Middle Channel GSM

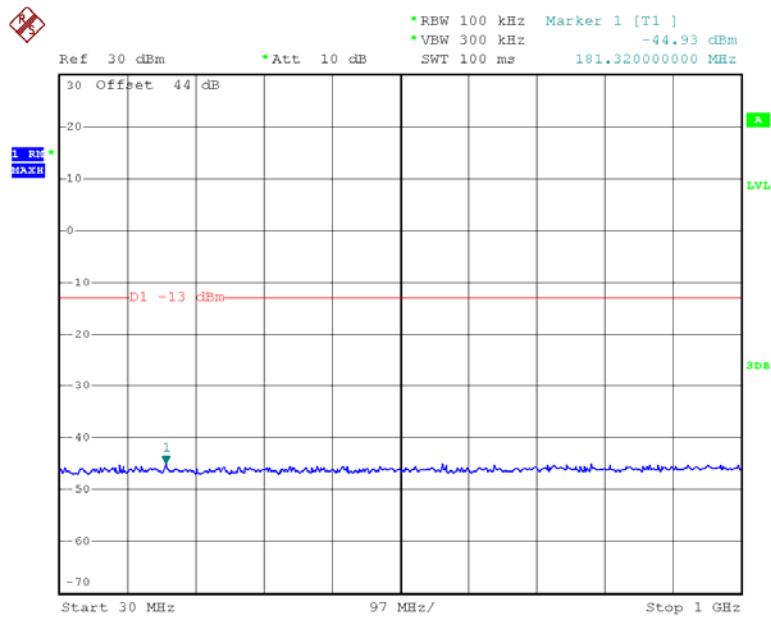

Date: 11.DEC.2015 22:18:53

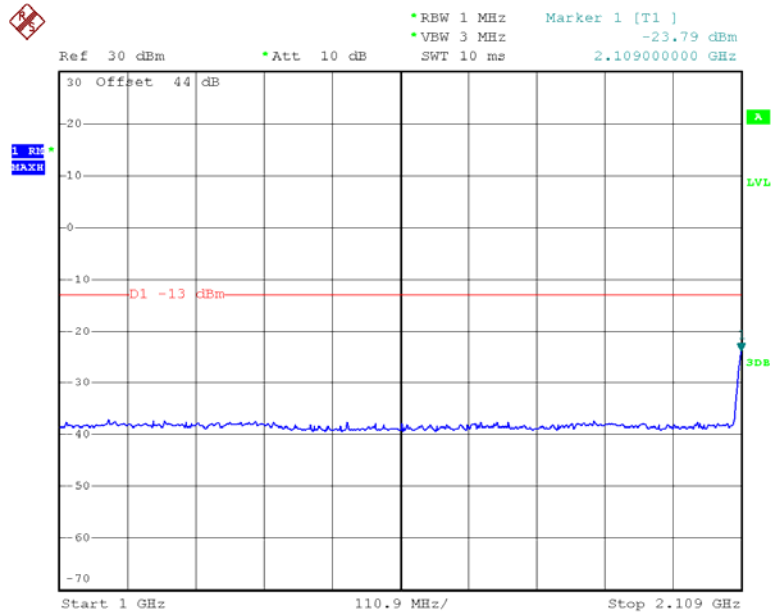


Date: 11.DEC.2015 22:46:25

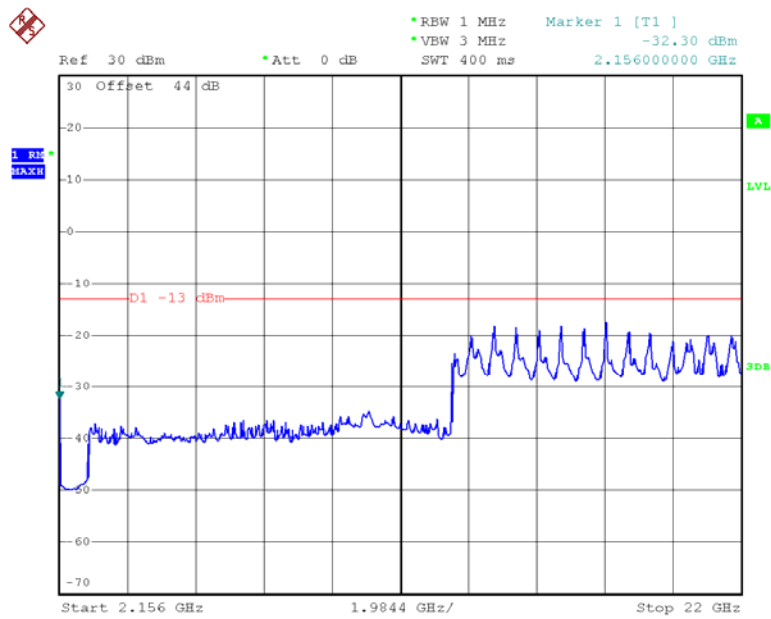


Date: 11.DEC.2015 23:09:17


High Channel GSM

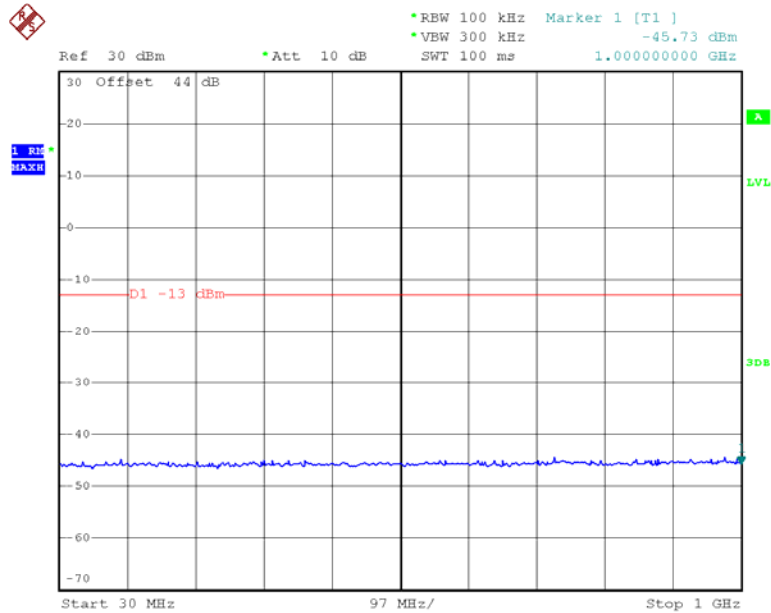

Date: 11.DEC.2015 22:17:26

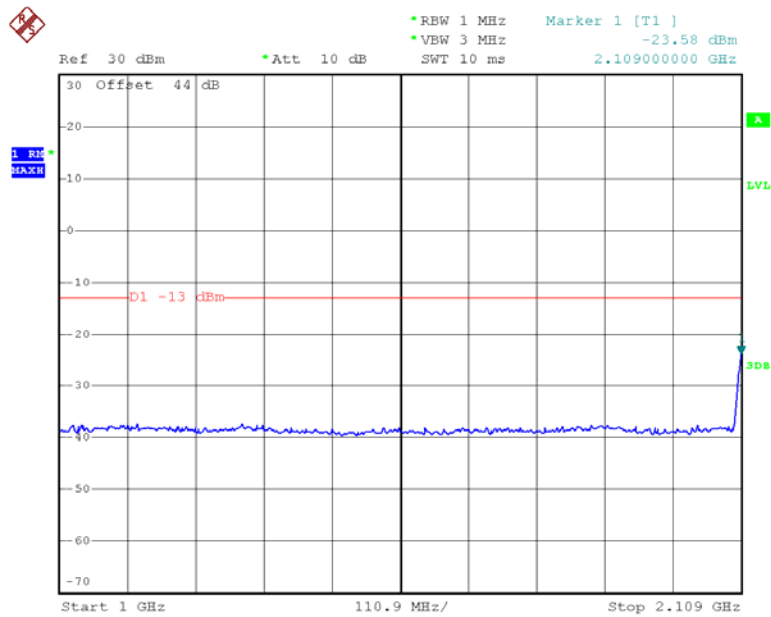

Date: 11.DEC.2015 22:54:05

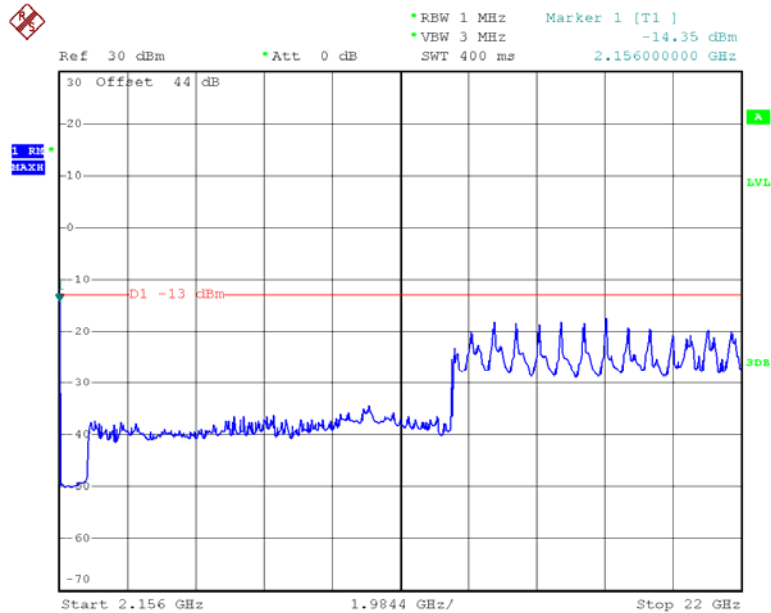

Date: 11.DEC.2015 23:08:26

§2.1053&§27.53- RADIATED SPURIOUS EMISSIONS

Applicable Standards

According to §2.1053 Measurements required: Field strength of spurious radiation.

According to §27.53(h) *AWS emission limits*—(1) *General protection levels*. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

Test Procedure

The transmitter was placed on a turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2015-11-23	2016-11-22
ETS-Lindgren	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2015-09-06	2016-09-06

*** Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	23.5℃
Relative Humidity:	47 %
ATM Pressure:	101.2 kPa

The testing was performed by Dean Liu on 2015-12-11.

Test mode: Transmitting

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			S.G. Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
Downlink, Test Frequency 2132.500MHz								
4265.000	H	38.03	-56.8	13.9	2.4	-45.3	-13.0	32.3
4265.000	V	39.06	-55.6	13.9	2.4	-44.1	-13.0	31.1
6397.500	H	46.59	-44.1	13.6	3.1	-33.6	-13.0	20.6
6397.500	V	48.57	-41.7	13.6	3.1	-31.2	-13.0	18.2
127.000	H	55.91	-43.4	0.0	0.3	-43.7	-13.0	30.7
67.000	V	51.59	-55	-6.6	0.2	-61.8	-13.0	48.8
Uplink, Test Frequency 1732.500MHz								
3465.000	H	33.25	-63.7	13.9	2.2	-52.0	13.0	65.0
3465.000	V	34.69	-61.5	13.9	2.2	-49.8	13.0	62.8
1200.000	H	34.74	-65.9	7.3	1.3	-59.9	-13.0	46.9
1600.000	V	34.45	-67.5	10.1	1.2	-58.6	-13.0	45.6
124.000	H	52.06	-46.9	0.0	0.3	-47.2	-13.0	34.2
127.000	V	56.48	-49.8	0.0	0.3	-50.1	-13.0	37.1

Note:

- 1) Absolute Level = SG Level - Cable loss + Antenna Gain
- 2) Margin = Limit- Absolute Level

DECLARATION LETTER**Product Similarity Declaration**

To Whom It May Concern,

We, **JDTECK INC**, hereby declare that our **JDTECK Industrial Repeater**, Model Number: **JDIR-37-87-AWS** is electrically identical with the Model **JDIR-40-90-AWS** that was certified by **Bay Area Compliance Laboratories Corporation**. They are named differently due to different output power levels and gains achieved by adjusting the potentiometers inside. However they have the same design, PCB board and work diagrams.

The **JDIR-40-90-AWS** repeater has a factory preset maximum output power of UL 19dBm/ DL 43dBm and maximum gain of UL 85dB/ DL 90dB. However, some users maybe want to use lower power due to different coverage requirements. The 37dBm power is used in some smaller applications. When the output power is preset at UL 19dBm / DL 43dBm and maximum gain of UL 85dB/ DL 90dB, then the model should be **JDIR-40-90-AWS**; When the output power is preset at UL 17dBm / DL 37dBm and maximum gain of UL 85dB/ DL 87dB, then the model should be **JDIR-37-87-AWS**.

We have summarized the differences in below table for your better understanding:

Item	Model Number	Max. Power UL/DL	Max. Gain UL/DL
1	JDIR-37-87-AWS	17dBm/37dBm	85dB/87dB
2	JDIR-40-90-AWS	19dBm/43dBm	85dB/90dB

Please contact me if there is any question.

Sincerely Yours,

Dennison Jurawan

Technical Sales Manager

******* END OF REPORT *******