

ANTENNA TEST REPORT

Test Place

Company Name	UL Japan, Inc. Ise EMC Lab.
Address	4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 Japan
Telephone Number	+81-596-24-8999

Equipment Under Test (EUT)

Description	Data Logger
Manufacturer	TandD Corporation
Model Number	TR42A(n)
Frequency of Operation	2402 MHz to 2480 MHz
Antenna Type	Chip Antenna


For the shape of the antenna is refer to Internal Photo.

Test Procedure


Test configuration	EUT was placed on a platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The measurements were performed for both vertical and horizontal antenna polarization with the Spectrum Analyzer. The setup are shown in Figure 1.
Test procedure	Step 1 The tests have been measured in semi anechoic chamber at the distance of 3 m between the Substitution Antenna and the measuring Antenna, both Antennas were placed for the height 1.5 m. The Substitution Antenna has been connected to the Signal Generator. Step 2 The output power of the Signal Generator was setting value calculated by compensating the finite difference in the Antenna gain of Substitution Antenna. Step 3 The electric field strength at the distance of 3 m is received via the measurement antenna, and the reference value at that time is measured with a spectrum analyzer. Step 4 The measurements were performed for both vertical and horizontal antenna polarization. Step 5 Exchanged the Substitution Antenna to the EUT, the output power of the Signal Generator was setting value calculated by 0 dBm at the input of EUT. Step 6 The EUT was rotated a full revolution and recorded the electric field strength for each degree. Step 7 Calculate and record the difference from the value recorded in Step 6 to the value recorded in Step 3. Step 8 The measurement in steps 5 to 7 repeated with both vertical and horizontal antenna polarization, each position of XY, YZ and ZX-plane of EUT.

Figure 1: Test Setup

Setup for step 1 to 4

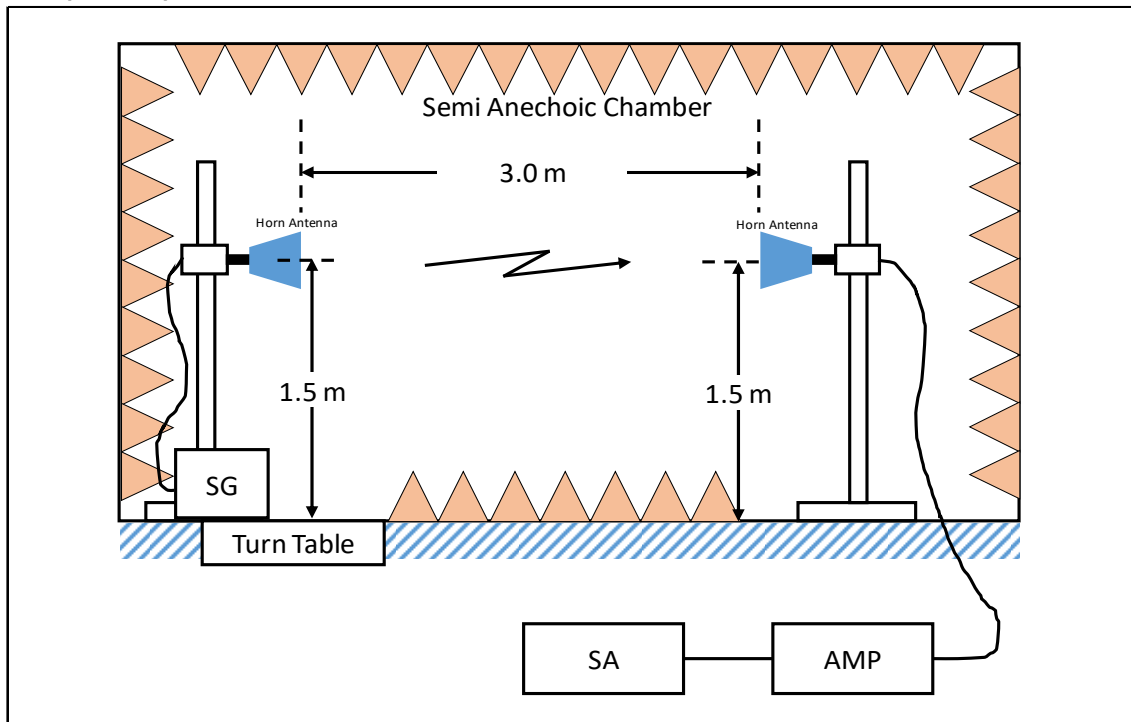

Setup after step 5

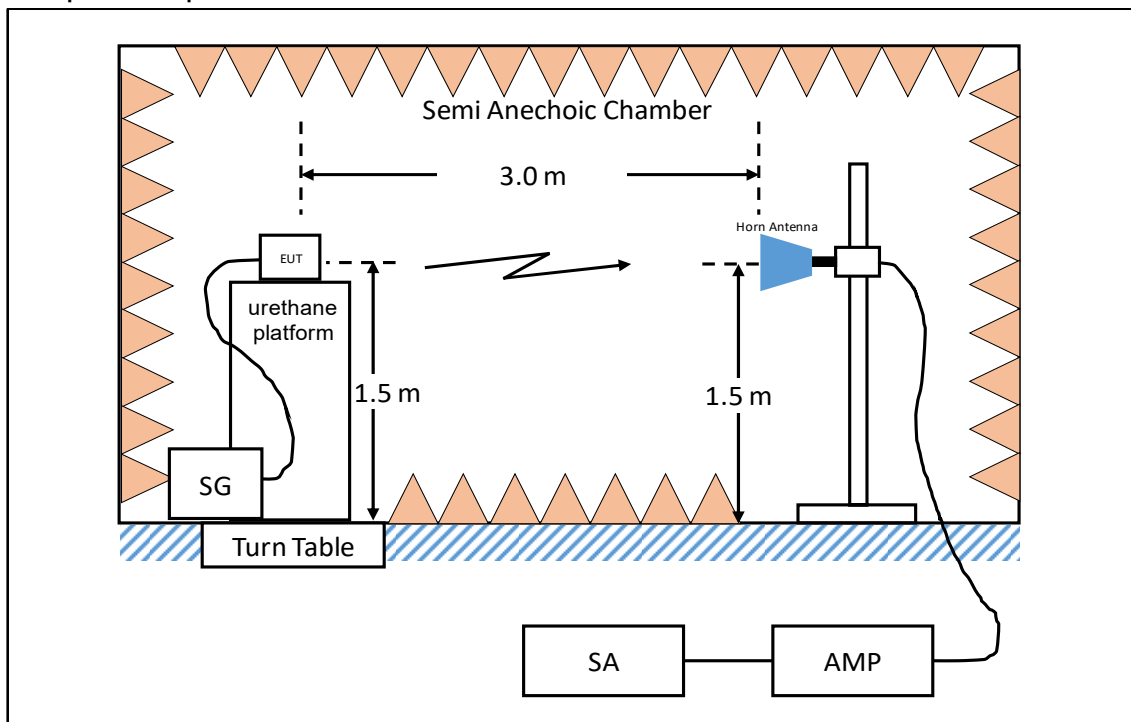


SG: Signal Generator
SA: Spectrum Analyzer
AMP: Pre Amplifier

Test Data

Antenna Pattern and Gain

Test place
Semi Anechoic Chamber
Date
Temperature / Humidity
Engineer
Mode

Ise EMC Lab.
No.4
September 9, 2024
21 deg. C / 53 % RH
Yuichiro Yamazaki
Tx

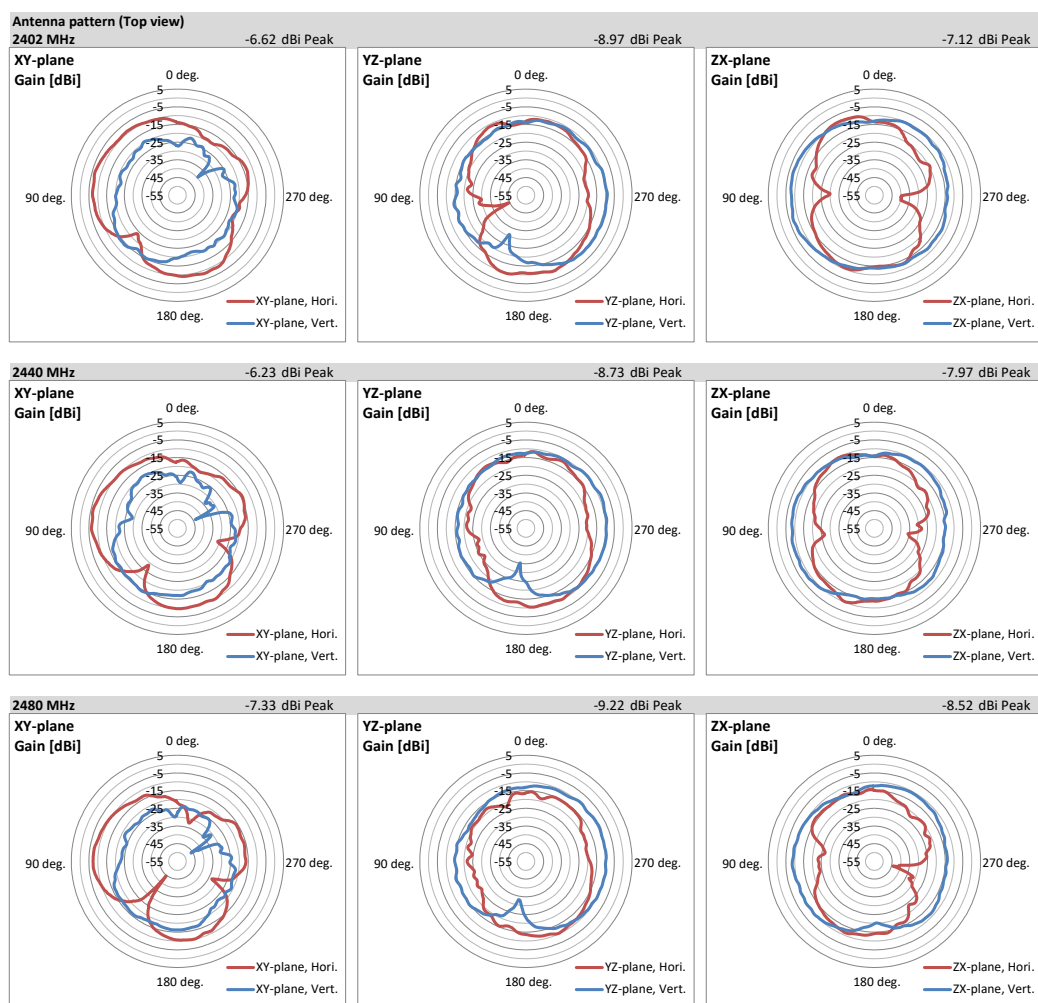

Antenna gain [UNIT: dBi]

Peak	2402	2440	2480
Frequency [MHz]	2402	2440	2480
Peak gain	-6.62	-6.23	-7.33

Average	2402	2440	2480
Frequency [MHz]	2402	2440	2480
XY-plane Hori.	-11.18	-11.92	-13.16
XY-plane Vert.	-19.79	-19.77	-20.48
Avg (H/V)	-13.63	-14.27	-15.43
YZ-plane Hori.	-13.81	-14.50	-16.22
YZ-plane Vert.	-12.67	-12.53	-12.78
Avg (H/V)	-13.20	-13.40	-14.16
ZX-plane Hori.	-14.63	-15.36	-16.67
ZX-plane Vert.	-10.66	-11.19	-11.91
Avg (H/V)	-12.21	-12.79	-13.66
Total	-12.97	-13.45	-14.36

Hori. : Horizontal
Vert. : Vertical

Average : Result of averaging the true value of the value of each degree of angle.

Yellow highlighted area: Maximum Antenna Gain [dBi]

Test Instruments

Test Equipment

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
APG	142011	AC4_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	2023/12/13	24
APG	244710	Thermo-Hygrometer	HIOKI E.E. CORPORATION	LR5001	231202104	2024/01/25	12
APG	141545	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	51201148	2024/02/01	12
APG	142230	Measure, Tape, Steel	KOMELON	KMC-36	-	-	-
APG	142017	AC4_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-10005	2023/04/14	24
APG	141899	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY46180655	2024/05/09	12
APG	141507	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	258	2023/11/20	12
APG	246001	Microwave Cable	Huber+Suhner	SF103/11PC35/11PC35/1000mm / SF126E/5000mm	800673(1m) / 610204(5m)	2024/03/06	12
APG	141581	MicroWave System Amplifier	Keysight Technologies Inc	83017A	00650	2023/10/05	12
APG	141894	Signal Generator	Rohde & Schwarz	SMC100A	103408	2023/10/05	12
APG	141414	Microwave Cable	Junkosha	MWX221	1207S407	2024/07/06	12
APG	141514	Horn Antenna 1-18GHz	Schwarzbeck Mess-Elektronik OHG	BBHA9120D	01611	2024/06/25	12

***Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.**

**The expiration date of the calibration is the end of the expired month.
As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.**

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item: APG: Antenna Pattern and Gain

Photographs of Test Setup

Test setup (Overall view)

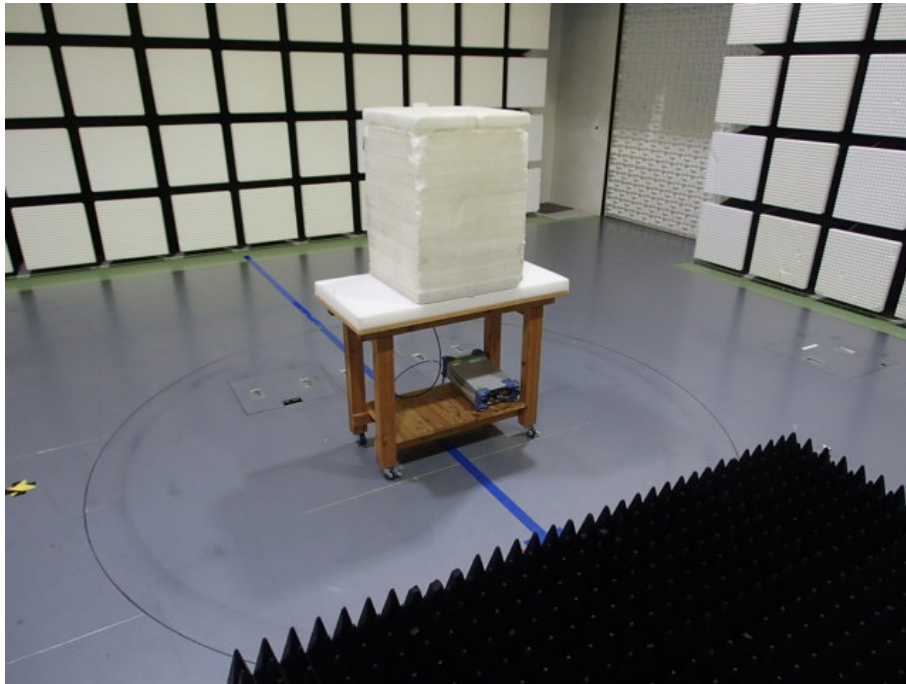


Photo 1


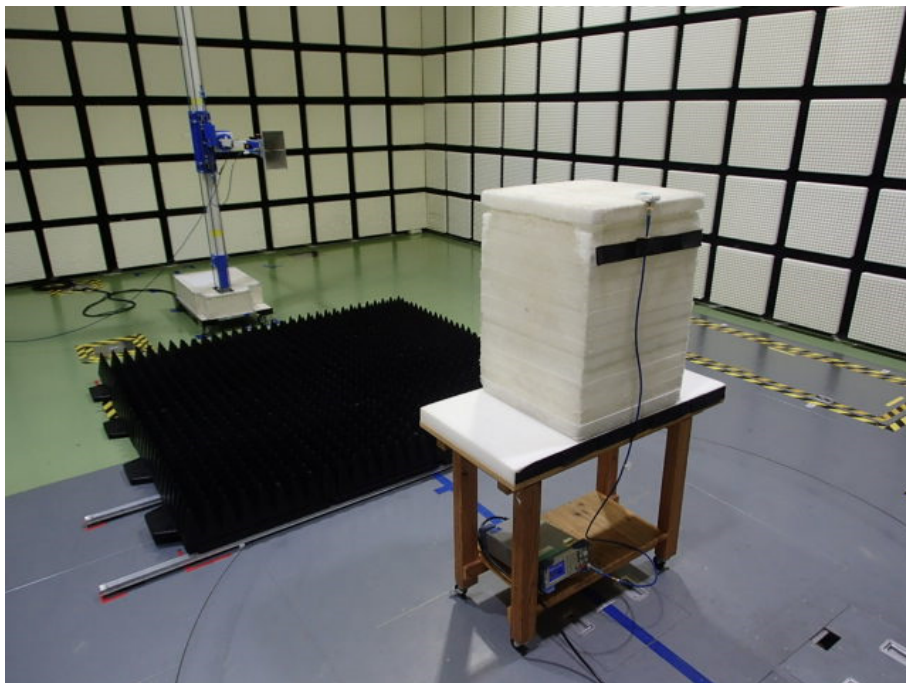


Photo 2

Test setup (Top view)

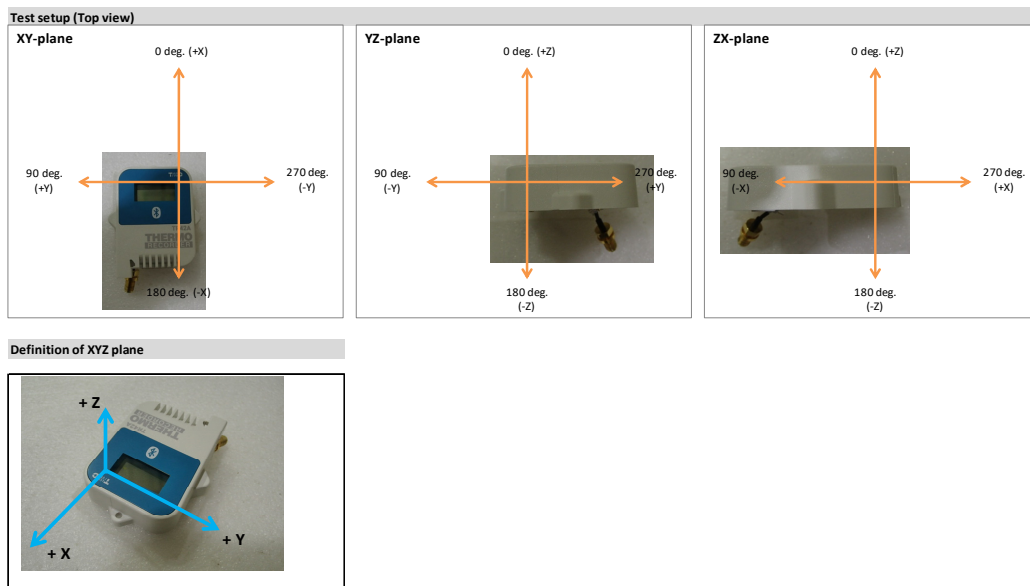

*The photo shows the connection cable to Signal Generator removed.

End of Report