




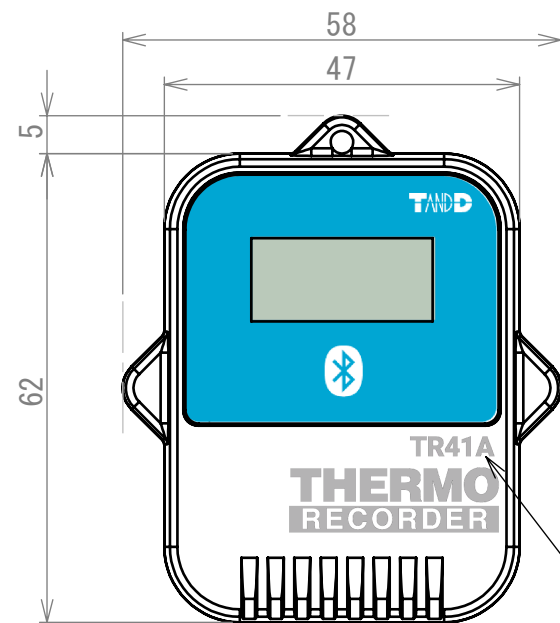


<TR41A>

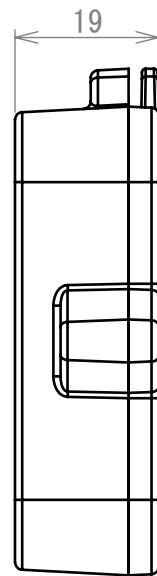


PMN

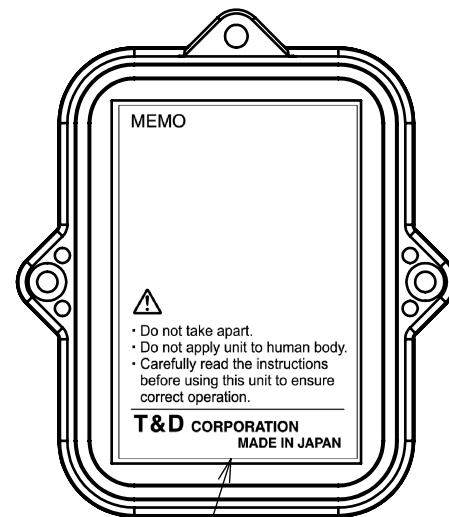


Caution Label

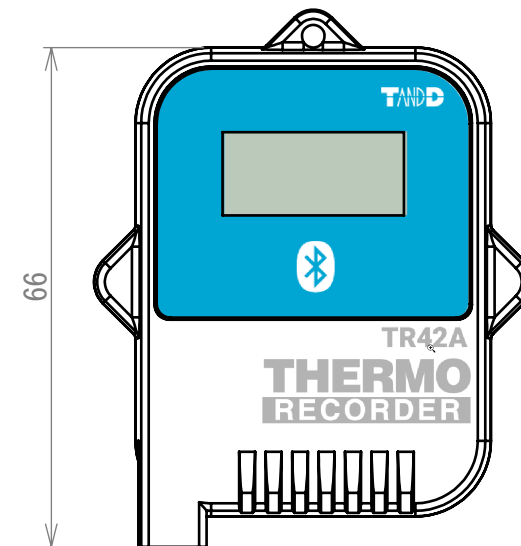

<TR42A>

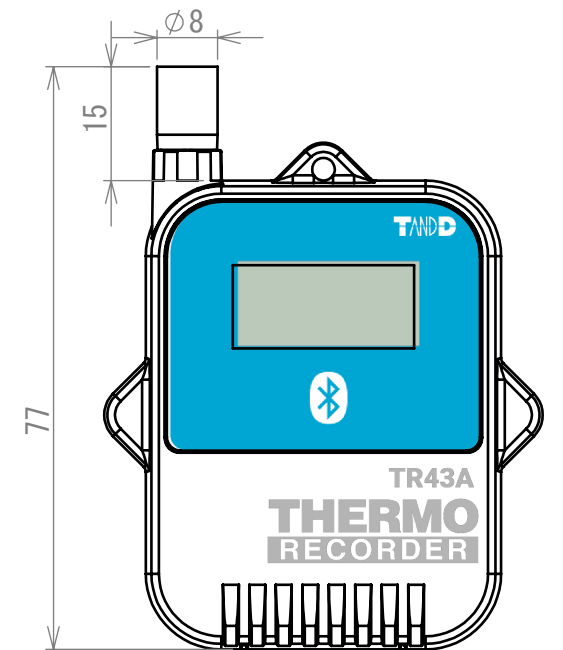

<TR43A>



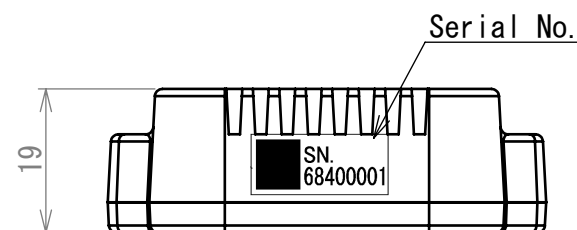


Serial No.

Certification Label

The FCC/ISED certification label is attached inside the battery box. After purchasing the data logger, the user will see this label when inserting the batteries.

FCC/ISED 4pt

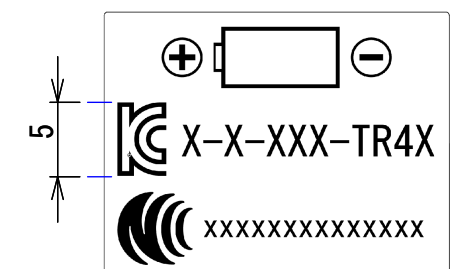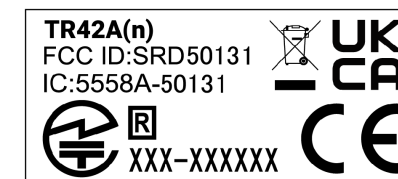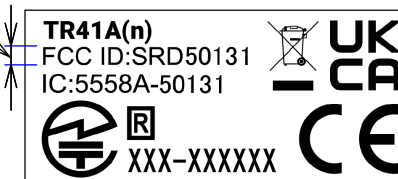


Certification Label Scale(2 : 1)

- Material: PET thickness:0.05mm
- Base: White Text color: Black
- Surface: Laminated

will be replaced by the official certification number after the product is certified

The label cannot be peeled off easily within the product lifetime because:
 • It is laminated.
 • It is attached inside the battery box.
 It makes difficult to contact with any materials or environmental effects.

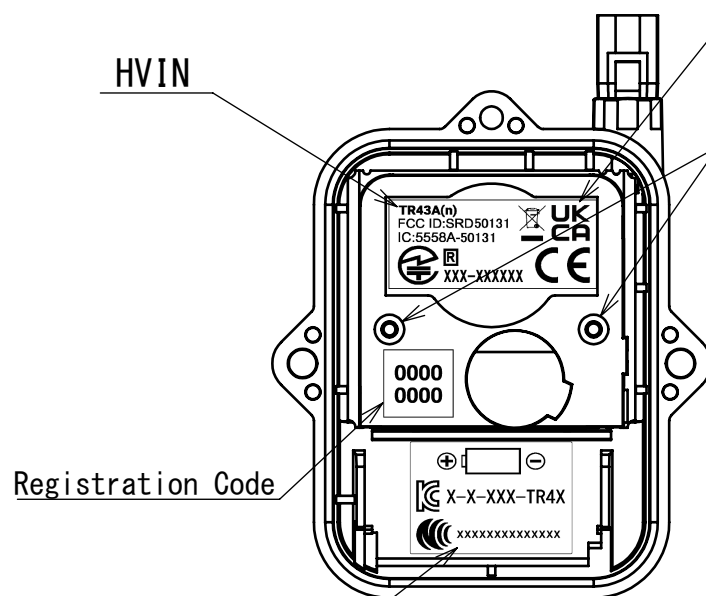

Tamper-proof Pan Head LR Machine Screw(x2)

Registration Code

Certification Label

Material

Upper Case, Lower Case : Polycarbonate

SABIC 「LEXAN EXL9330-WH9A302」 Min.thickness : 1mm

Display Panel : Polycarbonate

TEIJIN KASEI 「Panlite L-1225-Z-100」 Min.thickness : 1.5mm

Doc.No.851-0811-7160

△3					材料							処理	
△2					公差	0	0.5	6	30	120	350	品名	TR4xA (海外) nRF 外観図
△1						0.5	6	30	120	350	1000		
			24.09.05	担当		±0.05	±0.1	±0.2	±0.3	±0.5	±0.8		
		内 容				設計	製図		検図		承認		
					福田				株式会社 ティアンドディ		製品コード		
									尺 数				
									度 1:1		量		