



# PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA

Tel. 410.290.6652 / Fax 410.290.6554

<http://www.pctestlab.com>



## CERTIFICATE OF COMPLIANCE FCC PART 15.249 Certification

**Applicant Name:**

TandD Corporation  
5652-169 Sasaga  
Matsumoto, Nagano  
399-0033 Japan

**Date of Testing:**

January 26 - 31, 2007

**Test Site/Location:**

PCTEST Lab. Columbia, MD, USA

**Test Report Serial No.:**

0611281065.SRD

**FCC ID:** SRDRTR50**APPLICANT:** TandD Corporation**Model(s):** RTR-50**EUT Type:** Wireless Communication Port**Frequency Range:** 902.28 – 927.053 MHz**FCC Classification:** FCC Part 15 Low Power Transceiver, Rx Verified (DXT)**FCC Rule Part(s):** Part 15 Subpart C (15.249)

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

*PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.*

  
\_\_\_\_\_  
Randy Ortanez  
President


FCC ID: SRDRTR50	FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))		Reviewed by: Quality Manager
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port	Page 1 of 24

## T A B L E   O F   C O N T E N T S

---

FCC PART 15.249 MEASUREMENT REPORT.....	3
1.0 INTRODUCTION.....	4
1.1 EVALUATION PROCEDURE.....	4
1.2 SCOPE.....	4
1.3 PCTEST TEST LOCATION.....	4
2.0 PRODUCT INFORMATION .....	5
2.1 EQUIPMENT DESCRIPTION.....	5
2.2 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....	5
3.0 DESCRIPTION OF TEST .....	6
3.1 CONDUCTED EMISSIONS.....	6
3.2 RADIATED EMISSIONS .....	7
4.0 ANTENNA REQUIREMENTS.....	8
5.0 TEST EQUIPMENT CALIBRATION DATA.....	9
6.0 TEST RESULTS .....	10
6.1 20DB BANDWIDTH MEASUREMENT.....	11
6.2 RADIATED FUNDAMENTAL MEASUREMENTS .....	13
6.3 RADIATED HARMONIC MEASUREMENTS.....	14
6.4 RADIATED SPURIOUS MEASUREMENTS .....	15
6.5 LINE-CONDUCTED TEST DATA.....	17
7.0 CONCLUSION .....	19
EXHIBIT A – LABELING REQUIREMENTS.....	20
EXHIBIT B – TEST SETUP PHOTOGRAPHS .....	21
EXHIBIT C – EUT INTERNAL PHOTOGRAPHS .....	22
EXHIBIT D – EUT EXTERNAL PHOTOGRAPHS .....	23
EXHIBIT E – USER'S MANUAL .....	24

FCC ID: SRDRTR50		FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))		Reviewed by: Quality Manager
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port		Page 2 of 24



# MEASUREMENT REPORT


## FCC Part 15.249

### A. § 2.1033 General Information

**APPLICANT:** TandD Corporation  
**APPLICANT ADDRESS:** 5652-169 Sasaga  
**Matsumoto, Nagano, 399-0033 Japan**  
**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.  
**TEST SITE ADDRESS:** 6660-B Dobbin Road, Columbia, MD 21045 USA  
**FCC RULE PART(S):** Part 15 Subpart C (15.249)  
**MODEL NAME:** RTR-50  
**FCC ID:** SRDRTR50  
**Test Device Serial No.:** N/A  Production  Pre-Production  Engineering  
**FCC CLASSIFICATION:** FCC Part 15 Low Power Transceiver, Rx Verified (DXT)  
**DATE(S) OF TEST:** January 26 - 31, 2007  
**TEST REPORT S/N:** 0611281065.SRD

### A.1 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC-2451).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EVDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: SRDRTR50	FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))		Reviewed by: Quality Manager
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port	Page 3 of 24

## 1.0 INTRODUCTION

### 1.1 Evaluation Procedure

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2003) was used in the measurement of the **RTR-50 Wireless Communication Port** FCC ID: SRDRTR50.

Deviation from measurement procedure.....**None**


### 1.2 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

### 1.3 PCTEST Test Location

The map at the right shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity are, the Baltimore-Washington Interntl (BWI) airport, the city of Baltimore and the Washington, DC area. (see Figure 1.3-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 27, 2006 and Industry Canada.

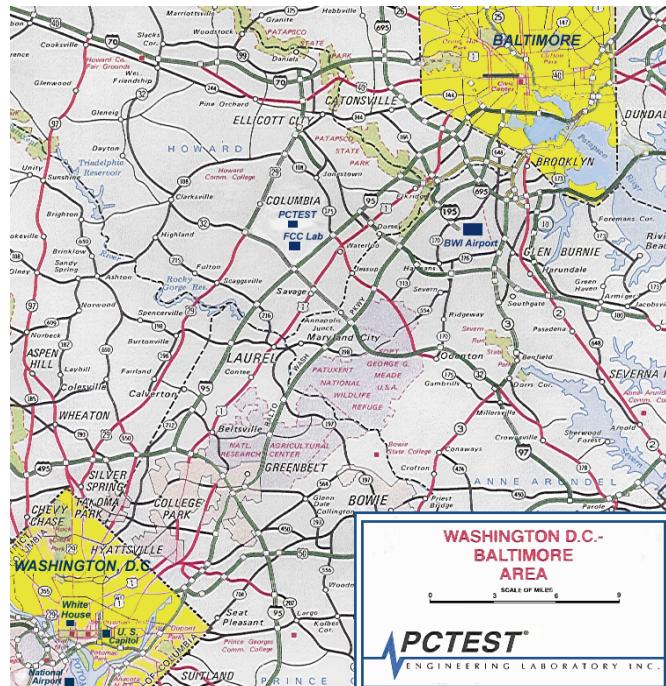

**Figure 1.3-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area**

FCC ID: SRDRTR50	FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))		Reviewed by: Quality Manager
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port	Page 4 of 24

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Wireless Communication Port FCC ID: SRDRTR50**. The RTR-50 is designed to control and collect data from wireless data loggers. Data is then sent from the RTR-50 to a computer system via the USB or RS-232 communication port. The RTR-50 can also be set as a wireless bridge and send the data to another RTR-50 device.

The RTR-50 is power via an AC power adapter or from 2 "AA" batteries.

- The EUT consisted of the following components(s):

Manufacturer / Description	FCC ID	Serial Number
Wireless Communication Port	SRDRTR50	N/A
Jameco AC Power Adapter Model: DBU060050	N/A	None

**Table 2-1. EUT Equipment Description**

### 2.2 EMI Suppression Device(s)/Modifications


EMI suppression device(s) added and/or modifications made during testing.

- None


FCC ID: SRDRTR50		FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))		Reviewed by: Quality Manager
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port		Page 5 of 24

## 3.0 DESCRIPTION OF TEST


### 3.1 Conducted Emissions




**Figure 3.1-1. Shielded Enclosure Line-Conducted Test Facility**

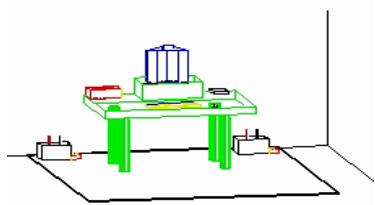

**Figure 3.1-2. Line Conducted Emission Test Set-Up**

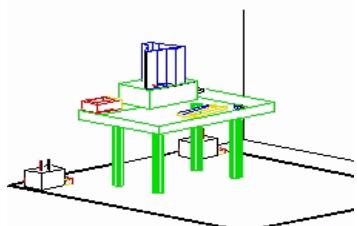

**Figure 3.1-3. Wooden Table & Bonded LISNs**

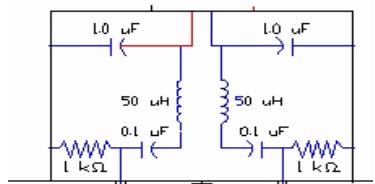

**Figure 3.1-4. LISN Schematic Diagram**

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure, manufactured by Ray Proof Series 81 (see *Figure 3.1-1*). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the sidewall of the shielded room (see *Figure 3.1-2*). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50µH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (See *Figure 3.1-3*). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filter (100dB 14Hz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with an inner diameter of 1/2". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the Solar LISN. The LISN schematic diagram is shown (See *Figure 3.1-4*). All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to CISPR quasi-peak and average mode. The bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Exhibit B. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator.

FCC ID: SRDRTR50		FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))		Reviewed by: Quality Manager
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port		Page 6 of 24

### 3.2 Radiated Emissions

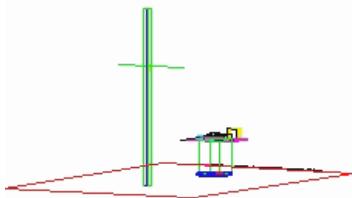


Figure 3.2-1. 3-Meter Test Site




Figure 3.2-2. Dimensions of Outdoor Test Site

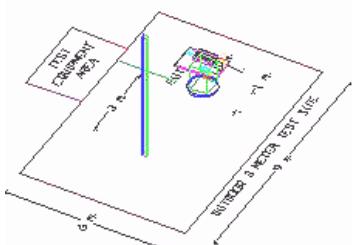


Figure 3.2-3. Turtable and System Setup

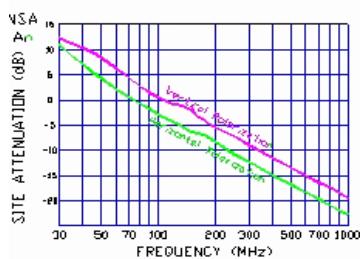


Figure 3.2-4. Normalized Site Attenuation Curves (H&V)

Preliminary measurements were made indoors at 1-meter using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, and turntable azimuth with respect to the antenna was noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using a bi-conical antenna and from 200 to 1000 MHz using a log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using Roberts™ Dipole antennas or horn antennas (see *Figure 3.2-1*). The test equipment was placed on a wooden and plastic bench situated on a 1.5m x 2m area adjacent to the measurement area (see *Figure 3.2-2*). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 100kHz for frequencies below 1GHz or 1MHz for frequencies above 1GHz. Above 1GHz the detector function was set to average mode (RBW = 1MHz, VBW = 10Hz).

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see *Figure 3.2-3*). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Exhibit B. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in *Figure 3.2-4*.

FCC ID: SRDRTR50		FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))	
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port	Reviewed by: Quality Manager

## 4.0 ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antennas of the Wireless Communication Port are **permanently attached**.
- There are no provisions for connection to an external antenna.

### Conclusion:

The **Wireless Communication Port FCC ID: SRDRTR50** unit complies with the requirement of §15.203.

The RTR-50 operates in the 902 to 928 MHz ISM band on channels 0 – 21 from 902.28072 to 927.053328MHz as shown in the following table

Ch.	Frequency (MHz)
0	902.28072
:	:
11	915.256848
:	:
21	927.053328

Table 4.1 Frequency/ Channel Operations

FCC ID: SRDRTR50	 PCTEST WIRELESS	FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))	 TAND	Reviewed by: Quality Manager
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port		Page 8 of 24

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model / Equipment	Calibration Date	Cal Interval	Calibration Due	Serial No.
Agilent	E4404B/E4407B ESA Spectrum Analyzer	04/20/06	Annual	04/20/07	US39210313
Agilent	N4010A Wireless Connectivity Test Set	06/11/06	Annual	06/11/07	GB46170464
EMCO	Model 3115 (1-18GHz) Horn Antenna	08/24/06	Biennial	08/23/08	9203-2178
EMCO	Model 3115 (1-18GHz) Horn Antenna	08/25/06	Biennial	08/24/08	9704-5182
Gigatronics	8657A Universal Power Meter	04/07/06	Annual	04/07/07	8650319
Gigatronics	80701A (0.05-18GHz) Power Sensor	04/11/06	Annual	04/11/07	1833460
Rohde & Schwarz	NRVS Power Meter	06/01/05	Biennial	06/01/07	835360/079
Rohde & Schwarz	NRV-Z53 Power Sensor	06/01/05	Biennial	06/01/07	846076/007
Rohde & Schwarz	CMU200 Base Station Simulator	04/20/06	Annual	04/20/07	836371/079
Agilent	HP 8566B (100Hz-22GHz)	12/21/06	Annual	12/21/07	3638A08713
Agilent	HP 8591A (9kHz-1.8GHz)	09/20/06	Annual	09/20/07	3144A02458
Agilent	E4448A (3Hz-50GHz)	09/22/06	Annual	09/22/07	US42510244
Gigatronics	8651A (50MHz-18GHz)	07/28/06	Annual	07/28/07	1834052
Gigatronics	80701A (0.05-18GHz) Power Sensor	08/04/06	Annual	08/04/07	1835299
Ailtech/Eaton	NM 37/57A (30MHz-1GHz)	06/07/06	Annual	06/07/07	0805-03334
Agilent	HP 85650A Quasi-Peak Adapter	12/21/06	Annual	12/21/07	2043A00301
Agilent	HP 8449B (1-26.5GHz) Pre-Amplifier	12/12/06	Annual	12/12/07	3008A00985
Agilent	HP 11713A Attenuation/Switch Driver	12/12/06	Annual	12/12/07	N/A
Agilent	HP 85685A (20Hz-2GHz) Preselector	12/12/06	Annual	12/12/07	N/A
Agilent	HP 8566B Opt. 462 Impulse Bandwidth	12/12/06	Annual	12/12/07	3701A22204
EMCO	3115 (1-18GHz) Horn Antenna	04/04/05	Biennial	04/04/07	9205-3874
Compliance Design	A100 Roberts Dipoles	08/31/05	Biennial	08/31/07	5118
EMCO	Dipole Pair	09/21/06	Biennial	09/20/08	23951
SOLAR	8012-50 LISN (2)	11/18/05	Biennial	11/18/07	0313233, 0310234
Agilent	HP 8495A (0-70dB) DC-4GHz Attenuator	N/A		N/A	N/A
-	263-10dB (DC-18GHz) 10 dB Attenuator	N/A		N/A	N/A
Pasternack	PE7000-6 6 dB Attenuator	N/A		N/A	N/A
Pasternack	PE2209-10 Bidirectional Coupler	N/A		N/A	N/A
-	No.165 (30MHz - 1000MHz) RG58 Coax Cable	N/A		N/A	N/A
-	No.166 (1000-26500MHz) Microwave RF Cable	N/A		N/A	N/A
-	No.167 (100kHz - 100MHz) RG58 Coax Cable	N/A		N/A	N/A

Table 5-1. Annual Test Equipment Calibration Schedule

FCC ID: SRDRTR50	FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))			Reviewed by: Quality Manager
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port	TANDD	
© 2007 PCTEST Engineering Laboratory, Inc.			Page 9 of 24	

## 6.0 TEST RESULTS

### Summary

The intentional radiator has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC performance and procedural standards. The radio was transmitting at full power on the specified channels. The channels tested are high, middle and low of the allocated bands. Final system data was gathered in a mode that tended to maximize emissions by varying the orientation of the EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization. The EUT was tested at the low, mid, and high channels of operation with the transmitter set for continuous transmission.

Method/System:

Continuous Transmission

Number of Channels:

22

FCC Part Section(s)	RSS Section	Test Description	Test Limit	Test Condition	Test Result
<b>TRANSMITTER MODE (TX)</b>					
2.1049	RSS-GEN	20dB Bandwidth	Emission must remain within the 902 – 928 MHz band	Radiated	PASS
15.249	RSS-210 A2.9	Radiated Fundamental	50mV/m @ 3 meters	Radiated at Low, Mid, and High Channels	PASS
15.249	RSS-210 A2.9	Radiated Harmonics	500μV/m @ 3 meters	Radiated to 10 <sup>th</sup> Harmonic	PASS
15.205 15.209	RSS-210 A2.9	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	< FCC 15.209 limits or < RSS-210 table 3 limits Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated (30M-1GHz) (1G-10GHz)	PASS
15.207	RSS-GEN [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits or < RSS-Gen table 2 limits	Line Conducted	PASS
<b>RECEIVER MODE (RX)</b>					
15.107	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits or < RSS-Gen table 2 limits	Line Conducted	PASS See Part 15B – DOC Report
15.109	RSS-Gen [7.2.3.2]	General Field Strength Limits (Restricted Bands and Radiated Emissions Limits)	< FCC 15.209 limits or < RSS-Gen limits [Section 6; Table1]	Radiated (30MHz-1GHz) (1-25 GHz)	PASS See Part 15B – DOC Report

Table 6-1. Summary of Test Results

FCC ID: SRDRTR50	FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))			Reviewed by: Quality Manager
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port	Page 10 of 24	

## 6.1 20dB Bandwidth Measurement

§2.1049; RSS-GEN 4.4

The bandwidth at 20dB down from the highest in-band spectral density (99% BW) is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

Channel	Frequency (MHz)	Bandwidth (kHz)
0	902.270	142.50
11	915.240	146.70
21	927.040	146.80

Table 6-2. Conducted Bandwidth Measurements



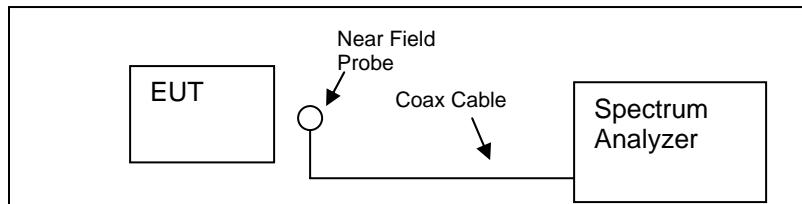


Figure 6-1. Test Instrument & Measurement Setup

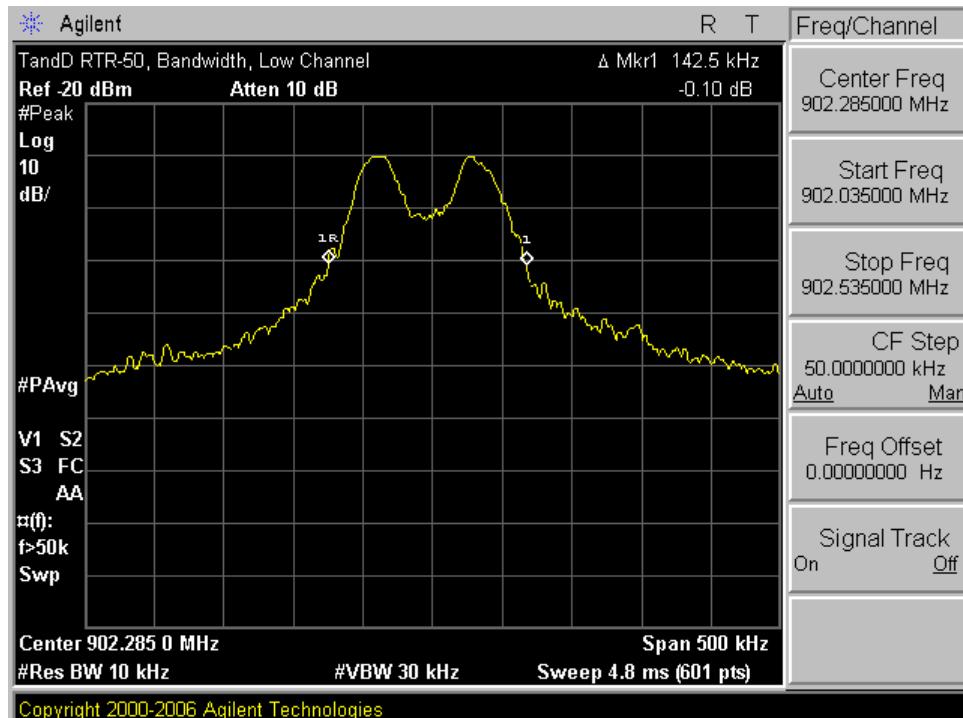


Plot 6-1. 20dB Bandwidth Plot (Ch. 0) (Low)

FCC ID: SRDRTR50		FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))		Reviewed by: Quality Manager
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port		Page 11 of 24

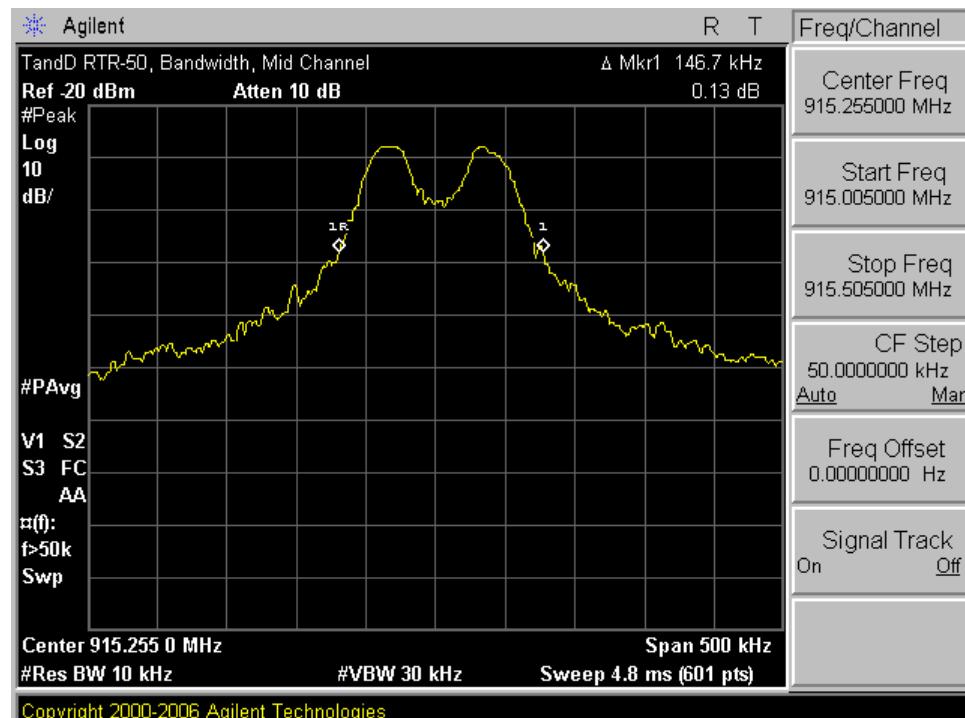

Plot 6-2. 20dB Bandwidth Plot (Ch. 11) (Mid)

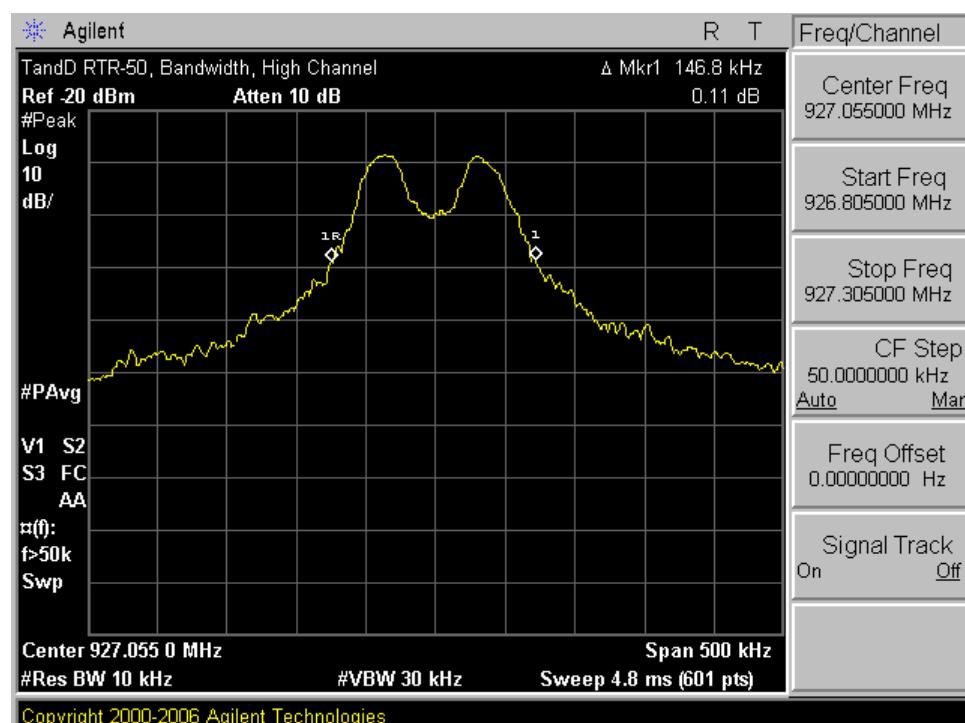

Plot 6-3. 20dB Bandwidth Plot (Ch. 21) (High)

FCC ID: SRDRTR50		FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))		Reviewed by: Quality Manager
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port		Page 12 of 24

## 6.2 Radiated Fundamental Measurements

§15.249; RSS-210 (A2.9)

Measurement is made while the EUT is operating in a continuous transmission mode. The measurements are performed on an Open Area Test Site at 3 meters. All measurements were performed with the EUT placed in three orthogonal planes with the worst case reported.

**Note:**

The EUT was tested at the low, mid, and high channels of operation with the transmitter set for continuous transmission.

Frequency (MHz)	Polarity H/V	Azimuth Degree	Ant. Height (m)	SA Level (dBm)	Ant. Corr. (dB/m)	Cable Corr. (dB)	Corr. Level (μV/m)	Limit (μV/m)	Margin (dB)
902.270	H	45.0	1.8	-49.4	28.5	3.2	29139.6	50000.0	-4.7
915.240	H	45.0	1.8	-50.1	28.7	3.2	27561.0	50000.0	-5.2
927.040	H	45.0	1.8	-50.0	28.9	3.2	28540.1	50000.0	-4.9
902.270	V	90.0	1.5	-52.0	28.5	3.2	21601.4	50000.0	-7.3
915.240	V	180.0	1.5	-48.9	28.7	3.2	31644.2	50000.0	-4.0
927.040	V	180.0	1.5	-52.7	28.9	3.2	20914.9	50000.0	-7.6

**Table 6-3. Radiated Fundamental Emission Measurements**

FCC ID: SRDRTR50		FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))		Reviewed by: Quality Manager
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port		Page 13 of 24

### **6.3 Radiated Harmonic Measurements**

**§15.249 / RSS-210 (A2.9)**

The EUT radiated harmonic emission levels were measured up to the 10<sup>th</sup> harmonic of the fundamental frequency of the transmitter and verified to be in compliance with the limits specified in §15.249 and RSS-210 (A2.9). All measurements were performed at 3 meters and with the EUT operating at the Low, Mid, and High channels.

Low Channel: 902.27MHz

Frequency (MHz)	Polarity H/V	Azimuth Degree	Ant. Height (m)	SA Level (dBm)	Ant. Corr. (dB/m)	Cable Corr. (dB)	Corr. Level (µV/m)	Limit (µV/m)	Margin (dB)
1804.486	H	90.0	1.0	-93.8	27.1	4.3	170.3	500.0	-9.4
2706.922	V	90.0	1.5	-102.1	29.4	5.6	99.7	500.0	-14.0
3609.240	V	0.0	1.5	-110.9	31.7	6.7	52.5	500.0	-19.6
4511.280	H	0.0	1.0	-117.7	32.9	7.8	31.5	500.0	-24.0
5413.551	H	0.0	1.0	-117.8	33.6	8.9	38.9	500.0	-22.2

**Table 6-4. Harmonic Emissions, Low Channel**

Mid Channel: 915.24MHz

Frequency (MHz)	Polarity H/V	Azimuth Degree	Ant. Height (m)	SA Level (dBm)	Ant. Corr. (dB/m)	Cable Corr. (dB)	Corr. Level (µV/m)	Limit (µV/m)	Margin (dB)
1830.480	H	90.0	1.0	-90.7	27.1	4.4	246.3	500.0	-6.1
2745.720	H	45.0	1.8	-102.3	29.5	5.7	99.0	500.0	-14.1
3660.960	V	45.0	1.5	-108.7	31.8	6.7	69.0	500.0	-17.2
4576.200	H	0.0	1.0	-116.4	32.9	7.9	37.2	500.0	-22.6
5491.440	H	0.0	1.0	-117.2	33.7	9.0	42.5	500.0	-21.4

**Table 6-5. Harmonic Emissions, Mid Channel**

High Channel: 927.04MHz

Frequency (MHz)	Polarity H/V	Azimuth Degree	Ant. Height (m)	SA Level (dBm)	Ant. Corr. (dB/m)	Cable Corr. (dB)	Corr. Level (µV/m)	Limit (µV/m)	Margin (dB)
1854.080	V	67.5	1.5	-93.9	27.2	4.4	172.2	500.0	-9.3
2781.120	H	67.5	1.5	-102.6	29.6	5.7	97.0	500.0	-14.2
3708.160	H	45.0	1.5	-105.3	31.9	6.7	103.9	500.0	-13.6
4635.200	H	0.0	1.0	-116.8	33.0	8.0	36.0	500.0	-22.9
5562.240	H	0.0	1.0	-115.5	33.8	9.1	52.6	500.0	-19.6

**Table 6-6. Harmonic Emissions, High Channel**

FCC ID: SRDRTR50		FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))						Reviewed by: Quality Manager
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port					Page 14 of 24	

## **6.4 Radiated Spurious Measurements**

§15.249 / §15.209; RSS-210 (A2.9)

The EUT was tested from 9kHz and up to the 10<sup>th</sup> harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHZ. Above 1 GHz, average measurement was used, using RBW = 1MHz, VBW = 10Hz and linearly polarized horn antennas. All harmonics/spurs are at least 20dB below the highest emission in the authorized band using RBW = 100kHz. In addition, peak measurements were taken to ensure that the peak levels are not more than 20dB above the average limit. All out of band emissions, other than those created by the spreading sequence, data sequence, and the carrier modulation must not exceed the limits show in Table 6-4 per Section 15.209.

Frequency	Field Strength [ $\mu$ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 6-7. Radiated Limits**

FCC ID: SRDRTR50		FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))		Reviewed by: Quality Manager
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port		Page 15 of 24

## Radiated Spurious Measurements (Continued)

FREQ (MHz)	Level (dBm)	AFCL (dB/m)	POL (H/V)	Height (m)	Azimuth (angle)	F/S (μV/m)	Margin (dB)
135.000	-93.94	12.60	V	1.0	180.0	11.53	-22.3
169.250	-102.29	14.86	V	1.0	180.0	5.74	-28.4
233.750	-105.25	18.05	V	1.5	180.0	9.82	-26.2
295.130	-116.22	20.42	V	1.5	180.0	3.68	-34.8
398.750	-116.36	23.67	H	1.5	90.0	5.24	-31.7
467.130	-115.21	25.31	H	1.5	90.0	7.21	-28.9

**Table 6-8. Spurious Radiated Emission Measurements at 3-meters**

**NOTES:**

1. The antenna is manipulated through typical positions, polarity and length during the testing.
2. The EUT is supplied with the minimal AC voltage or/and a new/fully re-charged battery.
3. The spectrum is measured from 9kHz up to the 10<sup>th</sup> harmonic and the worst-case emissions are reported.
4. Above 960 MHz the limit is 500μV/m.
5. < -135 dBm is below the analyzer measurement floor level.
6. The peak emissions above 1 GHz are not more than 20 dB above the average limit.


FCC ID: SRDRTR50		FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))		Reviewed by: Quality Manager
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port		Page 16 of 24

## 6.5 Line-Conducted Test Data

§15.207; RSS-Gen (7.2.2)

Company : [TandD](#)  
 Model Number : [RTR-50](#)  
 FCC ID Code : [SRDRTR50](#)  
 Standard : [FCC Part 15B class B](#)

Power Source : [AC120V/60Hz](#)  
 Tested Date : [01/26/2007](#)  
 Test Engineer : [Greg Snyder](#)  
 Note : [Tx = 915.26MHz](#)

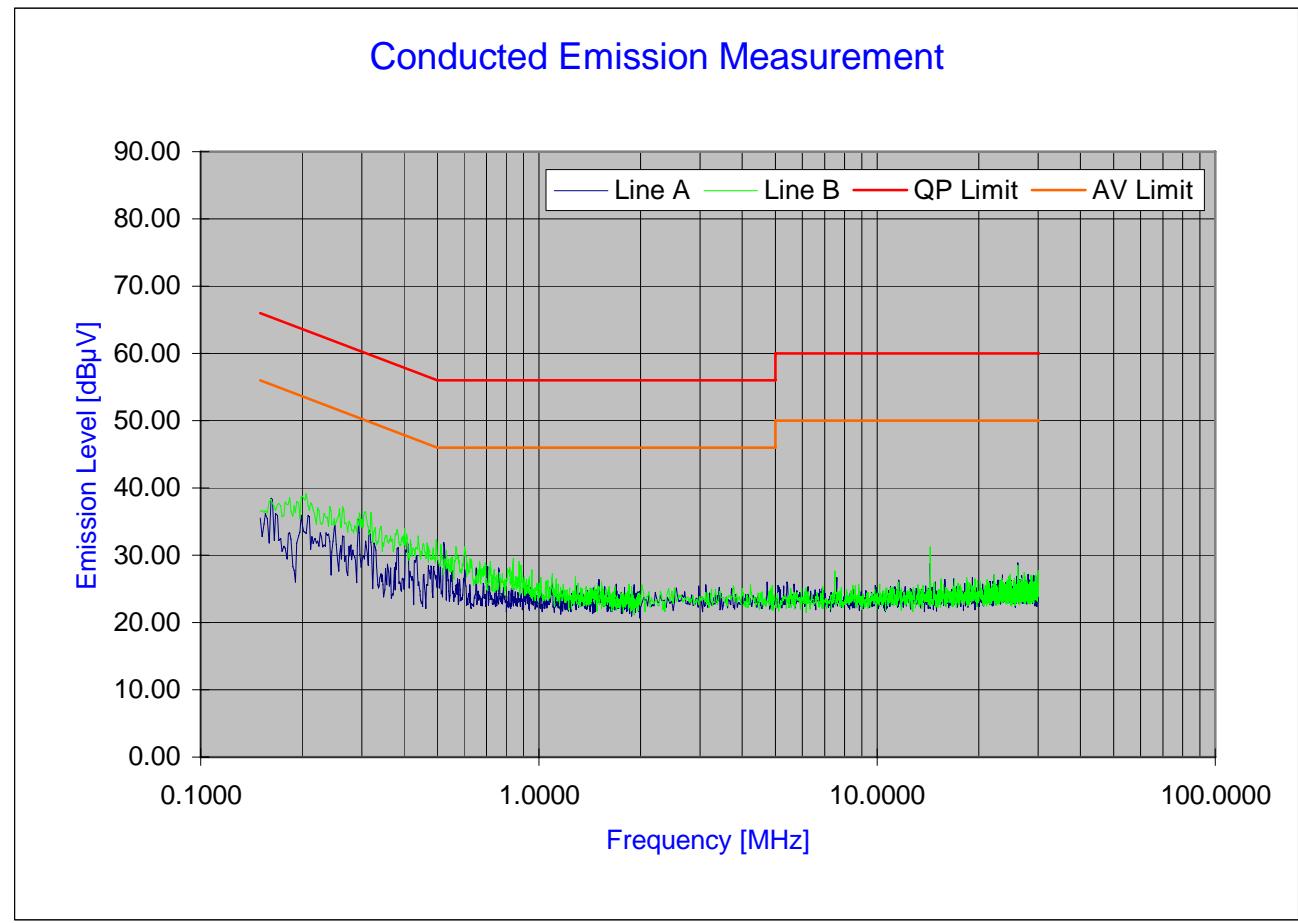

**Plot 6-4. Line Conducted Plot**

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.

FCC ID: SRDRTR50		FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))		Reviewed by: Quality Manager
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port		Page 17 of 24

## Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen (7.2.2)

No.	Line	Frequency [MHz]	Factor [dB]	QP [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]	Average [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]
1	A	0.150	8.20	50.13	66.00	-15.87	35.85	56.00	-20.15
2	A	0.233	7.81	38.64	62.34	-23.70	25.90	52.34	-26.44
3	A	0.280	7.64	33.64	60.83	-27.19	23.20	50.83	-27.63
4	A	0.298	7.58	31.94	60.30	-28.36	23.46	50.30	-26.84
5	A	0.367	7.52	26.75	58.57	-31.82	20.65	48.57	-27.92
6	A	0.400	7.49	25.62	57.86	-32.24	20.47	47.86	-27.39
7	A	0.427	7.47	25.04	57.31	-32.27	20.18	47.31	-27.13
8	A	0.498	7.43	24.46	56.04	-31.58	19.84	46.04	-26.20
9	A	0.506	7.43	24.48	56.00	-31.52	19.89	46.00	-26.11
10	A	0.522	7.42	24.59	56.00	-31.41	19.83	46.00	-26.17
11	B	0.188	7.99	48.22	64.14	-15.92	41.80	54.14	-12.34
12	B	0.246	7.77	41.13	61.91	-20.78	35.21	51.91	-16.70
13	B	0.290	7.61	36.64	60.52	-23.88	31.15	50.52	-19.37
14	B	0.299	7.58	36.02	60.26	-24.24	30.49	50.26	-19.77
15	B	0.323	7.55	33.87	59.62	-25.75	28.16	49.62	-21.46
16	B	0.362	7.52	31.97	58.68	-26.71	26.12	48.68	-22.56
17	B	0.383	7.50	31.50	58.22	-26.72	25.28	48.22	-22.94
18	B	0.420	7.48	29.77	57.46	-27.69	23.90	47.46	-23.56
19	B	0.481	7.44	28.04	56.32	-28.28	22.59	46.32	-23.73
20	B	0.602	7.40	28.24	56.00	-27.76	22.53	46.00	-23.47

Table 6-9. Line Conducted Data

**Notes:**

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Line A = Phase; Line B = Neutral
4. Traces shown in plot are made using a peak detector.
5. Deviations to the Specifications: None.

FCC ID: SRDRTR50	FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))			Reviewed by: Quality Manager
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port	TANDD	
© 2007 PCTEST Engineering Laboratory, Inc.		Page 18 of 24		REV 3.10BT 01/09/07

## 7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the TandD Model RTR-50 **Wireless Communication Port** FCC ID: **SRDRTR50** complies with Part 15 Subpart C (15.249) of the FCC Rules.

FCC ID: SRDRTR50	 PCTEST WIRELESS	FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))	 TANDD	Reviewed by: Quality Manager
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port		Page 19 of 24

## EXHIBIT A – LABELING REQUIREMENTS

Per 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(b)(2).

Please see attachment for FCC ID label and label location.



Figure A-1. FCC ID Label




Figure A-2. FCC DoC Label



Figure A-3. FCC ID Label Location

FCC ID: SRDRTR50	FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))		Reviewed by: Quality Manager
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port	Page 20 of 24



## EXHIBIT B – TEST SETUP PHOTOGRAPHS

FCC ID: SRDRTR50		FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))		Reviewed by: Quality Manager
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port		Page 21 of 24



## EXHIBIT C – EUT INTERNAL PHOTOGRAPHS

FCC ID: SRDRTR50		FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))		Reviewed by: Quality Manager
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port		Page 22 of 24



## EXHIBIT D – EUT EXTERNAL PHOTOGRAPHS

FCC ID: SRDRTR50		FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))		Reviewed by: Quality Manager
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port		Page 23 of 24



## EXHIBIT E – USER'S MANUAL

FCC ID: SRDRTR50	 PCTEST WIRELESS	FCC Pt. 15.249 CERTIFICATION TEST REPORT (Part 15 Low Power Transceiver, Rx Verified (DXT))	 TAND	Reviewed by: Quality Manager
Test Report S/N: 0611281065.SRD	Test Dates: January 26 - 31, 2007	EUT Type: Wireless Communication Port		Page 24 of 24