


# PCTEST ENGINEERING LABORATORY, INC.

6660 – B Dobbin Road . Columbia, MD 21045 . USA

Telephone 410.290.6652 / Fax 410.290.6654

<http://www.pctestlab.com> (email: [randy@pctestlab.com](mailto:randy@pctestlab.com))



## CERTIFICATE OF COMPLIANCE

FCC Part 15.249 Certification

**MANUFACTURER NAME & ADDRESS:**

TandD Corporation  
5652-169, Sasaga, Matsumoto City  
Nagano, 399-0033 JAPAN

**DATE & LOCATION OF TESTING:**

Date(s) of Tests: November 17-18, 2004  
Test Report S/N: TX.241117643-R1.SRD  
Test Site: PCTEST Lab, Columbia, MD

**FCC ID:** SRDRTR5X

**APPLICANT:** TandD Corporation


**SUMMARY:**


Model No.(s): RTR-51, RTR-52, RTR-53, RVR-521  
Equipment EUT Type: 900 MHz Data Recorder  
Frequency Range: 902.28 – 927.64 MHz  
FCC Classification: FCC Part 15 Low Power Transceiver, Rx Verified (DXT)  
FCC Rule Part(s): Parts 15.249 (Subpart C – Intentional Radiator)  
Test Device Serial No.: S/N: 0

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C-63.4-2001. If the EUT contains any additional embedded transmitters, then those transmitters were active during all tests. All models were evaluated and the worst case data was reported (Model: RTR-52). The JBC portion of this EUT is covered in the DOC report.

I authorize and attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

*PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.*

  
Alfred Cirwthian  
Vice President Engineering

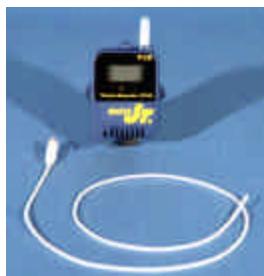

## TABLE OF CONTENTS

ATTESTATION STATEMENTS.....	1
FCC PART 15.249 MEASUREMENT REPORT COVER PAGE .....	2
1.0 INTRODUCTION.....	3
1.1 EVALUATION PROCEDURE .....	3
1.2 SCOPE .....	3
1.3 PCTEST TEST LOCATION .....	3
2.0 PRODUCT INFORMATION.....	4
2.1 EQUIPMENT DESCRIPTION.....	4
2.2 ENCLOSURE .....	4
2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS .....	4
3.0 DESCRIPTION OF TEST .....	5
3.1 CONDUCTED EMISSIONS.....	5
3.2 RADIATED EMISSIONS.....	6
4.0 ANTENNA REQUIREMENTS.....	7
5.0 TEST EQUIPMENT CALIBRATION DATA.....	8
EXHIBIT A. SUMMARY.....	9
EXHIBIT A. RADIATED FUNDAMENTAL & HARMONIC MEASUREMENTS .....	10-12
EXHIBIT A. RADIATED SPURIOUS MEASUREMENTS .....	13
EXHIBIT A. EQUIPMENT DESCRIPTION .....	14
EXHIBIT A. LINE CONDUCTED.....	15-16
EXHIBIT B. LABELING REQUIREMENTS.....	17-18
EXHIBIT C. BLOCK DIAGRAM/SCHEMATICS.....	19
EXHIBIT D. PARTS LIST.....	20
EXHIBIT E. OPERATIONAL DESCRIPTION.....	21
EXHIBIT F. TEST SETUP PHOTOGRAPHS.....	22
EXHIBIT G. EUT EXTERNAL/INTERNAL PHOTOGRAPHS.....	23
EXHIBIT H. USER'S MANUAL .....	24

PCTEST LAB TEST REPORT 15.249		FCC CERTIFICATION REPORT			Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder	FCC ID: SRDRTR5X	Page i of i	

**Attestation Statements**

PCTEST LAB TEST REPORT 15.249		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder	FCC ID: SRDRTR5X	Page 1 of 24

# MEASUREMENT REPORT

## A. General Information

APPLICANT	TandD Corporation			
APPLICANT ADDRESS	5652-169, Sasaga, Matsumoto City Nagano, 399-0033 JAPAN			
TEST SITE	PCTEST ENGINEERING LABORATORY, INC.			
TEST SITE ADDRESS	6660-B Dobbin Road, Columbia, MD 21045 USA			
FCC RULE PART(S)	Parts 15.249 (Subpart C – Intentional Radiator)			
MODEL NAME	RTR-51, RTR-52, RTR-53, RVR-521			
FCC ID	SRDRTR5X			
Test Device Serial No.:	S/N: 0	<input type="checkbox"/> Production	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Engineering
FCC CLASSIFICATION	FCC Part 15 Low Power Transceiver, Rx Verified (DXT)			
DATE(S) OF TEST	November 17-18, 2004			
TESTS REPORT S/N:	TX.241117643-R1.SRD			

## A.1 Test Facility / NVLAP Accreditation

Measurements were performed at PCTEST Engineering Lab in Columbia, MD 21045, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC 2451).
- PCTEST Lab is accredited by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) in EMC, Telecommunication, and FCC for satisfactory compliance with criteria established in Title 15, Part 285 Code of Federal Regulations. (NVLAP Lab code: 100431-0).
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules.
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.

PCTEST LAB TEST REPORT 15.249		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder	FCC ID: SRDRTR5X	Page 2 of 24

## 1.0 INTRODUCTION

### 1.1 Evaluation Procedure

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2001) and FCC Public Notice dated July 12, 1995 entitled "Guidance on Measurement for Direct Sequence Spread Spectrum System" were used in the measurement of **900 MHz Data Recorder**.

**Deviation from measurement procedure.....NONE**

### 1.2 Scope

Measurement & determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

### 1.3 PCTEST Test Location

The map at the right shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity are, the Baltimore-Washington Intert'l (BWI) airport, the city of Baltimore and the Washington, DC area. (see Figure 1.2-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 2002.

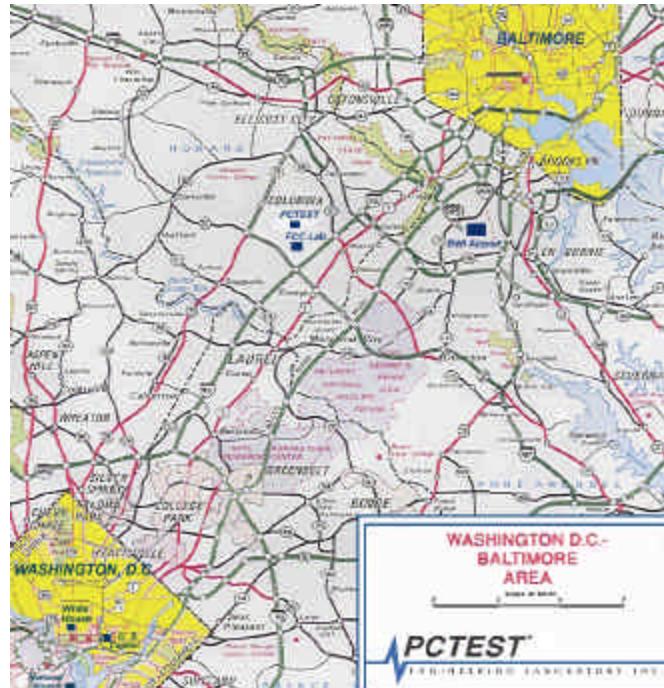


Figure 1.3-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

PCTEST LAB TEST REPORT 15.249		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder	FCC ID: SRDRTR5X	Page 3 of 24

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **900 MHz Data Recorder**. The EUT consisted of the following component(s):

**Table 2-1. EUT Equipment Description**

Manufacturer / Model / Description	Serial Number
900 MHz Data Recorder	0

### 2.2 Enclosure

The EUT incorporates the following enclosure:

- None – The EUT is self-contained in its own enclosure.

### 2.3 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing.

- none

PCTEST LAB TEST REPORT 15.249	 <b>FCC CERTIFICATION REPORT</b>		Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder	FCC ID: SRDRTR5X

## 3.0 DESCRIPTION OF TEST

### 3.1 Conducted Emissions

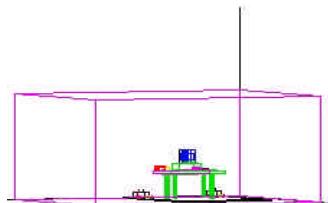


Figure 3.1-1. Shielded Enclosure Line-Conducted Test Facility

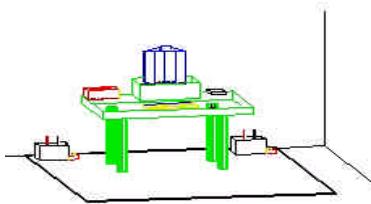


Figure 3.1-2. Line Conducted Emission Test Set-Up

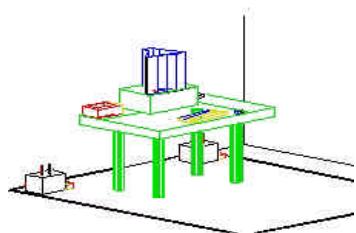


Figure 3.1-3. Wooden Table & Bonded LISNs

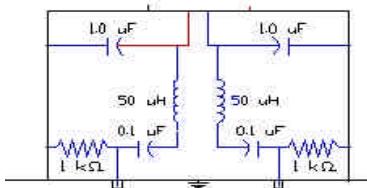


Figure 3.1-4. LISN Schematic Diagram

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure. It is manufactured by Ray Proof Series 81 (see Figure 3.1-1). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the sidewall of the shielded room (see Figure 3.1-2). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (See Figure 3.1-3). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filters (100dB 14Hz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with an inner diameter of 1/2". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the Solar LISN. The LISN schematic diagram is shown (See Figure 3.1-4). All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1-meter length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 150kHz to 30Mhz with a 20msec. sweep time. The frequencies producing the maximum level were re-examined using an EMI/Field Intensity Meter and Quasi-Peak adapter. The detector function was set to CISPR quasi-peak and average mode. The bandwidth of the receiver was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H patter to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Exhibit M. Each EME reported was calibrated using the HP8640B signal generator.

PCTEST LAB TEST REPORT 15.249	 FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder	FCC ID: SRDRTR5X

### 3.2 Radiated Emissions

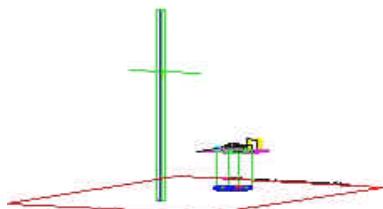


Figure 3.2-1. Meter Test Site

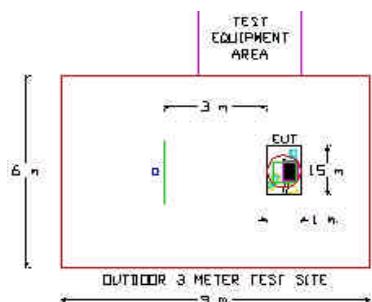


Figure 3.2-2. Dimensions of Outdoor Test Site

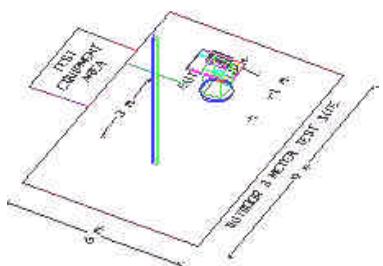


Figure 3.2-3. Turntable and System Setup

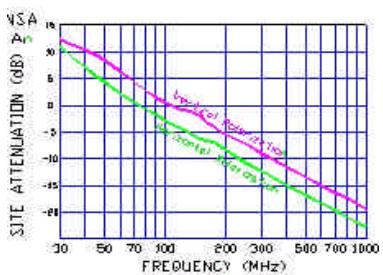


Figure 3.2-4. Normalized Site Attenuation Curves (H&V)

Preliminary measurements were made indoors at 1 meter using broadband antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna was noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using biconical antenna and from 200 to 1000 MHz using log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3 meter test range using Roberts™ Dipole antennas or horn antenna (see Figure 3.2-1). The test equipment was placed on a wooden and plastic bench situated on a 1.5 x 2 meter area adjacent to the measurement area (see Figure 3.2-2). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined and investigated using EMI/Field Intensity Meter and Quasi-Peak Adapter. The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 100kHz or 1 MHz depending on the frequency or type of signal. Above 1GHz the detector function was set to CISPR average mode (RBW = 1MHz, VBW = 10Hz).

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 3.2-3). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Exhibit E-G. Each EME reported was calibrated using the HP8640B signal generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 3.2-4.

PCTEST LAB TEST REPORT 15.249	 FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder	FCC ID: SRDRTR5X

## 4.0 ANTENNA REQUIREMENTS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the applicant can be used with the device. The use of a permanently attached antennas or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with this requirement.

The antenna is a **quarter wave helical**.

There are no provisions for connection to an external antenna.

**Conclusion:**

The **TandD Data Recorder** unit complies with the requirement of §15.203.

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
Low	902.28	:	:
:	:	:	:
:	:	:	:
:	:	:	:
:	:	:	:
Mid	915.26	High	927.64

## 5.0 Frequency/ Channel Operations

PCTEST LAB TEST REPORT 15.249	 <b>FCC CERTIFICATION REPORT</b>		Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder	FCC ID: SRDRTR5X

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

TYPE	MODEL	CAL. DUE DATE	CAL. INTERVAL	SERIAL No.
Microwave Spectrum Analyzer	HP 8566 (100Hz-22GHz)	12/05/04	Annual	3638A08713
Microwave Spectrum Analyzer	HP 8566 (100Hz-22GHz)	04/17/05	Annual	2542A11898
Spectrum Analyzer/Tracking Generator	HP 8591A (9kHz-1.8GHz)	06/02/05	Annual	3144A02458
Spectrum Analyzer	HP 8591A (9kHz-1.8GHz)	10/15/05	Annual	3108A02053
Spectrum Analyzer	HP 8594A (9kHz-2.9GHz)	11/02/05	Annual	3051A00187
Signal Generator	HP 8650B (500Hz-1GHz)	06/02/05	Annual	2232A19558
Signal Generator	HP 8640B (500Hz-1GHz)	06/02/05	Annual	1851A09816
Signal Generator	Rohde & Schwarz (0.1-1GHz)	09/22/05	Annual	894215/012
Ailtech/Eaton Receiver	NM 37/57A-SL (30MHz-1GHz)	04/12/05	Annual	0792-03271
Ailtech/Eaton Receiver	NM 37/57A (30MHz-1GHz)	03/11/05	Annual	0805-03334
Ailtech/Eaton Receiver	NM 17/27A (0.1-32MHz)	09/17/05	Annual	0608-03241
Quasi-Peak Adapter	HP 85650A	08/09/05	Annual	2043A00301
Ailtech/Eaton Adapter	CCA-7 CISPR/ANSI QP Adapter	03/11/05	Annual	0194-04082
RG58 Coax Test Cable	No.167			n/a
Harmonic/Flicker Test System	HP 6841A (IEC 555-2/3)			3531A00115
Broadband Amplifier (2)	HP 8447D			1145A00470, 1937A03348
Broadband Amplifier	HP 8447F			2443A03784
Transient Limiter	HP 11947A (9kHz-200MHz)			2820A00300
Horn Antenna (2)	EMCO Model 3115 (1-18GHz)			9704-5182, 9205-3874
Horn Antenna	EMCO Model 3116 (18-40GHz)			9203-2178
Biconical Antenna (3)	Eaton 94455-1			1295, 1332, 1277
Log-Spiral Antenna (2)	Ailtech/Eaton 93490-1			0227, 1104
Log-Spiral Antenna	Singer 93490-1			147
Roberts Dipoles	Compliance Design (1 set) A100			5118
Ailtech Dipoles	DM-105A (1set)			33448-111
EMCO LISN (3)	3816/2, 3816/2, 3725/2			1077, 1079, 2099
50-ohm Terminator	n/a			n/a
Microwave Preamp 40dB Gain	HP 83017A (0.5-26.5GHz)			3123A00181
Microwave Cables	MicroCoax (1.0-26.5GHz)			n/a
Ailtech/Eaton Receiver	NM37/57A-SL			0792-03271
Spectrum Analyzer	HP 8591A			3034A01395
Modulation Analyzer	HP 8901A			2432A03467
NTSC Pattern Generator	Leader 408			0377433
Noise Figure Meter	HP 8970B, Ailtech 7510			3106A02189, TE31700
Noise Generator	Ailtech 7010			1473
Microwave Survey Meter	Holaday Model 1501 (2.45GHz)			80931
Digital Thermometer	Extech Instruments 421305			426966
Attenuator	HP 8495A (0-70dB) DC-4GHz			
Bi-Directional Coax Coupler	Narda 3020A (50-1000MHz)			
Shielded Screen Room	RF Lindgren Model 26-2/2-0			6710 (PCT270)
Shielded Semi-Anechoic Chamber	Ray Proof Model S81			R2437 (PCT278)
Environmental Chamber	Associated Systems 1025			PCT285
OATS	n/a	12/31/2004	Tri-annual	

Table 5-1. Annual Test Equipment Calibration Schedule

PCTEST LAB TEST REPORT 15.249	 FCC CERTIFICATION REPORT 	Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004    EUT Type: 900 MHz Data Recorder    FCC ID: SRDRTR5X	Page 8 of 24

## **EXHIBIT A – Test Results**

### **Summary**

The intentional radiator has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC performance and procedural standards.

The radio was transmitting at full power on the specified channels and at a data rate(s) specified above. The channels tested are high, middle and low of the allocated bands.

Final system data was gathered in a mode that tended to maximize emissions by varying the orientation of the EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Test Date(s):	November 17-18, 2004		
Test Engineer:	AI Cirwithian		
Method/System:	Low Power Transceiver, Rx Verified (DXT)		

FCC Part Section(s)	RSS 210 Section	Test Description	Test Limit	Test Condition
<b>TRANSMITTER MODE (TX)</b>				
15.249	6.2.2	Radiated Fundamental	50 millivolts/ m @ 3 meters	Radiated at Low, Mid, High channels
15.249	6.2.2	Radiated Harmonics	0.5 millivolts/ m @ 3 meters	Radiated to the 10 <sup>th</sup> Harmonic
15.205 15.209	6.2.1 6.3	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	< FCC 15.209 limits or < RSS-210 table 3 limits Emissions in restricted bands must meet the radiated limits detailed in 15.209	RADIATED (30MHz-1GHz) (1-25 GHz)
15.207	6.6	AC Conducted Emissions 150kHz – 30MHz	EN55022	Line Conducted
<b>RECEIVER MODE (RX)</b>				
15.207	7.4	AC Conducted Emissions 150kHz – 30MHz	EN55022	Line Conducted
15.209	7.3	General Field Strength Limits (Restricted Bands and Radiated Emissions Limits)	< FCC 15.209 limits or < RSS-210 table 3 limits	Radiated (30MHz-1GHz) (1-25 GHz)
<b>RF EXPOSURE (SAR or MPE)</b>				
2.1093/2.1091	RSS-102	SAR Test or MPE	1.6 W/kg or mw/cm <sup>2</sup>	3 Channels

**Table A-1. Summary of Test Results**

PCTEST LAB TEST REPORT 15.249		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder	FCC ID: SRDRTR5X	Page 9 of 24

## EXHIBIT A – Test Results (Cont.)

### Frequency Measurements (Fundamental & Harmonics)

§15.247(b) / §15.205 & §15.209

Operating Frequency: 902.28

Distance of Measurements: 3 Meters

Channel: Low

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (dBmV/m)	F/S (mV/m)	Margin (dB)
902.28	-45.5	32.0	H	93.5	47315.1	-0.5
1804.56	-86.0	31.0	H	52.0	398.1	-2.0
2706.84	-88.9	33.0	H	51.1	358.9	-2.9
3609.12	-104.5	36.5	H	39.0	89.1	-15.0
4511.40	-106.0	39.0	H	40.0	100.0	-14.0

Table A-6. Peak Radiated Measurements @ 3 meters

NOTES:

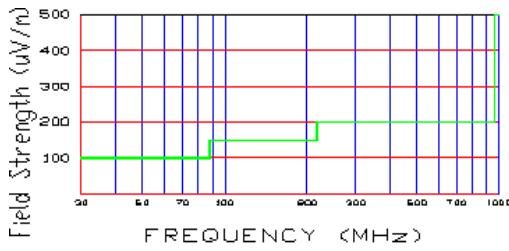


Figure A-5. Radiated limits at 3 meters.

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: \* = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported.
8. < -135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μV/m (54dBμ/m) at 3 meters radiated.

PCTEST LAB TEST REPORT 15.249		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder	FCC ID: SRDRTR5X	Page 10 of 24

## EXHIBIT A – Test Results (Cont.)

### Frequency Measurements (Fundamental & Harmonics)

§15.247(b) / §15.205 & §15.209

Operating Frequency: 915.25

Distance of Measurements: 3 Meters

Channel: Medium

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (dBmV/m)	F/S (mV/m)	Margin (dB)
915.26	-46.1	32.1	H	93.0	44668.4	-1.0
1830.51	-86.3	31.1	H	51.8	389.0	-2.2
2745.77	-89.0	33.1	H	51.1	358.9	-2.9
3661.02	-103.2	36.7	H	40.5	105.9	-13.5
4576.28	-105.3	39.0	H	40.8	109.6	-13.2

Table A-7. Peak Radiated Measurements @ 3 meters

NOTES:

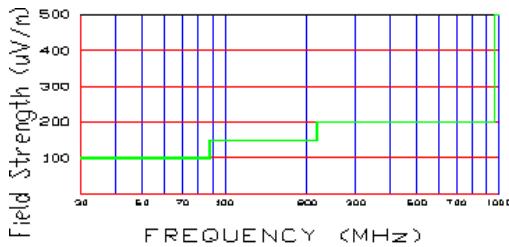


Figure A-6. Radiated limits at 3 meters.

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: \* = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported.
8. < -135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500  $\mu$ V/m (54dB $\mu$ /m) at 3 meters radiated.

PCTEST LAB TEST REPORT 15.249		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder	FCC ID: SRDRTR5X	Page 11 of 24

**EXHIBIT A – Test Results (Cont.)**

**Frequency Measurements (Fundamental & Harmonics)**

§15.247(b) / §15.205 & §15.209

Operating Frequency: 927.64

Distance of Measurements: 3 Meters

Channel: High

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	F/S (dBmV/m)	F/S (mV/m)	Margin (dB)
927.64	-46.3	32.3	H	93.0	44668.4	-1.0
1855.28	-86.0	31.4	H	52.4	416.9	-1.6
2782.92	-90.0	33.2	H	50.2	323.6	-3.8
3710.56	-106.2	36.7	H	37.5	75.0	-16.5
4638.20	-105.0	39.3	H	41.3	116.1	-12.7

Table A-8. Peak Radiated Measurements @ 3 meters

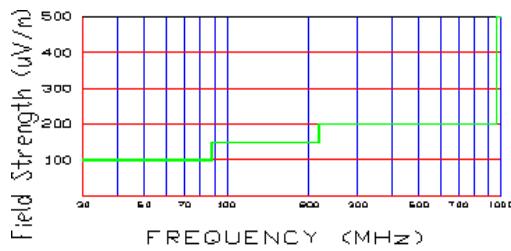


Figure A-7. Radiated limits at 3 meters.

**NOTES:**

1. All harmonics in the restricted bands specified in §15.205 are below the limit shown in Table A-19. (Note: \* = Restricted Band measured frequency)
2. All harmonics/spurs are at least 20 dB below the highest emission in the authorized band using RBW = 100kHz
3. Average Measurements > 1GHz using RBW = 1 MHz VBW = 10 Hz
4. The peak emissions above 1 GHz are not more than 20 dB above the average limit.
5. The antenna is manipulated through typical positions, polarity and length during the tests.
6. The EUT is supplied with nominal AC voltage or/and a new/fully-recharged battery.
7. The spectrum is measured from 9kHz to the 10<sup>th</sup> harmonic and the worst-case emissions are reported.
8. < -135 dBm are below the analyzer floor level.
9. Above 1 GHz, the limit is 500 μV/m (54dBμ/m) at 3 meters radiated.

PCTEST LAB TEST REPORT 15.249		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder	FCC ID: SRDRTR5X	Page 12 of 24

## EXHIBIT A – Test Results (Cont.)

### Radiated Spurious Measurements

§15.205 / §15.209

Distance of Measurements: 3 Meters

FREQ (MHz)	Level (dBm)	AFCL (dB/m)	POL (H/V)	Height (m)	Azimuth (° angle)	F/S (uV/M)	Margin (dB)
125.3	-84.8	11.9	V	2.2	90	50.8	-9.4
174.5	-86.5	13.4	V	2.1	90	49.6	-9.6
282.1	-182.1	20.0	H	1.5	210	65.4	-9.7
531.2	-97.5	26.7	H	1.6	80	64.6	-9.8
740.3	-98.5	30.5	V	1.3	70	89.2	-7.0
854.2	-96.5	32.0	H	1.1	150	133.4	-3.5

Table A-18. Radiated Measurements at 3-meters

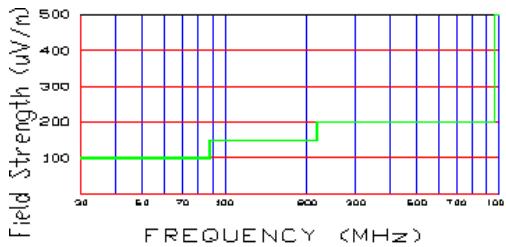


Figure A-17. Radiated limits at 3 meters

#### NOTES:

1. All emissions were investigated and the worst-case emissions are reported.
2. For hand-held devices, the EUT is rotated through three orthogonal axes to determine which configuration produces the maximum emissions.
3. The EUT is supplied with the minimal AC voltage or/and a new/fully re-charged battery.
4. The EUT was tested up to the 10<sup>th</sup> harmonic (25GHz) and no significant emission was found.
5. Above 1 GHz the limit is 500 $\mu$ V/m at 3 meters radiated.

PCTEST LAB TEST REPORT 15.249		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder	FCC ID: SRDRTR5X	Page 13 of 24

**EXHIBIT A – Test Results (Cont.)****Equipment Description**

The equipment under test (EUT) is the **TandD Corporation 900 MHz Data Receiver**.


- \* **Tx Freq. Range:** 902.28 – 927.64 MHz
- \* **Channels:** 1 Temperature Channels
- \* **Recording Capacity:** 16,000 readings x 1 Channel
- \* **Power:** Lithium Battery (LS14250(SAFT)) X 1
- \* **Dimensions:** H62 X W47 X D19mm (excluding protrusions/ antenna length 20mm) / with large capacity Battery Back D50mm
- \* **Weight:** Approx. 56g. (Including 1 Lithium Battery) / with large capacity Battery Pack: Approx. 109g.

PCTEST LAB TEST REPORT 15.249	FCC CERTIFICATION REPORT			Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder	FCC ID: SRDRTR5X	Page 14 of 24

## EXHIBIT A – Test Results (Cont.)

### Line-Conducted Test Data

§15.207

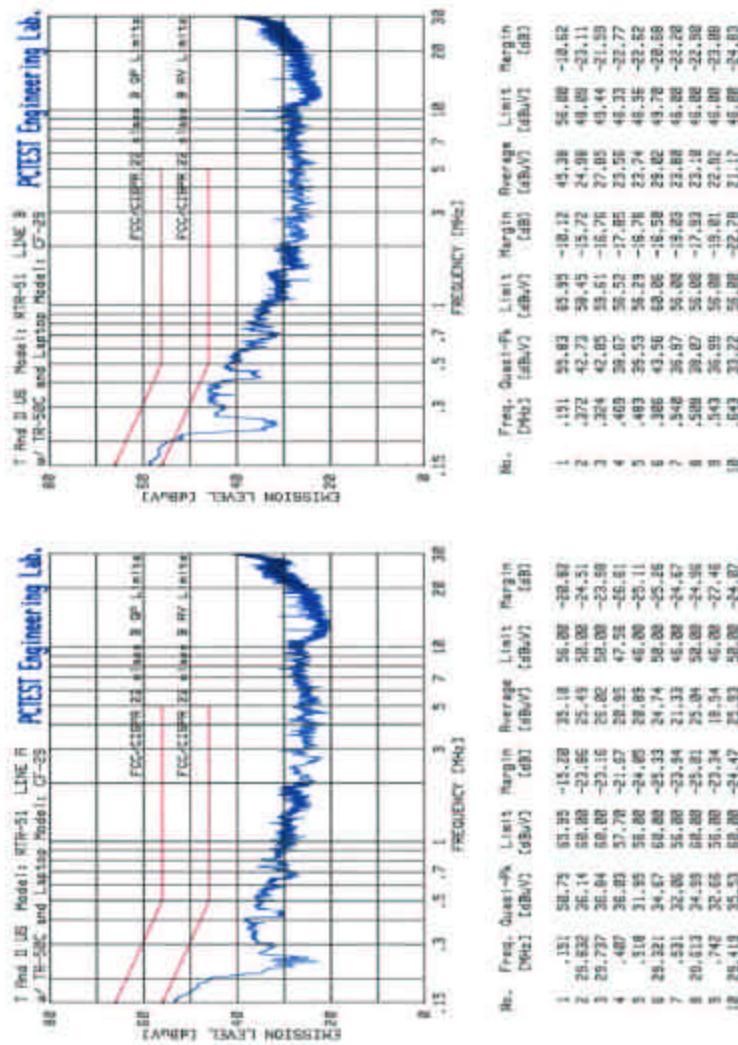

#### Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are Specified in EN55022.
3. Line A = Phase; Line B = Neutral
4. Deviations to the Specifications: *None.*


PCTEST LAB TEST REPORT 15.249	 FCC CERTIFICATION REPORT 	Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder

## EXHIBIT A – Test Results (Cont.)


### Line-Conducted Test Data

§15.207

PCTEST

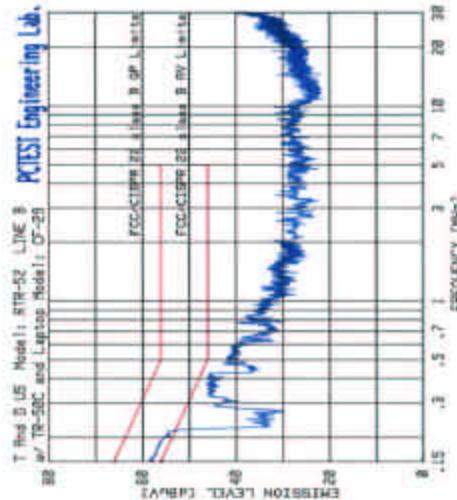

PCTEST

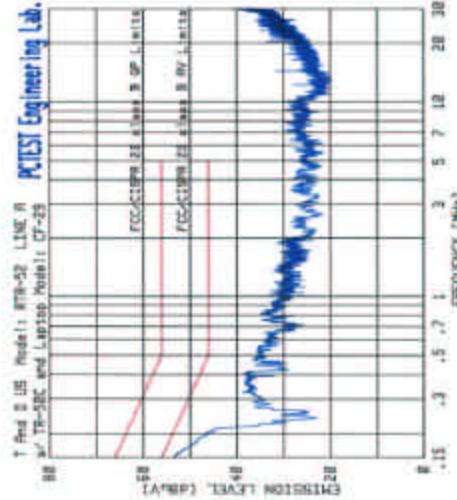

No.	Freq. (MHz)	Quasi-Peak Limits (dBuV1)	Margin (dBuV1)	Limit (dBuV2)	Margin (dBuV2)	No.	Freq. (MHz)	Quasi-Peak Limits (dBuV1)	Margin (dBuV1)	Limit (dBuV2)	Margin (dBuV2)	
1	1.151	55.35	-10.12	45.46	56.00	1	1.151	55.35	-10.12	45.46	56.00	
2	1.410	34.92	-22.72	67.73	-18.57	2	1.410	54.56	-83.13	42.53	54.59	-11.86
3	20.985	26.53	80.80	-23.41	35.98	3	4.484	43.84	57.29	-13.95	38.75	-13.84
4	4.484	36.21	57.76	-21.95	21.31	4	4.484	42.04	56.81	-19.57	23.51	-45.28
5	4.656	33.21	50.59	-23.39	20.34	5	4.656	33.79	56.20	-16.50	23.73	-32.51
6	5.396	55.87	51.53	-22.06	13.85	6	5.396	56.56	56.00	-19.50	21.05	-41.15
7	25.506	35.62	68.00	-24.40	25.56	7	25.506	69.97	-19.33	21.93	52.00	-19.27
8	25.688	25.91	80.00	-24.89	75.02	8	25.688	73.27	50.00	-22.23	19.97	-40.00
9	53.9	51.92	58.00	-24.70	13.92	9	53.9	55.48	56.00	-20.51	22.13	-45.00
10	58.67	58.67	56.79	-20.11	13.06	10	58.67	54.08	-21.26	21.12	46.00	-24.99

#### Notes:

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are Specified in EN55022.
3. Line A = Phase; Line B = Neutral
4. Deviations to the Specifications: *None.*

PCTEST LAB TEST REPORT 15.249		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder	FCC ID: SRDRTR5X	Page 16 of 24

**EXHIBIT B – Labeling Requirements****Sample Label & Location**

New Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19


The sample label shown below shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name, FCC ID, and the FCC logo must be displayed on the device per Section 15.19 (b)(2).



PCTEST LAB TEST REPORT 15.249	 <b>FCC CERTIFICATION REPORT</b>		Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder	FCC ID: SRDRTR5X

**EXHIBIT B – Labeling Requirements (Cont.)**

**Sample Label & Location**

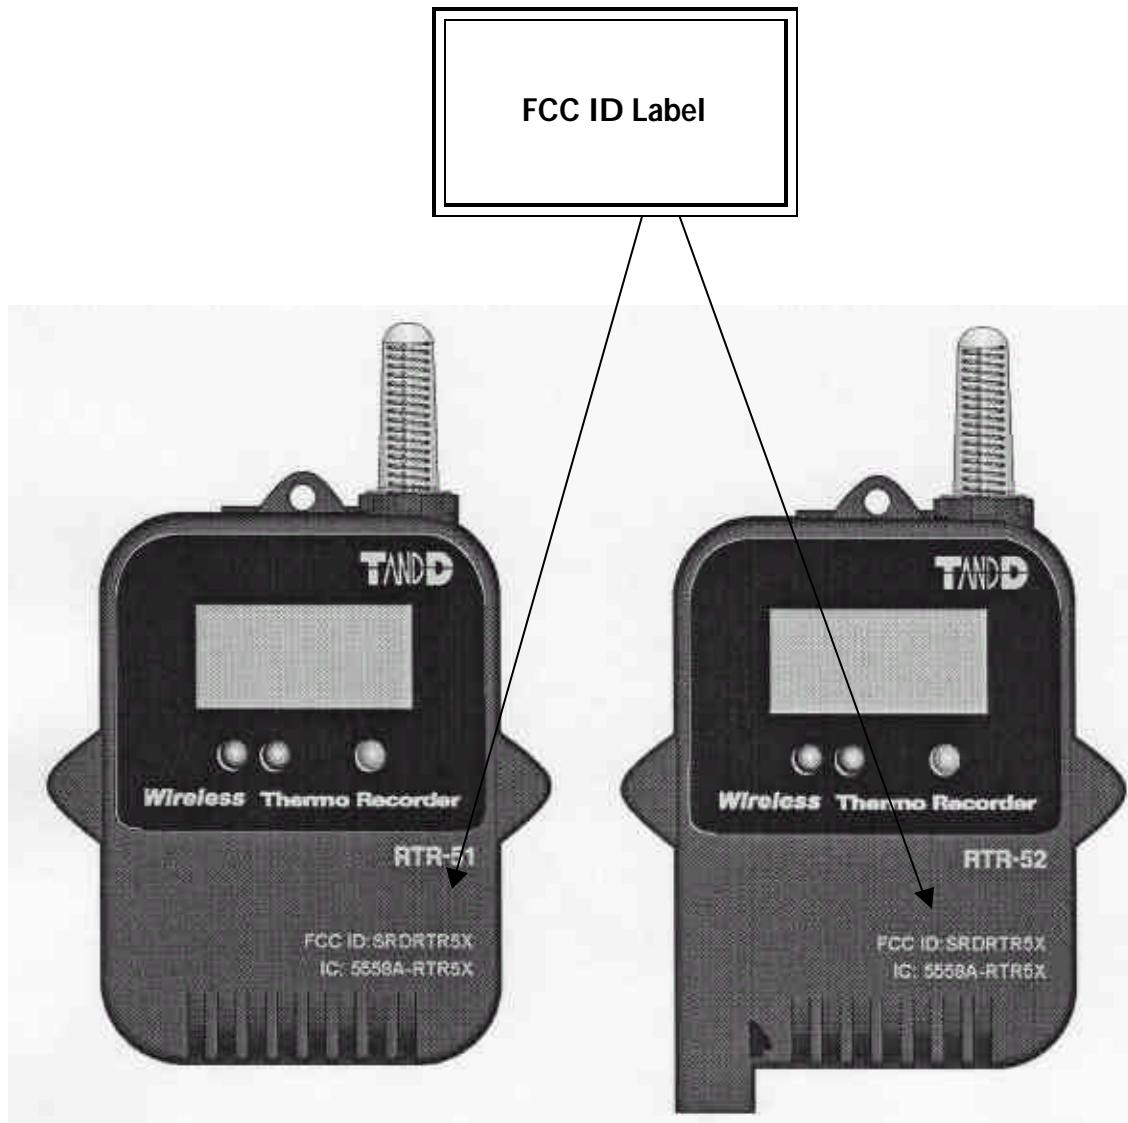

PCTEST LAB TEST REPORT 15.249	 FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder	FCC ID: SRDRTR5X

**EXHIBIT C – Block Diagram/Schematics**

PCTEST LAB TEST REPORT 15.249		FCC CERTIFICATION REPORT			Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder	FCC ID: SRDRTR5X	Page 19 of 24	

**EXHIBIT D – Parts List**

PCTEST LAB TEST REPORT 15.249		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder	FCC ID: SRDRTR5X	Page 20 of 24

**EXHIBIT E – Operational Description**

PCTEST LAB TEST REPORT 15.249		FCC CERTIFICATION REPORT			Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder	FCC ID: SRDRTR5X	Page 21 of 24	

**EXHIBIT F – Test Setup Photographs**

The Line-Conducted and Radiated Test Pictures show the worst-case configuration and cable placement with a minimum margin to the specifications.

PCTEST LAB TEST REPORT 15.249	 FCC CERTIFICATION REPORT 	Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder
		FCC ID: SRDRTR5X
		Page 22 of 24

**EXHIBIT G – EUT External/Internal Photographs**

PCTEST LAB TEST REPORT 15.249		FCC CERTIFICATION REPORT			Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder	FCC ID: SRDRTR5X	Page 23 of 24	

**EXHIBIT H – User's Manual**

PCTEST LAB TEST REPORT 15.249		FCC CERTIFICATION REPORT		Reviewed by: Quality Manager
Filename: TX.241117643-R1.SRD	Test Dates: Nov. 17-18, 2004	EUT Type: 900 MHz Data Recorder	FCC ID: SRDRTR5X	Page 24 of 24