



■ Report No: DDT-REN140338

■ Issued Date: Oct.13,2014

## FCC CERTIFICATION TEST REPORT FOR

Applicant	On Real Ltd
Address	Unit 1015,10/F,Technology Park, 18 On Lai Street, Shatin, N.T.,Hong Kong
Equipment under Test	FRS walkie talkie
Model No	37755-TRU,37756-TRU
Trade Mark	Rebelle,Nerf
FCC ID	SRLFRS37755-6
Manufacturer	On Real Electronics (Shenzhen)Ltd
Address	No.3 Tangxiayong Industrial Zone,Songgang, Bao'an, Shenzhen,Guangdong,China

**Issued By: Dongguan Dongdian Testing Service Co., Ltd.**

**Add:** No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808

**Tel:** +86-0769-22891499 [Http://www.dgddt.com](http://www.dgddt.com)

# REPORT

## TABLE OF CONTENTS

Test report declares.....	4
1. Summary of test results .....	5
2. General test information.....	6
2.1. Description of EUT .....	6
2.2. Accessories of EUT.....	6
2.3. Channel Information .....	6
2.4. Block diagram of EUT configuration for test .....	7
2.5. Test environment conditions .....	7
2.6. Test laboratory.....	7
2.7. Measurement uncertainty .....	7
3. Maximum Transmitter Power.....	8
3.1. Test equipment .....	8
3.2. Block diagram of test setup.....	8
3.3. Limits .....	8
3.4. Test Procedure.....	9
3.5. Test Result.....	10
4. Occupied bandwidth and emission mask .....	11
4.1. Test equipment .....	11
4.2. Block diagram of test setup.....	11
4.3. Limits .....	11
4.4. Test Procedure.....	11
4.5. Test Result.....	12
4.6. Original test data .....	13
5. Modulation Characteristics .....	15
5.1. Test equipment .....	15
5.2. Block diagram of test setup.....	15
5.3. Limits .....	15
5.4. Test Procedure.....	16
5.5. Test Result.....	17
6. Radiated Spurious Emission.....	21
6.1. Test equipment .....	21
6.2. Block diagram of test setup.....	22
6.3. Limit.....	22
6.4. Test Procedure.....	22
6.5. Test result.....	23
7. Frequency Stability .....	25

7.1.	Test equipment .....	25
7.2.	Block diagram of test setup .....	25
7.3.	Limits .....	25
7.4.	Test Procedure .....	25
7.5.	Test result .....	26
8.	Test setup photograph .....	29
9.	Photos of the EUT .....	30

## TEST REPORT DECLARE

Applicant	On Real Ltd
Address	Unit 1015,10/F,Technology Park, 18 On Lai Street,Shatin, N.T., Hong Kong
Equipment under Test	FRS walkie talkie
Model No	37755-TRU,37756-TRU
Trade Mark	Rebelle,Nerf
FCC ID	SRLFRS37755-6
Manufacturer	On Real Electronics (Shenzhen)Ltd
Address	No.3 Tangxiayong Industrial Zone,Songgang, Bao'an, Shenzhen, Guangdong,China

**Test Standard Used:** FCC Rules and Regulations Part 95; FCC Rules and Regulations Part 2;

**Test procedure used:** TIA-603-D:2010; ANSI C63.4:2003

**We Declare:**

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd is assumed of full responsibility for the accuracy and completeness of these tests.

**After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.**

Report No:	DDT-REN140338	
Date of Test:	Sep.27,2014---Sep.29,2014	Date of Report: Oct.13,2014

*Prepared By:*



**Leo Liu/Engineer**



**Jamy Yu/EMC Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

## 1. Summary of test results

Description of Test Item	Standard	Results
Maximum Transmitter Power	FCC Part 95.639	PASS
Modulation Characteristics	FCC Part 2.1047, FCC Part 95.637	PASS
Occupied Bandwidth and Emission Mask	FCC Part 2.1049, FCC Part 95.633, FCC Part 95.635	PASS
Radiated Spurious Emission	FCC Part 95.635	PASS
Frequency Stability	FCC Part 2.1055, FCC Part 95.621 FCC Part 95.626	PASS

## 2. General test information

### 2.1. Description of EUT

EUT* Name	FRS walkie talkie
Model Number	37755-TRU,37756-TRU
Difference of model number	Only cabinet color different
Trade Mark	Rebelle,Nerf
EUT function description	Please reference user manual of this device
Power supply	DC 4.5V from battery
Operation frequency range	GMRS:462.55MHz-462.7250MHz; FRS: 467.5625MHz-467.7125MHz
Modulation type	FM
Max Tx deviation	2.5KHz
Emission type	F3E
Antenna Type	Integral
Date of Receipt	Sep.21,2014
Sample Type	Series production

Note1: EUT is the ab. of equipment under test.


### 2.2. Accessories of EUT

Description of Accessories	Manufacturer	Model number or Type	Other
/	/	/	/

### 2.3. Channel Information

CH #	FREQ (MHz)	TYPE	CH #	FREQ (MHz)	TYPE
1	462.5625	GMRS	12	467.6625	FRS
2	462.5875	GMRS	13	467.6875	FRS
3	462.6125	GMRS	14	467.7125	FRS
4	462.6375	GMRS	15	462.55	GMRS
5	462.6625	GMRS	16	462.575	GMRS
6	462.6875	GMRS	17	462.6	GMRS
7	462.7125	GMRS	18	462.625	GMRS
8	467.5625	FRS	19	462.65	GMRS
9	467.5875	FRS	20	462.675	GMRS
10	467.6125	FRS	21	462.7	GMRS
11	467.6375	FRS	22	462.725	GMRS

## 2.4. Block diagram of EUT configuration for test



## 2.5. Test environment conditions

Unless otherwise specified, measurements were performed within below environmental conditions

Temperature range:	21-25°C
Humidity range:	40-75%
Pressure range:	86-106kPa

## 2.6. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd

Add: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808 Tel: +86-0769-22891499 <http://www.dgddt.com>

FCC Registration Number: 270092 Industry Canada site registration number: 10288A

## 2.7. Measurement uncertainty

Test Item	Uncertainty
Maximum RF output power (Radiated)	±1.5dB
Frequency Deviation	±0.05KHz
Uncertainty for radio frequency	$1 \times 10^{-9}$
Frequency stability	140Hz
Temperature	±0.2 °C
Humidity	±1%
DC and Low frequency voltage	±0.5%
Uncertainty for radiation emission test (30MHz-1GHz)	3.14 dB (Polarize: V) 3.16 dB (Polarize: H)
Uncertainty for radiation emission test (1GHz to 25GHz)	2.08dB(Polarize: V) 2.56dB (Polarize: H)
Uncertainty for radiation emission test (150KHz-30MHz)	3.21dB
Uncertainty for Power line conduction emission test	2.44dB


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3. Maximum Transmitter Power

#### 3.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum analyzer	R&S	FSU26	1166.1660.26	2013/11/26	1Y
2	Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	2013/11/26	1Y
3	Dipole antenna	Schwarzbeck	UHAP	1101	2013/11/26	1Y
4	Dipole antenna	Schwarzbeck	VHAP	1118	2013/11/26	1Y
5	RF Cable	R&S	R01	10403	2013/11/26	1Y
6	RF Cable	R&S	R02	10512	2013/11/26	1Y
7	RF Cable	R&S	R01	10454	2013/11/26	1Y
8	RF Cable	R&S	R02	10343	2013/11/26	1Y
9	Signal Generator	R&S	SMBV100A	1407.6004K02	2013/11/26	1Y

#### 3.2. Block diagram of test setup

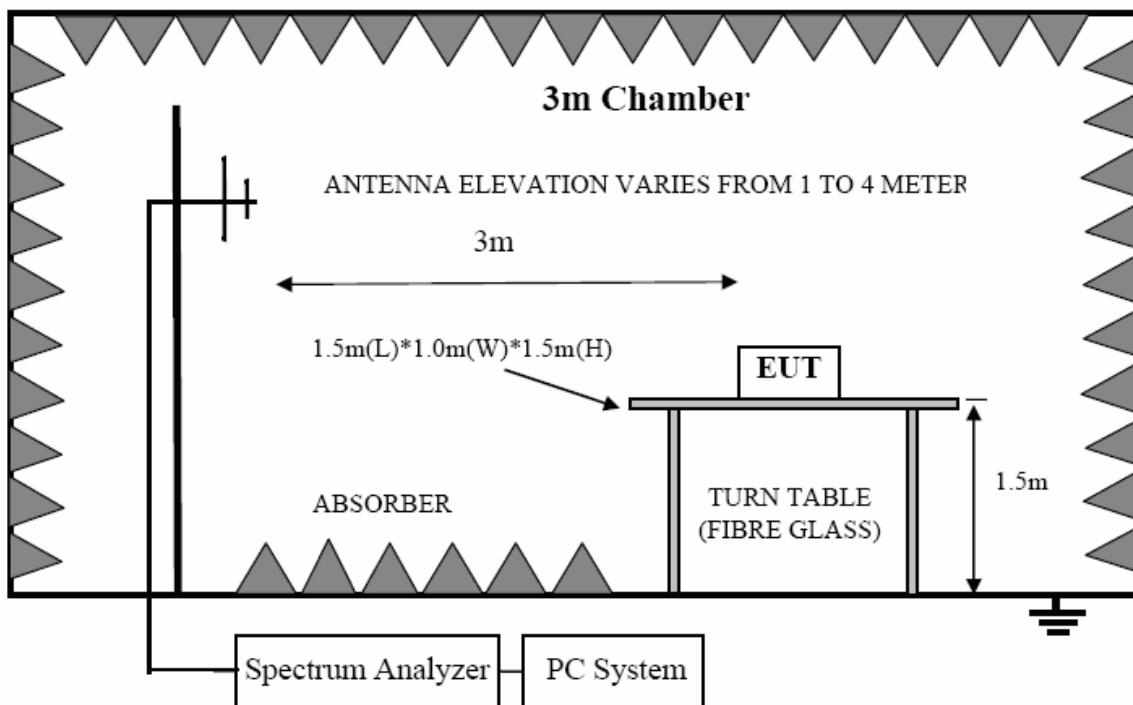

#### 3.3. Limits

##### According to FCC Part 95.639:

Power output shall not exceed 0.50 Watts effective radiated power for the FRS channels. There can be no provisions for increasing the power or varying the power.

No GMRS channel, under any condition of modulation, shall exceed:

- (1) 50W Carrier power (average TP during one modulated RF cycle) when transmitting emissions type A1D, F1D, G1D, A3E, F3E, or G3E.
- (2) 50W peak envelope TP when transmitting emission type H1D, J1D, R1D, H3E, J3E or R3E.

### **3.4. Test Procedure**

- (1) On a test site, the EUT shall be placed at 1.5m height on a wooden turntable, and in the position closest to normal use as declared by the applicant.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from EUT to correspond to the frequency of the transmitter.
- (3) The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
- (4) The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- (5) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- (6) The transmitter shall then be rotated through 360° in the horizontal plane, until a maximum signal level is detected by the measuring receiver.
- (7) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The transmitter shall be replaced by a tuned dipole (substitution antenna).
- (10) The substitution antenna shall be oriented for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- (11) The substitution antenna shall be connected to a calibrated signal generator.
- (12) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (13) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- (14) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- (15) The input signal to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (16) The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- (17) The measure of the ERP is the larger of the two levels recorded, at the input to the substitution antenna, corrected the gain of the substitution antenna if necessary.

### 3.5. Test Result


CH #	Frequency (MHz)	Type	Result		FCC Limit	FCC Margin
			dBm	(W)	(W)	(W)
1	462.5625	GMRS	25.87	0.386	5	4.614
2	462.5875	GMRS	25.99	0.397	5	4.603
3	462.6125	GMRS	25.86	0.385	5	4.615
4	462.6375	GMRS	25.29	0.338	5	4.662
5	462.6625	GMRS	25.78	0.378	5	4.622
6	462.6875	GMRS	25.77	0.378	5	4.622
7	462.7125	GMRS	25.67	0.369	5	4.631
8	467.5625	FRS	25.50	0.355	0.5	0.145
9	467.5875	FRS	25.49	0.354	0.5	0.146
10	467.6125	FRS	25.49	0.354	0.5	0.146
11	467.6375	FRS	25.51	0.356	0.5	0.144
12	467.6625	FRS	25.44	0.350	0.5	0.150
13	467.6875	FRS	25.48	0.353	0.5	0.147
14	467.7125	FRS	25.47	0.352	0.5	0.148
15	462.55	GMRS	25.58	0.361	5	4.639
16	462.575	GMRS	25.64	0.366	5	4.634
17	462.6	GMRS	25.71	0.372	5	4.628
18	462.625	GMRS	25.58	0.361	5	4.639
19	462.65	GMRS	25.63	0.366	5	4.634
20	462.675	GMRS	25.47	0.352	5	4.648
21	462.7	GMRS	25.46	0.352	5	4.648
22	462.725	GMRS	25.45	0.351	5	4.649
<b>Conclusion:PASS</b>						
Test Date : Sep.27,2014			Test Engineer : Leo Liu			

## 4. Occupied bandwidth and emission mask

### 4.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum analyzer	R&S	FSU	1166.1660.26	2013/11/13	1 Year
2	Attenuator	Mini-Circuits	BW-S20W2	101109	2013/11/13	1 Year
3	RF Cable	Micable	C10-01-01-1	100309	2013/11/13	1 Year
4	Audio Generator	Good Will Instrument	GAG-810	EM862120	2013/11/13	1 Year
5	Digit Multimeter	Agilent	34401A	MY47053313	2014/03/28	1 Year

### 4.2. Block diagram of test setup

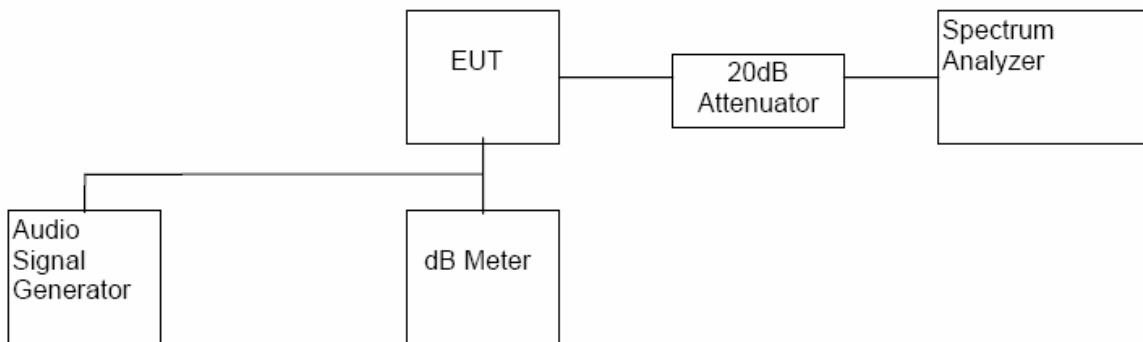

### 4.3. Limits

#### According to FCC 95.633:

For GMRS: the authorized bandwidth for emission type A1D or A3E is 8 KHz ,The authorized bandwidth for emission type F1D, G1D, F3E or G3E is 20 KHz.

For FRS: the authorized bandwidth for emission type F3E or F2D is 12.5 KHz

#### According to FCC 95.635:

At least 25dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50 % up to and including 100 % of the authorized bandwidth.

At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100 % up to and including 250 % of the authorized bandwidth.

At least  $43 + 10 \log_{10}(T)$  dB on any frequency removed from the center of the authorized bandwidth by more than 250 %.

### 4.4. Test Procedure

- (1). Configure EUT and assistant system according clause 4.2

(2). The EUT was modulated by 2.5 KHz Sine wave audio signal, The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing).

(3). Set SPA Center Frequency = fundamental frequency, RBW=VBW= 300 Hz, Span =20 KHz.

(4). Measure the -20 dB bandwidth of modulated signal.

#### 4.5. Test Result

##### Occupied Bandwidth:


CH	Freq (MHz)	Type	Occupied Bandwidth	Limit
CH4	462.6375	GMRS	5.288KHz	20KHz
CH11	467.6375	FRS	5.291KHz	12.5KHz
Conclusion:PASS				
Test Date : Sep.27,2014		Test Engineer : Leo Liu		

##### Emission mask:


CH	Freq (MHz)	Type	Emission mask result
CH4	462.6375	GMRS	PASS
CH11	467.6375	FRS	PASS
Test Date : Sep.27,2014			Test Engineer : Leo Liu

## 4.6. Original test data


Occupied Bandwidth CH4:

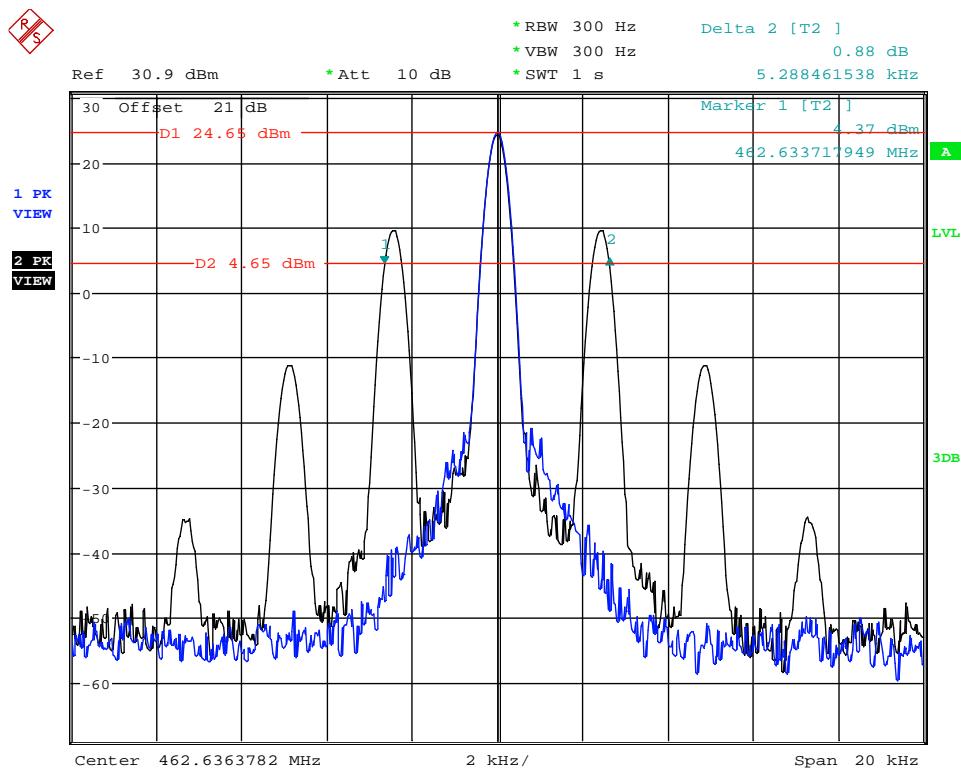


Occupied Bandwidth CH11:

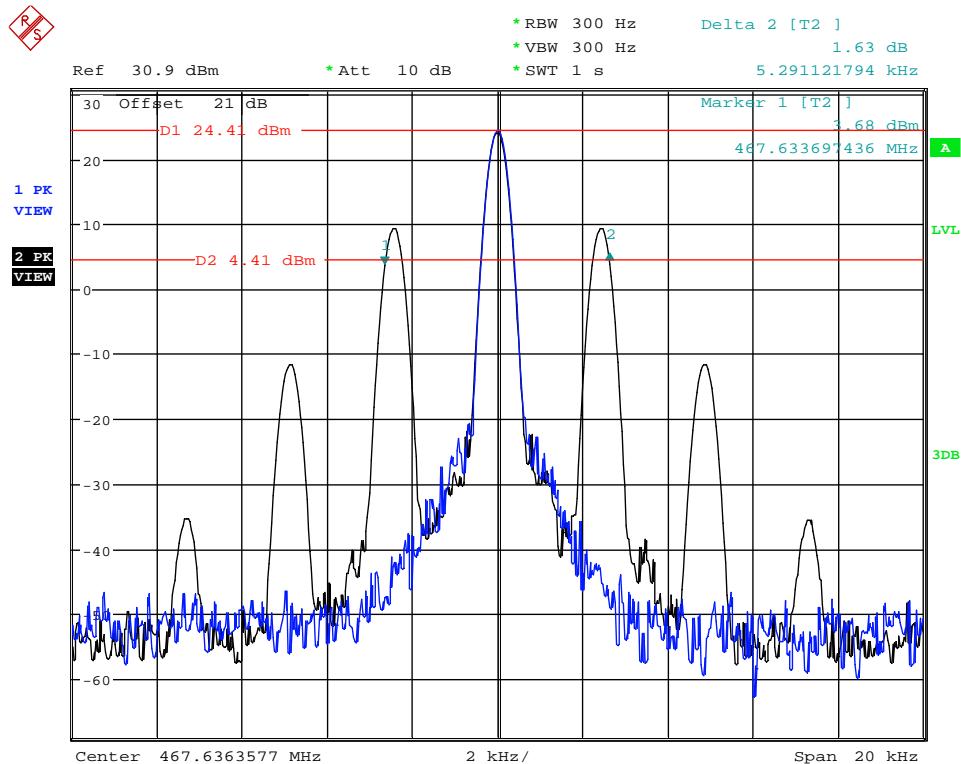

## Emission mask CH 4

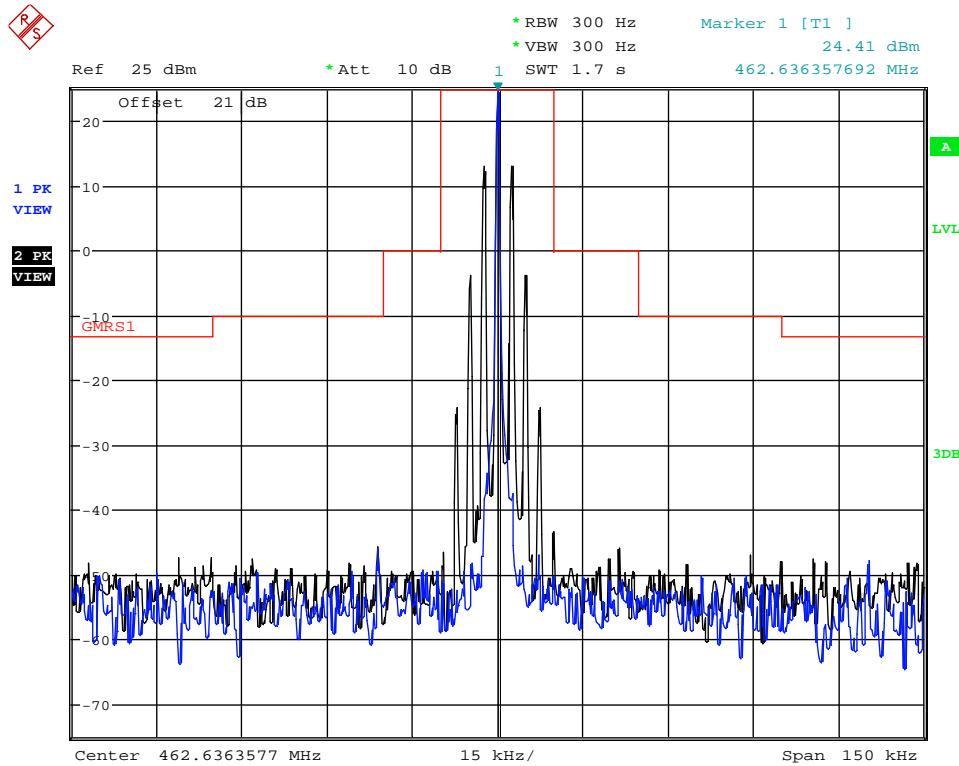

## Emission mask CH11

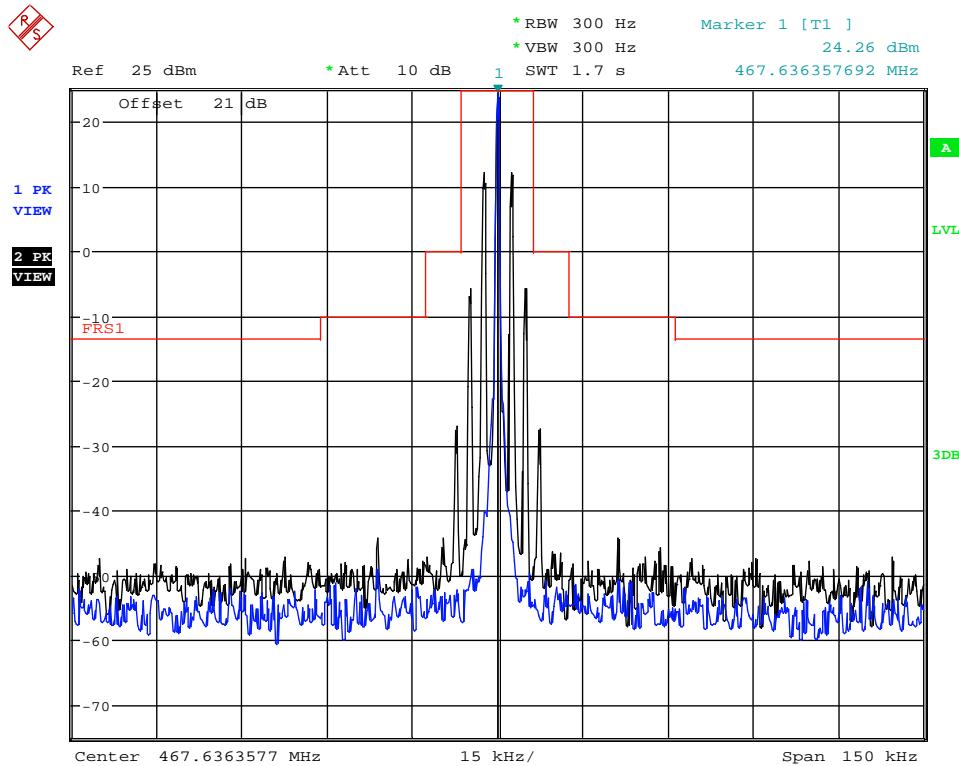

## 5. Modulation Characteristics

### 5.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum analyzer	R&S	FSU	1166.1660.26	2013/11/13	1 Year
2	Attenuator	Mini-Circuits	BW-S20W2	101109	2013/11/13	1 Year
3	RF Cable	Micable	C10-01-01-1	100309	2013/11/13	1 Year
4	Audio Generator	Good Will Instrument	GAG-810	EM862120	2013/11/13	1 Year
5	Digit Multimeter	Agilent	34401A	MY47053313	2014/03/28	1 Year
6	RF COMMUNICATION TEST SET	HP	8920A	3813A1016	2014/03/28	1 Year

### 5.2. Block diagram of test setup

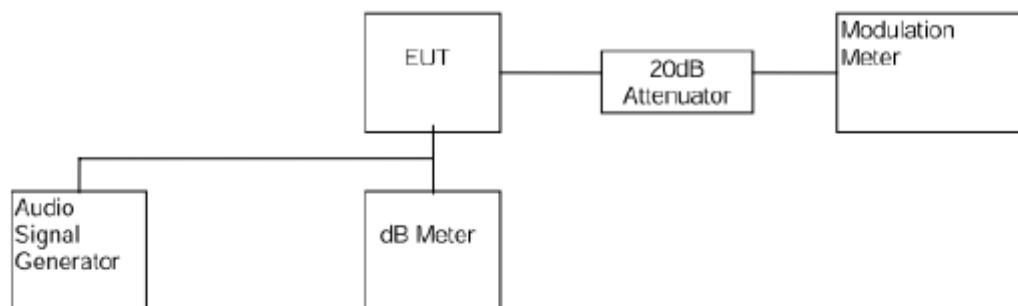


Figure 1

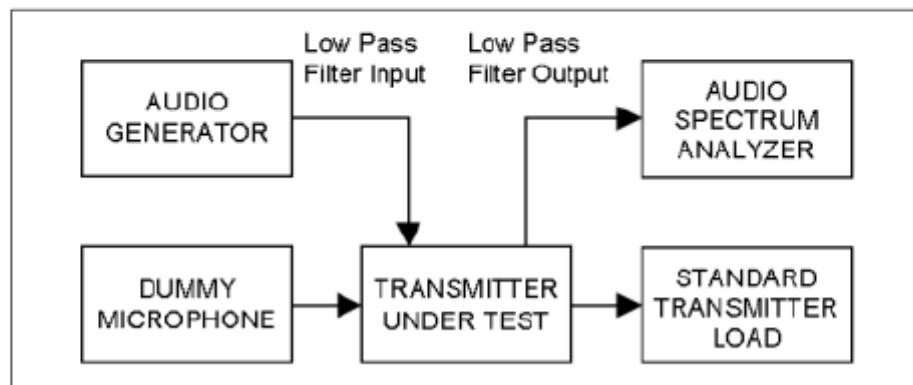


Figure 2

### 5.3. Limits

According to FCC 95.637:

(a) A GMRS transmitter that transmits emission types F1D, G1D, or G3E must not exceed a peak frequency deviation of plus or minus 5 kHz. A GMRS transmitter that transmits emission type F3E must not exceed a peak frequency deviation of plus or minus 5 kHz. A FRS unit that transmits emission type F3E must not exceed a peak frequency deviation of plus or minus 2.5 kHz, and the audio frequency response must not exceed 3.125 kHz .

(b) Each GMRS transmitter, except a mobile station transmitter with a power output of 2.5 W or less, must automatically prevent a greater than normal audio level from causing overmodulation. The transmitter also must include audio frequency low pass filtering, unless it complies with the applicable paragraphs of §95.631 (without filtering.) The filter must be between the modulation limiter and the modulated stage of the transmitter. At any frequency (f in kHz) between 3 and 20 kHz, the filter must have an attenuation of at least  $60 \log_{10}(f/3)$  dB greater than the attenuation at 1 kHz. Above 20 kHz, it must have an attenuation of at least 50 dB greater than the attenuation at 1 kHz.

**According to FCC 2.1047:**

(a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

(b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.

## 5.4. Test Procedure

**Frequency deviation:**

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1 kHz using this level as a reference (0dB) and vary the input level from -20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step (1) with input frequency changing to 300Hz, 500Hz, 1Kz, 1.5KHz, 2KHz and 3KHz in sequence.

**Audio Frequency Response:**

- (1). Configure the EUT as shown in figure 1.
- (2). Apply a 1000 Hz tone and adjust the audio frequency generator to produce 20% of the rated system deviation.
- (3). Vary the Audio frequency from 100 Hz to 5 kHz and record the frequency deviation.
- (4). The peak frequency deviation must not exceed  $\pm 2.5$ kHz.

**Audio Low Pass Filter Response:**


- (1) Connect the equipment in figure 2.

- (2) Connect the audio frequency generator as close as possible to the input of the post limiter low pass filter within the transmitter under test.
- (3) Connect the audio spectrum analyzer to the output of the post limiter low pass filter within the transmitter under test.
- (4) Apply a 1000 Hz tone from the audio frequency generator and adjust the level per manufacturer's specifications.
- (5) Record the dB level of the 1000 Hz spectral line on the audio spectrum analyzer as LEV1 .
- (6) Set the audio frequency generator to the desired test frequency between 3000 Hz and the upper low pass filter limit.
- (7) Record audio spectrum analyzer levels, at the test frequency in step (6).
- (8) Record the dB level on the audio spectrum analyzer as LEV2 . Method of Measurement for Transmitters .


## 5.5. Test Result

### Frequency deviation:

Channel 4: 462.6375MHz, GMRS								
Modulation Input(dB)	Peak Frequency Deviation (KHz)							Limit (KHz)
	300Hz	500Hz	1KHz	1.5KHz	2KHz	2.5KHz	3KHz	
-20.0	0.34	0.37	0.41	0.41	0.43	0.44	0.48	5
-15.0	0.38	0.42	0.44	0.47	0.48	0.52	0.53	5
-10.0	0.45	0.48	0.51	0.52	0.54	0.57	0.58	5
-5.0	0.67	0.76	0.79	0.78	0.79	0.81	0.84	5
0.0	1.09	1.25	1.5	1.65	1.71	1.76	1.94	5
5.0	1.21	1.38	1.59	1.82	2.1	2.19	2.2	5
10.0	1.82	1.96	2.01	2.11	2.17	2.18	2.21	5
15.0	1.95	2.11	2.12	2.13	2.15	2.22	2.22	5
20.0	2.15	2.21	2.19	2.21	2.22	2.24	2.3	5
Conclusion: PASS								
Test Date : Sep.28,2014					Test Engineer : Leo Liu			

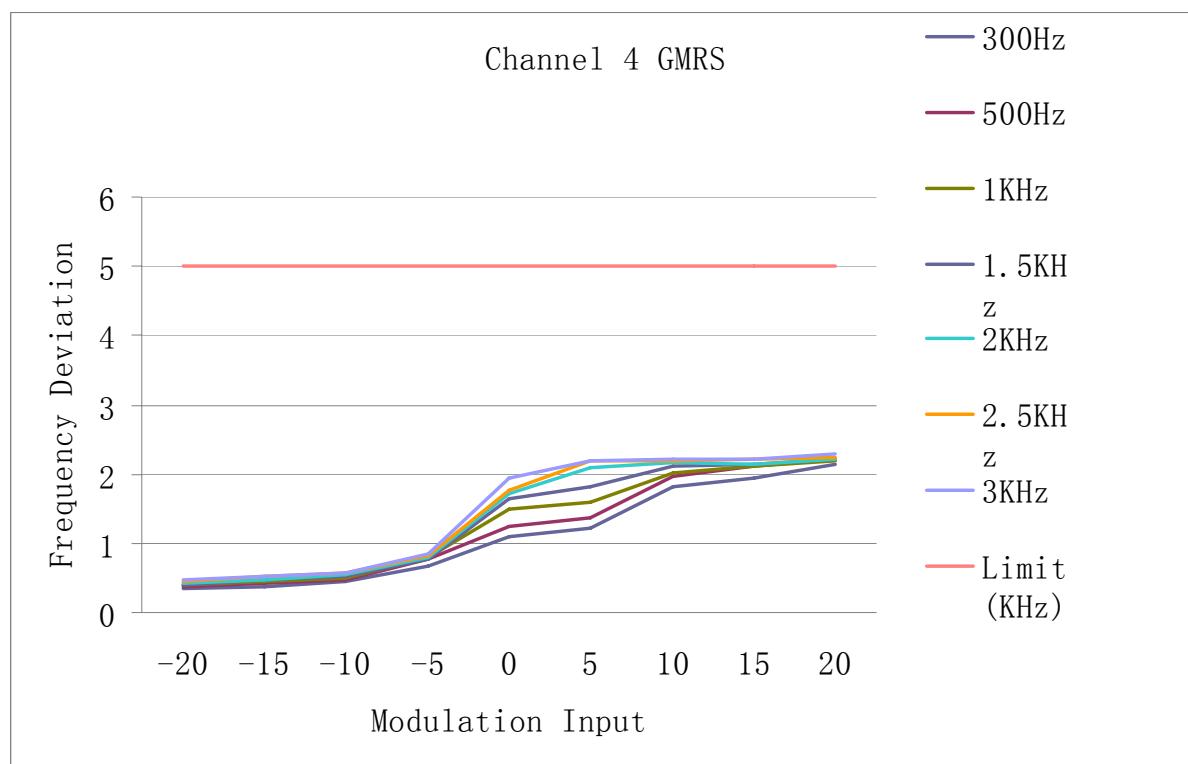


Channel 11: 467.6375MHz, FRS								
Modulation Input(dB)	Peak Frequency Deviation (KHz)							Limit (KHz)
	300Hz	500Hz	1KHz	1.5KHz	2KHz	2.5KHz	3KHz	
-20.0	0.35	0.36	0.42	0.41	0.45	0.47	0.48	2.5
-15.0	0.44	0.46	0.46	0.47	0.48	0.49	0.52	2.5
-10.0	0.46	0.51	0.52	0.51	0.54	0.55	0.55	2.5
-5.0	0.53	0.61	0.67	0.69	0.81	0.83	0.86	2.5
0.0	0.95	1.3	1.5	1.64	1.75	1.76	1.77	2.5
5.0	1.12	1.23	1.56	1.59	1.67	1.82	1.89	2.5
10.0	1.56	1.67	1.89	2.01	2.13	2.19	2.2	2.5
15.0	1.78	1.85	2.01	2.12	2.2	2.21	2.23	2.5
20.0	2.01	2.11	2.2	2.23	2.21	2.24	2.26	2.5
Conclusion: PASS								
Test Date : Sep.28,2014					Test Engineer : Leo Liu			

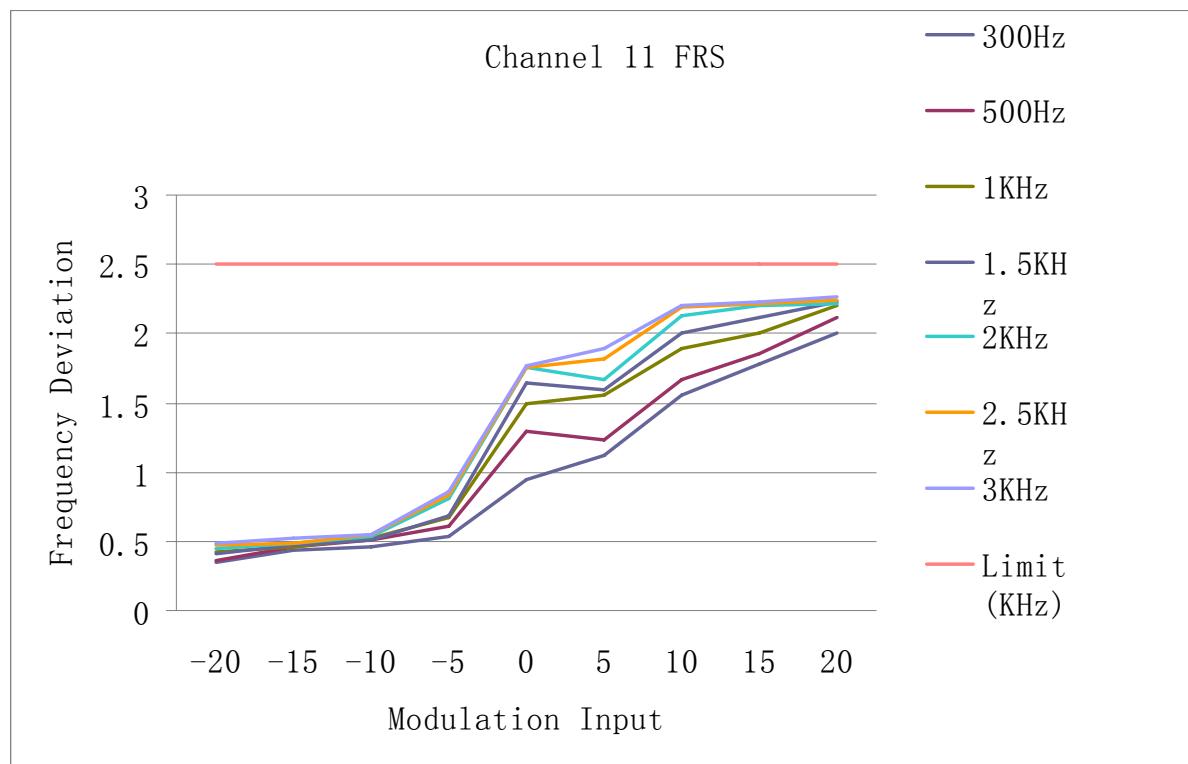

### Audio Frequency Response


Channel 11: 467.6375MHz, FRS		
Modulation Frequency(Hz)	Deviation (KHz)	Limit (KHz)
100	0.39	3.125
200	0.41	3.125
300	0.43	3.125
400	0.43	3.125
500	0.45	3.125
600	0.46	3.125
700	0.47	3.125
800	0.49	3.125
900	0.49	3.125
1000	0.5	3.125
1500	1.3	3.125
2000	1.89	3.125
2500	2.03	3.125
3000	2.12	3.125
3500	1.5	3.125
4000	1.24	3.125
4500	0.9	3.125

5000	0.82	3.125
Conclusion:PASS		
Test Date : Sep.28,2014		Test Engineer : Leo Liu

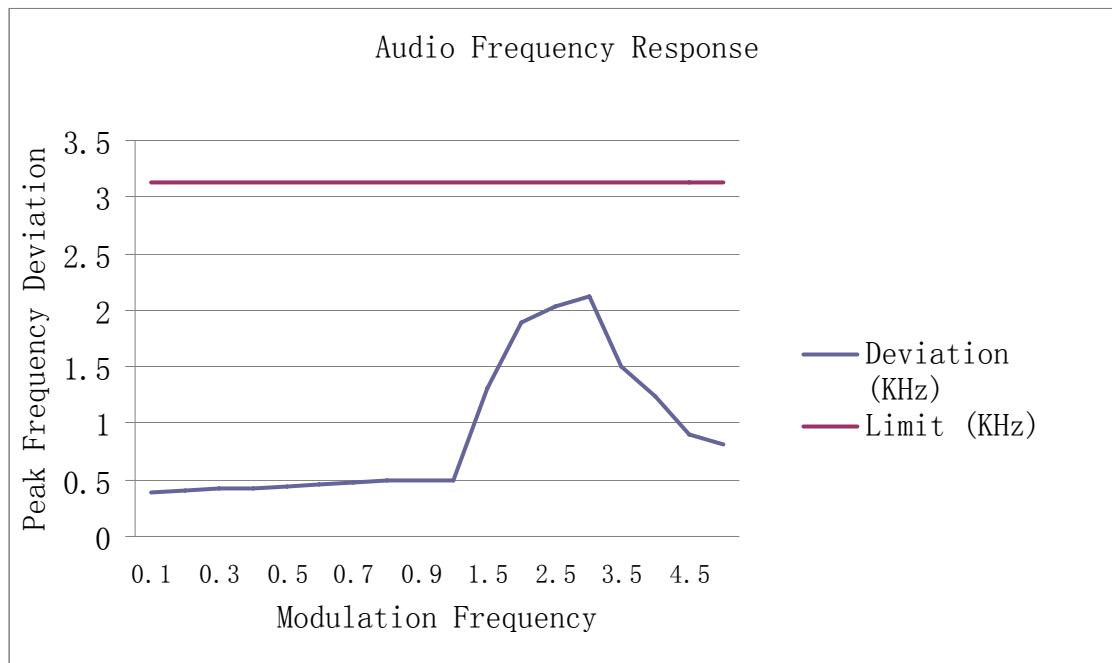

#### Audio Low Pass Filter Response

Channel 4: 462.6375MHz, GMRS		
Frequency(KHz)	Response	Limit
1	-1.2	0.00
2	-1.9	0.00
3	-3.2	0.00
4	-34.23	-8.62
5	-36.23	-13.64
6	-39.3	-18.75
7	-46.43	-22.16
8	-48.2	-25.57
9	-52.3	-28.98
10	-55.2	-32.39
20	-56.2	-49.43
30	-56.43	-50.00
40	-56.23	-50.00
50	-56.9	-50.00
Conclusion: PASS		
Test Date : Sep.28,2014		Test Engineer : Leo Liu

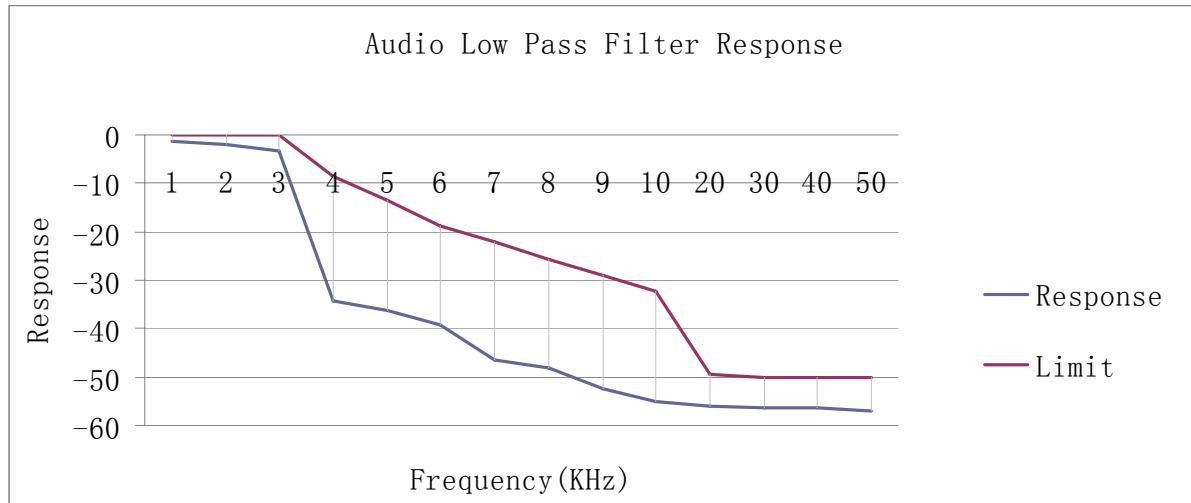


## 6. Radiated Spurious Emission

### 6.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum analyzer	R&S	FSU26	1166.1660.26	2013/11/26	1Y
2	EMI Test Receiver	R&S	ESU8	100316	2013/11/13	1 Y
3	Loop antenna	TESEQ	HLA6120	20129	2013/11/16	1 Y
4	Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	2013/11/26	1Y
5	Double Ridged Horn Antenna	R&S	HF907	100276	2013/11/16	1Y
6	Double Ridged Horn Antenna	R&S	HF907	100265	2013/11/16	1Y
7	Dipole antenna	Schwarzbeck	UHAP	1101	2013/11/26	1Y
8	Dipole antenna	Schwarzbeck	VHAP	1118	2013/11/26	1Y
9	RF Cable	R&S	R01	10403	2013/11/26	1Y
10	RF Cable	R&S	R02	10512	2013/11/26	1Y
11	RF Cable	R&S	R01	10454	2013/11/26	1Y
12	RF Cable	R&S	R02	10343	2013/11/26	1Y
13	Signal Generator	R&S	SMBV100A	1407.6004K02	2013/11/26	1Y

## 6.2. Block diagram of test setup

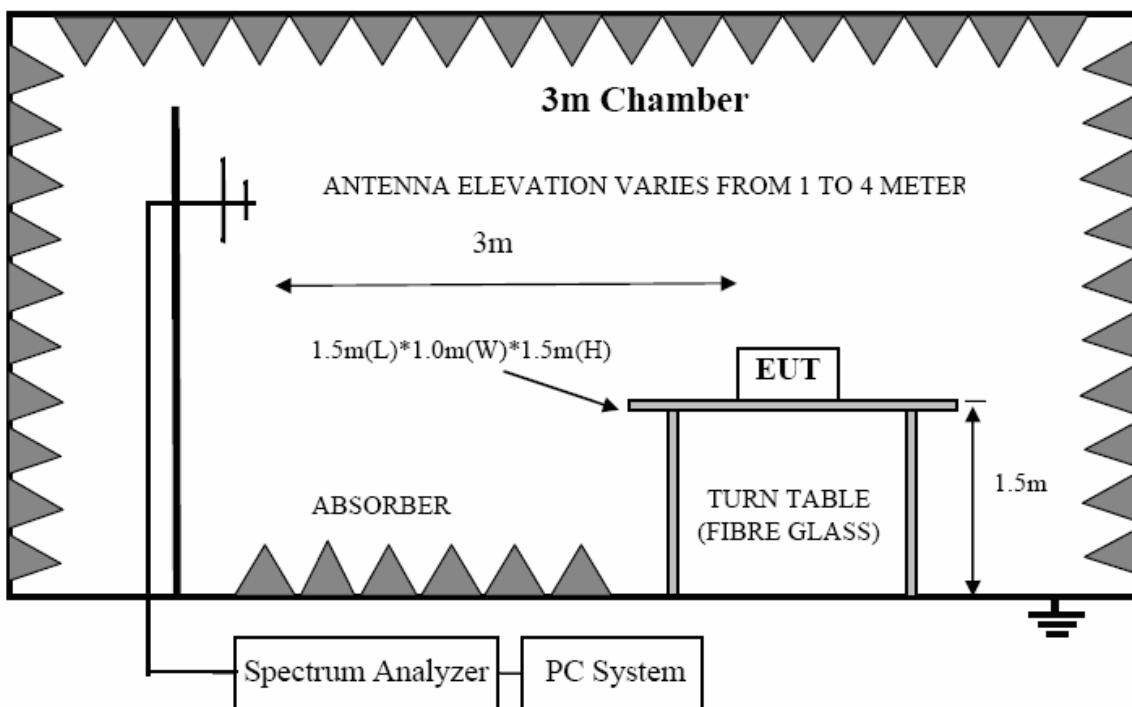

## 6.3. Limit

The unwanted emission should be attenuated below TP by at least  $43+10\log(\text{Transmit Power})$  dB

## 6.4. Test Procedure

- (1) On a test site, the EUT shall be placed on a turntable and in the position closest to the normal use as declared by the user.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3) The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4) The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5) The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7) The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8) The maximum signal level detected by the measuring receiver shall be noted.

(9) The measurement shall be repeated with the test antenna set to horizontal polarization.

(10) Replace the antenna with a proper Antenna (substitution antenna).

(11) The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.

(12) The substitution antenna shall be connected to a calibrated signal generator.

(13) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.

(14) The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.

(15) The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.

(16) The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.

(17) The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

## 6.5. Test result

Test Mode: GMRS mode continue transmitting Channel 4, Frequency= 462.6375MHz					
Channle Maximum Power: 25.79dBm					
Frequency (MHz)	Antenna polarization	Result (dBm)	Limit(Note 2) (dBm)	Margin (dB)	Conclusion
134	H	-56.89	-13		<b>PASS</b>
925.27	H	-37.25	-13		<b>PASS</b>
1387.9	H	-35.35	-13		<b>PASS</b>
135	V	-52.40	-13		<b>PASS</b>
925.27	V	-34.23	-13		<b>PASS</b>
1387.9	V	-32.53	-13		<b>PASS</b>
Note 1: According explorer test, this configuration have worst emission.					
Note 2: Limit= 25.79dBm- (43+10log(Transmit Power)) = -13dBm					
Test Date : Sep.29,2014			Test Engineer : Leo Liu		


Test Mode: FRS mode continue transmitting Channel 11, Frequency= 467.6375MHz					
Channle Maximum Power: 25.51dBm					
Frequency (MHz)	Antenna polarization	Result (dBm)	Limit(Note 2) (dBm)	Margin (dB)	Conclusion
135	H	-55.24	-13	36.78	<b>PASS</b>
935.27	H	-38.12	-13	23.12	<b>PASS</b>
1402.9	H	-36.39	-13	21.45	<b>PASS</b>
135	V	-53.56	-13	37.32	<b>PASS</b>
935.27	V	-35.19	-13	20.45	<b>PASS</b>
1402.9	V	-33.40	-13	19.98	<b>PASS</b>
Note 1: According explorer test, this configuration have worst emission.					
Note 2: Limit= 25.51dBm- (43+10log(Transmit Power)) = -13dBm					
Test Date : Sep.29,2014			Test Engineer : Leo Liu		

## 7. Frequency Stability

### 7.1. Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum analyzer	R&S	FSU	1166.1660.26	2013/11/26	1 Y
2	Attenuator	Mini-Circuits	BW-S10W2	101109	2013/11/13	1 Y
3	RF Cable	Micable	C10-01-01-1	100309	2013/11/26	1 Y
4	Temperature controller	Dongguan Bell	BE-TH-150M3	201208153364	2013/11/13	1 Y
5	DC Power Source	ALLPower	ADC50-20	990406	2013/11/26	1 Y

### 7.2. Block diagram of test setup

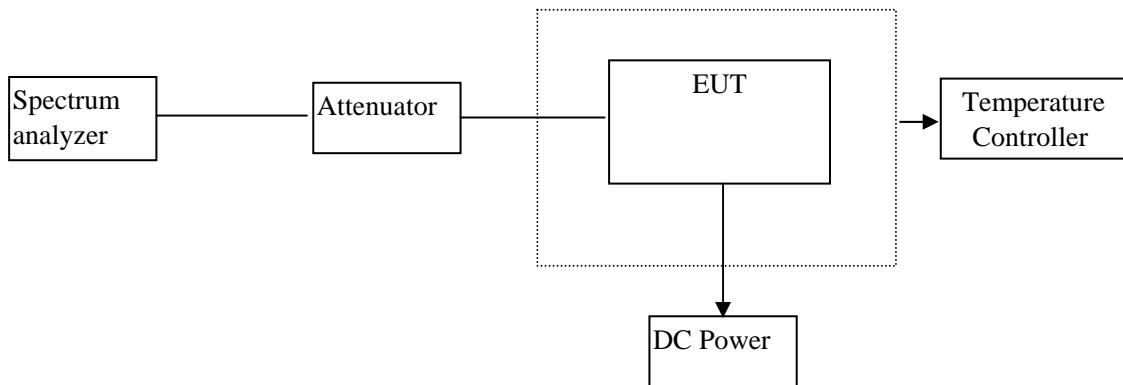

### 7.3. Limits

#### According to FCC 95.621

(b) Each GMRS transmitter for mobile station, small base station and control station operation must be maintained within a frequency tolerance of 0.0005%. Each GMRS transmitter for base station (except small base), mobile relay station or fixed station operation must be maintained within a frequency tolerance of 0.00025%.

#### According to FCC 95.627

(b) Each FRS unit must be maintained within a frequency tolerance of 0.00025%.

### 7.4. Test Procedure

#### Frequency stability versus environmental temperature:

- (1). Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- (2). Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz. Record this frequency as reference frequency.

(3). Set the temperature of chamber to 50°C. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.

(4). Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

**Frequency stability versus input voltage:**

(1). Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15°C to 25°C. Otherwise, an environment chamber set for a temperature of 20°C shall be used. The EUT shall be powered by DC 4.5 V

(2). Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.

(3). Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.


## 7.5. Test result

CH #	Frequency (MHz)	TYPE	Frequency Tolerance			FCC limit	
			Measured (MHz)	Tolerance (%)	Tolerance (ppm)	%	ppm
1	462.5625	GMRS	462.5625	0.000000	0	0.0005%	$\pm 5$
2	462.5875	GMRS	462.5881	0.000130	1.29	0.0005%	$\pm 5$
3	462.6125	GMRS	462.6129	0.000086	0.86	0.0005%	$\pm 5$
4	462.6375	GMRS	462.6378	0.000065	0.65	0.0005%	$\pm 5$
5	462.6625	GMRS	462.6625	0.000000	0	0.0005%	$\pm 5$
6	462.6875	GMRS	462.6875	0.000000	0	0.0005%	$\pm 5$
7	462.7125	GMRS	462.7131	0.000130	1.30	0.0005%	$\pm 5$
8	467.5625	FRS	467.5625	0.000000	0	0.00025%	$\pm 5$
9	467.5875	FRS	467.5873	-0.000043	-0.43	0.00025%	$\pm 5$
10	467.6125	FRS	467.6129	0.000086	0.86	0.00025%	$\pm 5$
11	467.6375	FRS	467.6378	0.000064	0.64	0.00025%	$\pm 5$
12	467.6625	FRS	467.6626	0.000021	0.21	0.00025%	$\pm 5$
13	467.6875	FRS	467.6875	0.000000	0	0.00025%	$\pm 5$
14	467.7125	FRS	467.7131	0.000128	1.29	0.00025%	$\pm 5$
15	462.55	GMRS	462.550	0.000000	0	0.0005%	$\pm 5$
16	462.575	GMRS	462.5753	0.000065	0.65	0.0005%	$\pm 5$
17	462.6	GMRS	462.60	0.000000	0	0.0005%	$\pm 5$
18	462.625	GMRS	462.625	0.000000	0	0.0005%	$\pm 5$
19	462.65	GMRS	462.6506	0.000130	1.30	0.0005%	$\pm 5$
20	462.675	GMRS	462.6754	0.000086	0.86	0.0005%	$\pm 5$
21	462.7	GMRS	462.70	0.000000	0	0.0005%	$\pm 5$
22	462.725	GMRS	462.7251	0.000022	0.22	0.0005%	$\pm 5$

Frequency Deviation With Temperature Variation						
GMRS Channel 4						
Temperature (°C)	Frequency (MHz)	Result			FCC limit	
		Measured (MHz)	Tolerance (%)	Tolerance (ppm)	%	ppm
-30	462.6375	462.6374	-0.000022	-0.22	0.0005%	±5
-20	462.6375	462.6375	0.000000	0	0.0005%	±5
-10	462.6375	462.6376	0.000022	0.22	0.0005%	±5
0	462.6375	462.6378	0.000065	0.65	0.0005%	±5
10	462.6375	462.6377	0.000043	0.43	0.0005%	±5
20	462.6375	462.6378	0.000065	0.65	0.0005%	±5
30	462.6375	462.6376	0.000022	0.22	0.0005%	±5
40	462.6375	462.6378	0.000065	0.65	0.0005%	±5
50	462.6375	462.6377	0.000043	0.43	0.0005%	±5
FRS Channel 11						
-30	467.6375	467.6374	-0.000021	-0.21	0.00025%	±5
-20	467.6375	467.6375	0.000000	0	0.00025%	±5
-10	467.6375	467.6375	0.000000	0	0.00025%	±5
0	467.6375	467.6378	0.000064	0.64	0.00025%	±5
10	467.6375	467.6377	0.000043	0.43	0.00025%	±5
20	467.6375	467.6378	0.000064	0.64	0.00025%	±5
30	467.6375	467.6376	0.000021	0.21	0.00025%	±5
40	467.6375	467.6375	0.000000	0	0.00025%	±5
50	467.6375	467.6377	0.000043	0.43	0.00025%	±5
20	467.6375	467.6378	0.000064	0.64	0.0005%	±5
30	467.6375	467.6376	0.000021	0.21	0.0005%	±5
40	467.6375	467.6377	0.000043	0.43	0.0005%	±5
50	467.6375	467.6378	0.000064	0.64	0.0005%	±5
Conclusion:PASS						
Test Date : Sep.29,2014			Test Engineer : Leo Liu			

Frequency Deviation With Voltage Variation						
GMRS Channel 4						
Voltage(V)	Frequency (MHz)	Result			FCC limit	
		Measured (MHz)	Tolerance (%)	Tolerance (ppm)	%	ppm
4.5	462.6375	462.6377	0.000043	0.43	0.0005%	$\pm 5$
4.2	462.6375	462.6378	0.000065	0.65	0.0005%	$\pm 5$
4.0	462.6375	462.6375	0.000000	0	0.0005%	$\pm 5$
3.8	462.6375	462.6376	0.000022	0.22	0.0005%	$\pm 5$
3.6	462.6375	462.6379	0.000086	0.86	0.0005%	$\pm 5$
3.4	462.6375	462.6374	-0.000022	-0.22	0.0005%	$\pm 5$
3.3	462.6375	462.6378	0.000065	0.65	0.0005%	$\pm 5$
FRS Channel 11						
4.5	467.6375	467.6377	0.000043	0.43	0.00025%	$\pm 5$
4.2	467.6375	467.6376	0.000021	0.21	0.00025%	$\pm 5$
4.0	467.6375	467.6377	0.000043	0.43	0.00025%	$\pm 5$
3.8	467.6375	467.6374	-0.000021	-0.21	0.00025%	$\pm 5$
3.6	467.6375	467.6378	0.000064	0.64	0.00025%	$\pm 5$
3.4	467.6375	467.6373	-0.000043	-0.43	0.00025%	$\pm 5$
3.3	467.6375	467.6376	0.000021	0.21	0.00025%	$\pm 5$
Conclusion:PASS						
Test Date : Sep.29,2014			Test Engineer : Leo Liu			

## 8. Test setup photograph

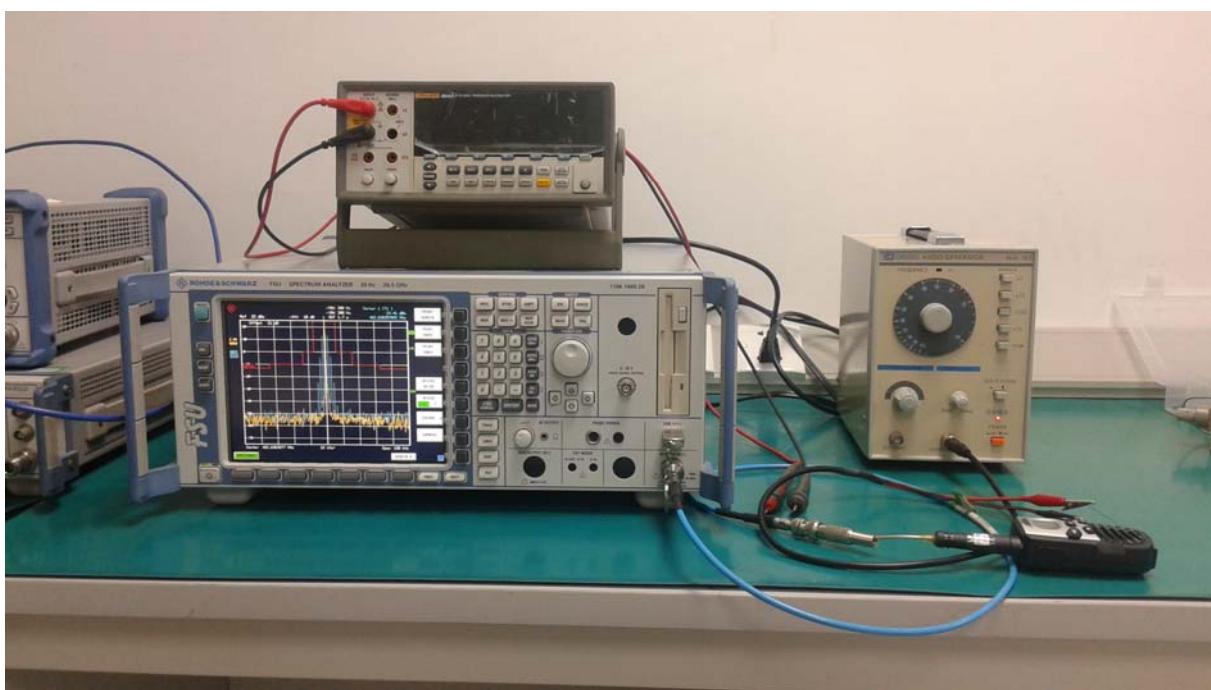



## 9. Photos of the EUT











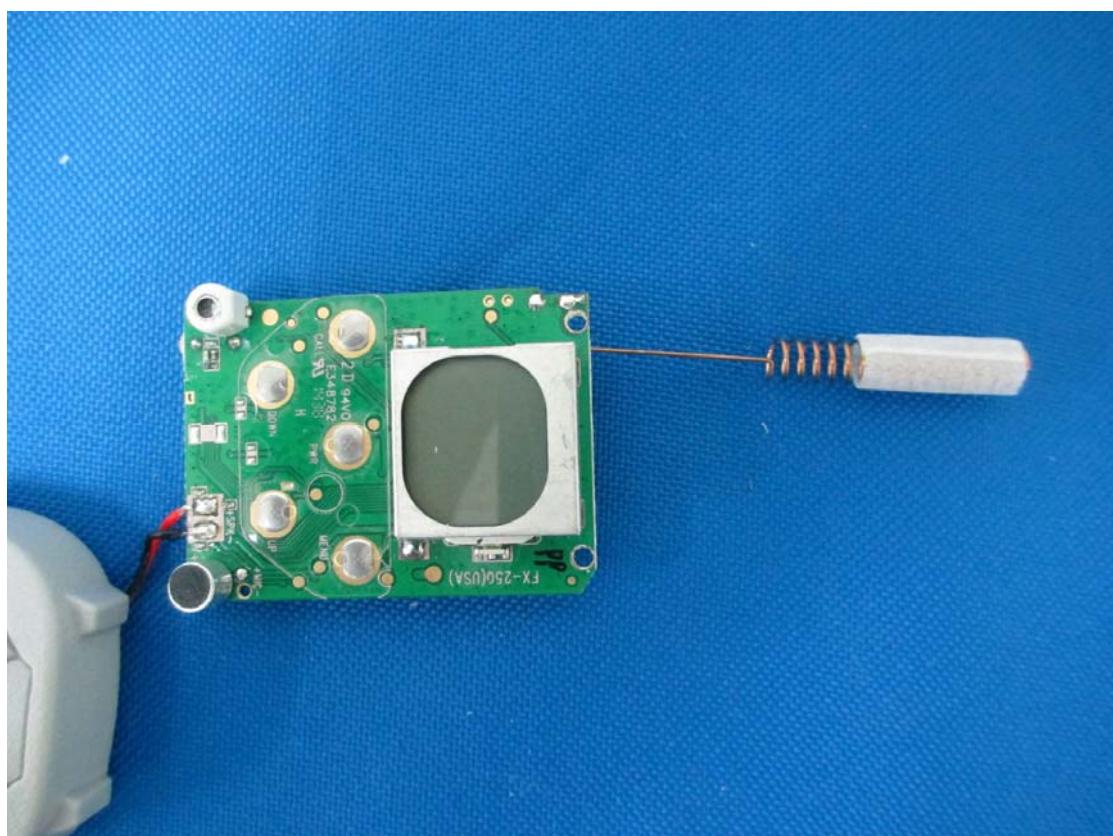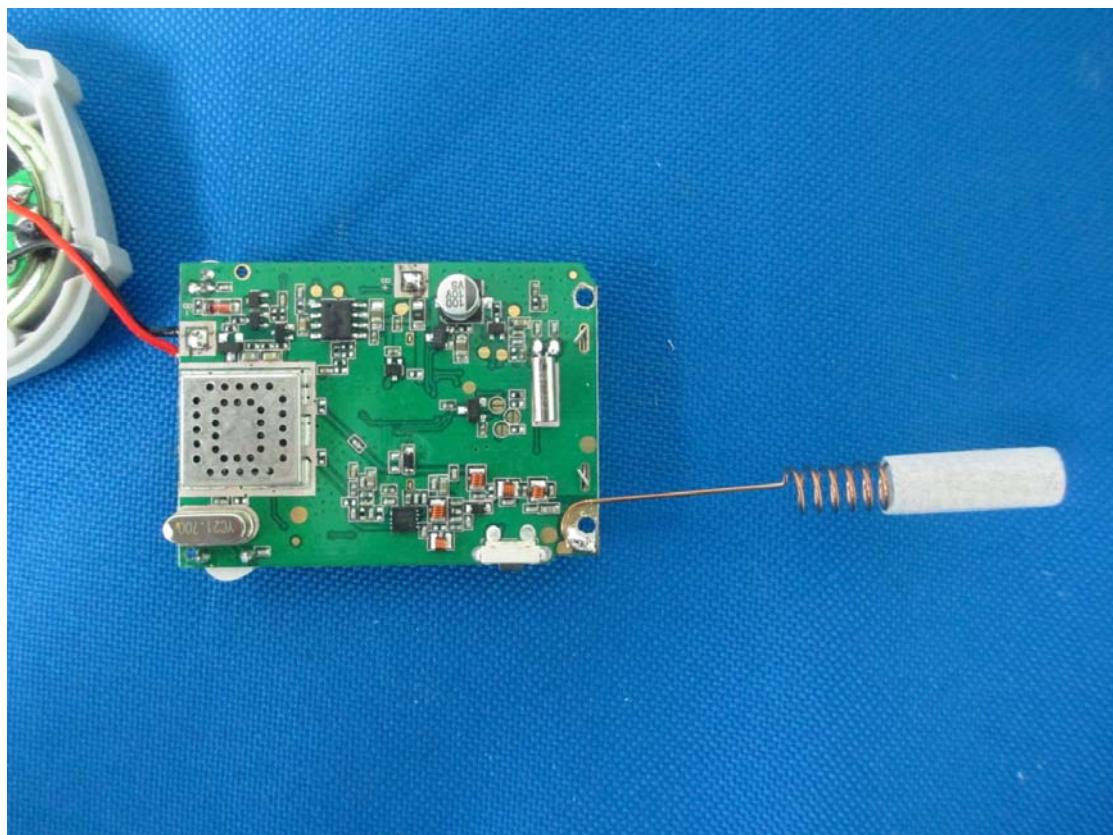

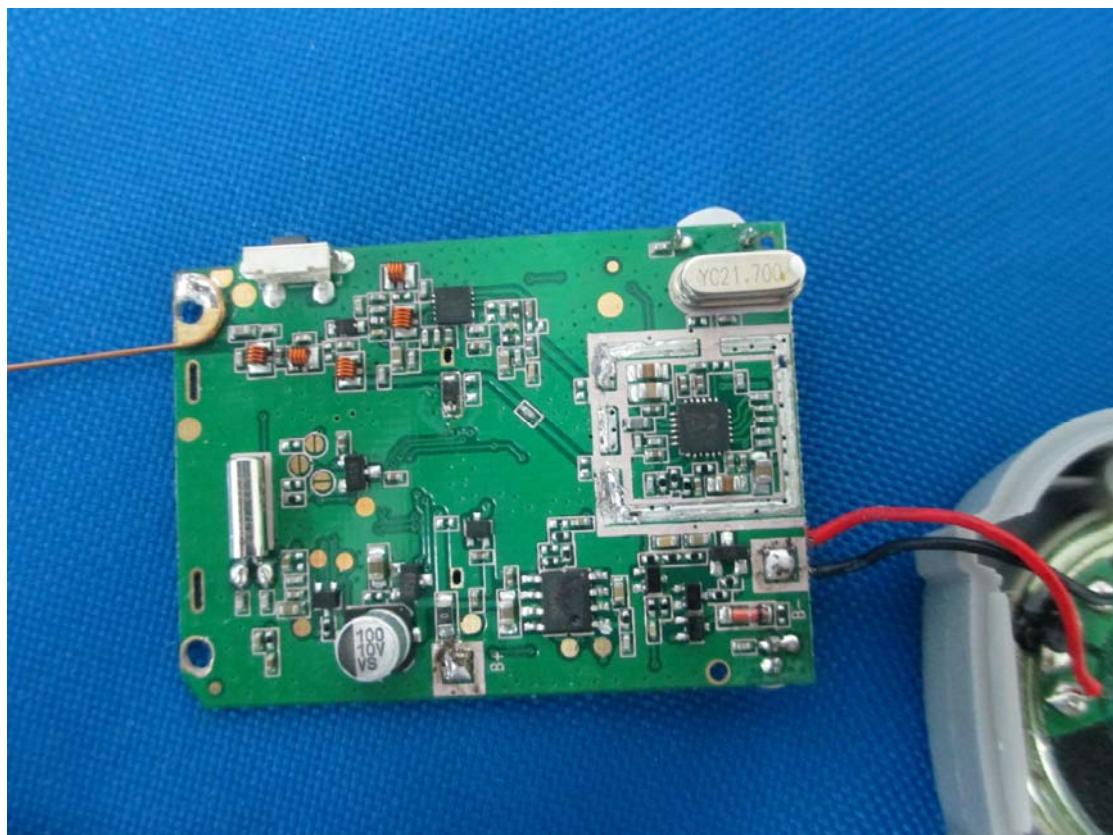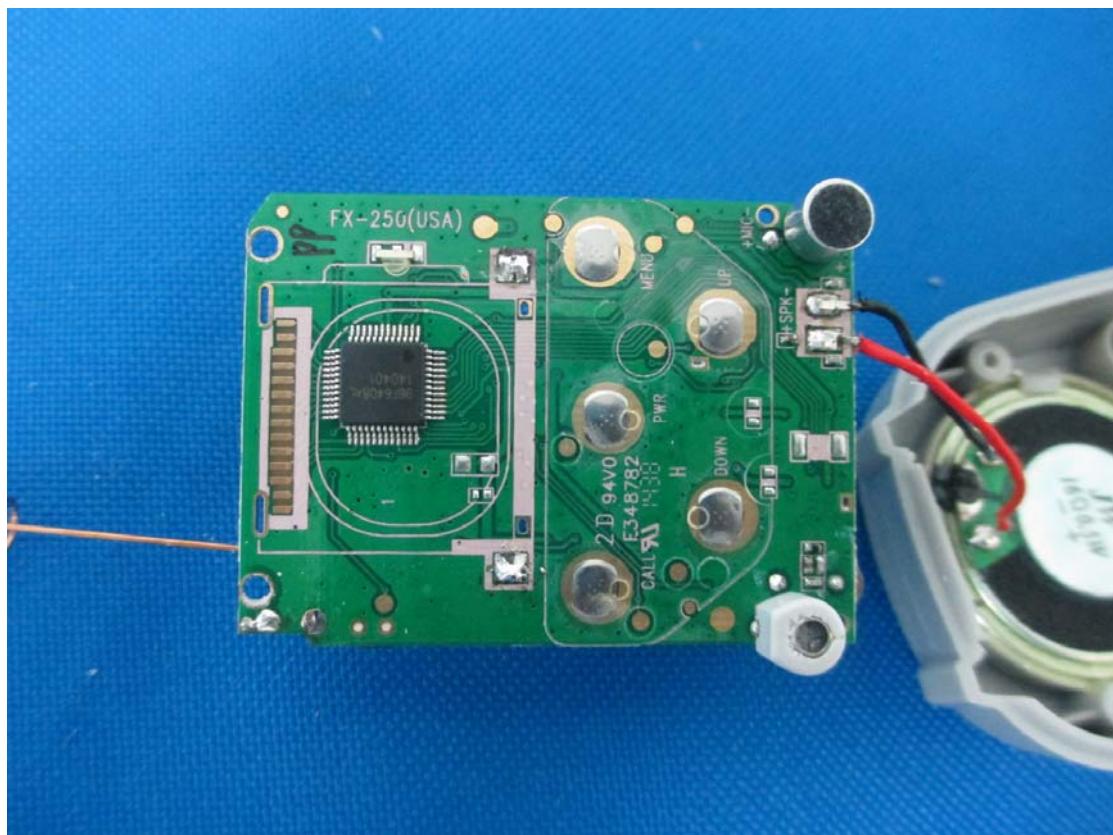

**END OF REPORT**