

FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : WCDMA/LTE Dual-Mode Digital
Mobile Phone
BRAND NAME : ZTE
MODEL NAME : Vodafone Smart ultra 6, VF-995N,
Vodafone Smart ultra
FCC ID : SRQ-995N
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The testing was completed on Apr. 29, 2015. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.

No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification subjective to this standard	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency Channel	7
2.2 Pre-Scanned RF Power.....	8
2.3 Test Mode.....	9
2.4 Connection Diagram of Test System.....	10
2.5 Support Unit used in test configuration and system	11
2.6 EUT Operation Test Setup	11
2.7 Measurement Results Explanation Example.....	12
3 TEST RESULT.....	13
3.1 6dB Bandwidth Measurement	13
3.2 Output Power Measurement.....	15
3.3 Power Spectral Density Measurement	17
3.4 Conducted Band Edges and Spurious Emission Measurement	19
3.5 Radiated Band Edges and Spurious Emission Measurement	29
3.6 AC Conducted Emission Measurement.....	33
3.7 Antenna Requirements.....	37
4 LIST OF MEASURING EQUIPMENT	38
5 UNCERTAINTY OF EVALUATION	39
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED TEST RESULTS	
APPENDIX C. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR531601-01C	Rev. 01	Initial issue of report	May 05, 2015

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 6.59 dB at 47.460 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 11.87 dB at 0.520 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	WCDMA/LTE Dual-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	Vodafone Smart ultra 6, VF-995N, Vodafone Smart ultra
FCC ID	SRQ-995N
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+/LTE/NFC/ WLAN 2.4GHz 802.11b/g/n HT20/ Bluetooth v3.0 + EDR/Bluetooth v4.1 LE
HW Version	wreA
SW Version	VDF-995NB01-DE02b
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to Antenna	802.11b : 17.28 dBm (0.0535 W) 802.11g : 20.37 dBm (0.1089 W) 802.11n HT20 : 19.23 dBm (0.0838 W)
Antenna Type	802.11b/g/n : PIFA Antenna with gain 0.58 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC Registration No.
	TH01-KS	CO01-KS	149928

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC Registration No.
	03CH02-KS		418269

Note: The test site complies with ANSI C63.4 2009 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The data were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

2.4GHz 802.11b RF Output Power (dBm)						
Power vs. Channel			Power vs. Data Rate			
Channel	Frequency (MHz)	Data Rate 1Mbps	Channel	2Mbps	5.5Mbps	11Mbps
CH 01	2412 MHz	13.77	CH 11	17.23	17.25	17.19
CH 06	2437 MHz	17.10				
CH 11	2462 MHz	17.28				

2.4GHz 802.11g RF Output Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate 6Mbps	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 01	2412 MHz	18.02	CH 06	20.25	20.31	20.33	20.27	20.30	20.23	20.28
CH 06	2437 MHz	20.37								
CH 11	2462 MHz	20.22								

2.4GHz 802.11n HT20 RF Output Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412 MHz	16.48	CH 06	19.09	19.18	19.15	19.21	19.12	19.17	19.07
CH 06	2437 MHz	19.23								
CH 11	2462 MHz	19.09								

2.3 Test Mode


Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0


Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone
Remark: For radiated test cases, the tests were performance with adapter, earphone and USB cable.	


2.4 Connection Diagram of Test System

<WLAN 2.4GHz 802.11b/g Tx Mode>

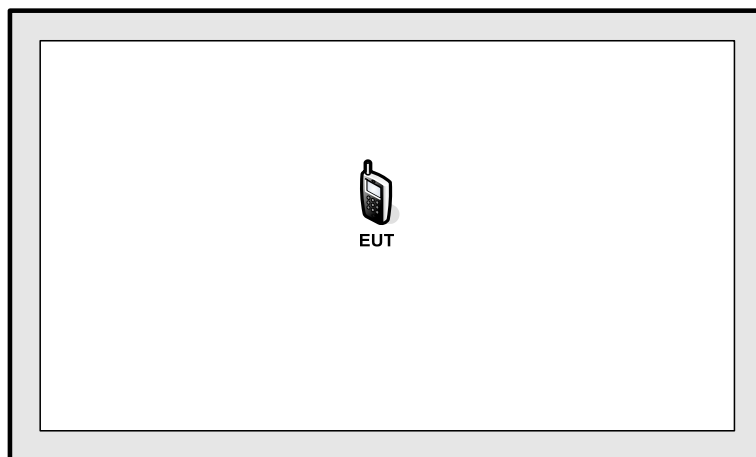

<WLAN 2.4GHz 802.11n HT20 Tx Mode>

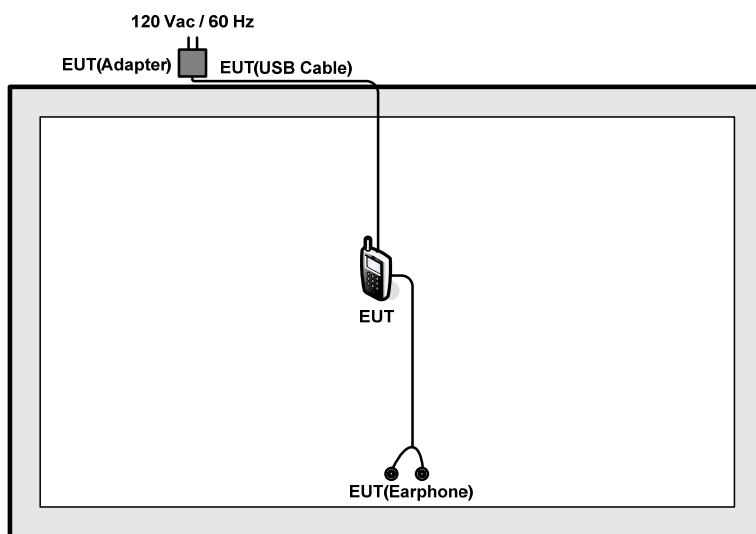
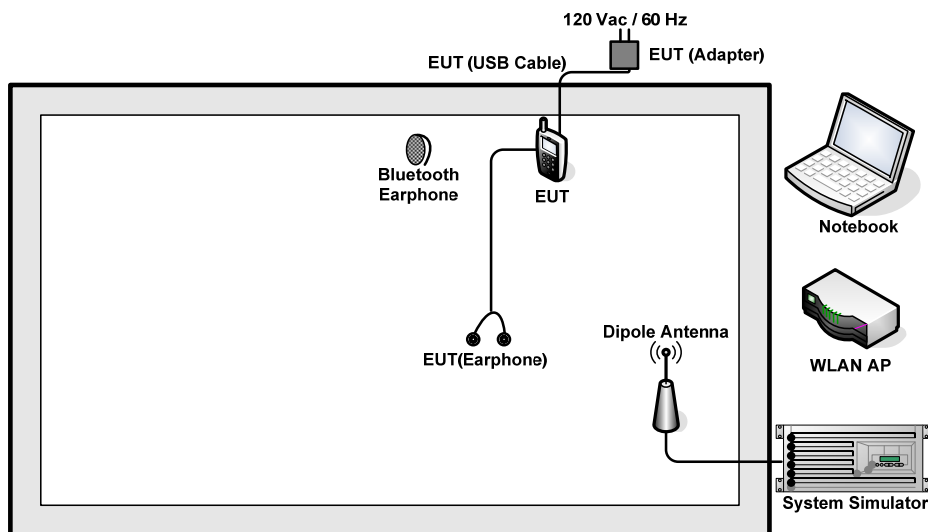
<AC Conducted Emission Mode>

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.5 dB.

Offset(dB) = RF cable loss(dB) = 5.5 (dB)

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


3.1.4 Test Setup

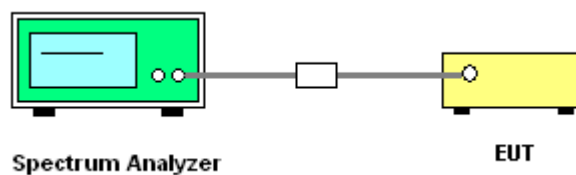



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A of this test report.

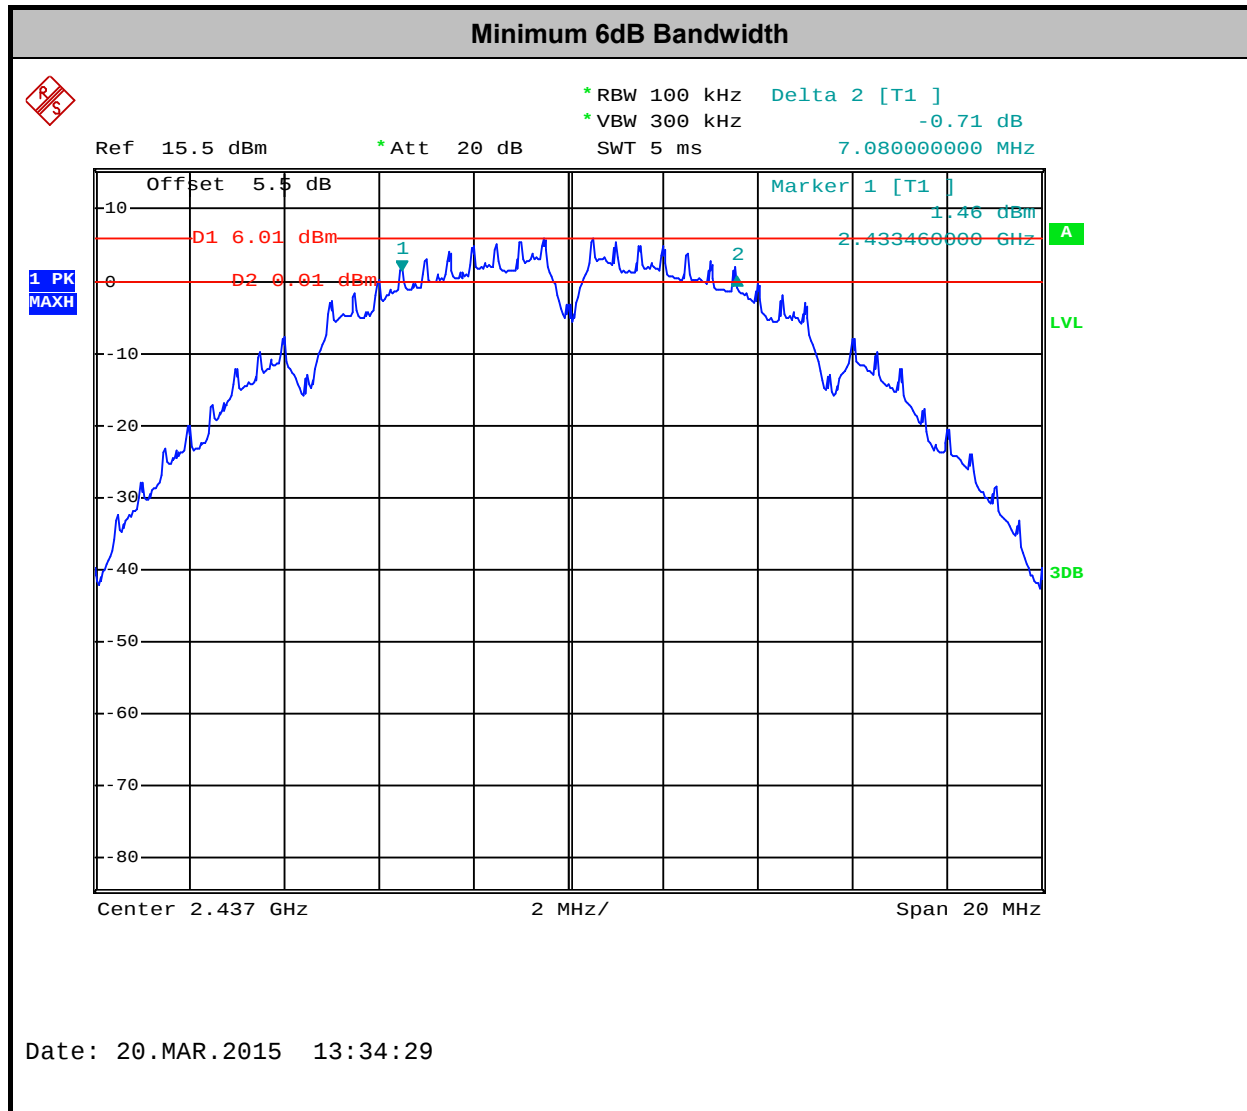

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r02.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup





3.2.5 Test Result of Peak Output Power

Please refer to Appendix A of this test report.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A of this test report.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup

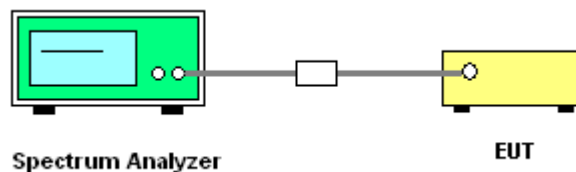



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A of this test report.

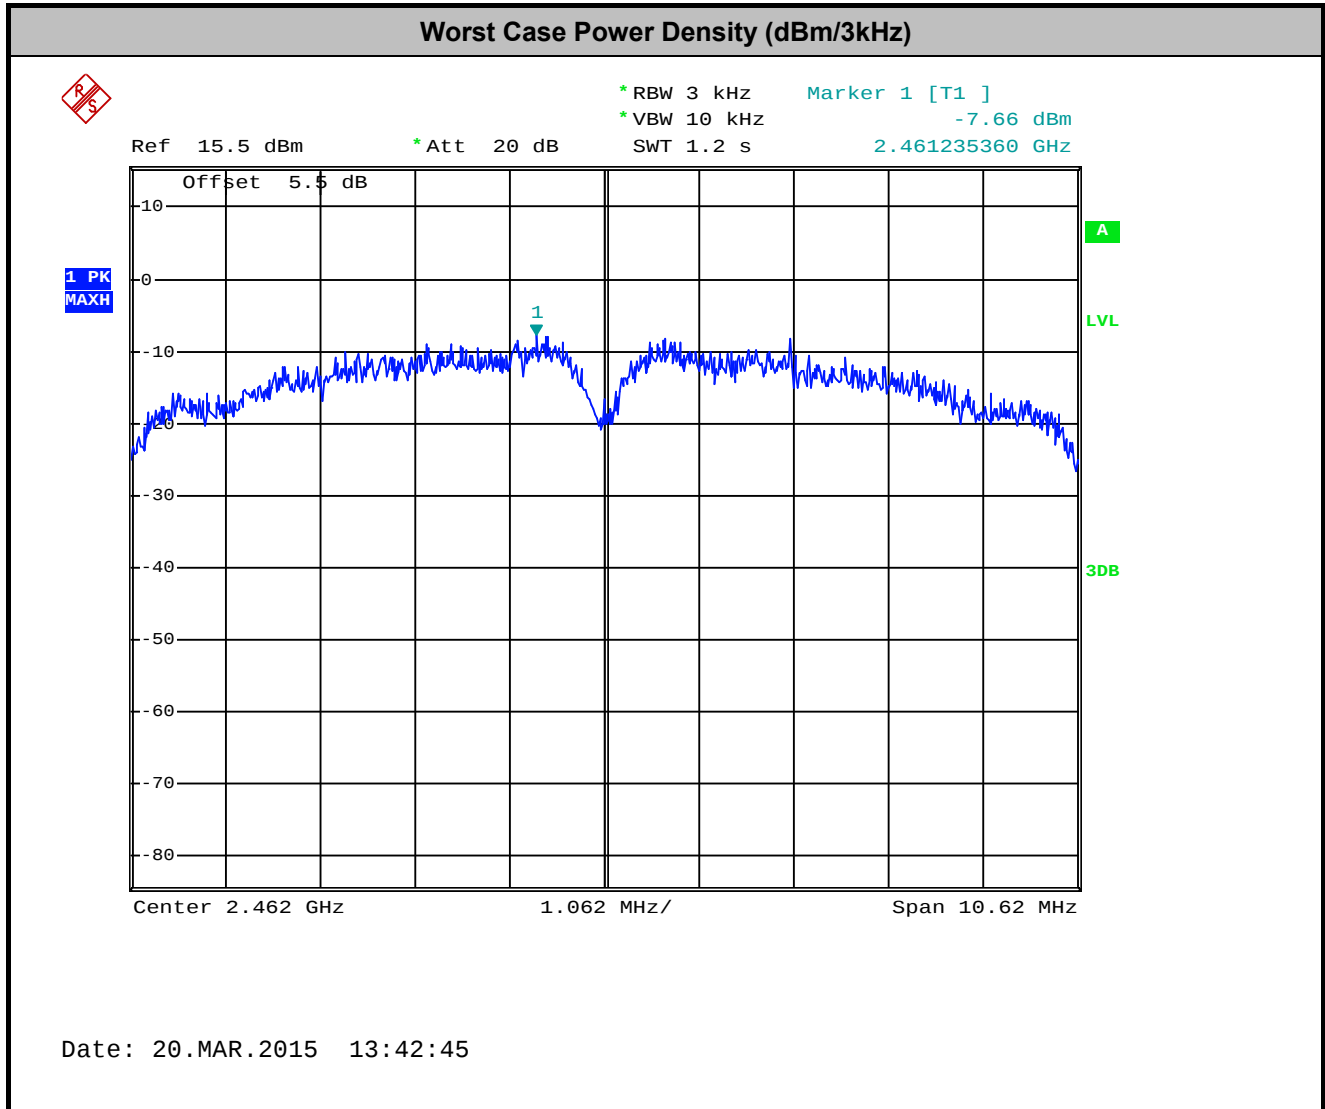

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

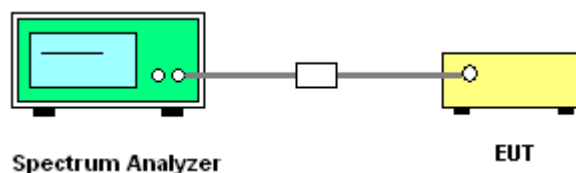




3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Fire Chai


WLAN 802.11b Channel 01

100kHz PSD reference Level

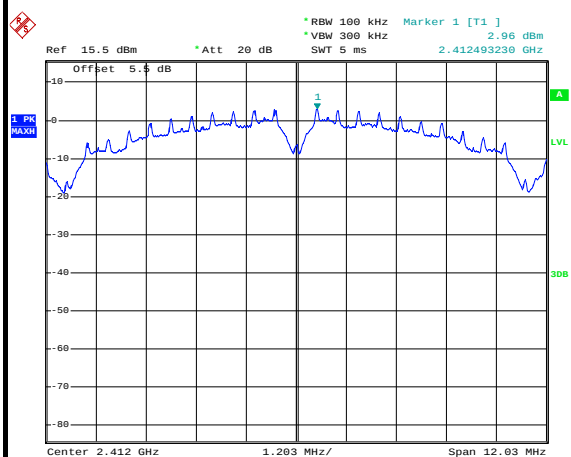


Date: 20.MAR.2015 13:31:50

Low Channel Plot

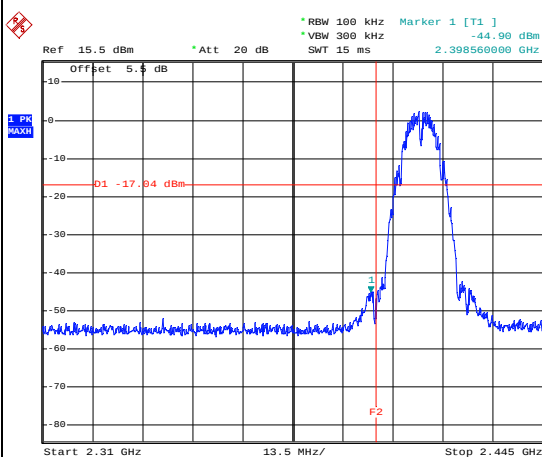


Date: 20.MAR.2015 13:32:10

Spurious Emission 30MHz~3GHz

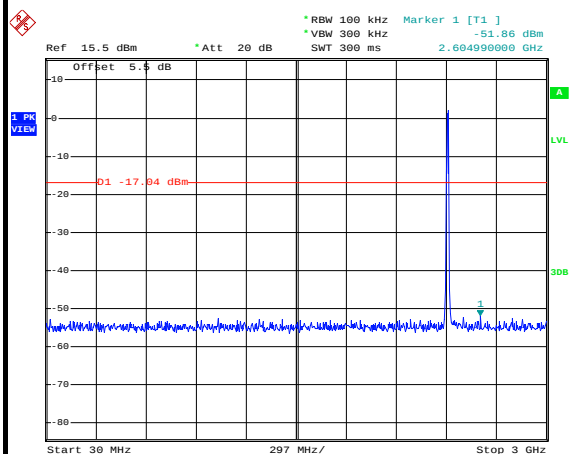

Date: 20.MAR.2015 13:32:33

Spurious Emission 2GHz~25GHz

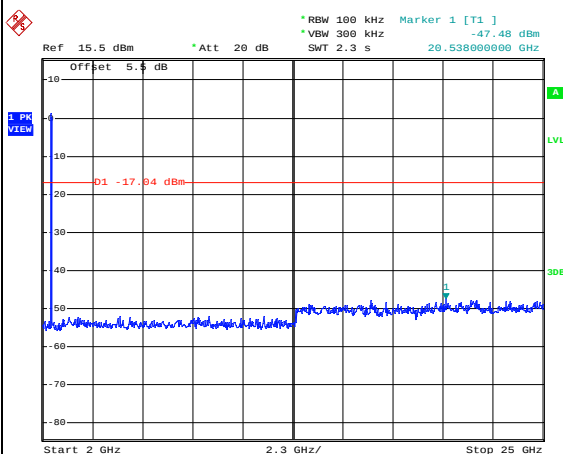


Date: 20.MAR.2015 13:32:51



Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Fire Chai


WLAN 802.11b Channel 06

100kHz PSD reference Level

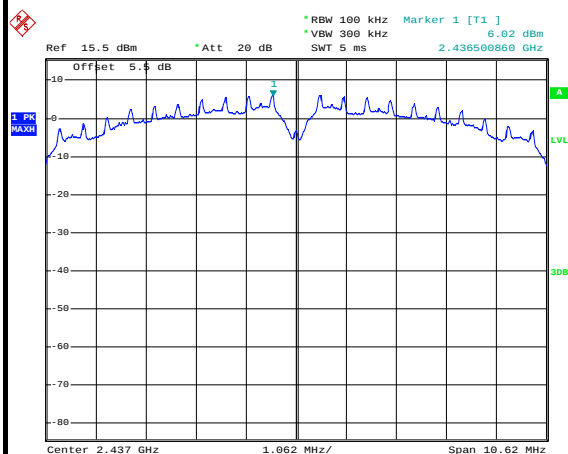


Date: 20.MAR.2015 13:35:48

Spurious Emission 30MHz~3GHz

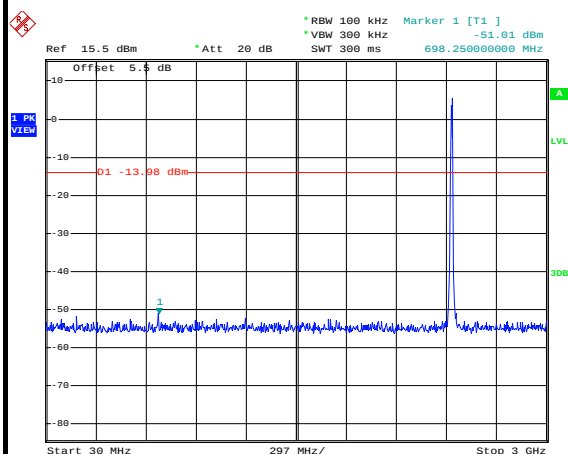

Date: 20.MAR.2015 13:36:27

Spurious Emission 2GHz~25GHz

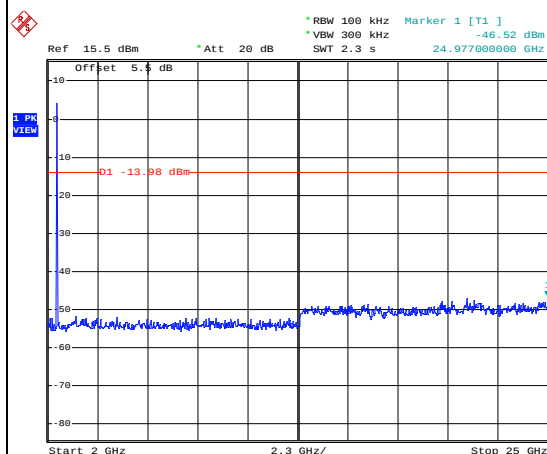


Date: 20.MAR.2015 13:36:45



Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Fire Chai


WLAN 802.11b Channel 11

100kHz PSD reference Level

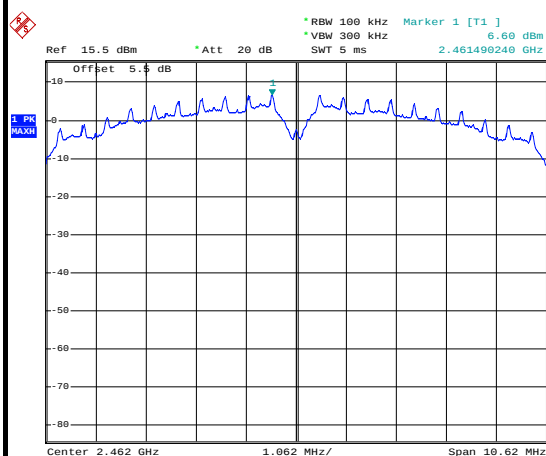


Date: 20.MAR.2015 13:43:16

High Channel Plot

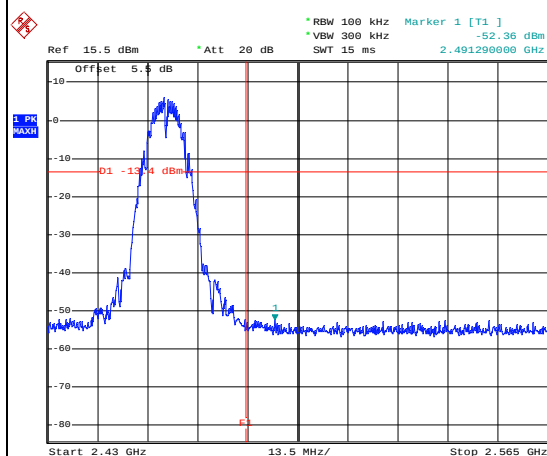


Date: 20.MAR.2015 13:44:09

Spurious Emission 30MHz~3GHz

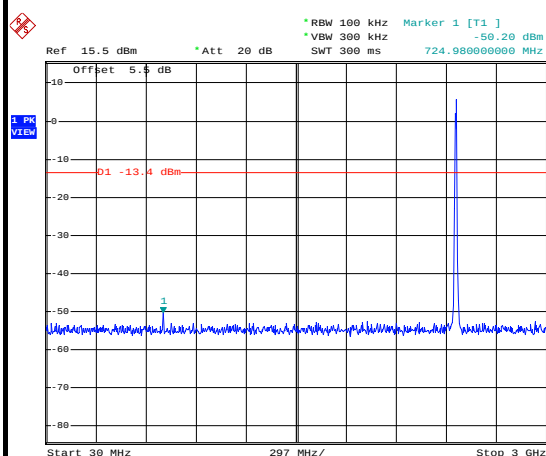

Date: 20.MAR.2015 13:44:38

Spurious Emission 2GHz~25GHz

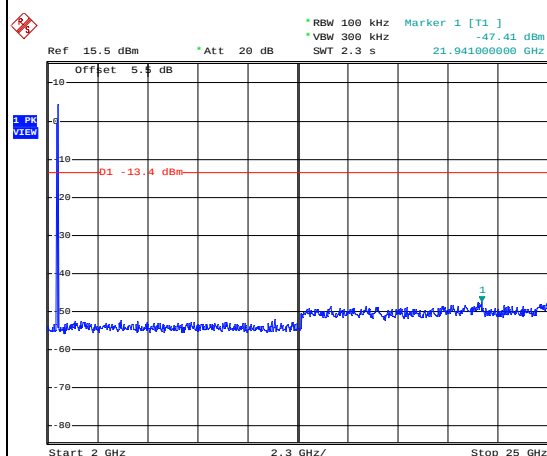


Date: 20.MAR.2015 13:44:56



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Fire Chai


WLAN 802.11g Channel 01

100kHz PSD reference Level

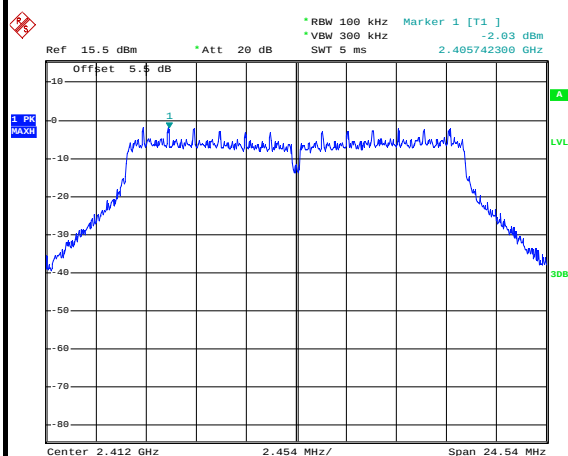


Date: 20.MAR.2015 14:18:27

Low Channel Plot

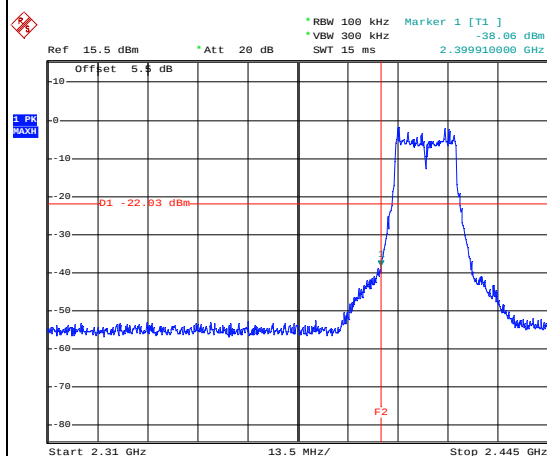


Date: 20.MAR.2015 14:18:58

Spurious Emission 30MHz~3GHz

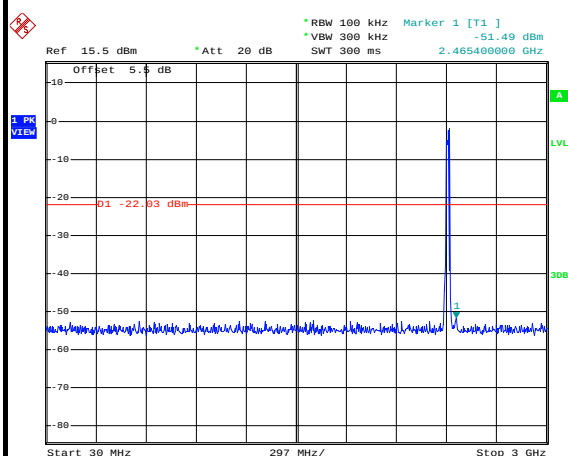

Date: 20.MAR.2015 14:19:38

Spurious Emission 2GHz~25GHz

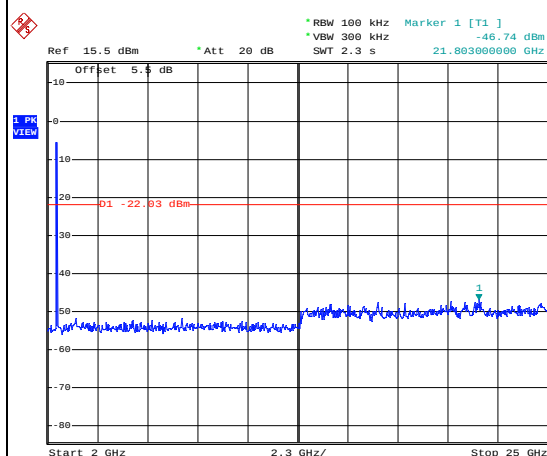


Date: 20.MAR.2015 14:19:56



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Fire Chai


WLAN 802.11g Channel 06

100kHz PSD reference Level

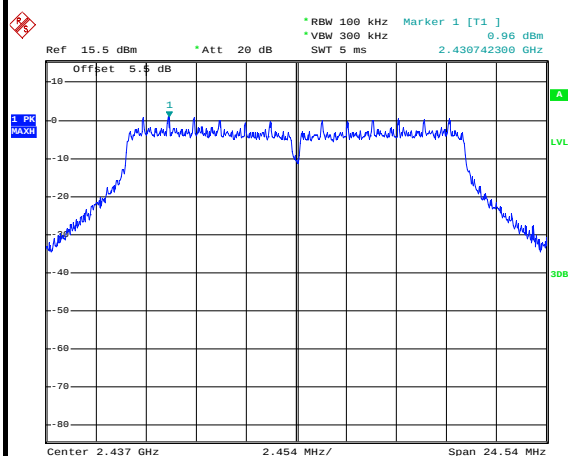


Date: 20.MAR.2015 14:23:17

Spurious Emission 30MHz~3GHz

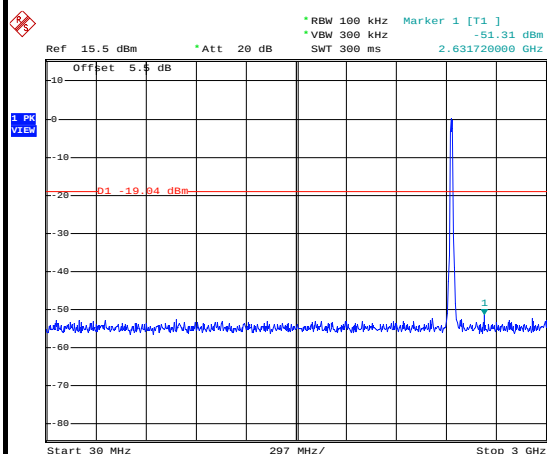

Date: 20.MAR.2015 14:24:32

Spurious Emission 2GHz~25GHz

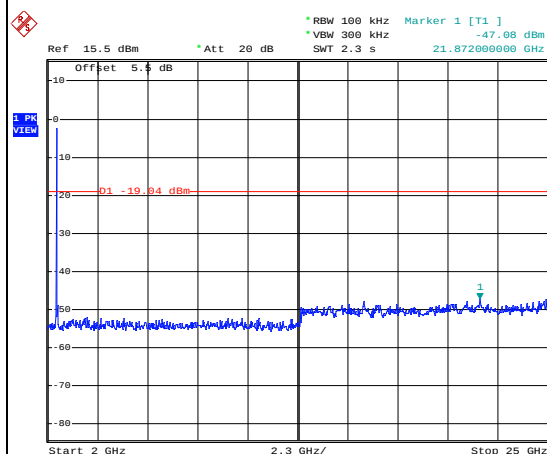


Date: 20.MAR.2015 14:24:50



Test Mode :	802.11g	Temperature :	24~26°C
Test Band :	2.4GHz High	Relative Humidity :	50~53%
Test Channel :	11	Test Engineer :	Fire Chai


WLAN 802.11g Channel 11

100kHz PSD reference Level

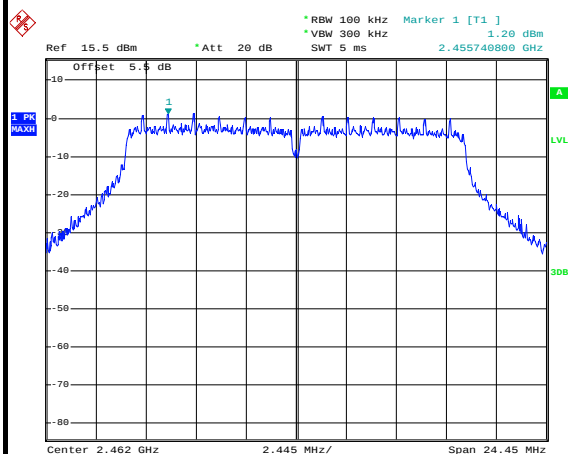


Date: 20.MAR.2015 14:30:04

High Channel Plot

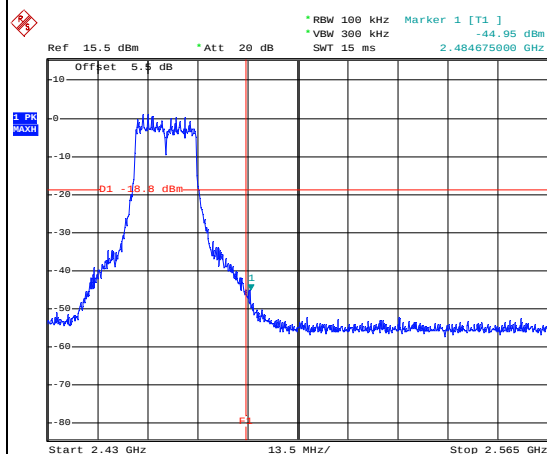


Date: 20.MAR.2015 14:31:31

Spurious Emission 30MHz~3GHz

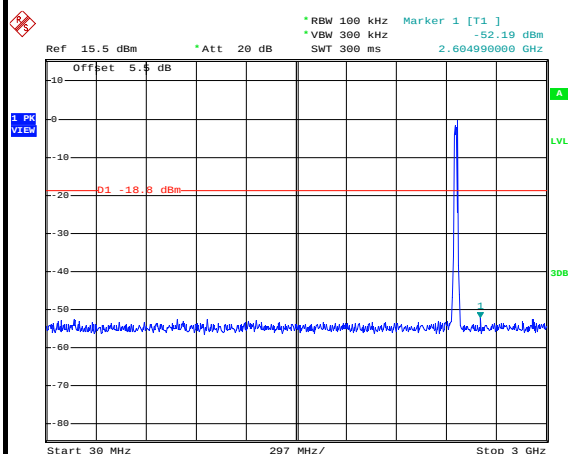

Date: 20.MAR.2015 14:30:56

Spurious Emission 2GHz~25GHz

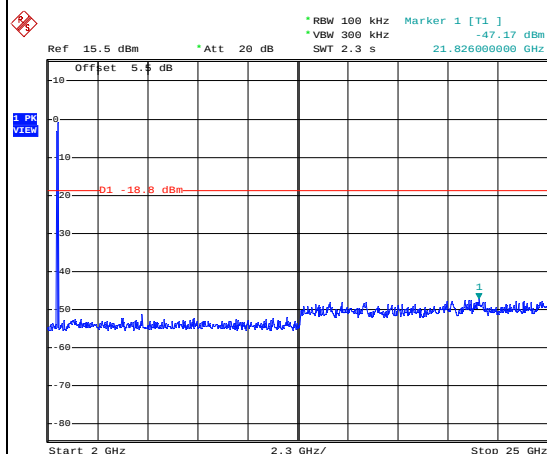


Date: 20.MAR.2015 14:31:14



Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Fire Chai


WLAN 802.11n HT20 Channel 01

100kHz PSD reference Level

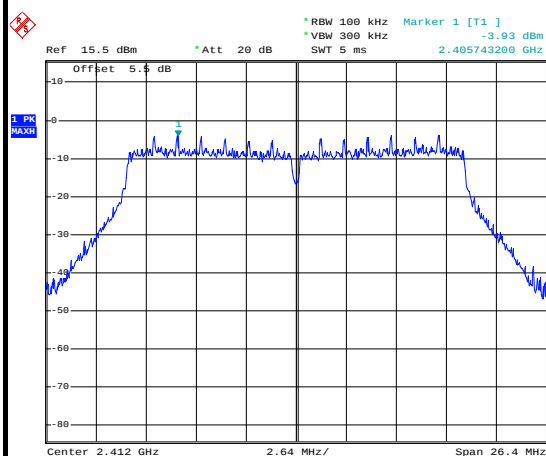


Date: 20.MAR.2015 14:05:33

Low Channel Plot

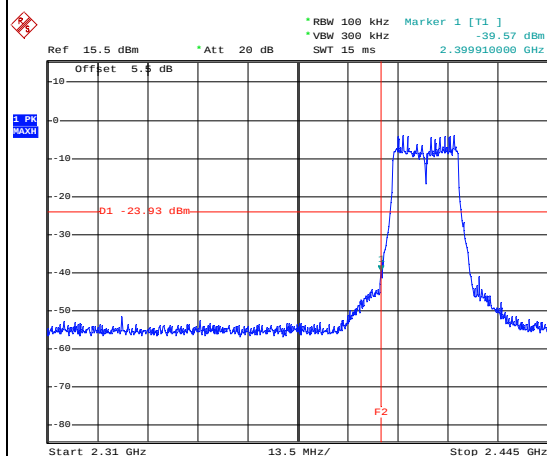


Date: 20.MAR.2015 14:06:09

Spurious Emission 30MHz~3GHz

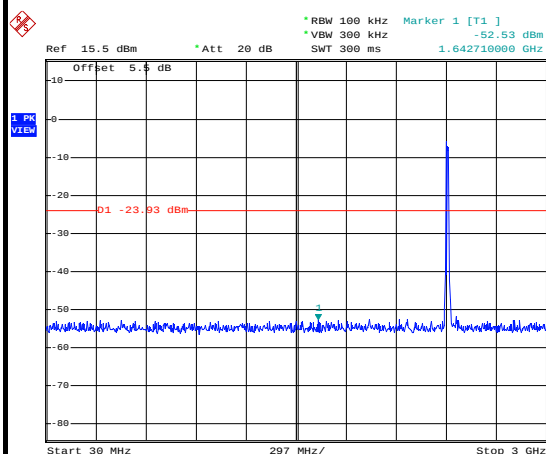

Date: 20.MAR.2015 14:06:39

Spurious Emission 2GHz~25GHz

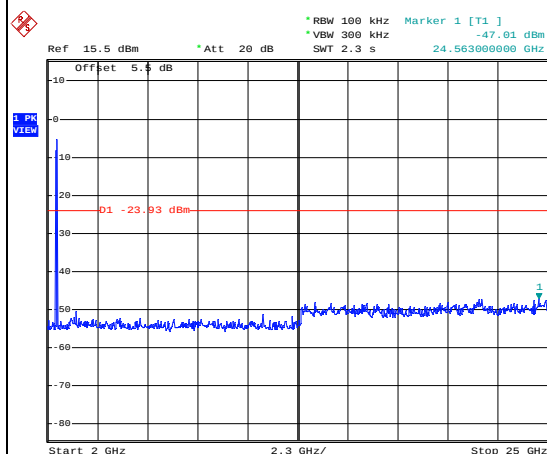


Date: 20.MAR.2015 14:06:57



Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Fire Chai


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

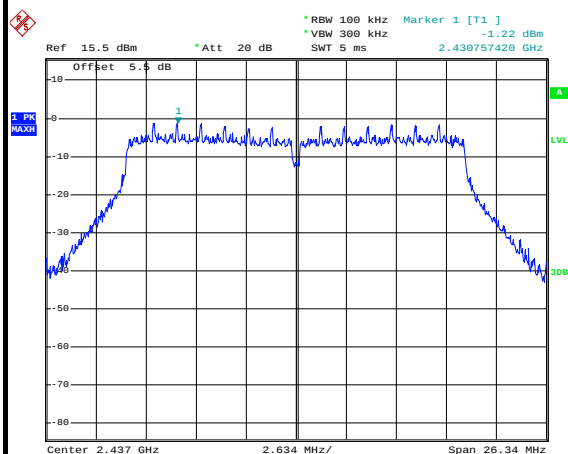


Date: 20.MAR.2015 14:10:47

Spurious Emission 30MHz~3GHz

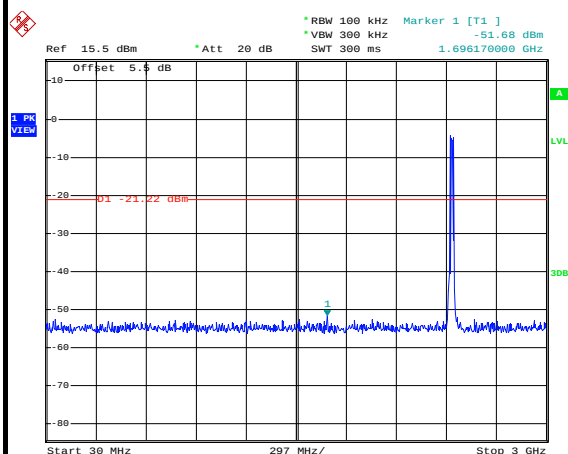

Date: 20.MAR.2015 14:11:13

Spurious Emission 2GHz~25GHz

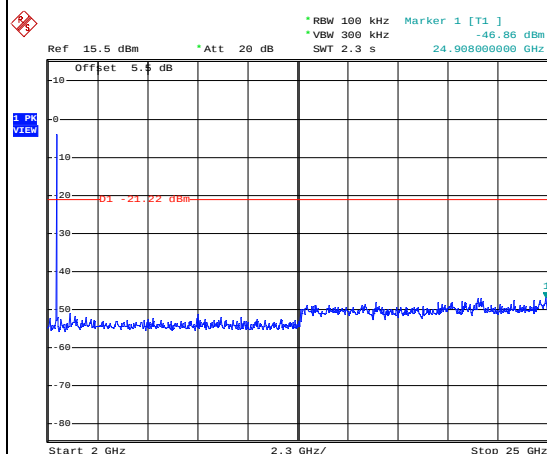


Date: 20.MAR.2015 14:11:31



Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Fire Chai


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

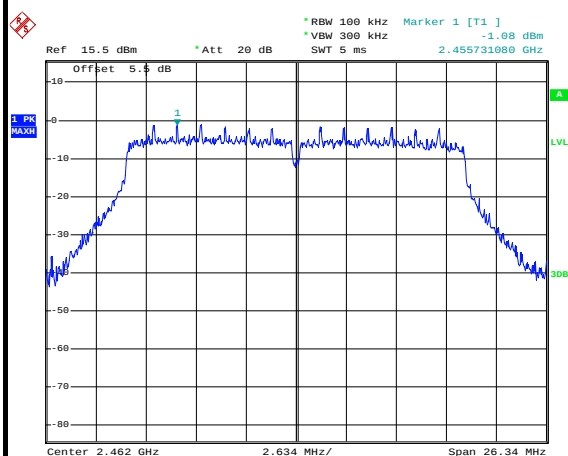


Date: 20.MAR.2015 14:14:28

High Channel Plot

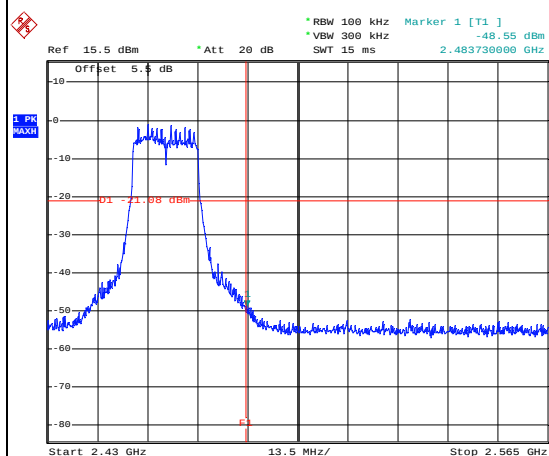


Date: 20.MAR.2015 14:14:47

Spurious Emission 30MHz~3GHz

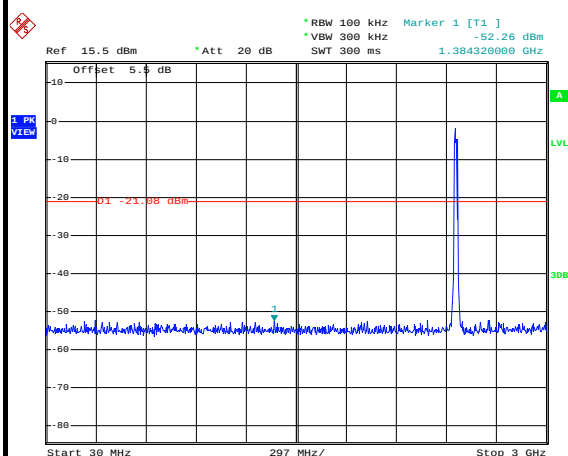

Date: 20.MAR.2015 14:15:14

Spurious Emission 2GHz~25GHz

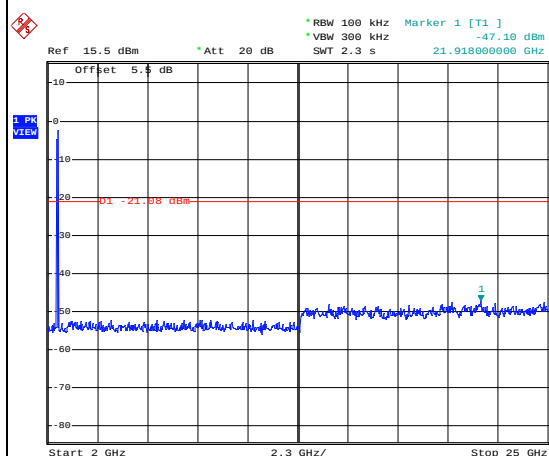

Date: 20.MAR.2015 14:15:32

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r02.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.


For average measurement:

 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	97.63	8.24	0.12	300Hz
802.11g	87.18	1.36	0.74	1kHz
2.4GHz 802.11n HT20	86.41	1.27	0.79	1kHz

3.5.4 Test Setup


For radiated emissions below 30MHz

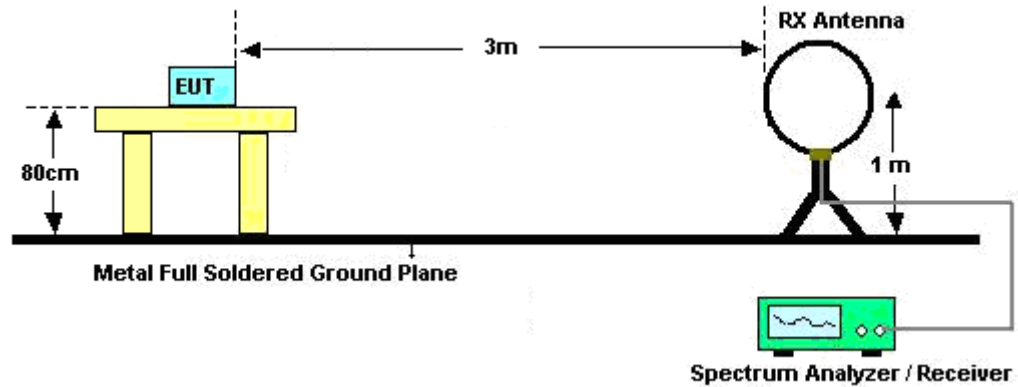

For radiated emissions from 30MHz to 1GHz

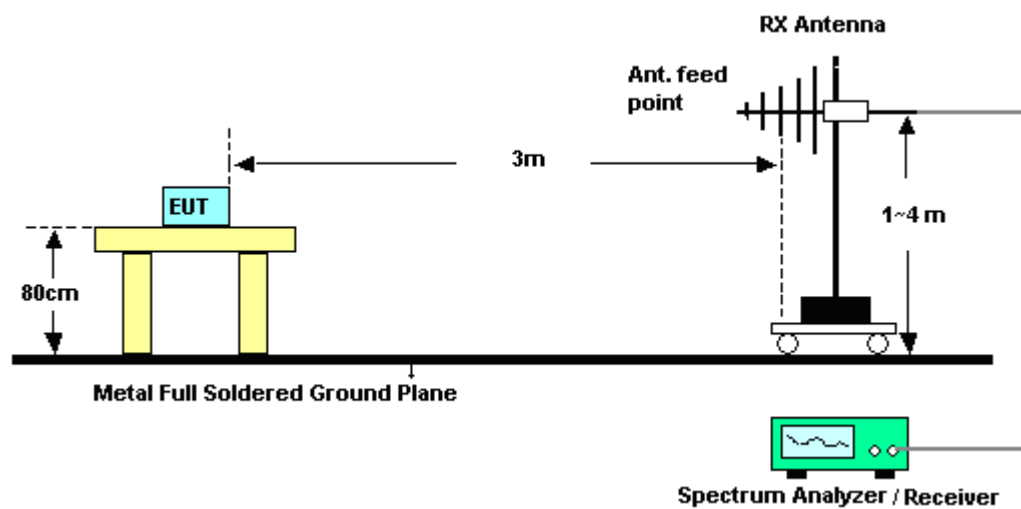

For radiated emissions above 1GHz

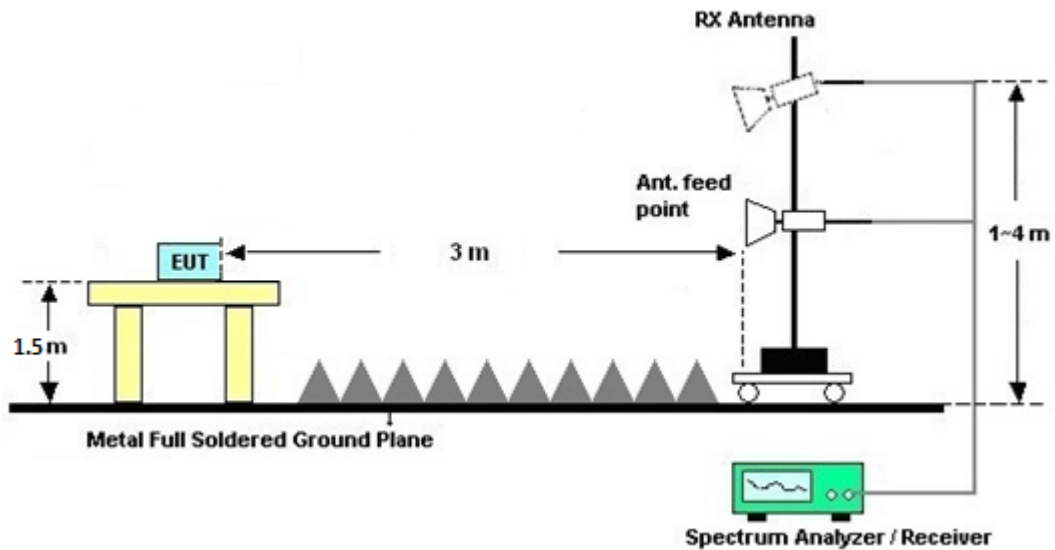

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


3.6.4 Test Setup

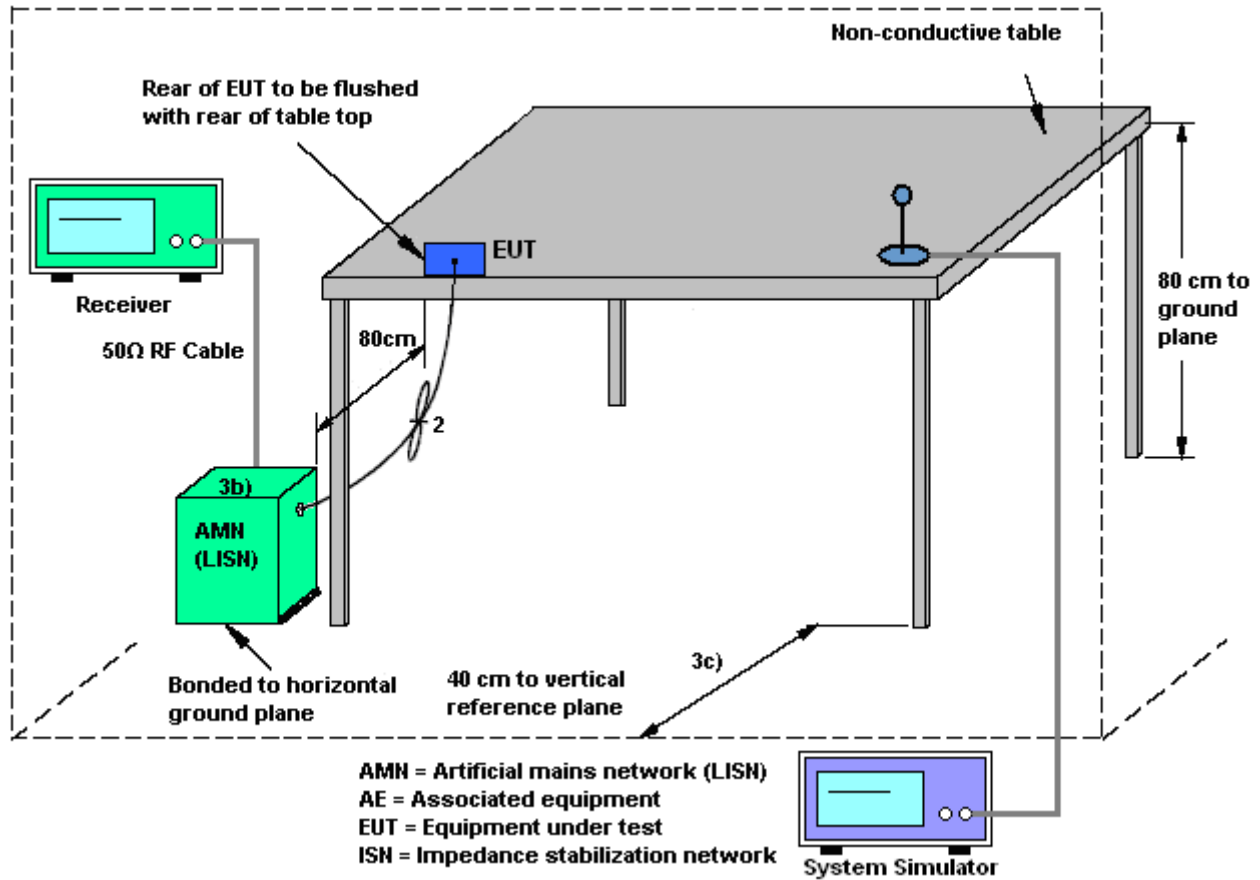



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Eko Guan	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone		

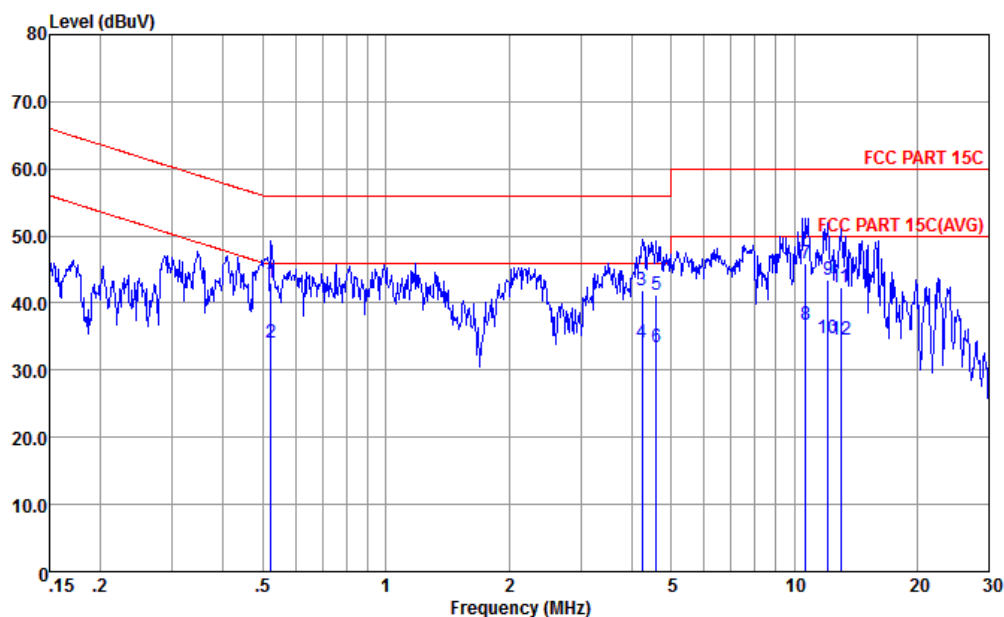


Site : CO01-KS
Condition : FCC PART 15C LISN-L20140306 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.52	43.03	-12.97	56.00	32.20	0.20	10.63	QP
2 *	0.52	34.13	-11.87	46.00	23.30	0.20	10.63	Average
3	4.25	41.82	-14.18	56.00	30.80	0.19	10.83	QP
4	4.25	34.12	-11.88	46.00	23.10	0.19	10.83	Average
5	4.60	41.34	-14.66	56.00	30.30	0.20	10.84	QP
6	4.60	33.44	-12.56	46.00	22.40	0.20	10.84	Average
7	10.68	45.96	-14.04	60.00	34.80	0.20	10.96	QP
8	10.68	36.86	-13.14	50.00	25.70	0.20	10.96	Average
9	12.12	43.37	-16.63	60.00	32.20	0.20	10.97	QP
10	12.12	34.77	-15.23	50.00	23.60	0.20	10.97	Average
11	12.99	42.38	-17.62	60.00	31.20	0.20	10.98	QP
12	12.99	34.48	-15.52	50.00	23.30	0.20	10.98	Average



Test Mode :	Mode 1	Temperature :	22~24℃
Test Engineer :	Eko Guan	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone		

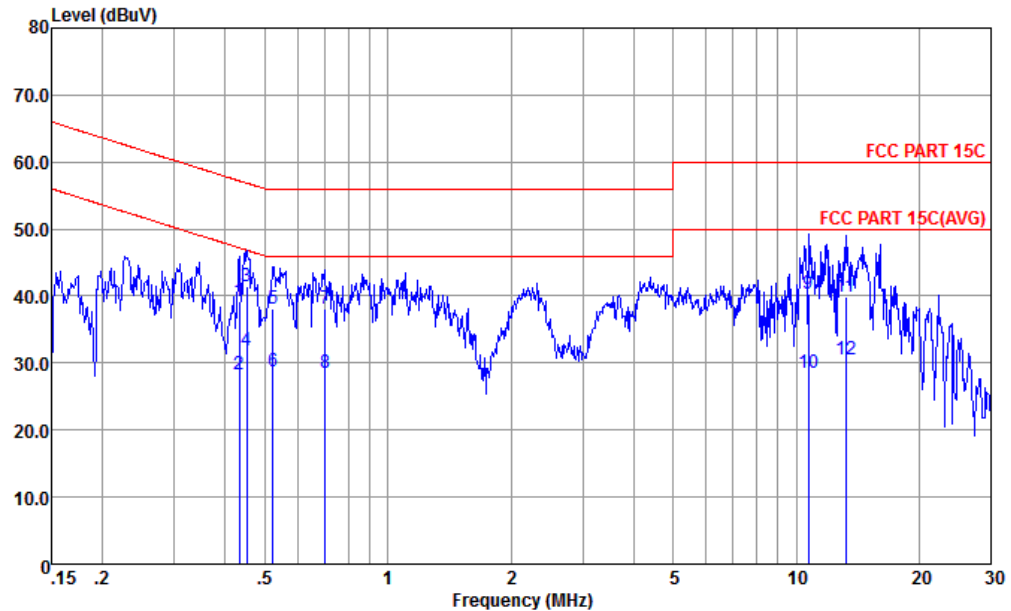

Site : CO01-KS
Condition : FCC PART 15C LISN-N20140306 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.43	39.28	-17.92	57.20	28.30	0.36	10.62	QP
2	0.43	28.28	-18.92	47.20	17.30	0.36	10.62	Average
3	0.45	41.36	-15.49	56.85	30.40	0.34	10.62	QP
4 *	0.45	31.76	-15.09	46.85	20.80	0.34	10.62	Average
5	0.52	38.22	-17.78	56.00	27.30	0.29	10.63	QP
6	0.52	28.72	-17.28	46.00	17.80	0.29	10.63	Average
7	0.70	38.14	-17.86	56.00	27.30	0.20	10.64	QP
8	0.70	28.44	-17.56	46.00	17.60	0.20	10.64	Average
9	10.73	40.38	-19.62	60.00	29.21	0.21	10.96	QP
10	10.73	28.48	-21.52	50.00	17.31	0.21	10.96	Average
11	13.20	39.86	-20.14	60.00	28.61	0.27	10.98	QP
12	13.20	30.56	-19.44	50.00	19.31	0.27	10.98	Average



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Oct. 28, 2014	Mar. 20, 2015~ Mar. 26, 2015	Oct. 27, 2015	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	30MHz~40GHz	Jan. 23, 2015	Mar. 20, 2015~ Mar. 26, 2015	Jan. 22, 2016	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 23, 2015	Mar. 20, 2015~ Mar. 26, 2015	Jan. 22, 2016	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max x 30dBm	Sep. 29, 2014	Mar. 29, 2015~ Apr. 29, 2015	Sep. 28, 2015	Radiation (03CH02-KS)
Spectrum Analyzer	R&S	FSV40	101040	10kHz~40GHz; Max 30dBm	Sep. 25, 2014	Mar. 29, 2015~ Apr. 29, 2015	Sep. 24, 2015	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 13, 2014	Mar. 29, 2015~ Apr. 29, 2015	Nov. 12, 2015	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz-2GHz	Sep. 13, 2014	Mar. 29, 2015~ Apr. 29, 2015	Sep. 12, 2015	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 08, 2014	Mar. 29, 2015~ Apr. 29, 2015	Nov. 07, 2015	Radiation (03CH02-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 08, 2014	Mar. 29, 2015~ Apr. 29, 2015	Nov. 07, 2015	Radiation (03CH02-KS)
SHF-EHF Horn	com-power	AH-840	101070	18GHz-40GHz	Sep. 04, 2014	Mar. 29, 2015~ Apr. 29, 2015	Sep. 03, 2015	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9kHz-1GHz Gain 32dB	Sep. 13, 2014	Mar. 29, 2015~ Apr. 29, 2015	Sep. 12, 2015	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1-26.5GHz Gain 30dB	Oct. 28, 2014	Mar. 29, 2015~ Apr. 29, 2015	Oct. 27, 2015	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Mar. 29, 2015~ Apr. 29, 2015	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Mar. 29, 2015~ Apr. 29, 2015	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Mar. 29, 2015~ Apr. 29, 2015	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 04, 2014	Mar. 31, 2015	May 03, 2015	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 25, 2014	Mar. 31, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 25, 2014	Mar. 31, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 25, 2014	Mar. 31, 2015	Oct. 24, 2015	Conduction (CO01-KS)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------



Appendix A. Conducted Test Results

Report Number : FR531601-01C

Test Engineer:	Fire Chai	Temperature:	21~25	℃
Test Date:	2015/3/20	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	12.60	8.02	0.50	Pass
11b	1Mbps	1	6	2437	12.40	7.08	0.50	Pass
11b	1Mbps	1	11	2462	12.25	7.08	0.50	Pass
11g	6Mbps	1	1	2412	18.25	16.36	0.50	Pass
11g	6Mbps	1	6	2437	18.30	16.36	0.50	Pass
11g	6Mbps	1	11	2462	18.05	16.30	0.50	Pass
HT20	MCS0	1	1	2412	19.15	17.60	0.50	Pass
HT20	MCS0	1	6	2437	19.05	17.56	0.50	Pass
HT20	MCS0	1	11	2462	18.90	17.56	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	13.77	30.00	0.58	14.35	36.00	Pass
11b	1Mbps	1	6	2437	17.10	30.00	0.58	17.68	36.00	Pass
11b	1Mbps	1	11	2462	17.28	30.00	0.58	17.86	36.00	Pass
11g	6Mbps	1	1	2412	18.02	30.00	0.58	18.60	36.00	Pass
11g	6Mbps	1	6	2437	20.37	30.00	0.58	20.95	36.00	Pass
11g	6Mbps	1	11	2462	20.22	30.00	0.58	20.80	36.00	Pass
HT20	MCS0	1	1	2412	16.48	30.00	0.58	17.06	36.00	Pass
HT20	MCS0	1	6	2437	19.23	30.00	0.58	19.81	36.00	Pass
HT20	MCS0	1	11	2462	19.09	30.00	0.58	19.67	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.10	10.85
11b	1Mbps	1	6	2437	0.10	14.11
11b	1Mbps	1	11	2462	0.10	14.25
11g	6Mbps	1	1	2412	0.60	8.85
11g	6Mbps	1	6	2437	0.60	12.19
11g	6Mbps	1	11	2462	0.60	11.93
HT20	MCS0	1	1	2412	0.63	7.12
HT20	MCS0	1	6	2437	0.63	10.30
HT20	MCS0	1	11	2462	0.63	10.17

TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-12.15	0.58	8.00	Pass
11b	1Mbps	1	6	2437	-8.61	0.58	8.00	Pass
11b	1Mbps	1	11	2462	-7.66	0.58	8.00	Pass
11g	6Mbps	1	1	2412	-15.52	0.58	8.00	Pass
11g	6Mbps	1	6	2437	-12.39	0.58	8.00	Pass
11g	6Mbps	1	11	2462	-13.32	0.58	8.00	Pass
HT20	MCS0	1	1	2412	-18.27	0.58	8.00	Pass
HT20	MCS0	1	6	2437	-15.67	0.58	8.00	Pass
HT20	MCS0	1	11	2462	-15.25	0.58	8.00	Pass



Appendix B. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2389.2	49.57	-24.43	74	46.45	31.3	6.17	34.35	231	140	P	H
		2390	35.12	-18.88	54	32	31.3	6.17	34.35	231	140	A	H
	*	2413.11	101.69	-	-	98.5	31.31	6.22	34.34	231	140	P	H
	*	2412.525	96.63	-	-	93.44	31.31	6.22	34.34	231	140	A	H
		2373.09	49.14	-24.86	74	46.05	31.28	6.17	34.36	150	146	P	V
		2390	34.48	-19.52	54	31.36	31.3	6.17	34.35	150	146	A	V
	*	2413.193	99.52	-	-	96.33	31.31	6.22	34.34	150	146	P	V
	*	2413.026	94.46	-	-	91.27	31.31	6.22	34.34	150	146	A	V
802.11b CH 06 2437MHz	*	2435.822	99.71	-	-	96.49	31.33	6.22	34.33	224	46	P	H
	*	2437.074	94.4	-	-	91.16	31.34	6.22	34.32	224	46	A	H
	*	2435.822	97.83	-	-	94.61	31.33	6.22	34.33	150	267	P	V
	*	2435.321	92.61	-	-	89.39	31.33	6.22	34.33	150	267	A	V
802.11b CH 11 2462MHz	*	2460.872	100.44	-	-	100.05	27.65	7.15	34.41	272	305	P	H
	*	2461.206	95.75	-	-	95.36	27.65	7.15	34.41	272	305	A	H
		2484.12	48.26	-25.74	74	47.81	27.67	7.19	34.41	272	305	P	H
		2483.76	36.26	-17.74	54	35.81	27.67	7.19	34.41	272	305	A	H
	*	2460.955	102.33	-	-	101.94	27.65	7.15	34.41	150	241	P	V
	*	2461.289	98.12	-	-	97.73	27.65	7.15	34.41	150	241	A	V
		2484.24	49.57	-24.43	74	49.12	27.67	7.19	34.41	150	241	P	V
		2483.8	36.77	-17.23	54	36.32	27.67	7.19	34.41	150	241	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	42.77	-31.23	74	56.29	34.89	8.73	57.14	150	30	P	H
		4824	39.23	-34.77	74	52.75	34.89	8.73	57.14	150	46	P	V
802.11b CH 06 2437MHz		4875	42.08	-31.92	74	55.48	34.92	8.76	57.08	150	145	P	H
		7311	41.55	-32.45	74	52.82	35.56	10.84	57.67	150	241	P	H
		4875	39.86	-34.14	74	53.26	34.92	8.76	57.08	150	211	P	V
		7311	41.31	-32.69	74	52.58	35.56	10.84	57.67	150	0	P	V
802.11b CH 11 2462MHz		4924	45.17	-28.83	74	38.44	31.7	9.88	34.85	150	360	P	H
		7386	43.49	-30.51	74	29.49	36.54	12.43	34.97	150	0	P	H
		4924	45.53	-28.47	74	38.8	31.7	9.88	34.85	150	0	P	V
		7386	42.92	-31.08	74	28.92	36.54	12.43	34.97	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.92	52.48	-21.52	74	49.36	31.3	6.17	34.35	150	282	P	H
		2390	36.42	-17.58	54	33.3	31.3	6.17	34.35	150	282	A	H
	*	2418.37	99.31	-	-	96.12	31.31	6.22	34.34	150	282	P	H
	*	2418.036	86.98	-	-	83.79	31.31	6.22	34.34	150	282	A	H
		2390	49.05	-24.95	74	45.93	31.3	6.17	34.35	150	351	P	V
		2390	35.03	-18.97	54	31.91	31.3	6.17	34.35	150	351	A	V
	*	2417.535	92.84	-	-	89.65	31.31	6.22	34.34	150	351	P	V
	*	2418.287	81.37	-	-	78.18	31.31	6.22	34.34	150	351	A	V
802.11g CH 06 2437MHz	*	2441.5	99.62	-	-	96.32	31.34	6.28	34.32	154	157	P	H
	*	2433.066	87.41	-	-	84.19	31.33	6.22	34.33	154	157	A	H
	*	2431.396	95.05	-	-	91.83	31.33	6.22	34.33	162	115	P	V
	*	2433.483	83.42	-	-	80.2	31.33	6.22	34.33	162	115	A	V
802.11g CH 11 2462MHz	*	2458.283	102.02	-	-	101.63	27.65	7.15	34.41	153	157	P	H
	*	2457.615	91.47	-	-	91.08	27.65	7.15	34.41	153	157	A	H
		2484.24	65.39	-8.61	74	64.94	27.67	7.19	34.41	153	157	P	H
		2483.52	40.89	-13.11	54	40.46	27.67	7.17	34.41	153	157	A	H
	*	2458.199	93.26	-	-	92.87	27.65	7.15	34.41	300	70	P	V
	*	2459.201	82.66	-	-	82.27	27.65	7.15	34.41	300	70	A	V
		2484.04	55.47	-18.53	74	55.02	27.67	7.19	34.41	300	70	P	V
		2483.6	35.77	-18.23	54	35.34	27.67	7.17	34.41	300	70	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	40.22	-33.78	74	53.74	34.89	8.73	57.14	184	236	P	H
		4824	40.1	-33.9	74	53.62	34.89	8.73	57.14	174	215	P	V
802.11g CH 06 2437MHz		4875	40.78	-33.22	74	54.18	34.92	8.76	57.08	168	180	P	H
		7311	41.25	-32.75	74	52.52	35.56	10.84	57.67	167	0	P	H
		4875	39.38	-34.62	74	52.78	34.92	8.76	57.08	177	136	P	V
		7311	42.26	-31.74	74	53.53	35.56	10.84	57.67	210	120	P	V
802.11g CH 11 2462MHz		4923	44.9	-29.1	74	38.17	31.7	9.88	34.85	156	245	P	H
		7386	48.91	-25.09	74	34.91	36.54	12.43	34.97	188	26	P	H
		4923	45.99	-28.01	74	39.26	31.7	9.88	34.85	158	26	P	V
		7386	46.95	-27.05	74	32.95	36.54	12.43	34.97	243	200	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2389.83	58.69	-15.31	74	55.57	31.3	6.17	34.35	185	200	P	H
		2390	38.25	-15.75	54	35.13	31.3	6.17	34.35	185	200	A	H
	*	2419.456	100.66	-	-	97.47	31.31	6.22	34.34	185	200	P	H
	*	2419.122	88.79	-	-	85.6	31.31	6.22	34.34	185	200	A	H
		2389.29	52.91	-21.09	74	49.79	31.3	6.17	34.35	163	20	P	V
		2390	36.24	-17.76	54	33.12	31.3	6.17	34.35	163	20	A	V
	*	2405.511	93.88	-	-	90.69	31.31	6.22	34.34	163	20	P	V
	*	2416.199	81.76	-	-	78.57	31.31	6.22	34.34	163	20	A	V
802.11n HT20 CH 06 2437MHz	*	2431.062	100.07	-	-	96.85	31.33	6.22	34.33	182	221	P	H
	*	2432.565	88.01	-	-	84.79	31.33	6.22	34.33	182	221	A	H
	*	2430.227	96.26	-	-	93.04	31.33	6.22	34.33	194	177	P	V
	*	2432.314	84.46	-	-	81.24	31.33	6.22	34.33	194	177	A	V
802.11n HT20 CH 11 2462MHz	*	2457.281	100.24	-	-	99.85	27.65	7.15	34.41	150	70	P	H
	*	2458.7	89.62	-	-	89.23	27.65	7.15	34.41	150	70	A	H
		2484.08	59.01	-14.99	74	58.56	27.67	7.19	34.41	150	70	P	H
		2483.52	39.2	-14.8	54	38.77	27.67	7.17	34.41	150	70	A	H
	*	2456.029	99.84	-	-	99.45	27.65	7.15	34.41	150	72	P	V
	*	2456.112	89.42	-	-	89.03	27.65	7.15	34.41	150	72	A	V
		2484.12	61.65	-12.35	74	61.2	27.67	7.19	34.41	150	72	P	V
		2483.52	39.69	-14.31	54	39.26	27.67	7.17	34.41	150	72	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	40.67	-33.33	74	54.19	34.89	8.73	57.14	184	269	P	H
		4824	40.32	-33.68	74	53.84	34.89	8.73	57.14	174	68	P	V
802.11n HT20 CH 06 2437MHz		4875	39.96	-34.04	74	53.36	34.92	8.76	57.08	168	52	P	H
		7311	41.4	-32.6	74	52.67	35.56	10.84	57.67	213	0	P	H
		4875	40.69	-33.31	74	54.09	34.92	8.76	57.08	199	230	P	V
		7311	41.02	-32.98	74	52.29	35.56	10.84	57.67	188	56	P	V
802.11n HT20 CH 11 2462MHz		4923	45.82	-28.18	74	39.09	31.7	9.88	34.85	148	23	P	H
		7386	46.69	-27.31	74	32.69	36.54	12.43	34.97	150	64	P	H
		4923	46.04	-27.96	74	39.31	31.7	9.88	34.85	150	305	P	V
		7386	46.72	-27.28	74	32.72	36.54	12.43	34.97	150	160	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11b LF		33.88	22.16	-17.84	40	38.54	17.9	0.98	35.26	-	-	P	H
		97.9	27.28	-16.22	43.5	48.52	11.82	2.18	35.24	124	56	P	H
		156.1	25.88	-17.62	43.5	47.24	10.99	2.57	34.92	-	-	P	H
		182.29	25.45	-18.05	43.5	48.14	10.04	2.25	34.98	-	-	P	H
		210.42	25.46	-18.04	43.5	48.21	9.82	2.47	35.04	-	-	P	H
		316.15	23.9	-22.1	46	42.18	13.86	2.73	34.87	-	-	P	H
		35.82	28.68	-11.32	40	46.06	16.84	0.98	35.2	-	-	P	V
		47.46	31.27	-8.73	40	54.78	9.82	1.52	34.85	148	95	P	V
		66.86	22.99	-17.01	40	49.39	6.76	1.77	34.93	-	-	P	V
		98.87	21.39	-22.11	43.5	42.55	11.96	2.18	35.3	-	-	P	V
		158.04	23.81	-19.69	43.5	45.23	10.92	2.57	34.91	-	-	P	V
		387.93	23.46	-22.54	46	40	15.82	2.83	35.19	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11g (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11g LF		34.85	17.79	-22.21	40	34.48	17.6	0.98	35.27	-	-	P	H
		95.96	20.65	-22.85	43.5	42.06	11.54	2.18	35.13	-	-	P	H
		171.62	24.96	-18.54	43.5	47.45	10.42	2.03	34.94	148	325	P	H
		210.42	20.43	-23.07	43.5	43.18	9.82	2.47	35.04	-	-	P	H
		321	19.16	-26.84	46	37.36	13.97	2.73	34.9	-	-	P	H
		420.91	22.34	-23.66	46	37.9	16.54	2.99	35.09	-	-	P	H
		35.82	29.95	-10.05	40	47.33	16.84	0.98	35.2	-	-	P	V
		46.49	30.05	-9.95	40	53.15	10.15	1.52	34.77	148	36	P	V
		95.96	21.55	-21.95	43.5	42.96	11.54	2.18	35.13	-	-	P	V
		159.01	25.8	-17.7	43.5	47.26	10.88	2.57	34.91	-	-	P	V
		169.68	28.24	-15.26	43.5	50.65	10.49	2.03	34.93	-	-	P	V
		210.42	21.09	-22.41	43.5	43.84	9.82	2.47	35.04	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11n HT20 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT20 LF		35.82	22.54	-17.46	40	39.92	16.84	0.98	35.2	152	68	P	H
		44.55	20.36	-19.64	40	42.76	10.8	1.52	34.72	-	-	P	H
		155.13	18.61	-24.89	43.5	39.94	11.02	2.57	34.92	-	-	P	H
		194.9	24.17	-19.33	43.5	47.4	9.58	2.25	35.06	-	-	P	H
		316.15	25.08	-20.92	46	43.36	13.86	2.73	34.87	-	-	P	H
		382.11	25.7	-20.3	46	42.41	15.64	2.83	35.18	-	-	P	H
		35.82	33.17	-6.83	40	50.55	16.84	0.98	35.2	-	-	P	V
		47.46	33.41	-6.59	40	56.92	9.82	1.52	34.85	148	95	P	V
		67.83	21.97	-18.03	40	48.27	6.84	1.77	34.91	-	-	P	V
		158.04	26.31	-17.19	43.5	47.73	10.92	2.57	34.91	-	-	P	V
		168.71	25.96	-17.54	43.5	48.33	10.53	2.03	34.93	-	-	P	V
		219.15	25.93	-20.07	46	48.29	10.17	2.47	35	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.