



FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : LTE/CDMA/WCDMA/GSM(GPRS) Multi-Mode
Digital Mobile Phone
BRAND NAME : ZTE
MODEL NAME : N9137
FCC ID : SRQ-N9137
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Jun. 03, 2017 and testing was completed on Jul. 11, 2017. We, Sporton International (KunShan) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (KunShan) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



Sporton International (KunShan) INC.

No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China



TABLE OF CONTENTS

1	GENERAL DESCRIPTION	5
1.1	Applicant	5
1.2	Manufacturer	5
1.3	Product Feature of Equipment Under Test.....	5
1.4	Product Specification of Equipment Under Test.....	6
1.5	Modification of EUT	6
1.6	Testing Location	6
1.7	Applicable Standards.....	7
2	TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1	Carrier Frequency and Channel	8
2.2	Test Mode.....	9
2.3	Connection Diagram of Test System.....	10
2.4	Support Unit used in test configuration and system	12
2.5	EUT Operation Test Setup	12
2.6	Measurement Results Explanation Example.....	12
3	TEST RESULT	13
3.1	6dB Bandwidth Measurement	13
3.2	Output Power Measurement.....	15
3.3	Power Spectral Density Measurement	17
3.4	Conducted Band Edges and Spurious Emission Measurement	19
3.5	Radiated Band Edges and Spurious Emission Measurement	32
3.6	AC Conducted Emission Measurement.....	36
3.7	Antenna Requirements.....	41
4	LIST OF MEASURING EQUIPMENT	42
5	UNCERTAINTY OF EVALUATION	43
APPENDIX A. CONDUCTED TEST RESULTS		
APPENDIX B. RADIATED SPURIOUS EMISSION		
APPENDIX C. DUTY CYCLE PLOTS		
APPENDIX D. SETUP PHOTOGRAPHS		



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR760302C	Rev. 01	Initial issue of report	Jul. 12, 2017

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 0.72 dB at 2389.950 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 8.19 dB at 2.409 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	LTE/CDMA/WCDMA/GSM(GPRS) Multi-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	N9137
FCC ID	SRQ-N9137
EUT supports Radios application	CDMA/EV-DO/GSM/GPRS/EGPRS/WCDMA/DC-HSDPA/HSPA+(16QAM uplink is not supported)/HSPA/LTE WLAN2.4GHz 802.11b/g/n HT20/HT40 Bluetoothv3.0+ EDR/ Bluetoothv4.0LE /Bluetoothv4.2LE
IMEI Code	Conducted: 990008900006193 conduction: 990008900004073 Radiation: 990008900006441
HW Version	N9137HW1.0
SW Version	N9137V1.0.0B01
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 17.85 dBm (0.0610 W) 802.11g : 21.72 dBm (0.1486 W) 802.11n HT20 : 20.75 dBm (0.1189 W) 802.11n HT40 : 20.67 dBm (0.1167 W)
Antenna Type / Gain	PIFA Antenna with gain 0 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	Sporton International (KunShan) INC.			
Test Site Location	No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC Registration No.
	TH01-KS	03CH03-KS	CO01-KS	306251

Note: The test site complies with ANSI C63.4 2014 requirement.



1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.


Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link(2.4G) + USB Link(Charging from Adapter1) + Earphone + Battery 1
	Mode 2 : GSM 850 Idle + Bluetooth Link + WLAN Link(2.4G) + USB Link(Charging from Adapter2) + Earphone + Battery 2
	Mode 3 : GSM 850 Idle + Bluetooth Link + WLAN Link(2.4G) + USB Link(Charging from Adapter3) + Earphone + Battery 2
Remark: The worst case of conducted emission is mode 2; only the test data of it was reported.	


2.3 Connection Diagram of Test System

<WLAN Tx Mode>


For 11g/11n(40M)

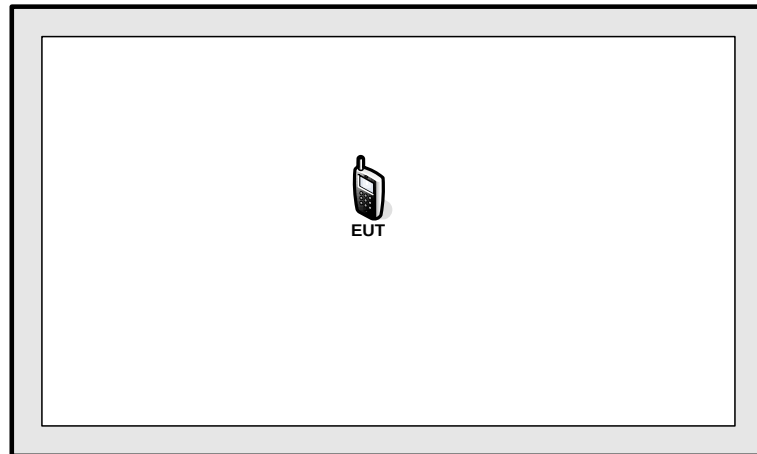

For 11b/11n(20M)

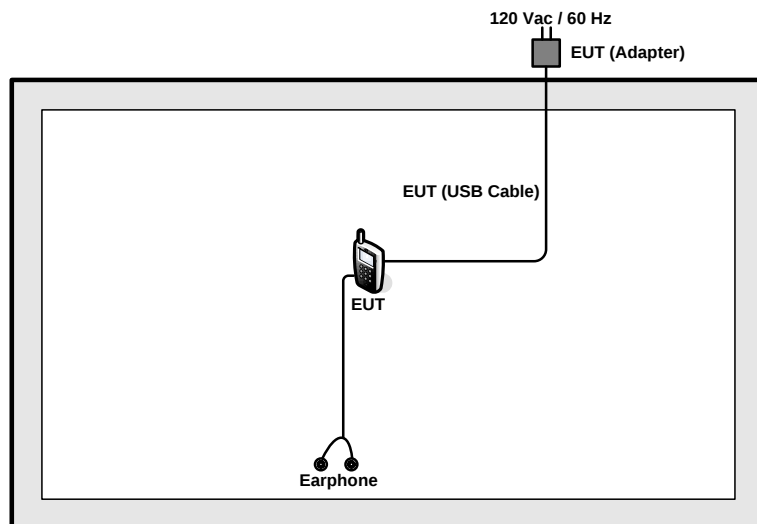

<AC Conducted Emission Mode>

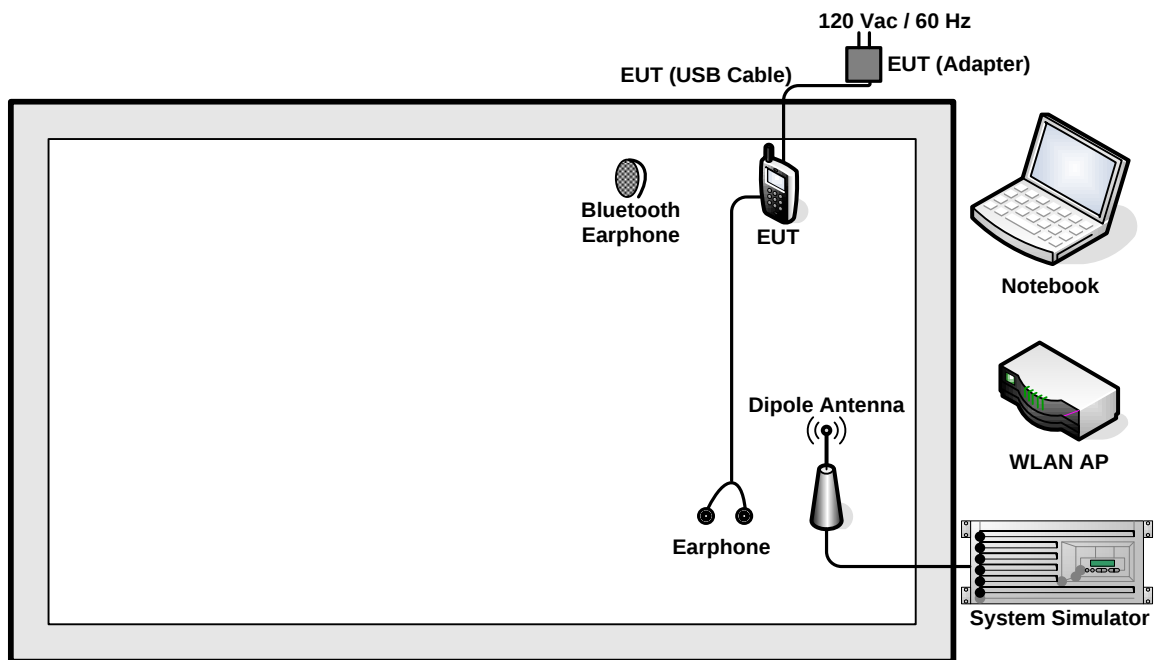

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
5.	Earphone	Lenovo	SH100	N/A	Unshielded, 1.2m	N/A

2.5 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.5 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.5 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


3.1.4 Test Setup

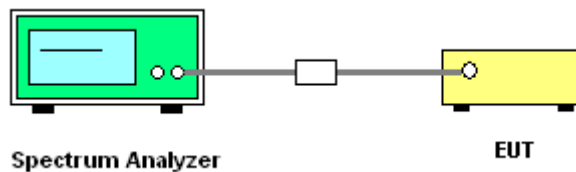



3.1.5 Test Result of 6dB Occupied Bandwidth

Please refer to Appendix A.

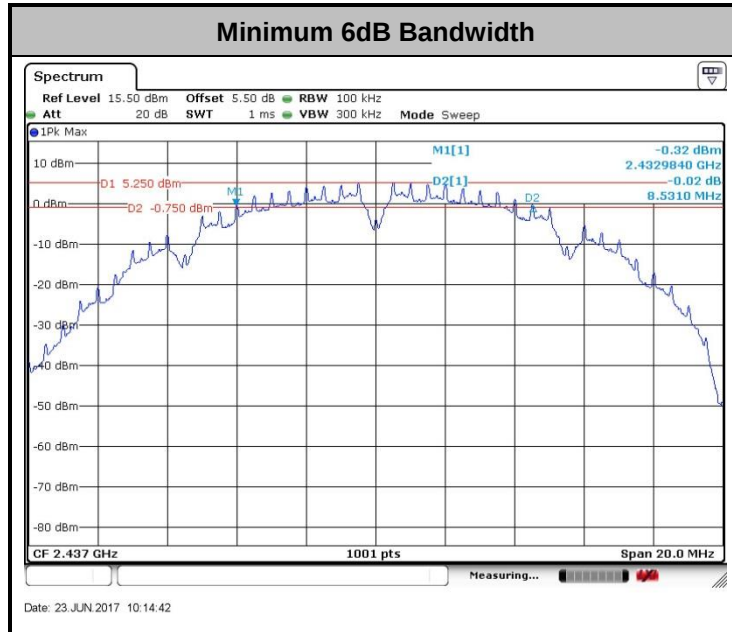

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

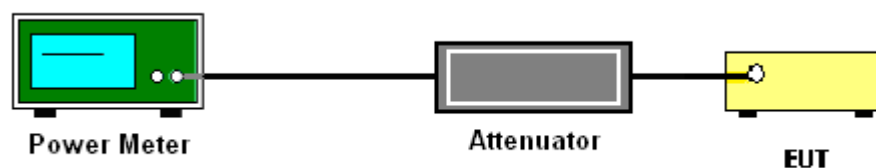



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

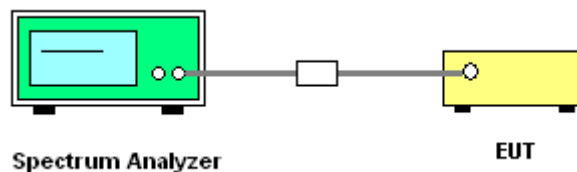

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

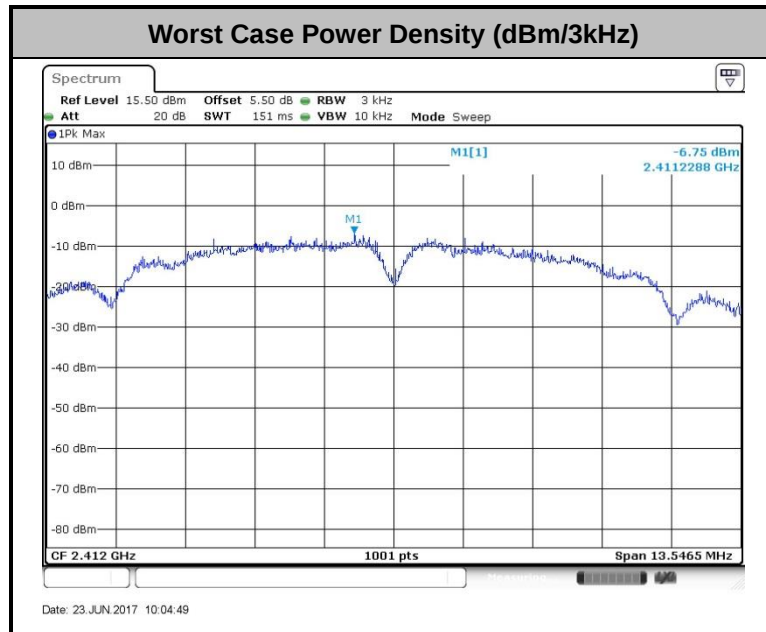

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

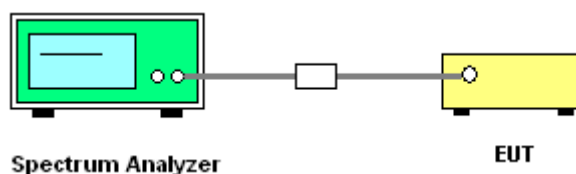



3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	21~25℃
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	01	Test Engineer :	Silent Hai

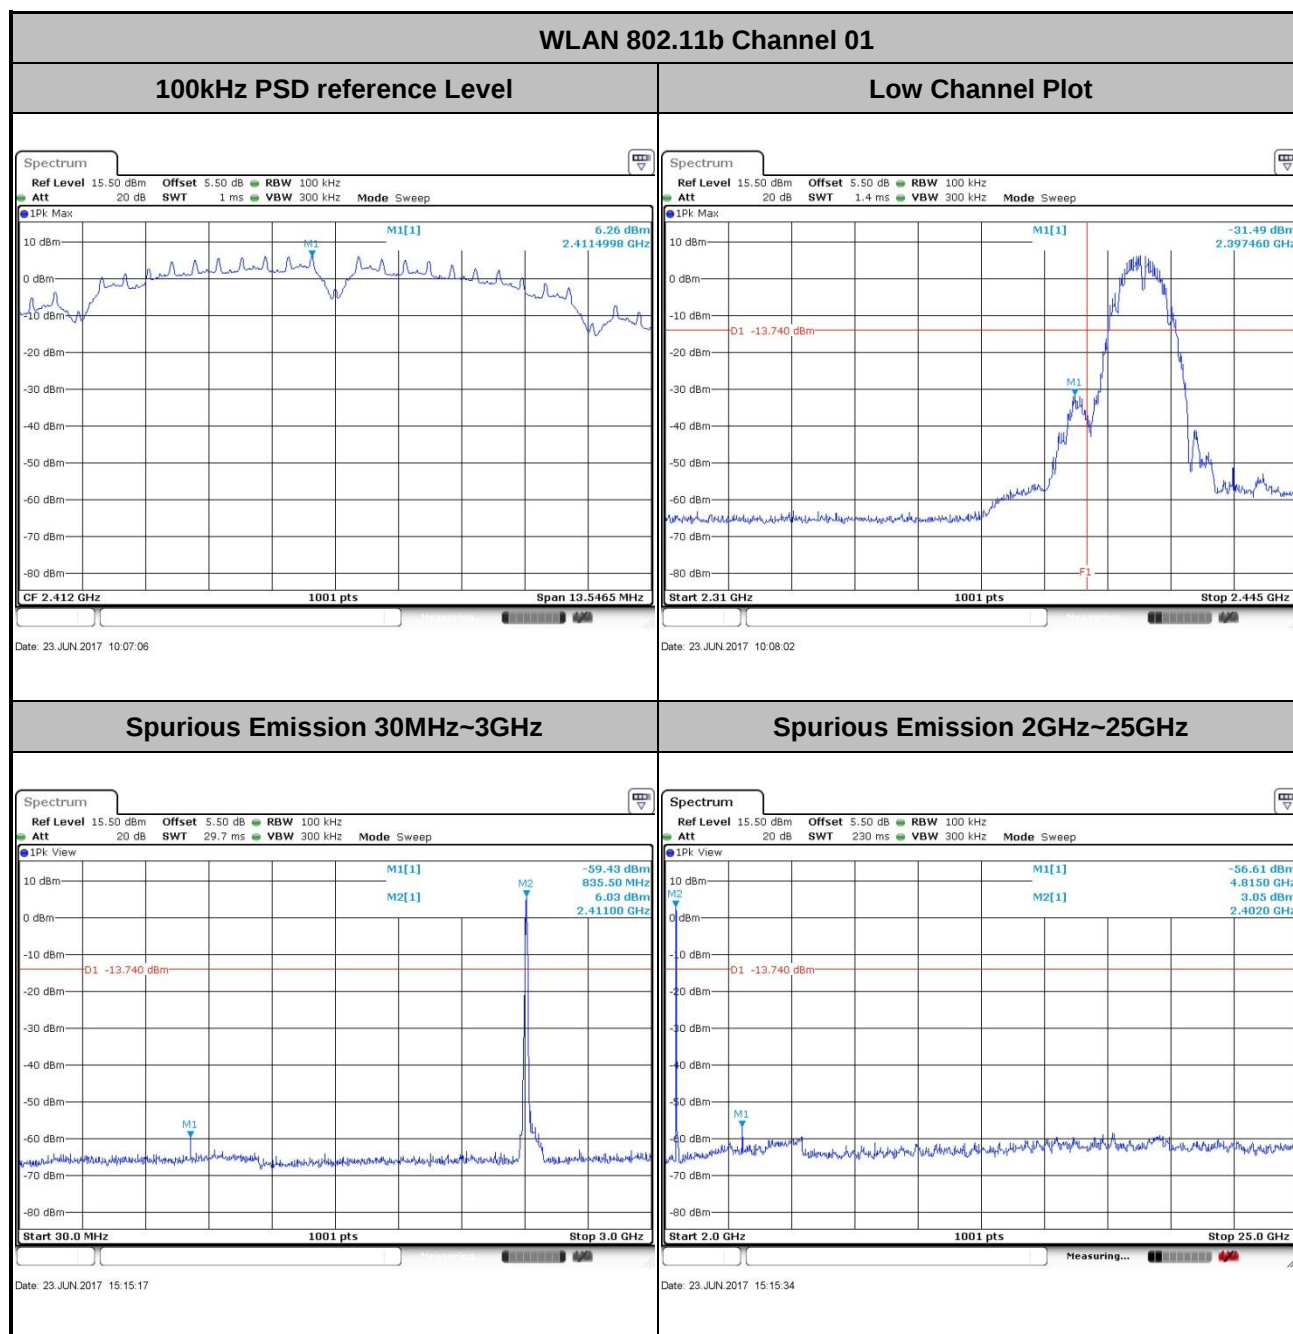




Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai


WLAN 802.11b Channel 06

100kHz PSD reference Level

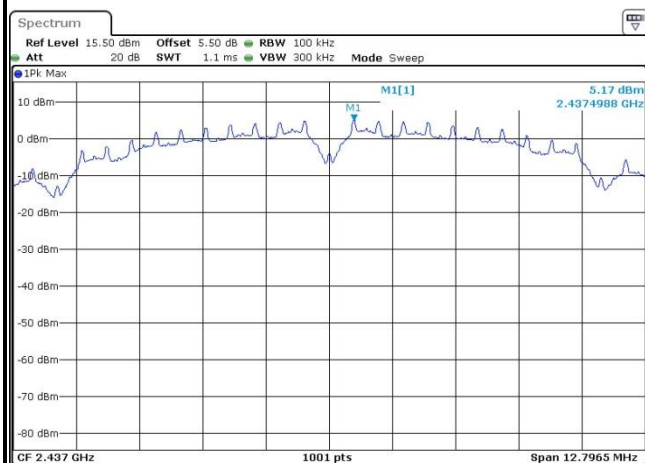


Mid Channel Plot

Spurious Emission 30MHz~3GHz




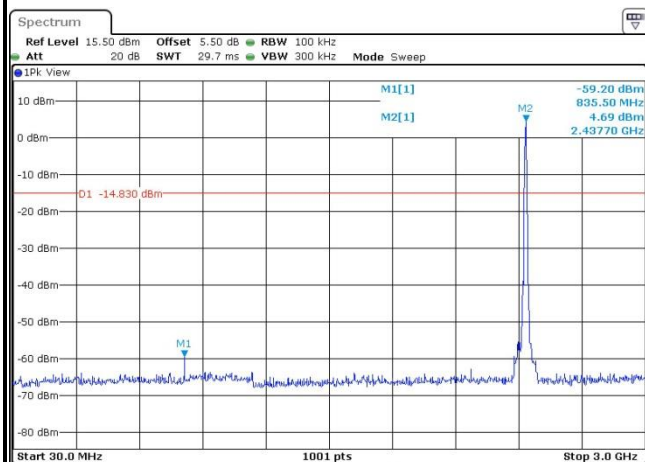


Spurious Emission 2GHz~25GHz

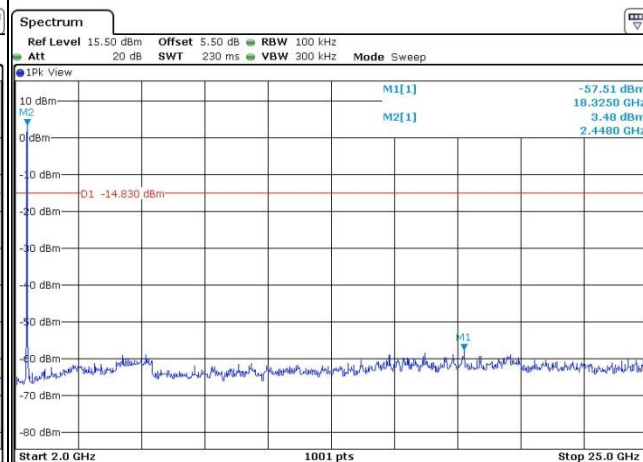







Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	11	Test Engineer :	Silent Hai

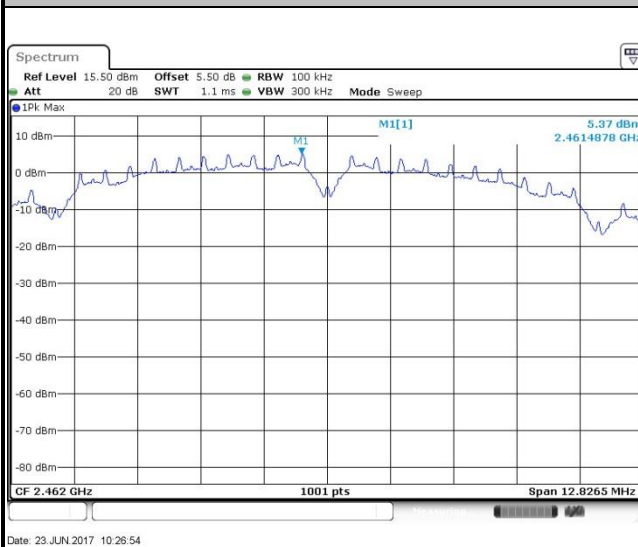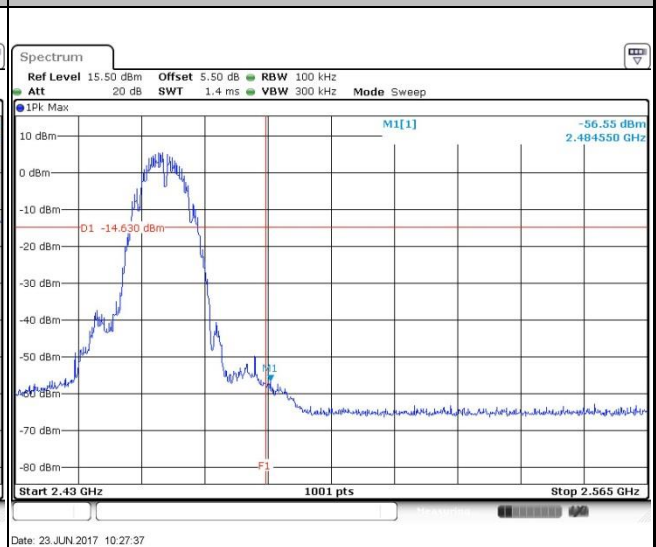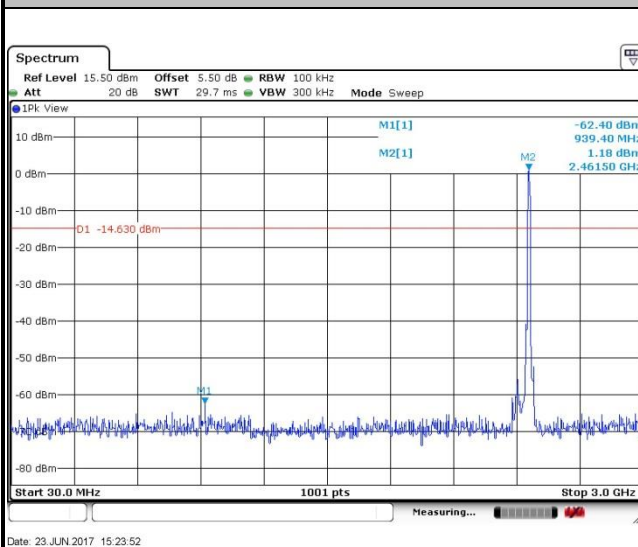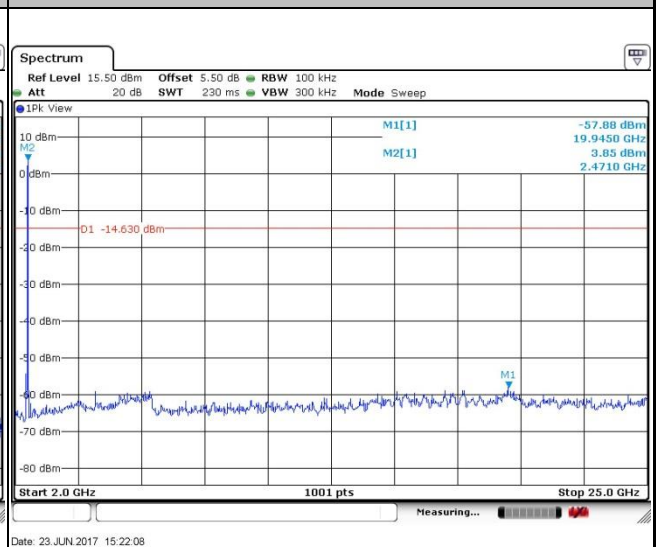WLAN 802.11b Channel 11**100kHz PSD reference Level****High Channel Plot****Spurious Emission 30MHz~3GHz****Spurious Emission 2GHz~25GHz**



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	01	Test Engineer :	Silent Hai

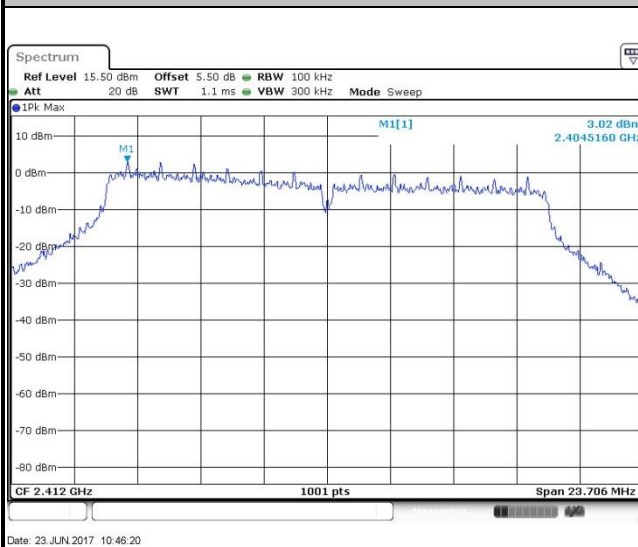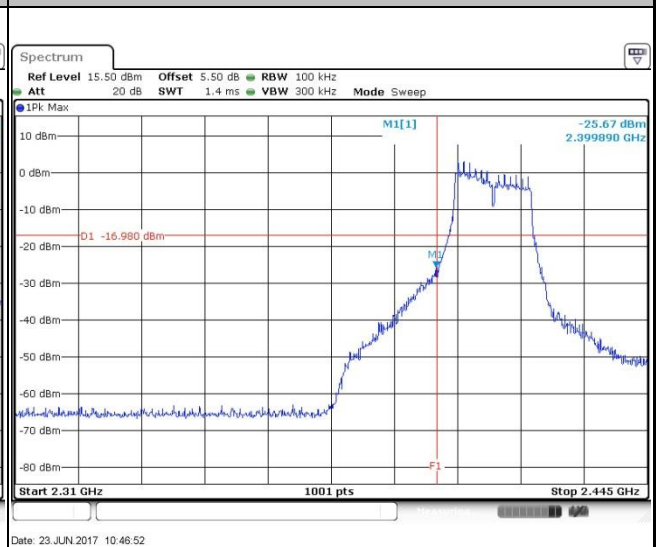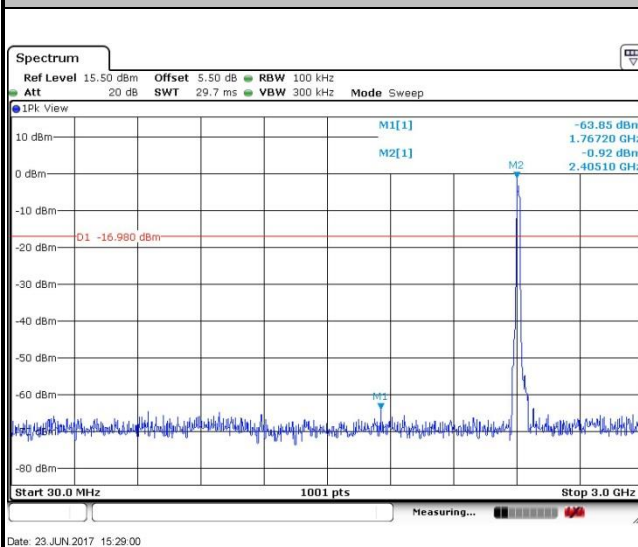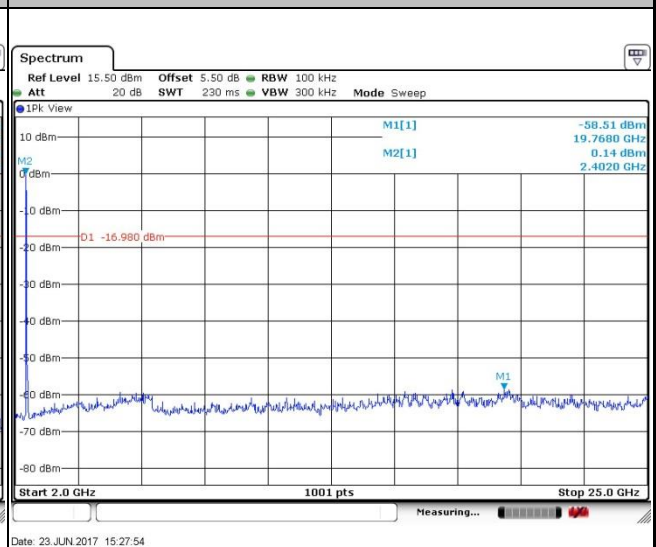
WLAN 802.11g Channel 01**100kHz PSD reference Level****Low Channel Plot****Spurious Emission 30MHz~3GHz****Spurious Emission 2GHz~25GHz**



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai


WLAN 802.11g Channel 06

100kHz PSD reference Level

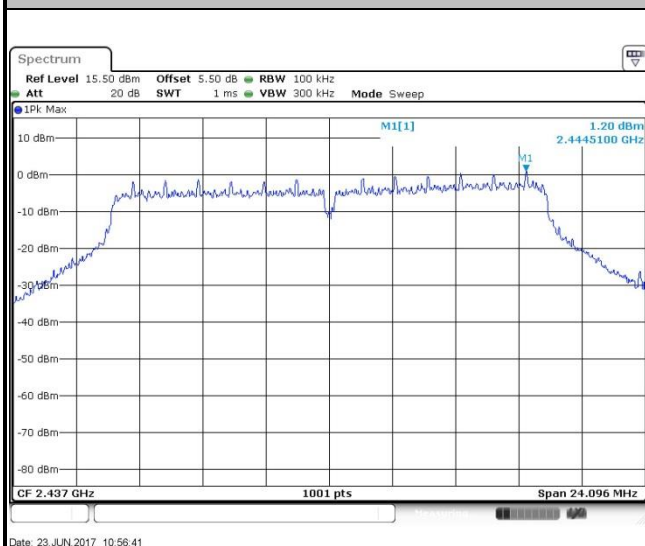


Mid Channel Plot

Spurious Emission 30MHz~3GHz

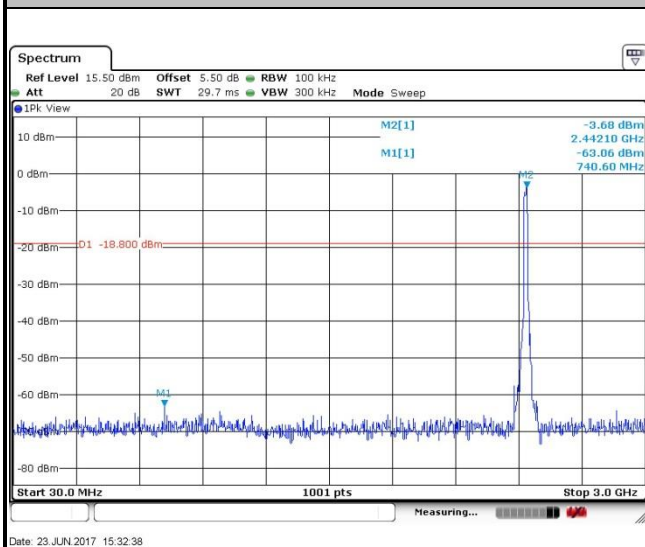

Spurious Emission 2GHz~25GHz

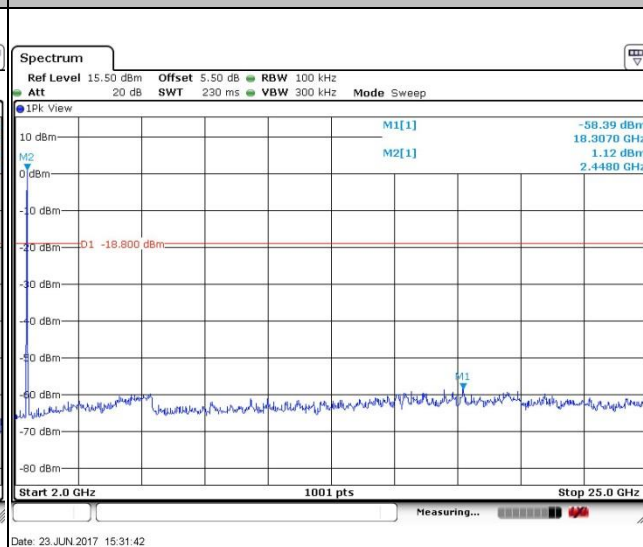





Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	11	Test Engineer :	Silent Hai

WLAN 802.11g Channel 11


100kHz PSD reference Level

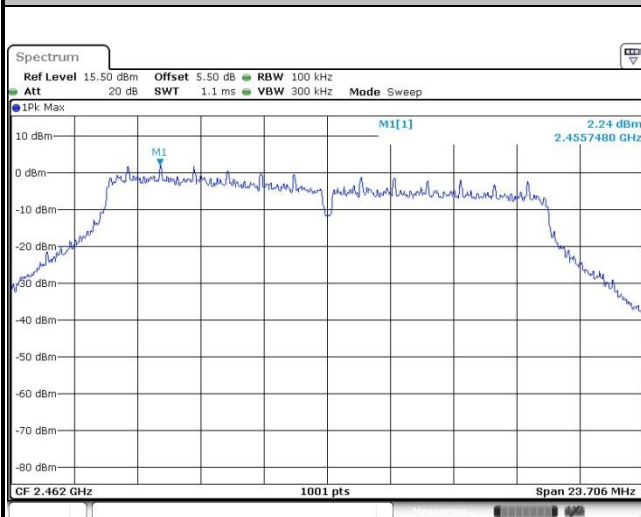


High Channel Plot

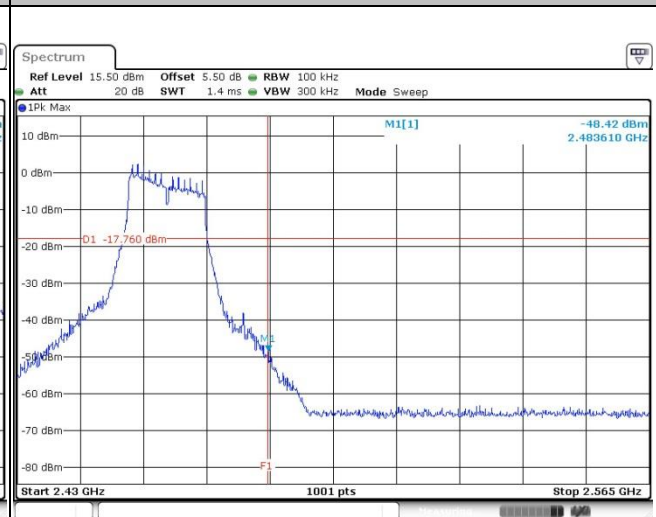

Spurious Emission 30MHz~3GHz

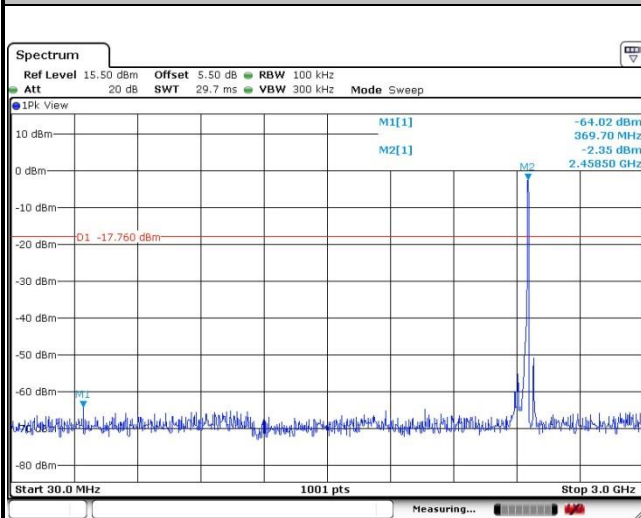

Spurious Emission 2GHz~25GHz

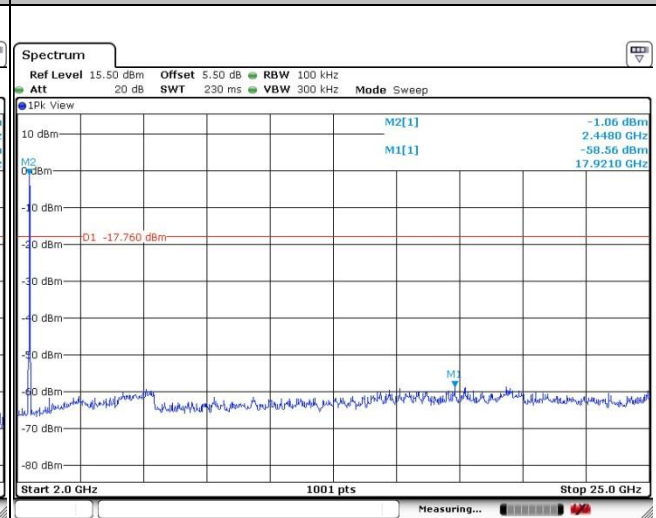





Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	01	Test Engineer :	Silent Hai

WLAN 802.11n HT20 Channel 01


100kHz PSD reference Level

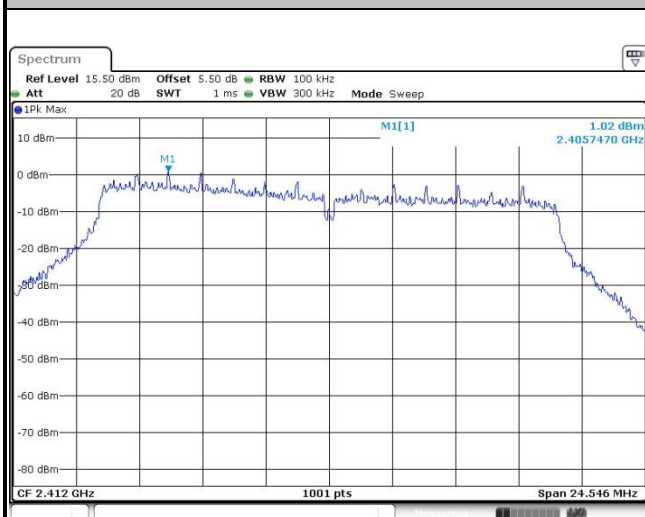


Low Channel Plot

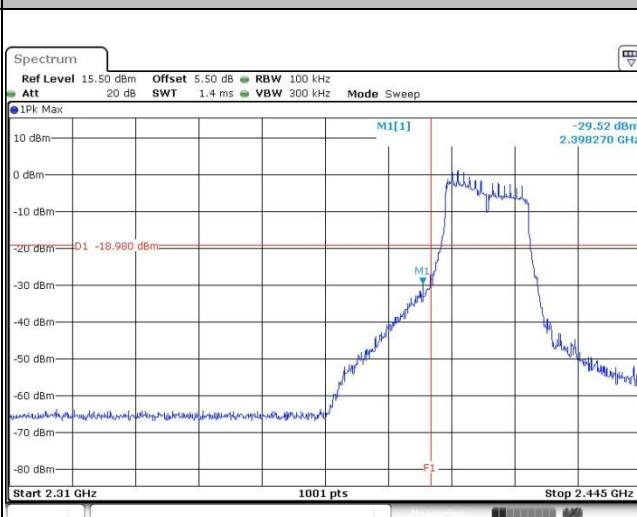

Spurious Emission 30MHz~3GHz

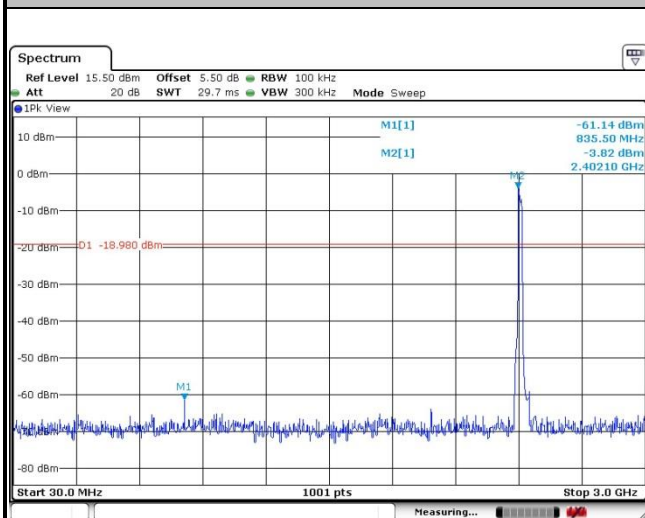

Spurious Emission 2GHz~25GHz

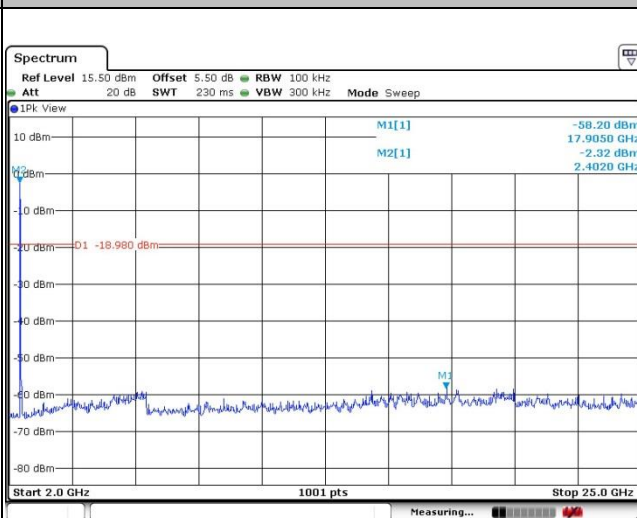




Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai


WLAN 802.11n HT20 Channel 06

100kHz PSD reference Level

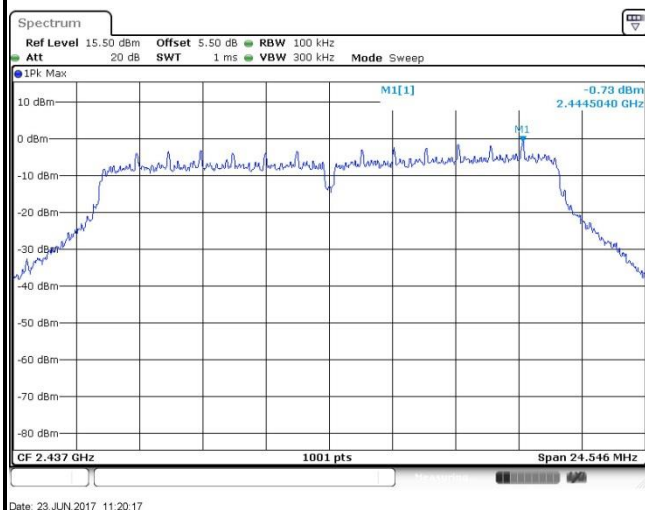


Mid Channel Plot

Spurious Emission 30MHz~3GHz

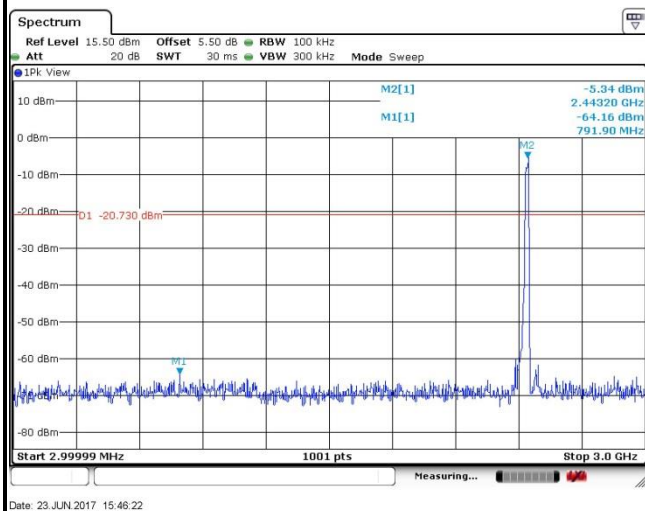

Spurious Emission 2GHz~25GHz

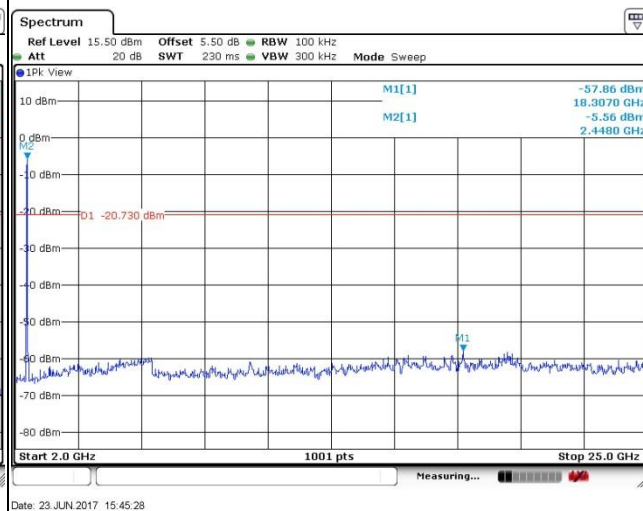




Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	11	Test Engineer :	Silent Hai


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

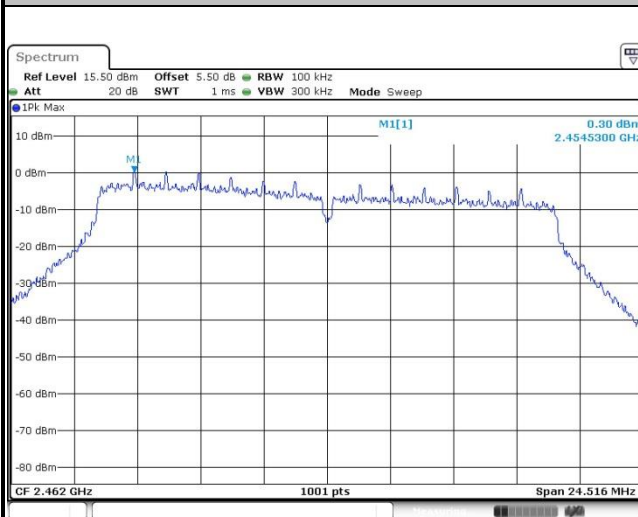


Date: 23 JUN 2017 11:27:52

High Channel Plot

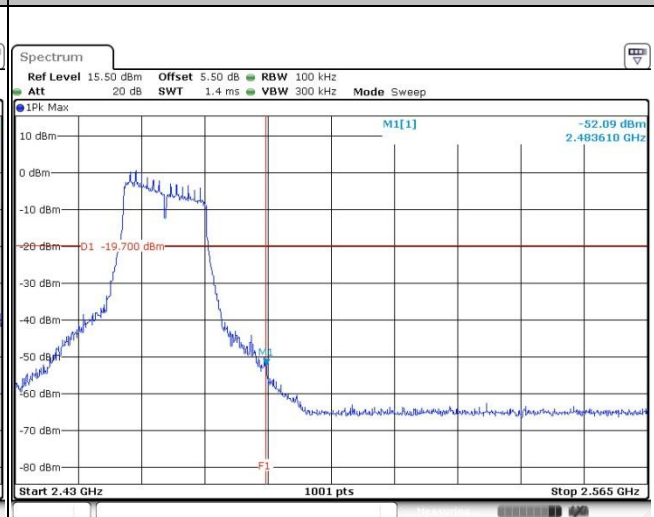


Date: 23 JUN 2017 11:28:34

Spurious Emission 30MHz~3GHz

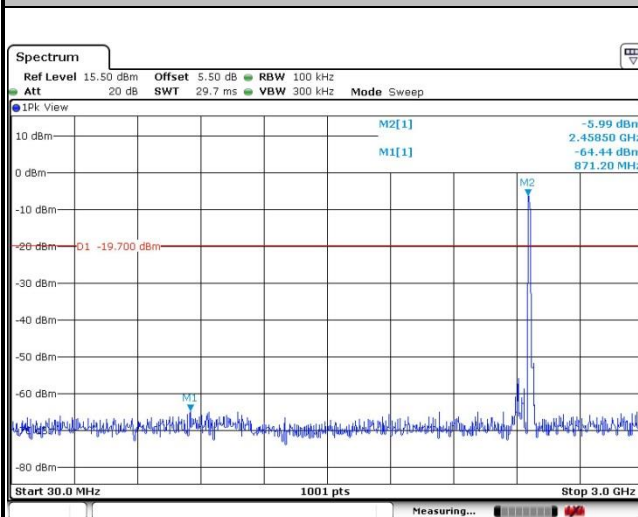

Date: 23 JUN 2017 15:49:47

Spurious Emission 2GHz~25GHz

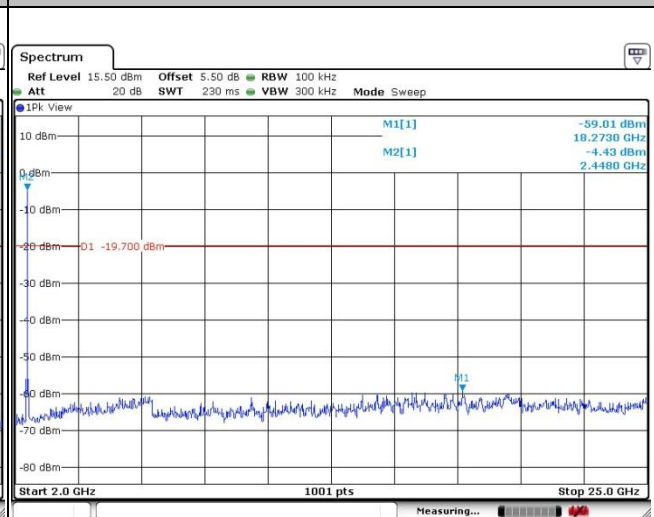


Date: 23 JUN 2017 15:48:35



Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	03	Test Engineer :	Silent Hai


WLAN 802.11n HT40 Channel 03

100kHz PSD reference Level

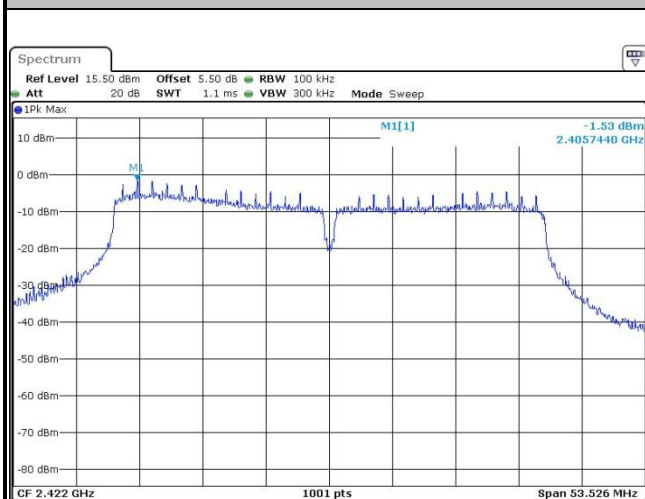


Date: 23 JUN 2017 11:38:24

Low Channel Plot

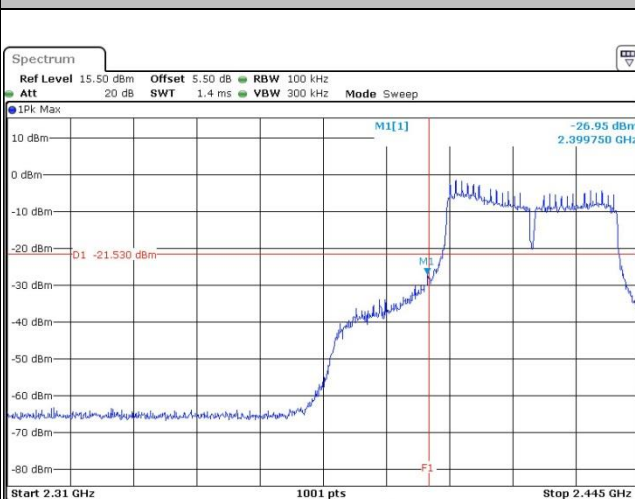


Date: 23 JUN 2017 11:38:52

Spurious Emission 30MHz~3GHz

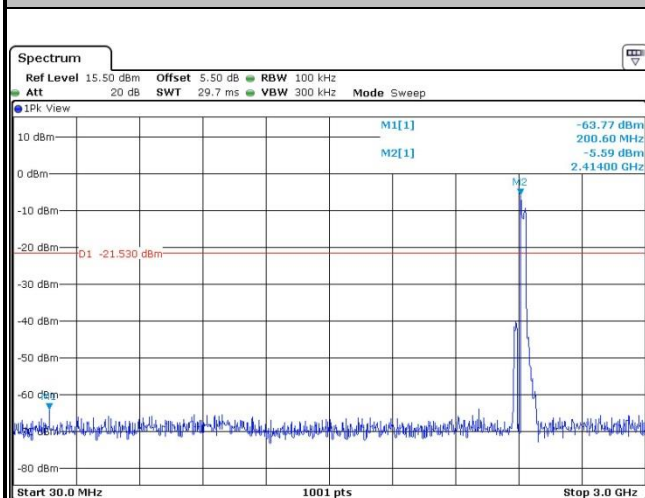

Date: 23 JUN 2017 15:53:32


Spurious Emission 2GHz~25GHz

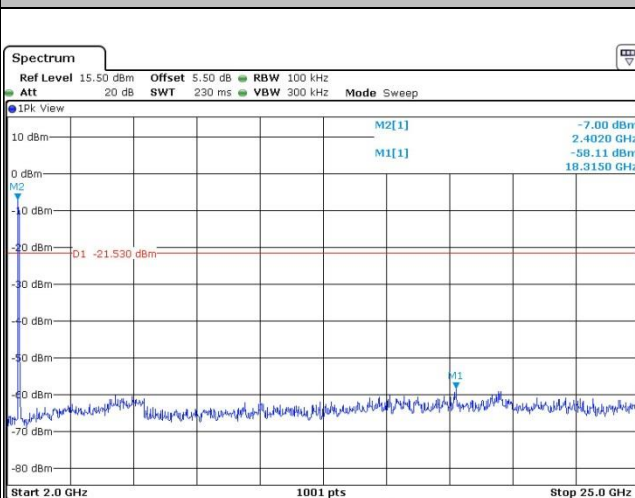

Date: 23 JUN 2017 15:52:40




Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai

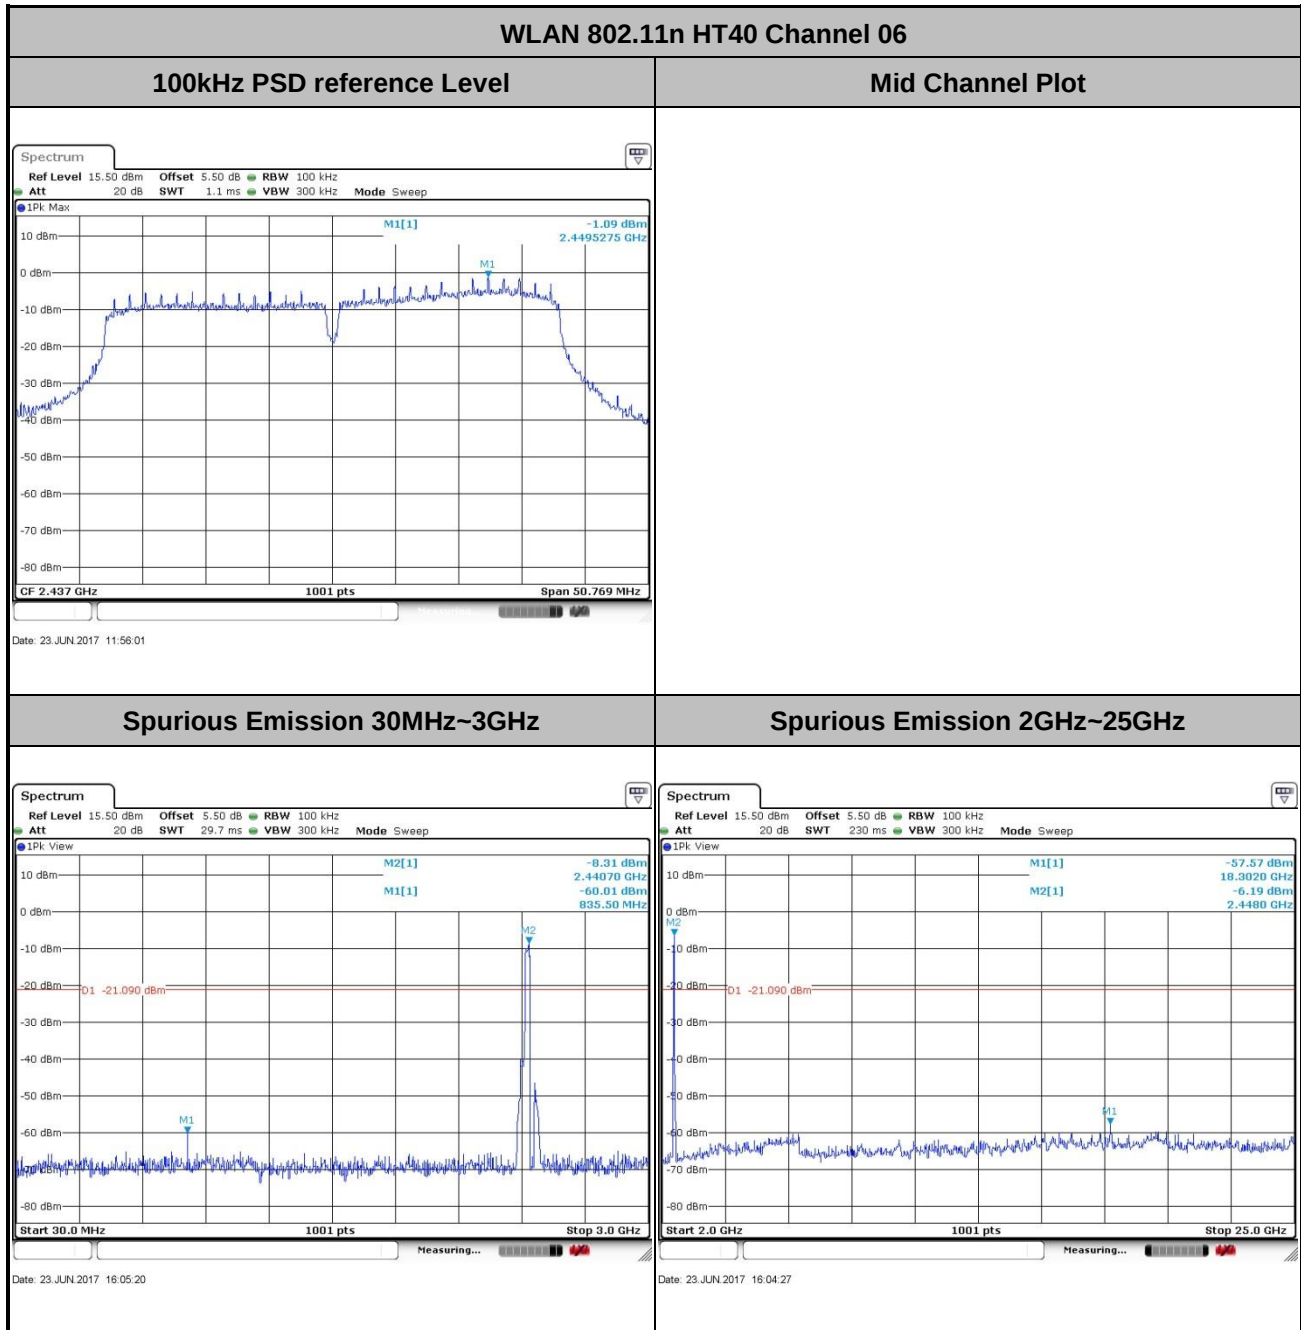



Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	09	Test Engineer :	Silent Hai

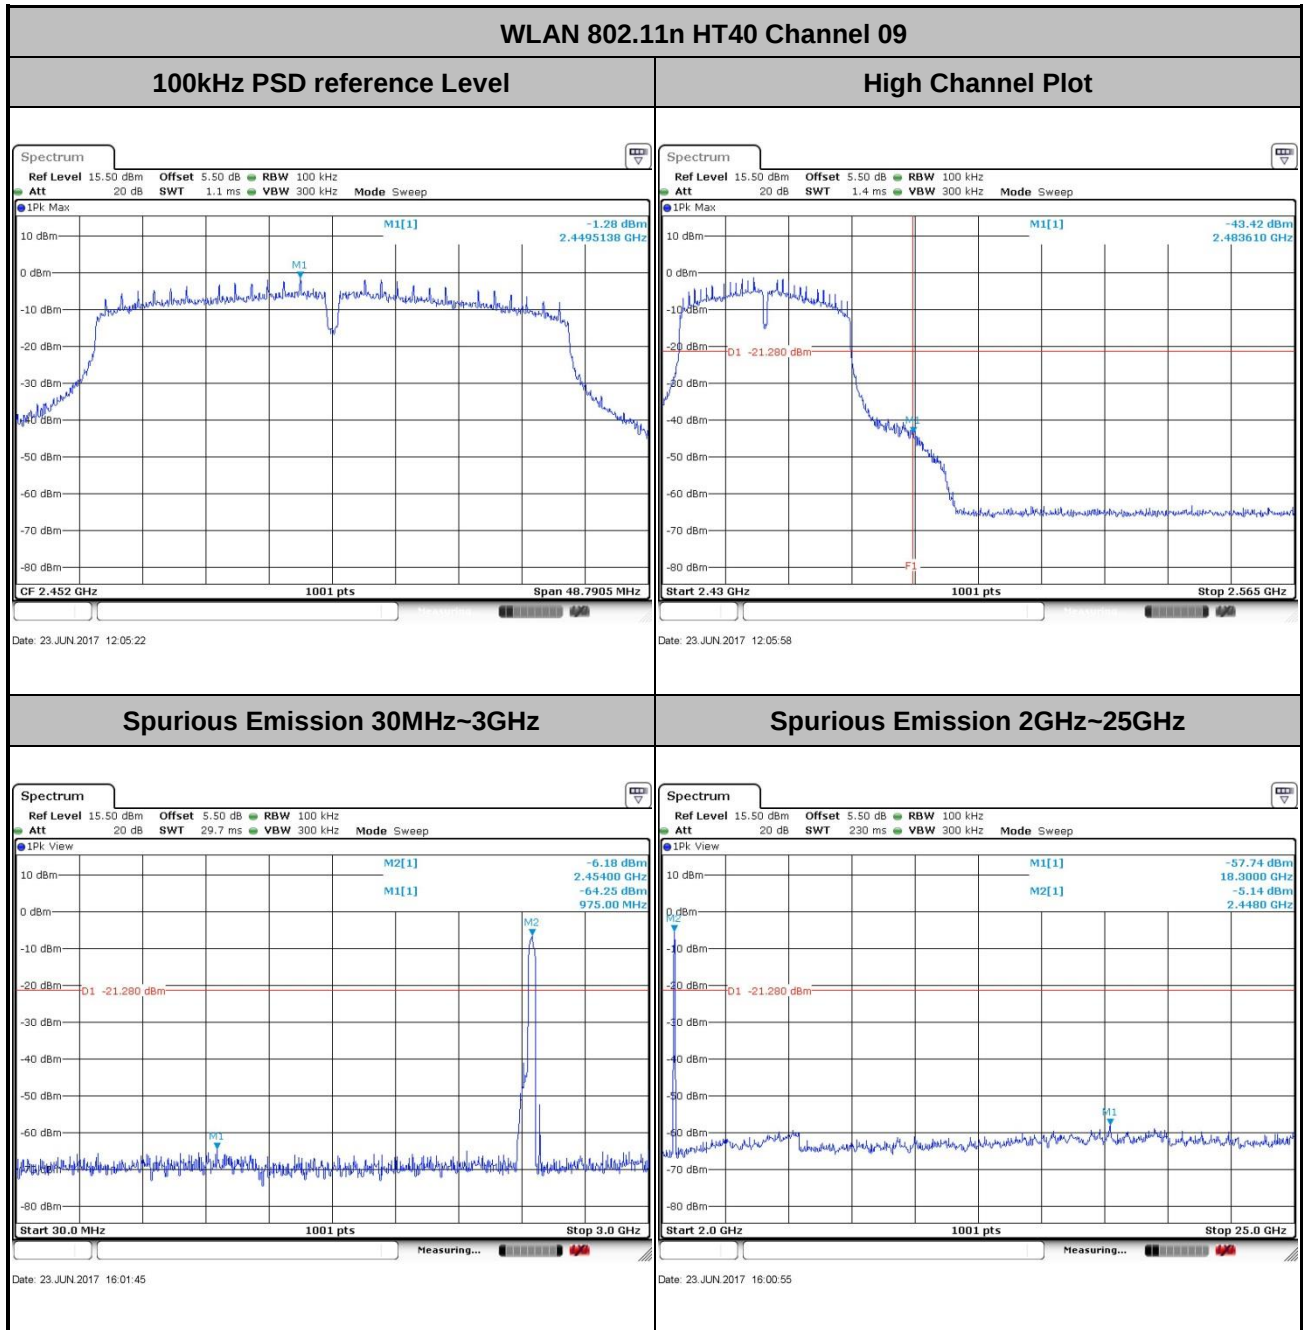

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

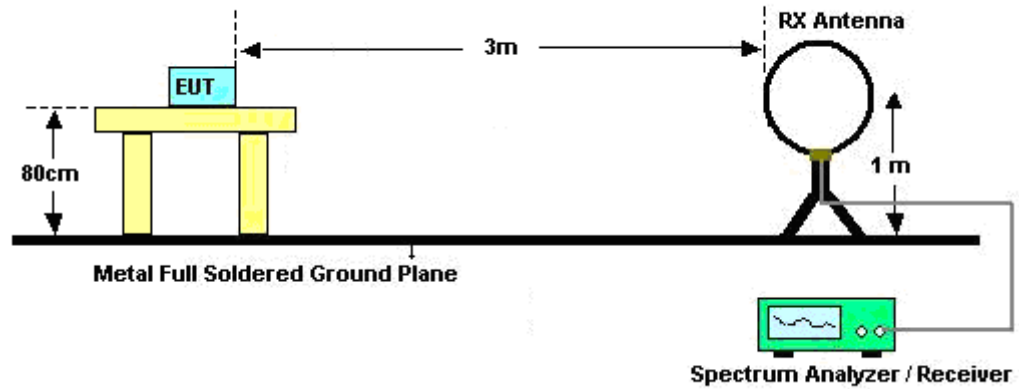

For radiated emissions from 30MHz to 1GHz

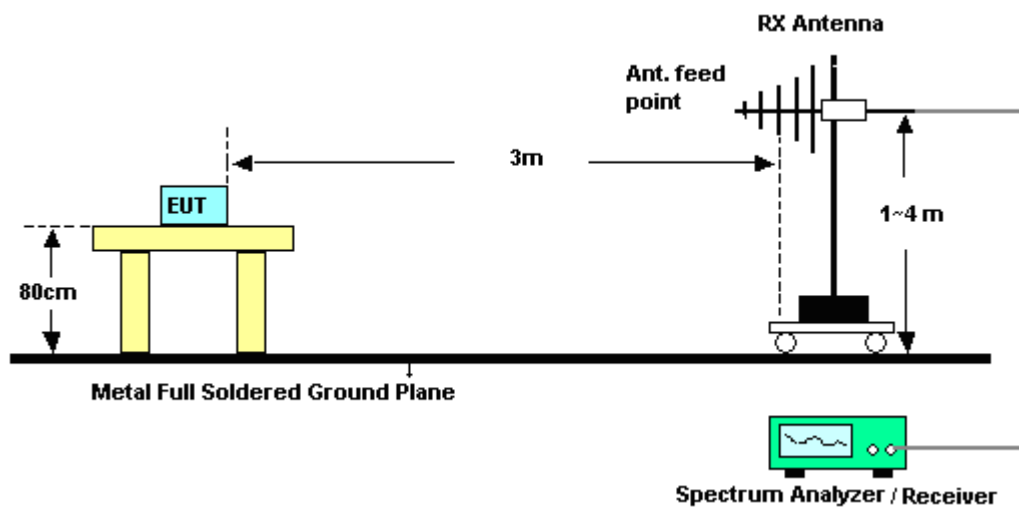

For radiated emissions above 1GHz

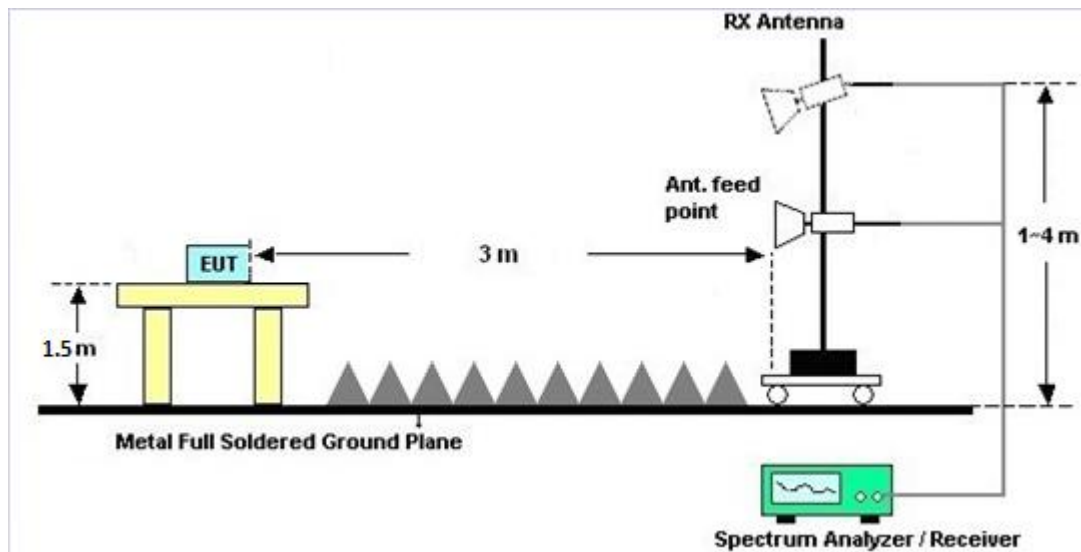

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


3.6.4 Test Setup

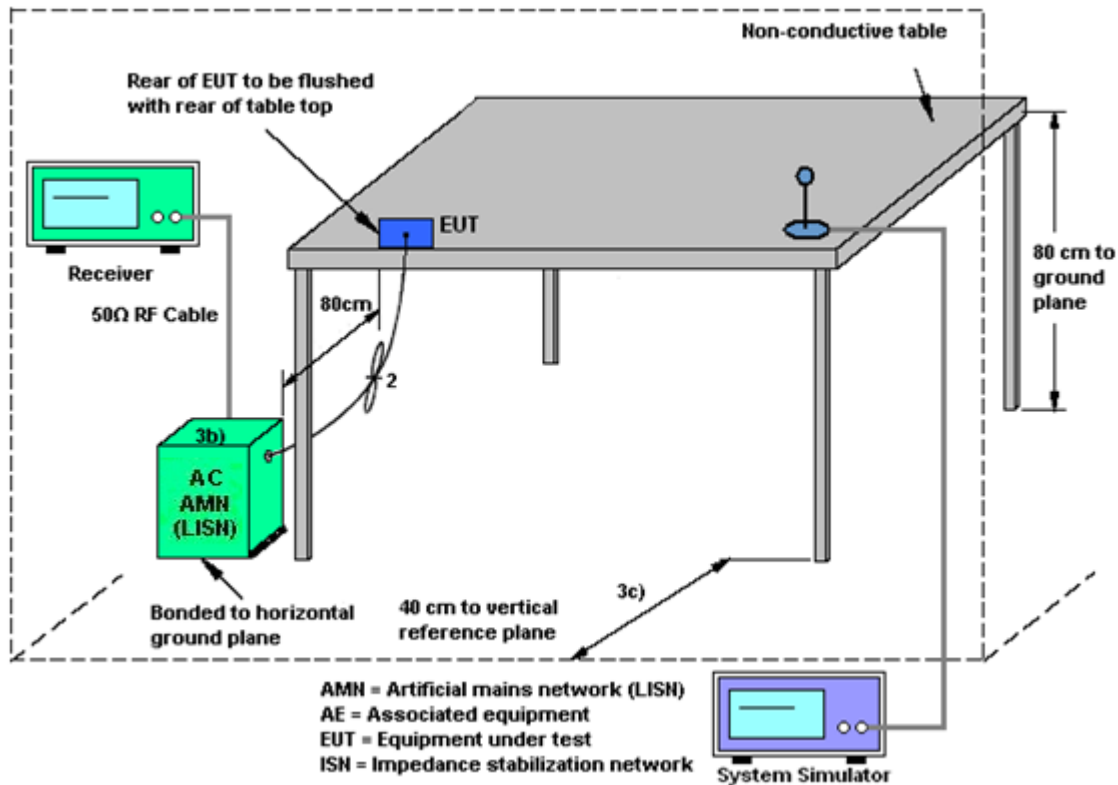



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	22~24℃
Test Engineer :	Amos Zhang	Relative Humidity :	42~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM 850 Idle + Bluetooth Link + WLAN Link(2.4G) + USB Link(Charging from Adapter2) + Earphone + Battery 2		

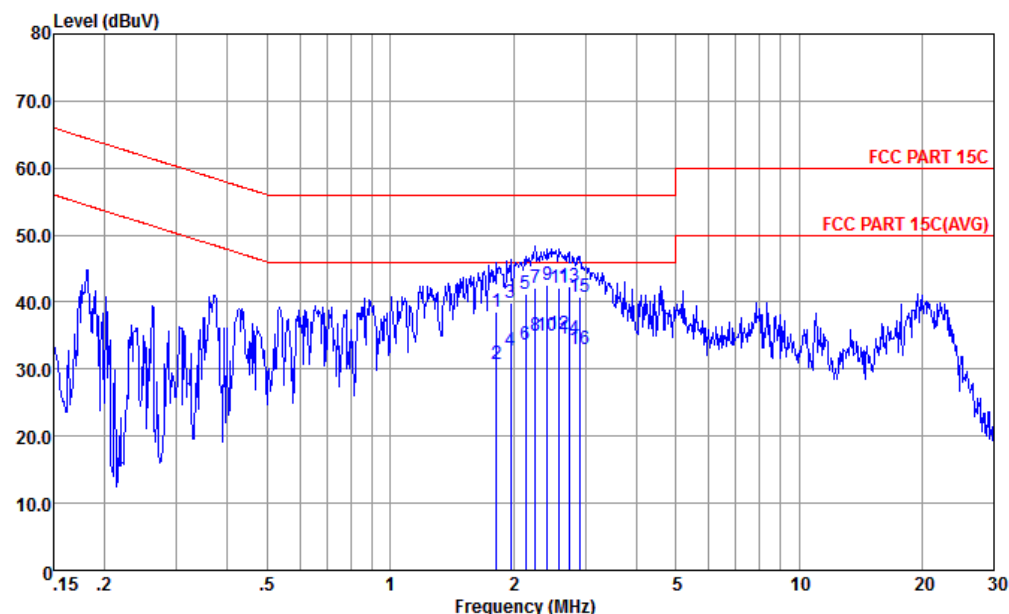


Site : CO01-KS
Condition : FCC PART 15C LISN-L-161017-060103 LINE

mode : Mode 2
: 990008900004073 #7

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	1.819	38.60	-17.40	56.00	28.19	0.22	10.19	QP
2	1.819	30.70	-15.30	46.00	20.29	0.22	10.19	Average
3	1.970	40.00	-16.00	56.00	29.60	0.21	10.19	QP
4	1.970	32.70	-13.30	46.00	22.30	0.21	10.19	Average
5	2.144	41.30	-14.70	56.00	30.90	0.21	10.19	QP
6	2.144	33.70	-12.30	46.00	23.30	0.21	10.19	Average
7	2.261	42.21	-13.79	56.00	31.80	0.21	10.20	QP
8	2.261	35.01	-10.99	46.00	24.60	0.21	10.20	Average
9	2.422	42.61	-13.39	56.00	32.20	0.21	10.20	QP
10	2.422	35.01	-10.99	46.00	24.60	0.21	10.20	Average
11	2.594	42.02	-13.98	56.00	31.60	0.21	10.21	QP
12 *	2.594	35.32	-10.68	46.00	24.90	0.21	10.21	Average
13	2.736	42.32	-13.68	56.00	31.90	0.21	10.21	QP
14	2.736	34.62	-11.38	46.00	24.20	0.21	10.21	Average
15	2.915	40.73	-15.27	56.00	30.30	0.21	10.22	QP
16	2.915	33.03	-12.97	46.00	22.60	0.21	10.22	Average



Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	42~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM 850 Idle + Bluetooth Link + WLAN Link(2.4G) + USB Link(Charging from Adapter2) + Earphone + Battery 2		

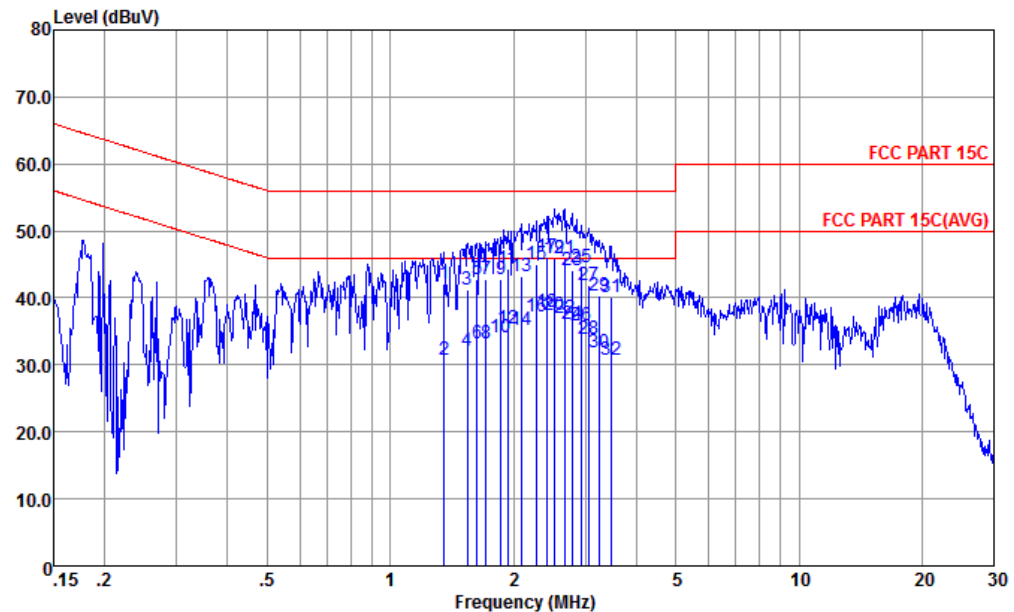


Site : CO01-KS
Condition : FCC PART 15C LISN-N-161017-060103 NEUTRAL
mode : Mode 2
: 990008900004073 #7

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	1.352	42.19	-13.81	56.00	31.60	0.40	10.19	QP
2	1.352	30.79	-15.21	46.00	20.20	0.40	10.19	Average
3	1.544	41.19	-14.81	56.00	30.59	0.41	10.19	QP
4	1.544	32.19	-13.81	46.00	21.59	0.41	10.19	Average
5	1.628	42.79	-13.21	56.00	32.19	0.41	10.19	QP
6	1.628	33.19	-12.81	46.00	22.59	0.41	10.19	Average
7	1.716	42.80	-13.20	56.00	32.20	0.41	10.19	QP
8	1.716	33.20	-12.80	46.00	22.60	0.41	10.19	Average
9	1.868	42.80	-13.20	56.00	32.20	0.41	10.19	QP
10	1.868	34.20	-11.80	46.00	23.60	0.41	10.19	Average
11	1.939	44.40	-11.60	56.00	33.80	0.41	10.19	QP
12	1.939	35.50	-10.50	46.00	24.90	0.41	10.19	Average
13	2.088	43.20	-12.80	56.00	32.60	0.41	10.19	QP
14	2.088	35.20	-10.80	46.00	24.60	0.41	10.19	Average
15	2.285	45.10	-10.90	56.00	34.49	0.41	10.20	QP
16	2.285	37.20	-8.80	46.00	26.59	0.41	10.20	Average
17	2.409	46.21	-9.79	56.00	35.61	0.40	10.20	QP



Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	42~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM 850 Idle + Bluetooth Link + WLAN Link(2.4G) + USB Link(Charging from Adapter2) + Earphone + Battery 2		

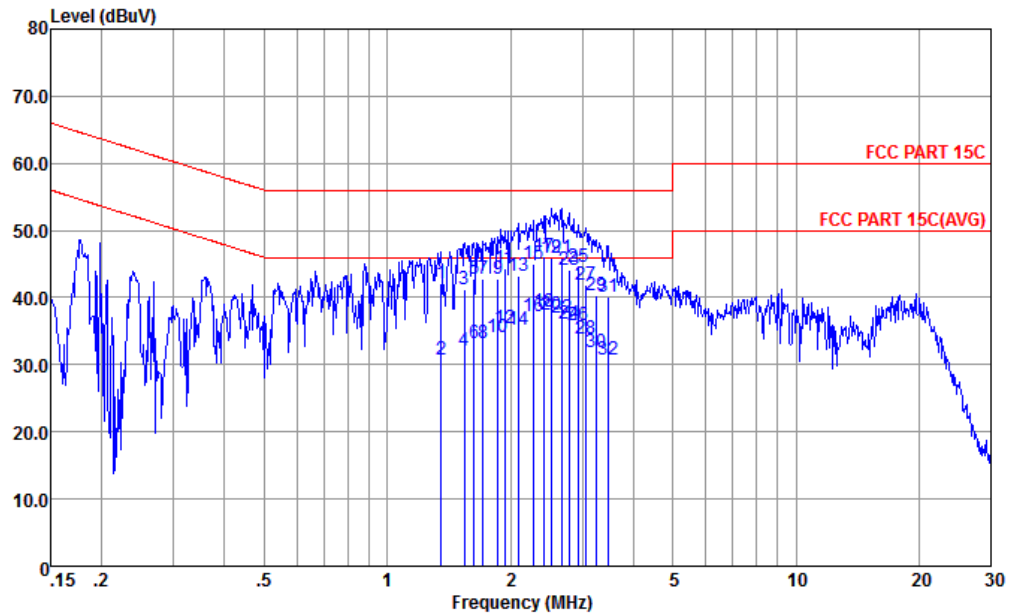

Site : CO01-KS
Condition : FCC PART 15C LISN-N-161017-060103 NEUTRAL
mode : Mode 2
: 990008900004073 #7

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
18 *	2.409	37.81	-8.19	46.00	27.21	0.40	10.20	Average
19	2.513	45.81	-10.19	56.00	35.21	0.40	10.20	QP
20	2.513	37.51	-8.49	46.00	26.91	0.40	10.20	Average
21	2.664	45.81	-10.19	56.00	35.20	0.40	10.21	QP
22	2.664	36.91	-9.09	46.00	26.30	0.40	10.21	Average
23	2.779	44.11	-11.89	56.00	33.50	0.40	10.21	QP
24	2.779	36.11	-9.89	46.00	25.50	0.40	10.21	Average
25	2.946	44.51	-11.49	56.00	33.89	0.40	10.22	QP
26	2.946	35.81	-10.19	46.00	25.19	0.40	10.22	Average
27	3.058	41.92	-14.08	56.00	31.30	0.40	10.22	QP
28	3.058	33.92	-12.08	46.00	23.30	0.40	10.22	Average
29	3.258	40.42	-15.58	56.00	29.81	0.39	10.22	QP
30	3.258	31.82	-14.18	46.00	21.21	0.39	10.22	Average
31	3.472	40.22	-15.78	56.00	29.60	0.39	10.23	QP
32	3.472	30.82	-15.18	46.00	20.20	0.39	10.23	Average



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Jun. 23, 2017	Aug. 08, 2017	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 19, 2017	Jun. 23, 2017	Jan. 18, 2018	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 19, 2017	Jun. 23, 2017	Jan. 18, 2018	Conducted (TH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 20, 2017	Jul. 11, 2017	Apr. 19, 2018	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2016	Jul. 11, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2016	Jul. 11, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 13, 2016	Jul. 11, 2017	Oct. 12, 2017	Conduction (CO01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 22, 2016	Jul. 10, 2017	Oct. 21, 2017	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 18, 2017	Jul. 10, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 23, 2016	Jul. 10, 2017	Nov. 22, 2017	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 22, 2017	Jul. 10, 2017	Apr. 21, 2018	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 22, 2017	Jul. 10, 2017	Apr. 21, 2018	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101070	18GHz ~40GHz	Oct. 19, 2016	Jul. 10, 2017	Oct. 18, 2017	Radiation (03CH03-KS)
Amplifier	com-power	PA-103A	161069	1MHz ~1000MHz / 32 dB	Apr. 18, 2017	Jul. 10, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18~40GHz	Oct. 13, 2016	Jul. 10, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Apr. 18, 2017	Jul. 10, 2017	Apr. 17, 2018	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 10, 2017	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 10, 2017	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 10, 2017	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3dB
--	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6dB
--	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7 dB
--	--------



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	Silent Hai	Temperature:	21~25	°C
Test Date:	2017/6/23	Relative Humidity:	51~55	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	13.14	9.03	0.50	Pass
11b	1Mbps	1	6	2437	13.14	8.53	0.50	Pass
11b	1Mbps	1	11	2462	13.14	8.55	0.50	Pass
11g	6Mbps	1	1	2412	18.83	15.80	0.50	Pass
11g	6Mbps	1	6	2437	19.03	16.06	0.50	Pass
11g	6Mbps	1	11	2462	18.68	15.80	0.50	Pass
HT20	MCS0	1	1	2412	19.33	16.36	0.50	Pass
HT20	MCS0	1	6	2437	19.68	16.36	0.50	Pass
HT20	MCS0	1	11	2462	19.13	16.34	0.50	Pass
HT40	MCS0	1	3	2422	38.16	35.68	0.50	Pass
HT40	MCS0	1	6	2437	37.06	33.85	0.50	Pass
HT40	MCS0	1	9	2452	35.96	32.53	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	17.85	30.00	0.00	17.85	36.00	Pass
11b	1Mbps	1	6	2437	16.88	30.00	0.00	16.88	36.00	Pass
11b	1Mbps	1	11	2462	16.65	30.00	0.00	16.65	36.00	Pass
11g	6Mbps	1	1	2412	21.72	30.00	0.00	21.72	36.00	Pass
11g	6Mbps	1	6	2437	20.18	30.00	0.00	20.18	36.00	Pass
11g	6Mbps	1	11	2462	21.18	30.00	0.00	21.18	36.00	Pass
HT20	MCS0	1	1	2412	20.75	30.00	0.00	20.75	36.00	Pass
HT20	MCS0	1	6	2437	19.11	30.00	0.00	19.11	36.00	Pass
HT20	MCS0	1	11	2462	20.11	30.00	0.00	20.11	36.00	Pass
HT40	MCS0	1	3	2422	20.14	30.00	0.00	20.14	36.00	Pass
HT40	MCS0	1	6	2437	20.25	30.00	0.00	20.25	36.00	Pass
HT40	MCS0	1	9	2452	20.67	30.00	0.00	20.67	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.11	14.95
11b	1Mbps	1	6	2437	0.11	13.79
11b	1Mbps	1	11	2462	0.11	13.89
11g	6Mbps	1	1	2412	0.58	12.89
11g	6Mbps	1	6	2437	0.58	11.36
11g	6Mbps	1	11	2462	0.58	11.86
HT20	MCS0	1	1	2412	0.62	10.97
HT20	MCS0	1	6	2437	0.62	9.48
HT20	MCS0	1	11	2462	0.62	10.18
HT40	MCS0	1	3	2422	0.66	10.58
HT40	MCS0	1	6	2437	0.66	10.87
HT40	MCS0	1	9	2452	0.66	11.21

TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-6.75	0.00	8.00	Pass
11b	1Mbps	1	6	2437	-8.05	0.00	8.00	Pass
11b	1Mbps	1	11	2462	-8.66	0.00	8.00	Pass
11g	6Mbps	1	1	2412	-9.58	0.00	8.00	Pass
11g	6Mbps	1	6	2437	-12.92	0.00	8.00	Pass
11g	6Mbps	1	11	2462	-11.76	0.00	8.00	Pass
HT20	MCS0	1	1	2412	-13.31	0.00	8.00	Pass
HT20	MCS0	1	6	2437	-15.63	0.00	8.00	Pass
HT20	MCS0	1	11	2462	-14.27	0.00	8.00	Pass
HT40	MCS0	1	3	2422	-16.36	0.00	8.00	Pass
HT40	MCS0	1	6	2437	-16.24	0.00	8.00	Pass
HT40	MCS0	1	9	2452	-15.97	0.00	8.00	Pass



Appendix B. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2382.41	49.69	-24.31	74	55.03	25.67	5.45	36.46	379	46	P	H
		2389.43	40.27	-13.73	54	45.42	25.8	5.47	36.42	379	46	A	H
	*	2412	100.98	-	-	106.11	25.83	5.47	36.43	379	46	P	H
	*	2410	97.83	-	-	102.96	25.83	5.47	36.43	379	46	A	H
		2389.3	49.88	-24.12	74	55.03	25.8	5.47	36.42	298	14	P	V
		2389.43	40.6	-13.4	54	45.75	25.8	5.47	36.42	298	14	A	V
	*	2412	101.97	-	-	107.1	25.83	5.47	36.43	298	14	P	V
	*	2410	98.82	-	-	103.95	25.83	5.47	36.43	298	14	A	V
802.11b CH 06 2437MHz		2382.41	49.08	-24.92	74	54.42	25.67	5.45	36.46	373	46	P	H
		2389.69	39.33	-14.67	54	44.48	25.8	5.47	36.42	373	46	A	H
	*	2436	96.41	-	-	101.51	25.86	5.48	36.44	373	46	P	H
	*	2438	93.55	-	-	98.62	25.89	5.49	36.45	373	46	A	H
		2498.14	50.16	-23.84	74	55.15	25.97	5.52	36.48	373	46	P	H
		2485.36	39.37	-14.63	54	44.39	25.94	5.51	36.47	373	46	A	H
		2389.56	50.03	-23.97	74	55.18	25.8	5.47	36.42	329	15	P	V
		2382.02	39.94	-14.06	54	45.28	25.67	5.45	36.46	329	15	A	V
	*	2436	98.44	-	-	103.54	25.86	5.48	36.44	329	15	P	V
	*	2438	95.45	-	-	100.52	25.89	5.49	36.45	329	15	A	V
		2488.42	50.19	-23.81	74	55.18	25.97	5.52	36.48	329	15	P	V
		2488.78	39.53	-14.47	54	44.52	25.97	5.52	36.48	329	15	A	V



802.11b CH 11 2462MHz	*	2462	96.74	-	-	101.79	25.91	5.5	36.46	385	31	P	H
	*	2460	93.58	-	-	98.63	25.91	5.5	36.46	385	31	A	H
		2486.38	49.65	-24.35	74	54.67	25.94	5.51	36.47	385	31	P	H
		2483.86	39.46	-14.54	54	44.48	25.94	5.51	36.47	385	31	A	H
	*	2462	99.98	-	-	105.03	25.91	5.5	36.46	321	13	P	V
	*	2460	96.9	-	-	101.95	25.91	5.5	36.46	321	13	A	V
		2495.14	50.58	-23.42	74	55.57	25.97	5.52	36.48	321	13	P	V
		2483.5	40.09	-13.91	54	45.11	25.94	5.51	36.47	321	13	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	42.63	-31.37	74	40.74	30.68	7.72	36.51	100	360	P	H
		4824	41.48	-32.52	74	39.59	30.68	7.72	36.51	100	360	P	V
802.11b CH 06 2437MHz		4872	42.41	-31.59	74	40.33	30.85	7.76	36.53	100	360	P	H
		7308	46.51	-27.49	74	38.19	34.81	9.76	36.25	100	360	P	H
		4872	43.25	-30.75	74	41.17	30.85	7.76	36.53	100	360	P	V
		7308	47.97	-26.03	74	39.65	34.81	9.76	36.25	100	360	P	V
802.11b CH 11 2462MHz		4926	43.52	-30.48	74	41.26	31.02	7.8	36.56	100	360	P	H
		7386	47.35	-26.65	74	38.74	35.03	9.86	36.28	100	360	P	H
		4926	43.39	-30.61	74	41.13	31.02	7.8	36.56	100	360	P	V
		7386	46.77	-27.23	74	38.16	35.03	9.86	36.28	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2388.78	60.55	-13.45	74	65.7	25.8	5.47	36.42	394	318	P	H
		2389.95	48.27	-5.73	54	53.42	25.8	5.47	36.42	394	318	A	H
	*	2406	99.59	-	-	104.72	25.83	5.47	36.43	394	318	P	H
	*	2406	91.83	-	-	96.96	25.83	5.47	36.43	394	318	A	H
		2389.3	63.81	-10.19	74	68.96	25.8	5.47	36.42	100	276	P	V
		2389.56	51.39	-2.61	54	56.54	25.8	5.47	36.42	100	276	A	V
	*	2406	101.67	-	-	106.8	25.83	5.47	36.43	100	276	P	V
	*	2406	93.89	-	-	99.02	25.83	5.47	36.43	100	276	A	V
802.11g CH 06 2437MHz		2384.75	51.25	-22.75	74	56.59	25.67	5.45	36.46	388	40	P	H
		2384.62	41.39	-12.61	54	46.73	25.67	5.45	36.46	388	40	A	H
	*	2442	96.43	-	-	101.5	25.89	5.49	36.45	388	40	P	H
	*	2442	87.69	-	-	92.76	25.89	5.49	36.45	388	40	A	H
		2490.46	49.74	-24.26	74	54.73	25.97	5.52	36.48	388	40	P	H
		2488.96	39.6	-14.4	54	44.59	25.97	5.52	36.48	388	40	A	H
		2384.88	51.25	-22.75	74	56.59	25.67	5.45	36.46	297	8	P	V
		2384.75	41.91	-12.09	54	47.25	25.67	5.45	36.46	297	8	A	V
	*	2444	98.96	-	-	104.03	25.89	5.49	36.45	297	8	P	V
	*	2444	90.97	-	-	96.04	25.89	5.49	36.45	297	8	A	V
		2494.54	50.16	-23.84	74	55.15	25.97	5.52	36.48	297	8	P	V
		2489.08	40.02	-13.98	54	45.01	25.97	5.52	36.48	297	8	A	V



802.11g CH 11 2462MHz	*	2456	98.45	-	-	103.5	25.91	5.5	36.46	399	144	P	H
	*	2456	90.69	-	-	95.74	25.91	5.5	36.46	399	144	A	H
		2483.68	58.44	-15.56	74	63.46	25.94	5.51	36.47	399	144	P	H
		2483.51	41.91	-12.09	54	46.93	25.94	5.51	36.47	399	144	A	H
	*	2456	101.42	-	-	106.47	25.91	5.5	36.46	306	281	P	V
	*	2458	92.89	-	-	97.94	25.91	5.5	36.46	306	281	A	V
		2483.98	56.97	-17.03	74	61.99	25.94	5.51	36.47	306	281	P	V
		2483.51	42.74	-11.26	54	47.76	25.94	5.51	36.47	306	281	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	42.84	-31.16	74	40.95	30.68	7.72	36.51	100	360	P	H
		4824	42.71	-31.29	74	40.82	30.68	7.72	36.51	100	360	P	V
802.11g CH 06 2437MHz		4872	44.01	-29.99	74	41.93	30.85	7.76	36.53	100	360	P	H
		7308	47.15	-26.85	74	38.83	34.81	9.76	36.25	100	360	P	H
		4872	44.23	-29.77	74	42.15	30.85	7.76	36.53	100	360	P	V
		7308	50.01	-23.99	74	41.69	34.81	9.76	36.25	100	360	P	V
802.11g CH 11 2462MHz		4926	43.66	-30.34	74	41.4	31.02	7.8	36.56	100	360	P	H
		7386	48.54	-25.46	74	39.93	35.03	9.86	36.28	100	360	P	H
		4926	43.78	-30.22	74	41.52	31.02	7.8	36.56	100	360	P	V
		7386	47.81	-26.19	74	39.2	35.03	9.86	36.28	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2384.62	58.92	-15.08	74	64.26	25.67	5.45	36.46	338	157	P	H
		2389.95	45.66	-8.34	54	50.81	25.8	5.47	36.42	338	157	A	H
	*	2406	98.54	-	-	103.67	25.83	5.47	36.43	338	157	P	H
	*	2404	90.7	-	-	95.83	25.83	5.47	36.43	338	157	A	H
		2389.69	58.7	-15.3	74	63.85	25.8	5.47	36.42	100	100	P	V
		2389.95	45.43	-8.57	54	50.58	25.8	5.47	36.42	100	100	A	V
	*	2406	98.09	-	-	103.22	25.83	5.47	36.43	100	100	P	V
	*	2404	90.19	-	-	95.32	25.83	5.47	36.43	100	100	A	V
802.11n HT20 CH 06 2437MHz		2383.71	49.65	-24.35	74	54.99	25.67	5.45	36.46	377	47	P	H
		2384.88	40.49	-13.51	54	45.83	25.67	5.45	36.46	377	47	A	H
	*	2444	95.21	-	-	100.28	25.89	5.49	36.45	377	47	P	H
	*	2444	87.3	-	-	92.37	25.89	5.49	36.45	377	47	A	H
		2490.28	49.5	-24.5	74	54.49	25.97	5.52	36.48	377	47	P	H
		2489.62	39.51	-14.49	54	44.5	25.97	5.52	36.48	377	47	A	H
		2383.97	50.57	-23.43	74	55.91	25.67	5.45	36.46	293	12	P	V
		2385.14	41.2	-12.8	54	46.54	25.67	5.45	36.46	293	12	A	V
	*	2444	96.91	-	-	101.98	25.89	5.49	36.45	293	12	P	V
	*	2444	89.03	-	-	94.1	25.89	5.49	36.45	293	12	A	V
		2490.1	49.7	-24.3	74	54.69	25.97	5.52	36.48	293	12	P	V
		2488.66	39.99	-14.01	54	44.98	25.97	5.52	36.48	293	12	A	V



802.11n HT20 CH 11 2462MHz	*	2458	97.29	-	-	102.34	25.91	5.5	36.46	321	65	P	H
	*	2458	89.33	-	-	94.38	25.91	5.5	36.46	321	65	A	H
		2483.8	53.7	-20.3	74	58.72	25.94	5.51	36.47	321	65	P	H
		2483.56	40.95	-13.05	54	45.97	25.94	5.51	36.47	321	65	A	H
	*	2458	98.9	-	-	103.95	25.91	5.5	36.46	300	7	P	V
	*	2454	90.94	-	-	95.99	25.91	5.5	36.46	300	7	A	V
		2484.82	56.89	-17.11	74	61.91	25.94	5.51	36.47	300	7	P	V
		2483.62	41.78	-12.22	54	46.8	25.94	5.51	36.47	300	7	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	43.99	-30.01	74	42.1	30.68	7.72	36.51	100	360	P	H
		4824	41.97	-32.03	74	40.08	30.68	7.72	36.51	100	360	P	V
802.11n HT20 CH 06 2437MHz		4872	43.21	-30.79	74	41.13	30.85	7.76	36.53	100	360	P	H
		7308	47.04	-26.96	74	38.72	34.81	9.76	36.25	100	360	P	H
		4872	44.38	-29.62	74	42.3	30.85	7.76	36.53	100	360	P	V
		7308	46.83	-27.17	74	38.51	34.81	9.76	36.25	100	360	P	V
802.11n HT20 CH 11 2462MHz		4926	42.86	-31.14	74	40.6	31.02	7.8	36.56	100	360	P	H
		7386	47.52	-26.48	74	38.91	35.03	9.86	36.28	100	360	P	H
		4926	42.97	-31.03	74	40.71	31.02	7.8	36.56	100	360	P	V
		7386	46.62	-27.38	74	38.01	35.03	9.86	36.28	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		2385.79	65.42	-8.58	74	70.57	25.8	5.47	36.42	390	0	P	H
		2389.95	53.28	-0.72	54	58.43	25.8	5.47	36.42	390	0	A	H
	*	2408	97.17	-	-	102.3	25.83	5.47	36.43	390	0	P	H
	*	2408	89.42	-	-	94.55	25.83	5.47	36.43	390	0	A	H
		2485.66	50.38	-23.62	74	55.4	25.94	5.51	36.47	390	0	P	H
		2483.92	39.71	-14.29	54	44.73	25.94	5.51	36.47	390	0	A	H
		2386.57	65.87	-8.13	74	71.02	25.8	5.47	36.42	337	10	P	V
		2389.69	52.98	-1.02	54	58.13	25.8	5.47	36.42	337	17	A	V
	*	2408	98.32	-	-	103.45	25.83	5.47	36.43	337	10	P	V
	*	2408	90.5	-	-	95.63	25.83	5.47	36.43	337	10	A	V
		2484.16	51.79	-22.21	74	56.81	25.94	5.51	36.47	337	10	P	V
		2483.5	40.45	-13.55	54	45.47	25.94	5.51	36.47	337	10	A	V
802.11n HT40 CH 06 2437MHz		2389.43	54.8	-19.2	74	59.95	25.8	5.47	36.42	400	143	P	H
		2389.82	42.82	-11.18	54	47.97	25.8	5.47	36.42	400	143	A	H
	*	2452	93.89	-	-	98.96	25.89	5.49	36.45	400	143	P	H
	*	2450	85.72	-	-	90.79	25.89	5.49	36.45	400	143	A	H
		2483.56	54.85	-19.15	74	59.87	25.94	5.51	36.47	400	143	P	H
		2483.56	40.97	-13.03	54	45.99	25.94	5.51	36.47	400	143	A	H
		2388.39	57.17	-16.83	74	62.32	25.8	5.47	36.42	300	10	P	V
		2389.82	44.51	-9.49	54	49.66	25.8	5.47	36.42	300	10	A	V
	*	2452	96.24	-	-	101.31	25.89	5.49	36.45	300	10	P	V
	*	2452	88.46	-	-	93.53	25.89	5.49	36.45	300	6	A	V
		2483.8	60.78	-13.22	74	65.8	25.94	5.51	36.47	300	10	P	V
		2483.98	42.16	-11.84	54	47.18	25.94	5.51	36.47	300	10	A	V



802.11n HT40 CH 09 2452MHz		2388.65	50.5	-23.5	74	55.65	25.8	5.47	36.42	369	0	P	H
		2389.69	39.67	-14.33	54	44.82	25.8	5.47	36.42	369	0	A	H
	*	2454	96.74	-	-	101.79	25.91	5.5	36.46	369	0	P	H
	*	2454	88.48	-	-	93.53	25.91	5.5	36.46	369	0	A	H
		2483.68	62.33	-11.67	74	67.35	25.94	5.51	36.47	369	0	P	H
		2483.56	46.03	-7.97	54	51.05	25.94	5.51	36.47	369	0	A	H
		2388.91	51.2	-22.8	74	56.35	25.8	5.47	36.42	300	284	P	V
		2387.35	39.73	-14.27	54	44.88	25.8	5.47	36.42	300	284	A	V
	*	2456	96.82	-	-	101.87	25.91	5.5	36.46	300	284	P	V
	*	2454	88.25	-	-	93.3	25.91	5.5	36.46	300	284	A	V
		2483.56	62.76	-11.24	74	67.78	25.94	5.51	36.47	300	284	P	V
		2483.5	45.27	-8.73	54	50.29	25.94	5.51	36.47	300	284	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		4842	42.51	-31.49	74	40.56	30.73	7.74	36.52	100	360	P	H
HT40		7266	47.59	-26.41	74	39.39	34.72	9.72	36.24	100	360	P	H
CH 03		4842	42.14	-31.86	74	40.19	30.73	7.74	36.52	100	360	P	V
2422MHz		7266	46.66	-27.34	74	38.46	34.72	9.72	36.24	100	360	P	V
802.11n		4872	43.09	-30.91	74	41.01	30.85	7.76	36.53	100	360	P	H
HT40		7308	46.9	-27.1	74	38.58	34.81	9.76	36.25	100	360	P	H
CH 06		4872	41.74	-32.26	74	39.66	30.85	7.76	36.53	100	360	P	V
2437MHz		7308	46.67	-27.33	74	38.35	34.81	9.76	36.25	100	360	P	V
802.11n		4902	41.4	-32.6	74	39.21	30.96	7.78	36.55	100	360	P	H
HT40		7356	46.58	-27.42	74	38.09	34.94	9.82	36.27	100	360	P	H
CH 09		4902	42.29	-31.71	74	40.1	30.96	7.78	36.55	100	360	P	V
2452MHz		7356	47.32	-26.68	74	38.83	34.94	9.82	36.27	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11n HT40 (LF)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT40 LF		30	26.79	-13.21	40	31.23	27.2	0.65	32.29	-	-	P	H
		44.55	29.26	-10.74	40	41.17	19.45	0.83	32.19	100	360	P	H
		55.22	28.25	-11.75	40	44.66	14.9	0.89	32.2	-	-	P	H
		88.2	23.03	-20.47	43.5	36.84	17.3	1.14	32.25	-	-	P	H
		195.87	23.05	-20.45	43.5	37.64	15.96	1.71	32.26	-	-	P	H
		573.2	27.09	-18.91	46	31.16	24.66	3	31.73	-	-	P	H
		31.94	35.28	-4.72	40	40.37	26.52	0.68	32.29	100	82	P	V
		55.22	34.02	-5.98	40	50.43	14.9	0.89	32.2	-	-	P	V
		66.86	31.33	-8.67	40	49.12	13.46	0.98	32.23	-	-	P	V
		323.91	26.25	-19.75	46	35.99	20.13	2.21	32.08	-	-	P	V
		554.77	26.08	-19.92	46	30.12	24.77	2.94	31.75	-	-	P	V
		842.86	30.49	-15.51	46	29.48	28.85	3.7	31.54	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(KHz)	VBW Setting
802.11b	97.59	8.232	0.121	300Hz
802.11g	87.44	1.362	0.734	1KHz
802.11n(BW20MHz)	86.70	1.275	0.784	1KHz
802.11n(BW40MHz)	85.86	1.232	0.812	1KHz




802.11b

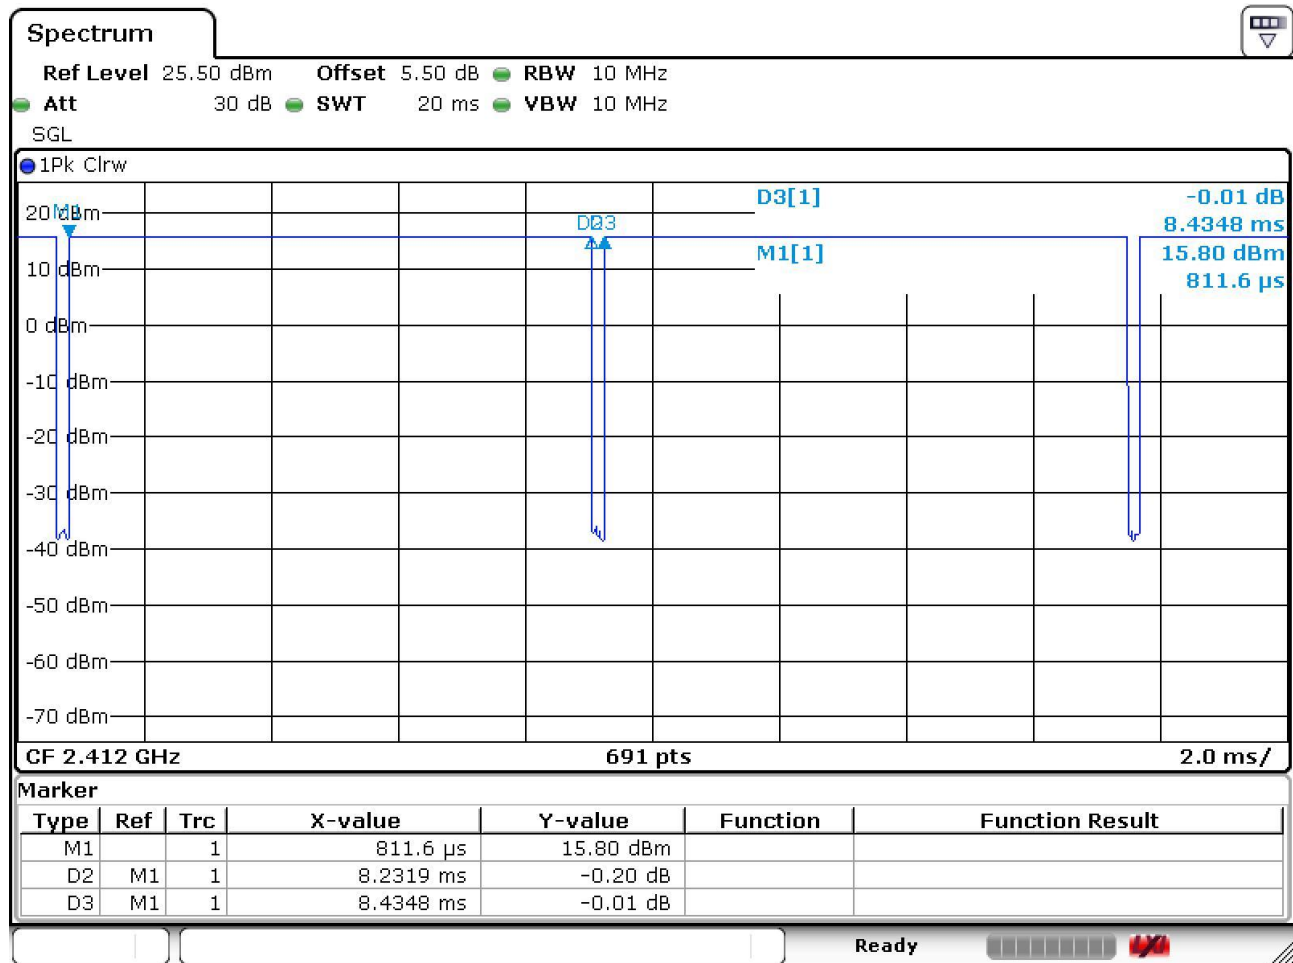




802.11g

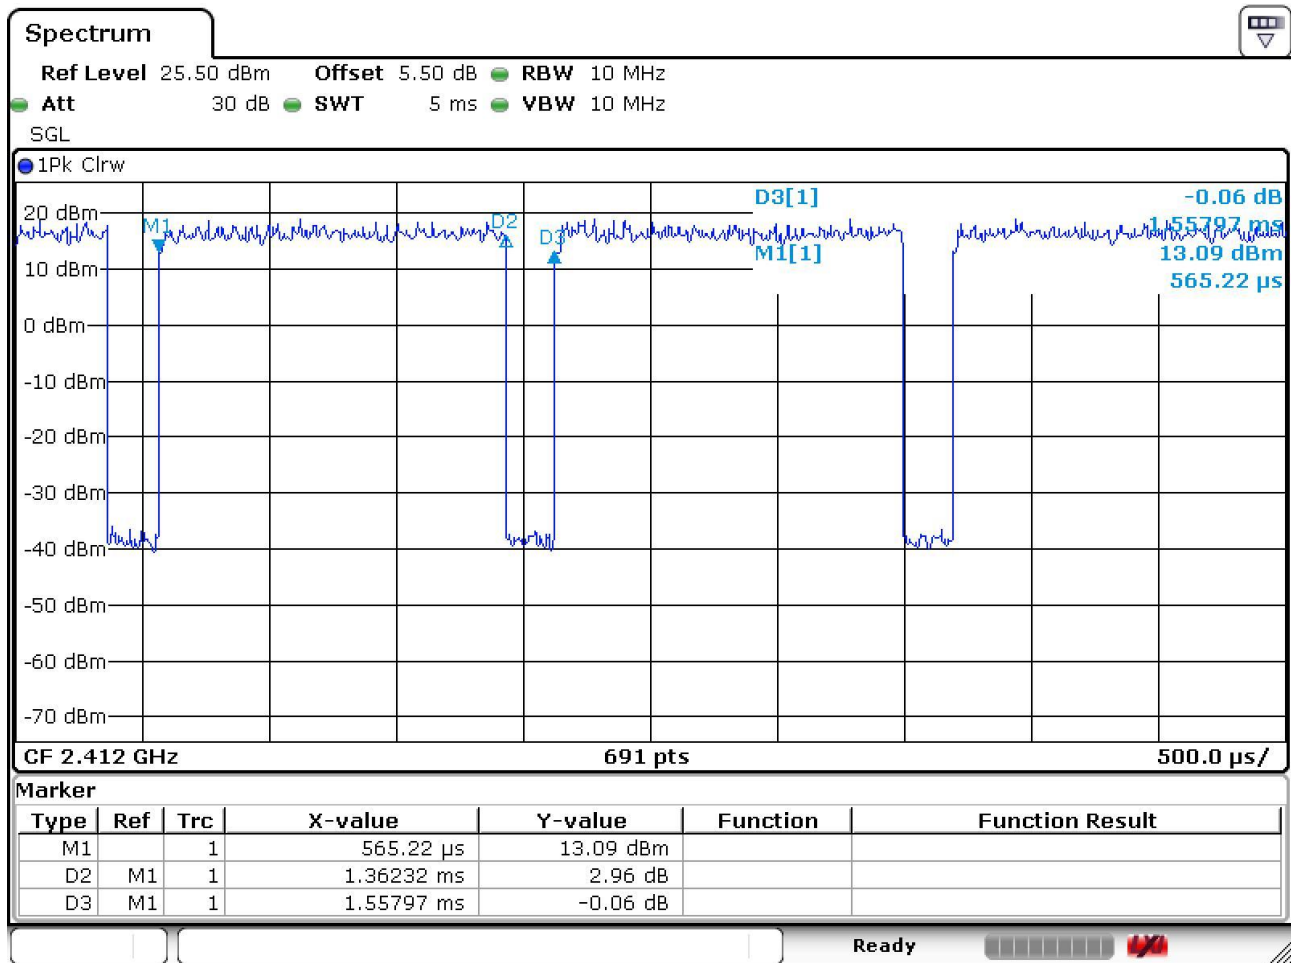



802.11n(BW20MHz)

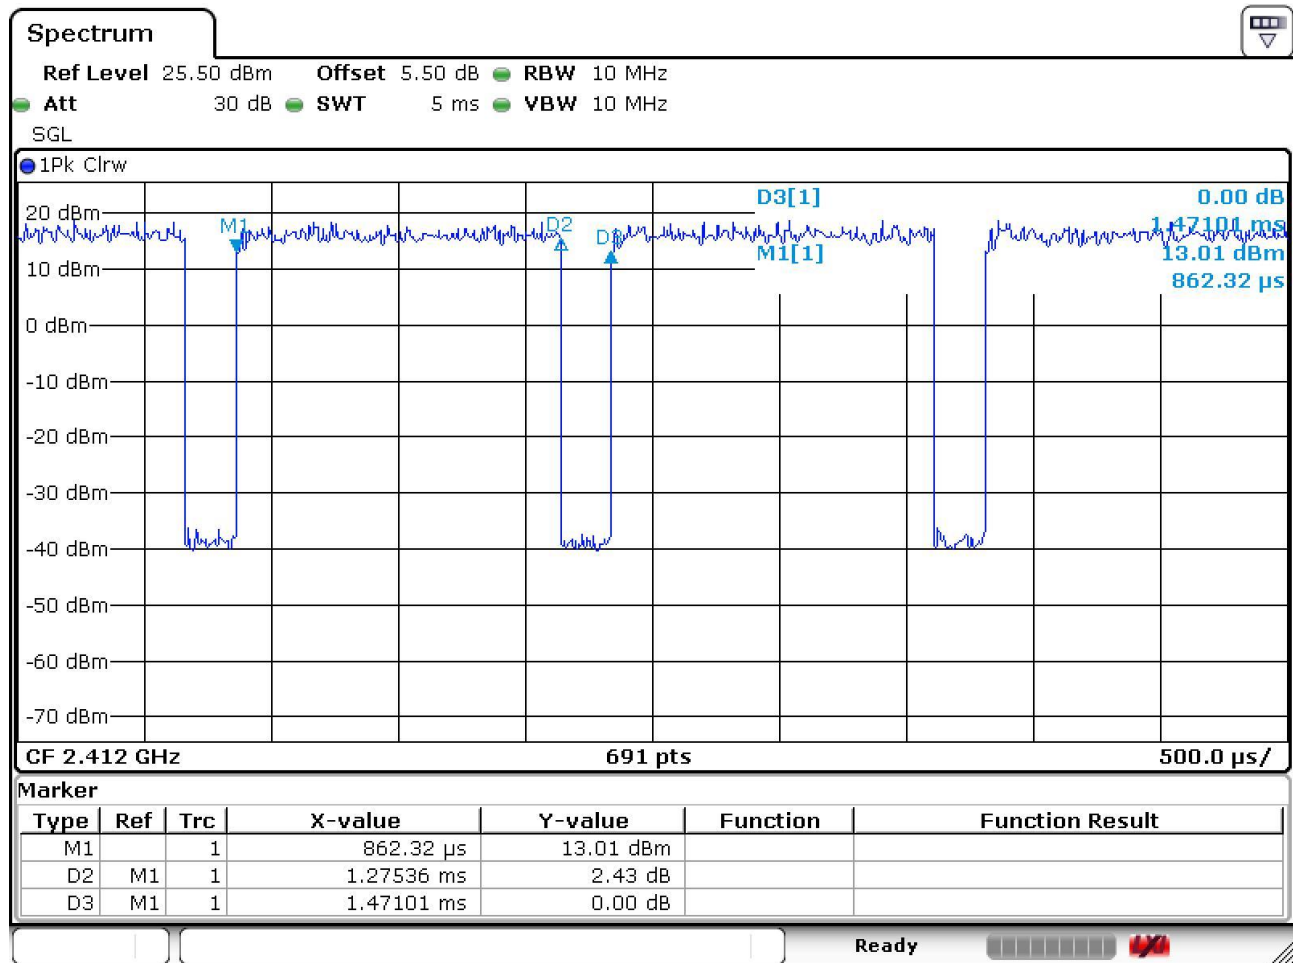



802.11n(BW40MHz)

