



7.8.5. Test Result

Test Mode	Channel No.	Frequency (MHz)	Limit (MHz)	Result
DH5	00	2402	20dBc	Pass
DH5	39	2441	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	39	2441	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	39	2441	20dBc	Pass
3DH5	78	2480	20dBc	Pass

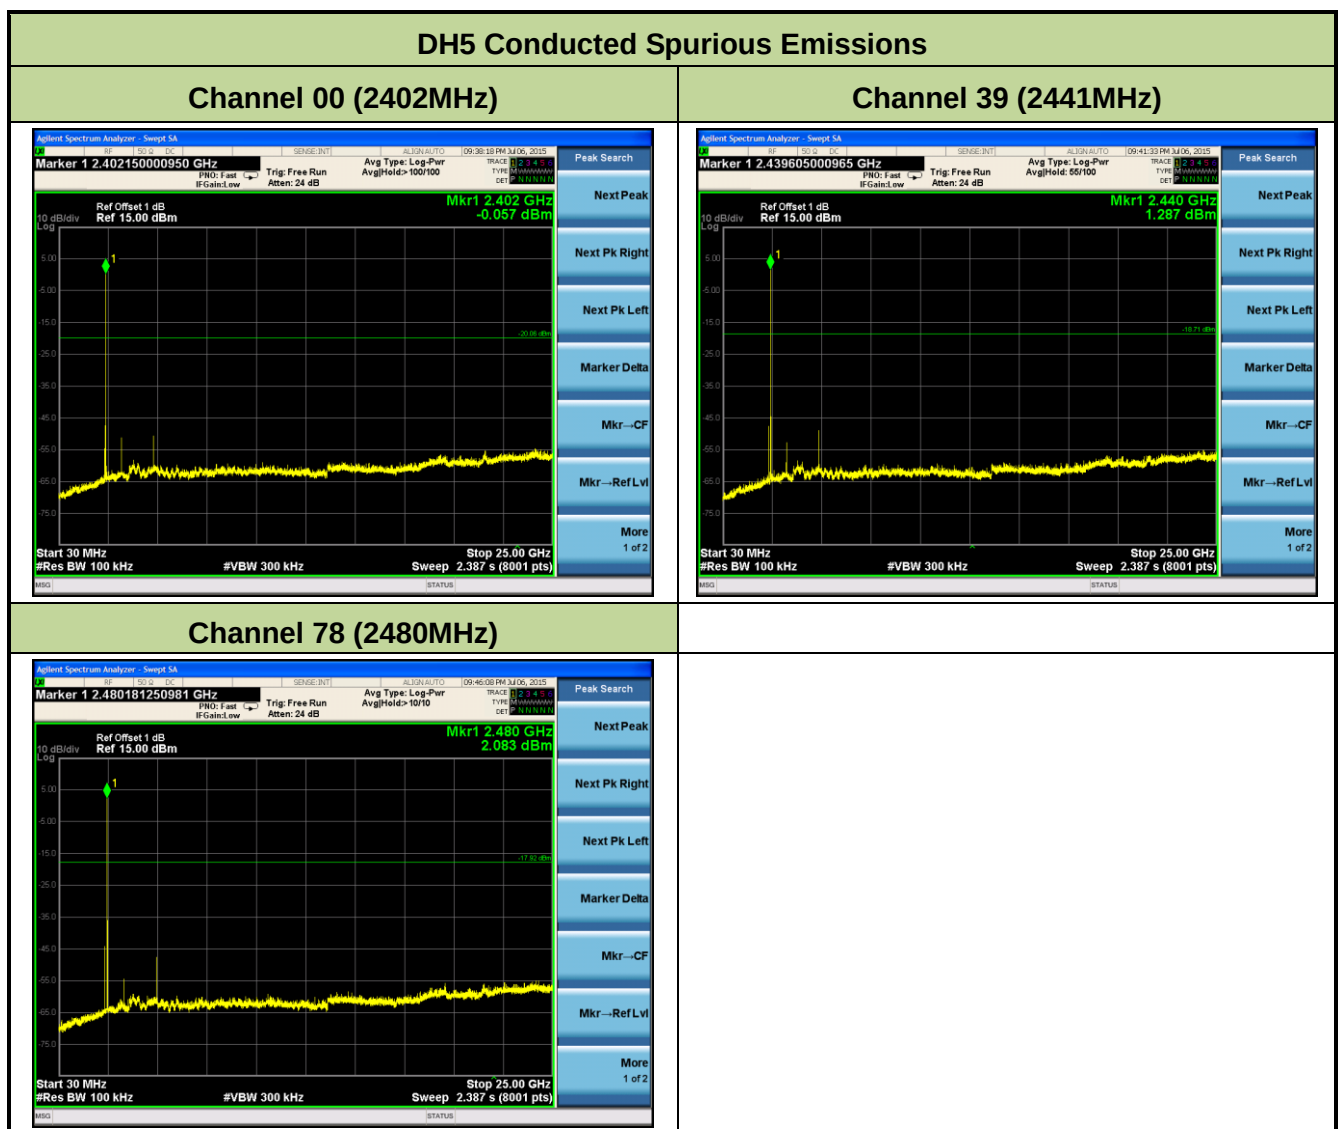


2DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

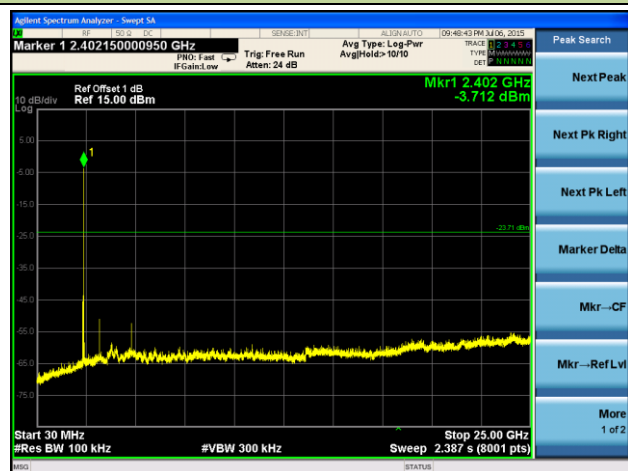

Channel 39 (2441MHz)

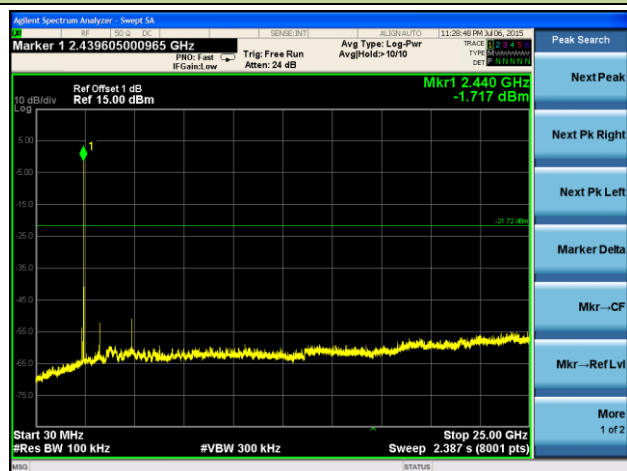


Channel 78 (2480MHz)

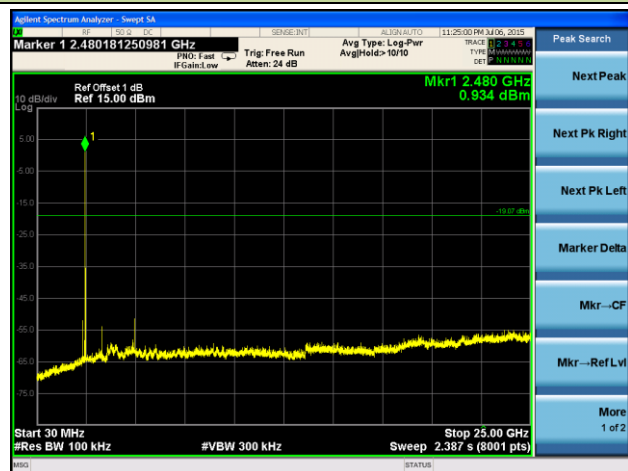


3DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

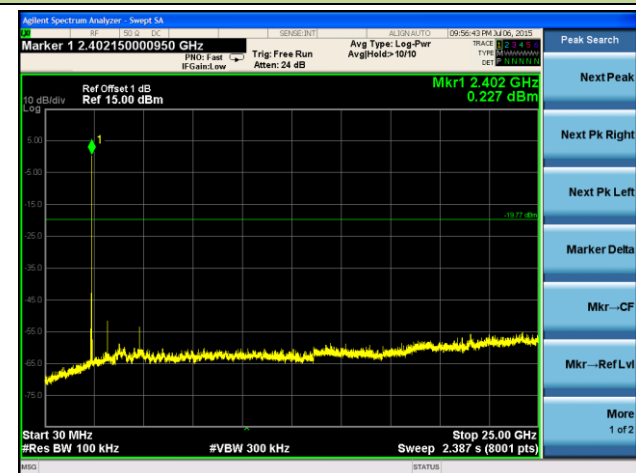

Channel 39 (2441MHz)

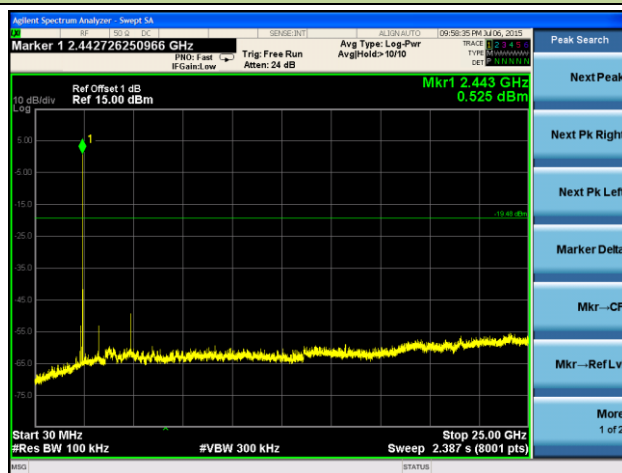

Channel 78 (2480MHz)

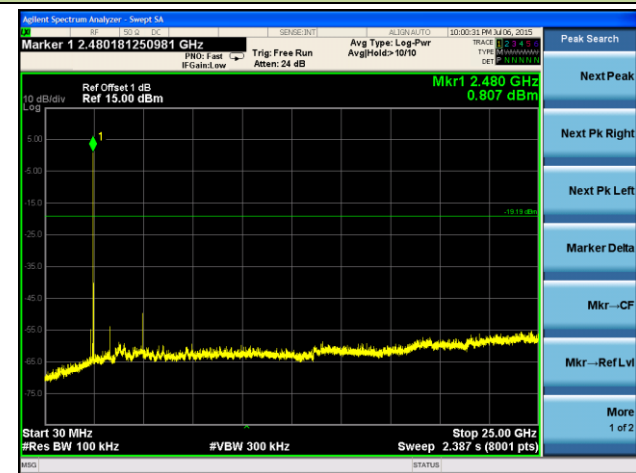

7.9. Radiated Spurious Emission Measurement

7.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 – 30	30	30
30 – 88	100	3
88 – 216	150	3
216 – 960	200	3
Above 960	500	3

7.9.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.12.1

7.9.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 * RBW
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency


Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Average Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. De As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

7.9.4. Test Setup


9kHz ~ 30MHz Test Setup:

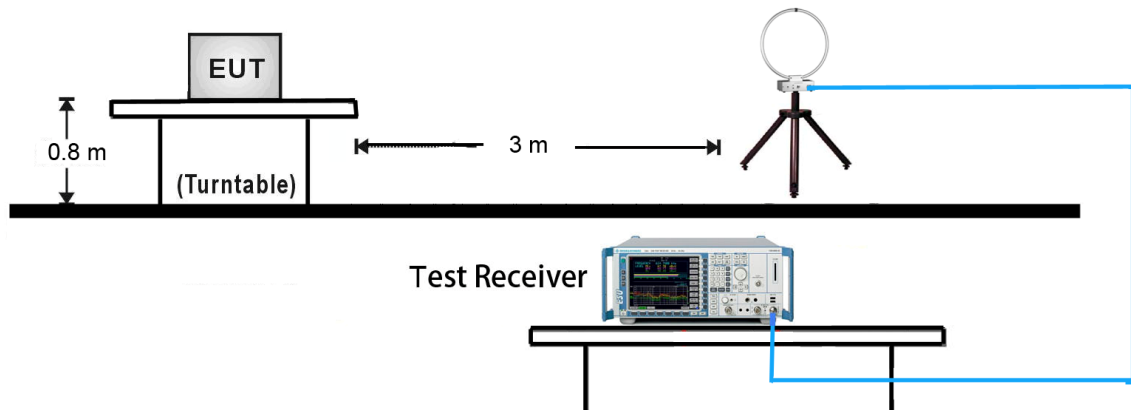

30MHz ~ 1GHz Test Setup:

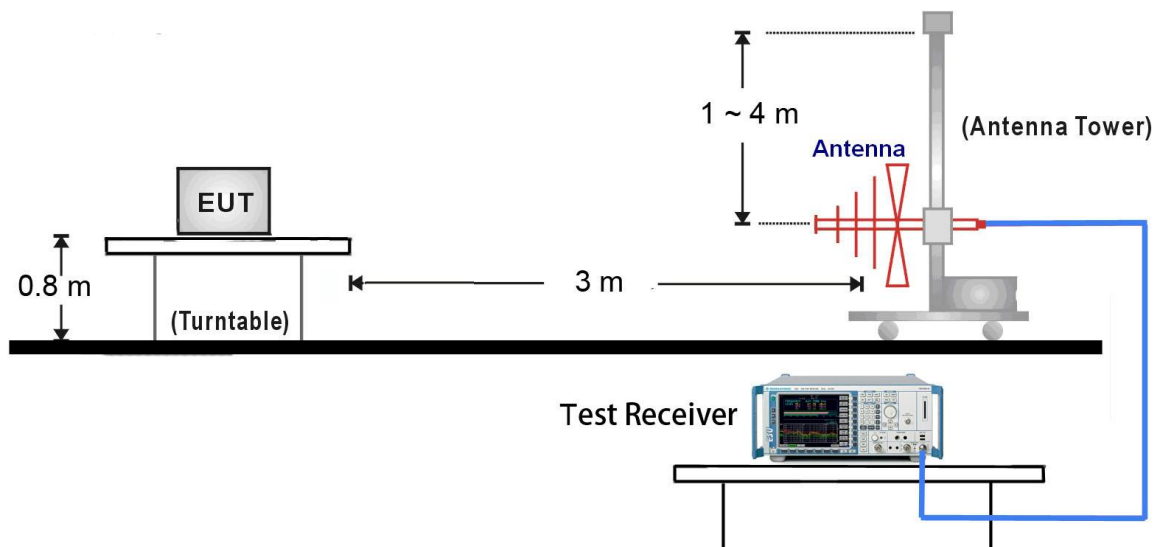

1GHz ~ 25GHz Test Setup:

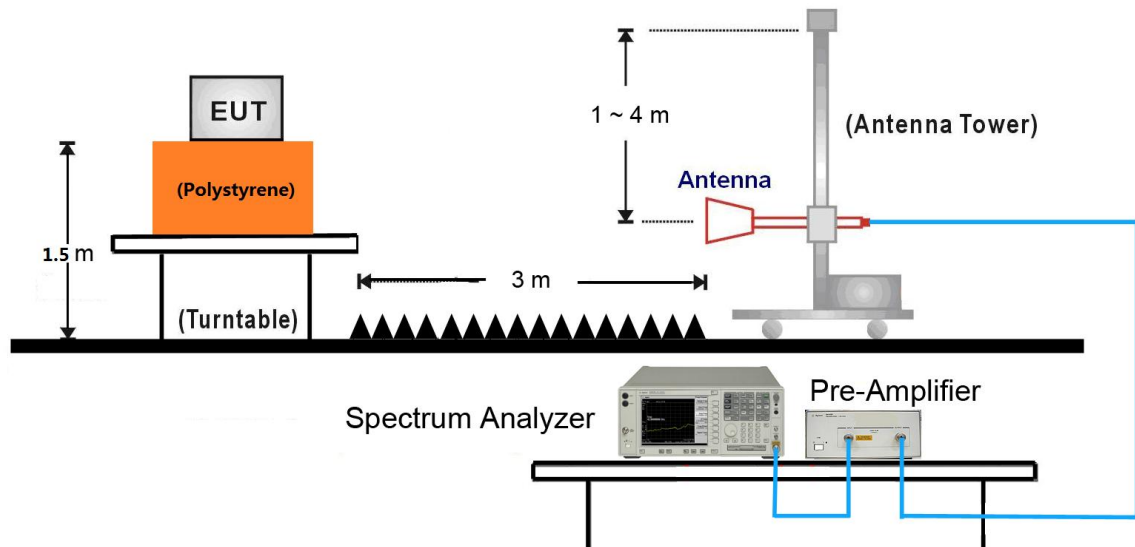

7.9.5. Test Result

Note: The worst case emission was shown as below when the EUT was placed in Z axis.

Test Mode:	DH5	Test Site:	AC1
Test Channel:	00	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	3018.0	39.2	-2.1	37.1	74.0	-36.9	Peak	Horizontal
*	3104.0	39.1	-1.8	37.3	74.0	-36.7	Peak	Horizontal
	4804.0	37.3	2.7	40.0	74.0	-34.0	Peak	Horizontal
	7341.0	37.4	8.0	45.4	74.0	-28.6	Peak	Horizontal
*	3123.0	38.7	-1.7	37.0	74.0	-37.0	Peak	Vertical
*	3211.0	39.0	-1.6	37.4	74.0	-36.6	Peak	Vertical
	4804.0	37.4	2.7	40.1	74.0	-33.9	Peak	Vertical
	7264.0	37.0	7.9	44.9	74.0	-29.1	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is 20dBc of the fundamental emission level (86.7dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	DH5	Test Site:	AC1
Test Channel:	39	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	3076.0	38.9	-1.9	37.0	74.0	-37.0	Peak	Horizontal
*	3129.0	38.5	-1.6	36.9	74.0	-37.1	Peak	Horizontal
	4804.0	35.8	2.7	38.5	74.0	-35.5	Peak	Horizontal
	7391.0	36.0	7.9	43.9	74.0	-30.1	Peak	Horizontal
*	3204.0	38.5	-1.6	36.9	74.0	-37.1	Peak	Vertical
*	4487.0	36.1	1.6	37.7	74.0	-36.3	Peak	Vertical
	4804.0	37.0	2.7	39.7	74.0	-34.3	Peak	Vertical
	7284.0	37.0	8.0	45.0	74.0	-29.0	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (88.5dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	DH5	Test Site:	AC1
Test Channel:	78	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	3215.0	39.5	-1.6	37.9	74.0	-36.1	Peak	Horizontal
*	4419.0	36.3	1.4	37.7	74.0	-36.3	Peak	Horizontal
	4804.0	36.8	2.7	39.5	74.0	-34.5	Peak	Horizontal
	7394.0	35.9	7.9	43.8	74.0	-30.2	Peak	Horizontal
*	3211.0	39.2	-1.6	37.6	74.0	-36.4	Peak	Vertical
*	4475.0	35.3	1.6	36.9	74.0	-37.1	Peak	Vertical
	4804.0	36.4	2.7	39.1	74.0	-34.9	Peak	Vertical
	7614.0	35.6	8.1	43.7	74.0	-30.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (90.5dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	2DH5	Test Site:	AC1
Test Channel:	00	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	4485.0	35.9	1.6	37.5	74.0	-36.5	Peak	Horizontal
*	5666.5	36.5	3.7	40.2	74.0	-33.8	Peak	Horizontal
	7417.5	38.7	8.0	46.7	74.0	-27.3	Peak	Horizontal
	7712.0	35.5	8.0	43.5	74.0	-30.5	Peak	Horizontal
*	3127.0	38.0	-1.6	36.4	74.0	-37.6	Peak	Vertical
*	4427.0	36.0	1.5	37.5	74.0	-36.5	Peak	Vertical
	4960.0	36.1	2.9	39.0	74.0	-35.0	Peak	Vertical
	7294.0	36.2	8.0	44.2	74.0	-29.8	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (89.4dBμV/m) or 15.209 which is higher. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB) Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Mode:	2DH5	Test Site:	AC1
Test Channel:	39	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	3104.0	39.3	-1.8	37.5	74.0	-36.5	Peak	Horizontal
*	4493.0	36.8	1.6	38.4	74.0	-35.6	Peak	Horizontal
	4804.0	37.0	2.7	39.7	74.0	-34.3	Peak	Horizontal
	7541.0	35.9	8.3	44.2	74.0	-29.8	Peak	Horizontal
*	3164.0	38.3	-1.5	36.8	74.0	-37.2	Peak	Vertical
*	4412.0	36.4	1.4	37.8	74.0	-36.2	Peak	Vertical
	4804.0	36.7	2.7	39.4	74.0	-34.6	Peak	Vertical
	7721.0	35.2	8.0	43.2	74.0	-30.8	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (90.4dBμV/m) or 15.209 which is higher. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB) Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Mode:	2DH5	Test Site:	AC1
Test Channel:	78	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	3216.0	38.0	-1.6	36.4	74.0	-37.6	Peak	Horizontal
*	4427.0	35.9	1.5	37.4	74.0	-36.6	Peak	Horizontal
	4960.0	35.5	2.9	38.4	74.0	-35.6	Peak	Horizontal
	7514.0	35.0	8.3	43.3	74.0	-30.7	Peak	Horizontal
*	3145.0	38.0	-1.5	36.5	74.0	-37.5	Peak	Vertical
*	4428.0	35.5	1.5	37.0	74.0	-37.0	Peak	Vertical
	4960.0	35.5	2.9	38.4	74.0	-35.6	Peak	Vertical
	7364.0	36.4	7.9	44.3	74.0	-29.7	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (91.6dBμV/m) or 15.209 which is higher. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB) Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Mode:	3DH5	Test Site:	AC1
Test Channel:	00	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	3166.0	37.6	-1.5	36.1	74.0	-37.9	Peak	Horizontal
*	4471.0	36.7	1.6	38.3	74.0	-35.7	Peak	Horizontal
	4882.0	36.3	2.7	39.0	74.0	-35.0	Peak	Horizontal
	7614.0	35.1	8.1	43.2	74.0	-30.8	Peak	Horizontal
*	3142.0	38.5	-1.6	36.9	74.0	-37.1	Peak	Vertical
*	4478.0	36.5	1.6	38.1	74.0	-35.9	Peak	Vertical
	4882.0	36.5	2.7	39.2	74.0	-34.8	Peak	Vertical
	7528.0	36.3	8.3	44.6	74.0	-29.4	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (88.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	3DH5	Test Site:	AC1
Test Channel:	39	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	3124.0	38.5	-1.6	36.9	74.0	-37.1	Peak	Horizontal
*	4497.0	36.0	1.6	37.6	74.0	-36.4	Peak	Horizontal
	4882.0	36.3	2.7	39.0	74.0	-35.0	Peak	Horizontal
	7614.0	35.1	8.1	43.2	74.0	-30.8	Peak	Horizontal
*	3124.0	37.8	-1.6	36.2	74.0	-37.8	Peak	Vertical
*	4424.0	35.6	1.4	37.0	74.0	-37.0	Peak	Vertical
	4882.0	35.5	2.7	38.2	74.0	-35.8	Peak	Vertical
	7526.0	35.0	8.3	43.3	74.0	-30.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (90.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Mode:	3DH5	Test Site:	AC1
Test Channel:	78	Test Engineer:	Roy Cheng
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	3120.0	38.4	-1.7	36.7	74.0	-37.3	Peak	Horizontal
*	4425.0	35.6	1.4	37.0	74.0	-37.0	Peak	Horizontal
	4882.0	35.8	2.7	38.5	74.0	-35.5	Peak	Horizontal
	7721.0	35.8	8.0	43.8	74.0	-30.2	Peak	Horizontal
*	3114.0	38.0	-1.7	36.3	74.0	-37.7	Peak	Vertical
*	4427.0	36.1	1.5	37.6	74.0	-36.4	Peak	Vertical
	4881.0	35.8	2.7	38.5	74.0	-35.5	Peak	Vertical
	7421.0	35.6	8.0	43.6	74.0	-30.4	Peak	Vertical
Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (91.8dBμV/m) or 15.209 which is higher. Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB) Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

The worst case of Radiated Emission 9KHz ~ 1GHz and 18GHz ~ 25GHz:

Site: AC1	Time: 2015/07/10 - 21:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: VULB9162_0.03-8GHz	Polarity: Horizontal
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Worse Case Mode: Transmit at Channel 2480MHz by 3DH5	

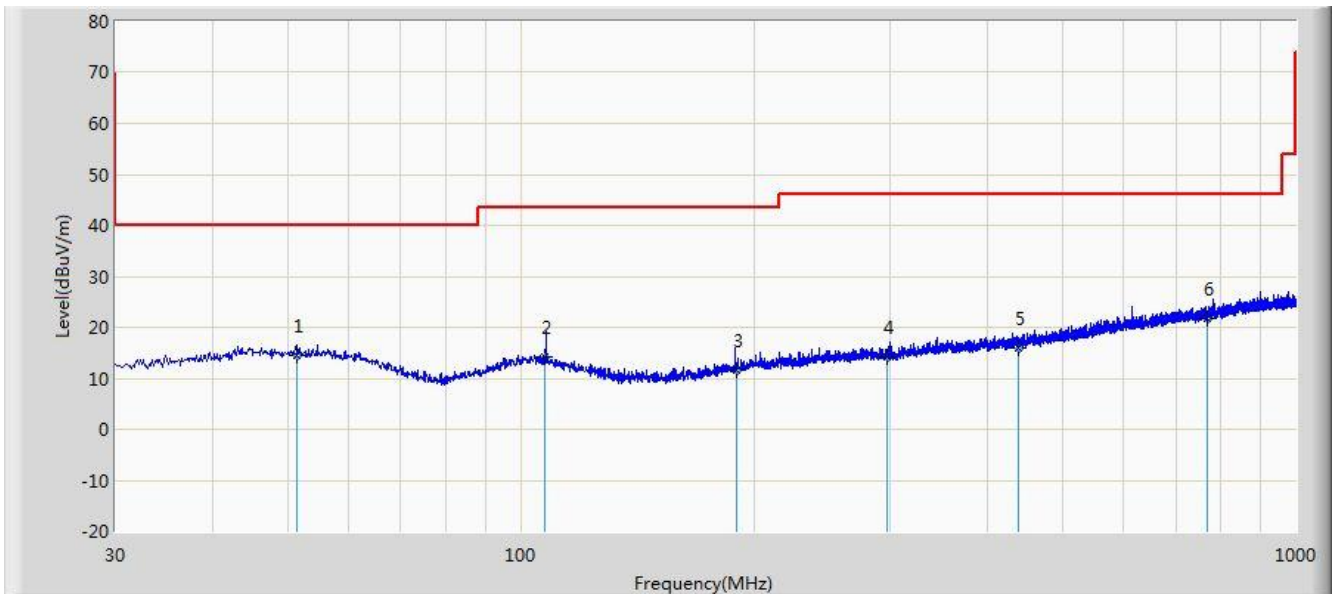


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		51.461	14.616	-0.267	-25.384	40.000	14.883	QP
2		107.479	14.131	1.135	-29.369	43.500	12.997	QP
3		189.807	11.469	-0.273	-32.031	43.500	11.741	QP
4		296.508	14.271	-0.164	-31.729	46.000	14.435	QP
5		438.855	15.865	-1.305	-30.135	46.000	17.170	QP
6	*	768.291	21.715	-0.612	-24.285	46.000	22.327	QP

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/07/10 - 21:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: VULB9162_0.03-8GHz	Polarity: Vertical
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Worse Case Mode: Transmit at Channel 2480MHz by 3DH5	

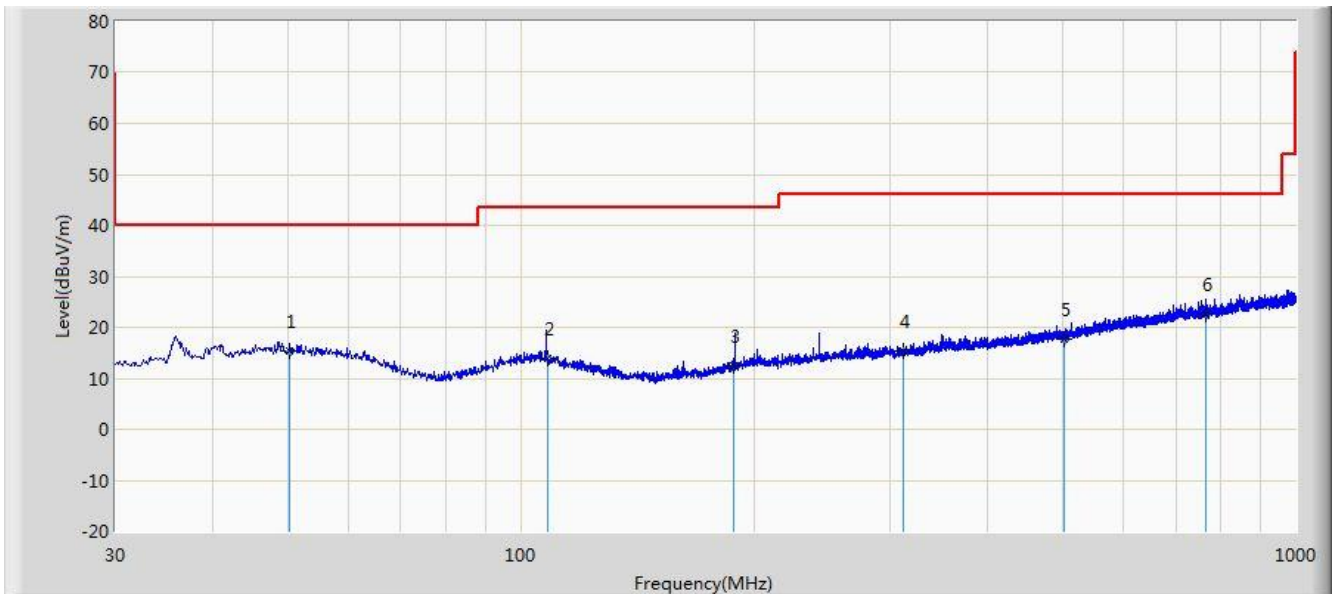


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		50.249	15.418	0.516	-24.582	40.000	14.902	QP
2		108.570	13.772	0.809	-29.728	43.500	12.963	QP
3		188.110	12.556	0.953	-30.944	43.500	11.603	QP
4		311.664	15.235	0.436	-30.765	46.000	14.799	QP
5		503.239	17.613	-0.656	-28.387	46.000	18.269	QP
6	*	765.018	22.650	0.358	-23.350	46.000	22.293	QP

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/07/07 - 15:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: FMZB1519_0.009-30MHz	Polarity: Face On
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Note: There is the ambient noise within frequency range 9kHz~30MHz.	

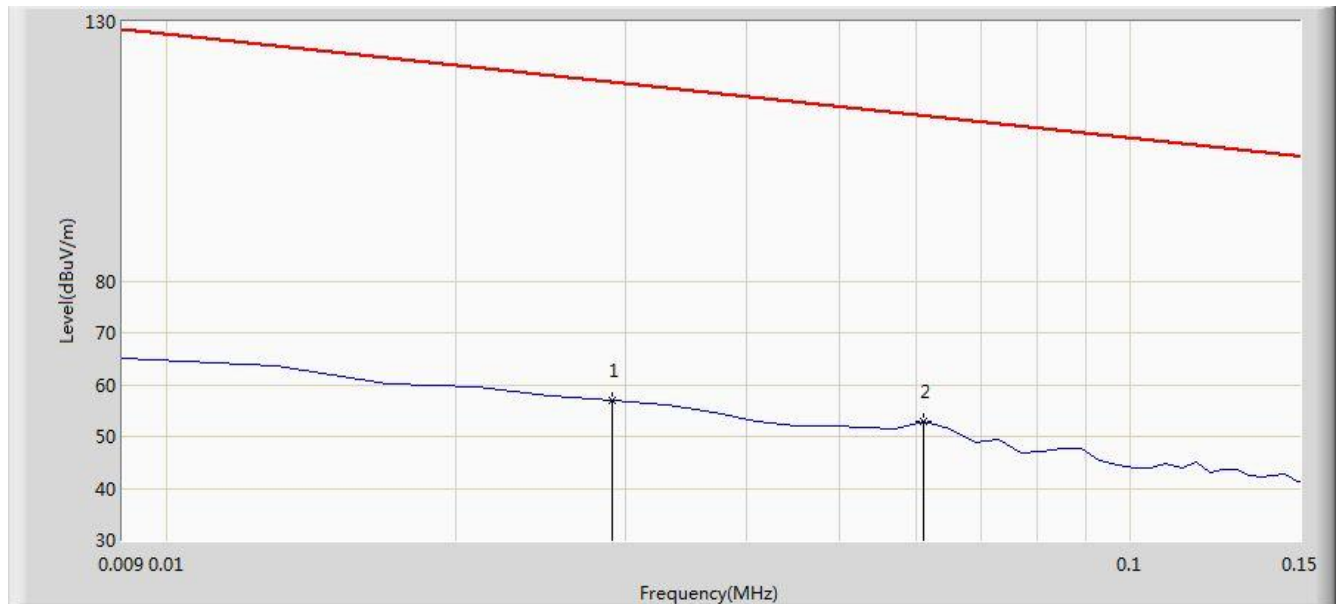


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			0.029	56.893	35.844	-61.463	118.356	21.049	QP
2		*	0.061	52.853	32.542	-59.045	111.898	20.311	QP

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/07/07 - 15:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: FMZB1519_0.009-30MHz	Polarity: Face On
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Note: There is the ambient noise within frequency range 9kHz~30MHz.	

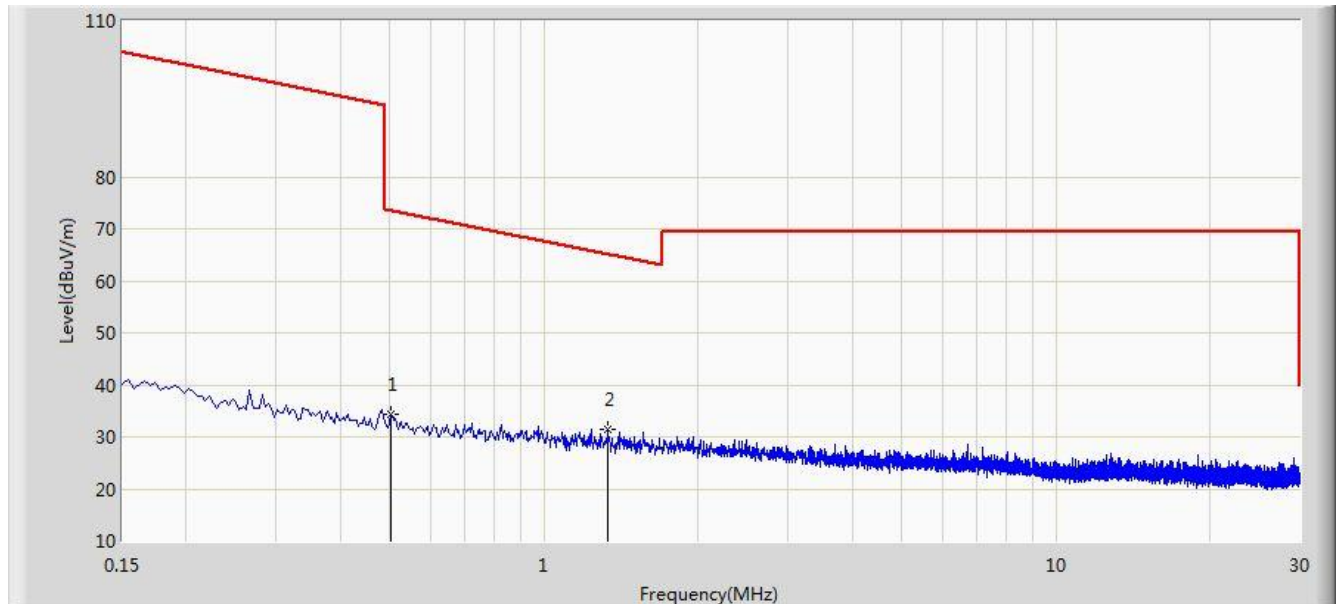


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			0.502	34.370	13.947	-39.220	73.590	20.423	QP
2		*	1.334	31.595	11.104	-33.530	65.125	20.491	QP

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/07/07 - 15:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9170_18-40GHz	Polarity: Horizontal
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Note: There is the ambient noise within frequency range 18GHz~25GHz.	

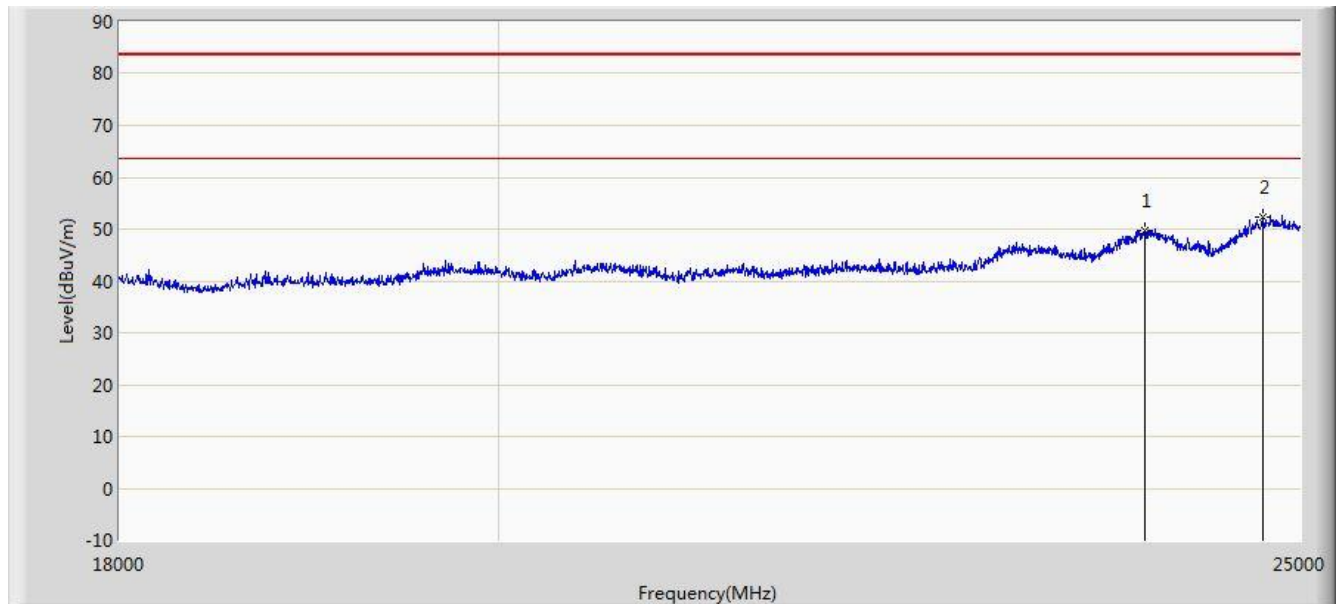


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			23943.000	49.776	35.866	-33.724	83.500	13.910	PK
2		*	24741.000	52.375	37.681	-31.125	83.500	14.694	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/07/07 - 16:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Line Chen
Probe: BBHA9170_18-40GHz	Polarity: Vertical
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Note: There is the ambient noise within frequency range 18GHz~25GHz.	

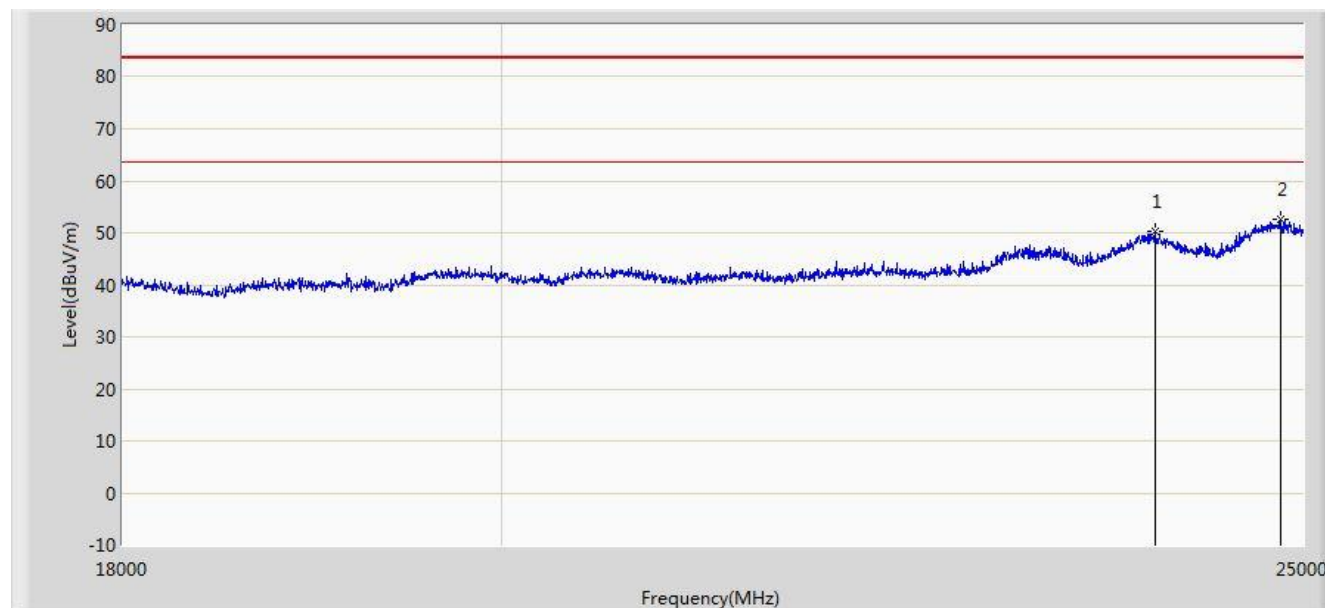

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			23999.000	50.379	36.435	-33.121	83.500	13.944	PK
2		*	24846.000	52.503	37.735	-30.997	83.500	14.768	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.10. Radiated Restricted Band Edge Measurement

7.10.1. Test Result

Note: The worst case band edge was shown as below when the EUT was placed in Z axis.

Site: AC 1	Time: 2015/07/08 - 04:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2402MHz by DH5	

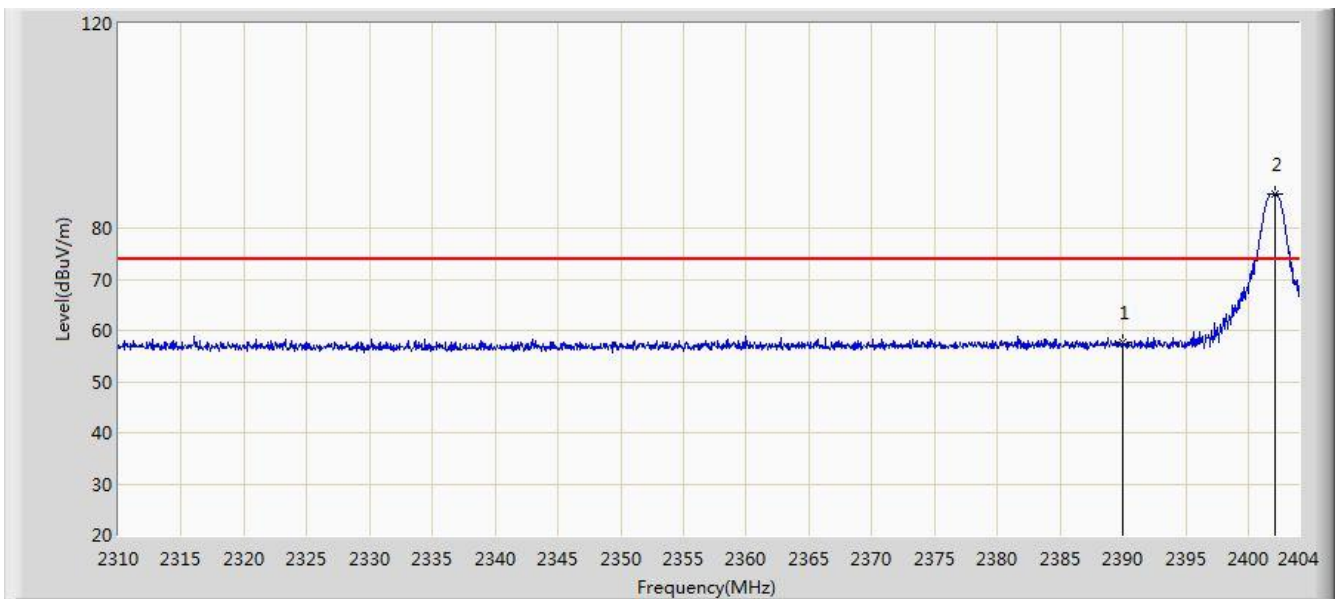


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	57.604	26.401	-16.396	74.000	31.203	PK
2		*	2402.073	86.724	55.540	N/A	N/A	31.184	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 05:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2402MHz by DH5	

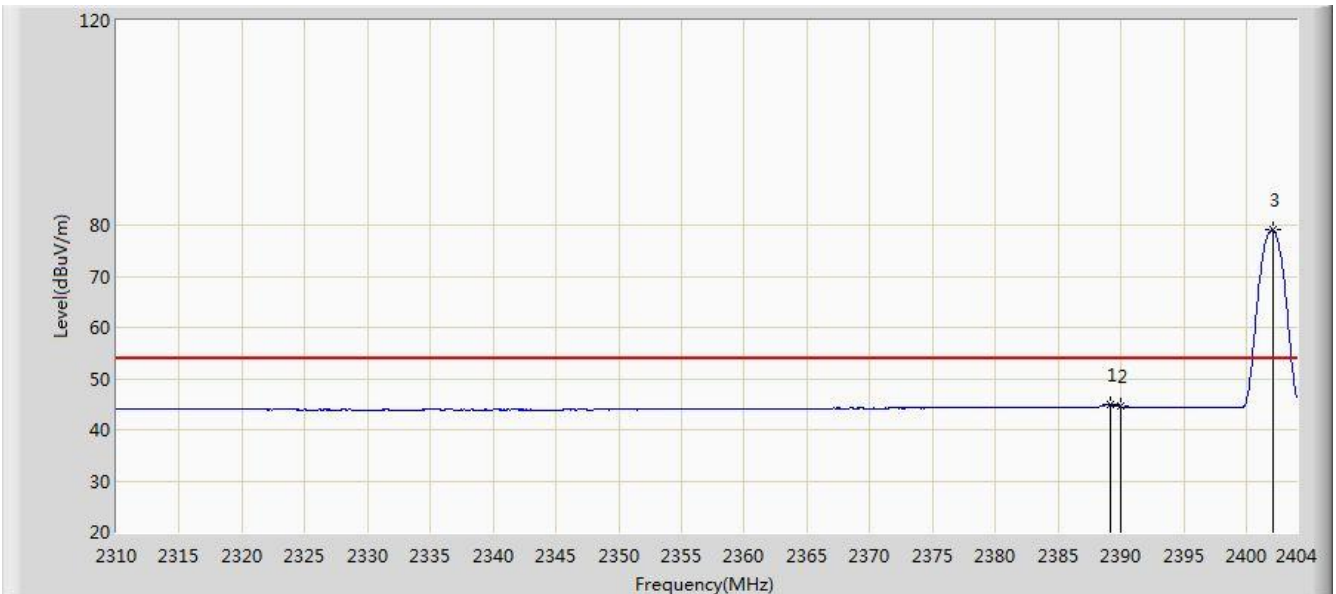


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.195	44.896	13.692	-9.104	54.000	31.204	AV
2			2390.000	44.502	13.299	-9.498	54.000	31.203	AV
3		*	2402.073	79.057	47.873	N/A	N/A	31.184	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 05:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2402MHz by DH5	

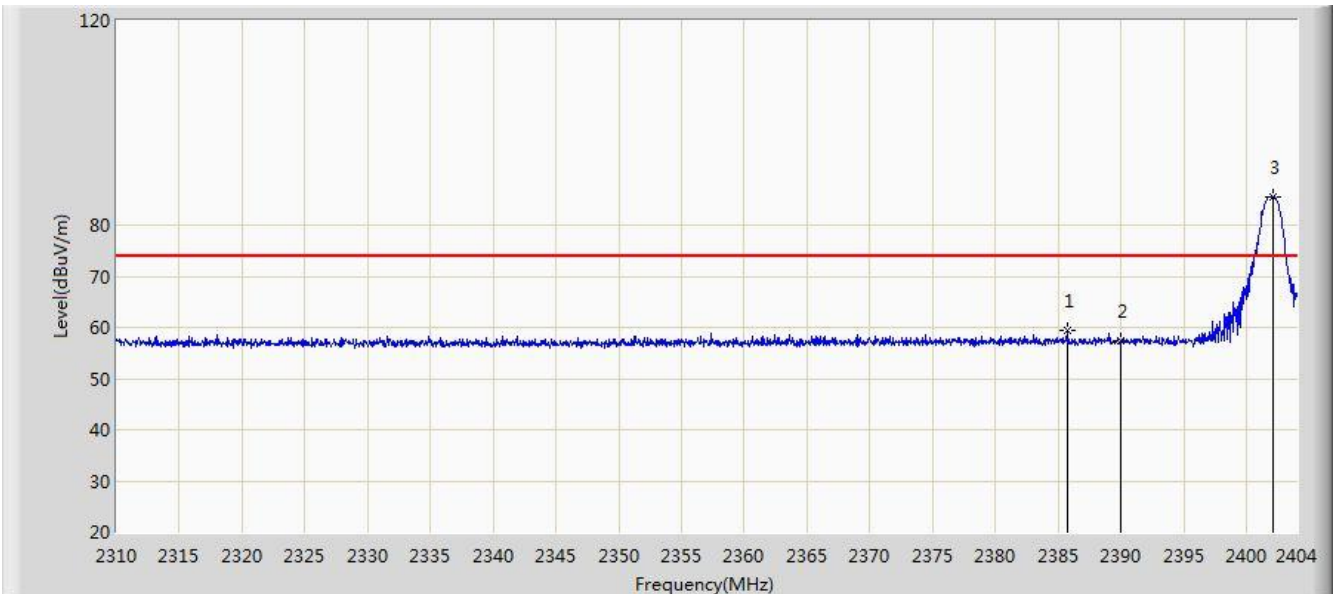


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.717	59.531	28.320	-14.469	74.000	31.211	PK
2			2390.000	57.251	26.048	-16.749	74.000	31.203	PK
3		*	2402.073	85.554	54.370	N/A	N/A	31.184	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 05:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2402MHz by DH5	

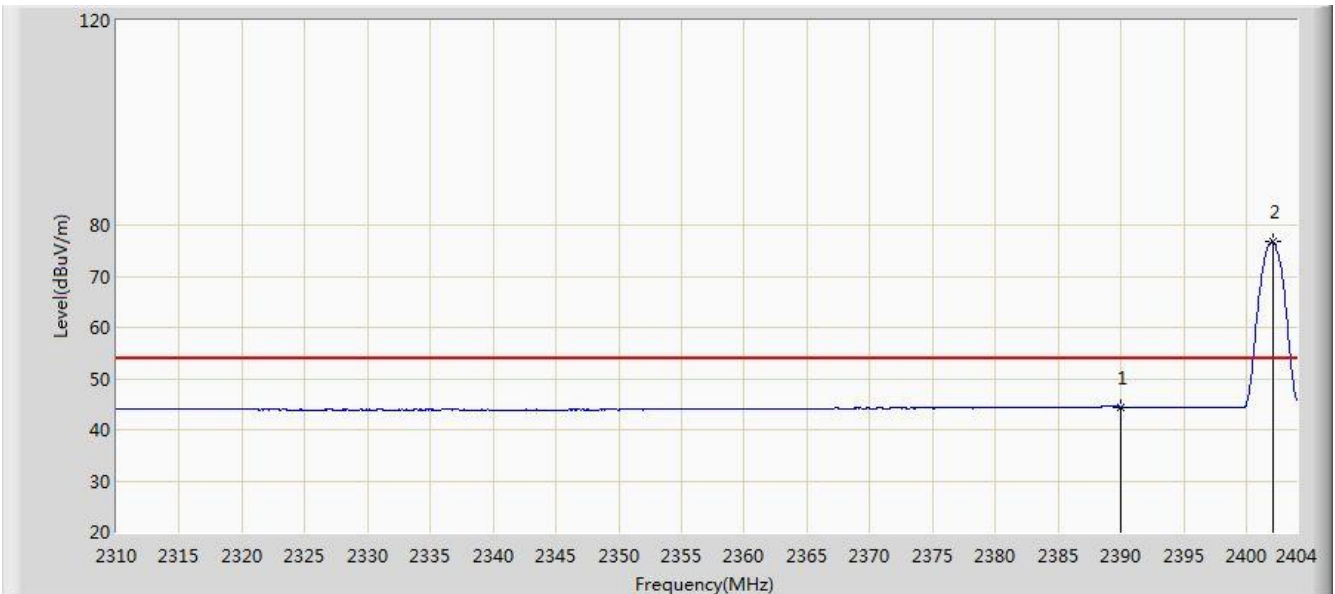


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.446	13.243	-9.554	54.000	31.203	AV
2		*	2402.073	76.717	45.533	N/A	N/A	31.184	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 05:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2480MHz by DH5	

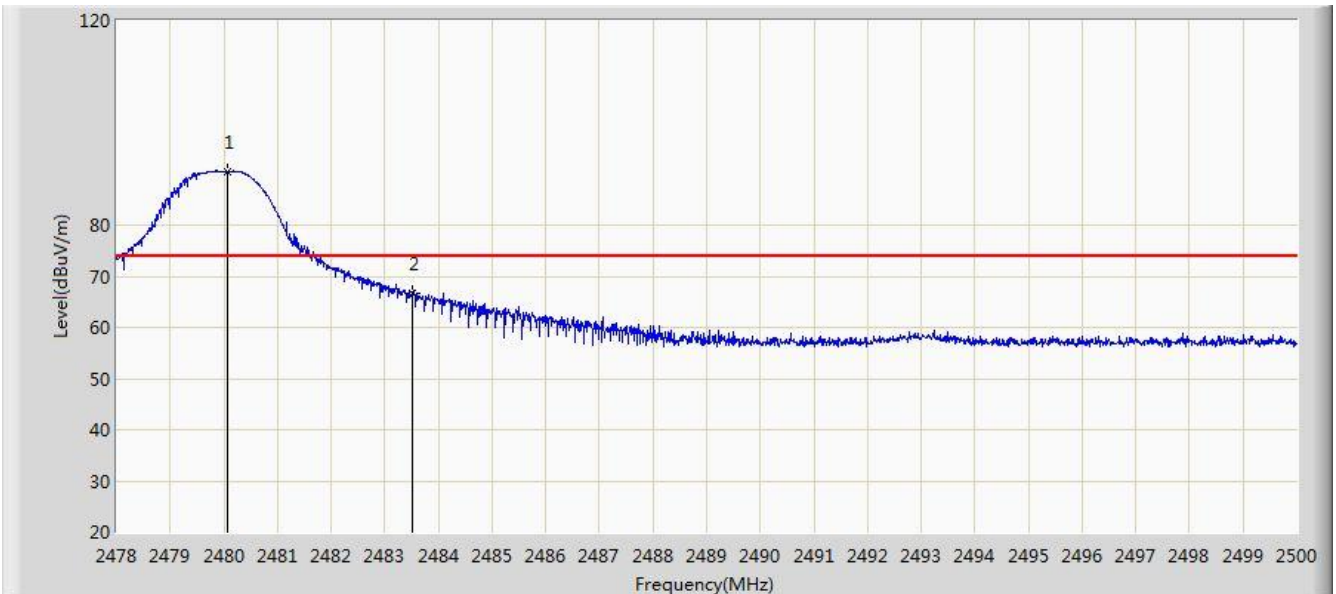


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.079	90.483	59.299	N/A	N/A	31.184	PK
2			2483.500	66.584	35.391	-7.416	74.000	31.194	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 05:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2480MHz by DH5	

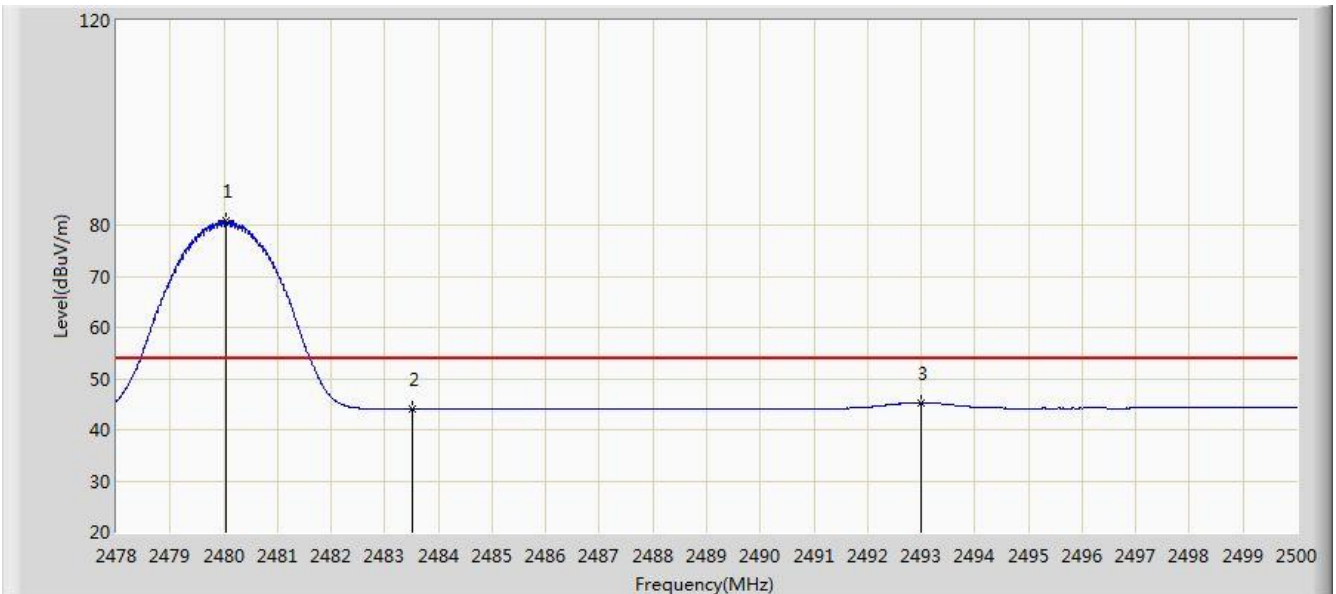


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.046	80.864	49.680	N/A	N/A	31.184	AV
2			2483.500	43.974	12.781	-10.026	54.000	31.194	AV
3			2493.004	45.253	14.035	-8.747	54.000	31.219	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 05:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2480MHz by DH5	

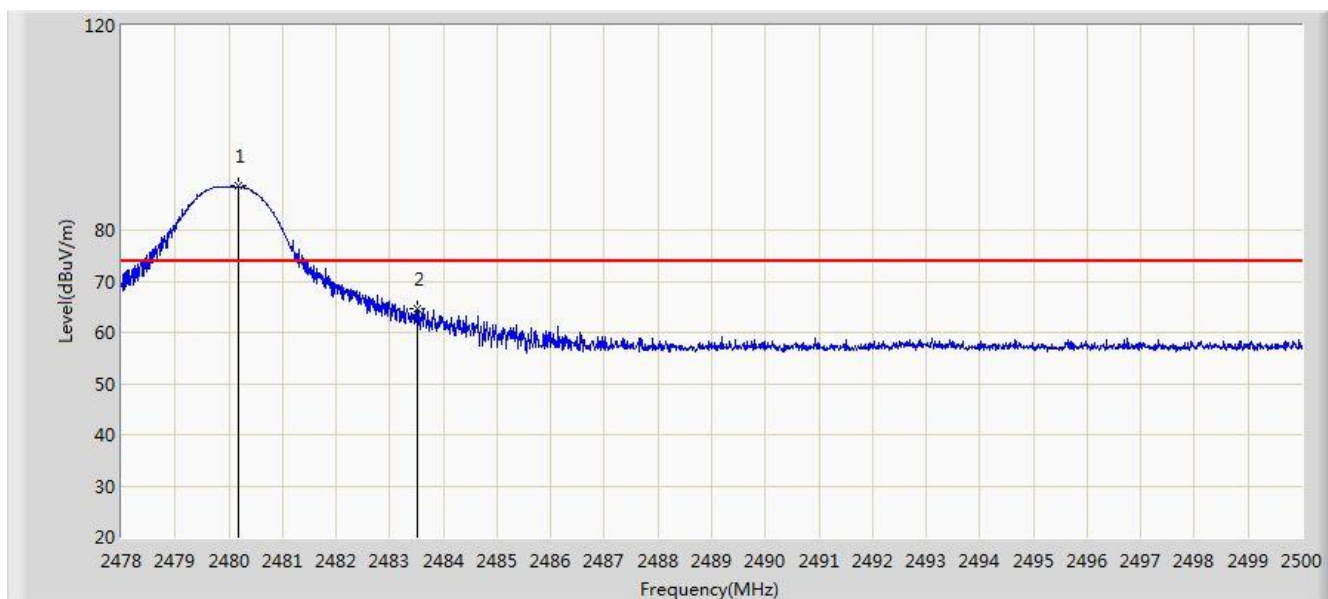


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.178	88.561	57.376	N/A	N/A	31.185	PK
2			2483.500	64.779	33.586	-9.221	74.000	31.194	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 05:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2480MHz by DH5	

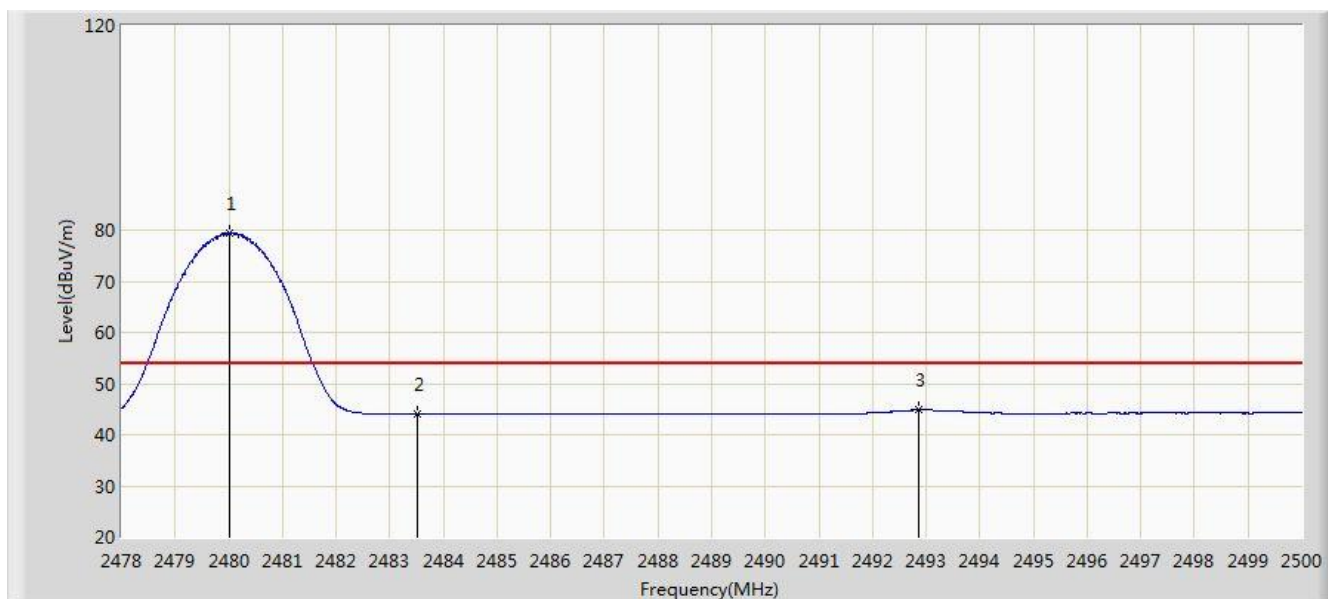


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.013	79.538	48.354	N/A	N/A	31.184	AV
2			2483.500	43.994	12.801	-10.006	54.000	31.194	AV
3			2492.872	44.861	13.643	-9.139	54.000	31.218	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 05:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2402MHz by 2DH5	

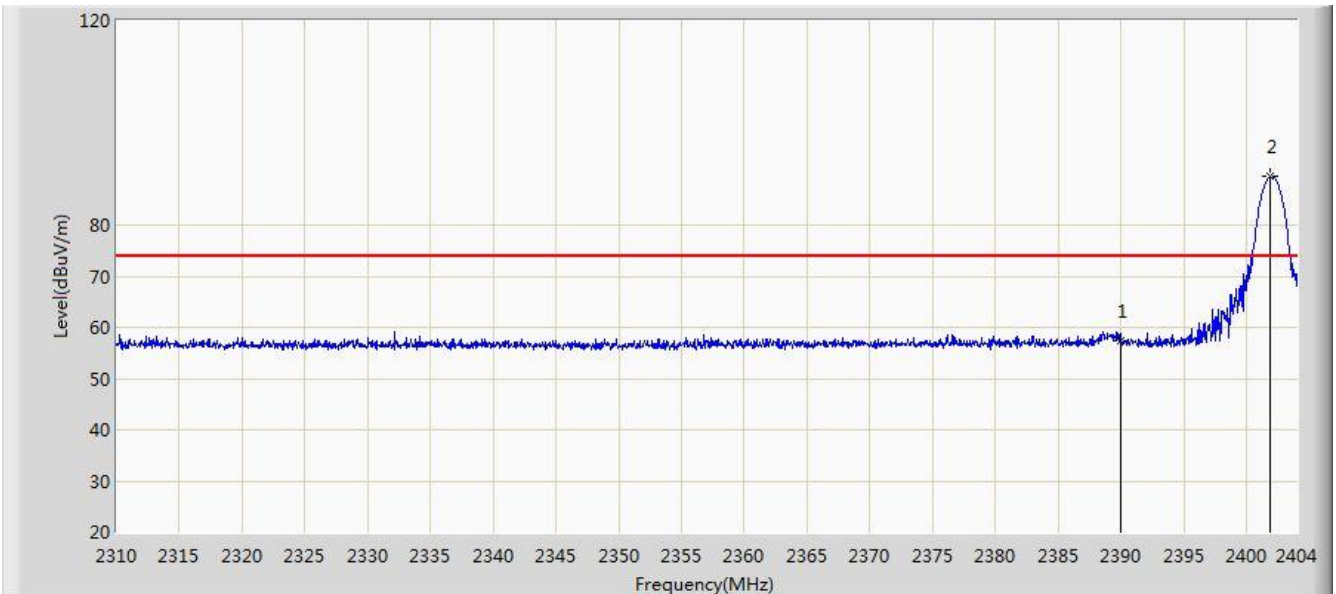


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	57.410	26.207	-16.590	74.000	31.203	PK
2		*	2401.838	89.428	58.244	N/A	N/A	31.184	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 05:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2402MHz by 2DH5	

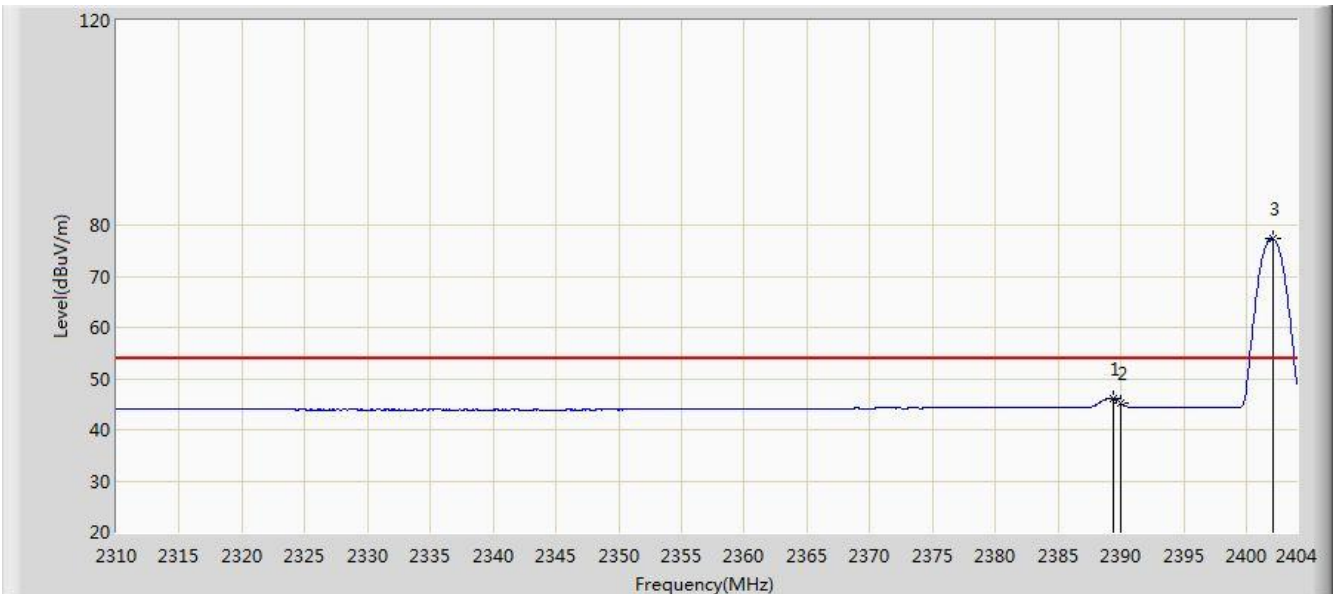


aa	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.336	46.157	14.953	-7.843	54.000	31.204	AV
2			2390.000	45.222	14.019	-8.778	54.000	31.203	AV
3		*	2402.073	77.442	46.258	N/A	N/A	31.184	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 05:23
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2402MHz by 2DH5	

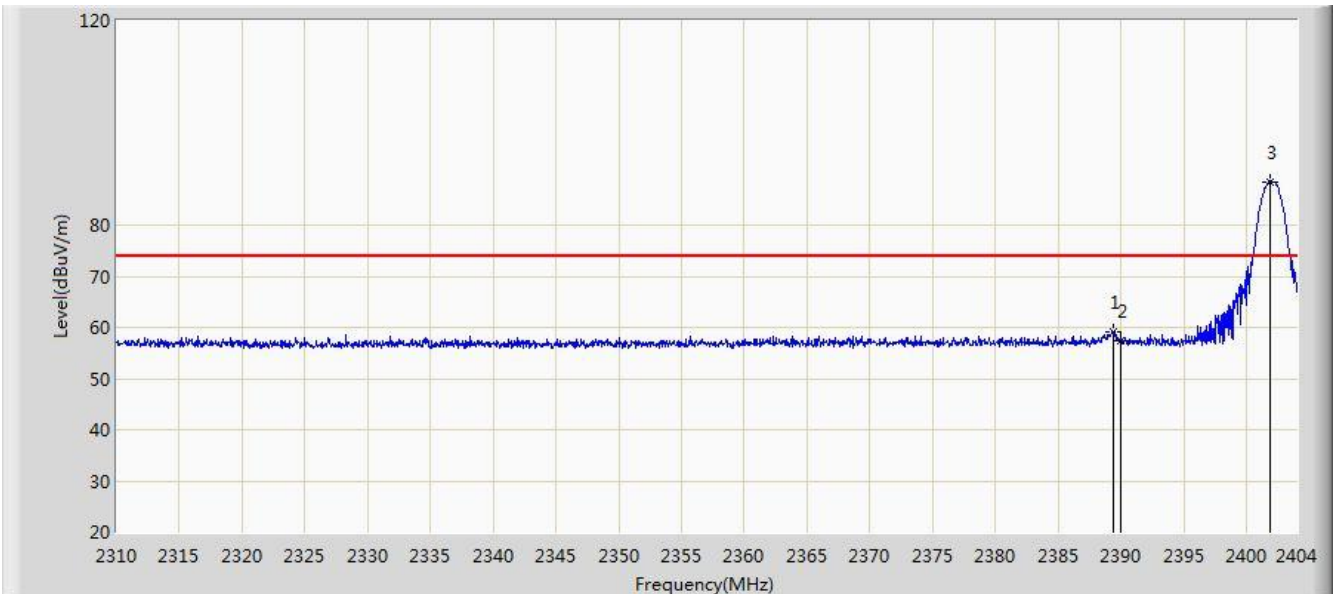


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.336	59.267	28.063	-14.733	74.000	31.204	PK
2			2390.000	57.424	26.221	-16.576	74.000	31.203	PK
3		*	2401.885	88.488	57.304	N/A	N/A	31.184	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 05:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2402MHz by 2DH5	

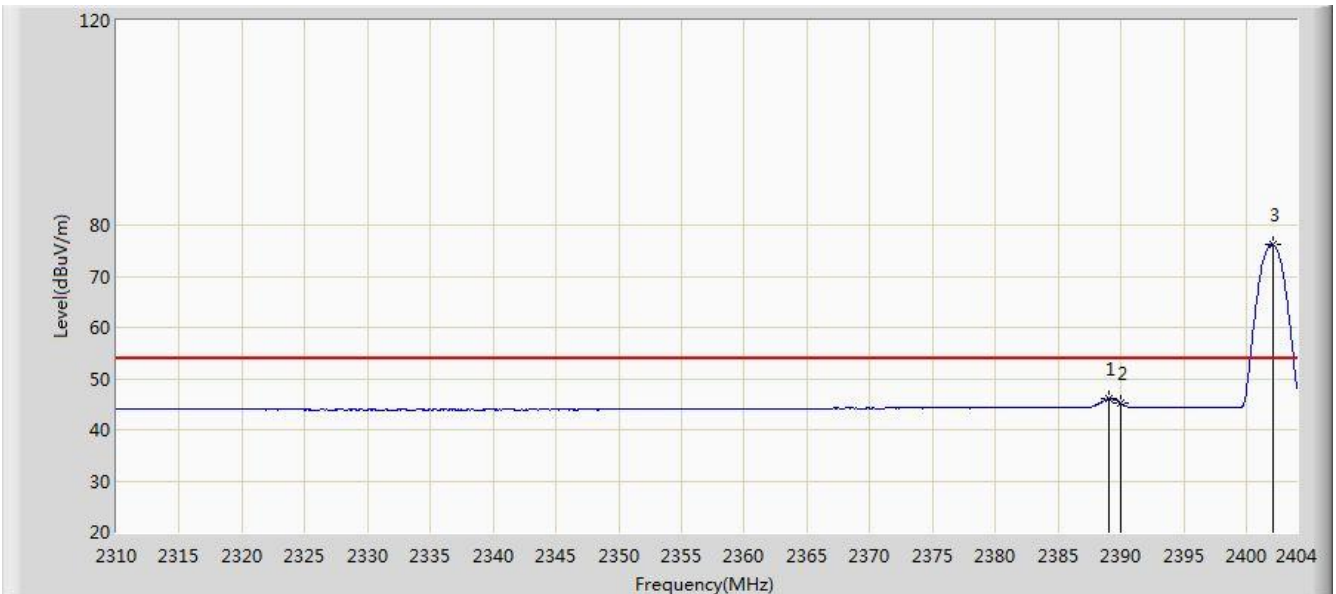


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.054	45.973	14.769	-8.027	54.000	31.204	AV
2			2390.000	45.126	13.923	-8.874	54.000	31.203	AV
3		*	2402.073	76.184	45.000	N/A	N/A	31.184	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 05:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2480MHz by 2DH5	

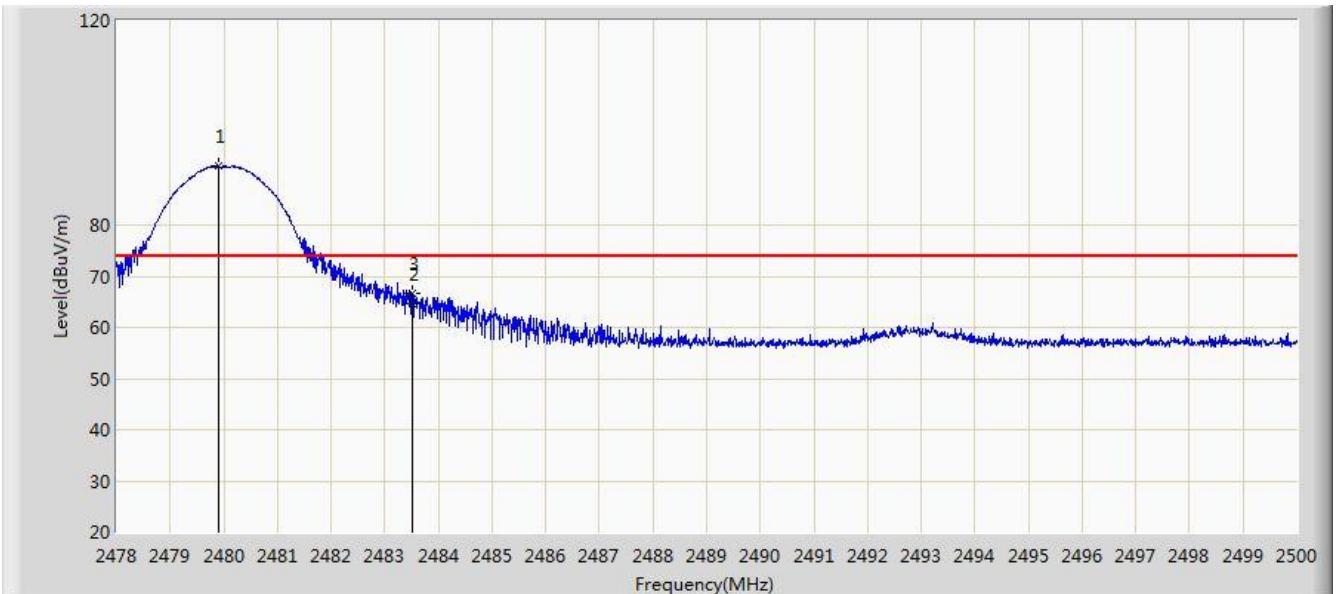


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.892	91.593	60.409	N/A	N/A	31.184	PK
2			2483.500	64.505	33.312	-9.495	74.000	31.194	PK
3			2483.511	66.624	35.431	-7.376	74.000	31.194	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 05:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2480MHz by 2DH5	

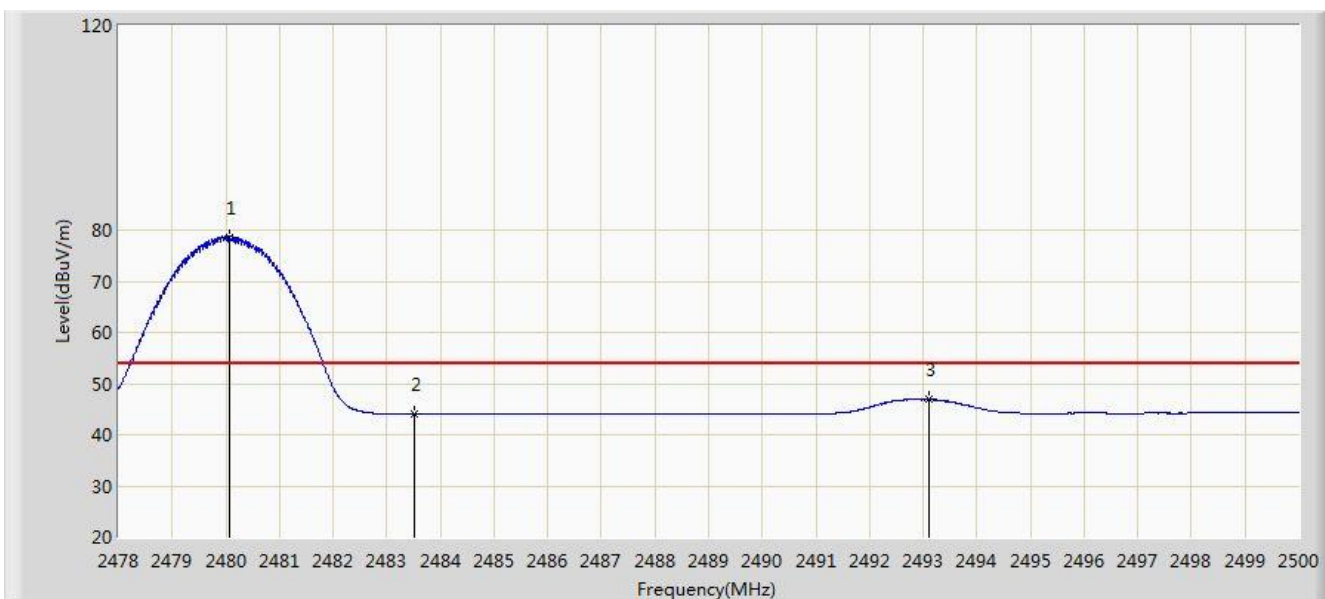


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.068	78.641	47.457	N/A	N/A	31.184	AV
2			2483.500	44.007	12.814	-9.993	54.000	31.194	AV
3			2493.114	46.885	15.666	-7.115	54.000	31.219	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 05:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2480MHz by 2DH5	

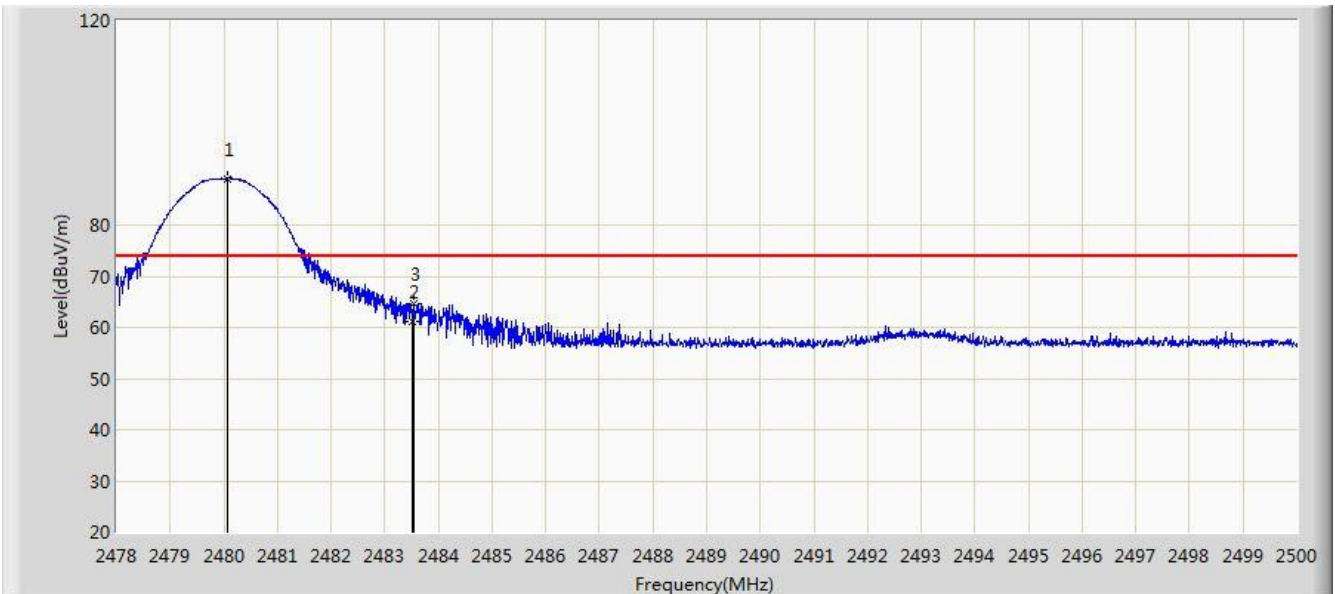


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.068	89.127	57.943	N/A	N/A	31.184	PK
2			2483.500	61.286	30.093	-12.714	74.000	31.194	PK
3			2483.533	64.683	33.490	-9.317	74.000	31.194	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 05:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2480MHz by 2DH5	

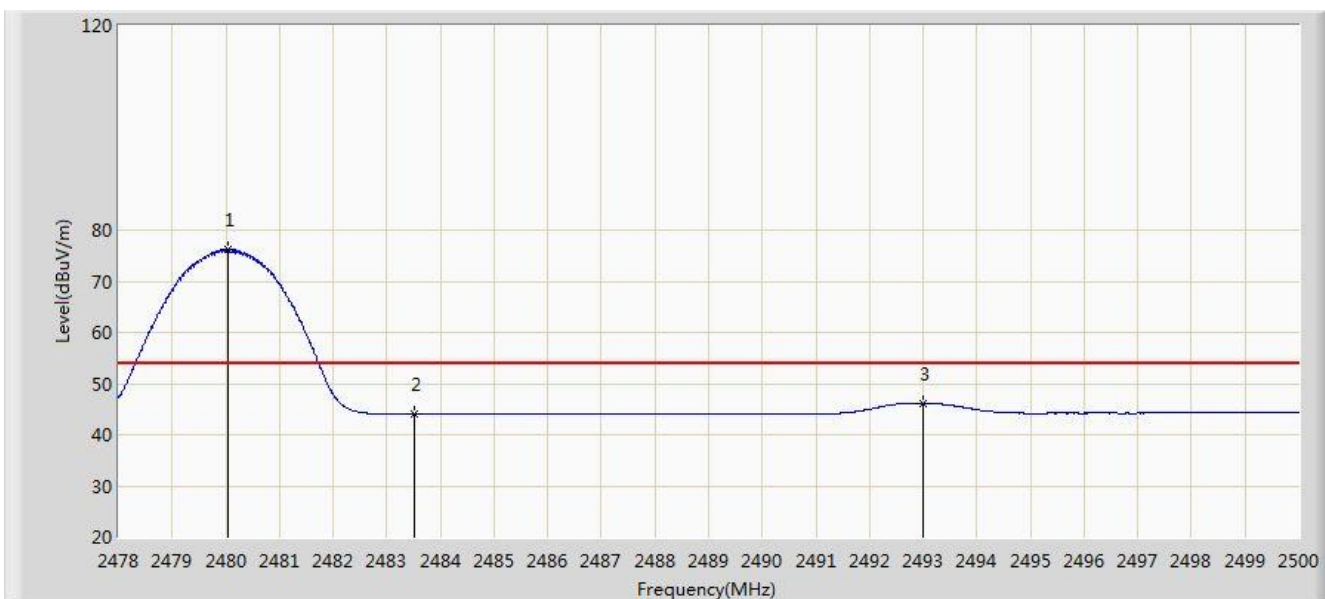


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.046	76.199	45.015	N/A	N/A	31.184	AV
2			2483.500	44.035	12.842	-9.965	54.000	31.194	AV
3			2493.004	46.123	14.905	-7.877	54.000	31.219	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 05:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2402MHz by 3DH5	

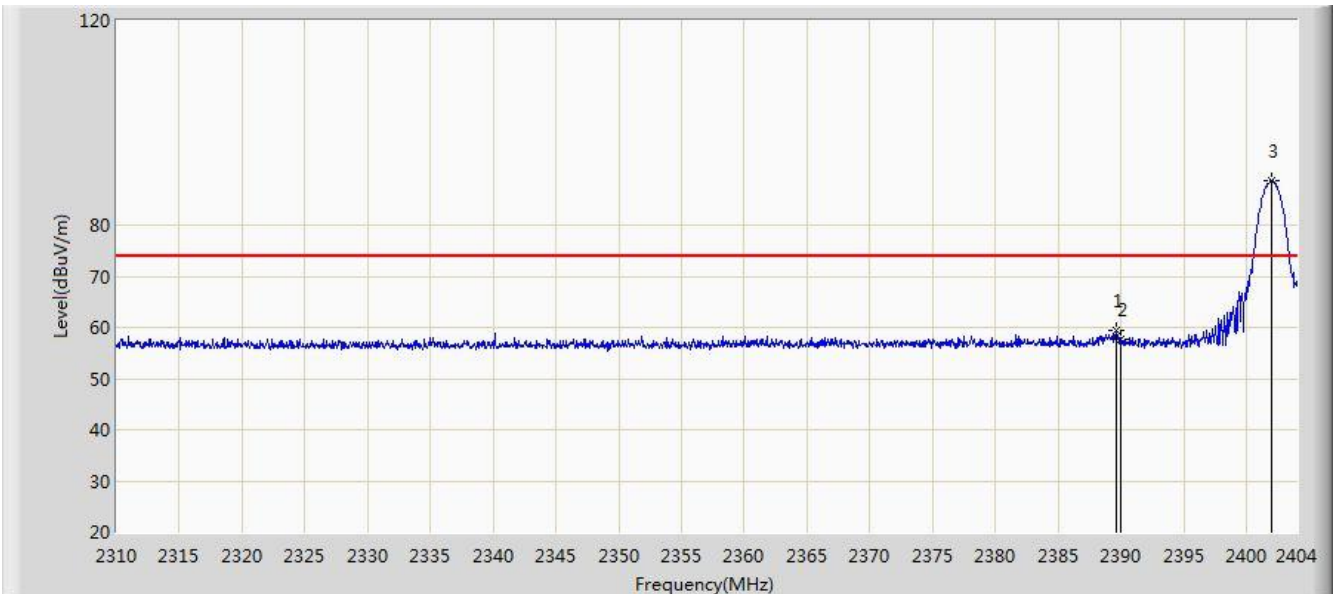


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.665	59.375	28.172	-14.625	74.000	31.204	PK
2			2390.000	57.755	26.552	-16.245	74.000	31.203	PK
3		*	2401.979	88.795	57.611	N/A	N/A	31.184	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 05:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2402MHz by 3DH5	

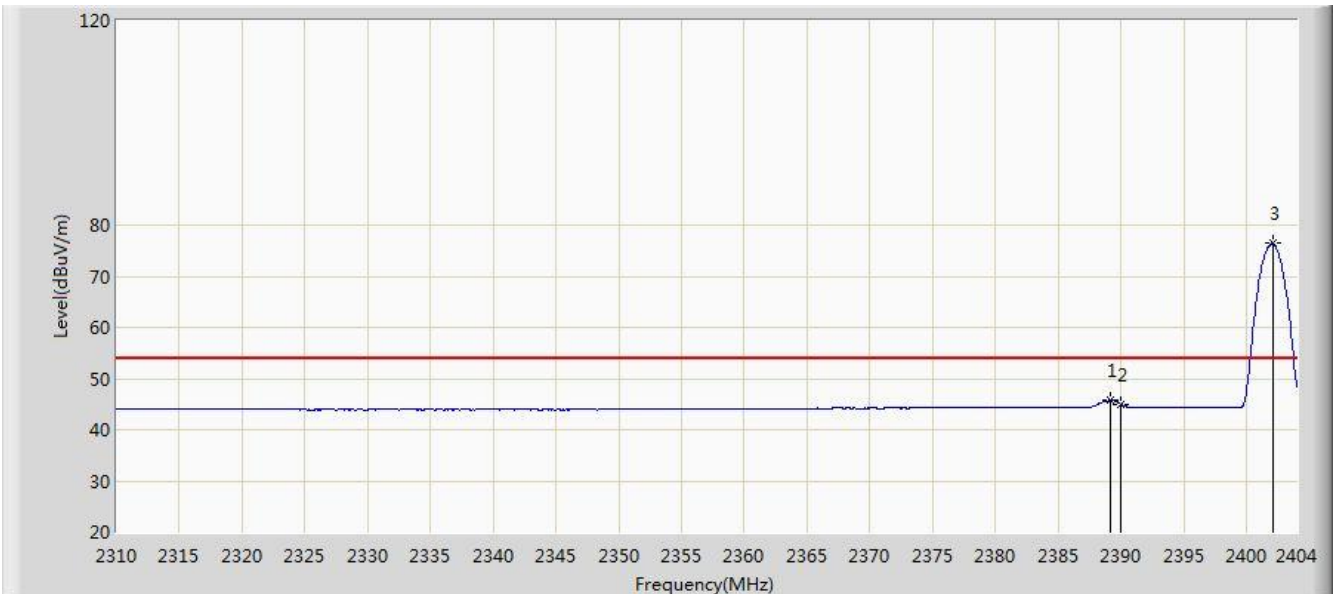


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.195	45.713	14.509	-8.287	54.000	31.204	AV
2			2390.000	44.991	13.788	-9.009	54.000	31.203	AV
3		*	2402.073	76.403	45.219	N/A	N/A	31.184	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 05:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2402MHz by 3DH5	

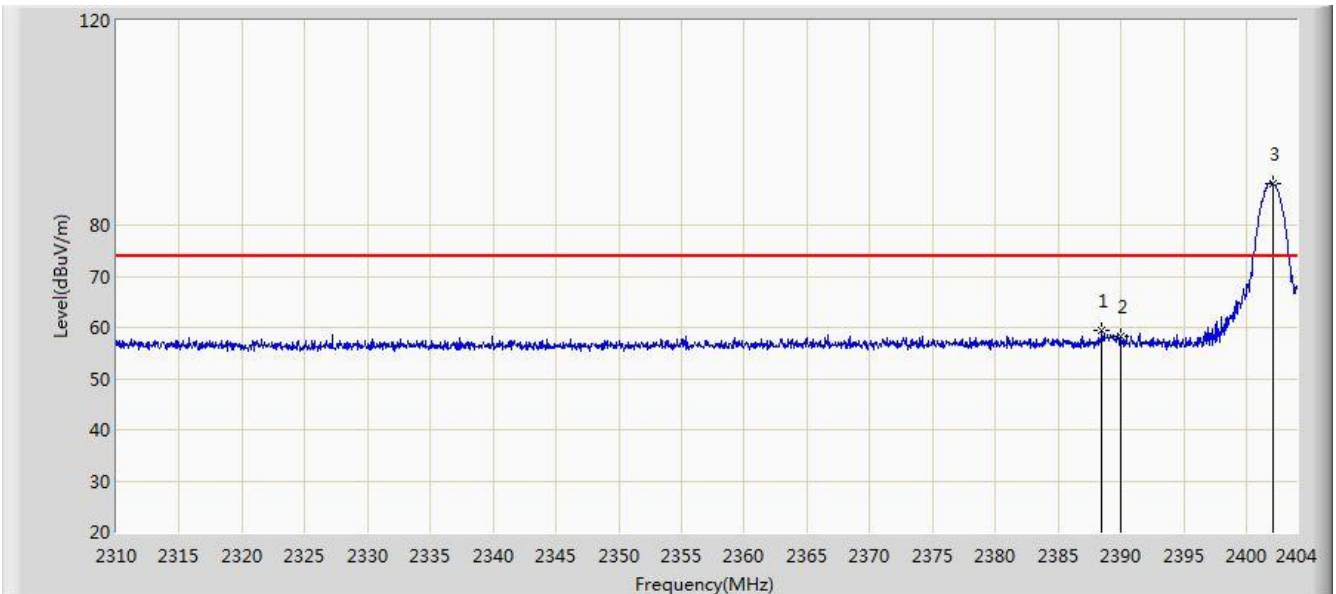


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.490	59.441	28.235	-14.559	74.000	31.206	PK
2			2390.000	58.223	27.020	-15.777	74.000	31.203	PK
3		*	2402.167	88.236	57.052	N/A	N/A	31.184	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 05:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2402MHz by 3DH5	

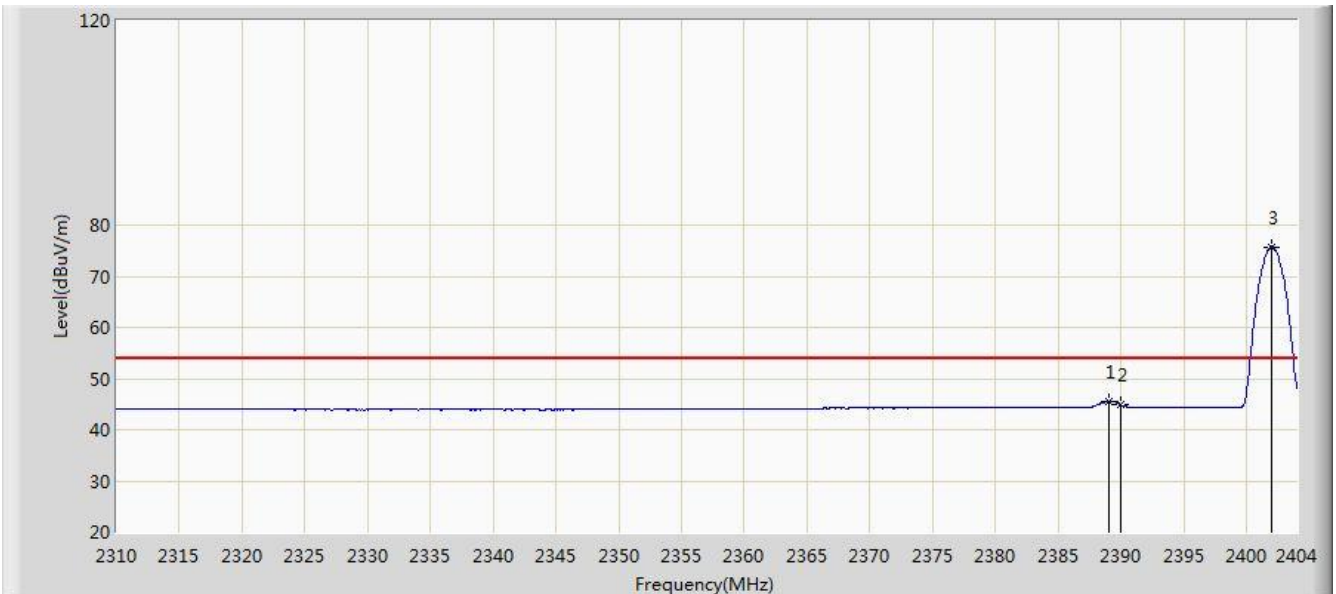


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.054	45.517	14.313	-8.483	54.000	31.204	AV
2			2390.000	44.848	13.645	-9.152	54.000	31.203	AV
3		*	2401.979	75.780	44.596	N/A	N/A	31.184	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 05:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2480MHz by 3DH5	

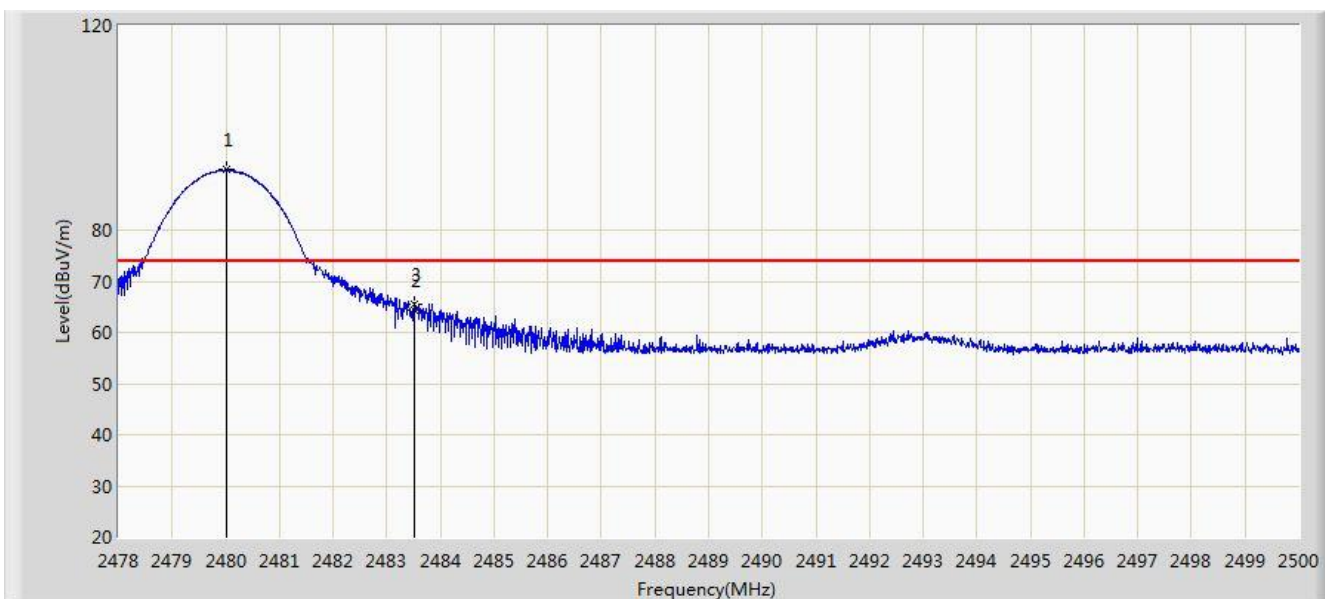


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.002	91.829	60.645	N/A	N/A	31.184	PK
2			2483.500	64.427	33.234	-9.573	74.000	31.194	PK
3			2483.511	65.603	34.410	-8.397	74.000	31.194	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 05:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2480MHz by 3DH5	

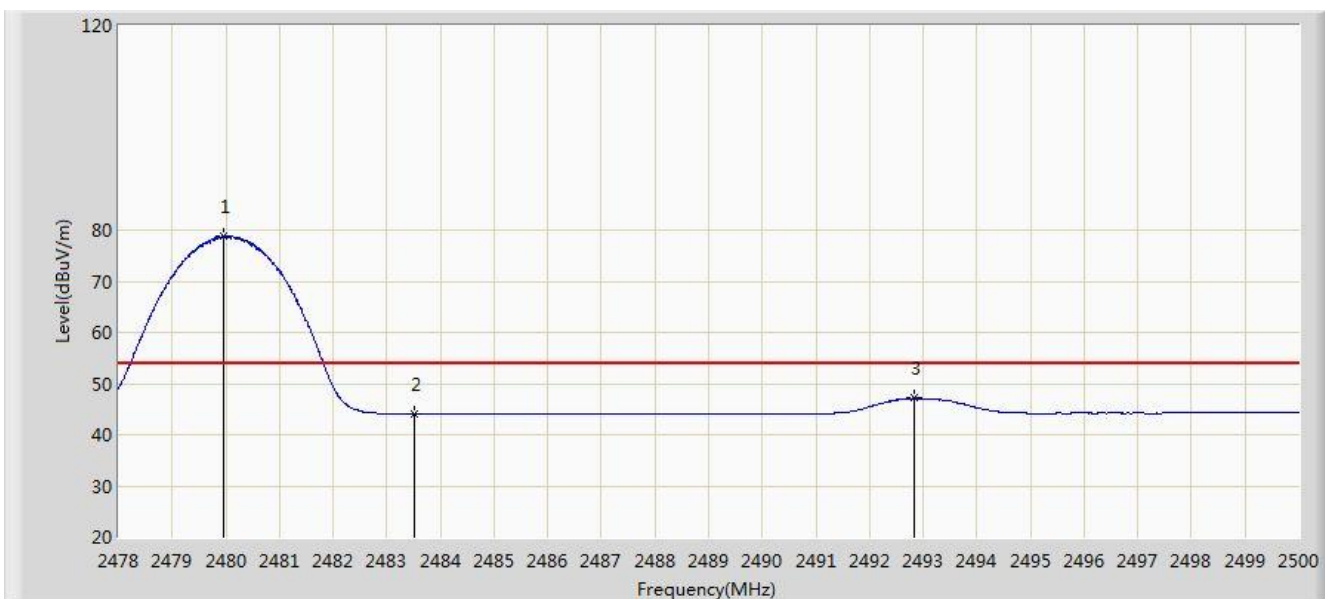


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.969	78.700	47.516	N/A	N/A	31.184	AV
2			2483.500	44.062	12.869	-9.938	54.000	31.194	AV
3			2492.839	47.104	15.886	-6.896	54.000	31.217	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 05:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2480MHz by 3DH5	

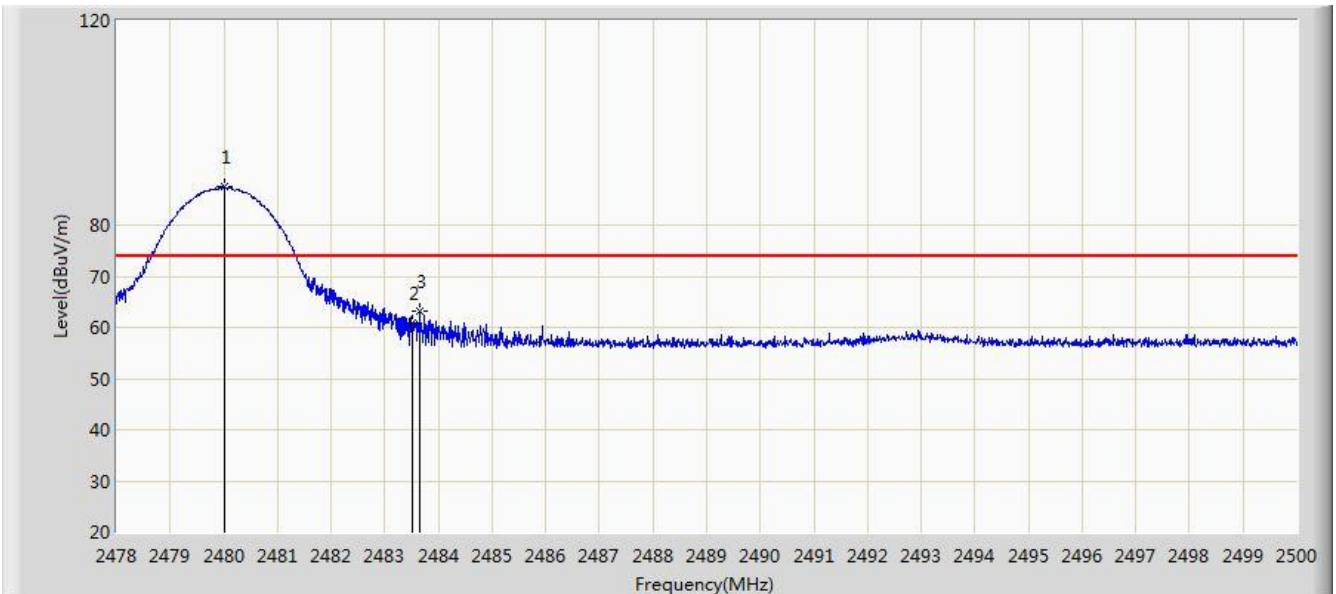


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.002	87.393	56.209	N/A	N/A	31.184	PK
2			2483.500	60.997	29.804	-13.003	74.000	31.194	PK
3			2483.665	63.146	31.952	-10.854	74.000	31.194	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC 1	Time: 2015/07/08 - 05:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Milo Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Test Mode: Transmit at channel 2480MHz by 3DH5	

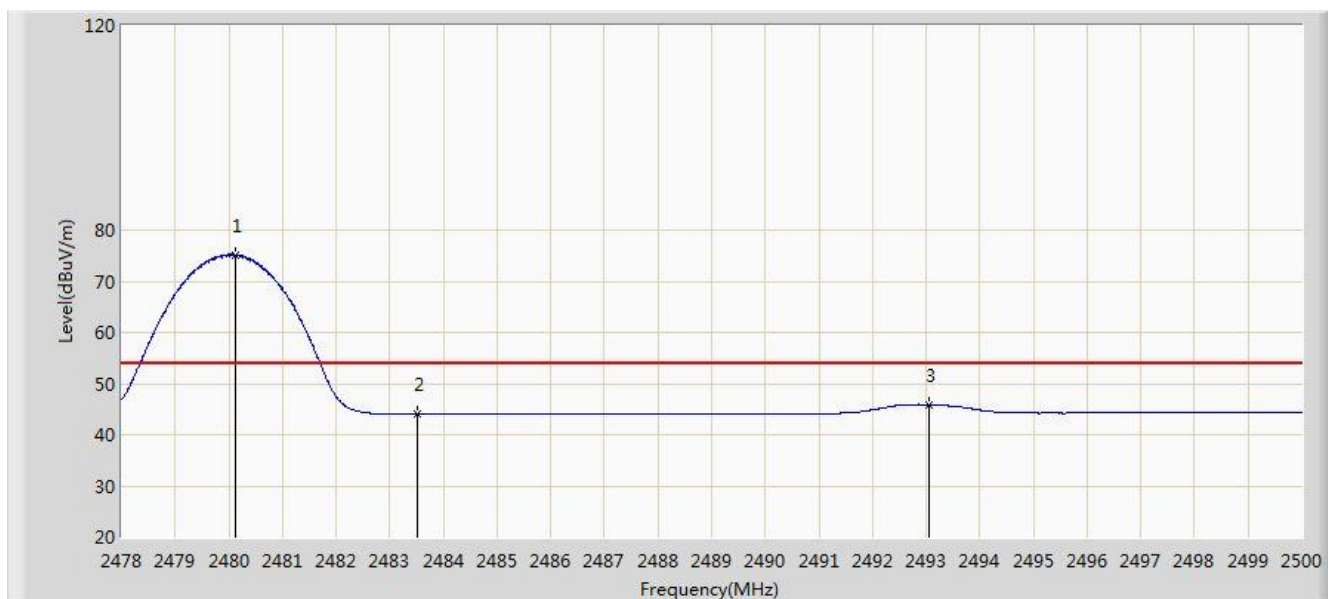

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.123	75.198	44.014	N/A	N/A	31.185	AV
2			2483.500	44.030	12.837	-9.970	54.000	31.194	AV
3			2493.059	45.932	14.714	-8.068	54.000	31.219	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.11. AC Conducted Emissions Measurement


7.11.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.11.2. Test Setup

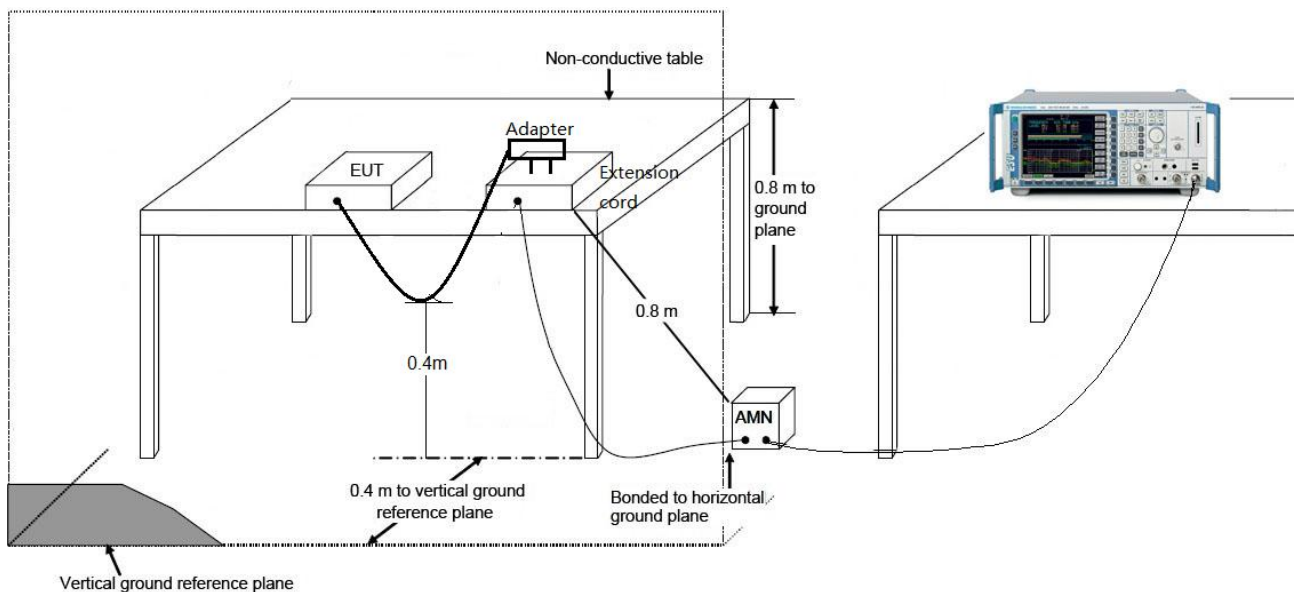

7.11.3. Test Result

Site: SR2	Time: 2015/07/10 - 21:42
Limit: FCC_Part15.207_CE_AC Power	Engineer: Line Chen
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Note: Mode1	

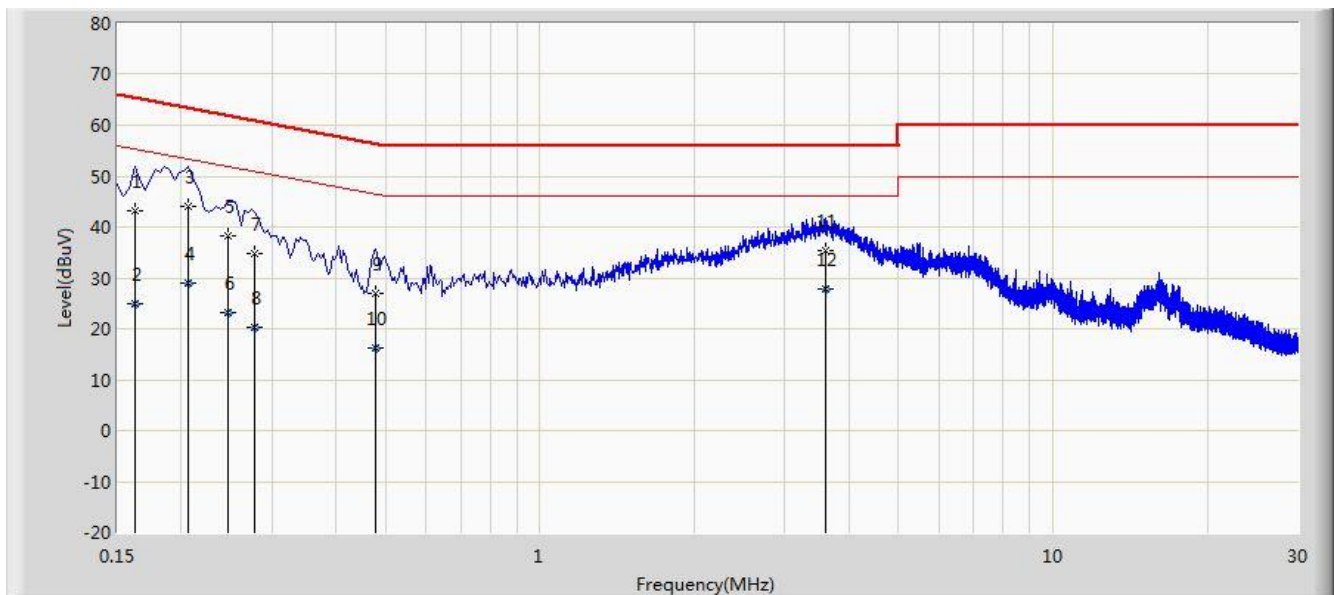


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.162	43.166	33.069	-22.195	65.361	10.097	QP
2			0.162	24.959	14.862	-30.402	55.361	10.097	AV
3			0.206	44.168	34.187	-19.197	63.365	9.981	QP
4			0.206	28.993	19.012	-24.372	53.365	9.981	AV
5			0.246	38.167	28.206	-23.724	61.891	9.961	QP
6			0.246	23.124	13.163	-28.768	51.891	9.961	AV
7			0.278	34.786	24.800	-26.089	60.875	9.986	QP
8			0.278	20.430	10.443	-30.446	50.875	9.986	AV
9			0.478	26.930	16.782	-29.444	56.374	10.149	QP
10			0.478	16.344	6.195	-30.030	46.374	10.149	AV
11			3.594	35.436	25.519	-20.564	56.000	9.916	QP
12		*	3.594	27.804	17.887	-18.196	46.000	9.916	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SR2	Time: 2015/07/10 - 21:46
Limit: FCC_Part15.207_CE_AC Power	Engineer: Line Chen
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone	Power: AC 120V/60Hz
Note: Mode1	

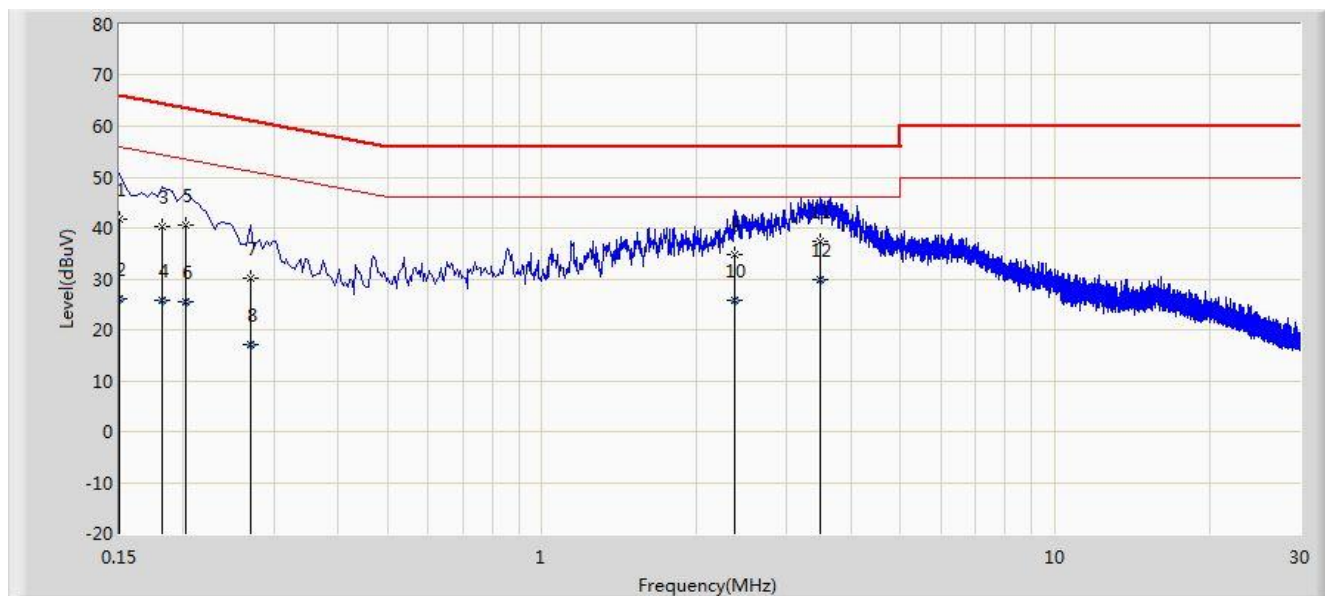

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.150	41.746	30.604	-24.254	66.000	11.142	QP
2			0.150	26.068	14.926	-29.932	56.000	11.142	AV
3			0.182	40.252	30.210	-24.142	64.394	10.042	QP
4			0.182	25.818	15.776	-28.576	54.394	10.042	AV
5			0.202	40.674	30.666	-22.854	63.528	10.008	QP
6			0.202	25.415	15.407	-28.113	53.528	10.008	AV
7			0.270	30.076	20.061	-31.042	61.118	10.016	QP
8			0.270	17.196	7.180	-33.922	51.118	10.016	AV
9			2.374	34.742	24.877	-21.258	56.000	9.865	QP
10			2.374	25.914	16.049	-20.086	46.000	9.865	AV
11			3.490	37.449	27.536	-18.551	56.000	9.913	QP
12		*	3.490	29.898	19.985	-16.102	46.000	9.913	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **WCDMA/GSM (GPRS)**

Dual-Mode Digital Mobile Phone FCC ID: SRQ-ZTEBLADEC342 is in compliance with Part 15C of the FCC Rules.

The End