



FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : CDMA/LTE Ufi
BRAND NAME : ZTE
MODEL NAME : 306ZT
FCC ID : SRQ-ZTEMF975S
STANDARD : FCC 47 CFR Part 2, and 90(S)
CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on Jun. 18, 2014 and testing was completed on Aug. 26, 2014. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager

SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Maximum Frequency Tolerance and Emission Designator	6
1.7 Testing Site	7
1.8 Applied Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration and system.....	9
2.4 Measurement Results Explanation Example	10
3 TEST RESULT	11
3.1 Conducted Output Power Measurement.....	11
3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	14
3.3 Emissions Mask Measurement	24
3.4 Emissions Mask – Out Of Band Emissions Measurement.....	41
3.5 Field Strength of Spurious Radiation Measurement	52
3.6 Frequency Stability Measurement.....	58
4 LIST OF MEASURING EQUIPMENT	61
5 UNCERTAINTY OF EVALUATION	62
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FW461802	Rev. 01	Initial issue of report	Aug. 26, 2014

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	N/A , Reporting only	PASS	-
3.2	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	N/A, Reporting only	PASS	-
3.3	§2.1051 §90.691	Emission masks – In-band emissions	$< 50+10\log_{10}(P[\text{Watts}])$	PASS	-
3.4	§2.1051 §90.691	Emission masks – Out of band emissions	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	-
3.5	§2.1053 §90.691	Field Strength of Spurious Radiation	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	Under limit 30.40 dB at 1635.000MHz
3.6	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	$< 2.5 \text{ ppm}$	PASS	-

1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	CDMA/LTE Ufi
Brand Name	ZTE
Model Name	306ZT
FCC ID	SRQ-ZTEMF975S
EUT supports Radios application	CDMA/EV-DO/LTE/ WLAN 2.4GHz 802.11b/g/n HT20/HT40/ WLAN 5GHz 802.11a/n HT20/HT40/ WLAN 5GHz 802.11ac VHT20/VHT40/VHT80
HW Version	xw3B
SW Version	306ZTV1.0.0B09
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx Frequency	LTE Band 26 : 814.7 ~ 823.3 MHz
Rx Frequency	LTE Band 26 : 859.7 ~ 868.3 MHz
Bandwidth	1.4MHz/3MHz/5MHz/10MHz
Maximum Output Power to Antenna	22.19 dBm
Antenna Type	Monopole Antenna
Type of Modulation	QPSK / 16QAM

Remark: This test report recorded only product characteristics and test results of PCS Licensed Transmitter (PCB).

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum Frequency Tolerance and Emission Designator

FCC Rule	System	Type of Modulation	BW	Frequency Tolerance (ppm)	Emission Designator
Part 90S	LTE Band 26	QPSK	1.4 MHz	-	1M09G7D
Part 90S	LTE Band 26	16QAM	1.4 MHz	-	1M10W7D
Part 90S	LTE Band 26	QPSK	3 MHz	-	2M74G7D
Part 90S	LTE Band 26	16QAM	3 MHz	-	2M74W7D
Part 90S	LTE Band 26	QPSK	5 MHz	-	4M50G7D
Part 90S	LTE Band 26	16QAM	5 MHz	-	4M52W7D
Part 90S	LTE Band 26	QPSK	10 MHz	0.0179 ppm	9M16G7D
Part 90S	LTE Band 26	16QAM	10 MHz	-	9M12W7D

1.7 Testing Site

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC Registration No.
	TH01-KS	03CH01-KS	149928

1.8 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- Preliminary Guidance for Receiving Applications for Certification of 3G Device. May 9, 2006.
- FCC 47 CFR Part 2, 90
- ANSI / TIA / EIA-603-C-2004

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.


2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	26	v	v	v	v	-	-	v	v	v	v	v	v	v	v
26dB and 99% Bandwidth	26	v	v	v	v	-	-	v	v			v		v	
Conducted Band Edge	26	v	v	v	v	-	-	v	v	v		v	v		v
Conducted Spurious Emission	26	v	v	v	v	-	-	v	v	v			v	v	v
Frequency Stability	26				v	-	-	v				v		v	
Radiated Spurious Emission	26	v	v	v	v	-	-	v	v	v				v	
Note	1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.														

2.2 Connection Diagram of Test System

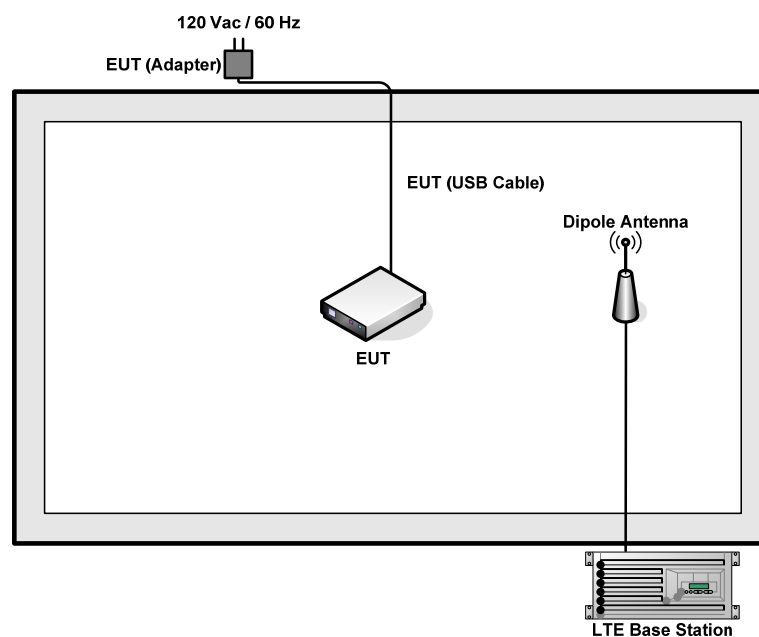

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 6 dB.

$$\begin{aligned}\text{Offset (dB)} &= \text{RF cable loss (dB)} \\ &= 6 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.1.4 Test Setup

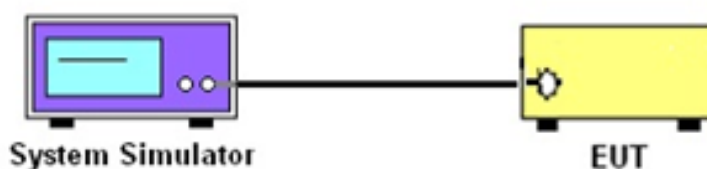

3.1.5 Test Result of Conducted Output Power

<LTE Band 26 Conducted Power>

BW [MHz]	Modulation	RB Size	RB Offset	Power (dBm) Low Ch. / Freq.	Power (dBm) Middle Ch. / Freq.	Power (dBm) High Ch. / Freq.
Channel					26740	
Frequency (MHz)					819	
10	QPSK	1	0		22.12	
10	QPSK	1	24		21.90	
10	QPSK	1	49		21.98	
10	QPSK	25	0		20.67	
10	QPSK	25	12		20.66	
10	QPSK	25	24		20.85	
10	QPSK	50	0		20.65	
10	16QAM	1	0		21.54	
10	16QAM	1	24		21.86	
10	16QAM	1	49		22.00	
10	16QAM	25	0		20.72	
10	16QAM	25	12		20.67	
10	16QAM	25	24		20.79	
10	16QAM	50	0		20.65	
Channel				26715	26740	26765
Frequency (MHz)				816.5	819	821.5
5	QPSK	1	0	22.16	21.88	21.88
5	QPSK	1	12	22.12	21.49	21.95
5	QPSK	1	24	21.96	21.56	21.97
5	QPSK	12	0	21.20	20.56	20.94
5	QPSK	12	6	21.00	20.61	21.11
5	QPSK	12	11	20.95	20.53	21.14
5	QPSK	25	0	21.03	20.57	21.12
5	16QAM	1	0	21.39	22.10	22.11
5	16QAM	1	12	22.08	21.79	22.07
5	16QAM	1	24	21.98	21.77	22.14
5	16QAM	12	0	21.02	20.74	21.00
5	16QAM	12	6	21.01	20.78	21.18
5	16QAM	12	11	20.99	20.71	21.20
5	16QAM	25	0	20.96	20.54	20.89



BW [MHz]	Modulation	RB Size	RB Offset	Power (dBm) Low Ch. / Freq.	Power (dBm) Middle Ch. / Freq.	Power (dBm) High Ch. / Freq.
Channel				26705	26740	26775
Frequency (MHz)				815.5	819	822.5
3	QPSK	1	0	22.19	21.64	21.91
3	QPSK	1	7	22.12	21.63	22.10
3	QPSK	1	14	22.00	21.60	21.97
3	QPSK	8	0	21.22	20.58	21.10
3	QPSK	8	4	21.20	20.61	21.14
3	QPSK	8	7	20.96	20.53	21.06
3	QPSK	15	0	21.10	20.55	21.11
3	16QAM	1	0	22.05	22.00	22.04
3	16QAM	1	7	22.04	22.06	22.14
3	16QAM	1	14	22.00	21.91	22.12
3	16QAM	8	0	20.76	20.66	21.14
3	16QAM	8	4	21.14	20.68	21.17
3	16QAM	8	7	21.00	20.59	21.07
3	16QAM	15	0	20.95	20.57	21.13
Channel				26697	26740	26783
Frequency (MHz)				814.7	819	823.3
1.4	QPSK	1	0	22.13	21.54	21.94
1.4	QPSK	1	2	22.14	21.52	21.91
1.4	QPSK	1	5	22.13	21.51	21.87
1.4	QPSK	3	0	22.11	21.46	21.88
1.4	QPSK	3	1	22.10	21.50	21.91
1.4	QPSK	3	2	22.02	21.53	21.92
1.4	QPSK	6	0	21.15	20.49	20.97
1.4	16QAM	1	0	21.83	21.84	22.13
1.4	16QAM	1	2	21.89	21.93	22.05
1.4	16QAM	1	5	21.88	21.84	22.02
1.4	16QAM	3	0	21.39	21.67	22.03
1.4	16QAM	3	1	21.58	21.72	22.07
1.4	16QAM	3	2	21.69	21.76	22.07
1.4	16QAM	6	0	20.70	20.42	20.83

Note: Maximum average power for LTE.

3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers were measured.

3.2.4 Test Setup

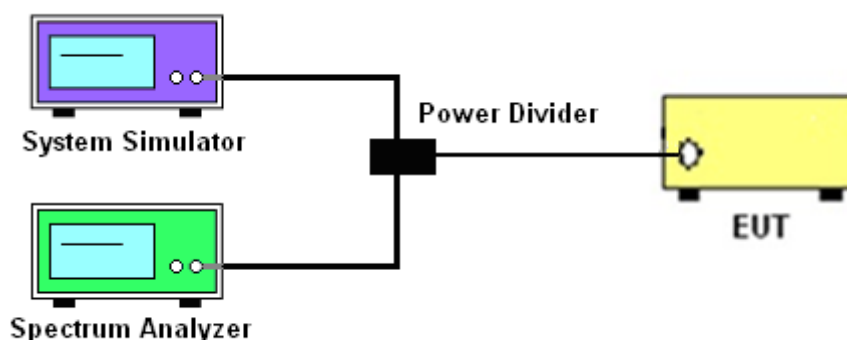

3.2.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Modes	LTE Band 26			
BW / Mod.	1.4MHz / QPSK	1.4MHz / 16QAM	3MHz / QPSK	3MHz / 16QAM
99% OBW (MHz)	1.092	1.103	2.736	2.736
26dB BW (MHz)	1.232	1.232	3.024	3.048
BW / Mod.	5MHz / QPSK	5MHz / 16QAM	10MHz / QPSK	10MHz / 16QAM
99% OBW (MHz)	4.500	4.520	9.160	9.120
26dB BW (MHz)	4.940	4.920	10.080	10.040

Note:

The maximum RB configurations of the 99% Occupied Bandwidth and 26dB Bandwidth summary as below:

BW1.4MHz RB setting : RB Size 6, RB offset 0

BW3.0MHz RB setting : RB Size 15, RB offset 0

BW5.0MHz RB setting : RB Size 25, RB offset 0


BW10MHz RB setting : RB Size 50, RB offset 0



3.2.6 Test Result (Plots) of 99% Occupied Bandwidth and 26dB Bandwidth


Band :	LTE Band 26	BW / Mod. :	1.4MHz / QPSK
--------	-------------	-------------	---------------

99% Occupied Bandwidth Plot on Channel 26740

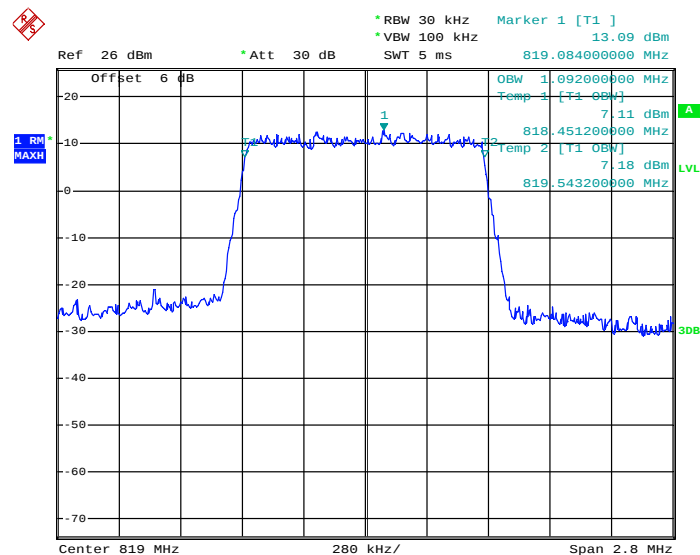


Date: 24.JUL.2014 00:49:39

26dB Bandwidth Plot on Channel 26740

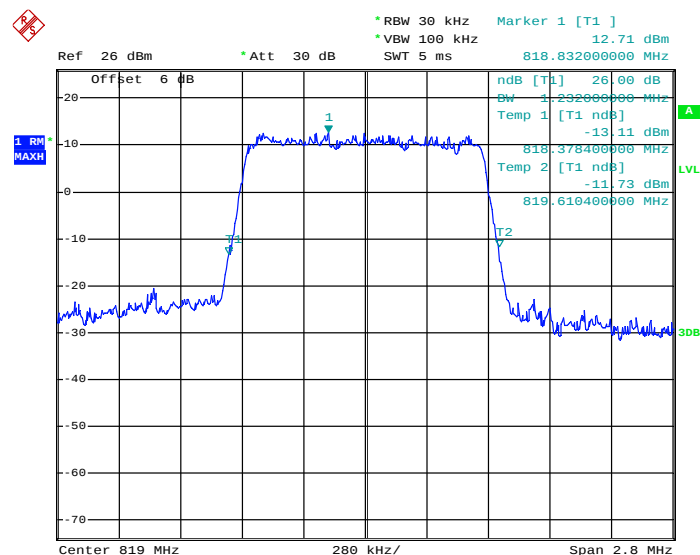


Date: 24.JUL.2014 00:40:35




Band :	LTE Band 26	BW / Mod. :	1.4MHz / 16QAM
--------	-------------	-------------	----------------

99% Occupied Bandwidth Plot on Channel 26740

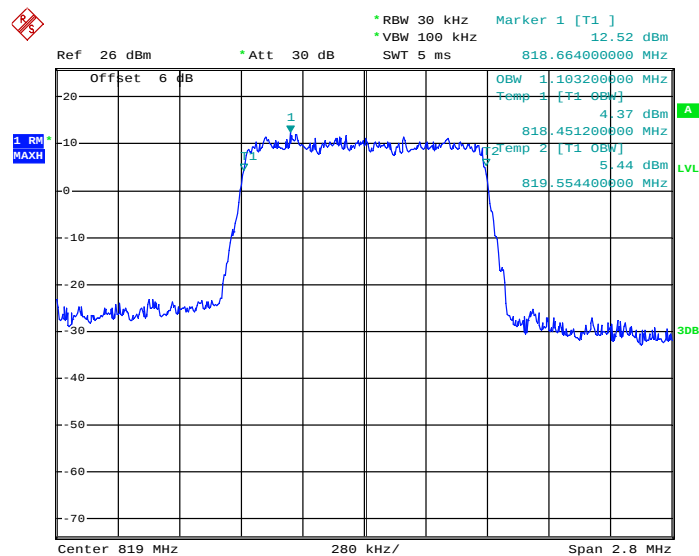


Date: 24.JUL.2014 00:49:51

26dB Bandwidth Plot on Channel 26740

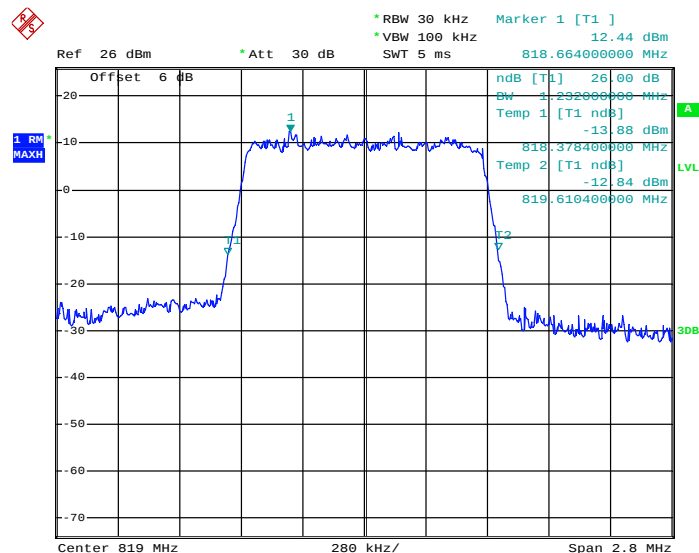


Date: 24.JUL.2014 00:40:23




Band :	LTE Band 26	BW / Mod. :	3MHz / QPSK
--------	-------------	-------------	-------------

99% Occupied Bandwidth Plot on Channel 26740

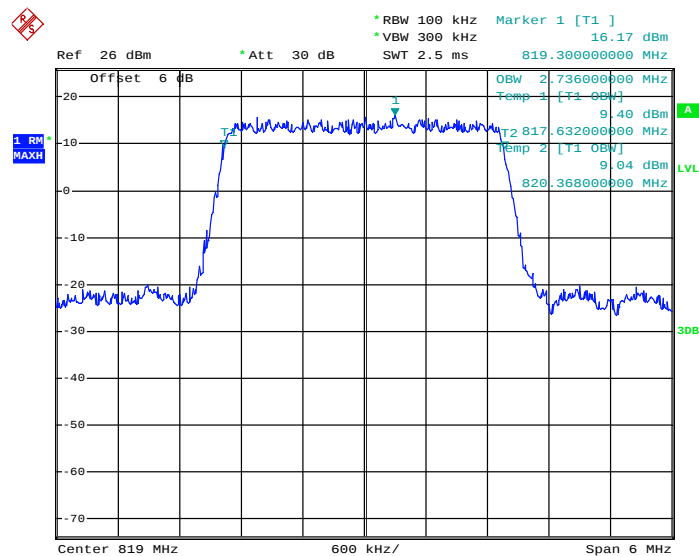


Date: 26.AUG.2014 20:16:52

26dB Bandwidth Plot on Channel 26740

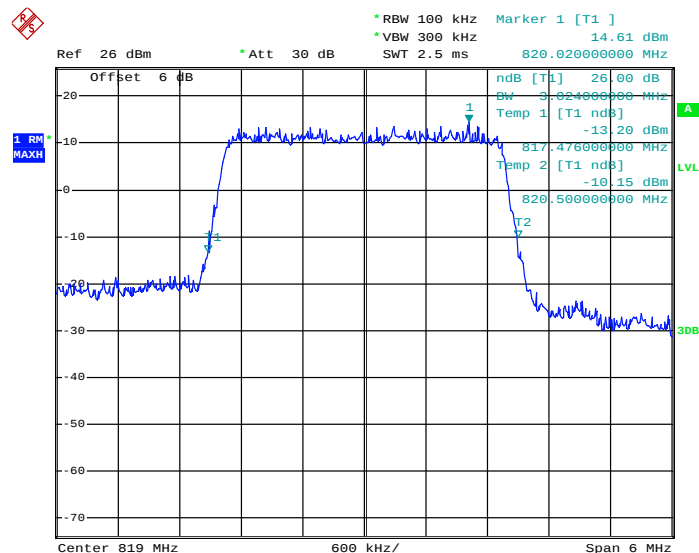


Date: 24.JUL.2014 00:41:00




Band :	LTE Band 26	BW / Mod. :	3MHz / 16QAM
--------	-------------	-------------	--------------

99% Occupied Bandwidth Plot on Channel 26740

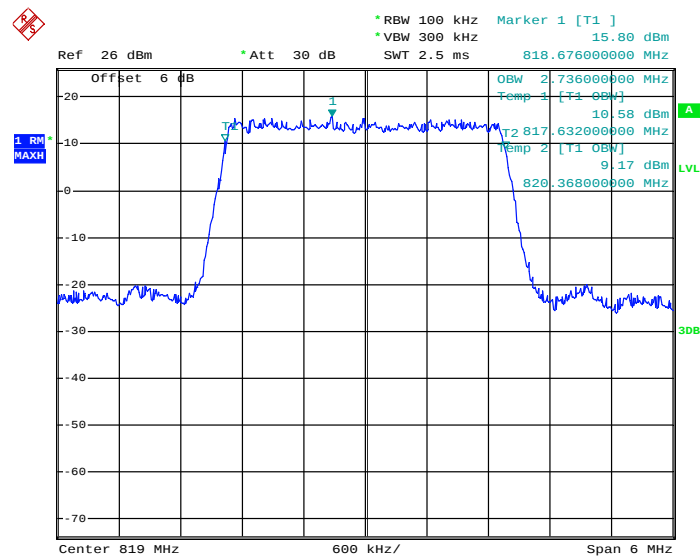


Date: 26.AUG.2014 20:16:36

26dB Bandwidth Plot on Channel 26740

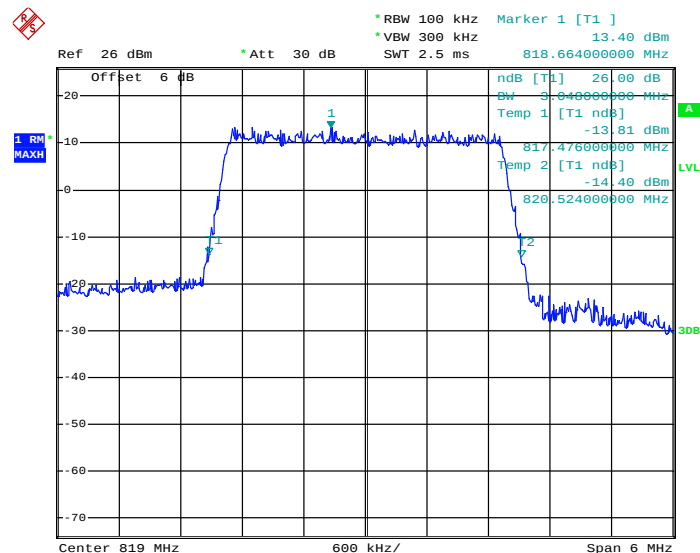


Date: 24.JUL.2014 00:41:18




Band :	LTE Band 26	BW / Mod. :	5MHz / QPSK
--------	-------------	-------------	-------------

99% Occupied Bandwidth Plot on Channel 26740

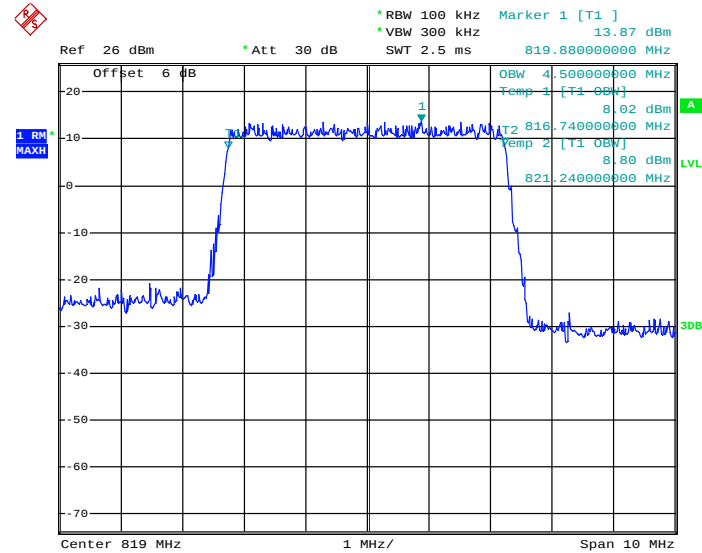


Date: 26.AUG.2014 20:17:13

26dB Bandwidth Plot on Channel 26740

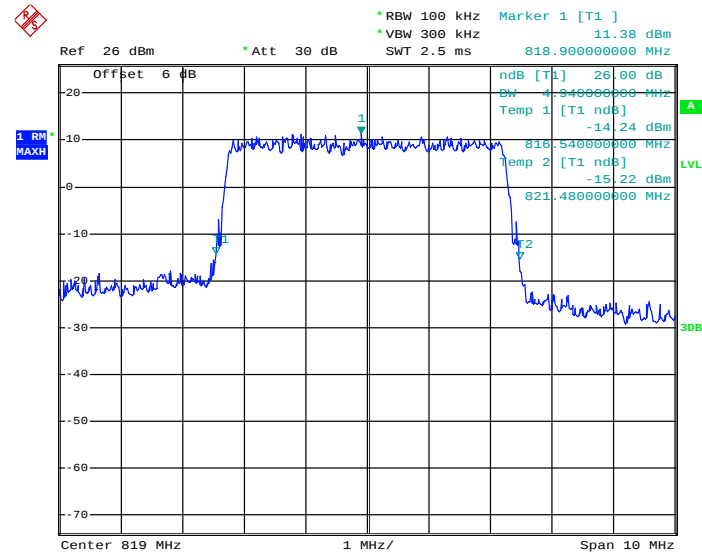


Date: 24.JUL.2014 00:41:56




Band :	LTE Band 26	BW / Mod. :	5MHz / 16QAM
--------	-------------	-------------	--------------

99% Occupied Bandwidth Plot on Channel 26740

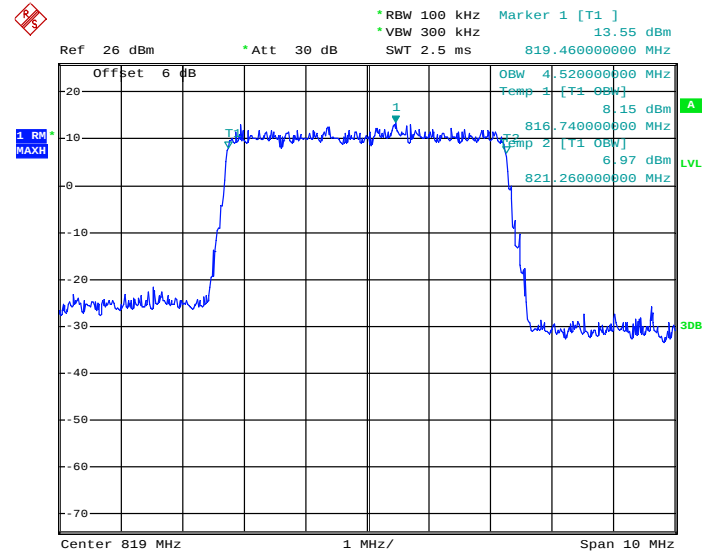


Date: 26.AUG.2014 20:17:30

26dB Bandwidth Plot on Channel 26740

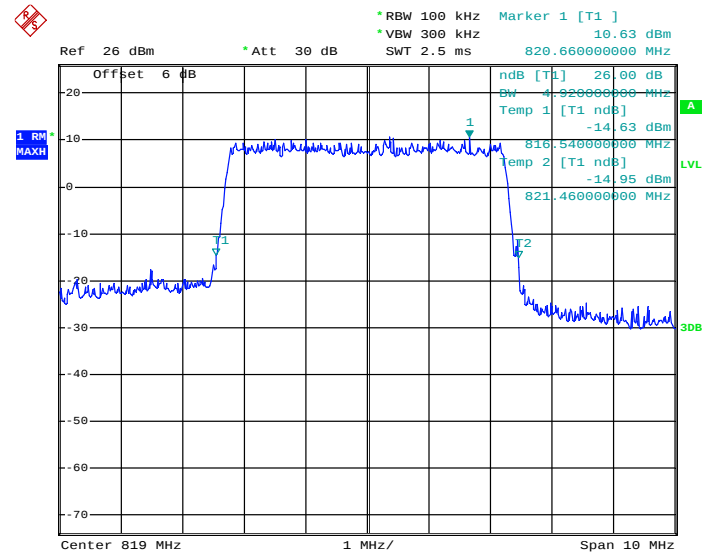


Date: 24.JUL.2014 00:41:44




Band :	LTE Band 26	BW / Mod. :	10MHz / QPSK
--------	-------------	-------------	--------------

99% Occupied Bandwidth Plot on Channel 26740

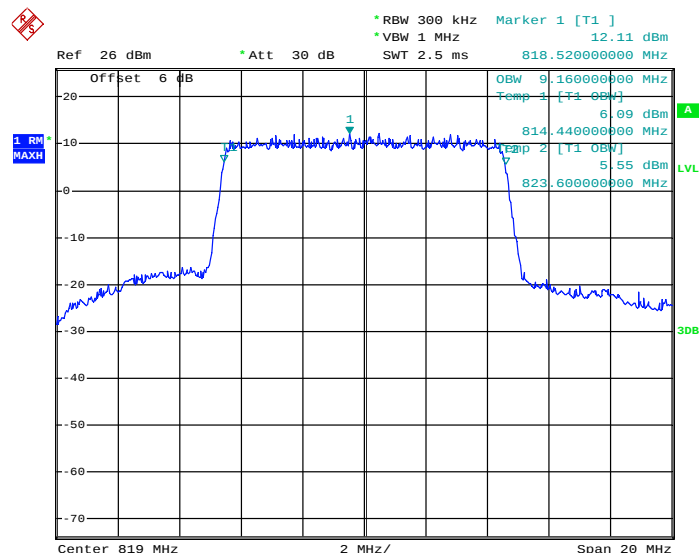


Date: 24.JUL.2014 00:47:58

26dB Bandwidth Plot on Channel 26740

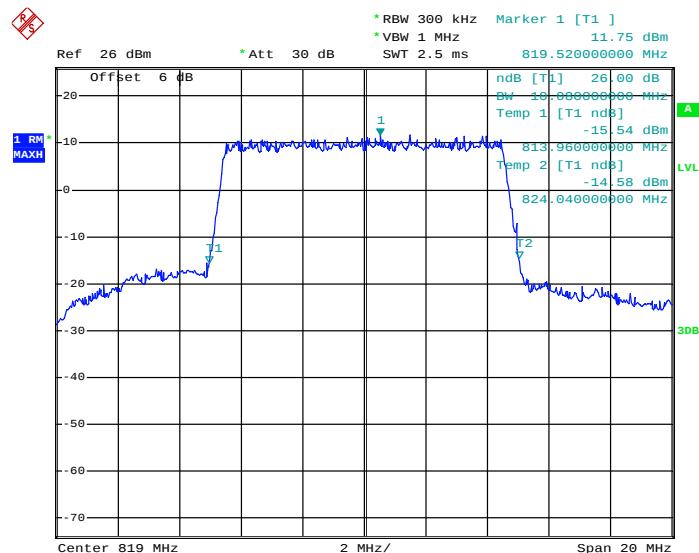


Date: 24.JUL.2014 00:42:20




Band :	LTE Band 26	BW / Mod. :	10MHz / 16QAM
--------	-------------	-------------	---------------

99% Occupied Bandwidth Plot on Channel 26740

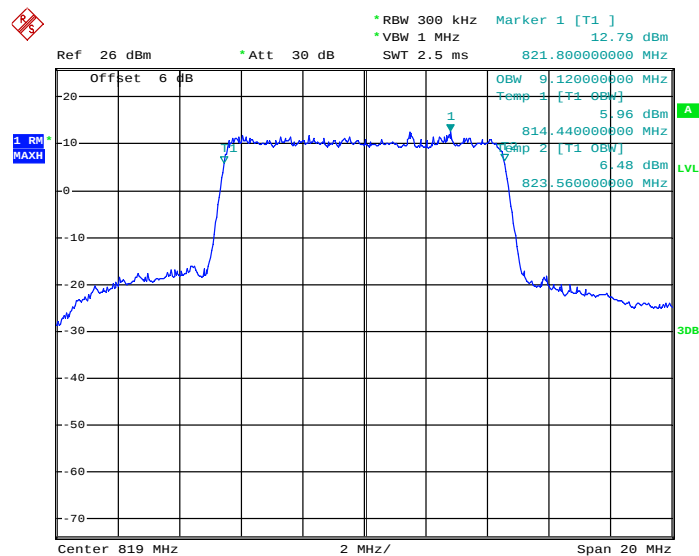

Date: 24.JUL.2014 00:47:42

26dB Bandwidth Plot on Channel 26740

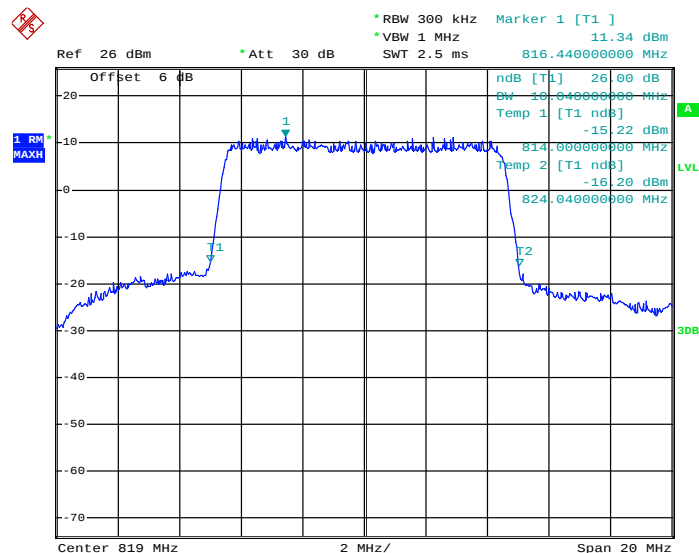

Date: 24.JUL.2014 00:42:36

3.3 Emissions Mask Measurement

3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a)

(a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The emissions mask of low and high channels for the highest RF powers were measured.
3. The RBW was set 10 kHz and VBW was set 3 times of RBW.
4. Use Channel Power Option to calculate total power.
 - a. First Rang: Block Edge ~ 37.5kHz, Channel Power BW = 37.5kHz
 - b. Sec. Rang: greater than 37.5kHz, Channel Power BW = 100kHz

3.3.4 Test Setup

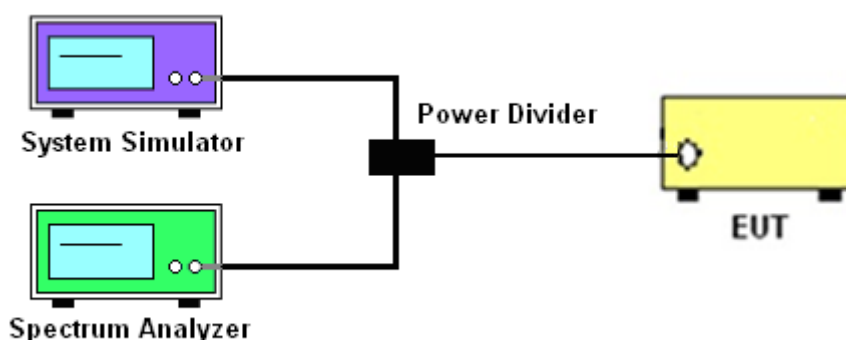




3.3.5 Test Result (Plots) of Conducted Emissions Mask


Band :	LTE Band 26	Band Width :	1.4MHz / QPSK
--------	-------------	--------------	---------------

Lower Band Edge Plot for QPSK-RB Size 1, RB Offset 0

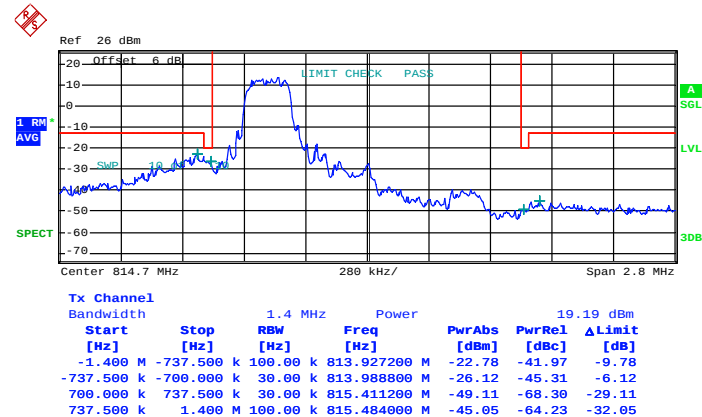


Date: 24.JUL.2014 01:07:07


Lower Band Edge Plot for QPSK-RB Size 6, RB Offset 0

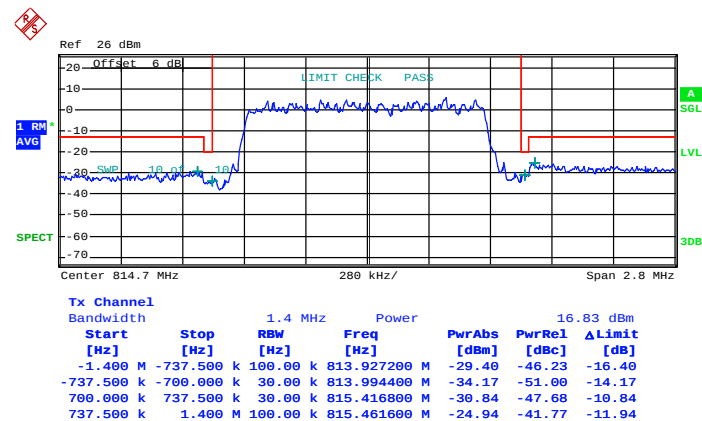

Date: 24.JUL.2014 01:06:45




Higher Band Edge Plot for QPSK-RB Size 1, RB Offset 5

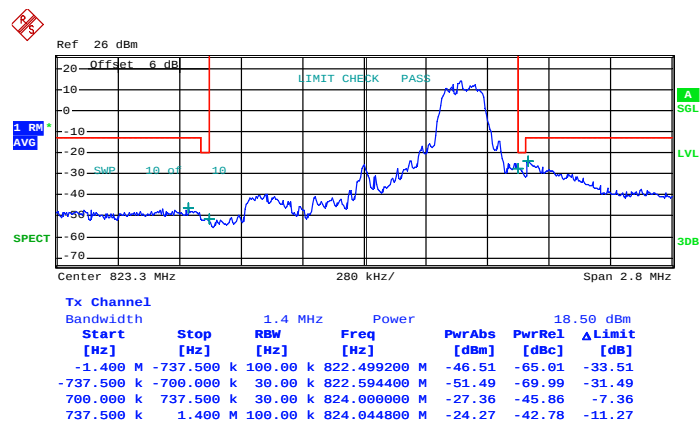


Date: 24.JUL.2014 01:08:18

Higher Band Edge Plot for QPSK-RB Size 6, RB Offset 0

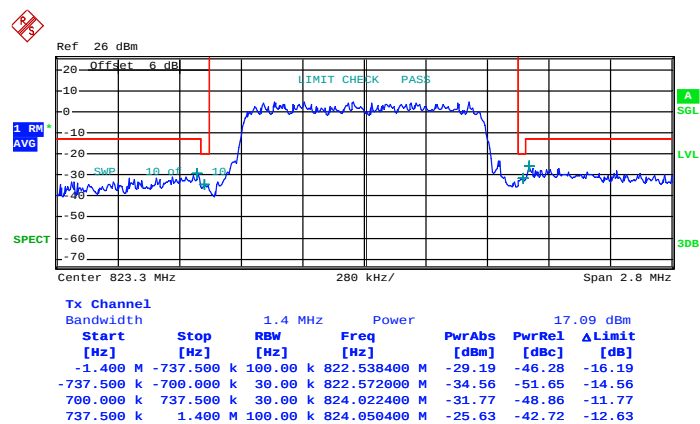


Date: 24.JUL.2014 01:08:32




Band :	LTE Band 26	Band Width :	1.4MHz / 16QAM
--------	-------------	--------------	----------------

Lower Band Edge Plot for 16QAM -RB Size 1, RB Offset 0

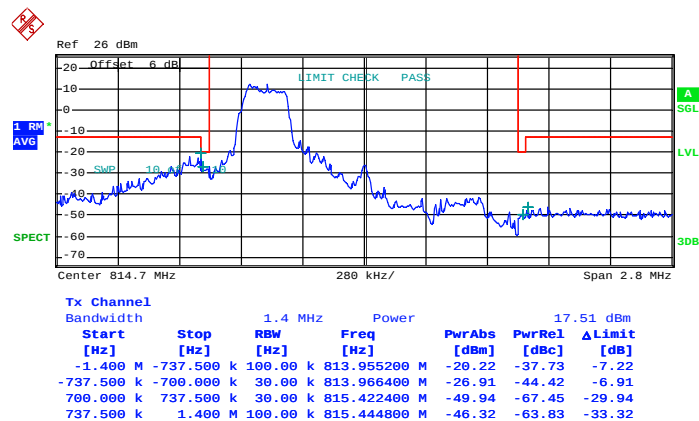


Date: 24.JUL.2014 01:07:26


Lower Band Edge Plot for 16QAM-RB Size 6, RB Offset 0

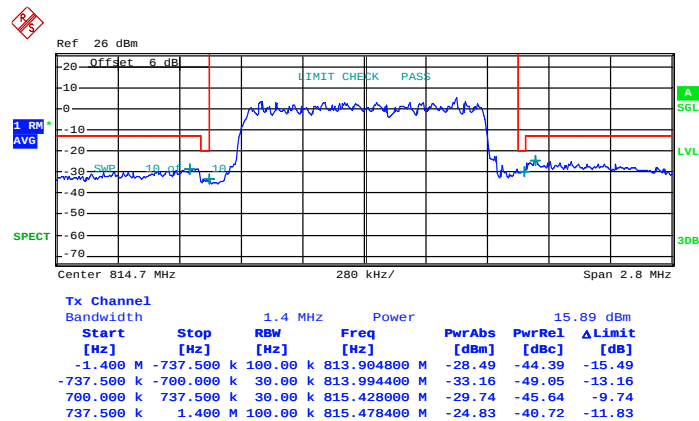

Date: 24.JUL.2014 01:06:33




Higher Band Edge Plot for 16QAM-RB Size 1, RB Offset 5

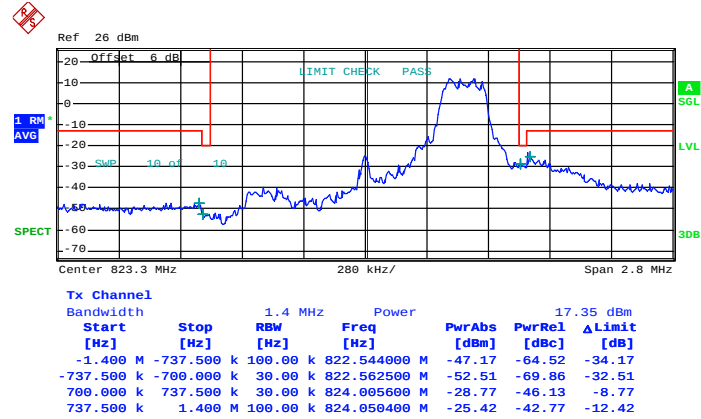

Date: 24.JUL.2014 01:07:59

Higher Band Edge Plot for 16QAM-RB Size 6, RB Offset 0

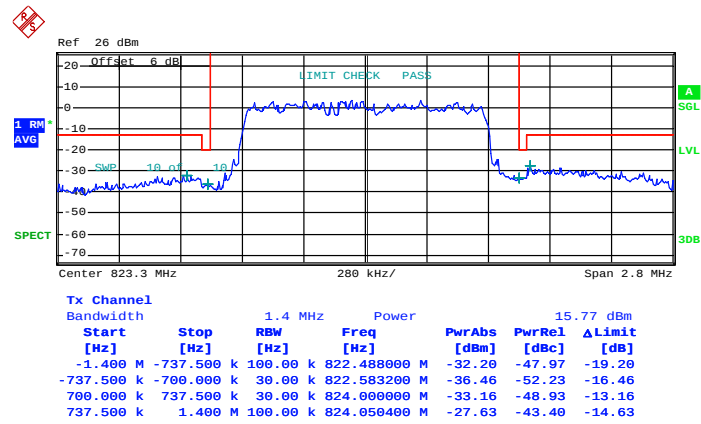


Date: 24.JUL.2014 01:08:45




Band :	LTE Band 26	Band Width :	3MHz / QPSK
--------	-------------	--------------	-------------

Lower Band Edge Plot for QPSK-RB Size 1, RB Offset 0

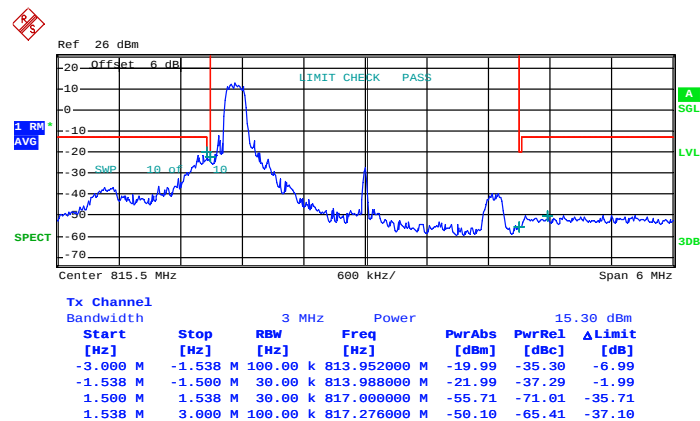


Date: 24.JUL.2014 01:04:03


Lower Band Edge Plot for QPSK-RB Size 15, RB Offset 0

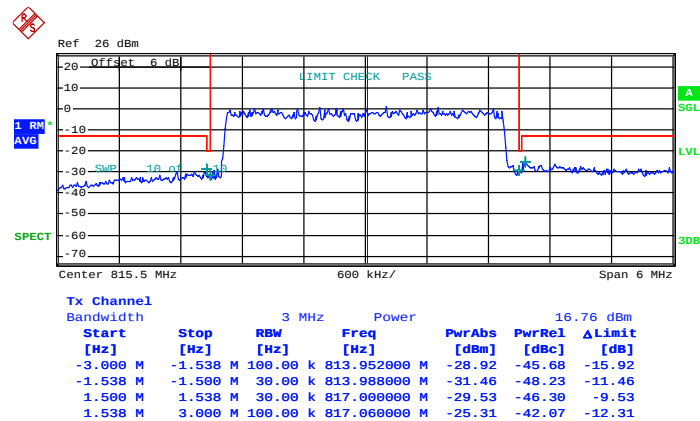

Date: 24.JUL.2014 01:04:17




Higher Band Edge Plot for QPSK-RB Size 1, RB Offset 14

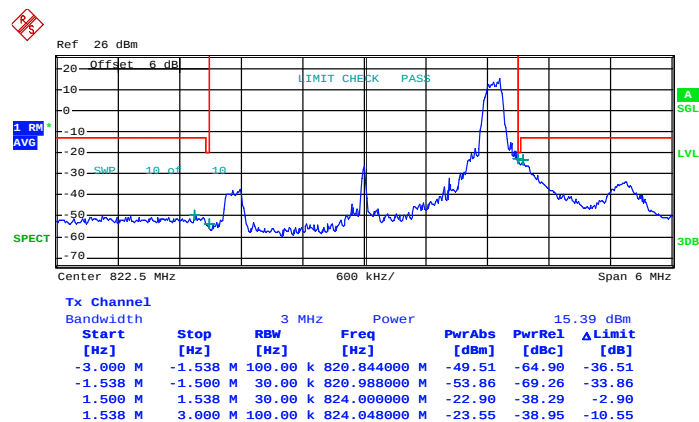


Date: 24.JUL.2014 01:03:03

Higher Band Edge Plot for QPSK-RB Size 15, RB Offset 0

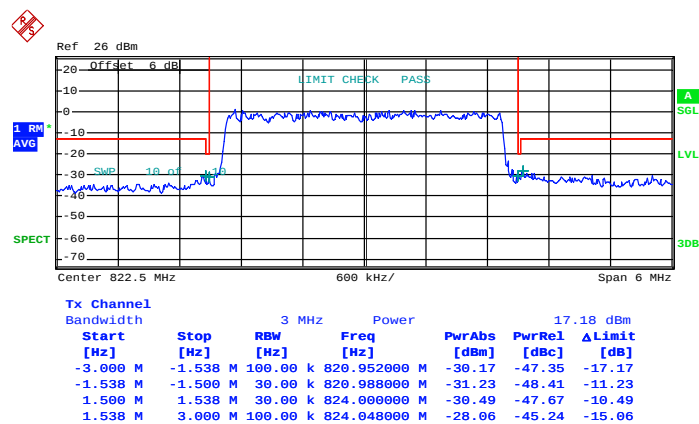


Date: 24.JUL.2014 01:02:46




Band :	LTE Band 26	Band Width :	3MHz / 16QAM
--------	-------------	--------------	--------------

Lower Band Edge Plot for 16QAM-RB Size 1, RB Offset 0

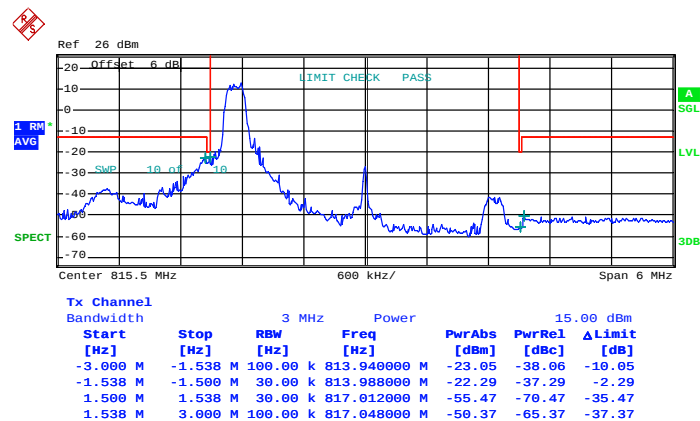


Date: 24.JUL.2014 01:03:50


Lower Band Edge Plot for 16QAM-RB Size 15, RB Offset 0

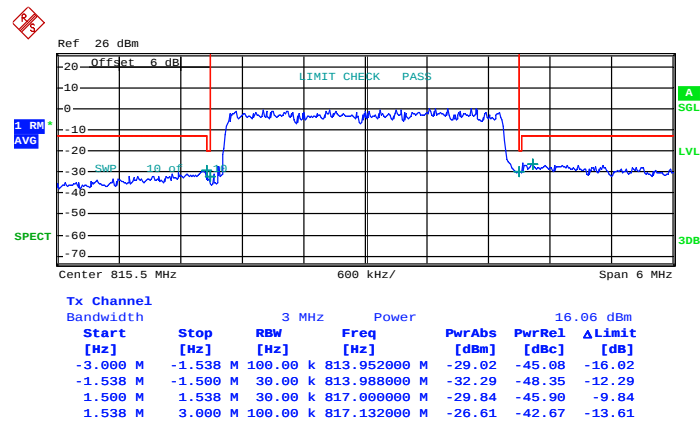

Date: 24.JUL.2014 01:04:30




Higher Band Edge Plot for 16QAM-RB Size 1, RB Offset 14

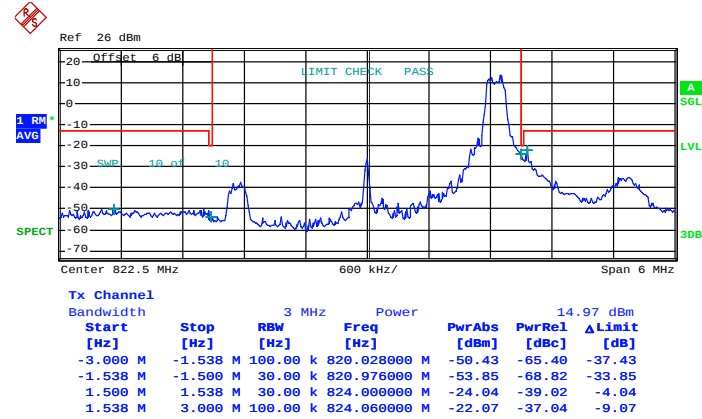


Date: 24.JUL.2014 01:03:17

Higher Band Edge Plot for 16QAM-RB Size 15, RB Offset 0

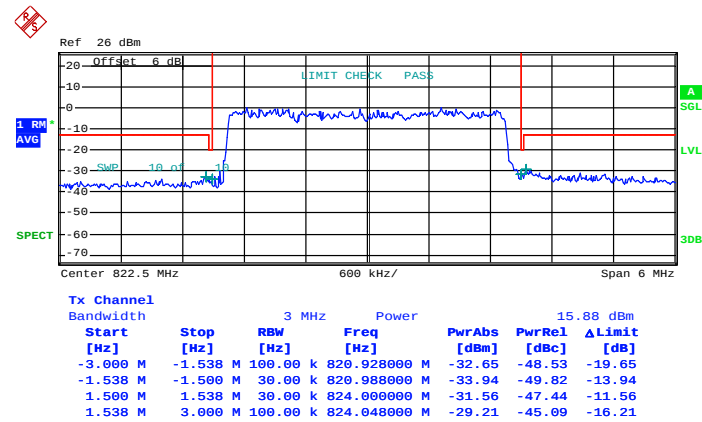


Date: 24.JUL.2014 01:02:33




Band :	LTE Band 26	Band Width :	5MHz / QPSK
--------	-------------	--------------	-------------

Lower Band Edge Plot for QPSK-RB Size 1, RB Offset 0

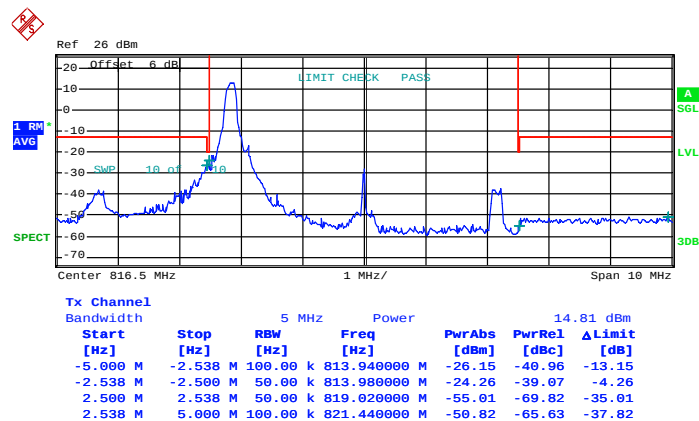


Date: 24.JUL.2014 01:14:43


Lower Band Edge Plot for QPSK-RB Size 25, RB Offset 0

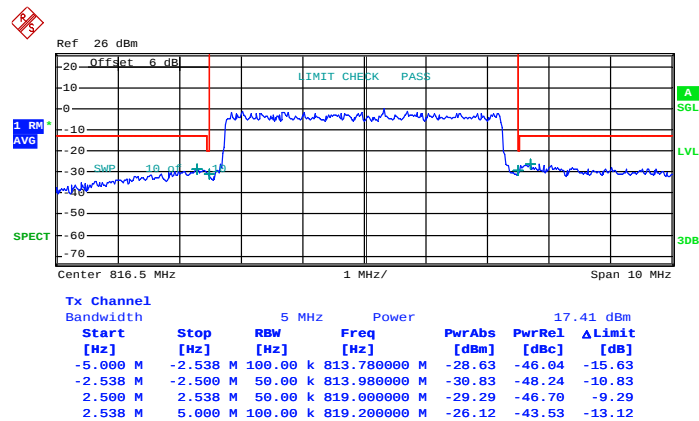

Date: 24.JUL.2014 01:14:58




Higher Band Edge Plot for QPSK-RB Size 1, RB Offset 24

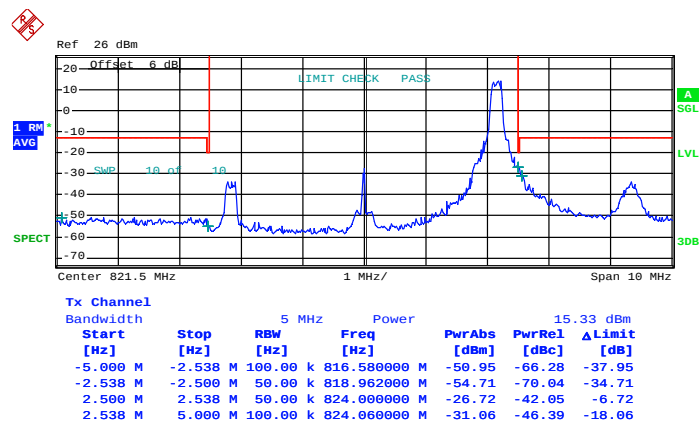

Date: 24.JUL.2014 01:11:47

Higher Band Edge Plot for QPSK-RB Size 25, RB Offset 0

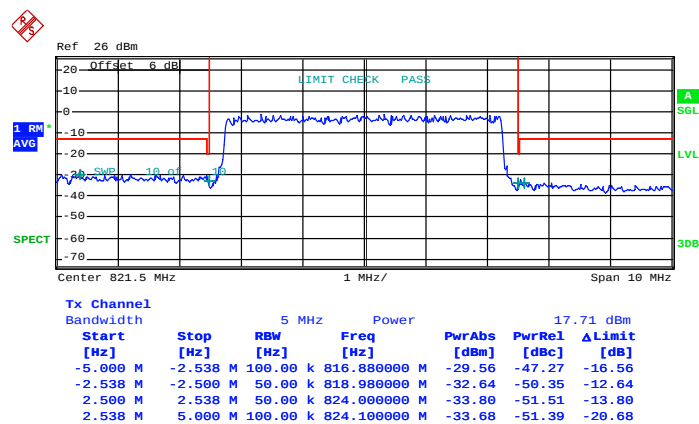


Date: 24.JUL.2014 01:11:27




Band :	LTE Band 26	Band Width :	5MHz / 16QAM
--------	-------------	--------------	--------------

Lower Band Edge Plot for 16QAM-RB Size 1, RB Offset 0

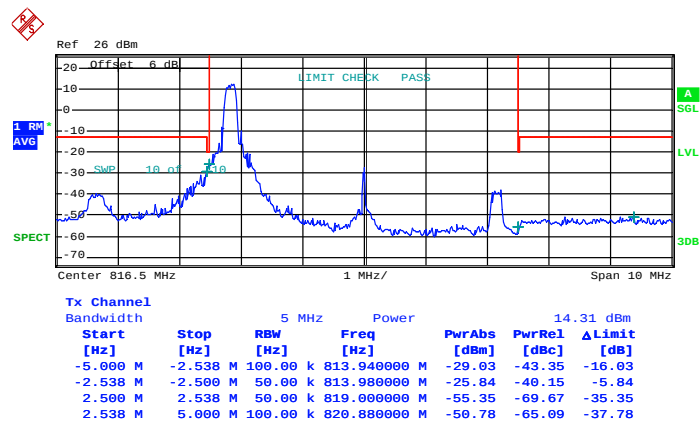


Date: 24.JUL.2014 01:14:29


Lower Band Edge Plot for 16QAM-RB Size 25, RB Offset 0

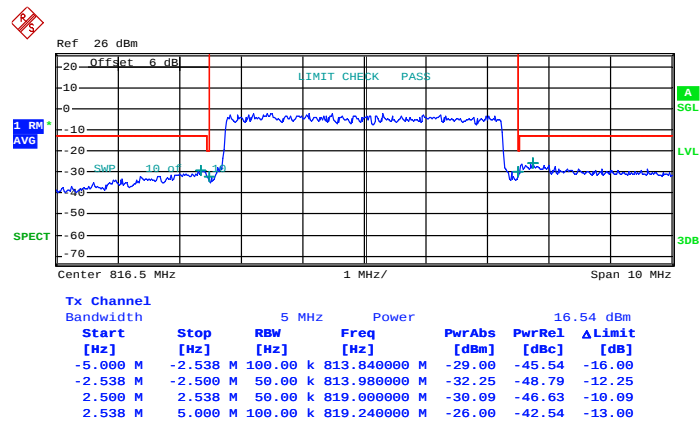

Date: 24.JUL.2014 01:15:13




Higher Band Edge Plot for 16QAM-RB Size 1, RB Offset 24

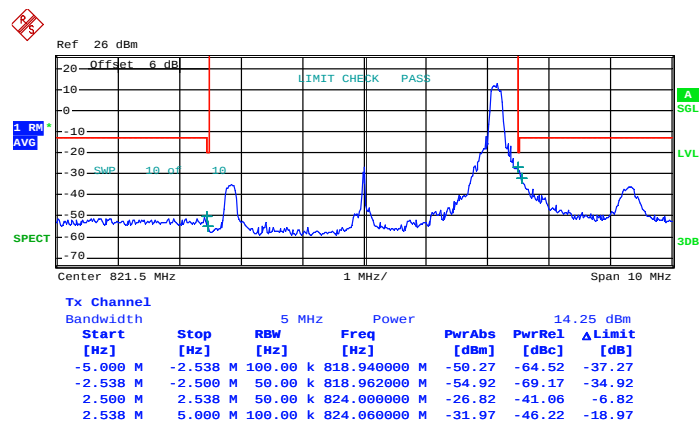

Date: 24.JUL.2014 01:12:02

Higher Band Edge Plot for 16QAM-RB Size 25, RB Offset 0

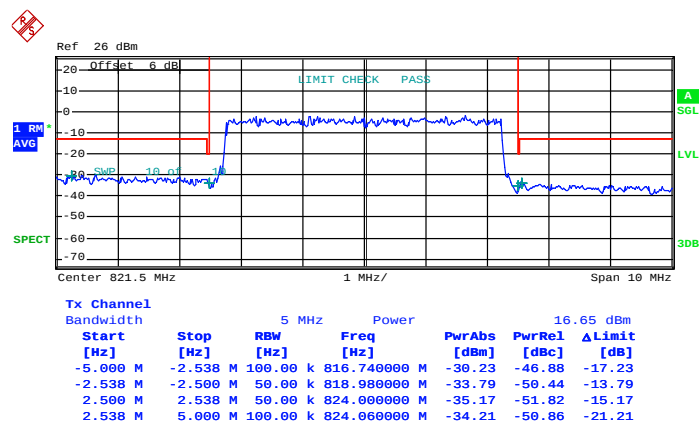


Date: 24.JUL.2014 01:11:16




Band :	LTE Band 26	Band Width :	10MHz / QPSK
--------	-------------	--------------	--------------

Band Edge Plot for QPSK-RB Size 1, RB Offset 0

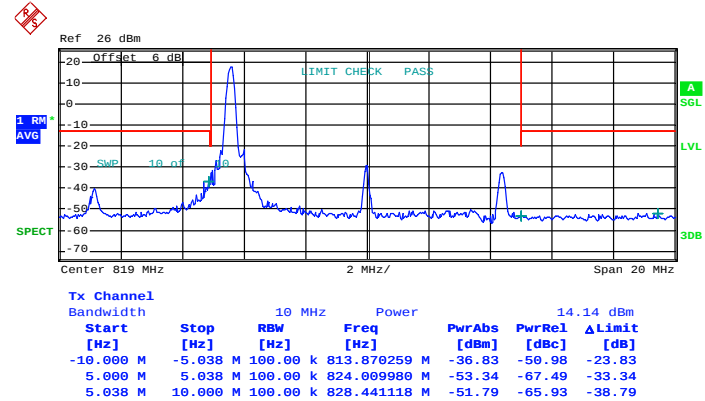


Date: 24.JUL.2014 01:19:25


Band Edge Plot for QPSK-RB Size 1, RB Offset 49

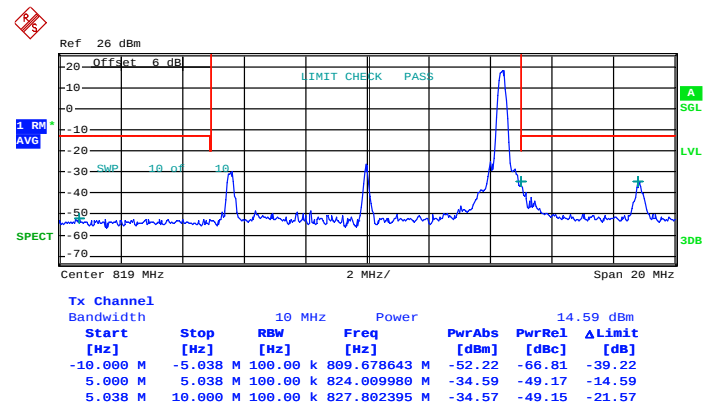

Date: 24.JUL.2014 01:20:35



Band Edge Plot for QPSK-RB Size 50 RB Offset 0

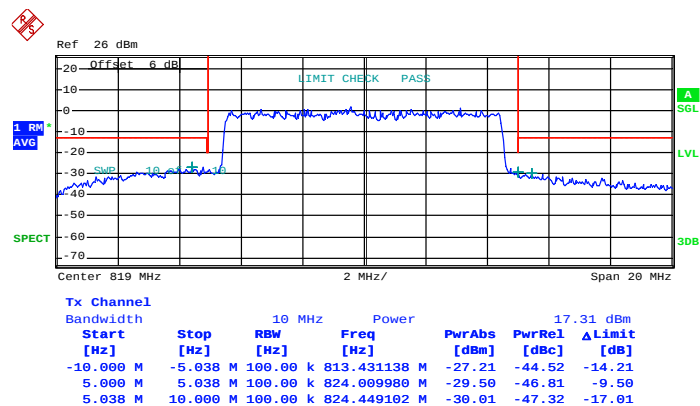


Date: 24.JUL.2014 01:20:09




Band :	LTE Band 26	Band Width :	10MHz / 16QAM
--------	-------------	--------------	---------------

Band Edge Plot for 16QAM-RB Size 1, RB Offset 0

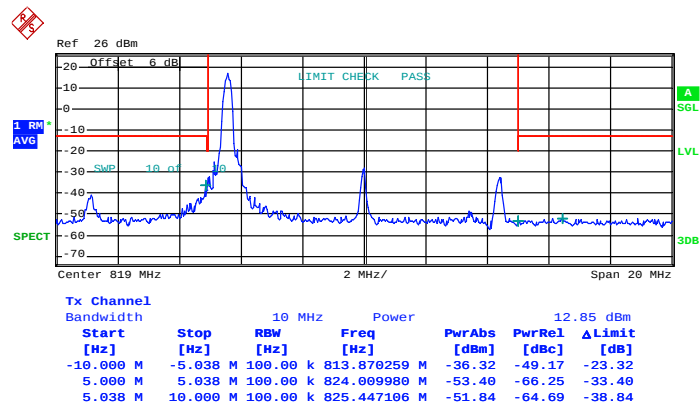

Date: 24.JUL.2014 01:19:36


Band Edge Plot for 16QAM-RB Size 1, RB Offset 49

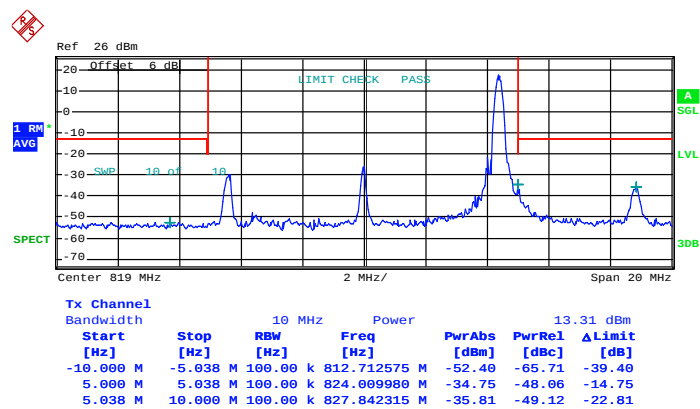

Date: 24.JUL.2014 01:20:48



Band Edge Plot for 16QAM-RB Size 50 RB Offset 0

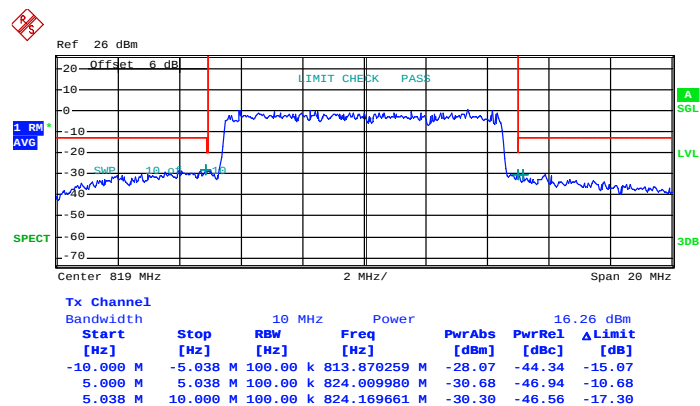

Date: 24.JUL.2014 01:19:58

3.4 Emissions Mask – Out Of Band Emissions Measurement

3.4.1 Description of Conducted Emissions Out of band emissions measurement

The power of any emission FCC Part 90.691 (a)(2) on any frequency removed from the assigned frequency by out of the authorized bandwidth at least $43 + 10 \log (P)$ dB. It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.
4. The final test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

3.4.4 Test Setup

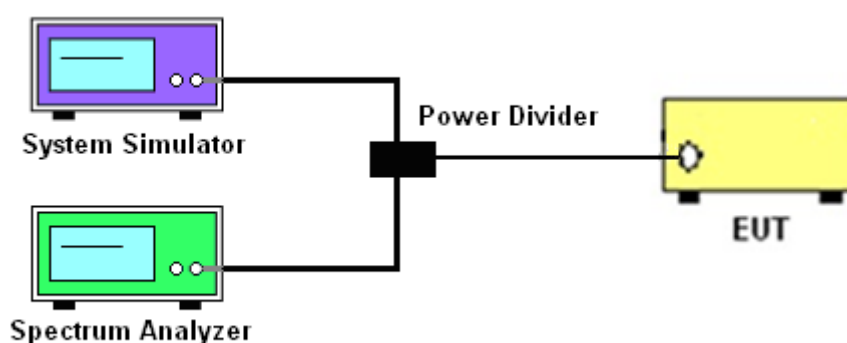




3.4.5 Test Result (Plots) of Conducted Emission


Band :	LTE Band 26	Channel :	CH26697 (Low)
Band Width :	1.4MHz		

QPSK (RB Size 1, RB Offset 2)

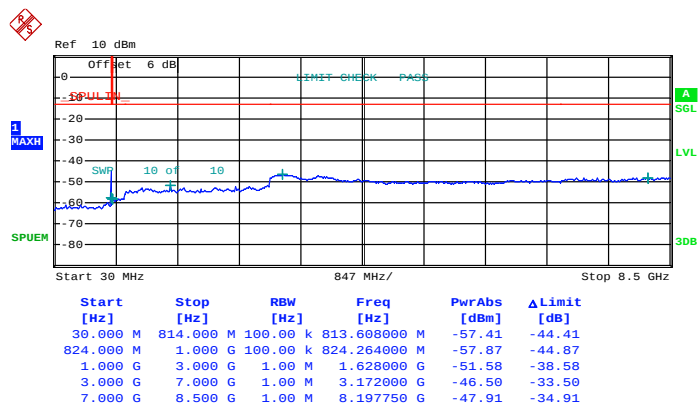


Date: 24.JUL.2014 01:54:37

16QAM (RB Size 1, RB Offset 2)

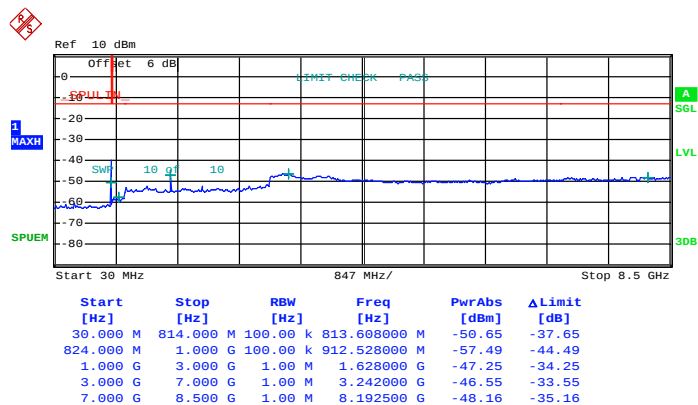


Date: 24.JUL.2014 01:55:12




Band :	LTE Band 26	Channel :	CH26740 (Middle)
Band Width :	1.4MHz		

QPSK (RB Size 1, RB Offset 0)

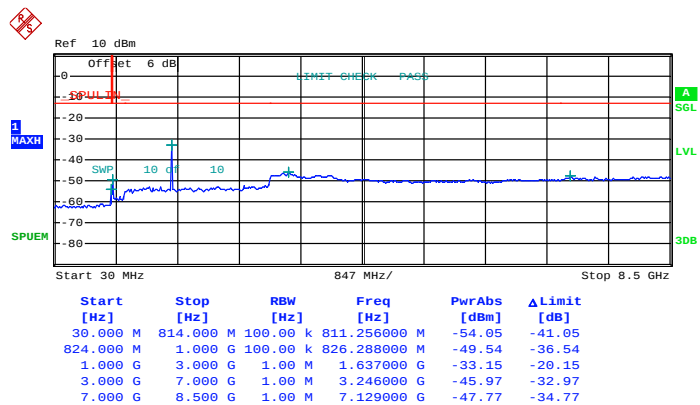


Date: 24.JUL.2014 01:58:16

16QAM (RB Size 1, RB Offset 2)

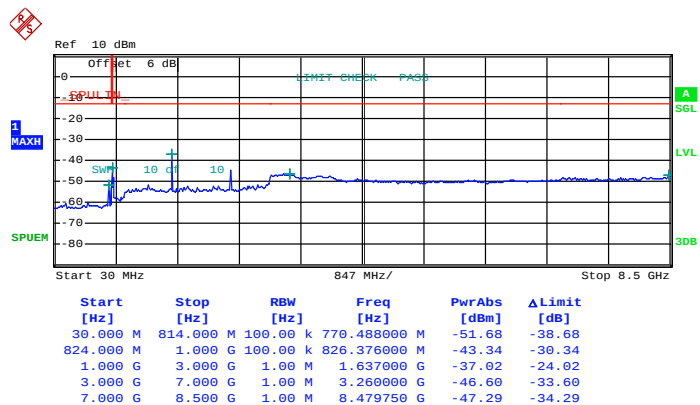


Date: 24.JUL.2014 01:57:05




Band :	LTE Band 26	Channel :	CH26783 (High)
Band Width :	1.4MHz		

QPSK (RB Size 1, RB Offset 0)

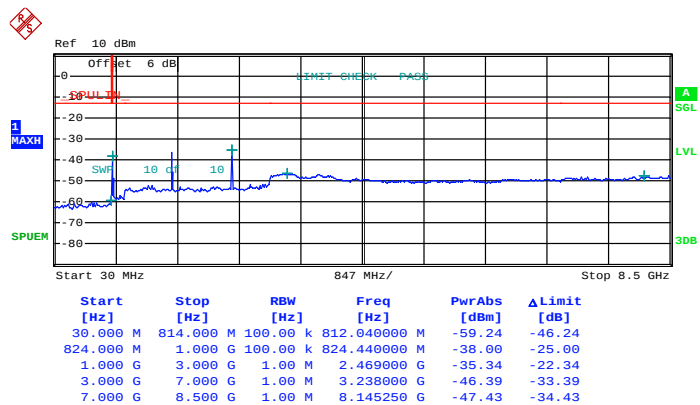

Date: 24.JUL.2014 01:53:40

16QAM (RB Size 1, RB Offset 0)

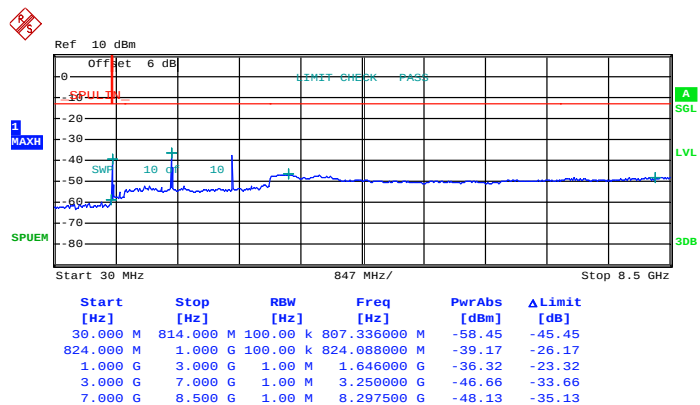


Date: 24.JUL.2014 01:52:49




Band :	LTE Band 26	Channel :	CH26705 (Low)
Band Width :	3MHz		

QPSK (RB Size 1, RB Offset 0)

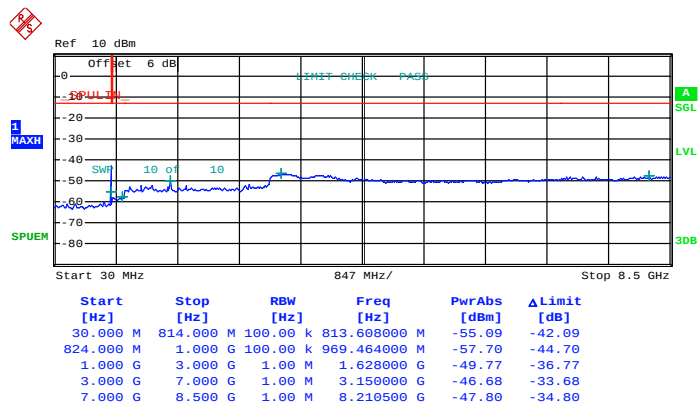

Date: 24.JUL.2014 02:03:20

16QAM (RB Size 1, RB Offset 0)

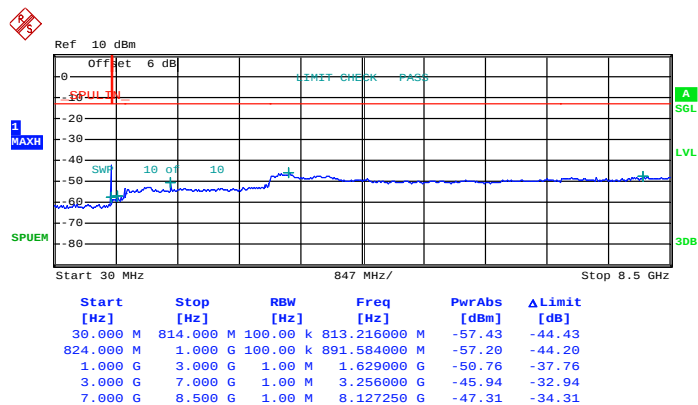


Date: 24.JUL.2014 02:02:20




Band :	LTE Band 26	Channel :	CH26740 (Middle)
Band Width :	3MHz		

QPSK (RB Size 1, RB Offset 0)

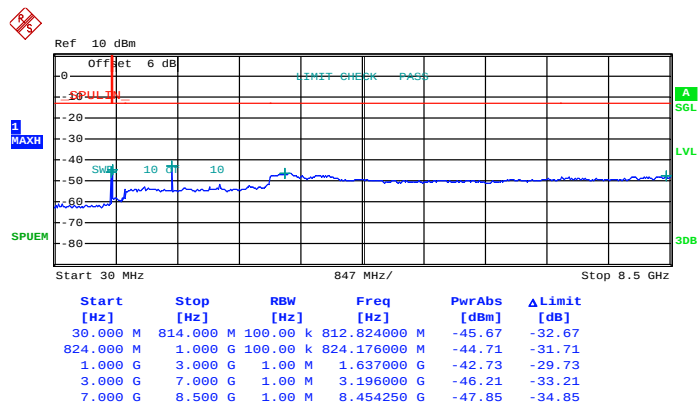

Date: 24.JUL.2014 01:59:18

16QAM (RB Size 1, RB Offset 7)

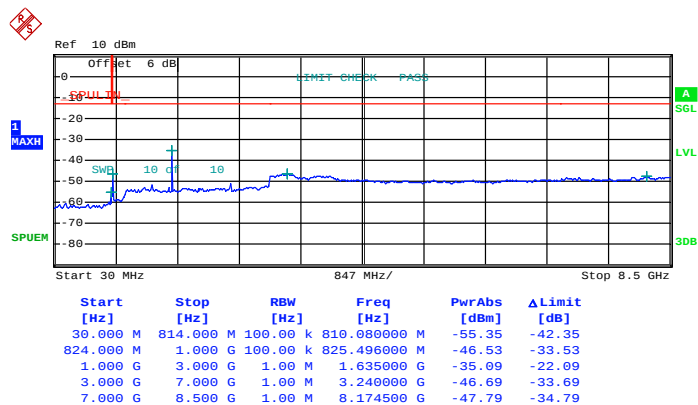


Date: 24.JUL.2014 01:59:59




Band :	LTE Band 26	Channel :	CH26775 (High)
Band Width :	3MHz		

QPSK (RB Size 1, RB Offset 7)

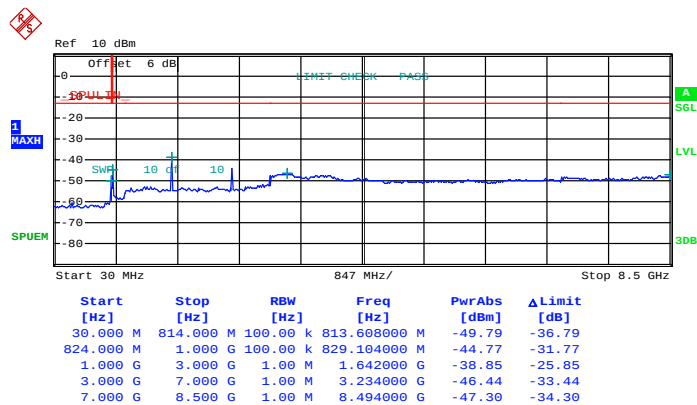


Date: 24.JUL.2014 02:04:27

16QAM (RB Size 1, RB Offset 7)

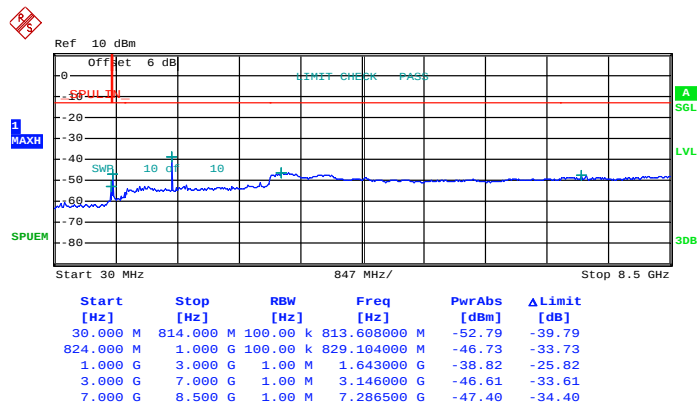


Date: 24.JUL.2014 02:07:05




Band :	LTE Band 26	Channel :	CH26715 (Low)
Band Width :	5MHz		

QPSK (RB Size 1, RB Offset 0)

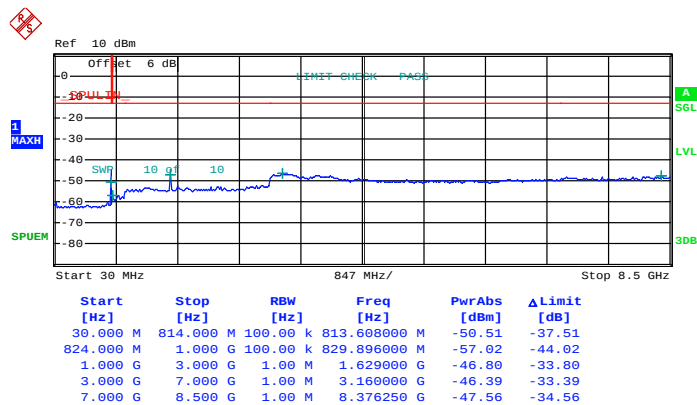

Date: 24.JUL.2014 02:10:15


16QAM (RB Size 1, RB Offset 12)

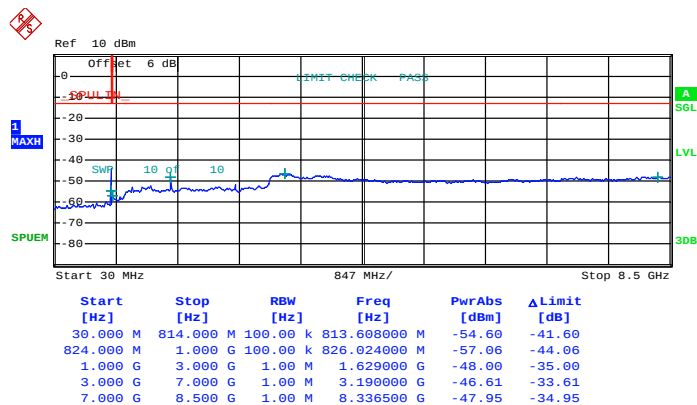

Date: 24.JUL.2014 02:10:49


Band :	LTE Band 26	Channel :	CH26740 (Middle)
Band Width :	5MHz		

QPSK (RB Size 1, RB Offset 0)

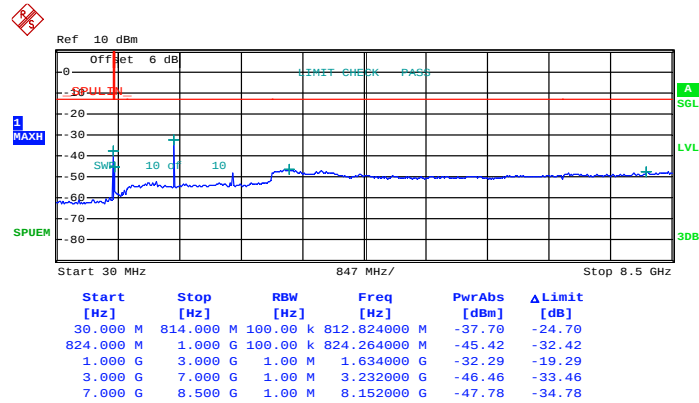


Date: 24.JUL.2014 02:12:11


16QAM (RB Size 1, RB Offset 0)

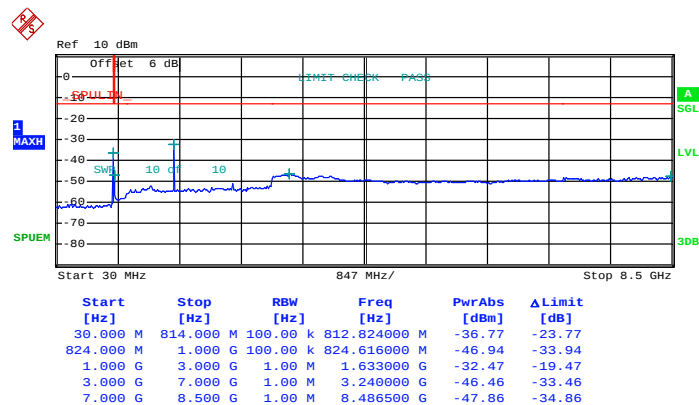


Date: 24.JUL.2014 02:11:40




Band :	LTE Band 26	Channel :	CH26765 (High)
Band Width :	5MHz		

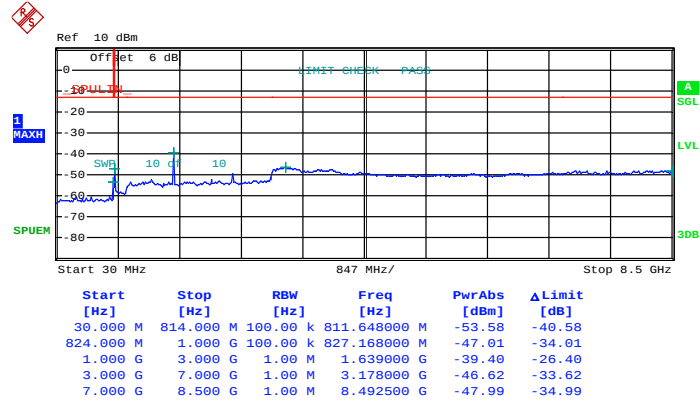QPSK (RB Size 1, RB Offset 24)

Date: 24.JUL.2014 02:08:49

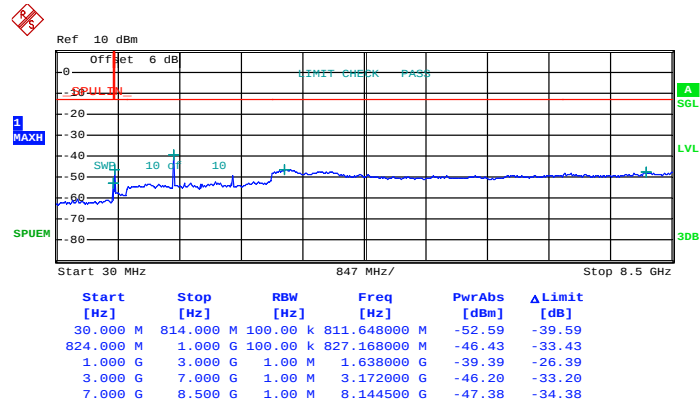
16QAM (RB Size 1, RB Offset 24)

Date: 24.JUL.2014 02:08:20




Band :	LTE Band 26	Channel :	CH26740 (Middle)
Band Width :	10MHz		

QPSK (RB Size 1, RB Offset 0)

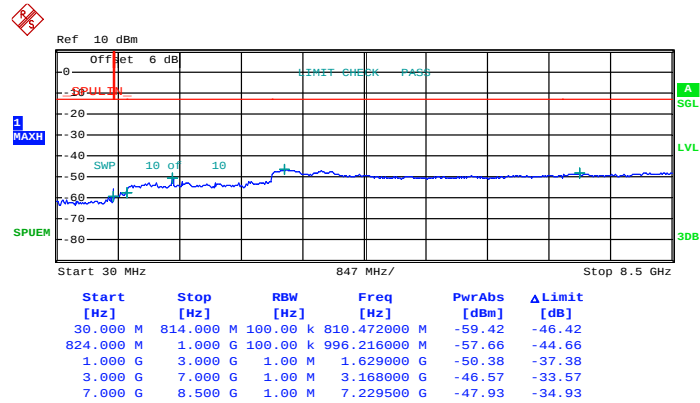

Date: 24.JUL.2014 02:13:58

16QAM (RB Size 1, RB Offset 49)

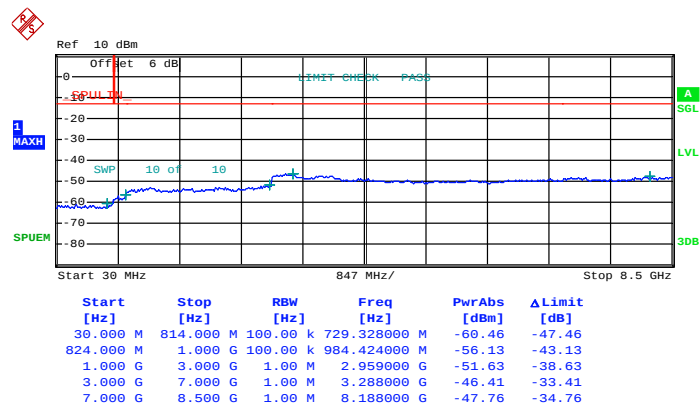

Date: 24.JUL.2014 02:14:51

3.5 Field Strength of Spurious Radiation Measurement

3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission FCC Part 90.691 on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log_{10}(P[\text{Watts}])$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.



3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$
11. $\text{ERP (dBm)} = \text{EIRP} - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10 \log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10 \log(P)] \text{ (dB)}$
 $= [30 + 10 \log(P)] \text{ (dBm)} - [43 + 10 \log(P)] \text{ (dB)}$
 $= -13 \text{ dBm}.$

3.5.4 Test Setup

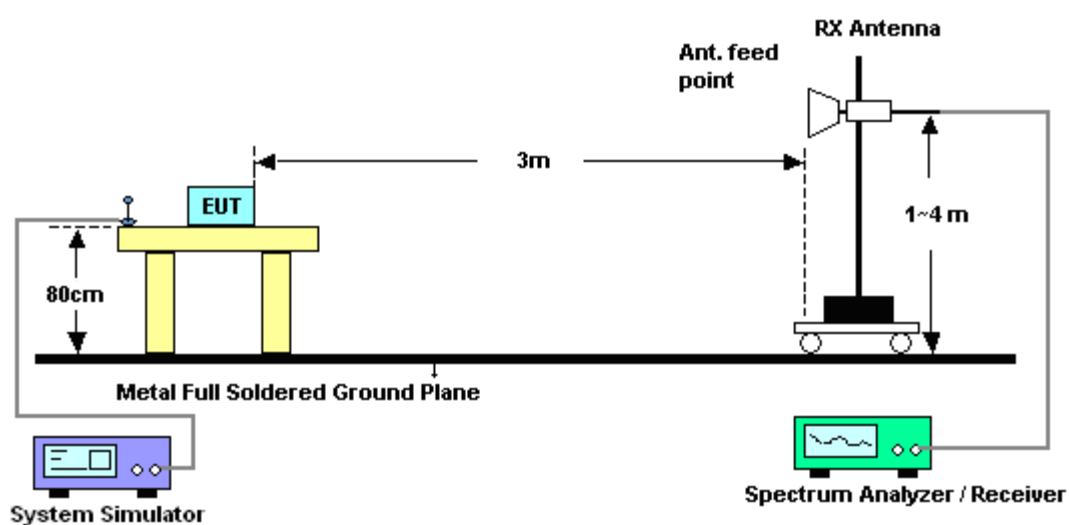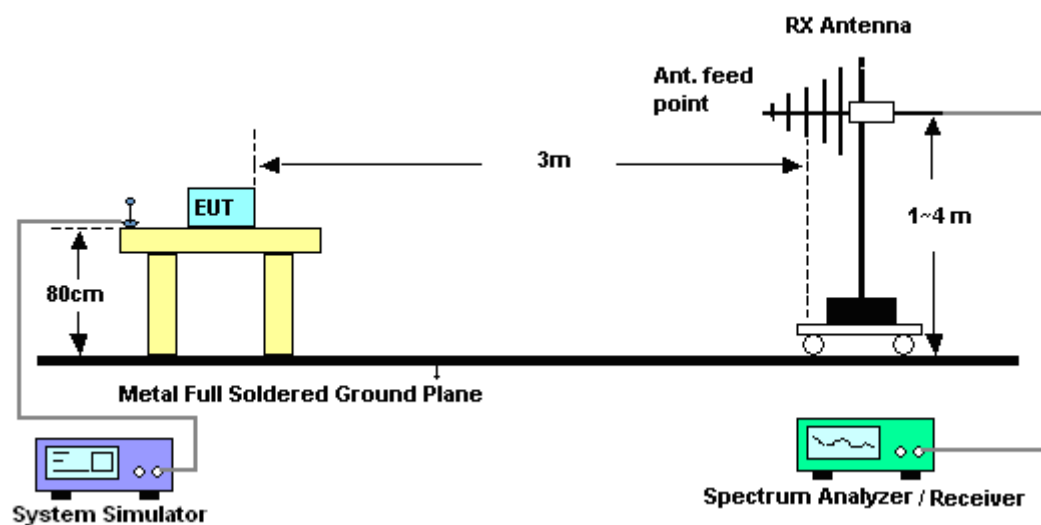

3.5.5 Test Result of Field Strength of Spurious Radiated

Band :	LTE Band 26				Temperature :	22~23°C			
Test Mode :	1.4MHz QPSK RB Size 1 Offset 0				Relative Humidity :	42~43%			
Test Engineer :	Star Wei				Polarization :	Horizontal			
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
1637	-59.26	-13	-46.26	-55.01	-59.91	0.57	3.37	H	Pass
2453	-68.44	-13	-55.44	-67.11	-70.67	0.78	5.16	H	Pass
3274	-67.28	-13	-54.28	-66.91	-70.92	0.87	6.66	H	Pass
4092	-61.13	-13	-48.13	-60.82	-65.72	0.97	7.71	H	Pass

Band :	LTE Band 26					Temperature :	22~23°C		
Test Mode :	1.4MHz QPSK RB Size 1 Offset 2					Relative Humidity :	42~43%		
Test Engineer :	Star Wei					Polarization :	Vertical		
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
1635	-44.50	-13	-31.50	-48.23	-45.15	0.57	3.37	V	Pass
2454	-65.00	-13	-52.00	-67.43	-67.23	0.78	5.16	V	Pass
3274	-65.22	-13	-52.22	-66.28	-68.86	0.87	6.66	V	Pass
4091	-61.80	-13	-48.80	-64.48	-66.39	0.97	7.71	V	Pass

Band :	LTE Band 26					Temperature :	22~23°C		
Test Mode :	3MHz QPSK RB Size 1 Offset 0					Relative Humidity :	42~43%		
Test Engineer :	Star Wei					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
1635	-62.01	-13	-49.01	-56.24	-62.66	0.57	3.37	H	Pass
2453	-64.98	-13	-51.98	-63.65	-67.21	0.78	5.16	H	Pass
3270	-67.20	-13	-54.20	-66.83	-70.84	0.87	6.66	H	Pass
4089	-57.40	-13	-44.40	-59.66	-61.99	0.97	7.71	H	Pass

Band :	LTE Band 26					Temperature :	22~23°C		
Test Mode :	3MHz QPSK RB Size 1 Offset 7					Relative Humidity :	42~43%		
Test Engineer :	Star Wei					Polarization :	Vertical		
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
1635	-43.40	-13	-30.40	-47.27	-44.05	0.57	3.37	V	Pass
2451	-64.54	-13	-51.54	-66.97	-66.77	0.78	5.16	V	Pass
3270	-65.51	-13	-52.51	-66.57	-69.15	0.87	6.66	V	Pass
4088	-61.14	-13	-48.14	-63.82	-65.73	0.97	7.71	V	Pass



Band :	LTE Band 26	Temperature :	22~23°C						
Test Mode :	5MHz QPSK RB Size 1 Offset 0					Relative Humidity :	42~43%		
Test Engineer :	Star Wei					Polarization :	Horizontal		
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit	Reading	Power	loss	Gain	(H/V)	
1633	-59.15	-13	-46.15	-54.96	-59.80	0.57	3.37	H	Pass
2450	-65.03	-13	-52.03	-63.70	-67.26	0.78	5.16	H	Pass
3266	-65.98	-13	-52.98	-65.61	-69.62	0.87	6.66	H	Pass
4082	-55.70	-13	-42.70	-58.51	-60.29	0.97	7.71	H	Pass

Band :	LTE Band 26				Temperature :	22~23°C			
Test Mode :	5MHz QPSK RB Size 1 Offset 0				Relative Humidity :	42~43%			
Test Engineer :	Star Wei				Polarization :	Vertical			
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit (dB)	Reading (dBm)	Power (dBm)	loss (dB)	Gain (dBi)	(H/V)	
1633	-44.44	-13	-31.44	-48.18	-45.09	0.57	3.37	V	Pass
2451	-63.57	-13	-50.57	-66.00	-65.80	0.78	5.16	V	Pass
3266	-66.20	-13	-53.20	-67.26	-69.84	0.87	6.66	V	Pass
4083	-60.07	-13	-47.07	-62.75	-64.66	0.97	7.71	V	Pass



Band :	LTE Band 26						Temperature :	22~23℃	
Test Mode :	10MHz QPSK RB Size 1 Offset 0						Relative Humidity :	42~43%	
Test Engineer :	Star Wei						Polarization :	Horizontal	
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over	SPA	S.G.	TX Cable	TX Antenna	Polarization	Result
(MHz)	(dBm)	(dBm)	Limit	Reading	Power	loss	Gain	(H/V)	
1628	-52.07	-13	-39.07	-49.90	-52.72	0.57	3.37	H	Pass
2442	-67.37	-13	-54.37	-66.04	-69.60	0.78	5.16	H	Pass
3256	-67.04	-13	-54.04	-66.67	-70.68	0.87	6.66	H	Pass
4074	-56.24	-13	-43.24	-58.84	-60.83	0.97	7.71	H	Pass
4884	-66.23	-13	-53.23	-67.87	-71.90	1.09	8.91	H	Pass
5698	-57.39	-13	-44.39	-62.85	-63.83	1.22	9.81	H	Pass

Band :	LTE Band 26						Temperature :	22~23°C	
Test Mode :	10MHz QPSK RB Size 1 Offset 49						Relative Humidity :	42~43%	
Test Engineer :	Star Wei						Polarization :	Vertical	
Remark :	Spurious emissions within 30-10th harmonic were found more than 20dB below limit line.								
Frequency	ERP	Limit	Over Limit	SPA Reading	S.G. Power	TX Cable loss	TX Antenna Gain	Polarization	Result
(MHz)	(dBm)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	(dBi)	(H/V)	
1629	-44.17	-13	-31.17	-47.96	-44.82	0.57	3.37	V	Pass
2442	-64.06	-13	-51.06	-66.49	-66.29	0.78	5.16	V	Pass
3256	-65.52	-13	-52.52	-66.58	-69.16	0.87	6.66	V	Pass
4070	-61.73	-13	-48.73	-64.41	-66.32	0.97	7.71	V	Pass
4884	-59.91	-13	-46.91	-66.46	-65.58	1.09	8.91	V	Pass
5698	-54.70	-13	-41.70	-61.65	-61.14	1.22	9.81	V	Pass

3.6 Frequency Stability Measurement

3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency according to FCC Part 90.213.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.6.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.6.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

3.6.5 Test Setup

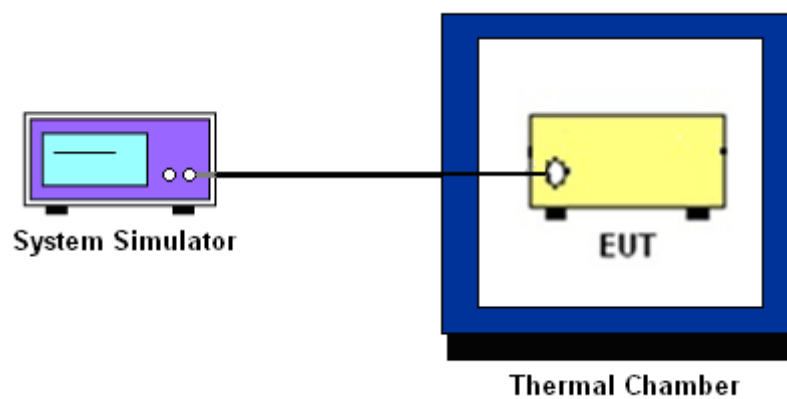

3.6.6 Test Result of Temperature Variation

Band :	LTE Band 26 (QPSK)	Limit (ppm) :	2.5
Temperature (°C)	BW 10MHz	Result	
	Deviation (ppm)		
50	+0.0040	PASS	
40	+0.0127		
30	+0.0032		
20(Ref.)	+0.0000		
10	+0.0179		
0	+0.0166		
-10	+0.0026		
-20	+0.0015		
-30	+0.0161		

3.6.7 Test Result of Voltage Variation

Band	Bandwidth	Voltage (Volt)	Deviation (ppm)	Limit (ppm)	Result
LTE Band 26 (QPSK)	10M	4.35	+0.0022	2.5	PASS
		Normal	+0.0068		
		3.5	+0.0060		

Remark:

1. Normal Voltage = 3.8V.
2. The manufacturer declared that the EUT could work properly between voltage 3.5V ~ 4.35V.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 28, 2013	Jul. 24, 2014~ Aug. 26, 2014	Dec. 27, 2014	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Dec. 10, 2013	Jul. 24, 2014~ Aug. 26, 2014	Dec. 09, 2014	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 05, 2013	Aug. 09, 2014	Nov. 04, 2014	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	101399	9kHz~30GHz	May 04, 2014	Aug. 09, 2014	May 03, 2015	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Jan. 08, 2014	Aug. 09, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 08, 2014	Aug. 09, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 18, 2013	Aug. 09, 2014	Nov. 17, 2014	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161073	1MHz~1GHz	May 04, 2014	Aug. 09, 2014	May 03, 2015	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02371	1GHz~26.5GHz	Dec. 10, 2013	Aug. 09, 2014	Dec. 09, 2014	Radiation (03CH01-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 09, 2014	NCR	Radiation (03CH01-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Aug. 09, 2014	NCR	Radiation (03CH01-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Aug. 09, 2014	NCR	Radiation (03CH01-KS)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5
---	-----